



ELEMENT Washington DC LLC

18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. +1.410.290.6652 / Fax +1.410.290.6654
<http://www.element.com>



NEAR-FIELD POWER DENSITY PART 0 REPORT

Applicant Name

Apple, Inc.
One Apple Park Way
Cupertino, CA 95014

Date of Testing

06/12/2022 - 07/21/2022

Test Site/Location

Element Washington DC LLC,
Morgan Hill, CA, USA

Document Serial No:

1C2205090025-28.BCG

FCC ID:

BCGA2435

APPLICANT:

APPLE, INC.

DUT Type:

Tablet Device

Report Type:

Part 0 Power Density Characterization

Model:

A2435

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez
Executive Vice President



FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 1 of 45

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
1.1	Device Overview	3
1.2	Time-Averaging Algorithm for RF Exposure Compliance	3
1.3	Nomenclature for Part 0 Report	3
1.4	Bibliography	3
2	MEASUREMENT SYSTEM	4
2.1	Measurement Setup	4
2.2	SPEAG EUmmWV3 Probe / E-Field 5G Probe	4
2.3	Peak Spatially Averaged Power Density Assessment Based on E-field Measurements	5
2.4	Reconstruction Algorithm	5
3	POWER DENSITY CHARACTERIZATION	6
3.1	Exposure Scenarios in Power Density Evaluation	6
3.2	Power Density Characterization Method	7
3.3	Codebook for all supported beams	8
3.4	Simulation and modeling validation	17
3.5	PD_design_target	18
3.6	Worst-case Housing Influence Determination: Δ_{min}	19
3.7	Scaling Factor for Single Beams	31
3.8	Scaling Factor for Beam Pairs	31
3.9	Input.Power.Limit Calculations	32
3.10	PD Char	34
4	EQUIPMENT LIST	43
5	MEASUREMENT UNCERTAINTIES	44
6	REFERENCES	45

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 2 of 45

1 DEVICE UNDER TEST

1.1 Device Overview

This device uses the Qualcomm® Smart Transmit feature to control and manage transmitting power in real time and to ensure the time-averaged RF exposure is in compliance with the FCC requirement at all times for 2G/3G/4G/5G WWAN operations.

1.2 Time-Averaging Algorithm for RF Exposure Compliance

This device is enabled with Qualcomm® Smart Transmit algorithm to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from 2G/3G/4G/5G NR WWAN is in compliance with FCC requirements. This Part 0 report shows Power Density characterization of WWAN radios for mmW NR. Characterization is achieved by determining *input.power.limit* for 5G mmW NR that correspond to the exposure design target after accounting for all device design related uncertainties, i.e., *PD_design_target* (< FCC PD limit) for mmW radio. The PD characterization is denoted as PD Char in this report.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time-varying) transmission scenario for WWAN technologies are reported in Part 2 report.

1.3 Nomenclature for Part 0 Report

Technology	Term	Description
5G mmW NR	<i>input.power.limit</i>	Power level at antenna element for each beam corresponding to the exposure design target (<i>PD_design_target</i>)
	<i>PD_design_target</i>	Target PD level < FCC PD limit after accounting for all device design related uncertainties
	Δ_{min}	Housing material influence
	<i>PD Char</i>	Table containing <i>input.power.limit</i> for all beams and bands

1.4 Bibliography

Table 1-9
Bibliography

Report Type	Serial Number
Part 0 SAR	1C2205090025-25.BCG
Part 1 SAR	1C2205090025-26.BCG
Part 1 PD	1C2205090025-29.BCG
Power Density Simulation Report	
RF Exposure Compliance Summary Report	1C2205090025-30.BCG
Part 2	1C2205090025-27.BCG

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 3 of 45

2 MEASUREMENT SYSTEM

2.1 Measurement Setup

Peak spatially averaged power density (psPD) measurements for mmWave frequencies were performed using the DASY6 with cDASY6 5G module. The DASY6 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom. The robot is a six-axis industrial robot, performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).

2.2 SPEAG EUmWV3 Probe / E-Field 5G Probe

The EUmWV3 probe consists of two dipoles optimally arranged to obtain pseudo-vector information.

Frequency Range	750 MHz – 110 GHz
Dynamic Range	< 20 V/m – 10,000 V/m with PRE-10 (min < 50 V/m – 3,000 V/m)
Position Precision	< 0.2 mm (cDASY6)
Dimensions	Probe Overall Length: 320 mm Probe Body Diameter: 8 mm Probe Tip Length: 23 mm Probe Tip Diameter: Encapsulation 8 mm Distance from Probe Tip to Sensor X Calibration Point: 1.5 mm Distance from Probe Tip to Sensor Y Calibration Point: 1.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10 GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction
Compatibility	cDASY6 + 5G-Module

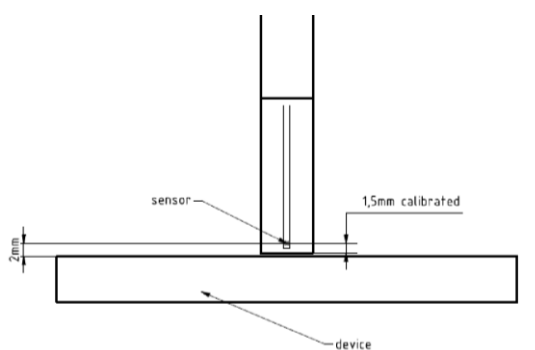
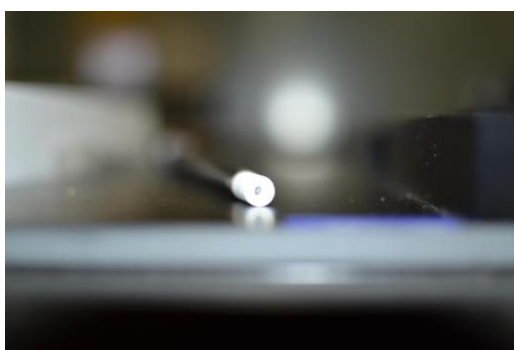


Figure 2-1
EUmWV3 Probe

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 4 of 45

2.3 Peak Spatially Averaged Power Density Assessment Based on E-field Measurements

Within a short distance from the transmitting source, power density was determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field were needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. Nevertheless, solutions based on direct measurement of E-field and H-field can be used to compute power density. The general measurement approach used for this device was:

- a) The local E field on the measurement surface was measured at a reference location where the field is well above the noise level. This reference level was used at the end of this procedure to assess output power drift of the DUT during the measurement.
- b) The electric field on the measurement surface was scanned. Measurements are conducted according to the instructions provided by the measurement system manufacturer. Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. The planar scan step size was configured at $\lambda/4$.
- c) For cDASY6, H-field was calculated from the measured E-field using a reconstruction algorithm. As the power density calculation requires knowledge of both amplitude and phase, reconstruction algorithms can also be used to obtain field information from the measured E-field data (e.g. the phase from the amplitude if only the amplitude is measured). H-field and phase data was reconstructed from repeated measurements (three per measurement point) on two measurement planes separated by $\lambda/4$.
- d) The total Peak spatially averaged power density (psPD) distribution on the evaluation surface is determined per the below equation. The spatial averaging area, A , is specified by the applicable exposure limits or regulatory requirements. A circular shape was used.

$$psPD = \frac{1}{2A_{av}} \iint_{A_{av}} || Re\{E \times H^*\} || dA$$

- e) The maximum spatial-average on the evaluation surface is the final quantity to determine compliance against applicable limits.
- f) The local E field reference value, at the same location as step 2, was re-measured after the scan was complete to calculate the power drift. If the drift deviated by more than 5%, the power density test and drift measurements were repeated.

2.4 Reconstruction Algorithm

Computation of the power density in general requires measurement information from the both E-field and H-field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible according to the manufacturer, as they are determined via Maxwell's equations. As such, the SPEAG reconstruction approach was based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmWV3 probe.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 5 of 45

3 POWER DENSITY CHARACTERIZATION

3.1 Exposure Scenarios in Power Density Evaluation

At frequencies > 6 GHz, the total peak spatial averaged power density (psPD) is required to be assessed for all antenna configurations (beams) from all mmW antenna modules installed inside the device.

The surfaces near-by each mmW antenna module for PD characterization are identified below.

Table 3-1
Evaluation Surfaces for PD Characterization

Band & Mode	Antenna	Back (S2)	Front (S1)	Top (S5)	Bottom (S6)	Right (S4)	Left (S3)
5G NR Band n261	M0	Yes	Yes	No	No	Yes	No
	M2	Yes	Yes	Yes	No	No	Yes
	M3	Yes	Yes	No	Yes	Yes	No
5G NR Band n260	M0	Yes	Yes	No	No	Yes	No
	M2	Yes	Yes	Yes	No	No	Yes
	M3	Yes	Yes	No	Yes	Yes	No
5G NR Band n258	M0	Yes	Yes	No	No	Yes	No
	M2	Yes	Yes	Yes	No	No	Yes
	M3	Yes	Yes	No	Yes	Yes	No

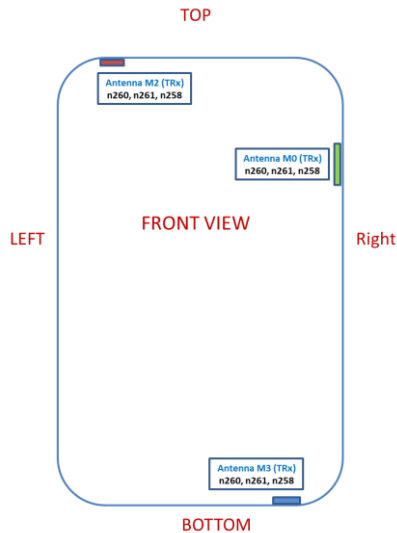


Figure 3-1
Location of mmW antenna modules

Particular DUT edges were not required to be evaluated for power density if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. Per FCC guidance, additional edges with negligible psPD results could be excluded from testing towards Δ_{min} calculations.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 6 of 45

3.2 Power Density Characterization Method

An overview of power density characterization method could be found below.

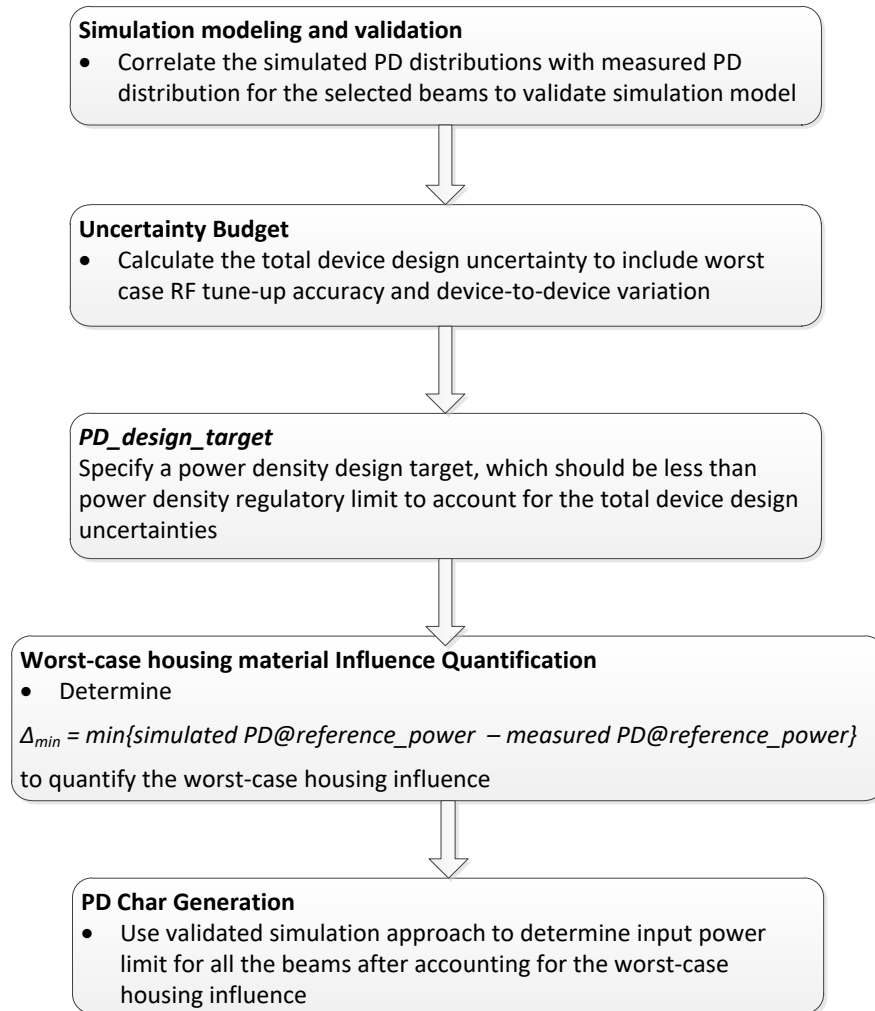


Figure 3-2
Flow Chart for Power Density Characterization

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 7 of 45

3.3 Codebook for all supported beams

All the beams that the DUT supports are specified in the pre-defined codebook. The codebook for this device is specified as below.

Table 3-2
5G mmW NR Band n258 Ant M0 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n258	M0	2	130	Patch	1
		5	133	Patch	1
		8	136	Patch	1
		11	139	Patch	1
		12	140	Patch	1
		21	149	Patch	2
		22	150	Patch	2
		23	151	Patch	2
		24	152	Patch	2
		31	159	Patch	2
		32	160	Patch	2
		33	161	Patch	2
		44	172	Patch	5
		45	173	Patch	5
		46	174	Patch	5
		47	175	Patch	5
		48	176	Patch	5
		57	185	Patch	5
		58	186	Patch	5
		59	187	Patch	5
		60	188	Patch	5
		130	2	Patch	1
		133	5	Patch	1
		136	8	Patch	1
		139	11	Patch	1
		140	12	Patch	1
		149	21	Patch	2
		150	22	Patch	2
		151	23	Patch	2
		152	24	Patch	2
		159	31	Patch	2
		160	32	Patch	2
		161	33	Patch	2
		172	44	Patch	5
		173	45	Patch	5
		174	46	Patch	5
		175	47	Patch	5
		176	48	Patch	5
		185	57	Patch	5
		186	58	Patch	5
		187	59	Patch	5
		188	60	Patch	5

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 8 of 45

Table 3-3
5G mmW NR Band n258 Ant M2 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n258	M2	0	128	Patch	1
		3	131	Patch	1
		6	134	Patch	1
		9	137	Patch	1
		13	141	Patch	2
		14	142	Patch	2
		15	143	Patch	2
		16	144	Patch	2
		25	153	Patch	2
		26	154	Patch	2
		27	155	Patch	2
		34	162	Patch	4
		35	163	Patch	4
		36	164	Patch	4
		37	165	Patch	4
		38	166	Patch	4
		49	177	Patch	4
		50	178	Patch	4
		51	179	Patch	4
		52	180	Patch	4
		128	0	Patch	1
		131	3	Patch	1
		134	6	Patch	1
		137	9	Patch	1
		141	13	Patch	2
		142	14	Patch	2
		143	15	Patch	2
		144	16	Patch	2
		153	25	Patch	2
		154	26	Patch	2
		155	27	Patch	2
		162	34	Patch	4
		163	35	Patch	4
		164	36	Patch	4
		165	37	Patch	4
		166	38	Patch	4
		177	49	Patch	4
		178	50	Patch	4
		179	51	Patch	4
		180	52	Patch	4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 9 of 45

Table 3-4
5G mmW NR Band n258 Ant M3 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n258	M3	1	129	Patch	1
		4	132	Patch	1
		7	135	Patch	1
		10	138	Patch	1
		17	145	Patch	2
		18	146	Patch	2
		19	147	Patch	2
		20	148	Patch	2
		28	156	Patch	2
		29	157	Patch	2
		30	158	Patch	2
		39	167	Patch	4
		40	168	Patch	4
		41	169	Patch	4
		42	170	Patch	4
		43	171	Patch	4
		53	181	Patch	4
		54	182	Patch	4
		55	183	Patch	4
		56	184	Patch	4
		129	1	Patch	1
		132	4	Patch	1
		135	7	Patch	1
		138	10	Patch	1
		145	17	Patch	2
		146	18	Patch	2
		147	19	Patch	2
		148	20	Patch	2
		156	28	Patch	2
		157	29	Patch	2
		158	30	Patch	2
		167	39	Patch	4
		168	40	Patch	4
		169	41	Patch	4
		170	42	Patch	4
		171	43	Patch	4
		181	53	Patch	4
		182	54	Patch	4
		183	55	Patch	4
		184	56	Patch	4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 10 of 45

Table 3-5
5G mmW NR Band n261 Ant M0 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n261	M0	2	130	Patch	1
		5	133	Patch	1
		8	136	Patch	1
		11	139	Patch	1
		12	140	Patch	1
		21	149	Patch	2
		22	150	Patch	2
		23	151	Patch	2
		24	152	Patch	2
		31	159	Patch	2
		32	160	Patch	2
		33	161	Patch	2
		44	172	Patch	5
		45	173	Patch	5
		46	174	Patch	5
		47	175	Patch	5
		48	176	Patch	5
		57	185	Patch	5
		58	186	Patch	5
		59	187	Patch	5
		60	188	Patch	5
		130	2	Patch	1
		133	5	Patch	1
		136	8	Patch	1
		139	11	Patch	1
		140	12	Patch	1
		149	21	Patch	2
		150	22	Patch	2
		151	23	Patch	2
		152	24	Patch	2
		159	31	Patch	2
		160	32	Patch	2
		161	33	Patch	2
		172	44	Patch	5
		173	45	Patch	5
		174	46	Patch	5
		175	47	Patch	5
		176	48	Patch	5
		185	57	Patch	5
		186	58	Patch	5
		187	59	Patch	5
		188	60	Patch	5

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 11 of 45

Table 3-6
5G mmW NR Band n261 Ant M2 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n261	M2	0	128	Patch	1
		3	131	Patch	1
		6	134	Patch	1
		9	137	Patch	1
		13	141	Patch	2
		14	142	Patch	2
		15	143	Patch	2
		16	144	Patch	2
		25	153	Patch	2
		26	154	Patch	2
		27	155	Patch	2
		34	162	Patch	4
		35	163	Patch	4
		36	164	Patch	4
		37	165	Patch	4
		38	166	Patch	4
		49	177	Patch	4
		50	178	Patch	4
		51	179	Patch	4
		52	180	Patch	4
		128	0	Patch	1
		131	3	Patch	1
		134	6	Patch	1
		137	9	Patch	1
		141	13	Patch	2
		142	14	Patch	2
		143	15	Patch	2
		144	16	Patch	2
		153	25	Patch	2
		154	26	Patch	2
		155	27	Patch	2
		162	34	Patch	4
		163	35	Patch	4
		164	36	Patch	4
		165	37	Patch	4
		166	38	Patch	4
		177	49	Patch	4
		178	50	Patch	4
		179	51	Patch	4
		180	52	Patch	4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 12 of 45

Table 3-7
5G mmW NR Band n261 Ant M3 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n261	M3	1	129	Patch	1
		4	132	Patch	1
		7	135	Patch	1
		10	138	Patch	1
		17	145	Patch	2
		18	146	Patch	2
		19	147	Patch	2
		20	148	Patch	2
		28	156	Patch	2
		29	157	Patch	2
		30	158	Patch	2
		39	167	Patch	4
		40	168	Patch	4
		41	169	Patch	4
		42	170	Patch	4
		43	171	Patch	4
		53	181	Patch	4
		54	182	Patch	4
		55	183	Patch	4
		56	184	Patch	4
		129	1	Patch	1
		132	4	Patch	1
		135	7	Patch	1
		138	10	Patch	1
		145	17	Patch	2
		146	18	Patch	2
		147	19	Patch	2
		148	20	Patch	2
		156	28	Patch	2
		157	29	Patch	2
		158	30	Patch	2
		167	39	Patch	4
		168	40	Patch	4
		169	41	Patch	4
		170	42	Patch	4
		171	43	Patch	4
		181	53	Patch	4
		182	54	Patch	4
		183	55	Patch	4
		184	56	Patch	4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 13 of 45

Table 3-8
5G mmW NR Band n260 Ant M0 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n260	M0	2	130	Patch	1
		5	133	Patch	1
		8	136	Patch	1
		11	139	Patch	1
		12	140	Patch	1
		21	149	Patch	2
		22	150	Patch	2
		23	151	Patch	2
		24	152	Patch	2
		31	159	Patch	2
		32	160	Patch	2
		33	161	Patch	2
		44	172	Patch	5
		45	173	Patch	5
		46	174	Patch	5
		47	175	Patch	5
		48	176	Patch	5
		57	185	Patch	5
		58	186	Patch	5
		59	187	Patch	5
		60	188	Patch	5
		130	2	Patch	1
		133	5	Patch	1
		136	8	Patch	1
		139	11	Patch	1
		140	12	Patch	1
		149	21	Patch	2
		150	22	Patch	2
		151	23	Patch	2
		152	24	Patch	2
		159	31	Patch	2
		160	32	Patch	2
		161	33	Patch	2
		172	44	Patch	5
		173	45	Patch	5
		174	46	Patch	5
		175	47	Patch	5
		176	48	Patch	5
		185	57	Patch	5
		186	58	Patch	5
		187	59	Patch	5
		188	60	Patch	5

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 14 of 45

Table 3-9
5G mmW NR Band n260 Ant M2 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n260	M2	0	128	Patch	1
		3	131	Patch	1
		6	134	Patch	1
		9	137	Patch	1
		13	141	Patch	2
		14	142	Patch	2
		15	143	Patch	2
		16	144	Patch	2
		25	153	Patch	2
		26	154	Patch	2
		27	155	Patch	2
		34	162	Patch	4
		35	163	Patch	4
		36	164	Patch	4
		37	165	Patch	4
		38	166	Patch	4
		49	177	Patch	4
		50	178	Patch	4
		51	179	Patch	4
		52	180	Patch	4
		128	0	Patch	1
		131	3	Patch	1
		134	6	Patch	1
		137	9	Patch	1
		141	13	Patch	2
		142	14	Patch	2
		143	15	Patch	2
		144	16	Patch	2
		153	25	Patch	2
		154	26	Patch	2
		155	27	Patch	2
		162	34	Patch	4
		163	35	Patch	4
		164	36	Patch	4
		165	37	Patch	4
		166	38	Patch	4
		177	49	Patch	4
		178	50	Patch	4
		179	51	Patch	4
		180	52	Patch	4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 15 of 45

Table 3-10
5G mmW NR Band n260 Ant M3 Codebook

Band	Antenna Module	Beam ID	Paired With	Antenna Type	# of Antenna Feed
n260	M3	1	129	Patch	1
		4	132	Patch	1
		7	135	Patch	1
		10	138	Patch	1
		17	145	Patch	2
		18	146	Patch	2
		19	147	Patch	2
		20	148	Patch	2
		28	156	Patch	2
		29	157	Patch	2
		30	158	Patch	2
		39	167	Patch	4
		40	168	Patch	4
		41	169	Patch	4
		42	170	Patch	4
		43	171	Patch	4
		53	181	Patch	4
		54	182	Patch	4
		55	183	Patch	4
		56	184	Patch	4
		129	1	Patch	1
		132	4	Patch	1
		135	7	Patch	1
		138	10	Patch	1
		145	17	Patch	2
		146	18	Patch	2
		147	19	Patch	2
		148	20	Patch	2
		156	28	Patch	2
		157	29	Patch	2
		158	30	Patch	2
		167	39	Patch	4
		168	40	Patch	4
		169	41	Patch	4
		170	42	Patch	4
		171	43	Patch	4
		181	53	Patch	4
		182	54	Patch	4
		183	55	Patch	4
		184	56	Patch	4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 16 of 45

3.4 Simulation and modeling validation

Power density simulations of all beams and surfaces were performed by the manufacturer. Details of these simulations and modeling validation can be found in the Power Density Simulation Report. A summary of the validation results to support worst-case housing influence quantification in power density characterization for this model can be seen below.

With an input power of 6 dBm for n258 band, n261 band, and n260 band, PD measurements are conducted for at least one single beam per antenna type and per antenna module on worst-surface(s). PD measurements are performed at mid channel of each mmW band and with CW modulation. All measured PD values are listed below along with corresponding simulated PD values for the same configuration. Beams are chosen based on worst case simulation value of mid channel only.

PD value will be used to determine worst-case housing influence for conservative assessment.

Table 3-11
Measured and Simulated 4cm² psPD for Selected Beams
with 6 dBm Input Power for n258, n261, and n260

Band	Antenna	Beam ID	Surface	4 cm^2 psPD		Delta = Simulated - Measured
				Measured	Simulated	
				(W/m^2)		(dB)
n258	M0	45	Front	15.8	25.29	2.04
		172	Front	17	29.2	2.35
	M2	37	Top	11.6	21.91	2.76
		180	Top	9.73	20.77	3.29
	M3	42	Bottom	15	22.28	1.72
		167	Bottom	12.8	18.46	1.59
n261	M0	46	Front	20.5	37.41	2.61
		175	Front	18.1	38.78	3.31
	M2	49	Top	14.3	21	1.67
		177	Top	15.1	19.81	1.18
	M3	56	Bottom	11.8	21.58	2.62
		184	Bottom	13.9	19.22	1.41
n260	M0	45	Front	7.25	22.03	4.83
		174	Front	5.62	17.18	4.85
	M2	50	Top	12.5	20.31	2.11
		179	Top	10.4	20.8	3.01
	M3	55	Bottom	12.2	19.28	1.99
		169	Bottom	14.6	20.57	1.49

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 17 of 45

3.5 PD_design_target

PD_design_target is determined by ensuring that it is less than FCC PD limit after accounting for total device design uncertainties including TxAGC and device-to-device variation, specified by the manufacturer.

Table 3-12
***PD_design_target* Calculations**

<i>PD_design_target</i>	
$PD_design_target < PD_regulatory_limit \times 10^{\frac{-Total\ Uncertainty}{10}}$	
psPD over 4 cm² Averaging Area	
<i>Total Uncertainty</i>	2.0 dB
<i>PD_regulatory_limit</i>	10.0 W/m ²
<i>PD_design_target</i>	4.50 W/m ²

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 18 of 45

3.6 Worst-case Housing Influence Determination: Δ_{min}

For non-metal material, the material property cannot be accurately characterized at mmW frequencies to date. The estimated material property for the device housing is used in the simulation model, which could influence the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Since the mmW antenna modules are placed at different locations, only surrounding material/housing has impact on EM field propagation, and in turn power density. Furthermore, depending on the type of antenna array, i.e., dipole antenna array or patch antenna array, the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this DUT, the below procedure was used to determine worst-case housing influence, Δ_{min} :

1. Based on PD simulation, for each module and antenna type, determine one or more worst-surface(s) that has highest 4cm² PD for all the single beams per antenna module and per antenna type in the mid channel of each band.
2. For identified worst surface(s) per antenna module, per beam polarization, and per antenna type group,
 - a. First determine Δ_{min} based on identified worst surface(s), and derive *input.power.limit*
 - b. Then prove all other near-by surface(s), i.e., non-selected surface(s), is not required for housing material loss quantification (in other words, these non-evaluated surfaces have no influence on the determined *input.power.limit*) by:
 - i. re-scale all simulated 4cm²PD values to *input.power.limit* to identify the worst-PD beam per each non-evaluated surface
 - ii. Measure 4cm²PD at *input.power.limit* on identified worst-PD beam per each non-evaluated surface
 - iii. Demonstrate all measured 4cm²PD values are below *PD_design_target*
3. If any of the above surface(s) in Step (2.b.iii) have measured 4cm² PD $\geq$ *PD_design_target*, then those surfaces must be included in the Δ_{min} determination in Step (2.a), and re-evaluate *input.power.limit* with these added surfaces.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 19 of 45

Following above procedure, the worst-surface(s) having highest 4cm² psPD for all the single beams per each antenna type and each antenna module group in the mid channel of n258, n261, and n260 bands are identified as:

- for Antenna M0: Front
- for Antenna M2: Top
- for Antenna M3: Bottom

Thus, when comparing a simulated 4cm²-averaged psPD and measured 4 cm²-averaged psPD for the identified worst surface(s), the worst error introduced for each antenna type and each antenna module group when using the estimated material property are chosen for Δ_{min} . Thus, the worst-case housing influence, denoted as $\Delta_{min} = \text{Sim. PD} - \text{Meas. PD}$, is determined as

Table 3-13
 Δ_{min} for all antennas

Band	Antenna	Δ_{min}
		(dB)
n258	M0 (V Beams)	2.04
	M0 (H Beams)	2.35
	M2 (V Beams)	2.76
	M2 (H Beams)	3.29
	M3 (V Beams)	1.72
	M3 (H Beams)	1.59
n261	M0 (V Beams)	2.61
	M0 (H Beams)	3.31
	M2 (V Beams)	1.67
	M2 (H Beams)	1.18
	M3 (V Beams)	2.62
	M3 (H Beams)	1.41
n260	M0 (V Beams)	4.83
	M0 (H Beams)	4.85
	M2 (V Beams)	2.11
	M2 (H Beams)	3.01
	M3 (V Beams)	1.99
	M3 (H Beams)	1.49

Δ_{min} represents the worst case where RF exposure is underestimated the most in simulation when using the estimated material property of the housing. For conservative assessment, the Δ_{min} is used as the worst-case factor and applied to all the beams in the corresponding antenna type and antenna module group to determine input power limits in PD char for compliance.

Simulated 4cm² psPD values in Power Density Simulation Report are scaled to *input.power.limit* and are listed in tables below for all single beams for all identified surfaces, when assuming the simulation is performed with correct housing influence.

Determine the worst beam for each of non-selected surface(s), i.e.,

- for antenna M0: Back, Right
- for antenna M2: Back, Front, Left
- for antenna M3: Back, Front, Right

Then perform PD measurement for all determined worst-case beams, highlighted in orange in tables below, on the corresponding surface. Measurement is performed in the mid channel of each band with CW modulation. The evaluation distance is at 2 mm.

The test results show that the all measured 4cm² psPD values are less than *PD_design_target* of 4.50 W/m², thus, the non-selected surfaces have no influence on the determined Δ_{min} and *input.power.limit*.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 20 of 45

Table 3-14
n258, mid channel, antenna M0 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm2 PD(W/m2) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M0	2	4.39	0.05	-	1.03	-	-
	5	4.40	0.04	-	1.12	-	-
	8	4.39	0.03	-	1.10	-	-
	11	4.21	0.04	-	1.12	-	-
	12	4.19	0.05	-	1.13	-	-
	21	4.12	0.05	-	0.96	-	-
	22	4.32	0.03	-	1.19	-	-
	23	4.20	0.04	-	1.27	-	-
	24	4.40	0.05	-	0.86	-	-
	31	4.25	0.05	-	1.01	-	-
	32	4.05	0.05	-	1.31	-	-
	33	4.40	0.05	-	0.86	-	-
	44	4.17	0.04	-	1.17	-	-
	45	4.39	0.05	-	1.41	-	-
	46	3.93	0.04	-	1.11	-	-
	47	4.40	0.03	-	1.02	-	-
	48	4.40	0.06	-	1.10	-	-
	57	4.34	0.04	-	1.16	-	-
	58	4.13	0.05	-	1.27	-	-
	59	4.25	0.04	-	1.11	-	-
	60	4.40	0.04	-	1.02	-	-
	130	4.17	0.07	-	1.28	-	-
	133	4.09	0.10	-	1.59	-	-
	136	4.40	0.09	-	1.54	-	-
	139	4.40	0.07	-	1.36	-	-
	140	4.20	0.06	-	1.31	-	-
	149	4.40	0.11	-	1.64	-	-
	150	4.13	0.11	-	1.66	-	-
	151	4.40	0.09	-	1.52	-	-
	152	4.36	0.11	-	1.32	-	-
	159	4.13	0.11	-	1.66	-	-
	160	4.20	0.10	-	1.61	-	-
	161	4.00	0.11	-	1.71	-	-
	172	4.35	0.11	-	1.56	-	-
	173	4.23	0.11	-	1.60	-	-
	174	4.40	0.11	-	1.67	-	-
	175	4.39	0.13	-	1.72	-	-
	176	4.35	0.12	-	1.62	-	-
	185	4.00	0.11	-	1.61	-	-
	186	4.40	0.12	-	1.63	-	-
	187	4.40	0.12	-	1.68	-	-
	188	4.38	0.13	-	1.72	-	-

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 21 of 45

Table 3-15
n258, mid channel, antenna M2 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M2	0	1.69	1.48	0.12	-	4.07	-
	3	1.59	1.53	0.18	-	4.28	-
	6	1.25	1.31	0.13	-	3.40	-
	9	1.49	1.86	0.17	-	4.40	-
	13	2.00	1.39	0.14	-	4.02	-
	14	2.00	1.73	0.02	-	4.14	-
	15	1.64	2.01	0.15	-	3.94	-
	16	1.56	1.56	0.33	-	4.20	-
	25	2.07	1.31	0.06	-	4.30	-
	26	1.74	1.83	0.07	-	4.02	-
	27	1.02	1.50	0.29	-	3.42	-
	34	2.44	1.25	0.05	-	4.40	-
	35	2.06	1.83	0.03	-	4.17	-
	36	1.92	1.87	0.02	-	4.00	-
	37	1.60	2.28	0.32	-	4.39	-
	38	0.77	1.75	0.60	-	3.29	-
	49	2.40	1.46	0.06	-	4.40	-
	50	1.83	2.02	0.06	-	3.97	-
	51	1.87	1.97	0.11	-	4.31	-
	52	1.02	2.28	0.51	-	4.02	-
	128	1.29	1.52	0.17	-	3.71	-
	131	1.23	1.30	0.12	-	3.36	-
	134	1.19	1.16	0.14	-	3.30	-
	137	1.41	1.17	0.13	-	3.36	-
	141	0.84	1.52	0.12	-	3.13	-
	142	1.26	1.77	0.06	-	3.33	-
	143	1.79	1.21	0.19	-	3.55	-
	144	1.28	0.86	0.25	-	2.98	-
	153	1.32	2.10	0.01	-	3.95	-
	154	1.68	1.68	0.07	-	3.68	-
	155	1.73	0.87	0.25	-	3.25	-
	162	0.86	1.94	0.02	-	3.31	-
	163	1.11	1.79	0.04	-	3.34	-
	164	1.34	1.36	0.15	-	3.37	-
	165	1.93	1.51	0.23	-	3.58	-
	166	1.72	0.65	0.40	-	2.83	-
	177	0.88	1.93	0.02	-	3.31	-
	178	1.33	1.52	0.07	-	3.43	-
	179	1.50	1.56	0.11	-	3.31	-
	180	1.95	0.92	0.36	-	3.23	-

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 22 of 45

Table 3-16
n258, mid channel, antenna M3 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M3	1	1.74	1.55	-	0.13	-	4.40
	4	1.48	1.42	-	0.18	-	4.22
	7	1.20	1.30	-	0.15	-	3.54
	10	1.43	1.76	-	0.16	-	4.40
	17	2.01	1.54	-	0.07	-	4.01
	18	1.74	1.72	-	0.07	-	4.10
	19	1.04	1.67	-	0.32	-	3.44
	20	1.58	2.16	-	0.36	-	4.39
	28	2.03	1.43	-	0.03	-	4.40
	29	1.78	1.92	-	0.08	-	4.39
	30	1.61	2.14	-	0.28	-	4.28
	39	2.29	1.31	-	0.07	-	4.31
	40	1.96	2.07	-	0.03	-	4.40
	41	1.94	1.92	-	0.03	-	4.40
	42	1.34	2.29	-	0.41	-	4.38
	43	0.79	1.88	-	0.62	-	3.48
	53	2.15	1.73	-	0.06	-	4.40
	54	1.93	2.12	-	0.04	-	4.40
	55	1.74	1.96	-	0.17	-	4.40
	56	1.05	2.18	-	0.48	-	4.06
	129	1.32	1.58	-	0.18	-	4.10
	132	1.11	1.22	-	0.12	-	3.25
	135	1.24	1.17	-	0.14	-	3.57
	138	1.25	1.17	-	0.12	-	3.35
	145	1.30	2.00	-	0.01	-	4.04
	146	1.27	1.65	-	0.02	-	3.51
	147	1.65	1.46	-	0.16	-	3.67
	148	1.51	0.92	-	0.26	-	3.21
	156	1.09	1.64	-	0.12	-	3.34
	157	1.58	1.66	-	0.04	-	3.73
	158	1.71	1.02	-	0.24	-	3.44
	167	1.00	1.88	-	0.04	-	3.49
	168	1.40	1.61	-	0.05	-	3.67
	169	1.46	1.59	-	0.11	-	3.60
	170	1.88	1.48	-	0.26	-	3.75
	171	1.66	0.65	-	0.42	-	2.89
	181	1.19	1.72	-	0.07	-	3.49
	182	1.45	1.55	-	0.10	-	3.68
	183	1.61	1.65	-	0.08	-	3.70
	184	1.86	1.01	-	0.36	-	3.37

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 23 of 45

Table 3-17
n261, mid channel, antenna M0 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm2 PD(W/m2) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M0	2	4.40	0.06	-	1.11	-	-
	5	4.40	0.06	-	1.12	-	-
	8	4.40	0.06	-	1.06	-	-
	11	4.40	0.04	-	1.18	-	-
	12	4.00	0.07	-	1.36	-	-
	21	4.34	0.09	-	1.21	-	-
	22	4.40	0.02	-	1.16	-	-
	23	4.40	0.06	-	1.36	-	-
	24	4.40	0.07	-	1.50	-	-
	31	4.34	0.08	-	0.96	-	-
	32	4.38	0.09	-	1.05	-	-
	33	4.40	0.09	-	1.56	-	-
	44	4.23	0.08	-	1.10	-	-
	45	4.40	0.03	-	1.20	-	-
	46	4.24	0.03	-	1.34	-	-
	47	4.39	0.06	-	1.55	-	-
	48	4.39	0.10	-	1.57	-	-
	57	4.34	0.05	-	1.13	-	-
	58	4.30	0.03	-	1.28	-	-
	59	4.36	0.04	-	1.46	-	-
	60	4.40	0.09	-	1.52	-	-
	130	4.39	0.09	-	1.51	-	-
	133	4.40	0.08	-	1.31	-	-
	136	4.35	0.08	-	1.34	-	-
	139	4.39	0.09	-	1.47	-	-
	140	4.26	0.06	-	1.08	-	-
	149	4.36	0.06	-	1.39	-	-
	150	4.31	0.14	-	1.62	-	-
	151	4.40	0.12	-	1.88	-	-
	152	4.36	0.08	-	1.76	-	-
	159	4.31	0.10	-	1.02	-	-
	160	4.40	0.14	-	1.89	-	-
	161	4.29	0.06	-	1.48	-	-
	172	4.21	0.14	-	1.58	-	-
	173	4.13	0.15	-	1.60	-	-
	174	4.36	0.14	-	1.87	-	-
	175	4.26	0.08	-	1.64	-	-
	176	4.28	0.06	-	1.45	-	-
	185	4.18	0.14	-	1.56	-	-
	186	4.28	0.14	-	1.82	-	-
	187	4.29	0.10	-	1.76	-	-
	188	4.26	0.08	-	1.46	-	-

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 24 of 45

Table 3-18
n261, mid channel, antenna M2 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) ($\Delta_{\min}$)

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M2	0	1.61	1.66	0.25	-	3.92	-
	3	1.46	1.62	0.24	-	4.12	-
	6	1.87	1.70	0.12	-	4.40	-
	9	1.72	1.50	0.11	-	4.15	-
	13	1.58	1.72	0.22	-	4.25	-
	14	1.61	2.29	0.36	-	4.22	-
	15	1.88	1.46	0.06	-	3.74	-
	16	1.65	1.20	0.28	-	3.72	-
	25	1.38	2.43	0.45	-	4.22	-
	26	1.98	2.10	0.23	-	4.31	-
	27	2.05	1.28	0.07	-	3.75	-
	34	1.07	2.63	0.71	-	4.40	-
	35	1.90	2.12	0.23	-	4.09	-
	36	2.01	1.93	0.14	-	4.09	-
	37	2.29	1.59	0.07	-	4.27	-
	38	2.32	1.04	0.07	-	3.92	-
	49	1.47	2.50	0.52	-	4.36	-
	50	2.05	2.05	0.17	-	4.09	-
	51	2.14	1.86	0.07	-	4.30	-
	52	2.25	1.27	0.04	-	4.09	-
	128	1.69	1.45	0.18	-	3.89	-
	131	1.65	1.76	0.20	-	4.14	-
	134	1.86	1.48	0.13	-	4.39	-
	137	1.81	1.70	0.16	-	4.40	-
	141	2.24	1.24	0.26	-	4.39	-
	142	2.26	1.84	0.16	-	4.19	-
	143	1.38	1.98	0.16	-	3.93	-
	144	1.09	1.70	0.27	-	3.64	-
	153	2.44	1.43	0.22	-	4.40	-
	154	2.00	2.15	0.05	-	4.36	-
	155	1.09	1.70	0.27	-	3.64	-
	162	2.37	1.00	0.64	-	4.02	-
	163	2.45	1.79	0.17	-	4.34	-
	164	2.07	2.05	0.08	-	4.26	-
	165	1.48	2.30	0.07	-	4.36	-
	166	1.03	2.37	0.14	-	4.19	-
	177	2.58	1.43	0.41	-	4.39	-
	178	2.25	1.98	0.03	-	4.39	-
	179	1.83	2.20	0.14	-	4.27	-
	180	1.14	2.36	0.07	-	4.23	-

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 25 of 45

Table 3-19
n261, mid channel, antenna M3 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M3	1	1.63	1.52	-	0.24	-	4.06
	4	1.53	1.59	-	0.25	-	4.40
	7	1.60	1.53	-	0.13	-	4.11
	10	1.70	1.56	-	0.12	-	4.40
	17	2.06	1.14	-	0.15	-	4.01
	18	2.03	1.55	-	0.03	-	4.08
	19	1.61	2.20	-	0.38	-	4.40
	20	1.31	2.21	-	0.48	-	4.38
	28	2.14	1.40	-	0.03	-	4.03
	29	1.90	2.03	-	0.25	-	4.40
	30	1.54	2.22	-	0.41	-	4.40
	39	2.48	1.18	-	0.05	-	4.35
	40	2.14	1.64	-	0.05	-	4.29
	41	2.04	1.93	-	0.17	-	4.40
	42	1.86	2.15	-	0.27	-	4.40
	43	1.08	2.30	-	0.61	-	4.22
	53	2.28	1.41	-	0.05	-	4.31
	54	2.07	1.76	-	0.07	-	4.32
	55	2.08	2.09	-	0.14	-	4.40
	56	1.45	2.27	-	0.48	-	4.40
	129	1.73	1.54	-	0.20	-	4.27
	132	1.66	1.67	-	0.24	-	4.40
	135	1.81	1.37	-	0.15	-	4.40
	138	1.63	1.68	-	0.15	-	4.40
	145	1.16	1.95	-	0.32	-	4.39
	146	1.74	2.10	-	0.08	-	4.39
	147	2.33	1.76	-	0.18	-	4.36
	148	2.20	1.25	-	0.25	-	4.40
	156	1.64	2.16	-	0.07	-	4.39
	157	2.02	2.03	-	0.05	-	4.40
	158	1.97	1.22	-	0.37	-	4.40
	167	1.05	2.39	-	0.10	-	4.40
	168	1.65	2.13	-	0.15	-	4.33
	169	2.01	1.91	-	0.03	-	4.40
	170	2.40	1.57	-	0.25	-	4.40
	171	2.43	0.94	-	0.73	-	4.40
	181	1.34	2.25	-	0.09	-	4.40
	182	1.89	2.04	-	0.19	-	4.26
	183	2.20	1.78	-	0.05	-	4.40
	184	2.43	1.12	-	0.51	-	4.40

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 26 of 45

Table 3-20
n260, mid channel, antenna M0 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M0	2	4.40	0.13	-	1.75	-	-
	5	4.07	0.14	-	1.85	-	-
	8	4.40	0.12	-	1.91	-	-
	11	4.27	0.12	-	1.87	-	-
	12	4.15	0.11	-	1.65	-	-
	21	4.40	0.16	-	2.01	-	-
	22	4.18	0.12	-	1.82	-	-
	23	4.40	0.18	-	1.88	-	-
	24	4.13	0.17	-	1.79	-	-
	31	4.28	0.11	-	1.97	-	-
	32	4.03	0.10	-	1.61	-	-
	33	4.03	0.12	-	1.27	-	-
	44	4.40	0.26	-	2.75	-	-
	45	4.40	0.16	-	2.26	-	-
	46	4.40	0.19	-	1.89	-	-
	47	3.40	0.11	-	1.21	-	-
	48	4.40	0.23	-	2.60	-	-
	57	4.36	0.19	-	2.40	-	-
	58	4.06	0.18	-	2.01	-	-
	59	3.84	0.17	-	1.54	-	-
	60	4.39	0.13	-	1.86	-	-
	130	4.19	0.14	-	1.90	-	-
	133	4.40	0.15	-	1.61	-	-
	136	4.40	0.14	-	1.67	-	-
	139	3.93	0.13	-	1.48	-	-
	140	3.90	0.10	-	1.50	-	-
	149	4.09	0.08	-	1.12	-	-
	150	3.36	0.11	-	1.40	-	-
	151	3.77	0.08	-	1.25	-	-
	152	3.76	0.19	-	2.08	-	-
	159	4.21	0.14	-	1.56	-	-
	160	4.38	0.14	-	1.48	-	-
	161	3.86	0.14	-	1.79	-	-
	172	3.86	0.19	-	1.95	-	-
	173	3.25	0.18	-	1.75	-	-
	174	4.40	0.15	-	1.44	-	-
	175	3.54	0.14	-	1.52	-	-
	176	3.58	0.16	-	1.70	-	-
	185	3.65	0.20	-	2.04	-	-
	186	4.31	0.16	-	1.98	-	-
	187	3.39	0.11	-	1.22	-	-
	188	3.84	0.18	-	1.85	-	-

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 27 of 45

Table 3-21
n260, mid channel, antenna M2 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) ($\Delta_{\min}$)

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M2	0	1.94	1.71	0.18	-	4.39	-
	3	1.51	1.61	0.05	-	3.69	-
	6	1.15	1.19	0.21	-	2.84	-
	9	1.67	1.64	0.11	-	4.08	-
	13	1.61	1.32	0.18	-	4.12	-
	14	1.87	1.88	0.13	-	3.98	-
	15	1.95	2.04	0.11	-	4.40	-
	16	1.82	1.70	0.15	-	4.36	-
	25	1.63	1.41	0.18	-	3.91	-
	26	2.05	2.18	0.08	-	4.30	-
	27	1.88	1.89	0.13	-	4.40	-
	34	1.60	1.54	0.17	-	3.69	-
	35	2.06	2.01	0.11	-	4.09	-
	36	2.04	2.27	0.07	-	4.29	-
	37	1.54	1.41	0.21	-	3.17	-
	38	1.40	1.26	0.40	-	3.48	-
	49	1.75	1.75	0.15	-	3.84	-
	50	2.24	2.26	0.07	-	4.39	-
	51	1.77	1.92	0.10	-	3.85	-
	52	1.38	1.20	0.39	-	3.10	-
	128	1.36	2.63	0.13	-	4.40	-
	131	1.06	2.40	0.28	-	4.04	-
	134	0.96	2.69	0.15	-	4.33	-
	137	1.22	2.46	0.10	-	4.03	-
	141	0.84	2.11	0.27	-	4.04	-
	142	1.61	3.16	0.18	-	4.40	-
	143	1.30	2.40	0.19	-	4.23	-
	144	0.99	1.70	0.28	-	3.58	-
	153	1.12	2.24	0.31	-	3.85	-
	154	1.15	2.63	0.09	-	3.76	-
	155	0.73	2.43	0.34	-	4.40	-
	162	0.90	2.30	0.27	-	4.40	-
	163	0.94	2.65	0.33	-	3.49	-
	164	1.86	2.90	0.04	-	4.39	-
	165	1.27	3.28	0.14	-	4.37	-
	166	1.11	2.18	0.45	-	4.40	-
	177	0.96	2.27	0.41	-	3.44	-
	178	1.50	3.08	0.10	-	4.27	-
	179	1.57	3.15	0.02	-	4.40	-
	180	1.28	2.09	0.51	-	4.17	-

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 28 of 45

Table 3-22
n260, mid channel, antenna M3 simulated 4cm² PD at PD_Design_Target
(if simulation performed with correct housing material properties) (Δ_{min})

Module	Beam ID_1	Simulated 4cm ² PD(W/m ²) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S1 (Front)	S2 (Back)	S3 (Left)	S4 (Right)	S5 (Top)	S6 (Bottom)
M3	1	1.80	1.64	-	0.18	-	4.13
	4	1.46	1.58	-	0.04	-	3.56
	7	1.18	1.22	-	0.20	-	2.88
	10	1.64	1.68	-	0.12	-	4.19
	17	1.66	1.60	-	0.15	-	4.10
	18	1.82	1.92	-	0.12	-	4.10
	19	1.66	1.62	-	0.14	-	3.69
	20	1.59	1.47	-	0.15	-	4.05
	28	1.75	1.77	-	0.14	-	4.13
	29	1.93	2.03	-	0.07	-	3.90
	30	1.47	1.27	-	0.16	-	3.81
	39	1.39	1.34	-	0.33	-	3.61
	40	1.44	1.29	-	0.27	-	2.99
	41	2.01	2.22	-	0.04	-	4.12
	42	1.76	1.87	-	0.21	-	3.89
	43	1.47	1.48	-	0.18	-	3.84
	53	1.31	1.21	-	0.43	-	3.15
	54	1.74	1.83	-	0.04	-	3.72
	55	2.29	2.26	-	0.10	-	4.40
	56	1.55	1.52	-	0.15	-	3.64
	129	1.23	2.73	-	0.13	-	4.40
	132	1.23	2.35	-	0.18	-	4.03
	135	0.87	2.54	-	0.11	-	3.86
	138	1.29	2.06	-	0.18	-	3.23
	145	1.05	2.07	-	0.25	-	3.72
	146	0.98	2.17	-	0.14	-	3.42
	147	1.40	3.07	-	0.15	-	4.31
	148	0.99	1.74	-	0.28	-	3.60
	156	0.73	2.47	-	0.30	-	4.27
	157	1.68	3.28	-	0.05	-	4.40
	158	0.90	1.87	-	0.24	-	3.52
	167	1.08	2.02	-	0.36	-	4.13
	168	0.99	2.69	-	0.24	-	3.85
	169	1.76	2.97	-	0.03	-	4.40
	170	1.11	2.89	-	0.17	-	3.69
	171	1.04	1.92	-	0.34	-	4.22
	181	1.26	1.90	-	0.49	-	4.10
	182	1.39	3.26	-	0.04	-	4.40
	183	1.55	3.04	-	0.05	-	4.25
	184	1.09	2.28	-	0.36	-	3.27

Please note the above scaled simulation values correspond to PD_design_target if the simulation was performed with correct housing material properties.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 29 of 45

Table 3-23
4cm² psPD of the selected beams measured on the corresponding
surfaces that are not selected for $\Delta_{\min}$ determination

Band	Antenna	Beam ID	Surface	input.power.limit (dBm)	Meas. 4cm ² PD (W/m ²)
n258	M0	188	Back	0.3	2.96
	M0	188	Right	0.3	3.9
	M2	52	Back	1.1	1.38
	M2	34	Front	1.0	1.25
	M2	38	Left	2.8	1.88
	M3	42	Back	-0.3	1.43
	M3	39	Front	-0.3	2.68
	M3	43	Right	0.8	0.397
n261	M0	173	Back	0.8	0.107
	M0	160	Right	3.0	1.02
	M2	34	Back	0.3	2.24
	M2	177	Front	-0.3	2.19
	M2	34	Left	0.3	0.067
	M3	167	Back	0.3	1.35
	M3	39	Front	1.7	0.098
	M3	171	Right	0.6	0.472
n260	M0	44	Back	3.9	0.214
	M0	44	Right	3.9	2
	M2	165	Back	2.0	2.45
	M2	50	Front	0.5	0.053
	M2	180	Left	2.1	0.278
	M3	157	Back	2.4	2.64
	M3	55	Front	0.6	1.88
	M3	181	Right	0.7	0.403

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 30 of 45

3.7 Scaling Factor for Single Beams

To determine the input power limit at each antenna port, simulation was performed at low, mid, and high channel for each mmW band supported, with 6 dBm input power per active port for n258 band, n261 band, and n260 band:

1. Obtained $PD_{surface}$ value (the worst PD among all identified surfaces of the DUT) at all three channels for all single beams specified in the codebook.
2. Derived a scaling factor at low, mid and high channel, $s(i)_{low_or_mid_or_high}$, by:

$$s(i)_{low_or_mid_or_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, i \in single\ beams \quad (1)$$

3. Determined the worst-case scaling factor, $s(i)$, among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i \in single\ beams \quad (2)$$

and this scaling factor applies to the input power at each antenna port.

For 2nd generation of Smart Transmit, “Qualcomm MG Script” prints the `sim.powerlimit` for all three channels, denoted as `sim.powerlimit_L`, `sim.powerlimit_M`, and `sim.powerlimit_H`. The `sim.powerlimit` is determined by: `sim.powerlimit = min{sim.powerlimit_L, sim.powerlimit_M, sim.powerlimit_H}`.

3.8 Scaling Factor for Beam Pairs

Per the manufacturer, the relative phase between beam pair is not controlled in the chipset design and could vary from run to run. Therefore, for each beam pair, based on the simulation results, the worst-case scaling factor was determined mathematically to ensure the compliance. The worst-case PD for MIMO operations was found by sweeping the relative phase for all possible angles to ensure a conservative assessment. The power density simulation report contains the worst-case power density for each surface after sweeping through all relative phases between beams.

Once the power density was determined for the worst-case $\emptyset$, the scaling factor was obtained by the below equation for low, mid and high channels:

$$s(i)_{low_or_mid_or_high} = \frac{PD\ design\ target}{total\ PD\ (\emptyset(i)_{worstcase})}, i \in beam\ pairs \quad (3)$$

The $total\ PD\ (\emptyset_{worstcase})$ varies with channel and beam pair, the lowest scaling factor among all three channels, $s(i)$, is determined for the beam pair i :

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i \in beam\ pairs \quad (4)$$

For 2nd generation of Smart Transmit, “Qualcomm MG Script” prints the `sim.powerlimit` for all three channels, denoted as `sim.powerlimit_L`, `sim.powerlimit_M`, and `sim.powerlimit_H`. The `sim.powerlimit` is determined by: `sim.powerlimit = min{sim.powerlimit_L, sim.powerlimit_M, sim.powerlimit_H}`.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 31 of 45

3.9 Input.Power.Limit Calculations

The PD Char specifies the limit of input power at antenna port that corresponds to *PD_design_target* for all the beams.

Ideally, if there is no uncertainty associated with hardware design, the input power limit, denoted as *input.power.limit(i)*, for beam *i* can be obtained after accounting for the housing influence (Δ_{min}), given by:

- For n258, n261, and n260

$$input.power.limit(i) = 6 \text{ dBm} + 10 * \log(s(i)) + \Delta_{min}, i \in \text{all beams} \quad (5)$$

where 6 dBm is the input power used in simulation for n258, n261, and n260; $s(i)$ is the scaling factor obtained from Eq. (2) or Eq. (4) for beam *i*; Δ_{min} is the worst-case housing influence factor for beam *i*.

If simulation overestimates the housing influence, then Δ_{min} (= simulated PD – measured PD) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates the loss, then Δ_{min} is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

In reality the hardware design has uncertainty which must be properly considered. The device design related uncertainty is embedded in the process of Δ_{min} determination. Since the device uncertainty is already accounted for in *PD_design_target*, it needs to be removed to avoid double counting this uncertainty.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 32 of 45

Thus, Equation 5 is modified to:

If -TxAGC uncertainty < Δ_{min} < TxAGC uncertainty,

$$input.power.limit(i) = 6 \text{ dBm} + 10 * \log(s(i)), i \in \text{all beams, for n258, n261, n260} \quad (6)$$

else if Δ_{min} < -TxAGC uncertainty,

$$input.power.limit(i) = 6 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{min} + \text{TxAGC uncertainty}),$$

$$i \in \text{all beams, for n258, n261, n260} \quad (7)$$

else if Δ_{min} > TxAGC uncertainty,

$$input.power.limit(i) = 6 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{min} - \text{TxAGC uncertainty}),$$

$$i \in \text{all beams, for n258, n261, n260} \quad (8)$$

Following above logic, the *input.power.limit* for this DUT can be calculated using Equations (6), (7), (8), i.e.,

Table 3-24
***input.power.limit* Calculation**

	Antenna	Δ_{min}	TxAGC Uncertainty	<i>input.power.limit</i>	Notes
		(dB)	(dB)	(dBm)	
n258	M0 (V Beams)	2.04	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 1.04$	Using Eq.8
	M0 (H Beams)	2.35	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 1.35$	Using Eq.8
	M2 (V Beams)	2.76	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 1.76$	Using Eq.8
	M2 (H Beams)	3.29	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 2.29$	Using Eq.8
	M3 (V Beams)	1.72	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.72$	Using Eq.8
	M3 (H Beams)	1.59	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.59$	Using Eq.8
n261	M0 (V Beams)	2.61	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 1.61$	Using Eq.8
	M0 (H Beams)	3.31	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 2.31$	Using Eq.8
	M2 (V Beams)	1.67	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.67$	Using Eq.8
	M2 (H Beams)	1.18	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.18$	Using Eq.8
	M3 (V Beams)	2.62	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 1.62$	Using Eq.8
	M3 (H Beams)	1.41	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.41$	Using Eq.8
n260	M0 (V Beams)	4.83	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 3.83$	Using Eq.8
	M0 (H Beams)	4.85	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 3.85$	Using Eq.8
	M2 (V Beams)	2.11	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 1.11$	Using Eq.8
	M2 (H Beams)	3.01	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 2.01$	Using Eq.8
	M3 (V Beams)	1.99	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.99$	Using Eq.8
	M3 (H Beams)	1.49	1	$input.power.limit(i) = 6 \text{ dBm} + 10 \times \log(s(i)) + 0.49$	Using Eq.8

Thus, the DUT PD Char for n258, n261, and n260 bands is as shown in the tables below. The full simulation results used to support this calculation can be found in the Power Density Simulation Report.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 33 of 45

3.10 PD Char

Table 3-25
5G NR n258 Antenna M2 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n258	0	-	5.7
n258	3	-	8.9
n258	6	-	7.4
n258	9	-	6.9
n258	13	-	5.7
n258	14	-	5.6
n258	15	-	3.8
n258	16	-	5.4
n258	25	-	3.8
n258	26	-	3.3
n258	27	-	5.1
n258	34	-	1.0
n258	35	-	1.0
n258	36	-	1.7
n258	37	-	0.8
n258	38	-	2.8
n258	49	-	0.9
n258	50	-	1.7
n258	51	-	1.2
n258	52	-	1.1
n258	-	128	9.9
n258	-	131	7.5
n258	-	134	8.9
n258	-	137	8.3
n258	-	141	5.0
n258	-	142	5.9
n258	-	143	5.5
n258	-	144	5.4
n258	-	153	5.9
n258	-	154	6.1
n258	-	155	5.4
n258	-	162	1.8
n258	-	163	2.3
n258	-	164	3.1
n258	-	165	2.8
n258	-	166	1.7
n258	-	177	1.8
n258	-	178	3.1
n258	-	179	3.6
n258	-	180	1.6
n258	0	128	3.2
n258	3	131	4.5
n258	6	134	4.5
n258	9	137	3.7
n258	13	141	1.7
n258	14	142	2.1
n258	15	143	1.7
n258	16	144	1.5
n258	25	153	0.7
n258	26	154	1.7
n258	27	155	1.3
n258	34	162	-2.2
n258	35	163	-2.4
n258	36	164	-0.7
n258	37	165	-2.3
n258	38	166	-2.0
n258	49	177	-2.4
n258	50	178	-1.2
n258	51	179	-1.3
n258	52	180	-2.8

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 34 of 45

Table 3-26
5G NR n258 Antenna M3 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n258	1	-	5.0
n258	4	-	7.3
n258	7	-	6.8
n258	10	-	6.1
n258	17	-	4.3
n258	18	-	4.1
n258	19	-	4.0
n258	20	-	3.9
n258	28	-	2.5
n258	29	-	2.6
n258	30	-	3.3
n258	39	-	-0.3
n258	40	-	0.7
n258	41	-	0.8
n258	42	-	-0.3
n258	43	-	0.8
n258	53	-	0.0
n258	54	-	1.3
n258	55	-	0.1
n258	56	-	-0.2
n258	-	129	7.8
n258	-	132	6.5
n258	-	135	7.4
n258	-	138	7.2
n258	-	145	4.3
n258	-	146	3.8
n258	-	147	4.2
n258	-	148	4.2
n258	-	156	4.5
n258	-	157	4.6
n258	-	158	4.1
n258	-	167	0.4
n258	-	168	2.0
n258	-	169	2.2
n258	-	170	1.2
n258	-	171	0.7
n258	-	181	1.3
n258	-	182	2.1
n258	-	183	2.1
n258	-	184	0.3
n258	1	129	2.2
n258	4	132	3.4
n258	7	135	3.7
n258	10	138	3.0
n258	17	145	0.7
n258	18	146	0.1
n258	19	147	0.7
n258	20	148	0.2
n258	28	156	0.0
n258	29	157	0.7
n258	30	158	0.2
n258	39	167	-3.6
n258	40	168	-2.7
n258	41	169	-2.4
n258	42	170	-3.4
n258	43	171	-3.1
n258	53	181	-3.4
n258	54	182	-2.2
n258	55	183	-2.8
n258	56	184	-3.6

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 35 of 45

Table 3-27
5G NR n258 Antenna M0 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n258	2	-	6.7
n258	5	-	7.3
n258	8	-	7.1
n258	11	-	6.6
n258	12	-	6.4
n258	21	-	5.4
n258	22	-	3.9
n258	23	-	3.2
n258	24	-	5.3
n258	31	-	4.8
n258	32	-	3.6
n258	33	-	4.8
n258	44	-	-0.1
n258	45	-	-0.5
n258	46	-	0.5
n258	47	-	-0.2
n258	48	-	2.5
n258	57	-	-0.1
n258	58	-	0.8
n258	59	-	-0.5
n258	60	-	1.3
n258	-	130	6.1
n258	-	133	6.7
n258	-	136	6.4
n258	-	139	6.2
n258	-	140	6.6
n258	-	149	3.9
n258	-	150	2.3
n258	-	151	4.4
n258	-	152	5.0
n258	-	159	2.3
n258	-	160	2.7
n258	-	161	2.7
n258	-	172	-0.8
n258	-	173	-0.1
n258	-	174	0.1
n258	-	175	-0.2
n258	-	176	1.2
n258	-	185	-0.8
n258	-	186	-0.1
n258	-	187	0.3
n258	-	188	0.3
n258	2	130	2.3
n258	5	133	2.5
n258	8	136	2.4
n258	11	139	2.2
n258	12	140	2.8
n258	21	149	0.7
n258	22	150	-0.7
n258	23	151	-0.2
n258	24	152	1.7
n258	31	159	0.5
n258	32	160	0.4
n258	33	161	0.9
n258	44	172	-3.8
n258	45	173	-4.0
n258	46	174	-3.7
n258	47	175	-3.7
n258	48	176	-2.1
n258	57	185	-4.0
n258	58	186	-3.2
n258	59	187	-4.0
n258	60	188	-2.5

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 36 of 45

Table 3-28
5G NR n261 Antenna M2 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n261	0	-	5.2
n261	3	-	6.2
n261	6	-	6.9
n261	9	-	5.8
n261	13	-	3.3
n261	14	-	2.6
n261	15	-	3.0
n261	16	-	2.9
n261	25	-	2.7
n261	26	-	2.9
n261	27	-	2.8
n261	34	-	0.3
n261	35	-	0.2
n261	36	-	0.4
n261	37	-	0.3
n261	38	-	0.5
n261	49	-	-0.1
n261	50	-	0.3
n261	51	-	0.5
n261	52	-	0.1
n261	-	128	5.2
n261	-	131	5.8
n261	-	134	6.4
n261	-	137	6.1
n261	-	141	3.0
n261	-	142	2.8
n261	-	143	2.1
n261	-	144	2.2
n261	-	153	3.0
n261	-	154	2.5
n261	-	155	2.2
n261	-	162	0.0
n261	-	163	0.2
n261	-	164	0.8
n261	-	165	-0.1
n261	-	166	-0.1
n261	-	177	-0.3
n261	-	178	0.7
n261	-	179	0.5
n261	-	180	-0.3
n261	0	128	0.7
n261	3	131	1.4
n261	6	134	2.2
n261	9	137	1.6
n261	13	141	-0.9
n261	14	142	-1.2
n261	15	143	-1.2
n261	16	144	-0.7
n261	25	153	-0.4
n261	26	154	-1.4
n261	27	155	-0.8
n261	34	162	-3.9
n261	35	163	-4.1
n261	36	164	-3.5
n261	37	165	-4.1
n261	38	166	-3.4
n261	49	177	-4.0
n261	50	178	-3.7
n261	51	179	-3.8
n261	52	180	-4.0

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 37 of 45

Table 3-29
5G NR n261 Antenna M3 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n261	1	-	6.3
n261	4	-	7.4
n261	7	-	7.4
n261	10	-	7.3
n261	17	-	4.2
n261	18	-	4.6
n261	19	-	3.6
n261	20	-	3.9
n261	28	-	4.0
n261	29	-	3.8
n261	30	-	3.6
n261	39	-	1.7
n261	40	-	1.3
n261	41	-	1.5
n261	42	-	1.2
n261	43	-	0.8
n261	53	-	1.3
n261	54	-	1.5
n261	55	-	1.5
n261	56	-	0.8
n261	-	129	5.6
n261	-	132	6.1
n261	-	135	6.7
n261	-	138	6.7
n261	-	145	2.9
n261	-	146	2.8
n261	-	147	3.2
n261	-	148	3.5
n261	-	156	3.7
n261	-	157	3.0
n261	-	158	3.4
n261	-	167	0.3
n261	-	168	0.8
n261	-	169	1.0
n261	-	170	0.1
n261	-	171	0.6
n261	-	181	0.2
n261	-	182	1.2
n261	-	183	0.7
n261	-	184	0.1
n261	1	129	1.3
n261	4	132	2.0
n261	7	135	2.8
n261	10	138	2.5
n261	17	145	-0.2
n261	18	146	0.1
n261	19	147	-0.8
n261	20	148	-0.1
n261	28	156	-0.2
n261	29	157	-1.0
n261	30	158	-0.9
n261	39	167	-2.9
n261	40	168	-3.5
n261	41	169	-3.0
n261	42	170	-3.7
n261	43	171	-3.7
n261	53	181	-3.7
n261	54	182	-3.1
n261	55	183	-3.3
n261	56	184	-3.7

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 38 of 45

Table 3-30
5G NR n261 Antenna M0 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n261	2	-	5.1
n261	5	-	5.3
n261	8	-	5.3
n261	11	-	5.3
n261	12	-	5.8
n261	21	-	2.8
n261	22	-	2.4
n261	23	-	1.9
n261	24	-	1.8
n261	31	-	3.0
n261	32	-	3.2
n261	33	-	2.1
n261	44	-	0.8
n261	45	-	-0.6
n261	46	-	-1.6
n261	47	-	-1.0
n261	48	-	-0.9
n261	57	-	0.2
n261	58	-	-1.4
n261	59	-	-1.2
n261	60	-	-1.0
n261	-	130	5.8
n261	-	133	6.0
n261	-	136	6.4
n261	-	139	6.3
n261	-	140	7.0
n261	-	149	3.2
n261	-	150	3.5
n261	-	151	2.7
n261	-	152	2.5
n261	-	159	3.5
n261	-	160	3.0
n261	-	161	2.5
n261	-	172	1.3
n261	-	173	0.8
n261	-	174	0.2
n261	-	175	-1.1
n261	-	176	-0.3
n261	-	185	1.6
n261	-	186	0.7
n261	-	187	-0.9
n261	-	188	-0.5
n261	2	130	1.7
n261	5	133	2.0
n261	8	136	2.3
n261	11	139	2.3
n261	12	140	2.4
n261	21	149	-0.7
n261	22	150	-0.6
n261	23	151	-1.1
n261	24	152	-1.5
n261	31	159	-0.6
n261	32	160	0.6
n261	33	161	-1.3
n261	44	172	-2.4
n261	45	173	-3.4
n261	46	174	-4.4
n261	47	175	-4.5
n261	48	176	-4.2
n261	57	185	-2.9
n261	58	186	-4.2
n261	59	187	-4.6
n261	60	188	-4.4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 39 of 45

Table 3-31
5G NR n260 Antenna M2 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n260	0	-	5.7
n260	3	-	5.3
n260	6	-	6.0
n260	9	-	6.4
n260	13	-	2.7
n260	14	-	3.0
n260	15	-	2.8
n260	16	-	2.6
n260	25	-	2.8
n260	26	-	3.0
n260	27	-	2.6
n260	34	-	0.4
n260	35	-	0.7
n260	36	-	0.5
n260	37	-	0.2
n260	38	-	0.4
n260	49	-	0.8
n260	50	-	0.5
n260	51	-	0.4
n260	52	-	0.2
n260	-	128	6.9
n260	-	131	7.0
n260	-	134	7.4
n260	-	137	7.5
n260	-	141	4.2
n260	-	142	4.3
n260	-	143	5.1
n260	-	144	3.9
n260	-	153	4.2
n260	-	154	4.8
n260	-	155	4.3
n260	-	162	1.7
n260	-	163	1.1
n260	-	164	1.3
n260	-	165	2.0
n260	-	166	1.9
n260	-	177	1.4
n260	-	178	1.4
n260	-	179	1.3
n260	-	180	2.1
n260	0	128	2.3
n260	3	131	2.0
n260	6	134	3.0
n260	9	137	3.0
n260	13	141	-0.7
n260	14	142	-0.4
n260	15	143	0.3
n260	16	144	-0.6
n260	25	153	-0.6
n260	26	154	0.2
n260	27	155	-0.6
n260	34	162	-3.3
n260	35	163	-3.2
n260	36	164	-2.9
n260	37	165	-3.0
n260	38	166	-3.0
n260	49	177	-3.2
n260	50	178	-2.7
n260	51	179	-3.0
n260	52	180	-3.2

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 40 of 45

Table 3-32
5G NR n260 Antenna M3 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n260	1	-	5.4
n260	4	-	5.2
n260	7	-	5.9
n260	10	-	6.3
n260	17	-	2.3
n260	18	-	2.5
n260	19	-	2.7
n260	20	-	2.3
n260	28	-	2.3
n260	29	-	2.8
n260	30	-	2.5
n260	39	-	0.1
n260	40	-	-0.1
n260	41	-	0.4
n260	42	-	0.7
n260	43	-	0.1
n260	53	-	0.0
n260	54	-	0.2
n260	55	-	0.6
n260	56	-	0.3
n260	-	129	5.4
n260	-	132	5.4
n260	-	135	5.6
n260	-	138	6.6
n260	-	145	3.3
n260	-	146	3.5
n260	-	147	2.8
n260	-	148	2.4
n260	-	156	2.9
n260	-	157	2.4
n260	-	158	2.4
n260	-	167	0.7
n260	-	168	0.4
n260	-	169	-0.2
n260	-	170	-0.2
n260	-	171	0.5
n260	-	181	0.7
n260	-	182	0.2
n260	-	183	-0.1
n260	-	184	-0.2
n260	1	129	1.6
n260	4	132	1.2
n260	7	135	2.3
n260	10	138	2.8
n260	17	145	-0.3
n260	18	146	-0.4
n260	19	147	-1.3
n260	20	148	-1.4
n260	28	156	-1.0
n260	29	157	-0.9
n260	30	158	-1.4
n260	39	167	-3.7
n260	40	168	-3.9
n260	41	169	-3.6
n260	42	170	-3.7
n260	43	171	-3.9
n260	53	181	-3.6
n260	54	182	-3.6
n260	55	183	-3.4
n260	56	184	-3.9

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 41 of 45

Table 3-33
5G NR n260 Antenna M0 *input.power.limit*

Band	V Beam ID	H Beam ID	input.power.limit (dBm)
n260	2	-	10.1
n260	5	-	10.5
n260	8	-	10.6
n260	11	-	10.5
n260	12	-	9.0
n260	21	-	6.9
n260	22	-	7.6
n260	23	-	9.0
n260	24	-	8.3
n260	31	-	6.4
n260	32	-	7.2
n260	33	-	9.1
n260	44	-	3.9
n260	45	-	2.9
n260	46	-	5.4
n260	47	-	4.4
n260	48	-	3.7
n260	57	-	4.0
n260	58	-	3.7
n260	59	-	5.1
n260	60	-	4.5
n260	-	130	9.7
n260	-	133	10.3
n260	-	136	10.5
n260	-	139	10.2
n260	-	140	10.0
n260	-	149	7.5
n260	-	150	7.1
n260	-	151	7.5
n260	-	152	7.3
n260	-	159	6.8
n260	-	160	6.8
n260	-	161	7.1
n260	-	172	3.8
n260	-	173	3.4
n260	-	174	4.0
n260	-	175	4.4
n260	-	176	3.8
n260	-	185	4.1
n260	-	186	4.1
n260	-	187	3.7
n260	-	188	4.4
n260	2	130	6.1
n260	5	133	6.5
n260	8	136	6.6
n260	11	139	6.8
n260	12	140	5.6
n260	21	149	3.6
n260	22	150	4.9
n260	23	151	4.5
n260	24	152	4.2
n260	31	159	5.2
n260	32	160	4.8
n260	33	161	4.3
n260	44	172	0.3
n260	45	173	0.4
n260	46	174	0.8
n260	47	175	1.1
n260	48	176	0.5
n260	57	185	0.5
n260	58	186	0.8
n260	59	187	1.2
n260	60	188	1.4

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 42 of 45

4

EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	N/A	Annual	N/A	WL25-1
-	WL40-1	Conducted Cable Set (40GHz)	N/A	Annual	N/A	WL40-1
Agilent	N9038A	MXE EMI Receiver	N/A	Annual	N/A	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	N/A	Annual	N/A	MY52350166
Emco	3116	Horn Antenna (18 - 40GHz)	N/A	Triennial	N/A	9203-2178
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	N/A	Annual	N/A	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	N/A	Annual	N/A	103200
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	N/A	Biennial	N/A	A051107
SPEAG	EUmmWV3	EUmmWV3 Probe	6/15/2022	Annual	6/15/2023	9364
SPEAG	EUmmWV3	EUmmWV3 Probe	12/13/2021	Annual	12/13/2022	9416
SPEAG	SM 003 100 AA	30GHz System Verification Ka- Band Source Antenna	10/19/2021	Annual	10/19/2022	1015
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/13/2021	Annual	12/13/2022	1644
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/20/2021	Annual	10/20/2022	1333
Agilent	N9030A	PXA Signal Analyzer (44GHz)	N/A	Annual	N/A	MY52350166
Emco	3115	Horn Antenna (1-18GHz)	N/A	Biennial	N/A	9704-5182
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	N/A	Annual	N/A	MY49430494
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	N/A	Annual	N/A	100342
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	N/A	Biennial	N/A	A051107

Note:

- Each equipment item was used solely within its respective calibration period.

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 43 of 45

5 MEASUREMENT UNCERTAINTIES

a	b	c	d	e	f =	g
					b x e/d	
Uncertainty Component	Unc.	Prob.			ui	
	(± dB)	Dist.	Div.	ci	(± dB)	vi
Calibration	0.49	N	1	1.0	0.49	∞
Probe correction	0	R	1.73	1.0	0.00	∞
Frequency Response (BW ≤ 1 GHz)	0.20	R	1.73	1.0	0.12	∞
Sensor cross coupling	0	R	1.73	1.0	0.00	∞
Isotropy	0.50	R	1.73	1.0	0.29	∞
Linearity	0.20	R	1.73	1.0	0.12	∞
Probe Scattering	0	R	1.73	1.0	0	∞
Probe Positioning Offset	0.30	R	1.73	1.0	0.17	∞
Probe Positioning Repeatability	0.04	R	1.73	1.0	0.02	∞
Sensor Mechanical Offset	0	R	1.73	1.0	0	∞
Probe Spatial Resolution	0	R	1.73	1.0	0	∞
Field Impedance Dependence	0	R	1.73	1.0	0	∞
Amplitude and phase drift	0	R	1.73	1.0	0	∞
Amplitude and phase noise	0.04	R	1.73	1.0	0.02	∞
Measurement area truncation	0	R	1.73	1.0	0	∞
Data acquisition	0.03	N	1	1.0	0.03	∞
Sampling	0	R	1.73	1.0	0	∞
Field Reconstruction	0.60	R	1.73	1.0	0.35	∞
Forward Transformation	0	R	1.73	1.0	0	∞
Power Density Scaling	-	R	1.73	1.0	-	∞
Spatial Averaging	0.10	R	1.73	1.0	0.06	∞
System Detection Limit	0.04	R	1.73	1.0	0.02	∞
Test Sample and Environmental Factors						
Probe Coupling with DUT	0	R	1.73	1.0	0	∞
Modulation Response	0.40	R	1.73	1.0	0.23	∞
Integration Time	0	R	1.73	1.0	0	∞
Response Time	0	R	1.73	1.0	0	∞
Device Holder Influence	0.10	R	1.73	1.0	0.06	∞
DUT Alignment	0	R	1.73	1.0	0	∞
RF Ambient Conditions	0.04	R	1.73	1.0	0.02	∞
Ambient Reflections	0.04	R	1.73	1.0	0.02	∞
Immunity / Secondary Reception	0	R	1.73	1.0	0	∞
Drift of the DUT	0.22	R	1.73	1.0	0.13	∞
Combined Standard Uncertainty (k=1)		RSS			0.76	∞
(95% CONFIDENCE LEVEL)	k=2				1.53	

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 44 of 45

- [1] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [2] IEC TR 63170:2018, Measurement Procedure for the Evaluation of Power Density Related to Human Exposure to Radiofrequency Fields from Wireless Communication Devices Operating between 6 GHz and 100 GHz
- [3] IEC TR 62630 : 2010, Guidance for Evaluating Exposure from Multiple Electromagnetic Sources
- [4] K. Pokovic, T. Schmid, J. Frohlich, and N. Kuster. Novel Probes and Evaluation Procedures to Assess Field Magnitude and Polarization. IEEE Transactions on Electromagnetic Compatibility 42(2): 240 -244, 2000
- [5] R. W. Gerchberg and W. O. Saxton. A Practical Algorithm for the Determination of Phase from Image and Diffraction Plane Pictures. Optik 35(2): 237 – 246, 1972
- [6] A. P. Anderson and S. Sali. New Possibilities for Phaseless Microwave Diagnostics. Part 1: Error Reduction Techniques. IEE Proceedings H – Microwaves, Antennas and Propagation 132(5): 290 – 298, 1985
- [7] FCC KDB 865664 D02 v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz. Federal Communications Commission – Office of Engineering and Technology, Laboratory Division.
- [8] FCC KDB 447498 D01 v02r01: RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. Federal Communications Commission – Office of Engineering and Technology, Laboratory Division.
- [9] November 2017 Telecommunications Certification Body Council (TCBC) Workshop Notes
- [10] October 2018 Telecommunications Certification Body Council (TCBC) Workshop Notes
- [11] April 2019 Telecommunications Certification Body Council (TCBC) Workshop Notes
- [12] November 2019 Telecommunications Certification Body Council (TCBC) Workshop Notes
- [13] SPEAG DASY6 System Handbook (September 2019)

FCC ID: BCGA2435	Near-Field Power Density Part 0 Report	Approved by: Technical Manager
Document S/N: 1C2205090025-28.BCG	DUT Type: Tablet Device	Page 45 of 45