


Plot 7-715. AC Line Conducted Plot with CDD 11n Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB µ V]	Averaqe [dBµV]	Limit [dB µ V]	Marqin [dB]	Line	PE
0.150	FINAL	_	34.47	56.00	-21.53	N	GND
0.150	FINAL	50.5	_	66.00	-15.52	N	GND
0.222	FINAL	_	30.93	52.74	-21.82	N	GND
0.222	FINAL	47.6	_	62.74	-15.15	N	GND
0.517	FINAL	38.1	_	56.00	-17.91	N	GND
0.519	FINAL	_	20.86	46.00	-25.14	N	GND
0.809	FINAL	_	19.83	46.00	-26.17	N	GND
0.827	FINAL	33.3		56.00	-22.73	N	GND
1.401	FINAL	29.9	_	56.00	-26.11	N	GND
1.428	FINAL	_	15.41	46.00	-30.59	N	GND
4.900	FINAL	30.9	_	56.00	-25.14	N	GND
5.091	FINAL	_	16.52	50.00	-33.48	N	GND

Table 7-71. AC Line Conducted Data with CDD 11n Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 421 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 431 of 434



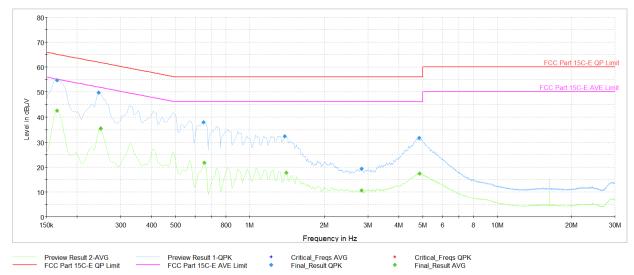


Plot 7-716. AC Line Conducted Plot with CDD 11ax - SU Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB µ V]	Averaqe [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.166	FINAL	_	42.49	55.17	-12.68	L1	GND
0.166	FINAL	54.7	_	65.17	-10.51	L1	GND
0.245	FINAL	49.7	_	61.94	-12.23	L1	GND
0.249	FINAL	_	35.34	51.79	-16.45	L1	GND
0.650	FINAL	37.8	_	56.00	-18.25	L1	GND
0.654	FINAL	_	21.76	46.00	-24.24	L1	GND
1.385	FINAL	32.3	_	56.00	-23.72	L1	GND
1.406	FINAL	_	17.70	46.00	-28.30	L1	GND
2.828	FINAL	19.4	_	56.00	-36.61	L1	GND
2.828	FINAL	_	10.70	46.00	-35.30	L1	GND
4.841	FINAL	31.8		56.00	-24.23	L1	GND
4.855	FINAL	_	17.41	46.00	-28.59	L1	GND

Table 7-72. AC Line Conducted Data with CDD 11ax - SU Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA2435 IC: 579C-A2435	element)	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 432 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Faye 432 01 434



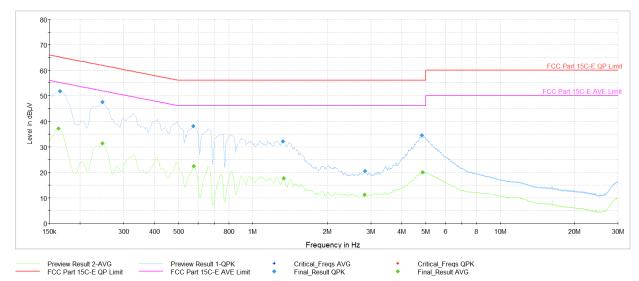

Plot 7-717. AC Line Conducted Plot with CDD 11ax - SU Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Averaqe [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.164	FINAL	_	37.11	55.28	-18.17	N	GND
0.166	FINAL	51.8		65.17	-13.41	N	GND
0.247	FINAL		31.46	51.87	-20.41	N	GND
0.247	FINAL	47.5		61.87	-14.36	N	GND
0.575	FINAL	38.1	_	56.00	-17.92	N	GND
0.578	FINAL		22.46	46.00	-23.54	N	GND
1.327	FINAL	32.2		56.00	-23.78	N	GND
1.336	FINAL	_	17.65	46.00	-28.35	N	GND
2.823	FINAL		11.19	46.00	-34.81	N	GND
2.839	FINAL	20.5		56.00	-35.54	N	GND
4.814	FINAL	34.6	_	56.00	-21.37	N	GND
4.862	FINAL	_	20.09	46.00	-25.91	Ν	GND

Table 7-73. AC Line Conducted Data with CDD 11ax - SU Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 422 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 433 of 434



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2435, IC: 579C-A2435** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 424 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 434 of 434