




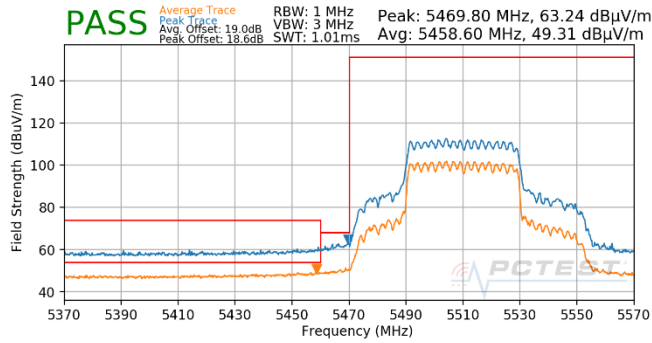


**Plot 7-1809. CDD (Pk & Avg, Ch.102, 802.11ax(SU), MCS2)**

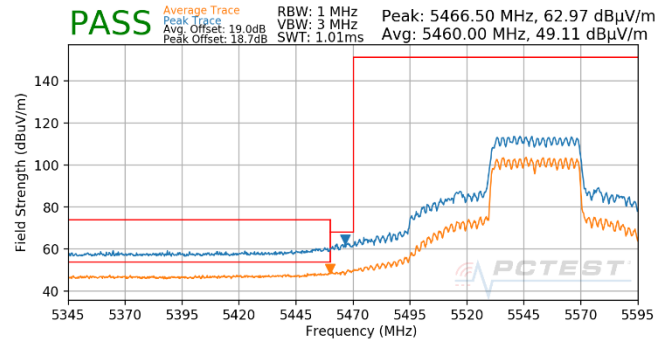


**Plot 7-1812. CDD (Pk & Avg, Ch.110, 802.11ax(SU), MCS2)**

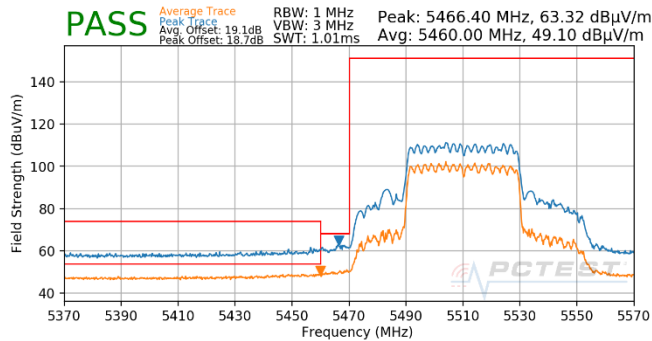


**Plot 7-1810. CDD (Pk & Avg, Ch.102, 802.11ax(SU), MCS3)**

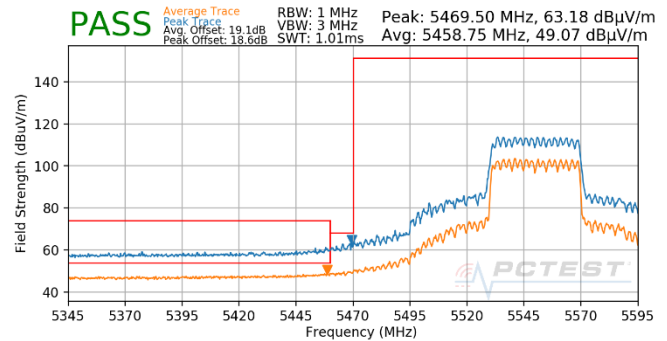

**Plot 7-1813. CDD (Pk & Avg, Ch.110, 802.11ax(SU), MCS3)**

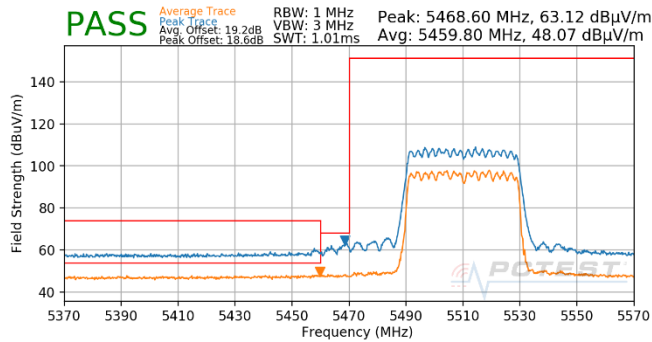


**Plot 7-1811. CDD (Pk & Avg, Ch.102, 802.11ax(SU), MCS5)**

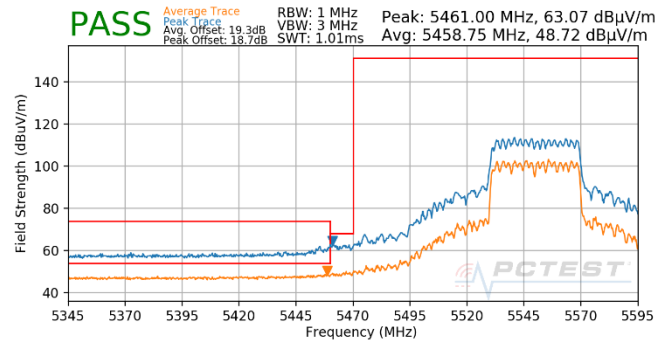


**Plot 7-1814. CDD (Pk & Avg, Ch.110, 802.11ax(SU), MCS5)**


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 540 of 569                 |

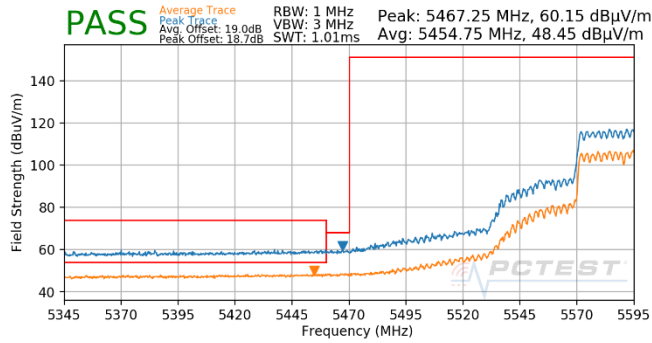


Plot 7-1815. (FCC Only) CDD (Pk & Avg, Ch.118, 802.11ax(SU), MCS2)

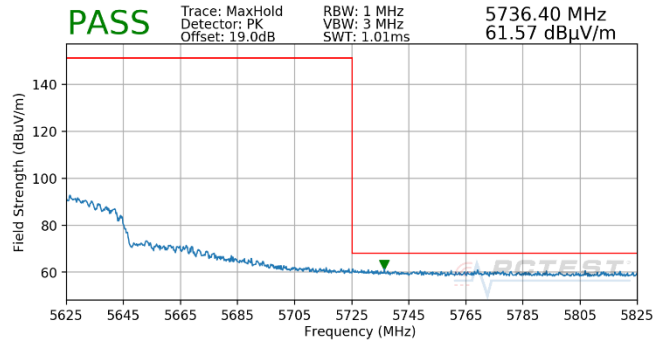


Plot 7-1818. (FCC Only) CDD (Pk, Ch.118, 802.11ax(SU), MCS2)

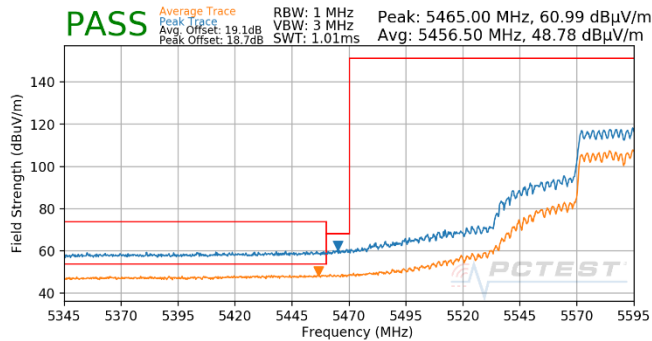


Plot 7-1816. (FCC Only) CDD (Pk & Avg, Ch.118, 802.11ax(SU), MCS3)

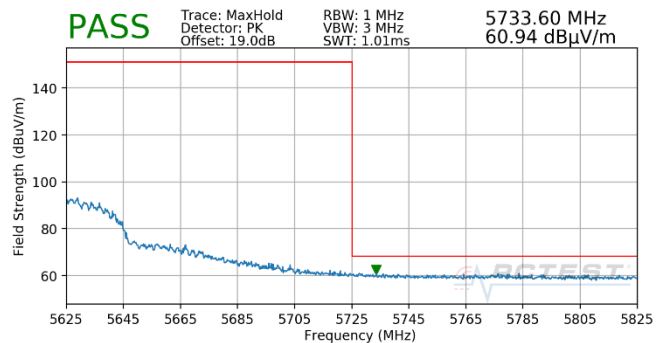

Plot 7-1819. (FCC Only) CDD (Pk, Ch.118, 802.11ax(SU), MCS3)

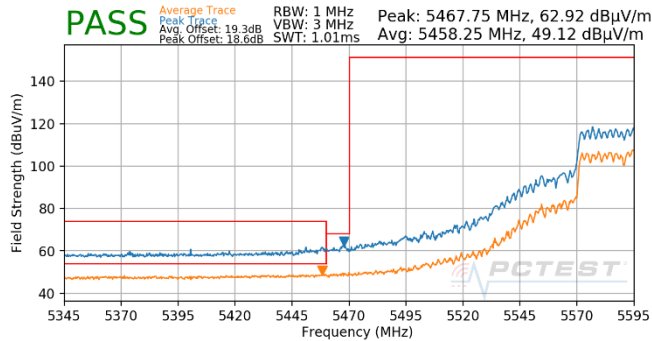


Plot 7-1817. (FCC Only) CDD (Pk & Avg, Ch.118, 802.11ax(SU), MCS5)

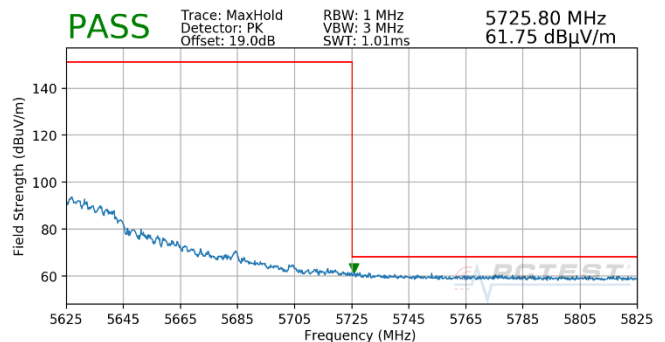


Plot 7-1820. (FCC Only) CDD (Pk, Ch.118, 802.11ax(SU), MCS5)


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 541 of 569                 |

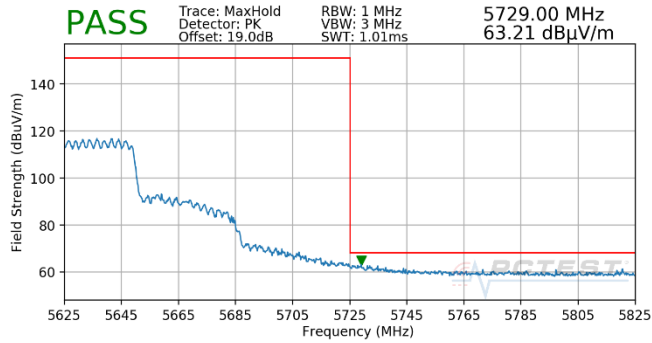


**Plot 7-1821. (FCC Only) CDD (Pk, Ch.126, 802.11ax(SU), MCS2)**

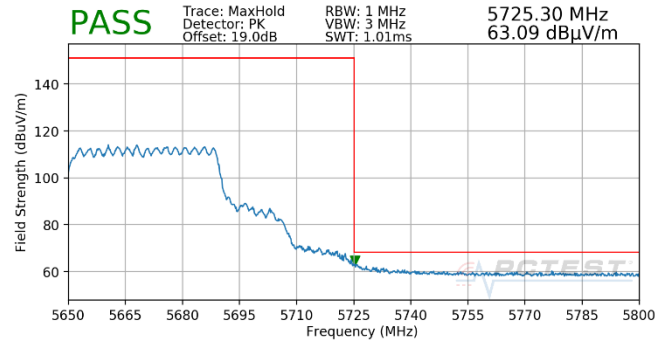


**Plot 7-1824. CDD (Pk, Ch.134, 802.11ax(SU), MCS2)**

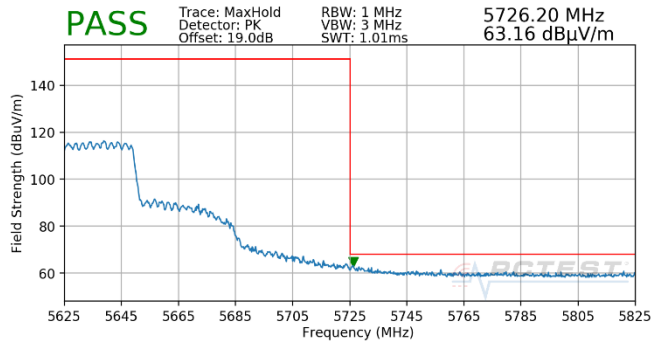


**Plot 7-1822. (FCC Only) CDD (Pk, Ch.126, 802.11ax(SU), MCS3)**

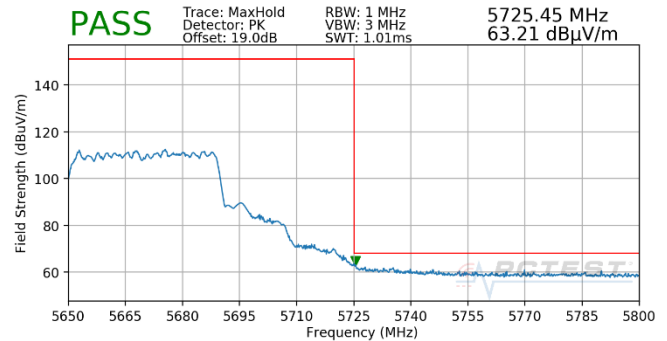

**Plot 7-1825. CDD (Pk, Ch.134, 802.11ax(SU), MCS3)**

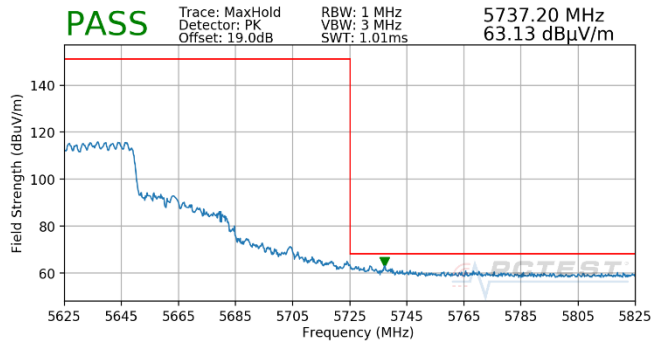


**Plot 7-1823. (FCC Only) CDD (Pk, Ch.126, 802.11ax(SU), MCS5)**

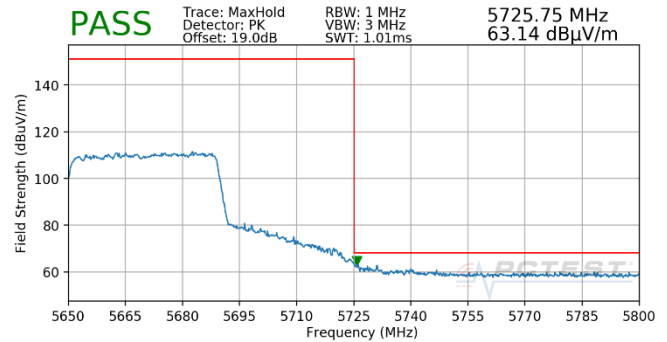


**Plot 7-1826. CDD (Pk, Ch.134, 802.11ax(SU), MCS5)**


|                                                  |                                            |                                               |  |                                        |
|--------------------------------------------------|--------------------------------------------|-----------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 |                                            | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021 | <b>EUT Type:</b><br>Tablet Device             |  | Page 542 of 569                        |

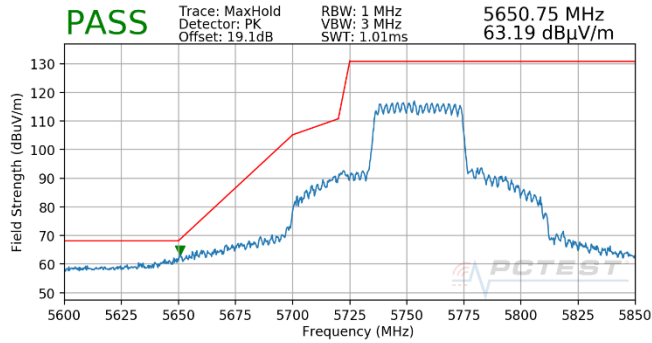


**Plot 7-1827. CDD (Pk, Ch.151, 802.11ax(SU), MCS2)**

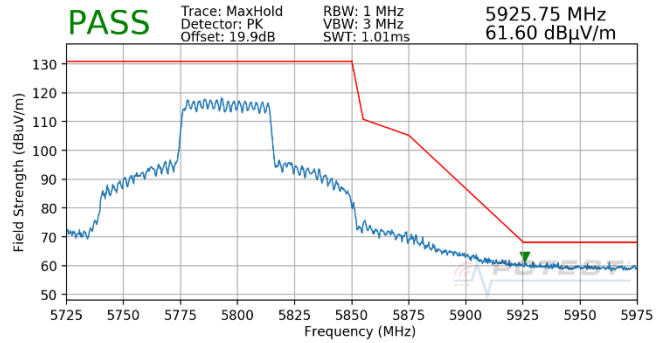


**Plot 7-1830. CDD (Pk, Ch.159, 802.11ax(SU), MCS2)**

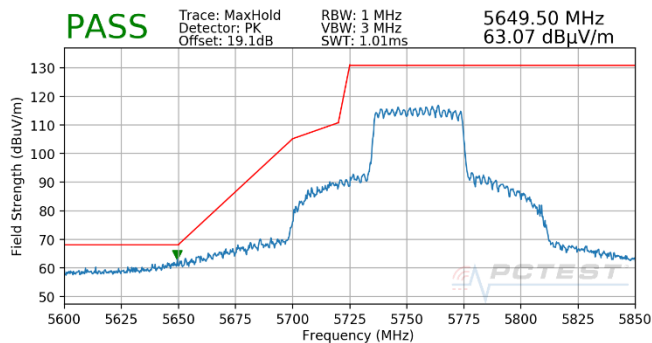


**Plot 7-1828. CDD (Pk, Ch.151, 802.11ax(SU), MCS3)**

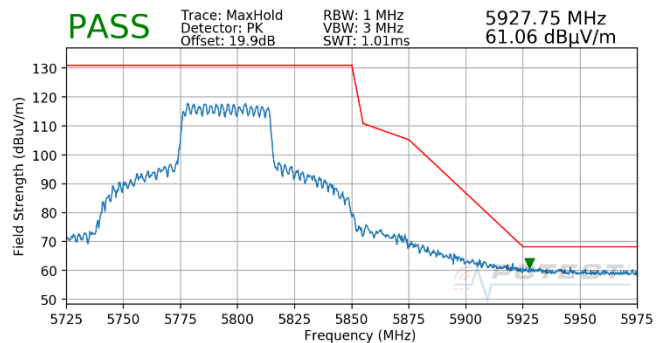

**Plot 7-1831. CDD (Pk, Ch.159, 802.11ax(SU), MCS3)**

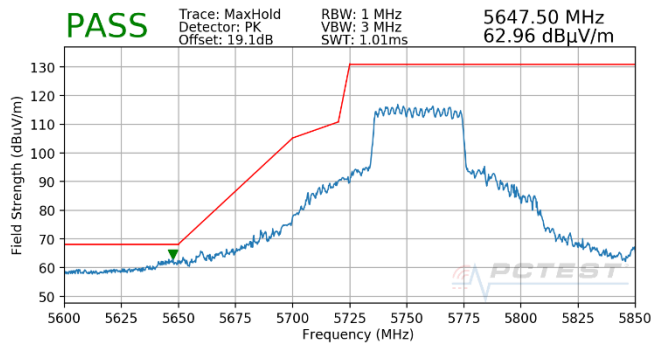


**Plot 7-1829. CDD (Pk, Ch.151, 802.11ax(SU), MCS5)**

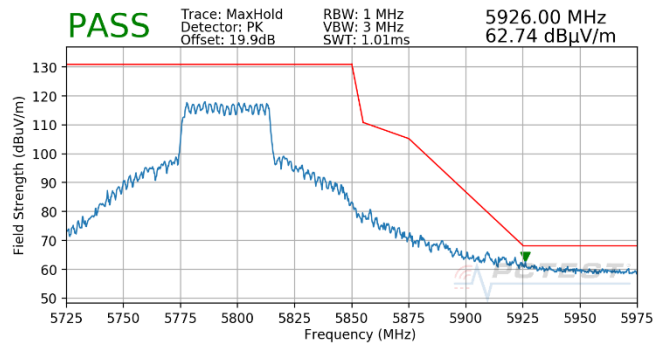


**Plot 7-1832. CDD (Pk, Ch.159, 802.11ax(SU), MCS5)**

|                                                |                                                                                                                                                                                                              |                                               |                                        |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568             |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021                                                                                                                                                                   | <b>EUT Type:</b><br>Tablet Device             | Page 543 of 569                        |


© 2021 PCTEST. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

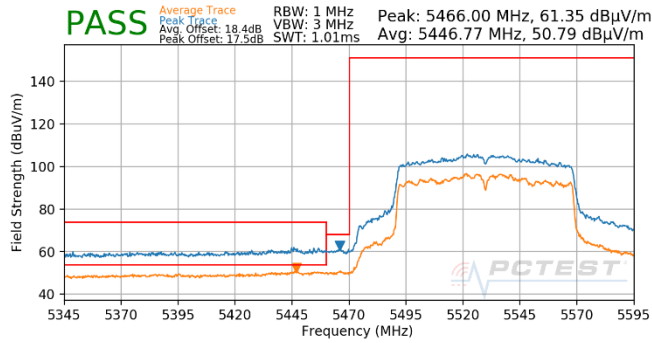


Plot 7-1839. CDD (Pk & Avg, Ch.106, 802.11ac, MCS2)

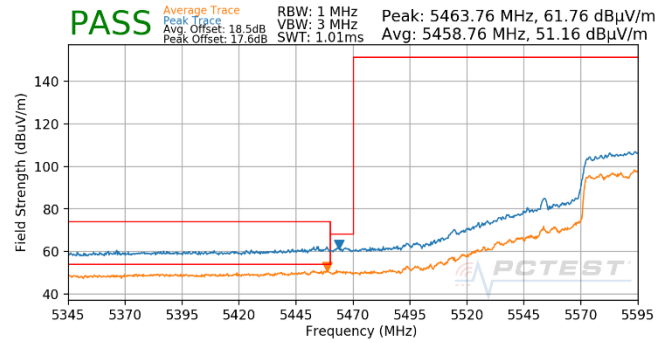


Plot 7-1842. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ac, MCS2)

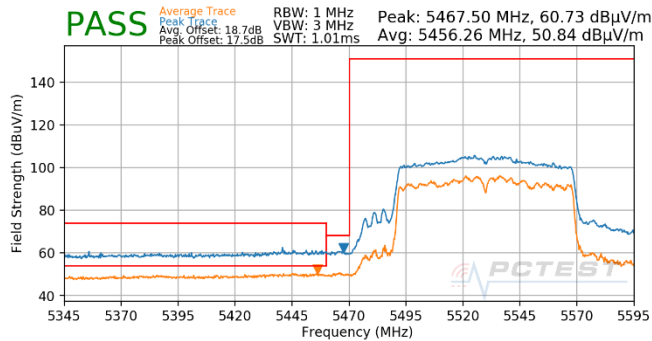


Plot 7-1840. CDD (Pk & Avg, Ch.106, 802.11ac, MCS3)

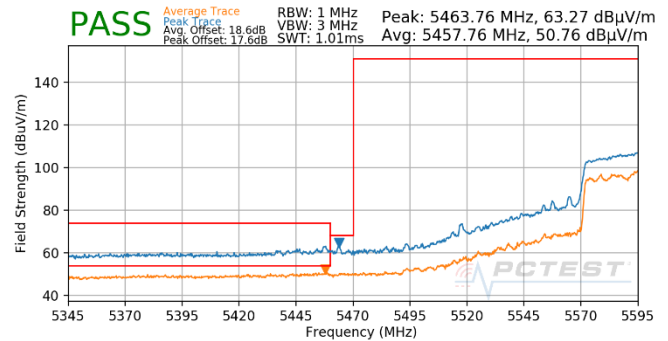

Plot 7-1843. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ac, MCS3)

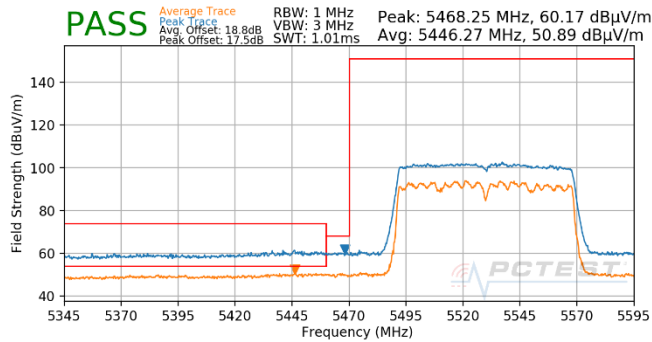


Plot 7-1841. CDD (Pk & Avg, Ch.106, 802.11ac, MCS5)

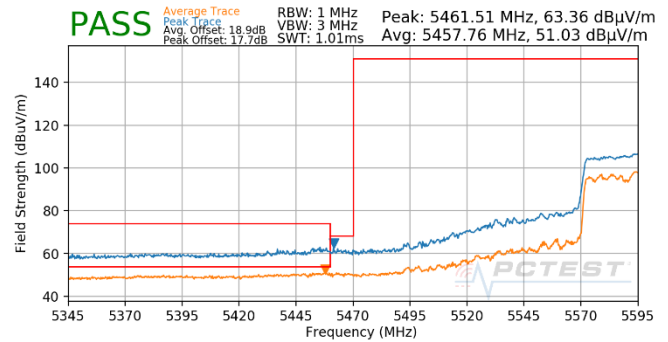


Plot 7-1844. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ac, MCS5)


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 545 of 569                 |

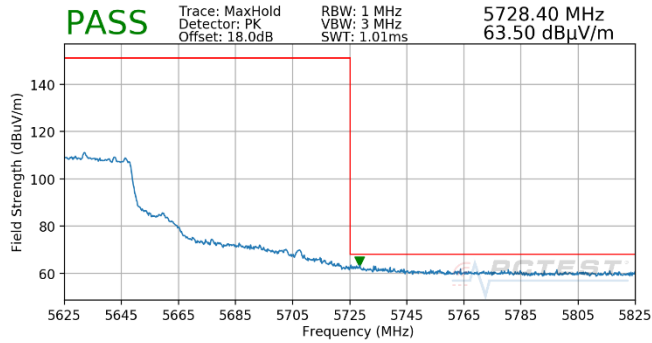


Plot 7-1845. (FCC Only) CDD (Pk, Ch.122, 802.11ac, MCS2)

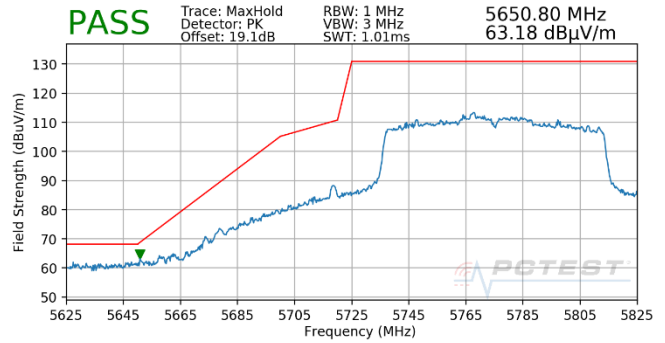


Plot 7-1848. CDD (Pk, Ch.155, 802.11ac, MCS2)

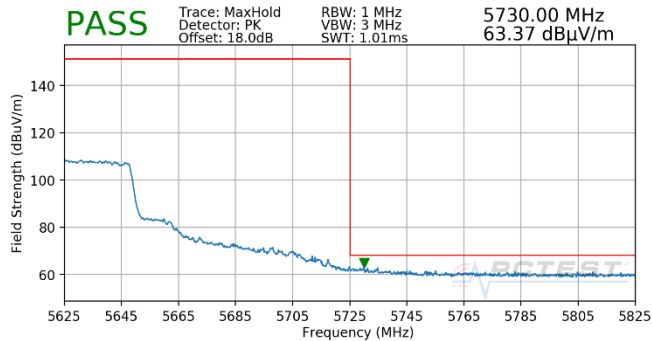


Plot 7-1846. (FCC Only) CDD (Pk, Ch.122, 802.11ac, MCS3)

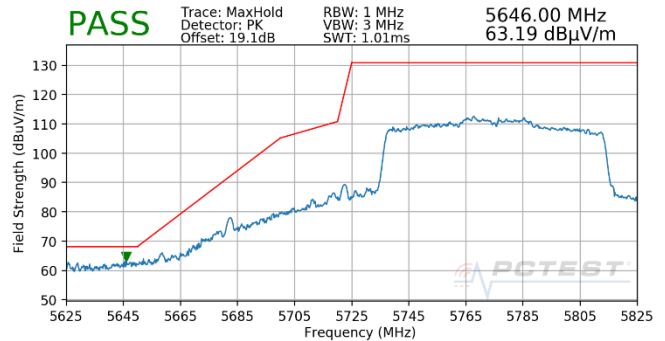

Plot 7-1849. CDD (Pk, Ch.155, 802.11ac, MCS3)

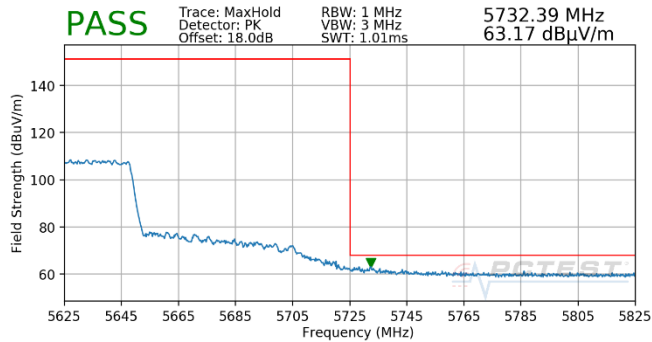


Plot 7-1847. (FCC Only) CDD (Pk, Ch.122, 802.11ac, MCS5)

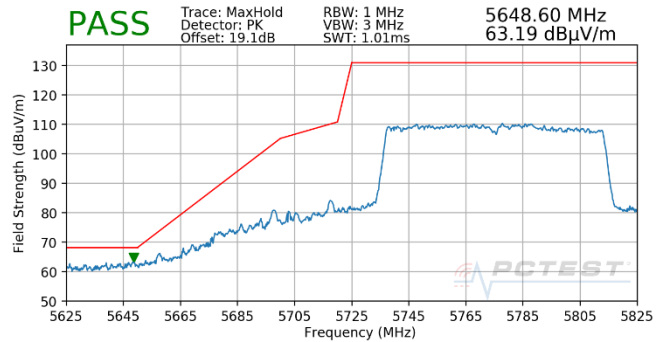


Plot 7-1850. CDD (Pk, Ch.155, 802.11ac, MCS5)


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 546 of 569                 |

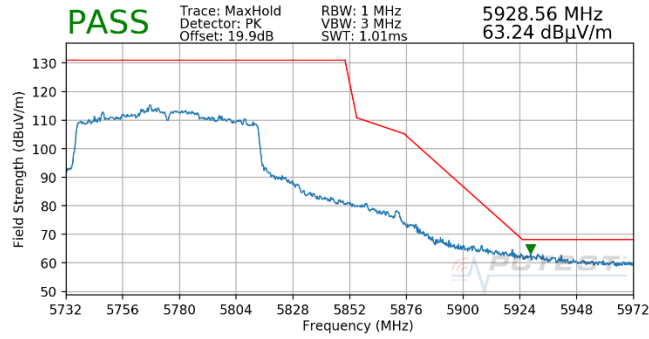

**Plot 7-1851. CDD (Pk, Ch.155, 802.11ac, MCS2)**

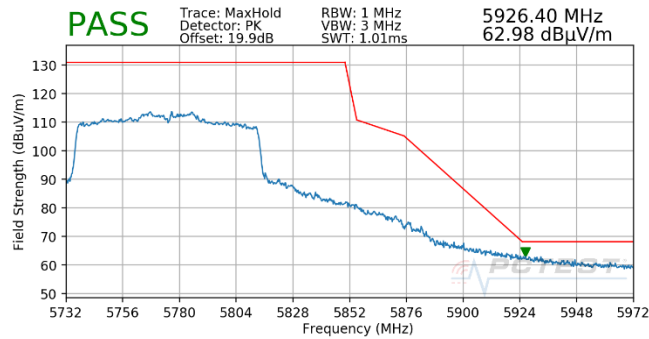


**Plot 7-1852. CDD (Pk, Ch.155, 802.11ac, MCS3)**

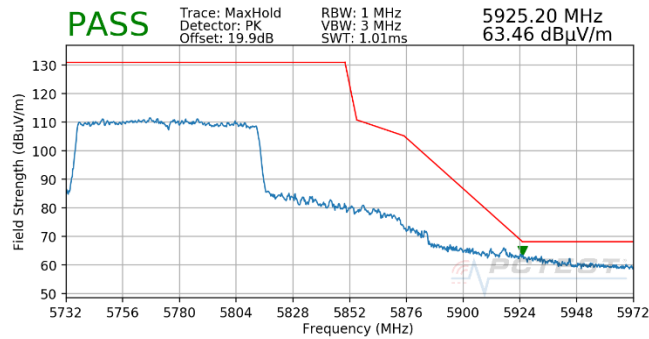


**Plot 7-1853. CDD (Pk, Ch.155, 802.11ac, MCS5)**


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 547 of 569                 |

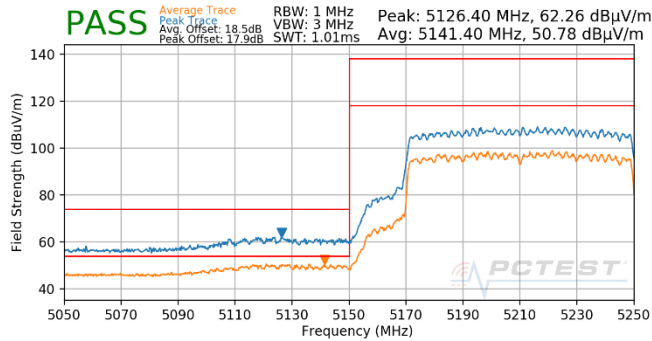


Plot 7-1854. CDD (Pk & Avg, Ch.42, 802.11ax(SU), MCS2)

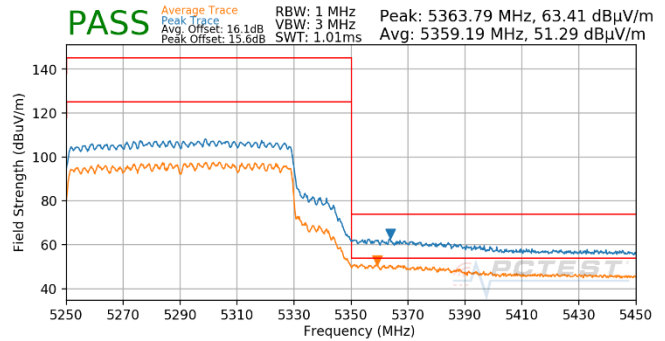


Plot 7-1857. CDD (Pk & Avg, Ch.58, 802.11ax(SU), MCS2)

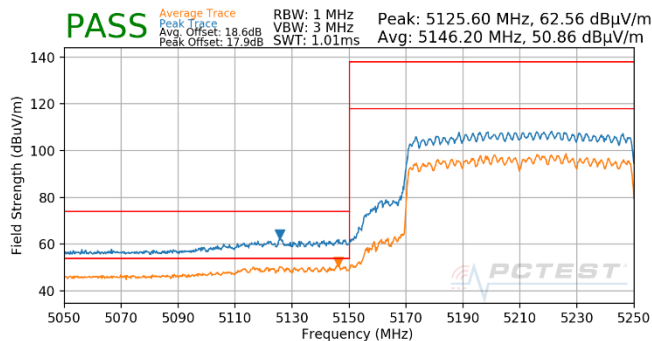


Plot 7-1855. CDD (Pk & Avg, Ch.42, 802.11ax(SU), MCS3)

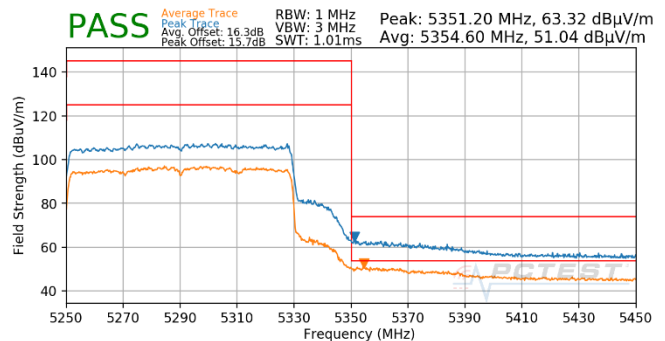

Plot 7-1858. CDD (Pk & Avg, Ch.58, 802.11ax(SU), MCS3)

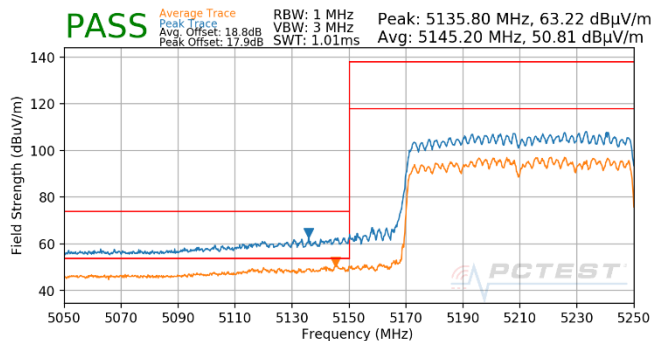


Plot 7-1856. CDD (Pk & Avg, Ch.42, 802.11ax(SU), MCS5)

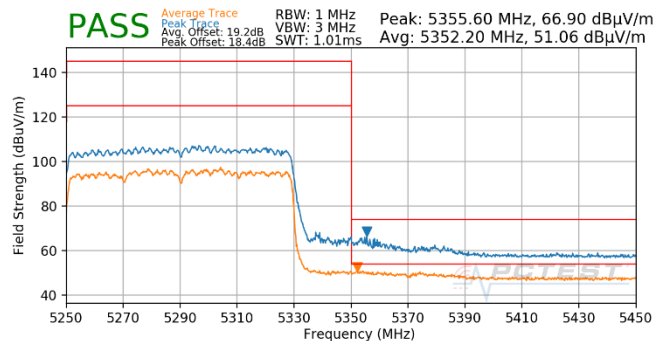


Plot 7-1859. CDD (Pk & Avg, Ch.58, 802.11ax(SU), MCS5)


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 548 of 569                 |

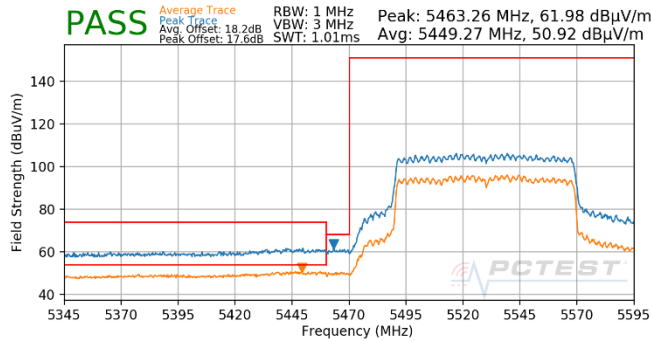


Plot 7-1860. CDD (Pk & Avg, Ch.106, 802.11ax(SU), MCS2)

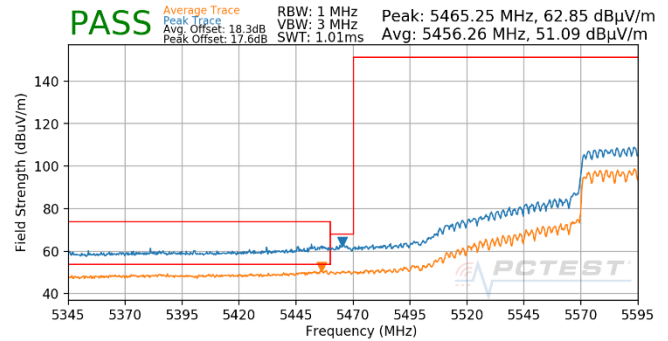


Plot 7-1863. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ax(SU), MCS2)

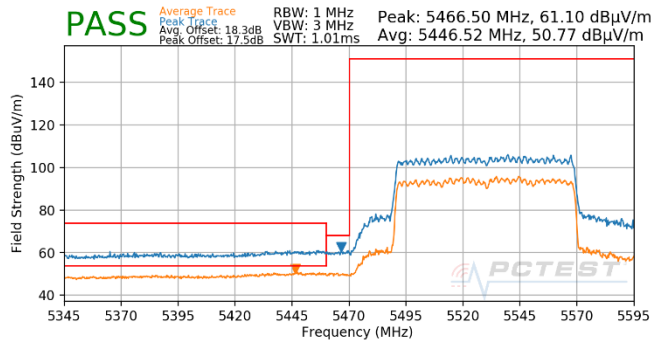


Plot 7-1861. CDD (Pk & Avg, Ch.106, 802.11ax(SU), MCS3)

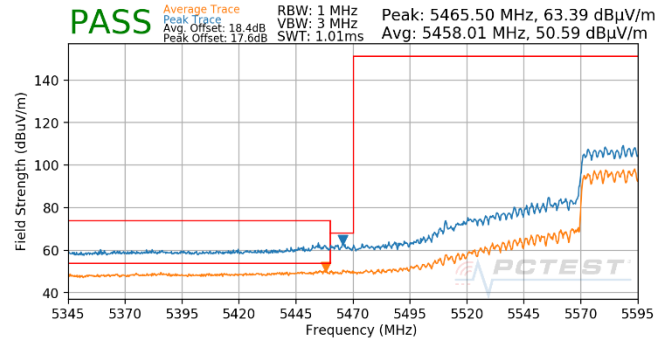

Plot 7-1864. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ax(SU), MCS3)

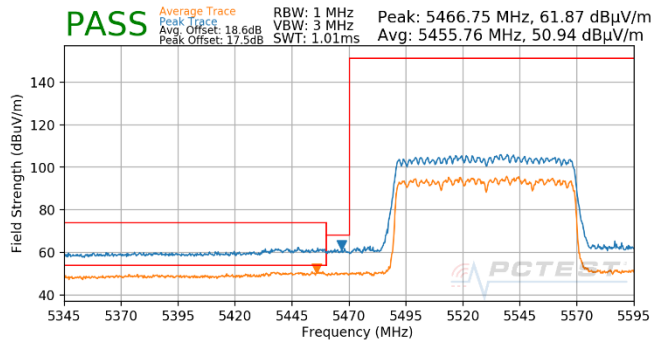


Plot 7-1862. CDD (Pk & Avg, Ch.106, 802.11ax(SU), MCS5)

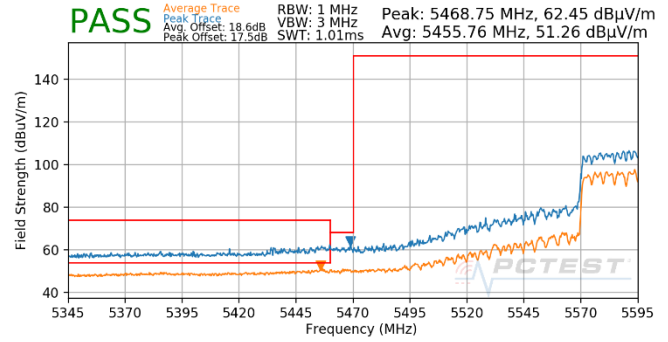


Plot 7-1865. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ax(SU), MCS5)


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 549 of 569                 |

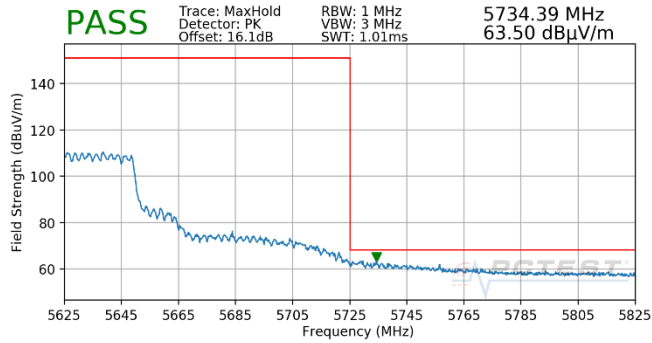


**Plot 7-1866. (FCC Only) CDD (Pk, Ch.122, 802.11ax(SU), MCS2)**

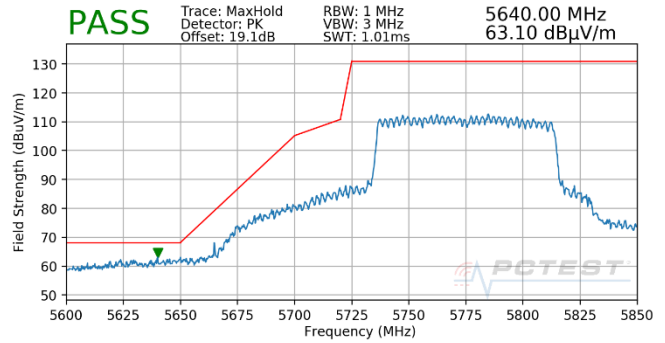


**Plot 7-1869. CDD (Pk, Ch.155, 802.11ax(SU), MCS2)**

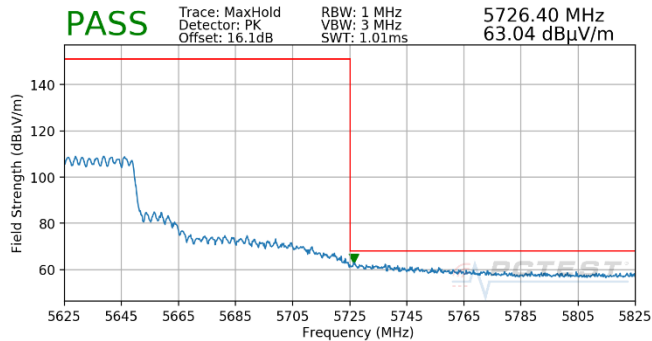


**Plot 7-1867. (FCC Only) CDD (Pk, Ch.122, 802.11ax(SU), MCS3)**

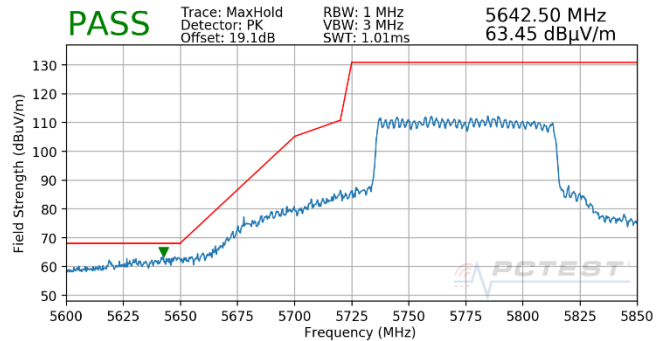

**Plot 7-1870. CDD (Pk, Ch.155, 802.11ax(SU), MCS3)**

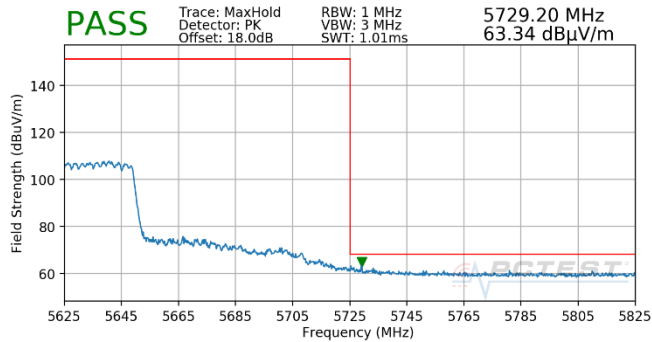


**Plot 7-1868. (FCC Only) CDD (Pk, Ch.122, 802.11ax(SU), MCS5)**

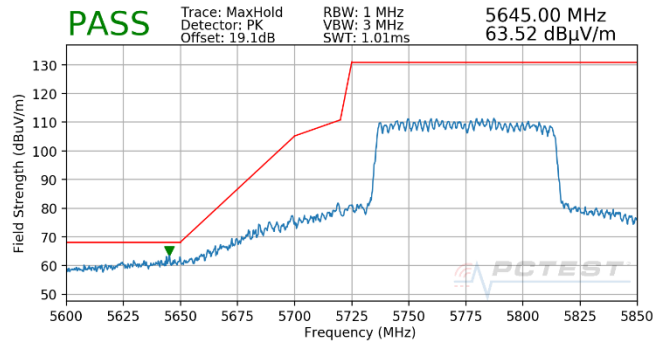


**Plot 7-1871. CDD (Pk, Ch.155, 802.11ax(SU), MCS5)**


|                                                  |                                            |                                               |  |                                        |
|--------------------------------------------------|--------------------------------------------|-----------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 |                                            | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021 | <b>EUT Type:</b><br>Tablet Device             |  | Page 550 of 569                        |

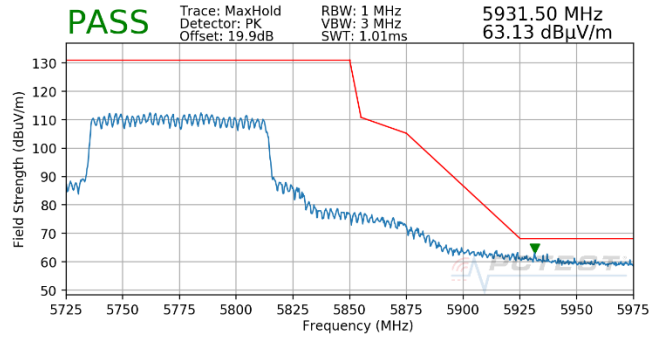

Plot 7-1872. CDD (Pk, Ch.155, 802.11ax(SU), MCS2)

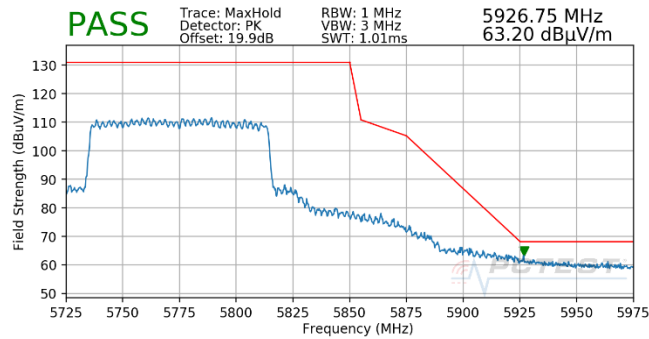

Plot 7-1873. CDD (Pk, Ch.155, 802.11ax(SU), MCS3)

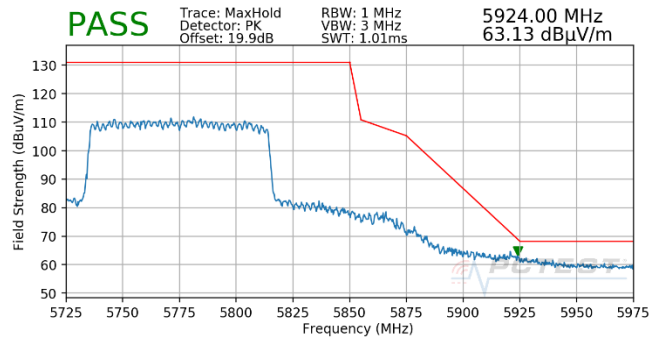

Plot 7-1874. CDD (Pk, Ch.155, 802.11ax(SU), MCS5)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 551 of 569                 |

## 7.7 Radiated Spurious Emissions – Below 1GHz

**§15.209; RSS-Gen [8.9]**

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-324 per Section 15.209 and RSS-Gen (8.9).***

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 7-324. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021                                                                                                                                                                          | EUT Type:<br>Tablet Device            | Page 552 of 569                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

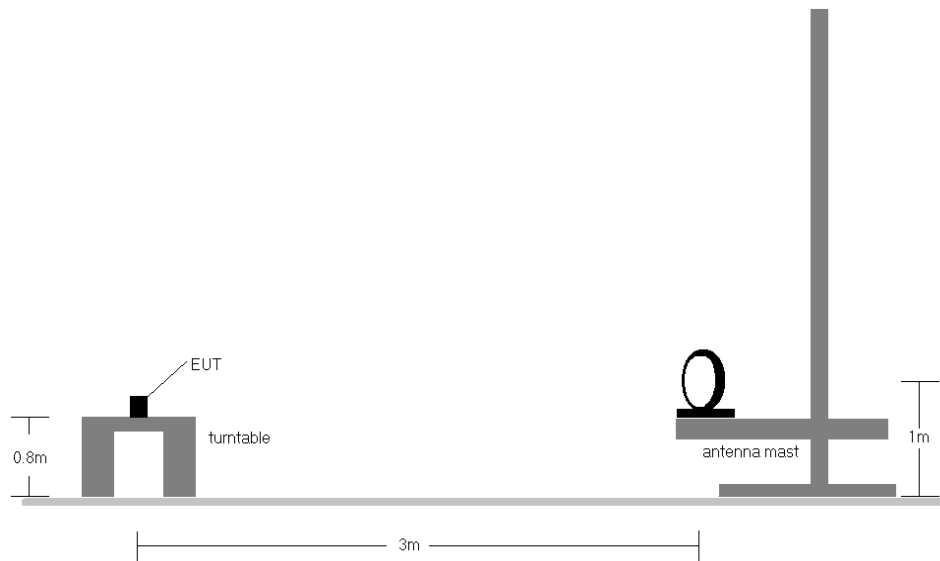

**Figure 7-6. Radiated Test Setup < 30MHz**

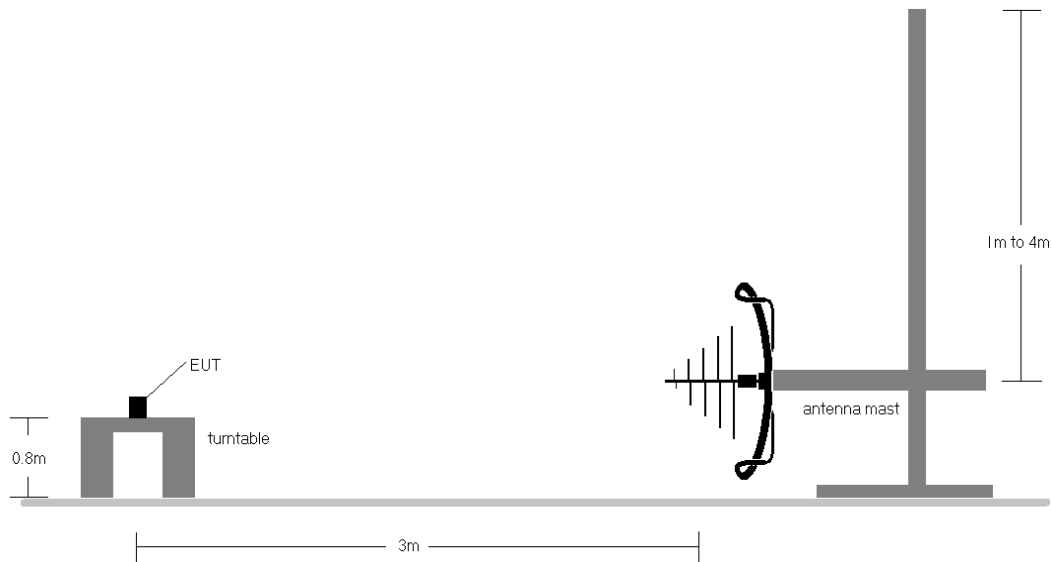

**Figure 7-7. Radiated Test Setup < 1GHz**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 553 of 569                        |

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-324.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamp Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

|                                                  |                                                                                                                                   |                                   |                                        |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                                   | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021                                                                                        | <b>EUT Type:</b><br>Tablet Device | Page 554 of 569                        |

**CDD/SDM Primary**  
**§15.209; RSS-Gen [8.9]**

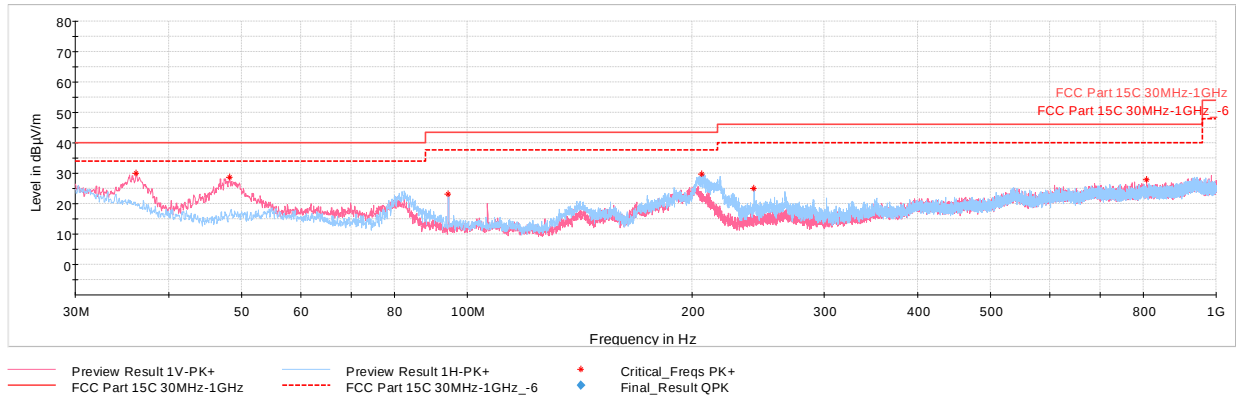


**Plot 7-1875. Radiated Spurious Emissions below 1GHz CDD/SDM Primary, 802.11n, Ch.36 with AC/DC Adapter**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 36.21           | Max Peak | V               | 100                 | 293                        | -62.19               | -14.82      | 29.99                   | 40.00          | -10.01      |
| 48.19           | Max Peak | V               | 100                 | 137                        | -57.72               | -20.72      | 28.56                   | 40.00          | -11.44      |
| 94.46           | Max Peak | H               | 250                 | 308                        | -63.38               | -20.42      | 23.20                   | 43.52          | -20.32      |
| 205.62          | Max Peak | H               | 100                 | 246                        | -60.85               | -16.29      | 29.86                   | 43.52          | -13.66      |
| 241.65          | Max Peak | H               | 100                 | 278                        | -67.60               | -14.34      | 25.06                   | 46.02          | -20.96      |
| 807.07          | Max Peak | V               | 250                 | 247                        | -77.26               | -1.87       | 27.87                   | 46.02          | -18.15      |

**Table 7-325. Radiated Spurious Emissions below 1GHz CDD/SDM Primary, 802.11n, Ch.36 with AC/DC Adapter**

|                                                  |                                              |                                              |                                        |
|--------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device            | Page 555 of 569                        |

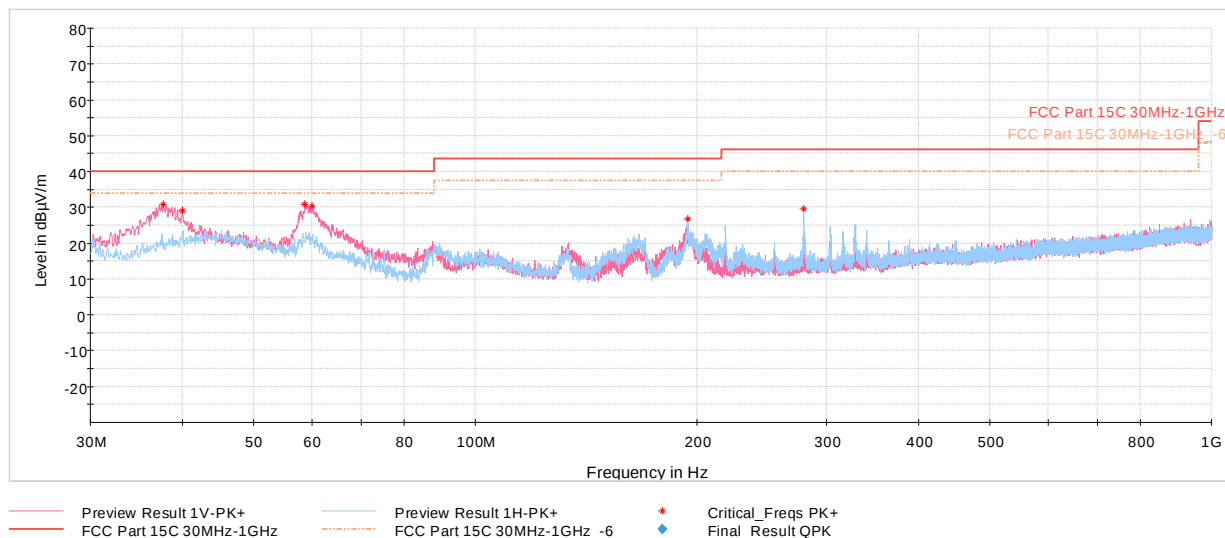

**Plot 7-1876. Radiated Spurious Emissions below 1GHz CDD/SDM Primary, 802.11ax (SU), Ch.36 with AC/DC Adapter**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 37.66           | Max Peak | V               | 100                 | 104                        | -61.09               | -14.98      | 30.93                   | 40.00          | -9.07       |
| 40.04           | Max Peak | V               | 100                 | 193                        | -63.94               | -14.10      | 28.96                   | 40.00          | -11.04      |
| 58.71           | Max Peak | V               | 100                 | 71                         | -61.75               | -14.45      | 30.80                   | 40.00          | -9.20       |
| 60.02           | Max Peak | V               | 100                 | 115                        | -61.89               | -14.81      | 30.30                   | 40.00          | -9.70       |
| 194.37          | Max Peak | H               | 100                 | 274                        | -64.99               | -15.28      | 26.73                   | 43.52          | -16.79      |
| 279.44          | Max Peak | H               | 100                 | 186                        | -64.17               | -13.30      | 29.53                   | 46.02          | -16.49      |

**Table 7-326. Radiated Spurious Emissions below 1GHz CDD/SDM Primary, 802.11ax (SU), Ch.36 with AC/DC Adapter**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 556 of 569                        |

## CDD/SDM Diversity

**§15.209; RSS-Gen [8.9]**



**Plot 7-1877. Radiated Spurious Emissions below 1GHz CDD/SDM Diversity, 802.11n, Ch.36 with AC/DC Adapter**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 38.05           | Max Peak | V               | 100                 | 132                        | -59.97               | -14.86      | 32.17                   | 40.00          | -7.83       |
| 58.96           | Max Peak | V               | 100                 | 219                        | -61.95               | -14.49      | 30.56                   | 40.00          | -9.44       |
| 194.27          | Max Peak | V               | 100                 | 356                        | -64.65               | -15.29      | 27.06                   | 43.52          | -16.46      |
| 218.47          | Max Peak | H               | 100                 | 300                        | -67.74               | -15.08      | 24.18                   | 46.02          | -21.84      |
| 230.69          | Max Peak | H               | 100                 | 291                        | -72.74               | -14.32      | 19.94                   | 46.02          | -26.08      |
| 279.05          | Max Peak | H               | 100                 | 352                        | -66.93               | -13.31      | 26.76                   | 46.02          | -19.26      |

**Table 7-327. Radiated Spurious Emissions below 1GHz CDD/SDM Diversity, 802.11n, Ch.36 with AC/DC Adapter**

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 557 of 569                 |



**Plot 7-1878. Radiated Spurious Emissions below 1GHz CDD/SDM Diversity, 802.11ax (SU), Ch.36 with AC/DC Adapter**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 37.66           | Max Peak | V               | 100                 | 104                        | -61.09               | -14.98      | 30.93                   | 40.00          | -9.07       |
| 40.04           | Max Peak | V               | 100                 | 193                        | -63.94               | -14.10      | 28.96                   | 40.00          | -11.04      |
| 58.71           | Max Peak | V               | 100                 | 71                         | -61.75               | -14.45      | 30.80                   | 40.00          | -9.20       |
| 60.02           | Max Peak | V               | 100                 | 115                        | -61.89               | -14.81      | 30.30                   | 40.00          | -9.70       |
| 194.37          | Max Peak | H               | 100                 | 274                        | -64.99               | -15.28      | 26.73                   | 43.52          | -16.79      |
| 279.44          | Max Peak | H               | 100                 | 186                        | -64.17               | -13.30      | 29.53                   | 46.02          | -16.49      |

**Table 7-328. Radiated Spurious Emissions below 1GHz CDD/SDM Diversity, 802.11ax (SU), Ch.36 with AC/DC Adapter**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 558 of 569                        |

## 7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

| Frequency of emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

**Table 7-329. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021                                                                                                                                                                          | EUT Type:<br>Tablet Device            | Page 559 of 569                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

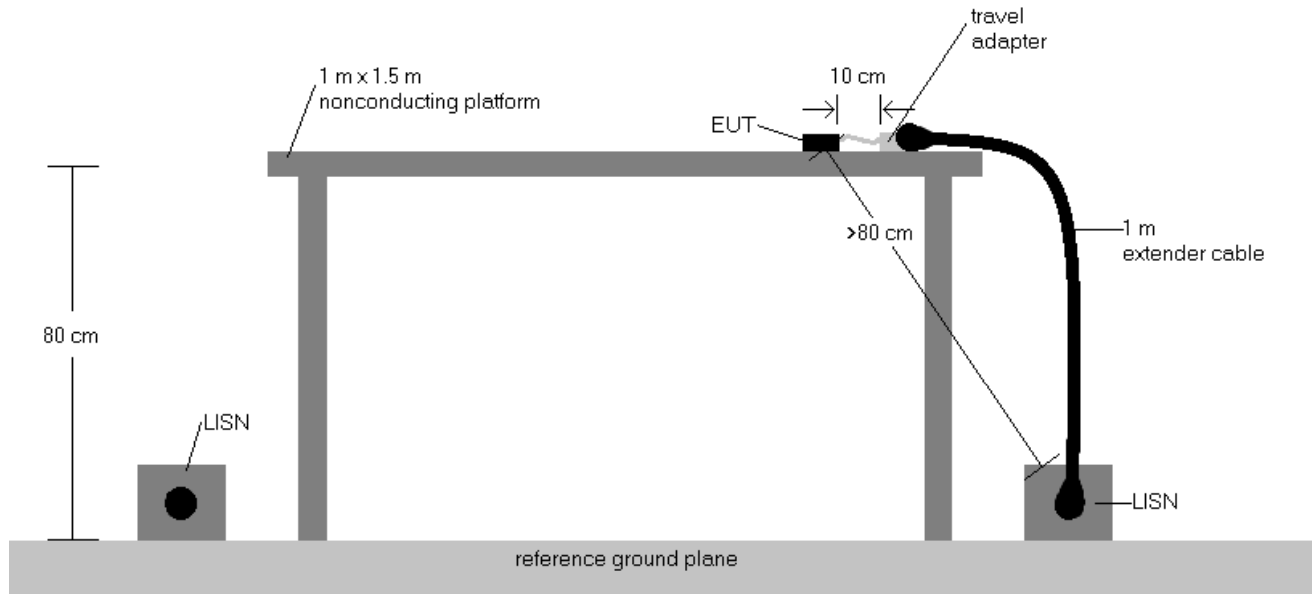


**Figure 7-8. Test Instrument & Measurement Setup**

## Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
  - EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 560 of 569                 |

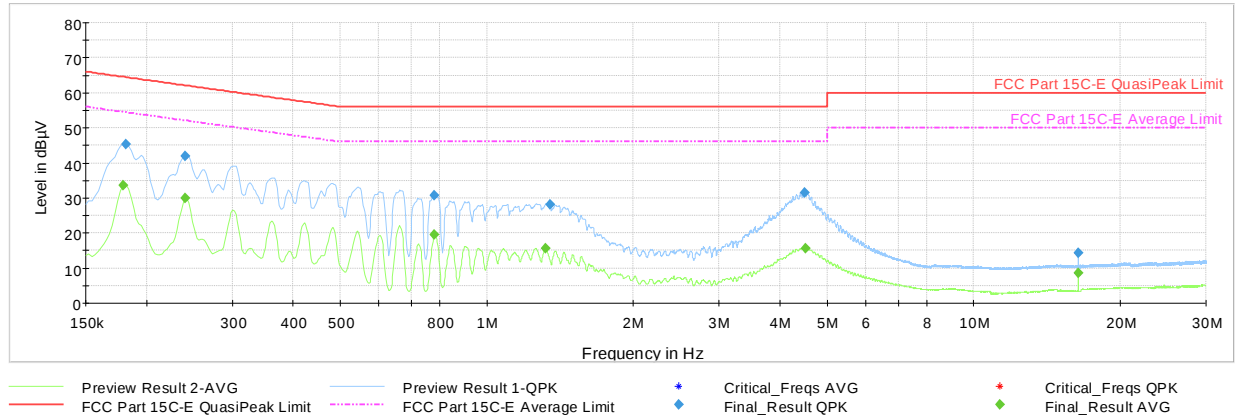


**Plot 7-1879. AC Line Conducted Plot with 802.11n CDD/SDM Primary – Ch.36 (L1), with AC/DC adapter**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.179           | FINAL         | —                | 33.65          | 54.52        | -20.87      | L1   | GND |
| 0.182           | FINAL         | 45.28            | —              | 64.42        | -19.14      | L1   | GND |
| 0.240           | FINAL         | 42.08            | —              | 62.10        | -20.02      | L1   | GND |
| 0.240           | FINAL         | —                | 29.86          | 52.10        | -22.24      | L1   | GND |
| 0.780           | FINAL         | 30.79            | —              | 56.00        | -25.21      | L1   | GND |
| 0.780           | FINAL         | —                | 19.45          | 46.00        | -26.55      | L1   | GND |
| 1.320           | FINAL         | —                | 15.62          | 46.00        | -30.38      | L1   | GND |
| 1.349           | FINAL         | 28.19            | —              | 56.00        | -27.81      | L1   | GND |
| 4.488           | FINAL         | 31.44            | —              | 56.00        | -24.56      | L1   | GND |
| 4.511           | FINAL         | —                | 15.68          | 46.00        | -30.32      | L1   | GND |
| 16.377          | FINAL         | 14.41            | —              | 60.00        | -45.59      | L1   | GND |
| 16.377          | FINAL         | —                | 8.65           | 50.00        | -41.35      | L1   | GND |

**Table 7-330. AC Line Conducted Data with 802.11n CDD/SDM Primary – Ch.36 (L1), with AC/DC adapter**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 561 of 569                        |

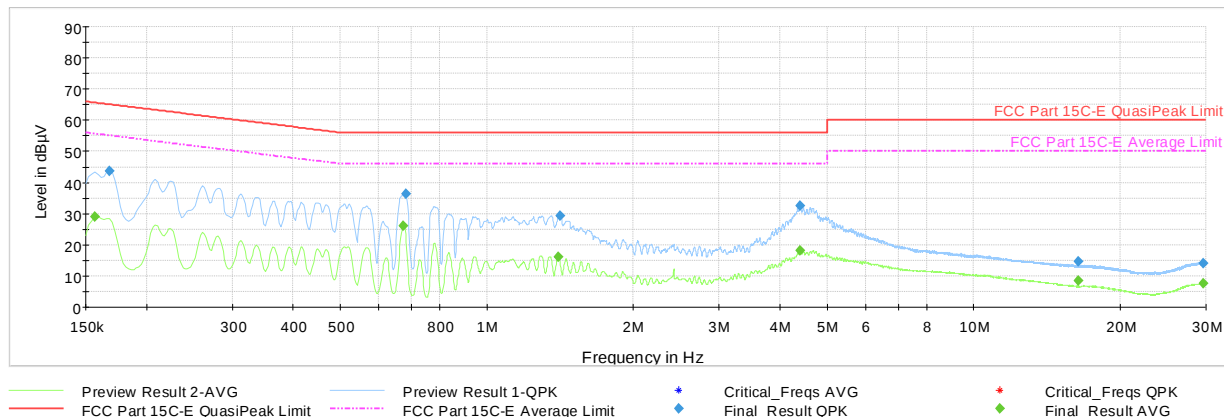


**Plot 7-1880. AC Line Conducted Plot with 802.11n CDD/SDM Primary – Ch.36 (N), with AC/DC adapter**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.175           | FINAL         | 31.45            | —              | 64.73        | -33.28      | N    | GND |
| 0.177           | FINAL         | —                | 25.59          | 54.63        | -29.03      | N    | GND |
| 0.366           | FINAL         | 27.43            | —              | 58.59        | -31.16      | N    | GND |
| 0.368           | FINAL         | —                | 25.62          | 48.54        | -22.92      | N    | GND |
| 1.109           | FINAL         | —                | 19.02          | 46.00        | -26.98      | N    | GND |
| 1.111           | FINAL         | 23.15            | —              | 56.00        | -32.85      | N    | GND |
| 4.871           | FINAL         | 20.86            | —              | 56.00        | -35.14      | N    | GND |
| 5.064           | FINAL         | —                | 13.34          | 50.00        | -36.66      | N    | GND |
| 11.857          | FINAL         | —                | 18.28          | 50.00        | -31.72      | N    | GND |
| 11.861          | FINAL         | 26.34            | —              | 60.00        | -33.66      | N    | GND |
| 17.590          | FINAL         | —                | 20.98          | 50.00        | -29.02      | N    | GND |
| 17.824          | FINAL         | 27.27            | —              | 60.00        | -32.73      | N    | GND |

**Table 7-331. AC Line Conducted Data with 802.11n CDD/SDM Primary – Ch.36 (N), with AC/DC adapter**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 562 of 569                        |

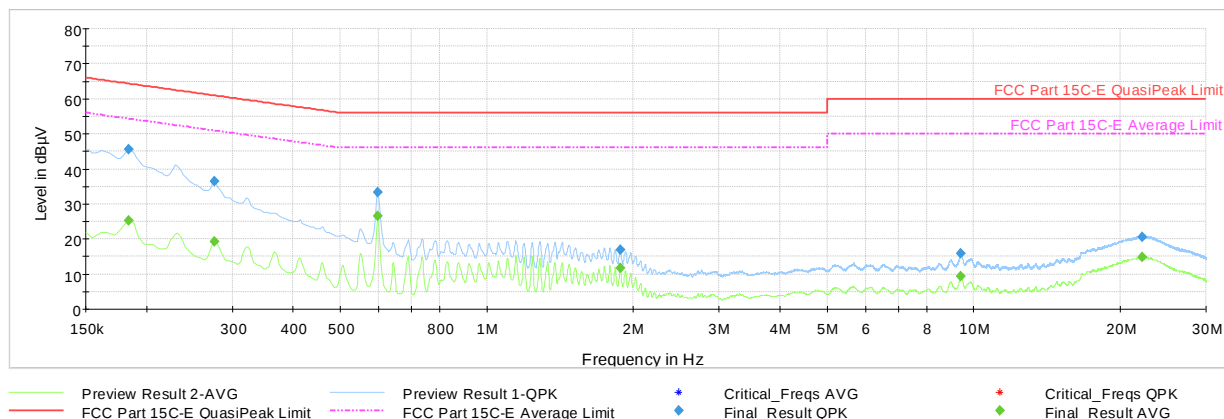


**Plot 7-1881. AC Line Conducted Plot with 802.11ax (SU) CDD/SDM Primary – Ch.36 (L1), with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.184           | FINAL         | 45.60            | —              | 64.31        | -18.71      | L1   | GND |
| 0.184           | FINAL         | —                | 25.22          | 54.31        | -29.09      | L1   | GND |
| 0.276           | FINAL         | 36.53            | —              | 60.94        | -24.40      | L1   | GND |
| 0.276           | FINAL         | —                | 19.23          | 50.94        | -31.70      | L1   | GND |
| 0.596           | FINAL         | 33.31            | —              | 56.00        | -22.69      | L1   | GND |
| 0.598           | FINAL         | —                | 26.52          | 46.00        | -19.48      | L1   | GND |
| 1.880           | FINAL         | —                | 11.84          | 46.00        | -34.16      | L1   | GND |
| 1.880           | FINAL         | 16.99            | —              | 56.00        | -39.01      | L1   | GND |
| 9.411           | FINAL         | 15.92            | —              | 60.00        | -44.08      | L1   | GND |
| 9.413           | FINAL         | —                | 9.30           | 50.00        | -40.70      | L1   | GND |
| 22.144          | FINAL         | 20.67            | —              | 60.00        | -39.33      | L1   | GND |
| 22.202          | FINAL         | —                | 14.82          | 50.00        | -35.18      | L1   | GND |

**Table 7-332. AC Line Conducted Data with 802.11ax (SU) CDD/SDM Primary – Ch.36 (L1) with Laptop**

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 563 of 569                 |

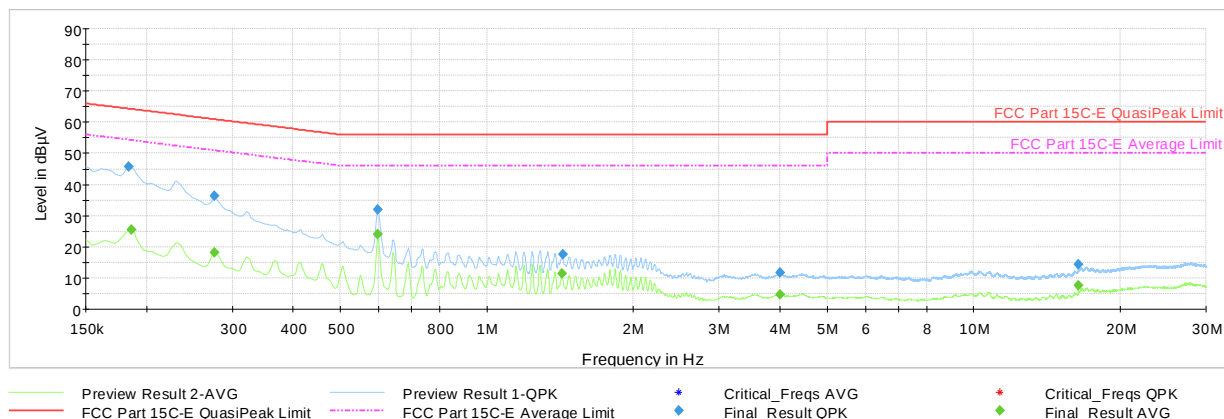


**Plot 7-1882. AC Line Conducted Plot with 802.11ax (SU) CDD/SDM Primary – Ch.36 (N), with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.184           | FINAL         | 45.66            | —              | 64.31        | -18.65      | N    | GND |
| 0.186           | FINAL         | —                | 25.45          | 54.21        | -28.76      | N    | GND |
| 0.276           | FINAL         | 36.41            | —              | 60.94        | -24.52      | N    | GND |
| 0.276           | FINAL         | —                | 18.10          | 50.94        | -32.83      | N    | GND |
| 0.598           | FINAL         | —                | 24.16          | 46.00        | -21.84      | N    | GND |
| 0.598           | FINAL         | 31.87            | —              | 56.00        | -24.13      | N    | GND |
| 1.428           | FINAL         | —                | 11.54          | 46.00        | -34.46      | N    | GND |
| 1.430           | FINAL         | 17.47            | —              | 56.00        | -38.53      | N    | GND |
| 3.993           | FINAL         | —                | 4.77           | 46.00        | -41.23      | N    | GND |
| 3.998           | FINAL         | 11.65            | —              | 56.00        | -44.35      | N    | GND |
| 16.406          | FINAL         | 14.34            | —              | 60.00        | -45.66      | N    | GND |
| 16.406          | FINAL         | —                | 7.58           | 50.00        | -42.42      | N    | GND |

**Table 7-333. AC Line Conducted Data with 802.11ax (SU) CDD/SDM Primary – Ch.36 (N), with Laptop**

|                                                  |                                                     |                                               |                                        |
|--------------------------------------------------|-----------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of <b>element</b> | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021          | <b>EUT Type:</b><br>Tablet Device             | Page 564 of 569                        |

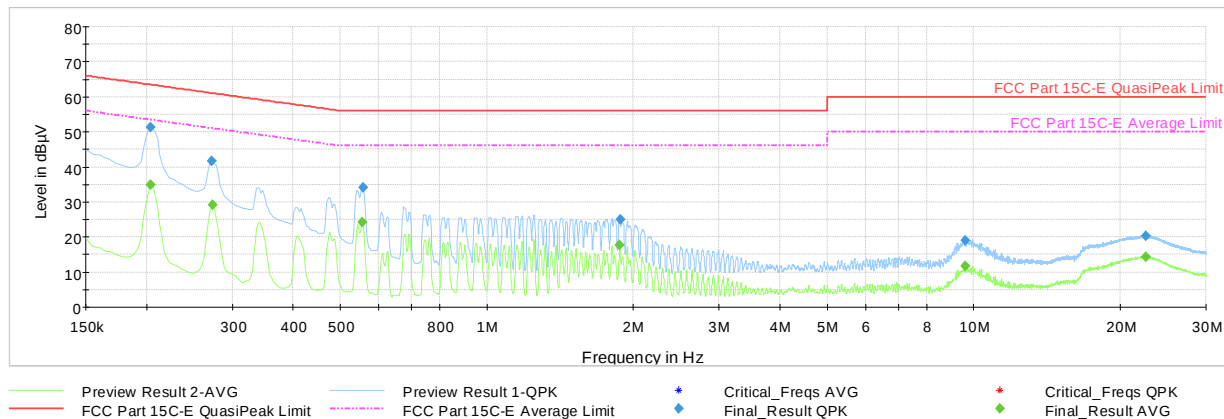


**Plot 7-1883. AC Line Conducted Plot with 802.11n CDD/SDM Diversity – Ch.36 (L1), with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.204           | FINAL         | 51.27            | —              | 63.45        | -12.18      | L1   | GND |
| 0.204           | FINAL         | —                | 34.87          | 53.45        | -18.57      | L1   | GND |
| 0.272           | FINAL         | 41.58            | —              | 61.07        | -19.49      | L1   | GND |
| 0.274           | FINAL         | —                | 29.25          | 51.00        | -21.75      | L1   | GND |
| 0.555           | FINAL         | —                | 24.12          | 46.00        | -21.88      | L1   | GND |
| 0.557           | FINAL         | 34.16            | —              | 56.00        | -21.84      | L1   | GND |
| 1.876           | FINAL         | —                | 17.65          | 46.00        | -28.35      | L1   | GND |
| 1.878           | FINAL         | 25.02            | —              | 56.00        | -30.98      | L1   | GND |
| 9.607           | FINAL         | 19.12            | —              | 60.00        | -40.88      | L1   | GND |
| 9.609           | FINAL         | —                | 11.63          | 50.00        | -38.37      | L1   | GND |
| 22.571          | FINAL         | 20.33            | —              | 60.00        | -39.67      | L1   | GND |
| 22.578          | FINAL         | —                | 14.35          | 50.00        | -35.65      | L1   | GND |

**Table 7-334. AC Line Conducted Data with 802.11n CDD/SDM Diversity – Ch.36 (L1) with Laptop**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 565 of 569                        |

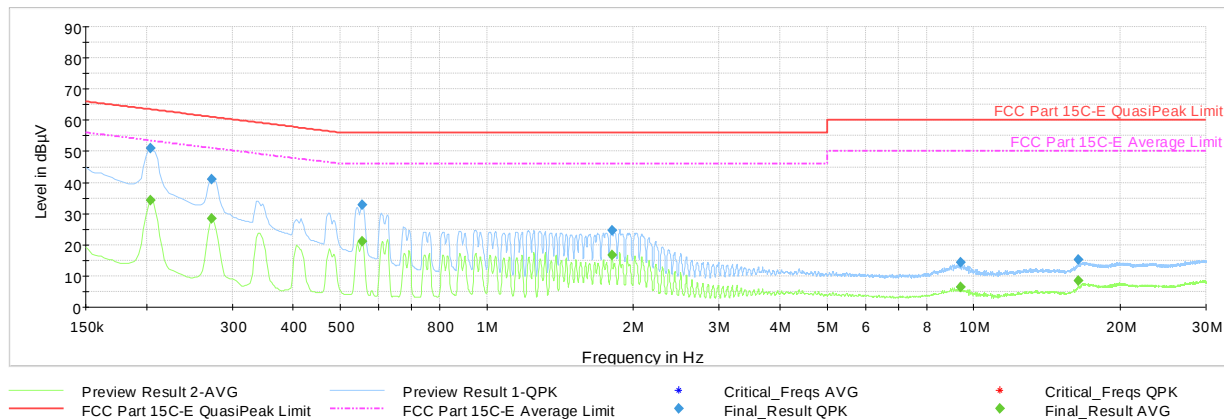


**Plot 7-1884. AC Line Conducted Plot with 802.11n CDD/SDM Diversity – Ch.36 (N), with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.204           | FINAL         | 50.87            | —              | 63.45        | -12.58      | N    | GND |
| 0.204           | FINAL         | —                | 34.39          | 53.45        | -19.06      | N    | GND |
| 0.272           | FINAL         | 40.98            | —              | 61.07        | -20.09      | N    | GND |
| 0.272           | FINAL         | —                | 28.33          | 51.07        | -22.74      | N    | GND |
| 0.555           | FINAL         | —                | 20.99          | 46.00        | -25.01      | N    | GND |
| 0.555           | FINAL         | 32.89            | —              | 56.00        | -23.11      | N    | GND |
| 1.806           | FINAL         | —                | 16.65          | 46.00        | -29.35      | N    | GND |
| 1.808           | FINAL         | 24.74            | —              | 56.00        | -31.26      | N    | GND |
| 9.380           | FINAL         | —                | 6.47           | 50.00        | -43.53      | N    | GND |
| 9.386           | FINAL         | 14.42            | —              | 60.00        | -45.58      | N    | GND |
| 16.409          | FINAL         | 15.24            | —              | 60.00        | -44.76      | N    | GND |
| 16.409          | FINAL         | —                | 8.50           | 50.00        | -41.50      | N    | GND |

**Table 7-335. AC Line Conducted Data with 802.11n CDD/SDM Diversity – Ch.36 (N), with Laptop**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 566 of 569                        |

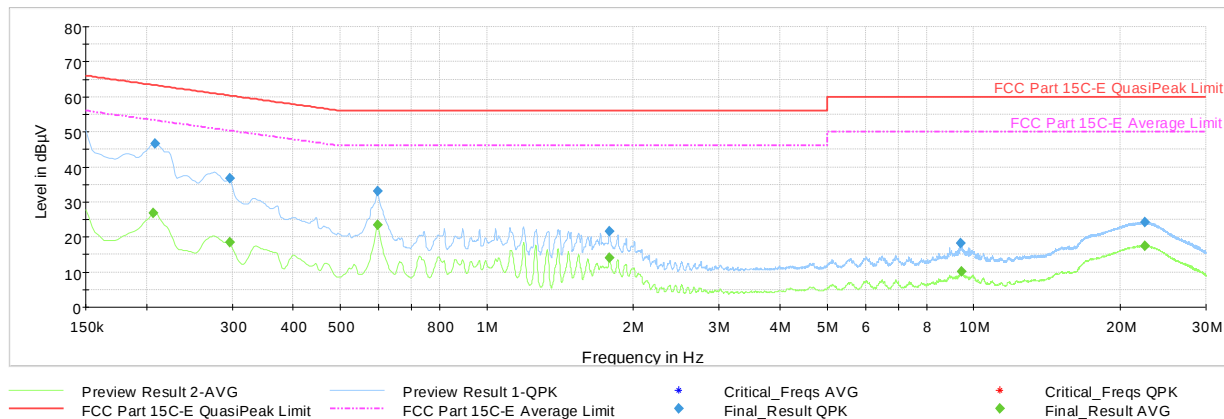


**Plot 7-1885. AC Line Conducted Plot with 802.11ax (SU) CDD/SDM Diversity – Ch.36 (L1), with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.206           | FINAL         | —                | 26.74          | 53.36        | -26.61      | L1   | GND |
| 0.209           | FINAL         | 46.60            | —              | 63.27        | -16.66      | L1   | GND |
| 0.296           | FINAL         | 36.79            | —              | 60.35        | -23.56      | L1   | GND |
| 0.296           | FINAL         | —                | 18.46          | 50.35        | -31.89      | L1   | GND |
| 0.596           | FINAL         | 32.97            | —              | 56.00        | -23.03      | L1   | GND |
| 0.596           | FINAL         | —                | 23.51          | 46.00        | -22.49      | L1   | GND |
| 1.786           | FINAL         | —                | 14.05          | 46.00        | -31.95      | L1   | GND |
| 1.786           | FINAL         | 21.73            | —              | 56.00        | -34.27      | L1   | GND |
| 9.384           | FINAL         | 18.23            | —              | 60.00        | -41.77      | L1   | GND |
| 9.452           | FINAL         | —                | 10.10          | 50.00        | -39.90      | L1   | GND |
| 22.427          | FINAL         | —                | 17.43          | 50.00        | -32.57      | L1   | GND |
| 22.445          | FINAL         | 24.20            | —              | 60.00        | -35.80      | L1   | GND |

**Table 7-336. AC Line Conducted Data with 802.11ax (SU) CDD/SDM Diversity – Ch.36 (L1) with Laptop**

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021   | <b>EUT Type:</b><br>Tablet Device             | Page 567 of 569                        |

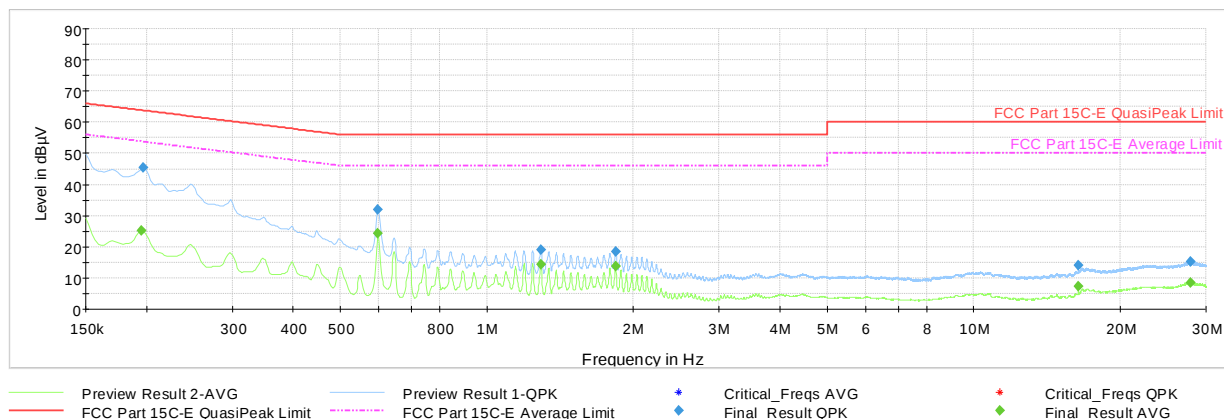

**Plot 7-1886. AC Line Conducted Plot with 802.11ax (SU) CDD/SDM Diversity – Ch.36 (N), with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.195           | FINAL         | —                | 25.31          | 53.82        | -28.52      | N    | GND |
| 0.197           | FINAL         | 45.46            | —              | 63.73        | -18.26      | N    | GND |
| 0.598           | FINAL         | 32.07            | —              | 56.00        | -23.93      | N    | GND |
| 0.598           | FINAL         | —                | 24.20          | 46.00        | -21.80      | N    | GND |
| 1.291           | FINAL         | —                | 14.43          | 46.00        | -31.57      | N    | GND |
| 1.291           | FINAL         | 18.92            | —              | 56.00        | -37.08      | N    | GND |
| 1.838           | FINAL         | —                | 13.84          | 46.00        | -32.16      | N    | GND |
| 1.838           | FINAL         | 18.33            | —              | 56.00        | -37.67      | N    | GND |
| 16.382          | FINAL         | —                | 7.47           | 50.00        | -42.53      | N    | GND |
| 16.384          | FINAL         | 14.02            | —              | 60.00        | -45.98      | N    | GND |
| 27.890          | FINAL         | —                | 8.57           | 50.00        | -41.43      | N    | GND |
| 27.893          | FINAL         | 15.21            | —              | 60.00        | -44.79      | N    | GND |

**Table 7-337. AC Line Conducted Data with 802.11ax (SU) CDD/SDM Diversity – Ch.36 (N), with Laptop**

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2568<br>IC: 579C-A2568      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2106080049-14.BCG | Test Dates:<br>6/2/2021 – 8/26/2021          | EUT Type:<br>Tablet Device            | Page 568 of 569                 |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2568** and **IC: 579C-A2568** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

|                                                  |                                                                                                                                   |                                        |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2568<br><b>IC:</b> 579C-A2568 |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2106080049-14.BCG   | <b>Test Dates:</b><br>6/2/2021 – 8/26/2021                                                                                        | <b>EUT Type:</b><br>Tablet Device      |