



MEASUREMENT REPORT

FCC PART 15.407 / ISSED RSS-247 UNII 802.11a/n/ac/ax(SU)

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

05/30/2022 - 09/22/2022

Test Site/Location:

Element Washington DC LLC, Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090024-09.BCG

FCC ID:

BCGA2759

IC:

579C-A2759

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2759

EUT Type:

Tablet Device

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDM

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 1 of 394

V 10.5 12/15/2021


TABLE OF CONTENTS

1.0	INTRODUCTION	6
1.1	Scope.....	6
1.2	Element Washington DC LLC Test Location.....	6
1.3	Test Facility / Accreditations.....	6
2.0	PRODUCT INFORMATION	7
2.1	Equipment Description	7
2.2	Device Capabilities.....	7
2.3	Antenna Description.....	10
2.4	Test Support Equipment.....	10
2.5	Test Configuration	10
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications.....	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions.....	13
3.4	Environmental Conditions.....	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA.....	16
7.0	TEST RESULTS	17
7.1	Summary.....	17
7.2	26dB & 99% Bandwidth Measurement – 802.11a/n/ac/ax(SU)	19
7.3	6dB & 99% Bandwidth Measurement – 802.11a/n/ac/ax(SU)	50
7.4	Conducted Output Power and Max EIRP Measurement – 802.11a/n/ac/ax(SU)	59
7.5	Maximum Power Spectral Density – 802.11a/n/ac/ax(SU).....	95
7.6	Radiated Spurious Emissions – Above 1GHz	193
7.7	Radiated Spurious Emissions – Below 1GHz	383
7.8	AC Line-Conducted Emissions Measurement.....	388
8.0	CONCLUSION.....	394


FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 2 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM				Summed	
				Antenna WF5T		Antenna WF5B		Antenna WF5T		Antenna WF5B			
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	802.11a/n	5180 - 5240	100.000	20.00	100.000	20.00	49.431	16.94	48.978	16.90	97.724	19.90
2A		802.11a/n	5260 - 5320	99.770	19.99	100.000	20.00	50.119	17.00	50.119	17.00	100.231	20.01
2C		802.11a/n	5500 - 5720	100.000	20.00	100.000	20.00	50.119	17.00	49.659	16.96	99.312	19.97
3		802.11a/n	5745 - 5825	112.202	20.50	111.686	20.48	111.429	20.47	111.944	20.49	223.357	23.49
1	40	802.11n	5190 - 5230	109.648	20.40	106.905	20.29	86.696	19.38	87.297	19.41	174.181	22.41
2A		802.11n	5270 - 5310	111.686	20.48	109.396	20.39	87.498	19.42	87.902	19.44	175.388	22.44
2C		802.11n	5510 - 5710	112.202	20.50	110.154	20.42	89.125	19.50	85.310	19.31	174.582	22.42
3		802.11n	5755 - 5795	109.396	20.39	112.202	20.50	112.202	20.50	106.905	20.29	219.280	23.41
1	80	802.11ac	5210	24.434	13.88	24.717	13.93	15.849	12.00	15.241	11.83	31.117	14.93
2A		802.11ac	5290	29.648	14.72	30.339	14.82	21.232	13.27	21.677	13.36	42.954	16.33
2C		802.11ac	5530 - 5690	105.439	20.23	107.895	20.33	100.000	20.00	95.060	19.78	194.984	22.90
3		802.11ac	5775	61.660	17.90	61.944	17.92	47.424	16.76	47.206	16.74	94.624	19.76
1	160	802.11ac	5250	8.872	9.48	8.913	9.50	7.079	8.50	7.015	8.46	14.093	11.49
2C		802.11ac	5570	6.237	7.95	6.166	7.90	5.559	7.45	5.598	7.48	11.169	10.48
1	20	802.11ax (SU)	5180 - 5240	100.000	20.00	100.000	20.00	49.888	16.98	50.119	17.00	100.000	20.00
2A		802.11ax (SU)	5260 - 5320	100.000	20.00	99.770	19.99	49.888	16.98	50.003	16.99	99.770	19.99
2C		802.11ax (SU)	5500 - 5720	100.000	20.00	100.000	20.00	48.641	16.87	49.659	16.96	96.605	19.85
3		802.11ax (SU)	5745 - 5825	111.944	20.49	111.686	20.48	112.202	20.50	107.152	20.30	218.776	23.40
1	40	802.11ax (SU)	5190 - 5230	112.202	20.50	107.895	20.33	89.125	19.50	88.512	19.47	177.828	22.50
2A		802.11ax (SU)	5270 - 5310	110.154	20.42	105.439	20.23	86.696	19.38	87.700	19.43	174.582	22.42
2C		802.11ax (SU)	5510 - 5710	112.202	20.50	110.917	20.45	89.125	19.50	87.297	19.41	176.604	22.47
3		802.11ax (SU)	5755 - 5795	112.202	20.50	107.399	20.31	109.648	20.40	106.170	20.26	215.774	23.34
1	80	802.11ax (SU)	5210	19.679	12.94	19.055	12.80	11.940	10.77	12.023	10.80	23.988	13.80
2A		802.11ax (SU)	5290	19.588	12.92	19.588	12.92	15.596	11.93	15.205	11.82	30.832	14.89
2C		802.11ax (SU)	5530 - 5690	109.648	20.40	112.202	20.50	99.083	19.96	94.406	19.75	193.642	22.87
3		802.11ax (SU)	5775	48.978	16.90	48.865	16.89	39.811	16.00	37.497	15.74	77.268	18.88
1	160	802.11ax (SU)	5250	7.745	8.89	7.798	8.92	7.079	8.50	7.031	8.47	23.988	13.80
2C		802.11ax (SU)	5570	6.310	8.00	6.237	7.95	5.000	6.99	4.989	6.98	30.832	14.89

FCC EUT Overview (Low Data Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM					
				Antenna WF5T		Antenna WF5B		Antenna WF5T		Antenna WF5B		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	802.11a/n	5180 - 5240	33.343	15.23	32.885	15.17	19.953	13.00	19.907	12.99	39.355	15.95
2A		802.11a/n	5260 - 5320	99.770	19.99	100.000	20.00	50.119	17.00	50.119	17.00	100.231	20.01
2C		802.11a/n	5500 - 5720	100.000	20.00	100.000	20.00	50.119	17.00	49.659	16.96	99.083	19.96
3		802.11a/n	5745 - 5825	112.202	20.50	111.686	20.48	111.429	20.47	111.944	20.49	223.357	23.49
1	40	802.11n	5190 - 5230	59.429	17.74	57.544	17.60	19.679	12.94	19.770	12.96	39.446	15.96
2A		802.11n	5270 - 5310	111.686	20.48	109.396	20.39	87.498	19.42	87.902	19.44	175.388	22.44
2C		802.11n	5510 - 5710	111.429	20.47	109.648	20.40	88.512	19.47	84.723	19.28	173.380	22.39
3		802.11n	5755 - 5795	109.396	20.39	112.202	20.50	112.202	20.50	106.905	20.29	219.280	23.41
1	80	802.11ac	5210	24.434	13.88	24.717	13.93	15.849	12.00	15.241	11.83	31.117	14.93
2A		802.11ac	5290	29.648	14.72	30.339	14.82	21.232	13.27	21.677	13.36	42.954	16.33
2C		802.11ac	5530 - 5690	105.439	20.23	107.895	20.33	100.000	20.00	95.060	19.78	194.984	22.90
3		802.11ac	5775	61.660	17.90	61.944	17.92	47.424	16.76	47.206	16.74	94.624	19.76
1	160	802.11ac	5250	8.872	9.48	8.913	9.50	7.079	8.50	7.015	8.46	14.093	11.49
1	20	802.11ax (SU)	5180 - 5240	33.420	15.24	32.509	15.12	19.953	13.00	19.907	12.99	39.811	16.00
2A		802.11ax (SU)	5260 - 5320	100.000	20.00	97.949	19.91	49.888	16.98	50.003	16.99	99.770	19.99
2C		802.11ax (SU)	5500 - 5720	100.000	20.00	98.175	19.92	50.003	16.99	50.119	17.00	100.231	20.01
3		802.11ax (SU)	5745 - 5825	111.944	20.49	111.686	20.48	112.202	20.50	107.152	20.30	218.776	23.40
1	40	802.11ax (SU)	5190 - 5230	59.566	17.75	58.076	17.64	35.237	15.47	34.041	15.32	69.343	18.41
2A		802.11ax (SU)	5270 - 5310	110.154	20.42	105.439	20.23	86.696	19.38	87.700	19.43	174.582	22.42
2C		802.11ax (SU)	5510 - 5710	112.202	20.50	108.643	20.36	89.125	19.50	87.297	19.41	176.604	22.47
3		802.11ax (SU)	5755 - 5795	112.202	20.50	107.399	20.31	109.648	20.40	106.170	20.26	215.774	23.34
1	80	802.11ax (SU)	5210	19.679	12.94	19.055	12.80	11.940	10.77	12.023	10.80	23.988	13.80
2A		802.11ax (SU)	5290	19.588	12.92	19.588	12.92	15.596	11.93	15.205	11.82	30.832	14.89
2C		802.11ax (SU)	5530 - 5690	109.648	20.40	112.202	20.50	99.083	19.96	94.406	19.75	193.642	22.87
3		802.11ax (SU)	5775	48.978	16.90	48.865	16.89	39.811	16.00	37.497	15.74	77.268	18.88
1	160	802.11ax (SU)	5250	7.745	8.89	7.798	8.92	7.079	8.50	7.031	8.47	23.988	13.80

ISED EUT Overview (Low Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 3 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM					
				Antenna WF5T		Antenna WF5B		Antenna WF5T		Antenna WF5B		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	802.11a/n	5180 - 5240	99.083	19.96	98.628	19.94	50.119	17.00	50.119	17.00	100.000	20.00
2A		802.11a/n	5260 - 5320	98.401	19.93	98.855	19.95	50.119	17.00	49.545	16.95	99.770	19.99
2C		802.11a/n	5500 - 5720	100.000	20.00	99.541	19.98	49.888	16.98	48.641	16.87	84.333	19.26
3		802.11a/n	5745 - 5825	112.202	20.50	109.648	20.40	110.408	20.43	111.173	20.46	217.771	23.38
1	40	802.11n	5190 - 5230	112.202	20.50	108.893	20.37	85.704	19.33	84.140	19.25	169.824	22.30
2A		802.11n	5270 - 5310	108.893	20.37	111.173	20.46	80.538	19.06	80.353	19.05	161.065	22.07
2C		802.11n	5510 - 5710	109.144	20.38	109.144	20.38	88.716	19.48	85.704	19.33	147.911	21.70
3		802.11n	5755 - 5795	110.917	20.45	110.408	20.43	110.408	20.43	110.408	20.43	220.293	23.43
1	80	802.11ac	5210	18.664	12.71	18.880	12.76	13.646	11.35	13.804	11.40	27.925	14.46
2A		802.11ac	5290	23.878	13.78	23.878	13.78	18.836	12.75	19.364	12.87	38.194	15.82
2C		802.11ac	5530 - 5690	108.893	20.37	107.152	20.30	98.175	19.92	99.770	19.99	164.816	22.17
3		802.11ac	5775	53.088	17.25	53.088	17.25	43.451	16.38	42.462	16.28	85.901	19.34
1	160	802.11ac	5250	7.551	8.78	7.499	8.75	6.281	7.98	5.943	7.74	12.218	10.87
2C		802.11ac	5570	5.559	7.45	5.458	7.37	4.864	6.87	4.932	6.93	9.795	9.91
1	20	802.11ax (SU)	5180 - 5240	96.161	19.83	96.383	19.84	49.888	16.98	49.888	16.98	98.855	19.95
2A		802.11ax (SU)	5260 - 5320	96.161	19.83	96.605	19.85	48.753	16.88	48.084	16.82	98.175	19.92
2C		802.11ax (SU)	5500 - 5720	97.499	19.89	95.940	19.82	50.119	17.00	49.774	16.97	100.000	20.00
3		802.11ax (SU)	5745 - 5825	112.202	20.50	109.648	20.40	112.202	20.50	108.393	20.35	219.786	23.42
1	40	802.11ax (SU)	5190 - 5230	108.393	20.35	109.144	20.38	88.716	19.48	86.896	19.39	175.792	22.45
2A		802.11ax (SU)	5270 - 5310	98.855	19.95	96.605	19.85	74.817	18.74	72.778	18.62	147.571	21.69
2C		802.11ax (SU)	5510 - 5710	111.944	20.49	110.662	20.44	87.498	19.42	84.528	19.27	171.791	22.35
3		802.11ax (SU)	5755 - 5795	112.202	20.50	109.901	20.41	109.901	20.41	107.647	20.32	217.771	23.38
1	80	802.11ax (SU)	5210	17.061	12.32	16.882	12.30	11.885	10.75	11.722	10.69	23.605	13.73
2A		802.11ax (SU)	5290	16.827	12.26	16.866	12.27	14.093	11.49	13.490	11.30	27.606	14.41
2C		802.11ax (SU)	5530 - 5690	110.408	20.43	106.170	20.26	96.605	19.85	94.624	19.76	191.426	22.82
3		802.11ax (SU)	5775	38.194	15.82	38.371	15.84	35.481	15.50	34.277	15.35	69.823	18.44
1	160	802.11ax (SU)	5250	6.039	7.81	6.067	7.83	6.138	7.88	6.039	7.81	12.190	10.86
2C		802.11ax (SU)	5570	5.408	7.33	5.572	7.46	4.426	6.46	4.236	6.27	8.670	9.38

FCC EUT Overview (Mid Data Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM					
				Antenna WF5T		Antenna WF5B		Antenna WF5T		Antenna WF5B		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	802.11a/n	5180 - 5240	33.497	15.25	33.420	15.24	19.953	13.00	19.861	12.98	39.628	15.98
2A		802.11a/n	5260 - 5320	98.401	19.93	98.855	19.95	50.119	17.00	49.545	16.95	99.770	19.99
2C		802.11a/n	5500 - 5720	100.000	20.00	99.541	19.98	49.888	16.98	48.641	16.87	84.333	19.26
3		802.11a/n	5745 - 5825	112.202	20.50	109.648	20.40	110.408	20.43	111.173	20.46	217.771	23.38
1	40	802.11n	5190 - 5230	58.614	17.68	58.076	17.64	34.995	15.44	34.041	15.32	69.024	18.39
2A		802.11n	5270 - 5310	108.893	20.37	111.173	20.46	80.538	19.06	80.353	19.05	161.065	22.07
2C		802.11n	5510 - 5710	108.393	20.35	106.414	20.27	86.696	19.38	84.918	19.29	146.555	21.66
3		802.11n	5755 - 5795	110.917	20.45	110.408	20.43	110.408	20.43	110.408	20.43	220.293	23.43
1	80	802.11ac	5210	18.664	12.71	18.880	12.76	13.646	11.35	13.804	11.40	27.925	14.46
2A		802.11ac	5290	23.878	13.78	23.878	13.78	18.836	12.75	19.364	12.87	38.194	15.82
2C		802.11ac	5530 - 5690	108.893	20.37	107.152	20.30	98.175	19.92	99.770	19.99	164.816	22.17
3		802.11ac	5775	53.088	17.25	53.088	17.25	43.451	16.38	42.462	16.28	85.901	19.34
1	160	802.11ac	5250	7.551	8.78	7.499	8.75	6.281	7.98	5.943	7.74	12.218	10.87
2A		802.11ax (SU)	5180 - 5240	33.266	15.22	33.266	15.22	19.953	13.00	19.724	12.95	39.628	15.98
2C		802.11ax (SU)	5260 - 5320	96.161	19.83	96.605	19.85	48.753	16.88	48.084	16.82	98.175	19.92
3		802.11ax (SU)	5500 - 5720	97.499	19.89	95.940	19.82	50.119	17.00	49.774	16.97	100.000	20.00
1	40	802.11ax (SU)	5745 - 5825	112.202	20.50	109.648	20.40	112.202	20.50	108.393	20.35	219.786	23.42
2A		802.11ax (SU)	5190 - 5230	59.429	17.74	56.364	17.51	33.574	15.26	34.674	15.40	68.234	18.34
2C		802.11ax (SU)	5270 - 5310	98.855	19.95	96.605	19.85	74.817	18.74	72.778	18.62	147.571	21.69
3		802.11ax (SU)	5510 - 5710	111.944	20.49	108.143	20.34	84.723	19.28	84.528	19.27	169.434	22.29
1	80	802.11ax (SU)	5755 - 5795	112.202	20.50	109.901	20.41	109.901	20.41	107.647	20.32	217.771	23.38
2A		802.11ax (SU)	5210	17.061	12.32	16.882	12.30	11.885	10.75	11.722	10.69	23.605	13.73
2C		802.11ax (SU)	5290	16.827	12.26	16.866	12.27	14.093	11.49	13.490	11.30	27.606	14.41
3		802.11ax (SU)	5530 - 5690	110.408	20.43	106.170	20.26	96.605	19.85	94.624	19.76	191.426	22.82
1	160	802.11ax (SU)	5775	38.194	15.82	38.371	15.84	35.481	15.50	34.277	15.35	69.823	18.44
2C		802.11ax (SU)	5250	6.039	7.81	6.067	7.83	6.138	7.88	6.039	7.81	12.190	10.86

ISED EUT Overview (Mid Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 4 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM					
				Antenna WF5T		Antenna WF5B		Antenna WF5T		Antenna WF5B		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	802.11a/n	5180 - 5240	100.000	20.00	100.000	20.00	48.978	16.90	49.545	16.95	97.724	19.90
2A		802.11a/n	5260 - 5320	99.541	19.98	100.000	20.00	49.204	16.92	50.119	17.00	99.312	19.97
2C		802.11a/n	5500 - 5720	100.000	20.00	100.000	20.00	49.545	16.95	49.888	16.98	99.312	19.97
3		802.11a/n	5745 - 5825	112.202	20.50	112.202	20.50	111.686	20.48	112.202	20.50	223.872	23.50
1	40	802.11n	5190 - 5230	110.662	20.44	107.647	20.32	88.105	19.45	87.498	19.42	175.792	22.45
2A		802.11n	5270 - 5310	100.000	20.00	98.401	19.93	70.469	18.48	70.146	18.46	140.605	21.48
2C		802.11n	5510 - 5710	112.202	20.50	112.202	20.50	87.902	19.44	89.125	19.50	176.604	22.47
3		802.11n	5755 - 5795	104.954	20.21	108.643	20.36	110.662	20.44	110.154	20.42	220.800	23.44
1	80	802.11ac	5210	19.953	13.00	19.011	12.79	12.589	11.00	12.589	11.00	25.177	14.01
2A		802.11ac	5290	21.232	13.27	21.878	13.40	15.417	11.88	15.849	12.00	31.261	14.95
2C		802.11ac	5530 - 5690	111.686	20.48	112.202	20.50	98.628	19.94	96.828	19.86	177.011	22.48
3		802.11ac	5775	42.954	16.33	41.879	16.22	43.451	16.38	44.157	16.45	87.700	19.43
1	160	802.11ac	5250	7.047	8.48	7.047	8.48	5.383	7.31	5.470	7.38	10.864	10.36
2C		802.11ac	5570	4.977	6.97	5.012	7.00	4.285	6.32	4.416	6.45	8.710	9.40
1	20	802.11ax (SU)	5180 - 5240	99.312	19.97	96.828	19.86	50.119	17.00	49.317	16.93	98.401	19.93
2A		802.11ax (SU)	5260 - 5320	100.000	20.00	98.855	19.95	49.774	16.97	49.774	16.97	99.541	19.98
2C		802.11ax (SU)	5500 - 5720	100.000	20.00	100.000	20.00	50.119	17.00	50.003	16.99	100.000	20.00
3		802.11ax (SU)	5745 - 5825	111.173	20.46	107.152	20.30	108.893	20.37	112.202	20.50	220.293	23.43
1	40	802.11ax (SU)	5190 - 5230	103.276	20.14	100.925	20.04	79.433	19.00	77.983	18.92	157.398	21.97
2A		802.11ax (SU)	5270 - 5310	86.896	19.39	86.298	19.36	68.391	18.35	69.663	18.43	138.038	21.40
2C		802.11ax (SU)	5510 - 5710	112.202	20.50	110.408	20.43	89.125	19.50	88.105	19.45	177.011	22.48
3		802.11ax (SU)	5755 - 5795	108.393	20.35	109.396	20.39	96.161	19.83	98.175	19.92	194.536	22.89
1	80	802.11ax (SU)	5210	15.241	11.83	15.849	12.00	11.092	10.45	10.740	10.31	21.827	13.39
2A		802.11ax (SU)	5290	15.311	11.85	15.668	11.95	11.995	10.79	12.303	10.90	24.322	13.86
2C		802.11ax (SU)	5530 - 5690	110.662	20.44	111.944	20.49	98.401	19.93	100.000	20.00	198.609	22.98
3		802.11ax (SU)	5775	33.420	15.24	34.435	15.37	29.992	14.77	30.903	14.90	60.954	17.85
1	160	802.11ax (SU)	5250	5.623	7.50	5.572	7.46	4.335	6.37	4.446	6.48	8.790	9.44
2C		802.11ax (SU)	5570	5.012	7.00	4.864	6.87	3.342	5.24	3.365	5.27	6.714	8.27

FCC EUT Overview (High Data Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM					
				Antenna WF5T		Antenna WF5B		Antenna WF5T		Antenna WF5B		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	802.11a/n	5180 - 5240	32.434	15.11	33.420	15.24	19.907	12.99	19.409	12.88	38.994	15.91
2A		802.11a/n	5260 - 5320	99.541	19.98	100.000	20.00	49.204	16.92	50.119	17.00	99.312	19.97
2C		802.11a/n	5500 - 5720	100.000	20.00	100.000	20.00	49.545	16.95	49.888	16.98	99.312	19.97
3		802.11a/n	5745 - 5825	112.202	20.50	112.202	20.50	111.686	20.48	112.202	20.50	223.872	23.50
1	40	802.11n	5190 - 5230	59.429	17.74	59.156	17.72	34.514	15.38	35.400	15.49	69.984	18.45
2A		802.11n	5270 - 5310	100.000	20.00	98.401	19.93	70.469	18.48	70.146	18.46	140.605	21.48
2C		802.11n	5510 - 5710	111.429	20.47	112.202	20.50	87.902	19.44	88.716	19.48	176.604	22.47
3		802.11n	5755 - 5795	104.954	20.21	108.643	20.36	110.662	20.44	110.154	20.42	220.800	23.44
1	80	802.11ac	5210	19.953	13.00	19.011	12.79	12.589	11.00	12.589	11.00	25.177	14.01
2A		802.11ac	5290	21.232	13.27	21.878	13.40	15.417	11.88	15.849	12.00	31.261	14.95
2C		802.11ac	5530 - 5690	111.686	20.48	112.202	20.50	98.628	19.94	96.828	19.86	177.011	22.48
3		802.11ac	5775	42.954	16.33	41.879	16.22	43.451	16.38	44.157	16.45	87.700	19.43
1	160	802.11ac	5250	7.047	8.48	7.047	8.48	5.383	7.31	5.470	7.38	10.864	10.36
2C		802.11ac	5570	4.977	6.97	5.012	7.00	4.285	6.32	4.416	6.45	8.710	9.40
1	20	802.11ax (SU)	5180 - 5240	33.497	15.25	32.961	15.18	19.815	12.97	19.907	12.99	39.537	15.97
2A		802.11ax (SU)	5260 - 5320	100.000	20.00	98.855	19.95	49.774	16.97	49.774	16.97	99.541	19.98
2C		802.11ax (SU)	5500 - 5720	100.000	20.00	100.000	20.00	50.119	17.00	50.003	16.99	100.000	20.00
3		802.11ax (SU)	5745 - 5825	111.173	20.46	107.152	20.30	108.893	20.37	112.202	20.50	220.293	23.43
1	40	802.11ax (SU)	5190 - 5230	59.566	17.75	57.544	17.60	34.356	15.36	33.574	15.26	67.920	18.32
2A		802.11ax (SU)	5270 - 5310	86.896	19.39	86.298	19.36	68.391	18.35	69.663	18.43	138.038	21.40
2C		802.11ax (SU)	5510 - 5710	112.202	20.50	110.408	20.43	88.920	19.49	88.105	19.45	177.011	22.48
3		802.11ax (SU)	5755 - 5795	108.393	20.35	109.396	20.39	96.161	19.83	98.175	19.92	194.536	22.89
1	80	802.11ax (SU)	5210	15.241	11.83	15.849	12.00	11.092	10.45	10.740	10.31	21.827	13.39
2A		802.11ax (SU)	5290	15.311	11.85	15.668	11.95	11.995	10.79	12.303	10.90	24.322	13.86
2C		802.11ax (SU)	5530 - 5690	110.662	20.44	111.944	20.49	98.401	19.93	100.000	20.00	198.609	22.98
3		802.11ax (SU)	5775	33.420	15.24	34.435	15.37	29.992	14.77	30.903	14.90	60.954	17.85
1	160	802.11ax (SU)	5250	5.623	7.50	5.572	7.46	4.335	6.37	4.446	6.48	8.790	9.44

ISED EUT Overview (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 5 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 6 of 394

V 10.5 12/15/2021

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2759** and **IC: 579C-A2759**. The test data contained in this report pertains only to the emissions due to the EUT's UNII 802.11a/n/ac/ax(SU) transmitter.

Test Device Serial No.: K6JXY2997P, DWKYV0X2W9, DLX226400LX1JY24J

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8)

This device supports BT Beamforming

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	50	5250	114	5570

Table 2-4. 802.11ac / 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 7 of 394

V 10.5 12/15/2021

Notes:

1. TDWR channels are not supported for ISCED.
2. 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Antenna WF5T	Antenna WF5B	CDD/SDM
5GHz	a (Low Rate)	97.3	97.8	97.6
	a (Mid Rate)	96.0	95.9	96.3
	a (High Rate)	89.6	90.7	91.7
	n (HT20) (Low Rate)	96.8	96.9	94.6
	n (HT20) (Mid Rate)	94.1	94.4	90.2
	n (HT20) (High Rate)	92.1	91.7	86.1
	ax(SU) (HT20 Low Rate)	96.3	95.9	95.9
	ax(SU) (HT20 Mid Rate)	93.2	93.2	93.3
	ax(SU) (HT20 High Rate)	86.9	87.1	86.7
	n (HT40 Low Rate)	94.0	94.2	90.2
	n (HT40 Mid Rate)	90.0	89.8	85.0
	n (HT40 High Rate)	86.9	86.7	81.7
	ax(SU) (HT40 Low Rate)	93.6	93.7	93.5
	ax(SU) (HT40 Mid Rate)	89.7	89.8	90.1
	ax(SU) (HT40 High Rate)	82.9	82.9	82.4
	ac (HT80 Low Rate)	89.2	88.9	83.4
	ac (HT80 Mid Rate)	83.3	84.1	79.1
	ac (HT80 High Rate)	78.0	77.7	74.8
	ax(SU) (HT80 Low Rate)	88.1	88.1	88.6
	ax(SU) (HT80 Mid Rate)	83.6	84.0	83.8
	ax(SU) (HT80 High Rate)	78.3	78.8	78.5
	ac (HT160 Low Rate)	89.2	84.8	79.9
	ac (HT160 Mid Rate)	78.9	79.2	76.2
	ac (HT160 High Rate)	73.4	74.1	71.6
	ax(SU) (HT160 Low Rate)	85.2	84.8	84.6
	ax(SU) (HT160 Mid Rate)	81.4	81.7	81.1
	ax(SU) (HE160 High Rate)	76.1	77.5	77.3

Table 2-5. Measured Duty Cycles

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 8 of 394

V 10.5 12/15/2021

3. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM		STBC	
		Antenna WF5T	Antenna WF5B	Antenna WF5T	Antenna WF5B	Antenna WF5T	Antenna WF5B	Antenna WF5T	Antenna WF5B
5GHz	11a	✓	✓	✓	✓	✗	✗	✗	✗
	11n (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ac (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)
 58/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7 (ac 160MHz)
 13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4Mbps (MIMO n/ac – 20MHz)
 156/173Mbps (MIMO ac – 20MHz)
 27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243/270, 270/300Mbps (MIMO n/ac – 40MHz) 324/360, 360/400Mbps (MIMO ac – 40MHz)
 58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7Mbps (MIMO ac – 80MHz)
 116/130, 234/260, 351/390, 468/520, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7 (MIMO ac – 160MHz)
 8/8.6, 16/17.2, 24/25.8, 33/34.4, 49/51.6, 65/68.8, 73/77.4, 81/86.0, 98/103.2, 108/114.7, 122/129.0, 135/143.4 (ax – 20MHz)
 16/17.2, 33/34.4, 49/51.6, 65/68.8, 98/103.2, 130/137.6, 146/154.9, 163/172.1, 195/206.5, 217/229.4, 244/258.1, 271/286.8 (ax – 40MHz BW)
 34/36.0, 68/72.1, 102/108.1, 136/144.1, 204/216.2, 272/288.2, 306/324.4, 340/360.3, 408/432.4, 453/480.4, 510/540.4, 567/600.5 (ax – 80MHz BW)
 136.2/144.2, 272/288.2, 408.2/432.4, 544.4, 576.4/816.6864.8, 1088.8/1153, 1225/1297, 1361.2/1441.2, 1633.4/1729.4, 1814.8/1921.6, 2041.6/2161.8, 2268.6/2402Mbps, (MIMO ax – 160MHz)

Note:

Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 9 of 394

V 10.5 12/15/2021

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna WF5T	Antenna WF5B
5.150 – 5.250	2.2	3.6
5.250 – 5.350	1.9	3.5
5.470 – 5.725	3.6	3.7
5725 – 5.850	3.7	3.8

Table 2-7. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model: A2141	S/N:	C02DV7VKMD6T
	w/AC/DC Adapter	Model: A2166	S/N:	N/A
2	Apple USB-C Cable	Model: Spartan	S/N:	000MKTR02U
3	USB-C Cable	Model: A246	S/N:	N/A
	w/ AC Adapter	Model: A2305	S/N:	N/A
4	Apple Pencil	Model: N/A	S/N:	GQXGSXBJKM9
5	DC Power Supply	Model: KPS3010D	S/N:	N/A

Table 2-8. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 10 of 394

V 10.5 12/15/2021

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11n HT20/40, 11ax(SU) HE20/40/80/160 and 11acVHT80/160 2TX CDD/SDM mode test data provided in this report covers 802.11n HT20/40, 11ax(SU) HE20/40/80/160 and 11acVHT80/160 2TX STBC mode.

802.11ac VHT20 and VHT40 mode are different from 802.11n HT20 and HT40 only in control messages and have the same power settings.

The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three groups of data rate have been investigated and only the worst case data rate per group is reported. The worst case data rate for each group per mode are as follows:

- 802.11a:
 - Low Data Rate: 12Mbps
 - Mid Data Rate: 24Mbps
 - High Data Rate: 54Mbps
- 802.11n HT20/40:
 - Low Data Rate: MCS2/MCS10 (SISO/CDD/SDM)
 - Mid Data Rate: MCS4/MCS12 (SISO/CDD/SDM)
 - High Data Rate: MCS7/MCS15 (SISO/CDD/SDM)
- 802.11ac VHT80/160:
 - Low Data Rate: MCS2 (SISO/CDD/SDM)
 - Mid Data Rate: MCS4 (SISO/CDD/SDM)
 - High Data Rate: MCS9 (SISO/CDD/SDM)
- 802.11ax(SU) HE20/HE40/HE80:
 - Low Data Rate: MCS2
 - Mid Data Rate: MCS4
 - High Data Rate: MCS11

For 802.11ax-RU test result, see separate UNII 802.11ax (OFDMA) report, 1C2205090024-10.BCG.

2.6 Software and Firmware

The test was conducted with firmware version 20A8359 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 11 of 394

V 10.5 12/15/2021

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 12 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 13 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 14 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.77
Line Conducted Disturbance	2.70
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz - 1GHz)	4.75
Radiated Disturbance (1 - 18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 15 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
Agilent Technologies	N9020A	MXA Signal Analyzer	4/26/2022	Annual	4/26/2023	MY56470202
Anritsu	ML2496A	Power Meter	11/29/2021	Annual	11/29/2022	1840005
Anritsu	MA2411B	Pulse Power Sensor	11/30/2021	Annual	11/30/2022	1726261
Anritsu	MA2411B	Pulse Power Sensor	11/30/2021	Annual	11/30/2022	1726262
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
Com-Power Corporation	LIN-120A	Line Impedance Stabilization Network (LISN)	3/7/2022	Annual	3/7/2023	241296
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 16 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2759
 IC: 579C-A2759
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		PASS	Section 7.2, Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report	RADIATED	PASS	See DFS Test Report (1C22050900 24-08.BCG)
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])		PASS	Section 7.6
15.205, 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 17 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 7.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.2.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 18 of 394

V 10.5 12/15/2021

7.2 26dB & 99% Bandwidth Measurement – 802.11a/n/ac/ax(SU)

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 19 of 394

V 10.5 12/15/2021

Antenna WF5T 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	19.5/21.7 (MCS2)	17.81	21.61
	5200	40	n (20MHz)	19.5/21.7 (MCS2)	17.72	20.68
	5240	48	n (20MHz)	19.5/21.7 (MCS2)	17.72	21.13
	5180	36	ax (SU) (20MHz)	24/25.8 (MCS2)	19.06	21.84
	5200	40	ax (SU) (20MHz)	24/25.8 (MCS2)	19.04	20.92
	5240	48	ax (SU) (20MHz)	24/25.8 (MCS2)	19.01	21.22
	5190	38	n (40MHz)	40.5/45 (MCS2)	36.49	41.53
	5230	46	n (40MHz)	40.5/45 (MCS2)	36.25	40.88
	5190	38	ax (SU) (40MHz)	49/51.6 (MCS2)	38.15	52.88
	5230	46	ax (SU) (40MHz)	49/51.6 (MCS2)	37.96	41.33
	5210	42	ac (80MHz)	87.8/97.5 (MCS2)	75.57	81.65
	5210	42	ax (SU) (80MHz)	102/108.1 (MCS2)	77.23	86.18
Band 1/2	5250	50	ac (160MHz)	175.5/195 (MCS2)	154.27	164.90
	5250	50	ax SU (160MHz)	204.2/216.2 (MCS2)	155.67	165.00
Band 2A	5260	52	n (20MHz)	19.5/21.7 (MCS2)	17.72	20.73
	5280	56	n (20MHz)	19.5/21.7 (MCS2)	17.74	20.78
	5320	64	n (20MHz)	19.5/21.7 (MCS2)	17.76	21.19
	5260	52	ax (SU) (20MHz)	24/25.8 (MCS2)	18.98	21.40
	5280	56	ax (SU) (20MHz)	24/25.8 (MCS2)	19.02	21.06
	5320	64	ax (SU) (20MHz)	24/25.8 (MCS2)	19.06	23.12
	5270	54	n (40MHz)	40.5/45 (MCS2)	36.37	41.14
	5310	62	n (40MHz)	40.5/45 (MCS2)	36.48	41.53
	5270	54	ax (SU) (40MHz)	49/51.6 (MCS2)	37.95	41.28
	5310	62	ax (SU) (40MHz)	49/51.6 (MCS2)	38.04	52.66
	5290	58	ac (80MHz)	87.8/97.5 (MCS2)	75.57	86.68
	5290	58	ax (SU) (80MHz)	102/108.1 (MCS2)	77.41	86.46
Band 2C	5500	100	n (20MHz)	19.5/21.7 (MCS2)	17.74	21.41
	5580	116	n (20MHz)	19.5/21.7 (MCS2)	17.69	20.87
	5720	144	n (20MHz)	19.5/21.7 (MCS2)	17.71	20.47
	5500	100	ax (SU) (20MHz)	24/25.8 (MCS2)	19.17	23.61
	5580	116	ax (SU) (20MHz)	24/25.8 (MCS2)	19.00	20.91
	5720	144	ax (SU) (20MHz)	24/25.8 (MCS2)	19.01	21.22
	5510	102	n (40MHz)	40.5/45 (MCS2)	36.44	42.00
	5550	110	n (40MHz)	40.5/45 (MCS2)	36.31	40.92
	5710	142	n (40MHz)	40.5/45 (MCS2)	36.27	40.91
	5510	102	ax (SU) (40MHz)	49/51.6 (MCS2)	38.05	52.53
	5550	110	ax (SU) (40MHz)	49/51.6 (MCS2)	37.90	41.43
	5710	142	ax (SU) (40MHz)	49/51.6 (MCS2)	37.88	41.42
	5530	106	ac (80MHz)	87.8/97.5 (MCS2)	75.50	81.47
	5690	138	ac (80MHz)	87.8/97.5 (MCS2)	75.50	80.62
	5530	106	ax (SU) (80MHz)	102/108.1 (MCS2)	77.26	87.31
	5690	138	ax (SU) (80MHz)	102/108.1 (MCS2)	77.25	81.53
	5570	114	ac (160MHz)	175.5/195 (MCS2)	154.27	165.50
	5570	114	ax SU (160MHz)	204.2/216.2 (MCS2)	155.72	165.10

Table 7-2. Conducted Bandwidth Measurements Antenna WF5T (Low Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 20 of 394

V 10.5 12/15/2021

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	39/43.3 (MCS4)	17.68	20.58
	5200	40	n (20MHz)	39/43.3 (MCS4)	17.72	20.61
	5240	48	n (20MHz)	39/43.3 (MCS4)	17.72	20.66
	5180	36	ax (SU) (20MHz)	49/51.6 (MCS4)	19.01	21.24
	5200	40	ax (SU) (20MHz)	49/51.6 (MCS4)	19.03	21.28
	5240	48	ax (SU) (20MHz)	49/51.6 (MCS4)	19.00	21.06
	5190	38	n (40MHz)	81/90 (MCS4)	36.40	41.89
	5230	46	n (40MHz)	81/90 (MCS4)	36.36	42.95
	5190	38	ax (SU) (40MHz)	98/103.2 (MCS4)	37.99	42.43
	5230	46	ax (SU) (40MHz)	98/103.2 (MCS4)	37.97	42.61
	5210	42	ac (80MHz)	175.5/195 (MCS4)	75.47	80.86
	5210	42	ax (SU) (80MHz)	204/216.2 (MCS4)	77.38	81.56
Band 1/2	5250	50	ac (160MHz)	351/390 (MCS4)	154.69	165.00
	5250	50	ax SU (160MHz)	408.3/432.4 (MCS4)	155.71	164.30
Band 2A	5260	52	n (20MHz)	39/43.3 (MCS4)	17.65	20.74
	5280	56	n (20MHz)	39/43.3 (MCS4)	17.70	20.93
	5320	64	n (20MHz)	39/43.3 (MCS4)	17.74	20.64
	5260	52	ax (SU) (20MHz)	49/51.6 (MCS4)	19.02	21.10
	5280	56	ax (SU) (20MHz)	49/51.6 (MCS4)	18.99	21.37
	5320	64	ax (SU) (20MHz)	49/51.6 (MCS4)	19.05	21.29
	5270	54	n (40MHz)	81/90 (MCS4)	36.38	41.77
	5310	62	n (40MHz)	81/90 (MCS4)	36.30	41.97
	5270	54	ax (SU) (40MHz)	98/103.2 (MCS4)	37.96	41.63
	5310	62	ax (SU) (40MHz)	98/103.2 (MCS4)	37.98	41.85
	5290	58	ac (80MHz)	175.5/195 (MCS4)	75.41	80.26
	5290	58	ax (SU) (80MHz)	204/216.2 (MCS4)	77.31	81.63
Band 2C	5500	100	n (20MHz)	39/43.3 (MCS4)	17.72	20.71
	5580	116	n (20MHz)	39/43.3 (MCS4)	17.70	20.68
	5720	144	n (20MHz)	39/43.3 (MCS4)	17.69	20.91
	5500	100	ax (SU) (20MHz)	49/51.6 (MCS4)	19.03	21.74
	5580	116	ax (SU) (20MHz)	49/51.6 (MCS4)	19.01	21.20
	5720	144	ax (SU) (20MHz)	49/51.6 (MCS4)	19.00	21.32
	5510	102	n (40MHz)	81/90 (MCS4)	36.47	42.04
	5550	110	n (40MHz)	81/90 (MCS4)	36.31	41.13
	5710	142	n (40MHz)	81/90 (MCS4)	36.44	41.81
	5510	102	ax (SU) (40MHz)	98/103.2 (MCS4)	37.95	42.59
	5550	110	ax (SU) (40MHz)	98/103.2 (MCS4)	37.91	41.62
	5710	142	ax (SU) (40MHz)	98/103.2 (MCS4)	38.00	41.72
	5530	106	ac (80MHz)	175.5/195 (MCS4)	75.41	80.68
	5690	138	ac (80MHz)	175.5/195 (MCS4)	75.51	80.90
	5530	106	ax (SU) (80MHz)	204/216.2 (MCS4)	77.24	81.56
	5690	138	ax (SU) (80MHz)	204/216.2 (MCS4)	77.35	81.71
	5570	114	ac (160MHz)	351/390 (MCS4)	154.74	164.90
	5570	114	ax SU (160MHz)	408.3/432.4 (MCS4)	155.64	164.60

Table 7-3. Conducted Bandwidth Measurements Antenna WF5T (Mid Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 21 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	65/72.2 (MCS7)	17.87	21.14
	5200	40	n (20MHz)	65/72.2 (MCS7)	17.90	23.11
	5240	48	n (20MHz)	65/72.2 (MCS7)	17.91	21.19
	5180	36	ax (SU) (20MHz)	135/143.4 (MCS11)	19.06	21.08
	5200	40	ax (SU) (20MHz)	135/143.4 (MCS11)	19.06	24.04
	5240	48	ax (SU) (20MHz)	135/143.4 (MCS11)	19.05	23.43
	5190	38	n (40MHz)	135/150 (MCS7)	36.52	41.20
	5230	46	n (40MHz)	135/150 (MCS7)	36.59	44.69
	5190	38	ax (SU) (40MHz)	271/286.8 (MCS11)	37.91	41.09
	5230	46	ax (SU) (40MHz)	271/286.8 (MCS11)	38.08	52.19
	5210	42	ac (80MHz)	390/433.3 (MCS9)	76.13	81.32
	5210	42	ax (SU) (80MHz)	390/433.3 (MCS9)	77.08	81.35
Band 1/2	5250	50	ac (160MHz)	780/866.7 (MCS9)	155.28	165.70
	5250	50	ax SU (160MHz)	1134.3/1201 (MCS11)	156.14	165.40
Band 2A	5260	52	n (20MHz)	65/72.2 (MCS7)	17.87	21.21
	5280	56	n (20MHz)	65/72.2 (MCS7)	17.70	20.93
	5320	64	n (20MHz)	65/72.2 (MCS7)	17.85	20.98
	5260	52	ax (SU) (20MHz)	135/143.4 (MCS11)	19.08	21.45
	5280	56	ax (SU) (20MHz)	135/143.4 (MCS11)	19.08	21.21
	5320	64	ax (SU) (20MHz)	135/143.4 (MCS11)	19.04	21.36
	5270	54	n (40MHz)	135/150 (MCS7)	36.53	41.01
	5310	62	n (40MHz)	135/150 (MCS7)	36.38	41.33
	5270	54	ax (SU) (40MHz)	271/286.8 (MCS11)	38.01	50.12
	5310	62	ax (SU) (40MHz)	271/286.8 (MCS11)	37.89	40.94
	5290	58	ac (80MHz)	390/433.3 (MCS9)	75.92	81.57
	5290	58	ax (SU) (80MHz)	567/600.5 (MCS11)	77.03	81.46
Band 2C	5500	100	n (20MHz)	65/72.2 (MCS7)	17.79	20.90
	5580	116	n (20MHz)	65/72.2 (MCS7)	17.81	21.09
	5720	144	n (20MHz)	65/72.2 (MCS7)	17.88	21.17
	5500	100	ax (SU) (20MHz)	135/143.4 (MCS11)	19.04	21.22
	5580	116	ax (SU) (20MHz)	135/143.4 (MCS11)	19.07	23.75
	5720	144	ax (SU) (20MHz)	135/143.4 (MCS11)	19.10	24.87
	5510	102	n (40MHz)	135/150 (MCS7)	36.46	41.05
	5550	110	n (40MHz)	135/150 (MCS7)	36.49	41.38
	5710	142	n (40MHz)	135/150 (MCS7)	36.62	41.69
	5510	102	ax (SU) (40MHz)	271/286.8 (MCS11)	37.96	41.25
	5550	110	ax (SU) (40MHz)	271/286.8 (MCS11)	37.95	41.19
	5710	142	ax (SU) (40MHz)	271/286.8 (MCS11)	38.12	57.23
	5530	106	ac (80MHz)	390/433.3 (MCS9)	75.95	81.38
	5690	138	ac (80MHz)	390/433.3 (MCS9)	76.11	81.88
	5530	106	ax (SU) (80MHz)	567/600.5 (MCS11)	77.13	81.52
	5690	138	ax (SU) (80MHz)	567/600.5 (MCS11)	77.24	81.59
	5570	114	ac (160MHz)	780/866.7 (MCS9)	155.12	165.00
	5570	114	ax SU (160MHz)	1134.3/1201 (MCS11)	156.42	166.00


Table 7-4. Conducted Bandwidth Measurements Antenna WF5T (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 22 of 394


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Low Data Rate

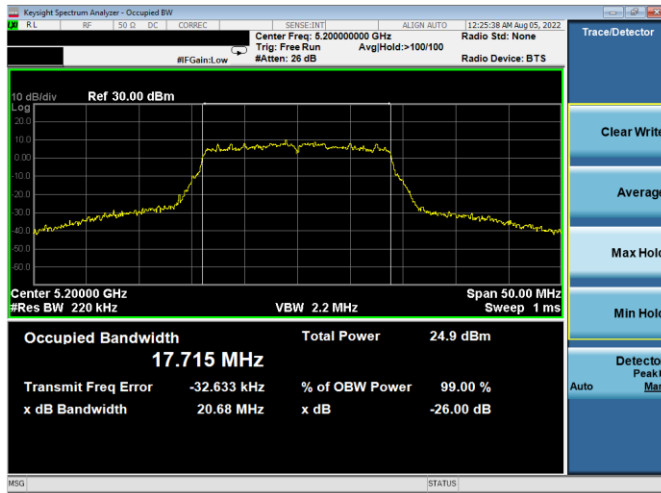


Plot 7-1. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11n - Ch. 40, MCS2)

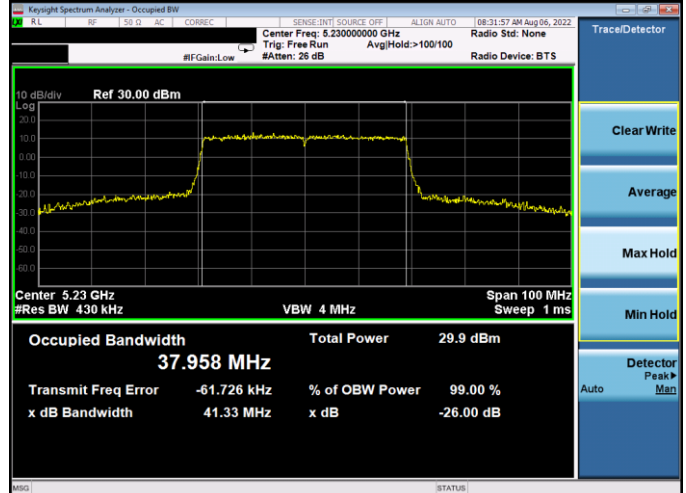


Plot 7-4. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11ax(SU) - Ch. 46, MCS2)

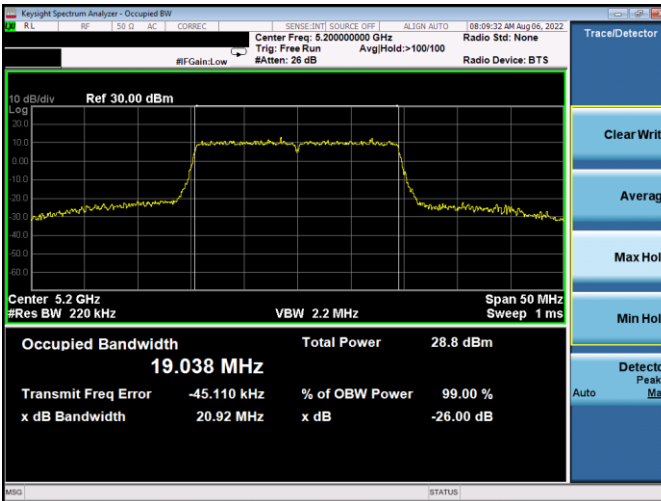


Plot 7-2. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11ax(SU) - Ch. 40, MCS2)

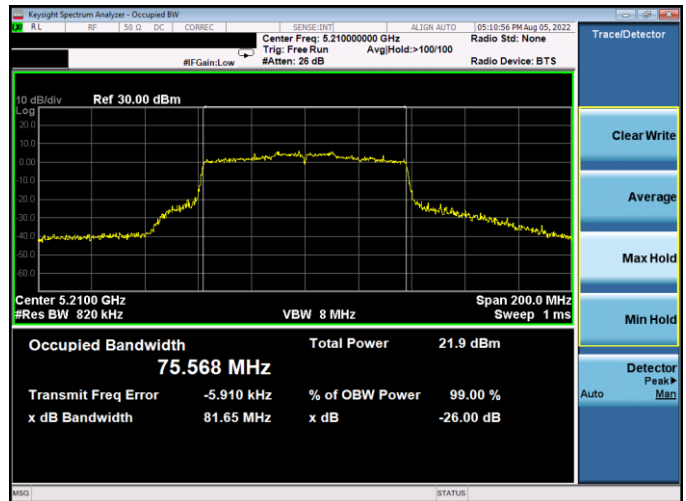

Plot 7-5. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ac - Ch. 42, MCS2)

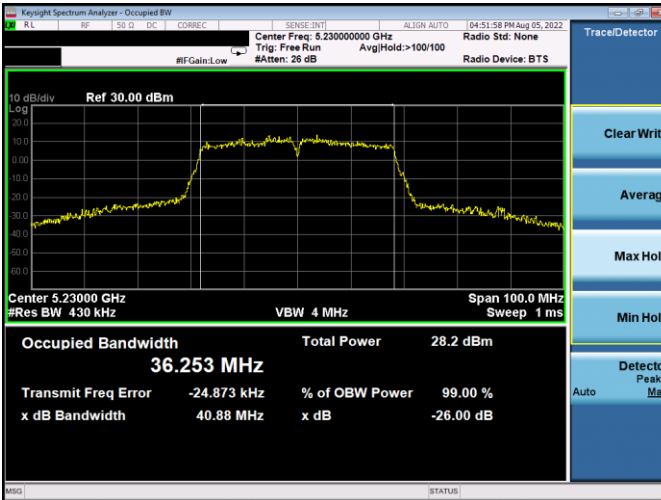

Plot 7-3. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11n - Ch. 46, MCS2)




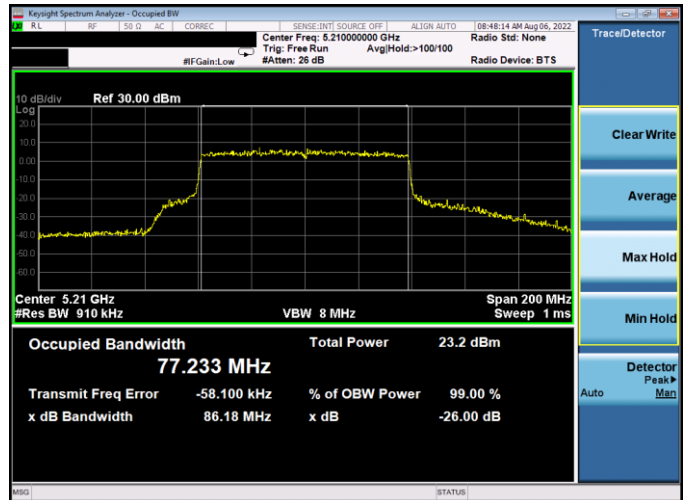


Plot 7-6. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ax(SU) - Ch. 42, MCS2)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 23 of 394

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

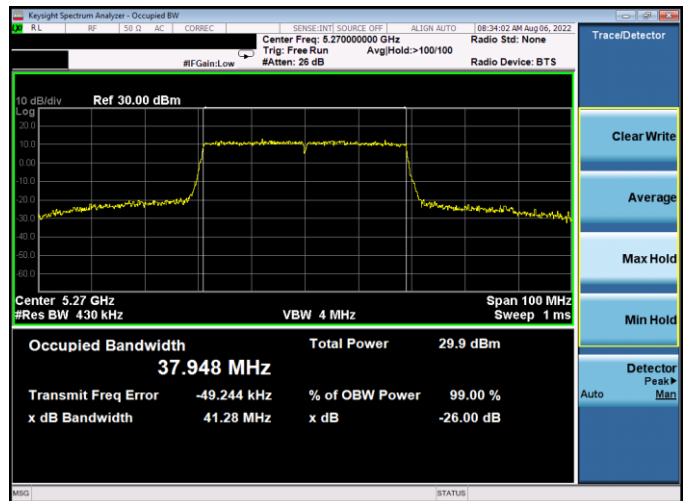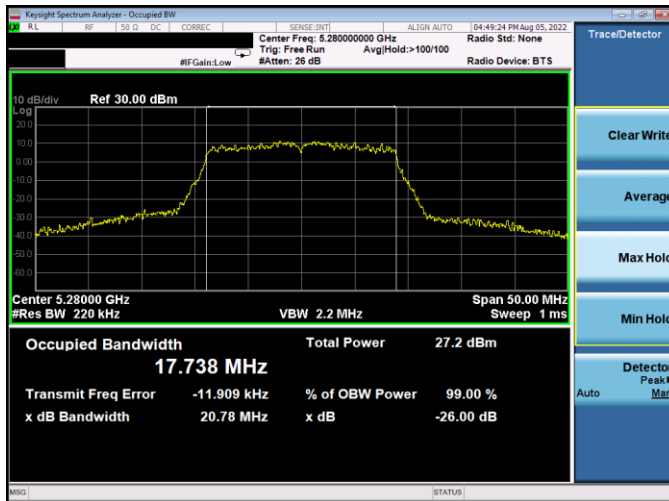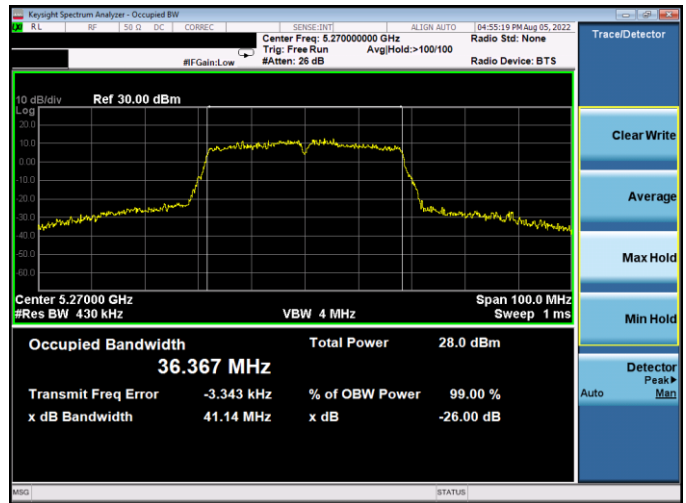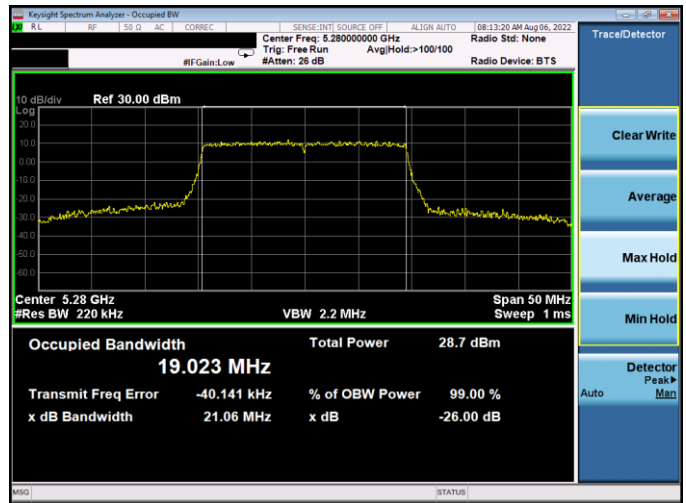


FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 24 of 394

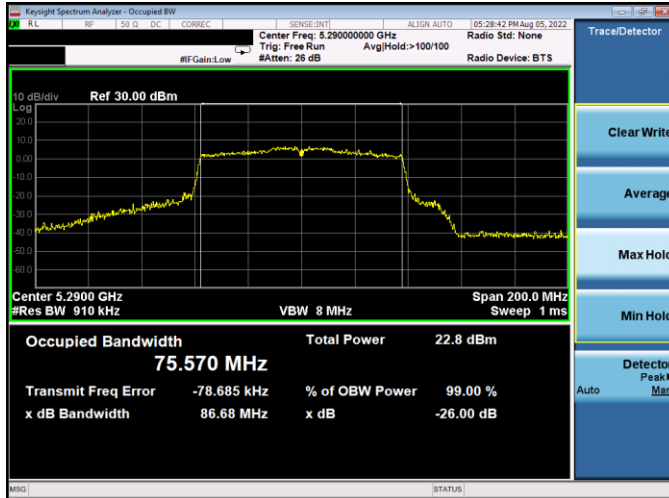


Plot 7-13. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ac – Ch. 58, MCS2)

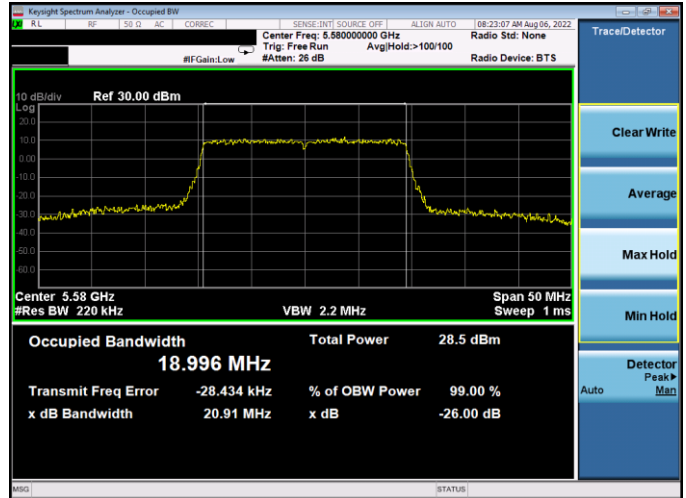


Plot 7-16. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11ax(SU) – Ch. 116, MCS2)

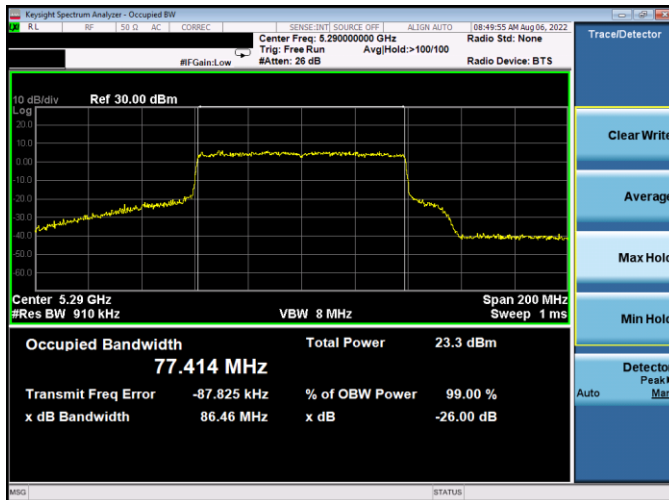


Plot 7-14. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ax(SU) – Ch. 58, MCS2)

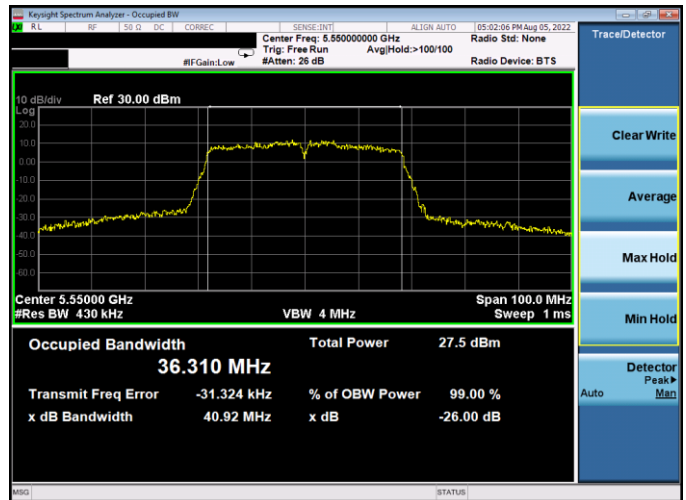

Plot 7-17. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11n – Ch. 110, MCS2)

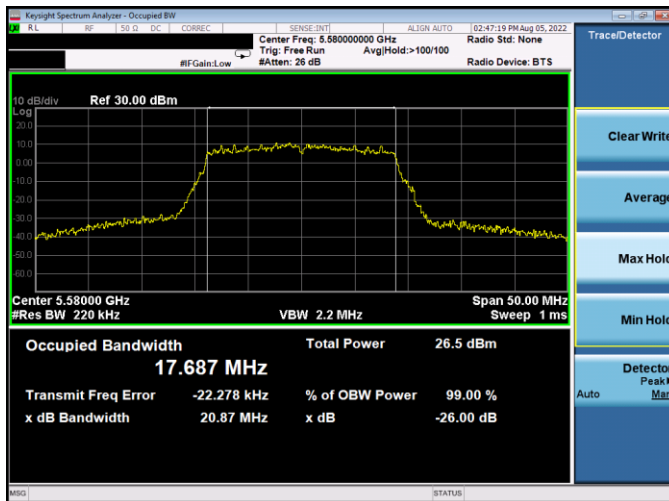

Plot 7-15. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11n – Ch. 116, MCS2)

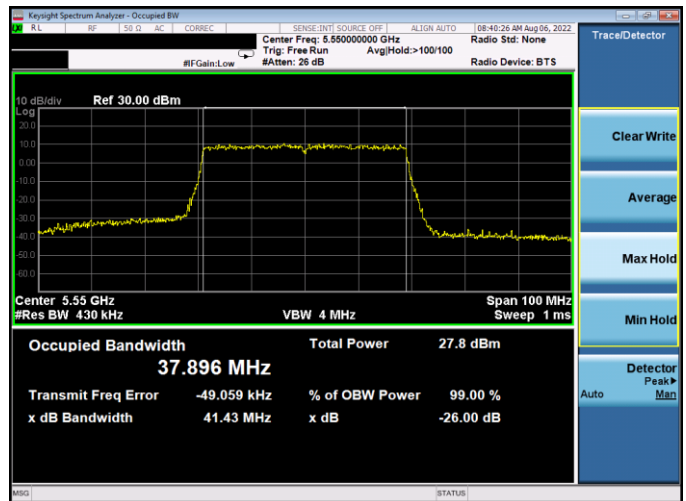

Plot 7-18. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11ax(SU) – Ch. 110, MCS2)


FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 25 of 394



Plot 7-19. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ac – Ch. 106, MCS2)



Plot 7-22. 26dB BW & 99% OBW Antenna WF5T (160MHz BW 802.11ax(SU) – Ch. 114, MCS2)

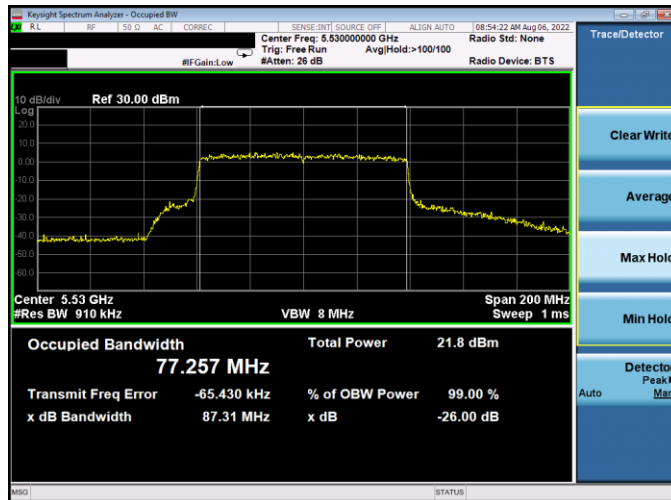

Plot 7-20. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ax(SU) – Ch. 106, MCS2)




Plot 7-21. 26dB BW & 99% OBW Antenna WF5T (160MHz BW 802.11ac – Ch. 114, MCS2)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 26 of 394

Mid Data Rate




Plot 7-23. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11n – Ch. 40, MCS4)

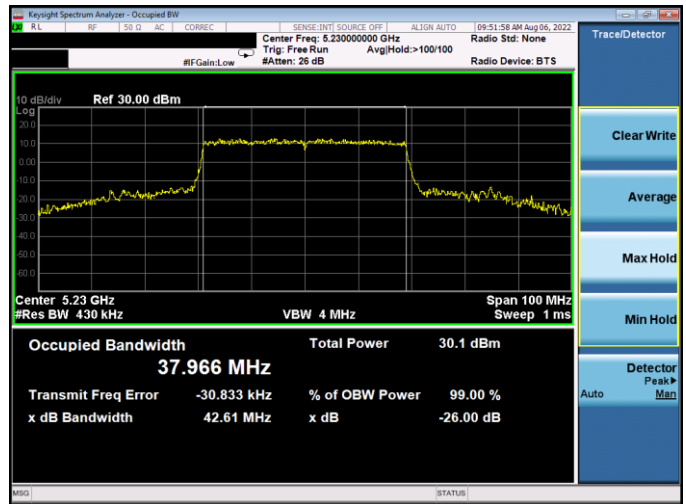


Plot 7-26. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11ax(SU) – Ch. 46, MCS4)




Plot 7-24. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11ax(SU) – Ch. 40, MCS4)

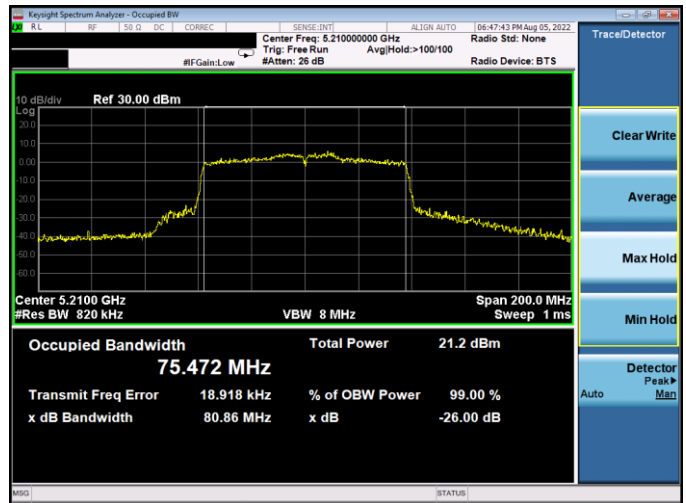

Plot 7-27. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ac – Ch. 42, MCS4)

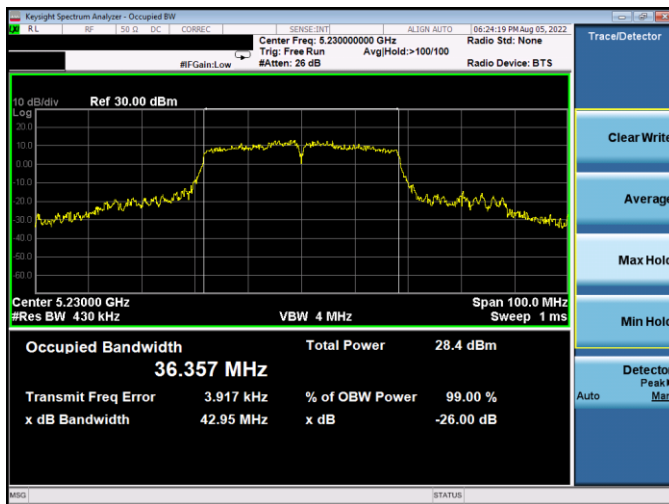

Plot 7-25. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11n – Ch. 46, MCS4)




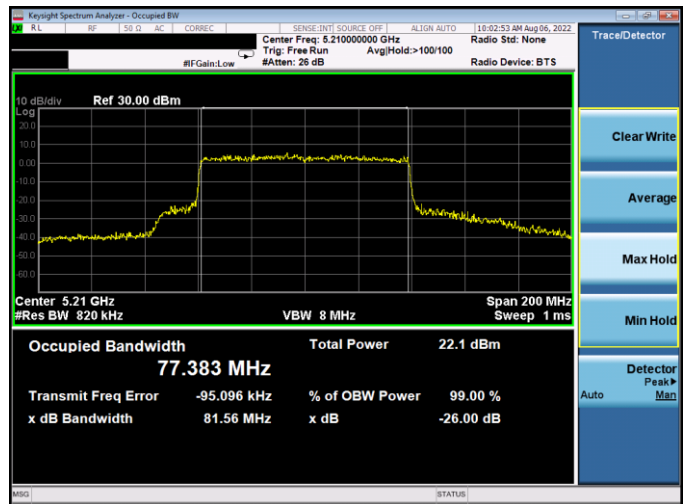


Plot 7-28. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ax(SU) – Ch. 42, MCS4)







FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 27 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

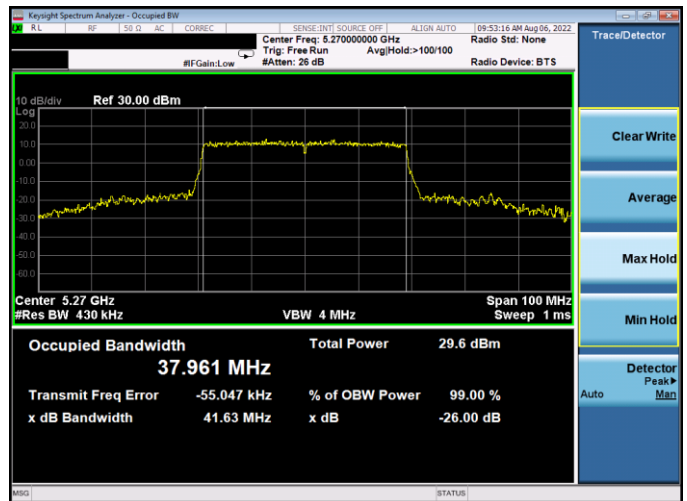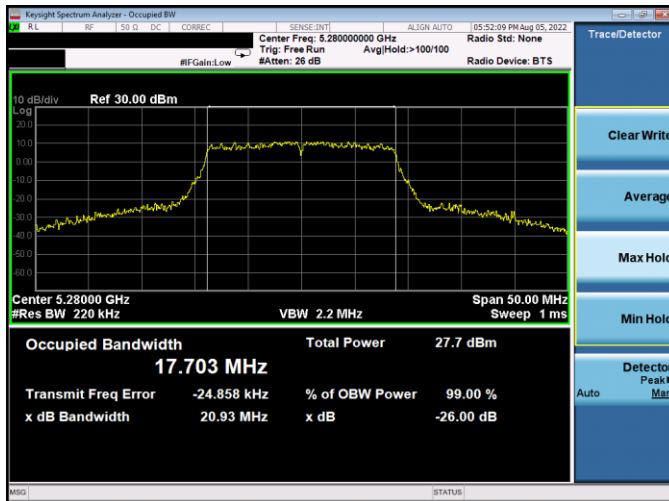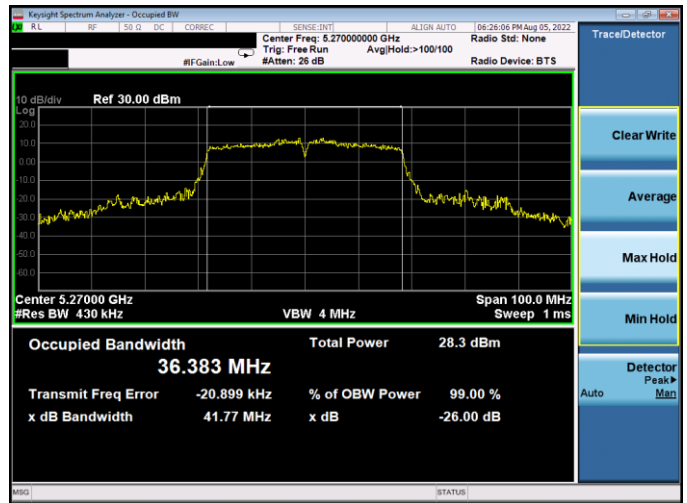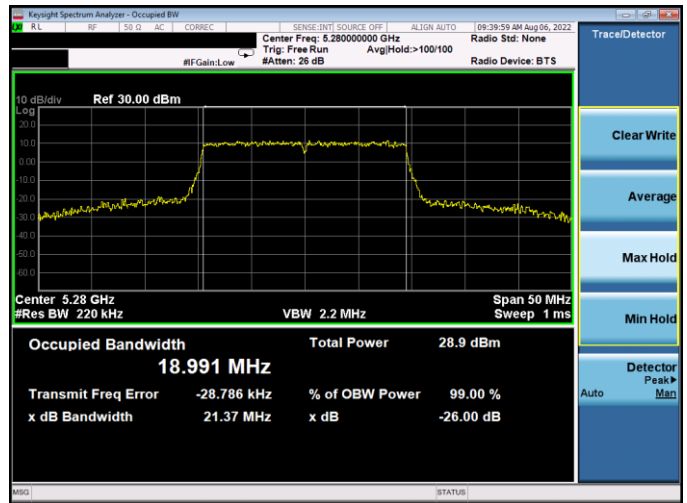


FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 28 of 394

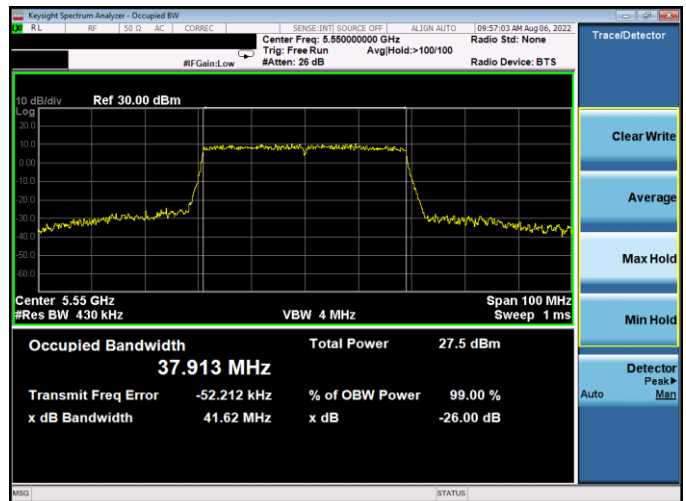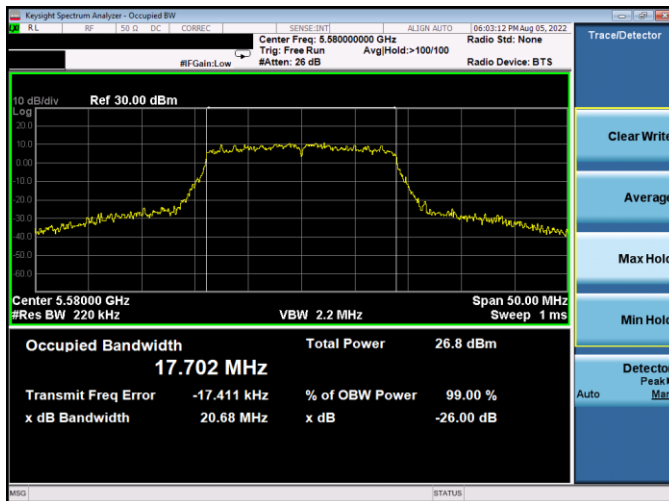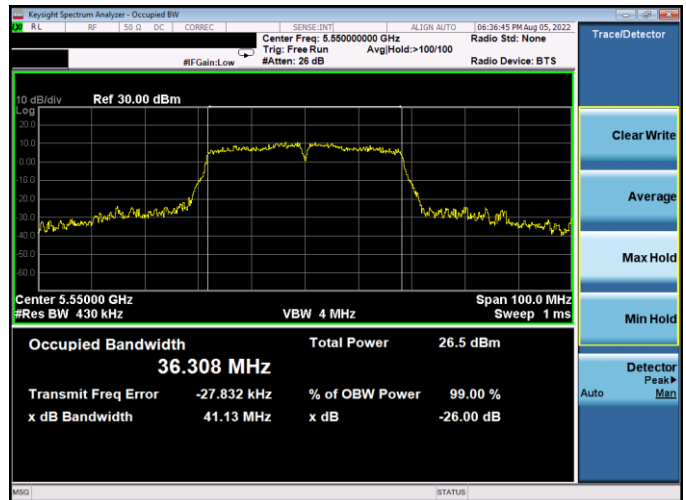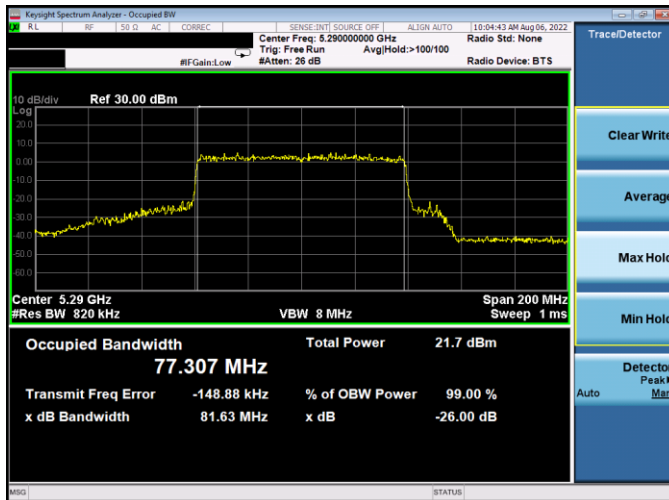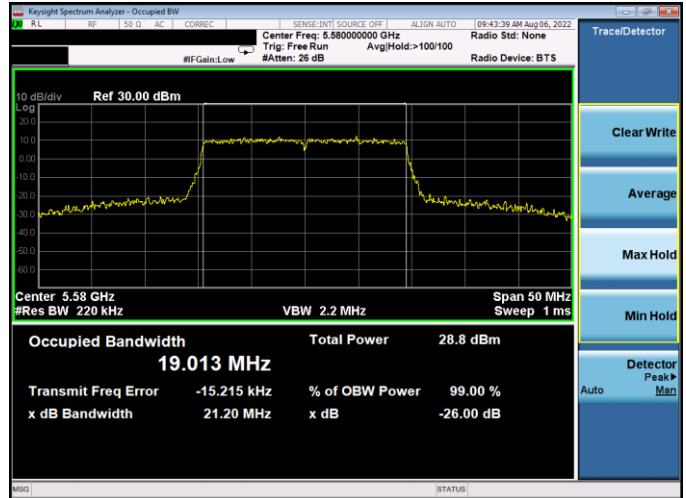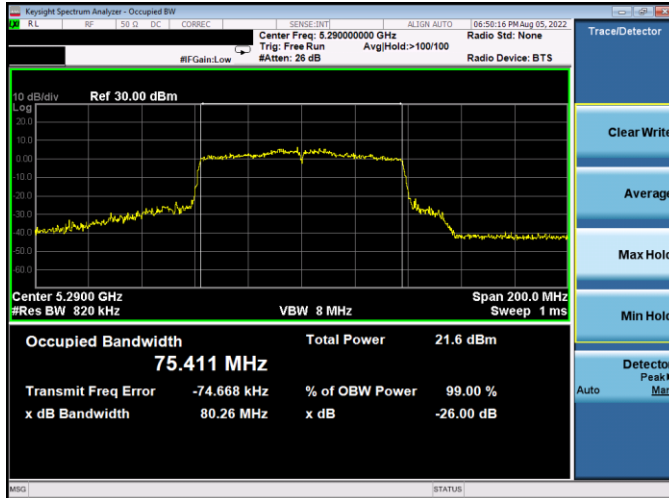


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG				Page 29 of 394
Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

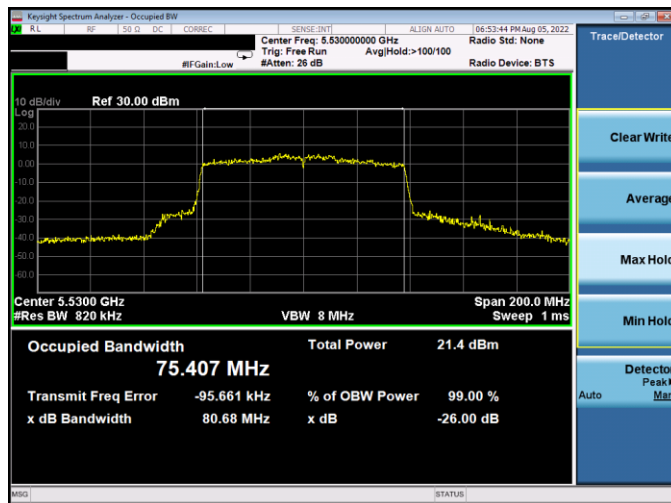

Plot 7-41. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ac – Ch. 106, MCS4)

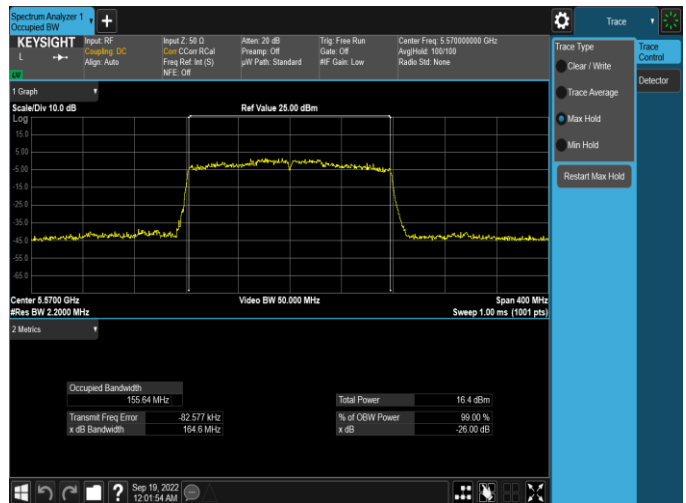

Plot 7-44. 26dB BW & 99% OBW Antenna WF5T (160MHz BW 802.11ax(SU) – Ch. 114, MCS4)

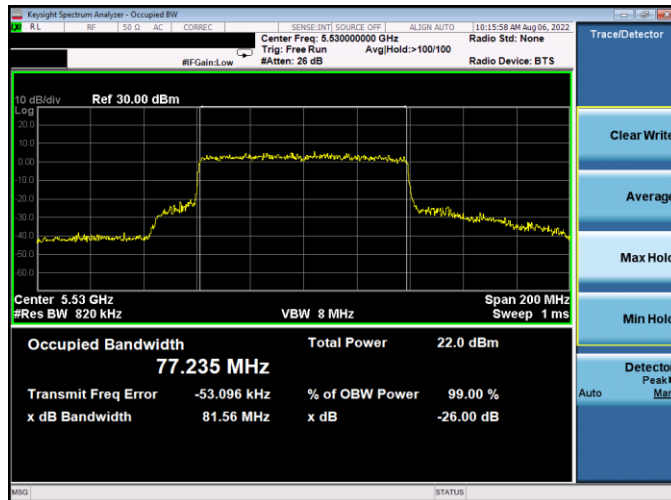


Plot 7-42. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ax(SU) – Ch. 106, MCS4)




Plot 7-43. 26dB BW & 99% OBW Antenna WF5T (160MHz BW 802.11ac – Ch. 114, MCS4)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 30 of 394


High Data Rate

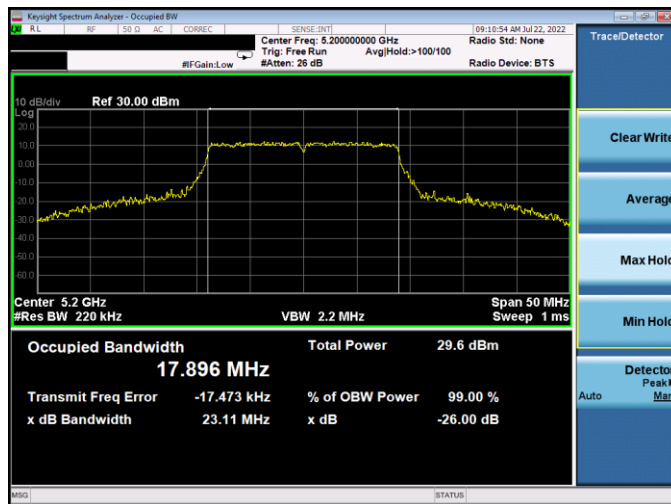


Plot 7-45. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11n – Ch. 40, MCS7)

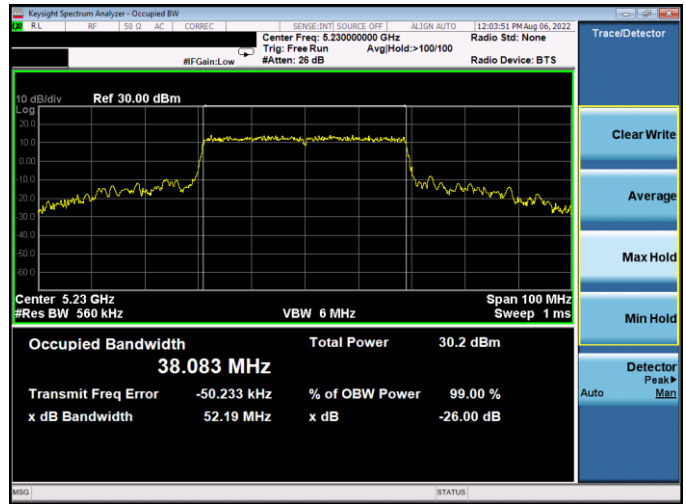


Plot 7-48. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11ax(SU) – Ch. 46, MCS11)

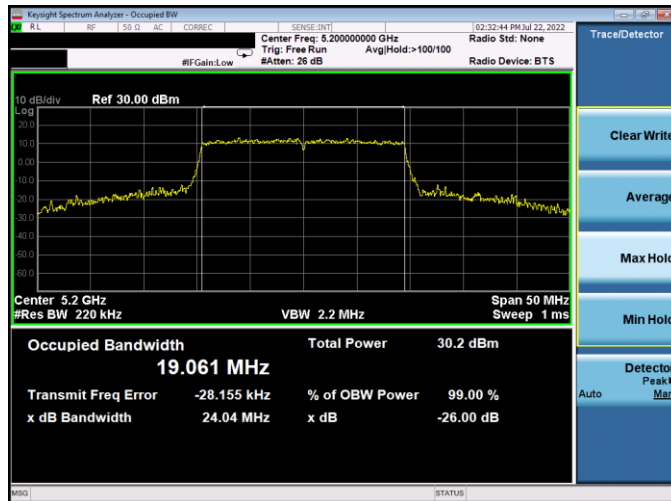


Plot 7-46. 26dB BW & 99% OBW Antenna WF5T (20MHz BW 802.11ax(SU) – Ch. 40, MCS11)

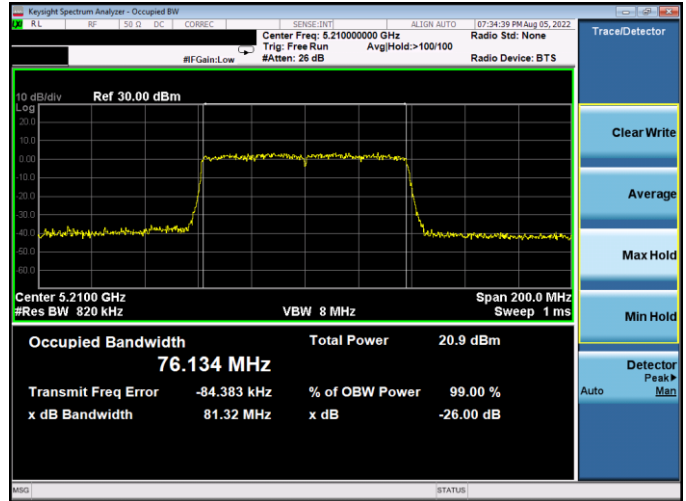

Plot 7-49. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ac – Ch. 42, MCS9)

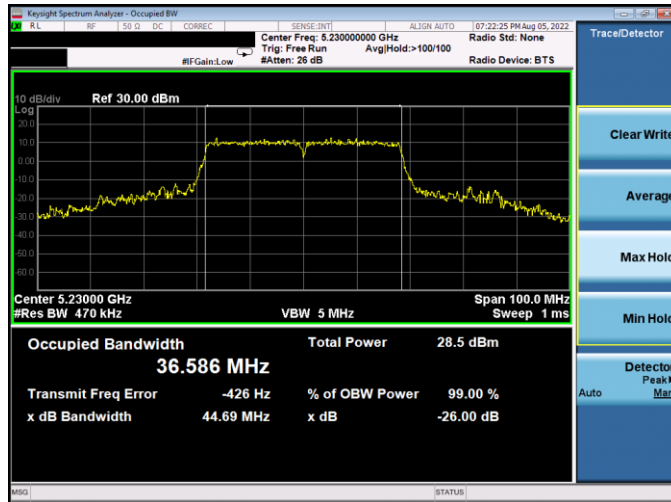

Plot 7-47. 26dB BW & 99% OBW Antenna WF5T (40MHz BW 802.11n – Ch. 46, MCS7)

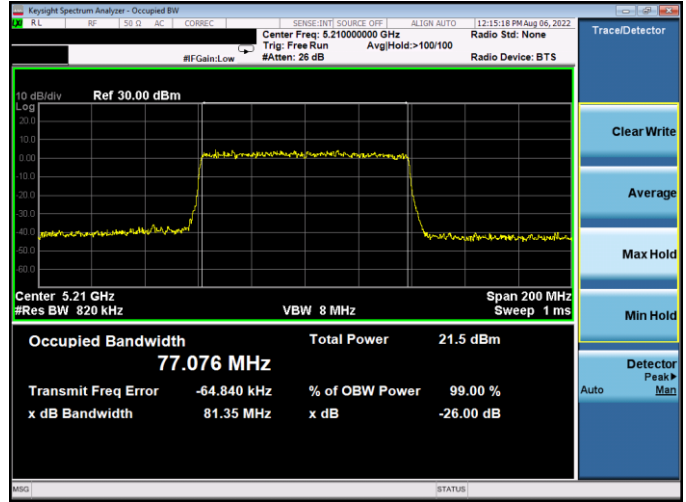

Plot 7-50. 26dB BW & 99% OBW Antenna WF5T (80MHz BW 802.11ax(SU) – Ch. 42, MCS11)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-09.BCG	Test Dates: 05/30/2022 - 09/22/2022	EUT Type: Tablet Device	Page 31 of 394

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.