



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	11.25	6443.400
802.11ax HE40 SU SP	9.35	6559.694
802.11ax HE80 SU SP	4.90	6635.000

Table 388 - Unwanted Emissions Within the RLAN Band Summary Results

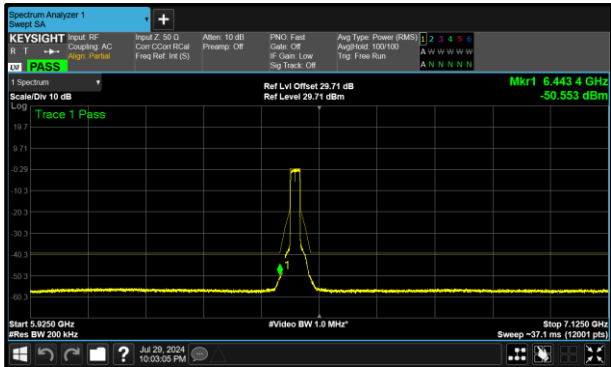


Figure 442 - B (Core 1) 802.11ax HE20 SU SP
6475 MHz (CH105)

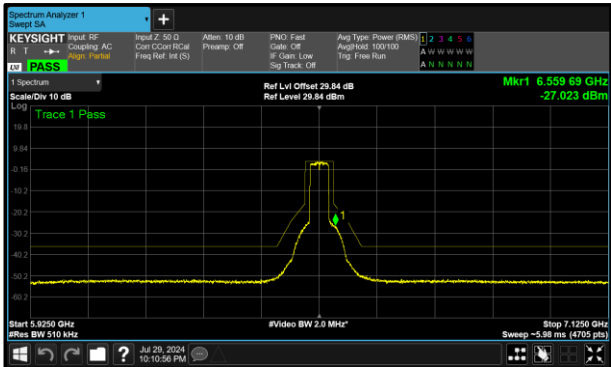


Figure 443 - B (Core 1) 802.11ax HE40 SU SP
6525 MHz (CH115)

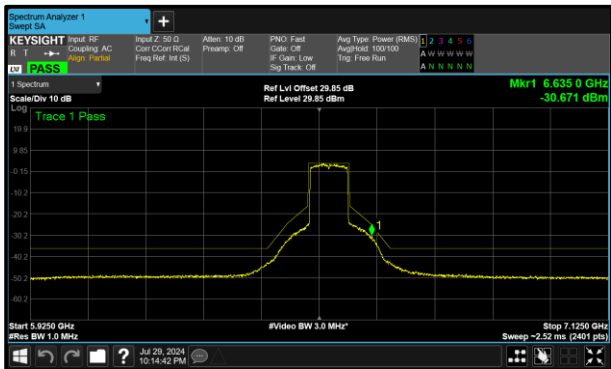


Figure 444 - B (Core 1) 802.11ax HE80 SU SP
6545 MHz (CH119)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	13.89	14.11	-	-
6175	13.44	13.81	-	-
6415	13.11	12.59	-	-
6435	11.85	11.29	-	-
6475	11.91	11.25	-	-
6515	11.82	12.59	-	-
6535	12.71	12.51	-	-
6695	13.02	12.95	-	-
6855	12.02	12.34	-	-

Table 389 - Unwanted Emissions Within the Band Results

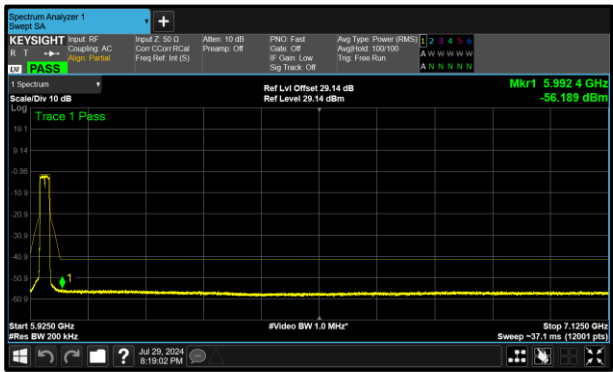


Figure 445 - A (Core 0) 5955 MHz (CH1)

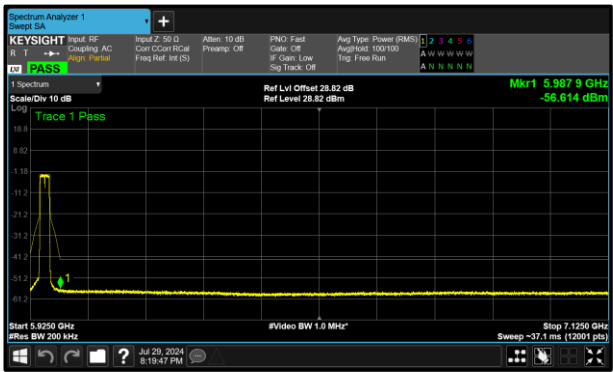


Figure 446 - B (Core 1) 5955 MHz (CH1)

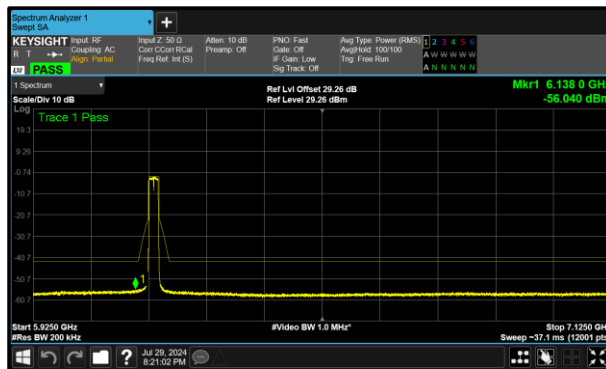


Figure 447 - A (Core 0) 6175 MHz (CH45)

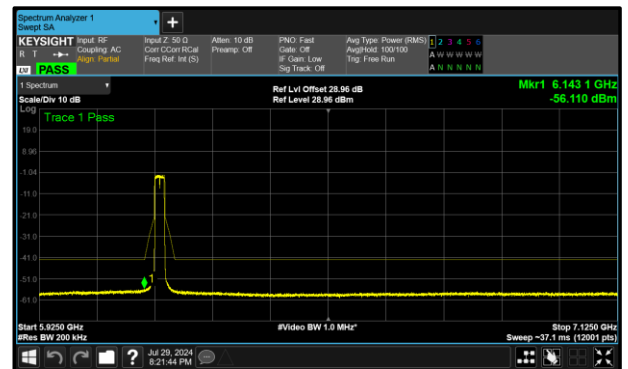


Figure 448 - B (Core 1) 6175 MHz (CH45)

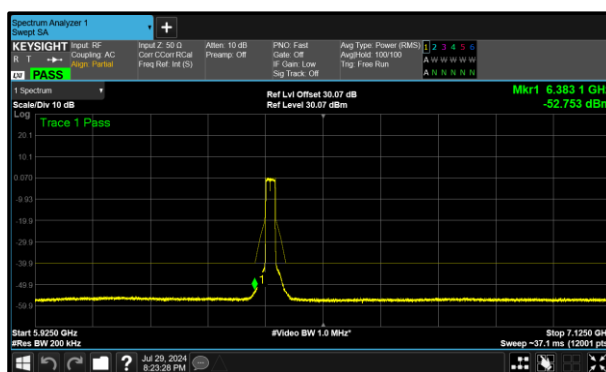


Figure 449 - A (Core 0) 6415 MHz (CH93)

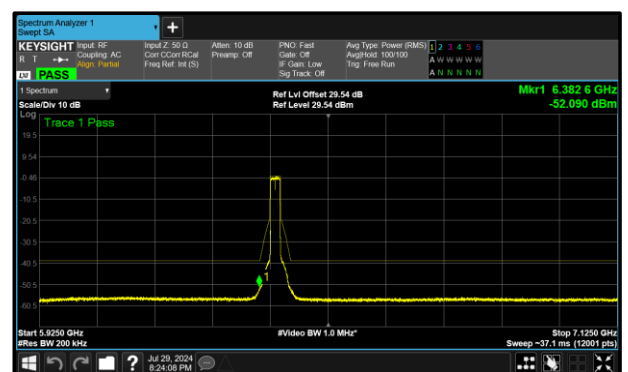


Figure 450 - B (Core 1) 6415 MHz (CH93)

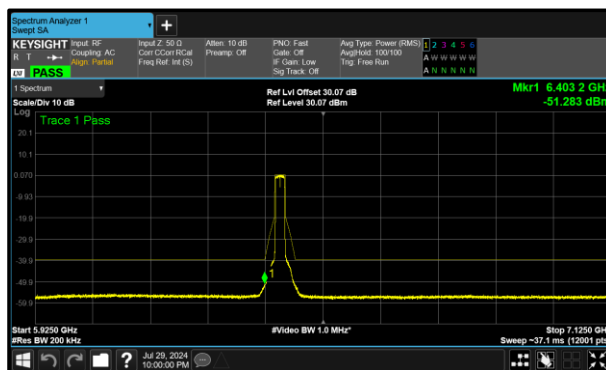


Figure 451 - A (Core 0) 6435 MHz (CH97)

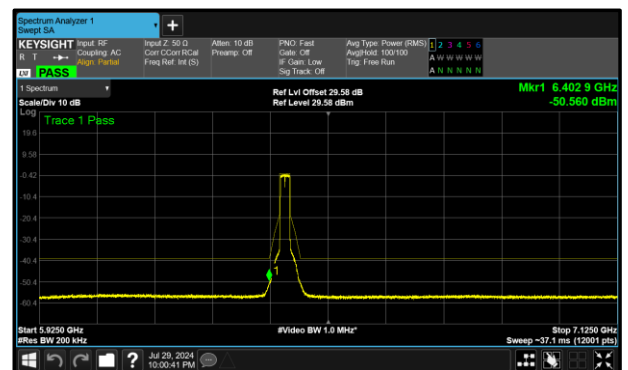
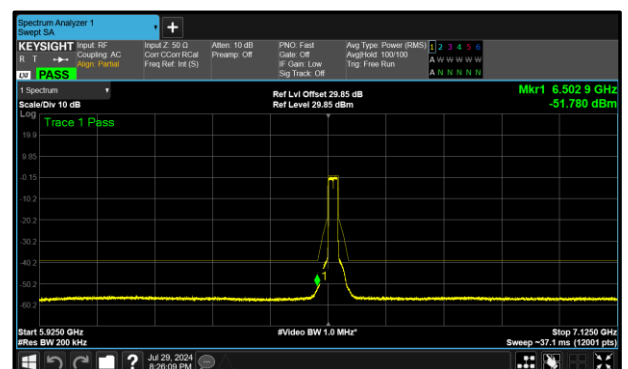
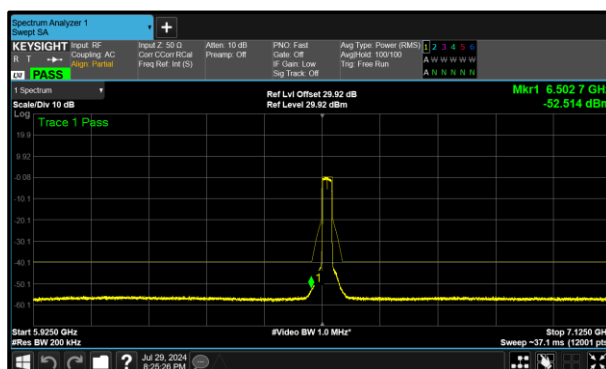
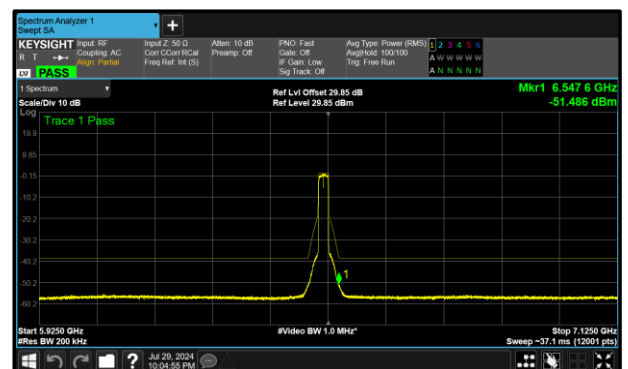
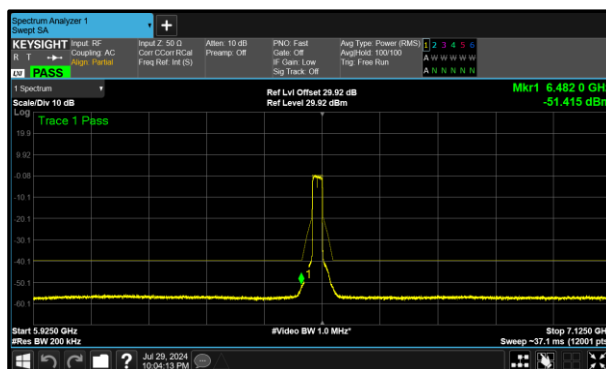
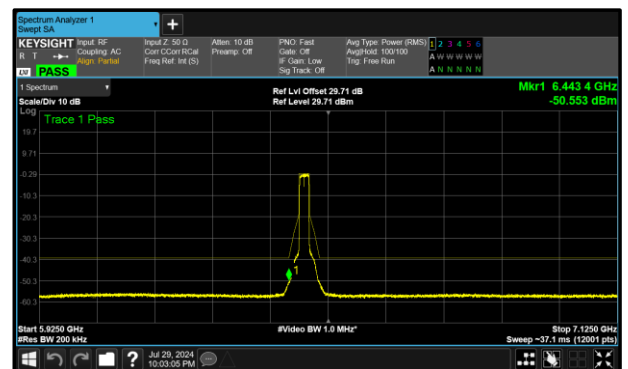
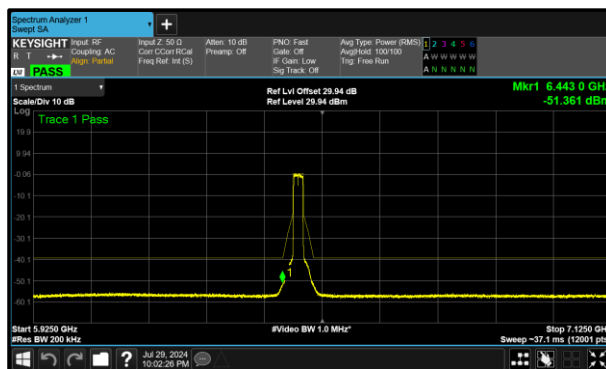


Figure 452 - B (Core 1) 6435 MHz (CH97)



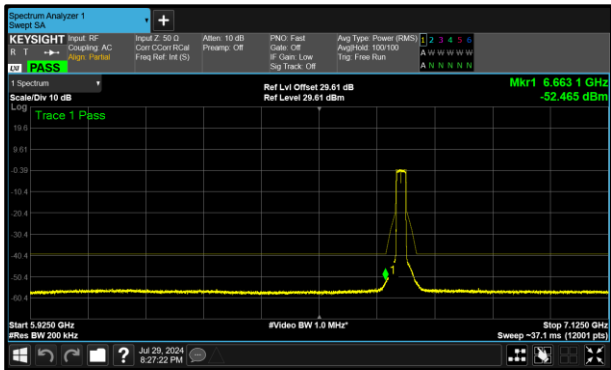


Figure 459 - A (Core 0) 6695 MHz (CH149)

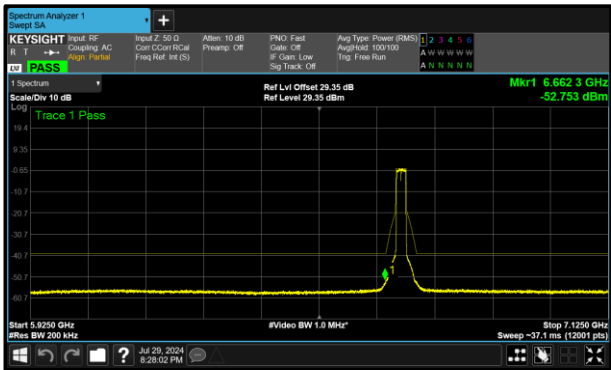


Figure 460 - B (Core 1) 6695 MHz (CH149)

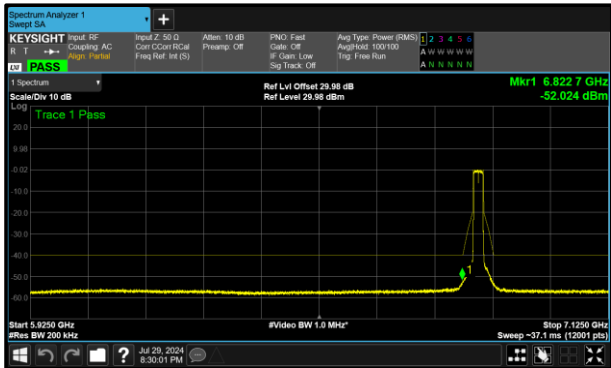


Figure 461 - A (Core 0) 6855 MHz (CH181)

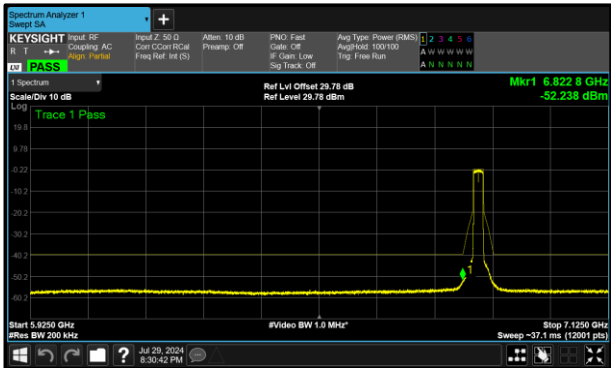


Figure 462 - B (Core 1) 6855 MHz (CH181)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	12.40	12.58	-	-
6165	11.26	10.40	-	-
6405	10.43	10.55	-	-
6445	10.86	11.45	-	-
6485	10.95	11.03	-	-
6525	9.66	9.35	-	-
6565	11.35	11.86	-	-
6685	11.20	10.74	-	-
6845	12.28	11.81	-	-

Table 390 - Unwanted Emissions Within the Band Results

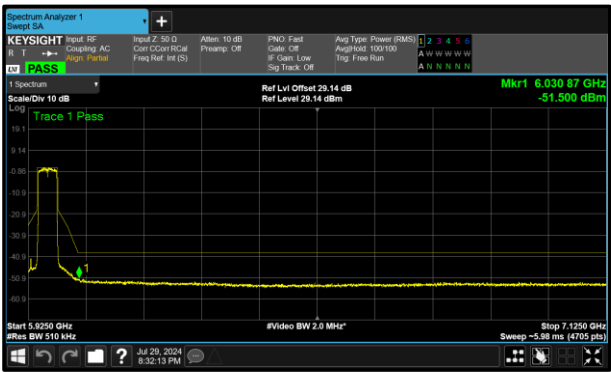


Figure 463 - A (Core 0) 5965 MHz (CH3)

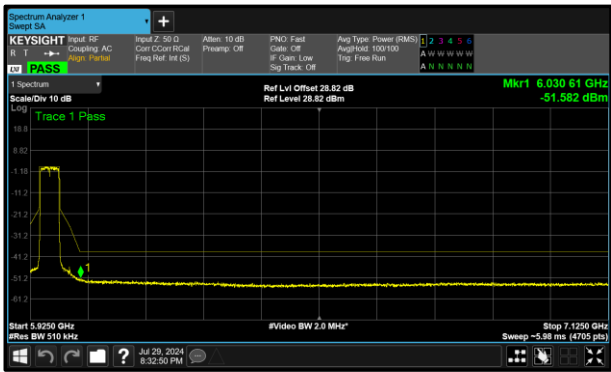


Figure 464 - B (Core 1) 5965 MHz (CH3)

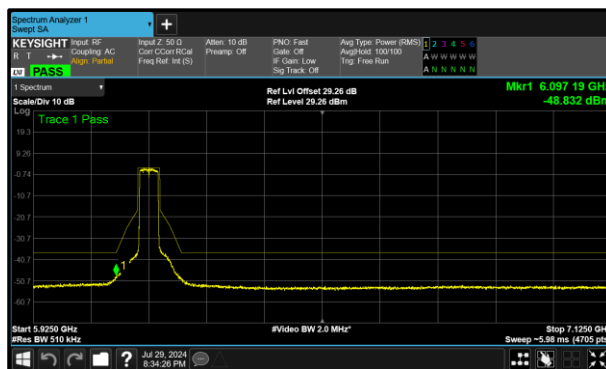


Figure 465 - A (Core 0) 6165 MHz (CH43)

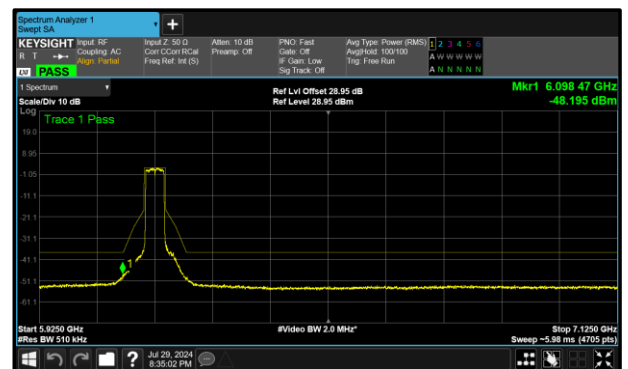


Figure 466 - B (Core 1) 6165 MHz (CH43)

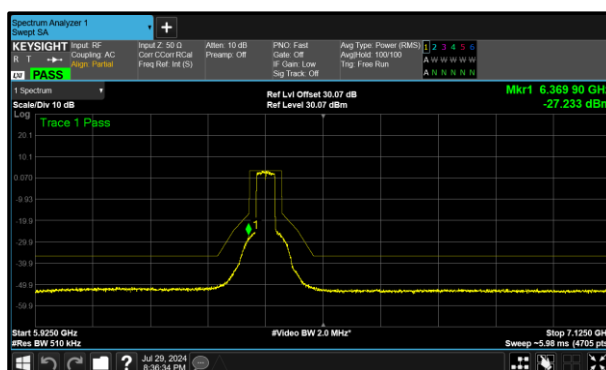


Figure 467 - A (Core 0) 6405 MHz (CH91)

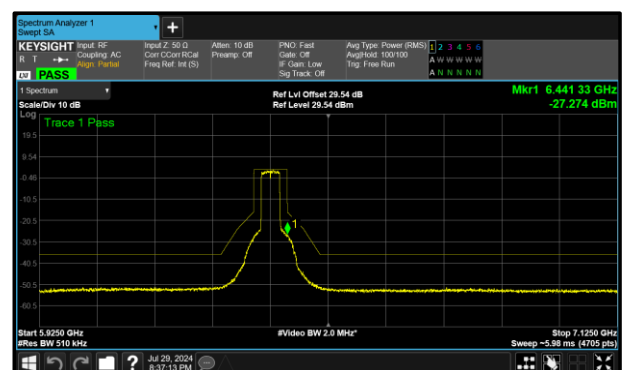


Figure 468 - B (Core 1) 6405 MHz (CH91)

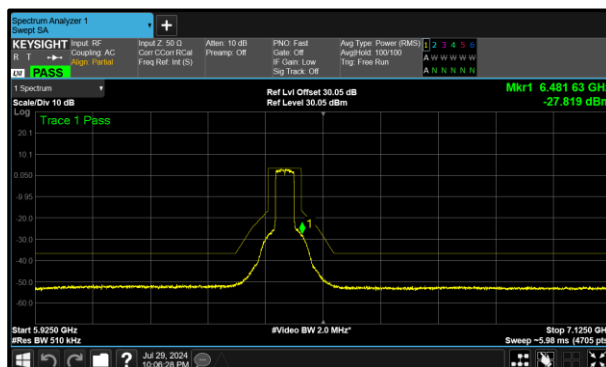


Figure 469 - A (Core 0) 6445 MHz (CH99)

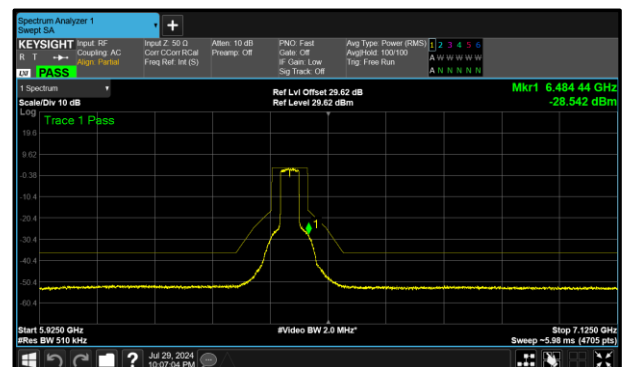
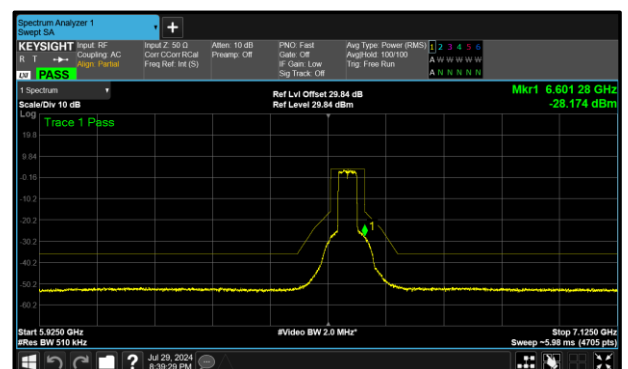
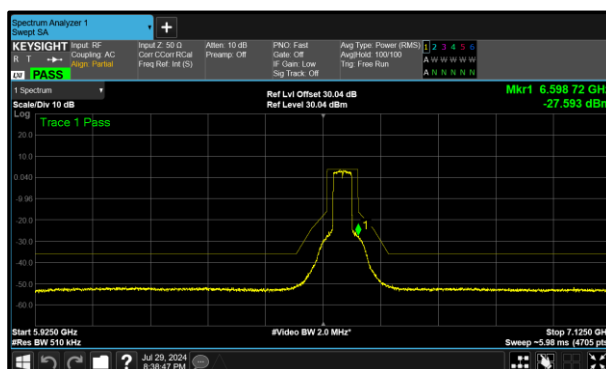
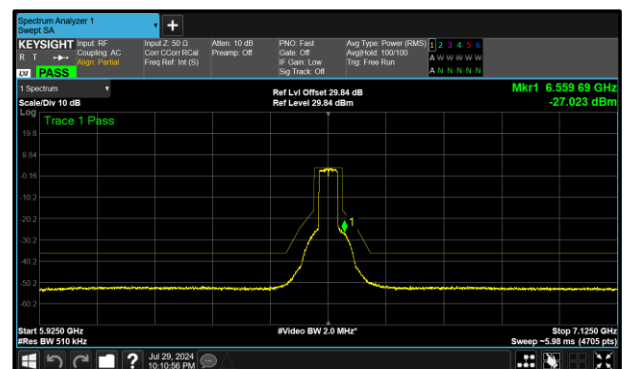
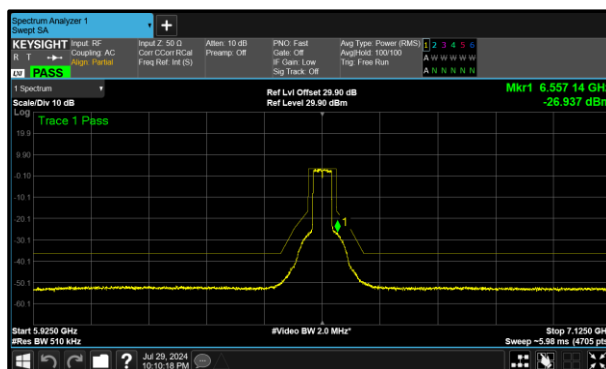
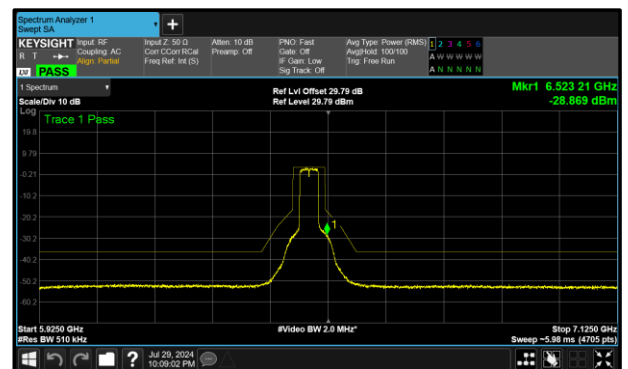
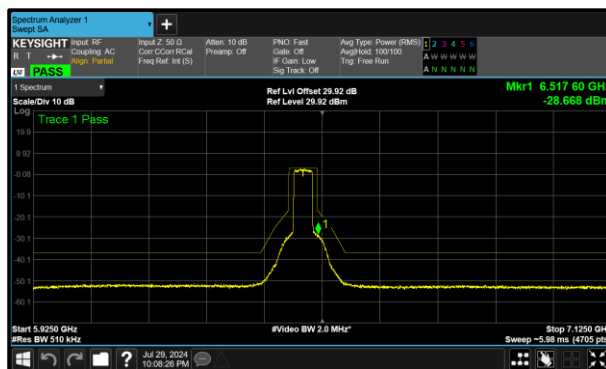


Figure 470 - B (Core 1) 6445 MHz (CH99)



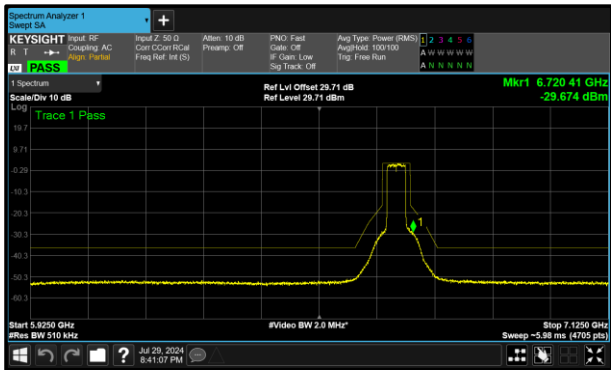


Figure 477 - A (Core 0) 6685 MHz (CH147)

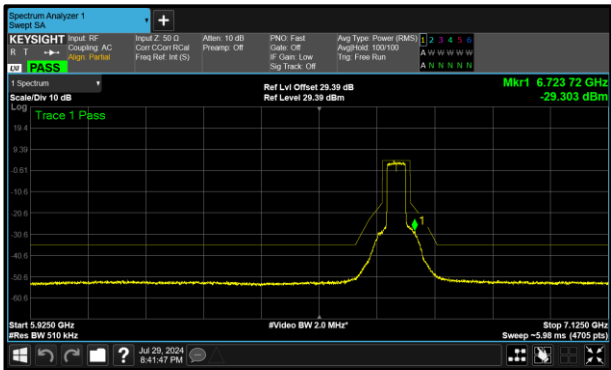


Figure 478 - B (Core 1) 6685 MHz (CH147)

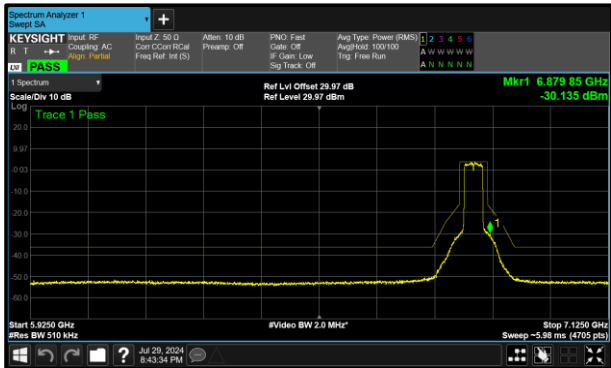


Figure 479 - A (Core 0) 6845 MHz (CH179)

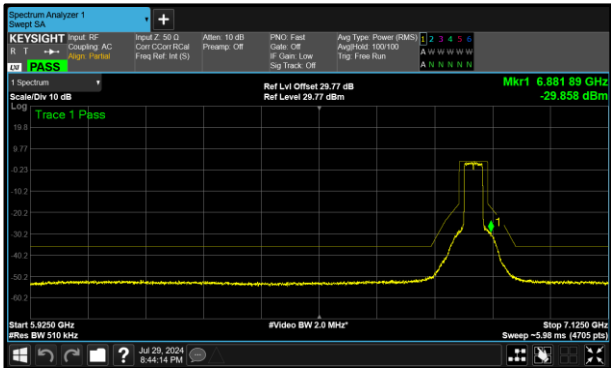


Figure 480 - B (Core 1) 6845 MHz (CH179)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)(7) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	9.64	11.03	-	-
6145	8.16	8.39	-	-
6385	7.85	7.26	-	-
6465	5.21	8.39	-	-
6545	5.66	4.90	-	-
6625	7.78	6.59	-	-
6705	6.61	6.62	-	-
6785	6.32	6.38	-	-

Table 391 - Unwanted Emissions Within the Band Results

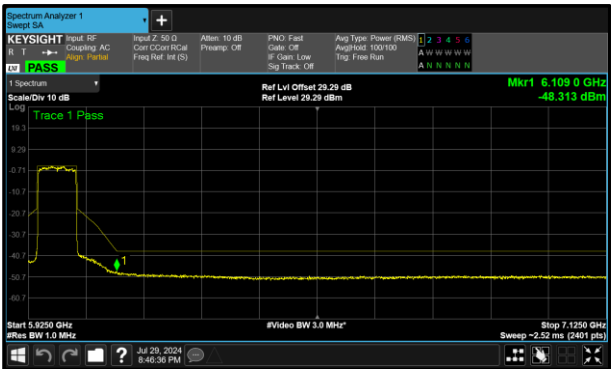


Figure 481 - A (Core 0) 5985 MHz (CH7)

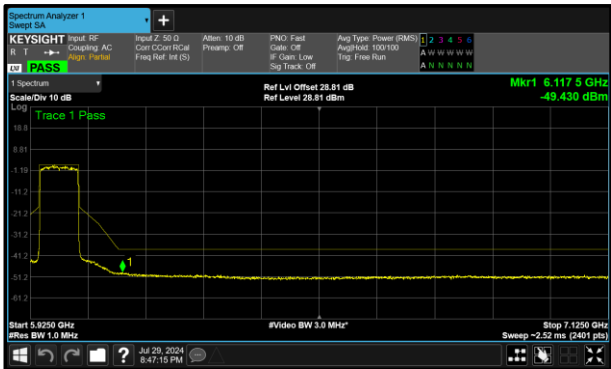


Figure 482 - B (Core 1) 5985 MHz (CH7)

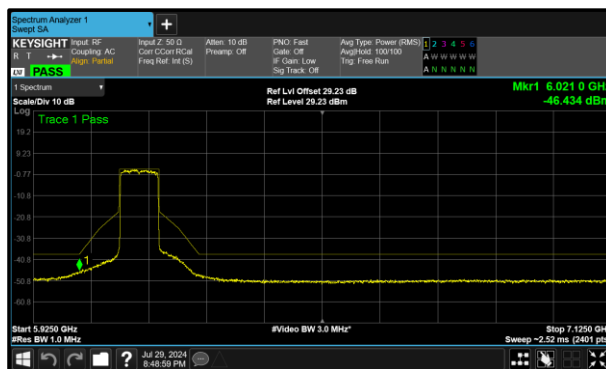


Figure 483 - A (Core 0) 6145 MHz (CH39)

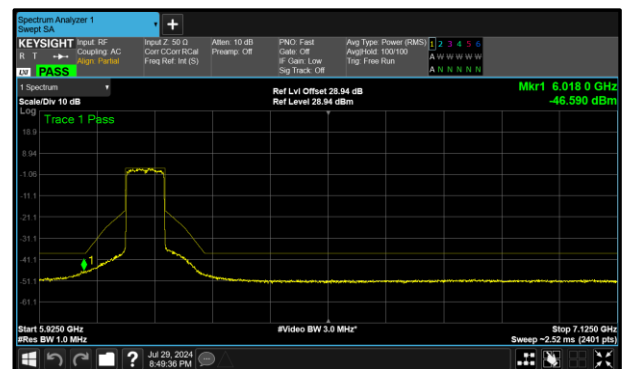


Figure 484 - B (Core 1) 6145 MHz (CH39)

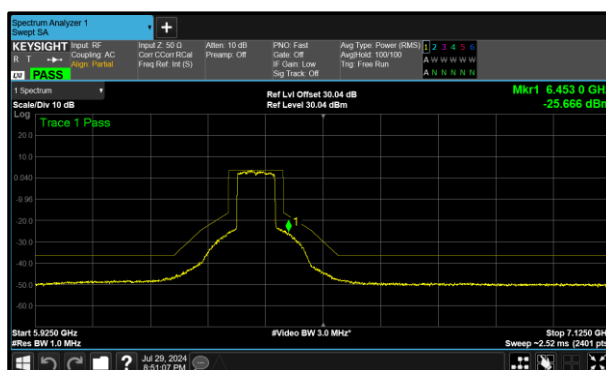


Figure 485 - A (Core 0) 6385 MHz (CH87)

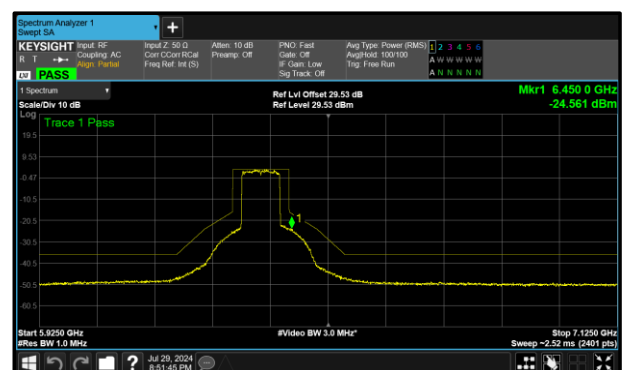


Figure 486 - B (Core 1) 6385 MHz (CH87)

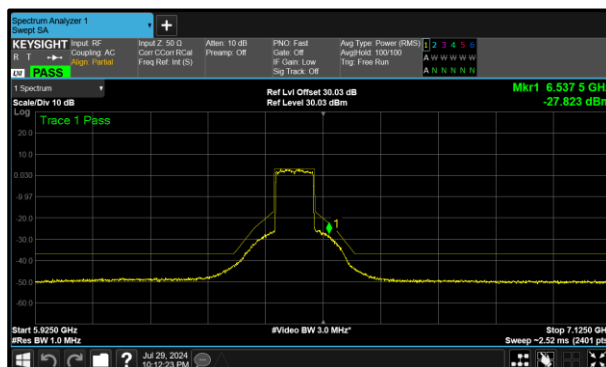


Figure 487 - A (Core 0) 6465 MHz (CH103)

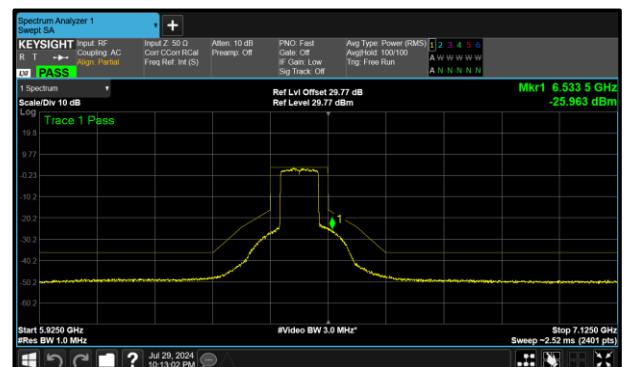


Figure 488 - B (Core 1) 6465 MHz (CH103)

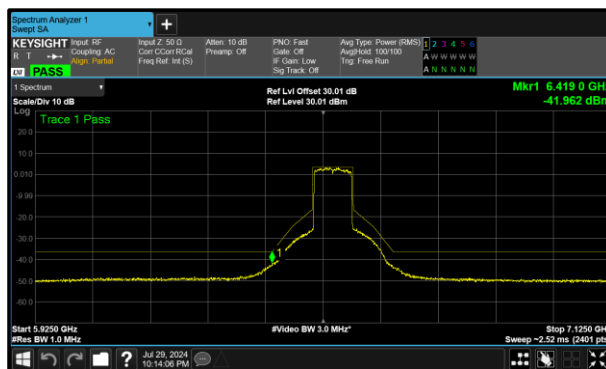


Figure 489 - A (Core 0) 6545 MHz (CH119)

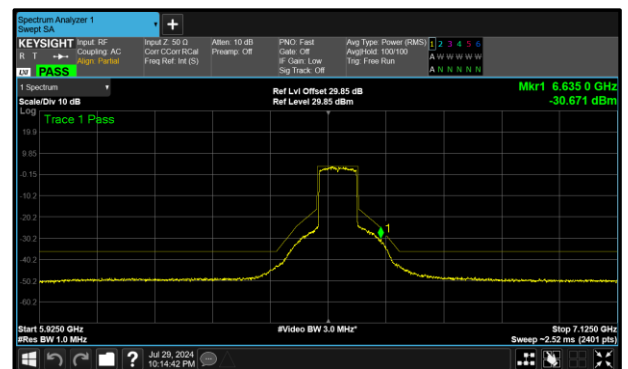


Figure 490 - B (Core 1) 6545 MHz (CH119)

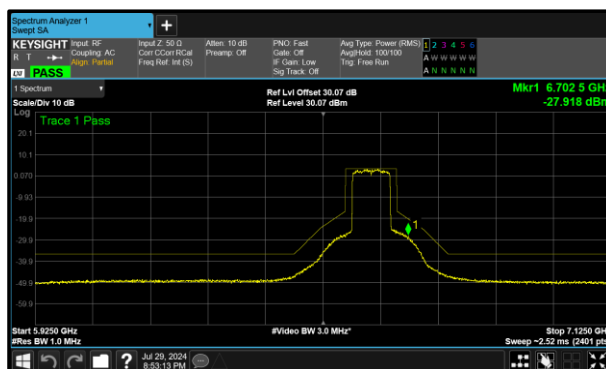


Figure 491 - A (Core 0) 6625 MHz (CH135)

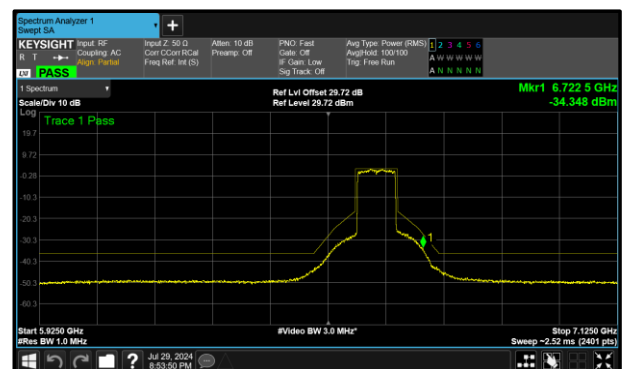


Figure 492 - B (Core 1) 6625 MHz (CH135)

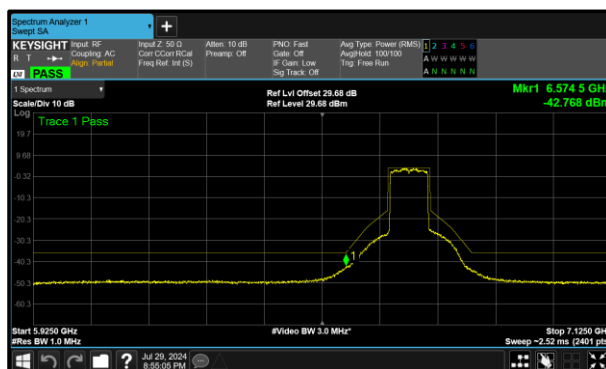


Figure 493 - A (Core 0) 6705 MHz (CH151)

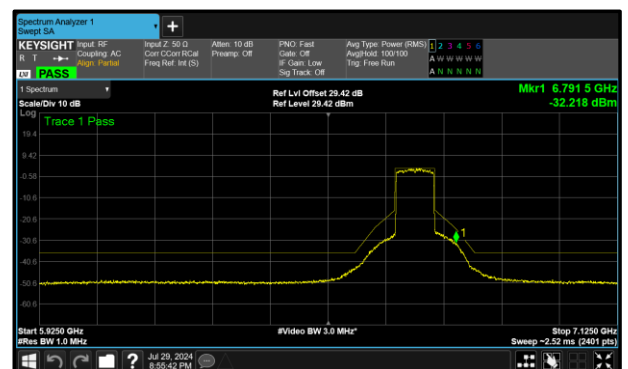


Figure 494 - B (Core 1) 6705 MHz (CH151)

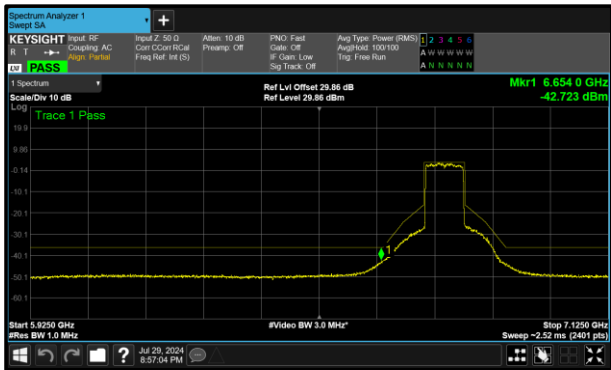


Figure 495 - A (Core 0) 6785 MHz (CH167)

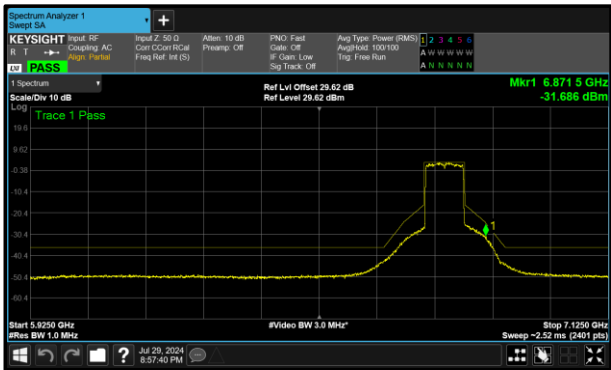


Figure 496 - B (Core 1) 6785 MHz (CH167)



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE80 SU VLP	3.60	6978.500

Table 392 - Unwanted Emissions Within the RLAN Band Summary Results

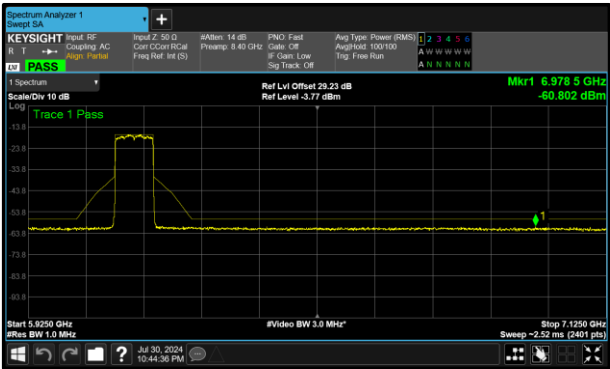


Figure 497 - A (Core 0) 802.11ax HE80 SU VLP 6140 MHz (CH39)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)(7)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	3.60	4.36	-	-
6225	5.31	4.05	-	-
6385	9.45	4.73	-	-
6625	7.99	4.29	-	-
6705	4.52	4.87	-	-
6785	4.81	4.77	-	-

Table 393 - Unwanted Emissions Within the Band Results

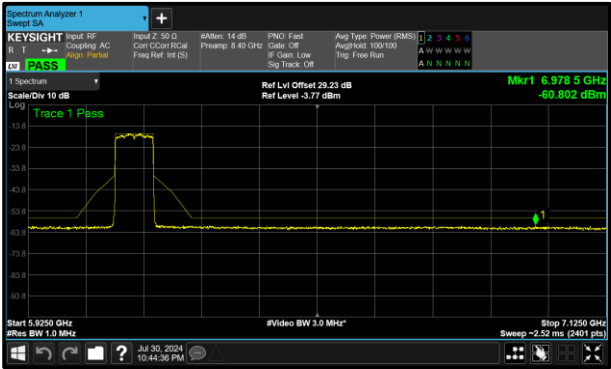


Figure 498 - A (Core 0) 6145 MHz (CH39)

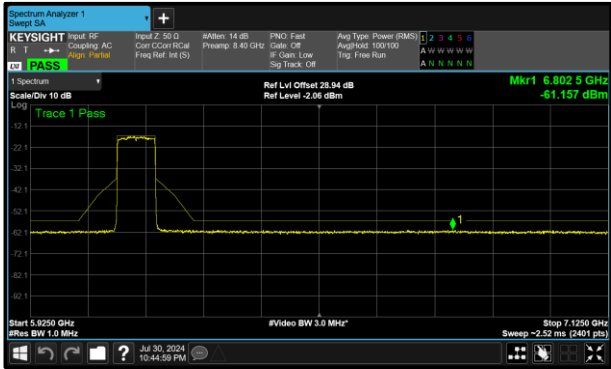


Figure 499 - B (Core 1) 6145 MHz (CH39)

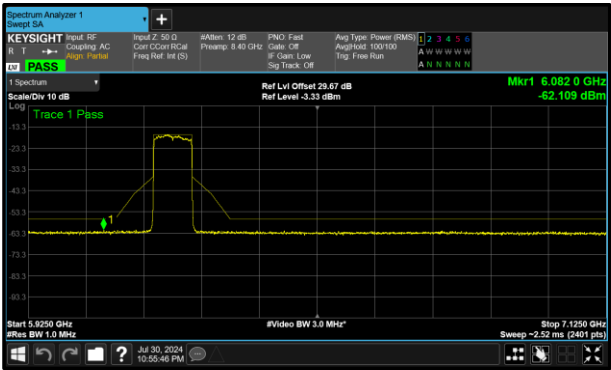


Figure 500 - A (Core 0) 6225 MHz (CH55)

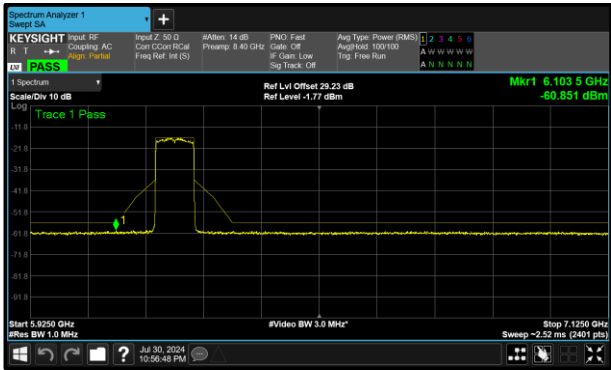


Figure 501 - B (Core 1) 6225 MHz (CH55)

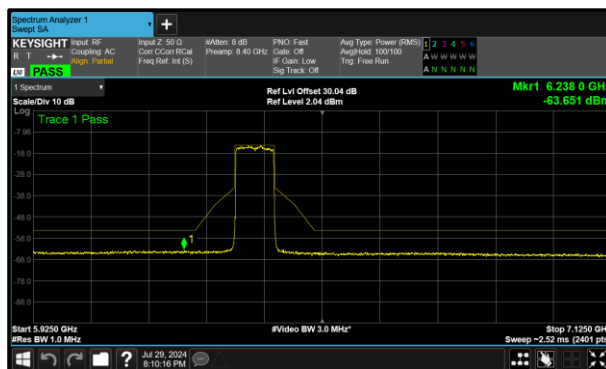


Figure 502 - A (Core 0) 6385 MHz (CH87)

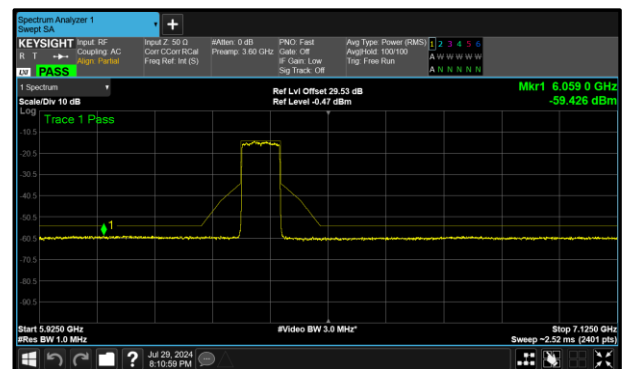


Figure 503 - B (Core 1) 6385 MHz (CH87)

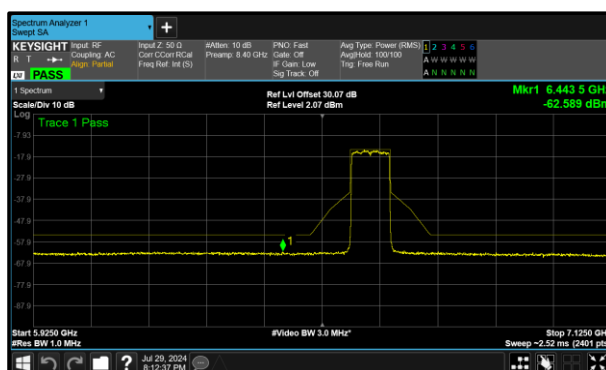


Figure 504 - A (Core 0) 6625 MHz (CH135)

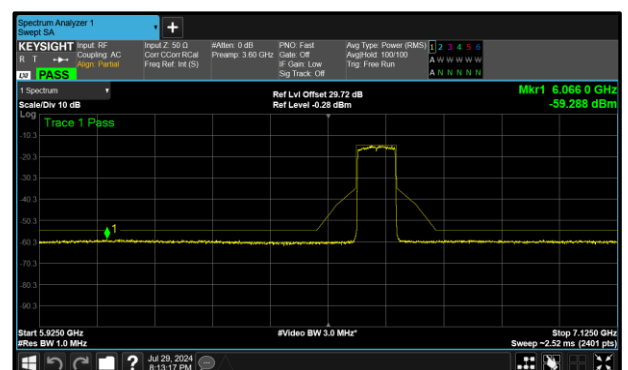


Figure 505 - B (Core 1) 6625 MHz (CH135)

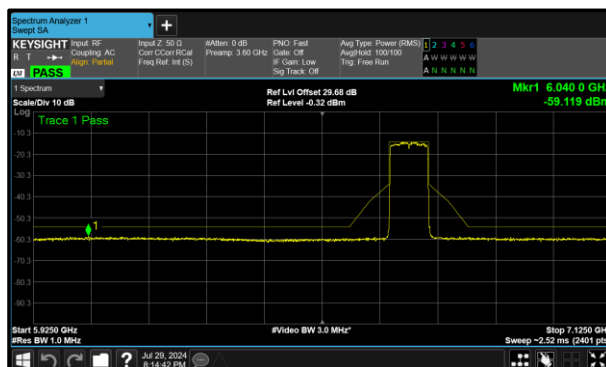


Figure 506 - A (Core 0) 6705 MHz (CH151)

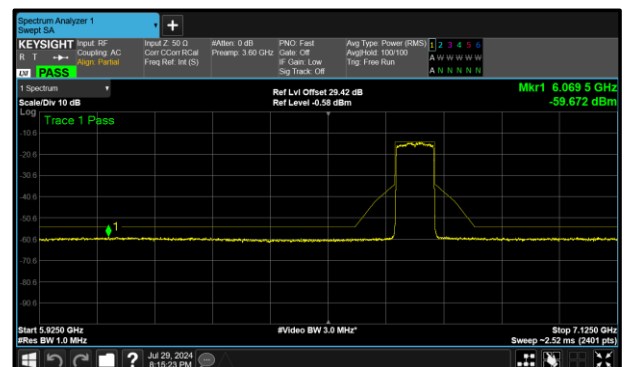


Figure 507 - B (Core 1) 6705 MHz (CH151)

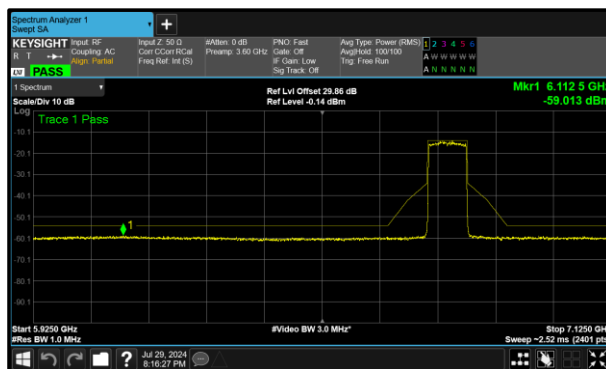


Figure 508 - A (Core 0) 6785 MHz (CH167)

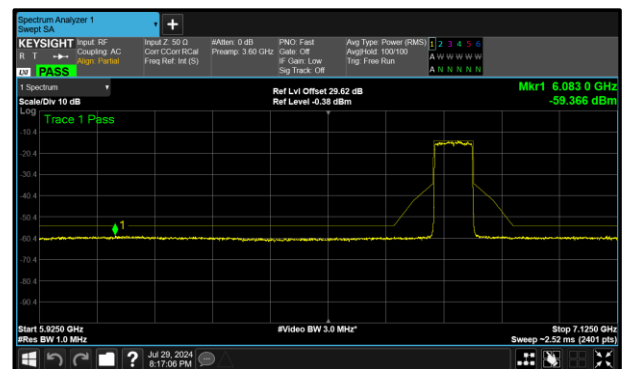


Figure 509 - B (Core 1) 6785 MHz (CH167)

FCC 47 CFR Part 15, Limit Clause 15.407(b)(6)

For transmitters operating within the 5.925-7.125 GHz bands:

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel centre, and by 40 dB at one- and one-half times the channel bandwidth away from channel centre. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the centre of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel centre by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

ISED RSS-248, Limit Clause 4.6.2(b)

e.i.r.p. spectral density of unwanted emissions falling into the 5925-7125 MHz band shall be attenuated (in dB) below the reference power spectral density by:

- i. 20 dB at 1 MHz away from the channel edge; and
- ii. a linearly interpolated value between 20 dB and 28 dB at frequencies between 1 MHz outside of channel edge and one (1) channel bandwidth from the operating channel centre, respectively; and
- iii. 28 dB at one (1) channel bandwidth away from the operating channel centre; and
- iv. a linearly interpolated value between 28 dB and 40 dB at frequencies between one (1) channel bandwidth from the channel centre and one- and one-half (1.5) times the channel bandwidth away from the operating channel centre, respectively; and
- v. 40 dB at one- and one-half (1.5) times the channel bandwidth away from the channel centre; and
- vi. a minimum of 40 dB at frequencies that are further away than one and one-half (1.5) times the channel bandwidth from the channel centre.



2.8.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
Attenuator 5W 30dB DC-18GHz	Aaren	AT40A-4041-D18-30	5505	12	22-Feb-2025
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Dec-2024
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	02-Jan-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6447	-	O/P Mon
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6448	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025

Table 394

O/P Mon - Output Monitored using calibrated equipment



2.9 Contention Based Protocol

2.9.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (d)(6)
ISED RSS-248, Clause 4.7

2.9.2 Equipment Under Test and Modification State

A3238, S/N: FJYC9L9VQL - Modification State 0

2.9.3 Date of Test

03-September-2024

2.9.4 Test Method

This test was performed in accordance with KDB 987594 D02, clause I.

The AWGN signal level was initially set at a level much less than the required threshold level ($\ll -62$ dBm) it was verified at this point that transmissions from the device under test (DUT) were present. The signal level was gradually increased until it was observed that the DUT continuously ceased transmissions with the AWGN signal present, i.e. no partial transmissions other than short control signalling transmissions.

The AWGN Signal level recorded is the level into the DUT's receiver, corrected for all cable losses. The minimum antenna gain value was then used to correct the level as described in KDB 987594 D04.

Timing plots showing verification that transmissions from the DUT responded to the interferer have been included in the test results below.

2.9.5 Test Setup Diagram

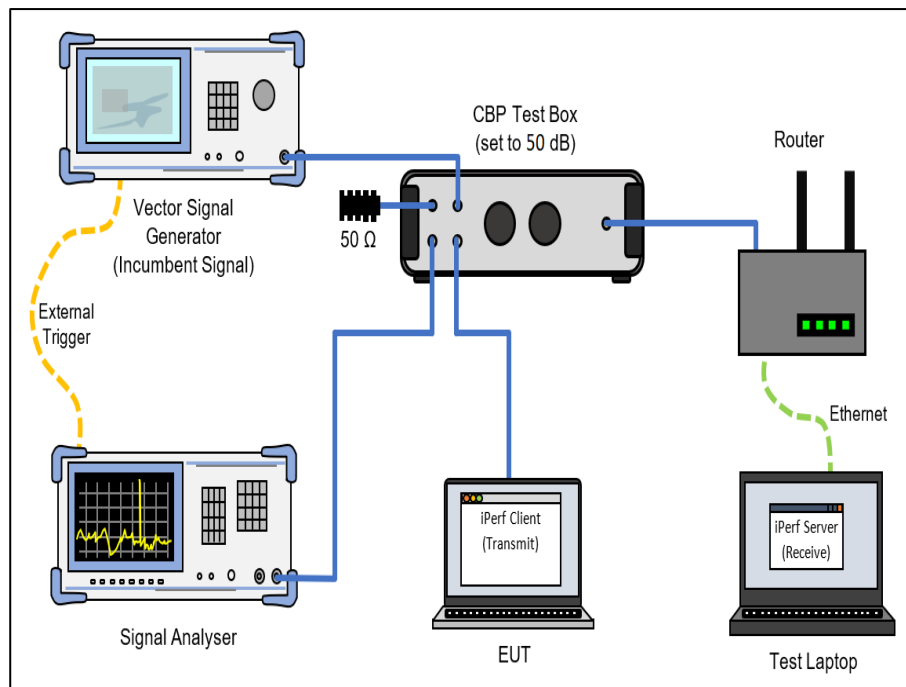


Figure 510 - Test Equipment Setup Diagram

2.9.6 Environmental Conditions

Ambient Temperature	22.6 °C
Relative Humidity	44.3 %



2.9.7 Test Results

6 GHz WLAN

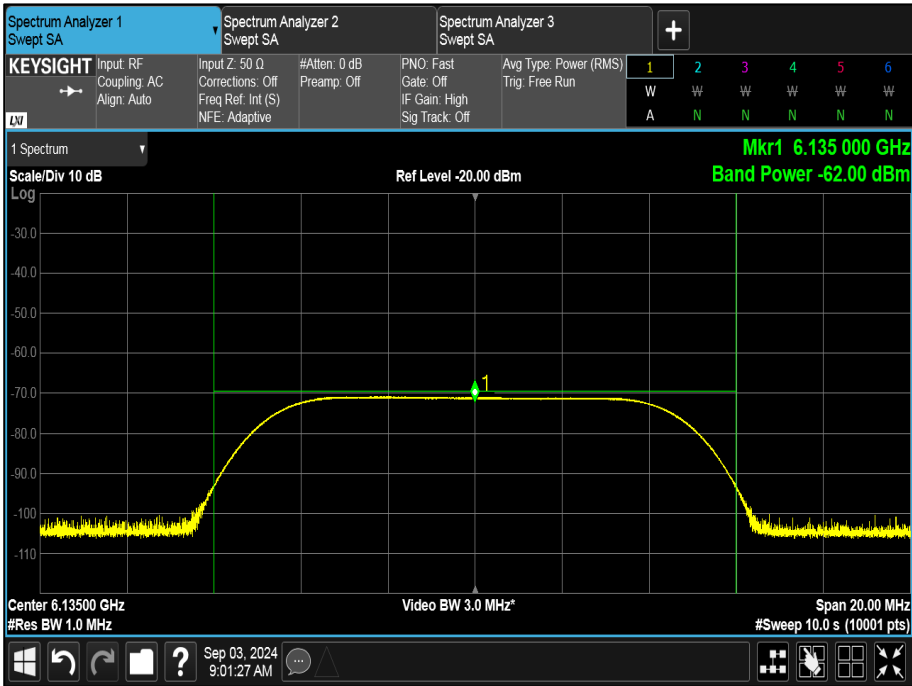


Figure 511 - Example of AWGN Signal



Parameter	Results		
U-NII Band	5	5	5
Channel Number	37	37	37
Bandwidth (MHz)	20	20	20
DUT Centre Frequency (MHz)	6135	6135	6135
AWGN Centre Frequency (MHz)	6135	6135	6135
AWGN Signal Power (dBm)	-74.25	-71.53	-70.03
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-74.65	-71.93	-70.43
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 395 - U-NII-5, Minimum Bandwidth

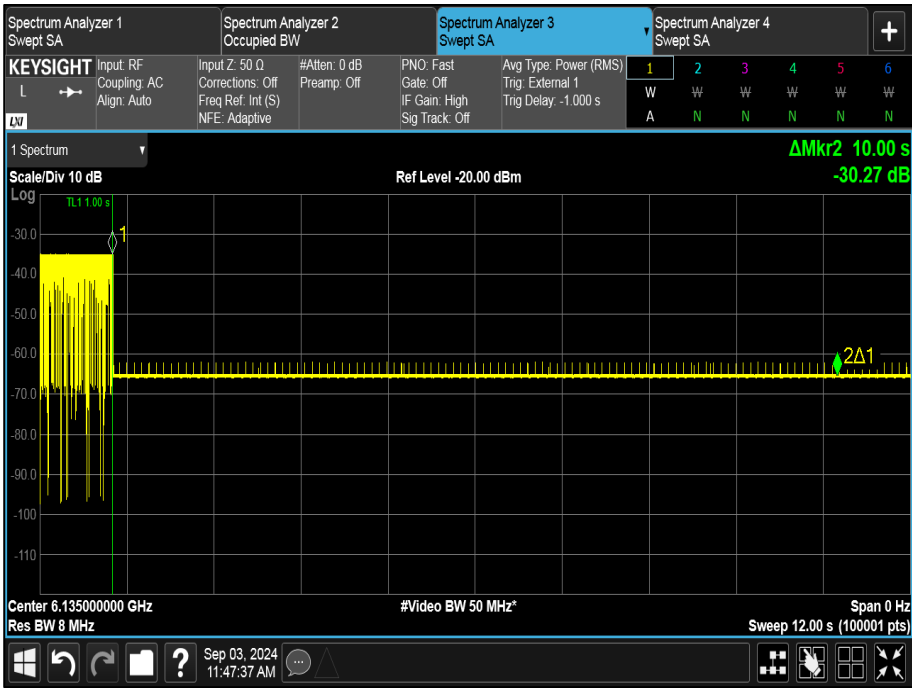


Figure 512 - U-NII-5, Minimum Bandwidth



Parameter	Results		
U-NII Band	5	5	5
Channel Number	47	47	47
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6185	6185	6185
AWGN Centre Frequency (MHz)	6110	6110	6110
AWGN Signal Power (dBm)	-68.98	-66.86	-66.46
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-69.38	-67.26	-66.86
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 396 - U-NII-5, Maximum Bandwidth (AWGN Low)

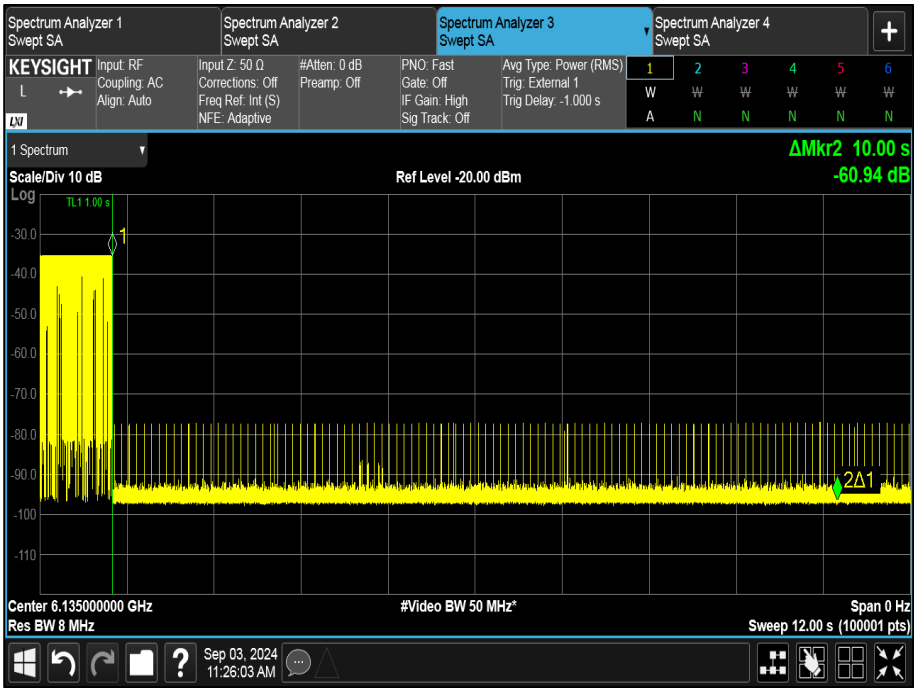


Figure 513 - U-NII-5, Maximum Bandwidth (AWGN Low)



Parameter	Results		
U-NII Band	5	5	5
Channel Number	47	47	47
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6185	6185	6185
AWGN Centre Frequency (MHz)	6185	6185	6185
AWGN Signal Power (dBm)	-71.92	-69.43	-67.52
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-72.32	-69.83	-67.92
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 397 - U-NII-5, Maximum Bandwidth (AWGN Mid)

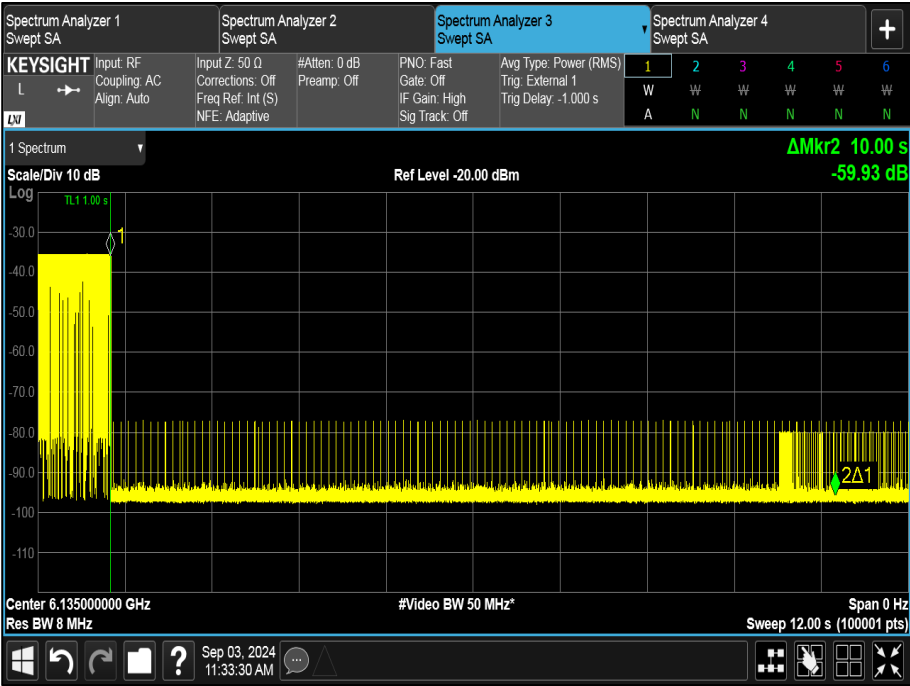


Figure 514 - U-NII-5, Maximum Bandwidth (AWGN Mid)



Parameter	Results		
U-NII Band	5	5	5
Channel Number	47	47	47
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6185	6185	6185
AWGN Centre Frequency (MHz)	6260	6260	6260
AWGN Signal Power (dBm)	-65.00	-63.57	-63.16
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-65.40	-63.97	-63.56
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 398 - U-NII-5, Maximum Bandwidth (AWGN High)

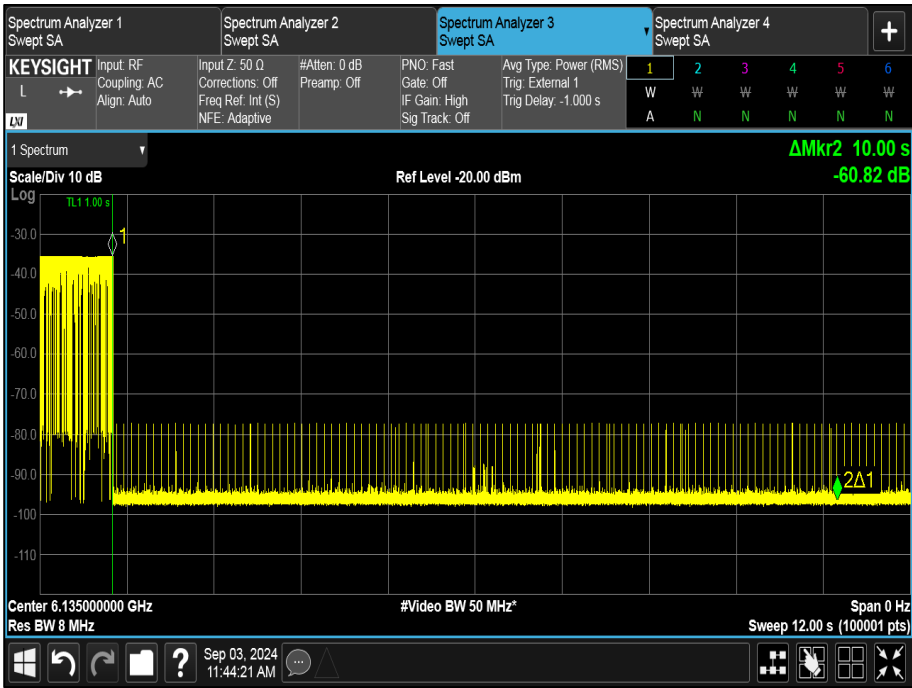


Figure 515 - U-NII-5, Maximum Bandwidth (AWGN High)



Parameter	Results		
U-NII Band	6	6	6
Channel Number	101	101	101
Bandwidth (MHz)	20	20	20
DUT Centre Frequency (MHz)	6455	6455	6455
AWGN Centre Frequency (MHz)	6455	6455	6455
AWGN Signal Power (dBm)	-74.93	-71.92	-69.93
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-75.33	-72.32	-70.33
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 399 - U-NII-6, Minimum Bandwidth

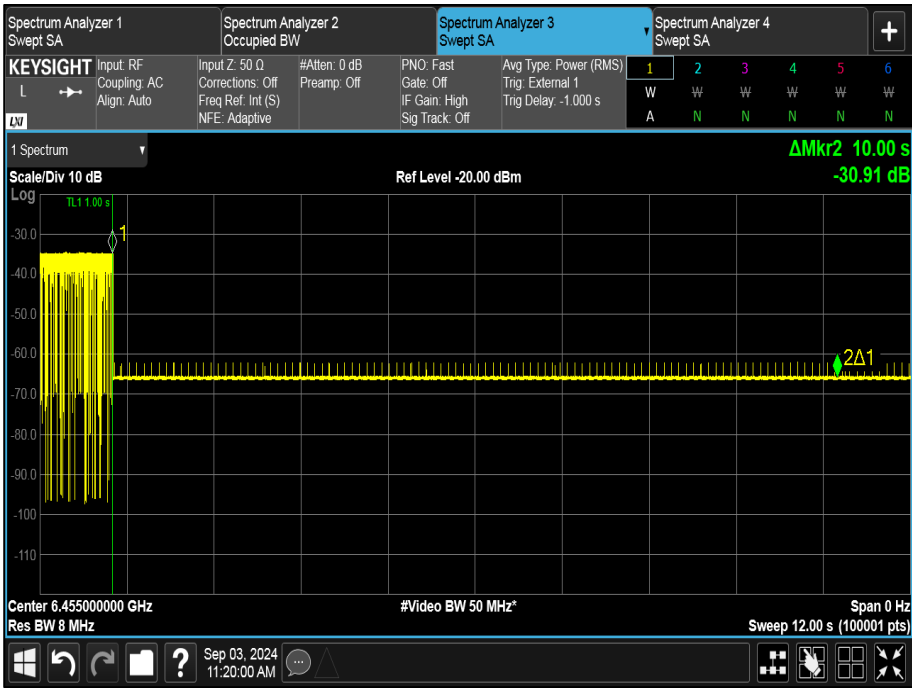


Figure 516 - U-NII-6, Minimum Bandwidth



Parameter	Results		
U-NII Band	6	6	6
Channel Number	111	111	111
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6505	6505	6505
AWGN Centre Frequency (MHz)	6430	6430	6430
AWGN Signal Power (dBm)	-72.73	-70.88	-68.98
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-73.13	-71.28	-69.38
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 400 - U-NII-6, Maximum Bandwidth (AWGN Low)

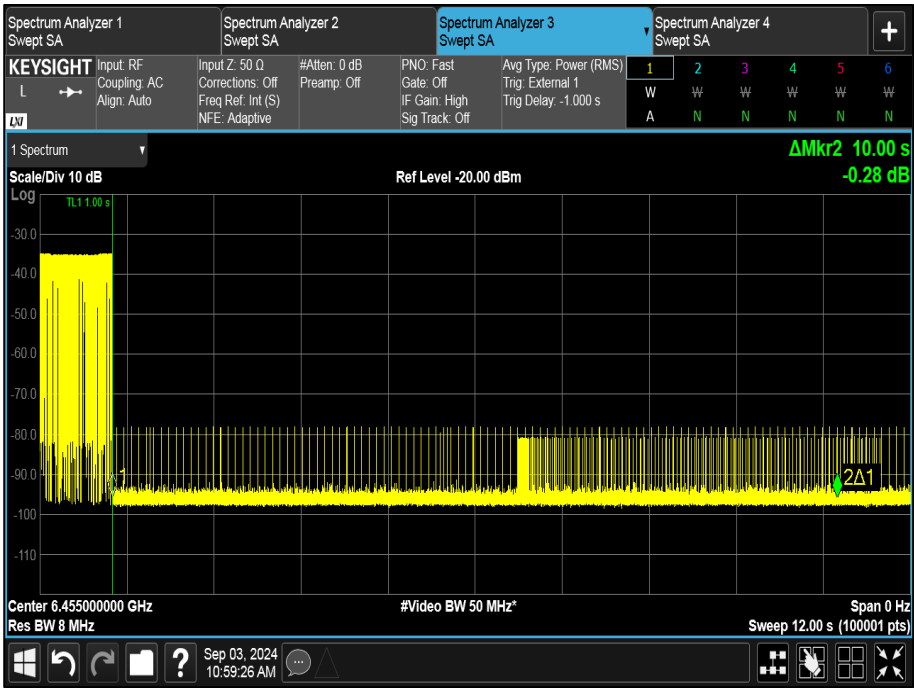


Figure 517 - U-NII-6, Maximum Bandwidth (AWGN Low)

Table 401 - U-NII-6, Maximum Bandwidth (AWGN Mid)





Parameter	Results		
U-NII Band	6	6	6
Channel Number	111	111	111
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6505	6505	6505
AWGN Centre Frequency (MHz)	6580	6580	6580
AWGN Signal Power (dBm)	-68.66	-67.04	-66.05
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-69.06	-67.44	-66.45
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 402 - U-NII-6, Maximum Bandwidth (AWGN High)


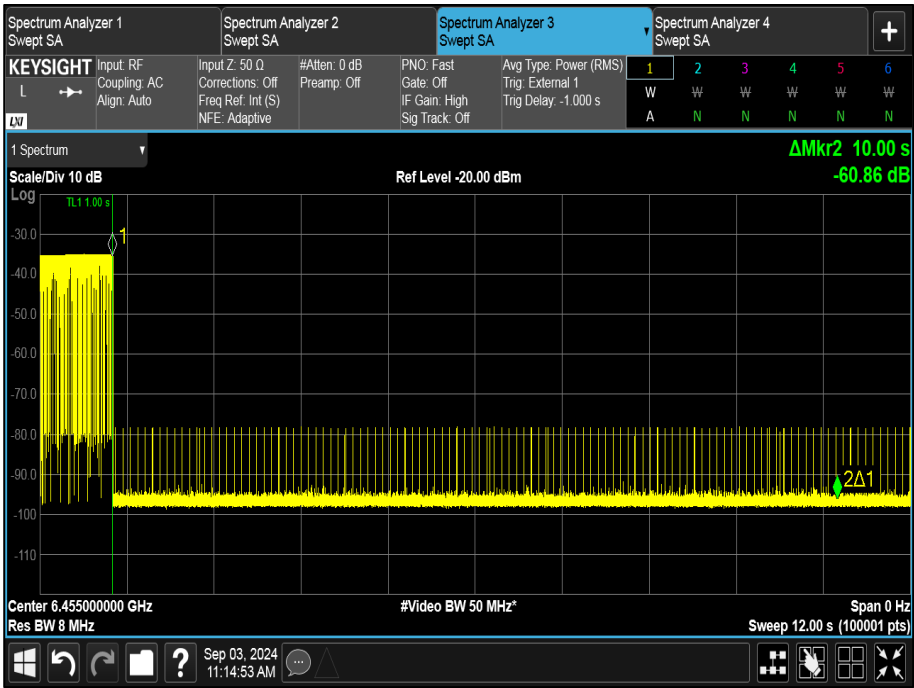


Figure 519 - U-NII-6, Maximum Bandwidth (AWGN High)

Table 403 - U-NII-7, Minimum Bandwidth





Parameter	Results		
U-NII Band	7	7	7
Channel Number	143	143	143
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6665	6665	6665
AWGN Centre Frequency (MHz)	6590	6590	6590
AWGN Signal Power (dBm)	-70.78	-67.46	-66.16
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-71.18	-67.86	-66.56
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 404 - U-NII-7, Maximum Bandwidth (AWGN Low)

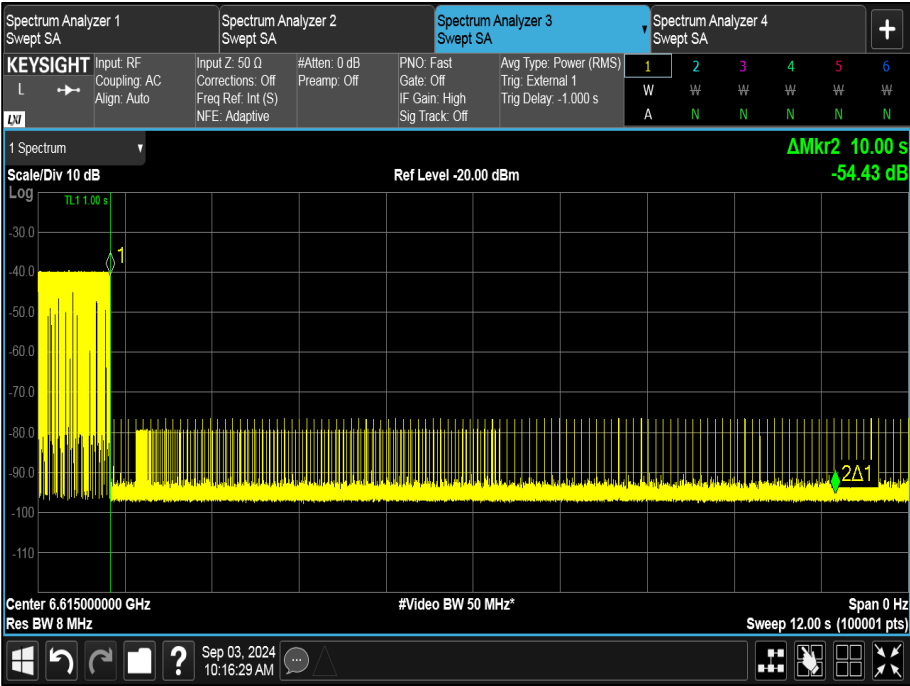


Figure 521 - U-NII-7, Maximum Bandwidth (AWGN Low)



Parameter	Results		
U-NII Band	7	7	7
Channel Number	143	143	143
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6665	6665	6665
AWGN Centre Frequency (MHz)	6665	6665	6665
AWGN Signal Power (dBm)	-71.70	-69.54	-66.05
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-72.10	-69.94	-66.45
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 405 - U-NII-7, Maximum Bandwidth (AWGN Mid)



Figure 522 - U-NII-7, Maximum Bandwidth (AWGN Mid)

Parameter	Results		
U-NII Band	7	7	7
Channel Number	143	143	143
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6665	6665	6665
AWGN Centre Frequency (MHz)	6740	6740	6740
AWGN Signal Power (dBm)	-67.01	-65.41	-63.30
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-67.41	-65.81	-63.70
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 406 - U-NII-7, Maximum Bandwidth (AWGN High)

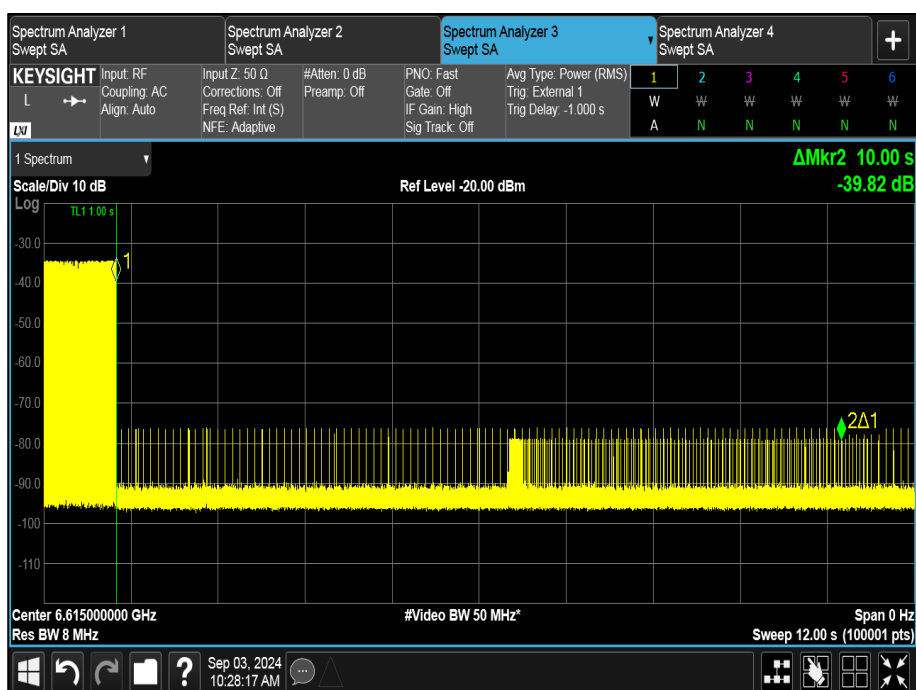


Figure 523 - U-NII-7, Maximum Bandwidth (AWGN High)



Parameter	Results		
U-NII Band	8	8	8
Channel Number	197	197	197
Bandwidth (MHz)	20	20	20
DUT Centre Frequency (MHz)	6935	6935	6935
AWGN Centre Frequency (MHz)	6935	6935	6935
AWGN Signal Power (dBm)	-75.13	-72.12	-70.72
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-75.53	-72.52	-71.12
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 407 - U-NII-8, Minimum Bandwidth

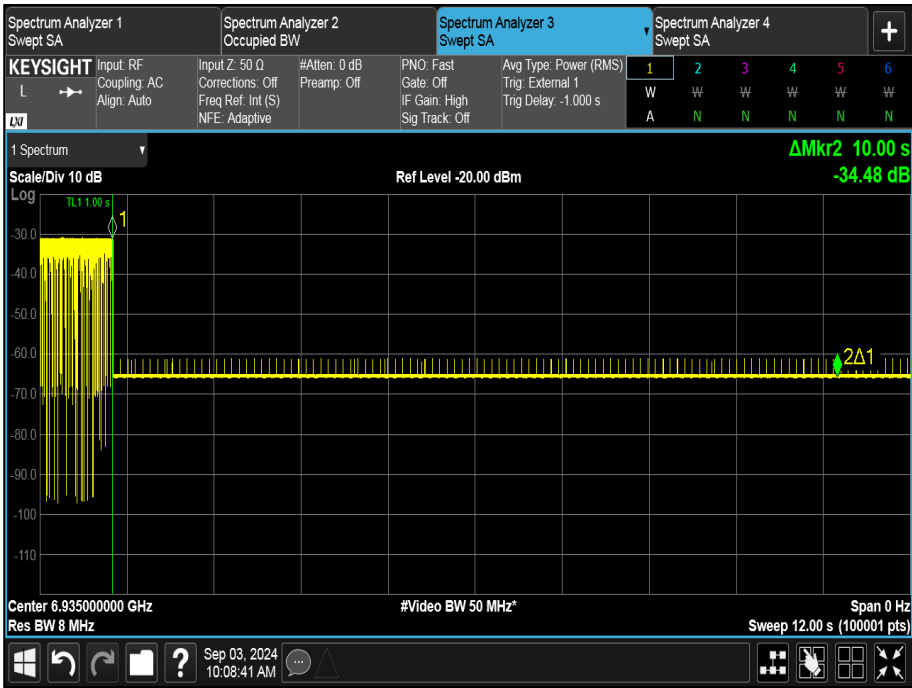


Figure 524 - U-NII-8, Minimum Bandwidth



Parameter	Results		
U-NII Band	8	8	8
Channel Number	207	207	207
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6985	6985	6985
AWGN Centre Frequency (MHz)	6910	6910	6910
AWGN Signal Power (dBm)	-69.35	-66.65	-66.14
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-69.75	-67.05	-66.54
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 408 - U-NII-8, Maximum Bandwidth (AWGN Low)

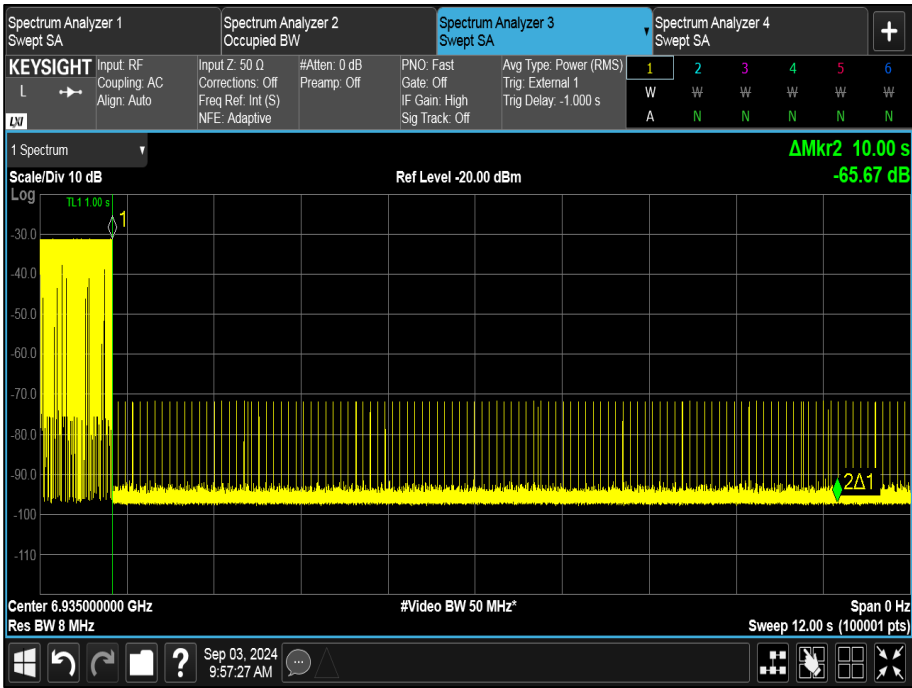


Figure 525 - U-NII-8, Maximum Bandwidth (AWGN Low)

Parameter	Results		
U-NII Band	8	8	8
Channel Number	207	207	207
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6985	6985	6985
AWGN Centre Frequency (MHz)	6985	6985	6985
AWGN Signal Power (dBm)	-69.17	-66.57	-65.68
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-69.57	-66.97	-66.08
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 409 - U-NII-8, Maximum Bandwidth (AWGN Mid)

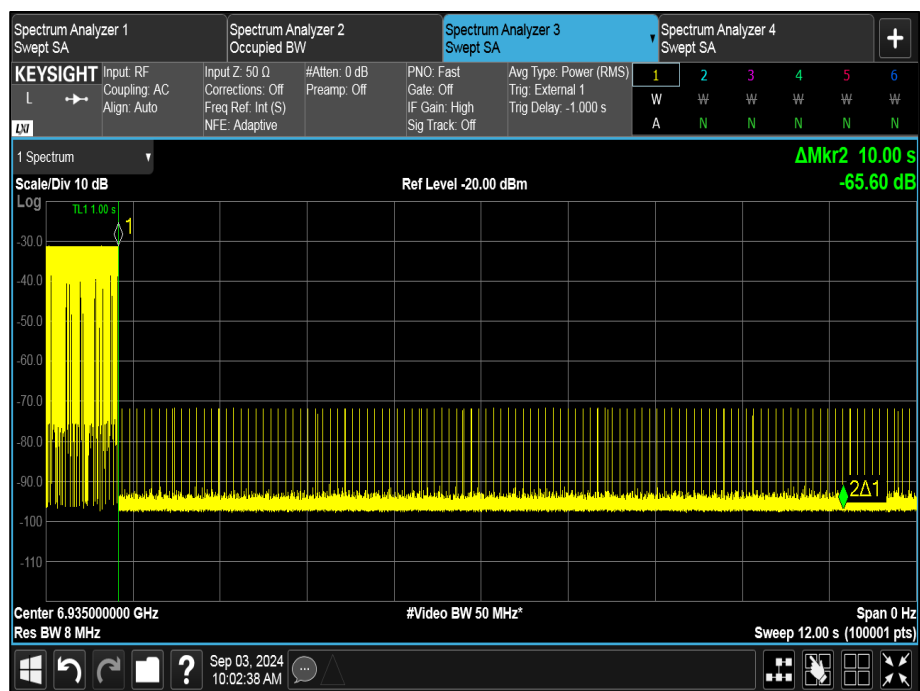


Figure 526 - U-NII-8, Maximum Bandwidth (AWGN Mid)



Parameter	Results		
U-NII Band	8	8	8
Channel Number	207	207	207
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6985	6985	6985
AWGN Centre Frequency (MHz)	7060	7060	7060
AWGN Signal Power (dBm)	-67.62	-65.52	-64.97
Antenna Gain (dBi)	0.40	0.40	0.40
Adjusted Power (dBm)	-68.02	-65.92	-65.37
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 410 - U-NII-8, Maximum Bandwidth (AWGN High)

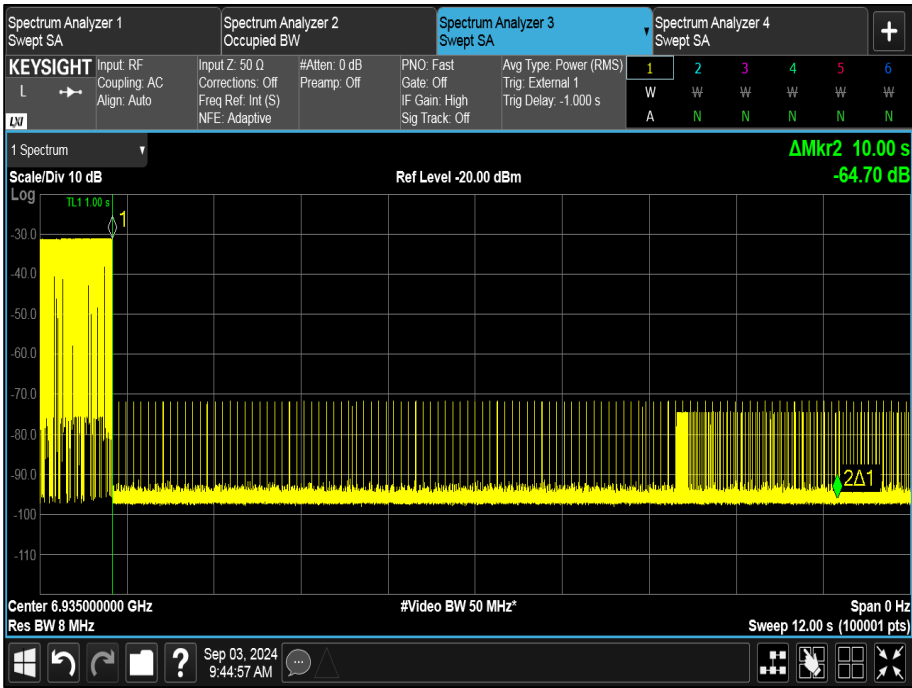


Figure 527 - U-NII-8, Maximum Bandwidth (AWGN High)



FCC 47 CFR Part 15.407 (d)(6)

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

KDB 987594, Limit Clause I

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

ISED RSS-248, Limit Clause 4.7.2

The minimum detection threshold power is the received power referenced to a 0 dBi antenna. Devices shall use a contention-based protocol to detect the presence of any emissions on the channel that the device intends to occupy. The device shall be able to detect, within its entire occupied bandwidth, a radio frequency power of at least -62 dBm or lower.

If an emission is detected on a channel, the device shall cease transmissions and shall not resume transmissions on this channel while the detected radio frequency power is at or above the -62 dBm threshold.



2.9.8 Test Location and Test Equipment Used

This test was carried out in Shielded Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
EXA Signal Analyser	Keysight Technologies	N9010B	4968	24	29-Jan-2026
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5429	12	16-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5430	12	16-May-2025
3.5mm Cable (1m)	Junkosha	MWX221/B	5837	12	29-Jul-2025
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	5926	-	TU
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5936	12	23-May-2025
Thermohygrometer	R.S Components	1364	6352	12	13-Jun-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6387	12	04-Sep-2024
Vector Signal Generator (7.5GHz)	Rohde & Schwarz	SMM100A	6532	36	11-Apr-2026

Table 411

TU - Traceability Unscheduled



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Emission Bandwidth	± 3.91 MHz
Dual Client Test	± 1.38 dB
Transmit Power Control	± 1.49 dB
Maximum Conducted Output Power	± 1.38 dB
Maximum Conducted Power Spectral Density	± 1.49 dB
Authorised Band Edges	± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Unwanted Emissions within the 5925-7125 MHz band	± 3.45 dB
Contention Based Protocol	Time: 0.30% Interferer BW: 267.98 kHz Interferer Level: 0.80 dB

Table 412

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.