

# Test report

**267266-3TRFWL**

Date of issue: March 5, 2015

Applicant:

**Andrew Wireless Innovations Group**

Product:

**ION-E**

Model:

**UAP**

FCC ID:

**BCR-IONEUAP**

Specification:

**FCC 47 CFR Part 27**

Miscellaneous wireless communications services

#### Test location

---

|              |                                                                                    |
|--------------|------------------------------------------------------------------------------------|
| Company name | Nemko Canada Inc.                                                                  |
| Address      | 303 River Road                                                                     |
| City         | Ottawa                                                                             |
| Province     | Ontario                                                                            |
| Postal code  | K1V 1H2                                                                            |
| Country      | Canada                                                                             |
| Telephone    | +1 613 737 9680                                                                    |
| Facsimile    | +1 613 737 9691                                                                    |
| Toll free    | +1 800 563 6336                                                                    |
| Website      | www.nemko.com                                                                      |
| Site number  | FCC test site registration number: 176392, IC: 2040A-4 (3 m semi anechoic chamber) |

|             |                                                 |
|-------------|-------------------------------------------------|
| Tested by   | Kevin Rose, Wireless/EMC Specialist             |
| Reviewed by | Andrey Adelberg, Senior Wireless/EMC Specialist |
| Date        | March 5, 2015                                   |
| Signature   |                                                 |

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. © Nemko Canada Inc.

## Table of contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Table of contents .....</b>                                    | <b>3</b>  |
| <b>Section 1. Report summary .....</b>                            | <b>4</b>  |
| 1.1 Applicant and manufacturer .....                              | 4         |
| 1.2 Test specifications .....                                     | 4         |
| 1.3 Statement of compliance .....                                 | 4         |
| 1.4 Exclusions .....                                              | 4         |
| 1.5 Test report revision history .....                            | 4         |
| <b>Section 2. Summary of test results .....</b>                   | <b>5</b>  |
| 2.1 FCC Part 27 test results .....                                | 5         |
| <b>Section 3. Equipment under test (EUT) details .....</b>        | <b>6</b>  |
| 3.1 Sample information .....                                      | 6         |
| 3.2 EUT information .....                                         | 6         |
| 3.3 Technical information .....                                   | 6         |
| 3.4 Product description and theory of operation .....             | 6         |
| 3.5 EUT exercise details .....                                    | 6         |
| 3.6 EUT setup diagram .....                                       | 7         |
| <b>Section 4. Engineering considerations .....</b>                | <b>8</b>  |
| 4.1 Modifications incorporated in the EUT .....                   | 8         |
| 4.2 Technical judgment .....                                      | 8         |
| 4.3 Deviations from laboratory tests procedures .....             | 8         |
| <b>Section 5. Test conditions .....</b>                           | <b>9</b>  |
| 5.1 Atmospheric conditions .....                                  | 9         |
| 5.2 Power supply range .....                                      | 9         |
| <b>Section 6. Measurement uncertainty .....</b>                   | <b>10</b> |
| <b>Section 7. Test equipment .....</b>                            | <b>11</b> |
| 7.1 Test equipment list .....                                     | 11        |
| <b>Section 8. Testing data .....</b>                              | <b>12</b> |
| 8.1 FCC 27.50(d) Peak output power at RF antenna connector .....  | 12        |
| 8.2 FCC 27.53(h) Spurious emissions at RF antenna connector ..... | 14        |
| 8.3 FCC 27.53(h) Radiated spurious emissions .....                | 26        |
| 8.4 FCC 27.54 Frequency stability .....                           | 27        |
| 8.5 Part 2.1049 Occupied bandwidth .....                          | 28        |
| <b>Section 9. Setup Photos .....</b>                              | <b>37</b> |
| 9.1 Set-up .....                                                  | 37        |
| <b>Section 10. Block diagrams of test set-ups .....</b>           | <b>38</b> |
| 10.1 Radiated emissions set-up .....                              | 38        |

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

|                 |                                   |
|-----------------|-----------------------------------|
| Company name    | Andrew Wireless Innovations Group |
| Address         | 620 N Greenfield Parkway          |
| City            | Garner                            |
| Province/State  | NC                                |
| Postal/Zip code | 27529                             |
| Country         | USA                               |

### 1.2 Test specifications

---

|                                                 |                                                                                    |
|-------------------------------------------------|------------------------------------------------------------------------------------|
| FCC 47 CFR Part 27                              | Miscellaneous wireless communications services                                     |
| 935210 D02 Signal Boosters Certification v02r01 | Appendix D booster, amplifier, and repeater interim basic authorization procedures |
| KDB 935210 D04                                  | Provider Specific Booster Measurements v01                                         |

### 1.3 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.4 Exclusions

---

None

### 1.5 Test report revision history

---

| Revision # | Details of changes made to test report |
|------------|----------------------------------------|
| TRF        | Original report issued                 |



Section 2. Summary of test results

2.1 FCC Part 27 test results

| Part      | Test description                           | Verdict |
|-----------|--------------------------------------------|---------|
| §27.50(d) | Peak output power at RF antenna connector  | Pass    |
| §27.53(h) | Spurious emissions at RF antenna connector | Pass    |
| §27.53(h) | Radiated spurious emissions                | Pass    |
| §27.54    | Frequency stability                        | Pass    |
| §2.1049   | Occupied bandwidth                         | Pass    |

Notes: None

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

|                        |                 |
|------------------------|-----------------|
| Receipt date           | August 18, 2014 |
| Nemko sample ID number | 1               |

### 3.2 EUT information

---

|               |       |
|---------------|-------|
| Product name  | ION-E |
| Model         | UAP   |
| Serial number | 18    |

### 3.3 Technical information

---

|                     |                                                                      |
|---------------------|----------------------------------------------------------------------|
| Operating band      | 2110–2155 MHz (LTE)                                                  |
| Modulation type     | LTE (QPSK and QAM) 1.4, 3, 5, 10, 15, 20 MHz and 4.1 MHz UMTS        |
| Power requirements  | 110 V <sub>AC</sub> , ~3 A for entire system tested                  |
| Emission designator | LTE, D7W<br>UMTS, F9W                                                |
| Gain                | 20 dB                                                                |
| Antenna information | External Antenna is not provided EUT used a 50 $\Omega$ termination. |

### 3.4 Product description and theory of operation

---

The UAP amplifier is a multi-band, multi-operator remote unit configuration used in conjunction with a master unit in the ION-E optical distribution antenna system.

### 3.5 EUT exercise details

---

The UAP was controlled via a Laptop interface with control software to configure the system

3.6 EUT setup diagram

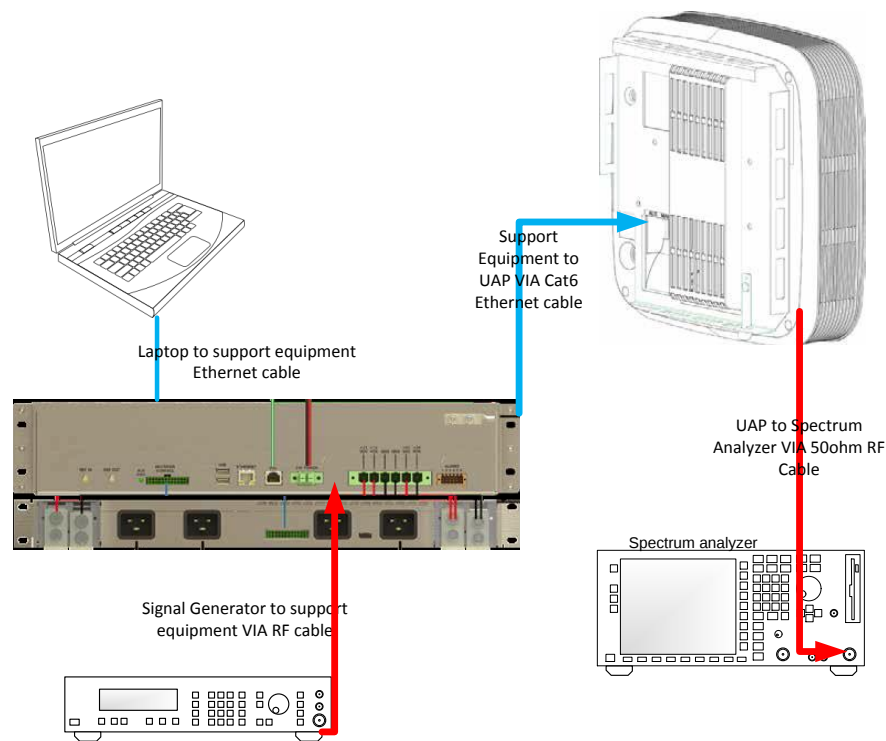


Figure 3.6-1: Setup diagram

Table 3.6-1: Support equipment

| Description  | Manufacturer | Model/Part number | Serial number | Rev. |
|--------------|--------------|-------------------|---------------|------|
| Power Supply | GE           | SP800XXXXXXZ0P3   | 14CS1227006   | 1    |
| WCS rack     | Commscope    | WCS4              | 47            | -    |

**Section 4.**    Engineering considerations

---

**4.1**    Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

**4.2**    Technical judgment

---

None

**4.3**    Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

# Section 5. Test conditions

---

## 5.1 Atmospheric conditions

---

|                   |               |
|-------------------|---------------|
| Temperature       | 15–30 °C      |
| Relative humidity | 20–75 %       |
| Air pressure      | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

## 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.



Section 6. Measurement uncertainty

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

| Test name                         | Measurement uncertainty, dB |
|-----------------------------------|-----------------------------|
| All antenna port measurements     | 0.55                        |
| Conducted spurious emissions      | 1.13                        |
| Radiated spurious emissions       | 3.78                        |
| AC power line conducted emissions | 3.55                        |

## Section 7. Test equipment

### 7.1 Test equipment list

*Table 7.1-1: Equipment list*

| Equipment                   | Manufacturer    | Model no.    | Asset no. | Cal cycle | Next cal.  |
|-----------------------------|-----------------|--------------|-----------|-----------|------------|
| 3 m EMI test chamber        | TDK             | SAC-3        | FA002047  | 1 year    | Mar. 18/15 |
| Flush mount turntable       | Sunol           | FM2022       | FA002082  | —         | NCR        |
| Controller                  | Sunol           | SC104V       | FA002060  | —         | NCR        |
| Antenna mast                | Sunol           | TLT2         | FA002061  | —         | NCR        |
| Receiver/spectrum analyzer  | Rohde & Schwarz | ESU 26       | FA002043  | 1 year    | Jan. 07/16 |
| Receiver/spectrum analyzer  | Rohde & Schwarz | ESU 40       | FA002071  | 1 year    | Mar. 20/15 |
| Bilog antenna (20–3000 MHz) | Sunol           | JB3          | FA002108  | 1 year    | Mar. 12/15 |
| Horn antenna (1–18 GHz)     | EMCO            | 3115         | FA000825  | 1 year    | Mar. 10/15 |
| Horn antenna (1–18 GHz)     | EMCO            | 3115         | FA000649  | 1 year    | Mar. 25/15 |
| Horn antenna (18–26.5 GHz)  | Electro-metrics | SH-50/60-1   | FA000479  | —         | VOU        |
| Pre-amplifier (1–18 GHz)    | JCA             | JCA118-503   | FA002091  | 1 year    | June 23/15 |
| Pre-amplifier (18–26 GHz)   | Narda           | BBS-1826N612 | FA001550  | —         | VOU        |
| Signal generator            | Rohde & Schwarz | SMIQ03E      | FA001269  | 1 year    | Feb 27/15  |
| Signal generator            | Rohde & Schwarz | SMIQ06B      | FA001878  | 1 year    | Feb 24/15  |
| 50 Ω coax cable             | C.C.A.          | None         | FA002555  | 1 year    | June 23/15 |
| 50 Ω coax cable             | Huber + Suhner  | None         | FA002074  | 1 year    | June 23/15 |
| Temperature chamber         | Thermotron      | SM-16C       | FA001030  | 1 year    | NCR        |
| Multimeter                  | Fluke           | 16           | FA001831  | 1 year    | Feb. 04/15 |

Note: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

---

### 8.1 FCC 27.50(d) Peak output power at RF antenna connector

---

#### 8.1.1 Definitions and limits

---

(2)(i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;

(2)(ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(5) Equipment employed must be authorized in accordance with the provisions of §24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 8.1.2 Test summary

---

|               |                   |                   |           |
|---------------|-------------------|-------------------|-----------|
| Test date     | February 10, 2015 | Temperature       | 23 °C     |
| Test engineer | Kevin Rose        | Air pressure      | 1004 mbar |
| Verdict       | Pass              | Relative humidity | 33 %      |

#### 8.1.3 Observations, settings and special notes

---

Test receiver settings:

|                       |                                                  |
|-----------------------|--------------------------------------------------|
| Detector mode         | RMS (for average), Peak (for peak)               |
| Resolution bandwidth  | 100 kHz                                          |
| Integration bandwidth | >OBW                                             |
| Video bandwidth       | >RBW                                             |
| Trace mode            | Power Average (for average), Max Hold (for peak) |
| Measurement time      | Auto                                             |

#### 8.1.4 Test data

Table 8.1-1: Peak to Average results

| Modulation       | Frequency, MHz | RF output power AVG, dBm | RF output power Peak, dBm | Peak to Average Ratio, dB | Peak to Average Ratio Limit, dBm | Peak to Average Margin, dB |
|------------------|----------------|--------------------------|---------------------------|---------------------------|----------------------------------|----------------------------|
| 1.4 MHz LTE QAM  | 2132           | 18.31                    | 28.23                     | 9.92                      | 13                               | 3.08                       |
| 1.4 MHz LTE QPSK | 2132           | 18.42                    | 28.07                     | 9.65                      | 13                               | 3.35                       |
| 3 MHz LTE QAM    | 2132           | 18.30                    | 28.19                     | 9.89                      | 13                               | 3.11                       |
| 3 MHz LTE QPSK   | 2132           | 18.42                    | 27.25                     | 8.83                      | 13                               | 4.17                       |
| 5 MHz LTE QAM    | 2132           | 18.33                    | 27.95                     | 9.62                      | 13                               | 3.38                       |
| 5 MHz LTE QPSK   | 2132           | 18.34                    | 27.88                     | 9.54                      | 13                               | 3.46                       |
| 10 MHz LTE QAM   | 2132           | 18.07                    | 27.41                     | 9.34                      | 13                               | 3.66                       |
| 10 MHz LTE QPSK  | 2132           | 18.06                    | 27.16                     | 9.1                       | 13                               | 3.9                        |
| 15 MHz LTE QAM   | 2132           | 18.25                    | 27.3                      | 9.05                      | 13                               | 3.95                       |
| 15 MHz LTE QPSK  | 2132           | 18.22                    | 27.51                     | 9.29                      | 13                               | 3.71                       |
| 20 MHz LTE QAM   | 2132           | 18.14                    | 27.18                     | 9.04                      | 13                               | 3.96                       |
| 20 MHz LTE QPSK  | 2132           | 18.28                    | 27.33                     | 9.05                      | 13                               | 3.95                       |
| UMTS             | 2132           | 18.19                    | 27.66                     | 9.47                      | 13                               | 3.53                       |

Table 8.1-2: EIRP results

| Modulation       | Frequency, MHz | RF output power AVG, dBm | Antenna Gain, dBi | EIRP, dBm | Limit, dBm/MHz | Margin, dBm |
|------------------|----------------|--------------------------|-------------------|-----------|----------------|-------------|
| 1.4 MHz LTE QAM  | 2132           | 18.31                    | 5                 | 23.31     | 62.15          | 38.84       |
| 1.4 MHz LTE QPSK | 2132           | 18.42                    | 5                 | 23.42     | 62.15          | 38.73       |
| 3 MHz LTE QAM    | 2132           | 18.30                    | 5                 | 23.30     | 62.15          | 38.85       |
| 3 MHz LTE QPSK   | 2132           | 18.42                    | 5                 | 23.42     | 62.15          | 38.73       |
| 5 MHz LTE QAM    | 2132           | 18.33                    | 5                 | 23.33     | 62.15          | 38.82       |
| 5 MHz LTE QPSK   | 2132           | 18.34                    | 5                 | 23.34     | 62.15          | 38.81       |
| 10 MHz LTE QAM   | 2132           | 18.07                    | 5                 | 23.07     | 62.15          | 39.08       |
| 10 MHz LTE QPSK  | 2132           | 18.06                    | 5                 | 23.06     | 62.15          | 39.09       |
| 15 MHz LTE QAM   | 2132           | 18.25                    | 5                 | 23.25     | 62.15          | 38.9        |
| 15 MHz LTE QPSK  | 2132           | 18.22                    | 5                 | 23.22     | 62.15          | 38.93       |
| 20 MHz LTE QAM   | 2132           | 18.14                    | 5                 | 23.14     | 62.15          | 39.01       |
| 20 MHz LTE QPSK  | 2132           | 18.28                    | 5                 | 23.28     | 62.15          | 38.87       |
| UMTS             | 2132           | 18.19                    | 5                 | 23.19     | 62.15          | 38.96       |

Note: The results were measured using a higher resolution bandwidth integrated power. 1MHz limit is the lowest limit  
The actual limit may be increased by  $(60+10*\text{LOG}(\text{actual bandwidth}/1\text{MHz}))$

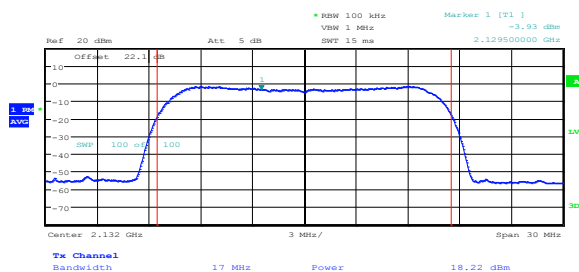


Figure 8.1-1: Conducted Average power example

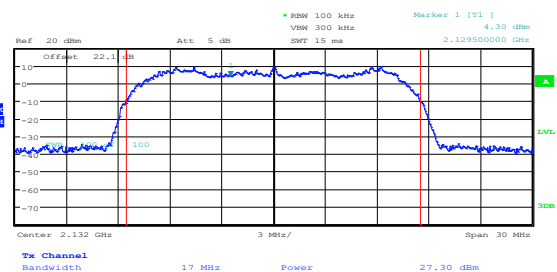


Figure 8.1-2: Conducted Peak power example

## 8.2 FCC 27.53(h) Spurious emissions at RF antenna connector

### 8.2.1 Definitions and limits

#### AWS emission limits

(1) General protection levels. Except as otherwise specified below, for operations in the 2110–2155 MHz band, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### (3) Measurement procedure.

(i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

### 8.2.2 Test summary


|               |                 |                   |           |
|---------------|-----------------|-------------------|-----------|
| Test date     | August 25, 2014 | Temperature       | 24 °C     |
| Test engineer | Kevin Rose      | Air pressure      | 1004 mbar |
| Verdict       | Pass            | Relative humidity | 47 %      |

### 8.2.3 Observations, settings and special notes

KDB 935210 D04 Provider Specific Booster Measurements used to perform the testing.


|                                |                                               |
|--------------------------------|-----------------------------------------------|
| Frequency range                | 30 MHz to 10 <sup>th</sup> harmonic           |
| Detector mode                  | Peak                                          |
| Resolution bandwidth sweep     | 100 kHz (below 1 GHz), 1000 kHz (above 1 GHz) |
| Resolution bandwidth band edge | > 1 % of OBW                                  |
| Video bandwidth                | >RBW                                          |
| Trace mode                     | Max Hold                                      |
| Measurement time               | Auto                                          |

8.2.4 Test data

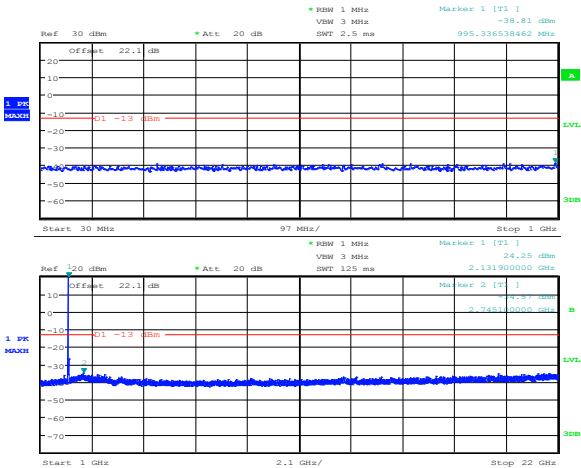


Date: 10.FEB.2015 20:21:43

Figure 8.2-1: 1.4 MHz LTE QAM 30 MHz – 22 GHz

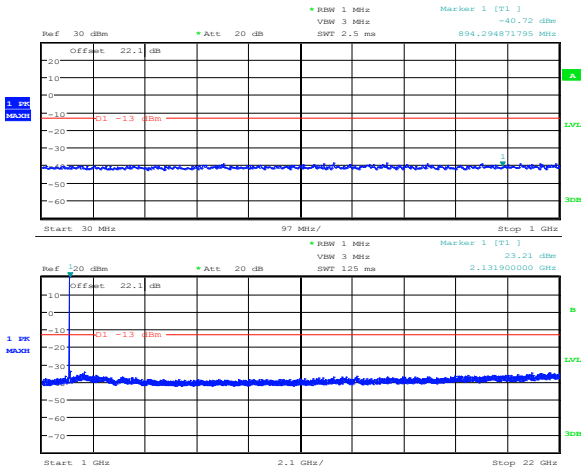


Date: 10.FEB.2015 20:20:50

Figure 8.2-2: 1.4 MHz LTE QPSK 30 MHz – 22 GHz

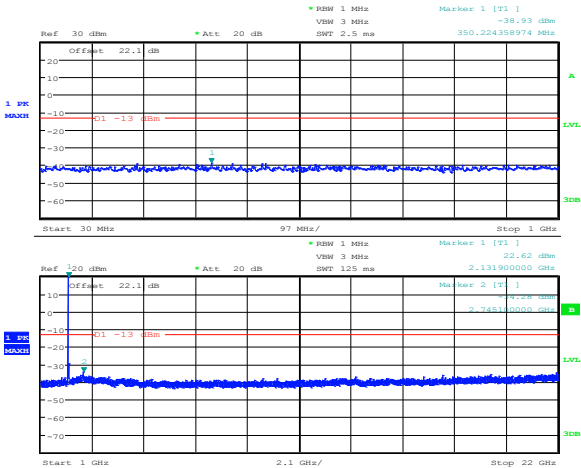

Date: 10.FEB.2015 20:22:08


Figure 8.2-3: 3 MHz LTE QAM 30 MHz – 22 GHz

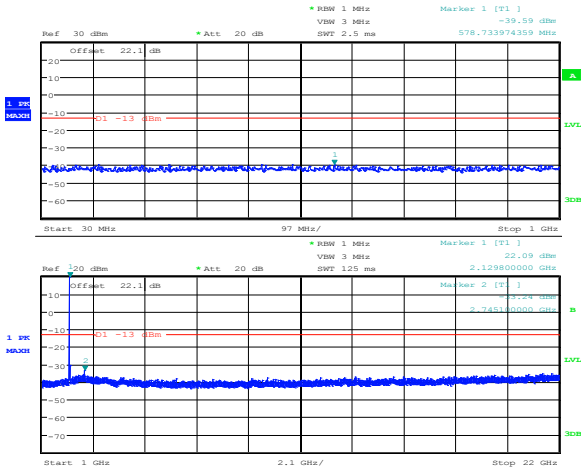

Date: 10.FEB.2015 20:22:33


Figure 8.2-4: 3 MHz LTE QPSK 30 MHz – 22 GHz

8.2.4 Test data continued

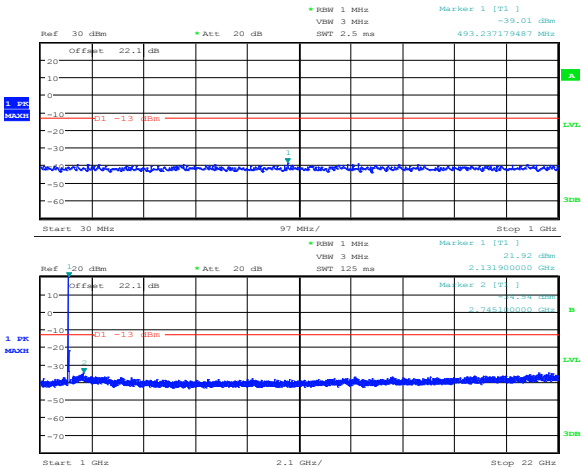


Date: 10.FEB.2015 20:23:22

Figure 8.2-5: 5 MHz LTE QAM 30 MHz – 22 GHz

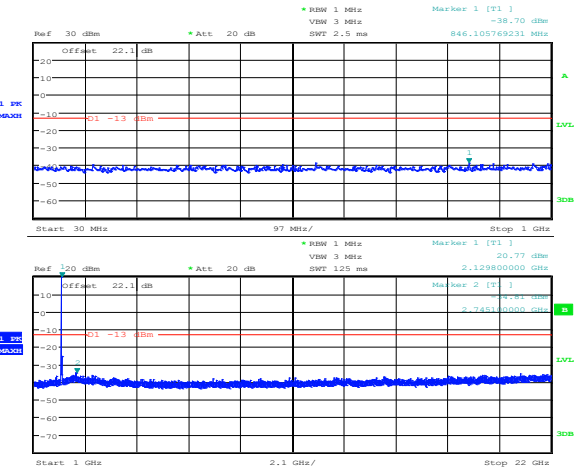


Date: 10.FEB.2015 20:22:54

Figure 8.2-6: 5 MHz LTE QPSK 30 MHz – 22 GHz

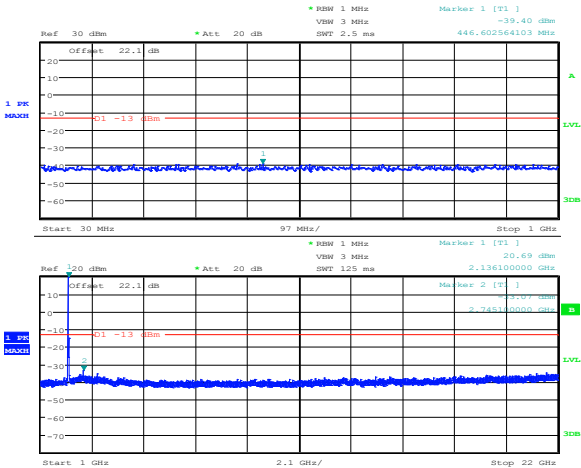

Date: 10.FEB.2015 20:23:51


Figure 8.2-7: 10 MHz LTE QAM 30 MHz – 22 GHz

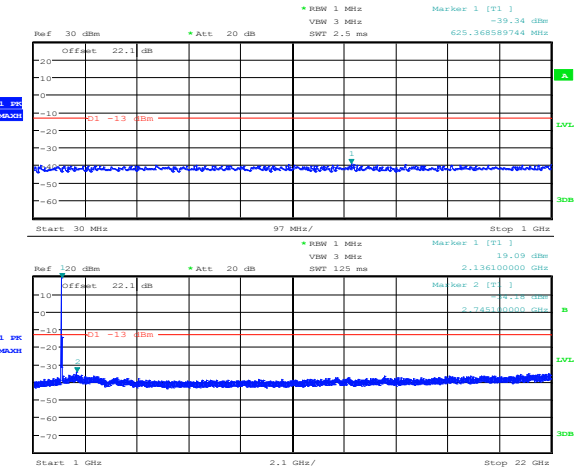

Date: 10.FEB.2015 20:24:18


Figure 8.2-8: 10 MHz LTE QPSK 30 MHz – 22 GHz

#### 8.2.4 Test data continued

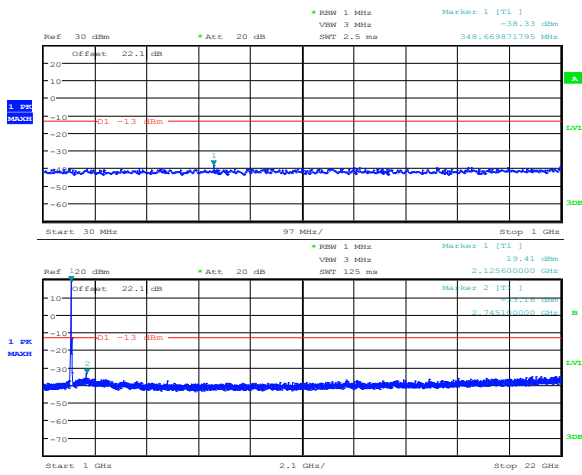


Date: 10.FEB.2015 20:25:12

**Figure 8.2-9: 15 MHz LTE QAM 30 MHz – 22 GHz**

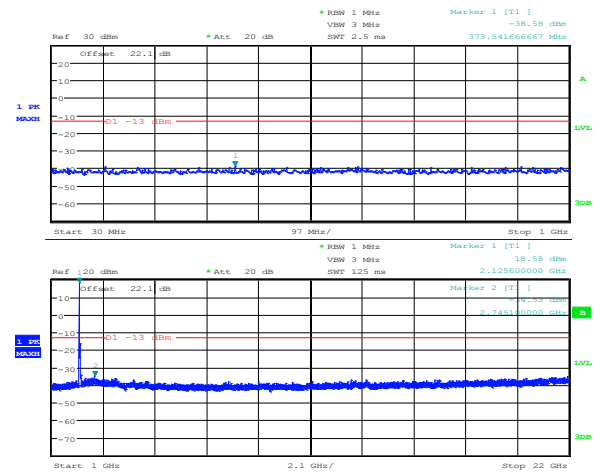


Date: 10.FEB.2015 20:24:48

**Figure 8.2-10: 15 MHz LTE QPSK 30 MHz – 22 GHz**

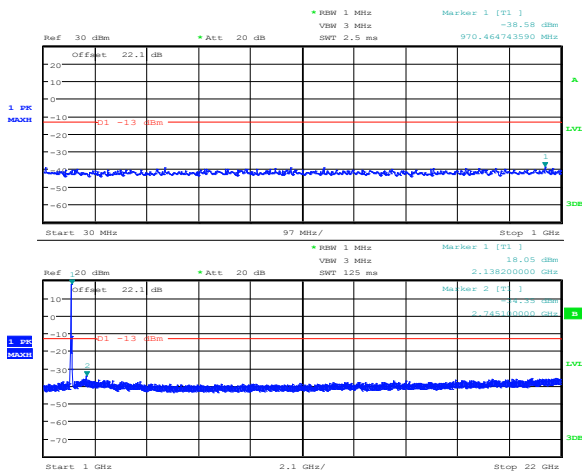

Date: 10.FEB.2015 20:25:34


**Figure 8.2-11: 20 MHz LTE QAM 30 MHz – 22 GHz**

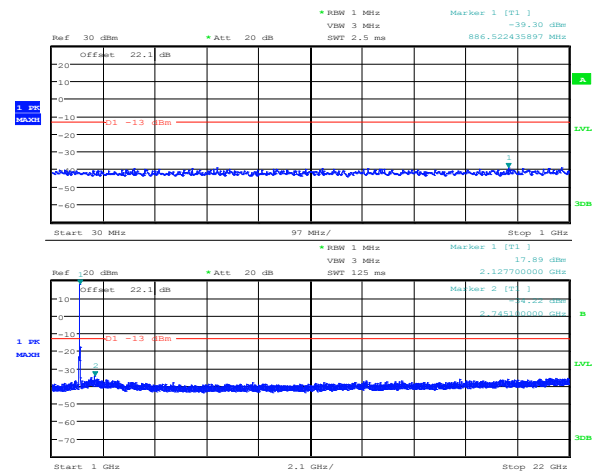

Date: 10.FEB.2015 20:25:56

**Figure 8.2-12: 20 MHz LTE QPSK 30 MHz – 22 GHz**


8.2.4 Test data continued

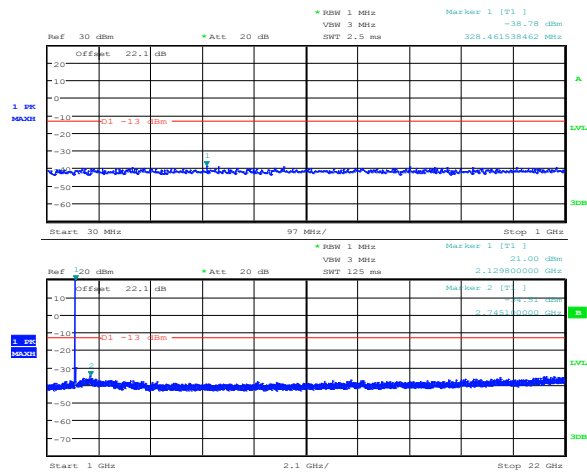

Date: 10.FEB.2015 20:26:27


Figure 8.2-13: UMTS 30 MHz – 22 GHz

8.2.4 Test data continued

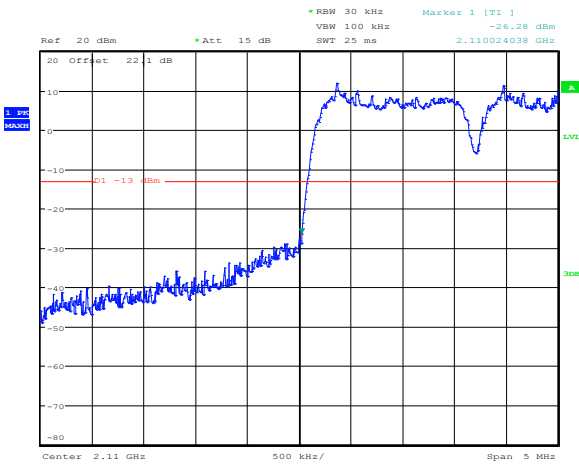


Date: 11.FEB.2015 12:53:24

Figure 8.2-14: 1.4 MHz Lower Band edge QPSK

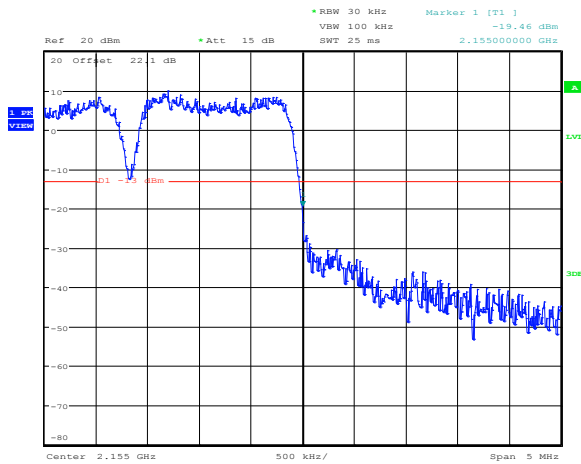


Date: 11.FEB.2015 13:19:52

Figure 8.2-15: 1.4 MHz Upper Band edge QPSK

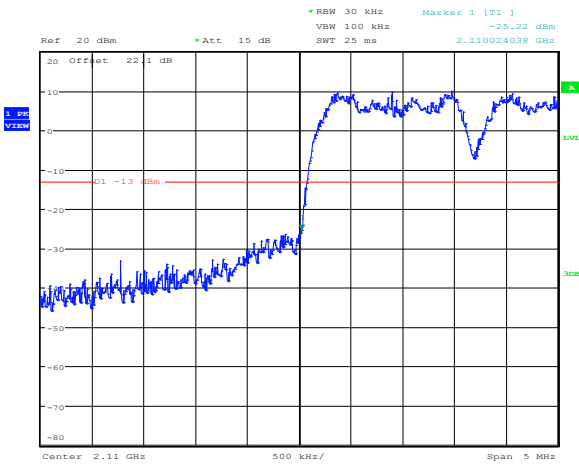

Date: 11.FEB.2015 12:53:03


Figure 8.2-16: 1.4 MHz Lower Band edge QAM

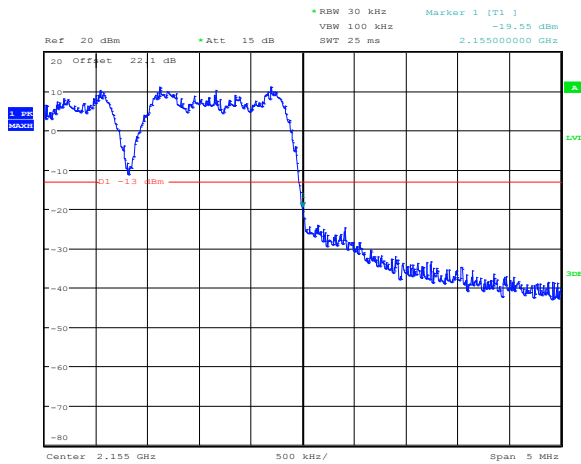

Date: 11.FEB.2015 13:20:04


Figure 8.2-17: 1.4 MHz Upper Band edge QAM

8.2.4 Test data continued

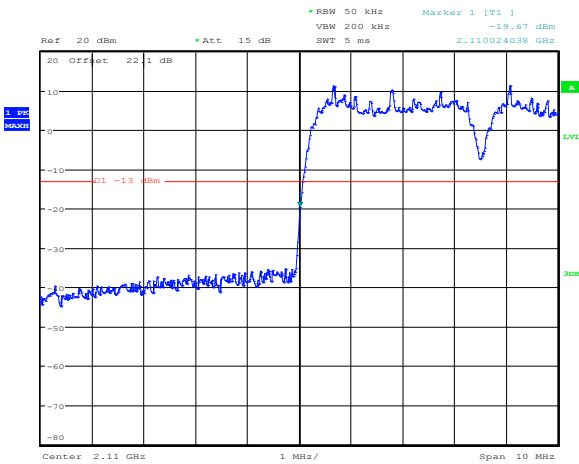


Date: 11.FEB.2015 12:55:16

Figure 8.2-18: 3 MHz Lower Band edge QPSK

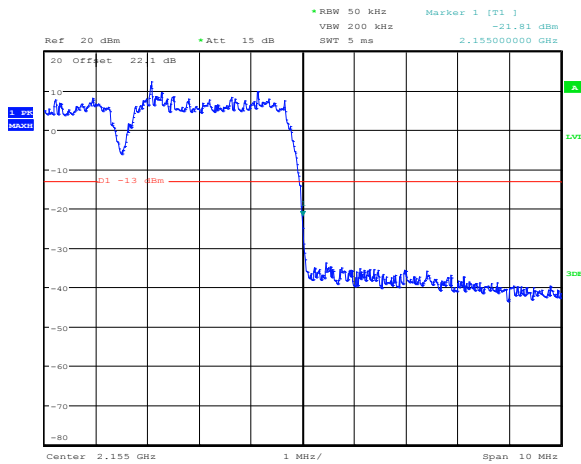


Date: 11.FEB.2015 13:18:09

Figure 8.2-19: 3 MHz Upper Band edge QPSK

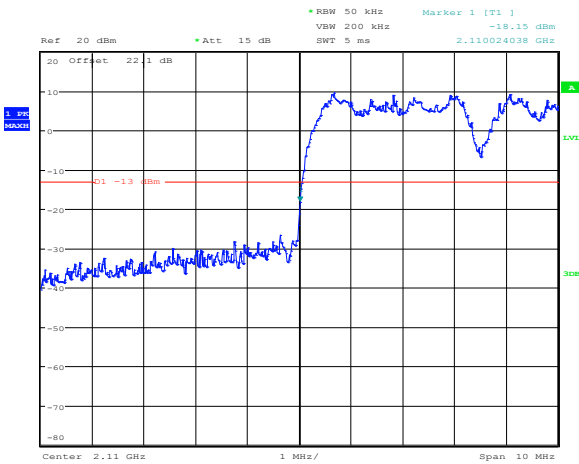

Date: 11.FEB.2015 12:54:45


Figure 8.2-20: 3 MHz Lower Band edge QAM

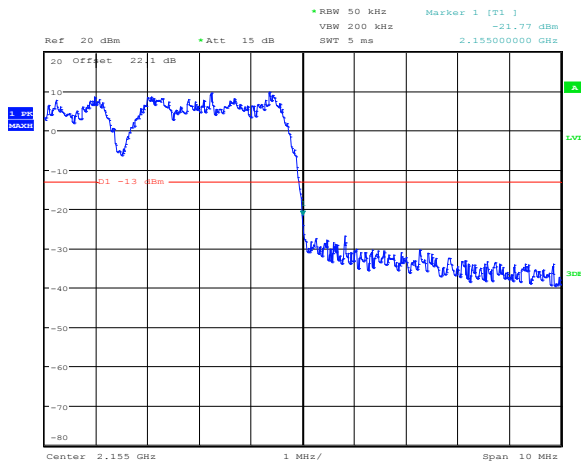

Date: 11.FEB.2015 13:18:30


Figure 8.2-21: 3 MHz Upper Band edge QAM

8.2.4 Test data

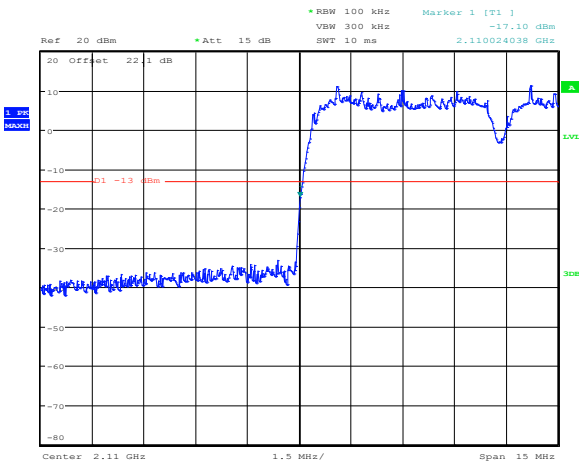


Date: 11.FEB.2015 12:55:55

Figure 8.2-22: 5 MHz Lower Band edge QPSK

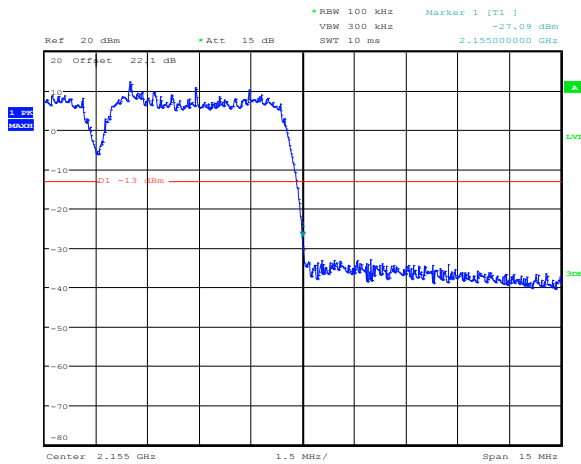


Date: 11.FEB.2015 13:14:00

Figure 8.2-23: 5 MHz Upper Band edge QPSK

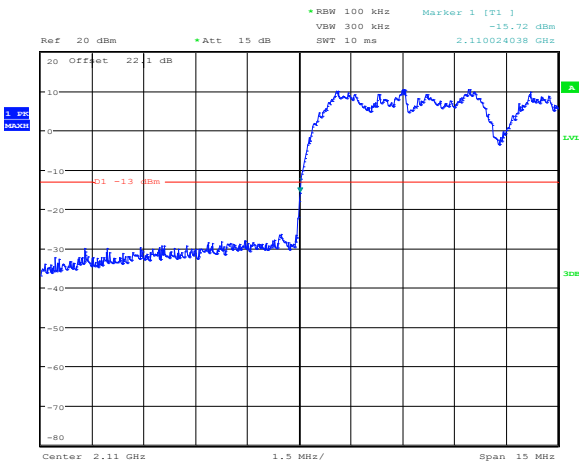

Date: 11.FEB.2015 12:56:18


Figure 8.2-24: 5 MHz Lower Band edge QAM

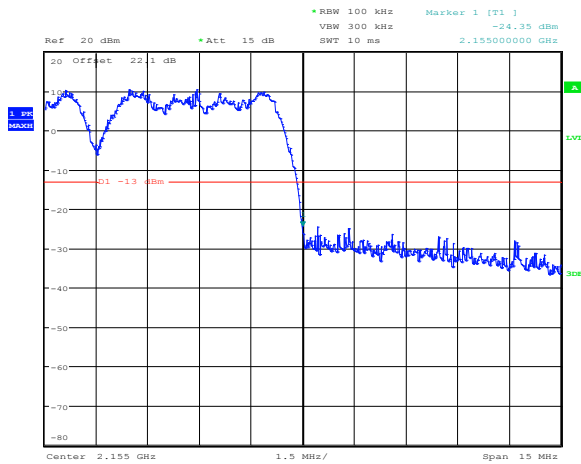

Date: 11.FEB.2015 13:13:32


Figure 8.2-25: 5 MHz Upper Band edge QAM

8.2.4 Test data

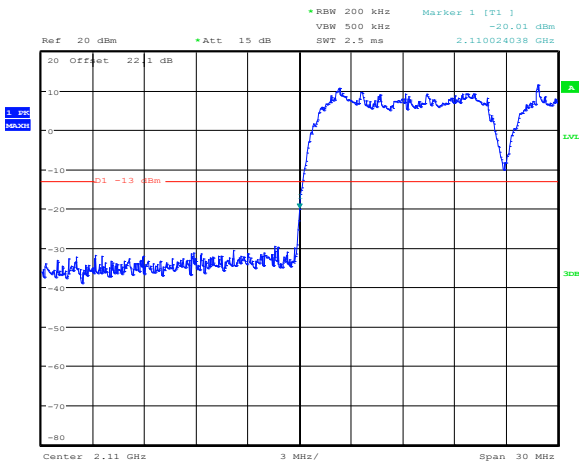


Date: 11.FEB.2015 12:57:42

Figure 8.2-26: 10 MHz Lower Band edge QPSK

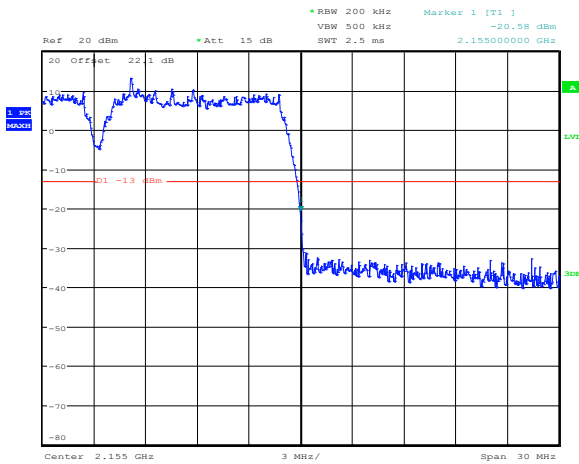


Date: 11.FEB.2015 13:07:25

Figure 8.2-27: 10 MHz Upper Band edge QPSK

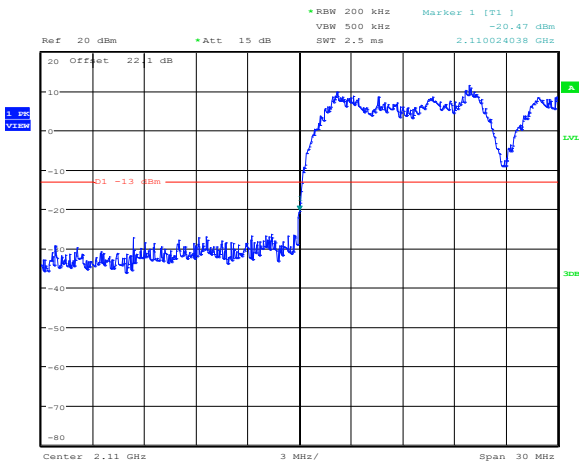

Date: 11.FEB.2015 12:57:26


Figure 8.2-28: 10 MHz Lower Band edge QAM

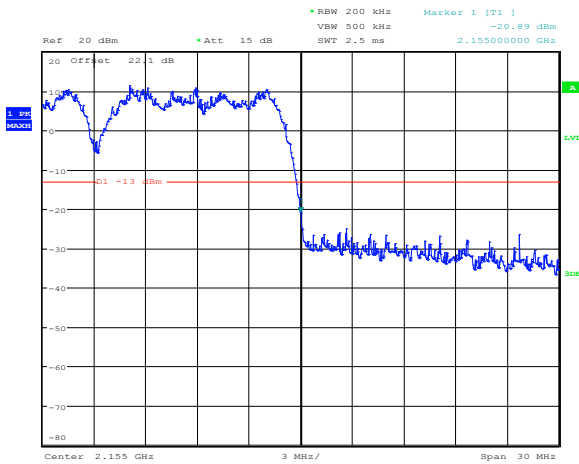

Date: 11.FEB.2015 13:07:46


Figure 8.2-29: 10 MHz Upper Band edge QAM

8.2.1 Test data

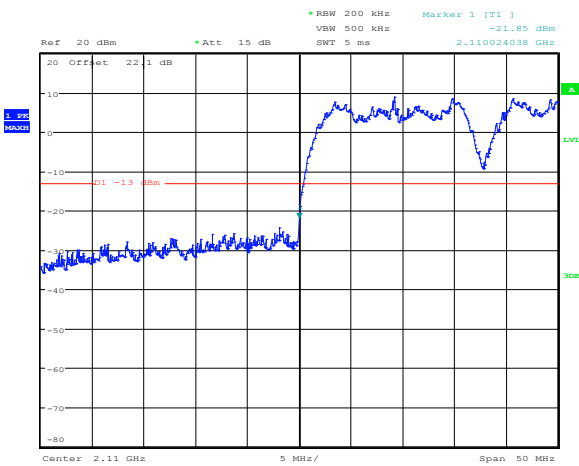


Date: 11.FEB.2015 12:58:54

Figure 8.2-30: 15 MHz Lower Band edge QPSK

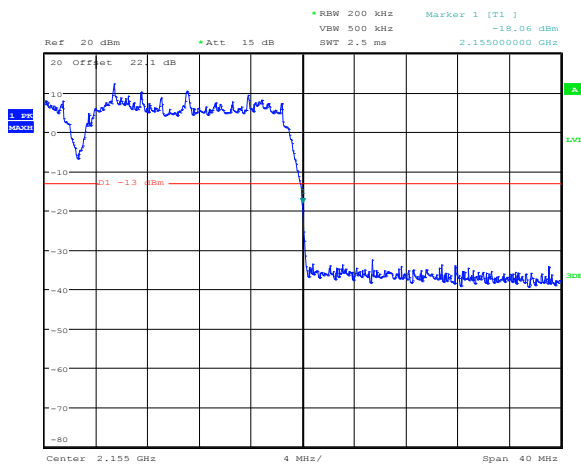


Date: 11.FEB.2015 13:12:03

Figure 8.2-31: 15 MHz Upper Band edge QPSK

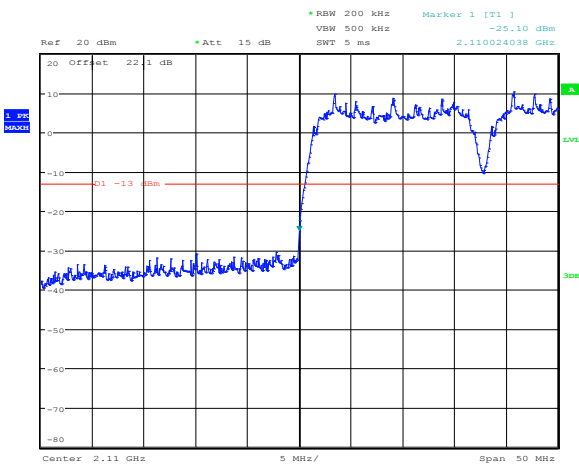

Date: 11.FEB.2015 12:58:35


Figure 8.2-32: 15 MHz Lower Band edge QAM

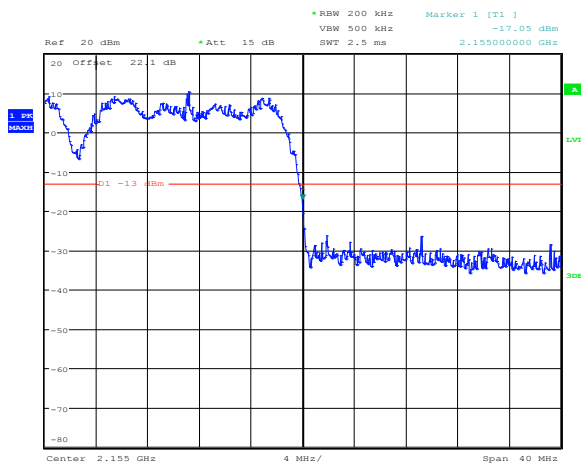

Date: 11.FEB.2015 13:12:23


Figure 8.2-33: 15 MHz Upper Band edge QAM

## 8.2.4 Test data

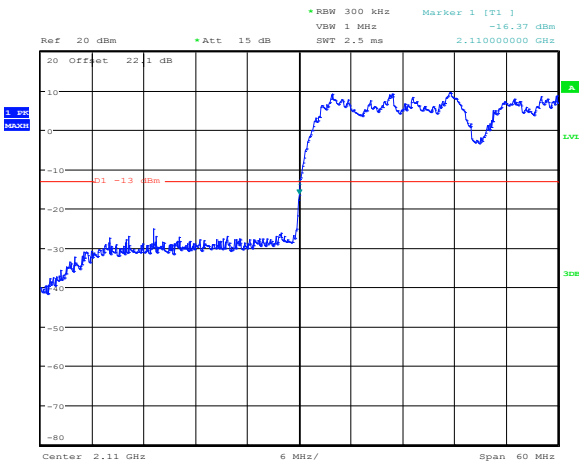


Date: 11.FEB.2015 13:04:14

Figure 8.2-34: 20 MHz Lower Band edge QPSK

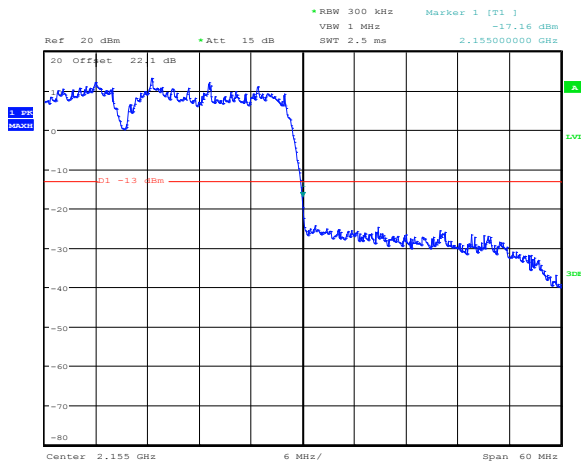


Date: 11.FEB.2015 13:02:28

Figure 8.2-35: 20 MHz Upper Band edge QPSK

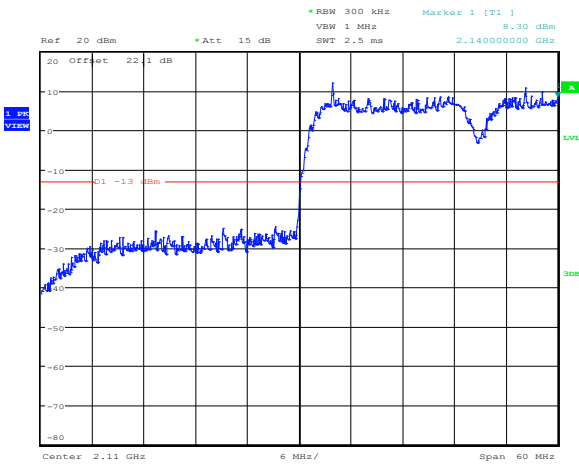

Date: 11.FEB.2015 13:03:31


Figure 8.2-36: 20 MHz Lower Band edge QAM

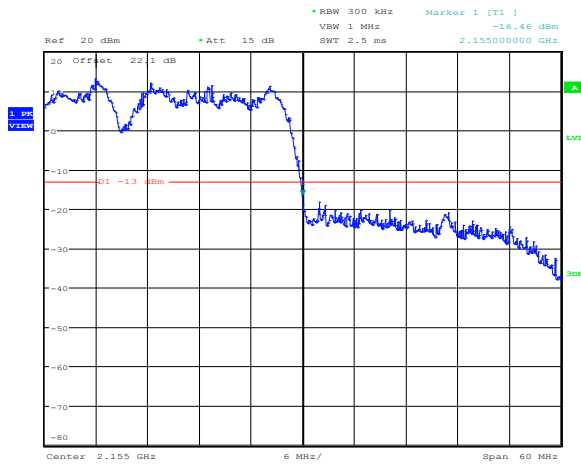

Date: 11.FEB.2015 13:02:11


Figure 8.2-37: 20 MHz Upper Band edge QAM

8.2.1 Test data

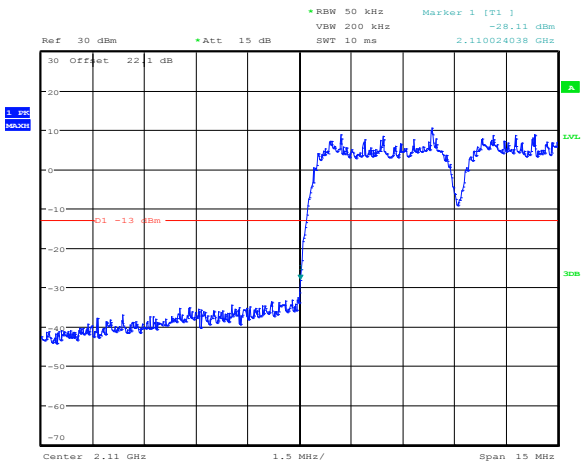

Date: 11.FEB.2015 12:50:21

Figure 8.2-38: UMTS Lower Band edge

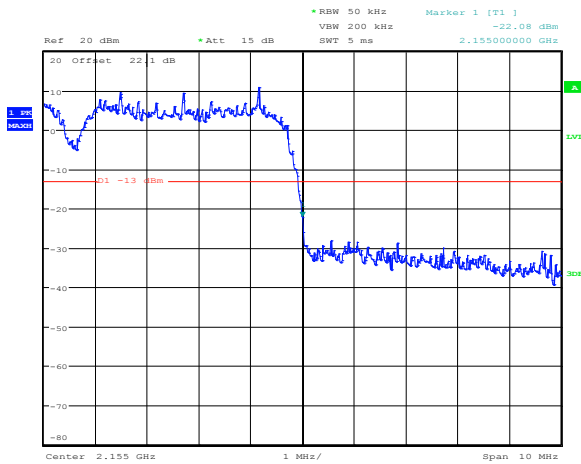

Date: 11.FEB.2015 13:21:29

Figure 8.2-39: UMTS Upper Band edge

## 8.3 FCC 27.53(h) Radiated spurious emissions

### 8.3.1 Definitions and limits

#### AWS emission limits

(1) General protection levels. Except as otherwise specified below, for operations in the 2110–2155 MHz band, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### (3) Measurement procedure.

(i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

### 8.3.2 Test summary

|               |                   |                   |           |
|---------------|-------------------|-------------------|-----------|
| Test date     | February 10, 2015 | Temperature       | 23 °C     |
| Test engineer | Kevin Rose        | Air pressure      | 1004 mbar |
| Verdict       | Pass              | Relative humidity | 30 %      |

### 8.3.3 Observations, settings and special notes

Low, Mid, and High channels of all modulations were investigated. Worst case examples are provided.  
935210 D02 Signal Boosters Certification v02r01 was used for Radiated Emissions

Receiver settings were:

|                      |                                               |
|----------------------|-----------------------------------------------|
| Frequency range      | 30 MHz to 10 <sup>th</sup> harmonic           |
| Detector mode        | Peak                                          |
| Resolution bandwidth | 100 kHz (below 1 GHz), 1000 kHz (above 1 GHz) |
| Video bandwidth      | >RBW                                          |
| Trace mode           | Max Hold                                      |

### 8.3.4 Test data

**Table 8.3-1: Radiated spurious results**

| Frequency, MHz | Field strength, dBμV/m | Substitution factor, dB | Calculated EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|----------------|------------------------|-------------------------|----------------------|-----------------|-----------------|
| 33             | 26.07                  | -73.37                  | -47.3                | -13             | 34.3            |
| 63.7           | 24.13                  | -91.23                  | -67.1                | -13             | 54.1            |
| 445.1          | 29.32                  | -83.52                  | -54.2                | -13             | 41.2            |
| 4264           | 19.09                  | -61.19                  | -42.1                | -13             | 29.1            |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.  
Substitution factor includes signal generator, cable loss, and antenna factor.

## 8.4 FCC 27.54 Frequency stability

### 8.4.1 Definitions and limits

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 8.4.2 Test summary

|               |                 |                   |           |
|---------------|-----------------|-------------------|-----------|
| Test date     | August 26, 2014 | Temperature       | 24 °C     |
| Test engineer | Kevin Rose      | Air pressure      | 1004 mbar |
| Verdict       | Pass            | Relative humidity | 47 %      |

### 8.4.3 Observations, settings and special notes

Assessed to remain within assigned band. Spectrum analyzer settings:

|                      |          |
|----------------------|----------|
| Detector mode        | Peak     |
| Resolution bandwidth | 20 Hz    |
| Video bandwidth      | RBW × 3  |
| Trace mode           | Max Hold |

### 8.4.4 Test data

**Table 8.4-1: Frequency Stability result**

| Test conditions | Frequency, Hz | Offset, Hz |
|-----------------|---------------|------------|
| +50 °C, Nominal | 2.131998566   | 0          |
| +40 °C, Nominal | 2.131998566   | 0          |
| +30 °C, Nominal | 2.131998566   | 0          |
| +20 °C, +15 %   | 2.131998566   | 0          |
| +20 °C, Nominal | 2.131998566   | Reference  |
| +20 °C, -15 %   | 2.131998566   | 0          |
| +10 °C, Nominal | 2.131998566   | 0          |
| 0 °C, Nominal   | 2.131998566   | 0          |
| -10 °C, Nominal | 2.131998566   | 0          |
| -20 °C, Nominal | 2.131998566   | 0          |
| -30 °C, Nominal | 2.131998566   | 0          |

## 8.5 Part 2.1049 Occupied bandwidth

---

### 8.5.1 Definitions and limits

---

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 8.5.2 Test summary

---

|               |                   |                   |           |
|---------------|-------------------|-------------------|-----------|
| Test date     | February 23, 2015 | Temperature       | 24 °C     |
| Test engineer | Kevin Rose        | Air pressure      | 1004 mbar |
| Verdict       | Pass              | Relative humidity | 47 %      |


### 8.5.3 Observations, settings and special notes

---

Spectrum analyzer settings:


|                      |                   |
|----------------------|-------------------|
| Detector mode        | Peak              |
| Resolution bandwidth | $\geq 1$ % of OBW |
| Video bandwidth      | $\geq$ RBW        |
| Trace mode           | Max Hold          |

8.5.4 Test data

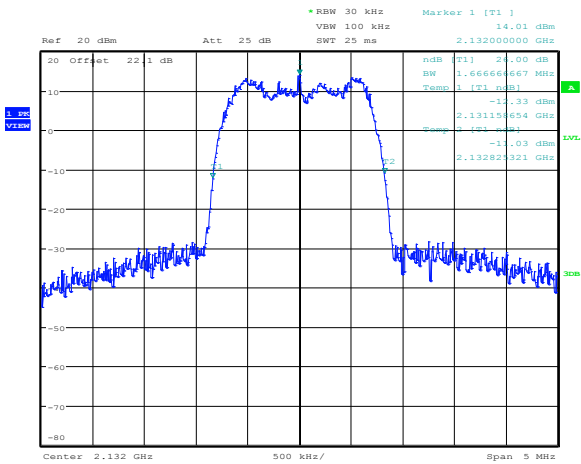


Date: 10.FEB.2015 20:30:13

Figure 8.5-1: 1.4 MHz QAM output

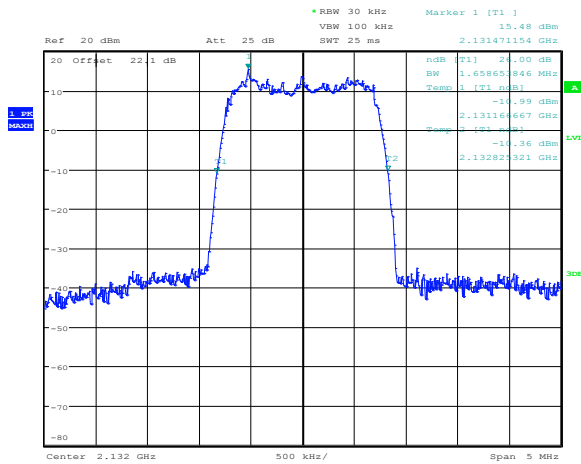


Date: 10.FEB.2015 20:29:50

Figure 8.5-2: 1.4 MHz QPSK output

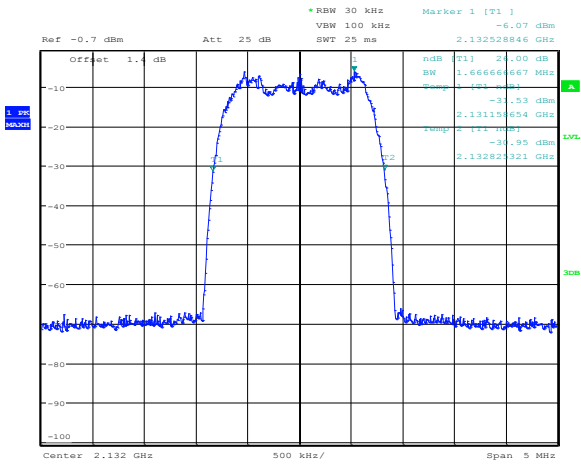

Date: 10.FEB.2015 20:40:40


Figure 8.5-3: 1.4 MHz QAM input

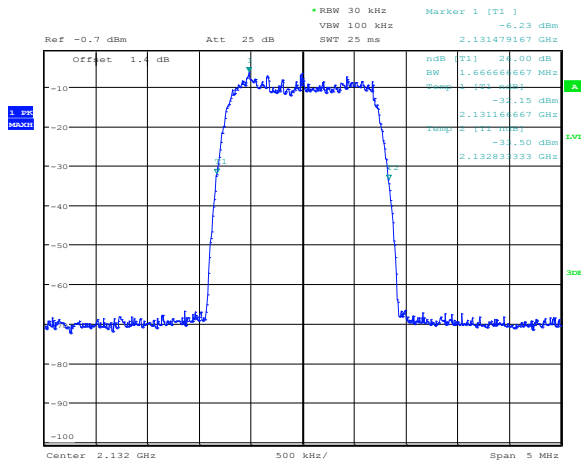

Date: 10.FEB.2015 20:40:26


Figure 8.5-4: 1.4 MHz QPSK input

#### 8.5.4 Test data continued

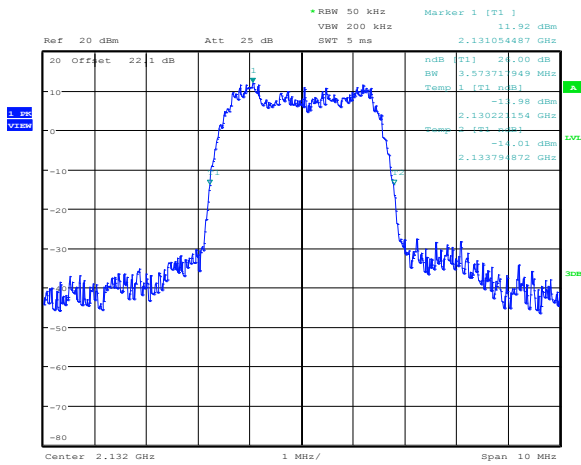


Date: 10.FEB.2015 20:30:39

**Figure 8.5-5: 3 MHz QAM output**

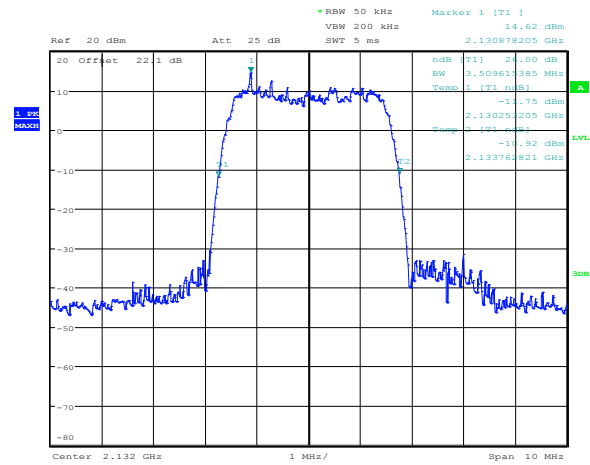


Date: 10.FEB.2015 20:30:53

**Figure 8.5-6: 3 MHz QPSK output**

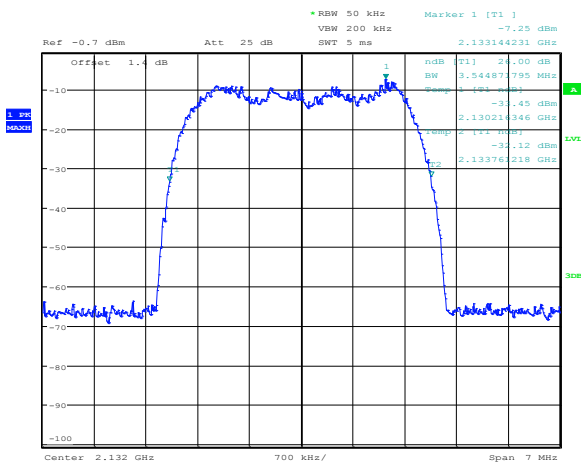

Date: 10.FEB.2015 20:39:16


**Figure 8.5-7: 3 MHz QAM input**

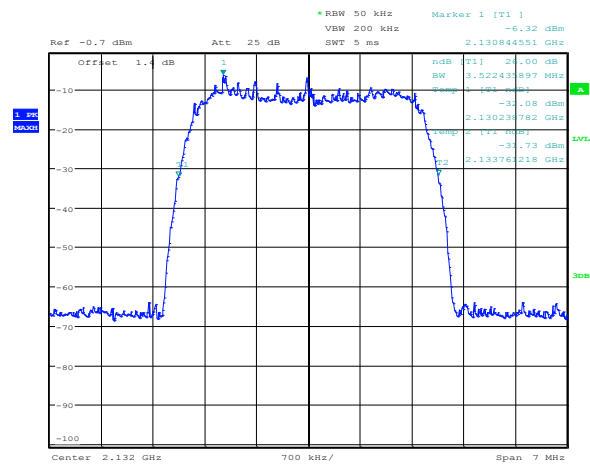

Date: 10.FEB.2015 20:39:00


**Figure 8.5-8: 3 MHz QPSK input**

#### 8.5.4 Test data continued

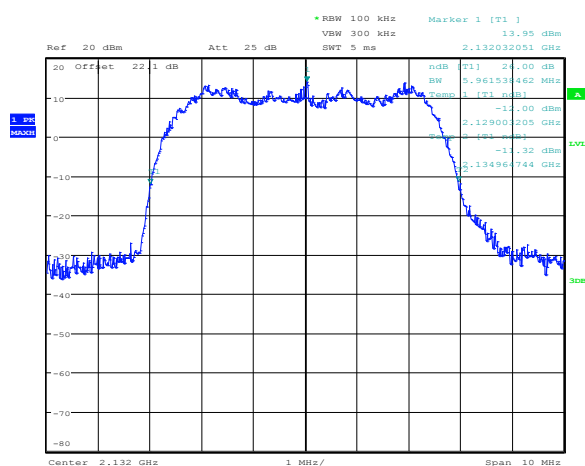


Date: 10.FEB.2015 20:31:39

**Figure 8.5-9: 5 MHz QAM output**

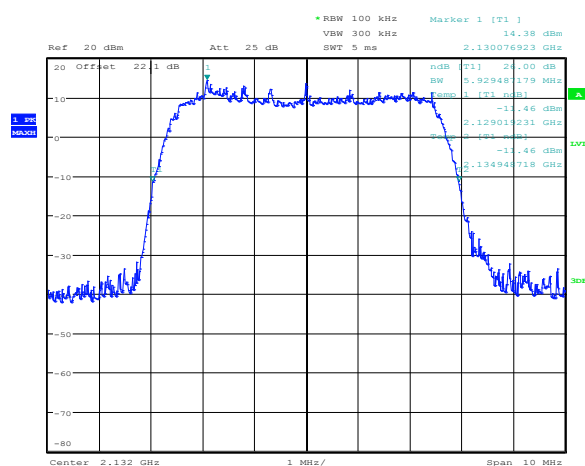


Date: 10.FEB.2015 20:31:19

**Figure 8.5-10: 5 MHz QPSK output**

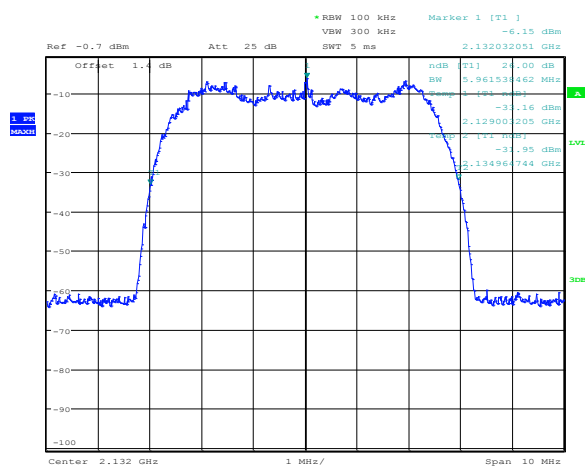

Date: 10.FEB.2015 20:38:18


**Figure 8.5-11: 5 MHz QAM input**

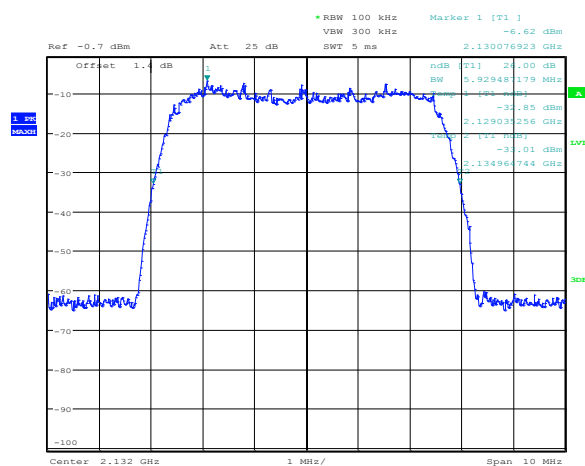

Date: 10.FEB.2015 20:38:34


**Figure 8.5-12: 5 MHz QPSK input**

8.5.4 Test data continued

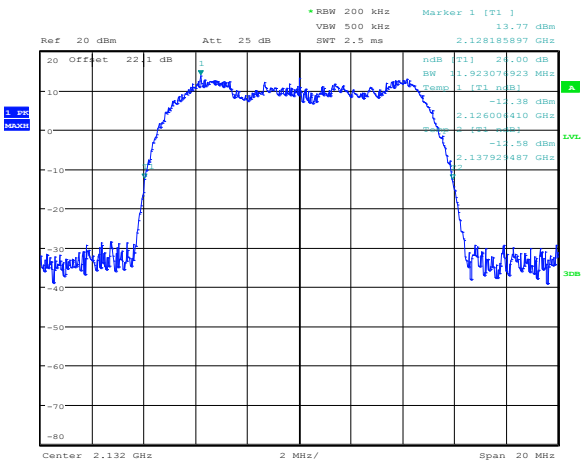


Date: 10.FEB.2015 20:33:01

Figure 8.5-13: 10 MHz QAM output

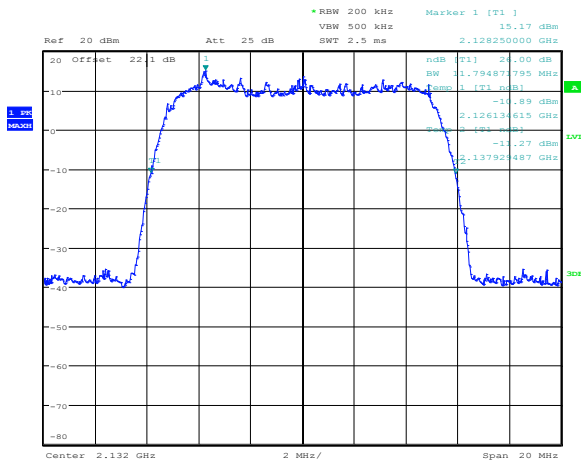


Date: 10.FEB.2015 20:32:45

Figure 8.5-14: 10 MHz QPSK output

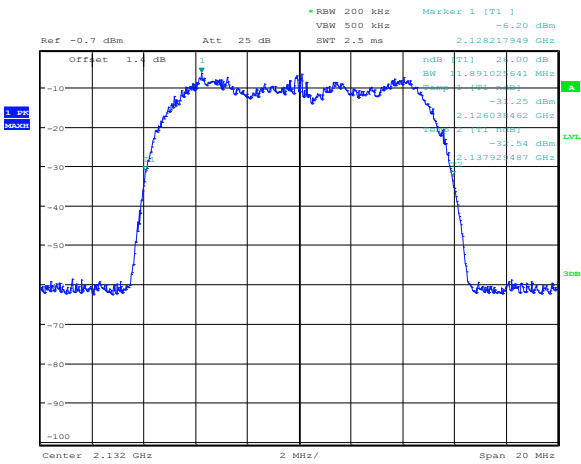

Date: 10.FEB.2015 20:37:52


Figure 8.5-15: 10 MHz QAM input

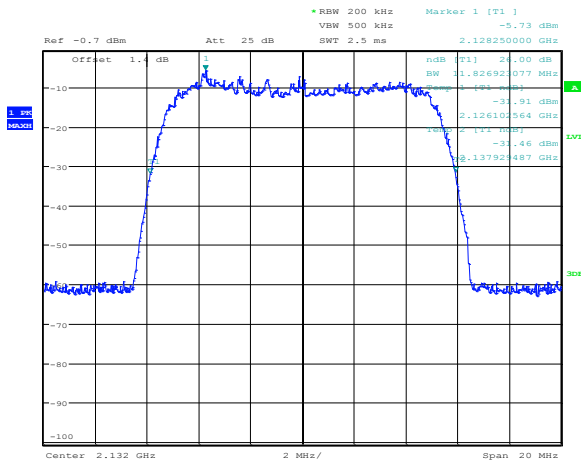

Date: 10.FEB.2015 20:37:36


Figure 8.5-16: 10 MHz QPSK input

8.5.1 Test data continued

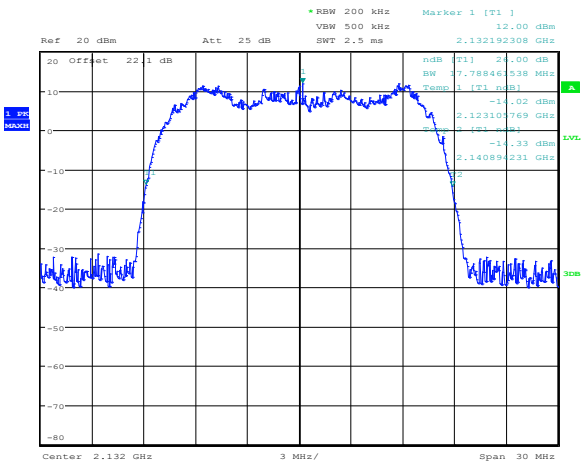


Date: 10.FEB.2015 20:34:18

Figure 8.5-17: 15 MHz QAM output

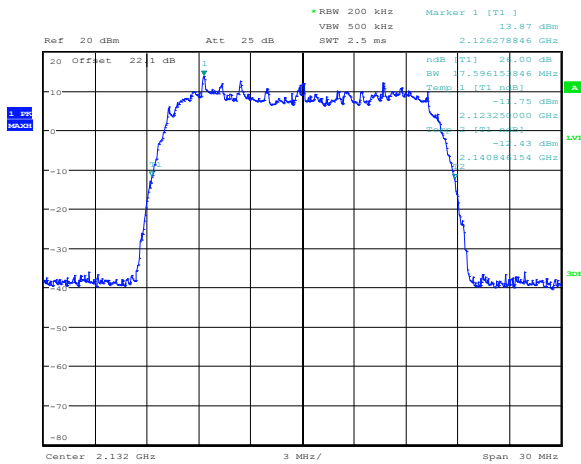


Date: 10.FEB.2015 20:34:01

Figure 8.5-18: 15 MHz QPSK output

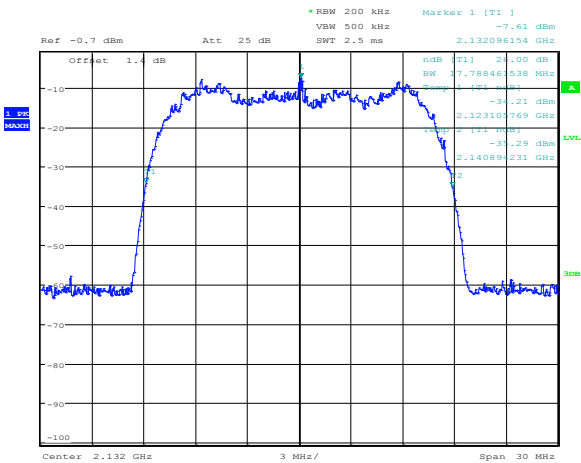

Date: 10.FEB.2015 20:36:54


Figure 8.5-19: 15 MHz QAM input

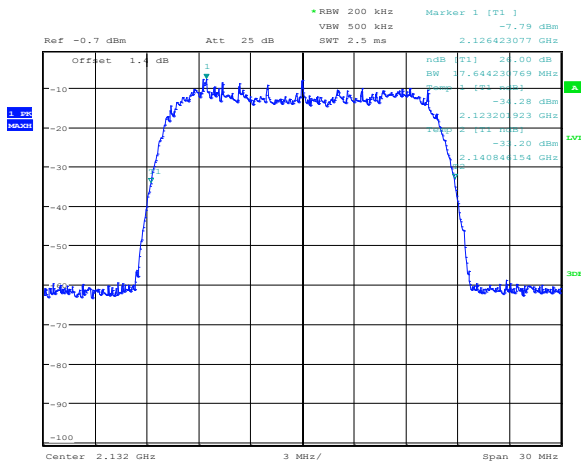

Date: 10.FEB.2015 20:37:10


Figure 8.5-20: 15 MHz QPSK input

8.5.2 Test data continued

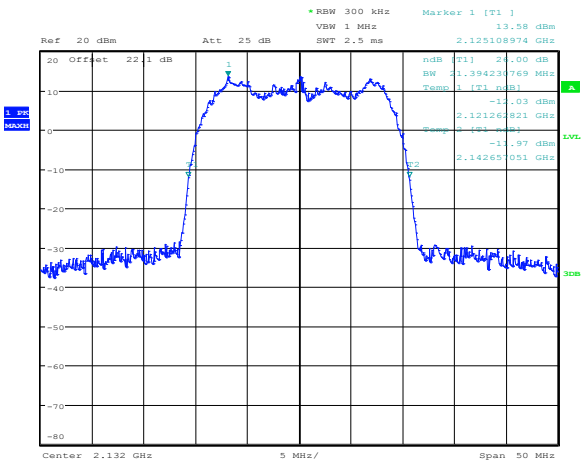


Date: 10.FEB.2015 20:34:45

Figure 8.5-21: 20 MHz QAM output

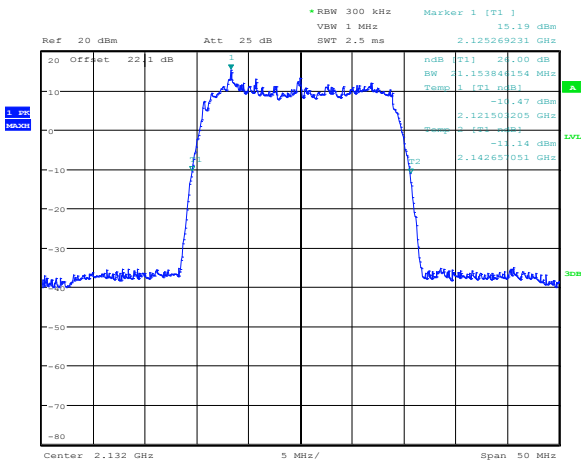


Date: 10.FEB.2015 20:35:11

Figure 8.5-22: 20 MHz QPSK output

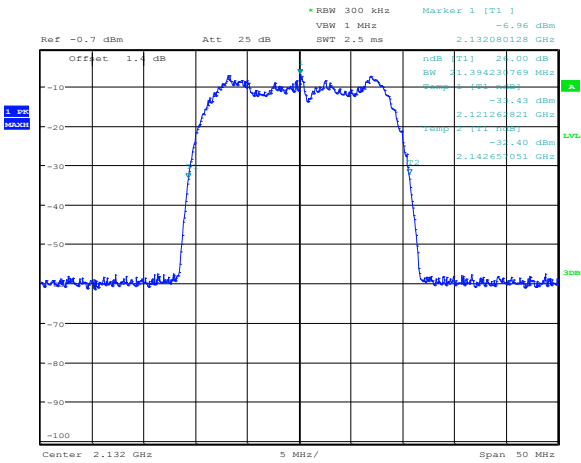

Date: 10.FEB.2015 20:36:23

Figure 8.5-23: 20 MHz QAM input

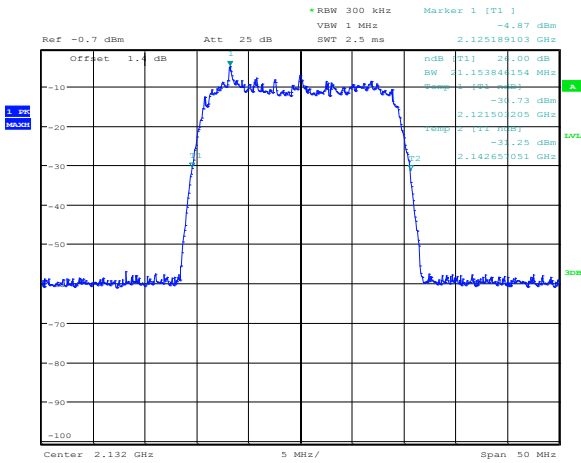


Date: 10.FEB.2015 20:36:07

Figure 8.5-24: 20 MHz QPSK input




8.5.4 Test data continued

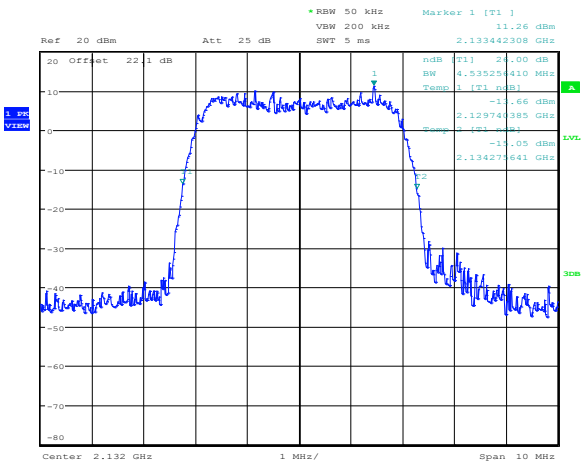

Date: 10.FEB.2015 20:28:57


Figure 8.5-25: UMTS QAM output

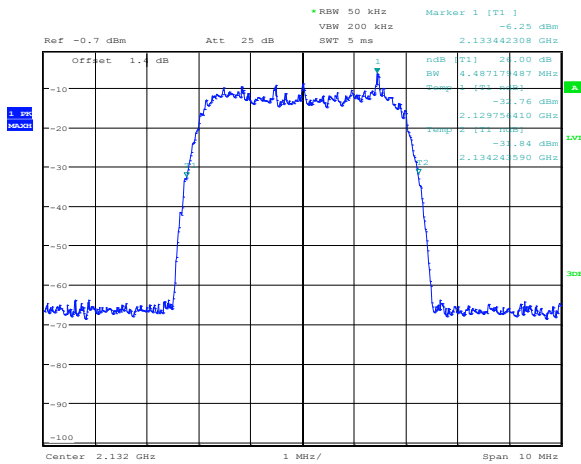

Date: 10.FEB.2015 20:41:22

Figure 8.5-26: UMTS QPSK input

#### 8.5.4 Test data continued

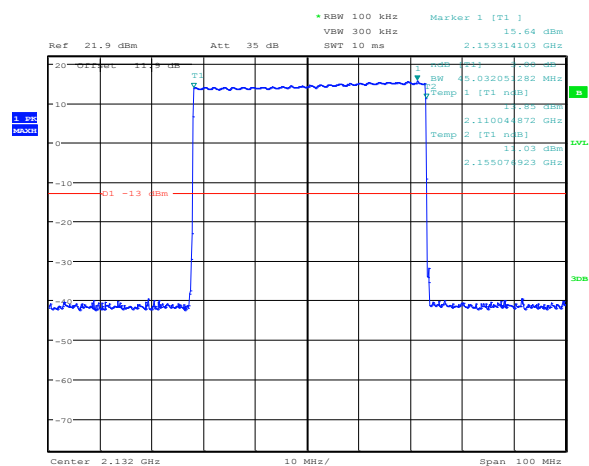

Date: 25.AUG.2014 14:32:56

**Figure 8.5-27: Filter response**

## Section 9. Setup Photos

---

### 9.1 Set-up

---



*Figure 9.1-1: Radiated setup photo*



*Figure 9.1-2: Conducted setup photo*

Section 10. Block diagrams of test set-ups

10.1 Radiated emissions set-up

