



FCC EVALUATION REPORT FOR CERTIFICATION

Applicant : LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon,

Pyeongteak-si, Gyeonggi-do, Korea.

Attn: Mr. Sang-Wook Lee, Chief research engineer

Date of Issue : April 6, 2010

Order Number: GETEC-C1-10-076

Test Report Number: GETEC-E3-10-034

Test Site: Gumi College EMC Center

FCC Registration Number: (100749, 443957)

FCC ID.: BEJ32LD320UA

Applicant: LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LCD TV/Monitor
Type of Authority	: Certification
Model Name	: 32LD320-UA
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,

Soon-Hoon Jeong, Engineer
GUMI College EMC center

Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S)	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	23
6.1 OPERATING ENVIRONMENT	23
6.2 TEST SET-UP	23
6.3 MEASUREMENT UNCERTAINTY.....	23
6.4 LIMIT	24
6.5 TEST EQUIPMENT USED.....	24
6.6 TEST DATA FOR RADIATED EMISSION.....	24
7. SAMPLE CALCULATIONS.....	31
7.1 EXAMPLE 1 :	31
7.2 EXAMPLE 2 :	31
8. RECOMMENDATION & CONCLUSION.....	32
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Sang-Wook Lee, Chief research engineer

Tel Number: +82-31-610-9623

- **FCC ID.** BEJ32LD320UA
- **EUT Type** LCD TV/Monitor
- **Model Name** 32LD320-UA
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** March 29 ~ 30, 2010
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749, 443957)
407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.
- **Test Report Number** GETEC-E3-10-034
- **Dates of Issue** April 6, 2010




2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LCD TV/Monitor (Model Name: 32LD320-UA)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2003)

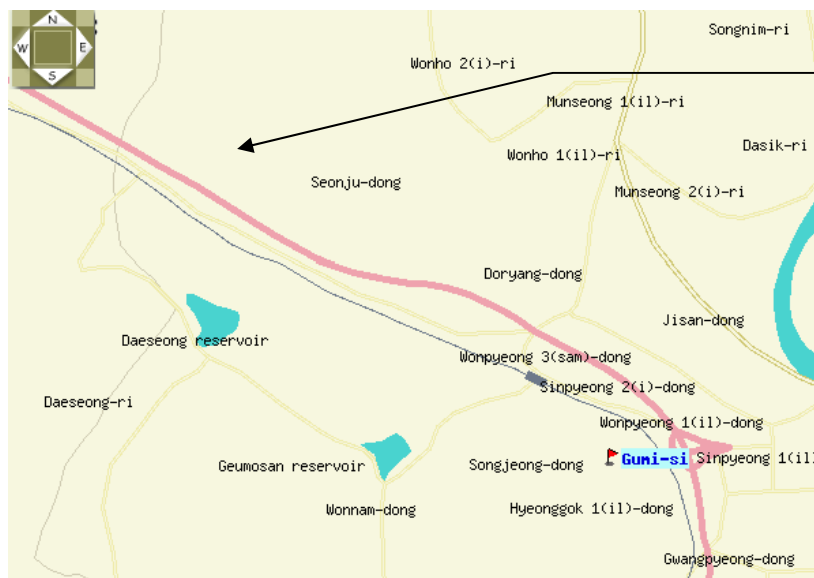

GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LCD TV/Monitor (Model Name: 32LD320-UA) FCC ID.: BEJ32LD320UA**

MODELS		32LD320 (32LD320-UA)	32LD420 (32LD420-UA)
Dimensions (Width x Height x Depth)	With stand	31.6 x 22.9 x 8.8 inches 805.0 x 583.0 x 224.0 mm	31.6 x 22.9 x 8.8 inches 805.0 x 583.0 x 224.0 mm
	Without stand	31.6 x 20.7 x 3.1 inches 805.0 x 528.0 x 79.9 mm	31.6 x 20.9 x 3.1 inches 805.0 x 531.0 x 79.9 mm
Weight	With stand	25.3 lbs / 11.5 kg	26.6 lbs / 12.1 kg
	Without stand	22.7 lbs / 10.3 kg	24.2 lbs / 11.0 kg
Power requirement		AC100-240V – 50/60Hz	
Television System		NTSC-M, ATSC, 64 & 256 QAM	
Program Coverage		VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135	
External Antenna Impedance		75 ohm	
Environment condition	Operating Temperature	32 – 104°F (0 – 40°C)	
	Operating Humidity	Less than 80%	
	Storage Temperature	-4 – 140°F (-20 – 60°C)	
	Storage Humidity	Less than 85%	

-. Maximum Frequency range : 666 MHz



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID.: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID.: DoC
Key board	COMPAQ	16516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
PS2 mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID.: JNZ211443
Joy stick	MICROSOFT	X05-92626	S/N: 9262600296169 FCC ID.: DoC
DVD player	LG Electronics Inc.	LC-954	S/N: 3850R-Z674K FCC ID.: DoC
Headset	GOWOONSORI	GW-500M	S/N: N/A FCC ID.: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID.: DoC
TV signal generator	FLUKE	54200	S/N: 831011 FCC ID.: DoC
USB memory stick	SM Electronics	UDD-32M	S/N: N/A FCC ID.: DoC

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	-



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT	1.80 m unshielded
RGB(Analog) cable	Connected to the EUT and PC	1.80 m shielded with two ferrite cores
HDMI/DVI(Digital) cable	Connected to the EUT and PC	2.00 m shielded
Audio(RGB/DVI) in cable	Connected to the EUT and PC	1.80 m shielded
RS-232C in (Control & Service) cable	Connected to the EUT and PC	1.80 m shielded
Component cable	Connected to the EUT and DVD player	2.00 m shielded
Component sound cable	Connected to the EUT and DVD player	3.00 m shielded
AV in cable	Connected to the EUT and DVD player	3.00 m shielded
Antenna cable	Connected to the EUT and TV signal generator	10.00 m shielded
Headphone cable	Connected to the EUT and Headset	2.75 m shielded

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz

- Test Mode(s)

- . Monitor mode

Radiated emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

Conducted emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

1 024 × 768 / 60 Hz (RGB: Analog), 640 × 480 / 60 Hz (RGB: Analog)

◆ Operating test pattern

- . “H” character scrolling mode (Font size: 10)
- . Black background white character
- . Brightness and contrast was adjusted as maximum level
- . 1 kHz sound tone with winamp player

- . USB memory stick play mode

◆ Operating test pattern

- . Continuous playback mode with video files

“The verification report for TV/AV mode would be issued by LG Electronics Inc.”



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

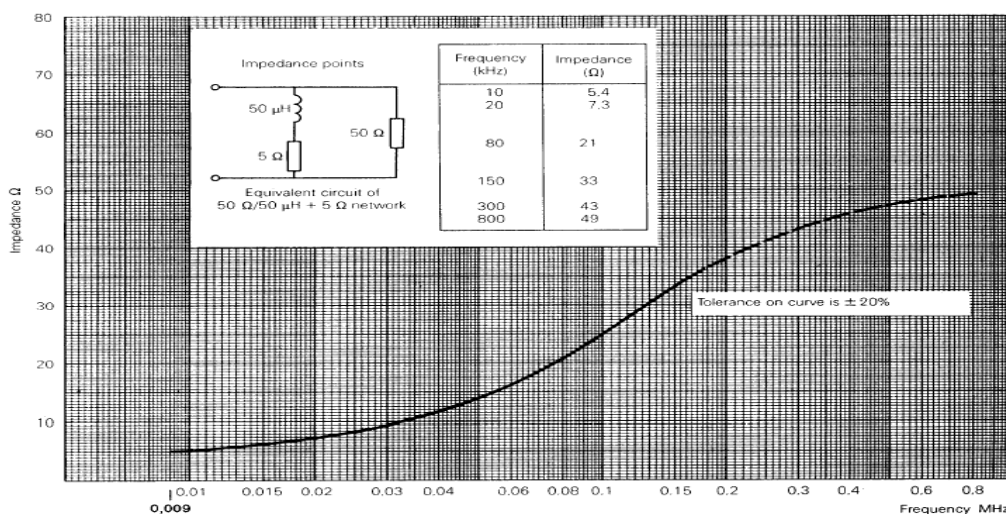


Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

Final measurements were made 3 m chamber (FCC registration No.: 443957) and/or 10 m OATS (FCC registration No.: 100749).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

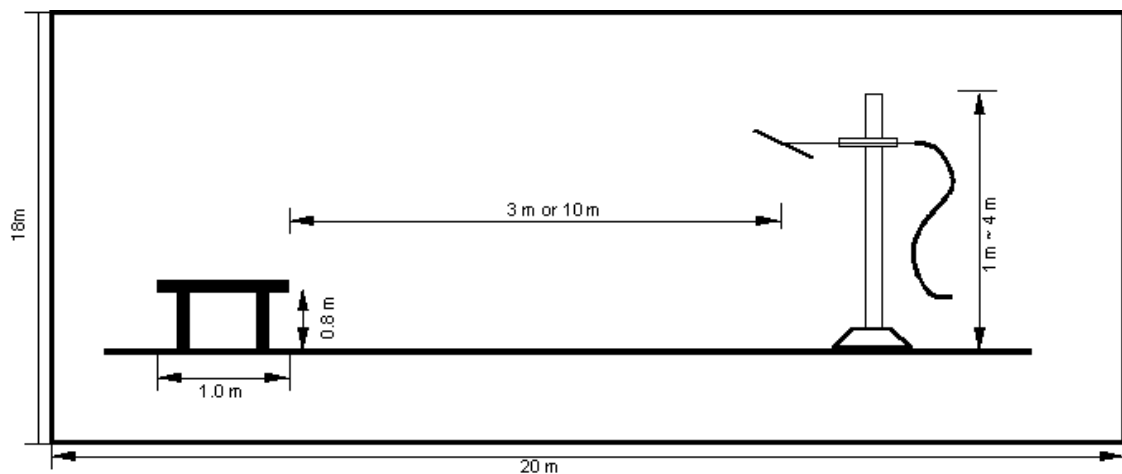


Fig 3. Dimensions of test site.



5. Conducted Emission

5.1 Operating Environment

Temperature : 26 °C
Relative Humidity : 42 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.69 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 4.16 dB	Confidence levels of 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 10. 2010
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 10. 2010
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 10. 2010
□- ISN T8	TESEQ. GmbH	Impedance Network	24568	10. 16. 2010


5.6 Test data for Conducted Emission

-. Test Date : March 29, 2010
-. Resolution Bandwidth : 9 kHz
-. Frequency Range : 0.15 MHz ~ 30 MHz



◆ Operating condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

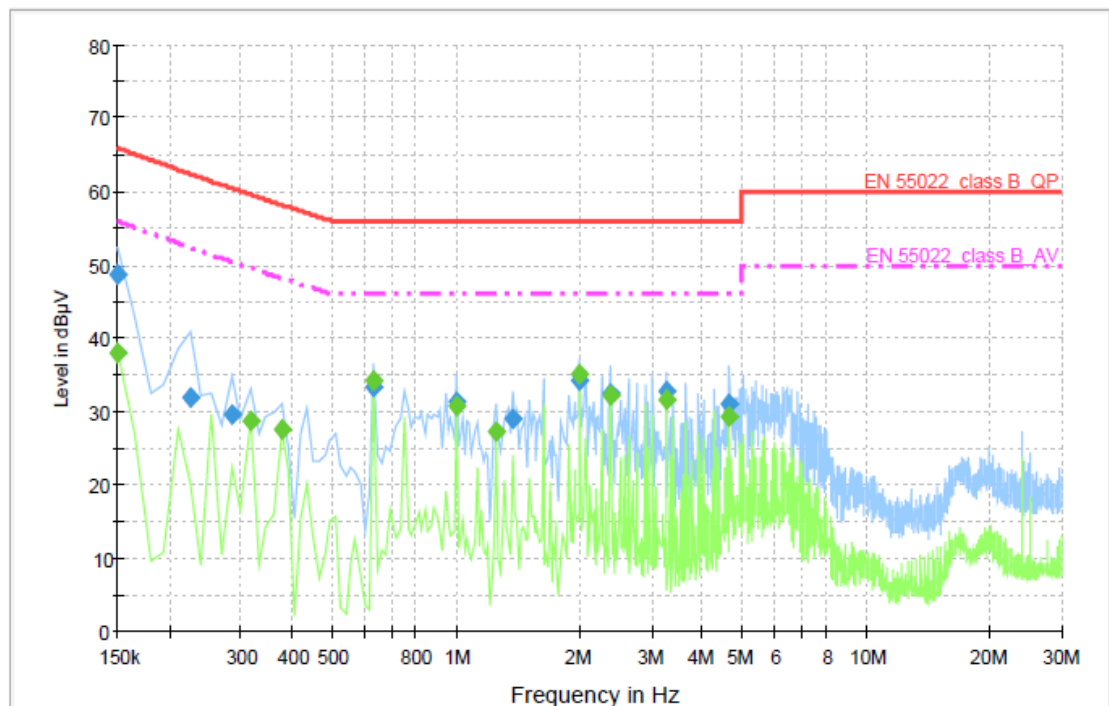

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.6	1000.000	9.000	GND	L1	10.0	17.4	66.0	
0.225000	31.9	1000.000	9.000	GND	L1	10.0	30.5	62.4	
0.285000	29.5	1000.000	9.000	GND	L1	10.0	31.0	60.5	
0.630000	33.3	1000.000	9.000	GND	L1	10.0	22.8	56.0	
1.005000	31.4	1000.000	9.000	GND	L1	10.0	24.6	56.0	
1.380000	29.1	1000.000	9.000	GND	L1	10.1	26.9	56.0	
2.010000	34.3	1000.000	9.000	GND	L1	10.1	21.7	56.0	
2.385000	32.5	1000.000	9.000	GND	L1	10.1	23.5	56.0	
3.270000	32.8	1000.000	9.000	GND	L1	10.1	23.2	56.0	
4.650000	31.0	1000.000	9.000	GND	L1	10.2	25.0	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.0	1000.000	9.000	GND	L1	10.0	18.0	56.0	
0.315000	28.8	1000.000	9.000	GND	L1	10.0	20.8	49.6	
0.375000	27.6	1000.000	9.000	GND	L1	10.0	20.6	48.2	
0.630000	34.1	1000.000	9.000	GND	L1	10.0	11.9	46.0	
1.005000	30.6	1000.000	9.000	GND	L1	10.0	15.4	46.0	
1.260000	27.2	1000.000	9.000	GND	L1	10.1	18.8	46.0	
2.010000	34.9	1000.000	9.000	GND	L1	10.1	11.1	46.0	
2.385000	32.3	1000.000	9.000	GND	L1	10.1	13.7	46.0	
3.270000	31.5	1000.000	9.000	GND	L1	10.1	14.5	46.0	
4.650000	29.3	1000.000	9.000	GND	L1	10.2	16.7	46.0	

< Fig 4. Conducted emission result (Live line)>



Voltage with 4-Line-LISN_N

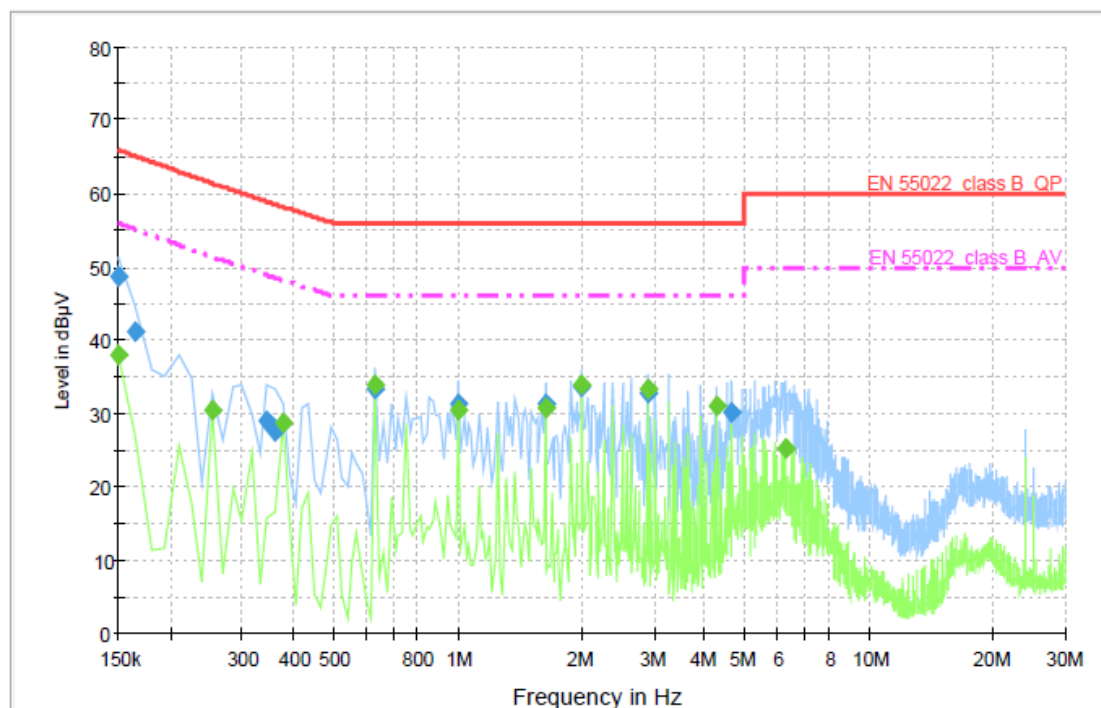

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.6	1000.000	9.000	GND	N	10.0	17.4	66.0	
0.165000	41.2	1000.000	9.000	GND	N	10.0	23.9	65.1	
0.345000	29.1	1000.000	9.000	GND	N	10.0	29.8	58.9	
0.360000	27.5	1000.000	9.000	GND	N	10.0	31.1	58.6	
0.630000	33.2	1000.000	9.000	GND	N	10.0	22.8	56.0	
1.005000	31.3	1000.000	9.000	GND	N	10.1	24.7	56.0	
1.635000	31.2	1000.000	9.000	GND	N	10.1	24.8	56.0	
2.010000	33.6	1000.000	9.000	GND	N	10.1	22.4	56.0	
2.895000	32.7	1000.000	9.000	GND	N	10.1	23.3	56.0	
4.650000	30.0	1000.000	9.000	GND	N	10.2	26.0	56.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.1	1000.000	9.000	GND	N	10.0	17.9	56.0	
0.255000	30.4	1000.000	9.000	GND	N	10.0	20.9	51.3	
0.375000	28.7	1000.000	9.000	GND	N	10.0	19.5	48.2	
0.630000	34.0	1000.000	9.000	GND	N	10.0	12.0	46.0	
1.005000	30.6	1000.000	9.000	GND	N	10.1	15.4	46.0	
1.635000	30.8	1000.000	9.000	GND	N	10.1	15.2	46.0	
2.010000	34.0	1000.000	9.000	GND	N	10.1	12.0	46.0	
2.895000	33.3	1000.000	9.000	GND	N	10.1	12.7	46.0	
4.275000	30.9	1000.000	9.000	GND	N	10.2	15.1	46.0	
6.285000	25.2	1000.000	9.000	GND	N	10.2	24.8	50.0	

< Fig 5. Conducted emission result (Neutral line)>



◆ Operating condition: 1 024 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

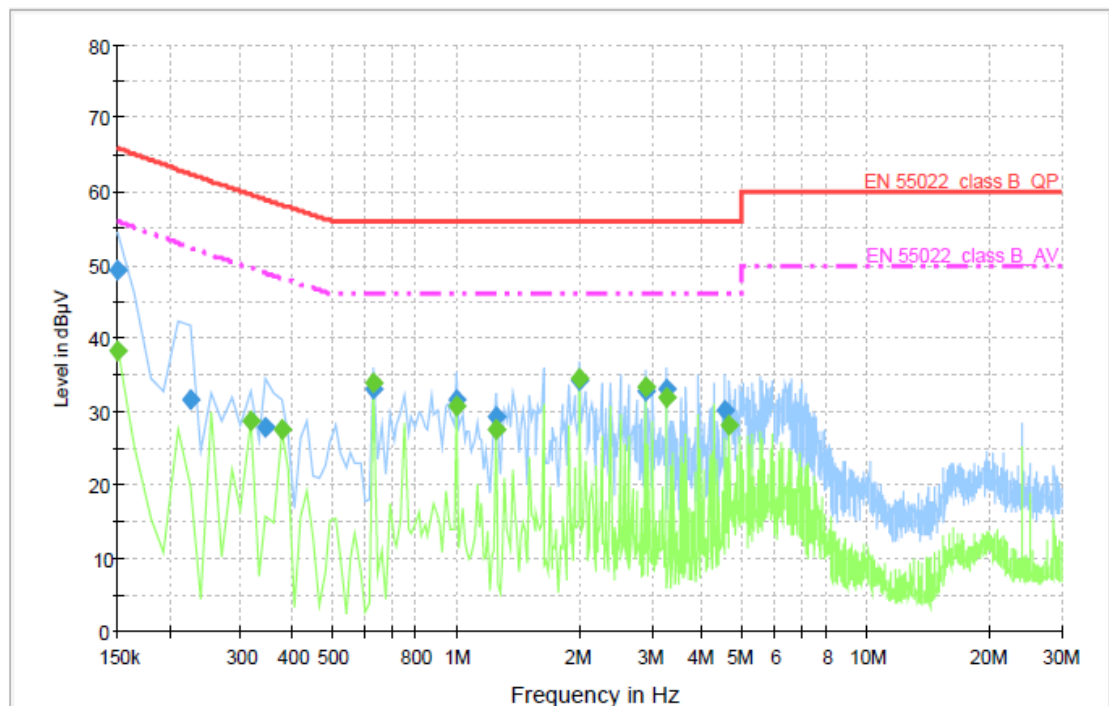

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	49.3	1000.000	9.000	GND	L1	10.0	16.7	66.0	
0.225000	31.7	1000.000	9.000	GND	L1	10.0	30.7	62.4	
0.345000	27.8	1000.000	9.000	GND	L1	10.0	31.1	58.9	
0.630000	33.1	1000.000	9.000	GND	L1	10.0	22.9	56.0	
1.005000	31.6	1000.000	9.000	GND	L1	10.0	24.4	56.0	
1.260000	29.4	1000.000	9.000	GND	L1	10.1	26.6	56.0	
2.010000	34.3	1000.000	9.000	GND	L1	10.1	21.7	56.0	
2.895000	32.9	1000.000	9.000	GND	L1	10.1	23.1	56.0	
3.270000	32.9	1000.000	9.000	GND	L1	10.1	23.1	56.0	
4.530000	30.2	1000.000	9.000	GND	L1	10.2	25.8	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.4	1000.000	9.000	GND	L1	10.0	17.6	56.0	
0.315000	28.7	1000.000	9.000	GND	L1	10.0	20.9	49.6	
0.375000	27.6	1000.000	9.000	GND	L1	10.0	20.6	48.2	
0.630000	34.0	1000.000	9.000	GND	L1	10.0	12.0	46.0	
1.005000	30.6	1000.000	9.000	GND	L1	10.0	15.4	46.0	
1.260000	27.7	1000.000	9.000	GND	L1	10.1	18.3	46.0	
2.010000	34.6	1000.000	9.000	GND	L1	10.1	11.4	46.0	
2.895000	33.4	1000.000	9.000	GND	L1	10.1	12.6	46.0	
3.270000	31.9	1000.000	9.000	GND	L1	10.1	14.1	46.0	
4.650000	28.0	1000.000	9.000	GND	L1	10.2	18.0	46.0	

< Fig 6. Conducted emission result (Live line)>



Voltage with 4-Line-LISN_N

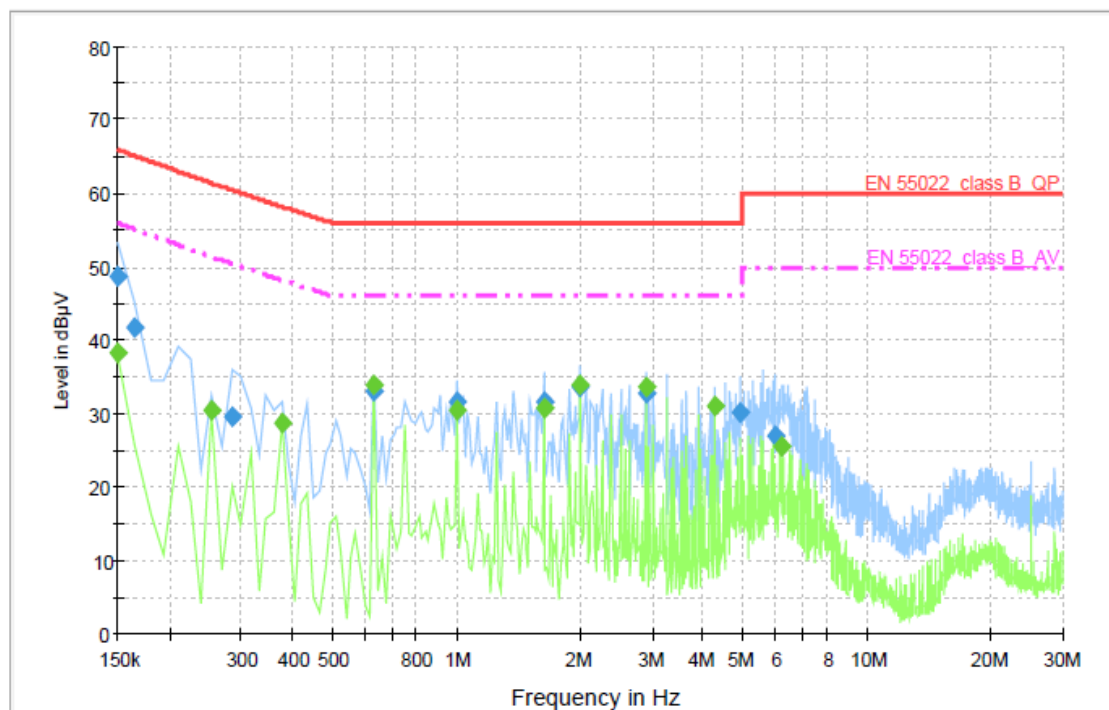

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.8	1000.000	9.000	GND	N	10.0	17.2	66.0	
0.165000	41.6	1000.000	9.000	GND	N	10.0	23.5	65.1	
0.285000	29.7	1000.000	9.000	GND	N	10.0	30.8	60.5	
0.630000	33.1	1000.000	9.000	GND	N	10.0	22.9	56.0	
1.005000	31.5	1000.000	9.000	GND	N	10.1	24.5	56.0	
1.635000	31.5	1000.000	9.000	GND	N	10.1	24.5	56.0	
2.010000	33.5	1000.000	9.000	GND	N	10.1	22.5	56.0	
2.895000	32.8	1000.000	9.000	GND	N	10.1	23.2	56.0	
4.905000	30.2	1000.000	9.000	GND	N	10.2	25.8	56.0	
5.970000	27.0	1000.000	9.000	GND	N	10.2	33.0	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.2	1000.000	9.000	GND	N	10.0	17.8	56.0	
0.255000	30.4	1000.000	9.000	GND	N	10.0	20.9	51.3	
0.375000	28.7	1000.000	9.000	GND	N	10.0	19.5	48.2	
0.630000	34.0	1000.000	9.000	GND	N	10.0	12.0	46.0	
1.005000	30.6	1000.000	9.000	GND	N	10.1	15.4	46.0	
1.635000	30.8	1000.000	9.000	GND	N	10.1	15.2	46.0	
2.010000	34.0	1000.000	9.000	GND	N	10.1	12.0	46.0	
2.895000	33.5	1000.000	9.000	GND	N	10.1	12.5	46.0	
4.275000	30.9	1000.000	9.000	GND	N	10.2	15.1	46.0	
6.225000	25.4	1000.000	9.000	GND	N	10.2	24.6	50.0	

< Fig 7. Conducted emission result (Neutral line)>



◆ Operating condition: 640 × 480 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

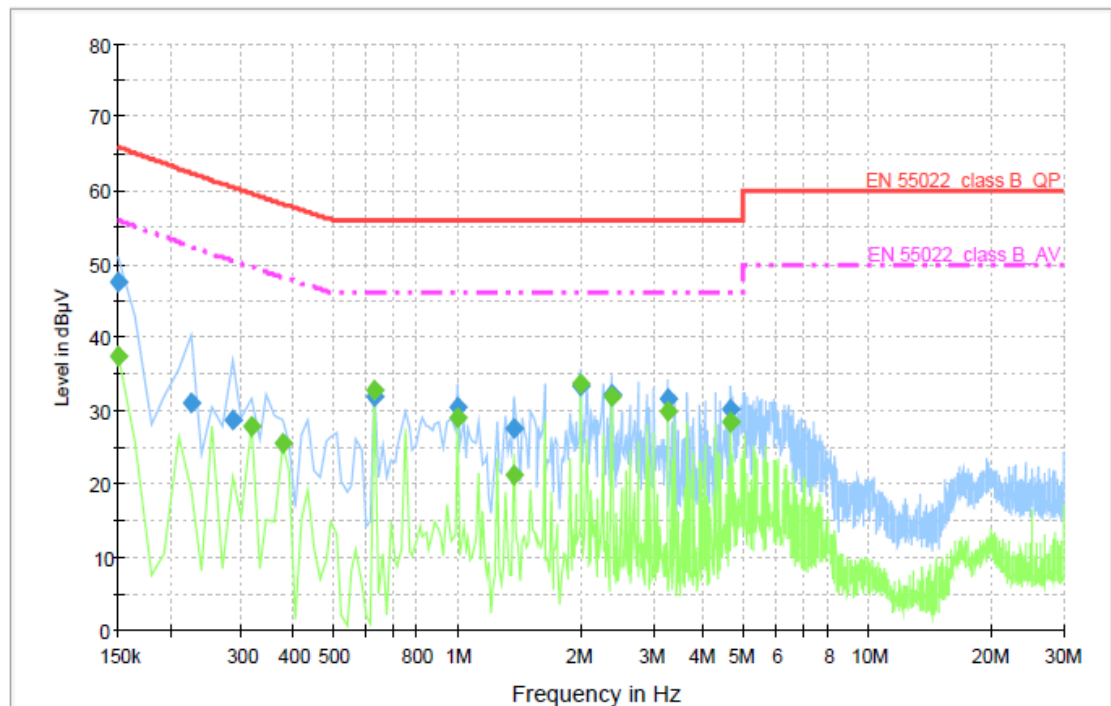

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	47.5	1000.000	9.000	GND	L1	10.0	18.5	66.0	
0.225000	31.0	1000.000	9.000	GND	L1	10.0	31.4	62.4	
0.285000	28.6	1000.000	9.000	GND	L1	10.0	31.9	60.5	
0.630000	31.8	1000.000	9.000	GND	L1	10.0	24.2	56.0	
1.005000	30.4	1000.000	9.000	GND	L1	10.0	25.6	56.0	
1.380000	27.4	1000.000	9.000	GND	L1	10.1	28.6	56.0	
2.010000	33.2	1000.000	9.000	GND	L1	10.1	22.8	56.0	
2.385000	32.2	1000.000	9.000	GND	L1	10.1	23.8	56.0	
3.270000	31.5	1000.000	9.000	GND	L1	10.1	24.5	56.0	
4.650000	30.3	1000.000	9.000	GND	L1	10.2	25.7	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	37.3	1000.000	9.000	GND	L1	10.0	18.7	56.0	
0.315000	27.7	1000.000	9.000	GND	L1	10.0	21.9	49.6	
0.375000	25.6	1000.000	9.000	GND	L1	10.0	22.6	48.2	
0.630000	32.7	1000.000	9.000	GND	L1	10.0	13.3	46.0	
1.005000	29.1	1000.000	9.000	GND	L1	10.0	16.9	46.0	
1.380000	21.2	1000.000	9.000	GND	L1	10.1	24.8	46.0	
2.010000	33.7	1000.000	9.000	GND	L1	10.1	12.3	46.0	
2.385000	31.8	1000.000	9.000	GND	L1	10.1	14.2	46.0	
3.270000	29.9	1000.000	9.000	GND	L1	10.1	16.1	46.0	
4.650000	28.3	1000.000	9.000	GND	L1	10.2	17.7	46.0	

< Fig 8. Conducted emission result (Live line)>



Voltage with 4-Line-LISN_N

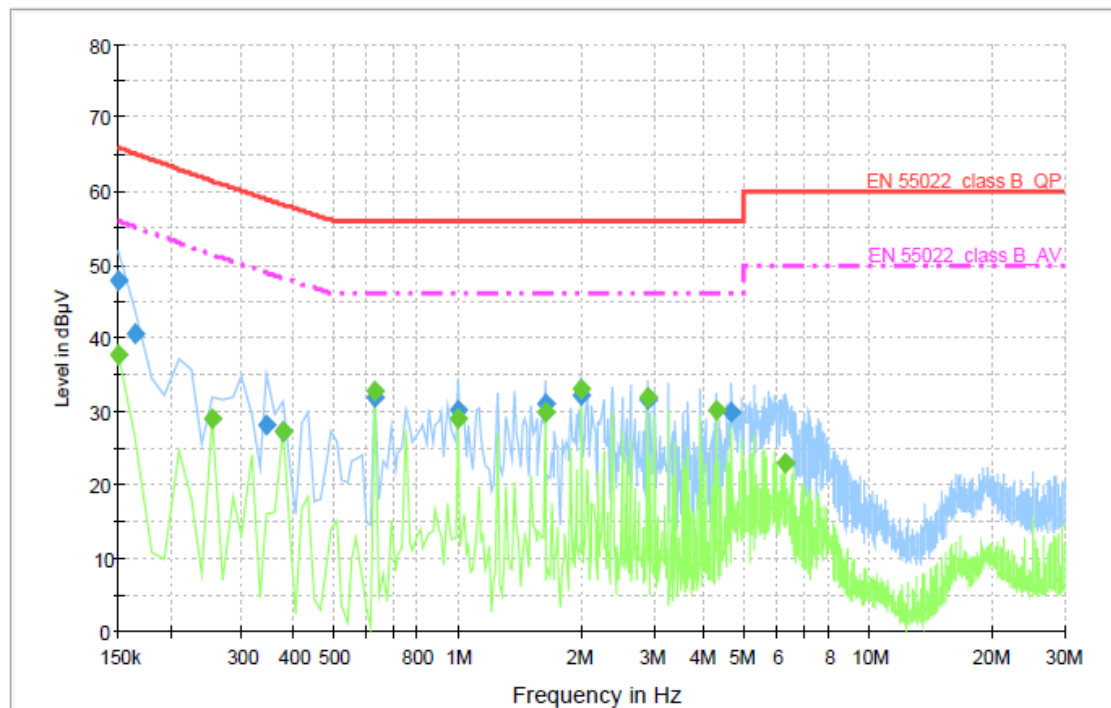

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	47.9	1000.000	9.000	GND	N	10.0	18.1	66.0	
0.165000	40.5	1000.000	9.000	GND	N	10.0	24.6	65.1	
0.345000	28.1	1000.000	9.000	GND	N	10.0	30.8	58.9	
0.375000	27.4	1000.000	9.000	GND	N	10.0	30.8	58.2	
0.630000	31.8	1000.000	9.000	GND	N	10.0	24.2	56.0	
1.005000	30.1	1000.000	9.000	GND	N	10.1	25.9	56.0	
1.635000	31.0	1000.000	9.000	GND	N	10.1	25.0	56.0	
2.010000	32.3	1000.000	9.000	GND	N	10.1	23.7	56.0	
2.895000	31.5	1000.000	9.000	GND	N	10.1	24.5	56.0	
4.650000	29.8	1000.000	9.000	GND	N	10.2	26.2	56.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	37.5	1000.000	9.000	GND	N	10.0	18.5	56.0	
0.255000	29.0	1000.000	9.000	GND	N	10.0	22.3	51.3	
0.375000	27.4	1000.000	9.000	GND	N	10.0	20.8	48.2	
0.630000	32.8	1000.000	9.000	GND	N	10.0	13.2	46.0	
1.005000	28.9	1000.000	9.000	GND	N	10.1	17.1	46.0	
1.635000	29.8	1000.000	9.000	GND	N	10.1	16.2	46.0	
2.010000	33.0	1000.000	9.000	GND	N	10.1	13.0	46.0	
2.895000	31.9	1000.000	9.000	GND	N	10.1	14.1	46.0	
4.275000	30.2	1000.000	9.000	GND	N	10.2	15.8	46.0	
6.285000	23.0	1000.000	9.000	GND	N	10.2	27.0	50.0	

< Fig 9. Conducted emission result (Neutral line)>



◆ Operating condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

Voltage with 4-Line-LISN_L1

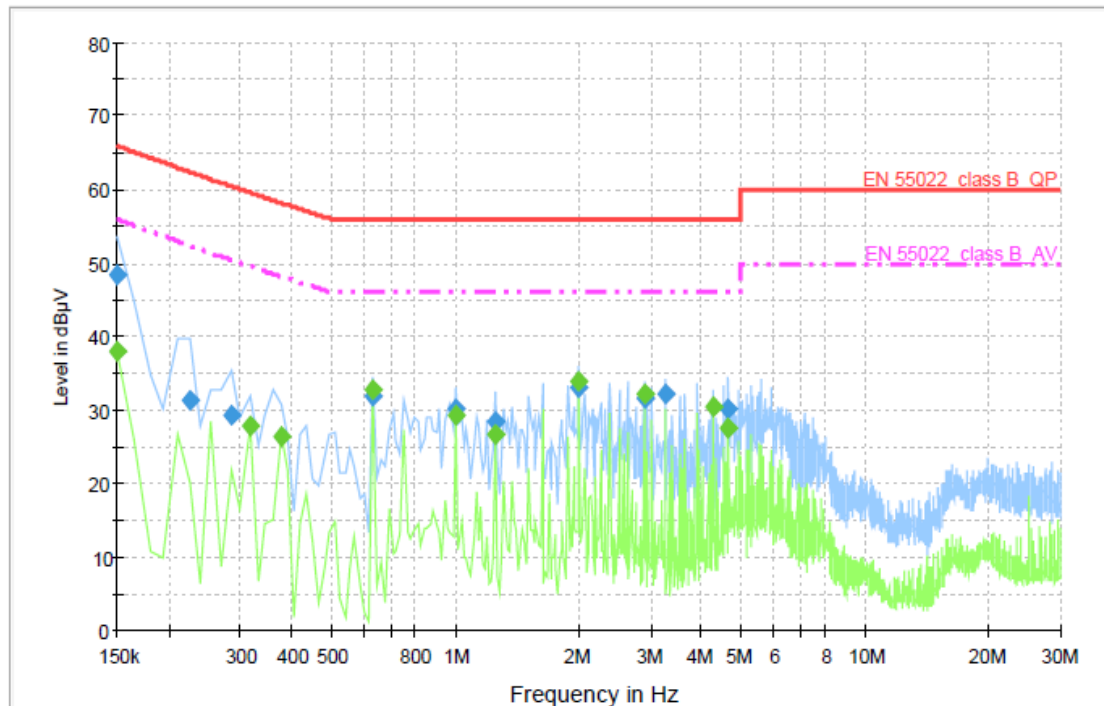

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.4	1000.000	9.000	GND	L1	10.0	17.6	66.0	
0.225000	31.3	1000.000	9.000	GND	L1	10.0	31.1	62.4	
0.285000	29.2	1000.000	9.000	GND	L1	10.0	31.3	60.5	
0.630000	32.0	1000.000	9.000	GND	L1	10.0	24.0	56.0	
1.005000	30.2	1000.000	9.000	GND	L1	10.0	25.8	56.0	
1.260000	28.4	1000.000	9.000	GND	L1	10.1	27.6	56.0	
2.010000	33.1	1000.000	9.000	GND	L1	10.1	22.9	56.0	
2.895000	31.7	1000.000	9.000	GND	L1	10.1	24.3	56.0	
3.270000	32.0	1000.000	9.000	GND	L1	10.1	24.0	56.0	
4.650000	30.1	1000.000	9.000	GND	L1	10.2	25.9	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	37.9	1000.000	9.000	GND	L1	10.0	18.1	56.0	
0.315000	27.9	1000.000	9.000	GND	L1	10.0	21.7	49.6	
0.375000	26.3	1000.000	9.000	GND	L1	10.0	21.9	48.2	
0.630000	32.9	1000.000	9.000	GND	L1	10.0	13.1	46.0	
1.005000	29.2	1000.000	9.000	GND	L1	10.0	16.8	46.0	
1.260000	26.7	1000.000	9.000	GND	L1	10.1	19.3	46.0	
2.010000	33.8	1000.000	9.000	GND	L1	10.1	12.2	46.0	
2.895000	32.2	1000.000	9.000	GND	L1	10.1	13.8	46.0	
4.275000	30.4	1000.000	9.000	GND	L1	10.2	15.6	46.0	
4.650000	27.7	1000.000	9.000	GND	L1	10.2	18.3	46.0	

< Fig 10. Conducted emission result (Live line)>



Voltage with 4-Line-LISN_N

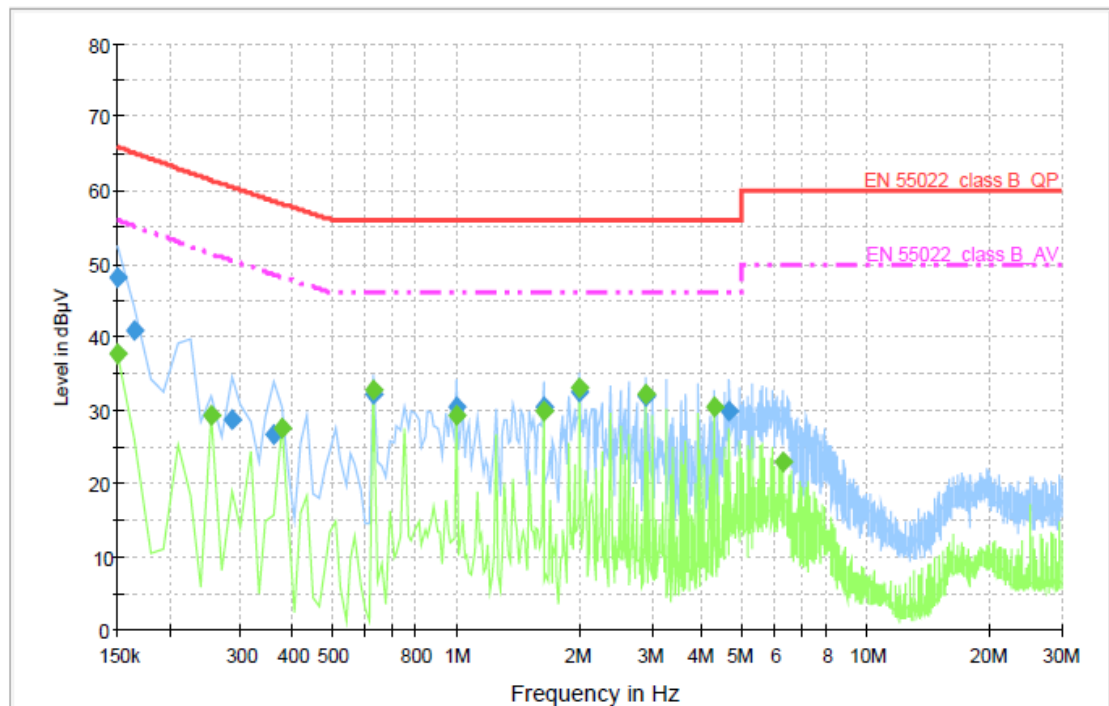

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.2	1000.000	9.000	GND	N	10.0	17.8	66.0	
0.165000	40.8	1000.000	9.000	GND	N	10.0	24.3	65.1	
0.285000	28.6	1000.000	9.000	GND	N	10.0	31.9	60.5	
0.360000	26.7	1000.000	9.000	GND	N	10.0	31.9	58.6	
0.630000	32.1	1000.000	9.000	GND	N	10.0	23.9	56.0	
1.005000	30.3	1000.000	9.000	GND	N	10.1	25.7	56.0	
1.635000	30.6	1000.000	9.000	GND	N	10.1	25.4	56.0	
2.010000	32.4	1000.000	9.000	GND	N	10.1	23.6	56.0	
2.895000	31.8	1000.000	9.000	GND	N	10.1	24.2	56.0	
4.650000	29.7	1000.000	9.000	GND	N	10.2	26.3	56.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	37.8	1000.000	9.000	GND	N	10.0	18.2	56.0	
0.255000	29.3	1000.000	9.000	GND	N	10.0	22.0	51.3	
0.375000	27.6	1000.000	9.000	GND	N	10.0	20.6	48.2	
0.630000	32.9	1000.000	9.000	GND	N	10.0	13.1	46.0	
1.005000	29.2	1000.000	9.000	GND	N	10.1	16.8	46.0	
1.635000	29.9	1000.000	9.000	GND	N	10.1	16.1	46.0	
2.010000	33.1	1000.000	9.000	GND	N	10.1	12.9	46.0	
2.895000	32.3	1000.000	9.000	GND	N	10.1	13.7	46.0	
4.275000	30.4	1000.000	9.000	GND	N	10.2	15.6	46.0	
6.285000	22.8	1000.000	9.000	GND	N	10.2	27.2	50.0	

< Fig 11. Conducted emission result (Neutral line)>



◆ Operating condition: USB play mode

Voltage with 4-Line-LISN_L1

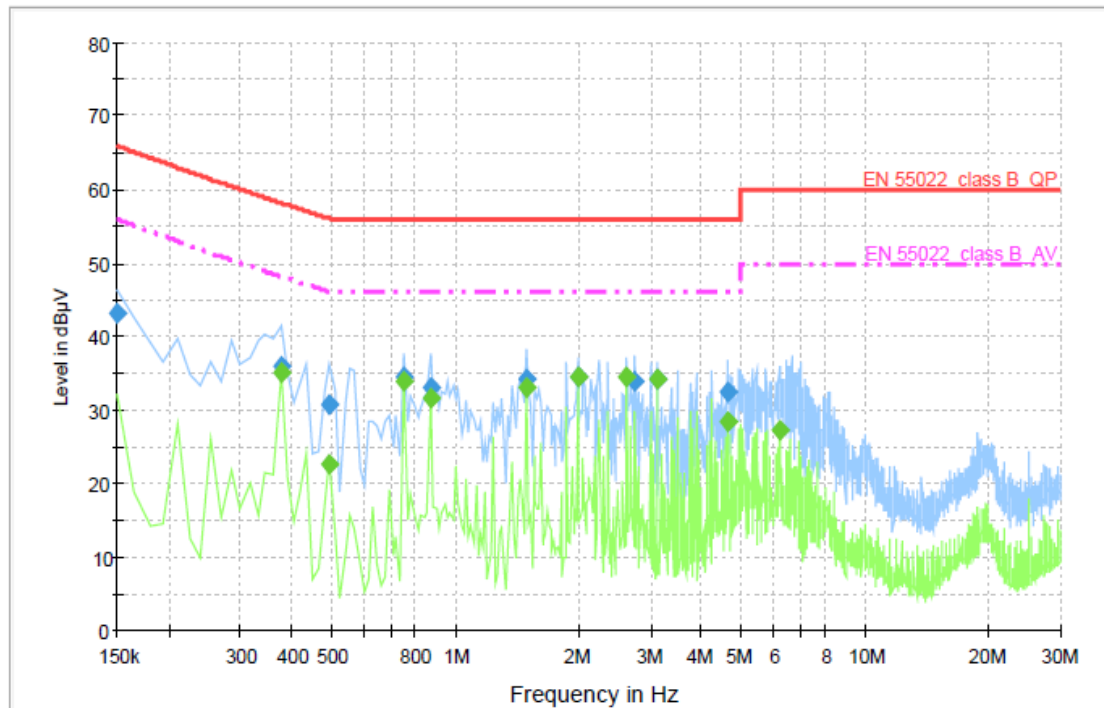

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	43.1	1000.000	9.000	GND	L1	10.0	22.9	66.0	
0.375000	36.0	1000.000	9.000	GND	L1	10.0	22.2	58.2	
0.495000	30.8	1000.000	9.000	GND	L1	10.0	25.3	56.1	
0.750000	34.5	1000.000	9.000	GND	L1	10.0	21.5	56.0	
0.870000	33.1	1000.000	9.000	GND	L1	10.0	22.9	56.0	
1.500000	34.2	1000.000	9.000	GND	L1	10.1	21.8	56.0	
1.995000	34.6	1000.000	9.000	GND	L1	10.1	21.4	56.0	
2.745000	33.9	1000.000	9.000	GND	L1	10.1	22.1	56.0	
3.120000	34.3	1000.000	9.000	GND	L1	10.1	21.7	56.0	
4.620000	32.6	1000.000	9.000	GND	L1	10.2	23.4	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.375000	35.1	1000.000	9.000	GND	L1	10.0	13.1	48.2	
0.495000	22.6	1000.000	9.000	GND	L1	10.0	23.5	46.1	
0.750000	33.9	1000.000	9.000	GND	L1	10.0	12.1	46.0	
0.870000	31.7	1000.000	9.000	GND	L1	10.0	14.3	46.0	
1.500000	33.0	1000.000	9.000	GND	L1	10.1	13.0	46.0	
1.995000	34.5	1000.000	9.000	GND	L1	10.1	11.6	46.0	
2.625000	34.5	1000.000	9.000	GND	L1	10.1	11.5	46.0	
3.120000	34.2	1000.000	9.000	GND	L1	10.1	11.8	46.0	
4.620000	28.5	1000.000	9.000	GND	L1	10.2	17.5	46.0	
6.180000	27.3	1000.000	9.000	GND	L1	10.2	22.7	50.0	

< Fig 12. Conducted emission result (Live line)>



Voltage with 4-Line-LISN_N

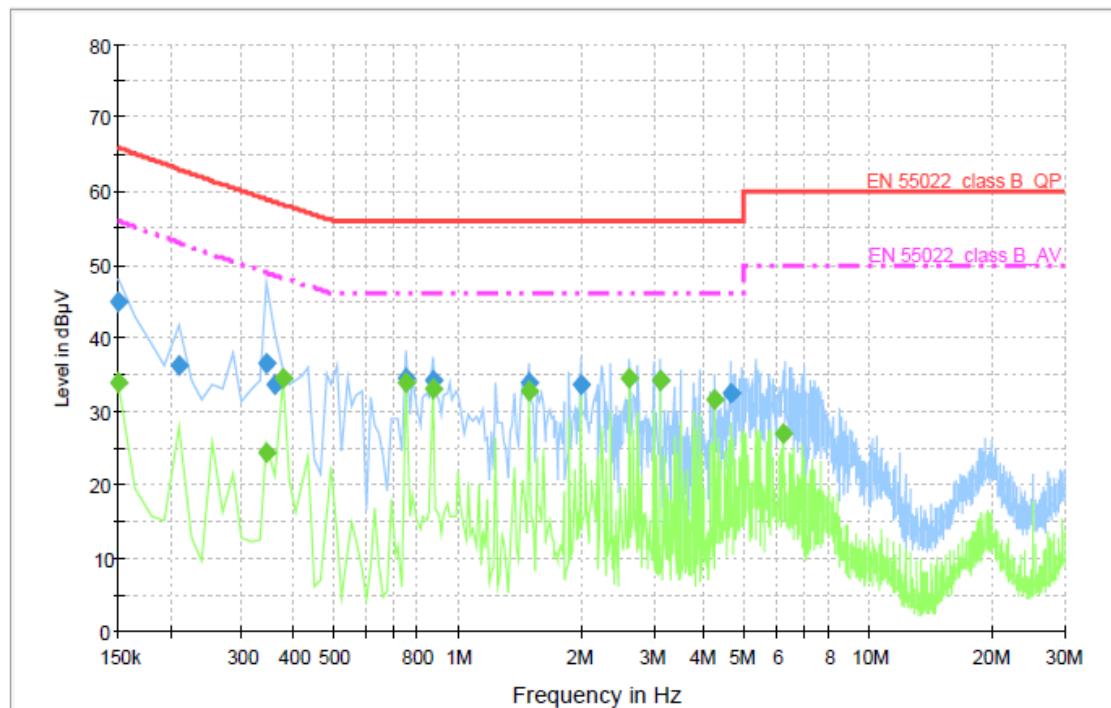

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	44.8	1000.000	9.000	GND	N	10.0	21.2	66.0	
0.210000	36.3	1000.000	9.000	GND	N	10.0	26.8	63.0	
0.345000	36.6	1000.000	9.000	GND	N	10.0	22.3	58.9	
0.360000	33.7	1000.000	9.000	GND	N	10.0	24.9	58.6	
0.750000	34.4	1000.000	9.000	GND	N	10.0	21.6	56.0	
0.870000	34.1	1000.000	9.000	GND	N	10.0	21.9	56.0	
1.500000	34.0	1000.000	9.000	GND	N	10.1	22.0	56.0	
1.995000	33.6	1000.000	9.000	GND	N	10.1	22.4	56.0	
3.120000	34.2	1000.000	9.000	GND	N	10.1	21.8	56.0	
4.620000	32.5	1000.000	9.000	GND	N	10.2	23.5	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	33.8	1000.000	9.000	GND	N	10.0	22.2	56.0	
0.345000	24.5	1000.000	9.000	GND	N	10.0	24.4	48.9	
0.375000	34.5	1000.000	9.000	GND	N	10.0	13.7	48.2	
0.750000	34.1	1000.000	9.000	GND	N	10.0	11.9	46.0	
0.870000	33.2	1000.000	9.000	GND	N	10.0	12.8	46.0	
1.500000	32.8	1000.000	9.000	GND	N	10.1	13.2	46.0	
2.625000	34.6	1000.000	9.000	GND	N	10.1	11.4	46.0	
3.120000	34.2	1000.000	9.000	GND	N	10.1	11.8	46.0	
4.245000	31.5	1000.000	9.000	GND	N	10.2	14.5	46.0	
6.180000	27.1	1000.000	9.000	GND	N	10.2	22.9	50.0	

< Fig 13. Conducted emission result (Neutral line)>



6. Radiated Emission

6.1 Operating Environment

Temperature : 23 °C
Relative Humidity : 40 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.32 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 4.21 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.96 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.97 dB	Confidence levels of 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 11. 2010
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 11. 2012
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 22. 2011
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 12. 2010

6.6 Test data for Radiated Emission

- Test Date : March 30, 2010
- Resolution Bandwidth : 120 kHz/1 MHz
- Frequency Range : 30 MHz ~ 5 000 MHz
- Measurement Distance : 3 m
- Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz (666 MHz). The measurement was made up to 5 000 MHz.



◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)

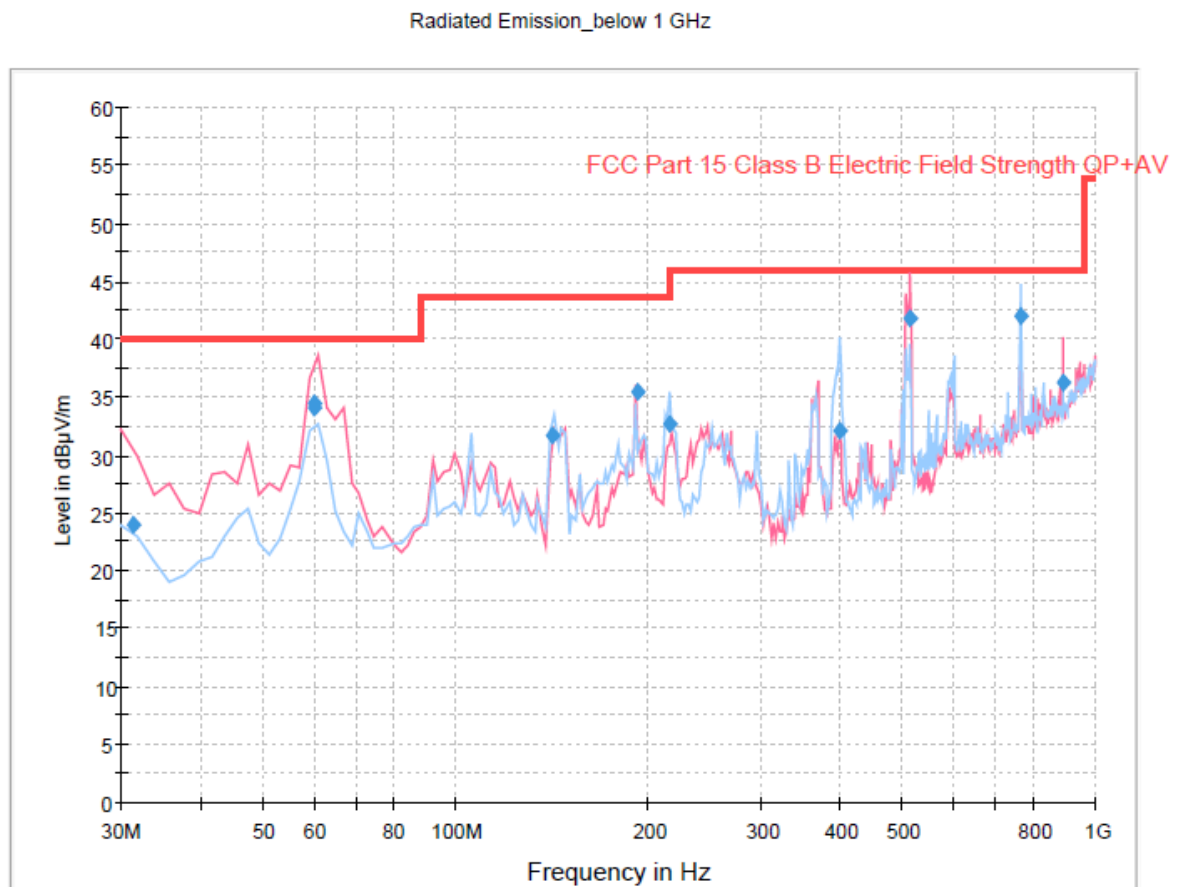


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.320000	24.0	1000.0	120.000	100.0	V	26.0	12.9	16.0	40.0
60.298317	34.5	1000.0	120.000	100.0	V	94.0	13.3	5.5	40.0
60.322204	34.1	1000.0	120.000	200.0	V	251.0	13.3	5.9	40.0
142.485491	31.7	1000.0	120.000	200.0	H	106.0	14.7	11.8	43.5
192.362685	35.4	1000.0	120.000	100.0	V	0.0	12.6	8.1	43.5
216.793226	32.6	1000.0	120.000	150.0	H	146.0	12.5	13.4	46.0
400.398677	32.1	1000.0	120.000	200.0	H	142.0	19.0	13.9	46.0
514.088056	41.7	1000.0	120.000	150.0	V	159.0	21.7	4.3	46.0
766.353467	42.0	1000.0	120.000	150.0	H	138.0	27.7	4.0	46.0
891.042285	36.1	1000.0	120.000	300.0	V	314.0	29.2	9.9	46.0

< Fig 14. Radiated emission result (30 MHz ~ 1 000 MHz)>



◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

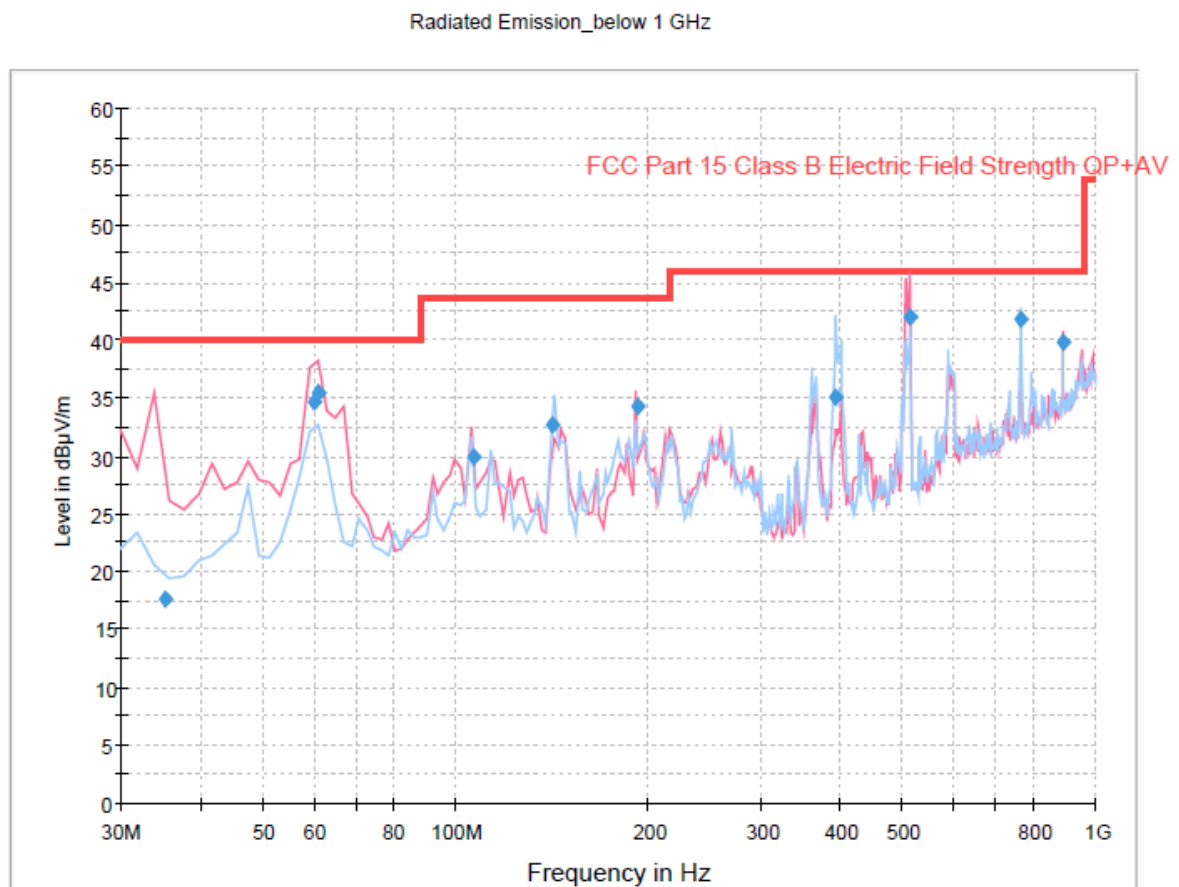


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
35.307776	17.7	1000.0	120.000	250.0	V	247.0	12.9	22.3	40.0
60.298317	34.7	1000.0	120.000	100.0	V	237.0	13.3	5.3	40.0
61.082204	35.5	1000.0	120.000	100.0	V	280.0	13.2	4.5	40.0
106.871623	30.0	1000.0	120.000	100.0	V	60.0	11.9	13.5	43.5
142.485491	32.7	1000.0	120.000	250.0	H	112.0	14.7	10.8	43.5
192.362685	34.2	1000.0	120.000	100.0	V	0.0	12.6	9.3	43.5
392.727014	35.0	1000.0	120.000	200.0	H	159.0	18.8	11.0	46.0
512.888056	42.0	1000.0	120.000	150.0	V	159.0	21.7	4.0	46.0
766.353467	41.7	1000.0	120.000	150.0	H	139.0	27.7	4.3	46.0
891.002285	39.8	1000.0	120.000	100.0	V	358.0	29.2	6.2	46.0

< Fig 15. Radiated emission result (30 MHz ~ 1 000 MHz)>



◆ Operating Condition: USB play mode

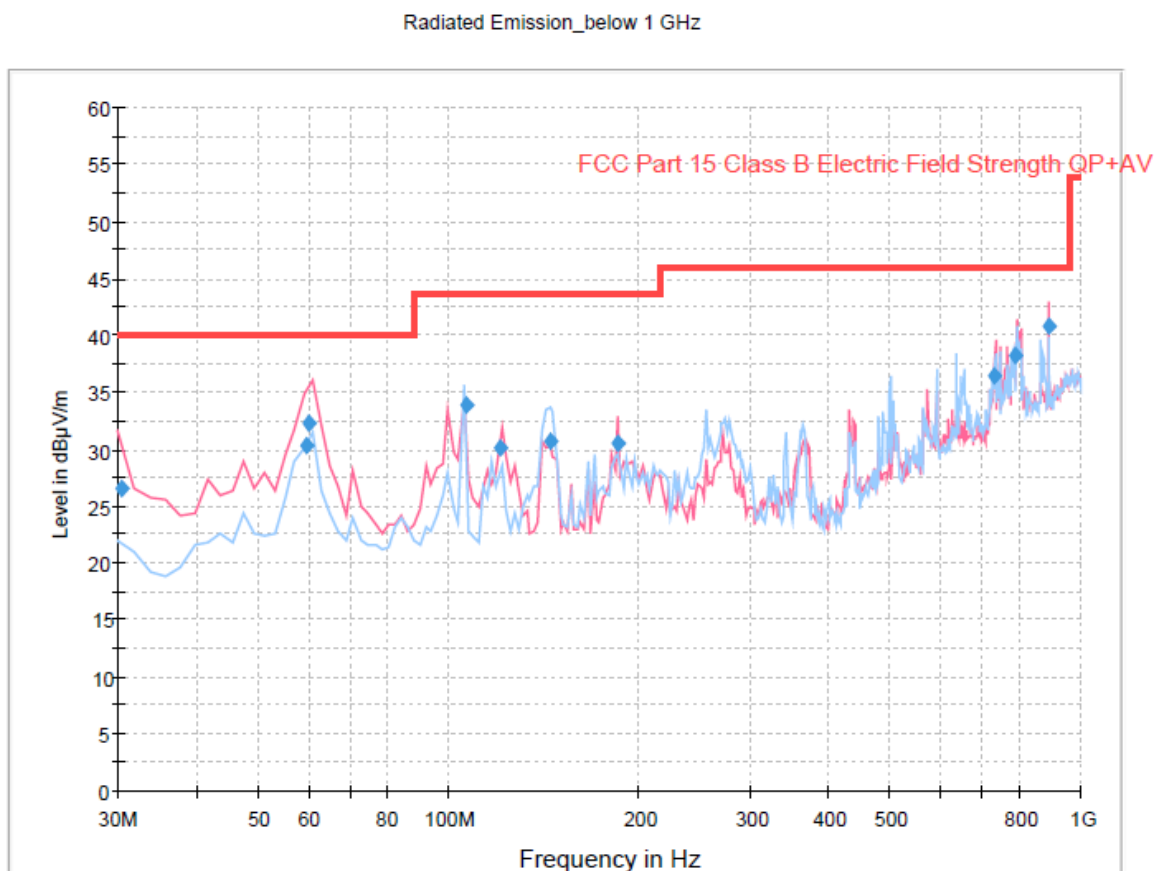


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.560000	26.6	1000.0	120.000	100.0	V	165.0	12.9	13.4	40.0
59.938317	30.3	1000.0	120.000	150.0	V	283.0	13.4	9.7	40.0
60.002204	32.3	1000.0	120.000	100.0	V	183.0	13.4	7.7	40.0
106.871623	33.8	1000.0	120.000	250.0	H	16.0	11.9	9.7	43.5
121.102725	30.0	1000.0	120.000	100.0	V	0.0	13.3	13.5	43.5
144.709379	30.7	1000.0	120.000	200.0	H	157.0	14.8	12.8	43.5
185.251022	30.5	1000.0	120.000	100.0	V	356.0	13.4	13.0	43.5
732.307375	36.4	1000.0	120.000	200.0	V	192.0	27.0	9.6	46.0
790.864008	38.2	1000.0	120.000	100.0	V	210.0	28.0	7.8	46.0
890.962285	40.8	1000.0	120.000	100.0	V	0.0	29.2	5.2	46.0

< Fig 16. Radiated emission result (30 MHz ~ 1 000 MHz)>



◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)

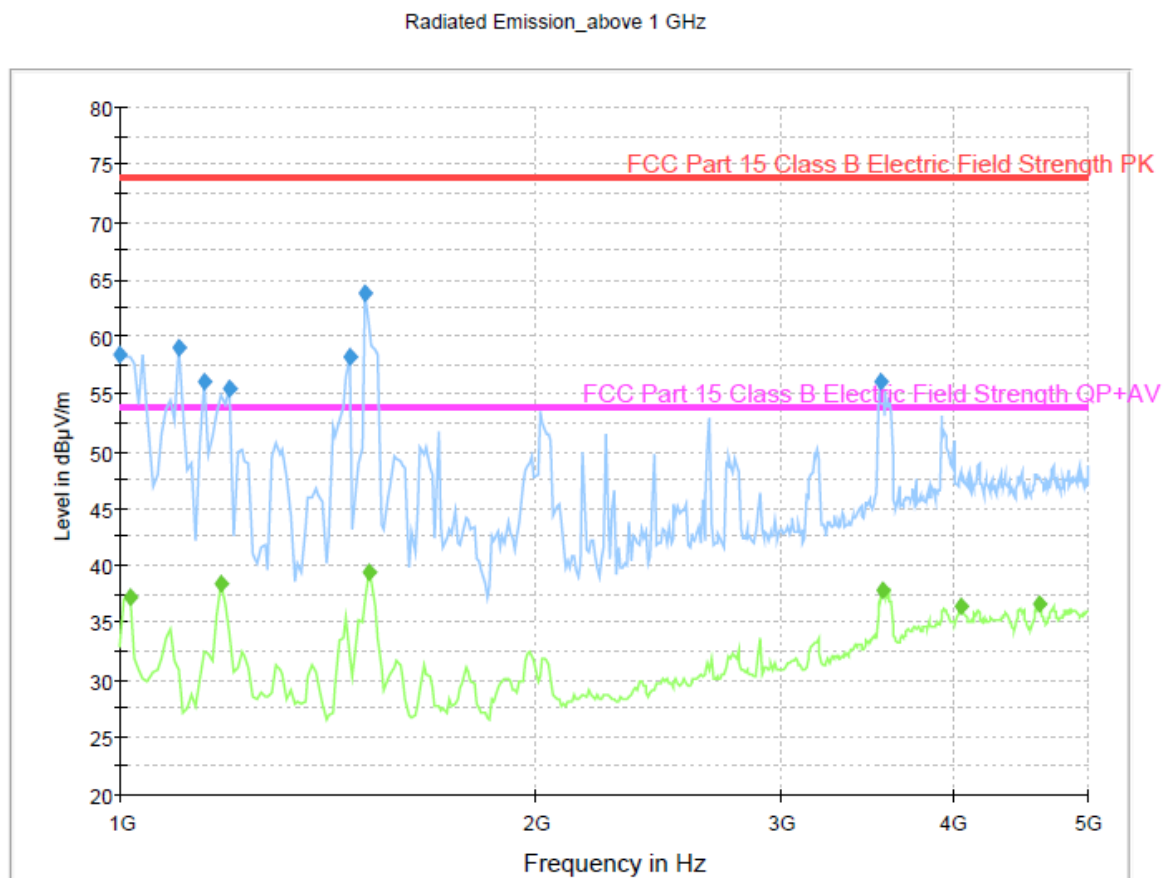

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
1000.000000	58.5	200.0	H	200.0	-15.9	15.4	73.9	
1104.208417	58.9	100.0	V	134.0	-15.3	15.0	73.9	
1152.304609	56.0	100.0	V	181.0	-15.2	17.9	73.9	
1200.400802	55.4	100.0	H	208.0	-15.0	18.5	73.9	
1464.929860	58.1	150.0	H	206.0	-14.3	15.8	73.9	
1505.010020	63.7	150.0	H	190.0	-14.2	10.2	73.9	
3541.082164	56.1	150.0	H	190.0	-5.9	17.8	73.9	

Final Result 2


Frequency (MHz)	Average-MaxHold (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
1016.032064	37.2	250.0	H	206.0	-15.8	16.7	53.9	
1184.368738	38.5	100.0	H	208.0	-15.1	15.4	53.9	
1513.026052	39.3	150.0	H	190.0	-14.2	14.6	53.9	
3557.114228	37.8	150.0	H	198.0	-5.8	16.1	53.9	
4054.108216	36.5	250.0	H	64.0	-3.1	17.4	53.9	
4607.214429	36.6	100.0	V	342.0	-3.1	17.3	53.9	

< Fig 17. Radiated emission result (1 000 MHz ~ 5 000 MHz)>



◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

Radiated Emission_above 1 GHz

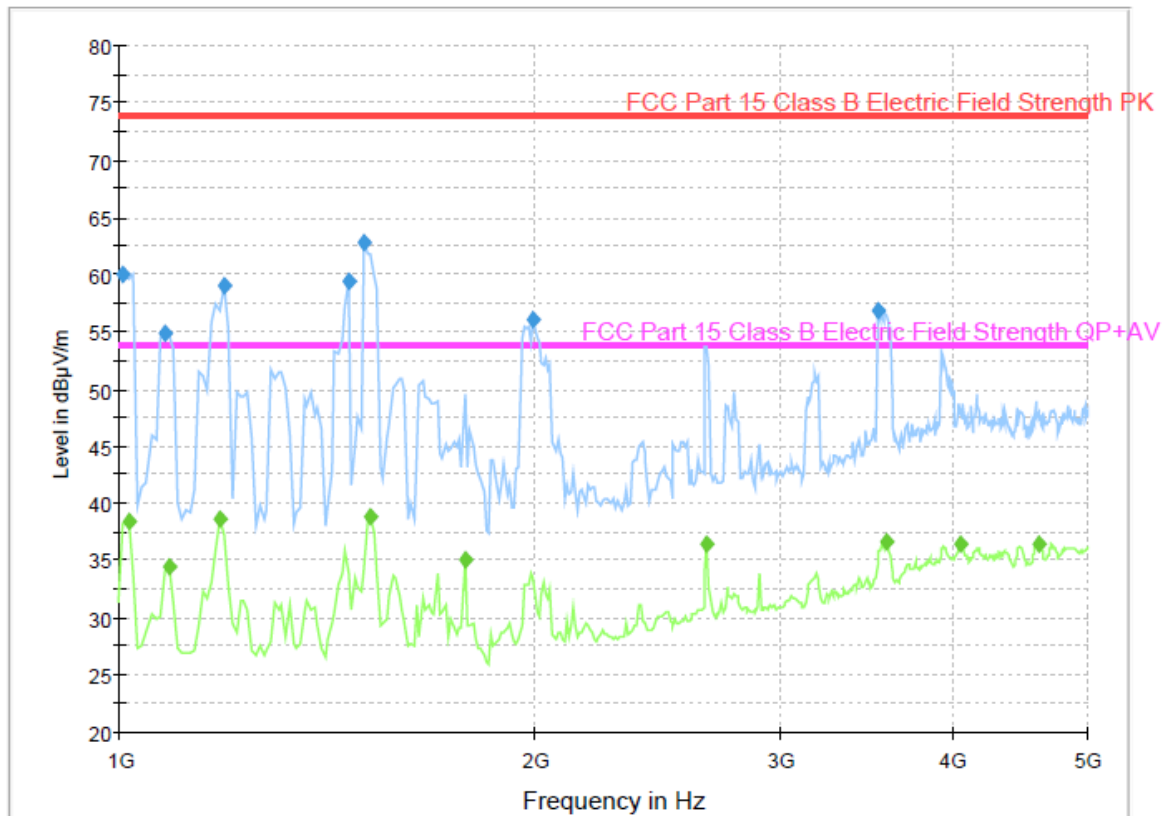

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1008.016032	60.0	200.0	H	215.0	-15.9	13.9	73.9	
1080.160321	54.8	200.0	V	183.0	-15.5	19.1	73.9	
1192.384770	59.0	100.0	H	199.0	-15.1	14.9	73.9	
1464.929860	59.3	100.0	H	190.0	-14.3	14.6	73.9	
1505.010020	62.7	150.0	H	193.0	-14.2	11.2	73.9	
1993.987976	56.1	150.0	H	137.0	-12.7	17.8	73.9	
3525.050100	56.8	150.0	H	185.0	-6.0	17.1	73.9	

Final Result 2


Frequency (MHz)	Average-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1016.032064	38.3	100.0	H	199.0	-15.8	15.6	53.9	
1088.176353	34.5	200.0	V	183.0	-15.4	19.4	53.9	
1184.368738	38.5	100.0	H	212.0	-15.1	15.4	53.9	
1521.042084	38.7	150.0	H	185.0	-14.1	15.2	53.9	
1777.555110	35.0	100.0	H	234.0	-13.2	18.9	53.9	
2659.318637	36.5	100.0	H	143.0	-9.7	17.4	53.9	
3581.162325	36.6	150.0	H	201.0	-5.6	17.3	53.9	
4046.092184	36.4	150.0	V	221.0	-3.1	17.5	53.9	
4607.214429	36.4	150.0	V	157.0	-3.1	17.5	53.9	

< Fig 18. Radiated emission result (1 000 MHz ~ 5 000 MHz)>



◆ Operating Condition: USB play mode

Radiated Emission_above 1 GHz

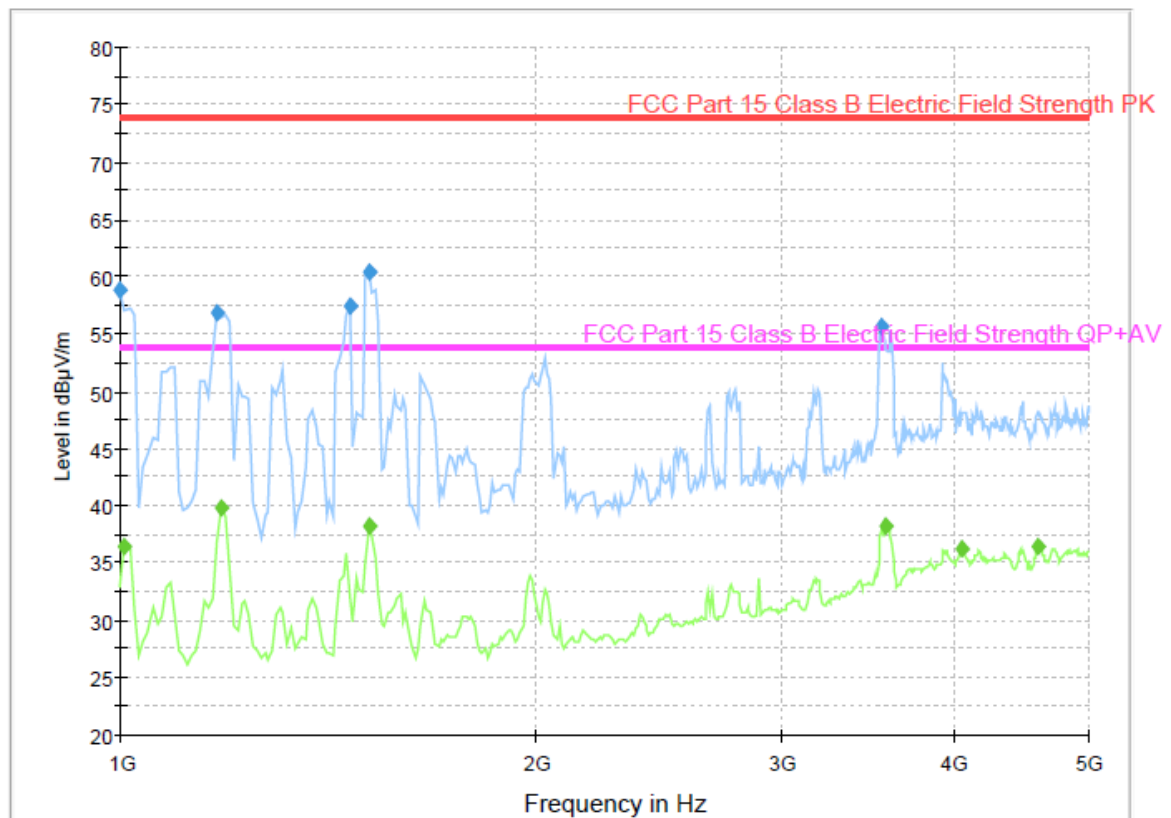

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1000.000000	58.9	200.0	H	204.0	-15.9	15.0	73.9	
1176.352706	56.9	100.0	H	210.0	-15.1	17.0	73.9	
1464.929860	57.5	100.0	H	193.0	-14.3	16.4	73.9	
1513.026052	60.5	150.0	H	190.0	-14.2	13.4	73.9	
3541.082164	55.7	150.0	H	182.0	-5.9	18.2	73.9	

Final Result 2

Frequency (MHz)	Average-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1008.016032	36.4	250.0	H	209.0	-15.9	17.5	53.9	
1184.368738	39.9	100.0	H	210.0	-15.1	14.0	53.9	
1513.026052	38.2	150.0	H	190.0	-14.2	15.7	53.9	
3573.146293	38.3	150.0	H	182.0	-5.7	15.6	53.9	
4054.108216	36.3	150.0	V	153.0	-3.1	17.6	53.9	
4599.198397	36.4	100.0	H	28.0	-3.2	17.5	53.9	

< Fig 19. Radiated emission result (1 000 MHz ~ 5 000 MHz)>



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ – 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LCD TV/Monitor (Model Name: 32LD320-UA)** was complies with §15.107 and 15.109 of the FCC Rules.