

RF TEST REPORT

Test item : JukeBlox Networked Media Module
Model No. : CX875-3PB
Order No. : DEMC1301-00316, DEMC1302-00799
Date of receipt : 2013-01-24, 2013-02-25
Test duration : 2013-02-07 ~ 2013-02-23, 2013-02-25
Date of issue : 2013-03-06
Use of report : FCC&ICOriginal Grant

Applicant : LG Electronics USA.
1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : FCC Part 15 Subpart C 247,
ANSI C63.10-2009, KDB558074
RSS-210, RSS-Gen

Test environment : See appended test report

Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
JaeJin, Lee

Witnessed by:

N/A

Reviewed by:



Deputy General Manager
WonJung, Lee

Test Report Version

Test Report No.	Date	Description
DRTFCC1303-0210	Mar. 06, 2013	Initial issue

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. SUMMARY OF TESTS	5
4. TEST METHODOLOGY	6
4.1 EUT CONFIGURATION	6
4.2 EUT EXERCISE	6
4.3 GENERAL TEST PROCEDURES	6
4.4 DESCRIPTION OF TEST MODES.....	6
5. INSTRUMENT CALIBRATION	7
6. FACILITIES AND ACCREDITATIONS.....	7
6.1 FACILITIES	7
6.2 EQUIPMENT	7
7. ANTENNA REQUIREMENTS.....	7
8. TEST RESULT	8
8.1 6dB Bandwidth	8
8.2 Maximum Peak Conducted Output Power	13
8.3 Maximum Power Spectral Density	15
8.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions.....	20
8.5 Radiated Spurious Emissions.....	33
8.6 Power-line Conducted Emissions	39
8.7 Occupied Bandwidth.....	42
9. LIST OF TEST EQUIPMENT.....	47
APPENDIX I	48

1. GENERAL INFORMATION

Applicant : LG Electronics USA.

Address : 1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

FCC ID : BEJ9QK-CX8753PB

IC : 2703H-CX8753PB

EUT : JukeBlox Networked Media Module

Model : CX875-3PB

Additional Model(s) : N/A

Data of Test : 2013-02-07 ~ 2013-02-23, 2013-02-25

Contact person : Jacob Cho

2. EUT DESCRIPTION

Product	JukeBlox Networked Media Module
Model Name	CX875-3PB
Power Supply	DC 3.3V
Frequency Range	802.11b/g: 2412 ~ 2462 MHz
Max. RF Output Power	802.11b: 16.96dBm 802.11g: 21.99dBm
Modulation Type	802.11b: DSSS/CCK 802.11g: OFDM
Antenna Specification	PCB(PIPA) Antenna (2TX 2RX) ▪ ANT1 Max. peak gain : 2.76dBi ▪ ANT2 Max. peak gain : 2.69dBi

Note: This device doesn't support MIMO mode.

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)					
15.247(a)	RSS-210 [A8.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-210 [A8.4]	Transmitter Output Power	< 1Watt		C
15.247(d)	RSS-210 [A8.5]	Out of Band Emissions / Band Edge	20dBc in any 100kHz BW		C
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz		C
-	RSS Gen 4.6.1	Occupied Bandwidth (99%)	RSS-Gen(4.6.1)		C
15.247(d) 15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	<FCC 15.209 limits	Radiated	C Note2
15.207	RSS-Gen [7.2.4]	AC Conducted Emissions	< FCC 15.207 limits	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: This test item was performed in each axis and the worst case data was reported.					

4. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and KDB558074

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

4.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10, the EUT is placed on the turntable, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10.

4.4 DESCRIPTION OF TEST MODES

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.

- Semi anechoic chamber registration Number :678747

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of antennas: loop, tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203& RSS-Gen [7.1.2]:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antenna used a unique coupling to the intentional radiator.

*Therefore this E.U.T Complies with the requirement of §15.203

8. TEST RESULT

8.1 6dB Bandwidth

Test Requirements and limit, §15.247(a)& RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of KDB558074.

1. Set resolution bandwidth (RBW) = 1-5% of DTS BW, not to exceed 100 KHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
(RBW:100KHz/VBW:300KHz)
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

■ TEST RESULTS: **Comply**


Test Mode	Data Rate	Frequency [MHz]	Test Results[MHz]
802.11b	1Mbps	2412	12.120
		2437	12.120
		2462	12.130
802.11g	6Mbps	2412	16.390
		2437	16.390
		2462	16.420

Note: This test item was performed in the worst case antenna port(ANT 1).

RESULT PLOTS


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps&2412MHz

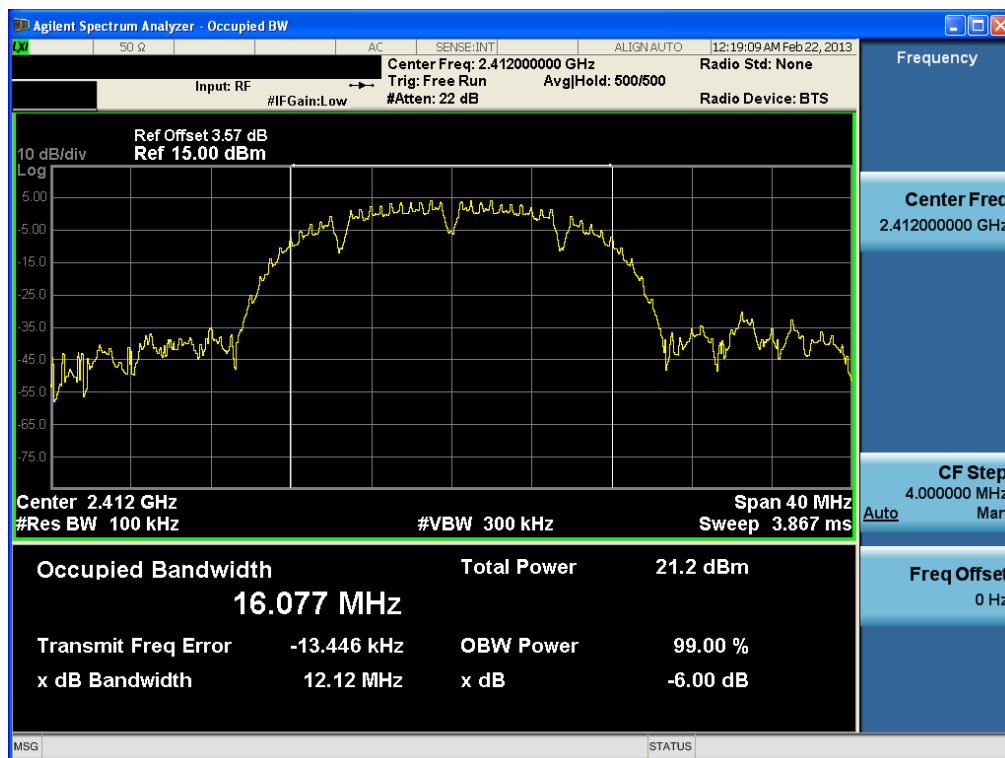


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps&2437MHz

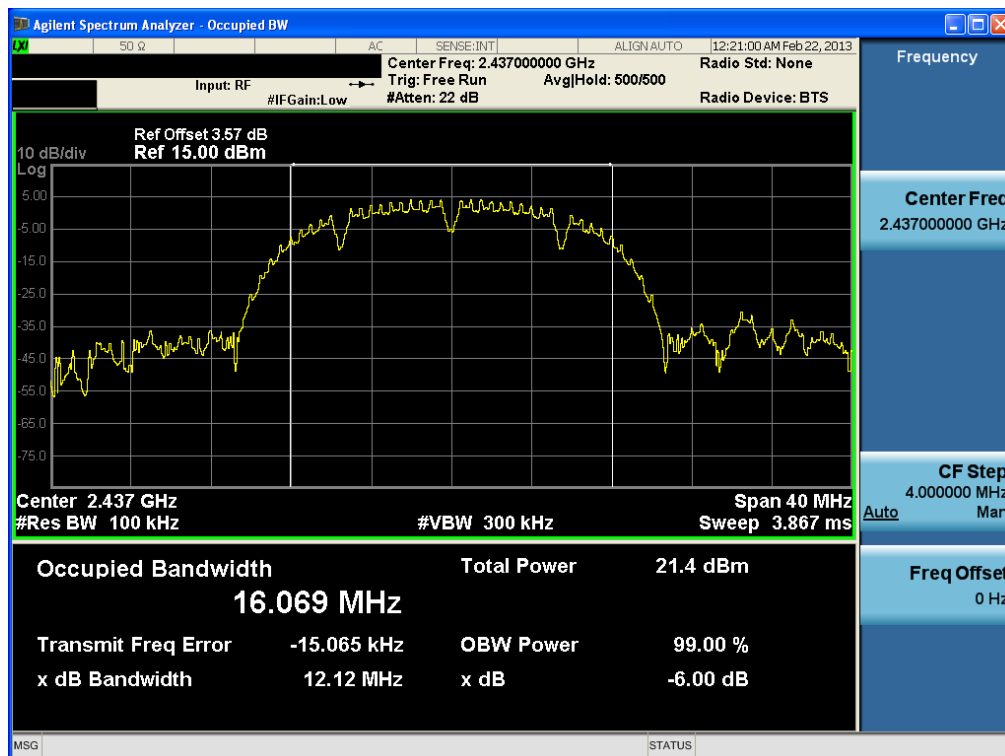


6 dB Bandwidth

Test Mode: 802.11b &1Mbps&2462MHz

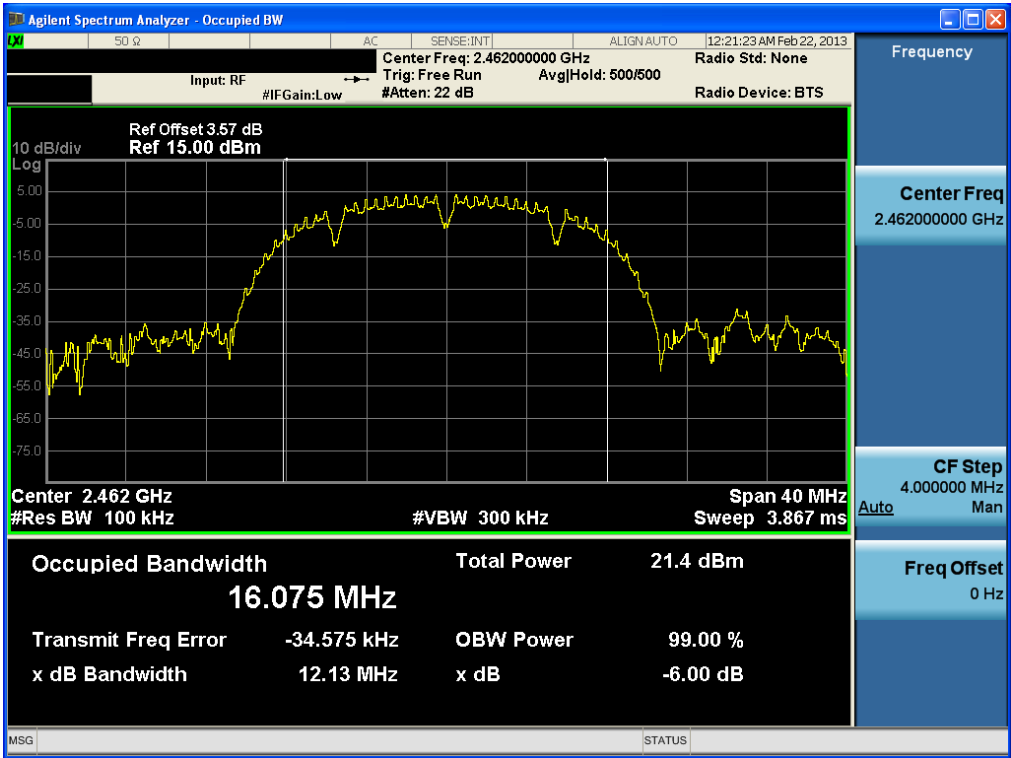


6 dB Bandwidth

Test Mode: 802.11g&6Mbps&2412MHz

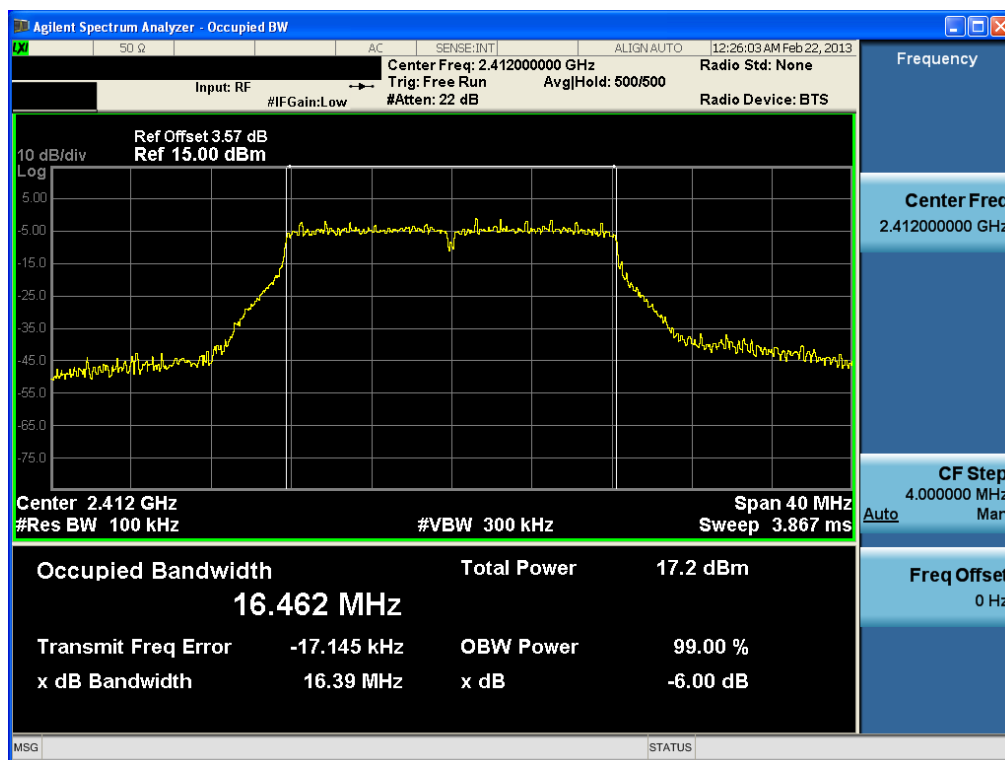


6 dB Bandwidth

Test Mode: 802.11g&6Mbps&2437MHz

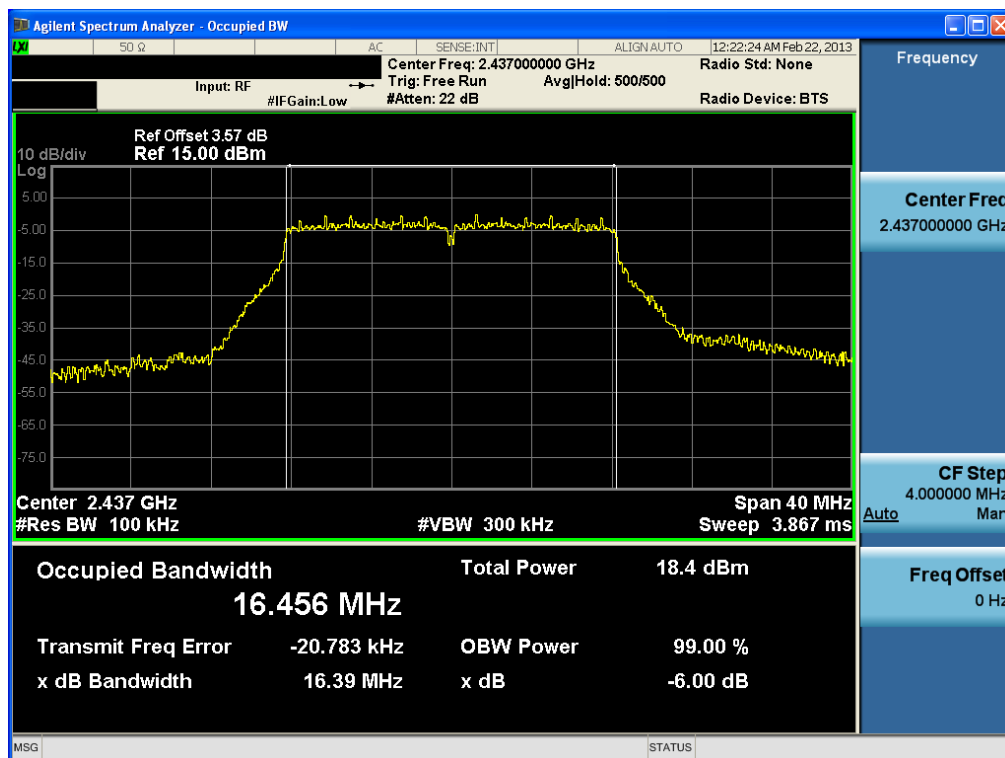

6 dB Bandwidth

Test Mode: 802.11g&6Mbps&2462MHz

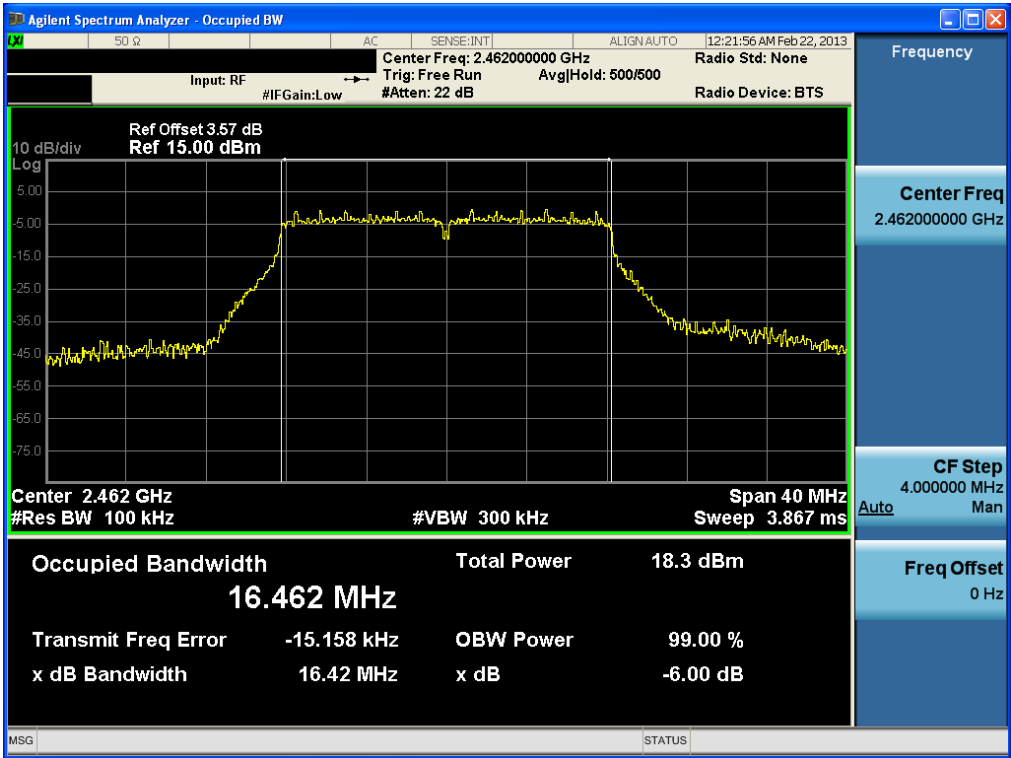


8.2 Maximum Peak Conducted Output Power

Test Requirements and limit, §15.247(b)& RSS-210 [A8.4]

The maximum permissible conducted output power is **1 Watt**.

■ TEST CONFIGURATION

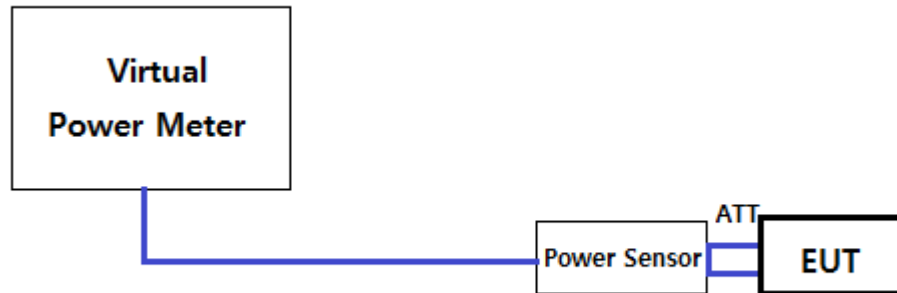

■ TEST PROCEDURE:

A transmitter antenna terminal of EUT is connected to the input of a power sensor using an appropriate attenuator and the total path loss between EUT and a Power Sensor was corrected on the final measurement data using a power meter's internal function.

Measurements are made with a broadband power meter capable of making peak and average measurements while the EUT is operating in transmission mode at the appropriate frequencies.

■ TEST RESULTS: **Comply**

- 802.11b mode

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [Mbps]							
				1	2	5.5	11	N/A	N/A	N/A	N/A
ANT 1	1	2412	PK	16.96	16.93	16.83	16.94	-	-	-	-
			AV	13.86	13.68	13.36	12.80	-	-	-	-
	6	2437	PK	16.95	16.94	16.81	16.91	-	-	-	-
			AV	13.88	13.70	13.35	12.75	-	-	-	-
	11	2462	PK	16.65	16.61	16.42	16.54	-	-	-	-
			AV	13.59	13.36	12.90	12.47	-	-	-	-
ANT 2	1	2412	PK	16.72	16.69	16.59	16.70	-	-	-	-
			AV	13.63	13.44	13.09	12.56	-	-	-	-
	6	2437	PK	16.78	16.71	16.63	16.76	-	-	-	-
			AV	13.65	13.49	13.15	12.68	-	-	-	-
	11	2462	PK	16.52	16.45	16.35	16.47	-	-	-	-
			AV	13.40	13.25	12.91	12.39	-	-	-	-

- 802.11g mode

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [Mbps]							
				6	9	12	18	24	36	48	54
ANT 1	1	2412	PK	21.99	21.87	21.89	21.99	21.77	21.91	21.77	21.79
			AV	11.00	10.64	10.45	10.29	9.92	9.24	8.78	8.58
	6	2437	PK	21.94	21.93	21.89	21.93	21.70	21.90	21.92	21.82
			AV	10.82	10.56	10.35	10.15	9.64	9.18	8.67	8.44
	11	2462	PK	21.75	21.60	21.61	21.67	21.53	21.73	21.74	21.55
			AV	10.67	10.20	10.16	9.80	9.52	9.06	8.60	8.28
ANT 2	1	2412	PK	21.84	21.74	21.65	21.80	21.58	21.82	20.73	21.61
			AV	10.98	10.57	10.37	10.20	9.83	9.20	8.72	8.56
	6	2437	PK	21.77	21.68	21.69	21.69	21.65	21.73	21.77	21.75
			AV	10.79	10.55	10.31	10.13	9.61	9.15	8.60	8.38
	11	2462	PK	21.73	21.69	21.65	21.61	21.62	21.62	21.66	21.68
			AV	10.61	10.44	10.11	10.00	9.42	8.97	8.49	8.26

8.3 Maximum Power Spectral Density

Test requirements and limit, §15.247(e)& RSS-210[A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard –specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

■TEST CONFIGURATION

Refer to the APPENDIX I.

■TEST PROCEDURE:

The Measurement Procedure **Option 1of KDB558074** is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


■TEST RESULTS: **Comply**

Test Mode	Data Rate	Frequency [MHz]	RBW	PKPSD [dBm]
802.11b	1Mbps	2412	3 kHz	-9.25
		2437	3 kHz	-9.21
		2462	3 kHz	-9.42
802.11g	6Mbps	2412	3 kHz	-14.60
		2437	3 kHz	-14.13
		2462	3 kHz	-14.21

RESULT PLOTS

Maximum PKPSD

Test Mode: 802.11b&1Mbps &2412MHz

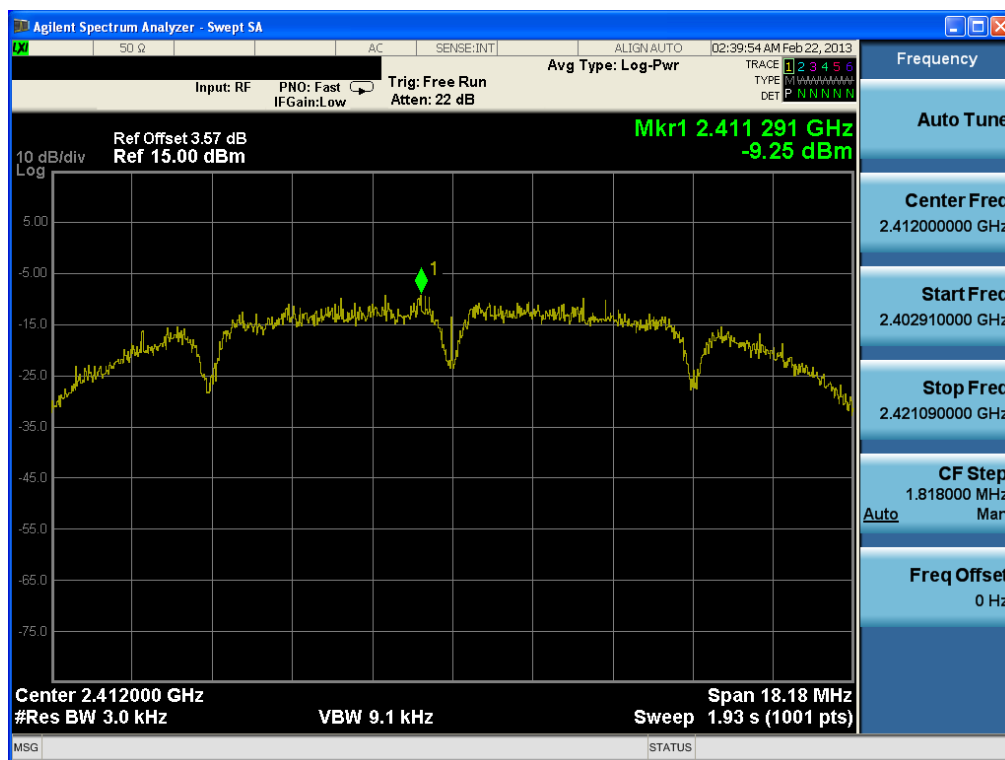

Maximum PKPSD

Test Mode: 802.11b&1Mbps &2437MHz




Maximum PKPSD

Test Mode: 802.11b&1Mbps &2462MHz




Maximum PKPSD

Test Mode: 802.11g&6Mbps &2412MHz

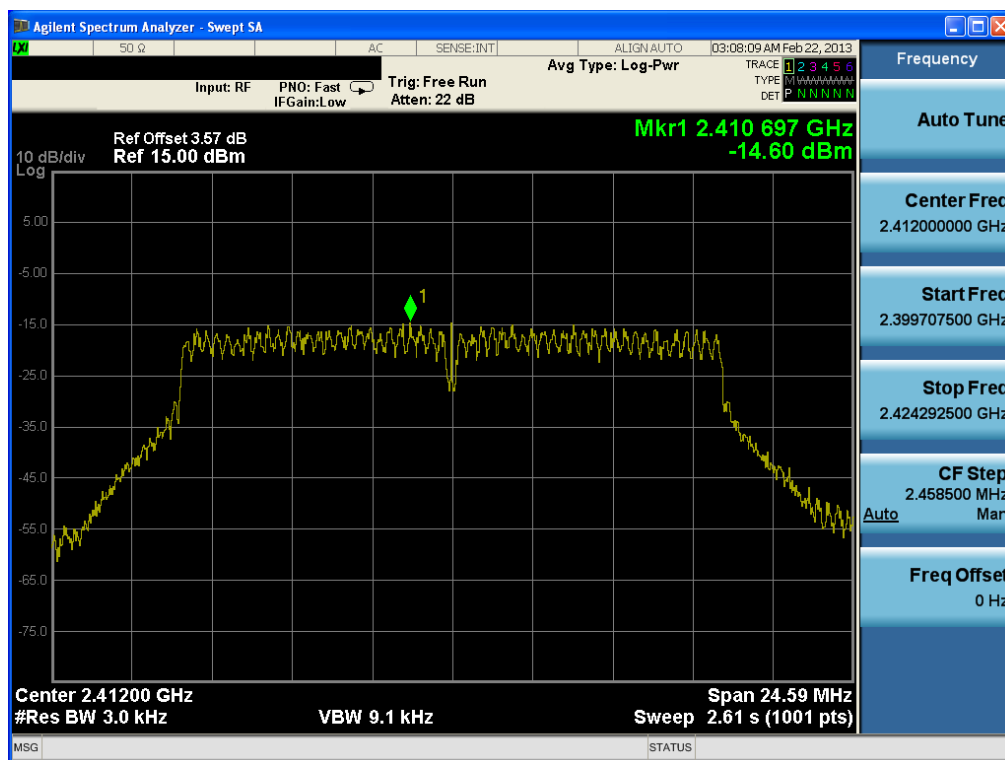


Maximum PKPSD

Test Mode: 802.11g &6Mbps &2437MHz

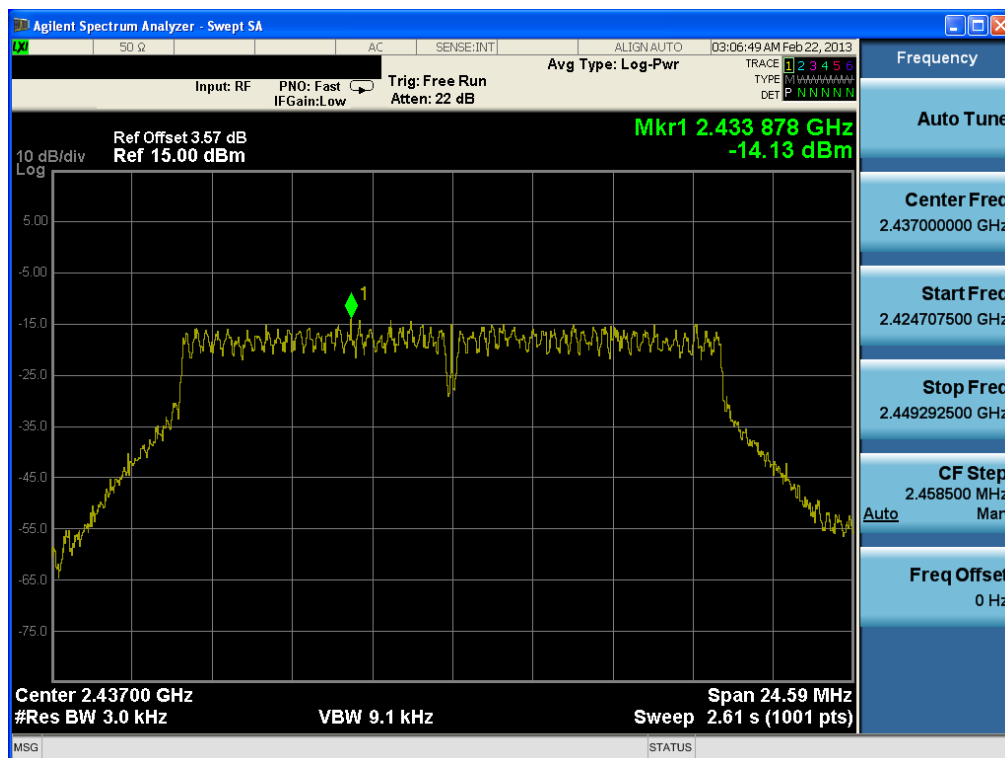

Maximum PKPSD

Test Mode: 802.11g&6Mbps&2462MHz

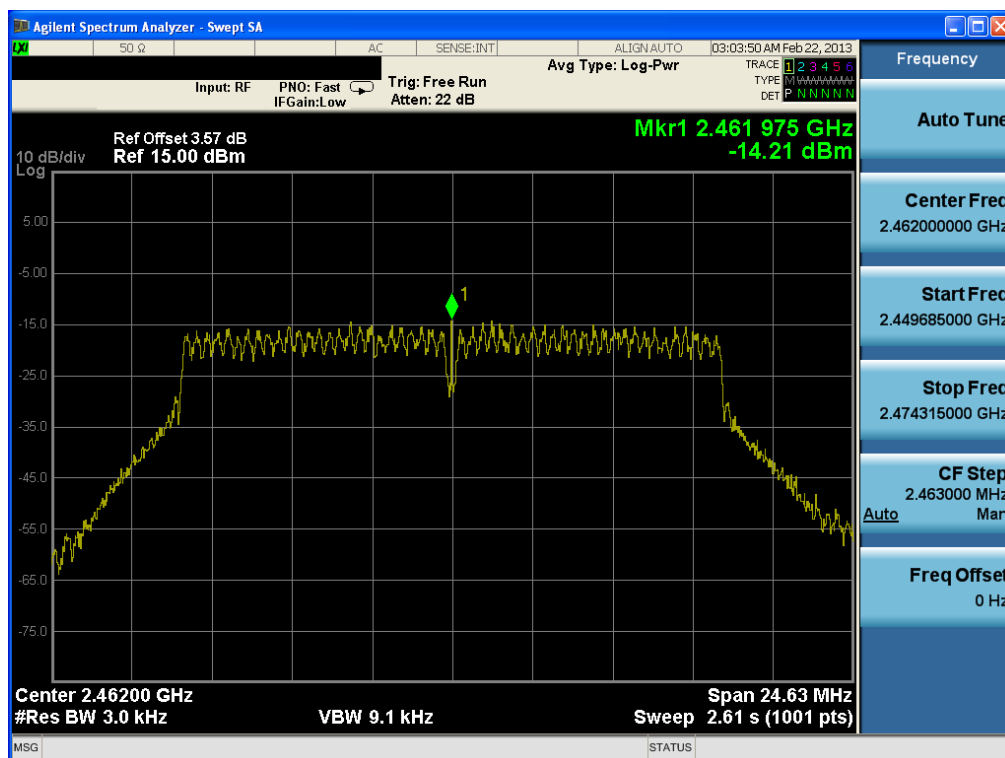

8.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions

Test requirements and limit, §15.247(d)& RSS-210 [A8.5]


§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

■ TEST CONFIGURATION

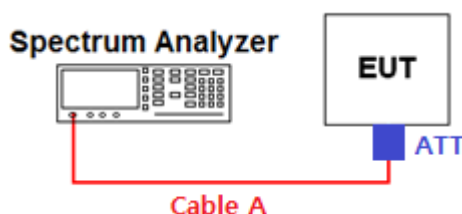

■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level

Establish the reference level by using the peak PSD procedure of KDB558074 to measure the PSD level in any 100 kHz bandwidth (i.e., set RBW = 100 kHz and VBW ≥ 300 kHz) within the DTS channel bandwidth (the channel found to contain the maximum PSD level can be used to establish the reference level).

- Measurement Procedure 2 - Unwanted Emissions

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = **100 kHz**. (**Actual 1 MHz** , See below note)
4. Set VBW ≥ **300 kHz**. (**Actual 3 MHz**, See below note)
5. Detector = **peak**.
6. Trace Mode = **max hold**.
7. Sweep = **auto couple**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 KHz bandwidth.

Note : The conducted unwanted emission was tested using S/A's measurement function with total 12 sub ranges.
The each sub ranges were set as below.

RBW= 1 MHz, VBW= 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SPAN = MAX 3 GHz (Below 10 GHz) and MAX 5 GHz (Above 10 GHz) , BINS = 10001 (Each sub range below 10 GHz) and 20001 (Each sub range above 10 GHz)


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 KHz, VBW = 300 KHz, SAPN = 100 MHz and BINS = 2001 to get accurate emission level within 100 KHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.


■ **RESULT PLOTS**


802.11b & 1Mbps & 2412MHz

Reference

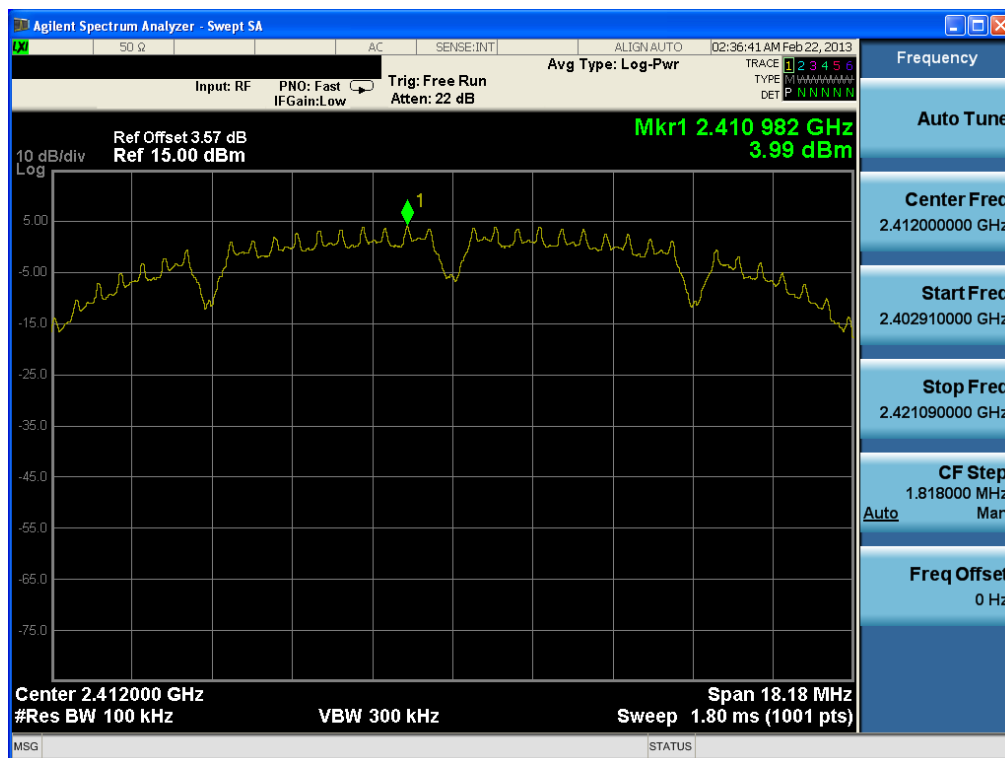


Low Band-edge

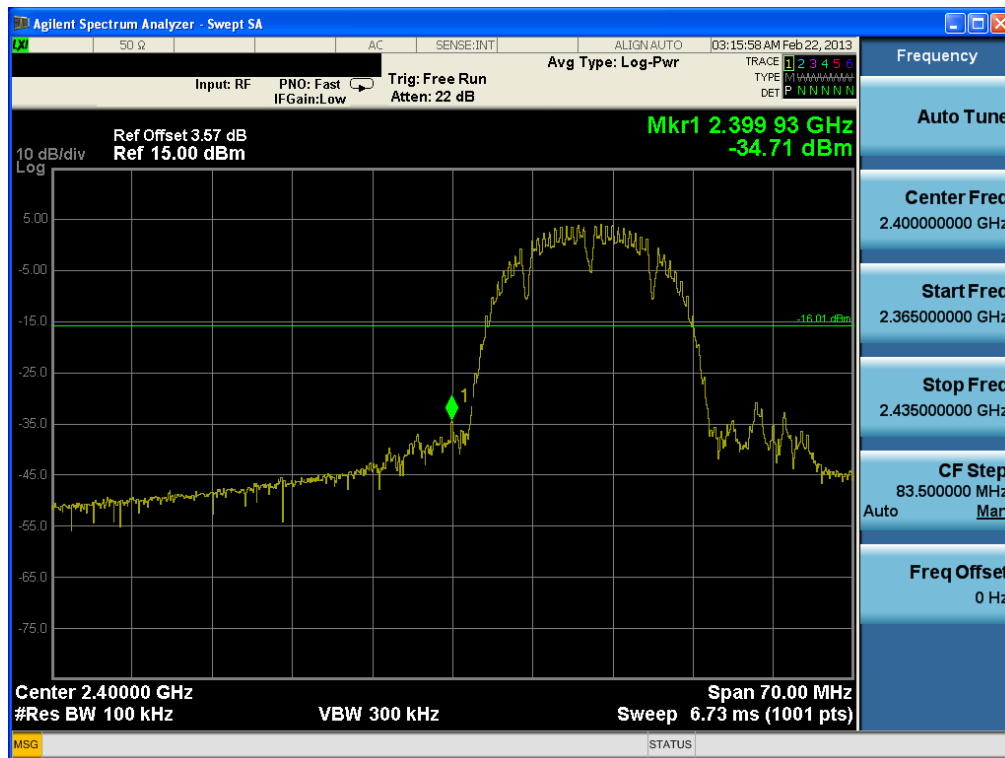

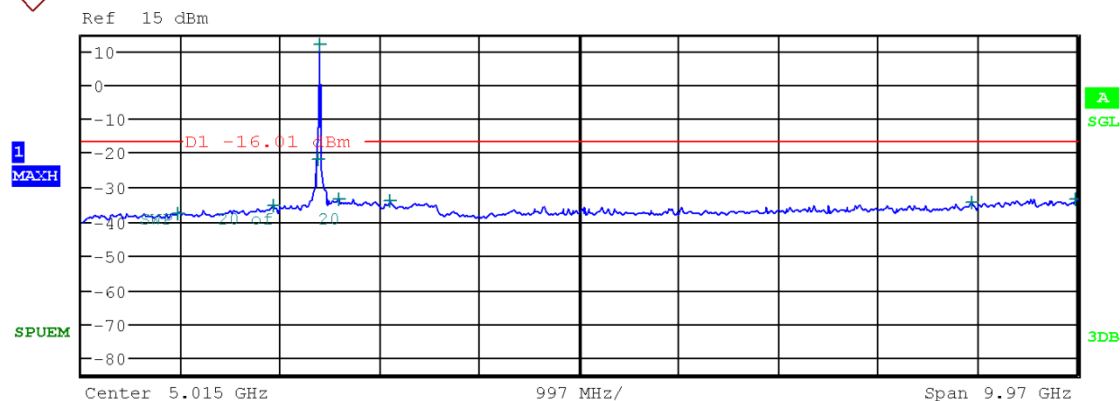Conducted Spurious Emissions


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	982.443000 M	-37.81
1.000 G	2.000 G	1.00 M	1.949800 G	-35.28
2.000 G	2.400 G	1.00 M	2.398640 G	-21.77
2.400 G	2.483 G	1.00 M	2.412258 G	11.92
2.483 G	3.000 G	1.00 M	2.602037 G	-33.72
3.000 G	6.000 G	1.00 M	3.109800 G	-34.20
6.000 G	9.000 G	1.00 M	8.937600 G	-34.45
9.000 G	10.000 G	1.00 M	9.990400 G	-33.61

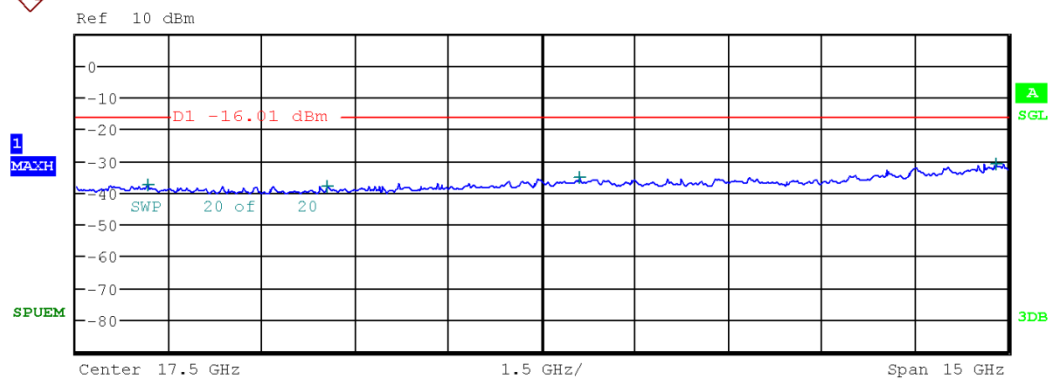


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
10.000 G	12.000 G	1.00 M	11.164600 G	-37.76
12.000 G	15.000 G	1.00 M	14.049150 G	-38.01
15.000 G	20.000 G	1.00 M	18.106000 G	-35.43
20.000 G	25.000 G	1.00 M	24.811000 G	-30.98

802.11b & 1Mbps & 2437MHz


Reference

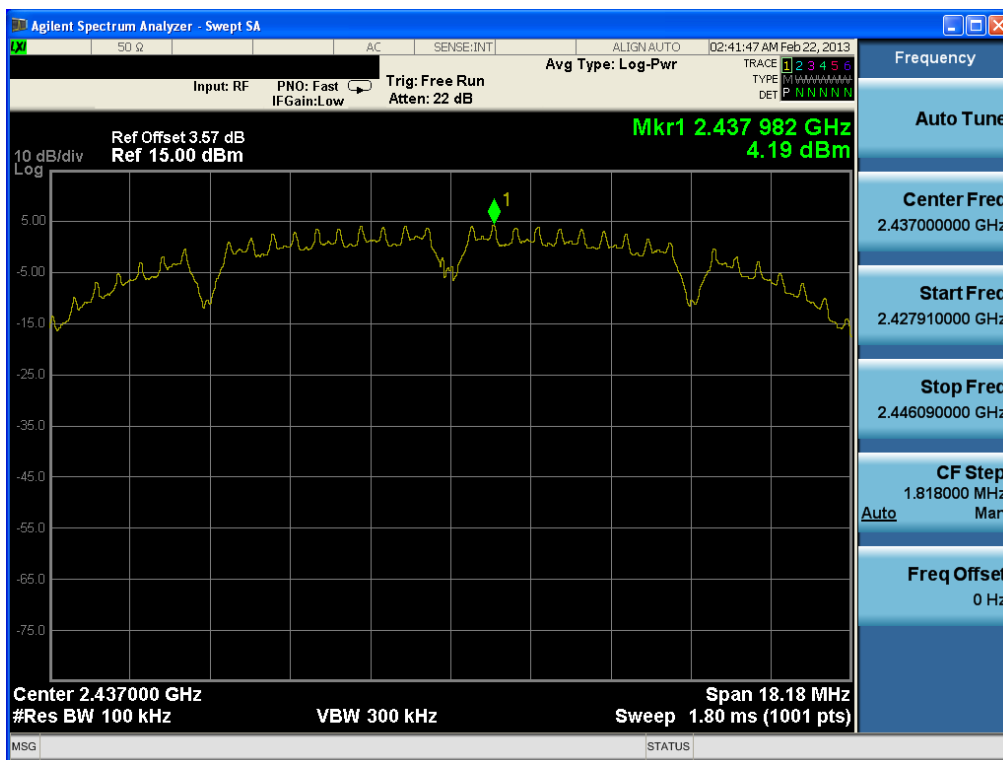

Conducted Spurious Emissions

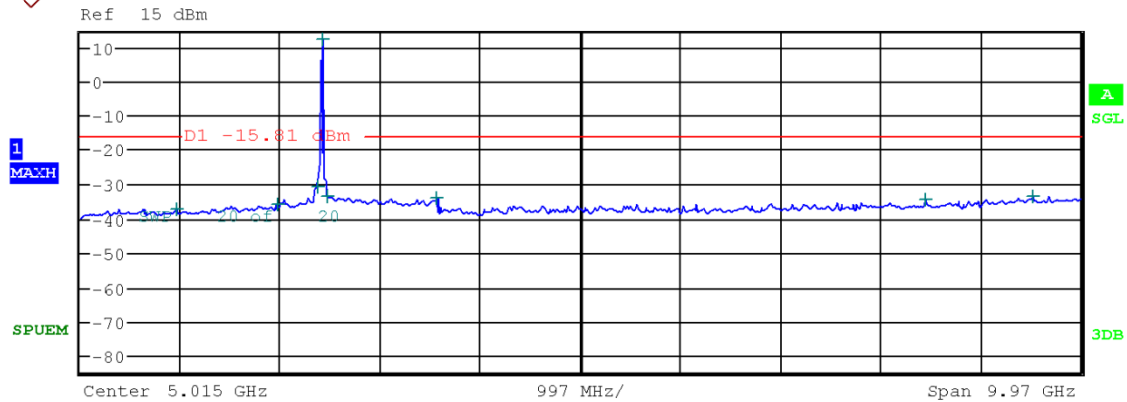


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	988.554000 M	-37.20
1.000 G	2.000 G	1.00 M	1.997700 G	-36.05
2.000 G	2.400 G	1.00 M	2.396960 G	-30.66
2.400 G	2.483 G	1.00 M	2.437166 G	12.26
2.483 G	3.000 G	1.00 M	2.492745 G	-33.65
3.000 G	6.000 G	1.00 M	3.585000 G	-33.87
6.000 G	9.000 G	1.00 M	8.449200 G	-34.54
9.000 G	10.000 G	1.00 M	9.514500 G	-33.56

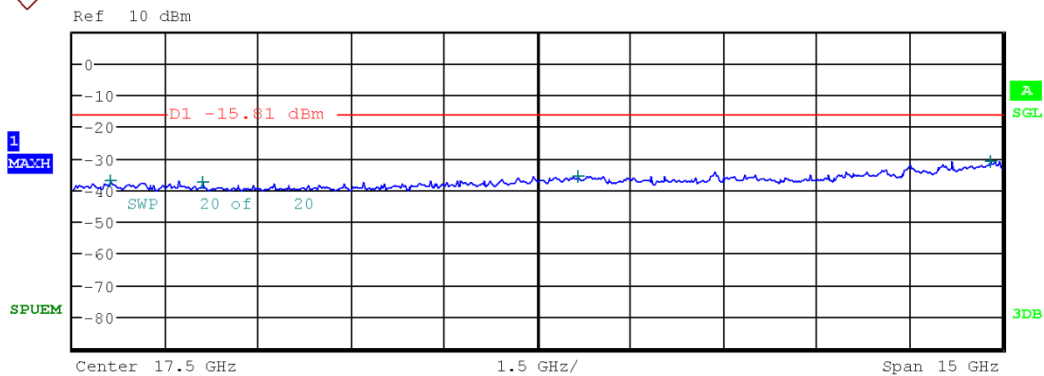


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
10.000 G	12.000 G	1.00 M	10.592900 G	-37.03
12.000 G	15.000 G	1.00 M	12.096750 G	-37.76
15.000 G	20.000 G	1.00 M	18.147000 G	-35.67
20.000 G	25.000 G	1.00 M	24.812000 G	-30.97

802.11b & 1Mbps & 2462MHz



Reference

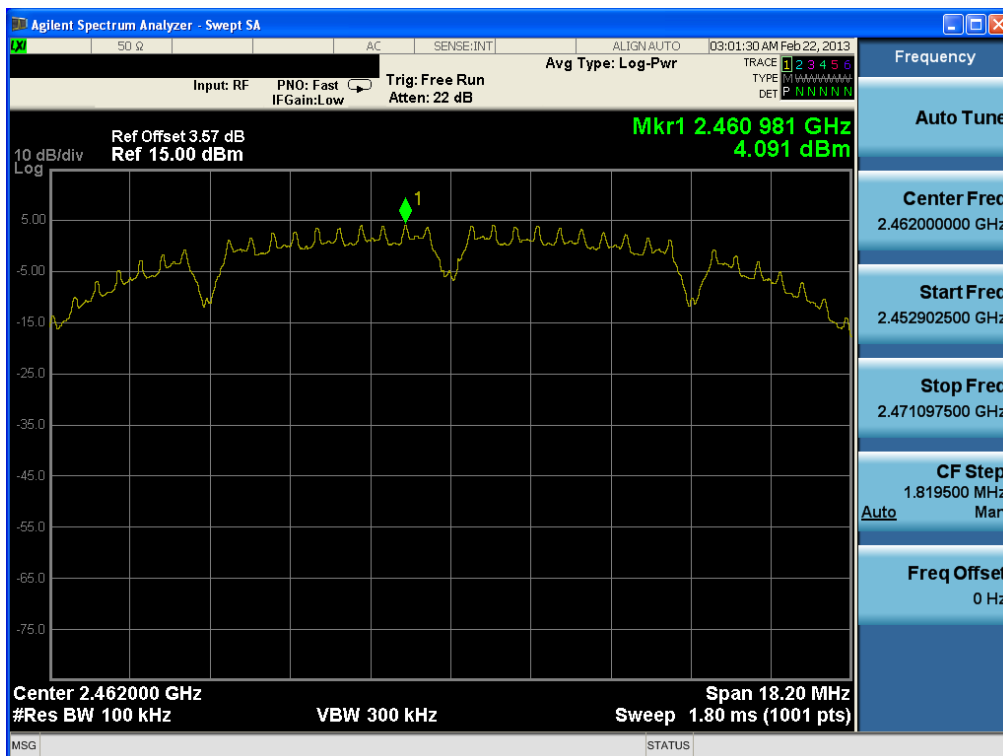

High Band-edge

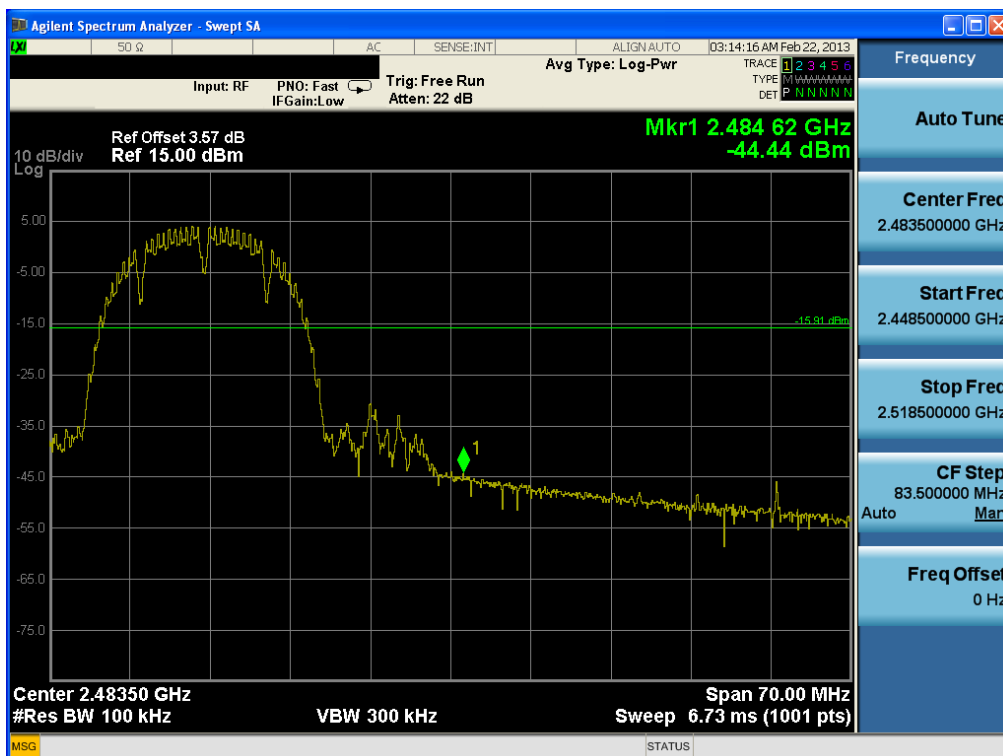


Conducted Spurious Emissions

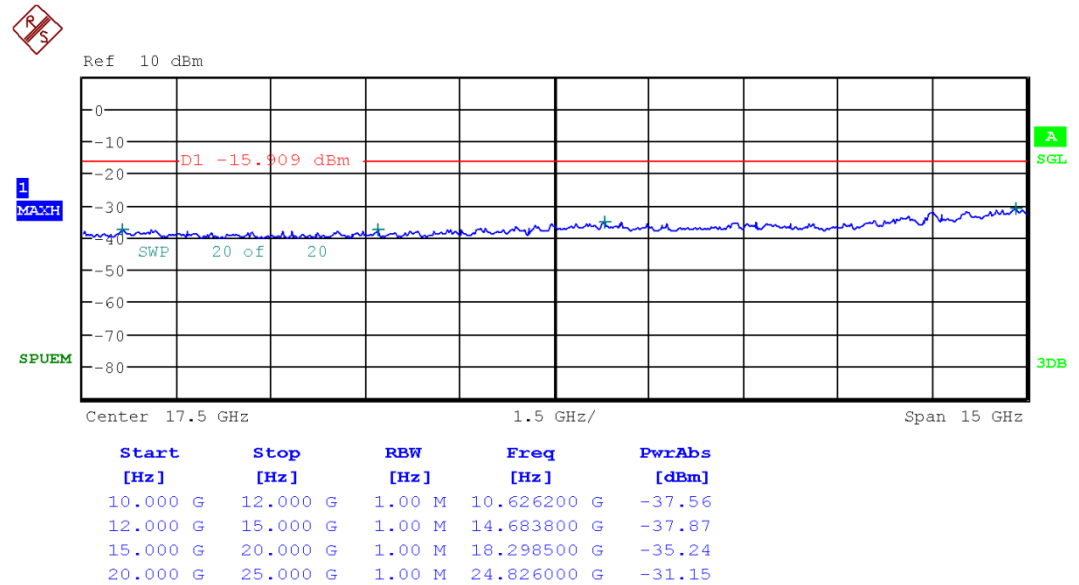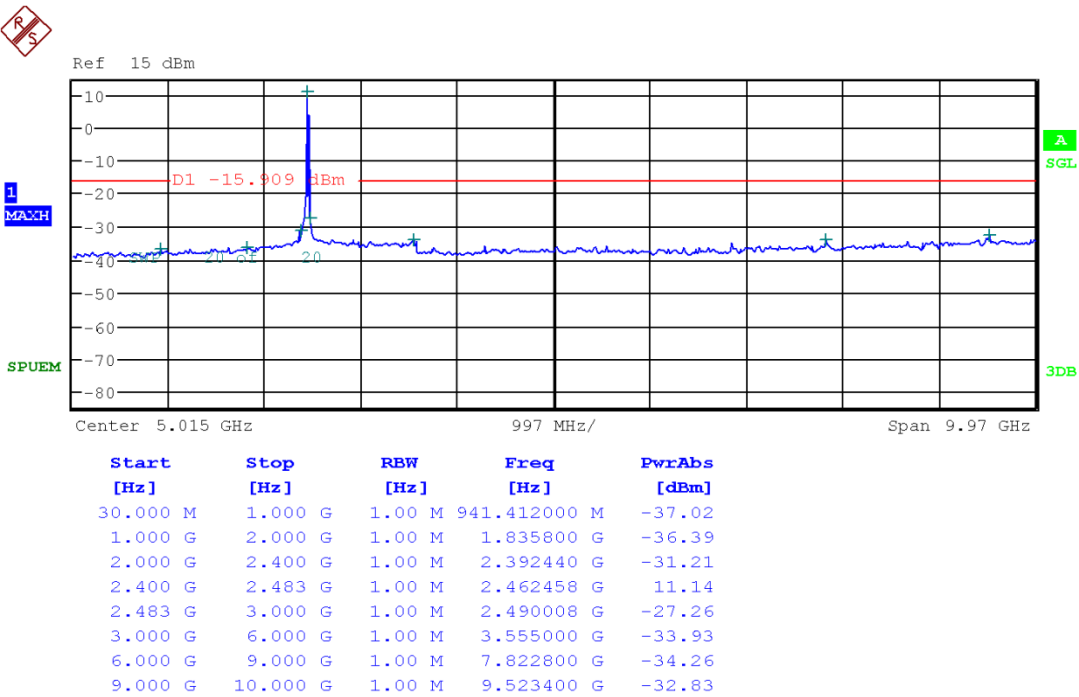


802.11g & 6Mbps & 2412MHz


Reference

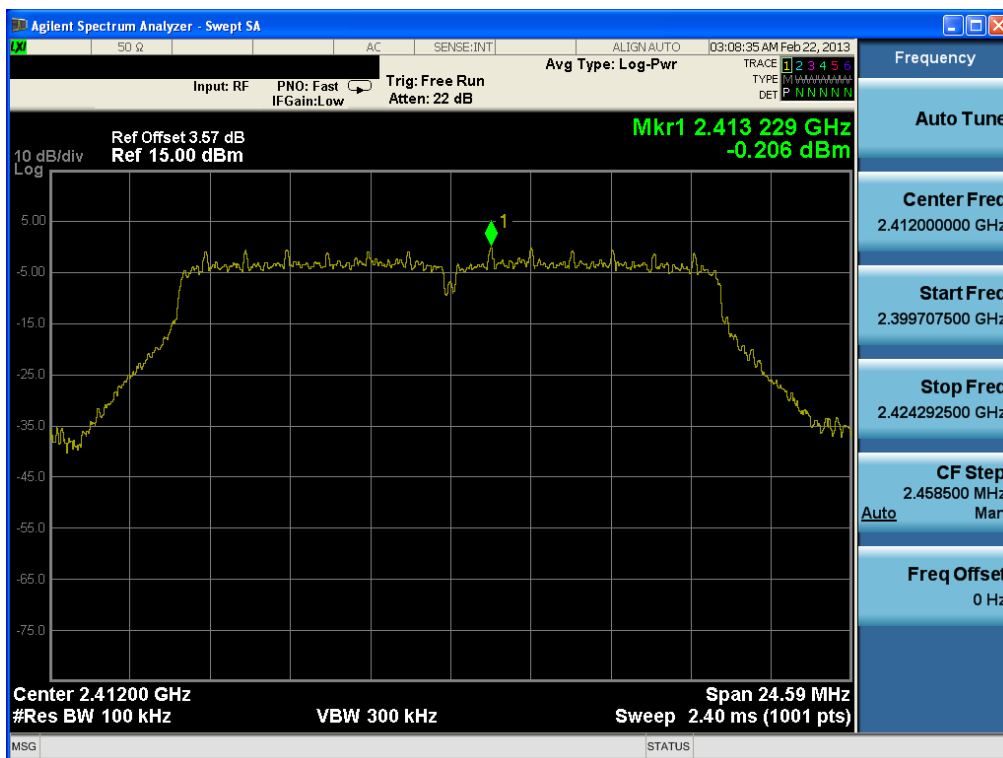


Low Band-edge

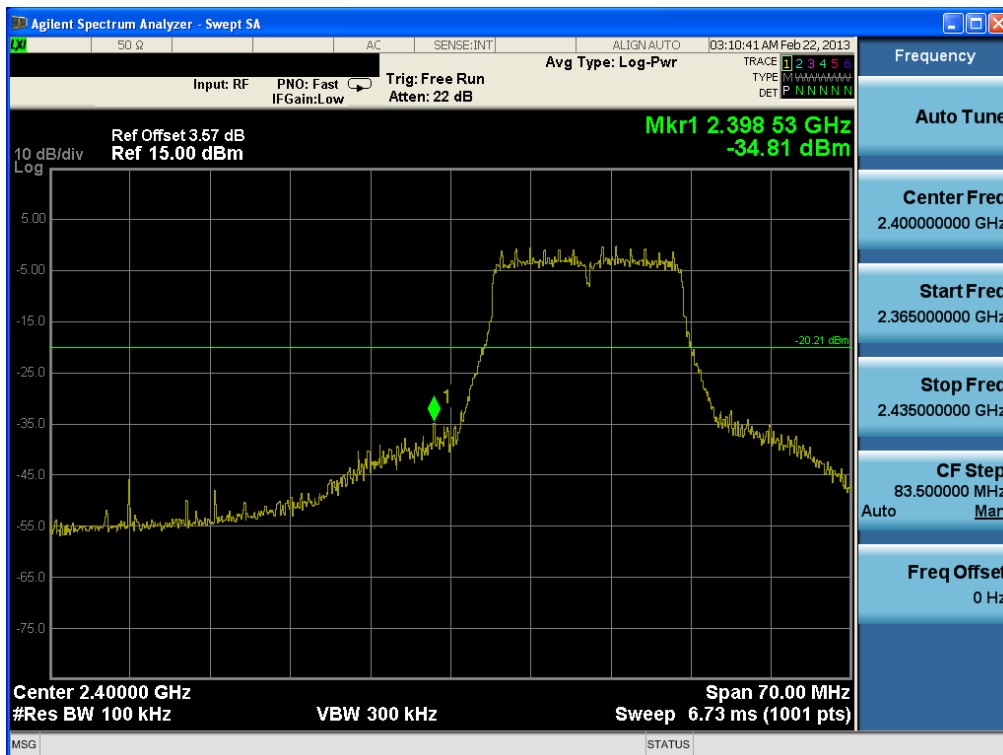

Conducted Spurious Emissions

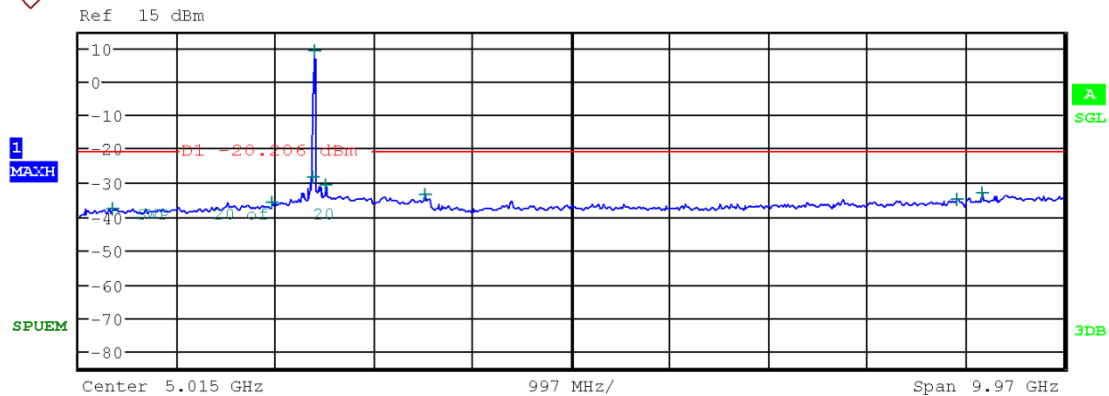


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	357.860000 M	-37.91
1.000 G	2.000 G	1.00 M	1.972600 G	-35.78
2.000 G	2.400 G	1.00 M	2.395120 G	-28.28
2.400 G	2.483 G	1.00 M	2.415949 G	9.20
2.483 G	3.000 G	1.00 M	2.528539 G	-30.73
3.000 G	6.000 G	1.00 M	3.531000 G	-33.75
6.000 G	9.000 G	1.00 M	8.919600 G	-34.83
9.000 G	10.000 G	1.00 M	9.168800 G	-33.06

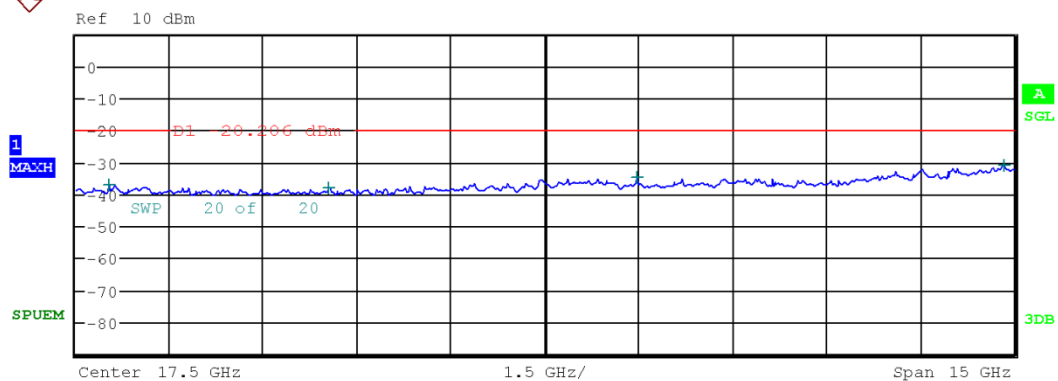

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
10.000 G	12.000 G	1.00 M	10.530800 G	-37.10
12.000 G	15.000 G	1.00 M	14.047500 G	-38.07
15.000 G	20.000 G	1.00 M	18.964000 G	-34.93
20.000 G	25.000 G	1.00 M	24.838000 G	-31.31

802.11g & 6Mbps & 2437MHz


Reference

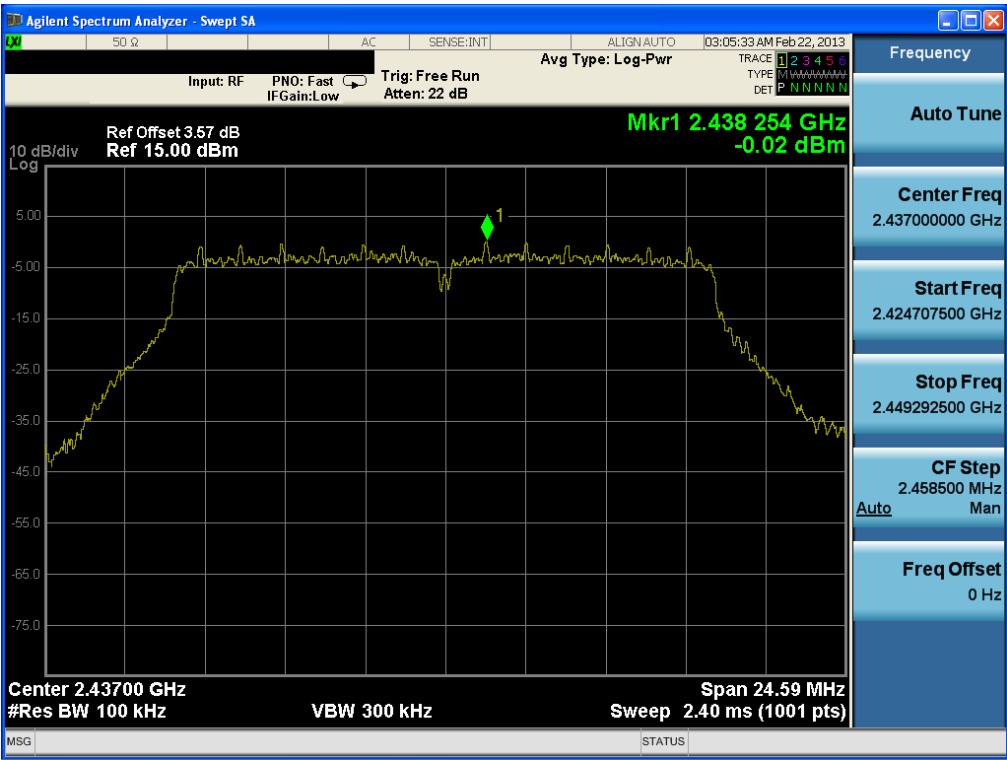

Conducted Spurious Emissions




Ref 15 dBm

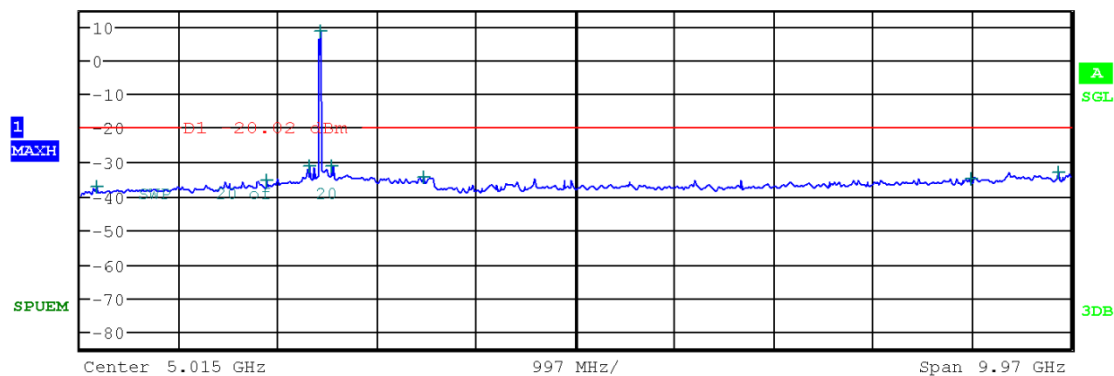

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	192.281000 M	-37.26
1.000 G	2.000 G	1.00 M	1.906100 G	-35.53
2.000 G	2.400 G	1.00 M	2.327000 G	-31.05
2.400 G	2.483 G	1.00 M	2.438777 G	8.59
2.483 G	3.000 G	1.00 M	2.557773 G	-31.11
3.000 G	6.000 G	1.00 M	3.482100 G	-34.64
6.000 G	9.000 G	1.00 M	8.994300 G	-35.06
9.000 G	10.000 G	1.00 M	9.879100 G	-33.06




Ref 10 dBm

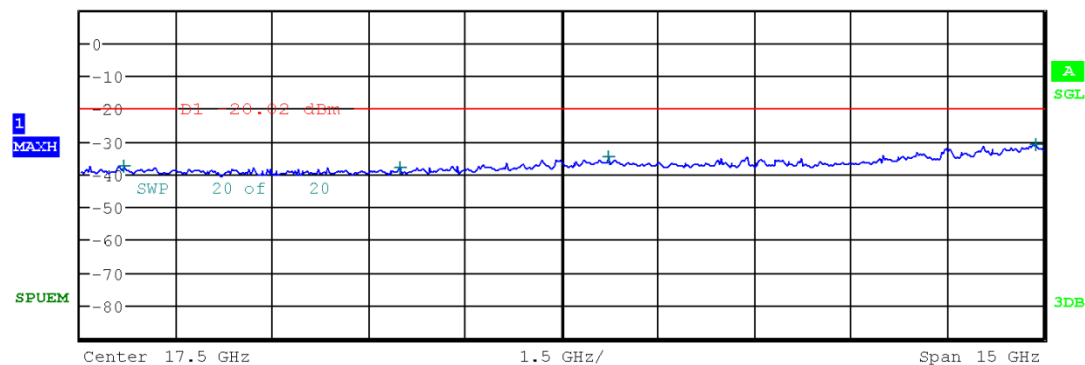


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
10.000 G	12.000 G	1.00 M	10.682700 G	-37.79
12.000 G	15.000 G	1.00 M	14.966700 G	-37.95
15.000 G	20.000 G	1.00 M	18.231000 G	-34.99
20.000 G	25.000 G	1.00 M	24.891500 G	-31.20



802.11g & 6Mbps & 2462MHz

Reference

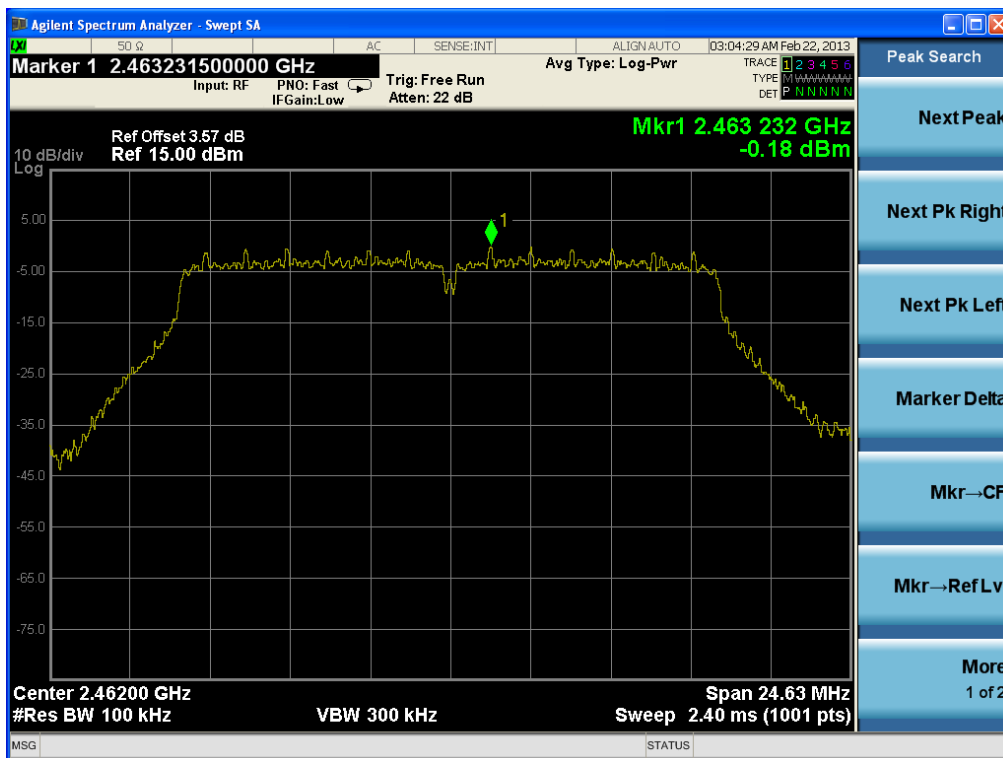

High Band-edge

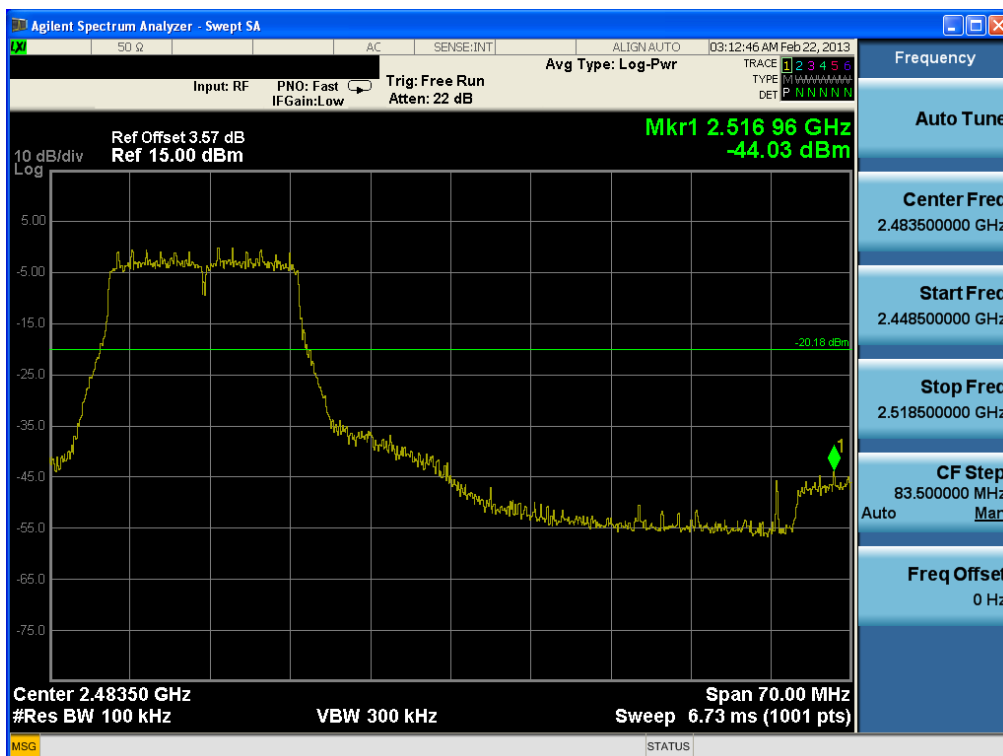

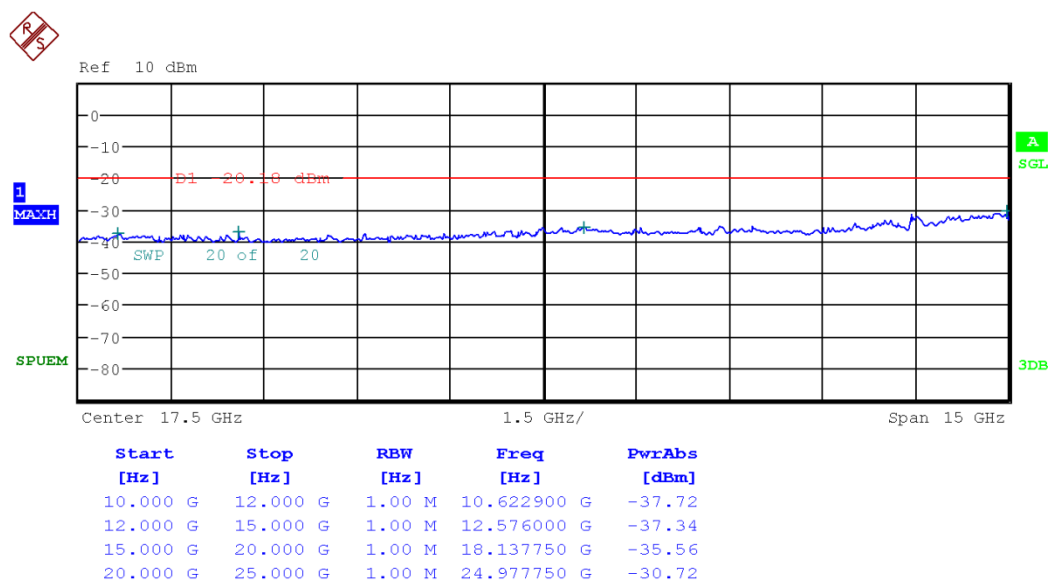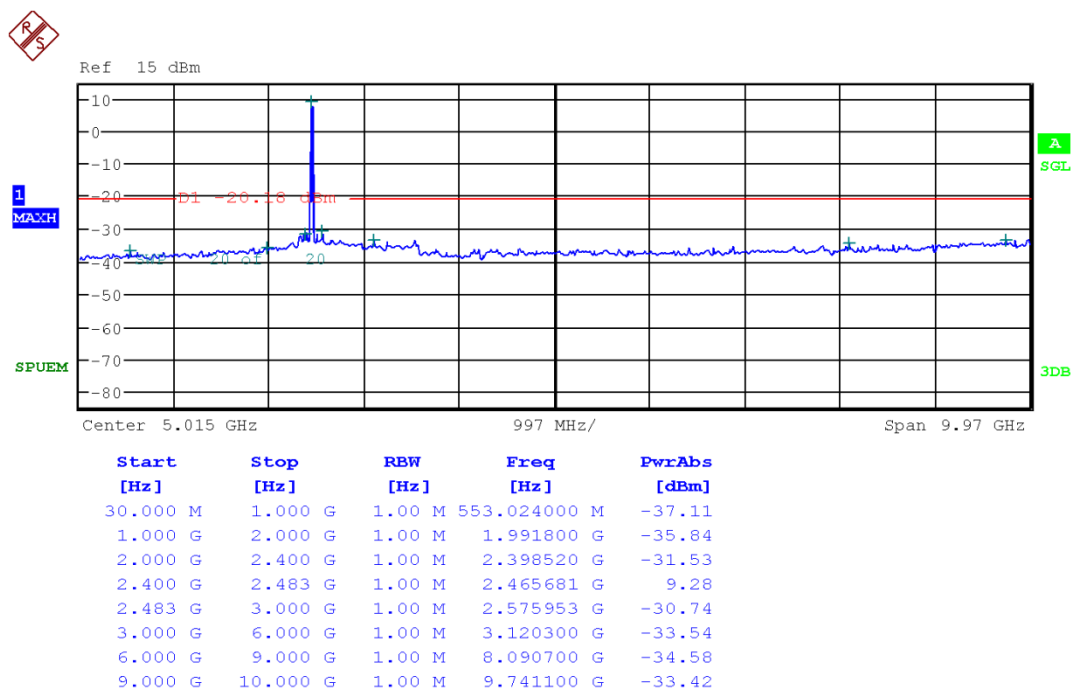Conducted Spurious Emissions

8.5 Radiated Spurious Emissions

Test Requirements and limit, §15.247(d), §15.205, §15.209 & RSS-210[A8.5], RSS-Gen [7.2.2]

In any 100 KHz bandwidth outside the operating frequency band. In case the emission falls within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

Test Configuration

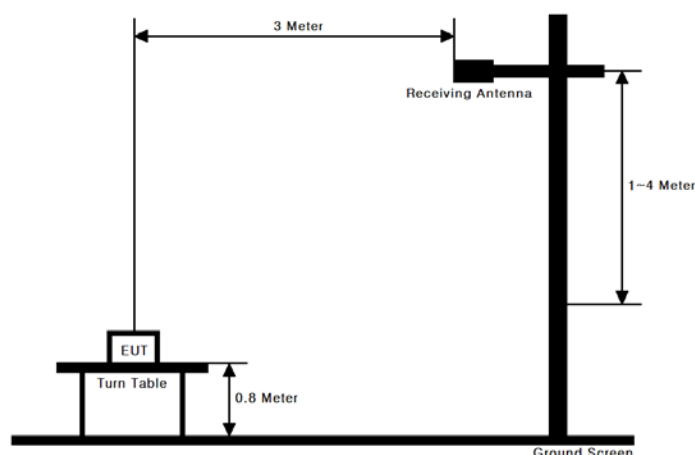

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note : Measurement Instrument Setting for Radiated Emission Measurements.

1. Frequency Range Below 1 GHz

RBW = 100 or 120 KHz, VBW = 3 x RBW , Detector = Peak or Quasi Peak

2. Frequency Range > 1 GHz

Peak Measurement(KDB 558074 Section 10.2.3.2)

RBW = 1 MHz , VBW = 3 MHz, Detector = Peak

Average Measurement(KDB 558074 Section 10.2.3.3)

1. Set analyzer center frequency to the frequency associated with the emission.
2. Set span to at least 1 MHz.
3. RBW = 1 MHz , VBW = 3 MHz
4. Detector = Power Average (RMS)
5. The number of measurement points = 1001 ($\geq 2 \times \text{SPAN}/\text{RBW}$)
6. Sweep Time = 1 S ($\geq 10 \times (\text{The number of measurement points in sweep}) \times (\text{Transmission symbol period}^{\text{Note 2}})$)
7. Perform the measurement over a single sweep.

Note1 : Below duty cycles were used for testing and duty cycle correction factor was included on the test results for 802.11b and 802.11g since they have less than 98 % duty cycle as described below and measured with free run mode.

Band	Duty Cycle(%)	T _{on} (ms)	T _{on} + T _{off} (ms)	DCF (20log(1/Duty)) (dB)
802.11b	96.06	12.45	12.96	0.35
802.11g	85.86	2.065	2.405	1.32
-	-	-	-	-

Note 2 : The transmission symbol period (in second) is defined as the reciprocal of the symbol rate (in bauds or symbols per second). Below is the sample calculation to determine minimum sweep time based on the EUT transmission data rate)

Sample Calculation to determine Sweep Time

1. Transmission Symbol Period" is defined as the reciprocal of the symbol rate, R_s
2. An 802.11b signal operating at 1 Mbps uses BPSK modulation which uses 2 bits/symbol and, thus, has a symbol rate, R_s of 0.5 Msps.
3. Transmission Symbol Period = $1 / R_s = 2 \text{ us}$
4. Minimum sweep time = $10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period}) = 10 \times 1001 \text{ points} \times 2 \text{ us} = 20 \text{ ms}$

9KHz ~ 25GHz Data(802.11b & 1Mbps)**ANT1****▪ Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.63	H	X	QP	51.22	-8.60	N/A	42.62	46.00	3.38
699.98	H	X	QP	43.40	-0.70	N/A	42.70	46.00	3.30
745.07	H	X	QP	41.53	0.10	N/A	41.63	46.00	4.37
2311.20	V	Y	PK	62.43	-2.45	N/A	59.98	74.00	14.02
2312.00	V	Y	AV	52.78	-2.45	0.35	50.68	54.00	3.32
2388.64	H	X	PK	69.74	-2.33	N/A	67.41	74.00	6.59
2388.64	H	X	AV	43.26	-2.33	0.35	41.28	54.00	12.72

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.71	H	X	QP	51.05	-8.60	N/A	42.45	46.00	3.55
699.97	H	X	QP	43.21	-0.70	N/A	42.51	46.00	3.49
745.07	H	X	QP	41.28	0.10	N/A	41.38	46.00	4.62
2376.80	H	X	PK	59.20	-2.33	N/A	56.87	74.00	17.13
2374.00	H	X	AV	40.11	-2.33	0.35	38.13	54.00	15.87
2487.88	H	Z	PK	65.27	-2.24	N/A	63.03	74.00	10.97
2486.99	H	Z	AV	51.23	-2.24	0.35	49.34	54.00	4.66

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.52	H	X	QP	50.98	-8.60	N/A	42.38	46.00	3.62
699.95	H	X	QP	43.63	-0.70	N/A	42.93	46.00	3.07
745.10	H	X	QP	40.95	0.10	N/A	41.05	46.00	4.95
2362.24	V	Y	PK	58.17	-2.33	N/A	55.84	74.00	18.16
2362.00	V	Y	AV	48.31	-2.33	0.35	46.33	54.00	7.67
2484.12	H	X	PK	72.57	-2.24	N/A	70.33	74.00	3.67
2484.12	H	X	AV	45.72	-2.24	0.35	43.83	54.00	10.17

Note.

1.No other spurious and harmonic emissions were found greater than listed emissions on above table.

2.Above listed point data is the worst case data.

3.Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG + DCF (if necessary)

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11b & 1Mbps)**ANT2****▪ Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.56	H	X	QP	50.55	-8.60	N/A	41.95	46.00	4.05
699.90	H	X	QP	42.94	-0.70	N/A	42.24	46.00	3.76
745.21	H	X	QP	41.97	0.10	N/A	42.07	46.00	3.93
2312.08	V	Y	PK	57.62	-2.45	N/A	55.17	74.00	18.83
2312.08	V	Y	AV	50.33	-2.45	0.35	48.23	54.00	5.77
2386.56	H	Z	PK	72.11	-2.33	N/A	69.78	74.00	4.22
2386.50	H	Z	AV	47.36	-2.33	0.35	45.38	54.00	8.62

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
248.00	H	X	QP	50.87	-8.60	N/A	42.27	46.00	3.73
699.89	H	X	QP	43.26	-0.70	N/A	42.56	46.00	3.44
745.09	H	X	QP	40.94	0.10	N/A	41.04	46.00	4.96
2378.96	H	X	PK	62.87	-2.33	N/A	60.54	74.00	13.46
2374.24	H	X	AV	41.66	-2.33	0.35	39.68	54.00	14.32
2486.83	H	Z	PK	60.76	-2.24	N/A	58.52	74.00	15.48
2487.04	H	Z	AV	46.25	-2.24	0.35	44.36	54.00	9.64

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.99	H	X	QP	50.54	-8.60	N/A	41.94	46.00	4.06
699.98	H	X	QP	43.06	-0.70	N/A	42.36	46.00	3.64
745.06	H	X	QP	41.44	0.10	N/A	41.54	46.00	4.46
2361.92	V	Y	PK	59.18	-2.33	N/A	56.85	74.00	17.15
2362.00	V	Y	AV	48.92	-2.33	0.35	46.94	54.00	7.06
2483.86	H	X	PK	73.24	-2.24	N/A	71.00	74.00	3.00
2483.82	H	X	AV	46.74	-2.24	0.35	44.85	54.00	9.15

Note.

1.No other spurious and harmonic emissions were found greater than listed emissions on above table.

2.Above listed point data is the worst case data.

3.Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG + DCF (if necessary)

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11g & 6Mbps)**ANT1**▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
248.37	H	X	QP	49.80	-8.60	N/A	41.20	46.00	4.80
699.95	H	X	QP	42.86	-0.70	N/A	42.16	46.00	3.84
745.10	H	X	QP	42.38	0.10	N/A	42.48	46.00	3.52
2357.04	V	Y	PK	60.81	-2.45	N/A	58.36	74.00	15.64
2357.20	V	Y	AV	49.92	-2.45	1.32	48.79	54.00	5.21
2388.56	V	Y	PK	66.39	-2.33	N/A	64.06	74.00	9.94
2390.00	V	Y	AV	48.76	-2.33	1.32	47.75	54.00	6.25

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
248.36	H	X	QP	50.17	-8.60	N/A	41.57	46.00	4.43
699.97	H	X	QP	43.74	-0.70	N/A	43.04	46.00	2.96
745.05	H	X	QP	41.22	0.10	N/A	41.32	46.00	4.68
2321.84	V	Y	PK	61.49	-2.33	N/A	59.16	74.00	14.84
2321.84	V	Y	AV	51.16	-2.33	1.32	50.15	54.00	3.85
2378.16	V	Y	PK	62.06	-2.24	N/A	59.82	74.00	14.18
2378.48	V	Y	AV	51.55	-2.24	1.32	50.63	54.00	3.37

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
248.11	H	X	QP	50.46	-8.60	N/A	41.86	46.00	4.14
699.94	H	X	QP	43.18	-0.70	N/A	42.48	46.00	3.52
745.13	H	X	QP	41.06	0.10	N/A	41.16	46.00	4.84
2338.88	V	Y	PK	63.43	-2.33	N/A	61.10	74.00	12.90
2339.36	V	Y	AV	52.48	-2.33	1.32	51.47	54.00	2.53
2483.50	V	Y	PK	70.61	-2.24	N/A	68.37	74.00	5.63
2483.50	V	Y	AV	52.84	-2.24	1.32	51.92	54.00	2.08

Note.

1.No other spurious and harmonic emissions were found greater than listed emissions on above table.

2.Above listed point data is the worst case data.

3.Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG + DCF (if necessary)

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11g & 6Mbps)**ANT2****▪ Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.61	H	X	QP	50.13	-8.60	N/A	41.53	46.00	4.47
699.97	H	X	QP	43.25	-0.70	N/A	42.55	46.00	3.45
745.09	H	X	QP	41.89	0.10	N/A	41.99	46.00	4.01
2357.12	V	Y	PK	61.47	-2.45	N/A	59.02	74.00	14.98
2354.88	V	Y	AV	49.56	-2.45	1.32	48.43	54.00	5.57
2389.52	H	Y	PK	65.09	-2.33	N/A	62.76	74.00	11.24
2389.76	H	Y	AV	48.97	-2.33	1.32	47.96	54.00	6.04

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
248.00	H	X	QP	50.57	-8.60	N/A	41.97	46.00	4.03
699.99	H	X	QP	43.26	-0.70	N/A	42.56	46.00	3.44
745.13	H	X	QP	41.76	0.10	N/A	41.86	46.00	4.14
2324.83	V	Y	PK	60.88	-2.33	N/A	58.55	74.00	15.45
2322.06	V	Y	AV	49.66	-2.33	1.32	48.65	54.00	5.35
2376.56	V	Y	PK	60.43	-2.24	N/A	58.19	74.00	15.81
2379.84	V	Y	AV	48.81	-2.24	1.32	47.89	54.00	6.11

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
247.88	H	X	QP	51.05	-8.60	N/A	42.45	46.00	3.55
699.94	H	X	QP	42.94	-0.70	N/A	42.24	46.00	3.76
745.03	H	X	QP	41.81	0.10	N/A	41.91	46.00	4.09
2339.68	V	Y	PK	61.47	-2.33	N/A	59.14	74.00	14.86
2340.16	V	Y	AV	40.51	-2.33	1.32	39.50	54.00	14.50
2486.63	V	Y	PK	67.45	-2.24	N/A	65.21	74.00	8.79
2483.50	V	Y	AV	49.67	-2.24	1.32	48.75	54.00	5.25

Note.

1.No other spurious and harmonic emissions were found greater than listed emissions on above table.

2.Above listed point data is the worst case data.

3.Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG + DCF (if necessary)

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, DCF = Duty Cycle Correction Factor.

8.6 Power-line Conducted Emissions

Test Requirements and limit, §15.207& RSS-Gen [7.2.2]

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs for the actual connections between EUT and support equipment.

Test Mode

The all modes of EUT operation were investigated and the worst case mode was reported.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ **RESULT PLOTS****AC Line Conducted Emissions (Graph)**

Test Mode: 802.11b(2.4GHz Band)



**Results of Conducted Emission**Digital EMC
Date : 2013-02-22

Model No. : CX875-3PB
Type :
Serial No. : Identical prototype
Test Condition : 802.11b

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 22 °C 40 % R.H.
Operator : J.J.LEE

Memo :

LIMIT : CISPR22_B_QP
CISPR22_B_AV

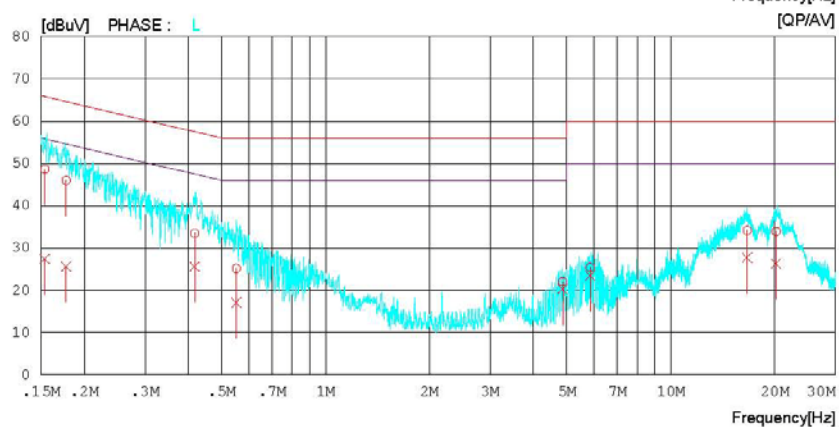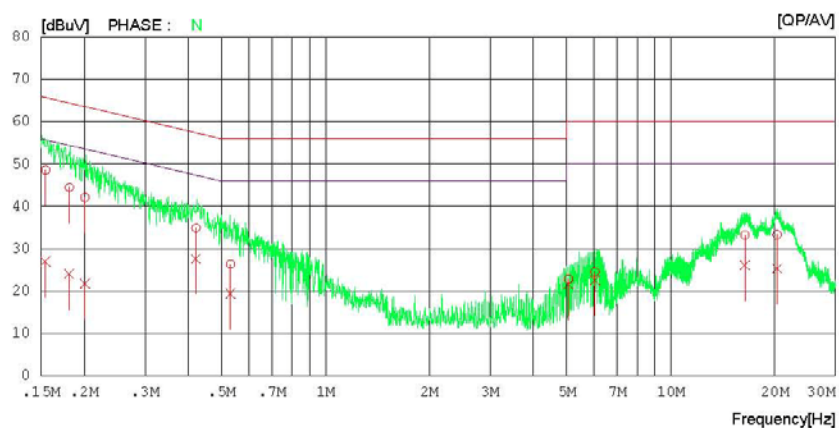

AC Line Conducted Emissions (List)

Test Mode: 802.11b(2.4GHz Band)

Results of Conducted EmissionDigital EMC
Date : 2013-02-22

Model No.	: CX875-3PB	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	: Identical prototype	Temp/Humi.	: 22 'C 40 % R.H.
Test Condition	: 802.11b	Operator	: J.J.LEE

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15449	48.4	26.8	0.2	48.6	27.0	65.8	55.8	17.2	28.8	N
2	0.18119	44.3	23.9	0.2	44.5	24.1	64.4	54.4	19.9	30.3	N
3	0.20103	41.9	21.6	0.2	42.1	21.8	63.6	53.6	21.5	31.8	N
4	0.42150	34.7	27.5	0.2	34.9	27.7	57.4	47.4	22.5	19.7	N
5	0.53056	26.2	19.2	0.2	26.4	19.4	56.0	46.0	29.6	26.6	N
6	5.05700	22.4	21.1	0.4	22.8	21.5	60.0	50.0	37.2	28.5	N
7	6.03150	23.9	22.0	0.5	24.4	22.5	60.0	50.0	35.6	27.5	N
8	16.40850	32.3	25.3	0.8	33.1	26.1	60.0	50.0	26.9	23.9	N
9	20.32450	32.4	24.4	0.9	33.3	25.3	60.0	50.0	26.7	24.7	N
10	0.15368	48.4	27.3	0.2	48.6	27.5	65.8	55.8	17.2	28.3	L
11	0.17728	45.8	25.5	0.2	46.0	25.7	64.6	54.6	18.6	28.9	L
12	0.41803	33.3	25.4	0.2	33.5	25.6	57.5	47.5	24.0	21.9	L
13	0.55186	25.0	16.9	0.2	25.2	17.1	56.0	46.0	30.8	28.9	L
14	4.86650	21.7	19.9	0.4	22.1	20.3	56.0	46.0	33.9	25.7	L
15	5.84350	25.0	23.0	0.5	25.5	23.5	60.0	50.0	34.5	26.5	L
16	16.65750	33.3	27.0	0.8	34.1	27.8	60.0	50.0	25.9	22.2	L
17	20.19150	33.0	25.4	0.9	33.9	26.3	60.0	50.0	26.1	23.7	L

8.7 Occupied Bandwidth

Test Requirements, RSS-Gen [4.6.1]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.


■ TEST RESULTS: **Comply**

Test Mode	Tested Channel	Test Results (MHz)
802.11b	Lowest	16.0754
	Middle	16.0767
	Highest	16.0751
802.11g	Lowest	16.6206
	Middle	16.6369
	Highest	16.5725

Note 1: See next pages for actual measured spectrum plots.


Occupied Bandwidth (99%)

802.11b& 1Mbps & 2412MHz

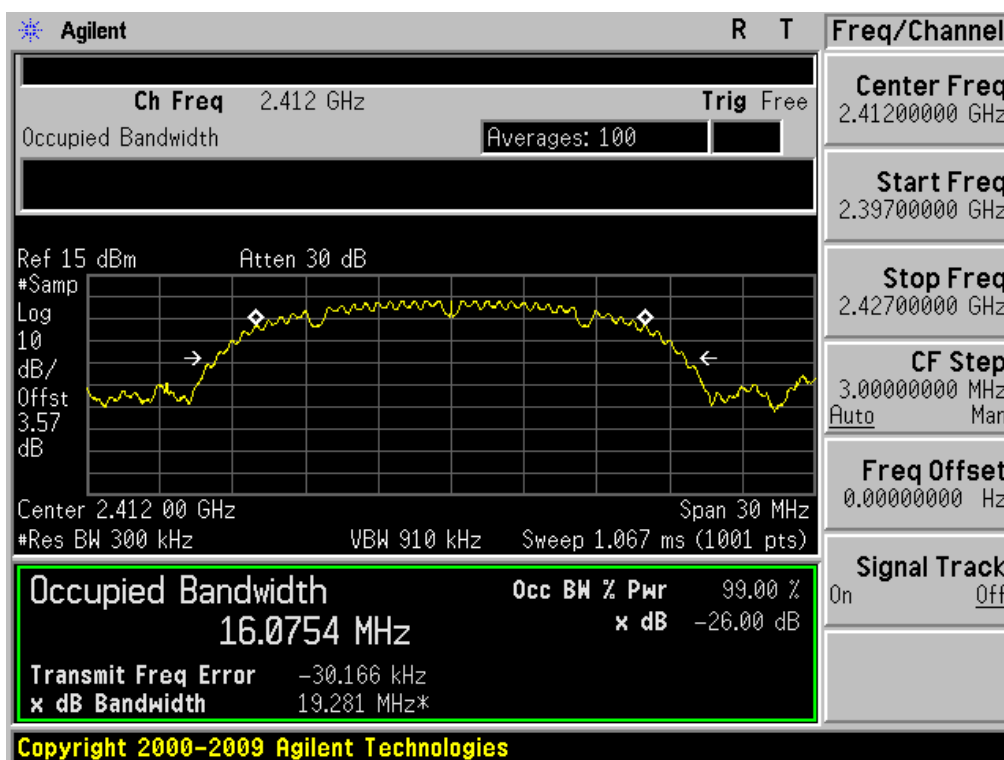


Occupied Bandwidth (99%)

802.11b& 1Mbps & 2437MHz

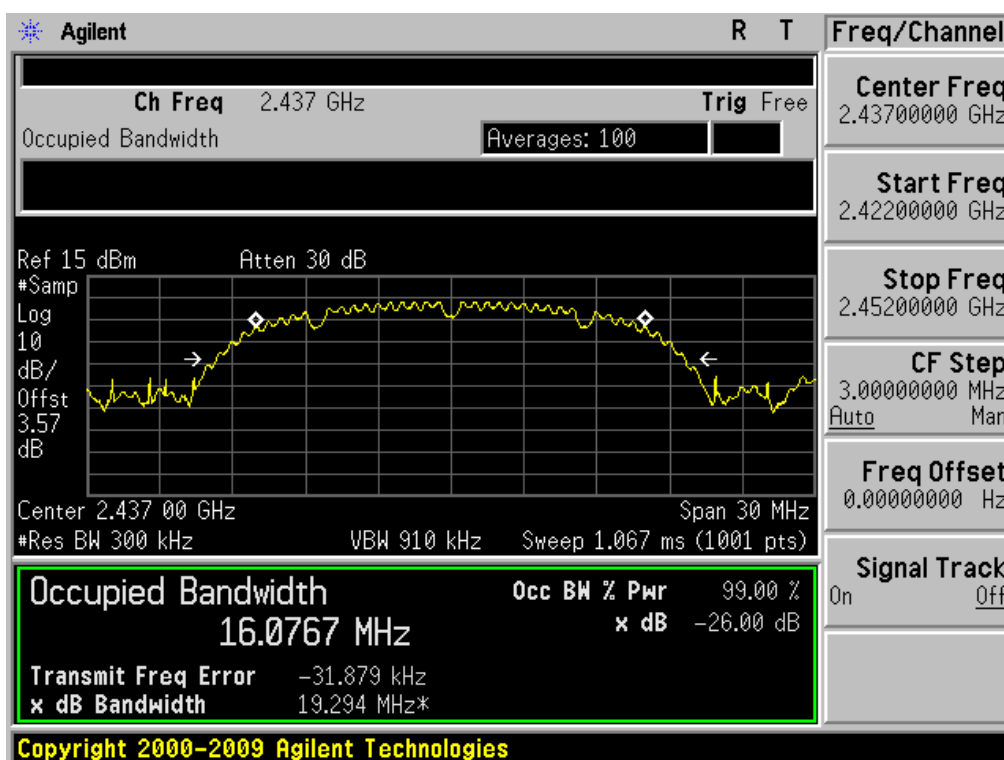


Occupied Bandwidth (99%)

802.11b& 1Mbps & 2462MHz

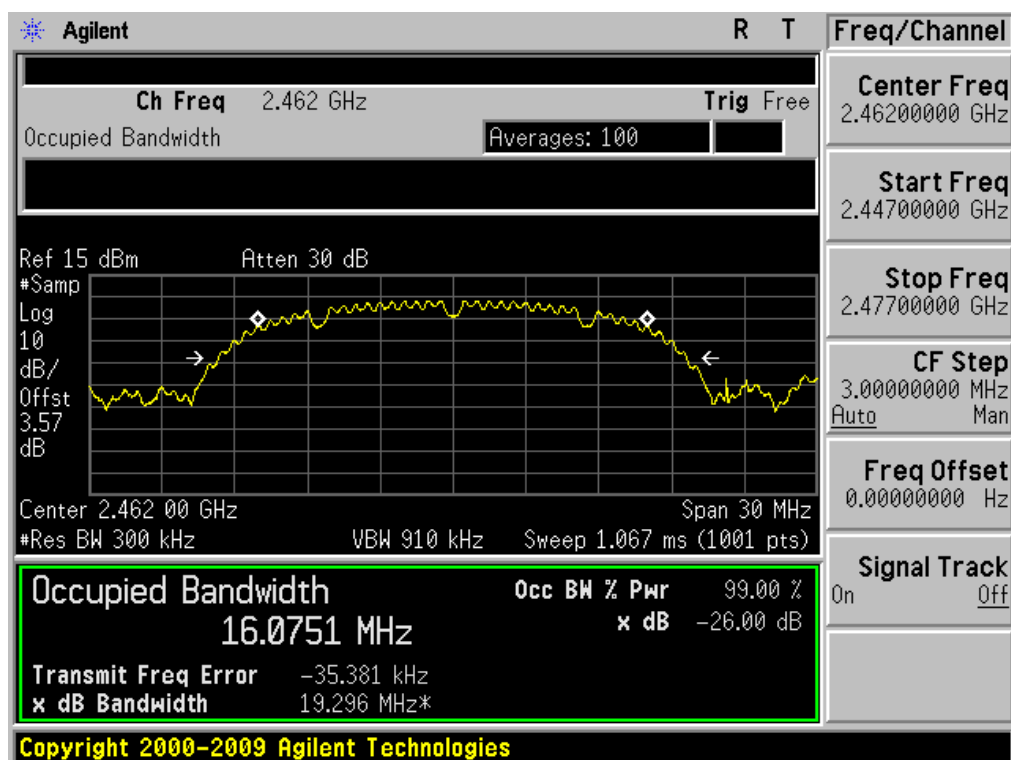


Occupied Bandwidth (99%)

802.11g&6Mbps & 2412MHz

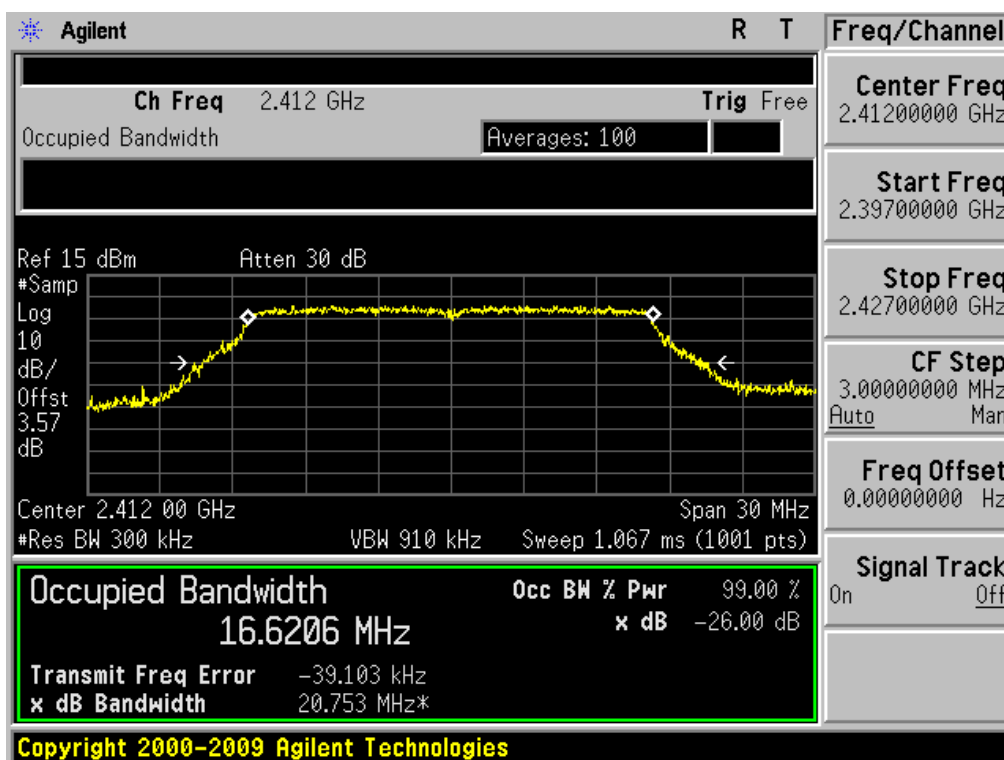


Occupied Bandwidth (99%)

802.11g&6Mbps & 2437MHz

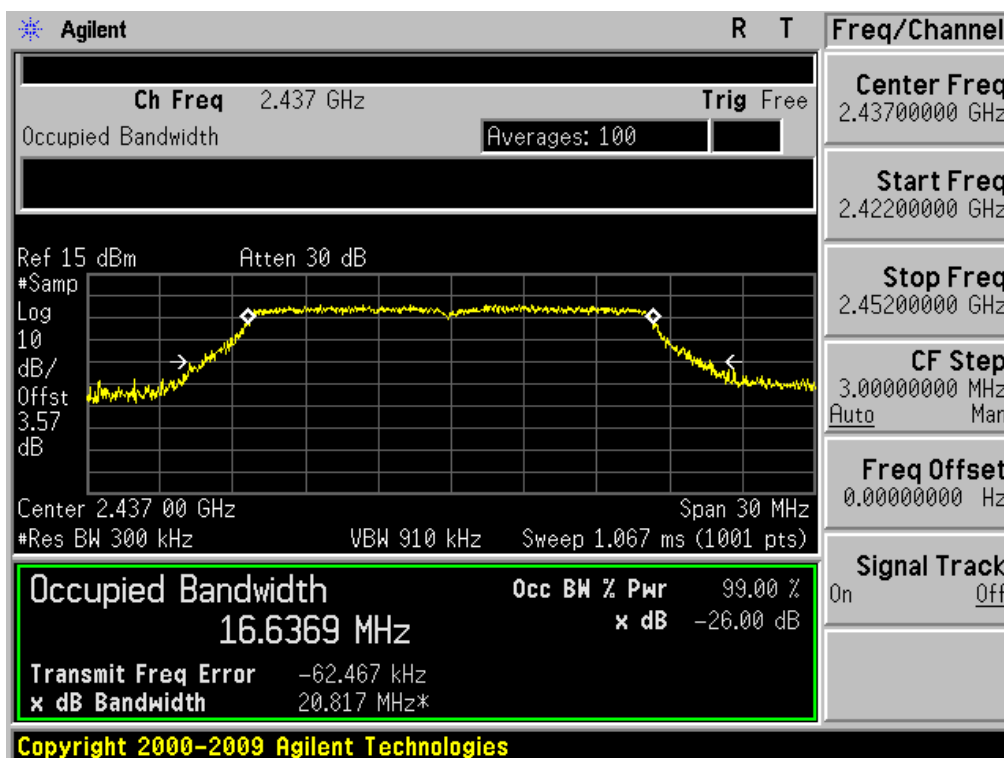

Occupied Bandwidth (99%)

802.11g&6Mbps & 2462MHz

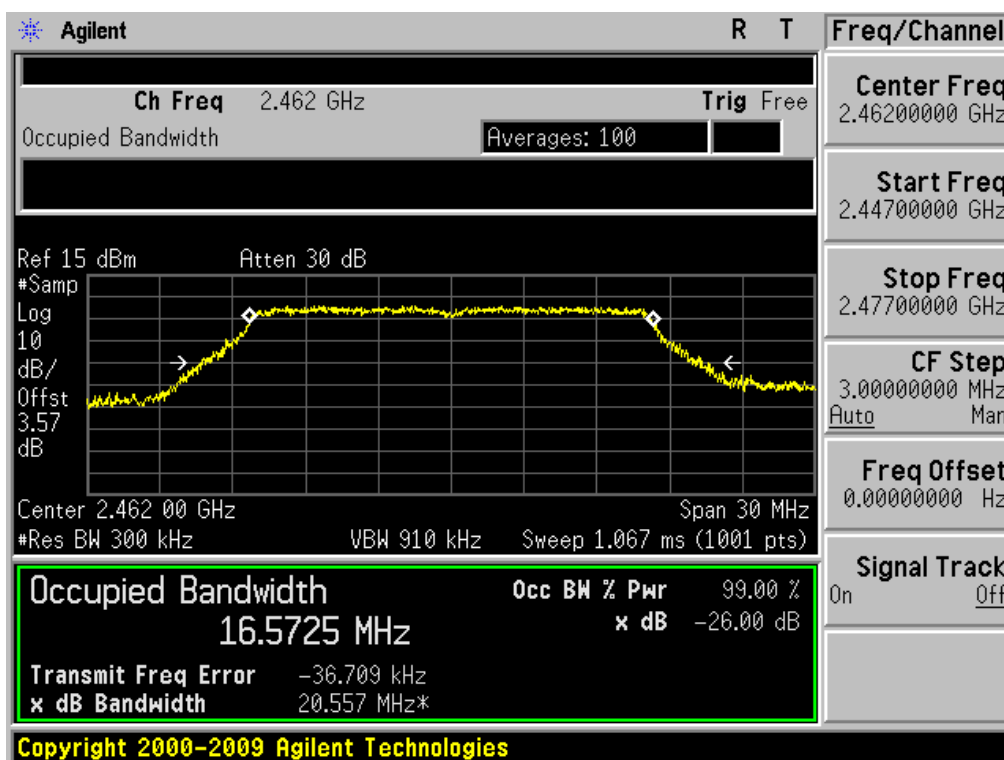


9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4445A	12/10/22	13/10/22	MY42510129
Spectrum Analyzer	Rohde Schwarz	FSQ26	12/02/06	13/02/06	200445
			13/02/14	14/02/14	
MXA Signal Analyzer	Agilent Technologies, Inc	N9020A	13/01/08	14/01/08	MY49100833
Power Sensor	Rohde Schwarz	NRP-Z81	12/06/28	13/06/28	1137.9009.02-101001
Virtual Power Meter(S/W)	Rohde Schwarz	R&S Power Viewer Plus	-	-	V 4.1.0
Digital Multimeter	H.P	34401A	12/03/05	13/03/05	3146A13475
Signal Generator	Rohde Schwarz	SMR20	12/03/05	13/03/05	101251
Thermo hygrometer	BODYCOM	BJ5478	12/06/20	13/06/20	120612-2
DC Power Supply	HP	6622A	12/03/05	13/03/05	3448A03760
High-pass filter	Wainwright	WHNX3.0	12/09/17	13/09/17	9
HORN ANT	ETS	3115	12/02/20	14/02/20	6419
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
LOOP Antenna	Schwarzbeck	FMZB1513	12/09/24	13/09/24	1513-128
Attenuator (3dB)	WEINSCHL	56-3	12/09/17	13/09/17	Y2342
Amplifier (30dB)	H.P	8449B	12/03/05	13/03/05	3008A00370
EMI TEST RECEIVER	R&S	ESU	13/01/08	14/01/08	100014
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Amplifier (22dB)	H.P	8447E	13/01/08	14/01/08	2945A02865
EMI TEST RECEIVER	R&S	ESCI	12/03/06	13/03/06	100364
CVCF	KIKUSUI	PCR1000L	12/09/15	13/09/15	14110610
LISN	Narda S.T.S. / PMM	PMM L2-16B	12/07/25	13/07/25	000WX20305

APPENDIX I

Conducted Test set up Diagram & Path loss Information

Conducted Measurement(30MHz ~ 26.5GHz)

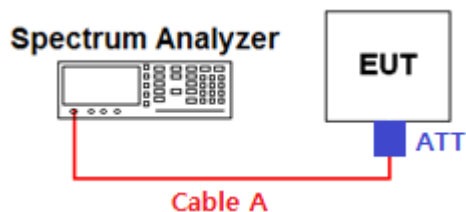

Path loss value information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	3.10	10	4.24
1	3.37	15	4.67
2.412 ~ 2.462	3.57	20	5.10
5	3.78	26.5	5.35

Note. 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (=S/A's offset value) = Cable A + ATT(Attenuator, Applied only when it was used externally)

Note. 2: For conducted spurious emissions, the path loss values were saved as the transducer factor on the spurious measurement function of the spectrum analyzer and the transducer factor of tested frequency is calculated and corrected automatically by the spectrum analyzer's measurement function.