

HCT CO., LTD.



PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL: +82 31 639 8539 FAX: +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

LG Electronics Inc.

**60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea**

Date of Issue: June 30, 2009

Test Report No.: HCT-EF09-0619

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJGW525F

Classification / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B
Equipment type : Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
Trade name / Model(s) : LG Electronics Inc. / GW525f
Port / Connector(s) : USB data port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See test report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.


Report prepared by
: Kun Hyoung Kim
Test Engineer of EMC Tech. Part


Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	3
1.1 Product description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested system details.....	4
1.4 Cable description.....	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology.....	5
1.7 Test facility.....	5
1.8 Frequency range of radiated measurements	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 Configuration of tested system.....	6
3. PRELIMINARY TEST.....	7
3.1 Conducted Emission test.....	7
3.2 Radiated Emission test.....	7
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY.....	8
4.1 Conducted Emission test.....	8
4.2 Radiated Emission test.....	13
5. FIELD STRENGTH CALCULATION.....	14
6. TEST EQUIPMENT.....	15
7. CONCLUSION.....	16

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

The LG Electronics Inc. Model: GW525f, Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth.

It's basic purpose is used for communications. It transmits from GSM 850 (824.20 MHz to 848.80 MHz), GSM 1 900(1 850.20 MHz to 1 909.80 MHz), WCDMA 850(826.40 MHz to 846.60 MHz), and receives from GSM 850 (869.20 MHz to 893.80 MHz), GSM 1 900 (1 930.20 MHz to 1 989.80 MHz), WCDMA 850 (871.40 MHz to 891.60 MHz).

Model	GW525f
FCC ID	BEJGW525F
E.U.T type	Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth
TX frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850)
RX frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device type	Manufacturer	Model number /Part number	FCC ID / DoC	Connected to
Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth	LG	GW525f	BEJGW525F	Notebook PC TA
Travel adaptor	DONGDO	STA-U12ED	-	E.U.T
Notebook PC	TOSHIBA	PSMA2K-01D002	DoC	E.U.T, TA
Notebook PC adaptor	DELTA	SADP-65KB B	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
Ear phone	I-SOUND	SGEY0003741	-	E.U.T
USB cable	-	-	-	E.U.T Notebook PC

1.4 Cable Description

Product name	Port	Power cord shielded (Y/N)	I/O cable shielded (Y/N)	Length (M)
Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth	DC in	Y	-	(P)1.6
	Ear jack	-	N	(D)1.0
	USB data	Y	Y	(P,D)1.6
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product name	Port	Ferrite bead (Y/N)	Location	Metal hood (Y/N)	Location
Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth	DC in	N	-	Y	E.U.T end
	Ear jack	N	-	Y	E.U.T end
	USB data	N	-	Y	Both end
Notebook PC	USB (Mouse)	Y	Notebook PC end	Y	Notebook PC end

1.6 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Icheon-si, Kyongki-do, 467-701, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of tested system]

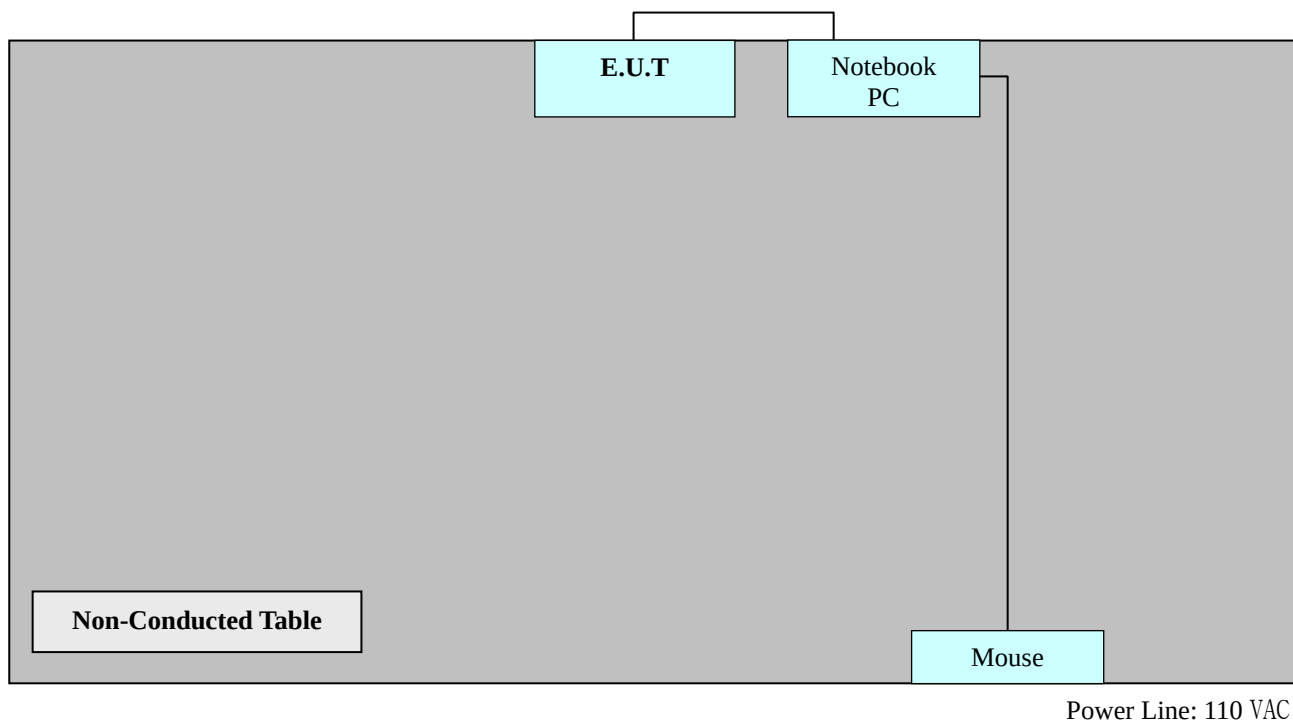

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated

Operation mode	The worst operating condition
GSM Idle (850, 1 900)	
WCDMA Idle (850)	
Camera	
MP3	
Data communication	○

3. 2 Radiated Emission Test

During preliminary test, the following operation mode was investigated

Operation mode	The worst operating condition
GSM Idle (850, 1 900)	
WCDMA Idle (850)	
Camera	
MP3	
Data communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 5.5 dB
Operating condition	: Data communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 22.3 °C
Humidity level	: 48.4 %
Test date	: June 29, 2009

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.2001	57.7	HOT	Quasi-Peak	64.0	5.9
0.1976	48.2	HOT	Average	54.0	5.5
0.2001	55.8	NEUTRAL	Quasi-Peak	64.0	7.9
0.2001	46.6	NEUTRAL	Average	54.0	7.0


HCT

EMC TEST LAB.

EUT: GW525f
Manufacturer: LG Electronics Inc.
Operating Condition: Data communication Mode
Test Site: SHIELD ROOM
Operator: KH-KIM
Test Specification: CISPR 22 CLASS B
Comment: H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

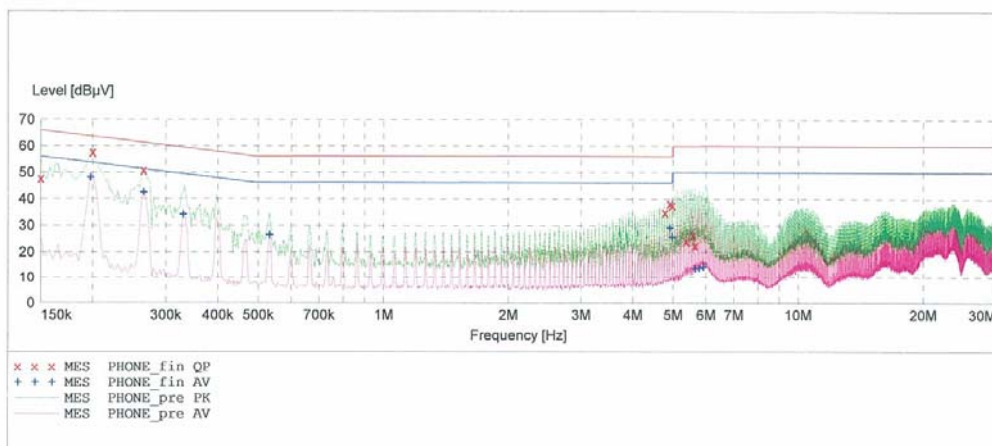

MEASUREMENT RESULT: "PHONE_fin QP"

6/29/2009 2:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150100	47.80	10.1	66	18.2	---	---
0.200100	57.70	10.1	64	5.9	---	---
0.265100	50.80	10.1	61	10.5	---	---
4.780000	35.00	10.6	56	21.0	---	---
4.916000	38.40	10.7	56	17.6	---	---
4.980000	37.80	10.7	56	18.2	---	---
5.384000	24.30	10.7	60	35.7	---	---
5.584000	26.50	10.7	60	33.5	---	---
5.648000	22.70	10.8	60	37.3	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

6/29/2009 2:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.197600	48.20	10.1	54	5.5	---	---
0.265100	42.60	10.1	51	8.7	---	---

MEASUREMENT RESULT: "PHONE fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.330100	34.20	10.1	49	15.3	---	---
0.532000	26.60	10.2	46	19.4	---	---
4.916000	29.30	10.7	46	16.7	---	---
4.980000	25.80	10.7	46	20.2	---	---
5.648000	13.60	10.8	50	36.4	---	---
5.780000	13.80	10.8	50	36.2	---	---
5.916000	14.40	10.8	50	35.6	---	---


HCT

EMC TEST LAB.

EUT: GW525f
Manufacturer: LG Electronics Inc.
Operating Condition: Data communication Mode
Test Site: SHIELD ROOM
Operator: KH-KIM
Test Specification: CISPR 22 CLASS B
Comment: N

SCAN TABLE: "CISPR 22 Voltage"

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

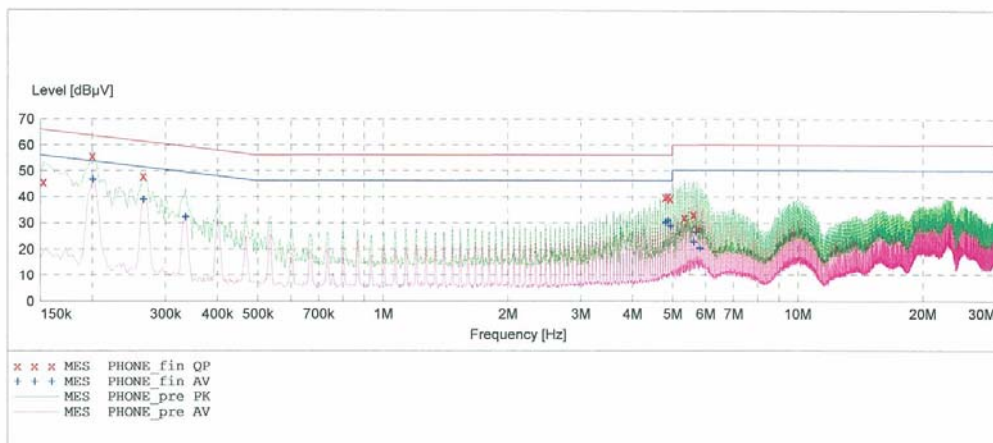

MEASUREMENT RESULT: "PHONE_fin OP"

6/29/2009 2:17PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.152600	45.70	10.1	66	20.1	---	---
0.200100	55.80	10.1	64	7.9	---	---
0.265100	47.90	10.1	61	13.4	---	---
4.804000	40.00	10.7	56	16.0	---	---
4.872000	40.30	10.7	56	15.7	---	---
4.936000	39.40	10.7	56	16.6	---	---
5.340000	32.30	10.7	60	27.7	---	---
5.608000	33.30	10.7	60	26.7	---	---
5.740000	28.20	10.8	60	31.8	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

6/29/2009 2:17PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.200100	46.60	10.1	54	7.0	---	---
0.265100	39.00	10.1	51	12.3	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.335100	32.30	10.1	49	17.0	---	---
4.804000	30.20	10.7	46	15.8	---	---
4.872000	31.00	10.7	46	15.0	---	---
4.936000	29.00	10.7	46	17.0	---	---
5.608000	23.00	10.7	50	27.0	---	---
5.676000	26.70	10.8	50	23.3	---	---
5.808000	20.50	10.8	50	29.5	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 9.7 dB
Operating condition	: Data communication mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 28.3 °C
Humidity level	: 41.5 %
Test date	: June 25, 2009

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
150.3	15.5	12.6	1.3	H	29.4	43.5	14.1
150.3	19.9	12.6	1.3	V	33.8	43.5	9.7
165.4	17.9	12.5	1.4	V	31.8	43.5	11.7
480.0	10.3	17.0	2.4	V	29.7	46.0	16.3
480.0	13.1	17.0	2.4	H	32.5	46.0	13.5
634.7	13.2	20.0	2.7	V	35.9	46.0	10.1

Note)

For measurement over 1 GHz, noise level was more than 10 dB below the limit.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission limits]

Frequency of emission (MHz)	Field strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model number</u>	<u>Next CAL date</u>
EMI Test Receiver	Rohde & Schwarz	ESI40	2009.10.31
EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
LISN	EMCO	703125	2010.05.04
Attenuator	Rohde & Schwarz	ESH3-Z2	2009.10.30
Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
Communication Antenna	TDK	LPDA-0802	-
Antenna Position Tower	HD	240/520/00	-
Base Station	Rohde & Schwarz	CMU 200	2010.02.17
Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
RF-Amplifier	MITEQ	AMF-6D-00101800-35.20P .PS	2010.04.25
Bluetooth Base Station	TESCOM	TC-3000A	2010.01.09

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: GW525f, Cellular/PCS GSM /EDGE/WCDMA Phone with Bluetooth. FCC ID: BEJGW525F** complies with §15.107 and §15.109 of the FCC rules.