

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-212-RWD-097

Reception No. : 2012005261

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States

Manufacturer : LG Electronics Inc.

Address : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 17709, Rep of Korea

Type of Equipment : Rear Seat Entertainment system

FCC ID. : BEJNDHKANBN0A2

Model Name : NDHKANBN0A2

Serial number : N/A

Total page of Report : 136 pages (including this page)

Date of Incoming : January 07, 2021

Date of issue : February 22, 2021

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Ju Yun Park / Manager
ONETECH Corp.



Reviewed by
Ha-Ram Lee / Manager
ONETECH Corp.



Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	7
2. TEST SUMMARY.....	8
2.1 TEST ITEMS AND RESULTS	8
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	8
2.3 RELATED SUBMITTAL(S) / GRANT(S)	8
2.4 PURPOSE OF THE TEST	8
2.5 TEST METHODOLOGY.....	8
2.6 TEST FACILITY.....	8
3. GENERAL INFORMATION.....	9
3.1 PRODUCT DESCRIPTION.....	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	9
4. EUT MODIFICATIONS.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION.....	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 MODE OF OPERATION DURING THE TEST	10
5.4 CONFIGURATION OF TEST SYSTEM.....	15
5.5 ANTENNA REQUIREMENT	15
6. PRELIMINARY TEST	15
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	15
6.2 GENERAL RADIATED EMISSIONS TESTS	15
7. MINIMUM 20 DB BANDWIDTH.....	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 TEST DATE	16
7.4 TEST DATA FOR LEFT SIDE	17
7.4.1 Test data for 1 Mbps	17
7.4.2 Test data for 2 Mbps	19
7.4.3 Test data for 3 Mbps	21
7.5 TEST DATA FOR RIGHT SIDE	23
7.5.1 Test data for 1 Mbps	23
7.5.2 Test data for 2 Mbps	25
7.5.3 Test data for 3 Mbps	27

8. HOPPING FREQUENCY SEPARATION.....	29
8.1 OPERATING ENVIRONMENT	29
8.2 TEST SET-UP	29
8.3 TEST DATE	29
8.4 TEST DATA FOR LEFT SIDE	30
8.4.1 Test data for 1 Mbps	30
8.4.2 Test data for 2 Mbps	31
8.4.3 Test data for 3 Mbps	32
8.5 TEST DATA FOR RIGHT SIDE	33
8.5.1 Test data for 1 Mbps	33
8.5.2 Test data for 2 Mbps	34
8.5.3 Test data for 3 Mbps	35
9. NUMBER OF HOPPING CHANNELS	36
9.1 OPERATING ENVIRONMENT	36
9.2 TEST SET-UP	36
9.3 TEST DATE	36
9.4 TEST DATA FOR LEFT SIDE	37
9.4.1 Test data for 1 Mbps	37
9.4.2 Test data for 2 Mbps	40
9.4.3 Test data for 3 Mbps	43
9.5 TEST DATA FOR RIGHT SIDE	46
9.5.1 Test data for 1 Mbps	46
9.5.2 Test data for 2 Mbps	49
9.5.3 Test data for 3 Mbps	52
10. TIME OF OCCUPANCY	55
10.1 OPERATING ENVIRONMENT	55
10.2 TEST SET-UP	55
10.3 TEST DATE	55
10.4 TEST DATA FOR LEFT SIDE	56
10.4.1 Test data for 1 Mbps	56
10.4.2 Test data for 2 Mbps	58
10.4.3 Test data for 3 Mbps	60
10.5 TEST DATA FOR RIGHT SIDE	62
10.5.1 Test data for 1 Mbps	62
10.5.2 Test data for 2 Mbps	64
10.5.3 Test data for 3 Mbps	66

11. MAXIMUM PEAK OUTPUT POWER	68
11.1 OPERATING ENVIRONMENT	68
11.2 TEST SET-UP	68
11.3 TEST DATE	68
11.4 TEST DATA FOR LEFT SIDE	69
11.4.1 Test data for 1 Mbps	69
11.4.2 Test data for 2 Mbps	71
11.4.3 Test data for 3 Mbps	73
11.5 TEST DATA FOR RIGHT SIDE	75
11.5.1 Test data for 1 Mbps	75
11.5.2 Test data for 2 Mbps	77
11.5.3 Test data for 3 Mbps	79
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	81
12.1 OPERATING ENVIRONMENT	81
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	81
12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	81
12.4 TEST DATE	81
12.5 TEST DATA FOR CONDUCTED EMISSION (LEFT SIDE)	82
12.5.1 Test data for 1 Mbps	82
12.5.2 Test data for 2 Mbps	88
12.5.3 Test data for 3 Mbps	94
12.6 TEST DATA FOR CONDUCTED EMISSION (RIGHT SIDE).....	100
12.6.1 Test data for 1 Mbps	100
12.6.2 Test data for 2 Mbps	106
12.6.3 Test data for 3 Mbps	112
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	118
12.6.1 Radiated Emission which fall in the Restricted Band (Left Side)	118
12.6.2 Radiated Emission which fall in the Restricted Band (Right Side).....	121
12.6.3 Spurious & Harmonic Radiated Emission above 1 GHz (Left Side)	124
12.6.4 Spurious & Harmonic Radiated Emission above 1 GHz (Right Side).....	127
13. RADIATED EMISSION TEST	130
13.1 OPERATING ENVIRONMENT	130
13.2 TEST SET-UP	130
13.3 TEST DATE	130
13.4 TEST DATA FOR 30 MHZ ~ 1 000 MHZ	131
13.4.1 Test data for Left Side.....	131

13.4.2 Test data for Right Side	132
13.4.3 Test data for Intermodulation Mode(Left & Right Side Bluetooth).....	133
13.5 TEST DATA FOR BELOW 30 MHz	134
13.5.1 Test data for Left Side.....	134
13.5.2 Test data for Right Side	134
13.5.3 Test data for Intermodulation Mode(Left & Right Side Bluetooth).....	134
13.6 TEST DATA FOR ABOVE 1 GHz	135
13.6.1 Test data for Left Side.....	135
13.6.2 Test data for Right Side	135
13.6.2 Test data for Intermodulation Mode(Left & Right Side Bluetooth).....	135
14. LIST OF TEST EQUIPMENT	136

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-212-RWD-097	February 22, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States

Contact Person : Dae Woong Kim / Director, Regulatory and Environmental Affairs

Telephone No. : 201-266-2215

FCC ID : BEJNDHKBANBN0A2

Model Name : NDHKBANBN0A2

Brand Name : LG

Serial Number : N/A

Date : February 22, 2021

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Rear Seat Entertainment system
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N/A / See Note
15.203	Antenna Requirement	Met requirement / PASS

Note.: This test item is not required as this product is only using DC power

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model NDHKANBN0A2 (referred to as the EUT in this report) is a Rear Seat Entertainment system. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	Rear Seat Entertainment system	
Temperature Range	-30 °C ~ 85 °C	
Operating Frequency	2 402 MHz ~ 2 480 MHz	
MAX. RF OUTPUT POWER	Left	3.30 dBm
	Right	1.84 dBm
Number of Channel	79 Channels	
Modulation Type	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps	
Antenna Type	Left	Chip Antenna
	Right	
Antenna Gain	Left	2.36 dBi
	Right	
List of each Osc. or crystal Freq.(Freq. $\geq$ 1 MHz)	12 MHz, 24 MHz	
Rated Supply Voltage	DC 12.0 V	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Electronics Inc.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
NDHKANBN0A2	LG Electronics Inc.	Rear Seat Entertainment system (EUT)	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Frequency / Channel Operations

Channel	Frequency
0	2 402
39	2 441
78	2 480


-. Left Side Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.875	0.87	76.77	1.15
Bluetooth [2 Mbps]	2.885	0.87	76.83	1.14
Bluetooth [3 Mbps]	2.895	0.855	77.20	1.12

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

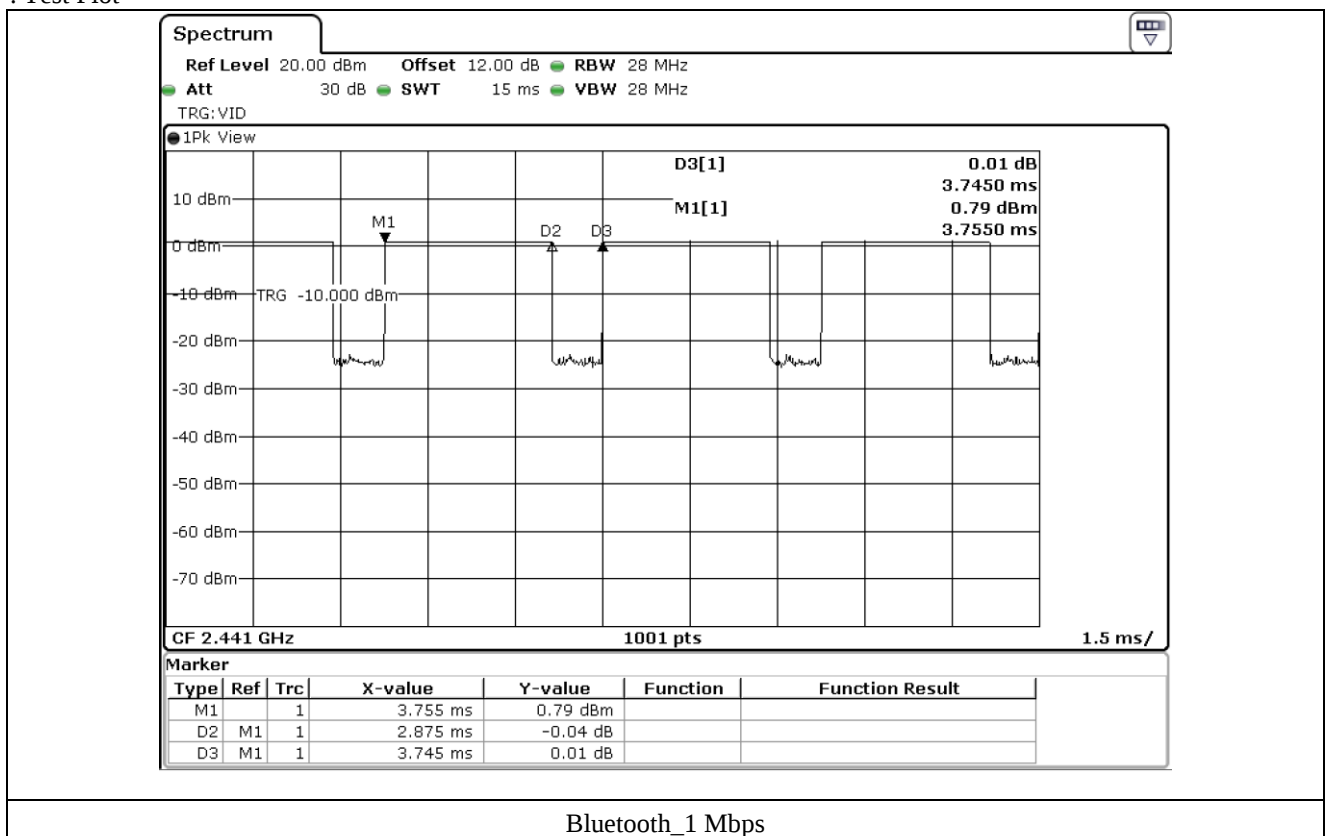

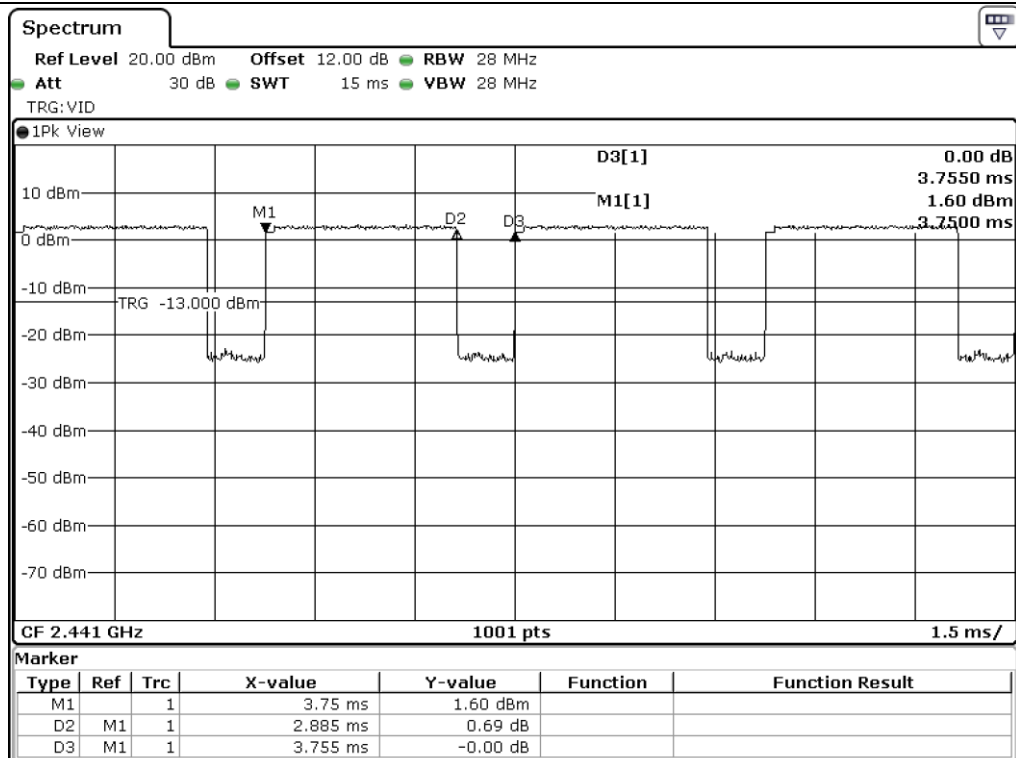

Bluetooth_2 Mbps

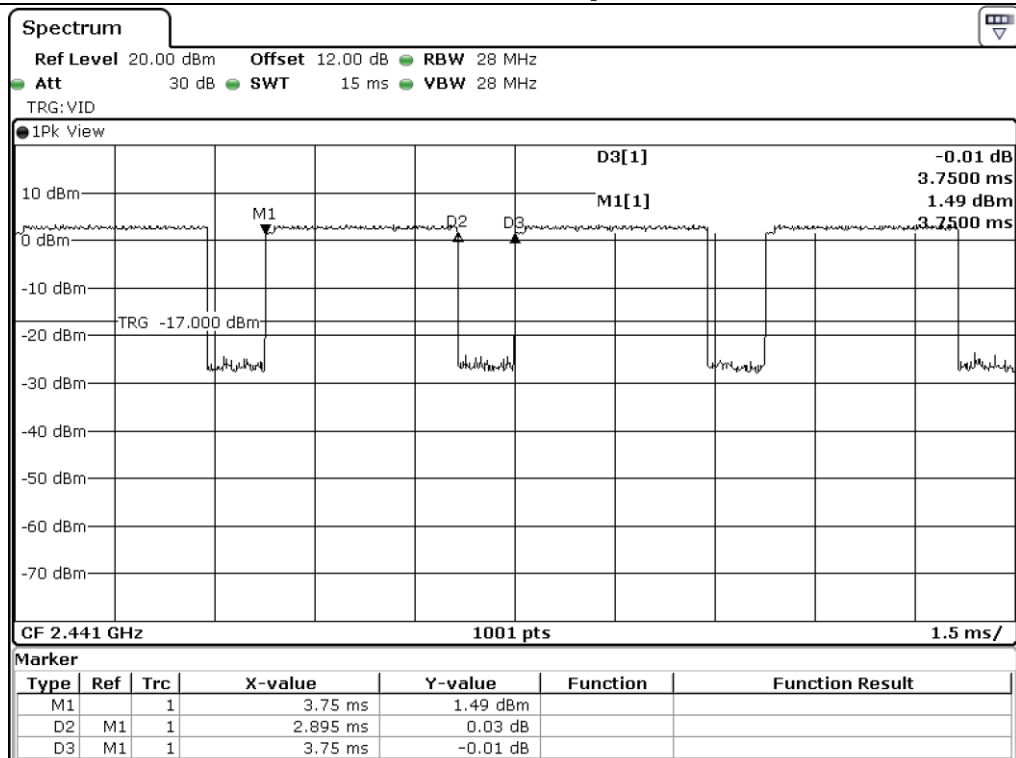

Bluetooth_3 Mbps


-. Right Side Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.89	0.855	77.17	1.13
Bluetooth [2 Mbps]	2.905	0.855	77.26	1.12
Bluetooth [3 Mbps]	2.88	0.865	76.90	1.14

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

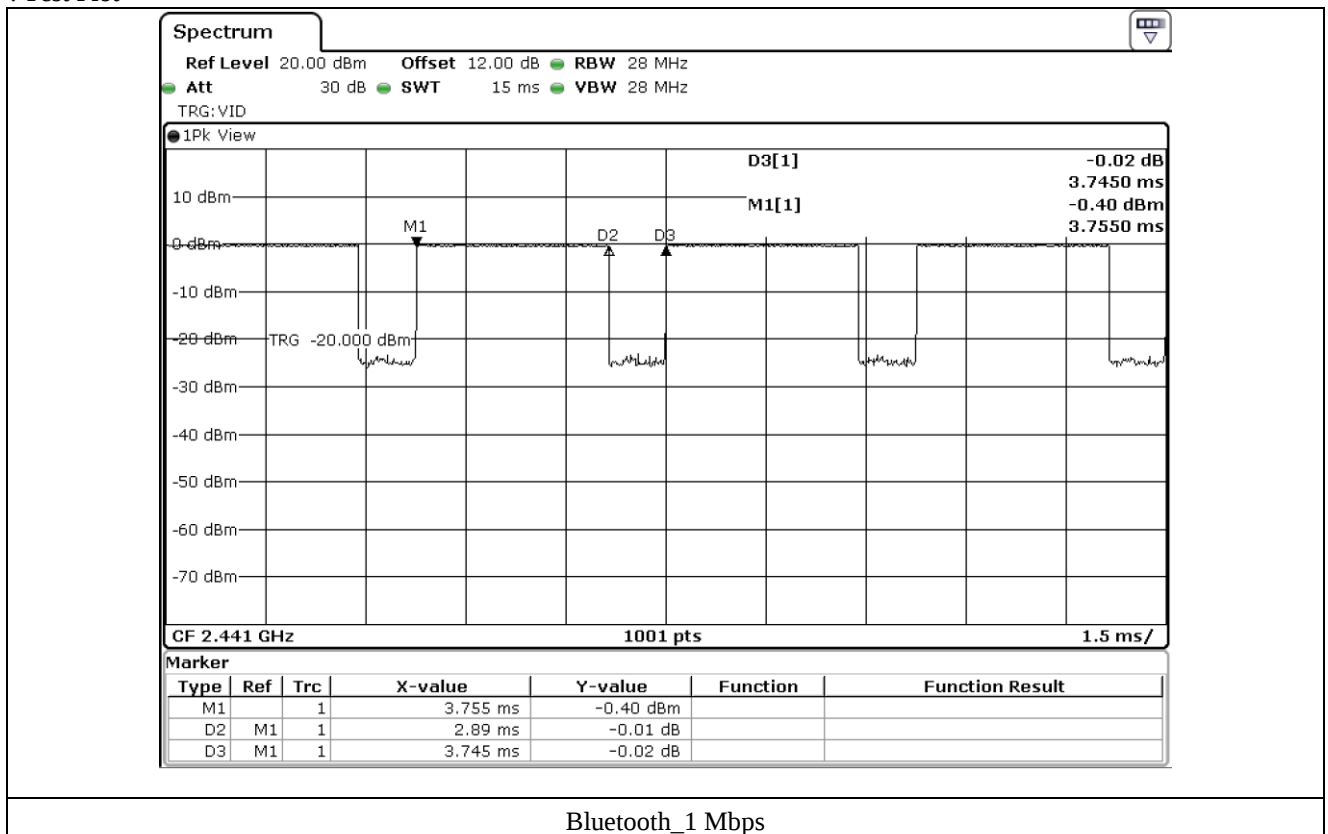

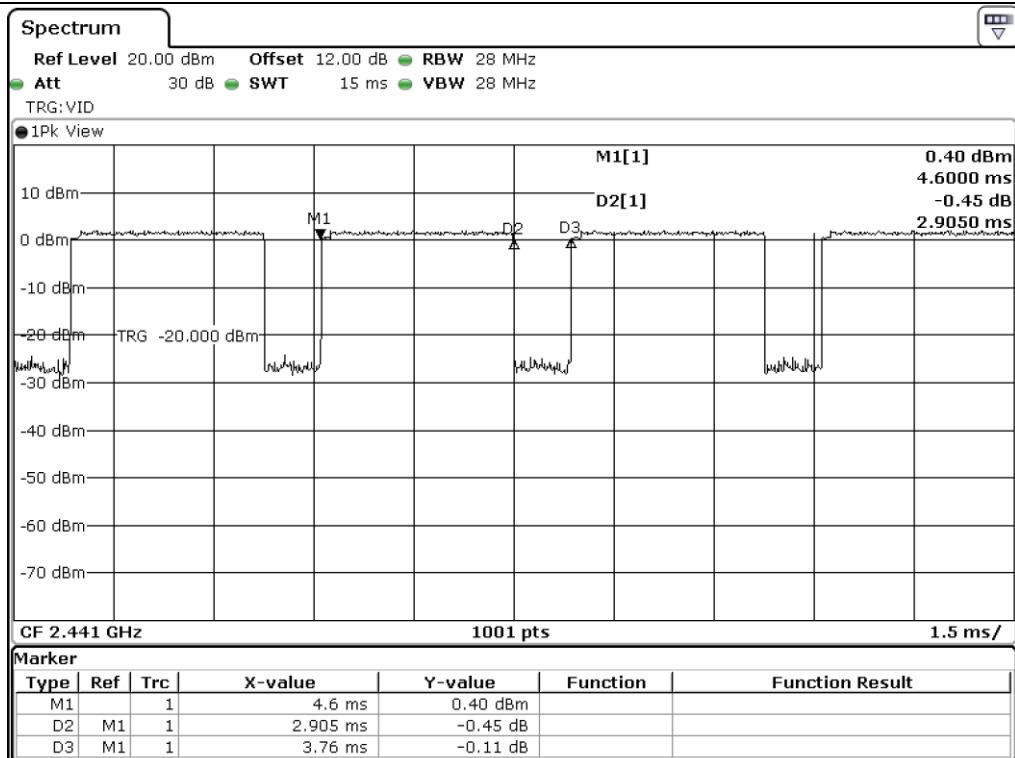

Bluetooth_2 Mbps

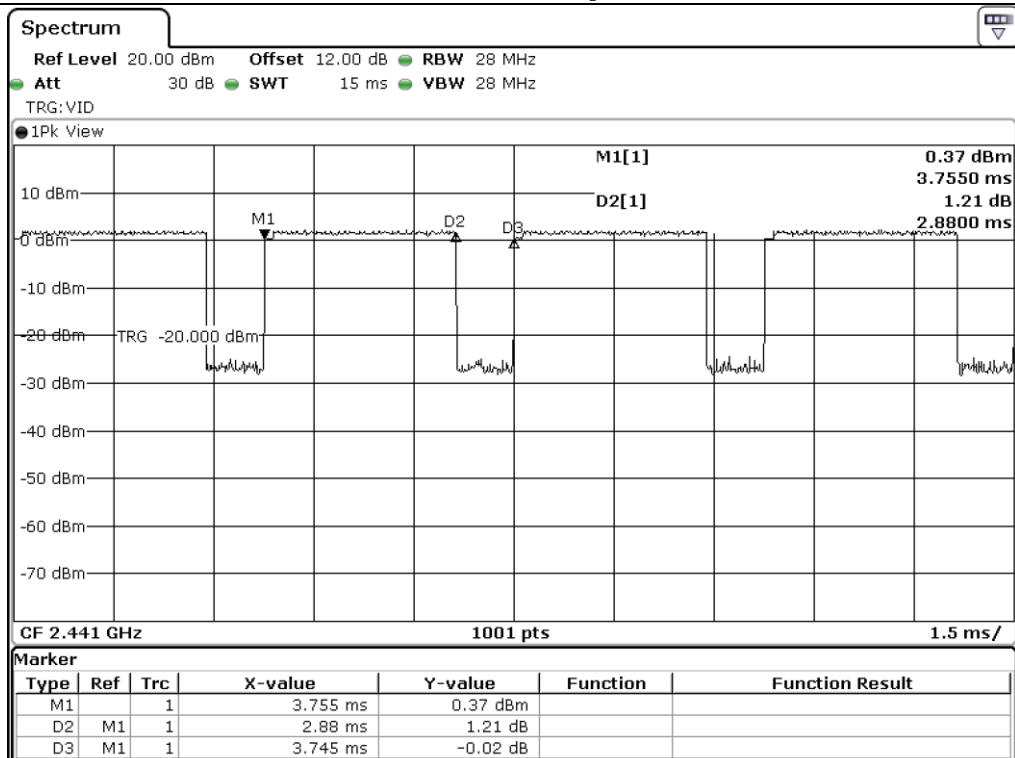

Bluetooth_3 Mbps

5.4 Configuration of Test System

Line Conducted Test: As This product is only using DC power, AC conducted emission test has not been performed

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The Left & Right sides Chip Antenna of the EUT is located the in the EUT internally, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

As This product is only using DC power, AC conducted emission test has not been performed

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 20 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

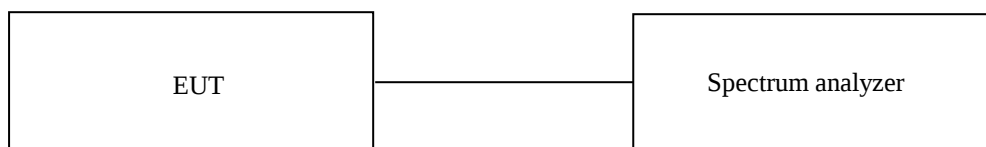


7.3 Test Date


January 07, 2021 ~ January 28, 2021

7.4 Test Data for Left Side


7.4.1 Test data for 1 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	814.20
Middle	2 441.00	814.20
High	2 480.00	819.20

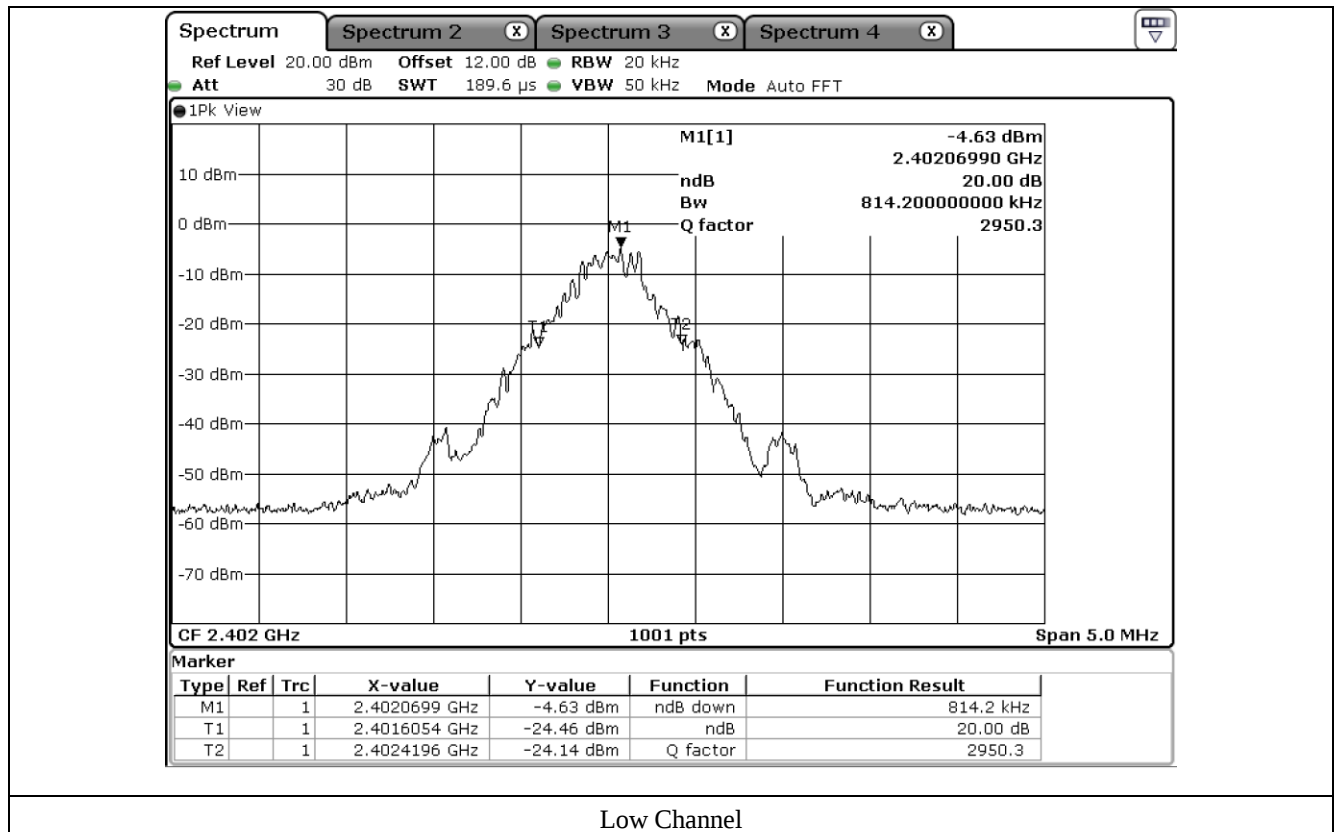

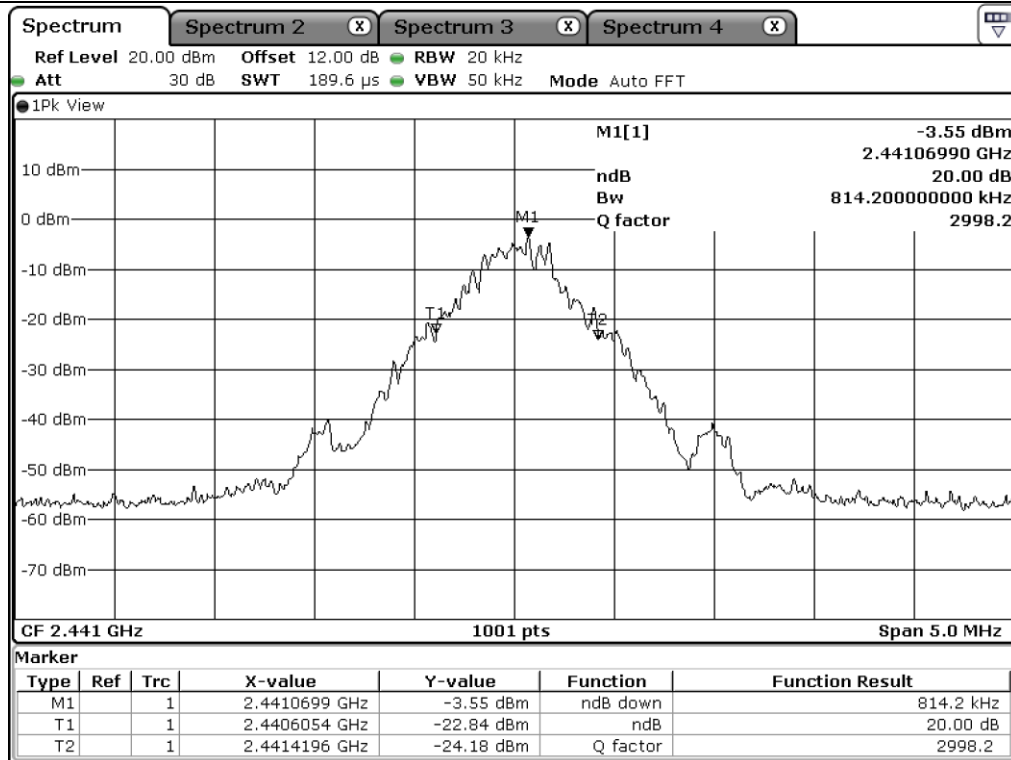


Middle Channel

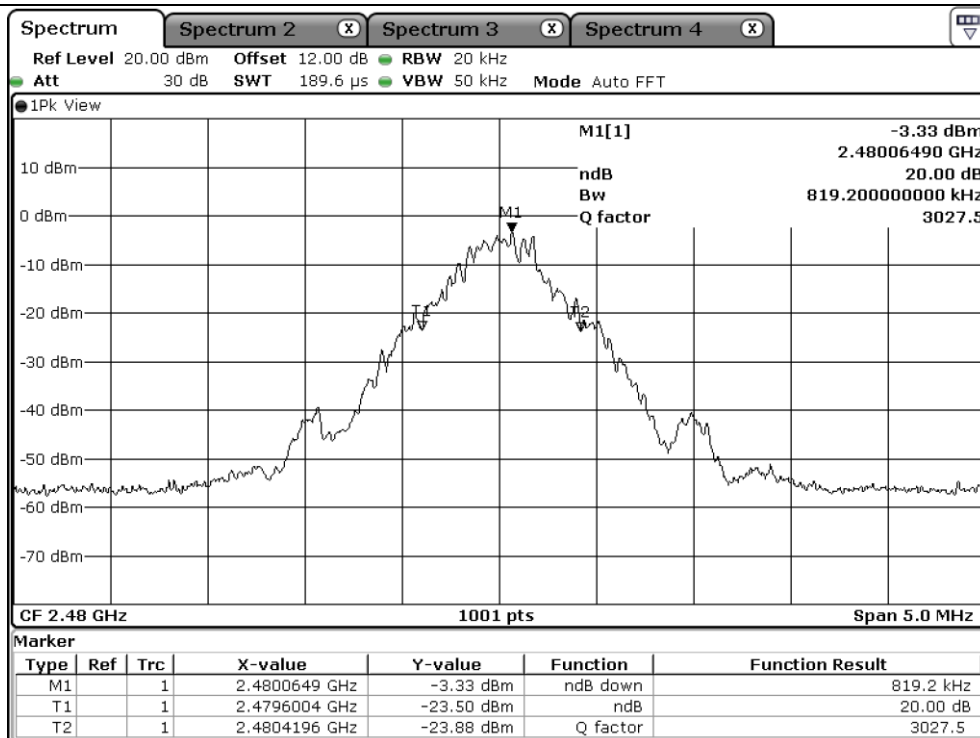


High Channel


7.4.2 Test data for 2 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 343.70
Middle	2 441.00	1 338.70
High	2 480.00	1 338.70

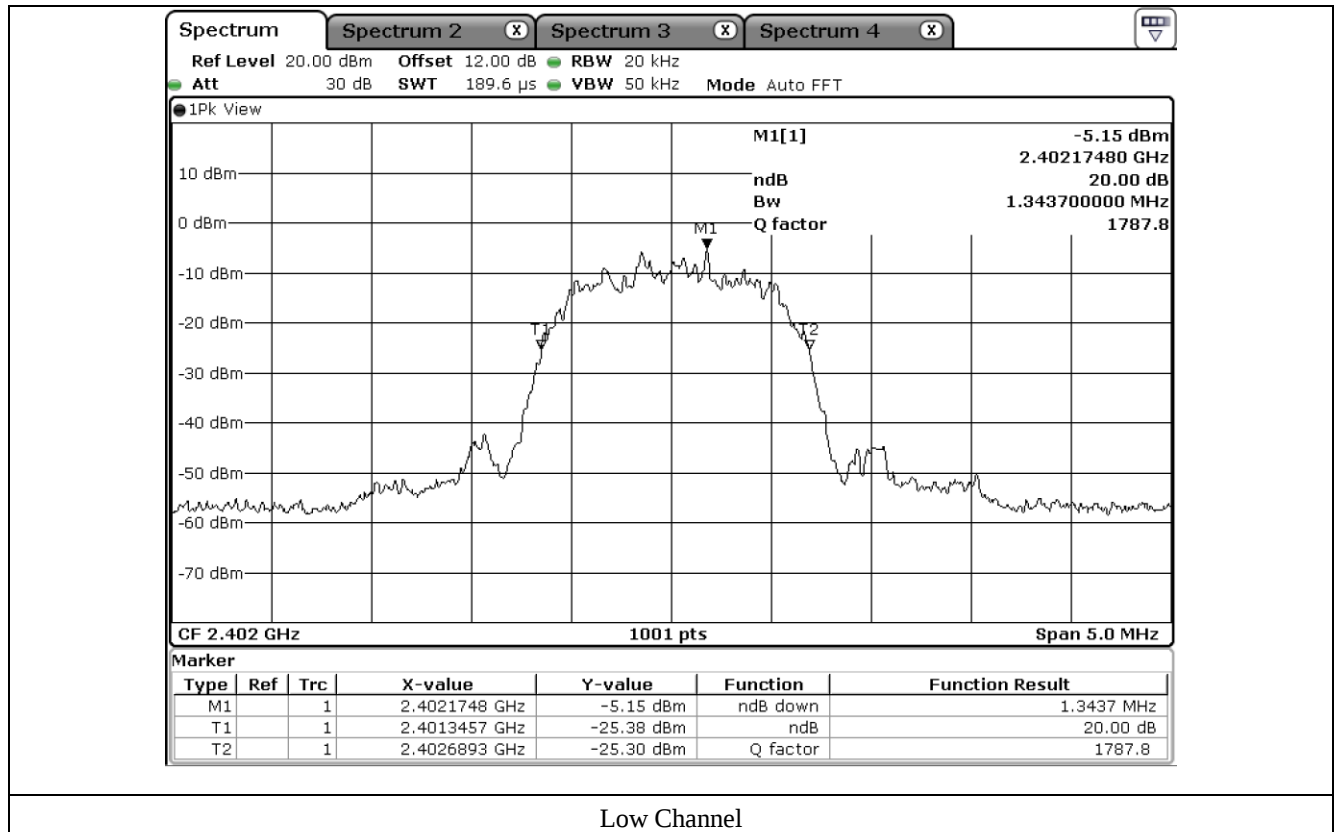

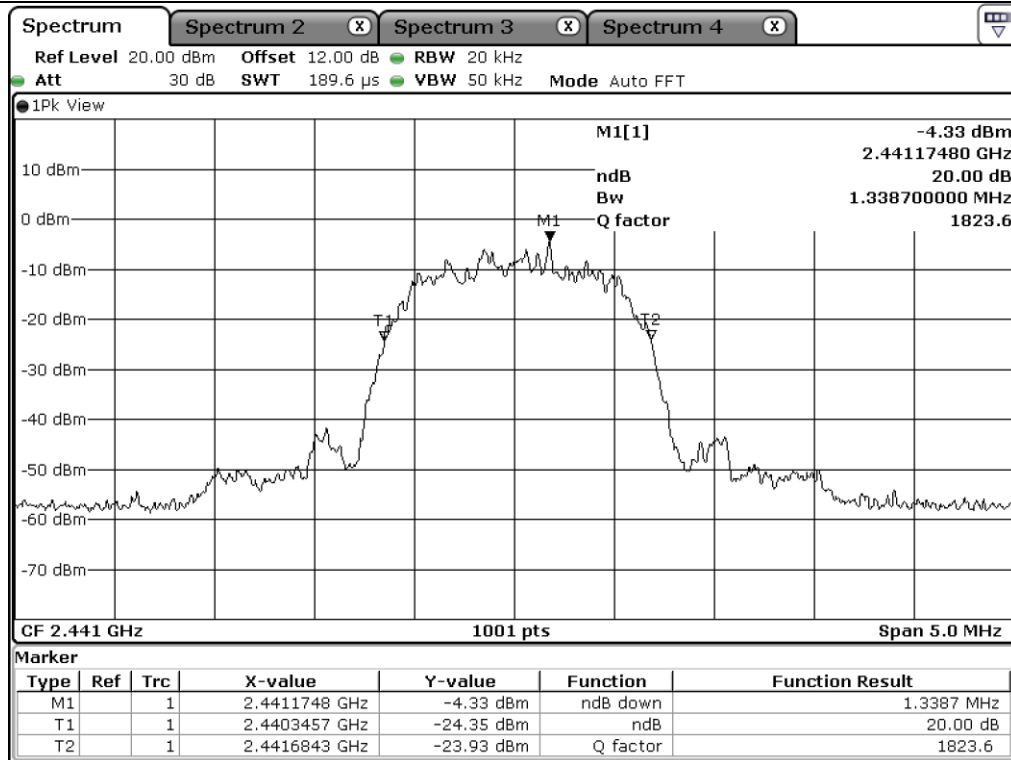


Middle Channel

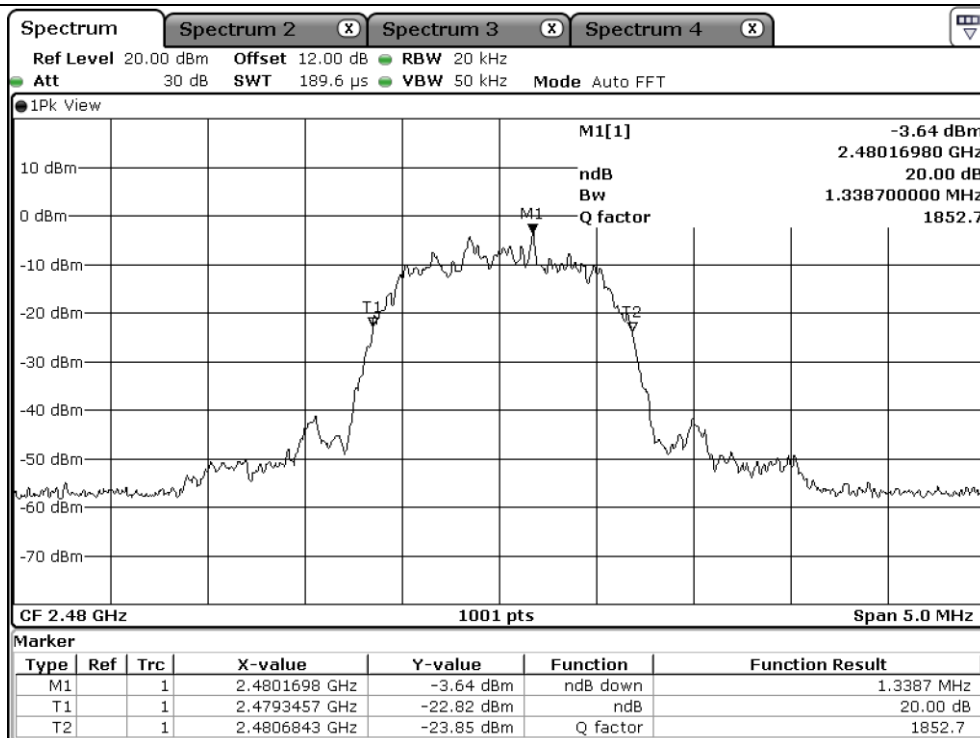


High Channel


7.4.3 Test data for 3 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 273.70
Middle	2 441.00	1 333.70
High	2 480.00	1 338.70

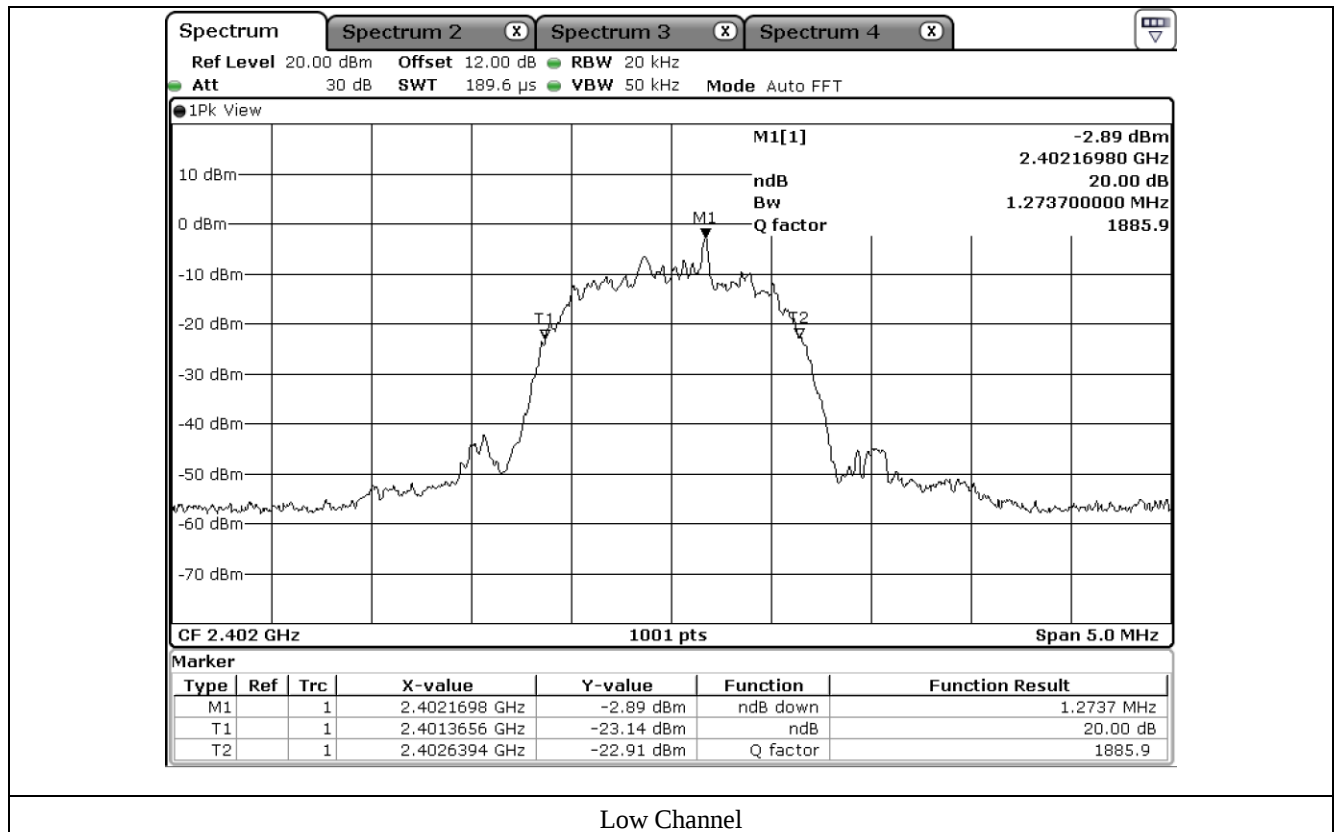

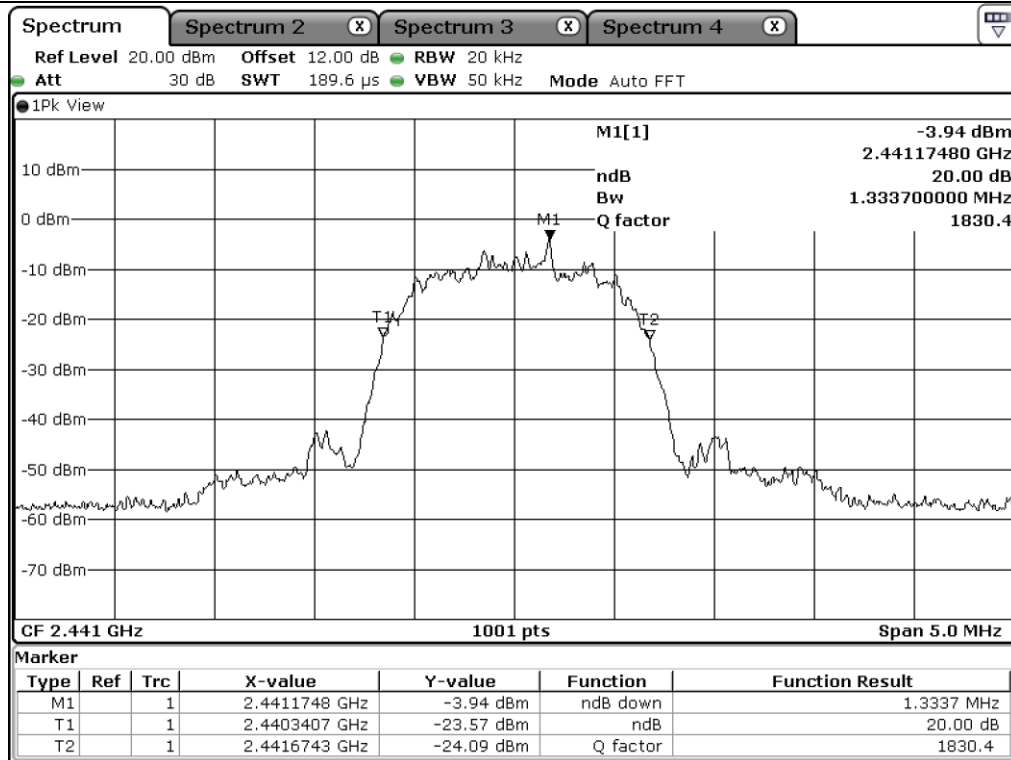

Middle Channel

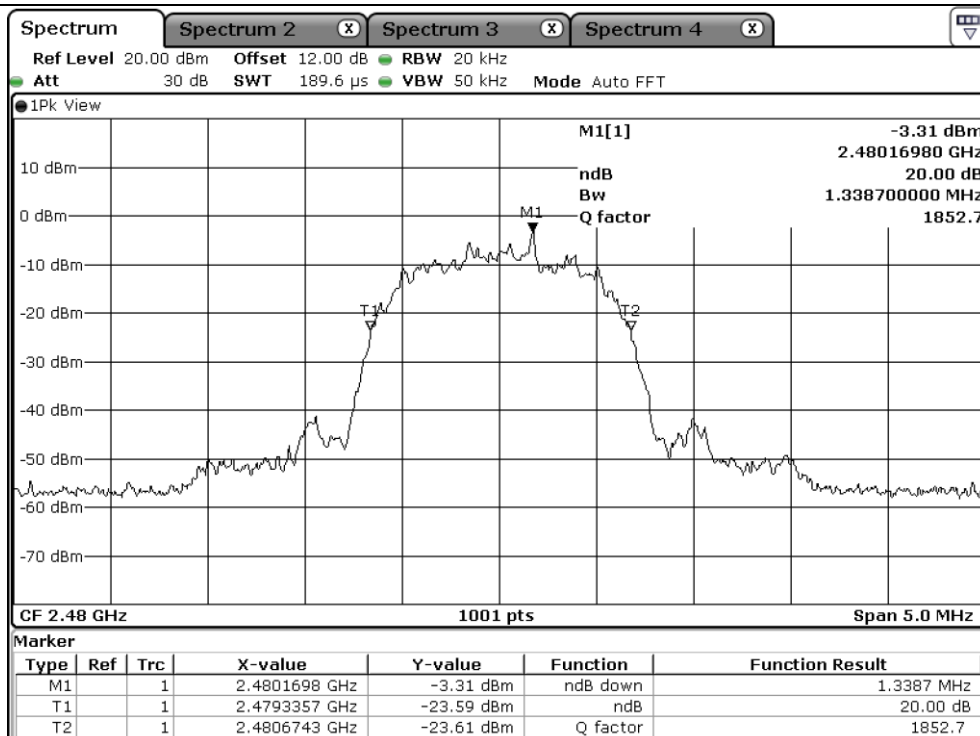



High Channel

7.5 Test Data for Right Side


7.5.1 Test data for 1 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	814.20
Middle	2 441.00	819.20
High	2 480.00	814.20

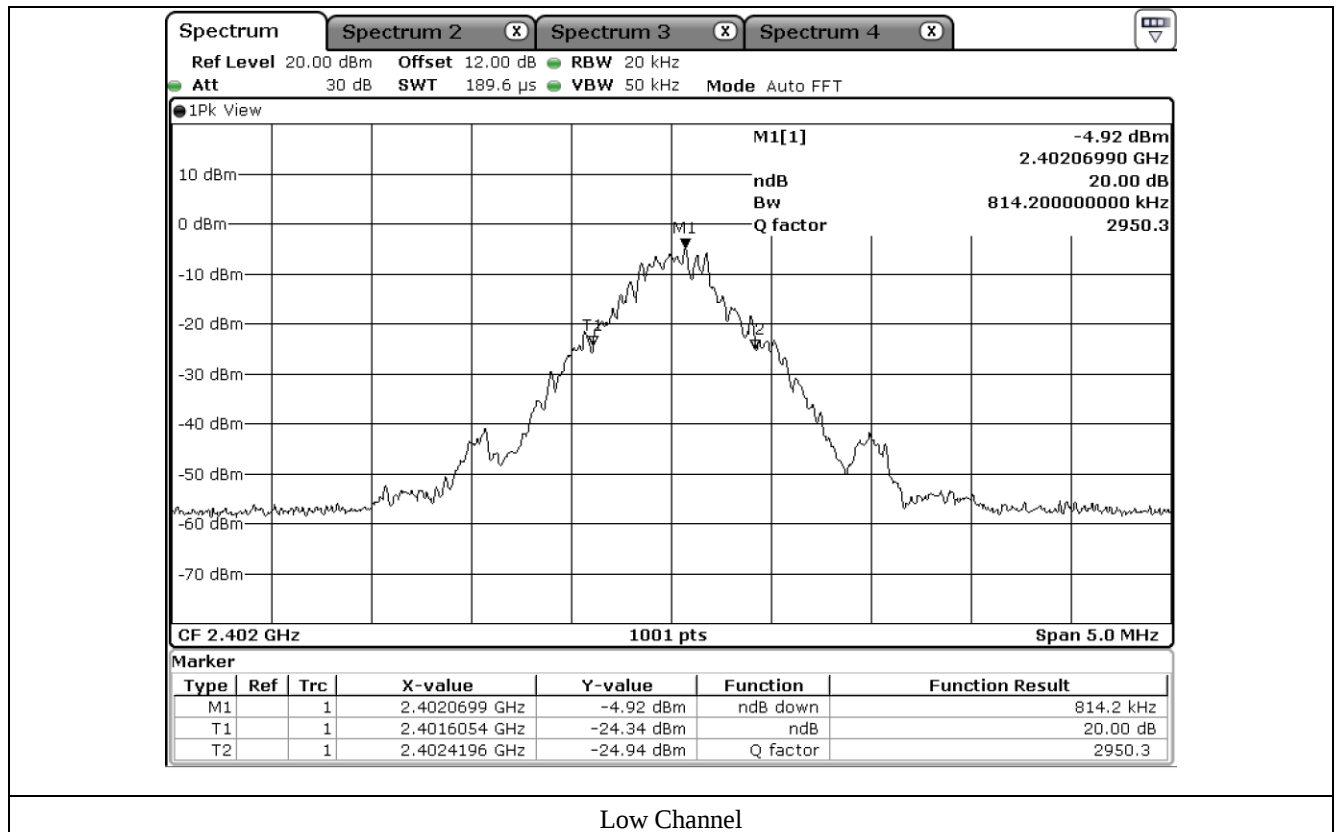

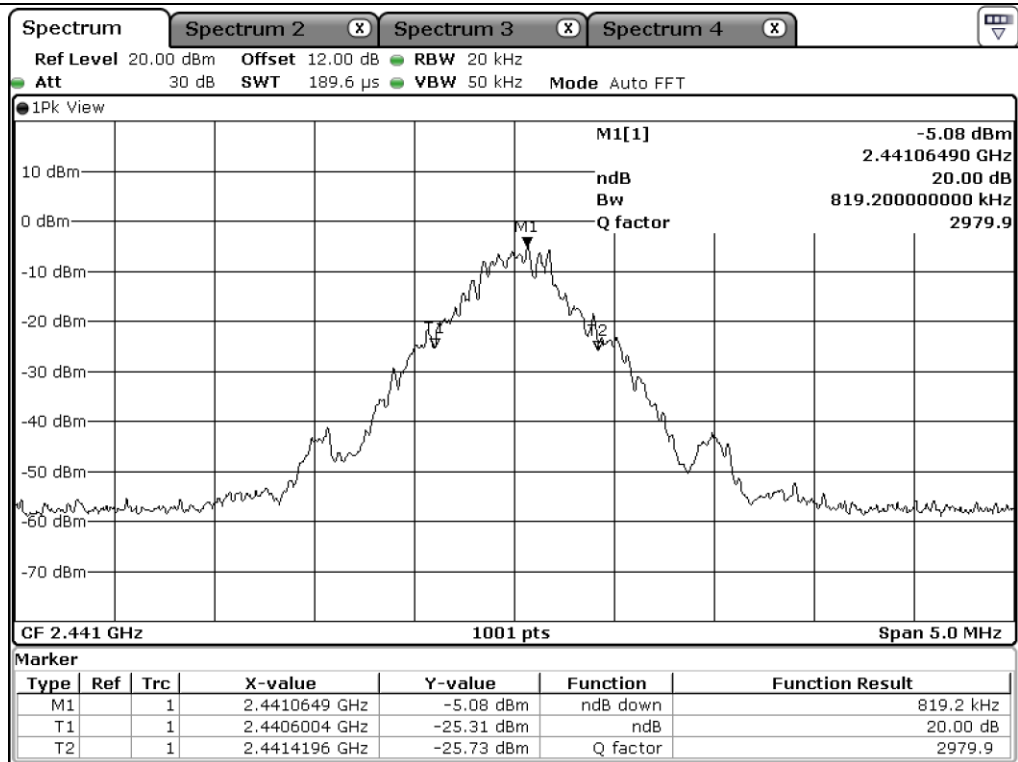


Middle Channel

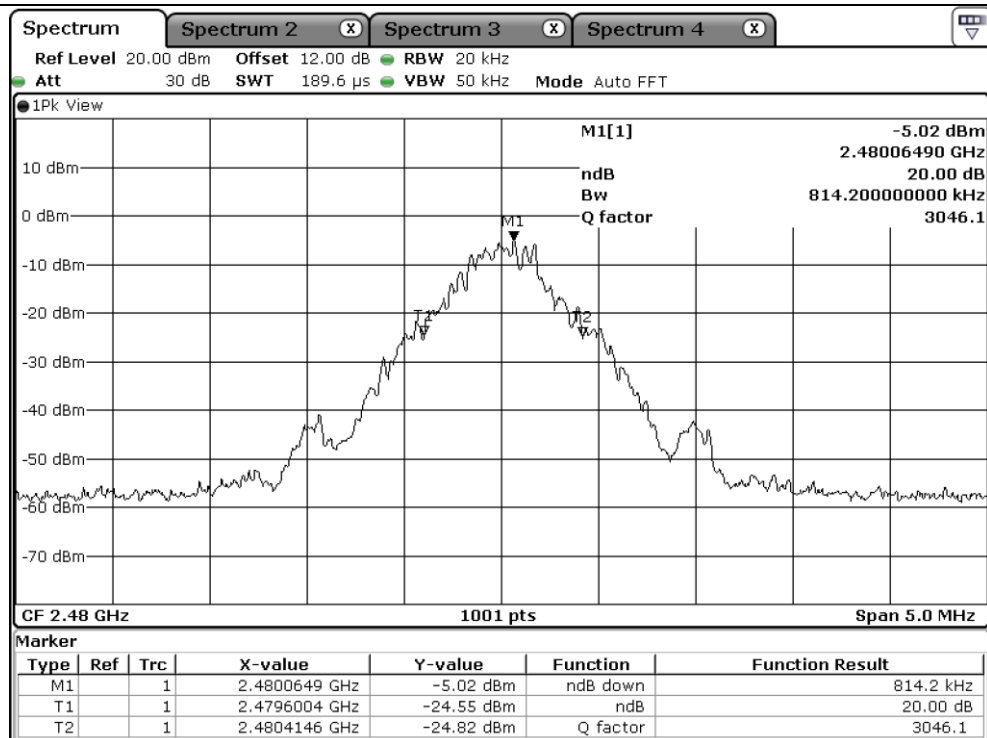


High Channel


7.5.2 Test data for 2 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 343.70
Middle	2 441.00	1 338.70
High	2 480.00	1 343.70

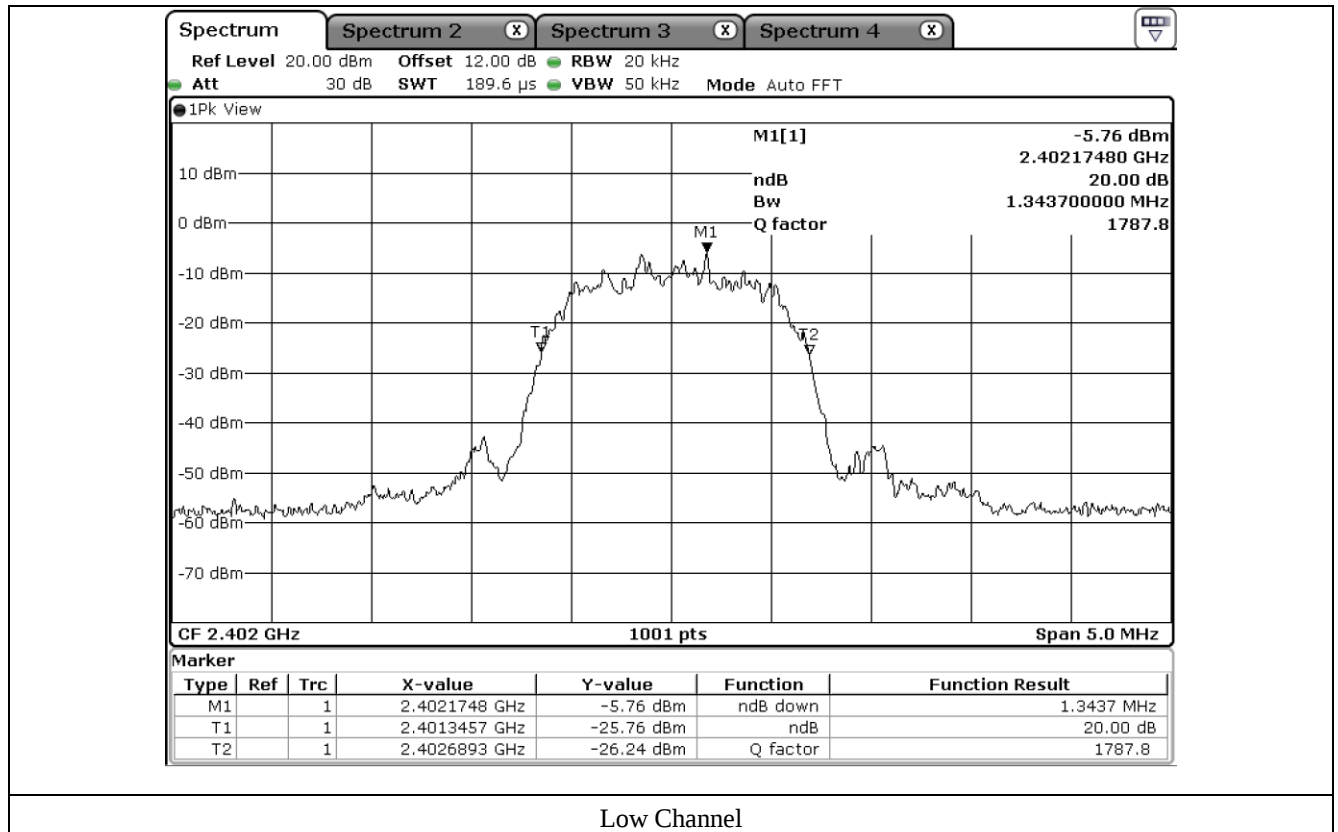

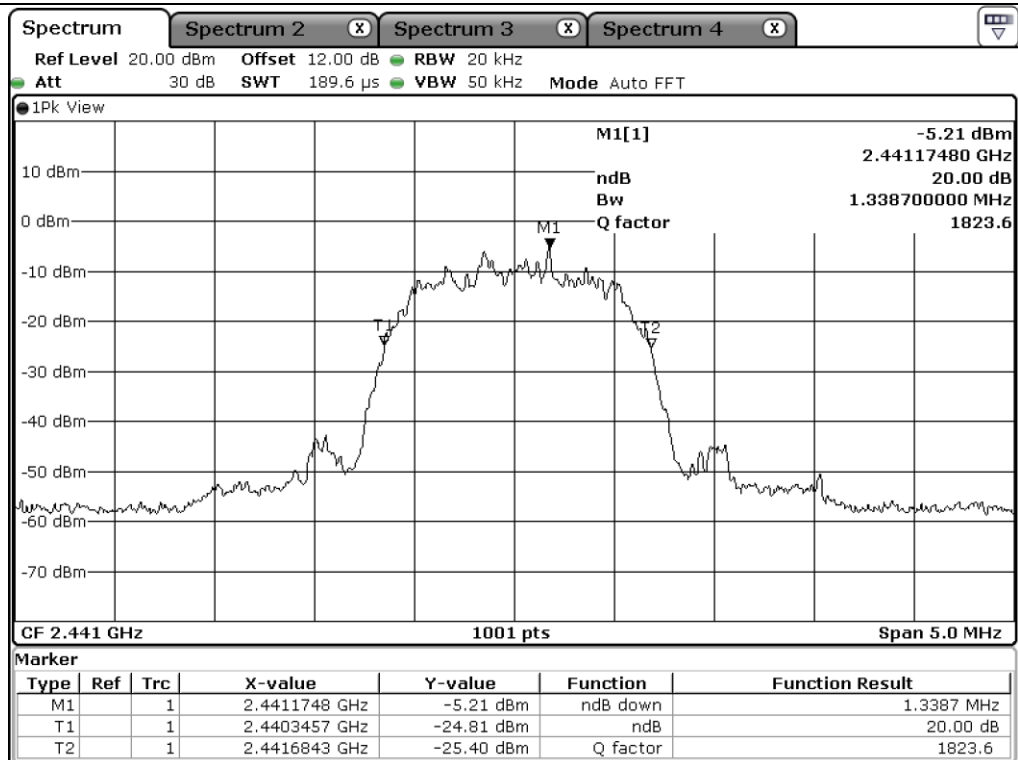


Middle Channel

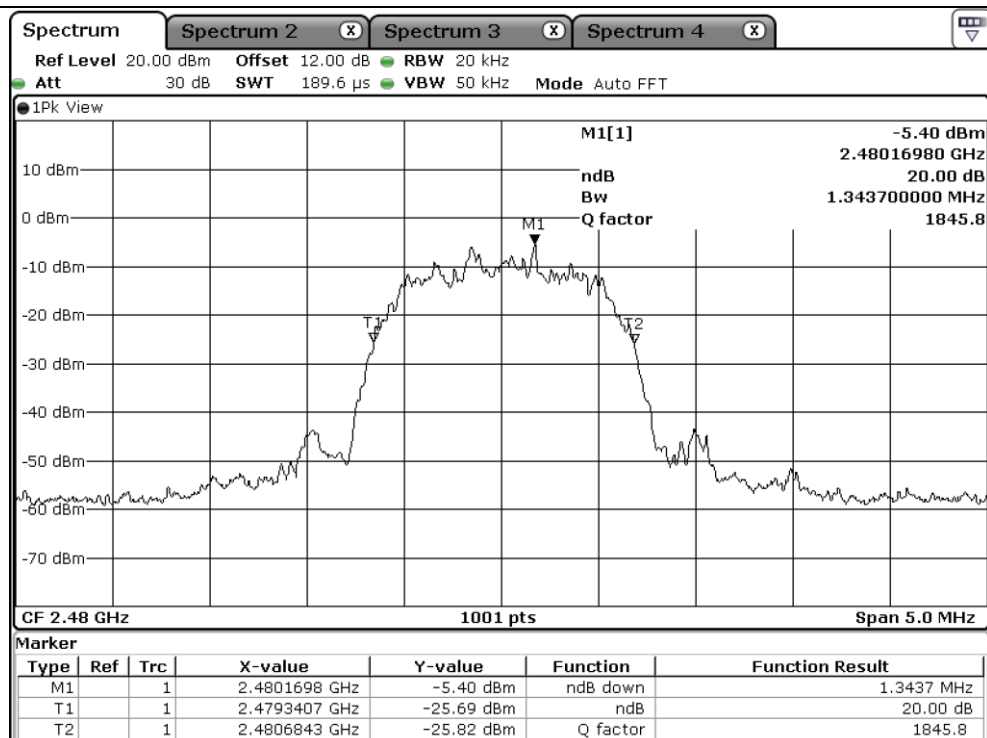


High Channel


7.5.3 Test data for 3 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 333.70
Middle	2 441.00	1 333.70
High	2 480.00	1 338.70

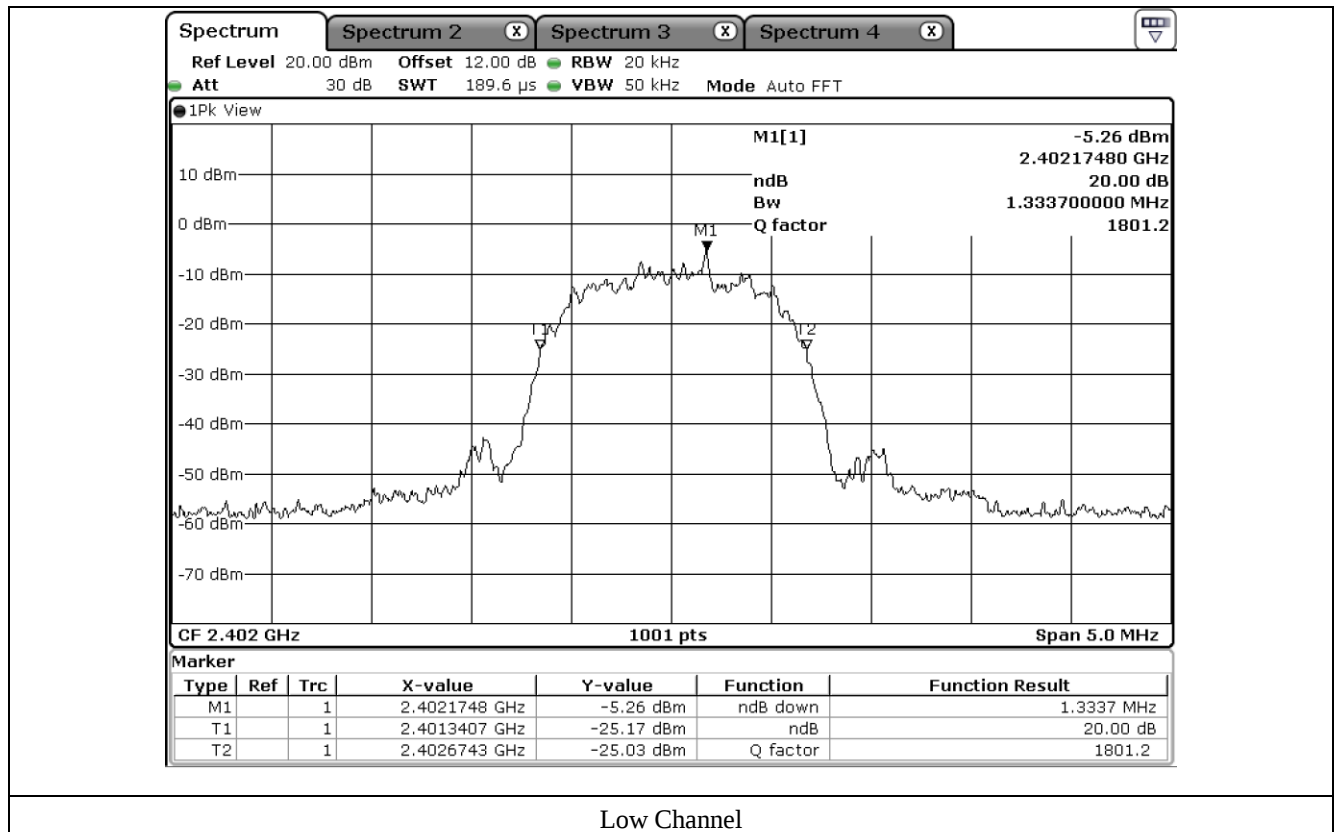

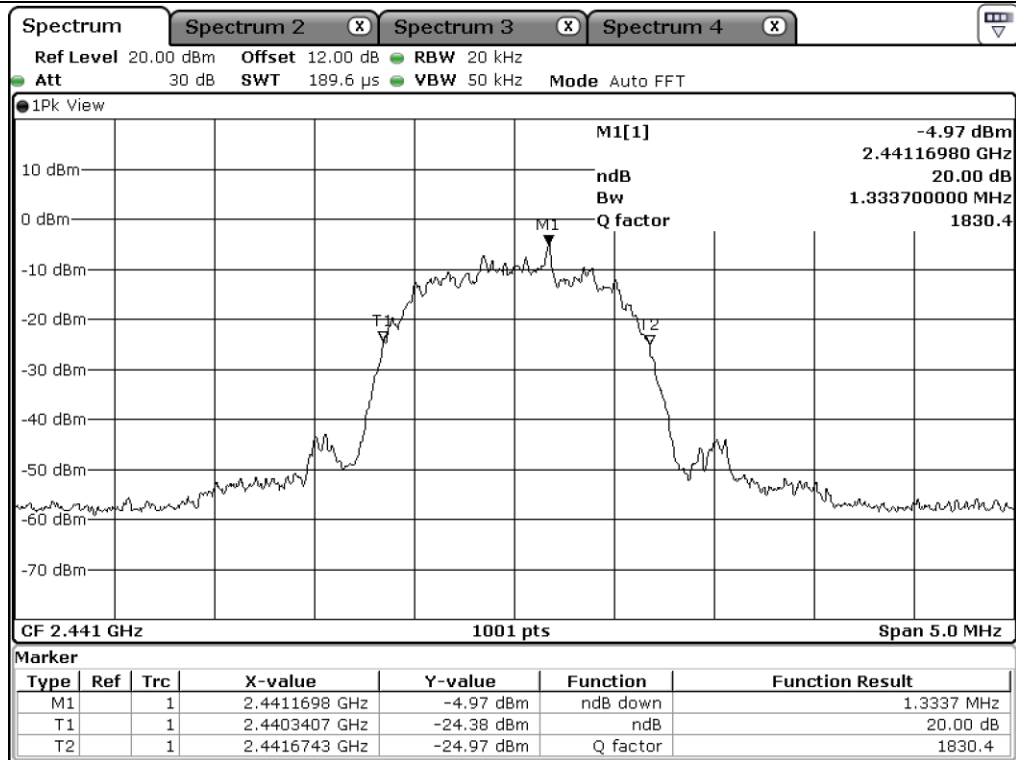

Middle Channel

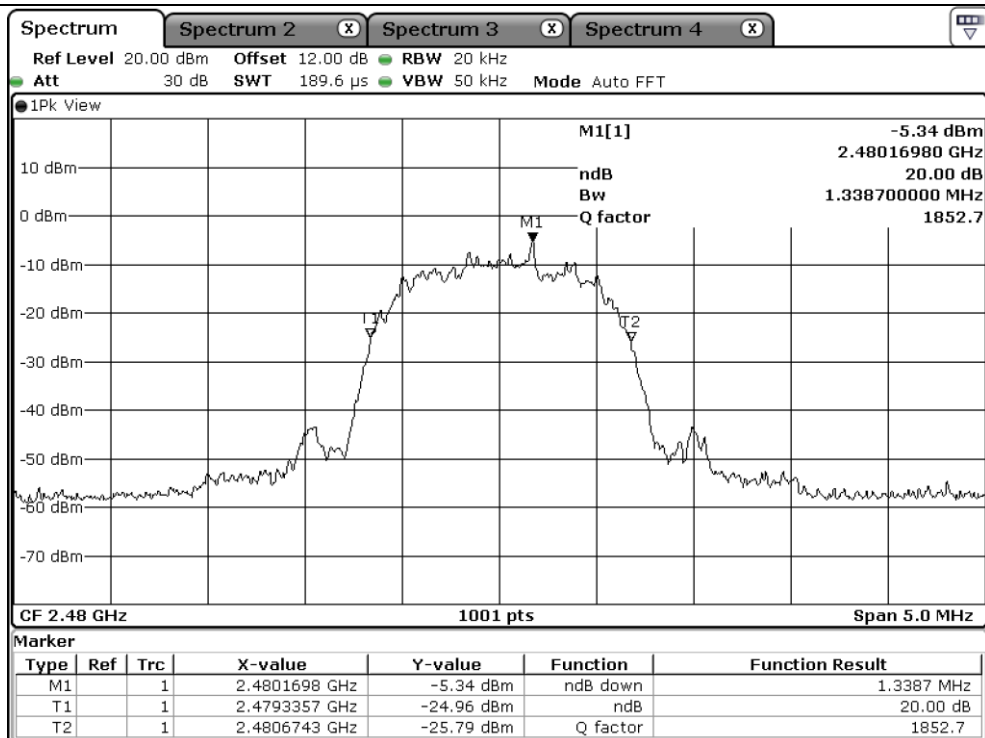

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

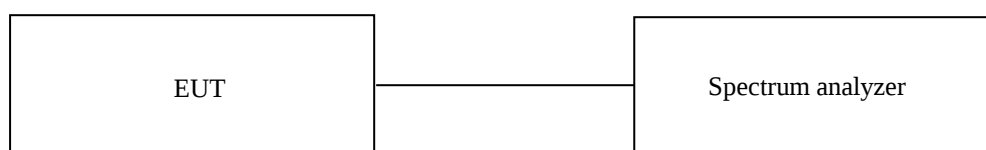

8.3 Test Date


January 07, 2021 ~ January 28, 2021

8.4 Test Data for Left Side

8.4.1 Test data for 1 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 004.000	542.80	Separated by a minimum of 542.80 kHz

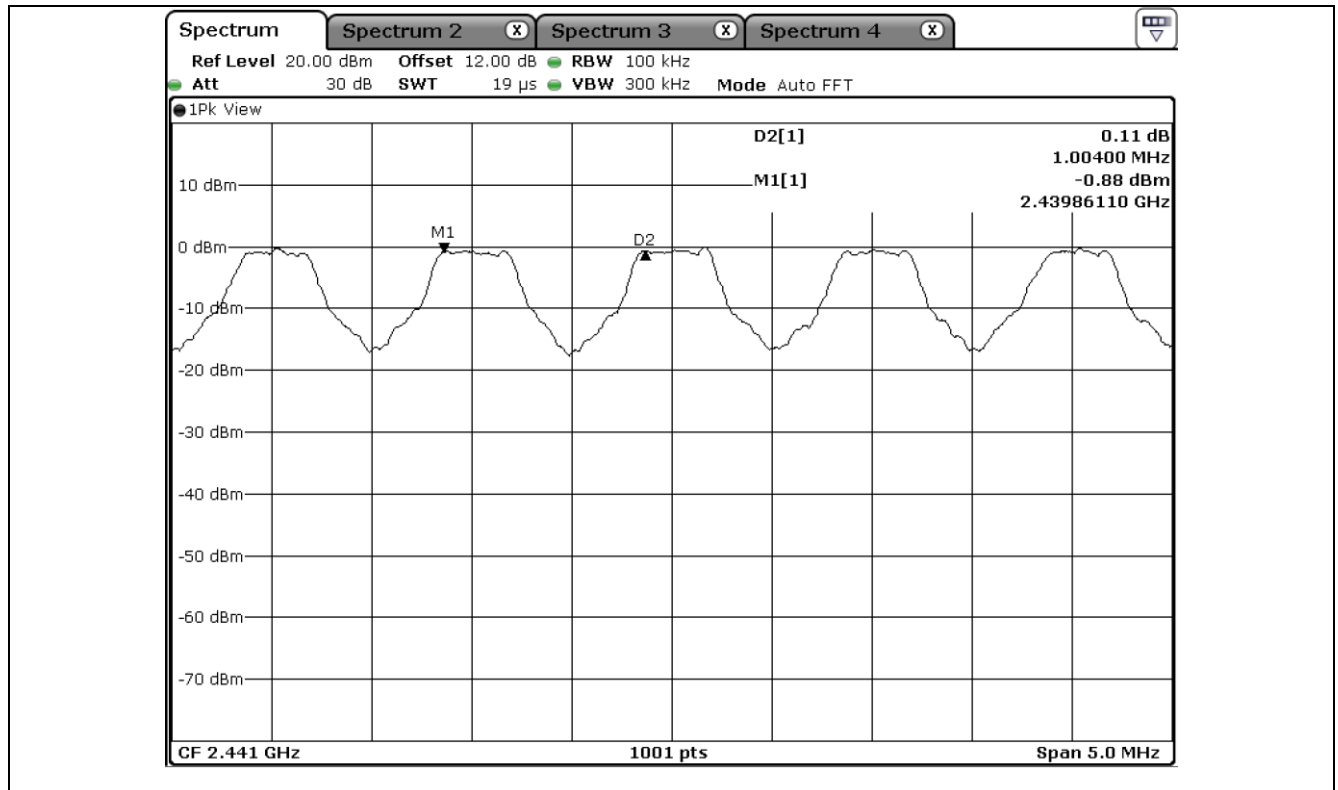

8.4.2 Test data for 2 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 004.000	892.47	Separated by a minimum of 892.47 kHz

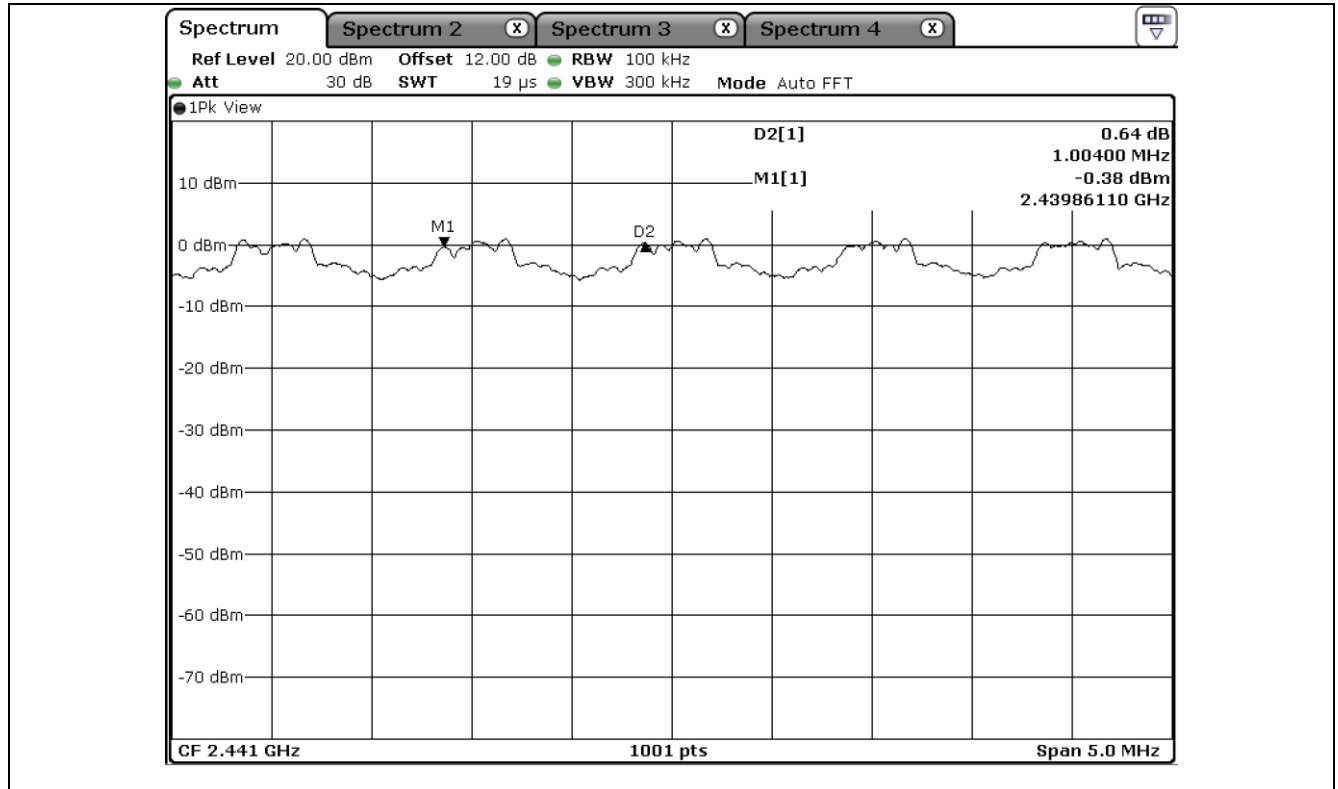

8.4.3 Test data for 3 Mbps

-. Test Result : Pass

Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 009.000	889.13	Separated by a minimum of 889.13 kHz

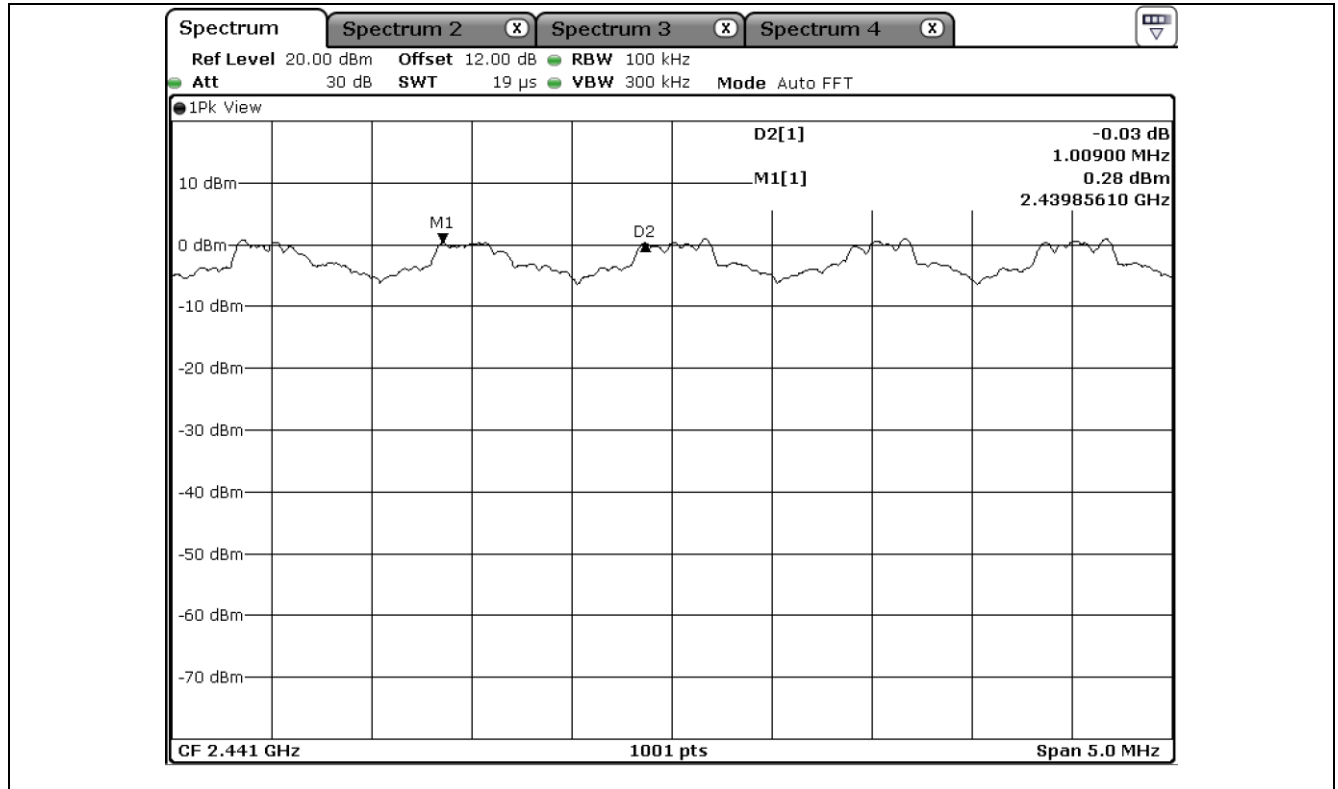


8.5 Test Data for Right Side

8.5.1 Test data for 1 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
989.000	546.13	Separated by a minimum of 546.13 kHz

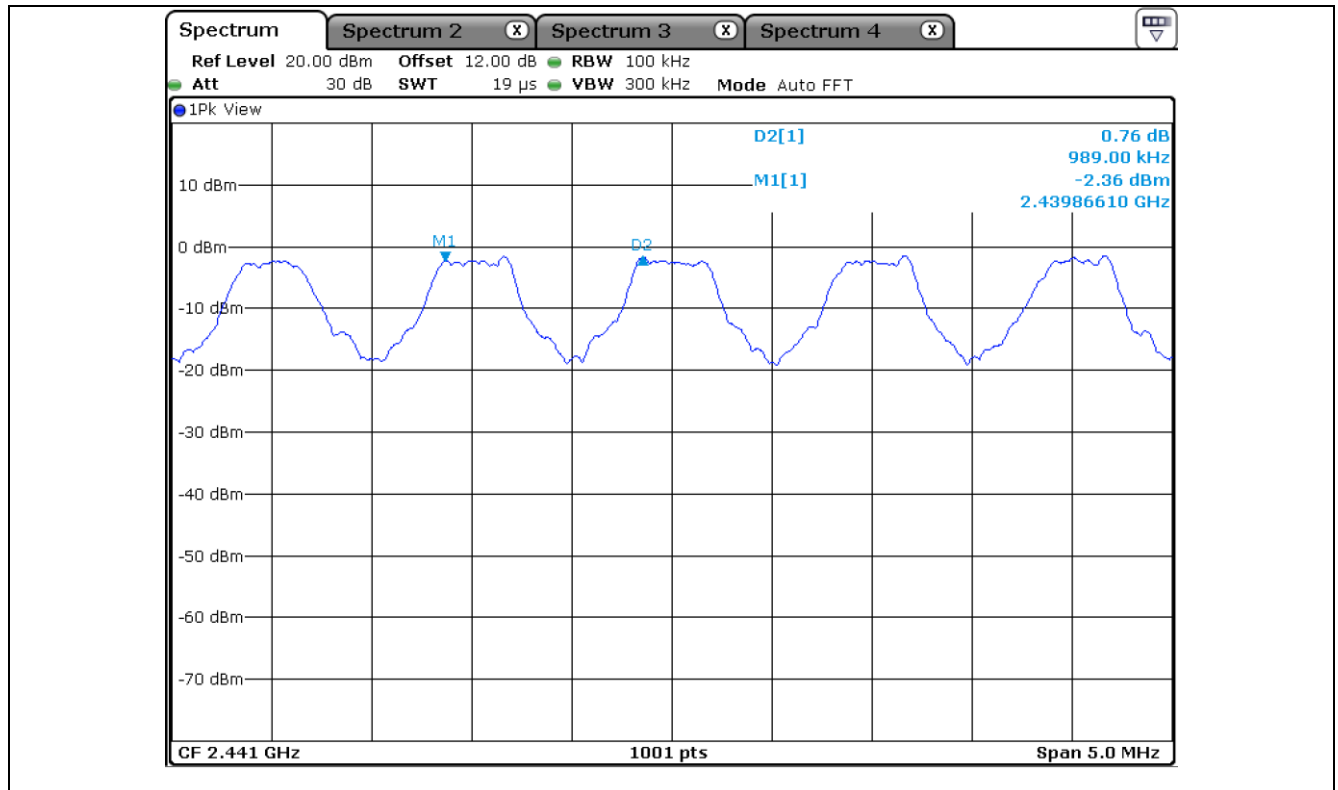

8.5.2 Test data for 2 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 009.000	892.47	Separated by a minimum of 892.47 kHz

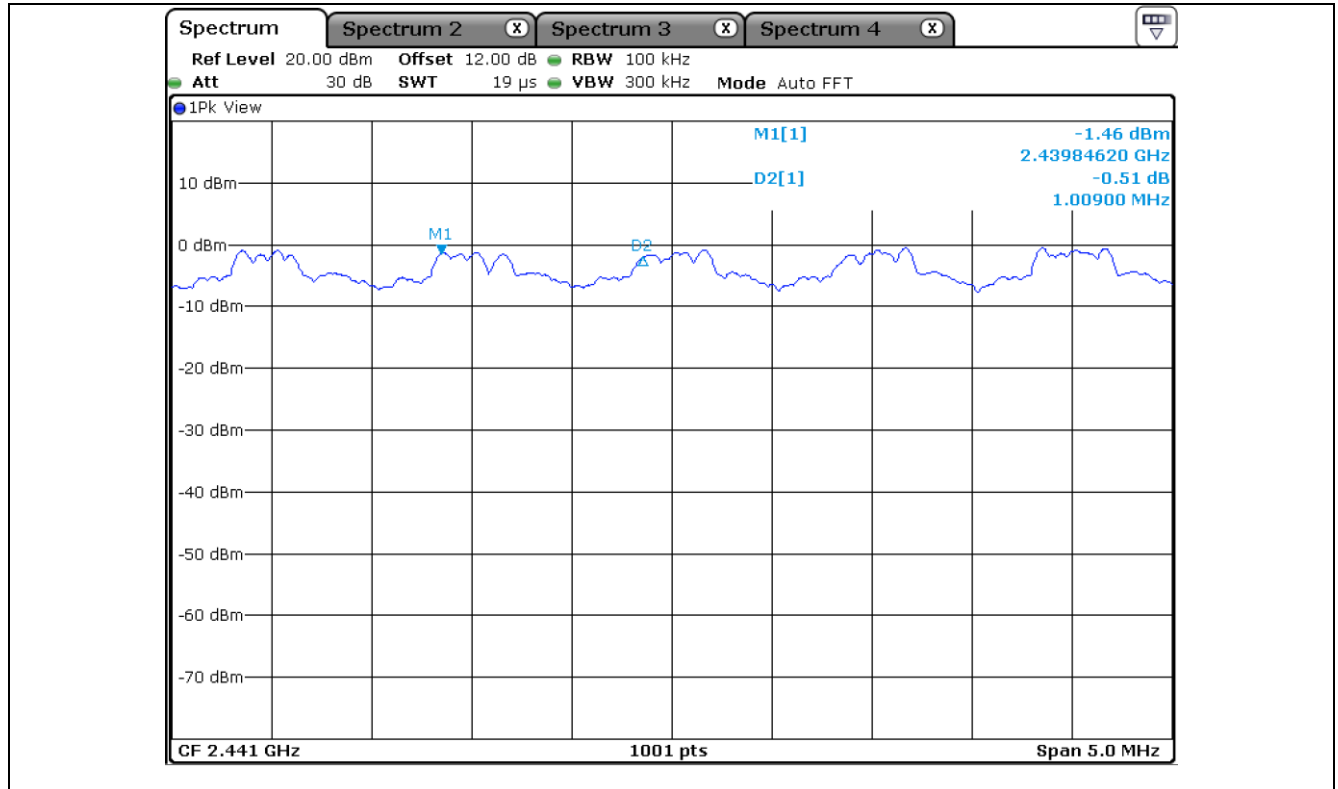

8.5.3 Test data for 3 Mbps

-. Test Result : Pass

Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 004.000	889.13	Separated by a minimum of 889.13 kHz

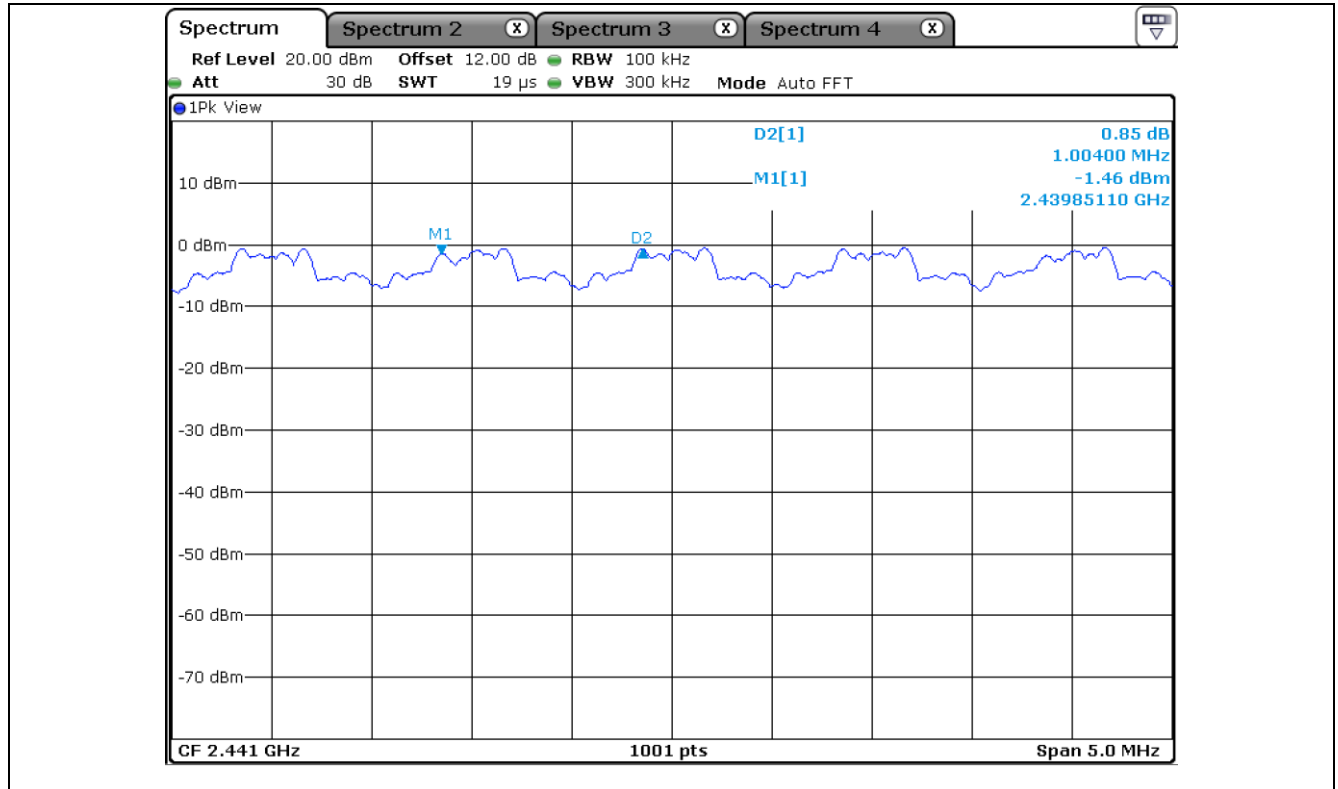

9. NUMBER OF HOPPING CHANNELS


9.1 Operating environment

Temperature : 23 °C

Relative humidity : 45 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

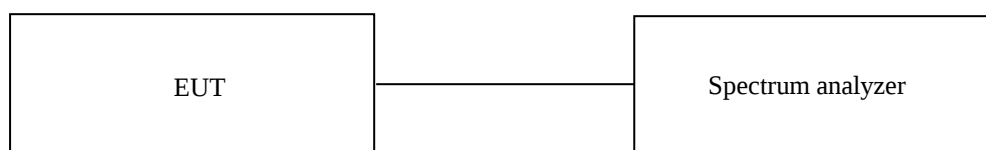

9.3 Test Date


January 07, 2021 ~ January 28, 2021


9.4 Test Data for Left Side

9.4.1 Test data for 1 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

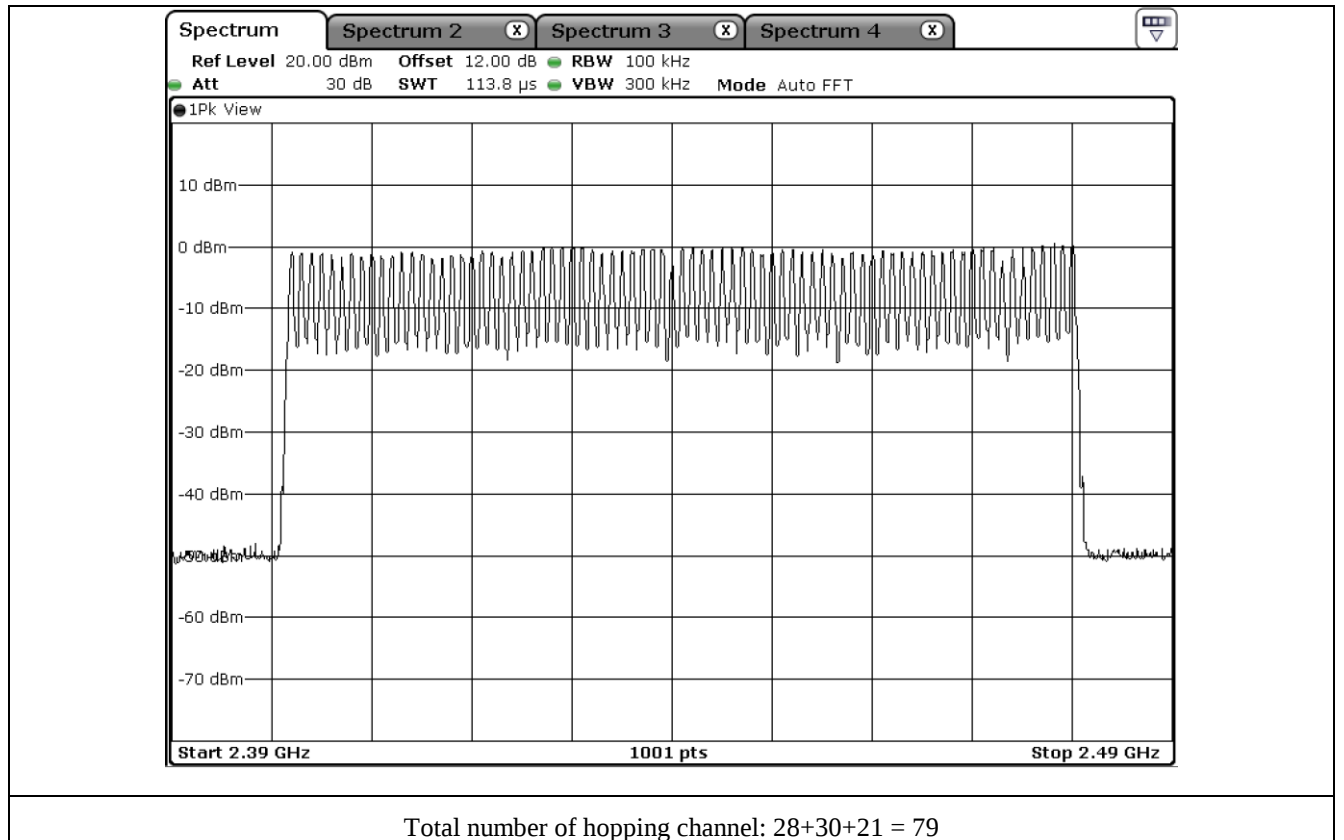


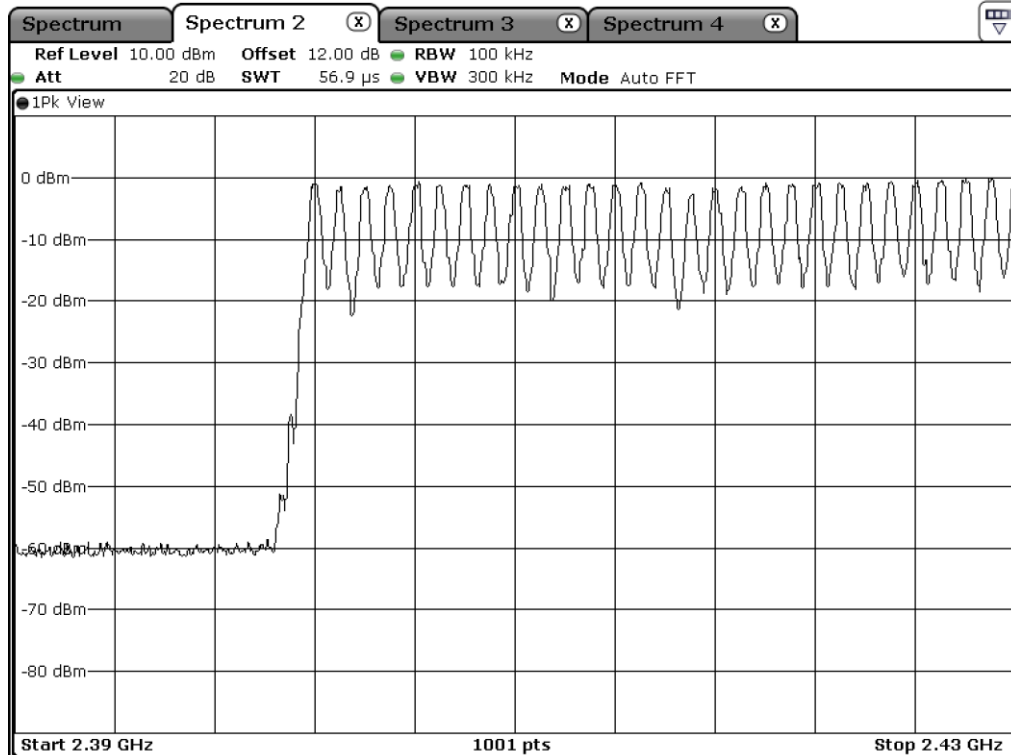

Number of hopping channel: 28

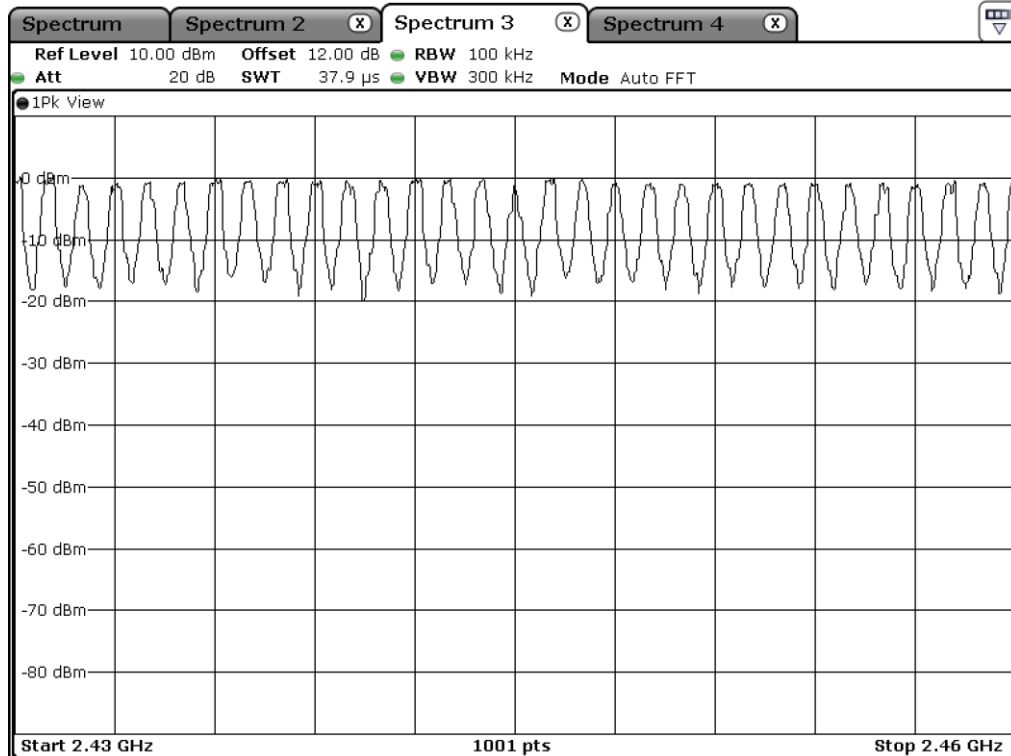


Number of hopping channel: 30

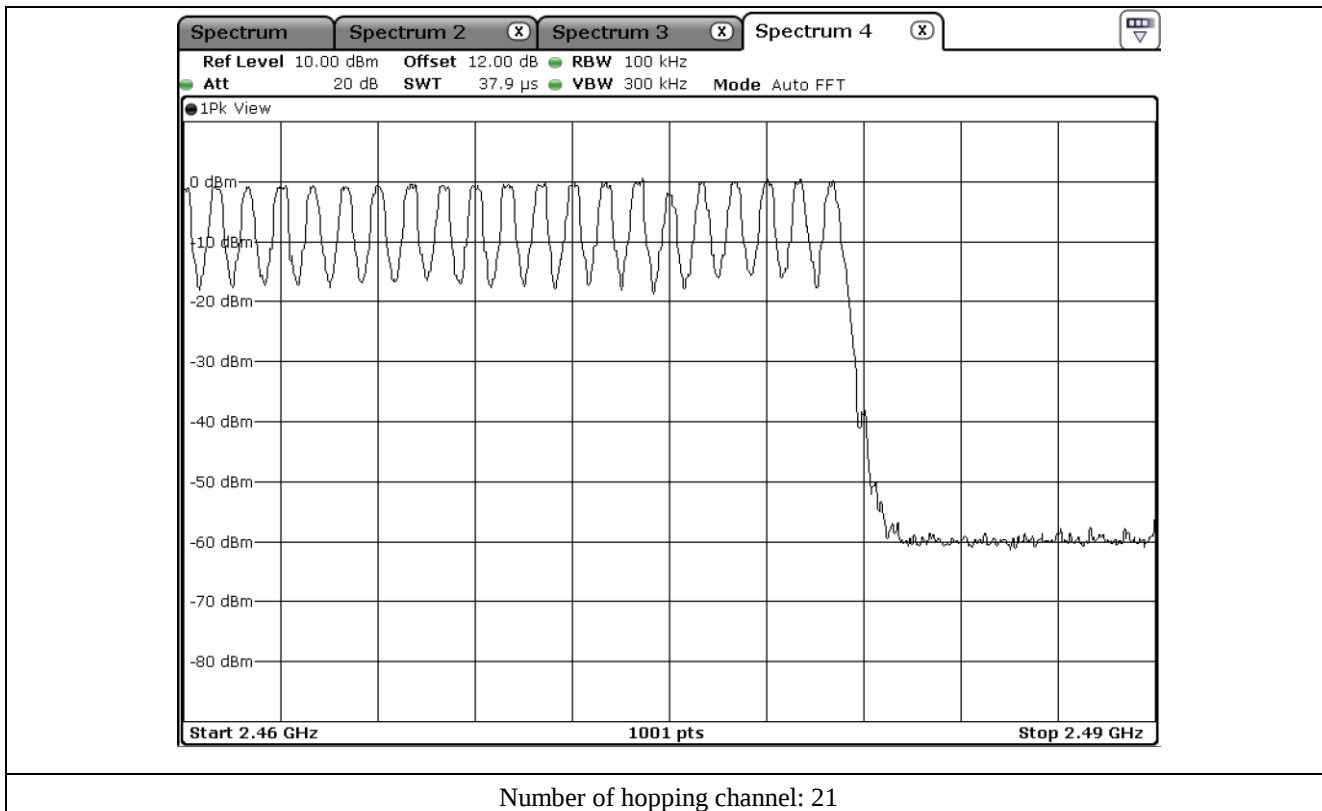


9.4.2 Test data for 2 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

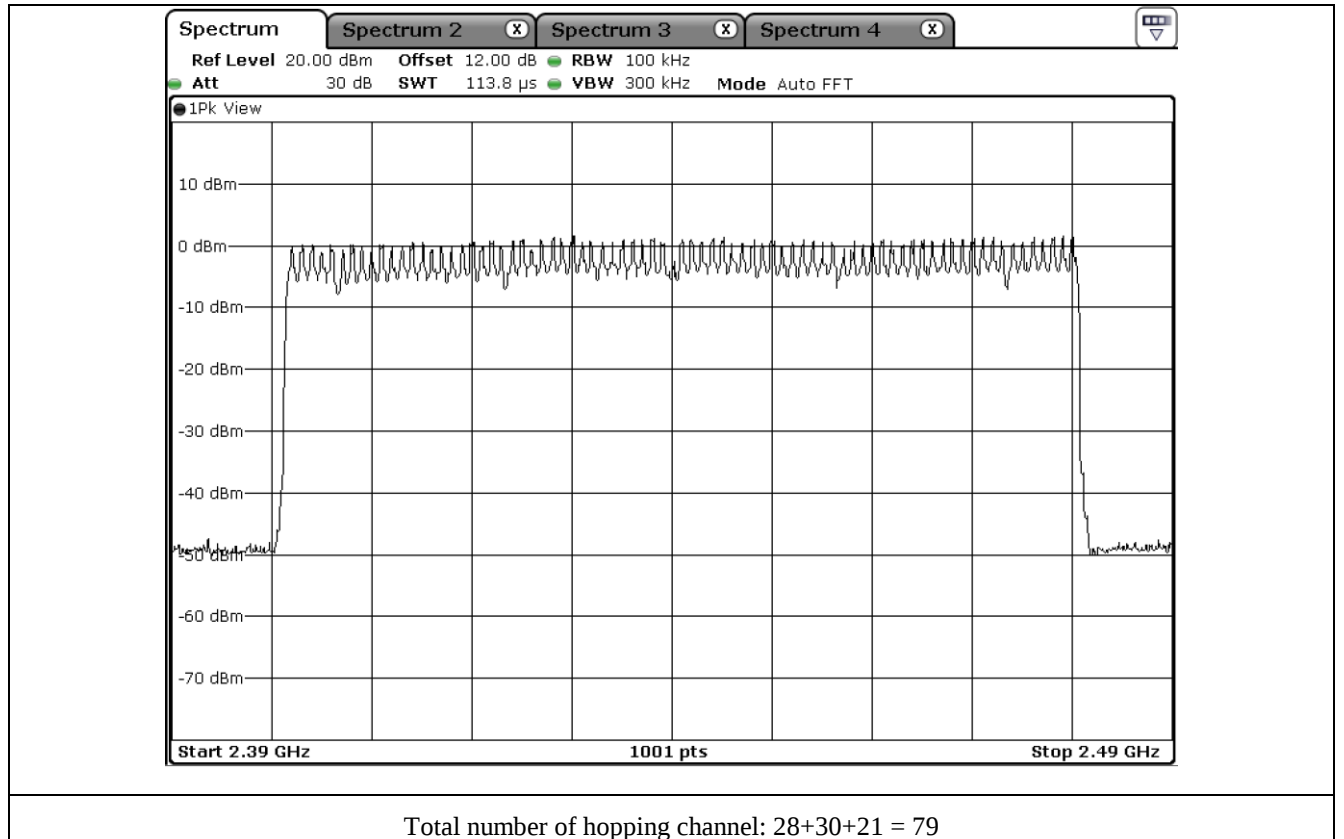


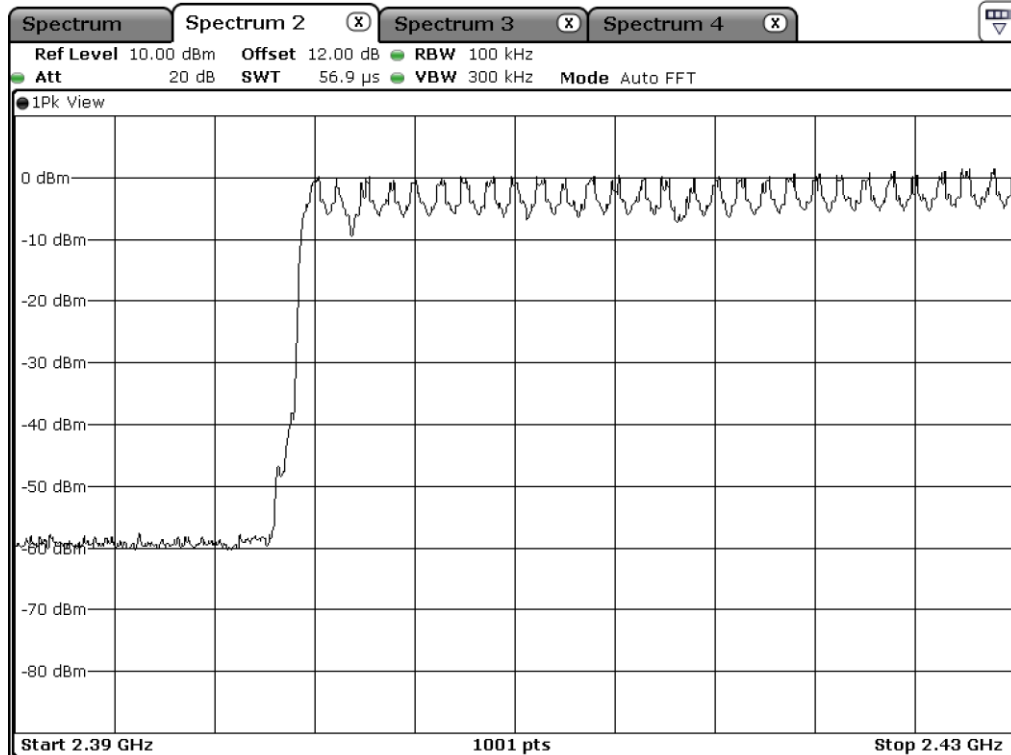

Number of hopping channel: 28

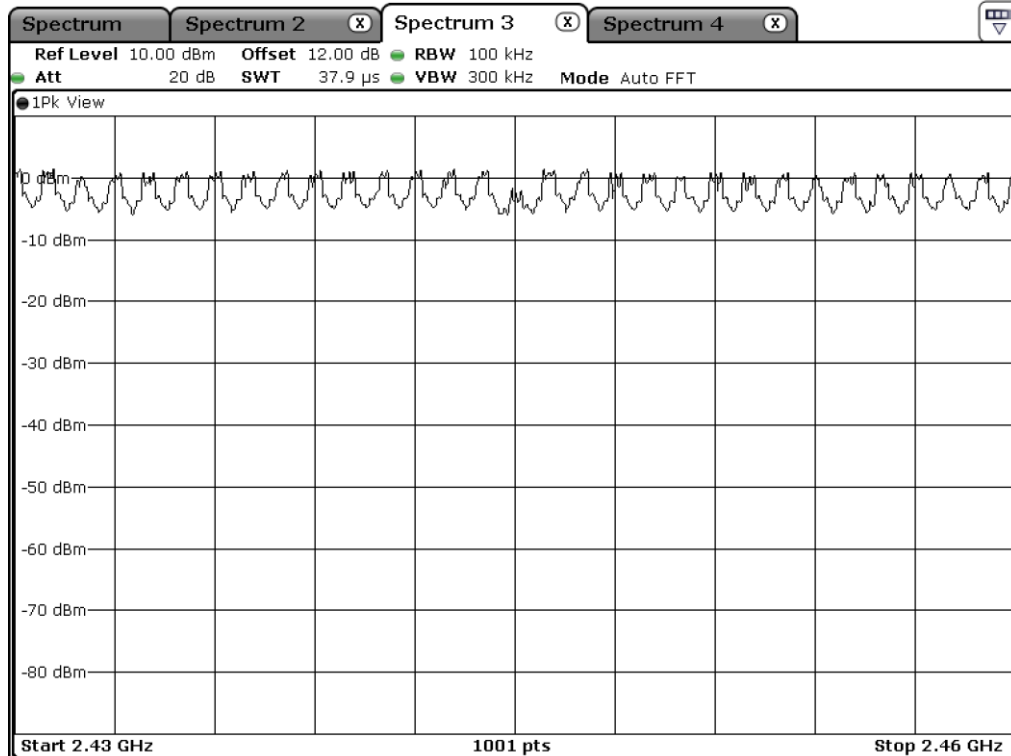


Number of hopping channel: 30

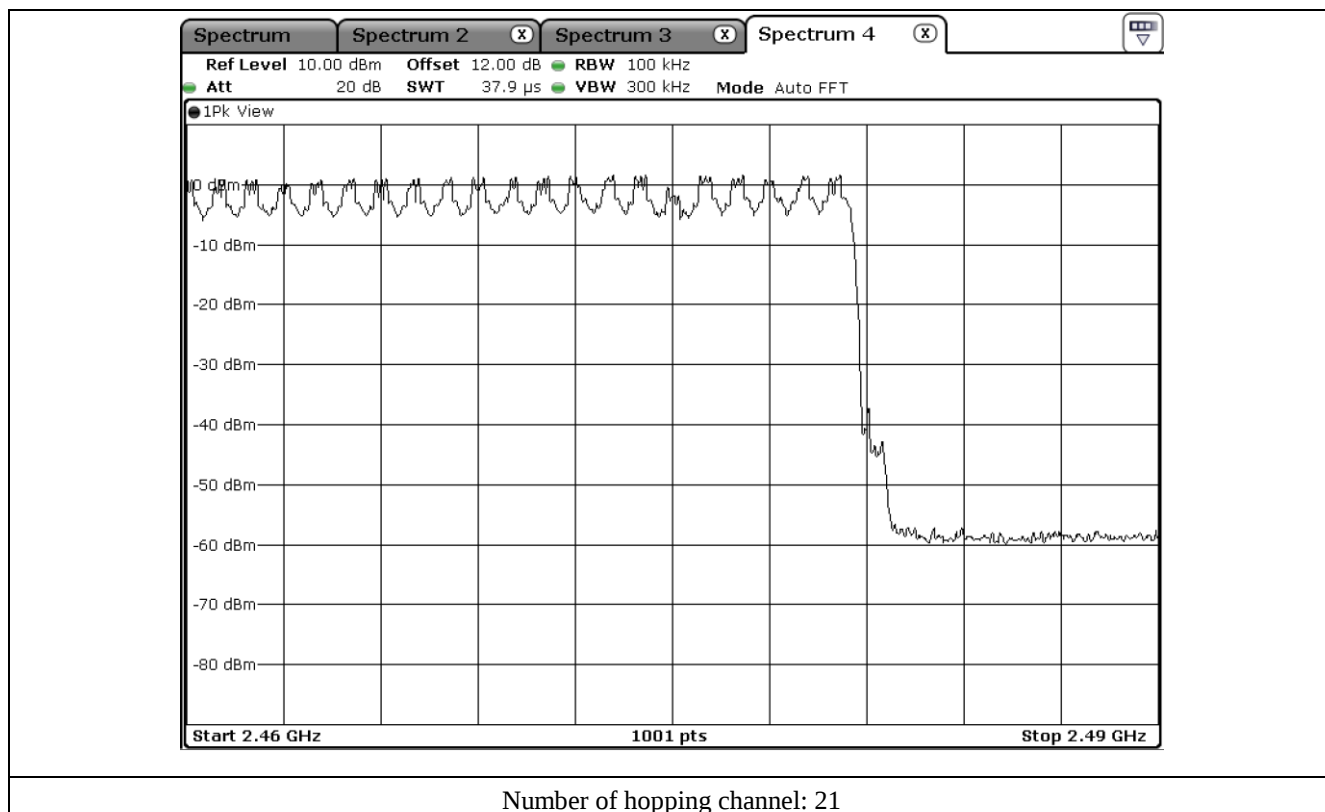


9.4.3 Test data for 3 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

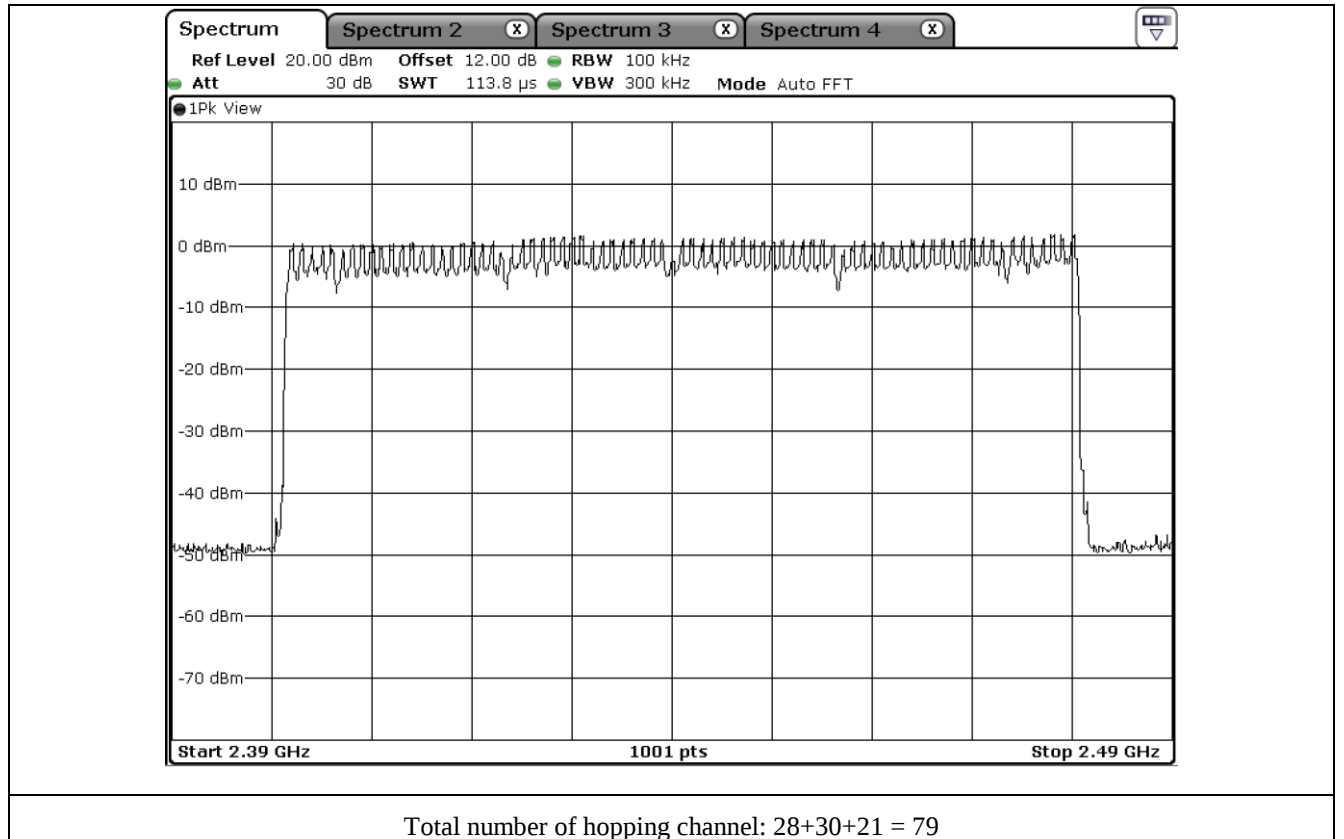


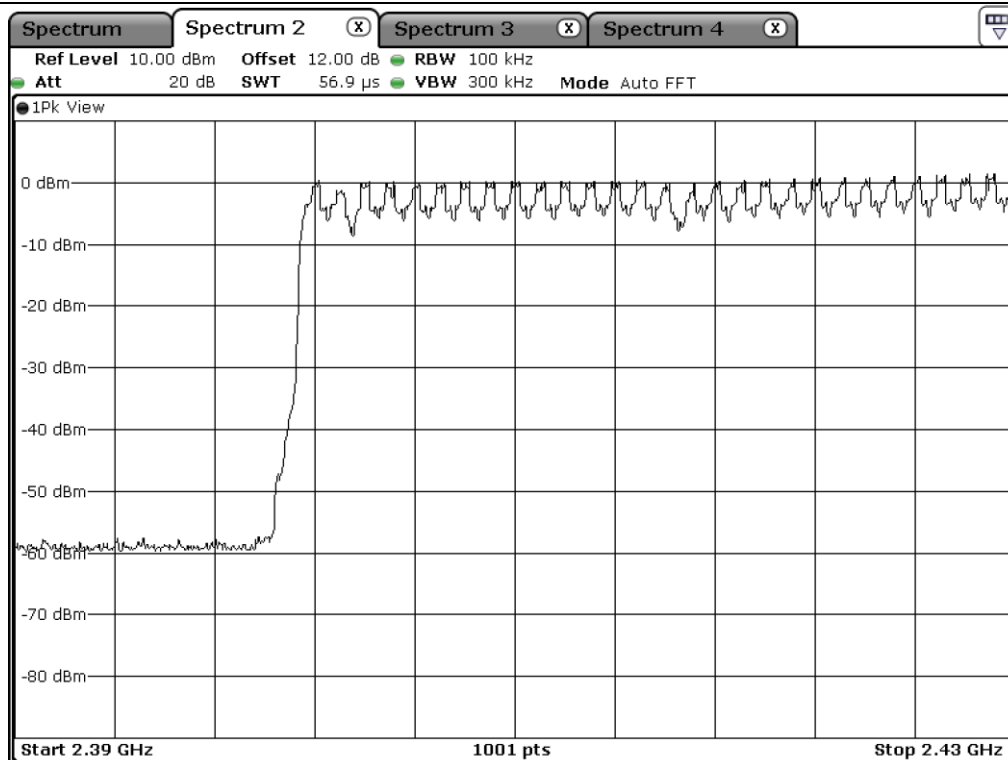

Number of hopping channel: 28

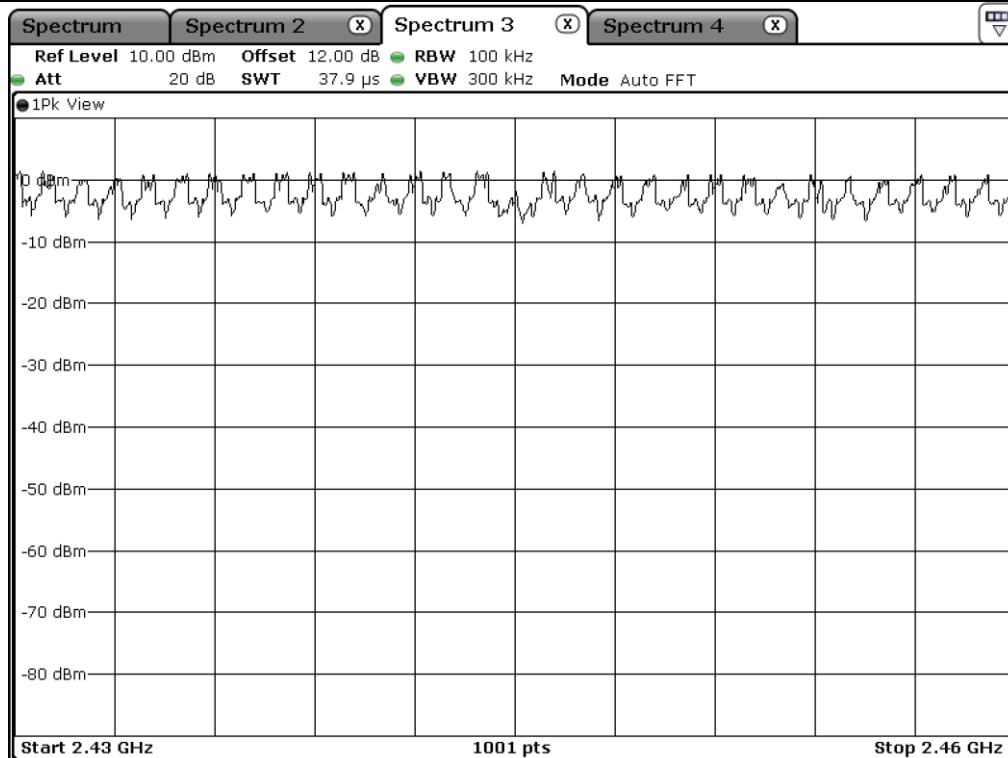

Number of hopping channel: 30

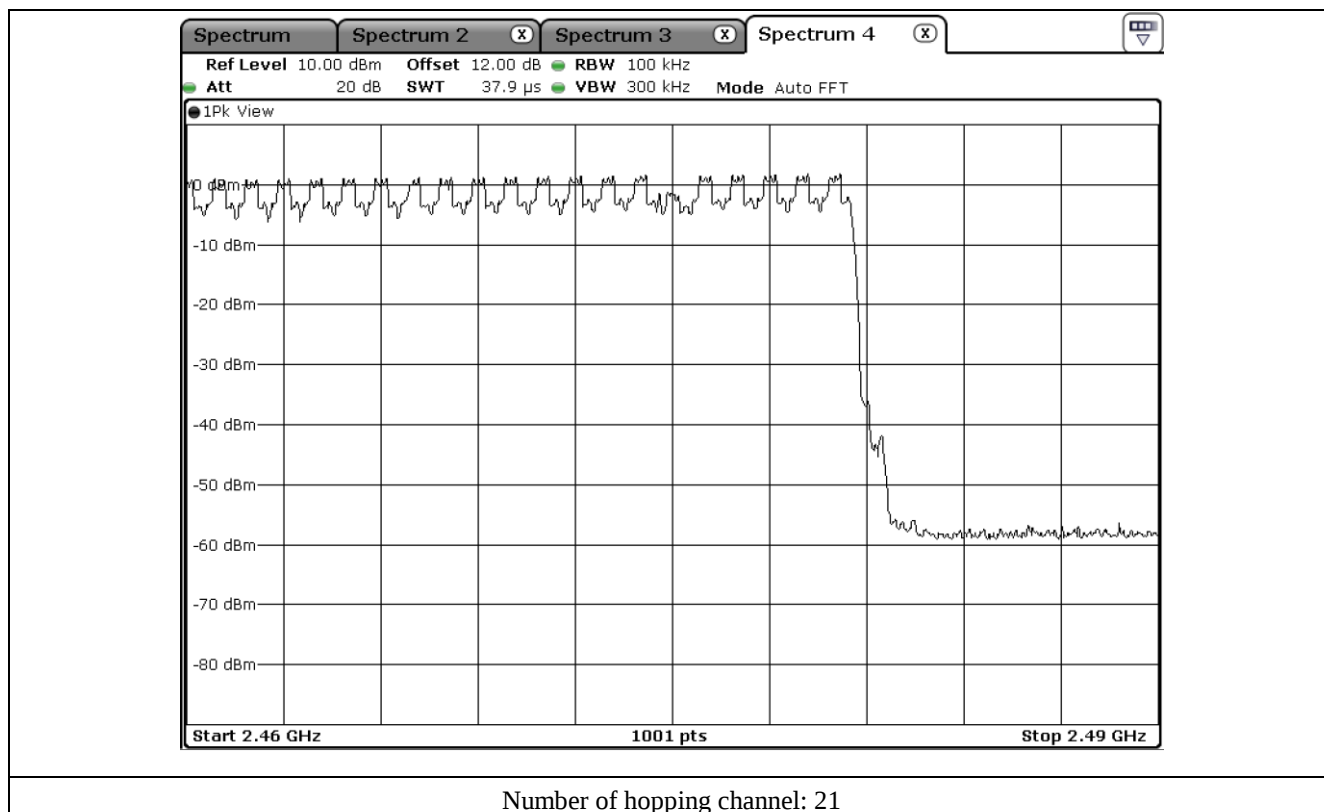



9.5 Test Data for Right Side

9.5.1 Test data for 1 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

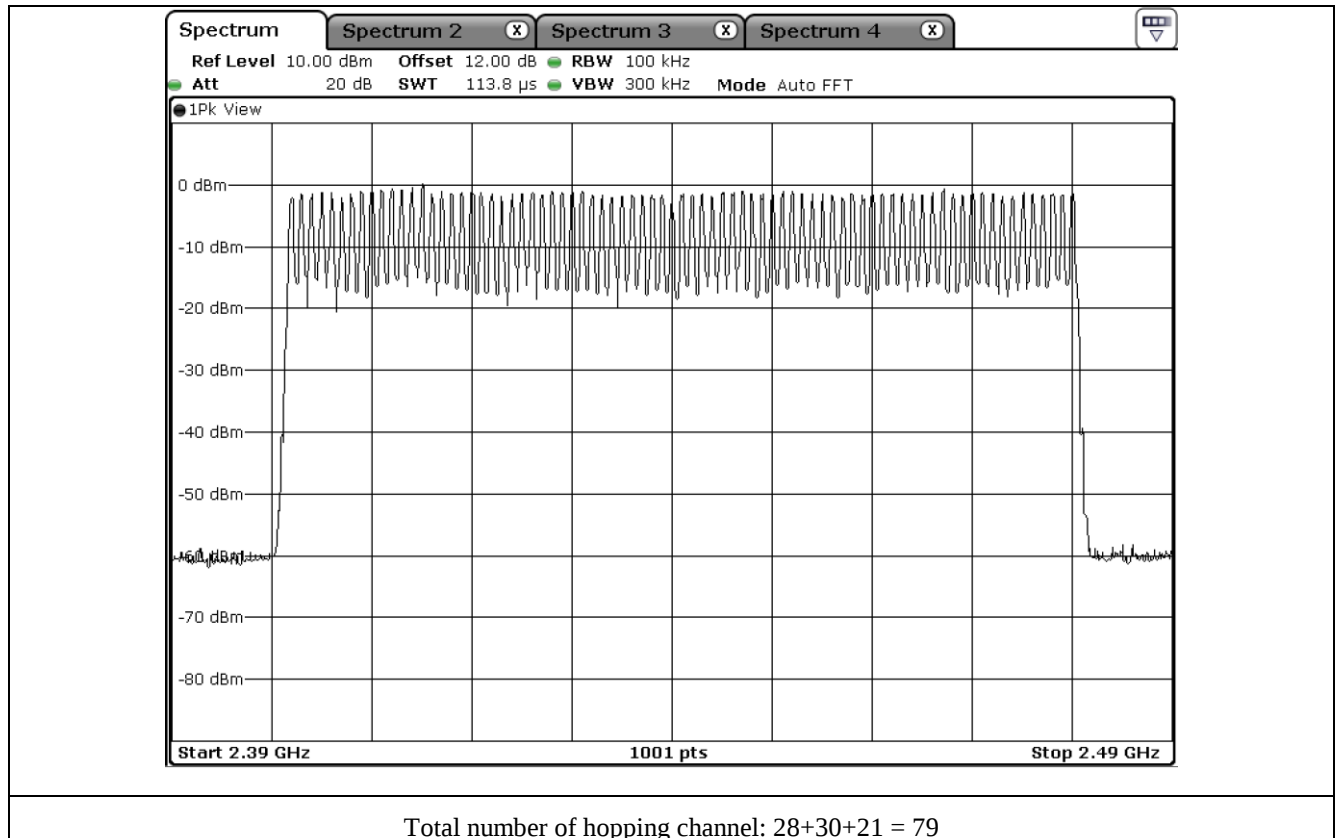


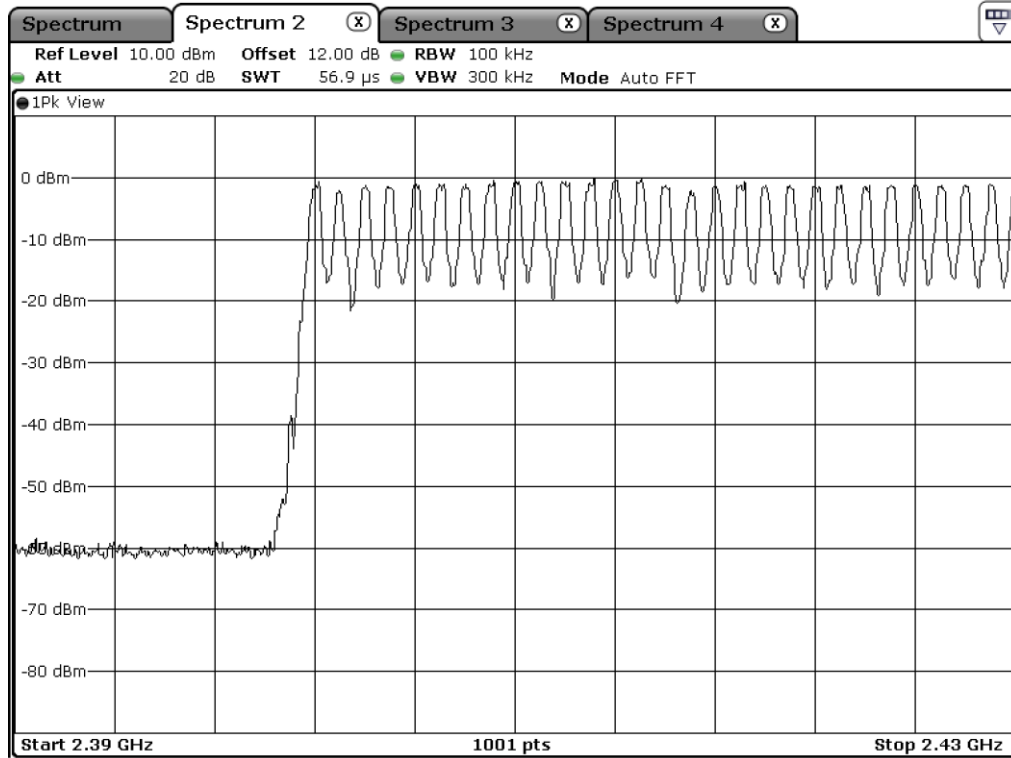

Number of hopping channel: 28

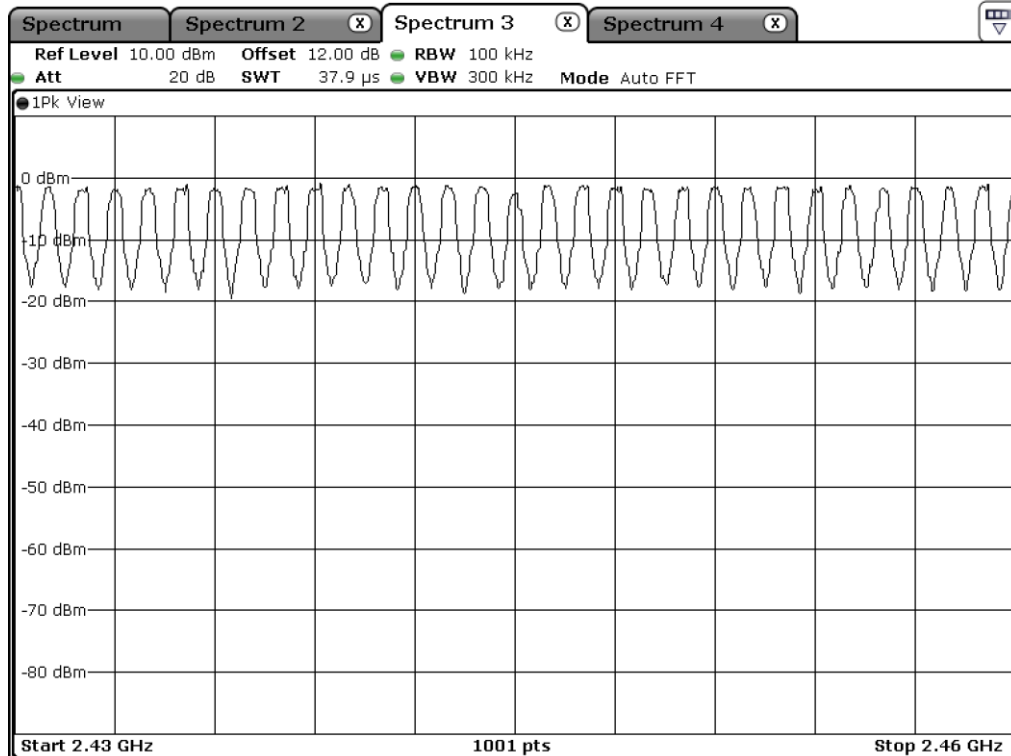


Number of hopping channel: 30

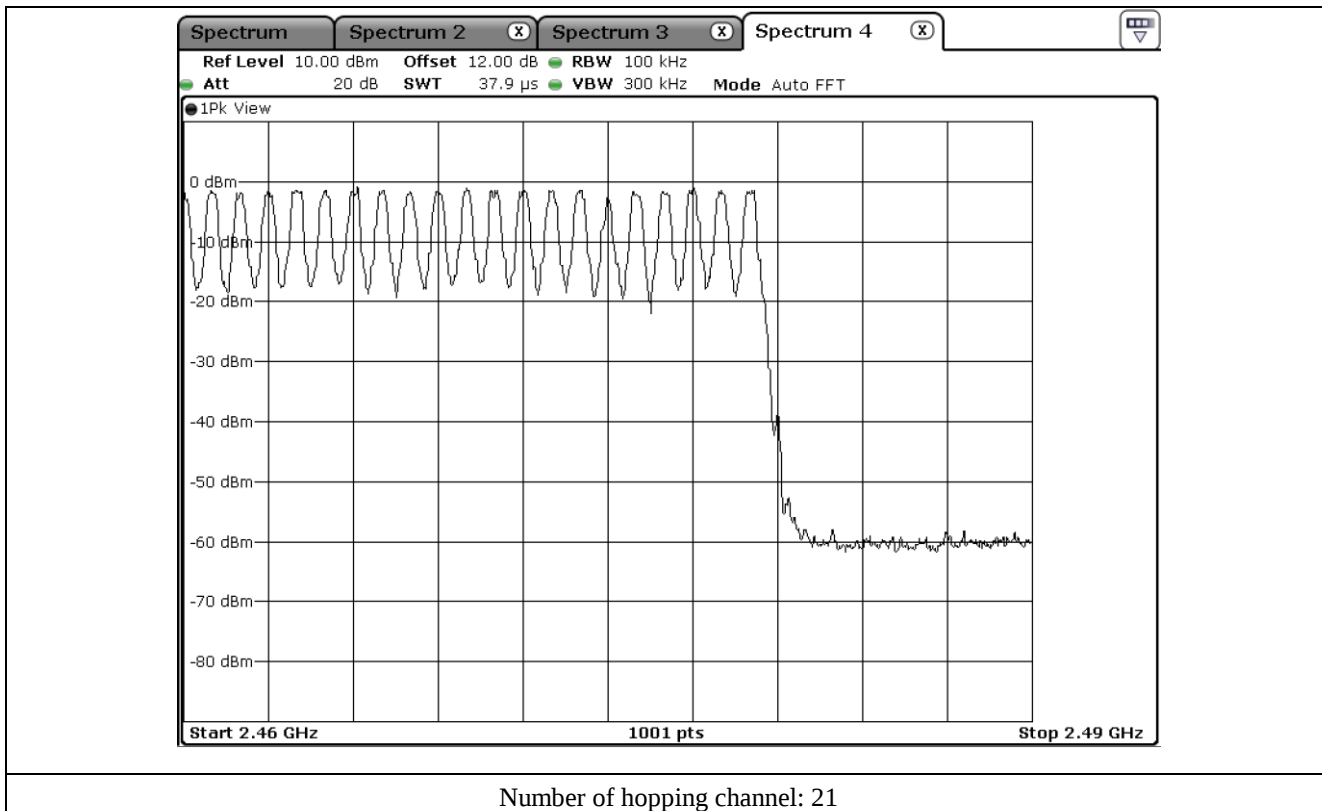


9.5.2 Test data for 2 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

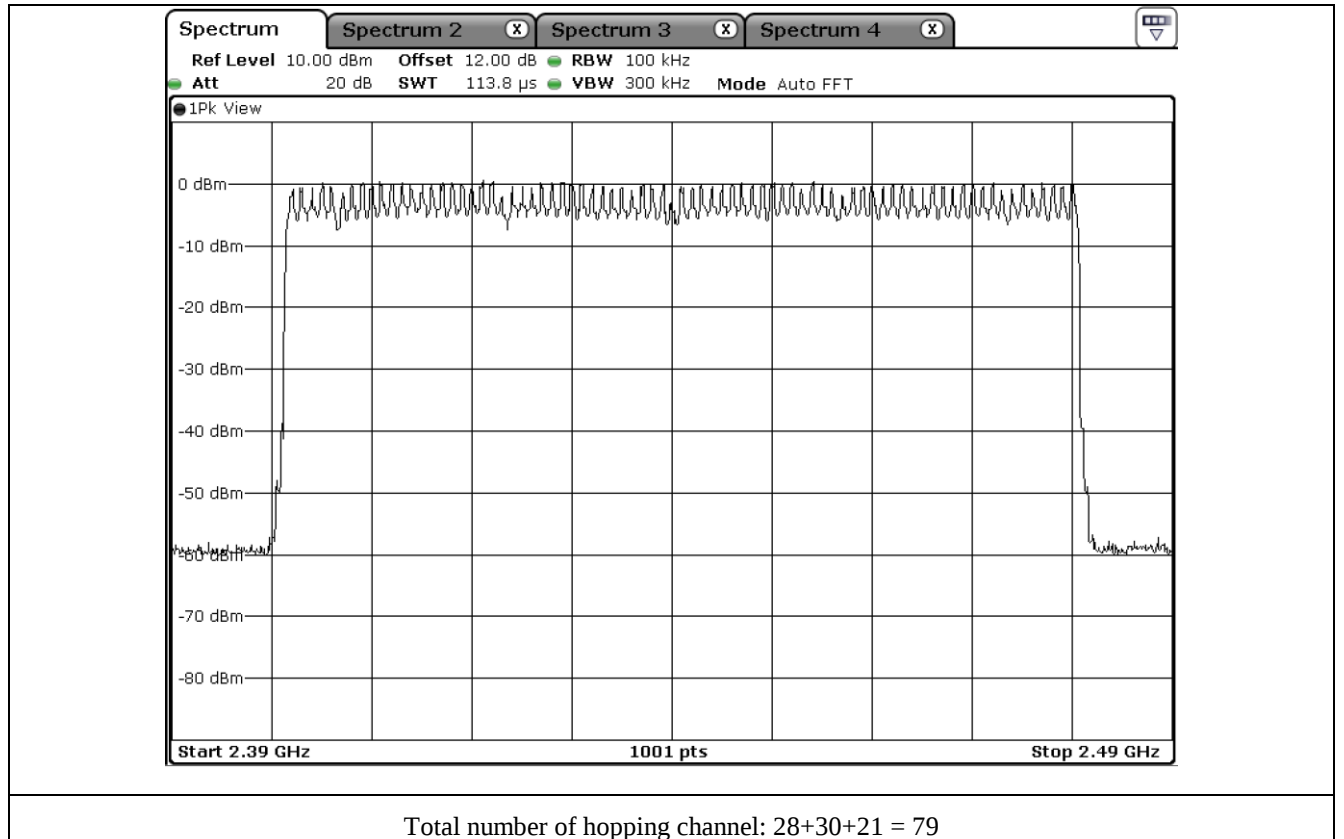


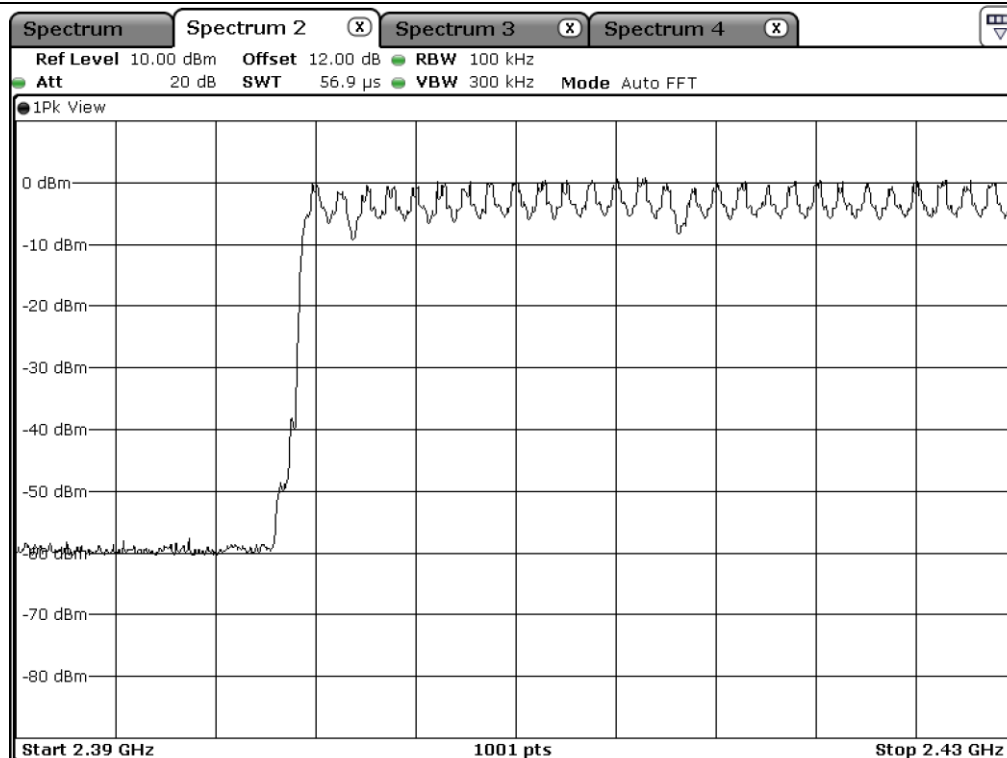

Number of hopping channel: 28

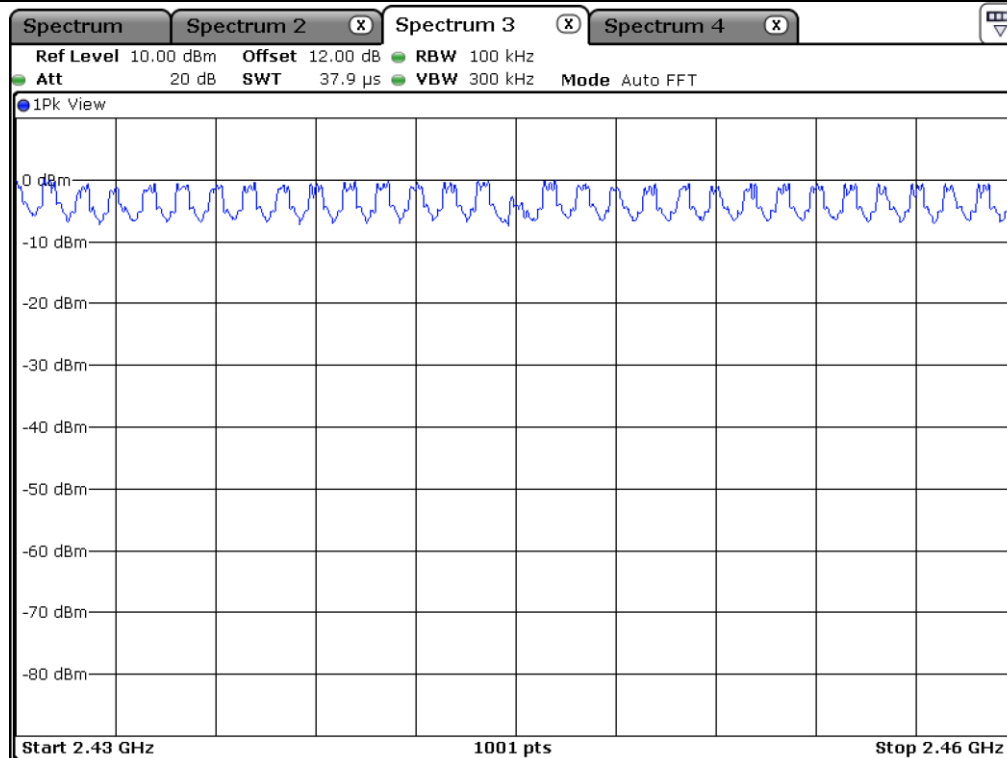


Number of hopping channel: 30

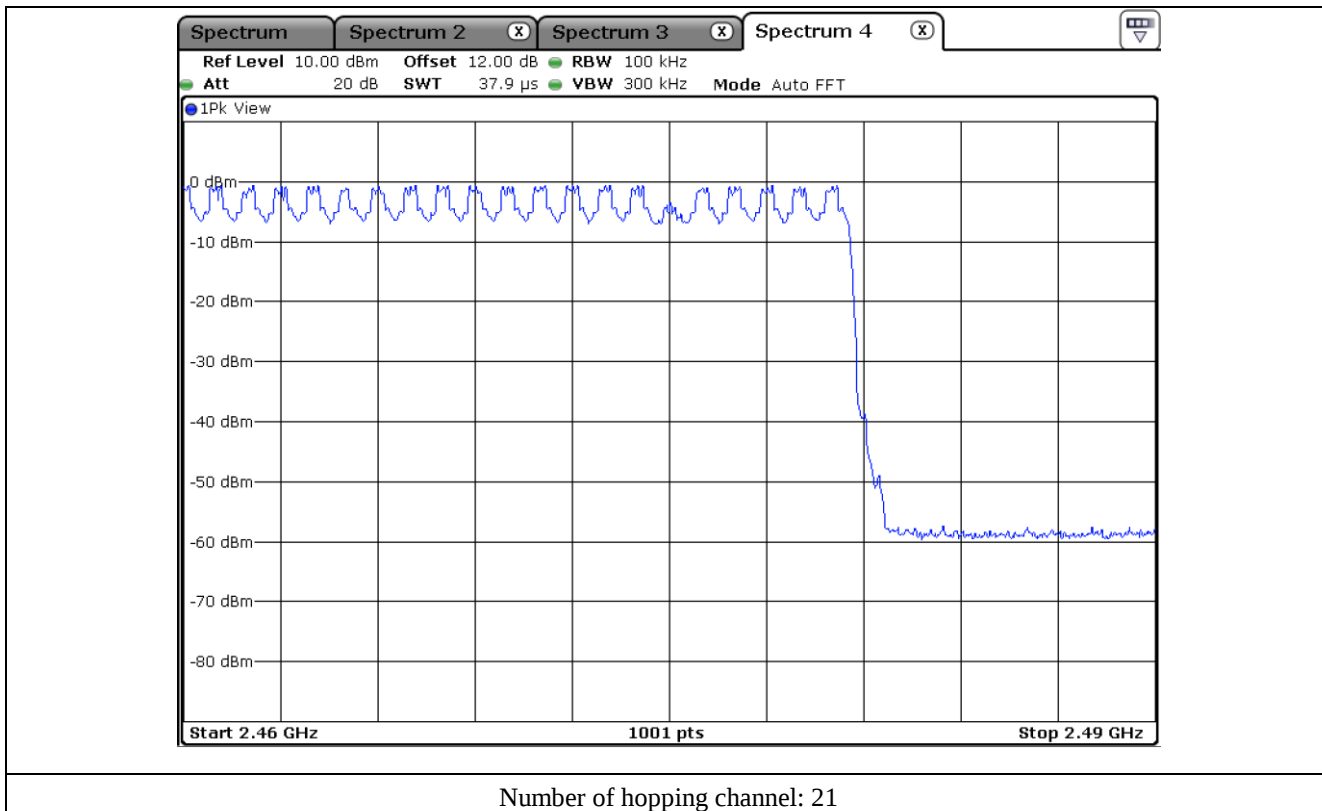


9.5.3 Test data for 3 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

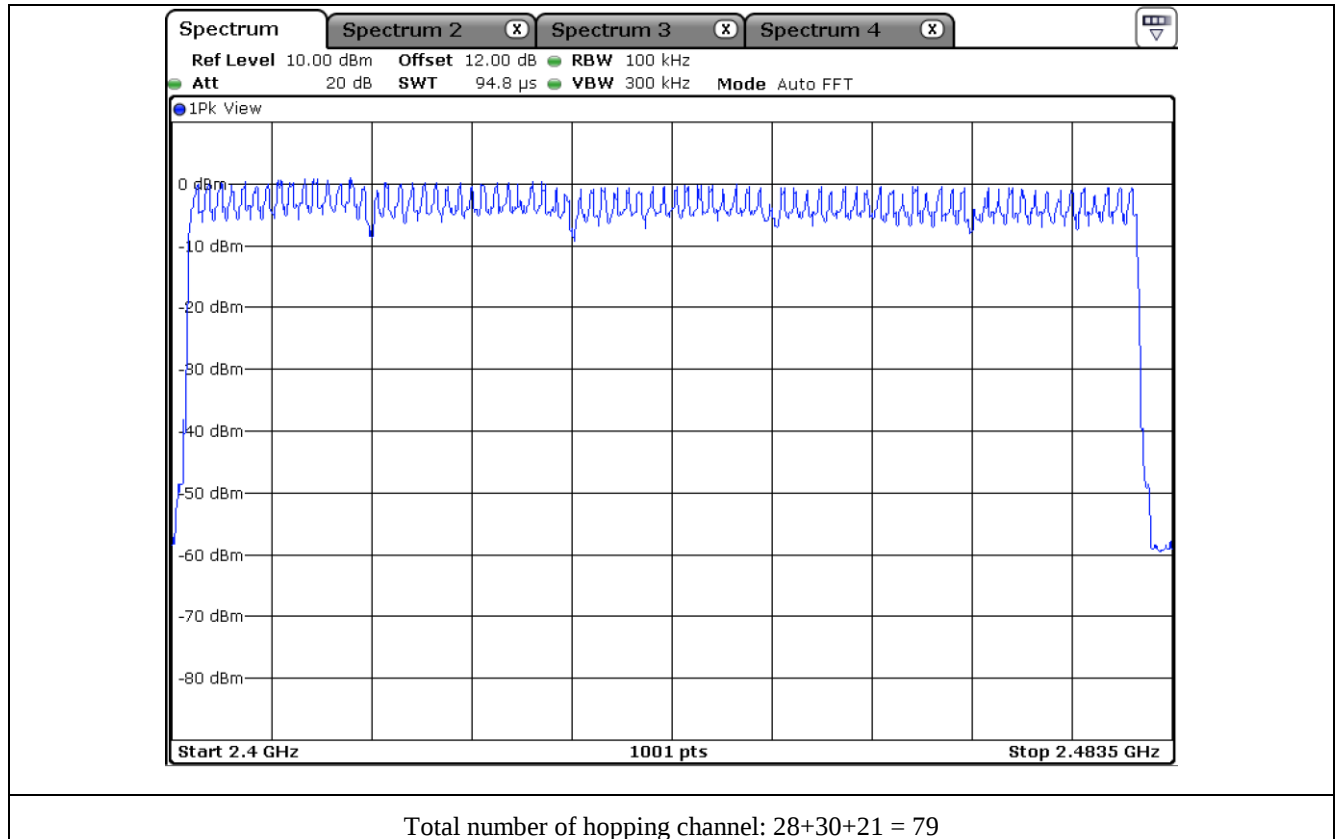


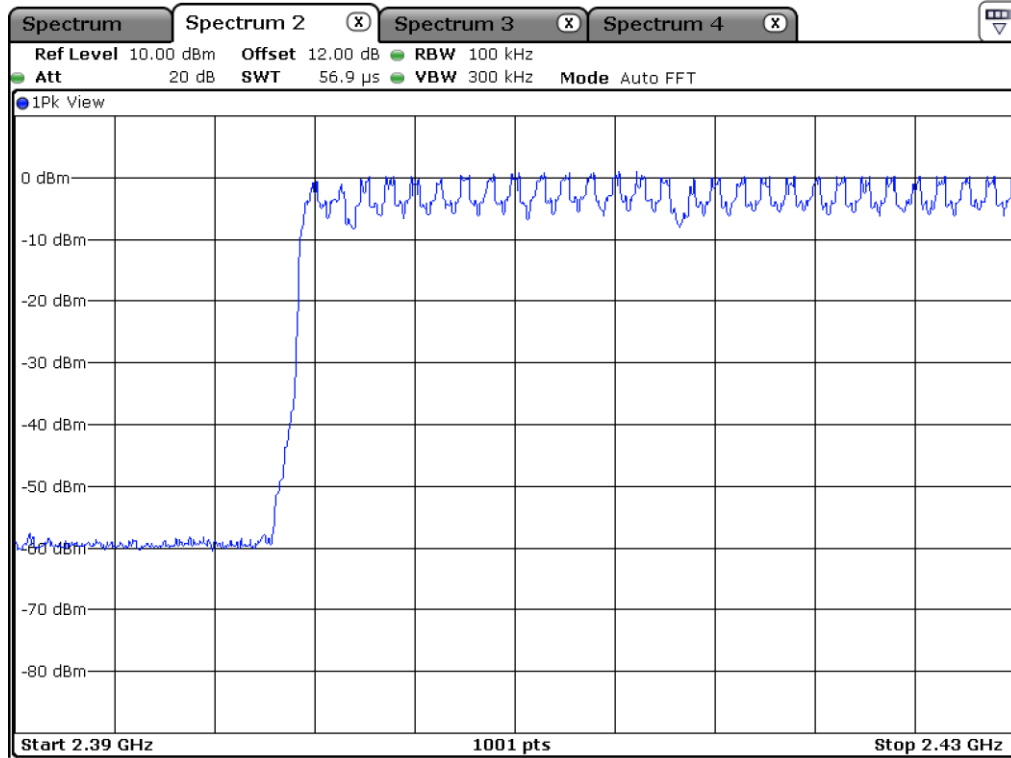

Number of hopping channel: 28

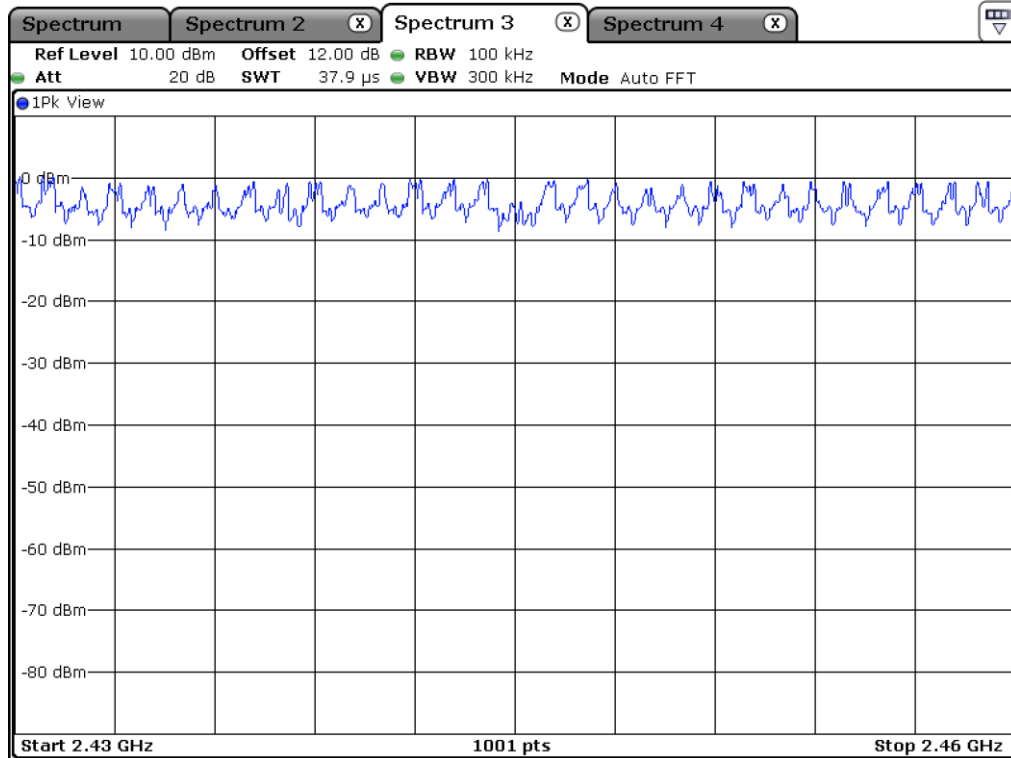

Number of hopping channel: 30

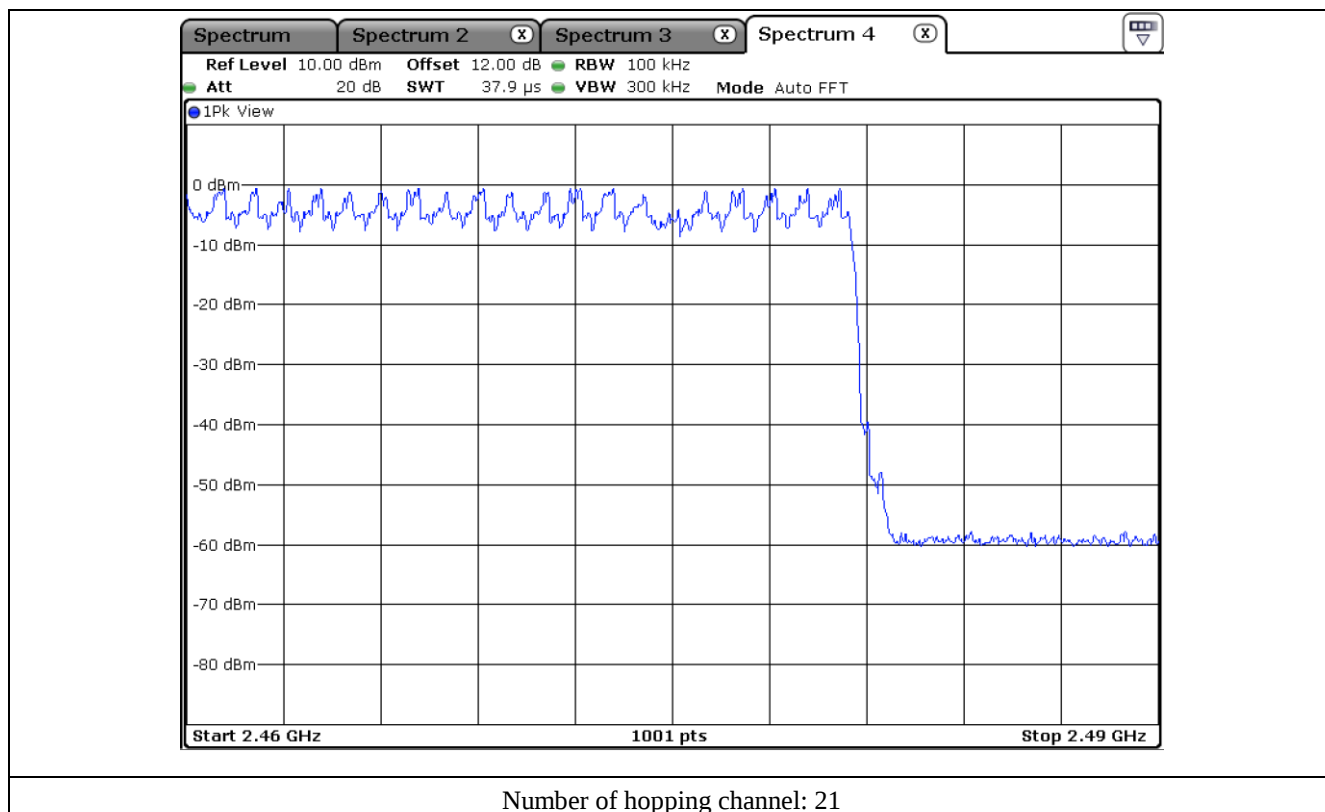


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

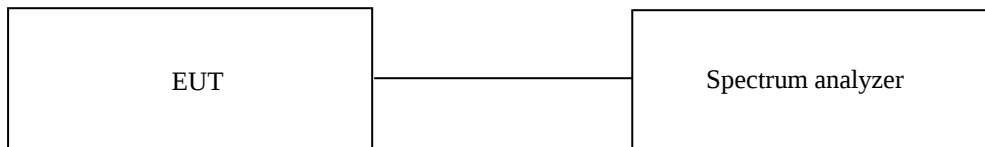

10.3 Test Date

January 07, 2021 ~ January 28, 2021

10.4 Test Data for Left Side

10.4.1 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.385	10.13	31.60	123.24	400	PASS
DH3	1.645	5.06	31.60	263.03	400	
DH5	2.875	3.38	31.60	307.07	400	

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

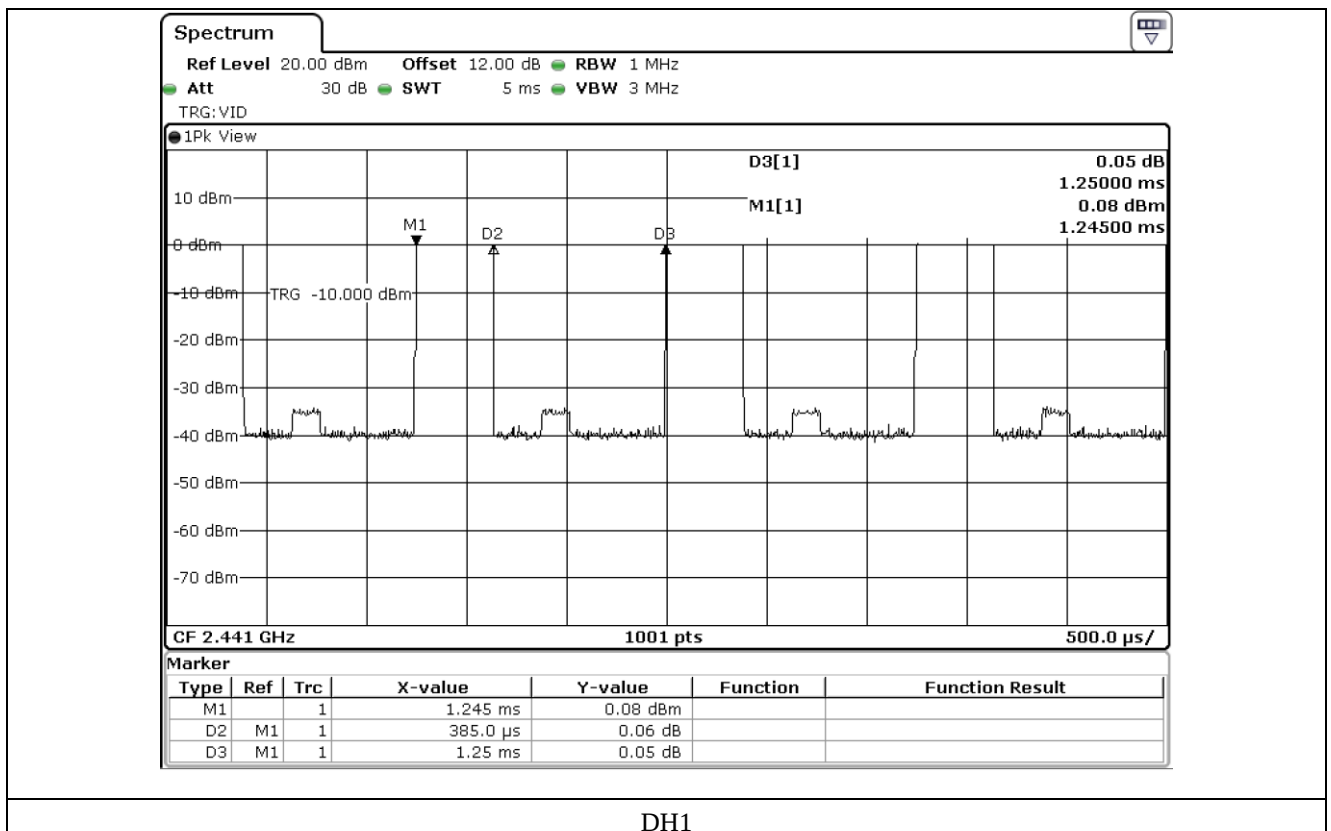

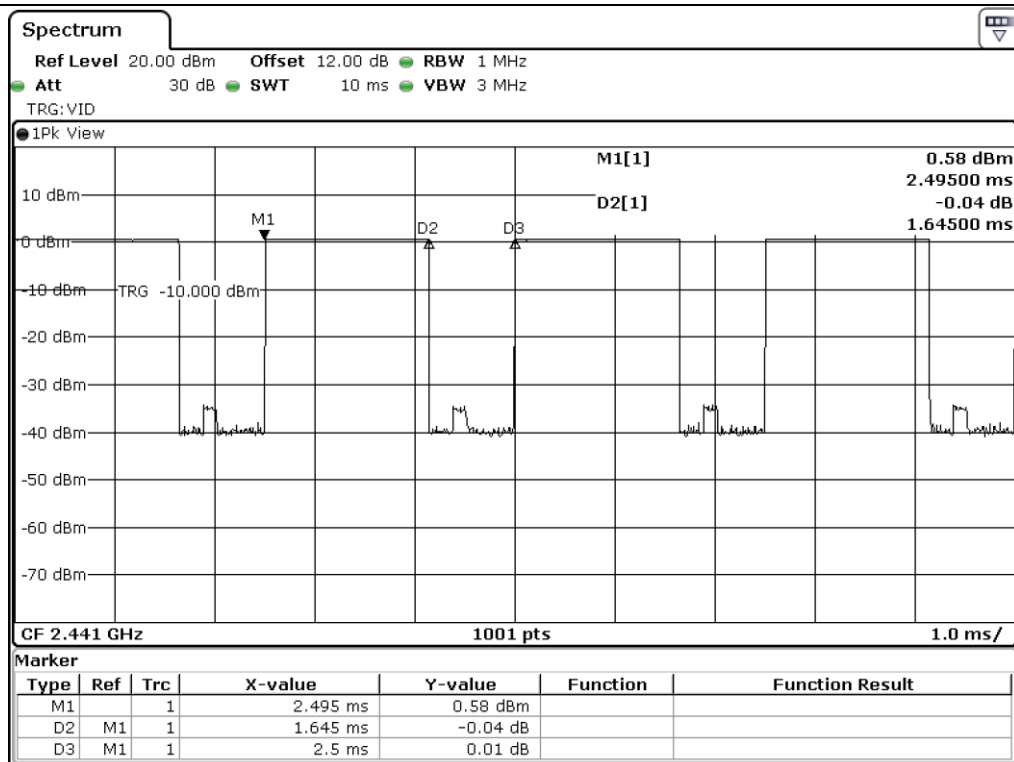

DH3

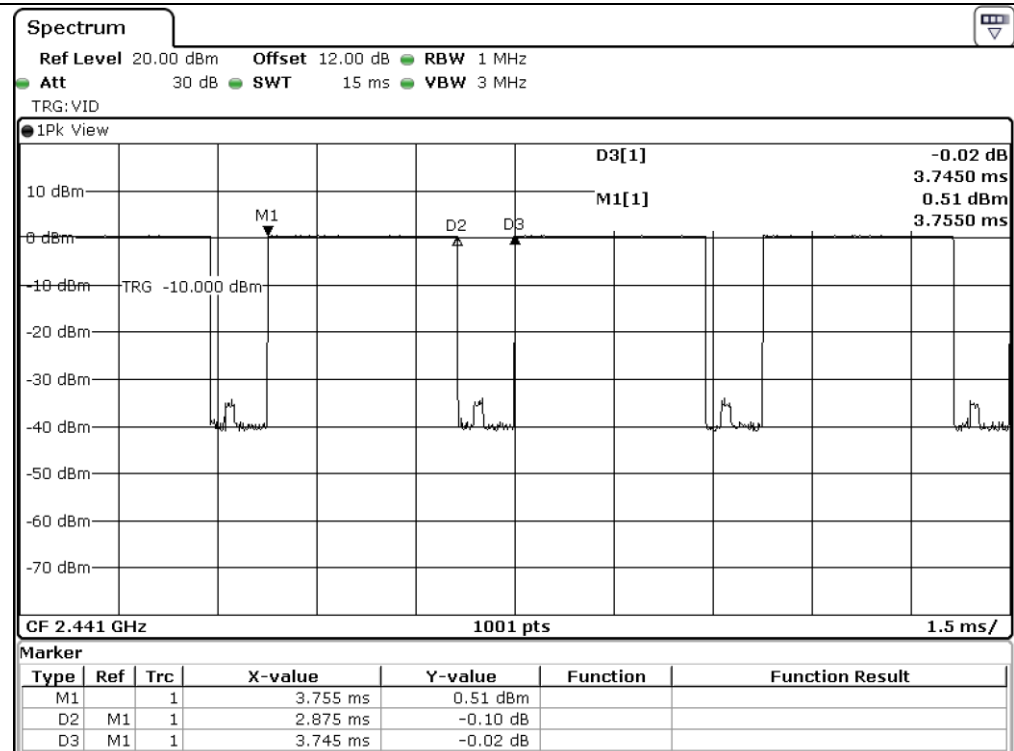

DH5

10.4.2 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.395	10.13	31.60	126.44	400	PASS
DH3	1.640	5.06	31.60	262.23	400	
DH5	2.885	3.38	31.60	308.14	400	

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

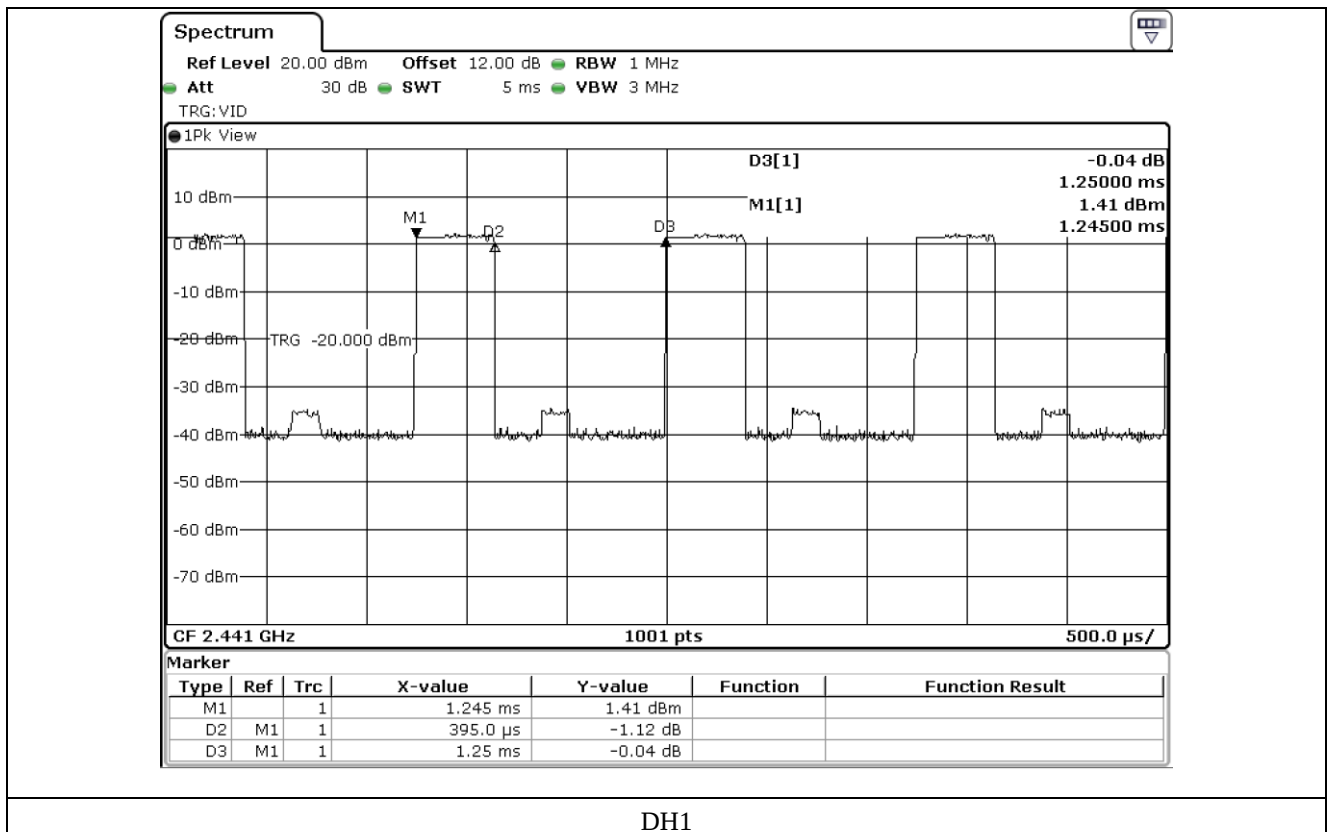

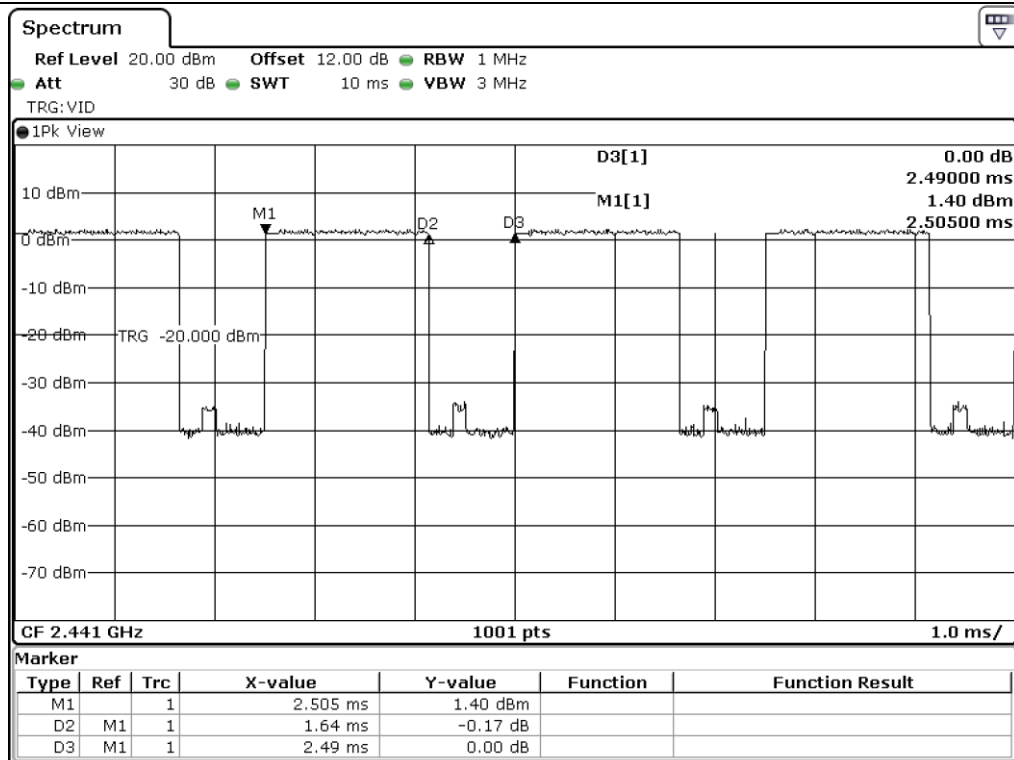

DH3

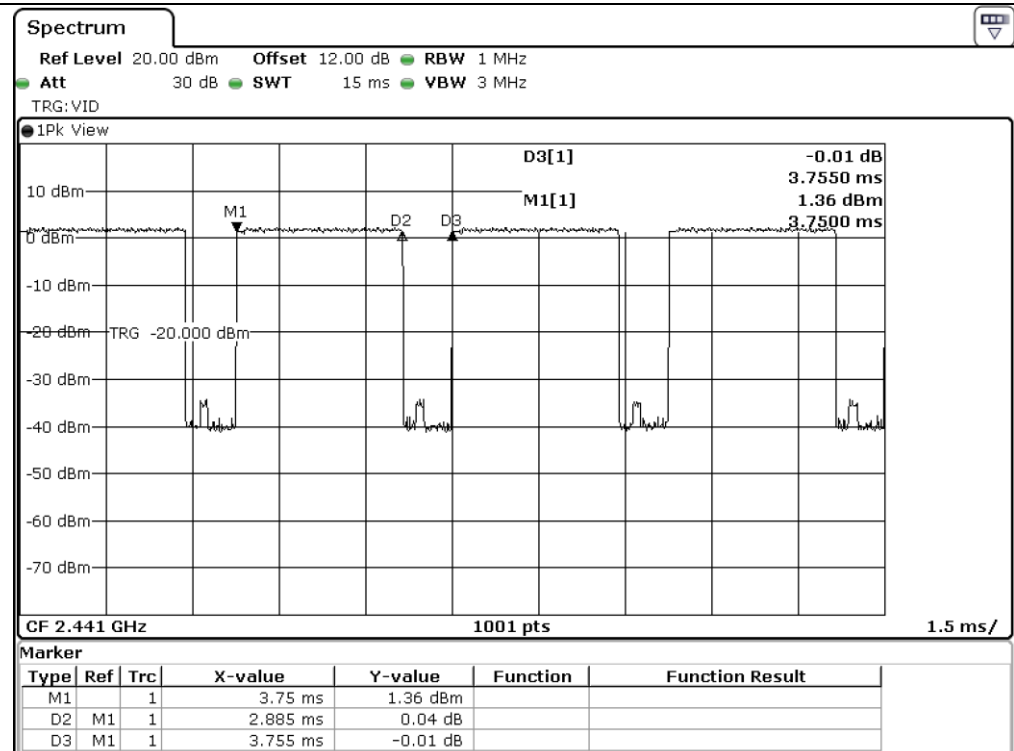

DH5

10.4.3 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.385	10.13	31.60	123.24	400	PASS
DH3	1.645	5.06	31.60	263.03	400	
DH5	2.890	3.38	31.60	308.68	400	

Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

