




Test Date	2018/10/31	Temp./Hum.	25°C/55%
Mode	802.11ac-VHT80	UNII Band	III
Mode		Frequency	TX 5775MHz
Cable Loss	3.91dB	Test Voltage	AC 120V/60HZ (via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			3



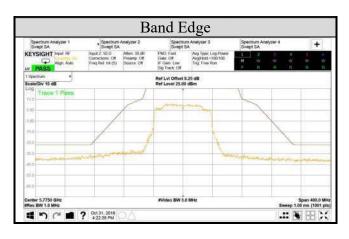


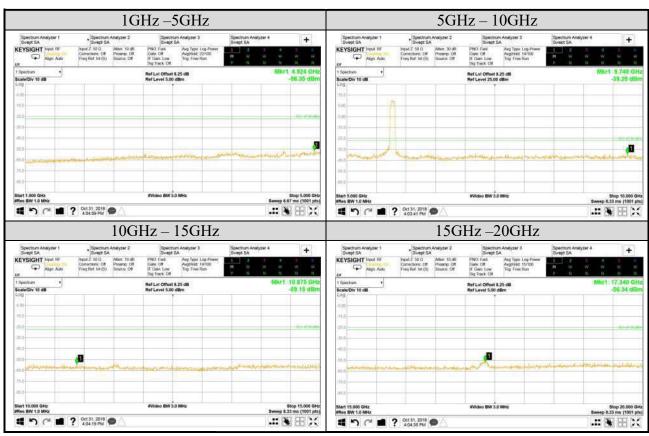

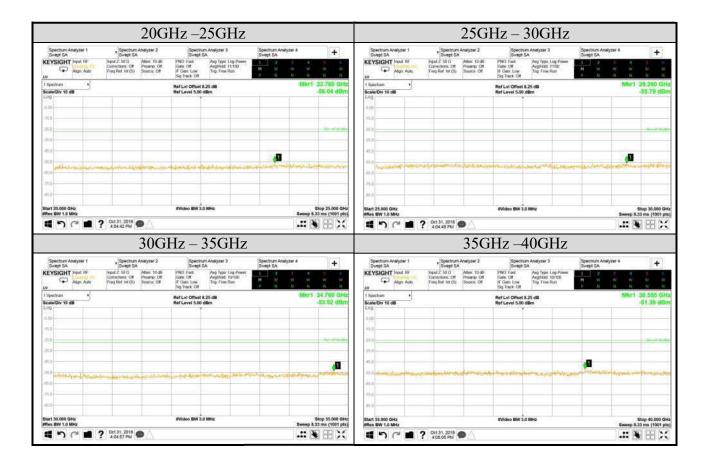




Test Date	2018/10/29	Temp./Hum.	25°C/55%
Mada	802.11ac-VHT160	UNII Band	I
Mode		Frequency	TX 5250MHz
Cable Loss	2.92dB	Test Voltage AC 120V/60HZ (via AC Adapter)	
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			3

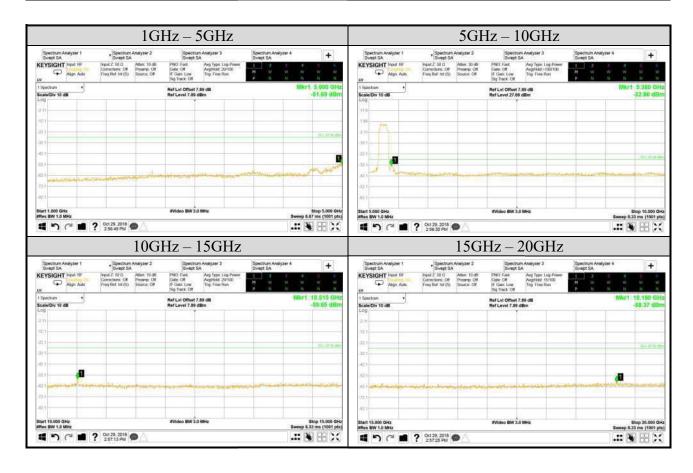




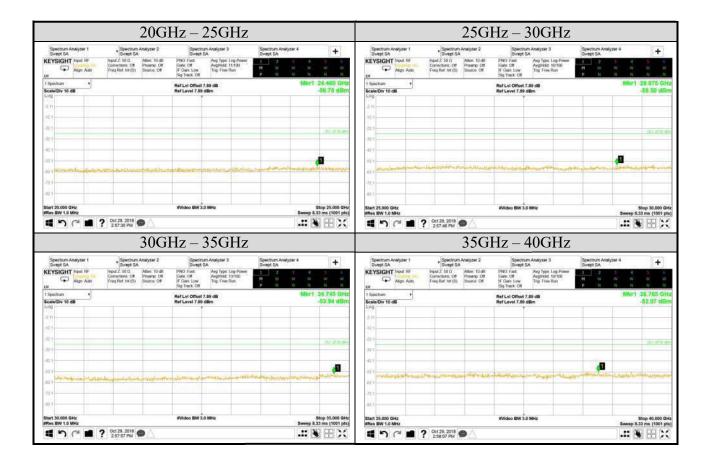



Test Date	2018/11/01	Temp./Hum.	25°C/55%
Modo	802.11ac-VHT160	UNII Band	II-2C
Mode		Frequency	TX 5570MHz
Cable Loss	3.91dB	Test Voltage AC 120V/60HZ (via AC Adapter)	
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			3

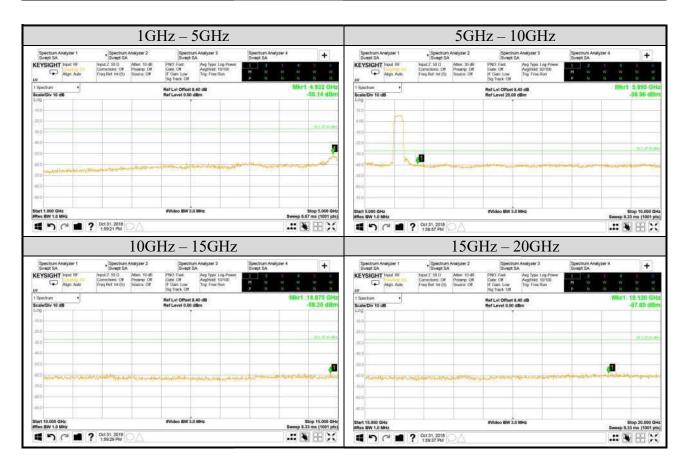







Tel: +886 2 26099301 Fax: +886 2 26099303

A.6 POWER SPECTRAL DENSITY

Test Date	2018/10/24 ~ 30	Temp./Hum.	25°C/55%	
Cable Loss	Band I: 2.92dB Band II-2A/2C: 3.37dB	Test Voltage	AC 120V, 60Hz (Via AC Adapter)	
	Band III: 3.91dB			
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			802.11a: 0; 802.11ac/n: 3	

A.6.1 Power Spectral Density Result

Mode	UNII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
		5180	7.337	
	I	5200	10.462	
		5240	10.385	
		5260	10.006	
	II-2A	5300	8.720	11 dBm/MHz
002.11		5320	5.737	
802.11a	II-2C	5500	5.619	
		5580	9.978	
		5700	7.156	
		5745	7.800	
	III ^{Note2}	5785	7.952	30dBm/500 kHz
		5825	6.862]

Note 1: All results have been included cable loss and Simultaneous Factor and correct duty factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.

File Number: C1M1810098 Report Number: EM-F180478



Tel: +886 2 26099301 Fax: +886 2 26099303

Mode	UNII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
		5180	7.878	
	I	5200	10.011	
		5240	10.210	
		5260	7.976	
	II-2A	5300	9.969	11 dBm/MHz
		5320	7.007	
802.11n- HT20		5500	6.370	
11120	II-2C	5580	9.913	
	II-2C	5700	9.039	
		5720	10.415	
		5745	10.667	
	III ^{Note2}	5785	10.285	30dBm/500 kHz
		5825	10.703	
	I	5190	1.821	
		5230	6.372	
	II-2A	5270	7.356	
		5310	3.343	11 dBm/MHz
802.11n- HT40		5510	1.183	11 apii/Minz
	W 2.0	5550	5.561	
	II-2C	5670	7.182	
		5710	8.571	
	III ^{Note2}	5755	4.709	30dBm/500 kHz
		5795	7.130	SUUDIII/SUU KHZ

Note 1: All results have been included cable loss and Simultaneous Factor and correct duty factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.



Tel: +886 2 26099301 Fax: +886 2 26099303

Modulation Type	UNII Band	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit	
	I	5210	-3.200		
	II-2A	5290	-1.621		
802.11ac-	II-2C	5530	-0.870	11 dBm/MHz	
VHT80		5610	3.972		
		5690	5.812		
	III	5775	-0.920	30dBm/500 kHz	
802.11ac- VHT160	I	5250	6.56	11 dBm/MHz	
	II-2C	5570	-5.204	11 UDIII/IVITIZ	


Note 1: All results have been included cable loss and Simultaneous Factor.

Note 2: BWCF 6.99dB (100kHz converted to 500kHz) has been included in the test result.




Tel: +886 2 26099301 Fax: +886 2 26099303


A.6.2 Measurement Plots

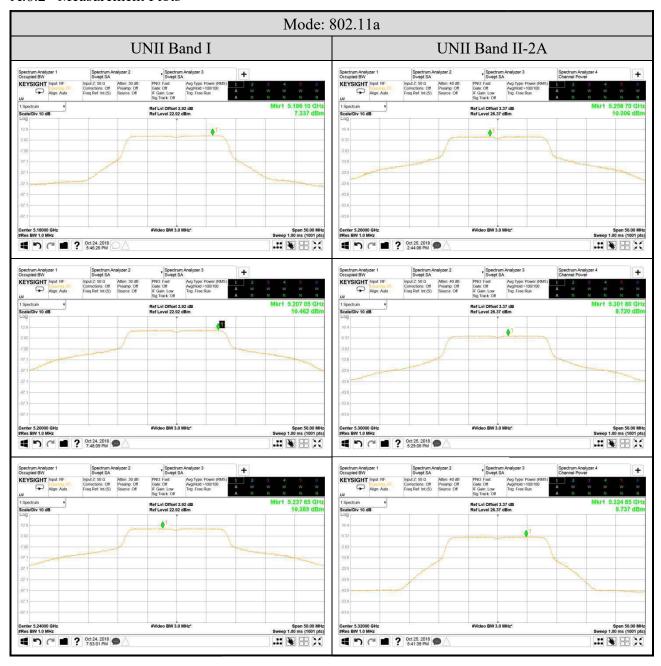



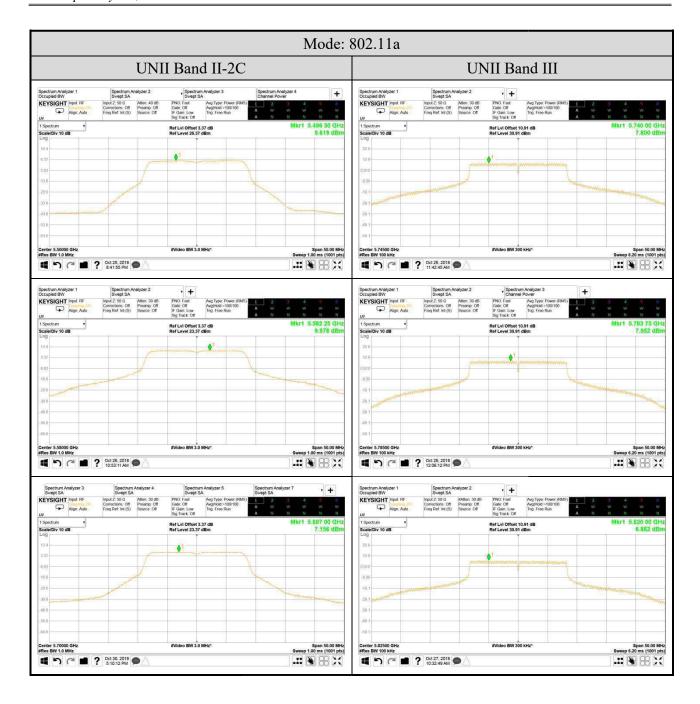




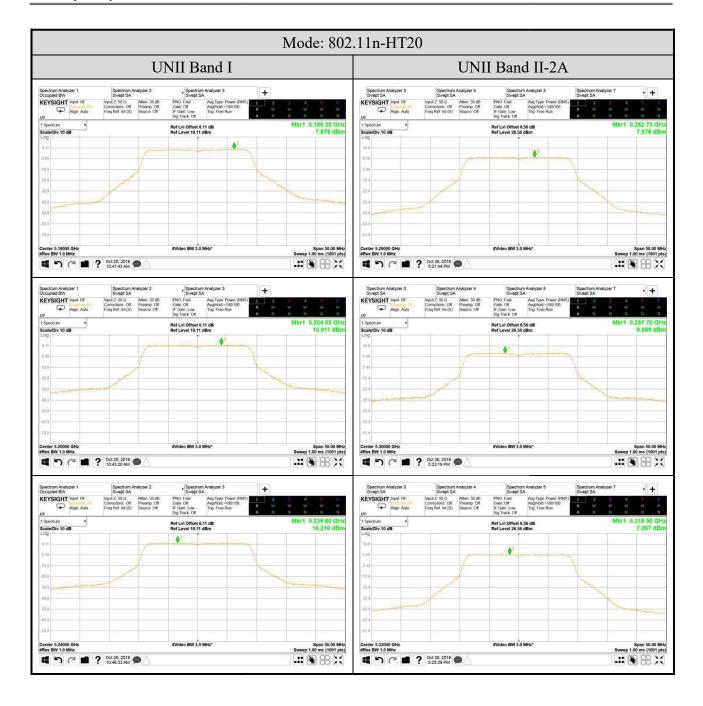









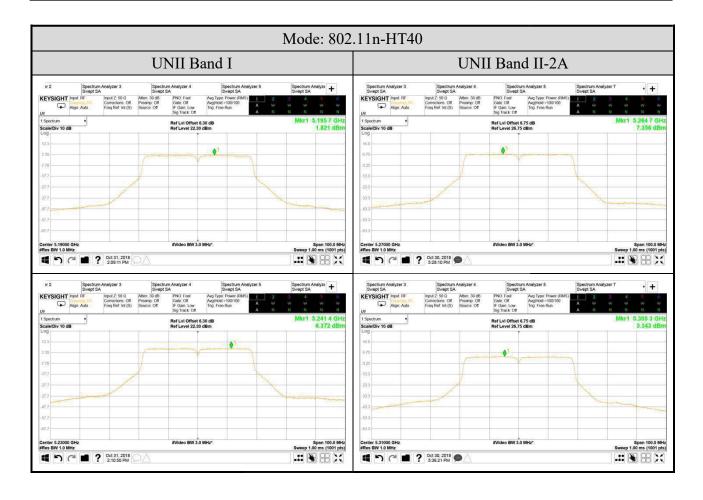




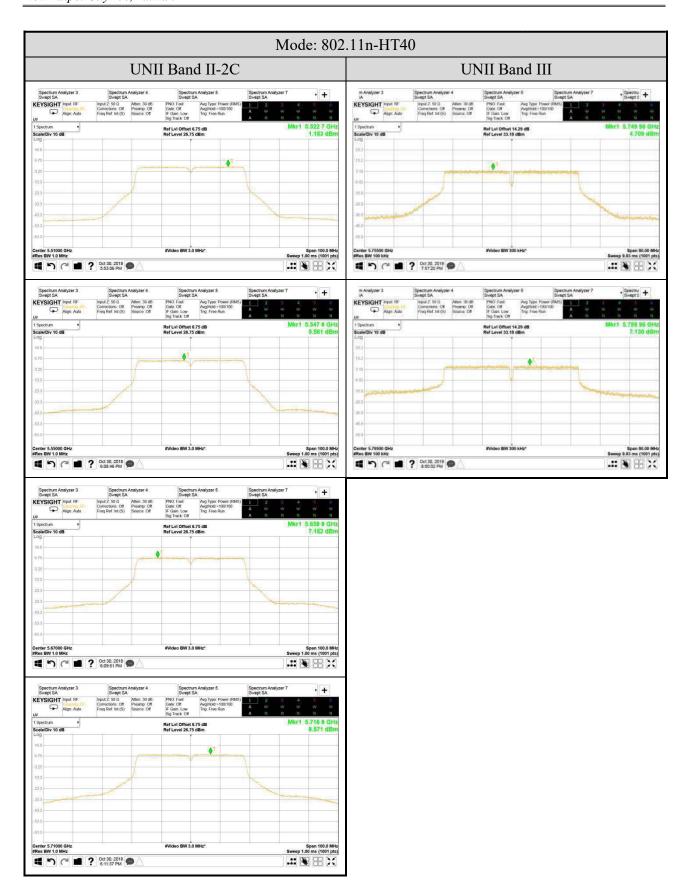



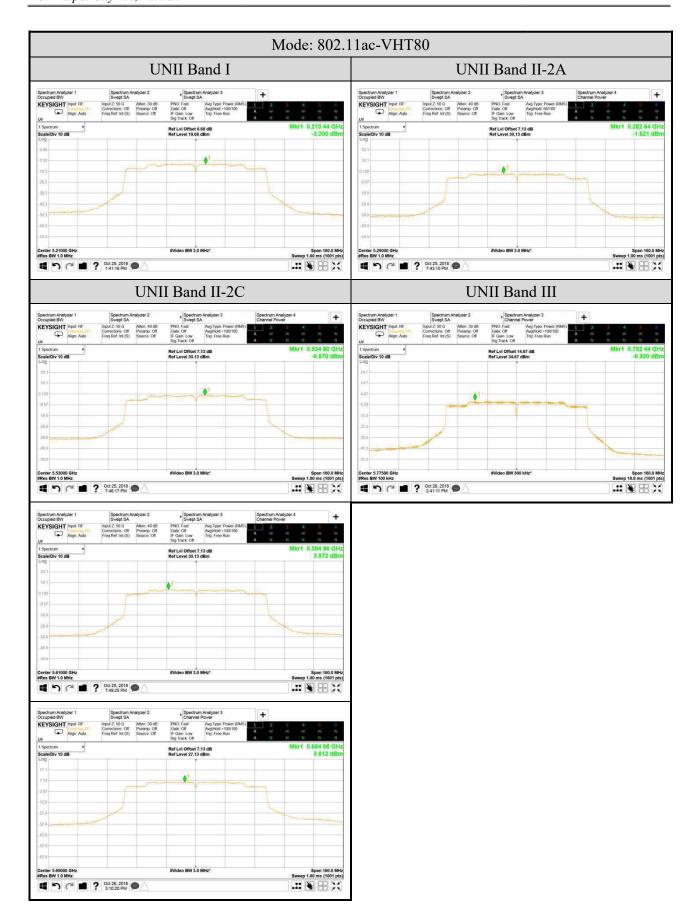



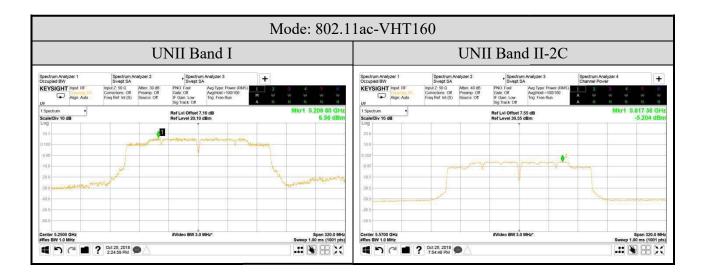



Tel: +886 2 26099301 Fax: +886 2 26099303

A.7 FREQUENCY STABILITY

Test Date	2018/11/01	Temp./Hum.	25°C/55%
Cable Loss 2.92dB		Test Voltage	AC 120V, 60Hz (via AC Adapter)

A.7.1 Frequency stability Result

Temperature $(^{\circ}\mathbb{C})$	Voltage (Vac)	Centre Frequency (MHz)	Measurement Value (MHz)	Frequency Stability (ppm)
25	120		5180.004	0.772
-30	102		5179.964	-6.950
-30	138		5179.972	-5.405
-20	102		5179.976	-4.633
-20	138		5179.982	-3.475
-10	102		5179.991	-1.737
-10	138		5179.996	-0.772
0	102		5180.002	0.386
U	138		5180.009	1.737
10	102	5180	5180.008	1.544
10	138		5180.019	3.668
20	102		5180.014	2.703
20	138		5180.025	4.826
30	102		5180.021	4.054
30	138		5180.031	5.985
40	102		5180.034	6.564
	138		5180.038	7.336
50	102		5180.041	7.915
	138		5180.046	8.880