FCC 2.1093 SAR Test Report

for

LG Electronics Inc.

222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea

Product Name : Notebook PC

Model Name : (1)14U70Q (2)14UD70Q

(3)14UB70Q (4)14UG70Q

Brand LG

FCC ID : BEJNT-14U70Q

Prepared by: : AUDIX Technology Corporation,

EMC Department





The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TABLE OF CONTENTS

<u>De</u>	Description				
TE	ST RI	EPORT	3		
1.	REV	VISION RECORD OF TEST REPORT	4		
2.	SUN	MMARY OF TEST RESULTS	5		
3.	GEN	NERAL INFORMATION	6		
	3.1.	Description of Application	6		
	3.2.	Description of EUT	7		
	3.3.	Reference Test Guidance			
	3.4.	Antenna Information	8		
	3.5.	EUT Specifications Assessed in Current Report	9		
	3.6.	Description of Key Components	11		
	3.7.	Test Environment	13		
	3.8.	Description of Test Facility	13		
	3.9.	Measurement Uncertainty	14		
4.	ME	ASUREMENT EQUIPMENTLIST	16		
5.		R MEASUREMENT SYSTEM			
	5.1.	Definition of Specific Absorption Rate (SAR)	17		
	5.2.	SPEAG DASY System			
	5.3.	SAR System Verification	25		
	5.4.	SAR Measurement Procedure	33		
6.	SAR	R MEASUREMENT EVALUATION	36		
	6.1.	Test Configuration and EUT setting	36		
	6.2.	EUT Testing Position			
	6.3.	Tissue Calibration Result			
	6.4.	SAR Exposure Limits			
	6.5.	Conducted Power Measurement			
	6.6.	SAR Test Result	48		

APPENDIX A TEST DATA AND PLOTS APPENDIX B TESTPHOTOGRAPHS





TEST REPORT

Applicant : LG Electronics Inc.

Manufacturer : LG Electronics Inc.

Factory : LG Electronics Nanjing New Technology Co., Ltd.

EUT Description

(1) Product : Notebook PC

(2) Model : (1)14U70Q (2)14UD70Q (3)14UB70Q (4)14UG70Q

(3) Brand : LG

(4) Power Supply: DC 19V, 3.42A

Applicable Standards:

47 CFR FCC Part 2(§2.1093)

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report:	2022. 06. 20	
Reviewed by:	Smile In	(Annie Yu/Administrator)
Approved by:	Johnny Haudh	(Johnny Hsueh/Section Manager)



1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2022. 06. 09	Original Report	EM-SR220033
A	2022. 06. 20	To revise SAR test result on BT.	EM-SR220033





2. SUMMARY OF TEST RESULTS

Highest Transmission SAR	Reported Body SAR _{1g}	Limit
WLAN 2.4G	0.680 (W/kg)	1.6 W/kg
BT	0.040 (W/kg)	1.6 W/kg
WLAN 5G	1.040 (W/kg)	1.6 W/kg

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do, 17709 Republic of Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook PC
Model	(1)14U70Q (2)14UD70Q (3)14UB70Q (4)14UG70Q The difference between all models is different in the sales customers.
Brand	LG



3.2. Description of EUT

Test Model	14U70Q			
Serial Number	N/A			
Power Rating	DC 19V, 3.42A			
Software Version	XY (X, Y can be 0 to 9 for different SW version not in parameter)	afluence RF		
RF Features	WLAN:802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.0)			
	2.4 GHz			
	802.11b	1T1R		
	802.11g	1T1R		
	802.11n-HT20	2T2R		
	802.11n-HT40	2T2R		
	802.11ax-HE20	2T2R		
	802.11ax-HE40	2T2R		
Transmit Type	BT/BLE	1T1R		
	U-NII Bands			
	802.11a	1T1R		
	802.11n-HT20/802.11ac-VHT20/802.11ax-HE20	2T2R		
	802.11n-HT40/802.11ac-VHT40/802.11ax-HE40	2T2R		
	802.11ac-VHT80/802.11ax-HE80	2T2R		
	802.11ac-VHT160/802.11ax-HE160 2T2R			
	The MIMO is uncorrelated and supported SDM mode only.			
Software Version	N/A			
Sample Status	Trial sample			
	Sample No. Test Item	Firmware		
Test Sample	04 SAR	N/A		
Date of Receipt	2022. 04. 13			
Date of Test	2022. 04. 18 ~ 06. 17			
Interface Ports of EUT	 One HDMI Port One USB Type C Port One Earphone Port One Micro SD Card Slot Two USB 3.0 Ports One DC IN Port 	 One HDMI Port One USB Type C Port One Earphone Port One Micro SD Card Slot Two USB 3.0 Ports 		
Accessories Supplied				

3.3. Reference Test Guidance

IEEE 1528-2013

IEC/IEEE 62209-1528:2020

KDB 447498 D04 Interim General RF Exposure Guidance v01

KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04

KDB 616217 D04 SAR for laptop and tablets v01r02

KDB 248227 D01 802 11 Wi-Fi SAR v02r02

3.4. Antenna Information

No.	Antenna Part	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)	
NO.	Number				Main	AUX
	WA-P-LELE-04-021	INPAQ	PAQ Mono-Pole	2400	2.8	2.6
				2450	2.6	2.2
1				2500	2.5	1.4
1.				5150	4.9	4.6
				5400	4.7	4.4
				5850	5.1	4.3

According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then Directional gain = $10 \log[(10^{G1/10}+10^{G2/10}+...+10^{GN/10})/N_{ANT}]$ dBi Note 1. 2.4G: Directional gain = $10 \log[(10^{2.8/10}+10^{2.6/10})/2]=2.70$ dBi

Note 2. UNII Band (1) Directional gain = $10 \log[(10^{4.9/10} + 10^{4.6/10})/2] = 4.75 dBi$

UNII Band (2A) Directional gain = $10 \log[(10^{4.7/10} + 10^{4.4/10})/2] = 4.55 dBi$ UNII Band (2C) Directional gain = $10 \log[(10^{5.1/10} + 10^{4.3/10})/2] = 4.72 dBi$

UNII Band (3) Directional gain = $10 \log[(10^{5.1/10} + 10^{4.3/10})/2] = 4.72 dBi$

We chose the antenna gain corresponding to the frequency listed on the table which is closer to center frequency of WLAN.



3.5. EUT Specifications Assessed in Current Report

	2.4GHz				
Mode	Mode Fundamental Range (MHz)				
802.11b		13			
802.11g	2412-2472	13			
802.11n-HT20		13			
802.11n-HT40	2422-2462	9			
Bluetooth	2402-2480	79			
BLE	2402-2480	40			

5GHz				
Mode	U-NII Band	Fundamental Range (MHz)	Channel Number	
	I	5180-5240	4	
902.11	2A	5260-5320	4	
802.11a	2C	5500-5720	12	
	3	5745-5825	5	
	I	5180-5240	4	
802.11n-HT20/ 802.11ac-VHT20	2A	5260-5320	4	
802.11ac-VH120 802.11ax-HE20	2C	5500-5720	12	
	3	5745-5825	5	
	I	5190-5230	2	
802.11n-HT40/ 802.11ac-VHT40	2A	5270-5310	2	
802.11ac-VH140 802.11ax-HE40	2C	5510-5710	6	
	3	5755-5795	2	
	I	5210	1	
802.11ac-VHT80	2A	5290	1	
802.11ax-HE80	2C	5530-5690	3	
	3	5775	1	
	I	5250	1	
802.11ac-VHT160 /802.11ax-HE160	2A	5250	1	
7002.11ax-11L100	2C	5570	1	
Remark: U-NII Band 2A and 2C (DFS Function, Slave/no In service monitor, no Ad-Hoc mode)				





Mode	Modulation	Data Rate (Mbps)
802.11b	DSSS (DBPSK/DQPSK/CCK)	Up to 11
802.11g	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20	OFDM (DDCV/ODCV/140AM/440AM)	Up to 144.4
802.11n-HT40	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 300
802.11ac-VHT20		Up to 173.3
802.11ac-VHT40	OFDM (DDGW/ODGW/1/COAM/CAOAM/05/COAM)	Up to 400
802.11ac-VHT80	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 866.7
802.11ac-VHT160		Up to 1733.3
802.11ax-HE20		Up to 287
802.11ax-HE40	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/	Up to 574
802.11ax-HE80	256QAM/1024QAM)	Up to 1201
802.11ax-HE160		Up to 2402
Bluetooth	FHSS (GFSK, π/4 DQPSK, 8-DPSK)	1/2/3
BLE	GFSK (1M, 2M, PHY Coded S8, PHY Coded S2)	2

3.6. Description of Key Components

3.6.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Windows 11 Home	
Main Board	LG	16U70Q MAIN B/D PCB	Manufacturer: #1 Hannstar BoardTech (Jiang Yin) Corp.,Ltd. #2 Elec & Eltek Company (MCO) Limited.
WLAN SUB Board	LG	14U70Q SUB B/D	Manufacturer: #1 Hannstar BoardTech (Jiang Yin) Corp.,Ltd. #2 Elec & Eltek Company (MCO) Limited.
CPU	AMD	AMD Ryzen7 5825U	2.0GHz
(Socket: BGA1140)	AMD	AMD Ryzen5 5625U	2.3GHz
(BOCKEL BOTTITTO)	AMD	AMD Ryzen3 5300U	2.6GHz
14" LCD Panel	BOE	NV140WUM-N44	Full-HD (1920*1200) TFT LCD
		HFM001TD3JX013N	1TB
	SK hynix	HFM512GD3JX013N	512GB
Storage (SSD)		HFM256GD3JX013N	256GB
Storage (SSD)		MZVLQ1T0HBLB-00B00	1TB
	Samsung	MZVLQ512HBLU-00B00	512GB
		MZVLQ256HBJD-00B00	256GB
	Samsung		16GB LPDDR4x 4266 MHz (On Board)
Memory (RAM)	Samsung		8GB LPDDR4x 4266 MHz (On Board)
Mellory (KAM)	CV Hymin		16GB LPDDR4x 4266 MHz (On Board)
	SK Hynix		8GB LPDDR4x 4266 MHz (On Board)
Battery Pack	LG	LBZ722DM	DC7.76V, 72Wh, Typ 9279mAh
		AX200NGW	FCC ID: PD9AX200NG
WLAN Combo Card	Intel		IC: 1000M-AX200NG
			NCC ID: CCAH19LP0850T0
WLAN Combo Antenna	LG (INPAQ)	WA-P-LELE-04-021	PCB, Mono-pole Type Main: Black, Aux: Gray
Keyboard	TIC	KT0120B7A	
Touch Pad	Lite-on	SP8000(SG-A0620-00A)	LGPN (EBD63285205)
Touch Tau	Elan	SB068D-26H0	LGPN (EBD62827904)
Web Camera	Luxvisions	1BF115N3	HD Webcam with Mic
Finger Printer	Markone technology CO.,Ltd.	МРСГРЕ0ЈРВ	LGPN (EBD63285715)
		80-5946-111	(White) 10/100Megabit Ethernet
	SUZHOU MEC	80-5946-101	(Black) 10/100 Megabit Ethernet
	ELECTRONICS	80-5946-230	(White) 10/100/1000 Megabit Ethernet
		80-5946-240	(Black) 10/100/1000 Megabit Ethernet
	Type C to LAN: Shiel	ded, Undetached, 0.12m	
		GD-08MF-36-WH-LP10	(White) 10/100Megabit Ethernet
LAN Gender	ARIN TECH CO.	GD-08MF-36-BK-LP11	(Black) 10/100 Megabit Ethernet
(Type C to LAN)	LTD	GD-08MF-50-WH-LP12	(White) 10/100/1000 Megabit Ethernet
(Optional)		GD-08MF-50-BK-LP13	(Black) 10/100/1000 Megabit Ethernet
	Type C to LAN: Shiel	ded, Undetached, 0.12m	
	HUIZHOU DEHONG	370-50713	(White) 10/100Megabit Ethernet
	TECHNOLOGY CO.,LTD	370-50714	(Black) 10/100 Megabit Ethernet
	Type C to LAN: Shiel	ded, Undetached, 0.12m	



Item	Supplier	Model / Type	Character
	LG (HONOR)	ADS-65AI-19-3 19065E	Manufacturer: HONOR I/P: AC 100-240V, 1.5A, 50/60Hz O/P: DC 19V, 3.42A
A.C. A dometon	DC Power Cord: Non-Shielded, Undetached, 1.5m, With one ferrite core AC Power Cord: Non-Shielded, Detached, 1.8m (3C)		
AC Adapter	LG (APD)	DA-65G19	Manufacturer: APD I/P: AC 100-240V, 1.6A, 50/60Hz O/P: DC 19V, 3.42A
	DC Power Cord: Non-Shielded, Undetached, 1.2m, With one ferrite core AC Power Cord: Non-Shielded, Detached, 1.8m (3C)		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.6.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU (Mode) 1			
Main Board		LG, 16U70Q MAIN B/D PCB	
SUB Board		LG, 14U70Q SUB B/D	
CPU		AMD, AMD Ryzen7 5825U, 2.0GHz	
14" LCD Panel		BOE, NV140WUM-N44	
C+ (CCD)		SK hynix, 1TB	
Storage (SSD)		SK hynix, 256GB	
Memory (RAM)		16GB	
Battery Pack		LG, LBZ722DM	
Keyboard		TIC, KT0120B7A	
Touch Pad		Lite-on, SP8000(SG-A0620-00A)	
Web Camera		Luxvisions, 1BF115N3	
Finger Printer		Markone technology CO.,Ltd., MPCFPE0JPB	
WLAN Combo Card		Intel, AX200NGW	
WLAN Combo Antenna		LG (INPAQ), WA-P-LELE-04-021	
AC Adapter		LG (HONOR),ADS-65AI-19-3 19065E	
Type C Link to LAN Gender		ARIN, 10/100/1000Mbps	

File Number: C1M2204124 Report Number: EM-SR220033



3.7. Test Environment

Ambient conditions in the laboratory:

Item	Require	Actual
Temperature (°C)	18-25	22 ±2
Humidity (%RH)	30-70	48 ± 2

3.8. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website: www.audixtech.com Contact e-mail: attemc_report@audixtech.com	
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724	
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is: TW1724 (1) SAR Room	



3.9. Measurement Uncertainty

DASY5 Uncertainty								
According	to IEEE 15	528-2013 a	and IEC 62	2209-1/201	6 (0.3 - 6	GHz range	e)	
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(Vi) Veff
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	8
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty	Combined Std. Uncertainty $\pm 11\%$ $\pm 10.8\%$				387			
Expanded STD Uncertainty						±22%	±21.5%	



Ac	cording to		5 Unce 9-2/2010 (6 GHz ran	ge)		
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(Vi) Veff
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	8
Axial Isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	√3	1	1	±0.6%	±0.6%	8
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout Electronic	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	√3	1	1	±0.5%	±0.5%	8
Integration Time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Modulation Response	±2.5%	R	√3	1	1	±1.45	±1.45 %	∞
Post-processing	±3.8%	R	√3	1	1	±2.2%	±2.2%	∞
Test Sample Related			•	1	•	•	•	
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	8
Power Scaling	±0.0%	R	√3	1	1	±0.0%	±0.0%	∞
Phantom and Setup								
Phantom Uncertainty	±4.5%	R	√3	1	1	±2.4%	±2.4%	8
SAR correction	±1.9%	R	√3	1	0.84	±1.9%	±1.9%	8
Liquid Conductivity (target)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	8
Liquid Conductivity (mea.)DAK	±2.5%	R	√3	0.64	0.43	±0.9%	±0.6%	∞
Liquid Permittivity (target)	±5.0%	R	√3	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity(mea.)DAK	±2.5%	R	√3	0.6	0.49	±0.9%	±0.7%	∞
Combined Std. Uncertainty						387		
Expanded STD Uncertainty						±22.1%	±21.8%	

4. MEASUREMENT EQUIPMENTLIST

Item	Туре	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Stäubli Robot TX90 XL	Stäubli	TX90	F12/5K9SA1/A101	N/A	N/A
2.	Controller	SPEAG	CS8c	N/A	N/A	N/A
3.	SAM Twin Phantom	SPEAG	N/A	1706	N/A	N/A
4.	ELI5 Phantom	SPEAG	N/A	1170	N/A	N/A
5.	Device Holder	SPEAG	N/A	N/A	N/A	N/A
6.	Data Acquisition Electronic	SPEAG	DAE4	1337	2023. 03. 29	1 Year
7.	E-Field Probe	SPEAG	EX3DV4	3855	2021. 09. 24	1 Year
8.	SAR Software	SPEAG	DASY52	V.52.8.8.1222	N/A	N/A
9.	ENA Network Analyzer	Agilent	E5071C-480	MY46214331	2021. 10. 08	1 Year
10.	Signal Generator	Aglient	N5181A	MY50143917	2021. 09. 15	1 Year
11.	Power Meter	Aglient	ML2487A	MY52180007	2021. 09. 15	1 Year
12.	Power Sensor	Aglient	N8481	MY52080006	2021. 09. 15	1 Year
13.	Dipole Antenna	SPEAG	D2450V2	888	2021. 09. 13	3 Years
14.	Dipole Antenna	SPEAG	D5GHzV2	1124	2021. 09. 27	3 Years

5. SAR MEASUREMENT SYSTEM

5.1. Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ) . The equation description is as below:

$$SAR = \frac{d}{dt} \Big(\frac{dW}{dm} \Big) = \frac{d}{dt} \Big(\frac{dW}{\rho dv} \Big)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

5.2. SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

No. 491, Zhongfu Rd., Linkou Dist., New Taipei City244, Taiwan

Tel: +886 2 26099301 Fax: +886 2 26099303

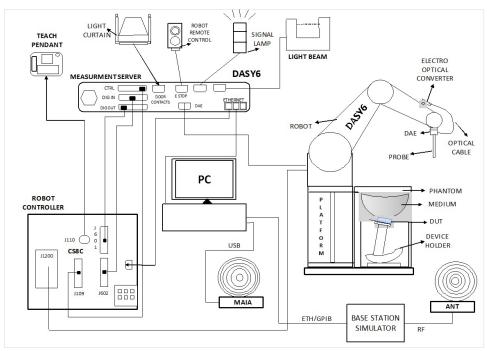


Fig-3.1 DASY6 System Setup

5.2.1. Robot

The DASY6 system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ±0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)





5.2.2. Probes

Model	EX3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	1
Directivity	\pm 0.3 dB in HSL (rotation around probe axis) \pm 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	$10~\mu W/g$ to $100~mW/g$ Linearity: $\pm~0.2~dB$ (noise: typically $<~1~\mu W/g$)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

5.2.3. Data Acquisition Electronics (DAE)

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	



5.2.4. Phantom

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	THE PERSON NAMED IN STREET
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

File Number: C1M2204124 Report Number: EM-SR220033



5.2.5. Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	

Model	Laptop Extensions Kit
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.
Material	POM, Acrylic glass, Foam



5.2.6. Reference Dipole


Model	System Validation Dipoles	4
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	Į.
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	Ť

File Number: C1M2204124 Report Number: EM-SR220033



5.2.7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-5.1.

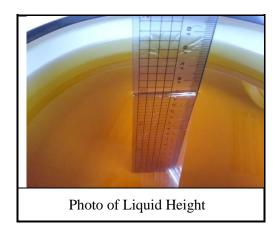

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



Table-5.1 Targets of Tissue Simulating Liquid

Table-5.1 Targets of Tissue Simulating Liquid										
Target Frequency [MHz]	Target Permittivity (ɛr)	Range of ± 5%	Target Conductivity σ[s/m]	Range of ± 5%						
750	41.9	39.805 ~ 43.995	0.89	0.846 ~ 0.935						
835	41.5	39.425 ~ 43.575	0.90	0.855 ~ 0.945						
900	41.5	39.425 ~ 43.575	0.97	0.922 ~ 1.019						
1450	40.5	38.475 ~ 42.525	1.20	1.140 ~ 1.260						
1640	40.3	38.285 ~ 42.315	1.29	1.226 ~ 1.355						
1750	40.1	38.095 ~ 42.105	1.37	1.302 ~ 1.439						
1800	40.0	38.000 ~ 42.000	1.40	1.330 ~ 1.470						
1900	40.0	38.000 ~ 42.000	1.40	1.330 ~ 1.470						
2000	40.0	38.000 ~ 42.000	1.40	1.330 ~ 1.470						
2300	39.5	37.525 ~ 41.475	1.67	1.587 ~ 1.754						
2450	39.2	37.240 ~ 41.160	1.80	1.710 ~ 1.890						
2600	39.0	37.050 ~ 40.950	1.96	1.862 ~ 2.058						
3500	37.9	36.005 ~ 39.795	2.91	2.765 ~ 3.056						
5200	36.0	34.2.00 ~ 37.800	4.66	4.427 ~ 4.893						
5300	35.9	34.105 ~ 37.695	4.76	4.522 ~ 4.998						
5500	35.6	33.820 ~ 37.380	4.96	4.712 ~ 5.208						
5600	35.5	33.725 ~ 37.275	5.07	4.817 ~ 5.324						
5800	35.3	33.535 ~ 37.065	5.27	5.007 ~ 5.534						
6000	35.1	33.345~ 36.855	5.48	5.206 ~ 5.754						
6500	34.5	32.775 ~ 36.225	6.07	5.767 ~ 6.374						
7000	33.9	32.205 ~ 35.595	6.65	6.318 ~ 6.983						

Audix Technology Corp. No. 491, Zhongfu Rd., Linkou Dist., New Taipei City244, Taiwan Tel: +886 2 26099301 Fax: +886 2 26099303

Table-5.2-1 Recipes of Tissue Simulating Liquid, 30MHz to 900MHz

Frequency (MHz)	30	5	0	14	44	4	50	835	90	0
Recipe source number	3	3	2	2	3	2	4	2	2	4
Ingredients (% by	weight)		•			•	•	•	-	
De-ionized water	48,30	48,30	53,53	55,12	48,30	48,53	56	50,36	50,31	56
Tween 20			44,70	43,31		49,51		48,39	48,34	
Oxidized mineral oil							44			44
Diethylenglycol monohexylether										
Triton X-100										
Diacetin	50,00	50,00			50,00					
DGBE										
NaCl	1,60	1,60	1,77	1,57	1,60	1,96		1,25	1,35	
Additives and salt	0,10	0,10			0,10					
Measured tempera	ture dep	endence		•	•	•		•		
Temp. (°C)			21	21		21	20	21	21	20
$\varepsilon_{ m liquid\ temp.\ unc.}$ (%)	0,8	0,1			0,1	0,1		0,04	0,04	
σ _{liquid temp. unc.} (%)	2,8	2,8			2,6	4,2		1,6	1,6	

Table-5.2-2 Recipes of Tissue Simulating Liquid, 1800MHz to 10000MHz

Frequency (MHz)	1 8	00	2 450	4 000	5 000	5 200	5 800	6 000	8 000	10 000
Recipe source number	2	4	4	4	4	1	1	4	5	5
Ingredients (% by weight)	Ingredients (% by weight)									
De-ionized water	54,23	56	56	56	56	65,53	65,53	56	67,8	66,0
Tween	45,27								31,1	33,0
Oxidized mineral oil		44	44	44	44			44		
Diethylenglycol monohexylether						17,24	17,24			
Triton X-100						17,24	17,24			
Diacetin										
DGBE										
NaCl	0,50									
Additives and salt										
Measured temperature de	pendend	e				•			•	•
Temp. (°C)	21	20	20	20	20	22	22	20	20	20
$arepsilon_{ ext{liquid temp. unc.}}$ (%)	0,4					1,7	1,8			
σ _{liquid temp. unc.} (%)	2,3					2,7	2,6			

NOTE 1 Multiple columns under a single frequency indicate optional recipes.

NOTE 2 Recipe source numbers: 1 verified by different labs, 2 Reference [59], 3 developed by IT'IS Foundation, 4 developed by IT'IS Foundation, 5 Reference [60].


NOTE 3 The values of $\varepsilon_{\text{liquid temp. unc.}}$ and $\sigma_{\text{liquid temp. unc.}}$ are liquid temperature uncertainties described in 0.9.6, based on measurements of the applicable liquid recipes given above. These are not part of the original publications but have been subsequently developed by the project team.

NOTE 4 The recipes at 8 000 MHz and 10 000 MHz are sufficiently broadband that they cover the frequency range of 6 000 MHz to 10 000 MHz within a tolerance of ± 10 % for permittivity and conductivity.



5.3. SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

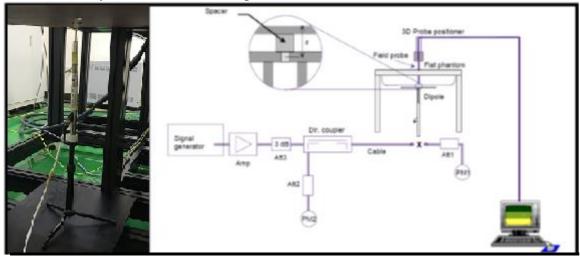

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the loation of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

5.3.1. SAR System Verification Result

Dipole Kit: D	Dipole Kit: D2450V2												
Test Date: 2022. 04. 19 Liquid Temp. [°C]: 21.0													
Frequency [MHz]	1 0 NAR					10g SAR							
2450MHz	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window							
	13.7	54.8	52.9 47.61 to 58.19	6.37	25.48	24.8 22.32 to 27.28							

Dipole Kit: D	Dipole Kit: D2450V2											
Test Date: 2022. 06. 17 Liquid Temp. [°C]: 21.0												
Frequency [MHz]		1g S	AR	10g SAR								
2450MHz	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 250mW	Normalize to 1W	Target Value Reference result ± 10% window						
	13.3	53.2	52.9 47.61 to 58.19	6.45	25.8	24.8 22.32 to 27.28						

Dipole Kit: D	Dipole Kit: D5GHzV2											
Test Date: 2022. 04. 18 Liquid Temp. [°C]: 21.0												
Frequency [MHz]		1g S	AR	10g SAR								
5200MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window						
	8.34	83.4	81.1 72.99 to 89.21	2.31	23.1	23.1 20.79 to 25.41						

Dipole Kit: D	Dipole Kit: D5GHzV2											
Test Date: 2022. 04. 18 Liquid Temp. [°C]: 21.0												
Frequency [MHz]		1g S	AR	10g SAR								
5600MHz	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window	Zoom Scan to 100mW	Normalize to 1W	Target Value Reference result ± 10% window						
	8.16	81.6	83.9 75.51 to 92.29	2.41	24.1	23.8 21.42 to 26.18						





Dipole Kit: D5GHzV2												
Test Date: 2022. 04. 18 Liquid Temp. [°C]: 21.0												
Frequency [MHz]	I GNAR						10g SAR					
5800MHz	Zoom Scan to 100mW	in to Normalize Reference result				Normalize to 1W	Refe	get Varence % wir	result			
	8.46 84.6		81.8 73.62 to 89.98		2.36	23.6	20.61	22.9 to	25.19			

5.3.2. SAR System Check Data

Date: 4/19/2022

Test Laboratory: Audix_SAR Lab

System Check H2450

DUT: D2450V2 - SN888

Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle:1:1 Medium parameters used: f = 2450 MHz; σ = 1.765 S/m; ϵ_r = 37.544; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN3855; ConvF(7.7, 7.7, 7.7) @ 2450 MHz; Calibrated: 9/24/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=250mW/Area Scan (9x9x1): Measurement grid: dx=20mm, dy=20mm Maximum value of SAR (measured) = 17.6 W/kg

P=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.89 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 28.7 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.37 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 15.4 W/kg

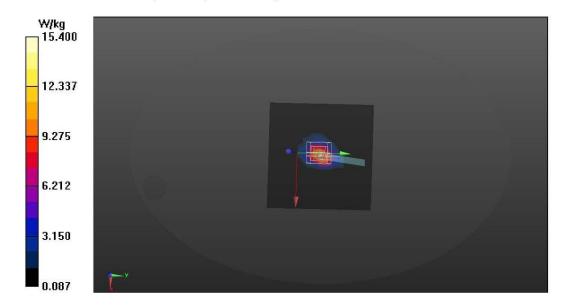

file:///C:/Users/USER/Desktop/report%20data/System%20Check H2450-31/System%20Check ...

Date: 6/17/2022

Test Laboratory: Audix SAR Lab

System Check H2450

DUT: D2450V2 - SN888

Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle:1:1 Medium parameters used: f = 2450 MHz; σ = 1.765 S/m; ϵ_r = 37.544; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 SN3855; ConvF(7.7, 7.7, 7.7) @ 2450 MHz; Calibrated: 9/24/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022

Maximum value of SAR (measured) = 15.4 W/kg

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=250mW/Area Scan (9x9x1): Measurement grid: dx=20mm, dy=20mm Maximum value of SAR (measured) = 17.9 W/kg

P=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 87.18 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 28.9 W/kg
SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.45 W/kg
Smallest distance from peaks to all points 3 dB below = 9.5 mm
Ratio of SAR at M2 to SAR at M1 = 48.8%

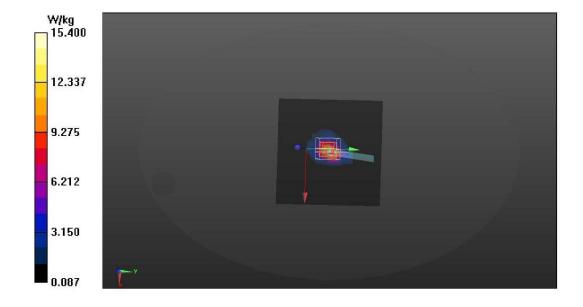

file:///C:/Users/USER/Desktop/report%20data/System%20Check H2450-31/System%20Check ...

Date: 4/18/2022

Test Laboratory: Audix SAR Lab

System Check H5200

DUT: D5GHzV2 - SN1124

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle:1:1 Medium parameters used: f = 5200 MHz; σ = 4.727 S/m; ϵ_r = 35.914; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN3855; ConvF(5.35, 5.35, 5.35) @ 5200 MHz; Calibrated: 9/24/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=100mW/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 16.2 W/kg

P=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 44.63 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.6% Maximum value of SAR (measured) = 17.0 W/kg



file:///C:/Users/USER/Desktop/report%20data/System%20Check H5200-26/System%20Check ...

Date: 4/18/2022

Test Laboratory: Audix SAR Lab

System Check H5600

DUT: D5GHzV2 - SN1124

Communication System: UID 0, CW (0); Frequency: 5600 MHz;Duty Cycle:1:1 Medium parameters used: f = 5600 MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 35.043$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN3855; ConvF(4.7, 4.7, 4.7) @ 5600 MHz; Calibrated: 9/24/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=100mW/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 20.9 W/kg

P=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 47.01 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 44.5 W/kg

SAR(1 g) = 8.16 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.4% Maximum value of SAR (measured) = 22.1 W/kg

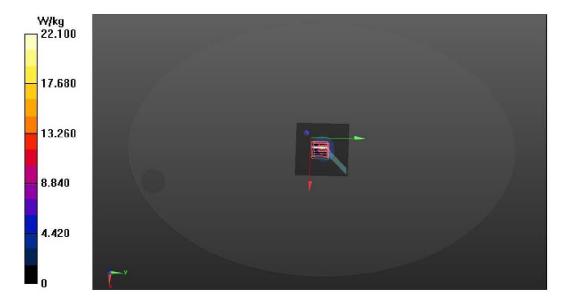

file:///C:/Users/USER/Desktop/report%20data/System%20Check H5600-32/System%20Check ...

Date: 4/18/2022

Test Laboratory: Audix_SAR Lab

System Check H5800

DUT: D5GHzV2 - SN1124

Communication System: UID 0, CW (0); Frequency: 5800 MHz;Duty Cycle:1:1 Medium parameters used: f = 5800 MHz; σ = 5.495 S/m; ϵ_r = 34.609; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN3855; ConvF(4.8, 4.8, 4.8) @ 5800 MHz; Calibrated: 9/24/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

P=100mW/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 19.4 W/kg

P=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 43.16 V/m; Power Drift = 0.21 dB


Peak SAR (extrapolated) = 42.6 W/kg

SAR(1 g) = 8.46 W/kg; SAR(10 g) = 2.36 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 20.0 W/kg

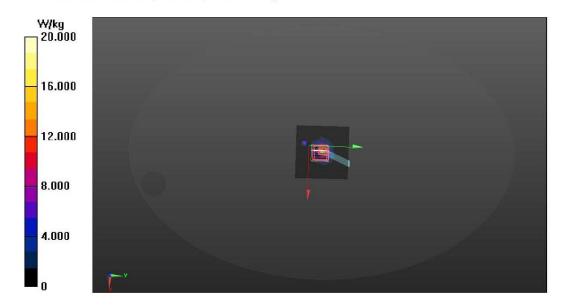

file:///C:/Users/USER/Desktop/report%20data/System%20Check H5800-27/System%20Check ...

5.4. SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

5.4.1. Area & Zoom Scan Procedure

According to IEC/IEEE 62209-1528, the resolution for Area and Zoom scan is specified in the table below.

Items	≤ 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan $(\Delta x, \Delta y)$	≤ 15mm	≤ 12mm	≤ 12mm	≤ 10mm	≤ 10mm
Zoom Scan $(\Delta x, \Delta y)$	≤ 8mm	≤ 5mm	≤ 5mm	≤ 4mm	≤ 4mm
Zoom Scan (Δz)	≤ 5mm	≤ 5mm	≤ 4mm	≤ 3mm	≤ 2mm
Zoom Scan Volume	≥30mm	≥30mm	≥28mm	≥25mm	≥22mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of Δx / Δy (2-3GHz: ≤ 8 mm, 3-4GHz: ≤ 7 mm, 4-6GHz: ≤ 5 mm) may be applied.

According to IEC/IEEE 62209-1528, if the zoom scan measured as specified in the preceding paragraphs complies with both of the following items, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- (1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal gird steps in both x and y directions (Δx , Δy). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance z_{M1} .
- (2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x, y location of the measured mazimum SAR value shall be at least 30%.

5.4.2. Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

5.4.3. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

5.4.4. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g





5.4.5. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

6. SAR MEASUREMENT EVALUATION

6.1. Test Configuration and EUT setting

The standalone SAR test exclusion shall be refer to FCC § 1.1307 (b)(3)(i)(B) SAR-Based exemption which device determined the distance from antenna to user/bystander. The formula is

 P_{th} (mW) = ERP_{20cm} (d / 20) for distance d \leq 20cm

 P_{th} (mW) = ERP_{20cm} for distance 20cm < d \leq 40cm

 $X = -\log 10 \left(\frac{60}{ERP20cm\sqrt{f}} \right)$

ERP_{20cm}(mW) $0.3 \text{ GHz} \le f < 1.5 \text{ GHz}$: 2040f

 $1.5 \text{ GHz} \le f \le 6 \text{ GHz}$: 3060

F = GHz

 P_{th} (mW) = available maximum time-average power or effective radiated power, whichever is greater.

D =the separation distance (cm)

From KDB 616217 D04 section 4.2 to 4.3, The SAR exclusion threshold can be applied to KDB 447498 to determine if SAR necessary test.

Test program "DRTU" is used for enabling EUT BT or WLAN function under continues transmitting and choosing data rate/ channel and supported stable power rating.

6.2. EUT Testing Position

SAR-Based exemption table

SAR-Dascu CACII	iption table				1	î .
Centre Frequency (MHz)	5	10	15	20	25	Distance(mm)
2450	3.000	10.000	22.000	38.000	59.000	
5200	2.000	6.000	15.000	26.000	42.000	Power(mW)
5500	1.000	6.000	14.000	26.000	41.000	Fower(IIIW)
5800	1.000	6.000	14.000	25.000	40.000	
	30	35	40	45	50	Distance(mm)
2450	83.000	111.000	143.000	179.000	219.000	
5200	61.000	84.000	110.000	110.000	110.000	Down (m.W.)
5500	59.000	82.000	108.000	108.000	108.000	Power(mW)
5800	58.000	80.000	106.000	106.000	106.000	
	7	10	15	20	25	Distance(cm)
2450	415.000	819.000	1770.000	3060.000	4678.000	
5200	350.000	731.000	1689.000	3060.000	4852.000	Downer(mW)
5500	345.000	725.000	1683.000	3060.000	4865.000	Power(mW)
5800	341.000	719.000	1678.000	3060.000	4877.000	
	30	33	35	37	40	Distance(cm
2450	6617.000	7932.000	8872.000	8872.000	11437.000	
5200	7071.000	8609.000	9722.000	9722.000	12809.000	Power(mW)
5500	7106.000	8662.000	9788.000	9788.000	12918.000	1 OWEI(IIIW)
5800	7139.000	8712.000	9851.000	9851.000	13021.000	

The SAR testing required mode is listed as below.

Antenna	Front Face	Rear Face	Top Side	Bottom Side	Left Side	Right Side	Screen Side
WLAN				$\sqrt{}$			$\sqrt{}$

According to SAR-Based exemption table, the laptop only need evaluate bottom side and screen side.



6.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Agilent Dielectric Probe Kit and Agilent E5071C Vector Network Analyzer.

Body Tissue Simulate Measurement								
Frequency	Description	Dielectric I	Parameters	Liquid Temp.				
[MHz]	Description	$\epsilon_{ m r}$	σ[s/m]	[°C]				
	Reference result	39.2	1.8	N/A				
2 4 7 0 2 7 7 7	± 5% window	37.240 to 41.160	1.710 to 1.890	1 \ / A				
2450MHz	2022. 04. 19	37.544	1.765	21.0				
	2022. 06. 17	37.544	1.765	21.0				

Body Tissue Simulate Measurement								
Frequency	Description	Dielectric l	Dielectric Parameters					
[MHz]	Description	$\epsilon_{ m r}$	σ[s/m]	[℃]				
	Reference result	36.0	4.66	N/A				
5200MHz	± 5% window	34.200 to 37.800	4.427 to 4.893	IV/A				
	2022. 04. 18	35.914	4.727	21.0				

Body Tissue Simulate Measurement									
Frequency	Description	Dielectric l	Dielectric Parameters						
[MHz]	Description	$\epsilon_{ m r}$	σ[s/m]	[℃]					
	Reference result	35.50	5.07	N/A					
5600MHz	± 5% window	33.725 to 37.275	4.817 to 5.324	1 1 //A					
	2022. 04. 18	35.043	5.23	21.0					

Body Tissue Simulate Measurement								
Frequency	Description	Dielectric l	Liquid Temp.					
[MHz]	Description	$\epsilon_{ m r}$	σ[s/m]	[°C]				
	Reference result	35.3	5.27	N/A				
5800MHz	± 5% window	33.535 to 37.065	5.007 to 5.534					
	2022. 04. 18	34.609	5.495	21.0				

6.4. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 "Uncontrolled Environments" limits. These limits apply to a location which is deemed as "Uncontrolled Environment" which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

6.5. Conducted Power Measurement

Note:

- 1. Per KDB 447498 D04 the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Scale Factor = tune-up limit power (mW)/EUT Conducted power (mW), where tune-up limit is the maximum rated power among all production units.
 - Scale SAR(W/kg)= Measured SAR(W/kg)* Scaling Factor
- 2. Per KDB 447498 D04 for each exposure position, if the highest output channel reported SAR ≤0.8W/kg, other channels SAR testing is not necessary.
- 3. Per KDB 248227 D01, for OFDM transmission configuration in the 2.4G and 5G bands. An initial test configuration is determined by the highest maximum output power including tune-up tolerance. When multiple transmission modes(802.11a/g/n/ac/ax) have same maximum power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected.(i.e. a, g, n, ac then ax)
- 4. Per KDB 248227 D01, when the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 5. Per KDB 248227 D01,U-NII-1 and U-NII-2A bands have the same specified maximum output and tolerance; SAR is measured for U-NII-2A band first. Adjusted SAR of U-NII-2A band is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.
- 6. Per KDB 248227 D01, When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested.
- 7. Pursuant section 2.8.1(2) KDB 865664 D01, when the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.
- 8. Pursuant section 2.8.1(3) KDB 865664 D01, perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit)

6.5.1. For WLAN Function

				O	utput Po	wer (dBm))			
Type of	Channel	Frequency	Ch	ain 0 (AUX	<u>(</u>)	Ch	nain 1 (Mai	in)	SAR Test	
Network	Chamier	(MHz)	Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	STIR TOST	
	CH 1	2412	18.85	19.00		18.71	19.00			
	CH 2	2417	19.80	20.00		19.74	20.00		No ^{NOTE2}	
	CH 3	2422	19.51	20.00		19.98	20.00			
	CH 7	2442	19.95	20.00	1.01	19.90	20.00	1.02	Yes	
802.11b	CH 8	2447	19.77	20.00		19.80	20.00			
	CH 9	2452	19.76	20.00		19.89	20.00			
	CH 10	2457	19.71	20.00		19.87	20.00		No ^{NOTE2}	
	CH 11	2462	18.67	19.00		18.68	19.00		NO	
	CH 12	2467	17.03	17.50		16.56	17.00			
	CH 13	2472	14.84	15.00		14.10	14.50			
	CH 1	2412	15.70	16.00		15.84	16.00			
	CH 2	2417	18.19	18.50		18.26	18.50			
	CH 7	2442	19.09	19.50		19.23	19.50			
	CH 8	2447	18.85	19.00		18.98	19.00			
802.11g	CH 9	2452	18.13	18.50		18.24	18.50		No ^{NOTE6}	
	CH 10	2457	17.62	18.00		17.95	18.00			
	CH 11	2462	15.31	15.50		15.29	15.50			
	CH 12	2467	12.85	13.00		12.90	13.00			
	CH 13	2472	11.18	11.50		11.18	11.50			

				(Output Po	ower (dBr	n)		
Type of	Channel	Frequency	Ch	ain 0 (AUX	()	C	Chain 1 (Main	n)	SAR Test
Network	Chainei	(MHz)	Average	Tune-Up	Scale	Average	Tune-Up	Scale	SAK IESI
			Power	Limit	Factor	Power	Limit	Factor	
	CH 1	2412	14.93	15.00		14.68	15.00		
	CH 2	2417	16.14	16.50		15.82	16.00		
000 11	CH 7	2442	16.27	16.50		15.93	16.00		
802.11n-	CH 10	2457	16.26	16.50		16.14	16.50		
HT20	CH 11	2462	13.98	14.00		13.77	14.00		
	CH 12	2467	11.20	11.50		10.55	11.00		
	CH 13	2472	7.99	8.00		7.88	8.00		
	CH 3	2422	13.72	14.00		13.56	14.00		No ^{NOTE4 · 3}
	CH 4	2427	13.60	14.00		13.43	13.50		NO
	CH 5	2432	13.61	14.00		13.44	13.50		
000 11	CH 6	2437	14.01	14.50		13.73	14.00		
802.11n-	CH 7	2442	14.45	14.50		14.26	14.50		
HT40	CH 8	2447	13.54	14.00		13.32	13.50		
	CH 9	2452	14.31	14.50		13.95	14.00		
	CH 10	2457	5.82	6.00		5.73	6.00		
	CH 11	2462	8.36	8.50		8.22	8.50		



				C	Output Po	ower (dBm	n)			
Type of	Channel	Frequency	Ch	ain 0 (AUX	()	C	hain 1 (Mai	n)	SAR Test	
Network		(MHz)		Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor		
	CH 1	2412	14.82	15.00		14.54	15.00			
	CH 2	2417	16.03	16.50		15.76	16.00			
002.11	CH 7	2442	16.03	16.50		15.82	16.00			
802.11ax-	CH 10	2457	16.03	16.50		15.93	16.00			
HE20	CH 11	2462	13.90	14.00		13.58	14.00			
	CH 12	2467	10.98	11.00		10.47	10.50			
	CH 13	2472	7.89	8.99		7.70	8.00			
	CH 3	2422	13.50	14.00		13.22	13.50		No ^{NOTE4 · 3}	
	CH 4	2427	13.36	13.50		13.19	13.50		INO	
	CH 5	2432	13.34	13.50		13.16	13.50			
002 11	CH 6	2437	13.77	14.00		13.50	14.00			
802.11ax-	CH 7	2442	14.20	14.50		13.94	14.00			
HE40	CH 8	2447	13.24	13.50		13.01	13.50			
	CH 9	2452	13.99	14.00		13.64	14.00			
	CH 10	2457	5.51	6.00		5.44	5.50			
	CH 11	2462	8.40	8.50		8.24	8.50			

				Output Power (dBm)						
Type of	RU	Frequency	Chain 0 (AUX)			C	SAR Test			
Network	Config	(MHz)	Average	Tune-Up	Scale	Average	Tune-Up	Scale		
			Power	Limit	Factor	Power	Limit	Factor		
	26/0		15.33	15.50		15.68	16.00			
	52/37	2412	16.09	16.50		16.31	16.50			
802.11ax-	106/53		14.92	15.00		15.28	15.50			
HE20	26/8		-1.25	-1.00		-0.09	0		No ^{NOTE4 · 3}	
	52/40	2472	1.91	2.00		2.16	2.50		INO	
	106/54		2.53	3.00		3.06	3.50			
802.11ax-	242/61	2422	14.18	14.50		14.46	14.50			
HE40	242/62	2462	7.26	7.50		7.49	7.50			



Trans	o.f				O	utput Po	wer (dBm)		
Type Netwo			Frequency	Cha	ain 0 (AUX	X)	Cha	ain 1 (Mai	n)	
	U-NII Band	Channel	nannel (MHz)	Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	
		CH 36	5180	15.44	15.50		15.50	16.00		No ^{NOTE5 · 3}
	1	CH 40	5200	15.61	16.00	1.09	15.74	16.00	1.06	Yes
		CH 48	5240	15.51	16.00	1.12	15.59	16.00	1.10	Yes
	2A	CH 52	5260	15.27	15.50		15.29	15.50		
		CH 60	5300	15.34	15.50		15.21	15.50		No ^{NOTE2}
		CH 64	5320	15.44	15.50		15.33	15.50		
802.11a		CH 100	5500	15.67	16.00	1.08	15.76	16.00	1.06	Yes
	20	CH 116	5580	15.75	16.00	1.06	15.82	16.00	1.04	Yes
	2C	CH 140	5700	15.53	16.00		15.64	16.00		No ^{NOTE2 · 3}
		CH 144	5720	15.57	16.00		15.65	16.00		NO
-		CH 149	5745	15.54	16.00	1.11	15.77	16.00	1.05	Yes
	3	CH 157	5785	15.58	16.00	1.10	15.82	16.00	1.04	Yes
		CH 165	5825	15.40	15.50		15.51	16.00		No ^{NOTE2 · 3}

Typo	of				O	utput Po	wer (dBm)		
Type Netwo			Frequency	Chain 0 (AUX)			Chain 1 (Main)			
	U-NII	Channel	(MHz)	Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	SAR Test
	Band									
	1	CH 36	5180	15.71	16.00		15.27	15.50		
		CH 40	5200	15.72	16.00		15.31	15.50		
		CH 48	5240	15.74	16.00		15.30	15.50		
	2A	CH 52	5260	15.70	16.00		15.47	15.50		
		CH 60	5300	15.71	16.00		15.42	15.50		
802.11n-		CH 64	5320	15.72	16.00		15.50	16.00		
HT20		CH 100	5500	15.71	16.00		15.52	16.00		No ^{NOTE4 · 3}
11120	2C	CH 116	5580	15.67	16.00		15.49	15.50		
	2C	CH 140	5700	15.69	16.00		15.38	15.50		
		CH 144	5720	15.69	16.00		15.57	16.00		
		CH 149	5745	15.62	16.00	1	15.61	16.00		
	3	CH 157	5785	15.69	16.00		15.43	15.50		
		CH 165	5825	15.68	16.00		15.35	15.50		





_					O	utput Po	wer (dBm)		
Type Netwo			Г	Cha	ain 0 (AUX	K)	Ch	ain 1 (Mai	n)	
Netwo	U-NII Band	Channel	Frequency (MHz)	Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	SAR Test
	1	CH 38	5190	15.68	16.00		15.06	15.50		
	1	CH 46	5230	15.71	16.00		15.08	15.50		
	2.4	CH 54	5270	15.69	16.00		15.21	15.50		
802.11n-	2A	CH 62	5310	14.31	14.50		14.19	14.50		
	2C	CH 102	5510	15.69	16.00	-	14.99	15.00		No ^{NOTE4 · 3}
HT40		CH 110	5550	15.68	16.00		15.05	15.50		
		CH 134	5670	15.70	16.00		15.27	15.50		
		CH 142	5710	15.70	16.00		15.13	15.50		
	3	CH 151	5755	15.70	16.00		15.40	15.50]
	3	CH 159	5795	15.69	16.00		15.15	15.50		
	1	CH 52	5210	14.44	14.50		14.00	14.50		
	2A	CH 58	5290	13.10	13.50		12.44	12.50		
802.11ac		CH 106	5530	15.24	15.50		14.91	15.00		No ^{NOTE4 · 3}
-VHT80	2C	CH 133	5610	14.86	15.00		14.51	15.00		110
		CH 138	5690	15.46	15.50		15.10	15.50		
	3	CH 155	5775	15.39	15.50		15.49	15.50		
802.11ac	1/2A	CH 50	5250	10.79	11.00		9.92	10.00		No ^{NOTE4 · 3}
-VHT160	2C	CH 114	5570	12.96	13.00		12.42	12.50		110



Туре	of				O	utput Po	wer (dBm)		No ^{NOTE4 · 3}
Netwo			Frequency	Cha	in 0 (AUX	()	Cha	ain 1 (Mair	1)	
	U-NII Band	Channel	(MHz)	Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	SAR Test
		CH 36	5180	15.67	16.00		15.15	15.50		
	1	CH 40	5200	15.66	16.00		15.25	15.50		
		CH 48	5240	15.71	16.00		15.21	15.50		
		CH 52	5260	15.66	16.00		15.45	15.50		
	2A	CH 60	5300	15.70	16.00		15.35	15.50		
802.11ax		CH 64	5320	15.70	16.00		15.43	15.50]
-HE20		CH 100	5500	15.71	16.00		15.44	15.50		No ^{NOTE4 · 3}
-IIL20	2C	CH 116	5580	15.65	16.00		15.43	15.50		
	2C	CH 140	5700	15.71	16.00		15.38	15.50		
		CH 144	5720	15.74	16.00		15.58	16.00		
		CH 149	5745	15.70	16.00		15.65	16.00		
	3	CH 157	5785	15.71	16.00		15.43	15.50		
		CH 165	5825	15.70	16.00		15.25	15.50		
	1	CH 38	5190	15.68	16.00		15.03	15.50		
	1	CH 46	5230	15.71	16.00		15.07	15.50		
	2A	CH 54	5270	15.70	16.00		15.21	15.50		
	211	CH 62	5310	15.68	16.00		15.17	15.51		
802.11ax		CH 102	5510	15.73	16.00		15.40	15.50		No ^{NOTE4 · 3}
-HE40	20	CH 110	5550	15.71	16.00		15.27	15.50		
	2C	CH 134	5670	15.69	16.00		15.38	15.50		
		CH 142	5710	15.72	16.00		15.32	15.50		
	3	CH 151	5755	15.69	16.00		15.47	15.50		
	3	CH 159	5795	15.68	16.00		15.21	15.50		
	1	CH 52	5210	14.22	14.50		13.79	14.00		
	2A	CH 58	5290	12.99	13.00		12.23	12.50		
802.11ax		CH 106	5530	15.10	15.50		14.54	15.00		No ^{NOTE4 · 3}
-HE80	2C	CH 133	5610	14.77	15.00		14.25	14.50		
		CH 138	5690	15.26	15.50		14.88	15.00		
	3	CH 155	5775	15.17	15.50		15.16	15.50		
802.11ax	1/2A	CH 50	5250	10.30	10.50		9.73	10.00		No ^{NOTE4 · 3}
-HE160	2C	CH 114	5570	12.79	13.00		12.12	12.50		- 10



 Audix Technology Corp.
 Tel: +886 2 26099301

 No. 491, Zhongfu Rd., Linkou Dist.,
 Fax: +886 2 26099303

 New Taipei City244, Taiwan
 Fax: +886 2 26099303

	0					Ou	tput Po	wer (dBm)			
Type Netwo			Frequency	RU	Cha	in 0 (AUX	()	Cha	in 1 (Main	1)	SAR
rotwo	U-NII Band	Channel	(MHz)	Config	Average Power	Tune-Up Limit	Scale Factor	Average Power	Tune-Up Limit	Scale Factor	Test
				26/0	10.03	10.50		9.67	10.00		
	1	CH 36	5180	52/37	12.95	13.00		12.91	13.00		
				106/53	15.56	14.00		15.45	15.50		
				26/8	10.13	10.50		9.49	9.50		
	2A	CH 64	5320	52/40	13.02	13.50		12.76	13.00		
				106/54	14.67	15.00		14.49	14.50		
				26/0	10.19	10.50		9.82	10.00		
		CH 100	5500	52/37	13.01	13.50		13.03	13.50		
802.11ax	20			106/53	14.68	15.00		14.65	15.00		NoNOTE
-HE20	2C			26/8	10.40	10.50		9.82	10.00		4 · 3
		CH 140	5700	52/40	13.25	13.50		13.10	13.50		
				106/54	15.49	15.50		15.15	15.50		
					26/0	8.26	8.50		8.03	8.50	
	3	CH 149	5745	52/37	13.97	14.00		14.09	14.50		
				106/53	15.68	16.00		15.21	15.50		
		CH 165	165 5825	26/8	15.53	16.00		15.35	1550		
				52/40	15.67	16.00		15.43	15.50		
				106/54	15.45	15.50		15.09	15.50		
	1	CH 38	5190	242/61	15.41	15.50		15.19	15.50		
	2A	CH 62	5310	242/62	14.64	15.00		14.72	15.00		
802.11ax		CH 102	5510	242/61	15.31	15.50		15.15	15.50		NoNOTE
-HE40	2C	CH 142	5710	242/62	15.67	16.00		15.20	15.50		4 · 3
	_	CH 151	5755	242/61	15.52	16.00		15.63	16.00		
	3	CH 159	5795	242/62	15.18	15.50		15.12	15.50		
	1	CH 52	5210	484/65	12.45	12.50		12.33	12.50		
	2A	CH 58	5290	484/66	10.92	11.00		10.75	11.00		
802.11ax		CH 106	5530	484/65	14.70	15.00		14.55	15.00		NoNOTE
-HE80	2C	CH 133	5610	484/66	15.14	15.50		15.08	15.50		4 · 3
				484/65	15.63	16.00		15.51	16.00		
	3	CH 155	5775	484/66	15.42	15.50		15.23	15.50		
		GTT	70. 70	996/67	11.54	12.00		12.94	13.00		
802.11ax	2A	CH 50	5250	996/S67	12.27	12.50		11.70	12.00		No ^{NOTE}
-HE160		GTT 11:		996/67	12.07	12.50		13.33	13.50		4 · 3
	2C	2C CH 114	14 5570 ⊢	996/S67	13.79	14.00		13.19	13.50		



6.5.2. For BT Function

Type of Network	Channel	Frequency (MHz)	Max Output Power (dBm)	Tune-Up Limit	Scale Factor	SAR Test
	CH 0	2402	9.74	10.00		No
Bluetooth- GFSK	CH 39	2441	9.94	10.00	1.01	Yes
	CH 78	2480	10.16	10.50	1.08	Yes
	CH 0	2402	8.05	8.50		No
Bluetooth- 8-DPSK	CH 39	2441	8.29	8.50		No
	CH 78	2480	8.51	9.00		No
	CH 37	2402	5.61	6.00		No
BLE (1M)	CH 17	2440	5.64	6.00		No
(44.3)	CH 39	2480	5.71	6.00		No
	CH 37	2402	5.64	6.00		No
BLE (2M)	CH 17	2440	5.66	6.00		No
(==:=)	CH 39	2480	5.72	6.00		No
	CH 37	2402	5.62	6.00		No
BLE (PHY Coded S2)	CH 17	2440	5.64	6.00		No
	CH 39	2480	5.70	6.00		No
	CH 37	2402	5.64	6.00		No
BLE (PHY Coded S8)	CH 17	2440	5.65	6.00		No
	CH 39	2480	5.69	6.00		No



6.6. SAR Test Result

6.6.1. WiFi 2.4G/Bluetooth

Test Date	2022. 04. 19 ~ 06. 17	Temp./Hum.	20 ~ 21°C/46 ~ 48%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang

Liquio	d Temperatu	re : 21.0°℃						Depth of Liquid: >15cm			
Test	Test Mode: 2.4GHz										
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Scale SAR	Limit (W/kg)	
	802.11b										
				Antenna:	Chain 0 (AN	T 1-AUX)					
7	Bottom	Fixed	0	2442	19.95	20.00	0.565	1.01	0.571	1.60	
13	Screen	Fixed	0.5	2442	19.95	20.00	0.148	1.01	0.149	1.60	
	Antenna: Chain 1 (ANT 2-Main)										
8	Bottom	Fixed	0	2442	19.90	20.00	0.667	1.02	0.680	1.60	
14	Screen	Fixed	0.5	2442	19.90	20.00	0.154	1.02	0.157	1.60	

Liquio	l Temperatu	re : 21.0°C						Depth of	Liquid:>1:	5cm	
Test	Test Mode: BT-GFSK										
Plot No.	Position: Distance Frequency Power Tune-up										
				Antenna:	Chain 0 (AN	T 1-AUX)					
9	Bottom	Fixed	0	2441	9.94	10.00	0.0352	1.01	0.036	1.60	
15	Screen	Fixed	0.5	2441	9.94	10.00	0.0111	1.01	0.011	1.60	
9	Bottom	Fixed	0	2480	10.16	10.50	0.0367	1.08	0.040	1.60	
15	Screen	Fixed	0.5	2480	10.16	10.50	0.0116	1.08	0.013	1.60	

File Number: C1M2204124 Report Number: EM-SR220033



6.6.2. WiFi 5G

Test Date	2022. 04. 18	Temp./Hum.	22°C/47%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang

Liquid	l Temperatu	re:21.0°C					Depth	of Liquid:	>15cm	
Test	Mode: 5Gl	Hz								
Plot No.	Test Position: Body	Antenna Position	Separation Distance (cm)	Frequency	Conducted Power (dBm)	Maximum Tune-up (dBm)	SAR 1g (W/kg)	Scale Factor	Scale SAR	Limit (W/kg)
				802.1	1a (UNII Ba	and 1)				
				Antenna:	Chain 0 (AN	T 1-AUX)				
1	Bottom	Fixed	0	5200	15.61	16.00	0.770	1.09	0.839	1.60
16	Bottom	Fixed	0	5240	15.51	16.00	0.686	1.12	0.768	1.60
				Antenna:	Chain 1 (AN	T 2-Main)				
2	Bottom	Fixed	0	5200	15.74	16.00	0.803	1.06	0.851	1.60
17	Bottom	Fixed	0	5240	15.59	16.00	0.725	1.10	0.798	1.60
				802.11	la (UNII Ba	nd 2C)				
				Antenna:	Chain 0 (AN	T 1-AUX)				
18	Bottom	Fixed	0	5500	15.67	16.00	0.767	1.08	0.828	1.60
3	Bottom	Fixed	0	5580	15.75	16.00	0.885	1.06	0.938	1.60
				Antenna:	Chain 1 (AN	TT 2-Main)				
19	Bottom	Fixed	0	5500	15.76	16.00	0.830	1.06	0.880	1.60
4	Bottom	Fixed	0	5580	15.82	16.00	0.924	1.04	0.961	1.60
			ļ.	802.1	la (UNII Ba	and 3)		ļ.	'	
				Antenna:	Chain 0 (AN	T 1-AUX)				
20	Bottom	Fixed	0	5745	15.54	16.00	0.739	1.11	0.820	1.60
5	Bottom	Fixed	0	5785	15.58	16.00	0.734	1.10	0.807	1.60
11	Screen	Fixed	0.5	5785	15.58	16.00	0.245	1.10	0.270	1.60
				Antenna:	Chain 1 (AN	TT 2-Main)				
21	Bottom	Fixed	0	5745	15.77	16.00	0.910	1.05	0.956	1.60
6	Bottom	Fixed	0	5785	15.82	16.00	1.000	1.04	1.040	1.60
12	Screen	Fixed	0.5	5785	15.82	16.00	0.249	1.04	0.259	1.60



Audix Technology Corp. No. 491, Zhongfu Rd., Linkou Dist., New Taipei City244,Taiwan

Tel: +886 2 26099301 Fax: +886 2 26099303

Repeated SAR measurement

Test Date	2022. 04. 18	Temp./Hum.	22°C/47%
Test Voltage	AC 120V, 60Hz (with AC Adapter)	Tested by	Sean Wang

			802.11	a			
	Plot No	Frequency (MHz)	SAR 1g (W/kg)	Scale Factor	Scale SAR	Variation	Additional repeat SAR required
1	original	5200	0.770	1.09	0.839		Yes Note 1
1	first repeat	5200	0.734	1.09	0.800	0.95	No Note 2
2	original	5200	0.803	1.06	0.851		Yes Note 1
2	first repeat	5200	0.818	1.06	0.867	1.02	No Note 2
18	original	5500	0.767	1.08	0.828		Yes Note 1
18	first repeat	5500	0.765	1.08	0.826	1.00	No Note 2
19	original	5500	0.830	1.06	0.880		Yes Note 1
19	first repeat	5500	0.844	1.06	0.895	1.02	No Note 2
3	original	5580	0.885	1.06	0.938		Yes Note 1
3	first repeat	5580	0.879	1.06	0.932	0.99	No Note 2
4	original	5580	0.924	1.04	0.961		Yes Note 1
4	first repeat	5580	0.915	1.04	0.952	0.99	No Note 2
20	original	5745	0.739	1.11	0.820		Yes Note 1
20	first repeat	5745	0.735	1.11	0.816	0.99	No Note 2
21	original	5745	0.910	1.05	0.956		Yes Note 1
21	first repeat	5745	0.926	1.05	0.972	1.02	No Note 2
5	original	5785	0.734	1.10	0.807		Yes Note 1
5	first repeat	5785	0.729	1.10	0.802	0.99	No Note 2
6	original	5785	1.000	1.04	1.040		Yes Note 1
6	first repeat	5785	0.989	1.04	1.026	0.99	No Note 2

Remark: *: It means repeated SAR measurement.

- Note: 1. Pursuant section 2.8.1(2) KDB 865664 D01, when the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.
 - 2. Pursuant section 2.8.1(3) KDB 865664 D01, perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit)



6.6.3. Highest Simultaneous Transmission SAR

Highest Simultaneous Transmission SAR	Reported Body SAR _{1g}
WLAN 2.4G (2442MHz) ANT Main+ WLAN 2.4G (2442MHz) ANT AUX	1.251 (W/kg)
WLAN 2.4G (2442MHz) ANT AUX+ BT (2441MHz)ANT AUX	0.611 (W/kg)
WLAN 5G (5580MHz) ANT AUX+ BT (2441MHz)ANT AUX	0.978 (W/kg)
WLAN 5G (5580MHz) ANT Main+ WLAN 5 (5580MHz) ANT AUX	1.899 (W/kg) NOTE 3
WLAN 5G (5580MHz) ANT Main+ WLAN 5 (5580MHz) ANT AUX + BT (2441MHz)ANT AUX	1.939 (W/kg) NOTE 3

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).


- 2. It is calculated from scale SAR.
- 3. It is larger than the limit 1.6(W/kg), SAR test exclusion is determined by the SAR to peak location separation ratio.



Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+	5200MHz	1.69 (W/kg) ^{Note 2}	57.60	0.04
WLAN 5 ANT AUX	5580MHz	1.89 (W/kg) ^{Note 2}	5923	0.04

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).


2. SPLSR=(SAR1+SAR2)^{1.5}/Ri must ≤0.04

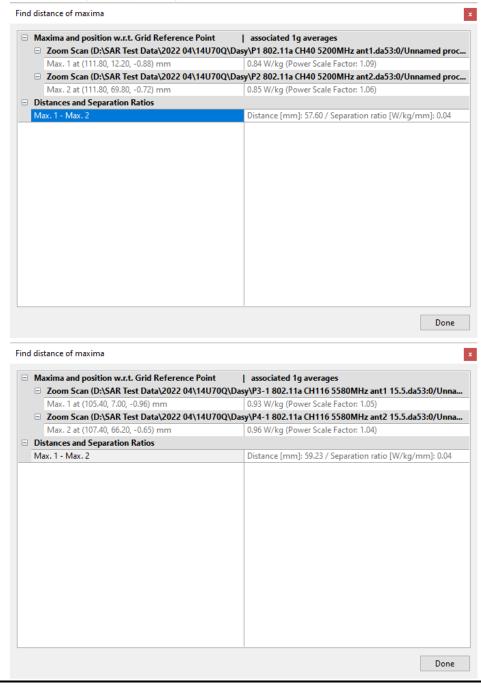



Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+ WLAN 5 ANT AUX	5785MHz	1.85 (W/kg) ^{Note 2}	58.40	0.04

- Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).
 - 2. SPLSR=(SAR1+SAR2)^{1.5}/Ri must ≤0.04

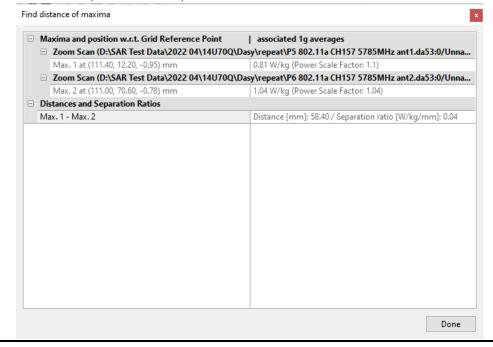




Repeated SAR

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+	5200MHz	1.67 (W/kg) ^{Note 2}	58.82	0.04
WLAN 5 ANT AUX	5500MHz	1.71 (W/kg) ^{Note 2}	58.01	0.04

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. SPLSR=(SAR1+SAR2)^{1.5}/Ri must ≤0.04

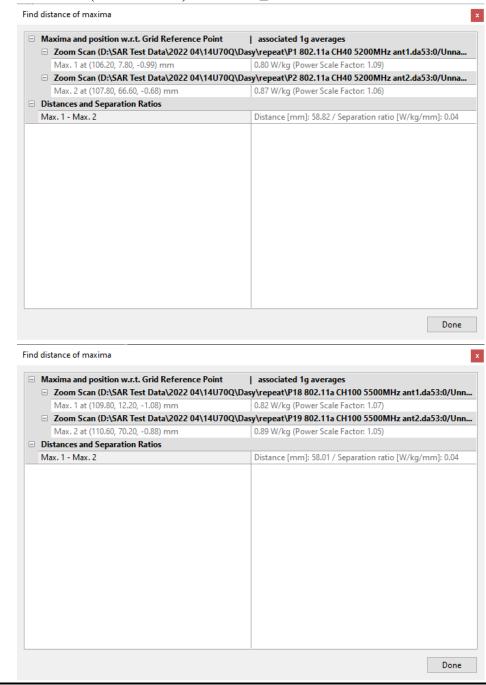




Repeated SAR

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+	5580MHz	1.88 (W/kg) ^{Note 2}	59.23	0.04
WLAN 5 ANT AUX	5745MHz	1.79 (W/kg) ^{Note 2}	56.45	0.04

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. SPLSR=(SAR1+SAR2)^{1.5}/Ri must ≤0.04

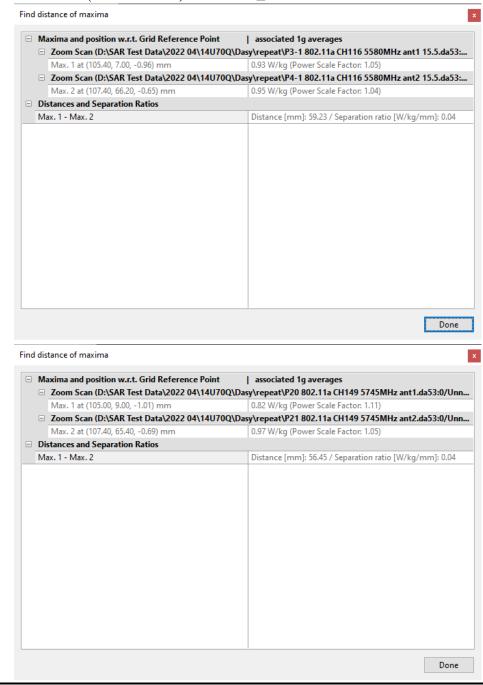




Repeated SAR

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+ WLAN 5 ANT AUX	5785MHz	1.83 (W/kg) ^{Note 2}	56.05	0.04

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. SPLSR= $(SAR1+SAR2)^{1.5}/Ri must \le 0.04$

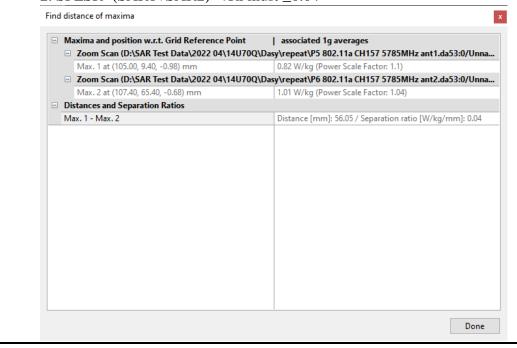




Subsequent highest output channel

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+	5240MHz	1.55 (W/kg) ^{Note 2}	57.21	0.03
WLAN 5 ANT AUX	5500MHz	1.69 (W/kg) ^{Note 2}	58.01	0.04

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. SPLSR=(SAR1+SAR2)^{1.5}/Ri must ≤0.04

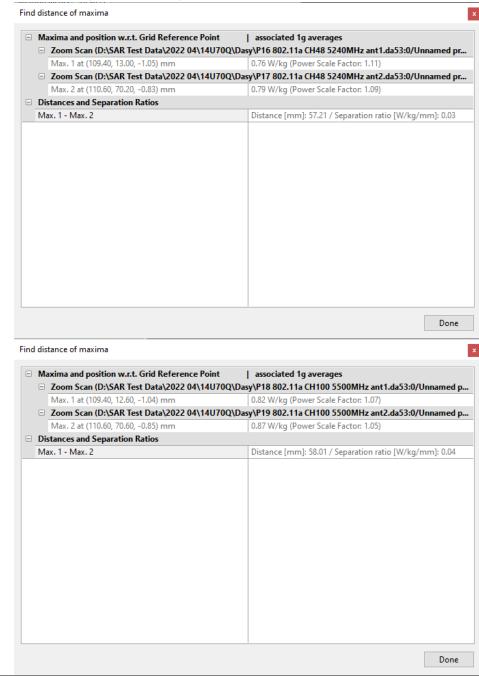




Subsequent highest output channel

Simultaneous Transmission SAR	Frequency	Reported Body SAR _{1g} (SAR1+SAR2) ^{Note2}	Ri (mm) Note2	SPLSR ^{Note2}
WLAN 5G ANT Main+ WLAN 5 ANT AUX	5745MHz	1.78 (W/kg) ^{Note 2}	57.62	0.04

Note: 1. The SAR limit (SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).

2. SPLSR= $(SAR1+SAR2)^{1.5}/Ri must \le 0.04$

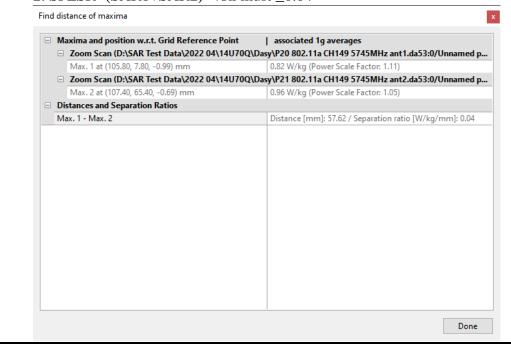



APPENDIX A

GRAPH RESULT

(Model: 14U70Q)



APPENDIX B

TEST PHOTOGRAPHS

(Model: 14U70Q)





APPENDIX C

Test Equipment Calibration Data