


TABLE OF CONTENTS

A.1. CONDUCTED EMISSION	2
A.2. RADIATED EMISSION	6
A.2.1. Emissions within Restricted Frequency Bands	6
A.2.2. Emissions outside the frequency band	347
A.2.3. Emissions in Non-restricted Frequency Bands	372
A.3. MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	373
A.3.1. Average Output Power and Emission/Occupied Bandwidth	373
A.3.2. Measurement Plots	382
A.4. POWER SPECTRAL DENSITY	405
A.4.1. Power Spectral Density Result.....	405
A.4.2. Measurement Plots	411
A.5. FREQUENCY STABILITY	432
A.5.1. Frequency stability Result.....	432

A.1. CONDUCTED EMISSION

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	With INPAQ Antenna		

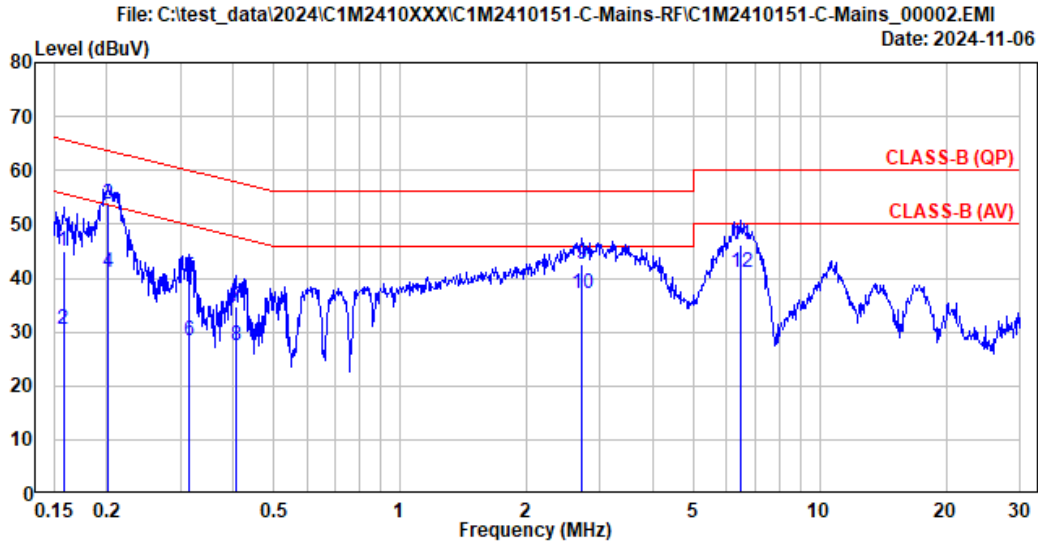


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating INPAQ		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.158	10.26	0.03	9.85	24.94	45.08	65.59	20.51	QP
2	0.158	10.26	0.03	9.85	10.30	30.44	55.59	25.15	Average
3	0.202	10.25	0.03	9.85	33.57	53.70	63.52	9.82	QP
4	0.202	10.25	0.03	9.85	21.07	41.20	53.52	12.32	Average
5	0.315	10.25	0.03	9.85	19.91	40.04	59.83	19.79	QP
6	0.315	10.25	0.03	9.85	8.30	28.43	49.83	21.40	Average
7	0.406	10.25	0.03	9.85	14.68	34.81	57.72	22.91	QP
8	0.406	10.25	0.03	9.85	7.21	27.34	47.72	20.38	Average
9	2.715	10.29	0.07	9.86	22.21	42.43	56.00	13.57	QP
10	2.715	10.29	0.07	9.86	16.95	37.17	46.00	8.83	Average
11	6.463	10.38	0.11	9.87	25.78	46.14	60.00	13.86	QP
12	6.463	10.38	0.11	9.87	20.84	41.20	50.00	8.80	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	With INPAQ Antenna		

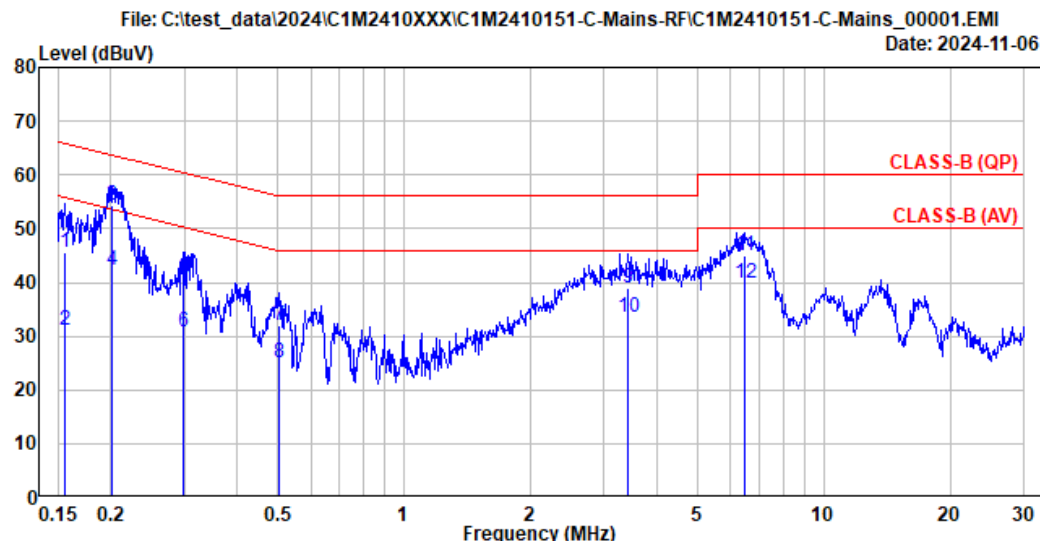


Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating		
	INPAQ		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.156	10.27	0.03	9.85	25.51	45.66	65.67	20.01	QP
2	0.156	10.27	0.03	9.85	10.90	31.05	55.67	24.62	Average
3	0.201	10.26	0.03	9.85	34.21	54.35	63.56	9.21	QP
4	0.201	10.26	0.03	9.85	22.08	42.22	53.56	11.34	Average
5	0.298	10.26	0.03	9.85	20.22	40.36	60.29	19.93	QP
6	0.298	10.26	0.03	9.85	10.79	30.93	50.29	19.36	Average
7	0.504	10.26	0.03	9.85	11.80	31.94	56.00	24.06	QP
8	0.504	10.26	0.03	9.85	4.86	25.00	46.00	21.00	Average
9	3.415	10.33	0.08	9.86	18.57	38.84	56.00	17.16	QP
10	3.415	10.33	0.08	9.86	13.21	33.48	46.00	12.52	Average
11	6.463	10.46	0.11	9.87	24.45	44.89	60.00	15.11	QP
12	6.463	10.46	0.11	9.87	19.53	39.97	50.00	10.03	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	With LUXSHARE-ICT Antenna		

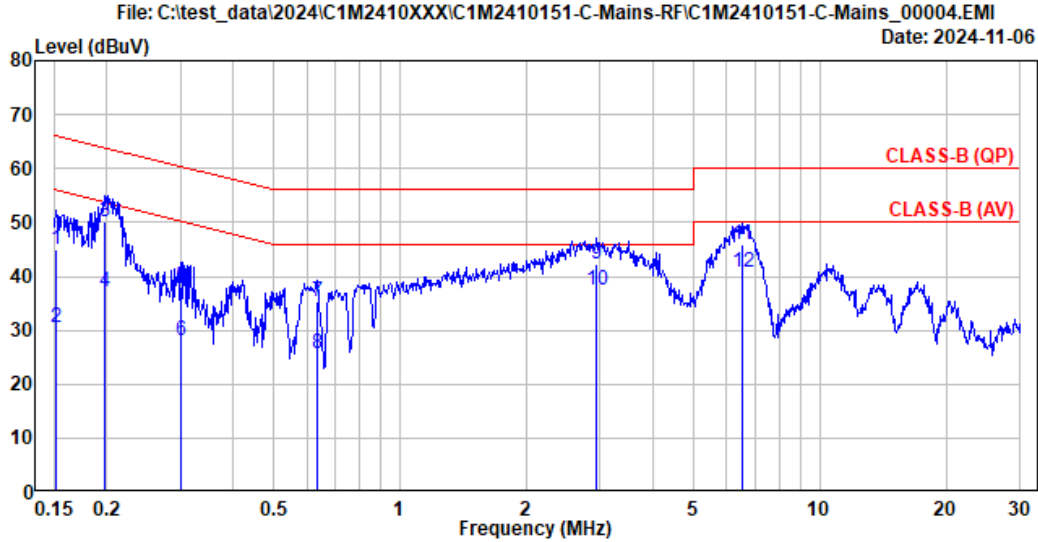


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.26	0.03	9.85	24.89	45.03	65.92	20.89	QP
2	0.152	10.26	0.03	9.85	10.44	30.58	55.92	25.34	Average
3	0.197	10.25	0.03	9.85	30.07	50.20	63.72	13.52	QP
4	0.197	10.25	0.03	9.85	16.99	37.12	53.72	16.60	Average
5	0.301	10.25	0.03	9.85	17.78	37.91	60.20	22.29	QP
6	0.301	10.25	0.03	9.85	8.08	28.21	50.20	21.99	Average
7	0.633	10.26	0.04	9.85	15.20	35.35	56.00	20.65	QP
8	0.633	10.26	0.04	9.85	5.45	25.60	46.00	20.40	Average
9	2.940	10.29	0.07	9.86	21.99	42.21	56.00	13.79	QP
10	2.940	10.29	0.07	9.86	17.19	37.41	46.00	8.59	Average
11	6.527	10.38	0.11	9.87	25.45	45.81	60.00	14.19	QP
12	6.527	10.38	0.11	9.87	20.51	40.87	50.00	9.13	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2024/11/06	Temp./Hum.	25°C/62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du
Test SKU	With LUXSHARE-ICT Antenna		

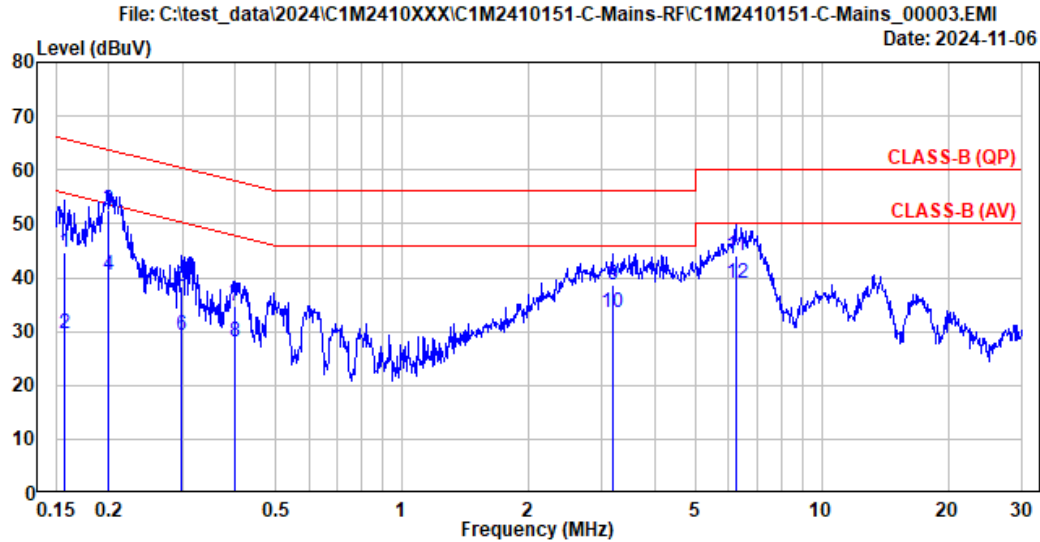

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/62%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90T	Engineer	: Nick Du
Test Mode	: Operating LUXSHARE		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.157	10.27	0.03	9.85	24.60	44.75	65.63	20.88	QP
2	0.157	10.27	0.03	9.85	9.53	29.68	55.63	25.95	Average
3	0.200	10.26	0.03	9.85	32.32	52.46	63.60	11.14	QP
4	0.200	10.26	0.03	9.85	20.29	40.43	53.60	13.17	Average
5	0.297	10.26	0.03	9.85	18.22	38.36	60.33	21.97	QP
6	0.297	10.26	0.03	9.85	9.24	29.38	50.33	20.95	Average
7	0.400	10.26	0.03	9.85	14.53	34.67	57.84	23.17	QP
8	0.400	10.26	0.03	9.85	8.02	28.16	47.84	19.68	Average
9	3.169	10.32	0.07	9.86	18.26	38.51	56.00	17.49	QP
10	3.169	10.32	0.07	9.86	13.22	33.47	46.00	12.53	Average
11	6.241	10.45	0.10	9.87	23.57	43.99	60.00	16.01	QP
12	6.241	10.45	0.10	9.87	18.44	38.86	50.00	11.14	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2. RADIATED EMISSION

Test Date	2024/10/04~12/23	Temp./Hum.	22~24°C/52~63%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1. Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

With INPAQ Antenna

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.50	32.31	29.29	40.00	10.71	Peak
115.000	17.57	2.69	26.22	33.40	27.44	43.50	16.06	Peak
317.500	19.10	4.75	25.82	33.53	31.56	46.00	14.44	Peak
445.500	21.93	6.20	26.86	30.20	31.46	46.00	14.54	Peak
540.000	23.34	6.71	27.33	30.06	32.78	46.00	13.22	Peak
742.500	24.75	7.53	27.42	32.21	37.07	46.00	8.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.500	20.95	1.47	26.50	40.50	36.42	40.00	3.58	Peak
56.500	12.58	1.88	26.46	45.62	33.62	40.00	6.38	Peak
175.500	14.97	3.34	25.92	39.62	32.01	43.50	11.49	Peak
282.000	18.35	4.34	25.68	30.18	27.19	46.00	18.81	Peak
594.000	24.00	6.80	27.47	29.54	32.88	46.00	13.12	Peak
944.000	26.53	8.70	27.00	27.92	36.15	46.00	9.85	Peak

With LUXSHARE-ICT Antenna

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	36.95	33.45	40.00	6.55	Peak
48.500	14.74	1.70	26.49	32.84	22.80	40.00	17.20	Peak
187.500	14.85	3.45	25.88	35.08	27.49	43.50	16.01	Peak
230.000	16.75	3.85	25.77	32.26	27.09	46.00	18.91	Peak
378.000	20.60	5.54	26.36	33.44	33.22	46.00	12.78	Peak
627.000	24.20	6.95	27.48	28.06	31.73	46.00	14.27	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
37.000	20.65	1.48	26.50	36.62	32.25	40.00	7.75	Peak
152.000	16.14	3.08	26.02	34.05	27.25	43.50	16.25	Peak
314.000	19.01	4.70	25.79	25.98	23.90	46.00	22.10	Peak
504.000	22.87	6.65	27.23	27.11	29.39	46.00	16.61	Peak
690.000	24.48	7.26	27.49	28.79	33.05	46.00	12.95	Peak
853.000	25.63	8.15	27.23	27.76	34.31	46.00	11.69	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


With INPAQ Antenna

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

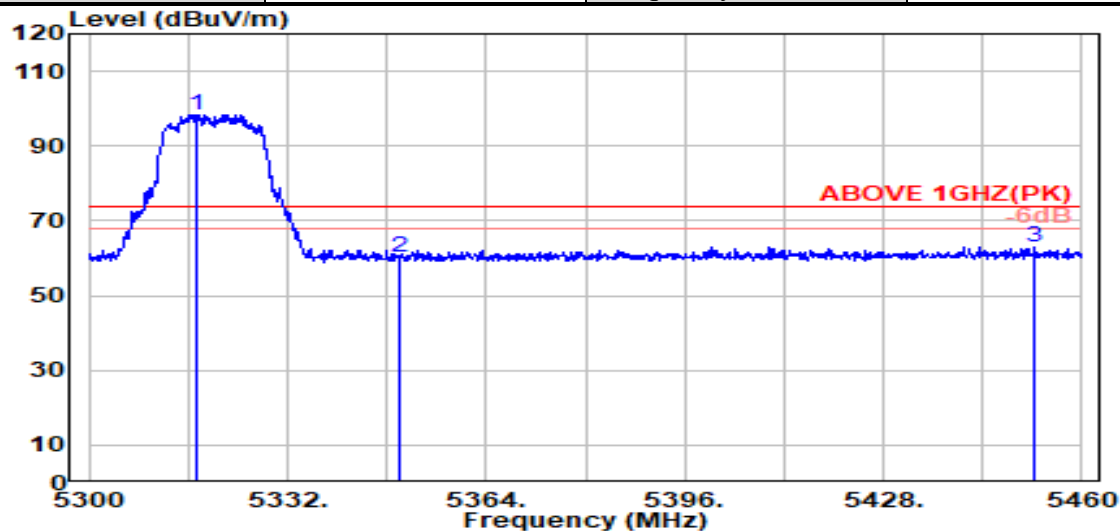

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	33.76	8.54	39.17	95.20	98.34	---	---	Peak
5350.000	33.70	8.57	39.17	56.92	60.03	74.00	13.97	Peak
5452.300	34.00	8.67	39.16	59.57	63.09	74.00	10.91	Peak

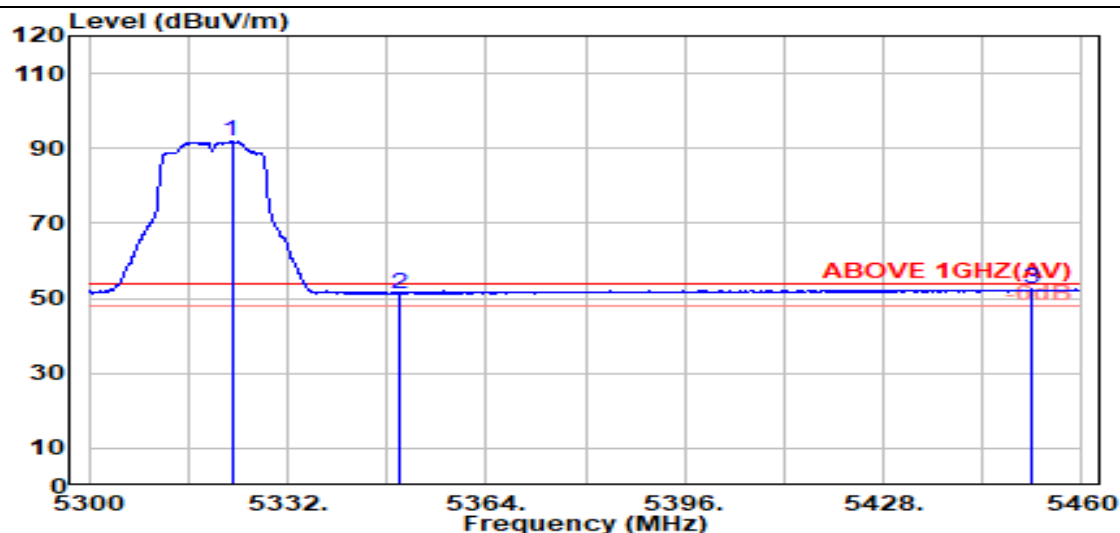


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	33.75	8.55	39.17	88.70	91.83	---	---	Average
5350.000	33.70	8.57	39.17	48.21	51.32	54.00	2.68	Average
5451.700	34.00	8.67	39.16	48.96	52.48	54.00	1.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

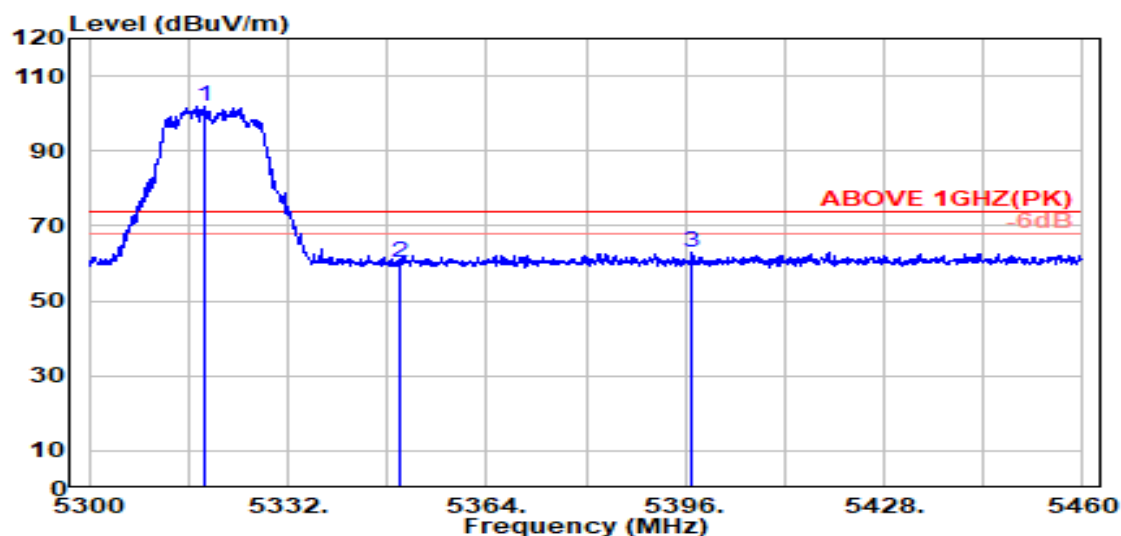

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.500	33.76	8.54	39.17	98.94	102.08	---	---	Peak
5350.000	33.70	8.57	39.17	57.13	60.24	74.00	13.76	Peak
5397.100	33.89	8.62	39.16	59.59	62.94	74.00	11.06	Peak

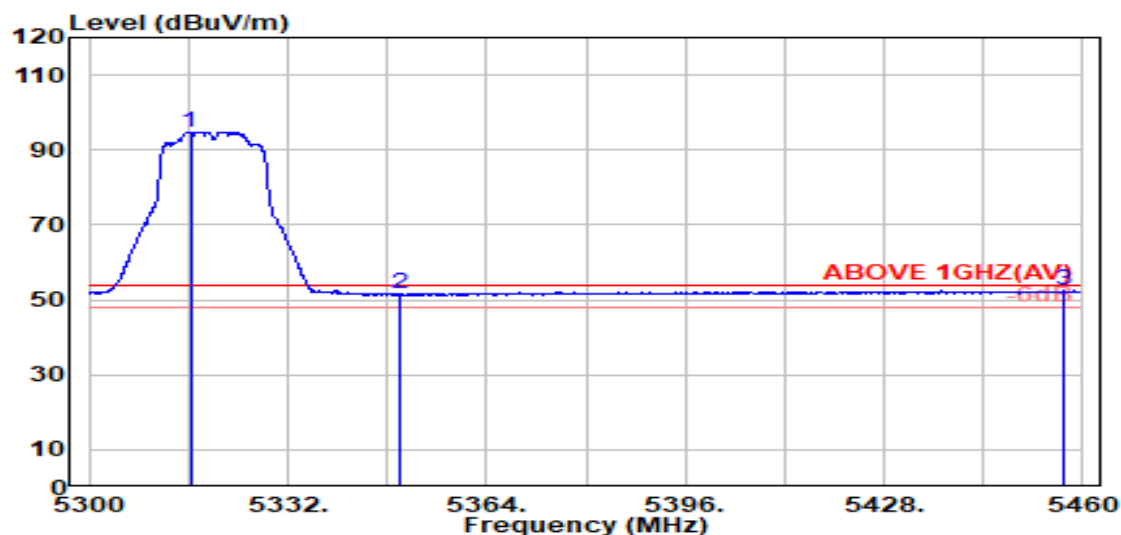


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.300	33.77	8.54	39.17	91.73	94.86	---	---	Average
5350.000	33.70	8.57	39.17	48.33	51.43	54.00	2.57	Average
5456.800	34.01	8.68	39.15	48.81	52.34	54.00	1.66	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

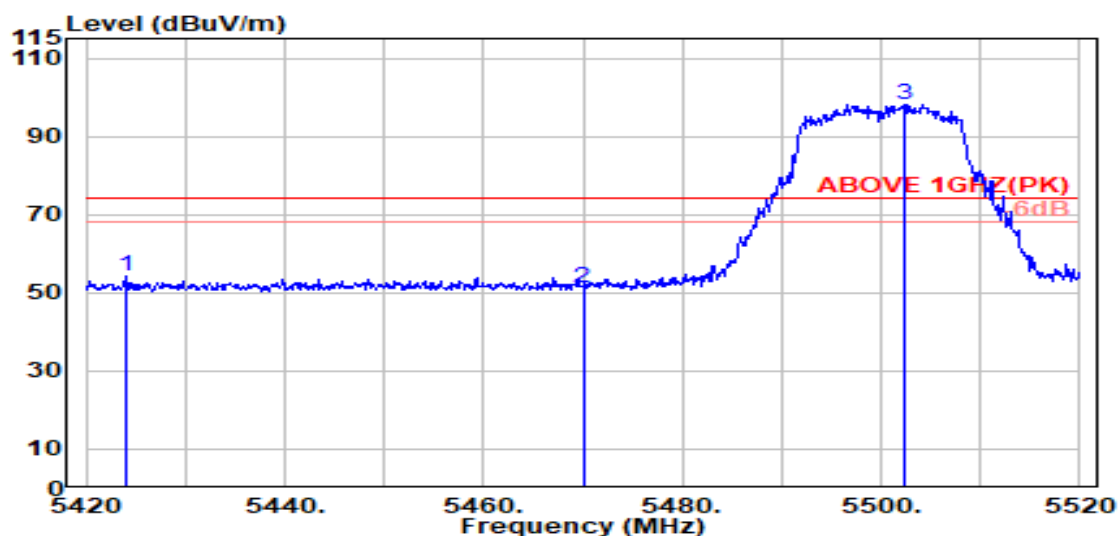

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.000	33.95	8.64	39.16	51.00	54.43	74.00	19.57	Peak
5470.000	34.04	8.69	39.15	47.81	51.38	74.00	22.62	Peak
@ 5502.400	34.10	8.72	39.15	94.48	98.15	---	---	Peak

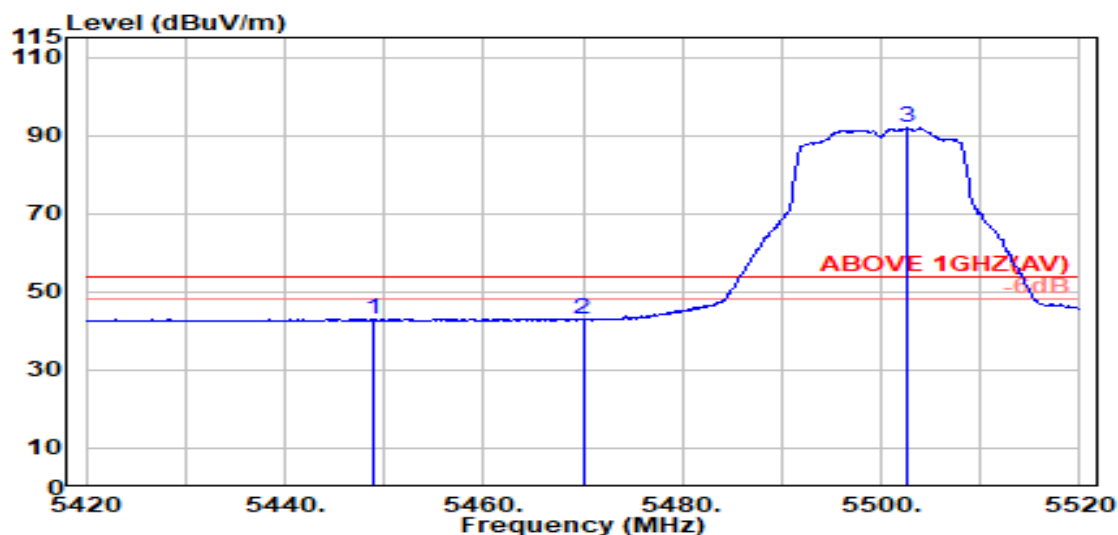


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.000	34.00	8.67	39.16	39.64	43.15	54.00	10.85	Average
5470.000	34.04	8.69	39.15	39.29	42.87	54.00	11.13	Average
@ 5502.700	34.09	8.72	39.15	88.22	91.89	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

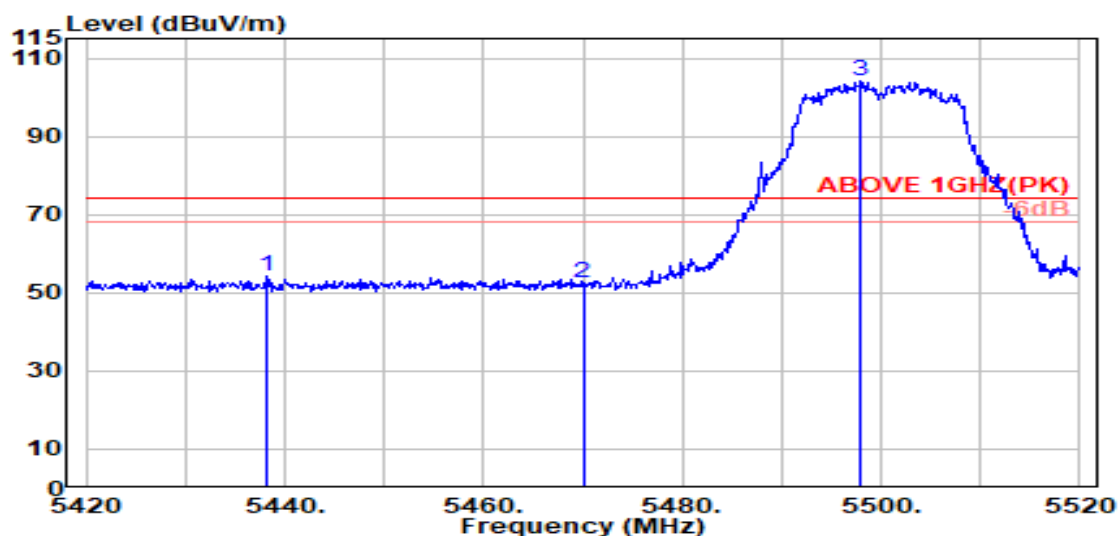

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5438.300	33.98	8.66	39.16	50.64	54.12	74.00	19.88	Peak
5470.000	34.04	8.69	39.15	48.84	52.41	74.00	21.59	Peak
@ 5497.900	34.10	8.71	39.15	100.55	104.21	---	---	Peak

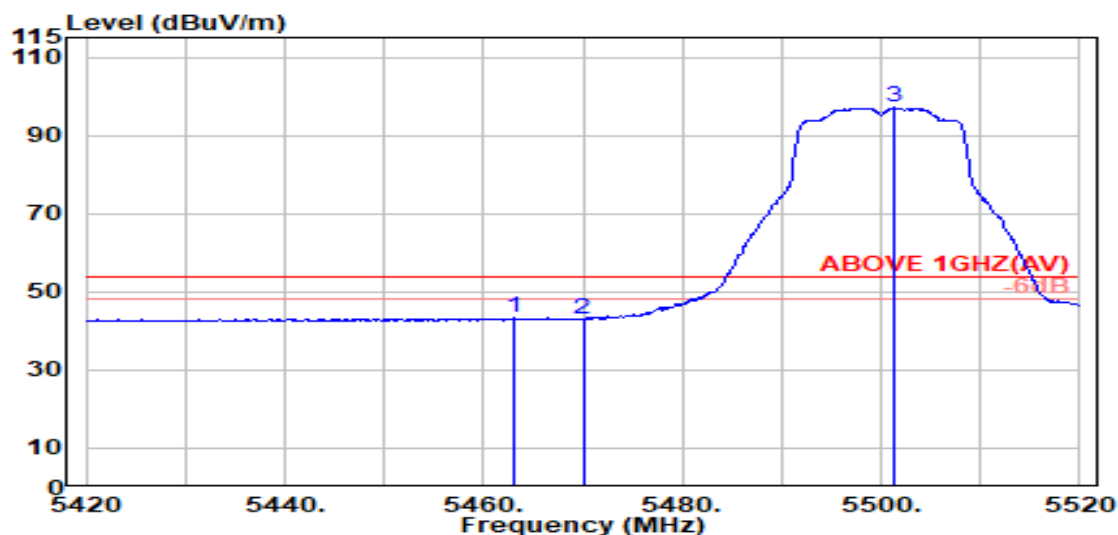


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.100	34.03	8.68	39.15	39.64	43.19	54.00	10.81	Average
5470.000	34.04	8.69	39.15	39.46	43.03	54.00	10.97	Average
@ 5501.200	34.10	8.72	39.15	93.39	97.06	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

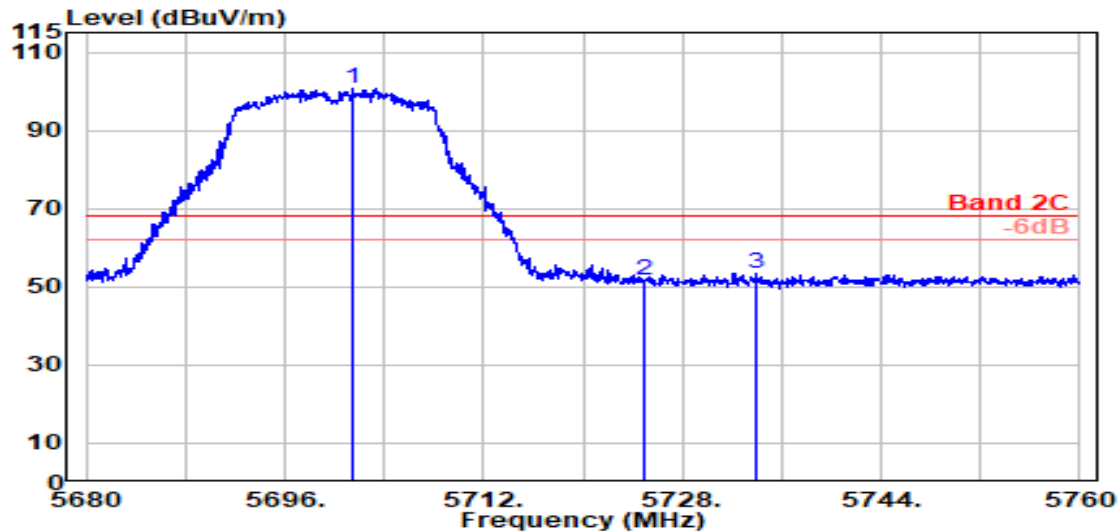

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.400	33.60	8.90	39.19	97.19	100.50	---	---	Peak
	5725.000	33.60	8.93	39.20	48.30	51.63	68.20	16.57	Peak
	5733.900	33.60	8.93	39.20	49.95	53.29	68.20	14.91	Peak

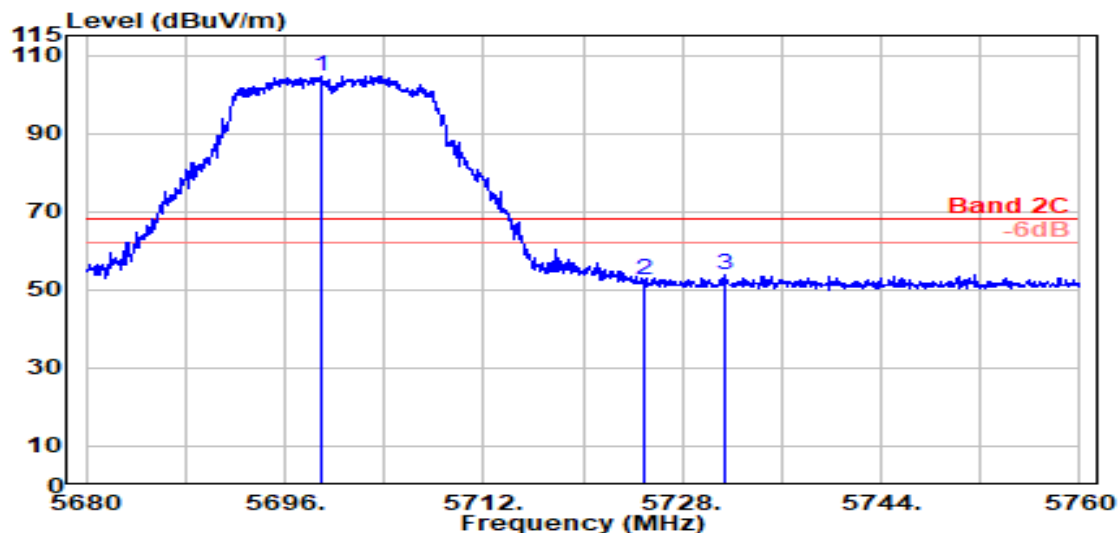


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.850	33.60	8.90	39.19	101.41	104.73	---	---	Peak
	5725.000	33.60	8.93	39.20	49.11	52.44	68.20	15.76	Peak
	5731.500	33.60	8.93	39.20	50.40	53.73	68.20	14.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

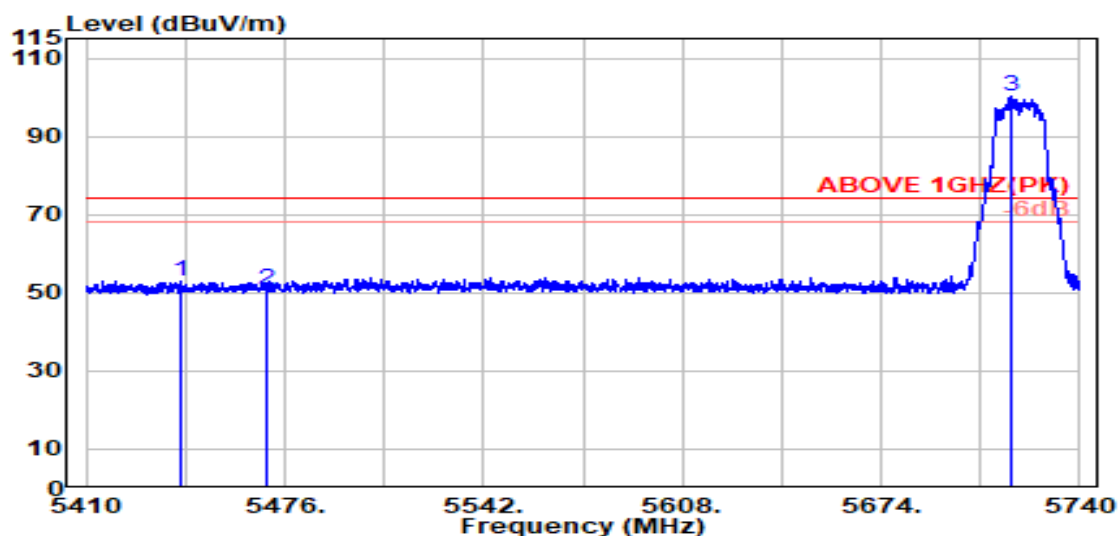

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.400	33.98	8.66	39.16	49.31	52.80	74.00	21.20	Peak
5470.000	34.04	8.69	39.15	47.06	50.63	74.00	23.37	Peak
@ 5717.200	33.60	8.92	39.19	96.75	100.07	---	---	Peak

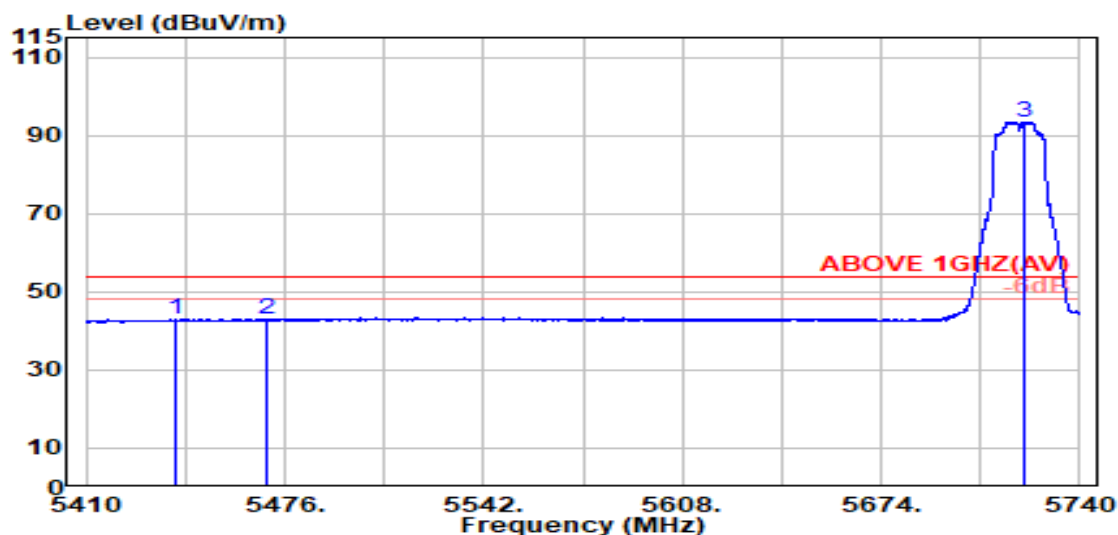


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.700	33.98	8.66	39.16	39.58	43.06	54.00	10.94	Average
5470.000	34.04	8.69	39.15	39.18	42.75	54.00	11.25	Average
@ 5721.400	33.60	8.92	39.20	90.05	93.38	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

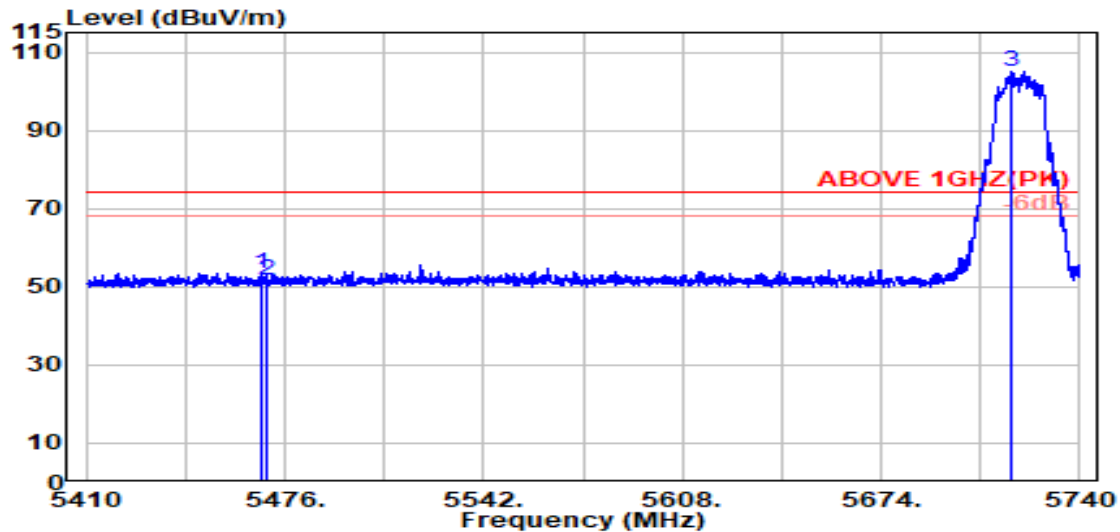

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	49.83	53.39	74.00	20.61	Peak
5470.000	34.04	8.69	39.15	47.97	51.55	74.00	22.45	Peak
@ 5717.500	33.60	8.92	39.19	101.75	105.07	---	---	Peak

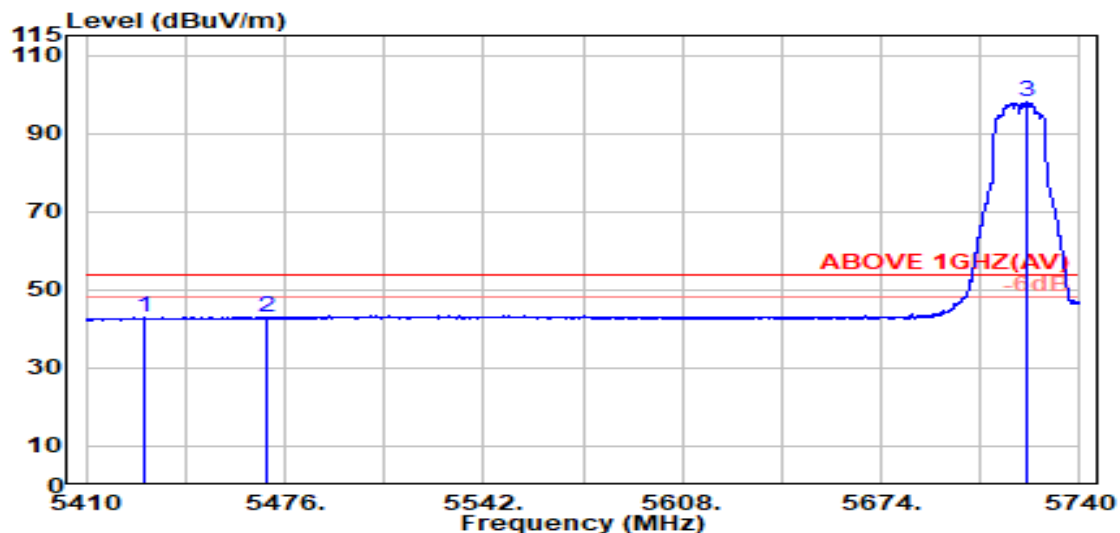


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.300	33.96	8.65	39.16	39.64	43.09	54.00	10.91	Average
5470.000	34.04	8.69	39.15	39.25	42.82	54.00	11.18	Average
@ 5722.500	33.60	8.92	39.20	94.55	97.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

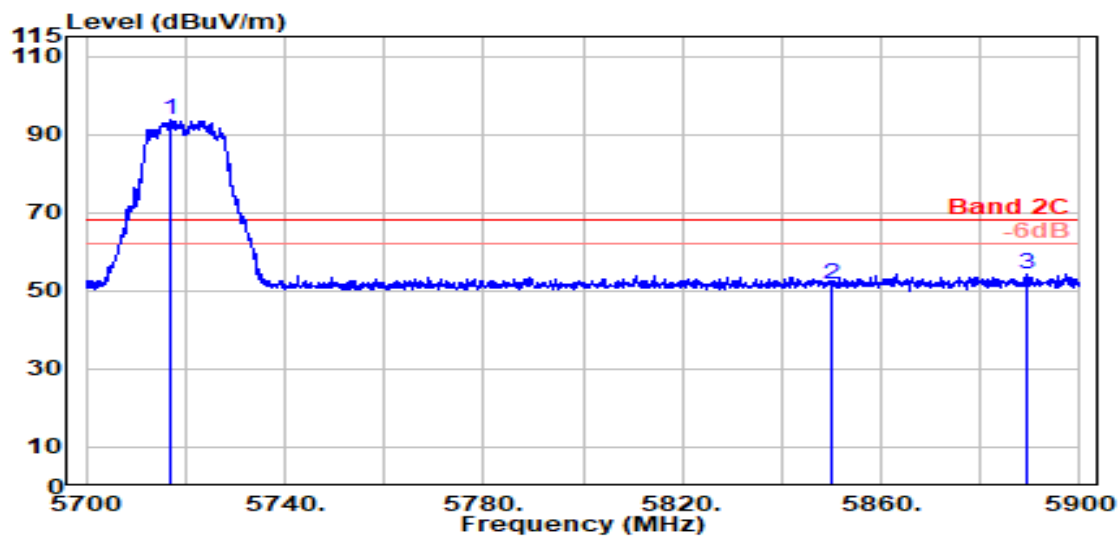

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.900	33.60	8.92	39.19	90.50	93.83	---	---	Peak
5850.000	33.90	9.04	39.22	47.96	51.68	68.20	16.52	Peak
5889.200	34.06	9.07	39.23	50.30	54.20	68.20	14.00	Peak

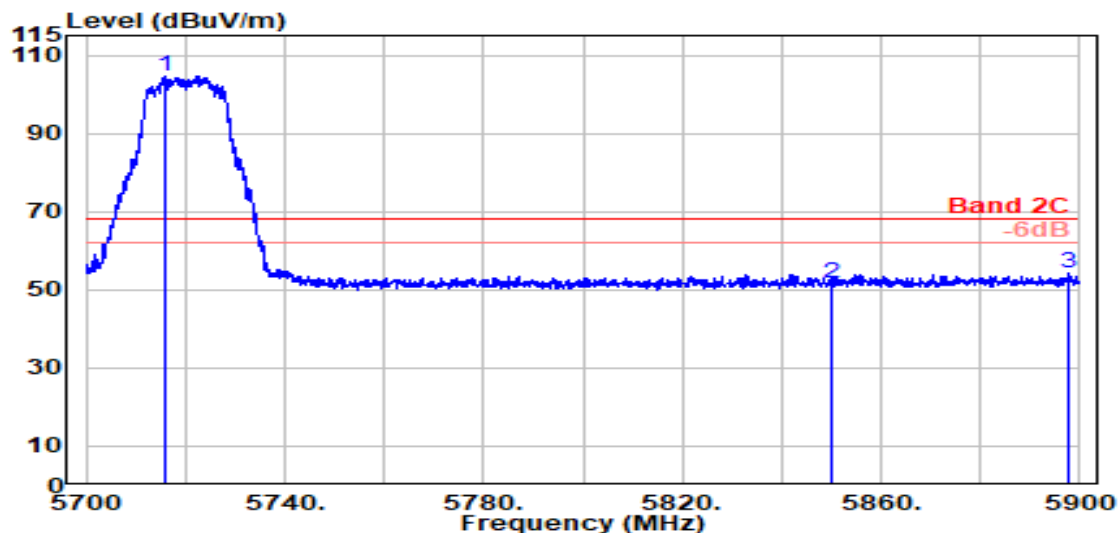


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.000	33.60	8.92	39.19	101.33	104.66	---	---	Peak
5850.000	33.90	9.04	39.22	47.84	51.56	68.20	16.64	Peak
5897.900	34.09	9.08	39.23	50.13	54.07	68.20	14.13	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

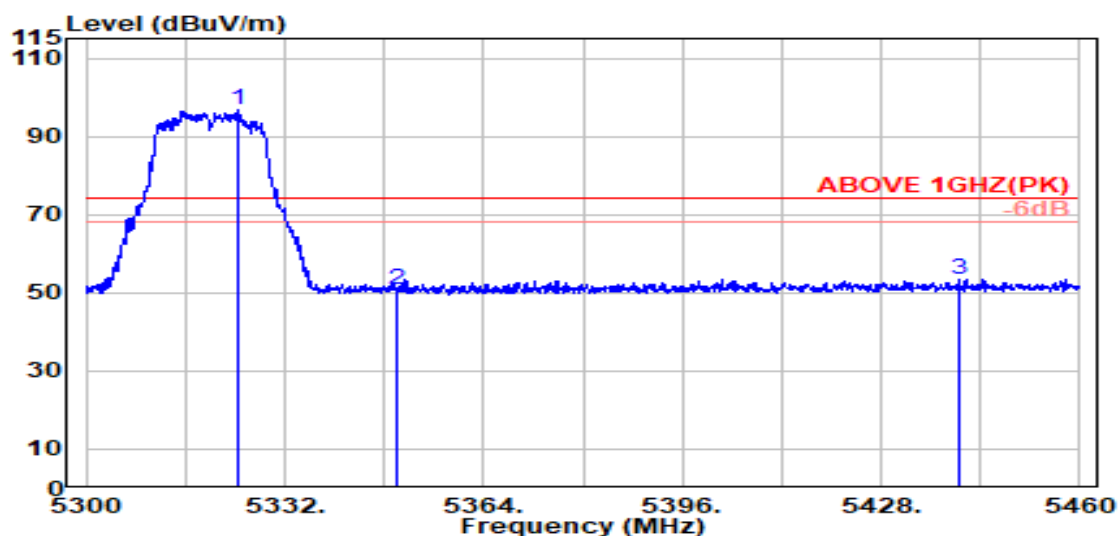

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.400	33.75	8.55	39.17	93.64	96.76	---	---	Peak
5350.000	33.70	8.57	39.17	47.79	50.90	74.00	23.10	Peak
5440.600	33.98	8.66	39.16	50.01	53.49	74.00	20.51	Peak

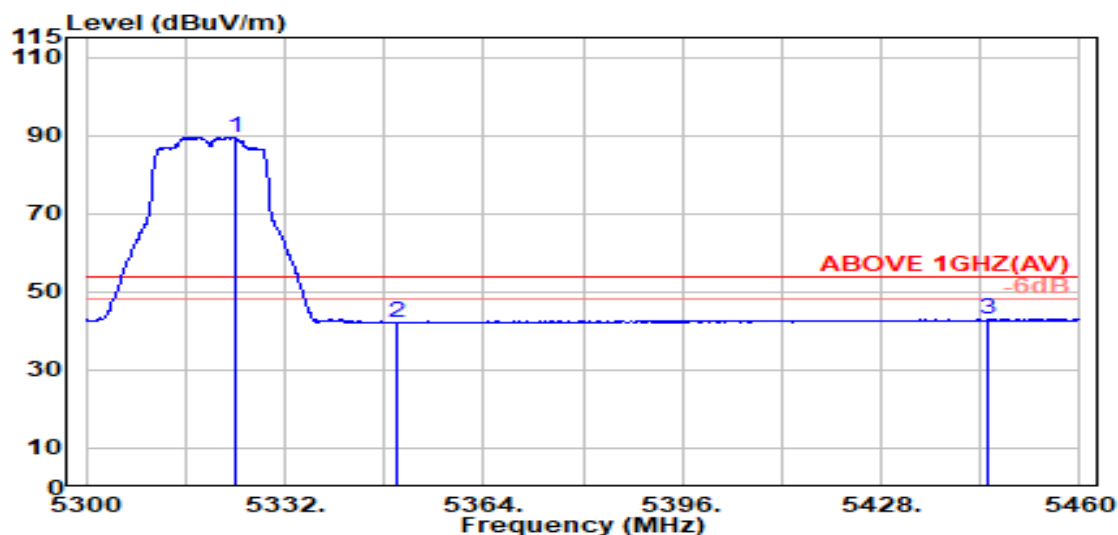


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	33.75	8.55	39.17	86.43	89.55	---	---	Average
5350.000	33.70	8.57	39.17	39.01	42.12	54.00	11.88	Average
5445.000	33.99	8.66	39.16	39.45	42.95	54.00	11.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

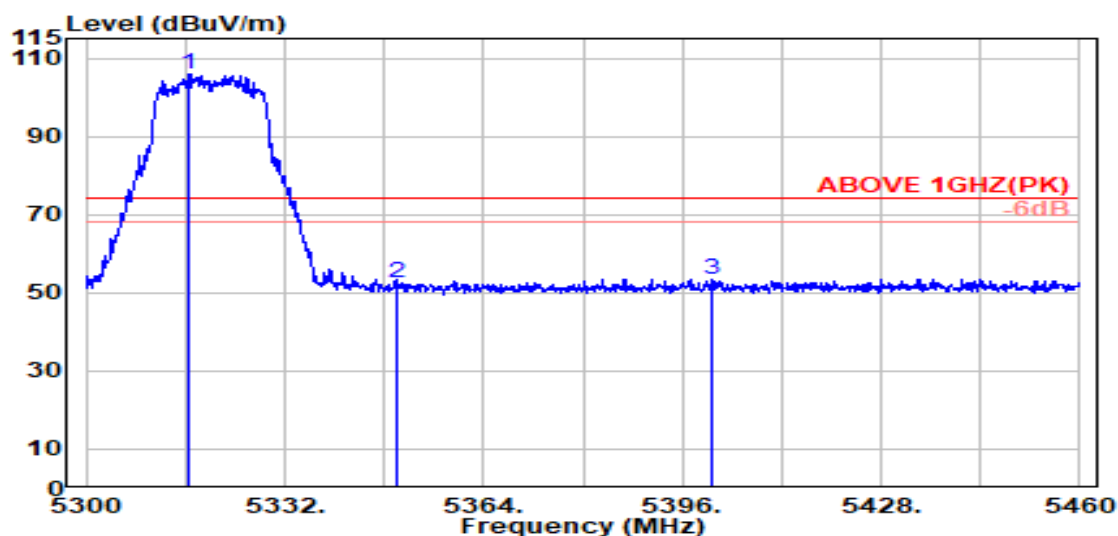

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.700	33.77	8.54	39.17	102.90	106.04	---	---	Peak
5350.000	33.70	8.57	39.17	49.39	52.49	74.00	21.51	Peak
5400.900	33.90	8.62	39.16	50.18	53.54	74.00	20.46	Peak

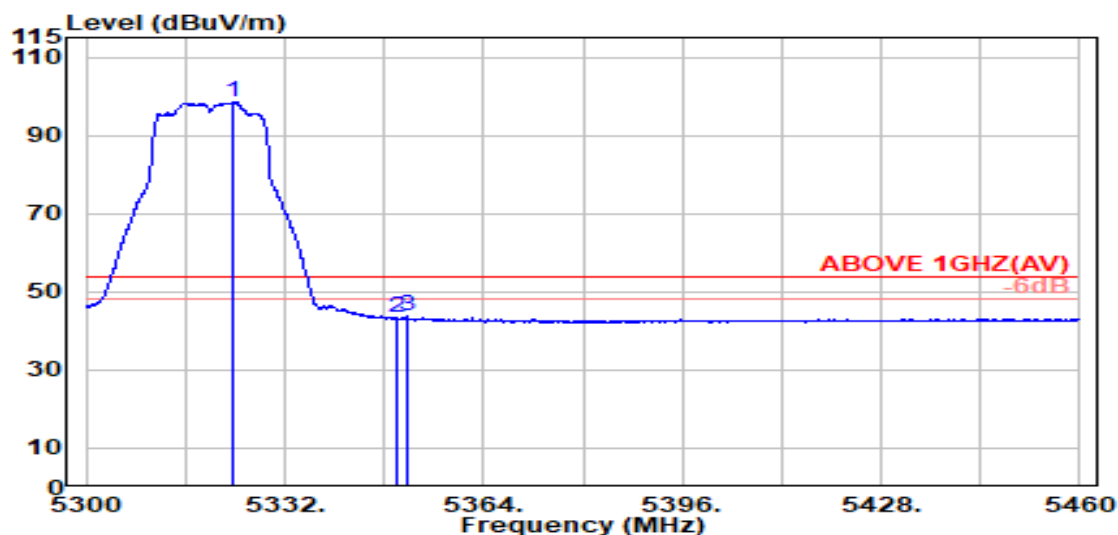

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	33.75	8.55	39.17	95.43	98.56	---	---	Average
5350.000	33.70	8.57	39.17	40.16	43.27	54.00	10.73	Average
5351.600	33.71	8.57	39.17	40.58	43.70	54.00	10.30	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

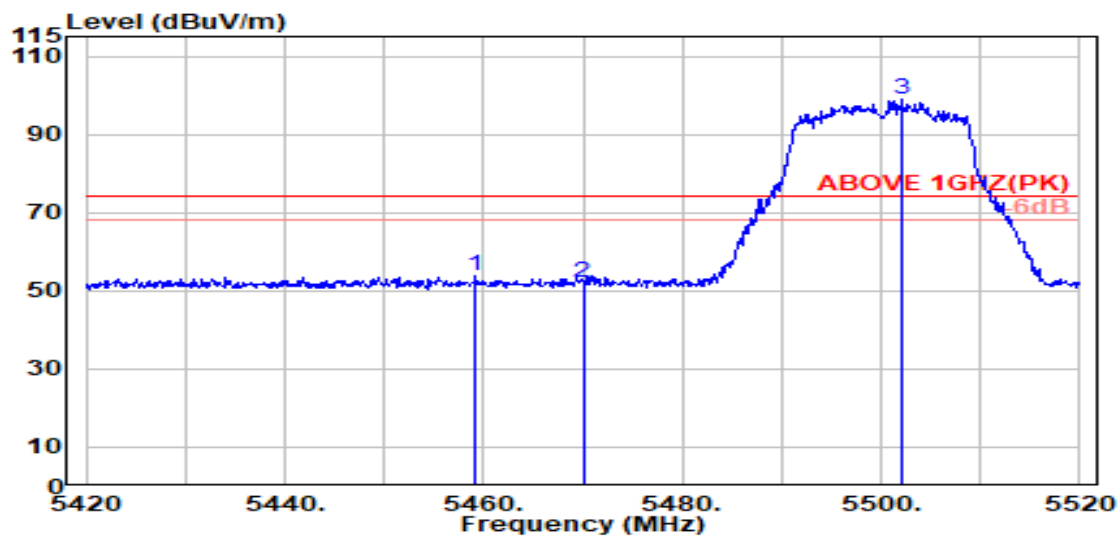

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.200	34.02	8.68	39.15	50.15	53.69	74.00	20.31	Peak
5470.000	34.04	8.69	39.15	48.64	52.22	74.00	21.78	Peak
@ 5502.100	34.10	8.72	39.15	95.40	99.06	---	---	Peak

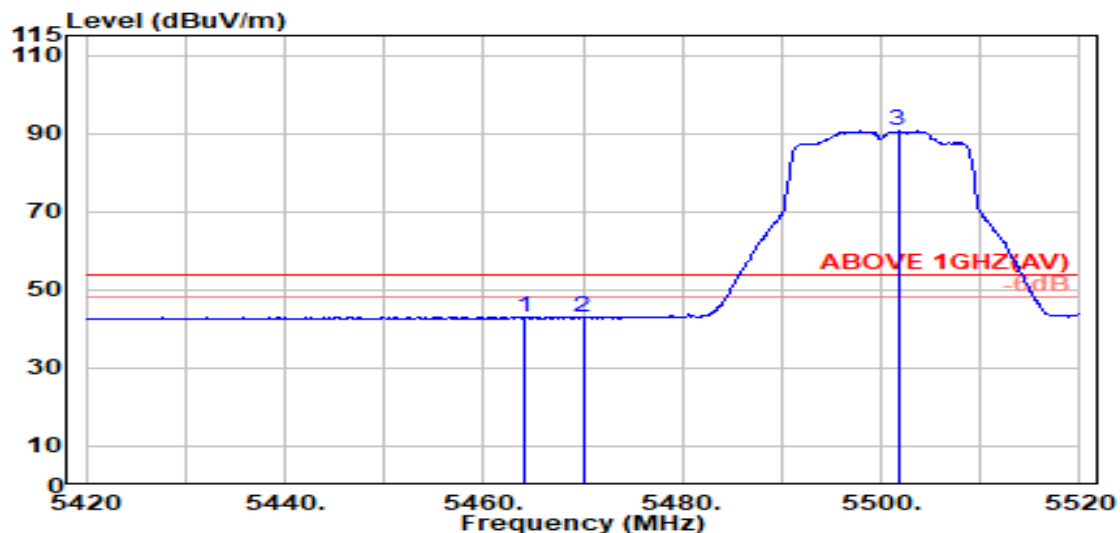

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.03	8.68	39.15	39.56	43.12	54.00	10.88	Average
5470.000	34.04	8.69	39.15	39.32	42.89	54.00	11.11	Average
@ 5501.700	34.10	8.72	39.15	86.91	90.57	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2410151

Report Number: EM-F240605


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

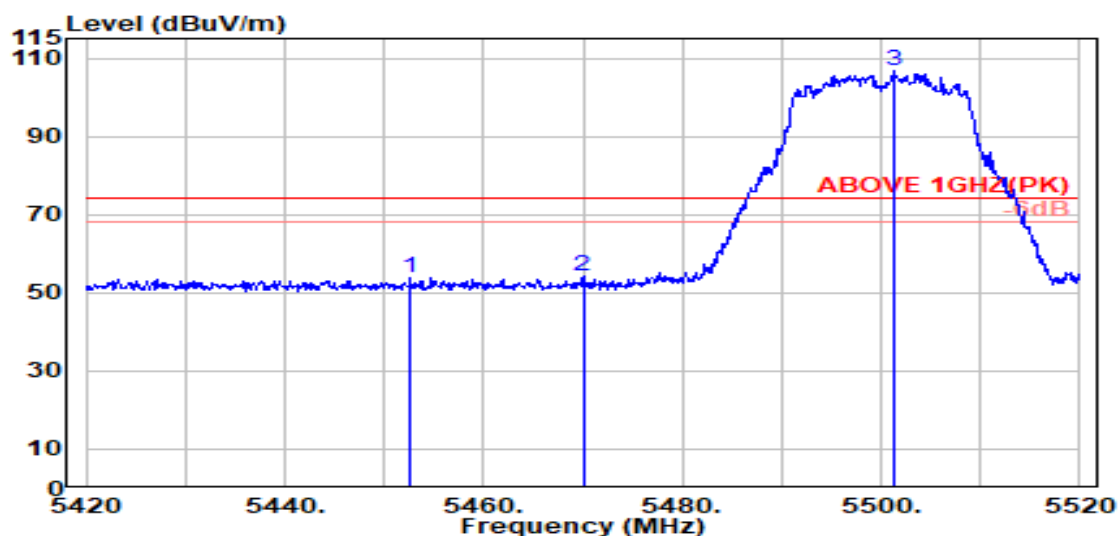

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.700	34.01	8.67	39.16	50.37	53.89	74.00	20.11	Peak
5470.000	34.04	8.69	39.15	50.50	54.08	74.00	19.92	Peak
@ 5501.200	34.10	8.72	39.15	102.94	106.60	---	---	Peak

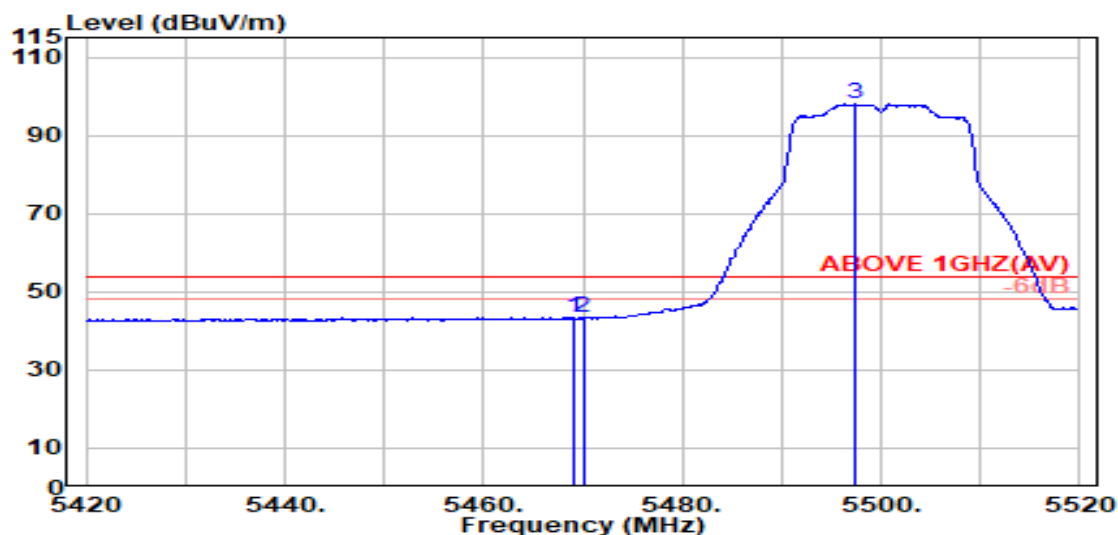


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	39.77	43.34	54.00	10.66	Average
5470.000	34.04	8.69	39.15	39.70	43.28	54.00	10.72	Average
@ 5497.500	34.10	8.71	39.15	94.35	98.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

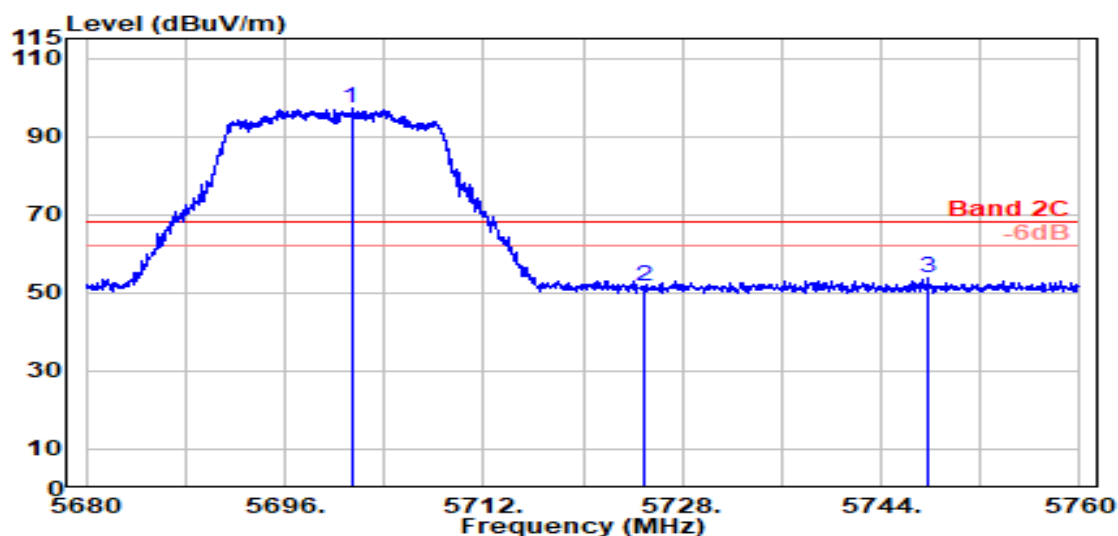

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.350	33.60	8.90	39.19	93.75	97.06	---	---	Peak
	5725.000	33.60	8.93	39.20	48.11	51.44	68.20	16.76	Peak
	5747.750	33.60	8.95	39.20	50.43	53.78	68.20	14.42	Peak

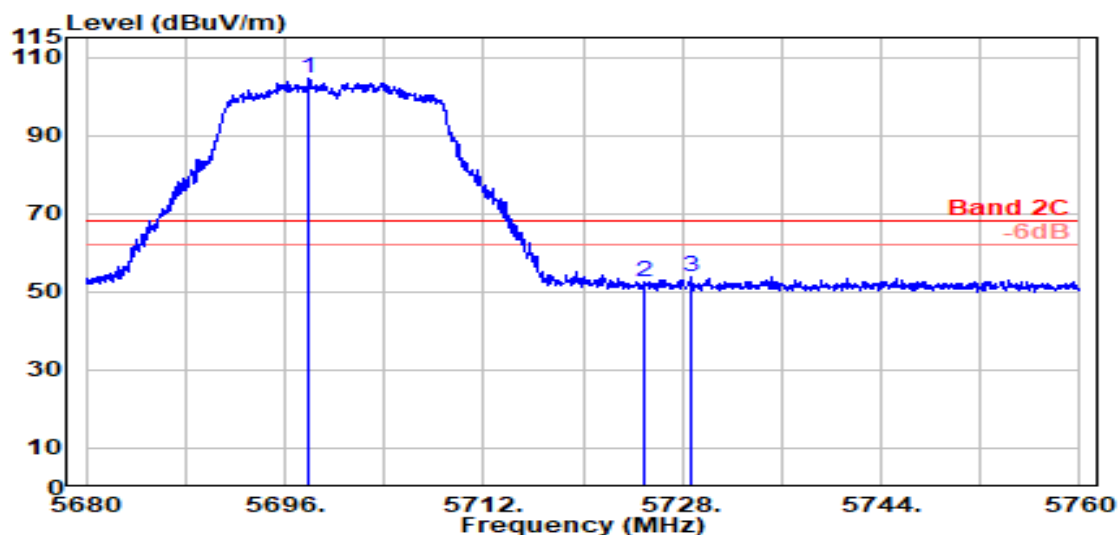


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.950	33.61	8.90	39.19	101.24	104.56	---	---	Peak
	5725.000	33.60	8.93	39.20	49.09	52.42	68.20	15.78	Peak
	5728.700	33.60	8.93	39.20	50.53	53.86	68.20	14.34	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

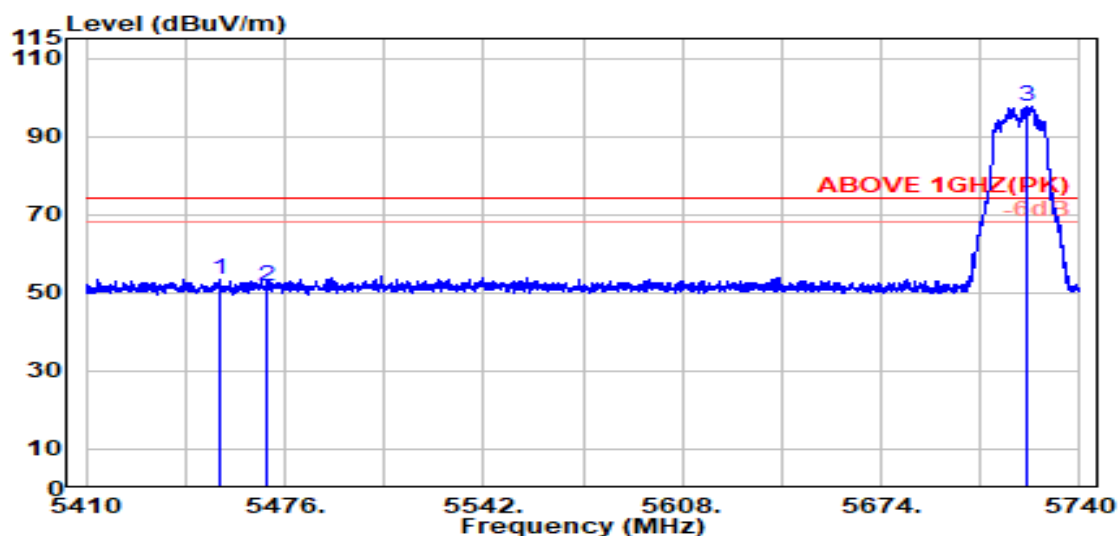

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.300	34.01	8.67	39.16	49.92	53.44	74.00	20.56	Peak
5470.000	34.04	8.69	39.15	48.10	51.68	74.00	22.32	Peak
@ 5722.700	33.60	8.92	39.20	94.35	97.68	---	---	Peak

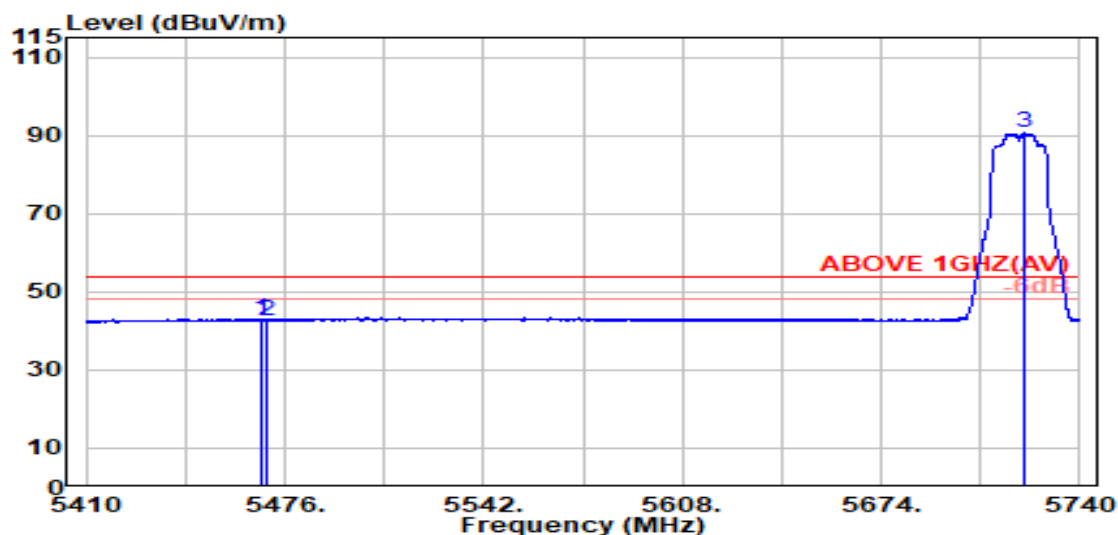


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	39.43	43.00	54.00	11.00	Average
5470.000	34.04	8.69	39.15	39.16	42.73	54.00	11.27	Average
@ 5721.500	33.60	8.92	39.20	87.27	90.60	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

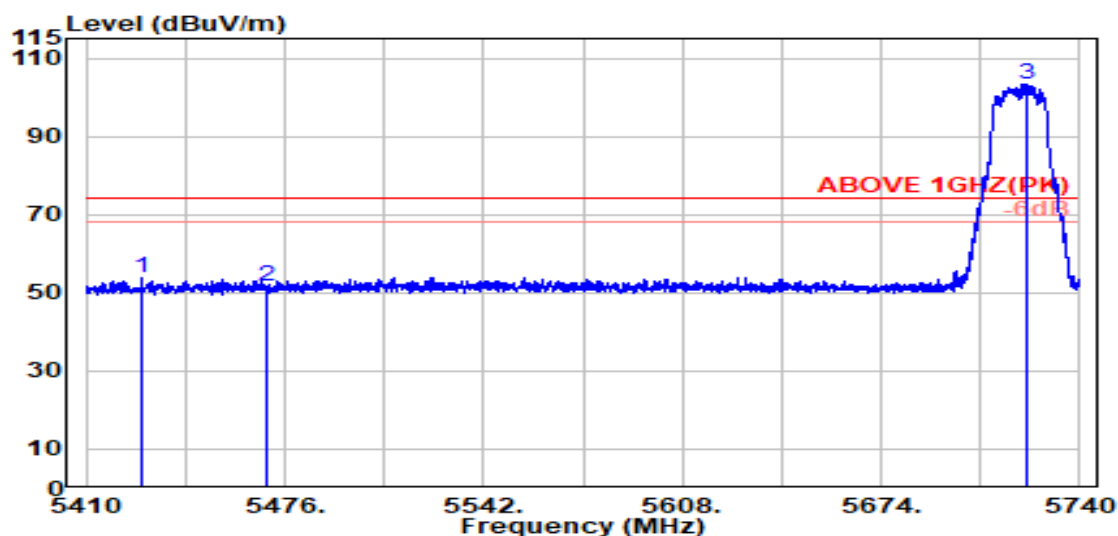

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.700	33.96	8.65	39.16	50.26	53.71	74.00	20.29	Peak
5470.000	34.04	8.69	39.15	48.09	51.66	74.00	22.34	Peak
@ 5722.200	33.60	8.92	39.20	99.97	103.30	---	---	Peak

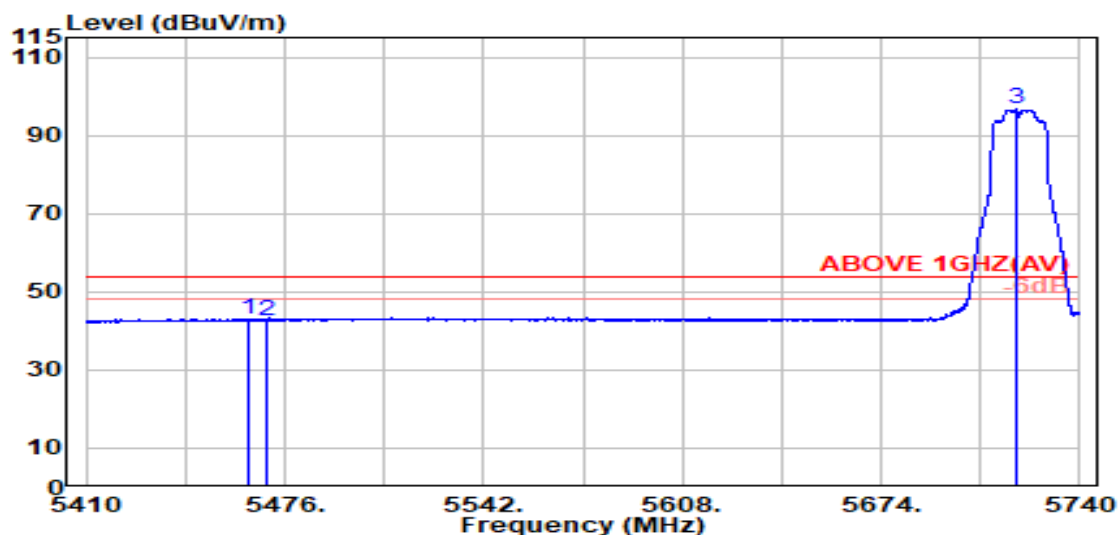


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.100	34.03	8.68	39.15	39.54	43.10	54.00	10.90	Average
5470.000	34.04	8.69	39.15	39.14	42.71	54.00	11.29	Average
@ 5719.100	33.60	8.92	39.19	93.34	96.67	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

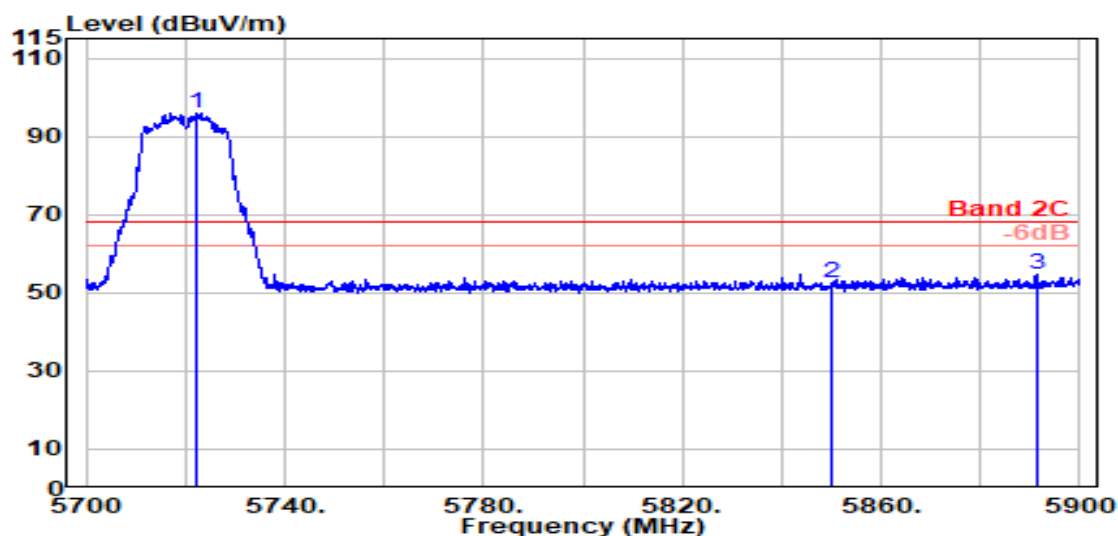

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.000	33.60	8.92	39.20	92.55	95.88	---	---	Peak
	5850.000	33.90	9.04	39.22	48.61	52.32	68.20	15.88	Peak
	5891.200	34.06	9.07	39.23	50.63	54.54	68.20	13.66	Peak

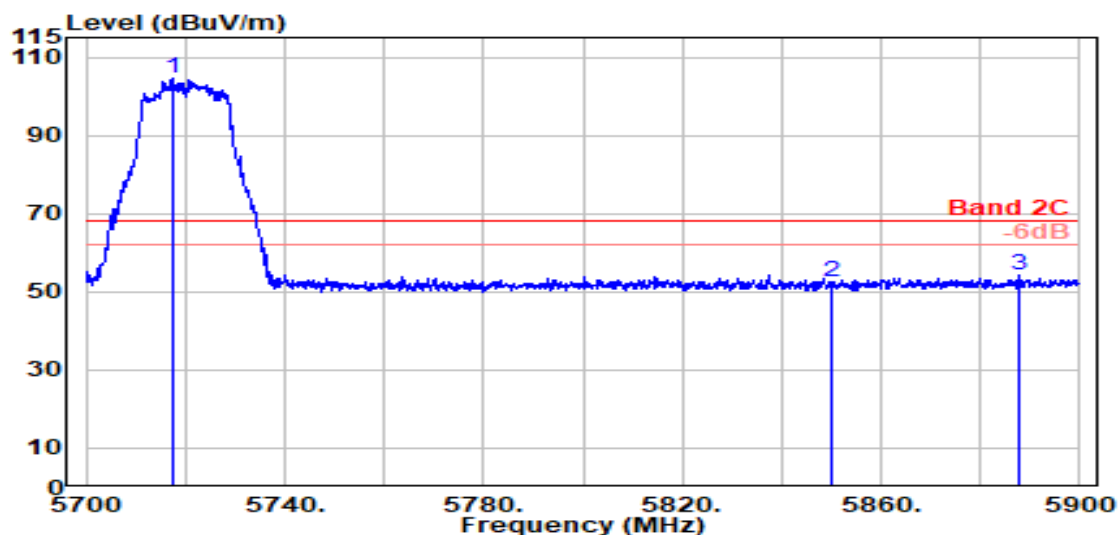


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.300	33.60	8.92	39.19	101.19	104.51	---	---	Peak
	5850.000	33.90	9.04	39.22	48.70	52.42	68.20	15.78	Peak
	5887.900	34.05	9.07	39.23	50.18	54.08	68.20	14.12	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

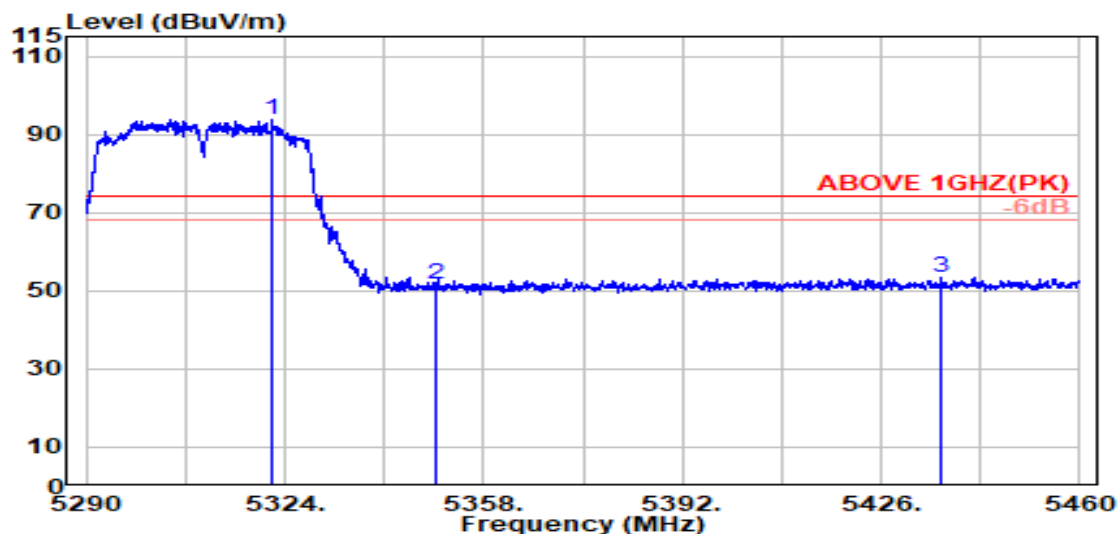

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.76	8.55	39.17	90.72	93.85	---	---	Peak
5350.000	33.70	8.57	39.17	48.43	51.54	74.00	22.46	Peak
5436.400	33.97	8.66	39.16	49.84	53.31	74.00	20.69	Peak

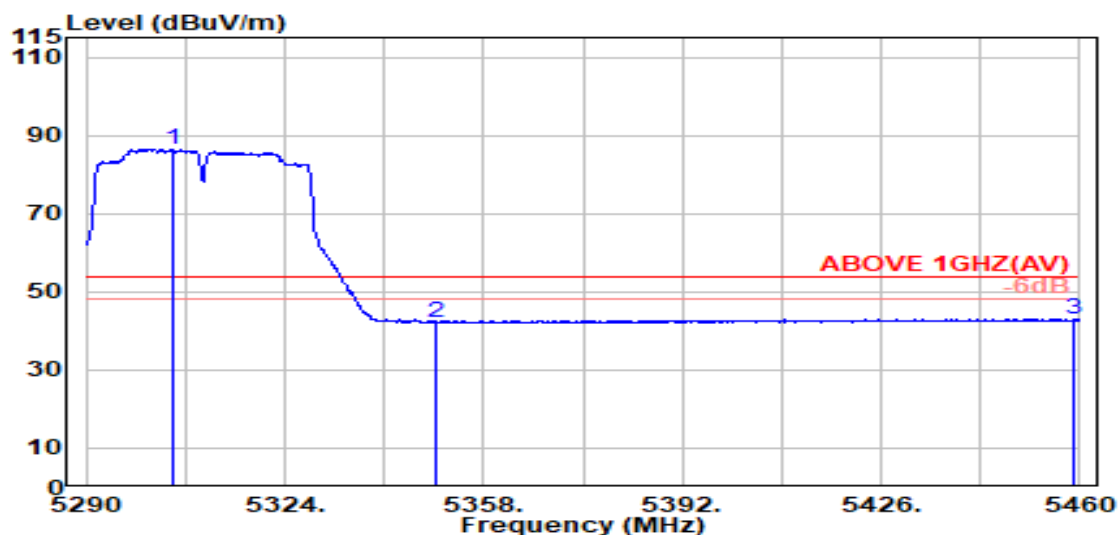


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.800	33.79	8.53	39.17	83.22	86.37	---	---	Average
5350.000	33.70	8.57	39.17	39.06	42.17	54.00	11.83	Average
5459.100	34.02	8.68	39.15	39.37	42.91	54.00	11.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

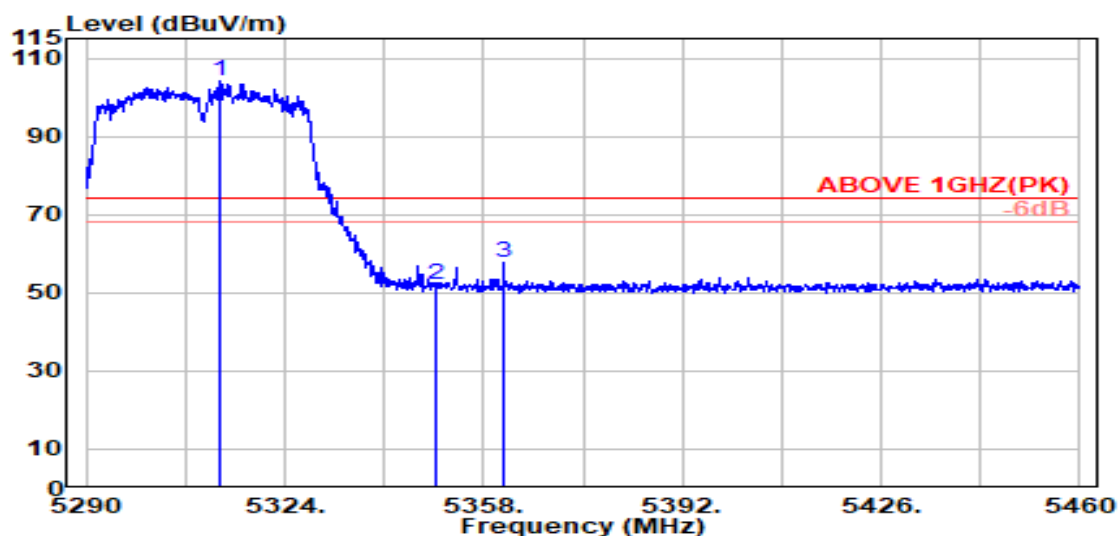

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.900	33.77	8.54	39.17	101.02	104.16	---	---	Peak
5350.000	33.70	8.57	39.17	49.11	52.22	74.00	21.78	Peak
5361.400	33.75	8.58	39.17	54.55	57.72	74.00	16.28	Peak

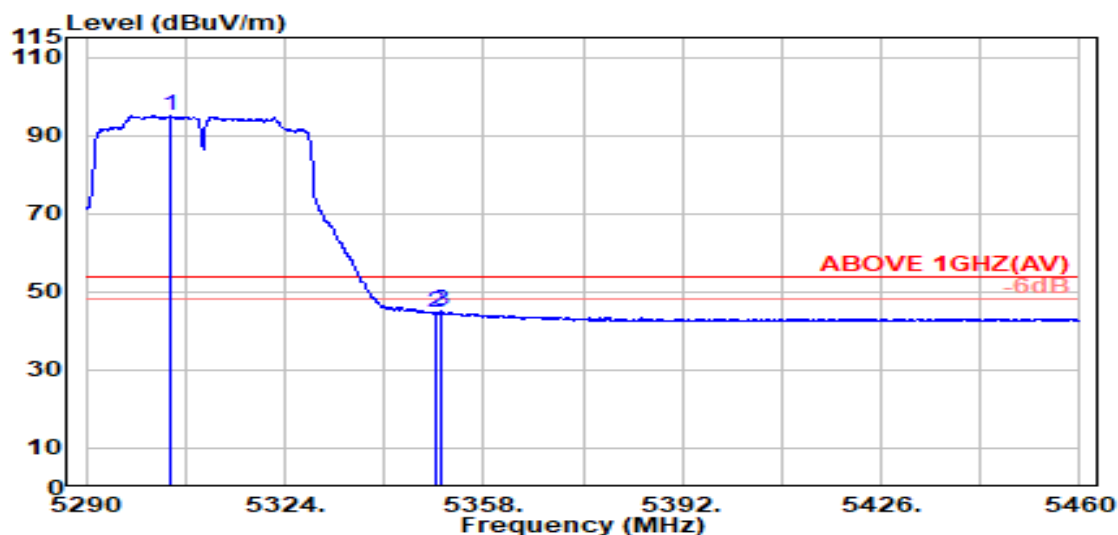


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.300	33.79	8.53	39.17	91.72	94.87	---	---	Average
5350.000	33.70	8.57	39.17	41.45	44.55	54.00	9.45	Average
5350.700	33.70	8.57	39.17	41.82	44.93	54.00	9.07	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

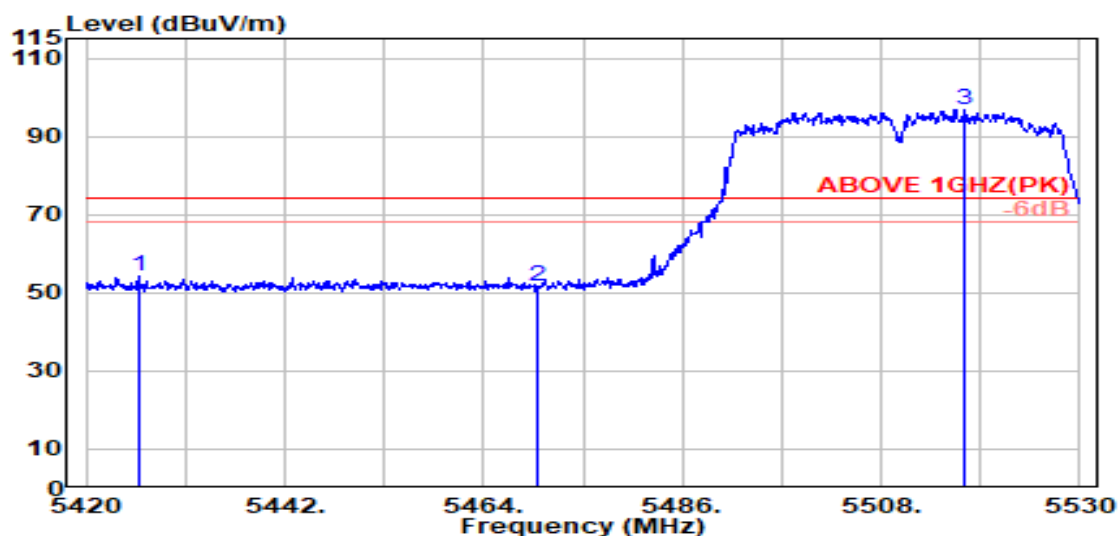

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.800	33.95	8.65	39.16	50.60	54.03	74.00	19.97	Peak
5470.000	34.04	8.69	39.15	48.09	51.66	74.00	22.34	Peak
@ 5517.100	34.07	8.73	39.15	93.17	96.82	---	---	Peak

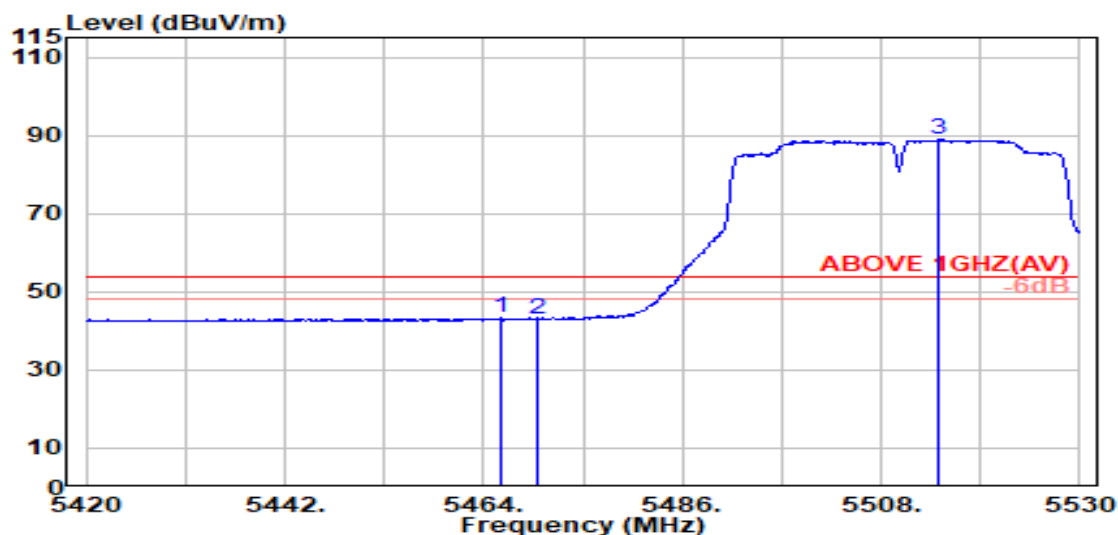


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.03	8.68	39.15	39.64	43.20	54.00	10.80	Average
5470.000	34.04	8.69	39.15	39.53	43.10	54.00	10.90	Average
@ 5514.400	34.07	8.73	39.15	85.34	88.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

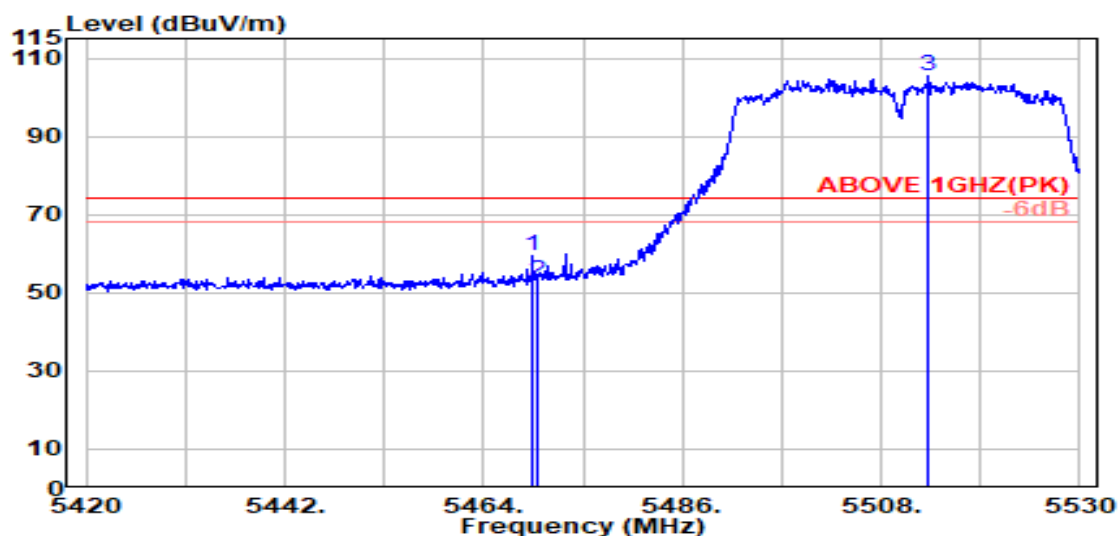

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.04	8.69	39.15	55.67	59.24	74.00	14.76	Peak
5470.000	34.04	8.69	39.15	49.17	52.75	74.00	21.25	Peak
@ 5513.200	34.07	8.73	39.15	101.60	105.25	---	---	Peak

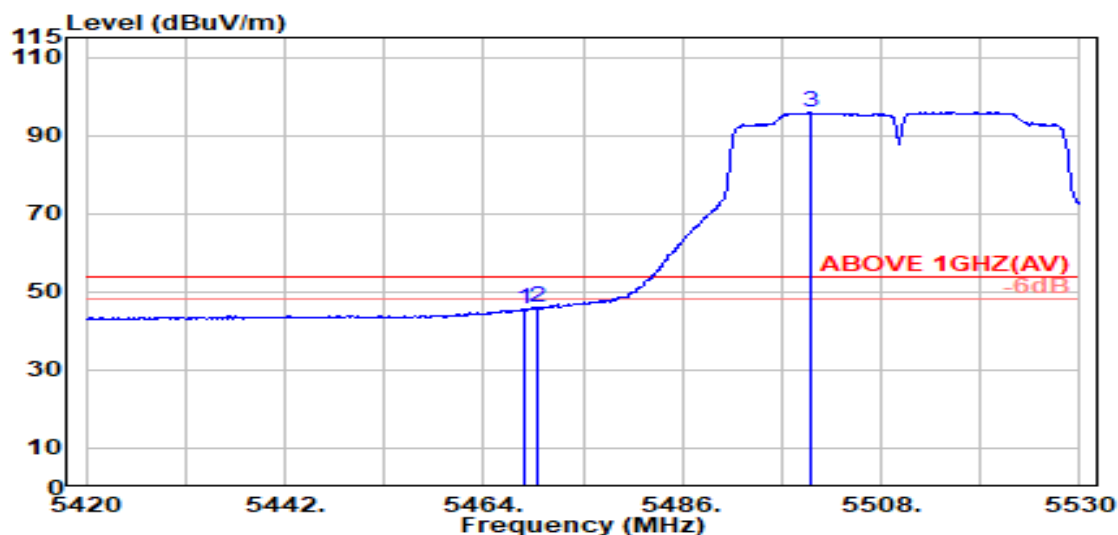


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	42.01	45.58	54.00	8.42	Average
5470.000	34.04	8.69	39.15	42.32	45.89	54.00	8.11	Average
@ 5500.200	34.10	8.72	39.15	92.31	95.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

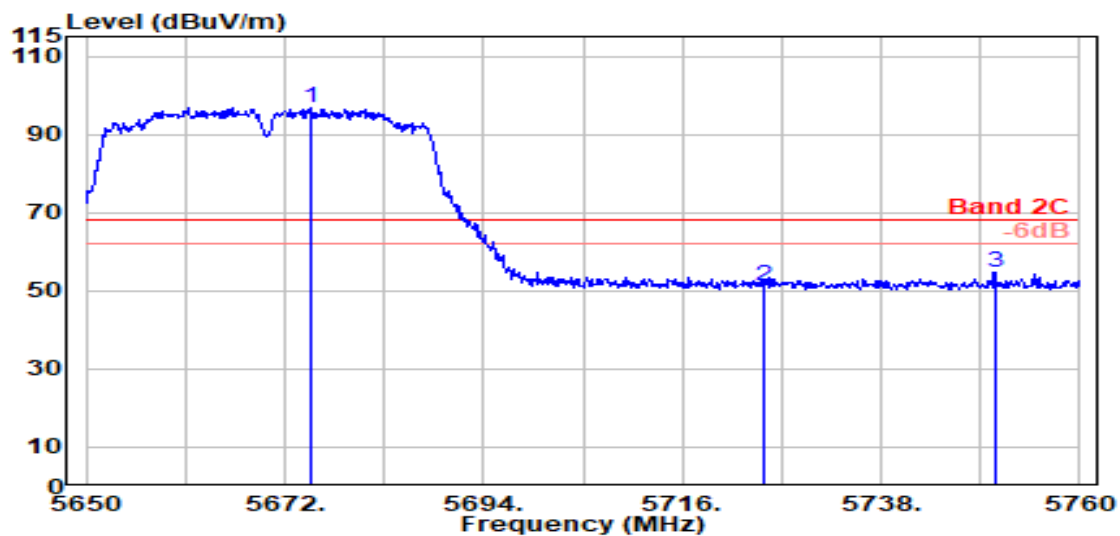

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.900	33.70	8.88	39.19	93.39	96.78	---	---	Peak
5725.000	33.60	8.93	39.20	47.70	51.03	68.20	17.17	Peak
5750.600	33.60	8.95	39.20	51.38	54.73	68.20	13.47	Peak

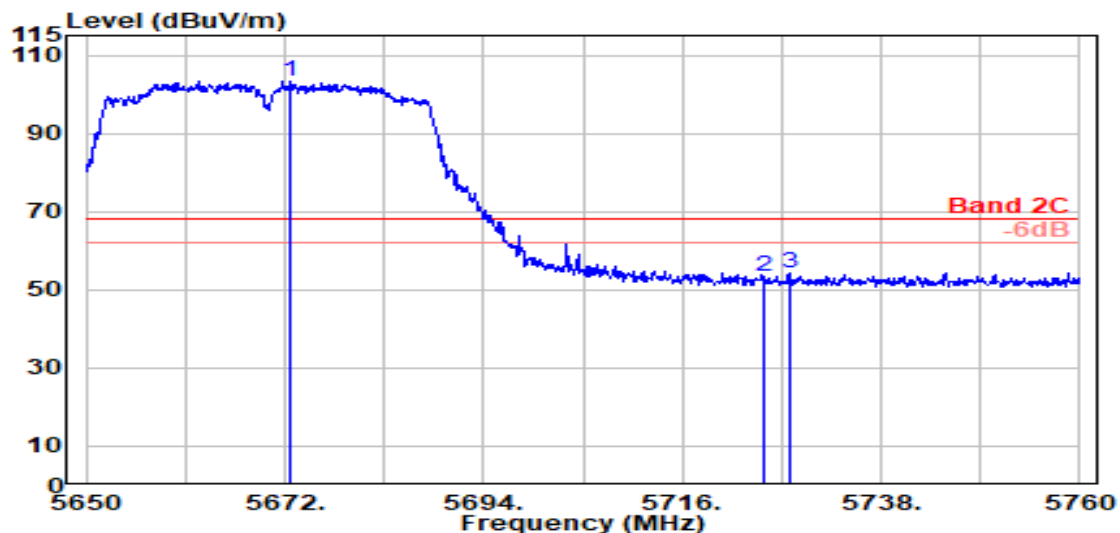


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.700	33.71	8.88	39.19	100.01	103.42	---	---	Peak
5725.000	33.60	8.93	39.20	50.07	53.40	68.20	14.80	Peak
5727.800	33.60	8.93	39.20	50.73	54.06	68.20	14.14	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

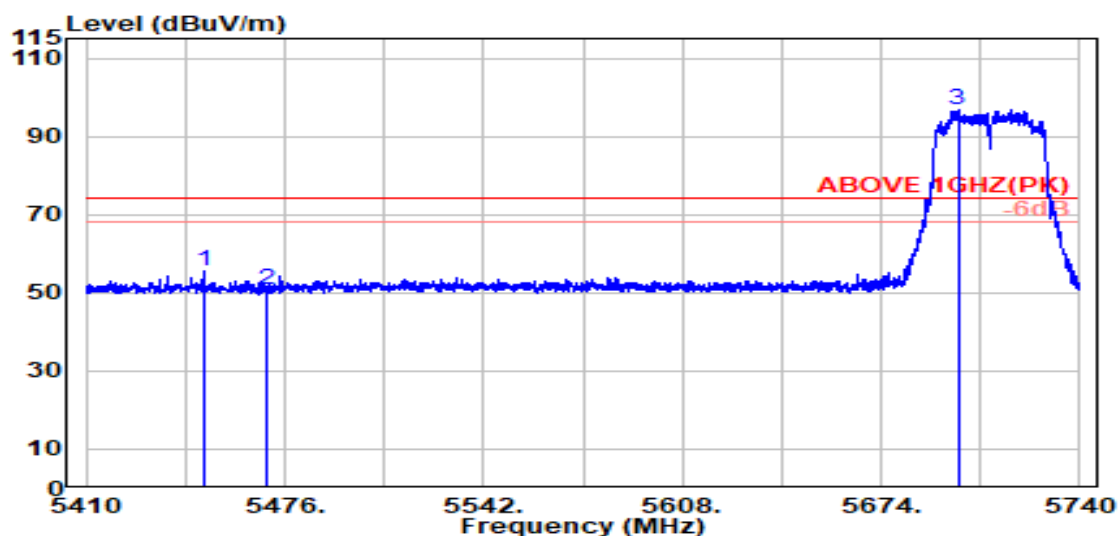

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.900	34.00	8.67	39.16	51.84	55.35	74.00	18.65	Peak
5470.000	34.04	8.69	39.15	47.35	50.92	74.00	23.08	Peak
@ 5699.500	33.60	8.90	39.19	93.51	96.82	---	---	Peak

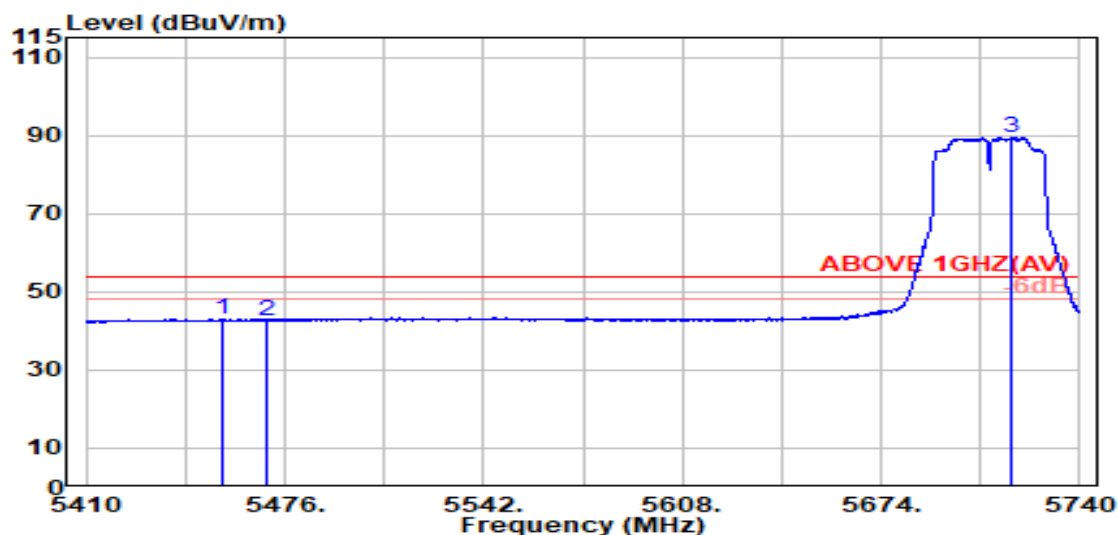


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.900	34.01	8.67	39.16	39.49	43.02	54.00	10.98	Average
5470.000	34.04	8.69	39.15	39.02	42.59	54.00	11.41	Average
@ 5717.400	33.60	8.92	39.19	86.03	89.35	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

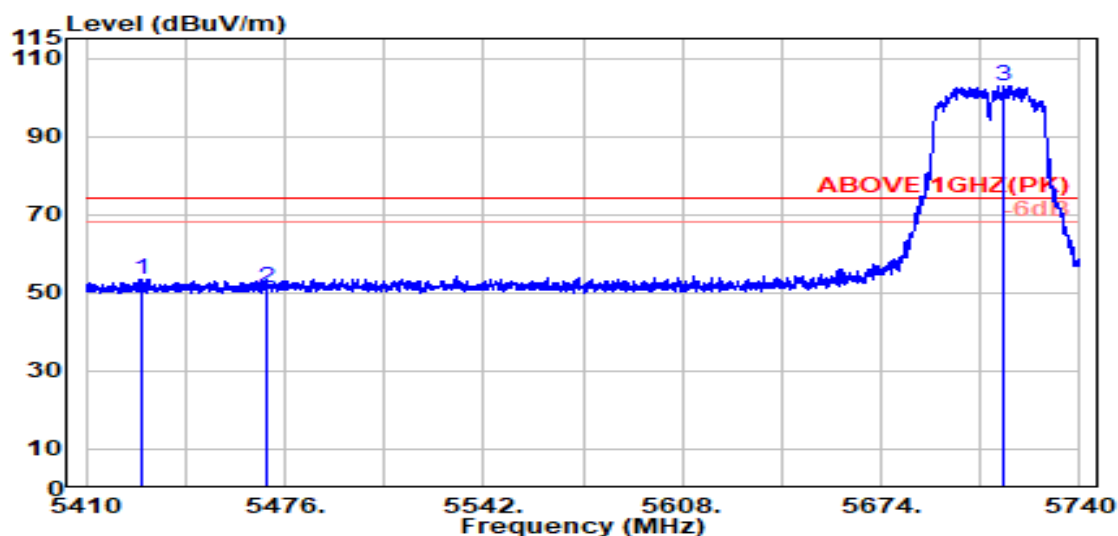

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.100	33.96	8.65	39.16	50.04	53.48	74.00	20.52	Peak
5470.000	34.04	8.69	39.15	47.82	51.40	74.00	22.60	Peak
@ 5714.900	33.60	8.92	39.19	99.60	102.92	---	---	Peak

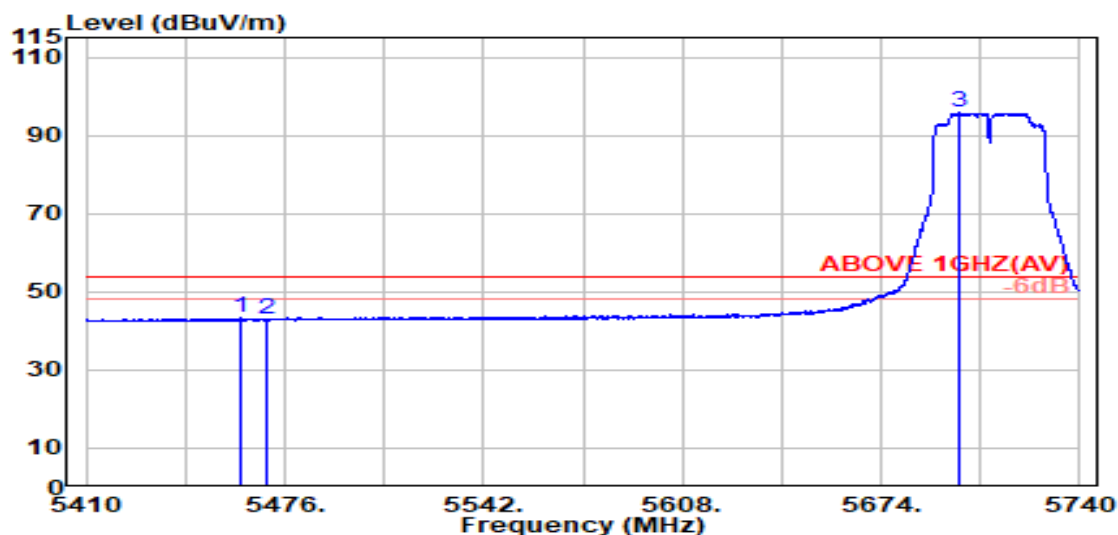


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.02	8.68	39.15	39.70	43.25	54.00	10.75	Average
5470.000	34.04	8.69	39.15	39.23	42.80	54.00	11.20	Average
@ 5699.700	33.60	8.90	39.19	92.50	95.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

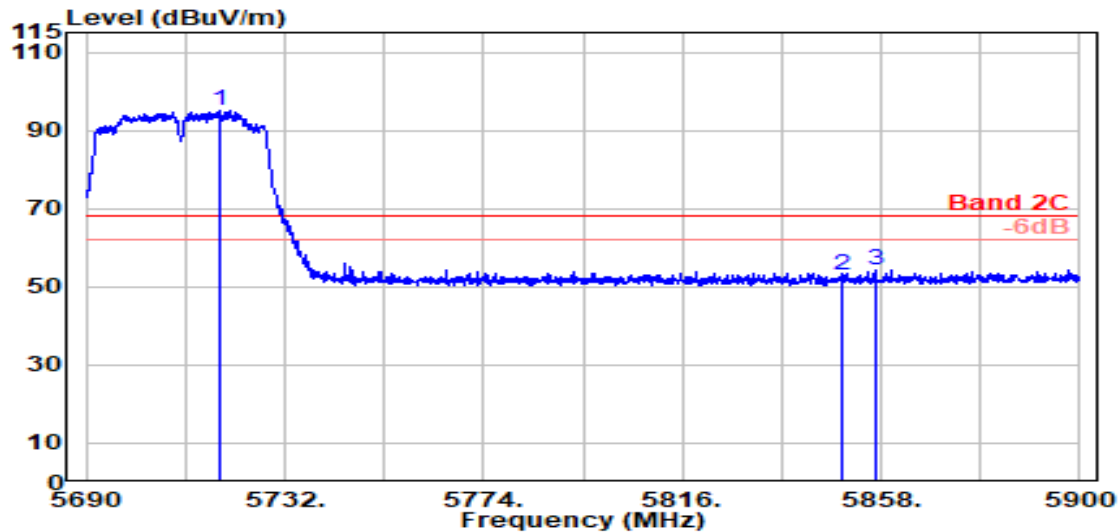

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.200	33.60	8.92	39.19	91.89	95.22	---	---	Peak
5850.000	33.90	9.04	39.22	49.07	52.79	68.20	15.41	Peak
5856.900	33.93	9.04	39.22	50.51	54.26	68.20	13.94	Peak

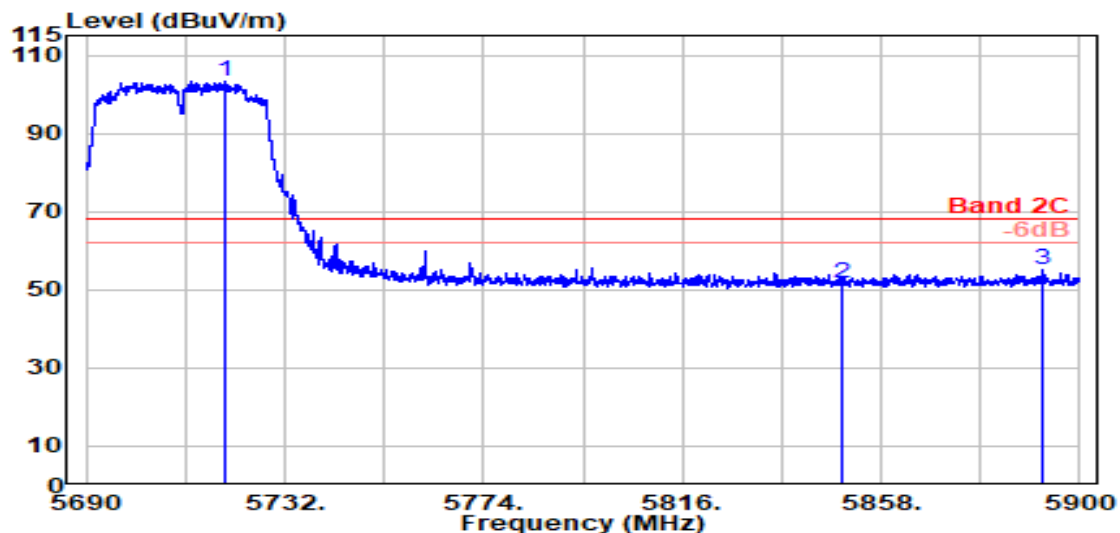


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.500	33.60	8.92	39.19	99.88	103.21	---	---	Peak
5850.000	33.90	9.04	39.22	47.80	51.51	68.20	16.69	Peak
5892.000	34.07	9.08	39.23	51.00	54.91	68.20	13.29	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

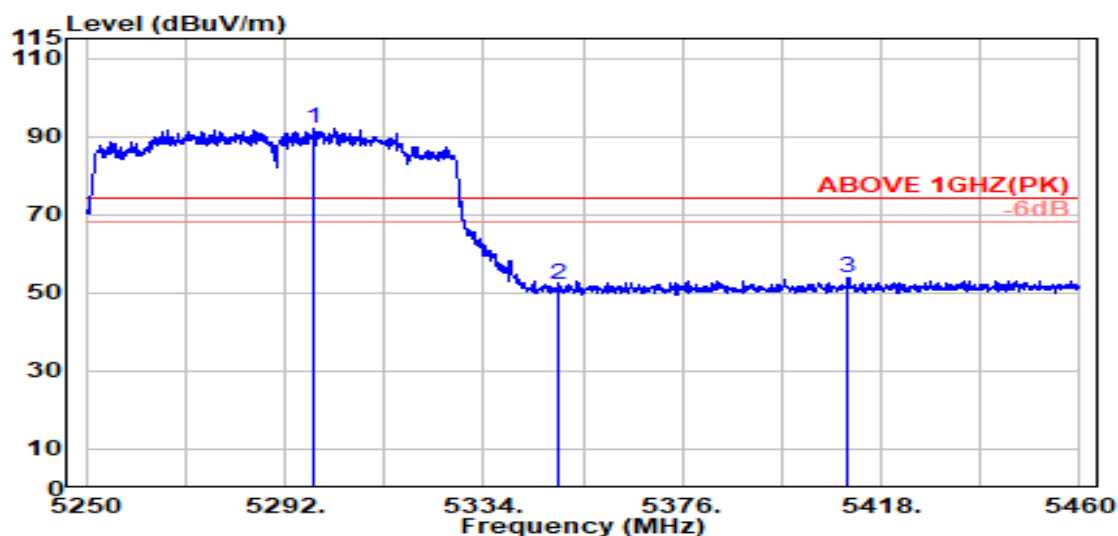

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5298.300	33.80	8.52	39.17	88.88	92.02	---	---	Peak
	5350.000	33.70	8.57	39.17	49.10	52.20	74.00	21.80	Peak
	5411.100	33.92	8.63	39.16	50.45	53.84	74.00	20.16	Peak

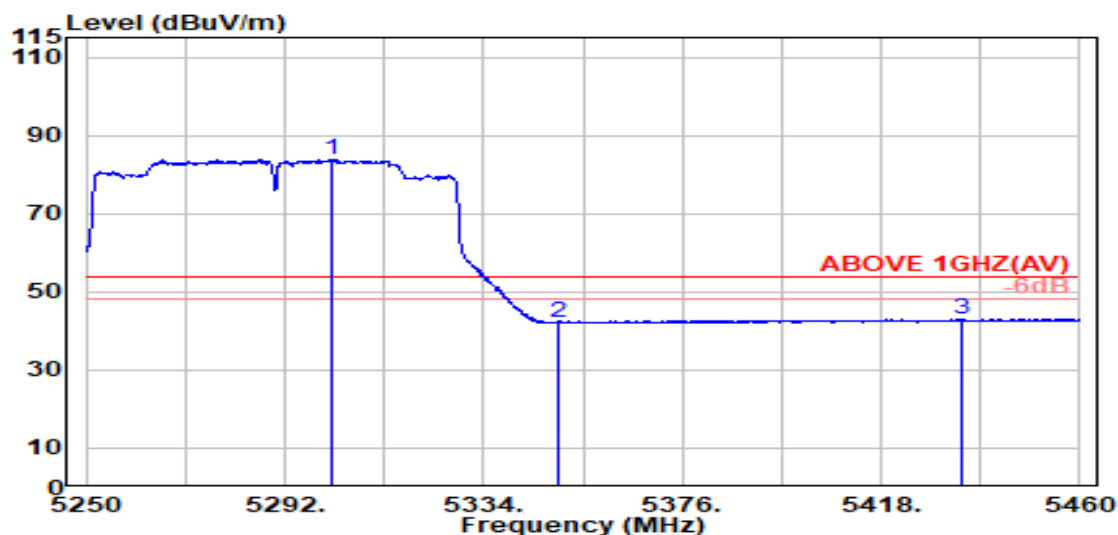


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5301.800	33.80	8.53	39.17	80.80	83.95	---	---	Average
	5350.000	33.70	8.57	39.17	39.21	42.31	54.00	11.69	Average
	5434.900	33.97	8.65	39.16	39.44	42.91	54.00	11.09	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

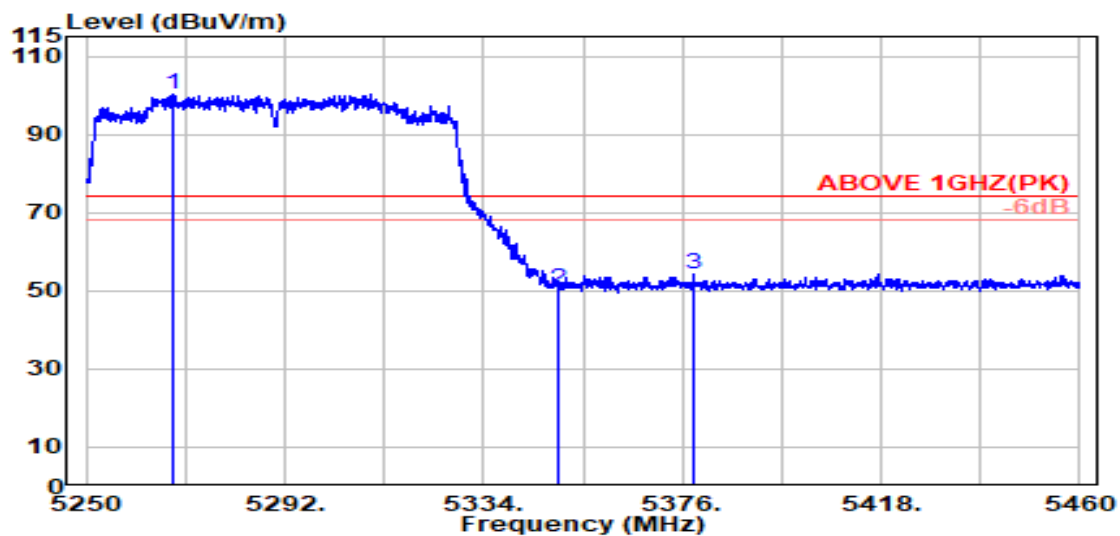

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.200	33.74	8.49	39.18	97.40	100.45	---	---	Peak
5350.000	33.70	8.57	39.17	47.34	50.44	74.00	23.56	Peak
5378.300	33.81	8.60	39.16	51.02	54.27	74.00	19.73	Peak

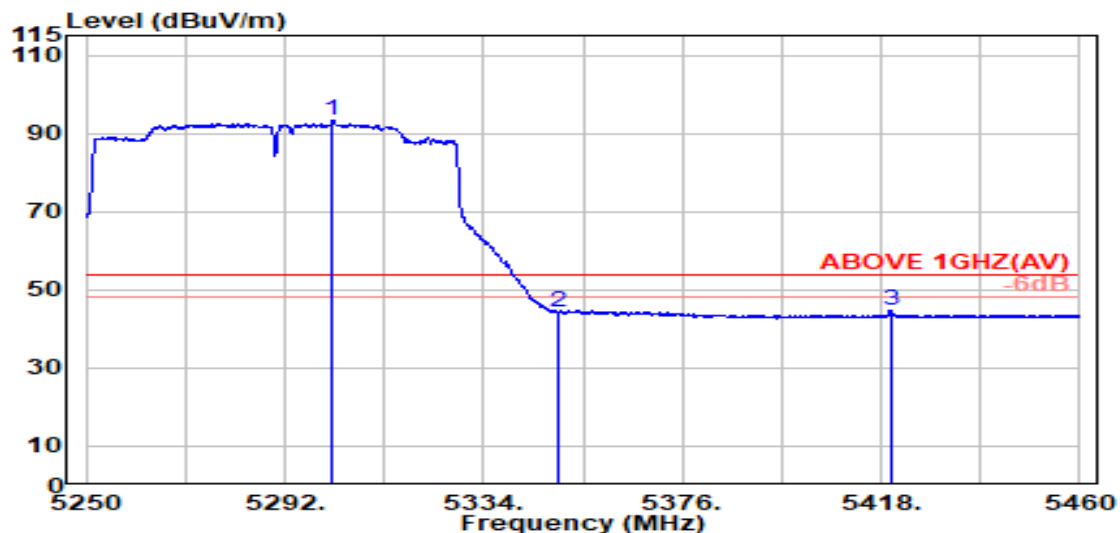


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.100	33.80	8.53	39.17	90.04	93.18	---	---	Average
5350.000	33.70	8.57	39.17	41.18	44.28	54.00	9.72	Average
5420.100	33.94	8.64	39.16	41.49	44.91	54.00	9.09	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

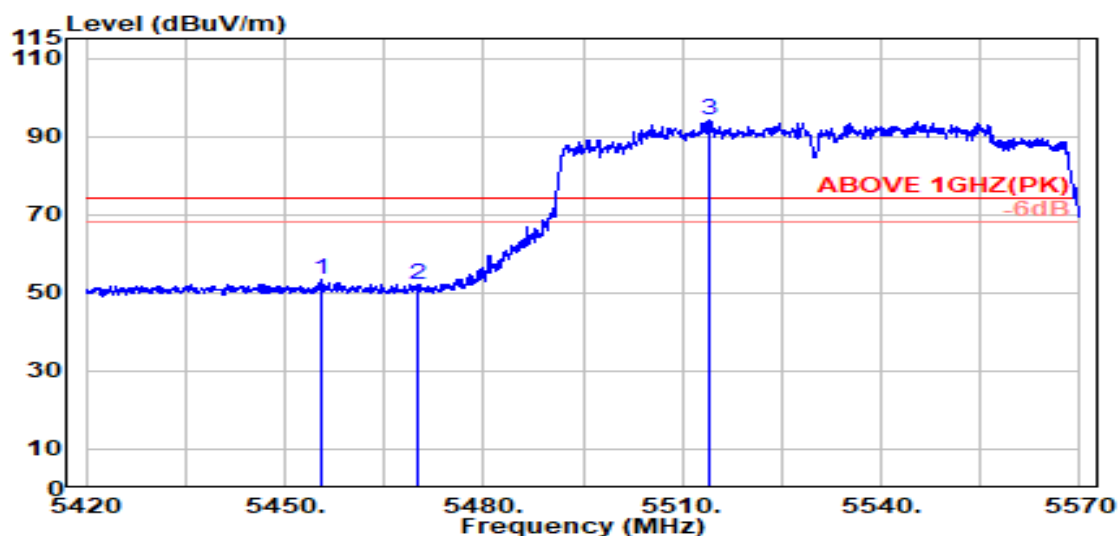

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5455.700	34.01	8.67	39.16	49.77	53.31	74.00	20.69	Peak
5470.000	34.04	8.69	39.15	48.39	51.96	74.00	22.04	Peak
@ 5513.900	34.07	8.73	39.15	90.41	94.06	---	---	Peak

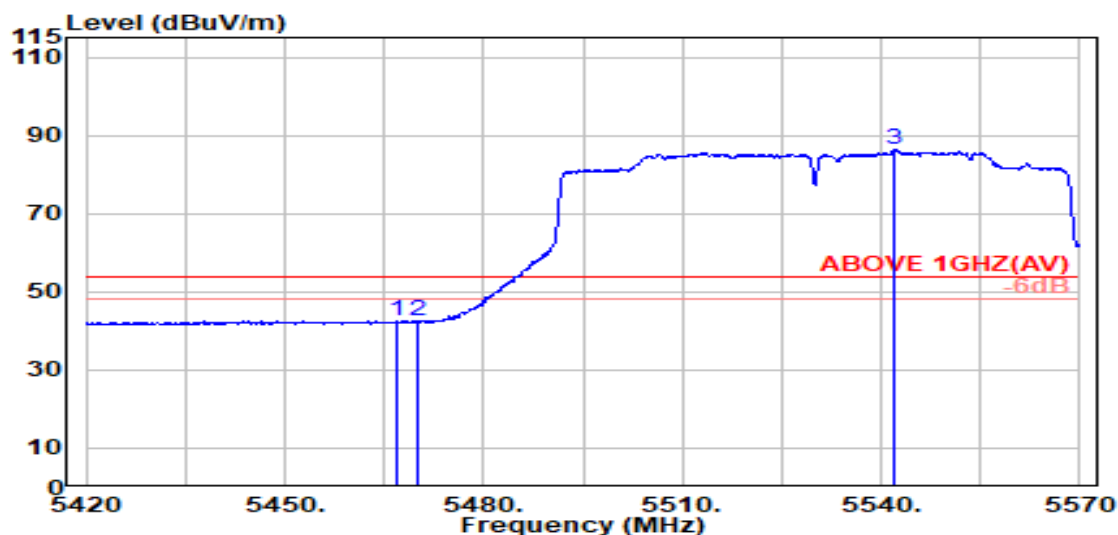


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.15	39.02	42.59	54.00	11.41	Average
5470.000	34.04	8.69	39.15	38.77	42.35	54.00	11.65	Average
@ 5542.100	34.02	8.76	39.16	82.86	86.47	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

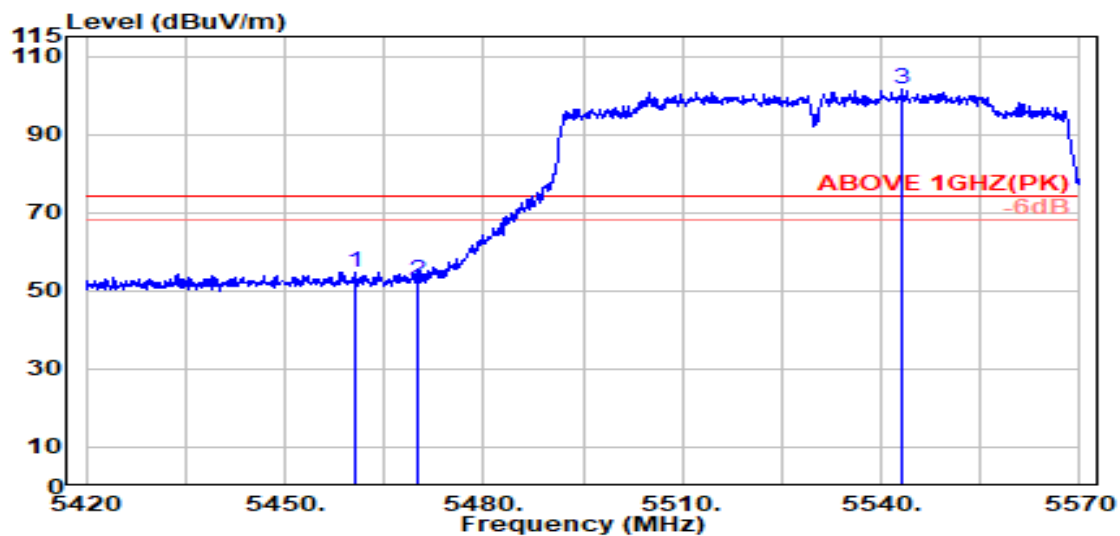

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.700	34.02	8.68	39.15	51.25	54.80	74.00	19.20	Peak
5470.000	34.04	8.69	39.15	48.91	52.48	74.00	21.52	Peak
@ 5543.200	34.01	8.76	39.16	97.72	101.33	---	---	Peak

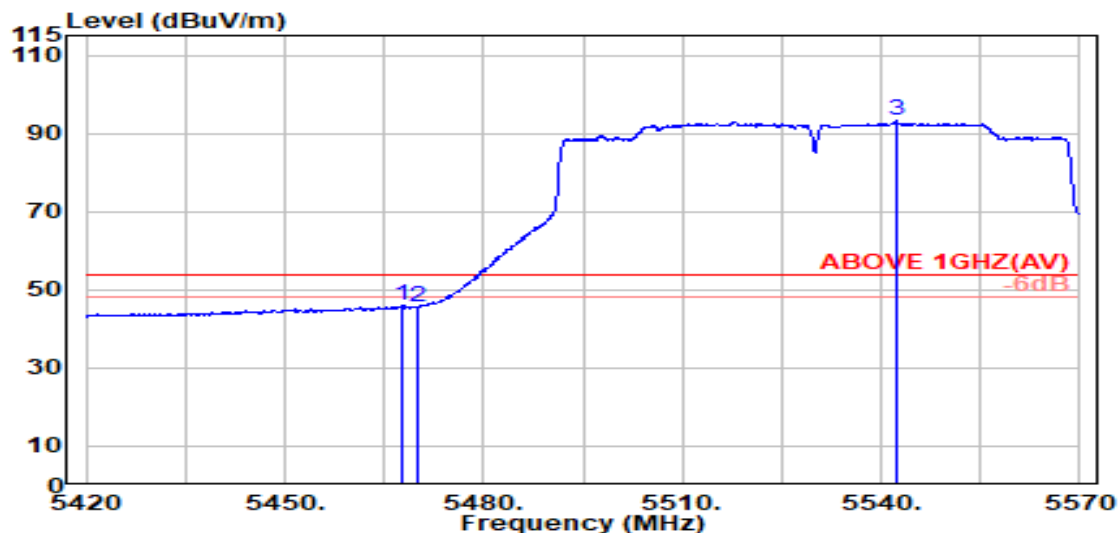


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	42.28	45.85	54.00	8.15	Average
5470.000	34.04	8.69	39.15	41.96	45.53	54.00	8.47	Average
@ 5542.300	34.02	8.76	39.16	89.57	93.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

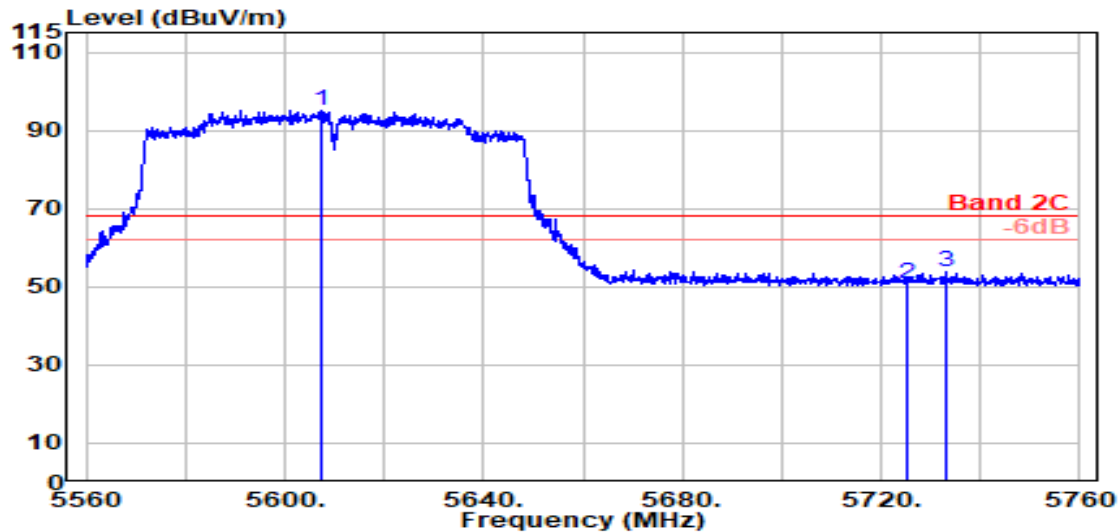

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.200	33.80	8.82	39.17	91.81	95.25	---	---	Peak
5725.000	33.60	8.93	39.20	47.57	50.90	68.20	17.30	Peak
5733.000	33.60	8.93	39.20	50.47	53.81	68.20	14.39	Peak

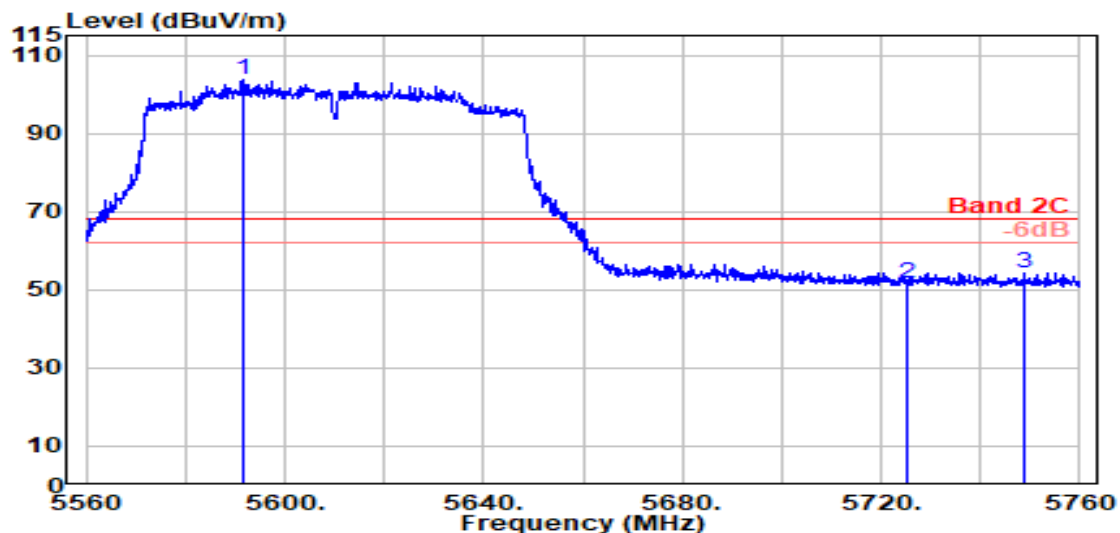


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5591.400	33.83	8.80	39.17	100.37	103.84	---	---	Peak
5725.000	33.60	8.93	39.20	48.46	51.79	68.20	16.41	Peak
5748.700	33.60	8.95	39.20	51.04	54.38	68.20	13.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

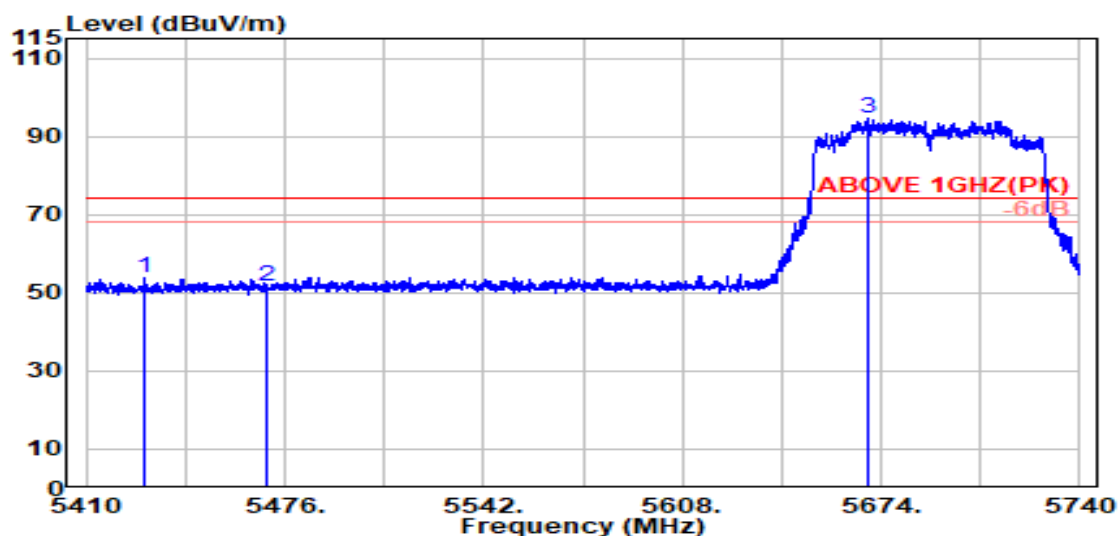

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.600	33.96	8.65	39.16	50.35	53.80	74.00	20.20	Peak
5470.000	34.04	8.69	39.15	48.20	51.77	74.00	22.23	Peak
@ 5669.800	33.72	8.88	39.18	91.01	94.42	---	---	Peak

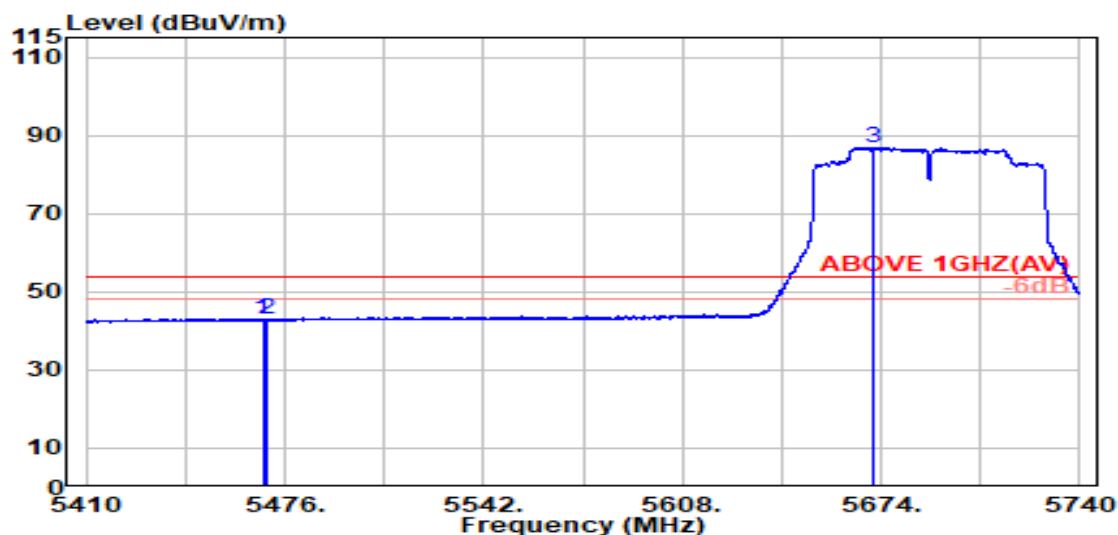


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	39.53	43.10	54.00	10.90	Average
5470.000	34.04	8.69	39.15	39.23	42.81	54.00	11.19	Average
@ 5671.100	33.72	8.88	39.19	83.50	86.91	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

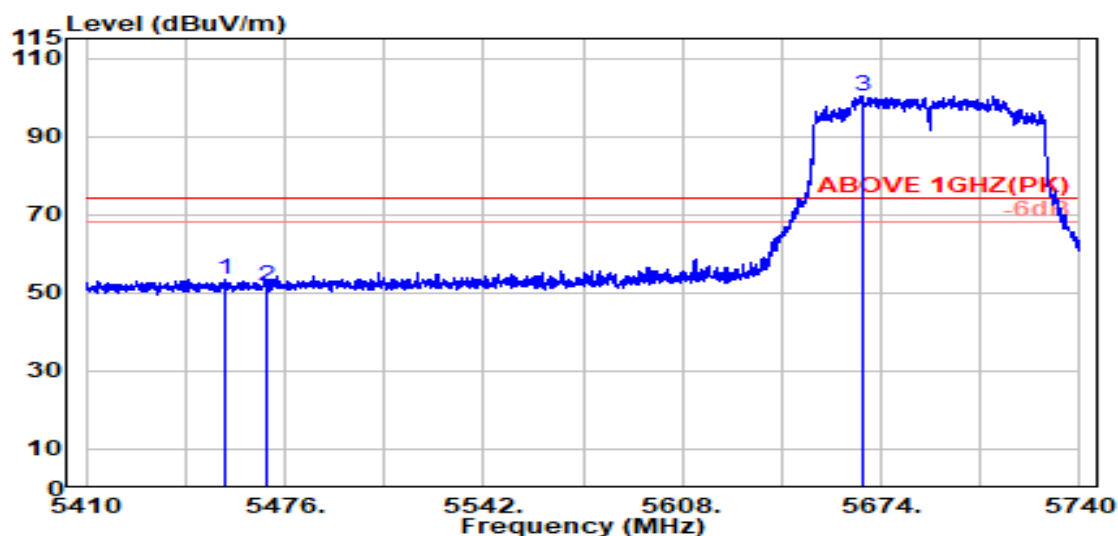

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.900	34.01	8.67	39.16	50.03	53.56	74.00	20.44	Peak
5470.000	34.04	8.69	39.15	47.99	51.57	74.00	22.43	Peak
@ 5667.800	33.73	8.87	39.18	96.78	100.20	---	---	Peak

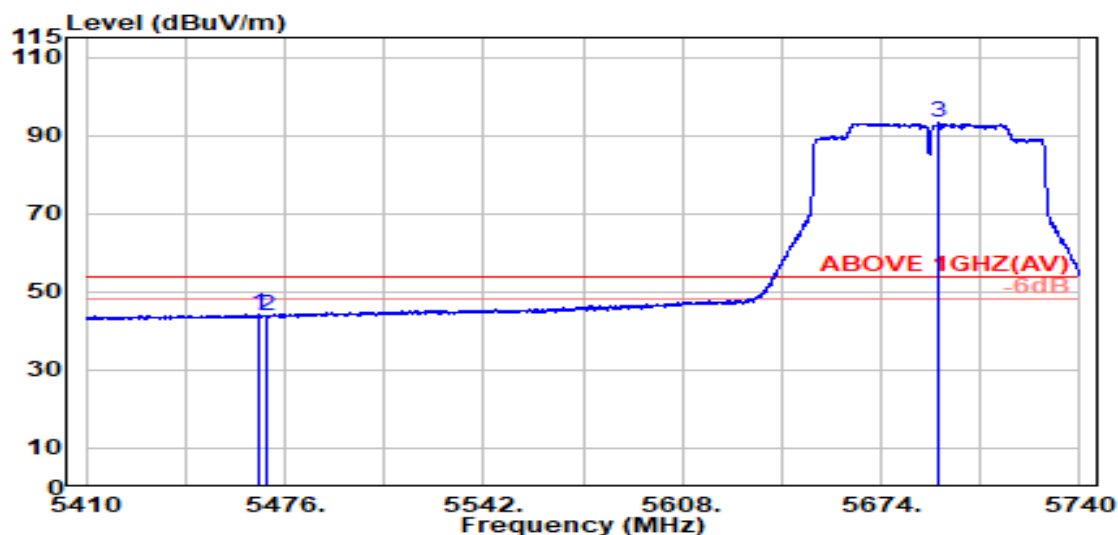


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.15	40.65	44.22	54.00	9.78	Average
5470.000	34.04	8.69	39.15	40.17	43.74	54.00	10.26	Average
@ 5693.300	33.63	8.90	39.19	89.92	93.26	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

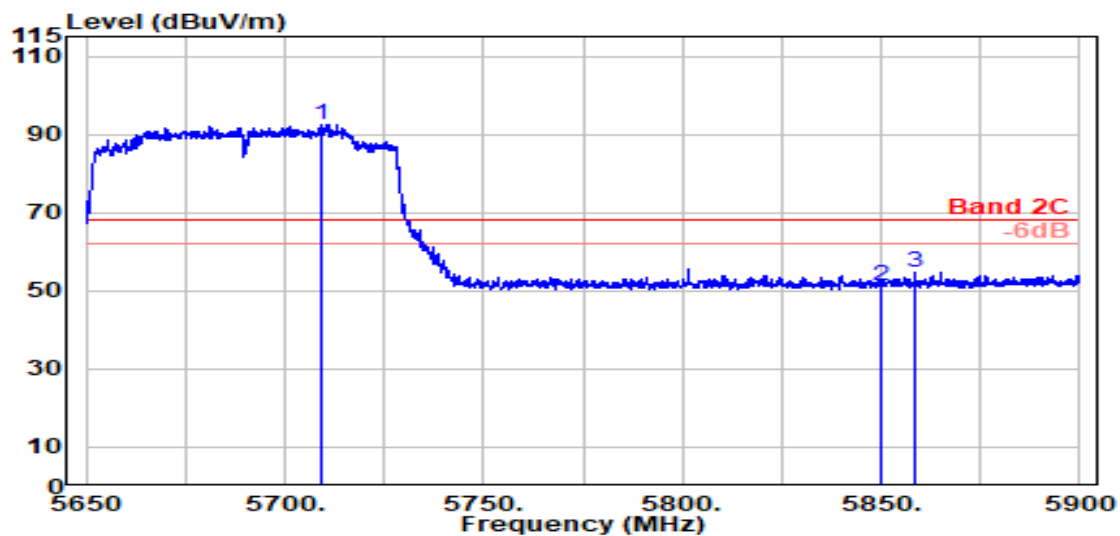

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5709.200	33.60	8.91	39.19	89.09	92.41	---	---	Peak
5850.000	33.90	9.04	39.22	47.66	51.38	68.20	16.82	Peak
5858.500	33.93	9.05	39.22	51.11	54.87	68.20	13.33	Peak

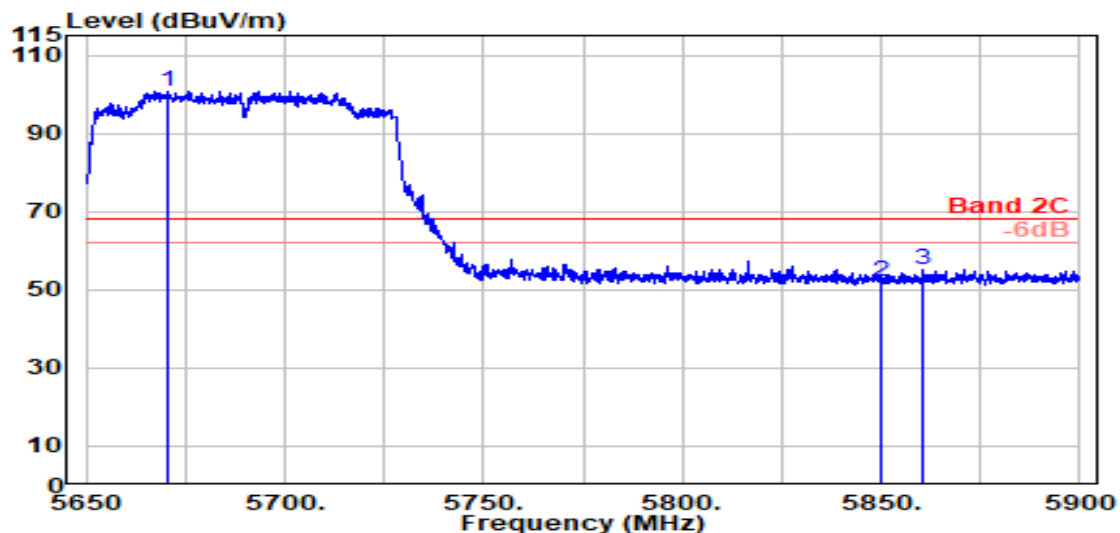


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5670.500	33.72	8.88	39.19	97.39	100.80	---	---	Peak
5850.000	33.90	9.04	39.22	48.29	52.00	68.20	16.20	Peak
5860.400	33.94	9.05	39.22	51.44	55.21	68.20	12.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

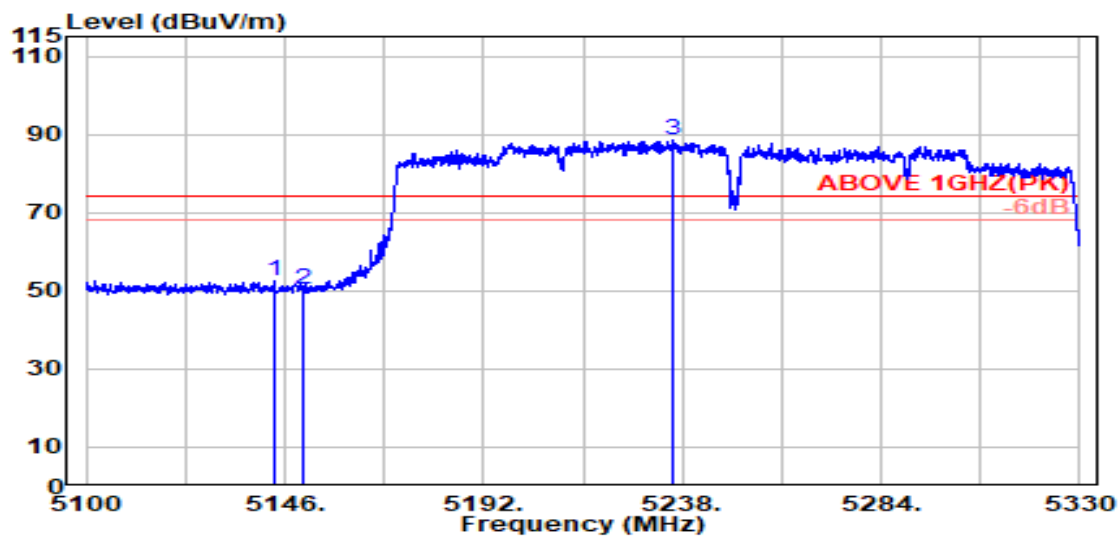

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.500	33.49	8.37	39.19	49.70	52.37	74.00	21.63	Peak
5150.000	33.50	8.37	39.19	47.53	50.21	74.00	23.79	Peak
@ 5235.800	33.73	8.46	39.18	85.69	88.70	---	---	Peak

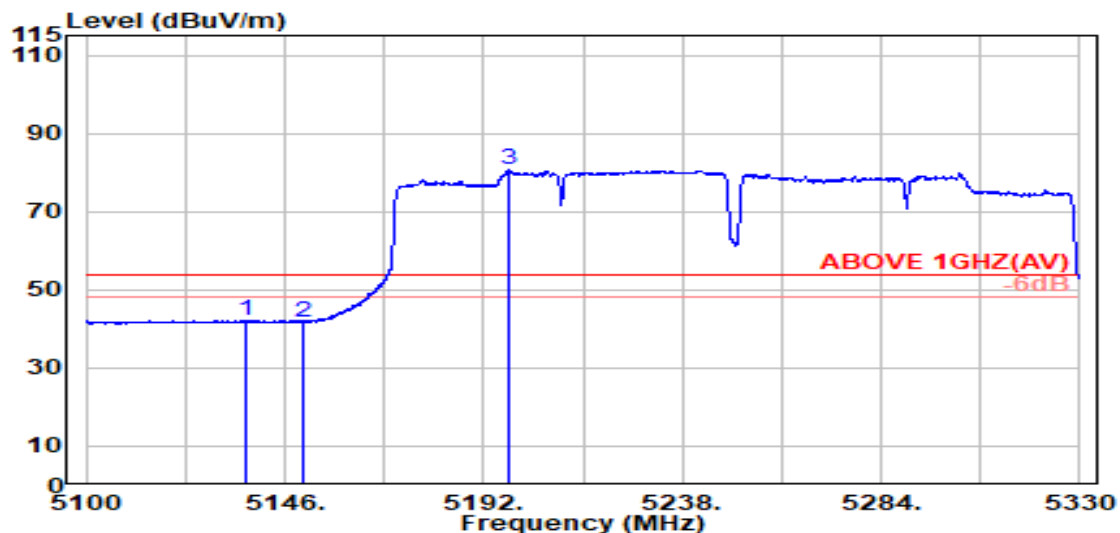


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.200	33.47	8.36	39.19	39.62	42.26	54.00	11.74	Average
5150.000	33.50	8.37	39.19	38.97	41.65	54.00	12.35	Average
@ 5197.800	33.79	8.42	39.19	77.60	80.63	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

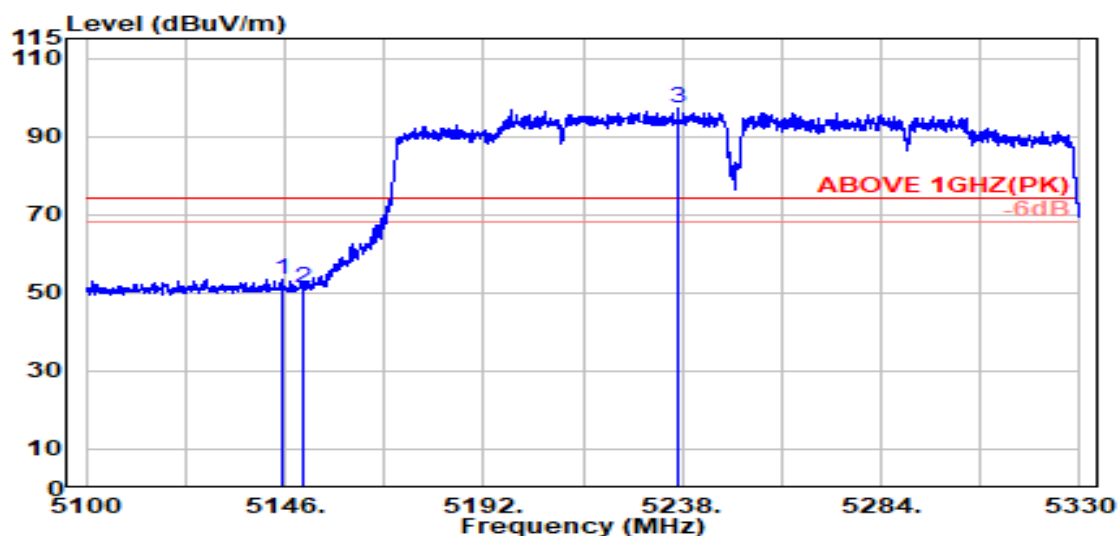

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	33.49	8.37	39.19	50.82	53.49	74.00	20.51	Peak
5150.000	33.50	8.37	39.19	48.51	51.19	74.00	22.81	Peak
@ 5237.100	33.73	8.46	39.18	94.05	97.06	---	---	Peak

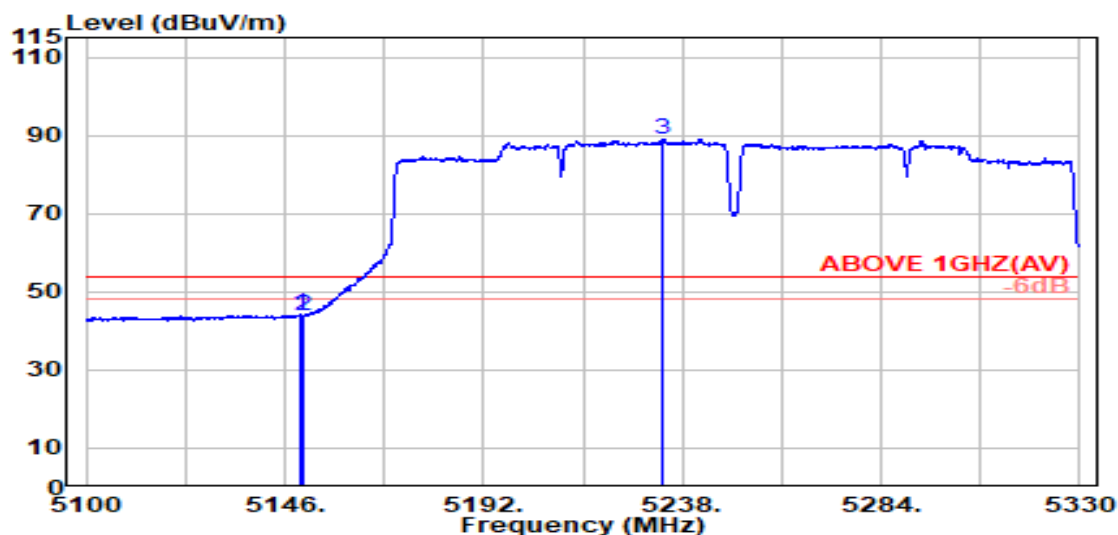


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.50	8.37	39.19	41.52	44.21	54.00	9.79	Average
5150.000	33.50	8.37	39.19	41.23	43.91	54.00	10.09	Average
@ 5233.400	33.73	8.46	39.18	86.02	89.03	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

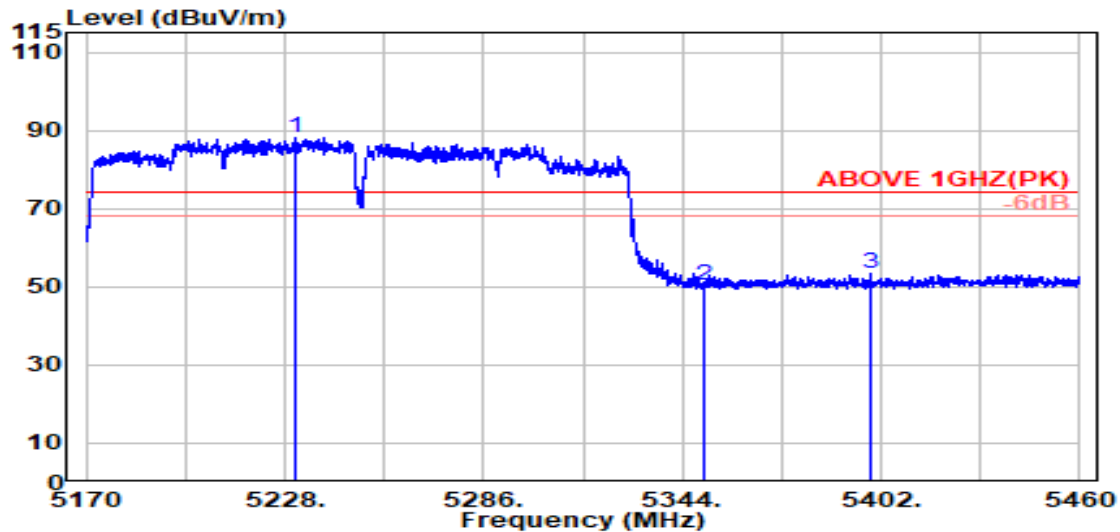

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5230.900	33.74	8.46	39.18	85.17	88.18	---	---	Peak
5350.000	33.70	8.57	39.17	47.25	50.35	74.00	23.65	Peak
5399.200	33.90	8.62	39.16	49.81	53.17	74.00	20.83	Peak

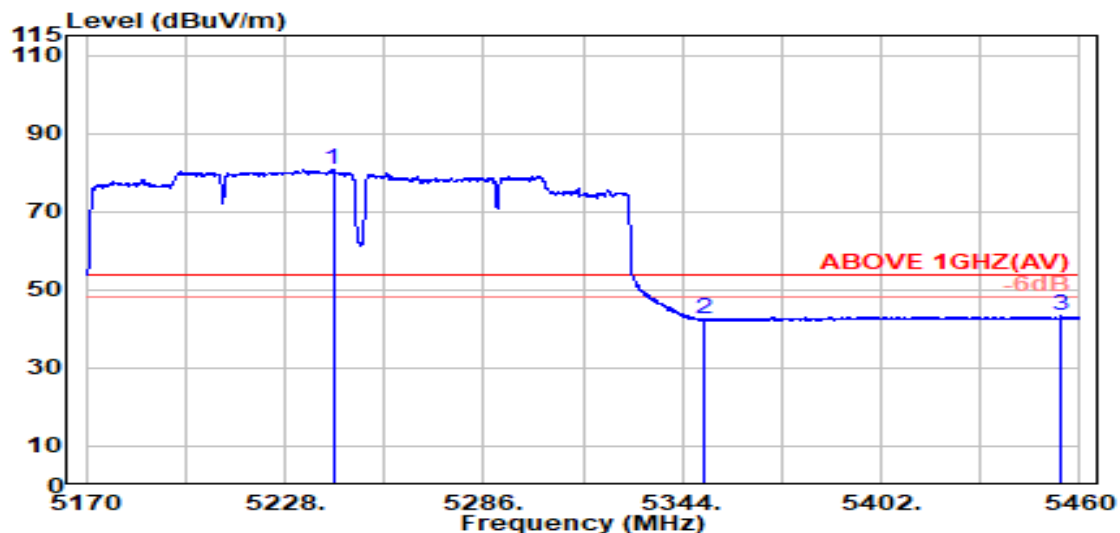


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5242.100	33.72	8.47	39.18	77.70	80.70	---	---	Average
5350.000	33.70	8.57	39.17	39.37	42.48	54.00	11.52	Average
5454.300	34.01	8.67	39.16	39.77	43.29	54.00	10.71	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

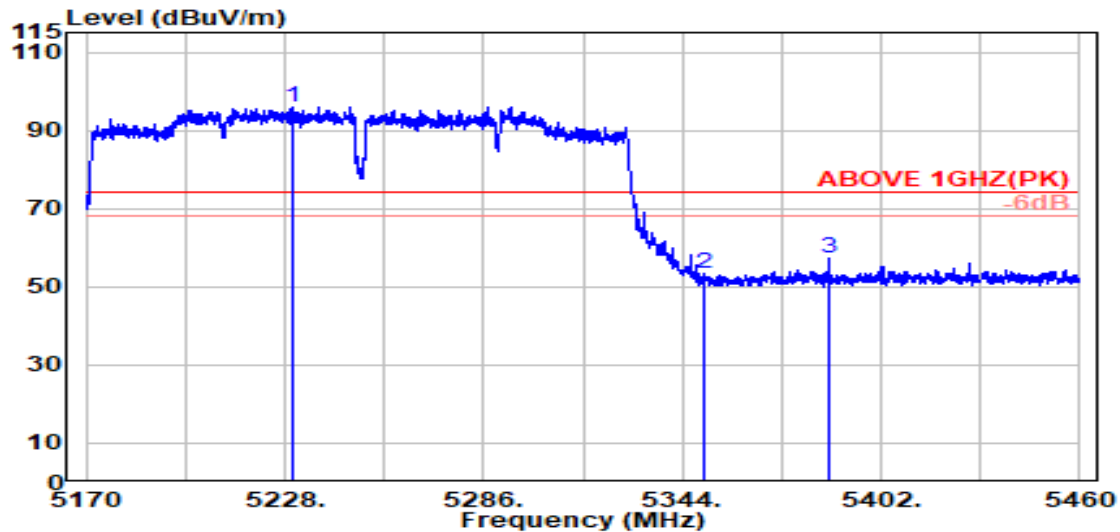

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5230.100	33.74	8.45	39.18	92.94	95.95	---	---	Peak
5350.000	33.70	8.57	39.17	50.12	53.23	74.00	20.77	Peak
5386.600	33.85	8.61	39.16	53.95	57.24	74.00	16.76	Peak

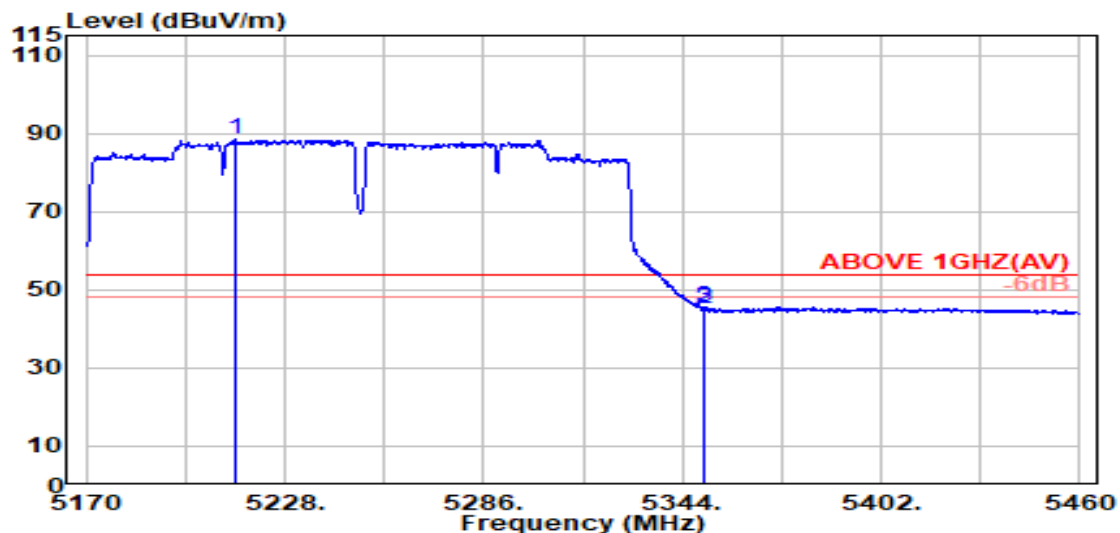


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5213.400	33.77	8.44	39.18	85.36	88.39	---	---	Average
5350.000	33.70	8.57	39.17	42.05	45.16	54.00	8.84	Average
5350.300	33.70	8.57	39.17	42.34	45.44	54.00	8.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

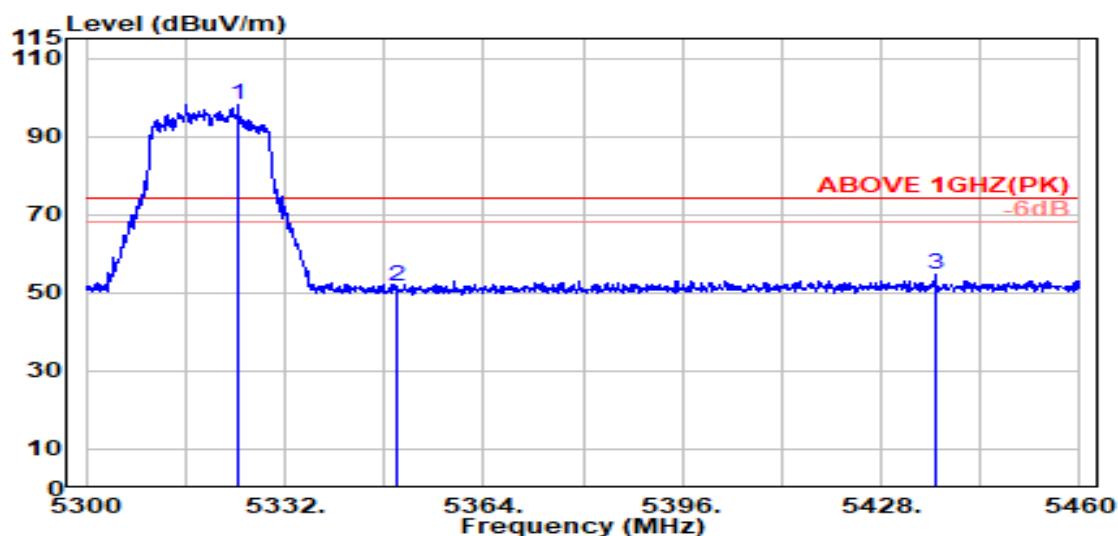

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.500	33.75	8.55	39.17	94.75	97.88	---	---	Peak
5350.000	33.70	8.57	39.17	48.62	51.72	74.00	22.28	Peak
5436.700	33.97	8.66	39.16	51.02	54.50	74.00	19.50	Peak

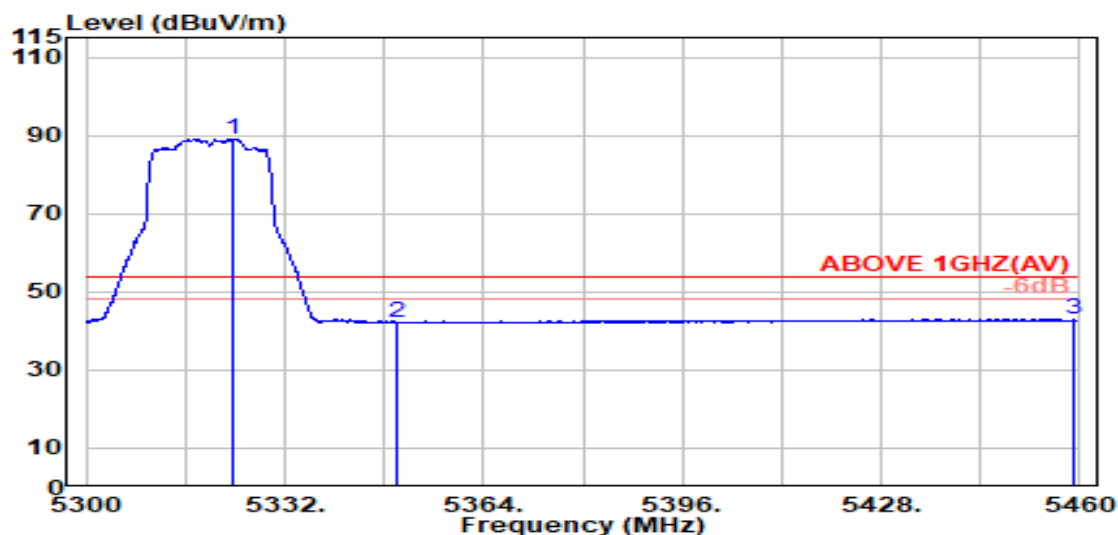


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.500	33.75	8.55	39.17	86.00	89.12	---	---	Average
5350.000	33.70	8.57	39.17	38.98	42.08	54.00	11.92	Average
5459.000	34.02	8.68	39.15	39.49	43.03	54.00	10.97	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

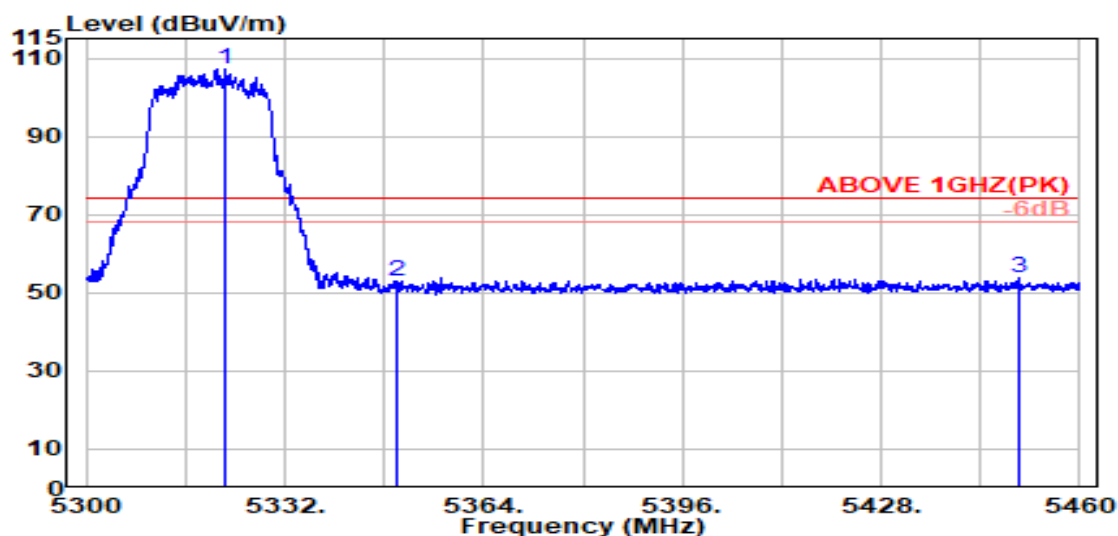

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.500	33.75	8.55	39.17	104.06	107.19	---	---	Peak
5350.000	33.70	8.57	39.17	49.75	52.86	74.00	21.14	Peak
5450.400	34.00	8.67	39.16	50.49	54.01	74.00	19.99	Peak

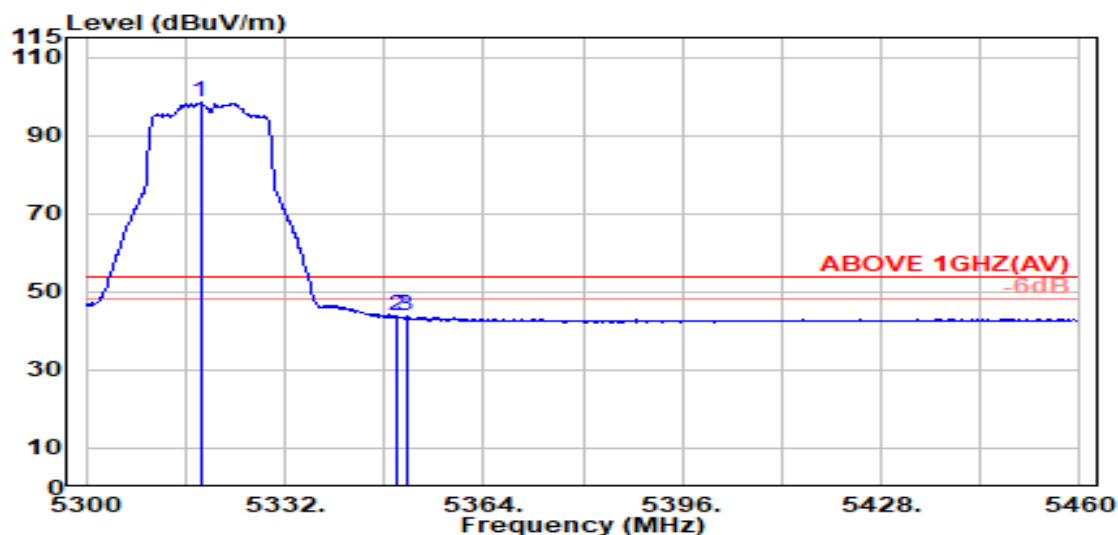


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	33.76	8.54	39.17	95.19	98.32	---	---	Average
5350.000	33.70	8.57	39.17	40.58	43.69	54.00	10.31	Average
5351.500	33.71	8.57	39.17	40.51	43.62	54.00	10.38	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

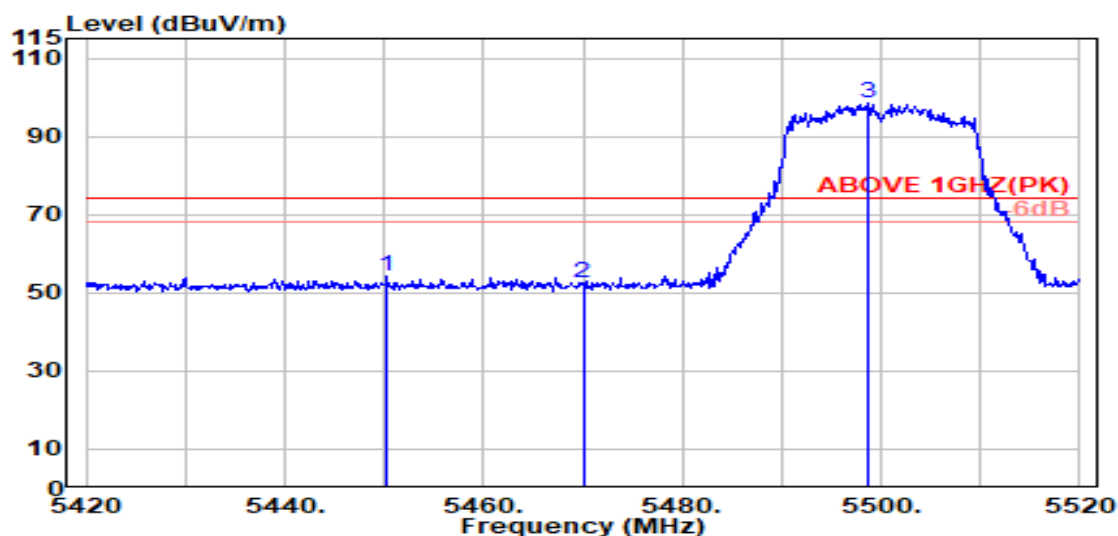

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.300	34.00	8.67	39.16	50.54	54.06	74.00	19.94	Peak
5470.000	34.04	8.69	39.15	48.74	52.31	74.00	21.69	Peak
@ 5498.800	34.10	8.72	39.15	95.06	98.72	---	---	Peak

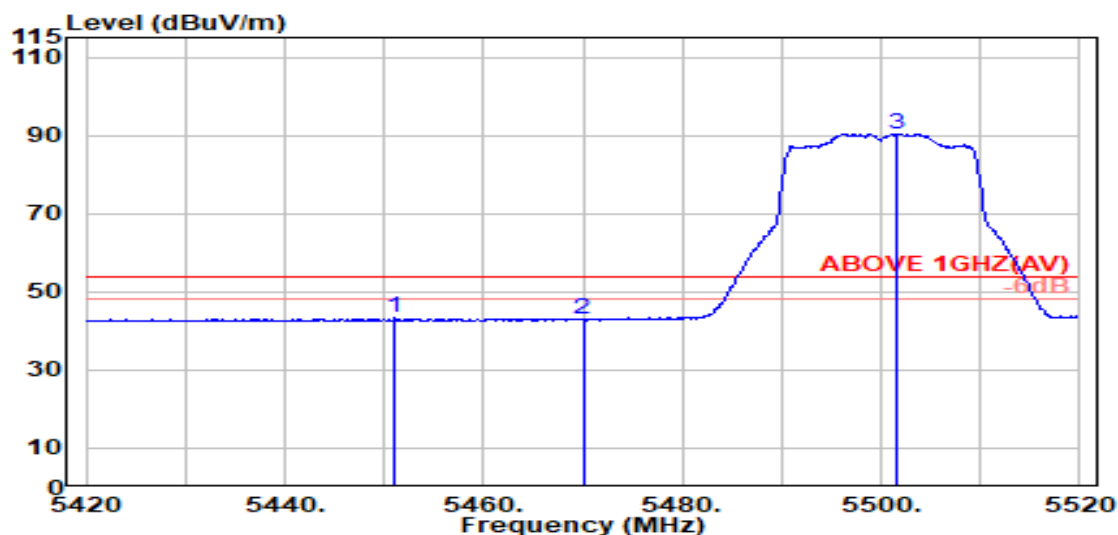


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.100	34.00	8.67	39.16	39.70	43.21	54.00	10.79	Average
5470.000	34.04	8.69	39.15	39.22	42.80	54.00	11.20	Average
@ 5501.600	34.10	8.72	39.15	86.70	90.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

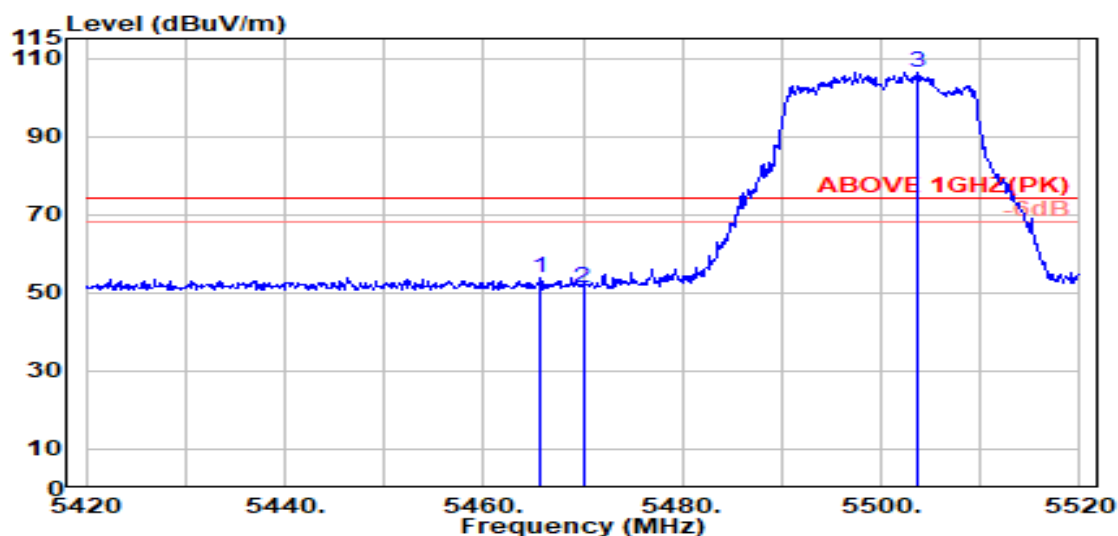

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.03	8.68	39.15	50.37	53.93	74.00	20.07	Peak
5470.000	34.04	8.69	39.15	47.77	51.35	74.00	22.65	Peak
@ 5503.700	34.09	8.72	39.15	102.86	106.53	---	---	Peak

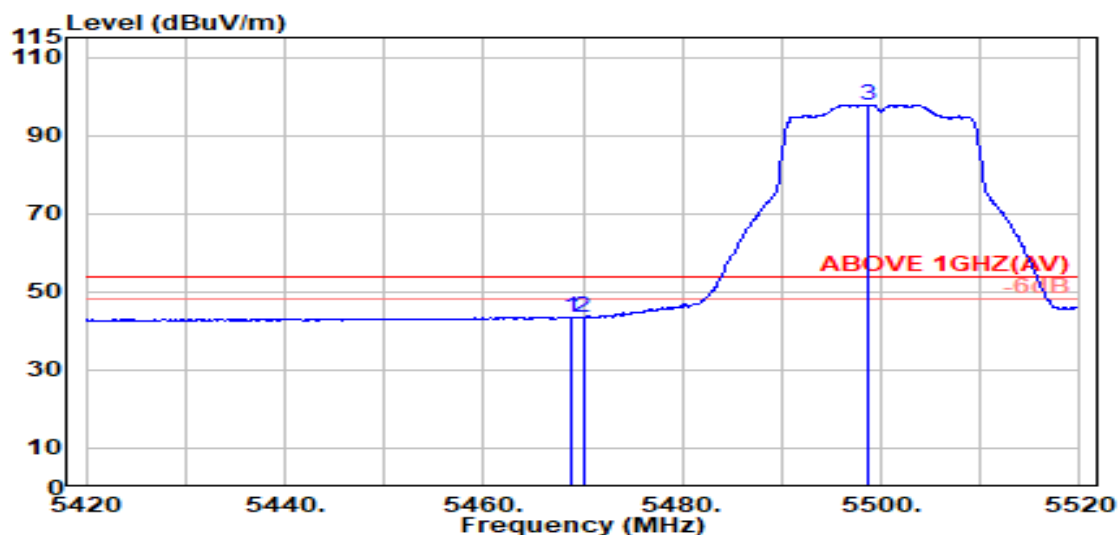


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	39.98	43.55	54.00	10.45	Average
5470.000	34.04	8.69	39.15	39.77	43.35	54.00	10.65	Average
@ 5498.600	34.10	8.72	39.15	94.18	97.84	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

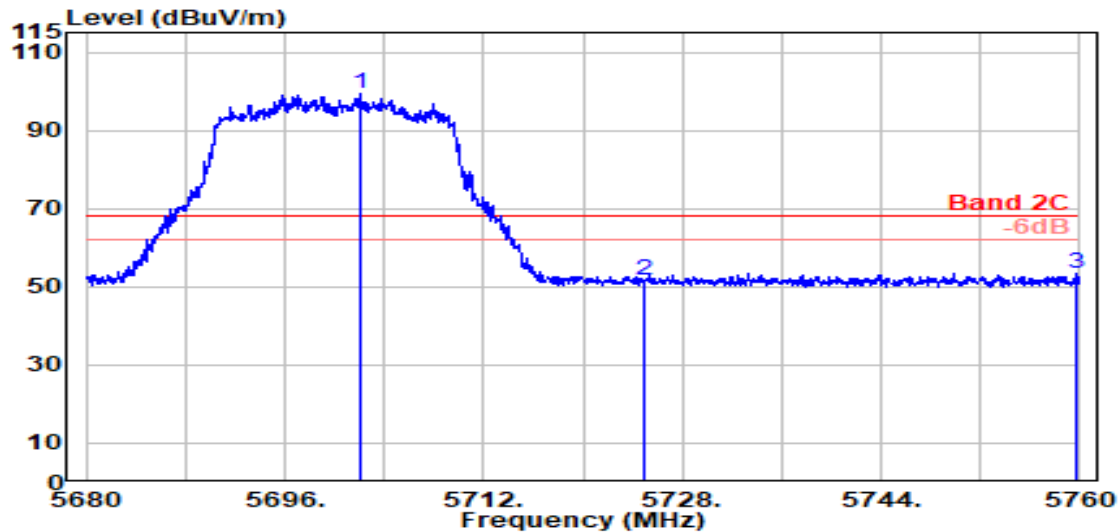

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.000	33.60	8.90	39.19	95.98	99.29	---	---	Peak
	5725.000	33.60	8.93	39.20	48.21	51.54	68.20	16.66	Peak
	5759.750	33.64	8.96	39.20	50.10	53.50	68.20	14.70	Peak

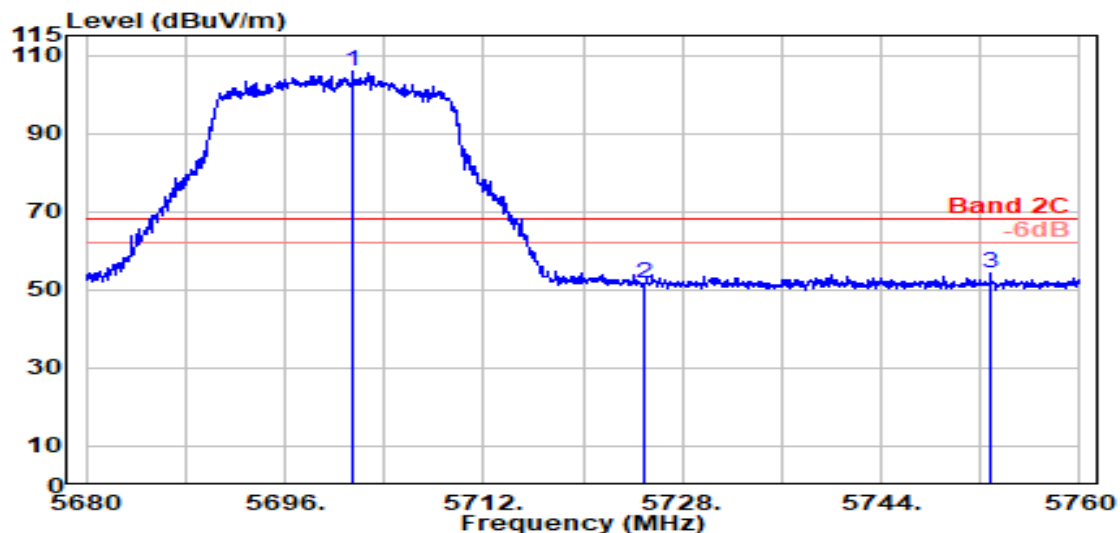


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.550	33.60	8.90	39.19	102.77	106.08	---	---	Peak
	5725.000	33.60	8.93	39.20	48.28	51.61	68.20	16.59	Peak
	5752.850	33.61	8.95	39.20	50.85	54.21	68.20	13.99	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

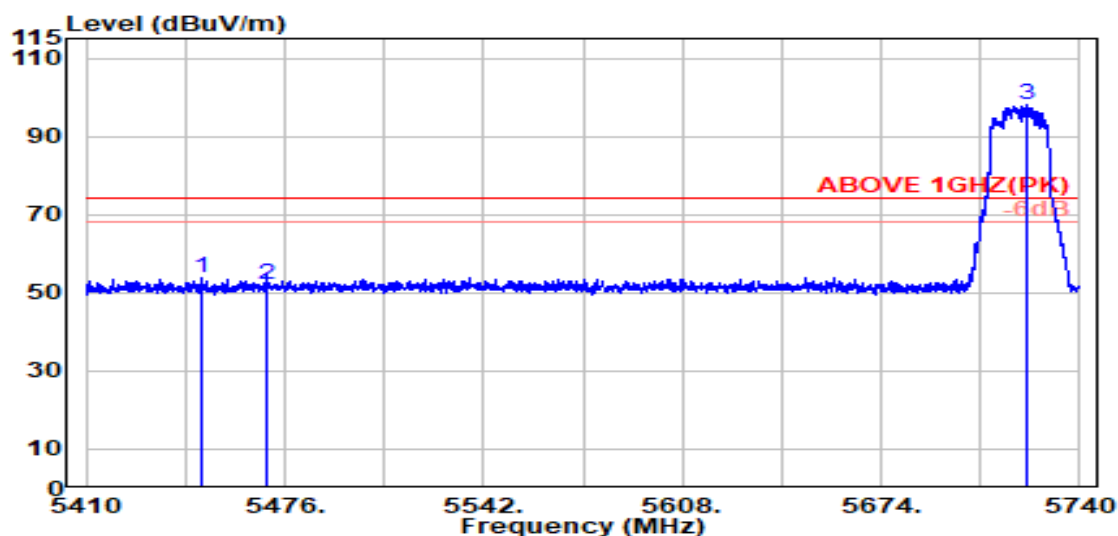

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.600	34.00	8.67	39.16	50.31	53.82	74.00	20.18	Peak
5470.000	34.04	8.69	39.15	48.35	51.92	74.00	22.08	Peak
@ 5722.200	33.60	8.92	39.20	94.76	98.09	---	---	Peak

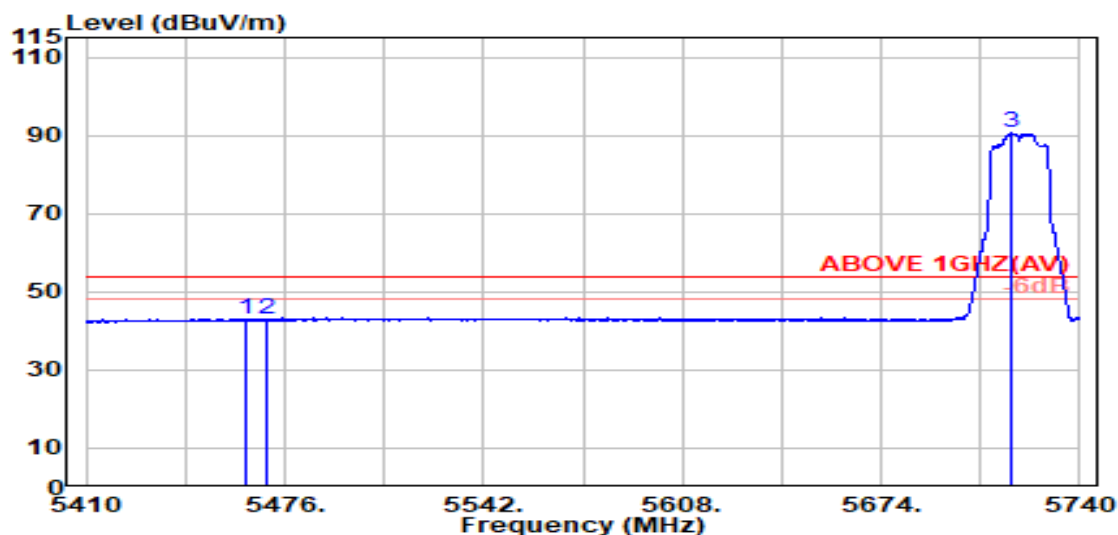


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.03	8.68	39.15	39.57	43.12	54.00	10.88	Average
5470.000	34.04	8.69	39.15	39.24	42.81	54.00	11.19	Average
@ 5717.400	33.60	8.92	39.19	87.21	90.53	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

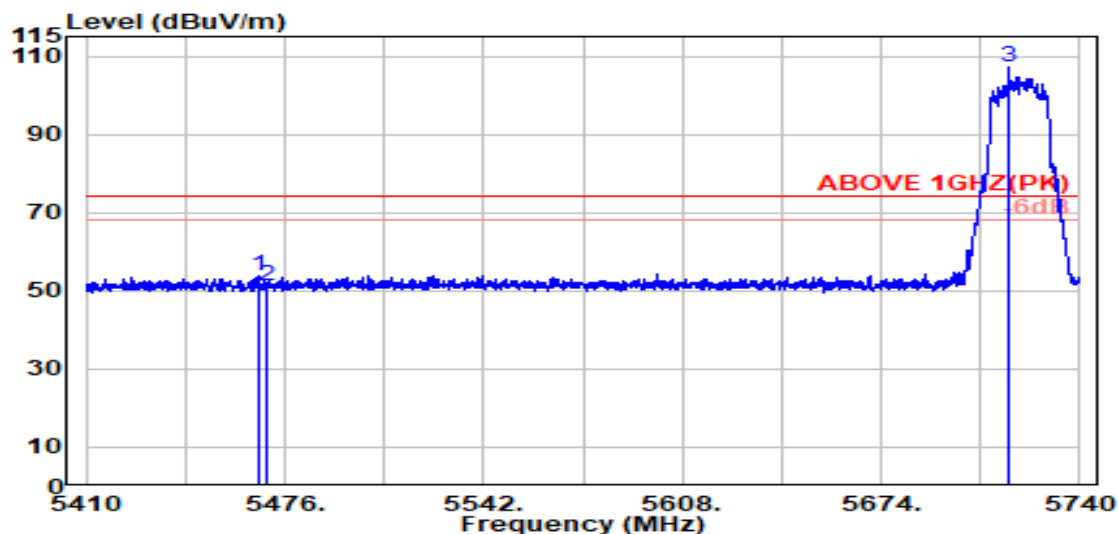

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.03	8.69	39.15	50.11	53.68	74.00	20.32	Peak
5470.000	34.04	8.69	39.15	47.65	51.23	74.00	22.77	Peak
@ 5716.300	33.60	8.92	39.19	103.84	107.17	---	---	Peak

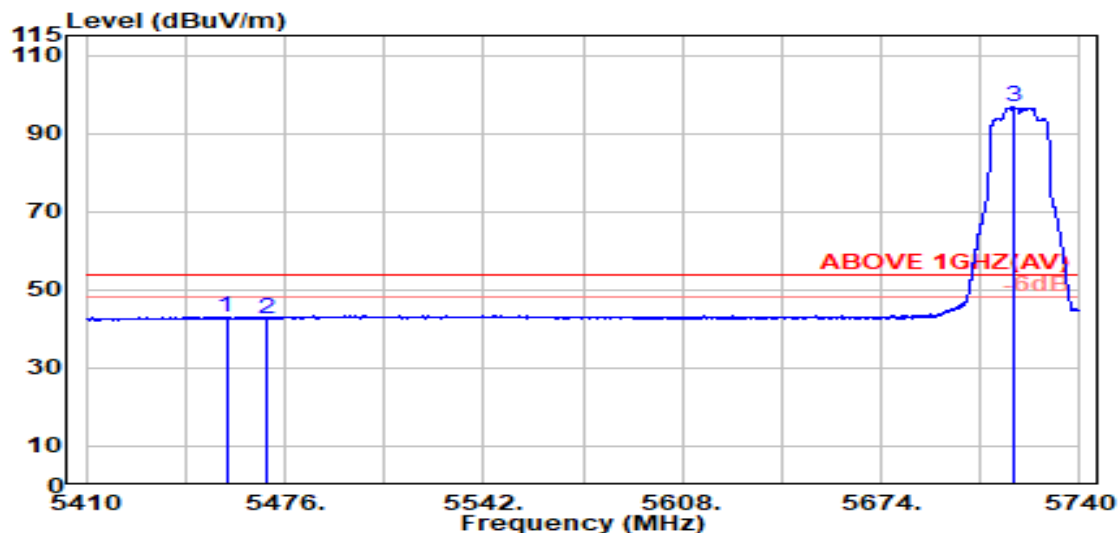


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.600	34.01	8.68	39.15	39.40	42.94	54.00	11.06	Average
5470.000	34.04	8.69	39.15	39.10	42.67	54.00	11.33	Average
@ 5718.100	33.60	8.92	39.19	93.33	96.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

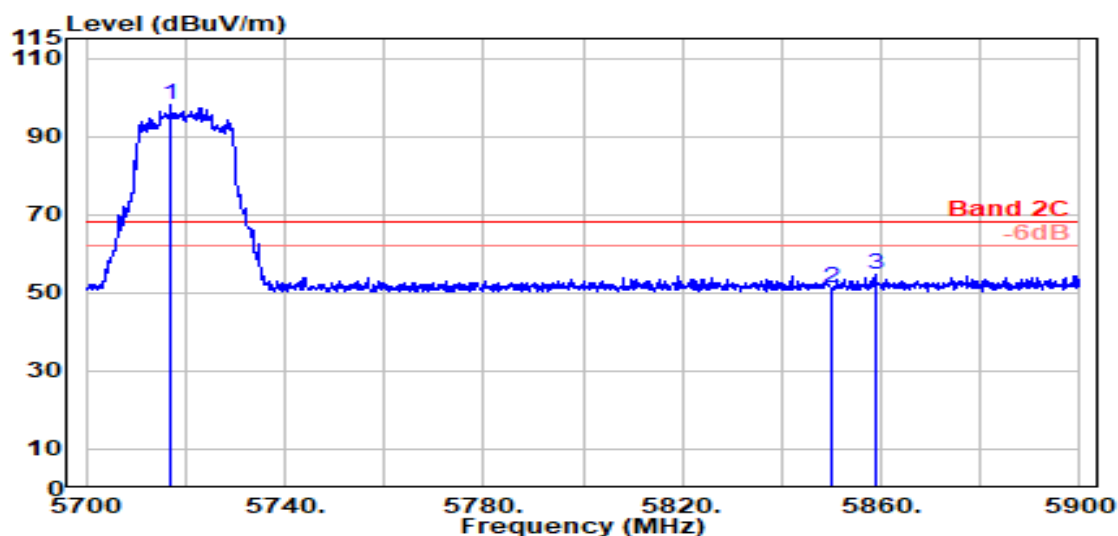

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.100	33.60	8.92	39.19	94.56	97.88	---	---	Peak
	5850.000	33.90	9.04	39.22	47.43	51.14	68.20	17.06	Peak
	5859.000	33.94	9.05	39.22	50.81	54.57	68.20	13.63	Peak

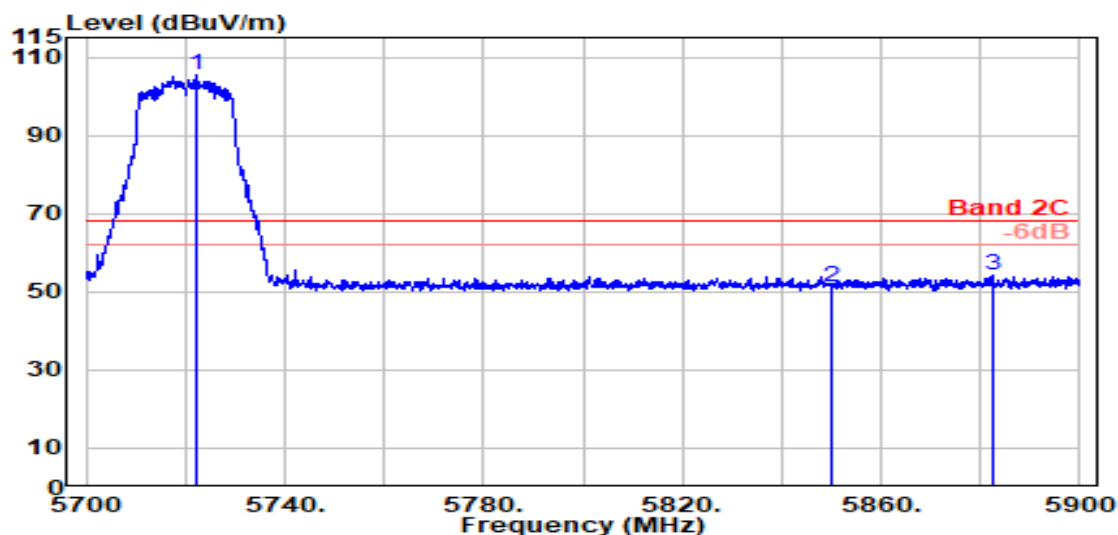


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.000	33.60	8.92	39.20	102.07	105.40	---	---	Peak
	5850.000	33.90	9.04	39.22	47.45	51.17	68.20	17.03	Peak
	5882.300	34.03	9.07	39.23	50.25	54.12	68.20	14.08	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

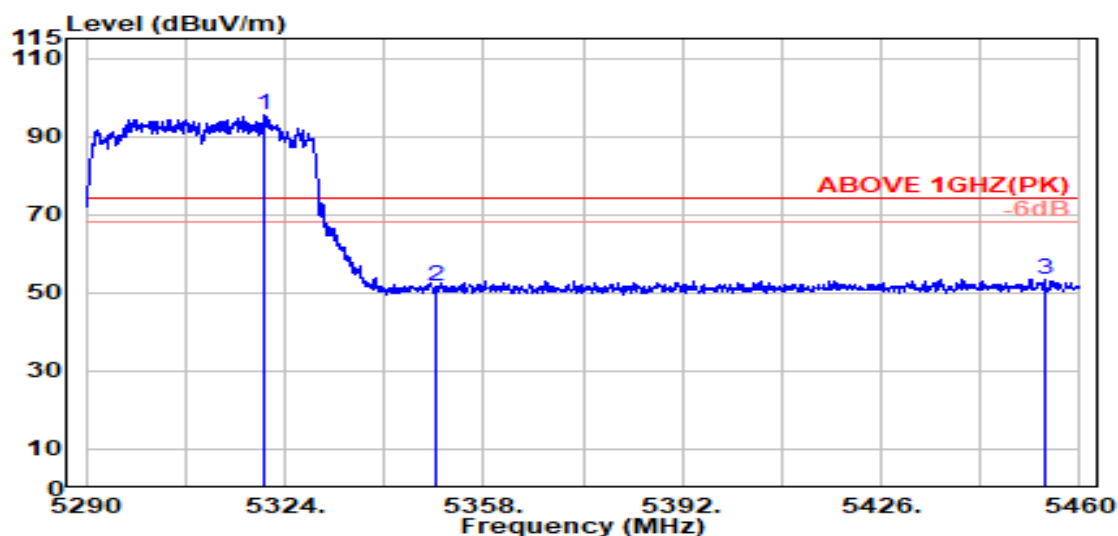

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.600	33.76	8.54	39.17	92.41	95.54	---	---	Peak
5350.000	33.70	8.57	39.17	48.58	51.69	74.00	22.31	Peak
5453.900	34.01	8.67	39.16	50.06	53.59	74.00	20.41	Peak

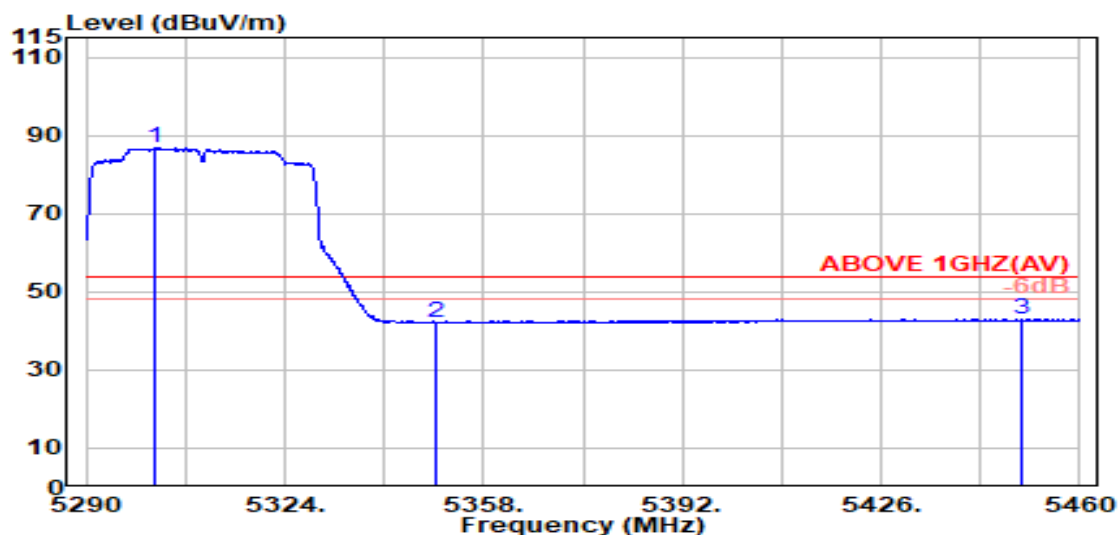


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.800	33.80	8.53	39.17	83.78	86.93	---	---	Average
5350.000	33.70	8.57	39.17	39.00	42.10	54.00	11.90	Average
5450.100	34.00	8.67	39.16	39.50	43.01	54.00	10.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

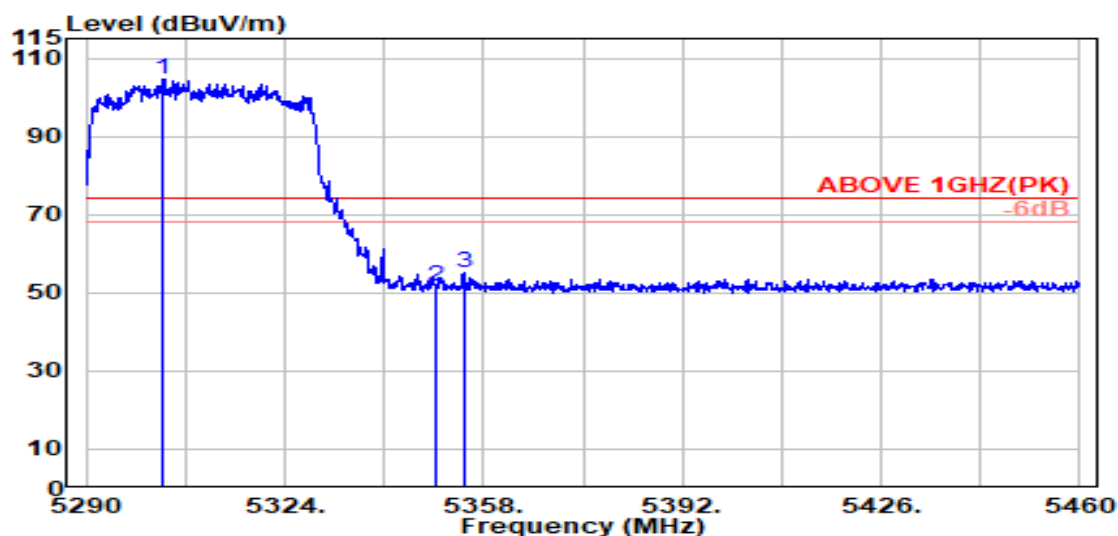

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.300	33.79	8.53	39.17	101.24	104.38	---	---	Peak
5350.000	33.70	8.57	39.17	48.62	51.72	74.00	22.28	Peak
5354.600	33.72	8.58	39.17	51.84	54.96	74.00	19.04	Peak

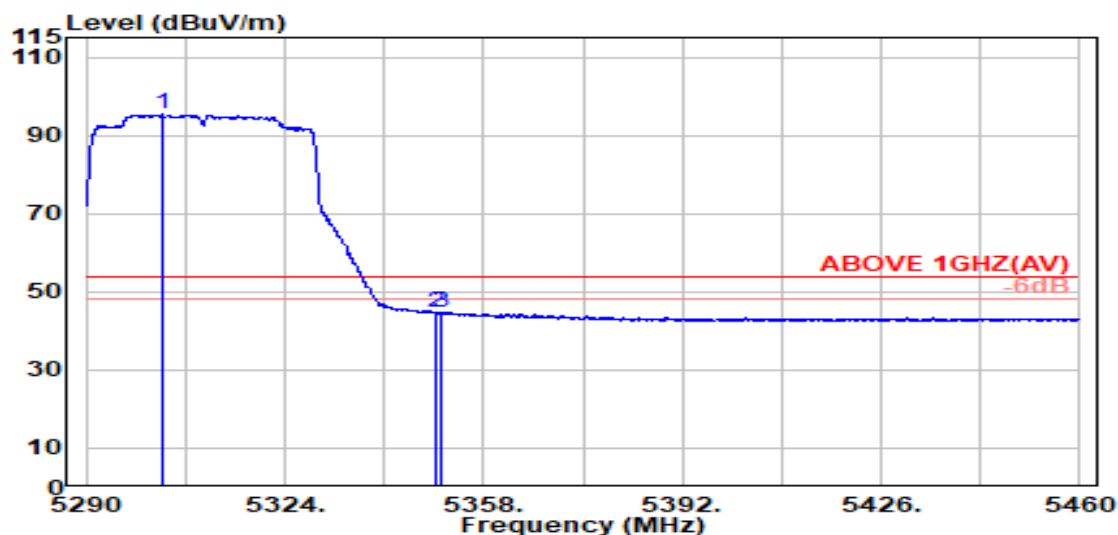


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.200	33.79	8.53	39.17	92.46	95.61	---	---	Average
5350.000	33.70	8.57	39.17	41.42	44.53	54.00	9.47	Average
5350.600	33.70	8.57	39.17	41.70	44.81	54.00	9.19	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

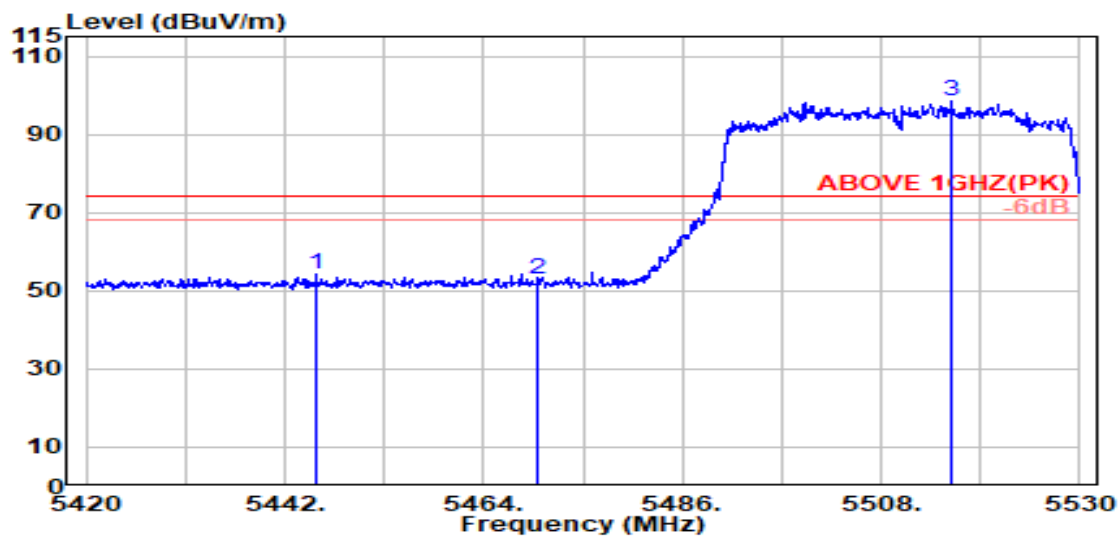

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	33.99	8.66	39.16	50.56	54.06	74.00	19.94	Peak
5470.000	34.04	8.69	39.15	49.25	52.82	74.00	21.18	Peak
@ 5515.800	34.07	8.73	39.15	94.70	98.35	---	---	Peak

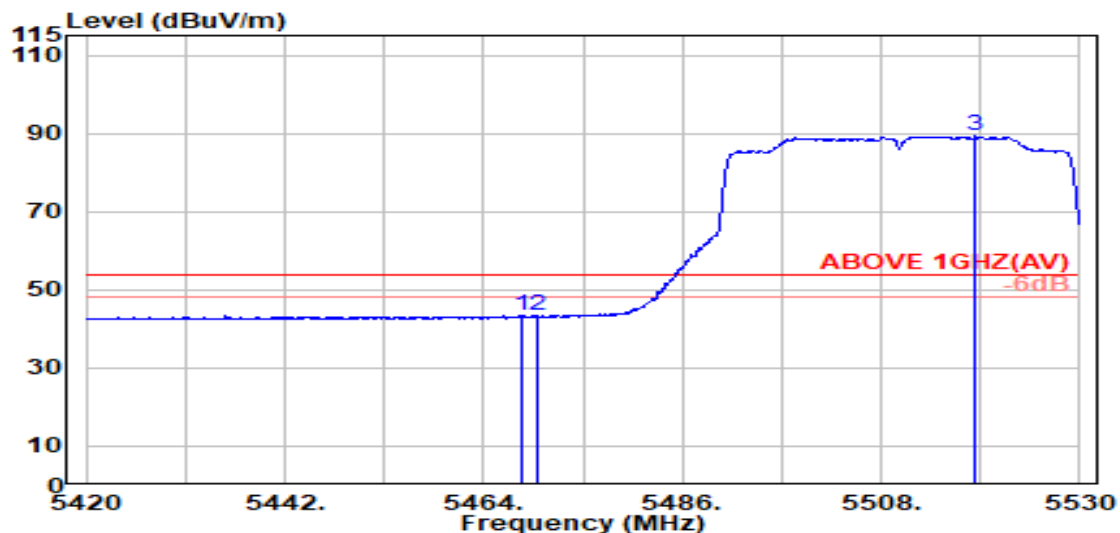


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	39.82	43.39	54.00	10.61	Average
5470.000	34.04	8.69	39.15	39.67	43.24	54.00	10.76	Average
@ 5518.400	34.06	8.73	39.15	85.56	89.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

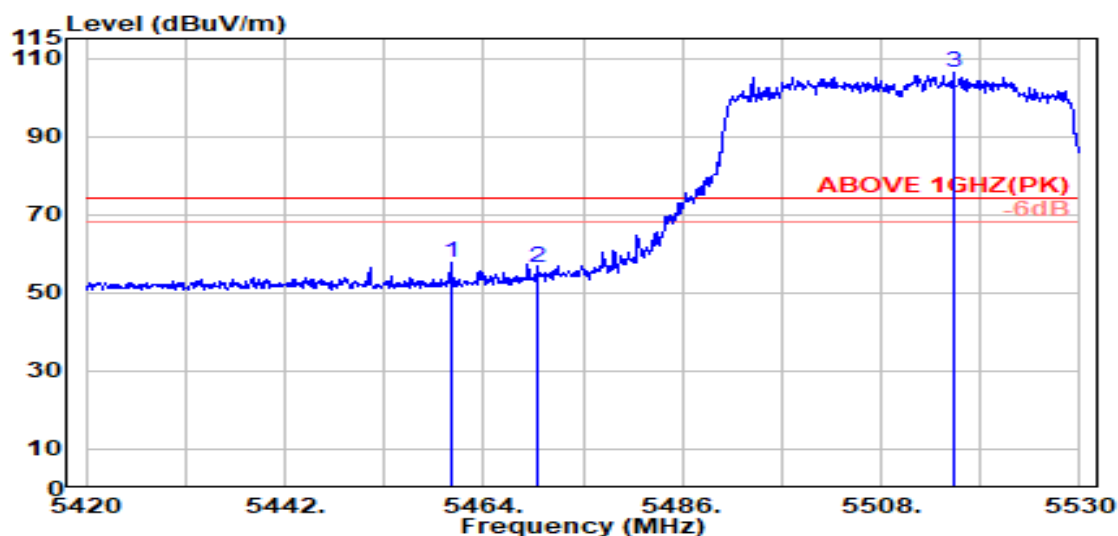

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.400	34.02	8.68	39.15	54.38	57.92	74.00	16.08	Peak
5470.000	34.04	8.69	39.15	52.99	56.57	74.00	17.43	Peak
@ 5516.100	34.07	8.73	39.15	102.46	106.11	---	---	Peak

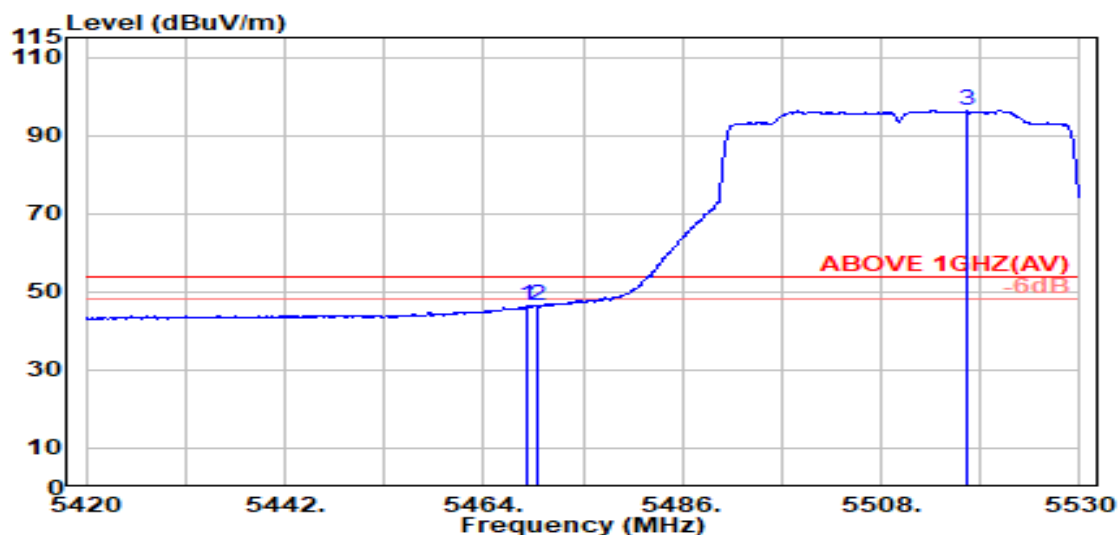


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	42.67	46.24	54.00	7.76	Average
5470.000	34.04	8.69	39.15	42.92	46.49	54.00	7.51	Average
@ 5517.500	34.06	8.73	39.15	92.66	96.30	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

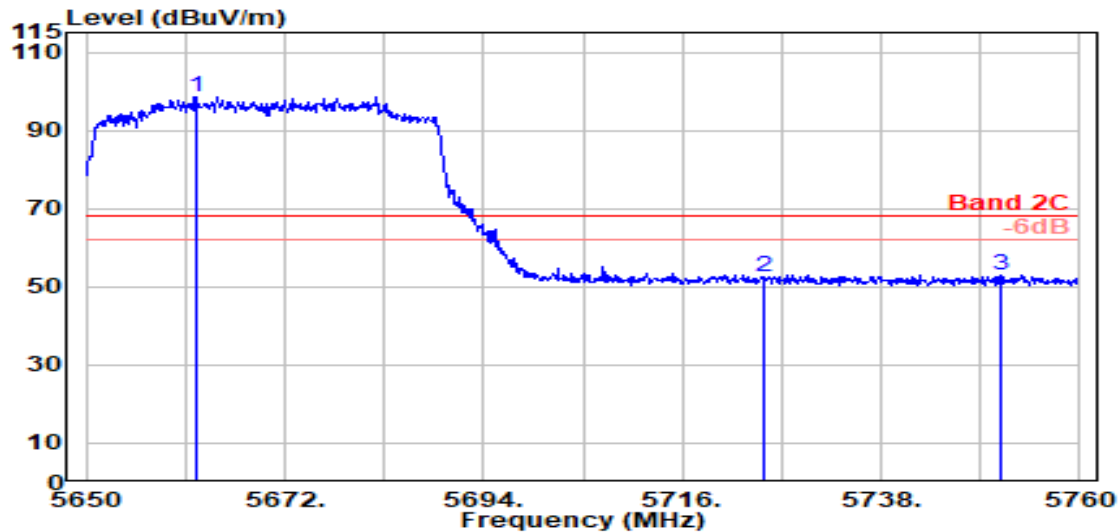

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5662.100	33.75	8.87	39.18	95.18	98.61	---	---	Peak
	5725.000	33.60	8.93	39.20	49.16	52.49	68.20	15.71	Peak
	5751.300	33.61	8.95	39.20	49.75	53.11	68.20	15.09	Peak

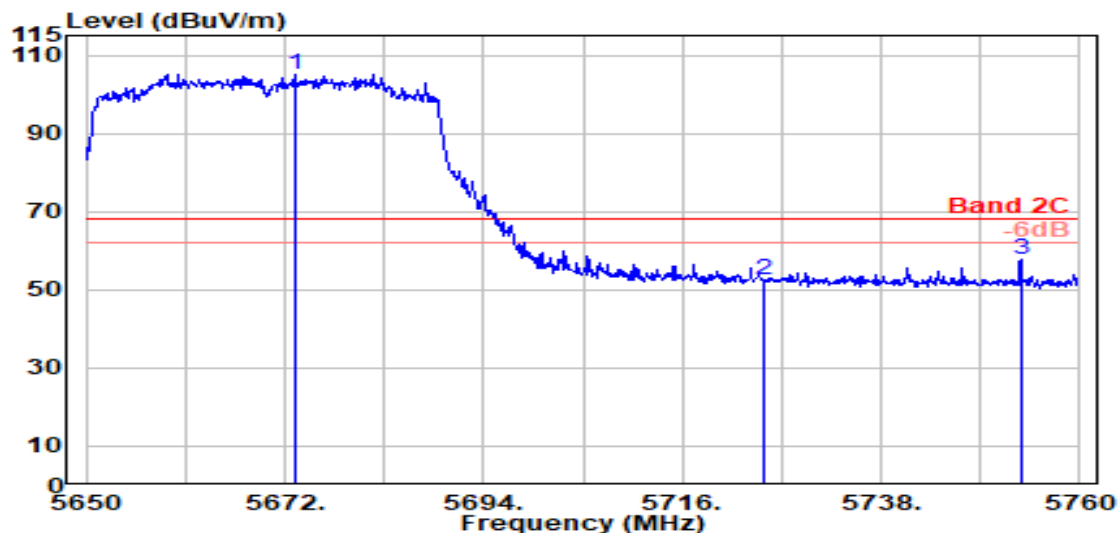


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5673.100	33.71	8.88	39.19	101.74	105.14	---	---	Peak
	5725.000	33.60	8.93	39.20	49.14	52.47	68.20	15.73	Peak
	5753.500	33.61	8.95	39.20	54.31	57.68	68.20	10.52	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

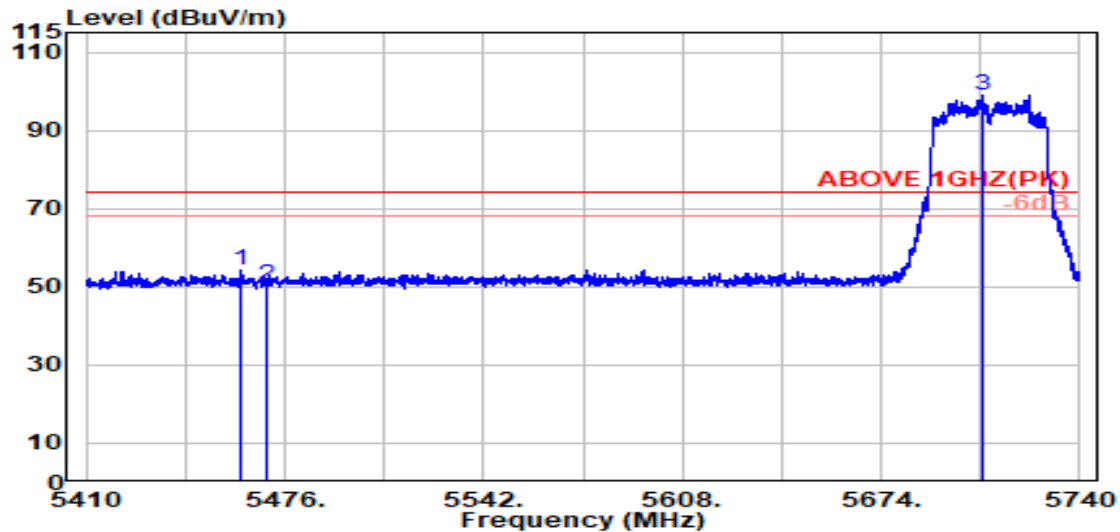

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.000	34.02	8.68	39.15	50.68	54.22	74.00	19.78	Peak
5470.000	34.04	8.69	39.15	46.94	50.52	74.00	23.48	Peak
@ 5707.400	33.60	8.91	39.19	95.78	99.10	---	---	Peak

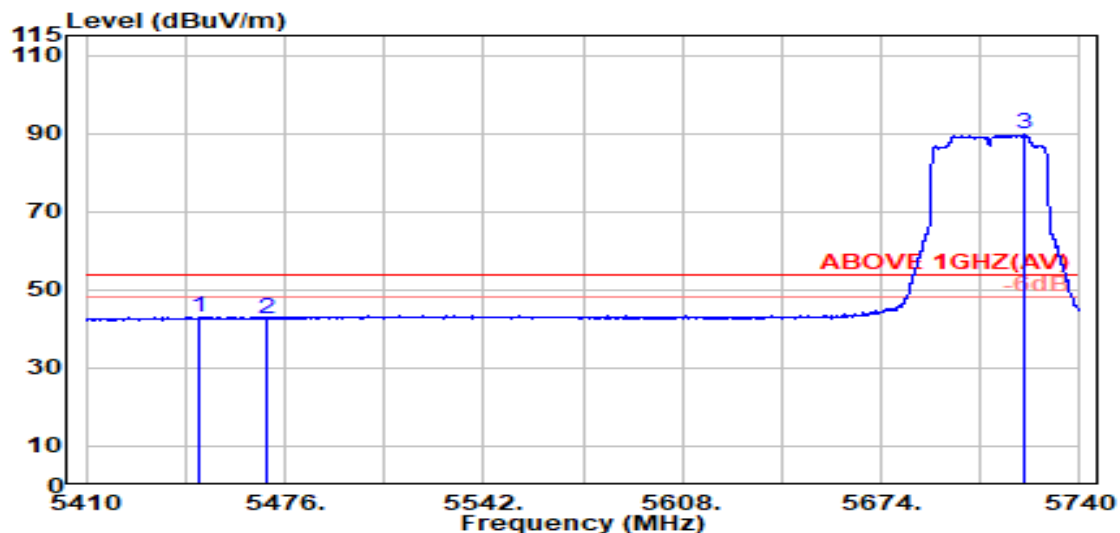


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.100	33.99	8.67	39.16	39.43	42.93	54.00	11.07	Average
5470.000	34.04	8.69	39.15	39.04	42.61	54.00	11.39	Average
@ 5721.600	33.60	8.92	39.20	86.29	89.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

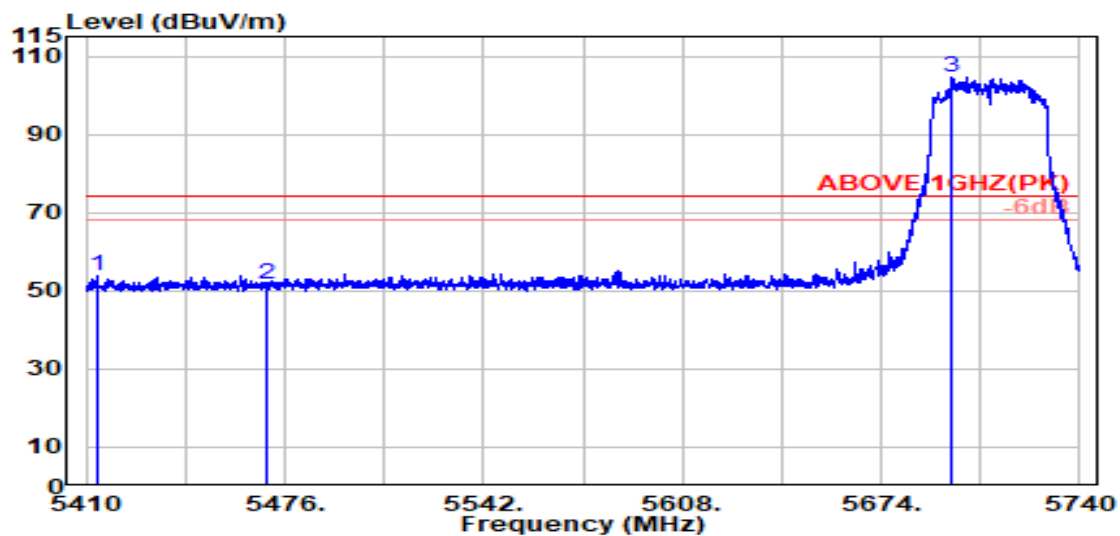

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.600	33.93	8.63	39.16	50.47	53.87	74.00	20.13	Peak
5470.000	34.04	8.69	39.15	48.07	51.64	74.00	22.36	Peak
@ 5697.300	33.61	8.90	39.19	101.24	104.57	---	---	Peak

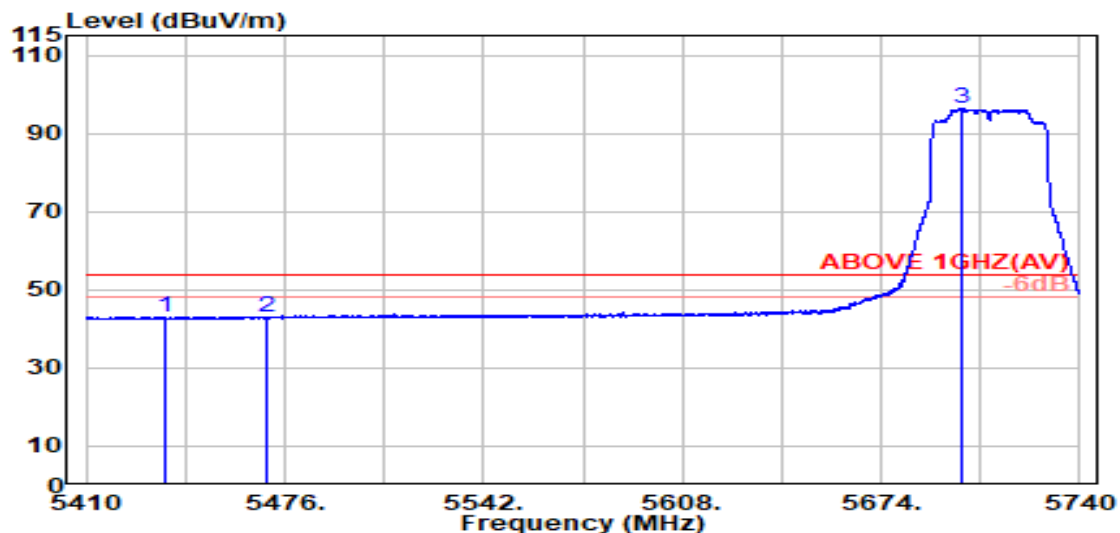


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.600	33.97	8.66	39.16	39.66	43.13	54.00	10.87	Average
5470.000	34.04	8.69	39.15	39.40	42.97	54.00	11.03	Average
@ 5700.900	33.60	8.90	39.19	92.92	96.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

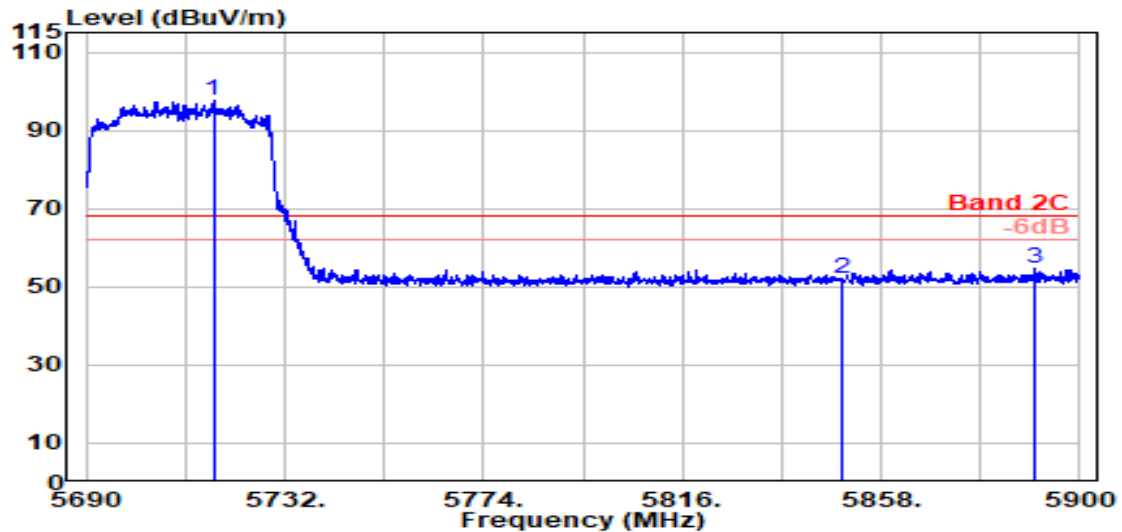

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.900	33.60	8.92	39.19	94.15	97.47	---	---	Peak
5850.000	33.90	9.04	39.22	48.56	52.28	68.20	15.92	Peak
5890.400	34.06	9.07	39.23	50.76	54.67	68.20	13.53	Peak

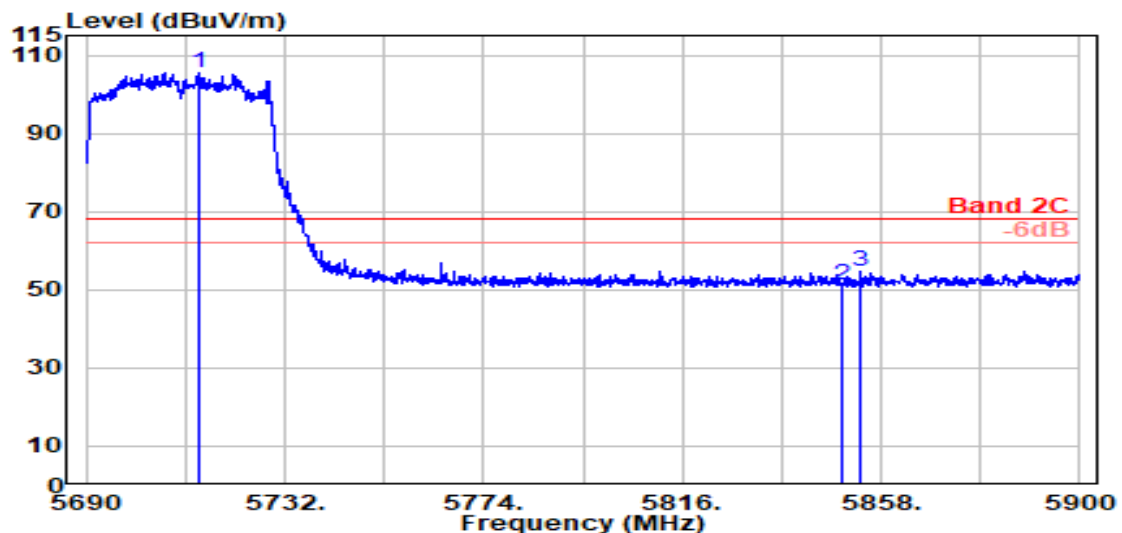


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.700	33.60	8.92	39.19	102.25	105.57	---	---	Peak
5850.000	33.90	9.04	39.22	47.45	51.16	68.20	17.04	Peak
5853.600	33.91	9.04	39.22	50.89	54.62	68.20	13.58	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

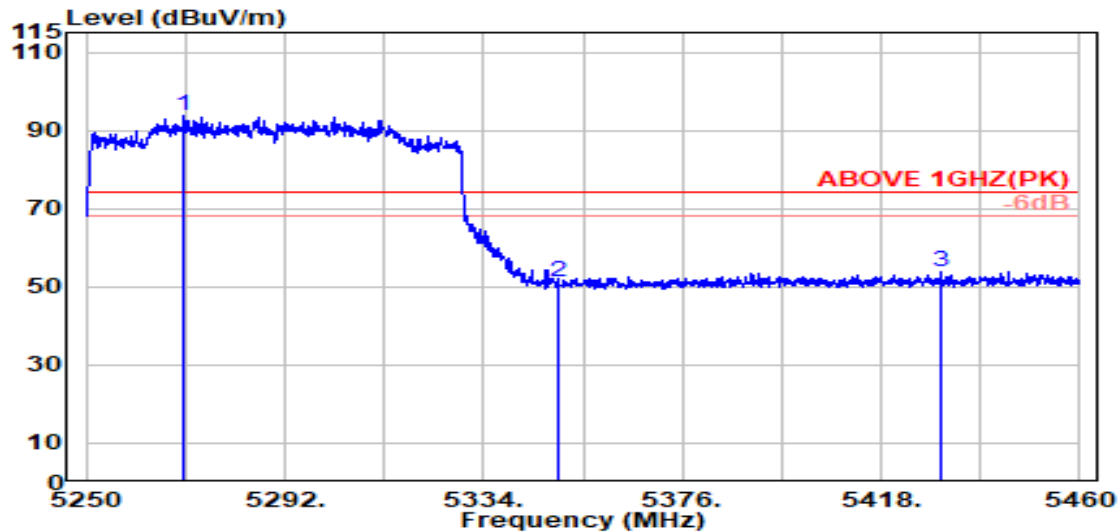

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.800	33.74	8.49	39.18	90.68	93.74	---	---	Peak
5350.000	33.70	8.57	39.17	47.99	51.10	74.00	22.90	Peak
5430.700	33.96	8.65	39.16	50.54	54.00	74.00	20.00	Peak

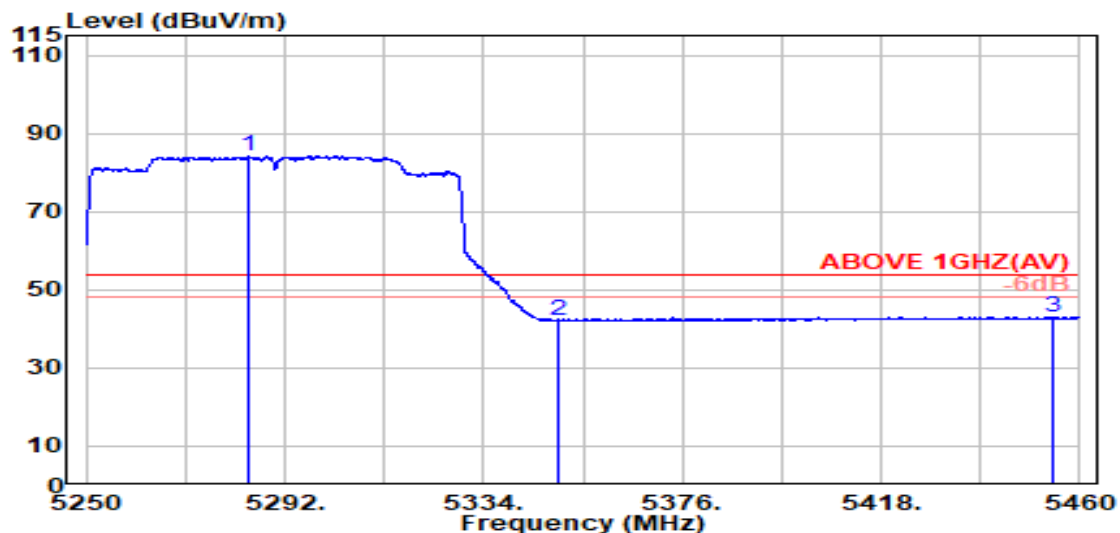


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.300	33.77	8.51	39.18	81.03	84.13	---	---	Average
5350.000	33.70	8.57	39.17	38.89	42.00	54.00	12.00	Average
5454.300	34.01	8.67	39.16	39.54	43.06	54.00	10.94	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

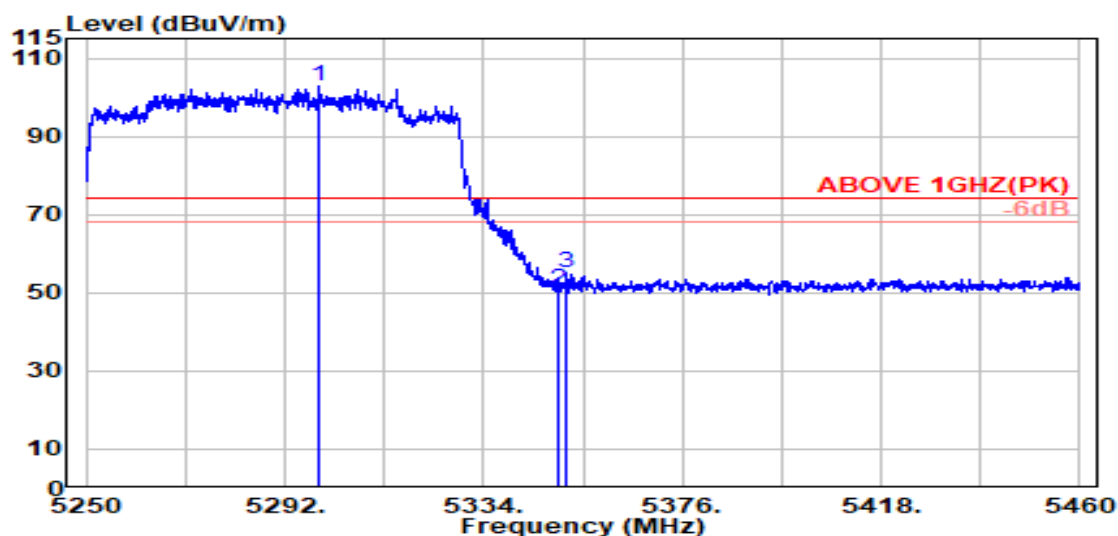

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.400	33.80	8.52	39.17	99.53	102.68	---	---	Peak
5350.000	33.70	8.57	39.17	47.84	50.95	74.00	23.05	Peak
5351.400	33.71	8.57	39.17	51.85	54.96	74.00	19.04	Peak

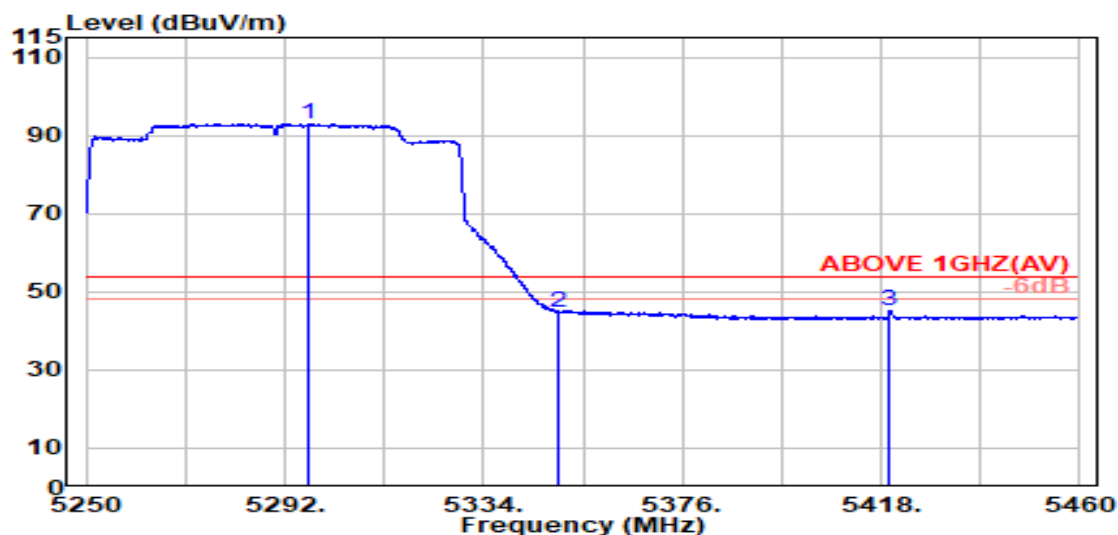


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.900	33.79	8.52	39.17	89.86	93.00	---	---	Average
5350.000	33.70	8.57	39.17	41.44	44.54	54.00	9.46	Average
5419.900	33.94	8.64	39.16	41.87	45.29	54.00	8.71	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

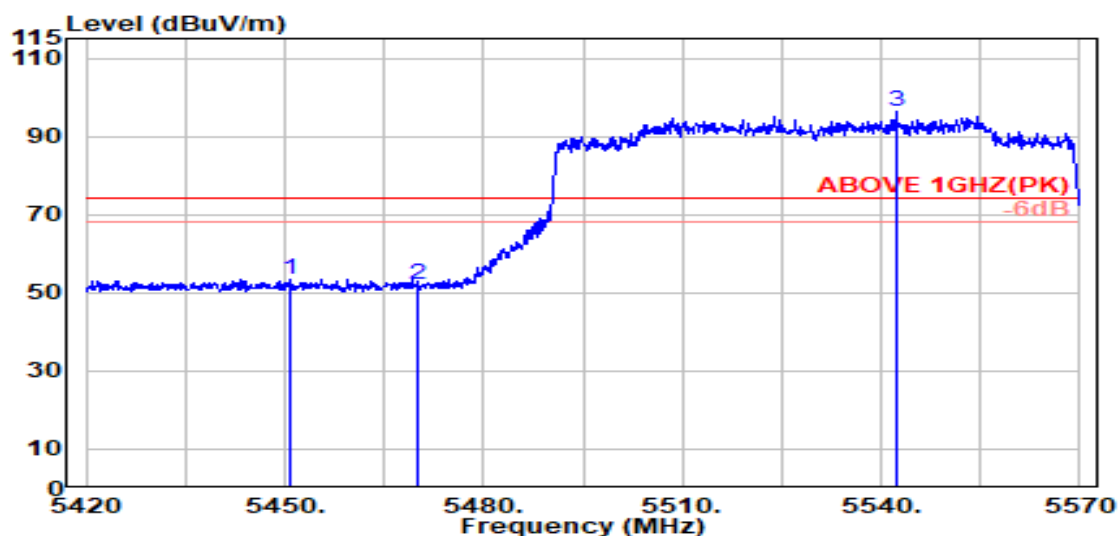

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.900	34.00	8.67	39.16	50.04	53.56	74.00	20.44	Peak
5470.000	34.04	8.69	39.15	48.42	51.99	74.00	22.01	Peak
@ 5542.400	34.02	8.76	39.16	92.54	96.16	---	---	Peak

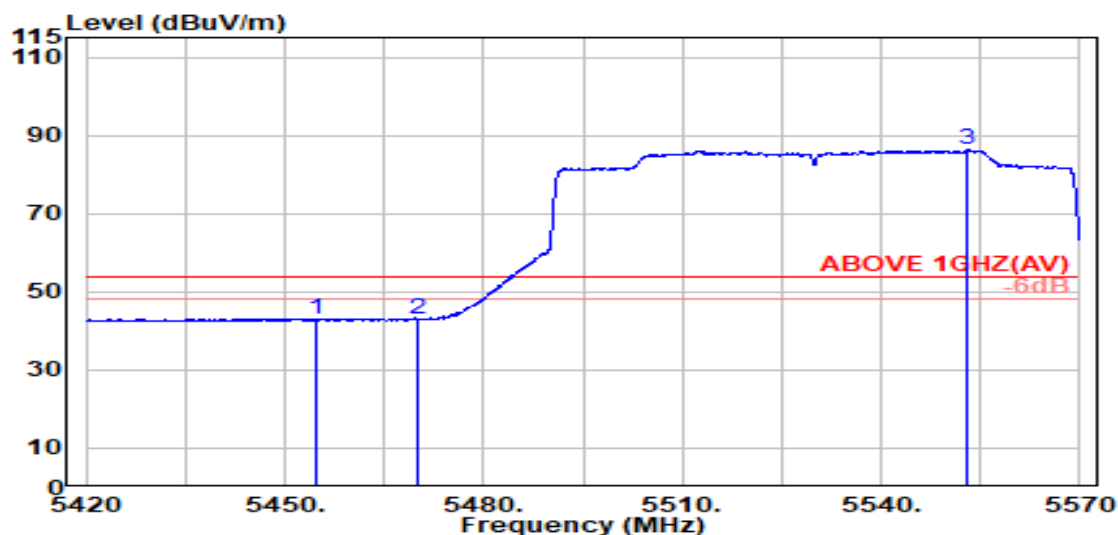


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.700	34.01	8.67	39.16	39.64	43.17	54.00	10.83	Average
5470.000	34.04	8.69	39.15	39.24	42.82	54.00	11.18	Average
@ 5553.100	33.99	8.77	39.16	82.63	86.22	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

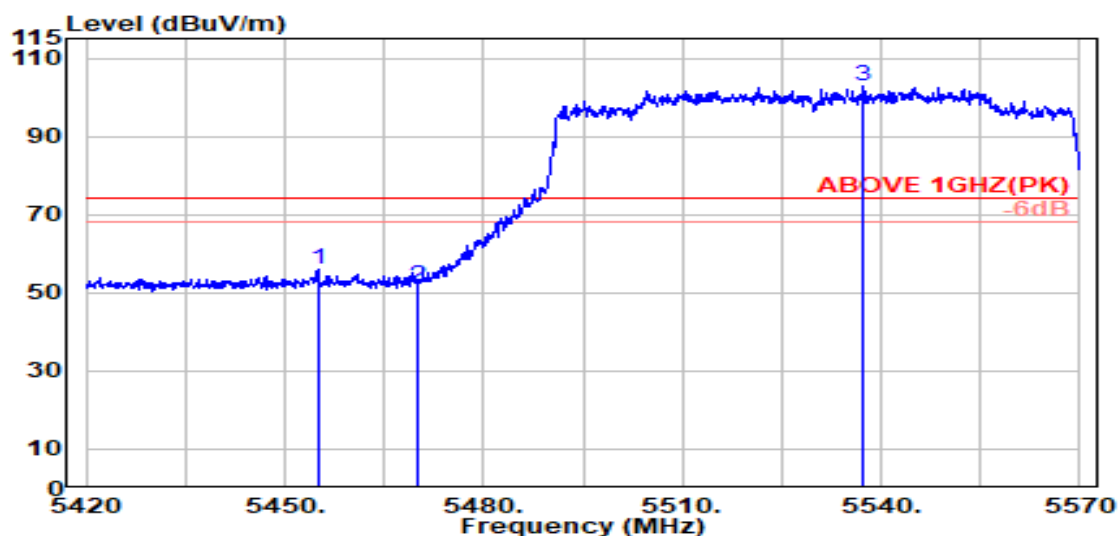

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.000	34.01	8.67	39.16	52.34	55.87	74.00	18.13	Peak
5470.000	34.04	8.69	39.15	48.27	51.84	74.00	22.16	Peak
@ 5537.300	34.03	8.75	39.16	99.28	102.90	---	---	Peak

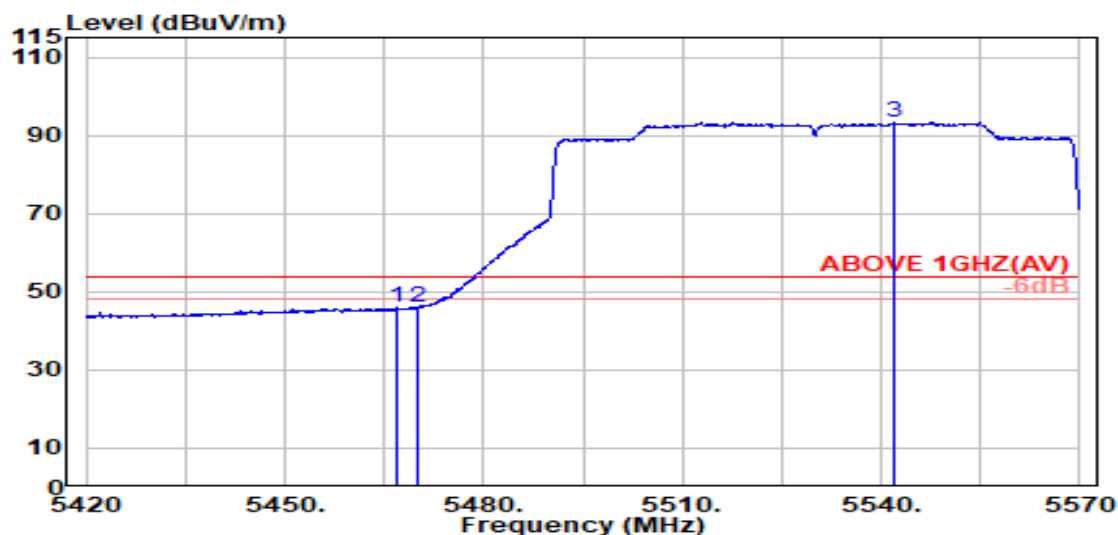


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.15	42.26	45.82	54.00	8.18	Average
5470.000	34.04	8.69	39.15	42.39	45.96	54.00	8.04	Average
@ 5542.000	34.02	8.76	39.16	89.56	93.18	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

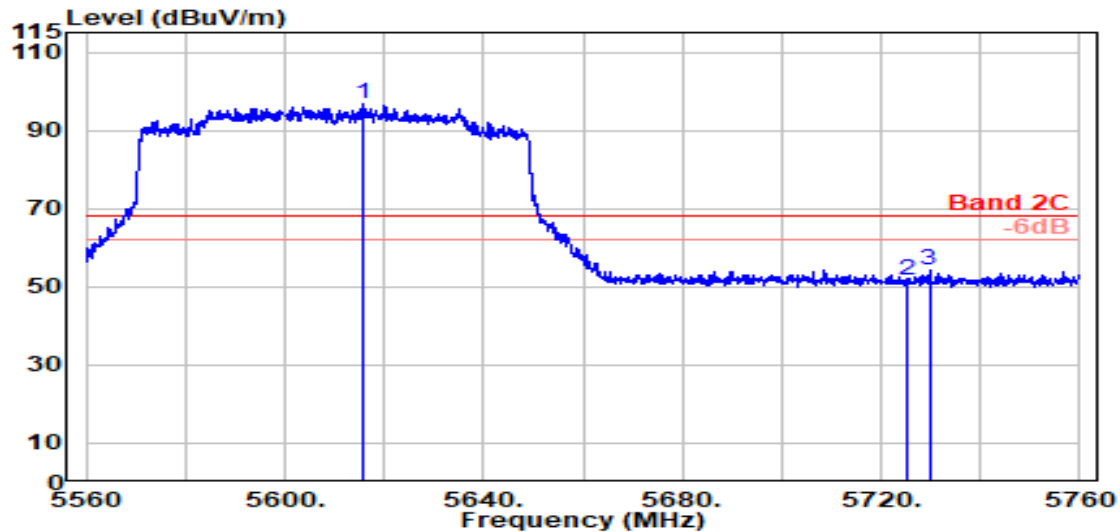

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5615.900	33.80	8.83	39.17	93.24	96.69	---	---	Peak
5725.000	33.60	8.93	39.20	48.30	51.63	68.20	16.57	Peak
5729.700	33.60	8.93	39.20	50.89	54.22	68.20	13.98	Peak

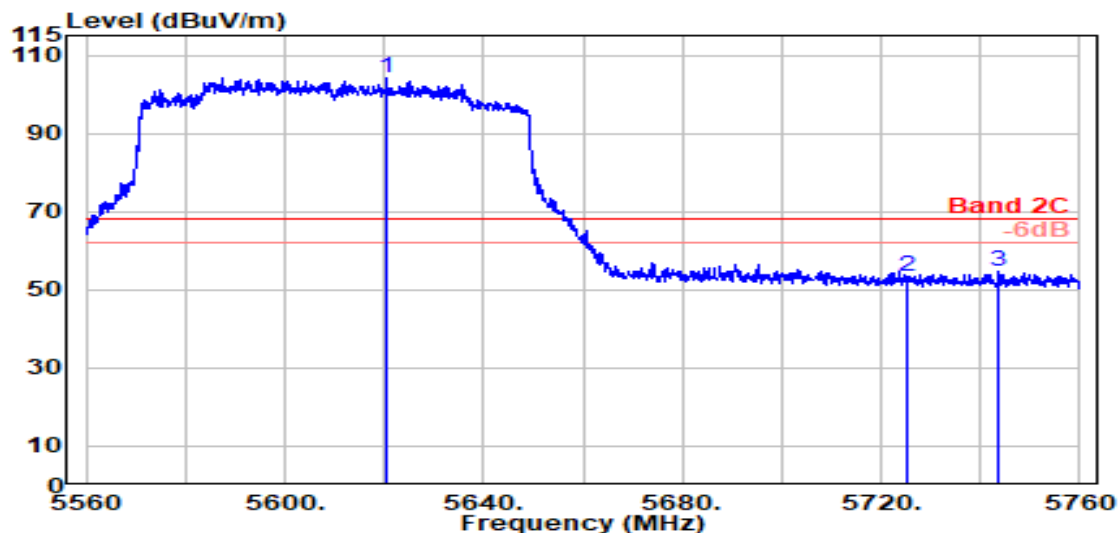


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5620.400	33.80	8.83	39.17	100.63	104.09	---	---	Peak
5725.000	33.60	8.93	39.20	50.22	53.55	68.20	14.65	Peak
5743.600	33.60	8.94	39.20	51.21	54.56	68.20	13.64	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

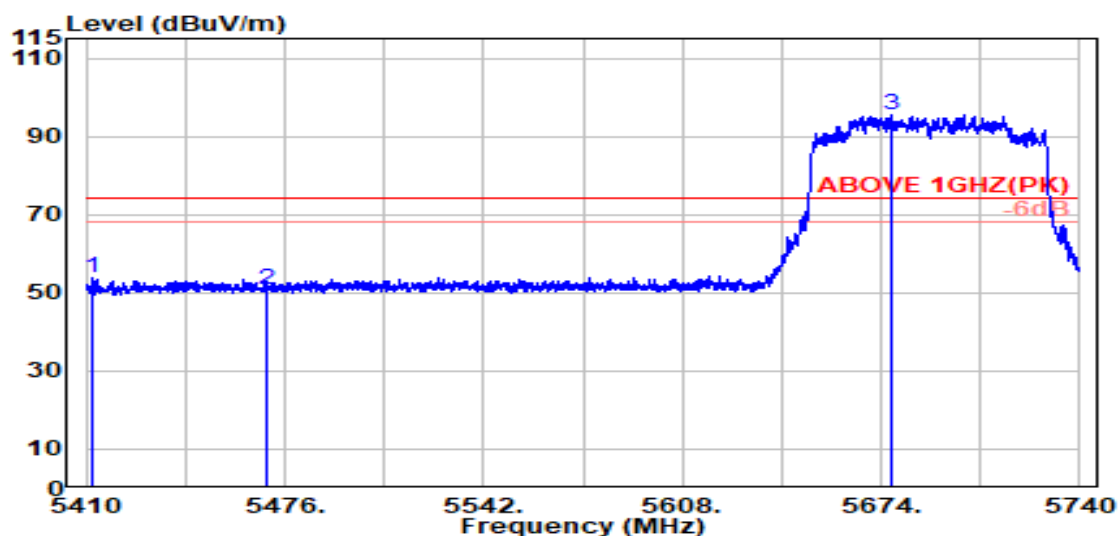

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.200	33.92	8.63	39.16	50.33	53.73	74.00	20.27	Peak
5470.000	34.04	8.69	39.15	47.25	50.83	74.00	23.17	Peak
@ 5677.300	33.69	8.88	39.19	91.90	95.29	---	---	Peak

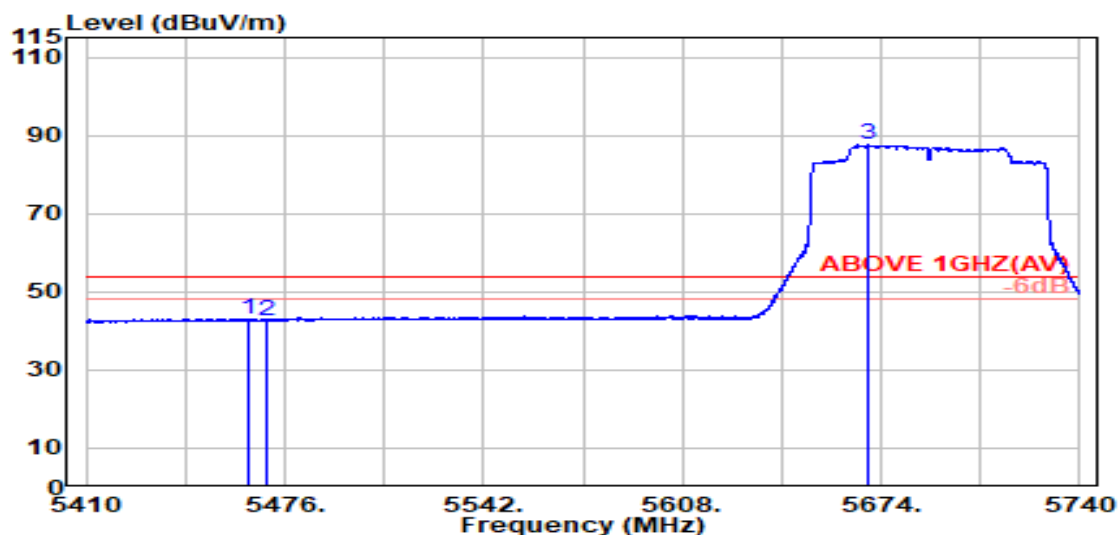


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.03	8.68	39.15	39.40	42.95	54.00	11.05	Average
5470.000	34.04	8.69	39.15	39.04	42.61	54.00	11.39	Average
@ 5669.800	33.72	8.88	39.18	84.05	87.46	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

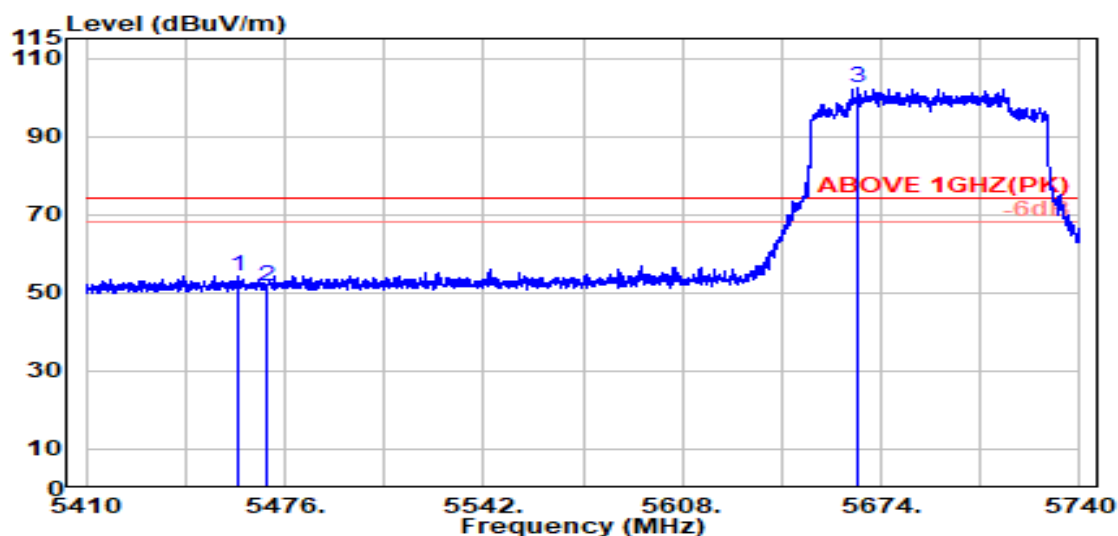

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	34.02	8.68	39.15	50.85	54.40	74.00	19.60	Peak
5470.000	34.04	8.69	39.15	48.24	51.81	74.00	22.19	Peak
@ 5666.500	33.73	8.87	39.18	98.97	102.39	---	---	Peak

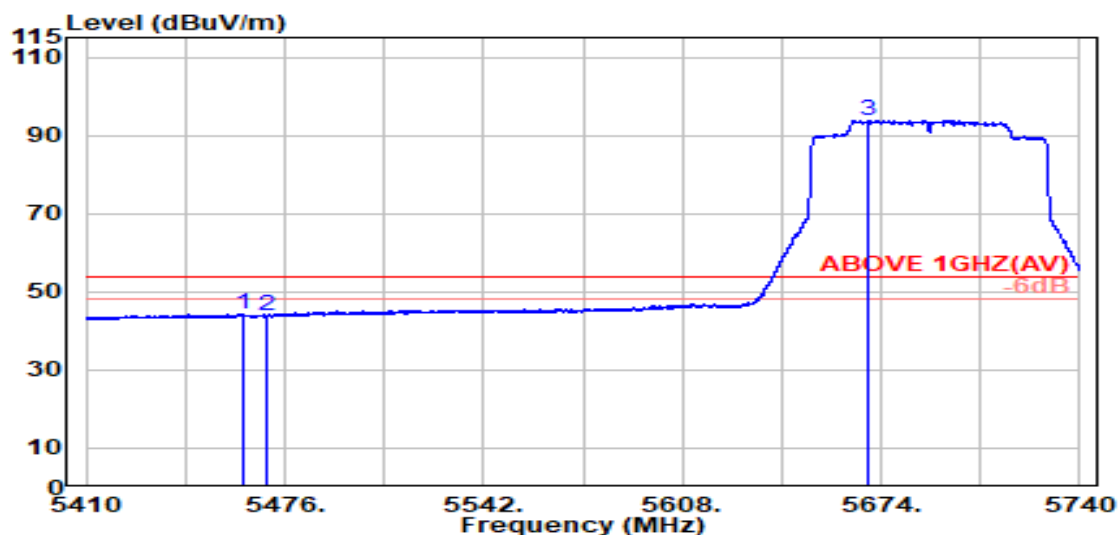


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.300	34.02	8.68	39.15	40.73	44.29	54.00	9.71	Average
5470.000	34.04	8.69	39.15	40.12	43.69	54.00	10.31	Average
@ 5670.000	33.72	8.88	39.18	90.33	93.74	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

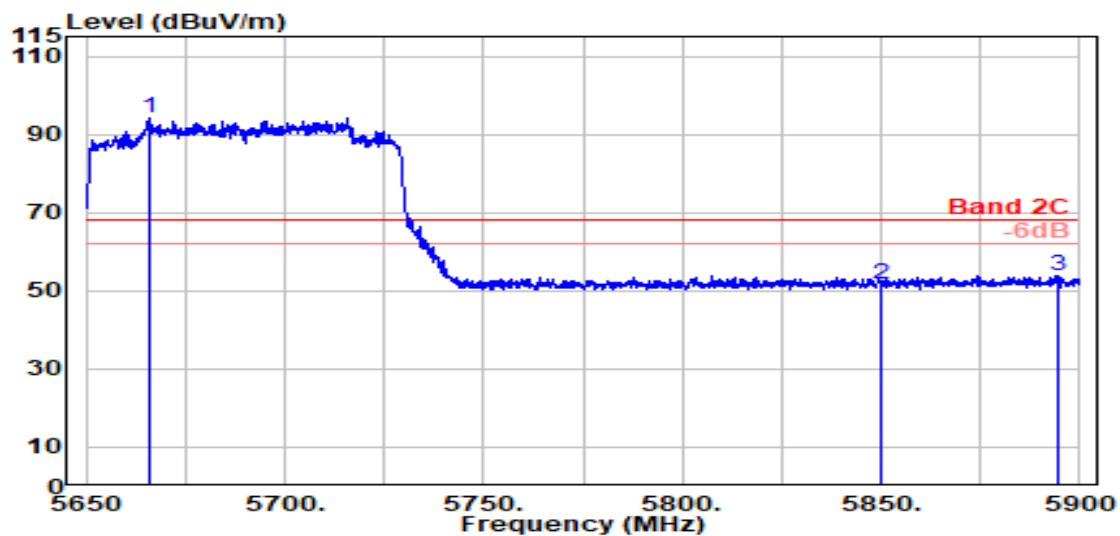

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.700	33.74	8.87	39.18	90.66	94.08	---	---	Peak
5850.000	33.90	9.04	39.22	47.96	51.68	68.20	16.52	Peak
5894.300	34.08	9.08	39.23	49.92	53.85	68.20	14.35	Peak

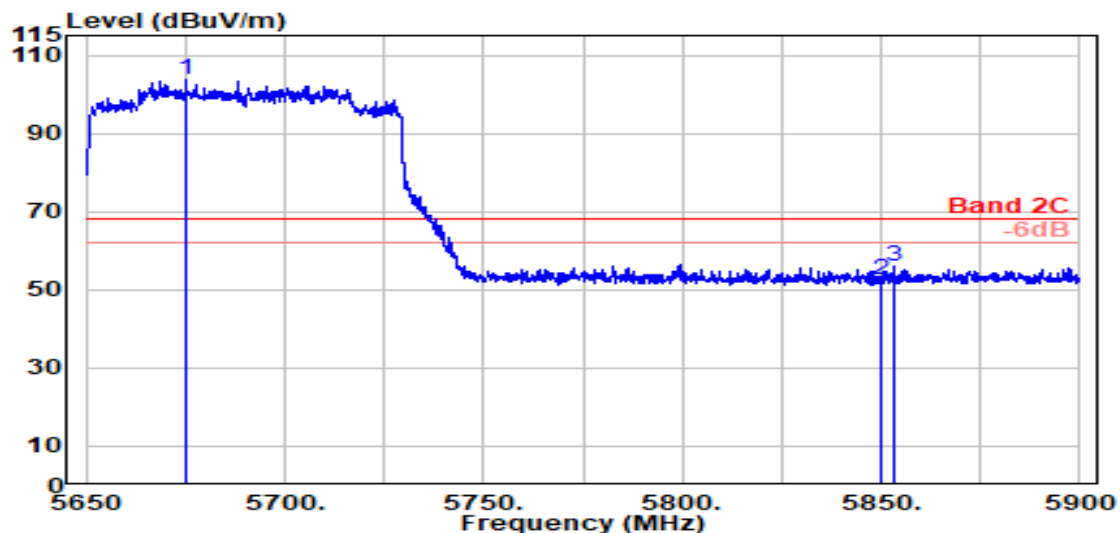


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.200	33.70	8.88	39.19	100.11	103.50	---	---	Peak
5850.000	33.90	9.04	39.22	48.88	52.60	68.20	15.60	Peak
5853.300	33.91	9.04	39.22	52.42	56.15	68.20	12.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

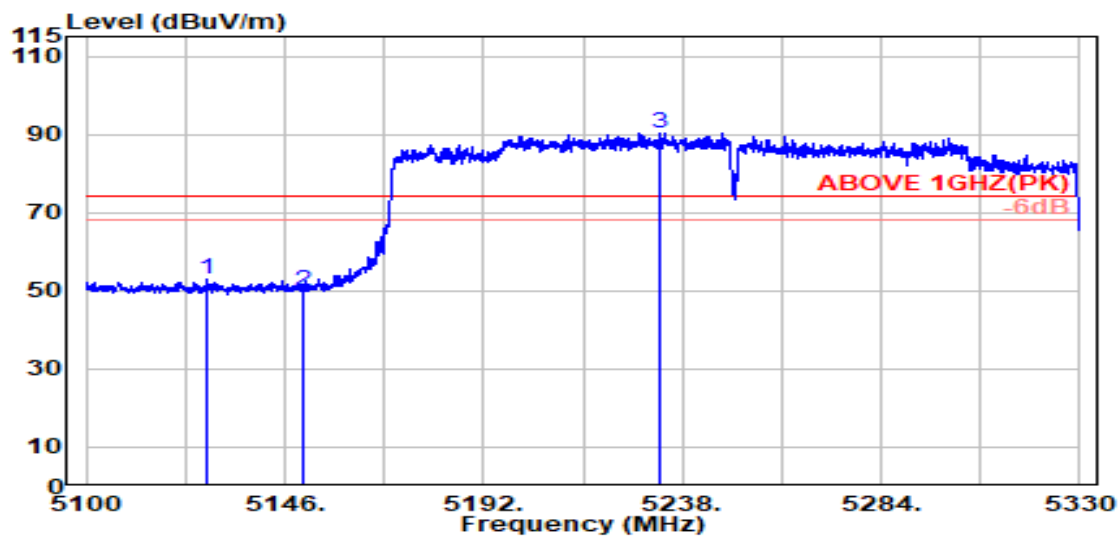

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.900	33.46	8.35	39.19	50.27	52.88	74.00	21.12	Peak
5150.000	33.50	8.37	39.19	47.31	49.99	74.00	24.01	Peak
@ 5232.800	33.73	8.46	39.18	87.31	90.32	---	---	Peak

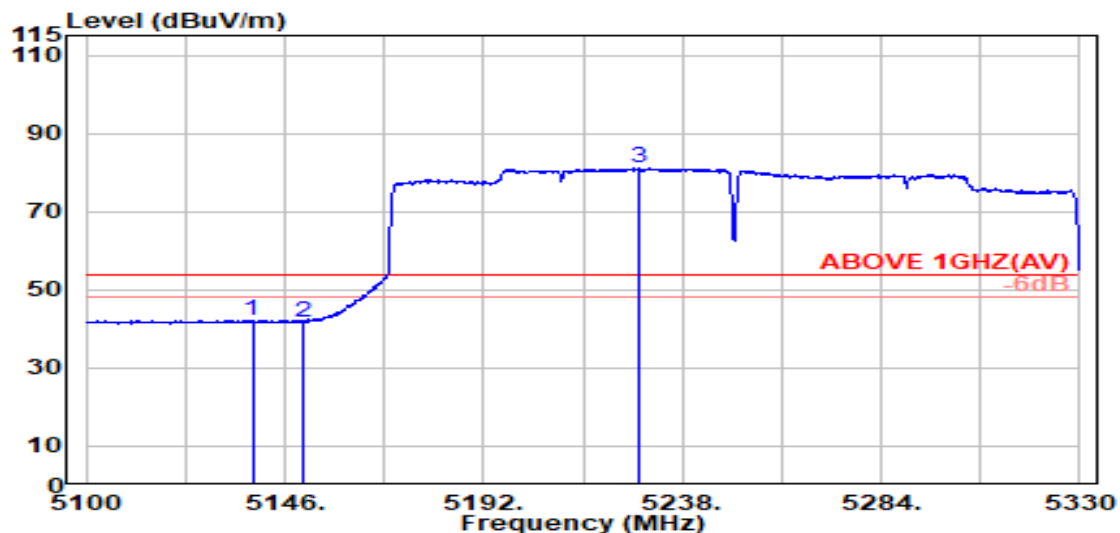


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.500	33.48	8.36	39.19	39.55	42.19	54.00	11.81	Average
5150.000	33.50	8.37	39.19	39.12	41.80	54.00	12.20	Average
@ 5227.800	33.74	8.45	39.18	77.98	81.00	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

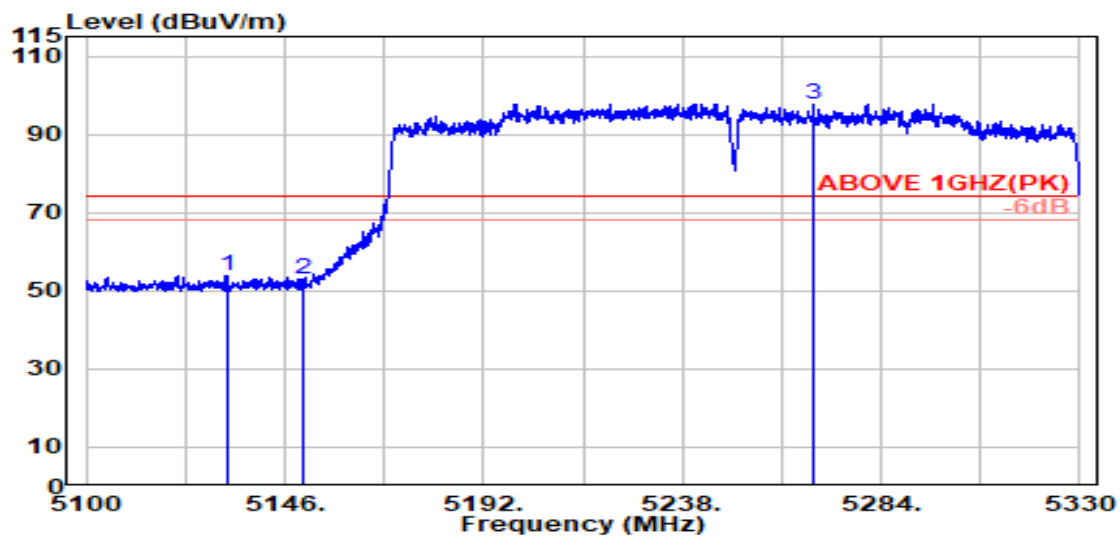

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.500	33.47	8.36	39.19	51.36	53.99	74.00	20.01	Peak
5150.000	33.50	8.37	39.19	50.14	52.82	74.00	21.18	Peak
@ 5268.200	33.74	8.49	39.18	94.75	97.81	---	---	Peak

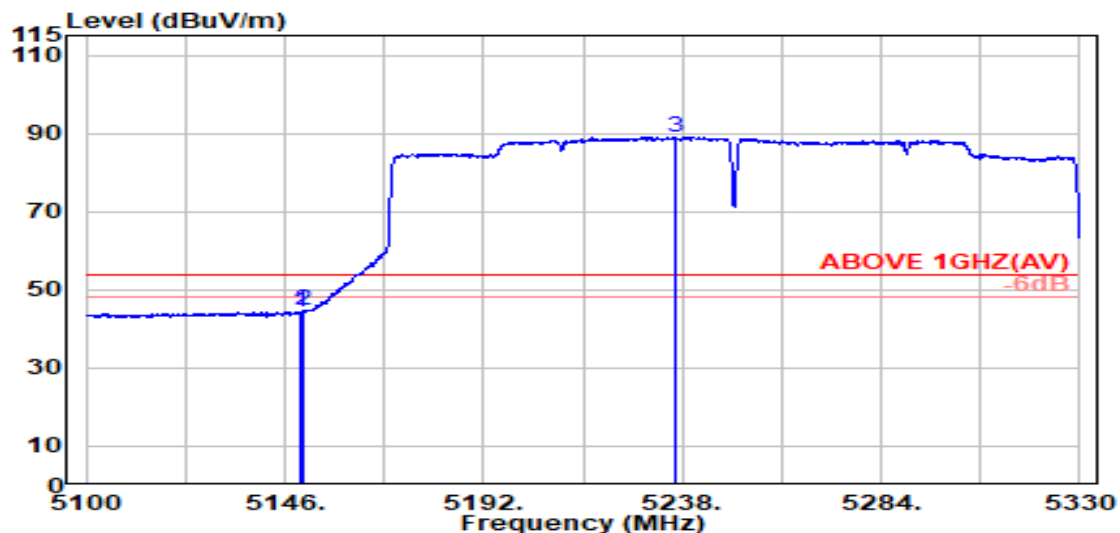


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	41.68	44.36	54.00	9.64	Average
5150.000	33.50	8.37	39.19	41.84	44.52	54.00	9.48	Average
@ 5236.300	33.73	8.46	39.18	86.02	89.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

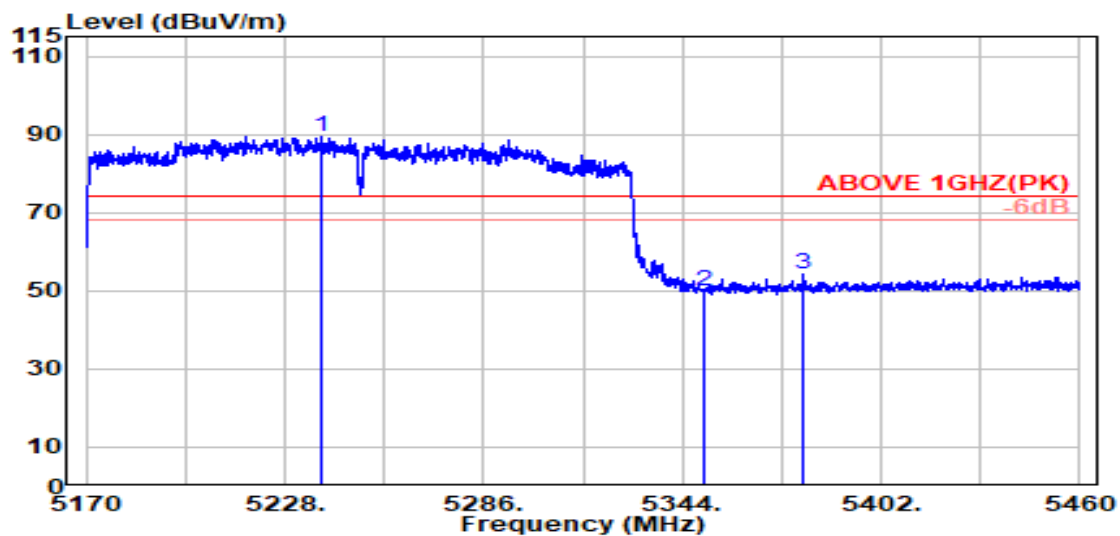

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5238.700	33.72	8.46	39.18	86.40	89.40	---	---	Peak
5350.000	33.70	8.57	39.17	46.95	50.06	74.00	23.94	Peak
5379.400	33.82	8.60	39.16	50.90	54.15	74.00	19.85	Peak

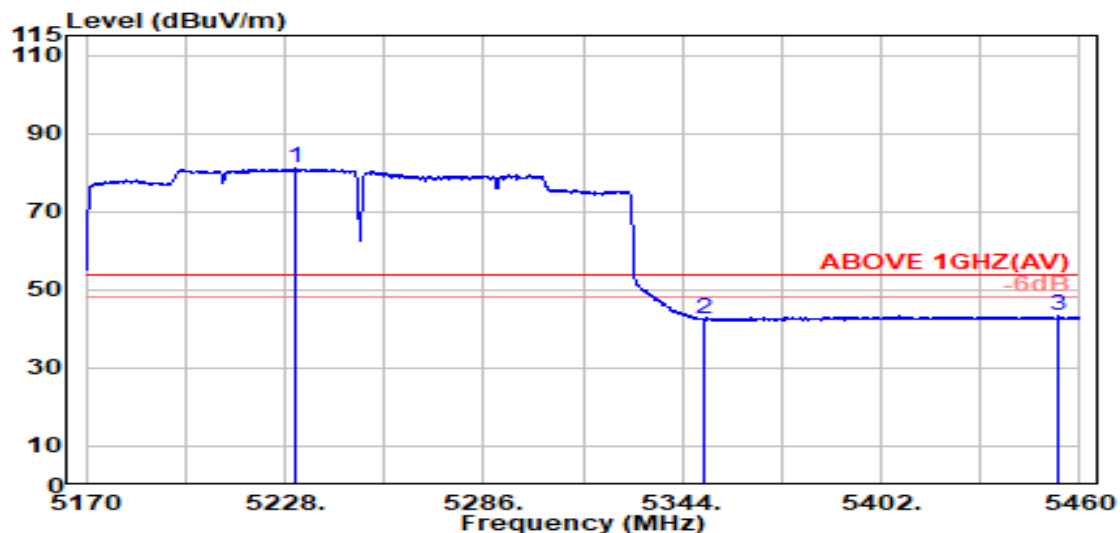


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5230.900	33.74	8.46	39.18	78.02	81.03	---	---	Average
5350.000	33.70	8.57	39.17	39.47	42.57	54.00	11.43	Average
5453.600	34.01	8.67	39.16	39.70	43.23	54.00	10.77	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

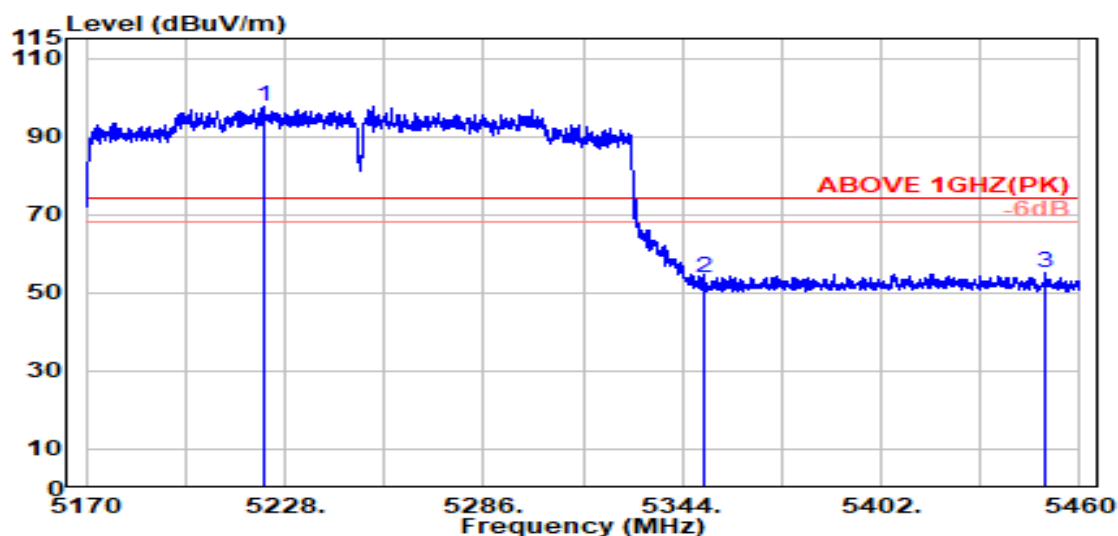

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5221.800	33.76	8.45	39.18	94.66	97.68	---	---	Peak
5350.000	33.70	8.57	39.17	50.83	53.94	74.00	20.06	Peak
5450.000	34.00	8.67	39.16	51.45	54.96	74.00	19.04	Peak

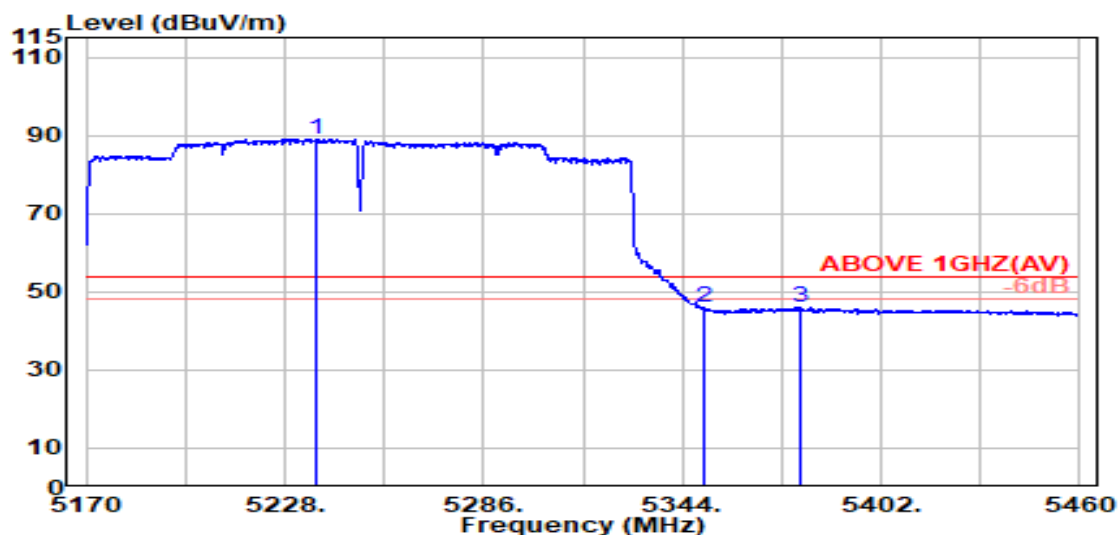


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5237.200	33.73	8.46	39.18	86.14	89.15	---	---	Average
5350.000	33.70	8.57	39.17	42.84	45.94	54.00	8.06	Average
5378.700	33.82	8.60	39.16	42.67	45.92	54.00	8.08	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

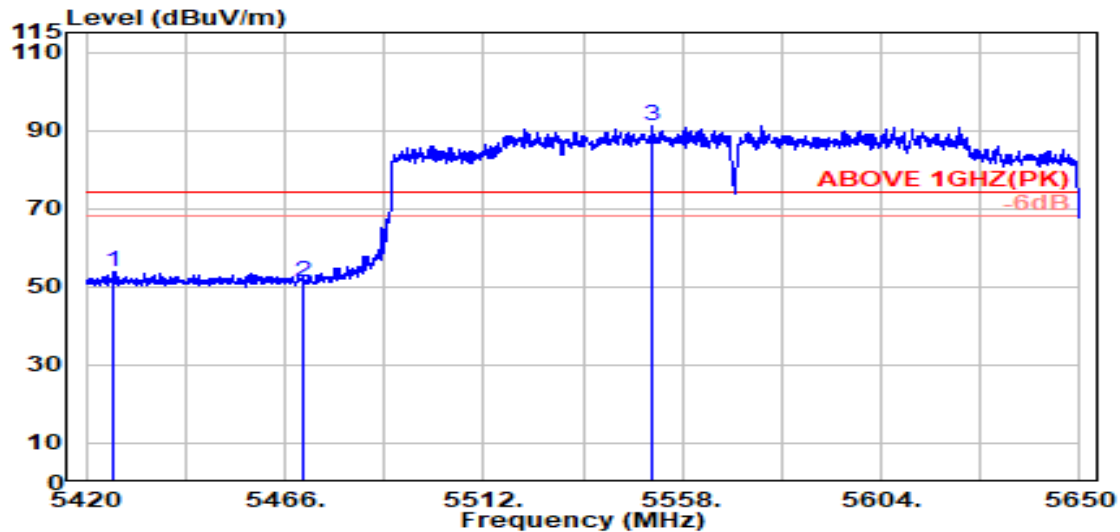

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.500	33.95	8.65	39.16	50.32	53.76	74.00	20.24	Peak
5470.000	34.04	8.69	39.15	47.57	51.14	74.00	22.86	Peak
@ 5550.900	34.00	8.76	39.16	87.49	91.09	---	---	Peak

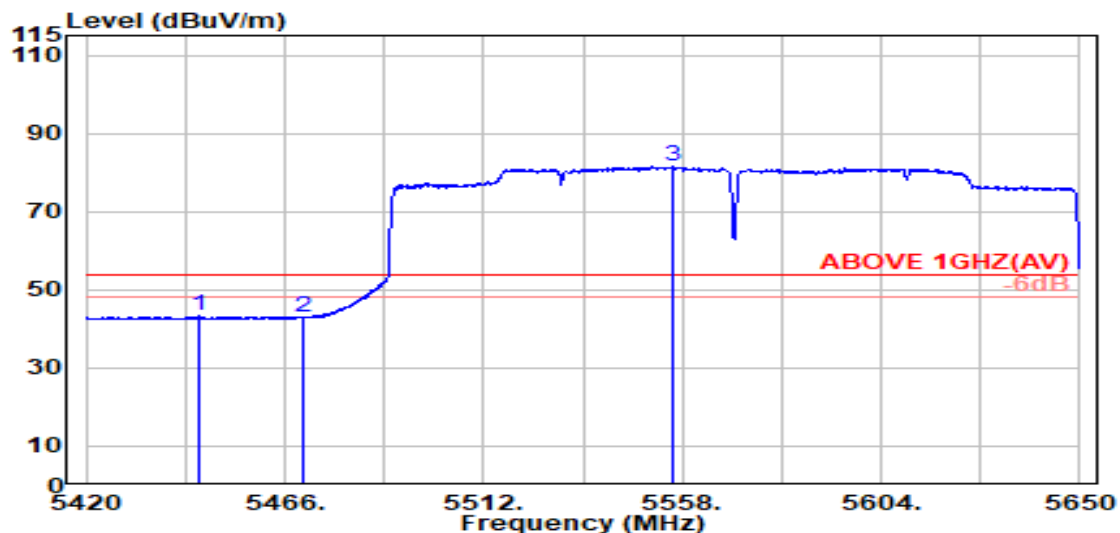


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.100	33.99	8.67	39.16	39.72	43.22	54.00	10.78	Average
5470.000	34.04	8.69	39.15	39.33	42.90	54.00	11.10	Average
@ 5555.900	33.98	8.77	39.16	77.88	81.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

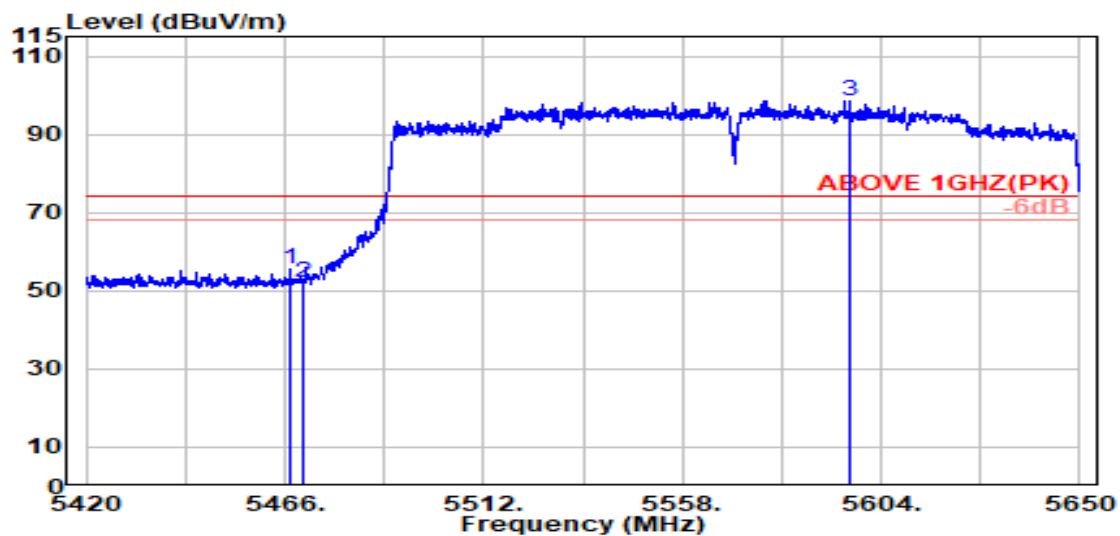

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.03	8.69	39.15	51.90	55.47	74.00	18.53	Peak
5470.000	34.04	8.69	39.15	48.63	52.20	74.00	21.80	Peak
@ 5596.800	33.81	8.81	39.17	95.15	98.60	---	---	Peak

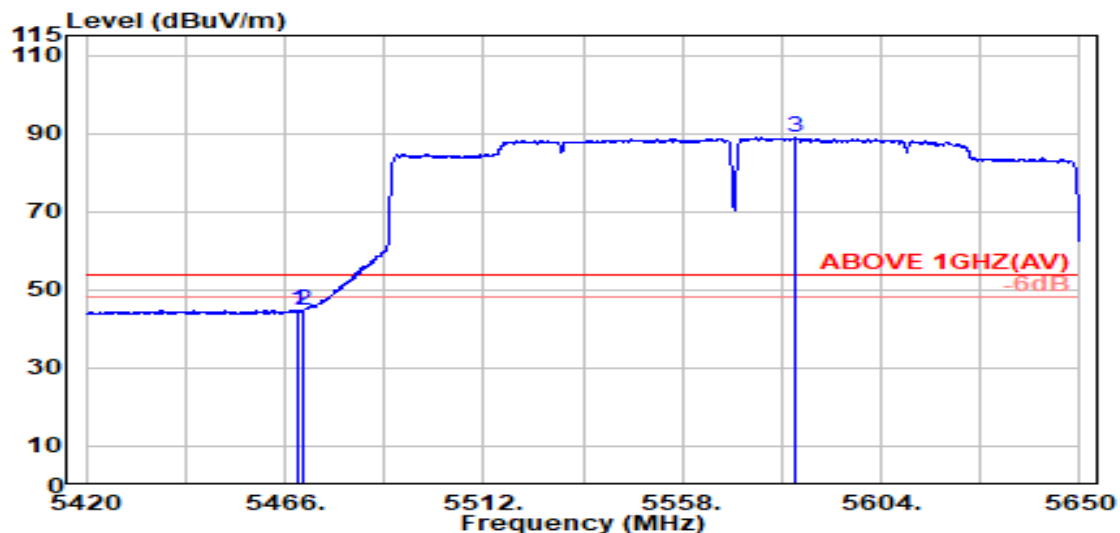


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.04	8.69	39.15	41.24	44.81	54.00	9.19	Average
5470.000	34.04	8.69	39.15	41.33	44.90	54.00	9.10	Average
@ 5584.000	33.86	8.80	39.17	85.54	89.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

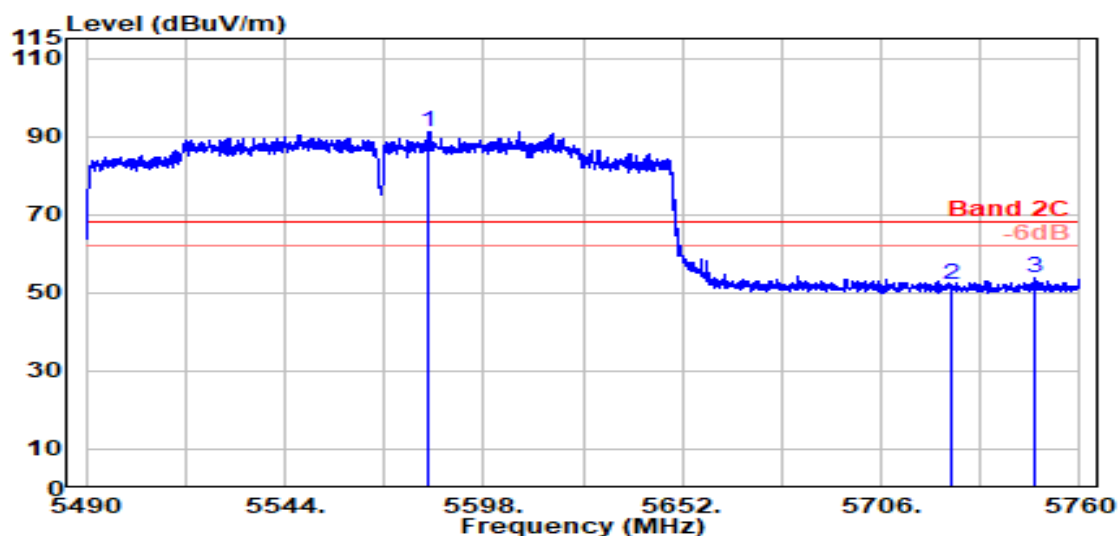

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5583.200	33.87	8.79	39.17	87.67	91.16	---	---	Peak
5725.000	33.60	8.93	39.20	48.54	51.87	68.20	16.33	Peak
5748.000	33.60	8.95	39.20	50.52	53.87	68.20	14.33	Peak

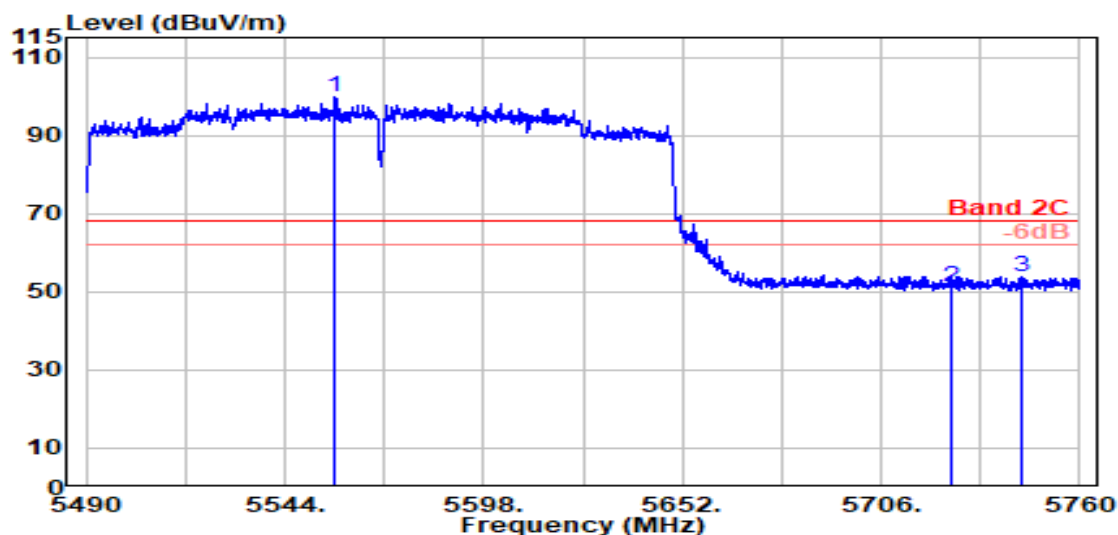


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5557.800	33.97	8.77	39.16	96.11	99.69	---	---	Peak
5725.000	33.60	8.93	39.20	47.98	51.31	68.20	16.89	Peak
5743.900	33.60	8.94	39.20	50.60	53.94	68.20	14.26	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

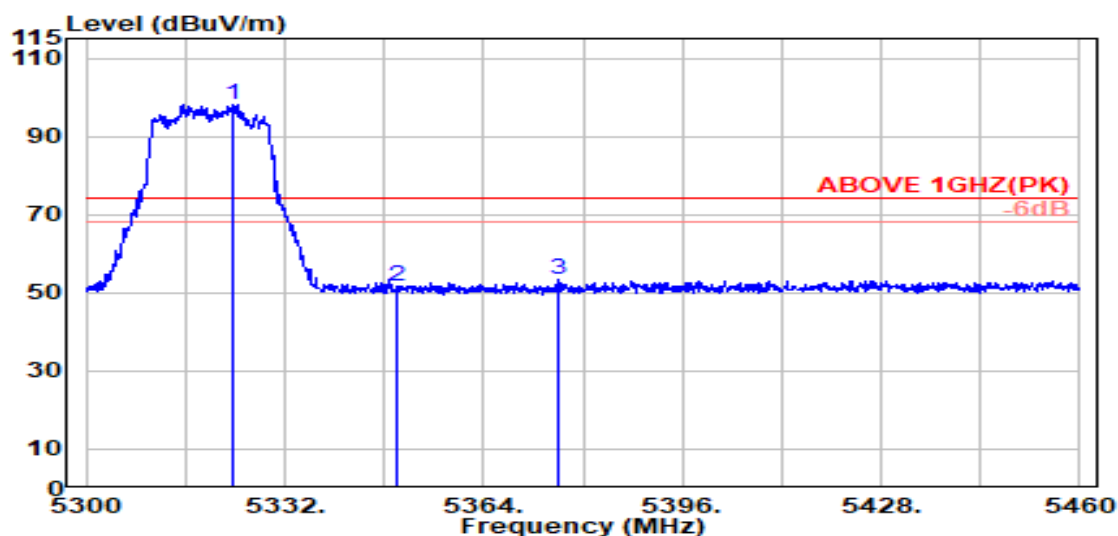

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	33.75	8.55	39.17	95.10	98.23	---	---	Peak
5350.000	33.70	8.57	39.17	48.40	51.51	74.00	22.49	Peak
5376.200	33.81	8.60	39.16	50.11	53.35	74.00	20.65	Peak

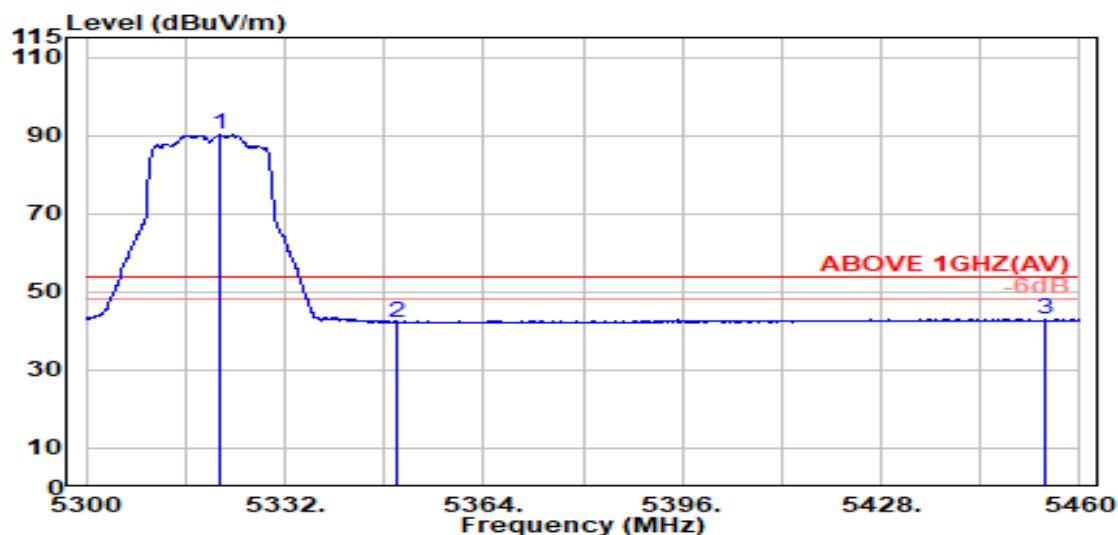


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	33.76	8.54	39.17	87.02	90.15	---	---	Average
5350.000	33.70	8.57	39.17	39.03	42.13	54.00	11.87	Average
5454.300	34.01	8.67	39.16	39.50	43.03	54.00	10.97	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

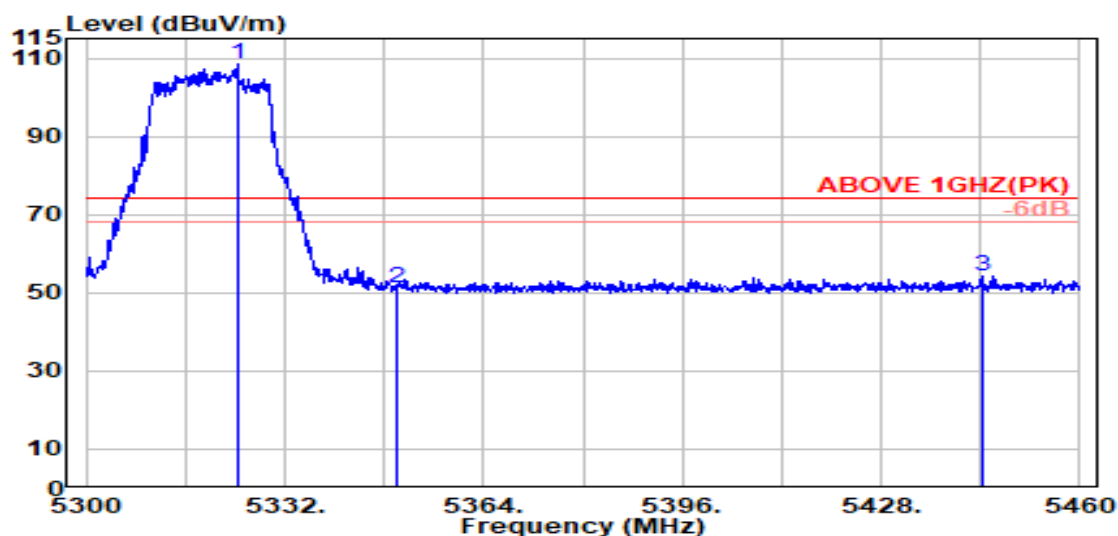

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.300	33.75	8.55	39.17	105.38	108.51	---	---	Peak
5350.000	33.70	8.57	39.17	48.31	51.42	74.00	22.58	Peak
5444.300	33.99	8.66	39.16	50.84	54.34	74.00	19.66	Peak

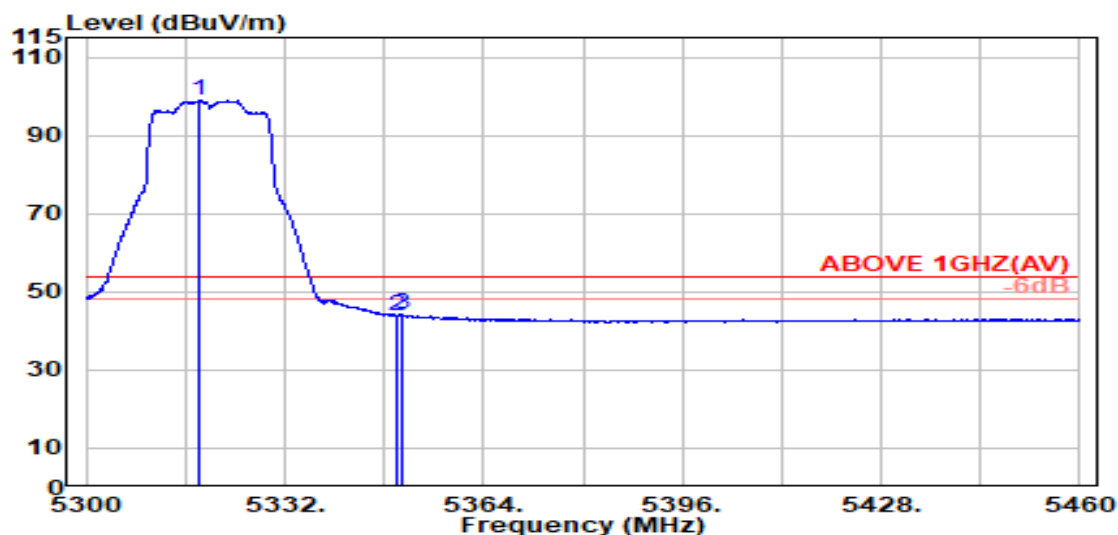


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	33.76	8.54	39.17	95.73	98.86	---	---	Average
5350.000	33.70	8.57	39.17	40.78	43.88	54.00	10.12	Average
5350.700	33.70	8.57	39.17	41.10	44.21	54.00	9.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

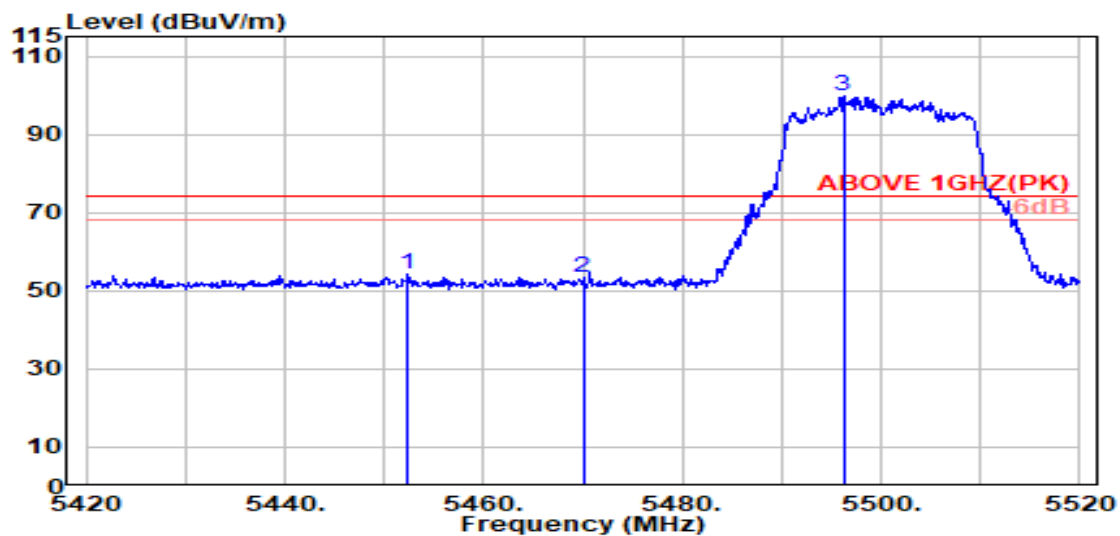

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.400	34.00	8.67	39.16	50.54	54.06	74.00	19.94	Peak
5470.000	34.04	8.69	39.15	49.77	53.35	74.00	20.65	Peak
@ 5496.200	34.09	8.71	39.15	96.04	99.70	---	---	Peak

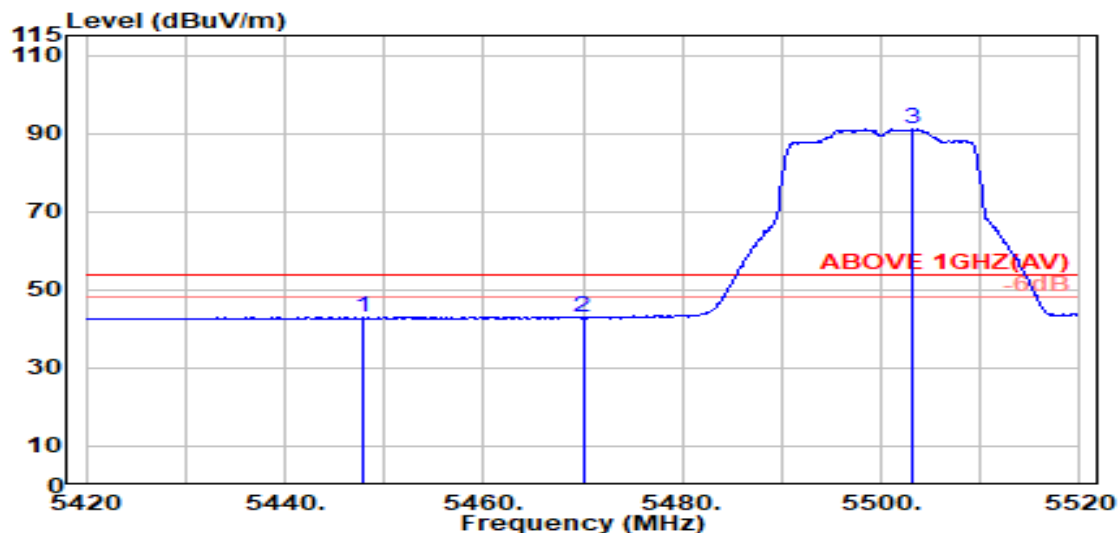


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.800	34.00	8.67	39.16	39.57	43.08	54.00	10.92	Average
5470.000	34.04	8.69	39.15	39.19	42.76	54.00	11.24	Average
@ 5503.200	34.09	8.72	39.15	87.50	91.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

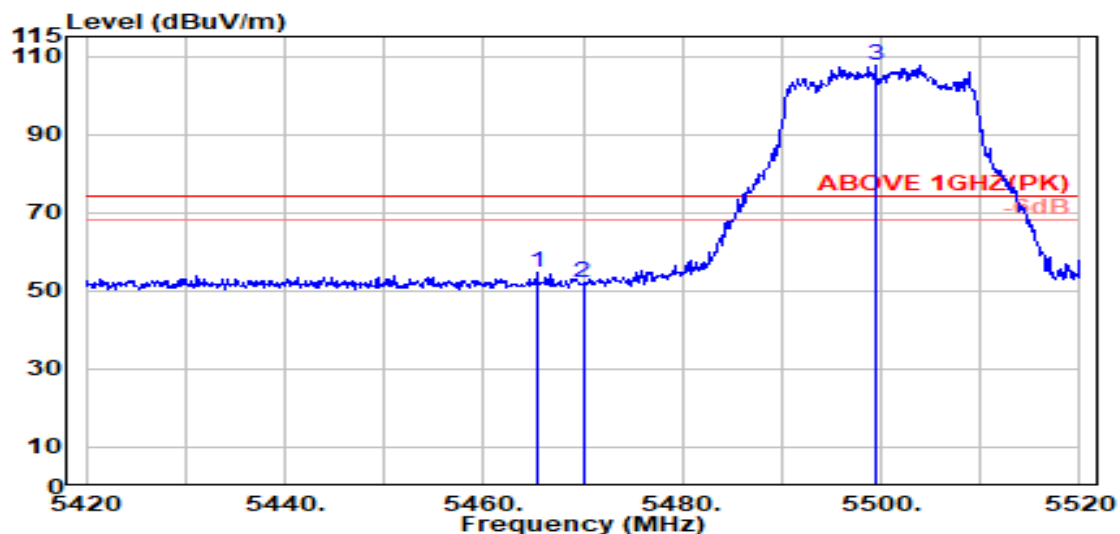

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.400	34.03	8.68	39.15	50.91	54.47	74.00	19.53	Peak
5470.000	34.04	8.69	39.15	48.56	52.13	74.00	21.87	Peak
@ 5499.500	34.10	8.72	39.15	103.75	107.42	---	---	Peak

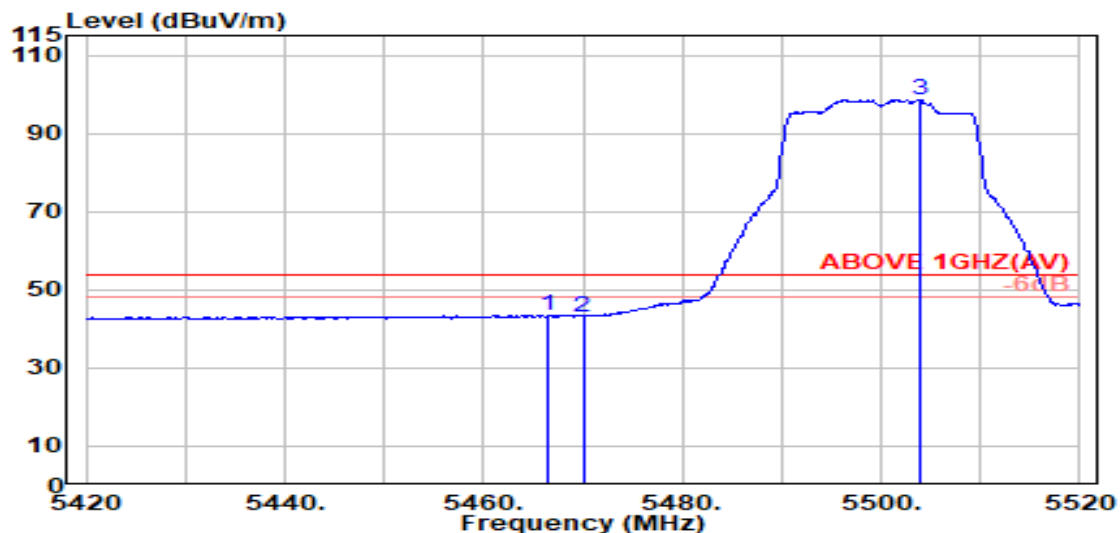


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.03	8.68	39.15	40.01	43.58	54.00	10.42	Average
5470.000	34.04	8.69	39.15	39.58	43.15	54.00	10.85	Average
@ 5503.900	34.09	8.72	39.15	95.03	98.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

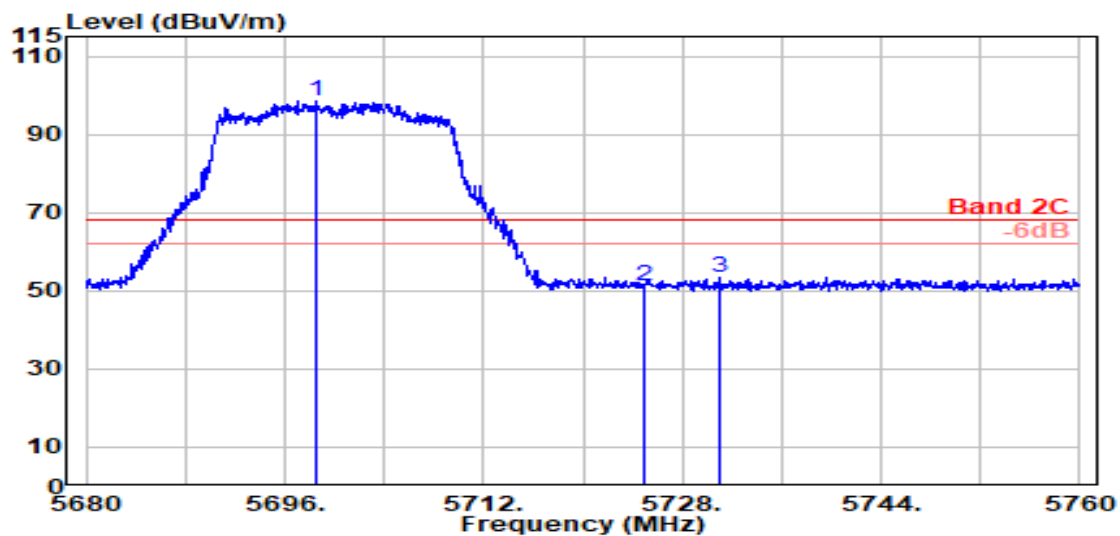

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.550	33.61	8.90	39.19	95.22	98.54	---	---	Peak
	5725.000	33.60	8.93	39.20	48.01	51.34	68.20	16.86	Peak
	5731.050	33.60	8.93	39.20	50.13	53.47	68.20	14.73	Peak

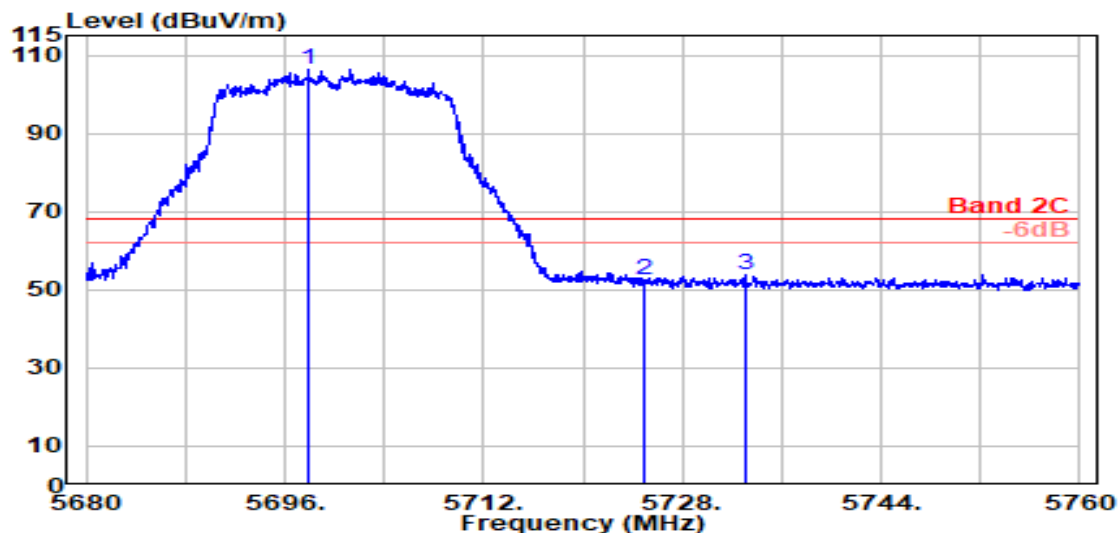


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.900	33.61	8.90	39.19	103.14	106.46	---	---	Peak
	5725.000	33.60	8.93	39.20	49.18	52.51	68.20	15.69	Peak
	5733.050	33.60	8.93	39.20	50.39	53.73	68.20	14.47	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

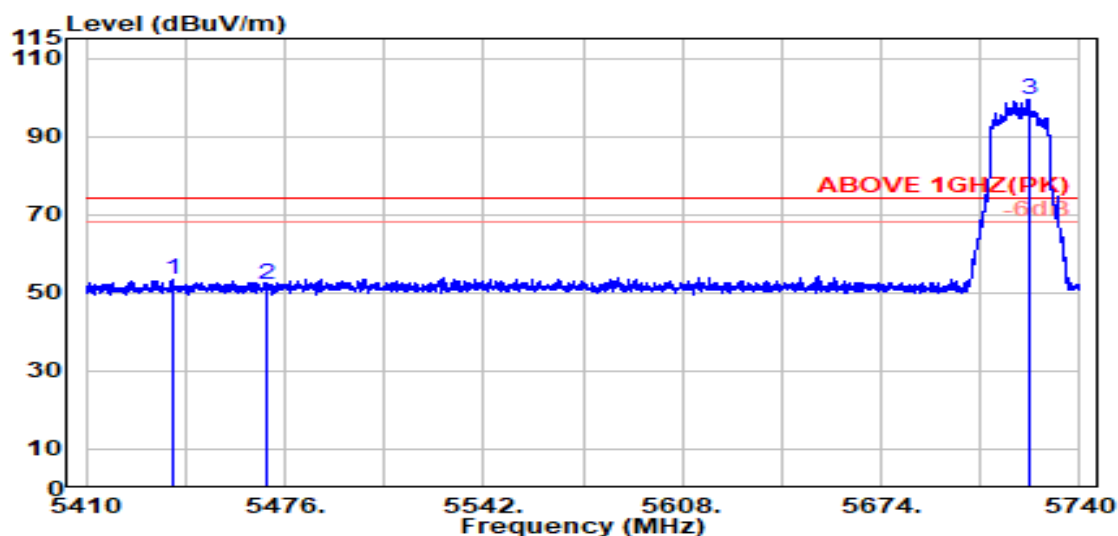

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.500	33.98	8.66	39.16	49.73	53.20	74.00	20.80	Peak
5470.000	34.04	8.69	39.15	48.50	52.07	74.00	21.93	Peak
@ 5722.900	33.60	8.92	39.20	96.00	99.32	---	---	Peak

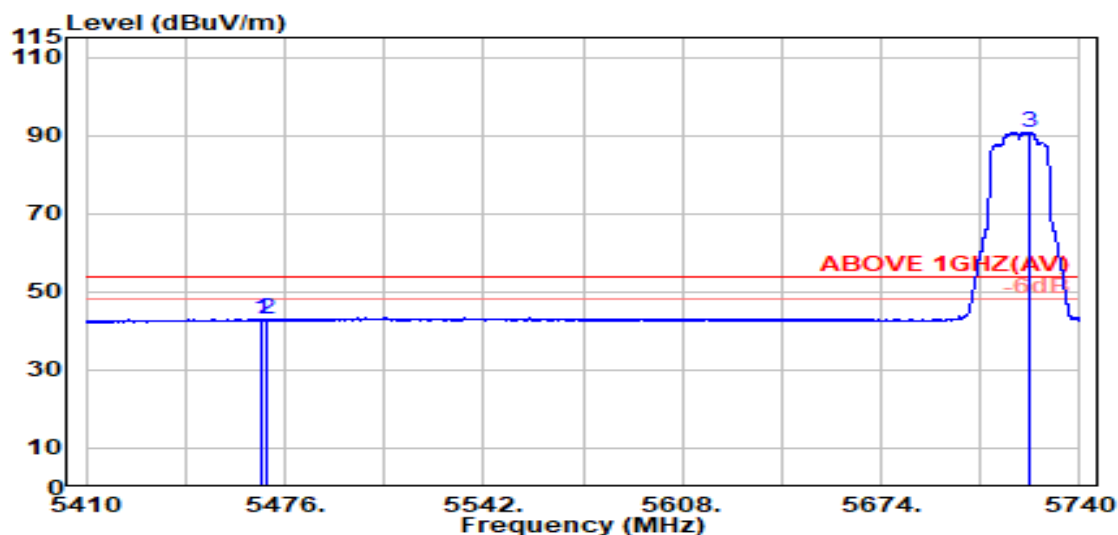


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	39.37	42.94	54.00	11.06	Average
5470.000	34.04	8.69	39.15	39.20	42.77	54.00	11.23	Average
@ 5723.200	33.60	8.92	39.20	87.50	90.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

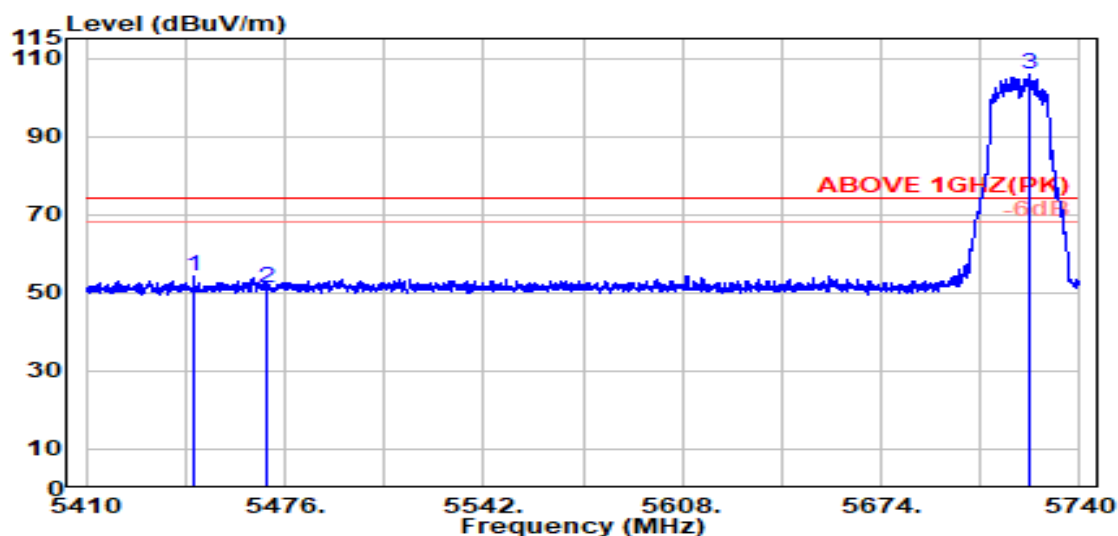

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.800	33.99	8.67	39.16	50.56	54.06	74.00	19.94	Peak
5470.000	34.04	8.69	39.15	47.75	51.32	74.00	22.68	Peak
@ 5723.500	33.60	8.92	39.20	102.68	106.01	---	---	Peak

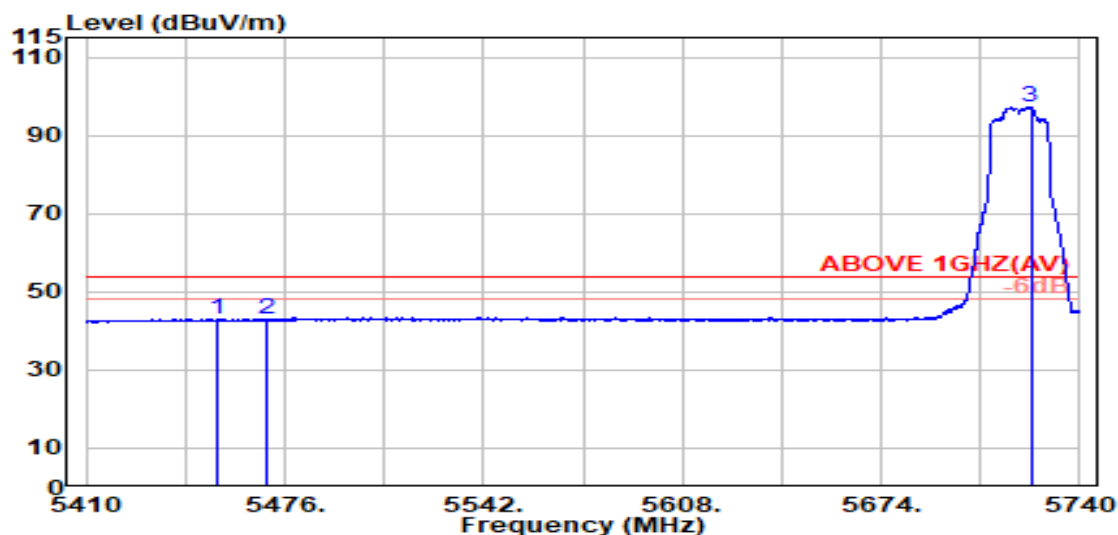

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.900	34.01	8.67	39.16	39.52	43.04	54.00	10.96	Average
5470.000	34.04	8.69	39.15	39.26	42.83	54.00	11.17	Average
@ 5723.700	33.60	8.92	39.20	93.87	97.19	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

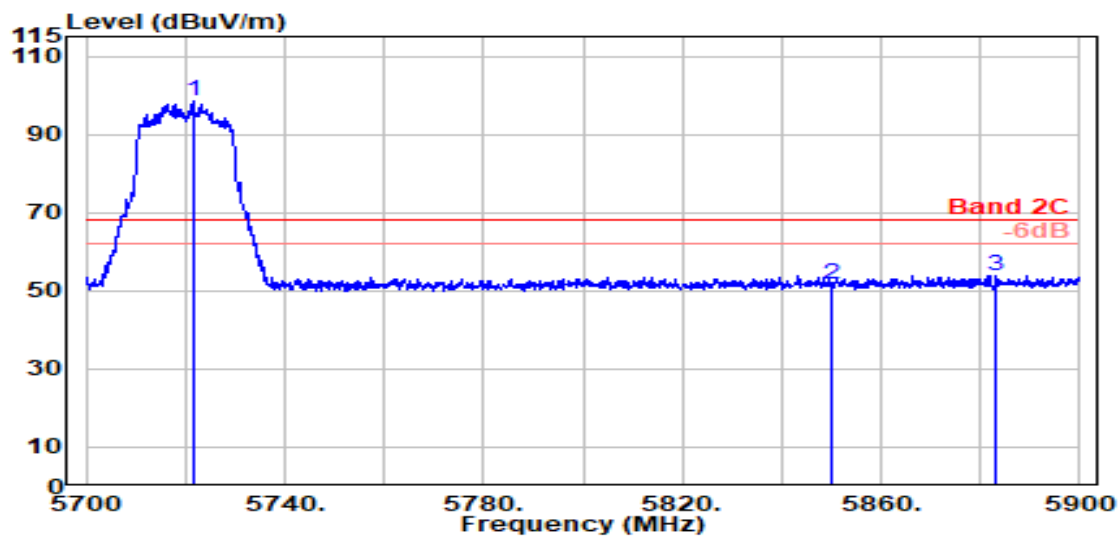

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.500	33.60	8.92	39.20	95.08	98.41	---	---	Peak
5850.000	33.90	9.04	39.22	47.97	51.68	68.20	16.52	Peak
5882.900	34.03	9.07	39.23	49.98	53.86	68.20	14.34	Peak

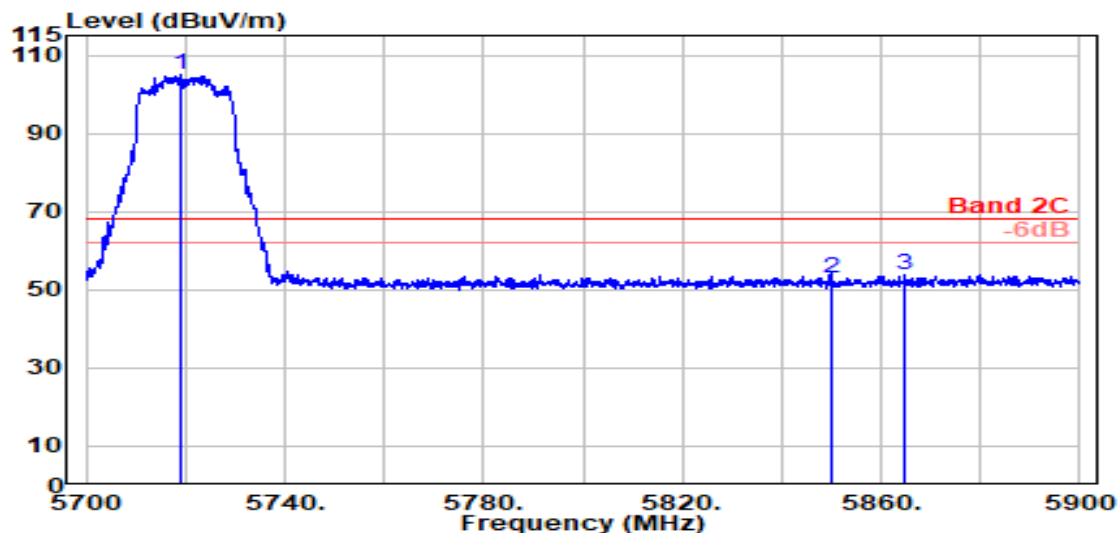

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.000	33.60	8.92	39.19	101.55	104.88	---	---	Peak
5850.000	33.90	9.04	39.22	49.11	52.83	68.20	15.37	Peak
5864.900	33.96	9.05	39.22	49.85	53.64	68.20	14.56	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2410151

Report Number: EM-F240605


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

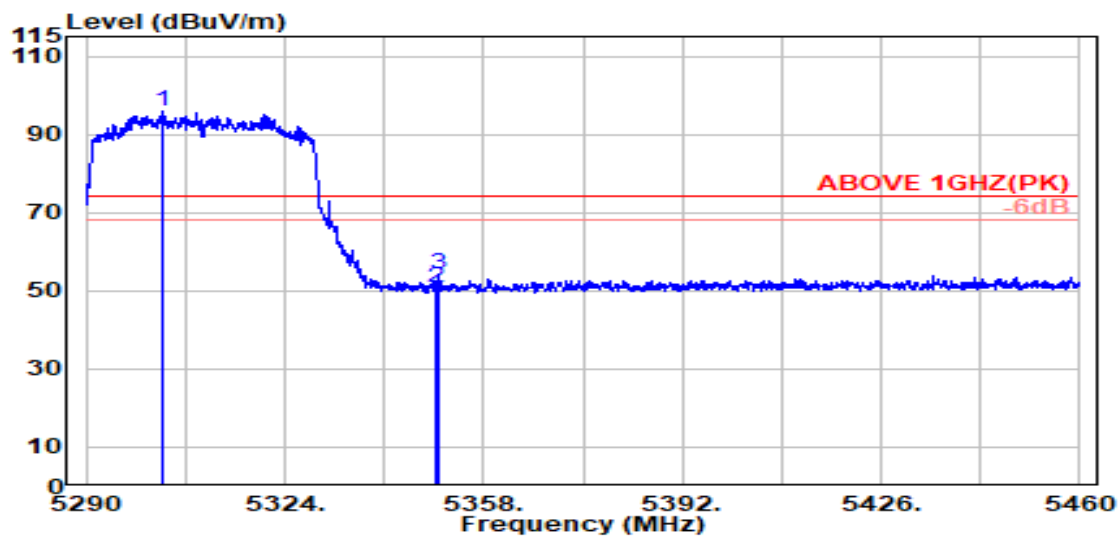

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.000	33.79	8.53	39.17	92.85	96.00	---	---	Peak
5350.000	33.70	8.57	39.17	47.87	50.97	74.00	23.03	Peak
5350.500	33.70	8.57	39.17	50.92	54.03	74.00	19.97	Peak

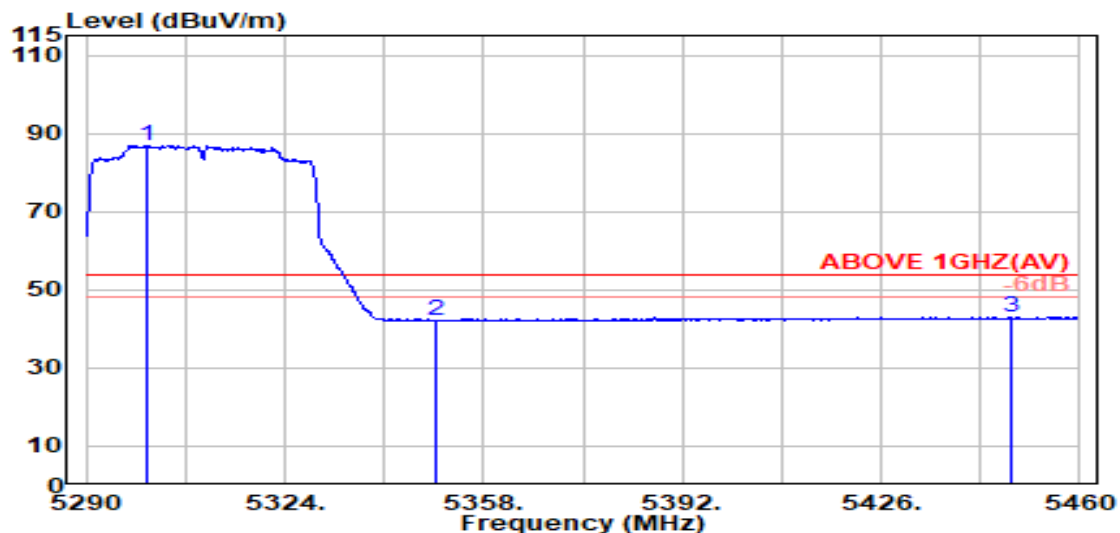


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	33.80	8.52	39.17	83.70	86.85	---	---	Average
5350.000	33.70	8.57	39.17	39.14	42.25	54.00	11.75	Average
5448.200	34.00	8.67	39.16	39.41	42.91	54.00	11.09	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

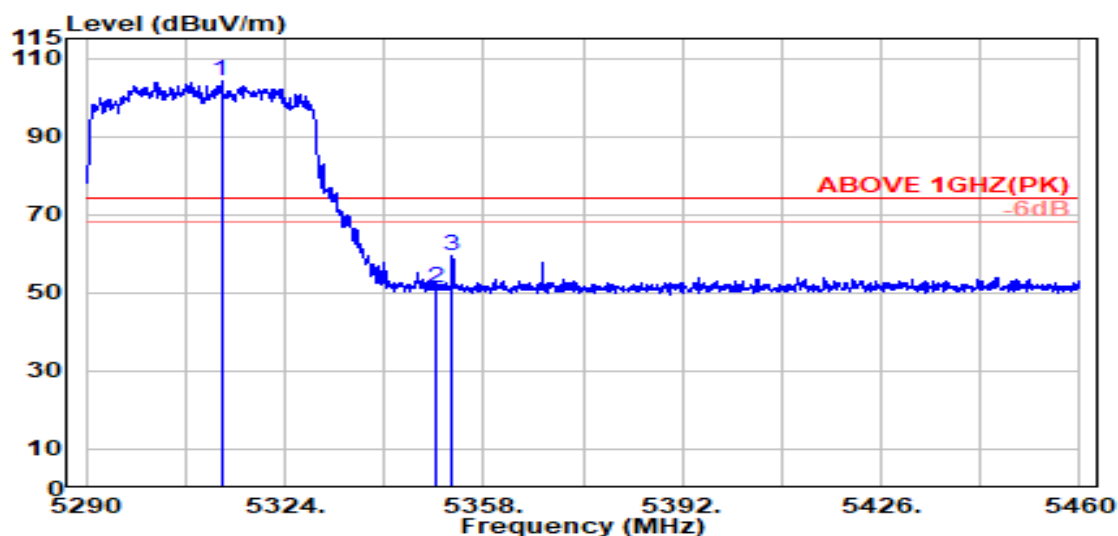

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.100	33.77	8.54	39.17	100.85	103.99	---	---	Peak
5350.000	33.70	8.57	39.17	48.18	51.29	74.00	22.71	Peak
5352.700	33.71	8.58	39.17	56.51	59.62	74.00	14.38	Peak

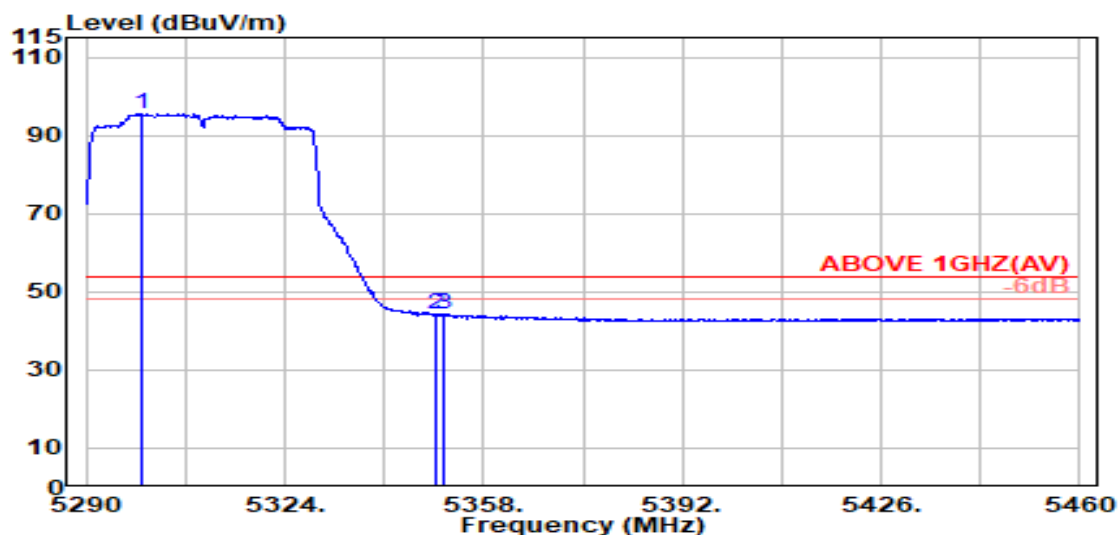


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.400	33.80	8.52	39.17	92.39	95.54	---	---	Average
5350.000	33.70	8.57	39.17	40.99	44.09	54.00	9.91	Average
5351.300	33.71	8.57	39.17	41.33	44.44	54.00	9.56	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

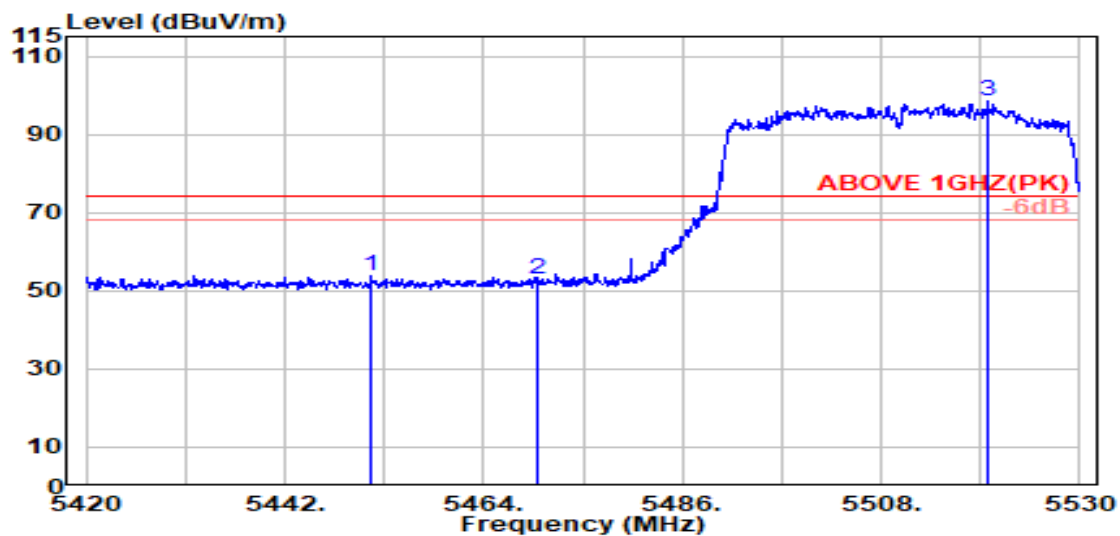

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.500	34.00	8.67	39.16	50.19	53.71	74.00	20.29	Peak
5470.000	34.04	8.69	39.15	49.46	53.04	74.00	20.96	Peak
@ 5519.800	34.06	8.74	39.15	94.69	98.33	---	---	Peak

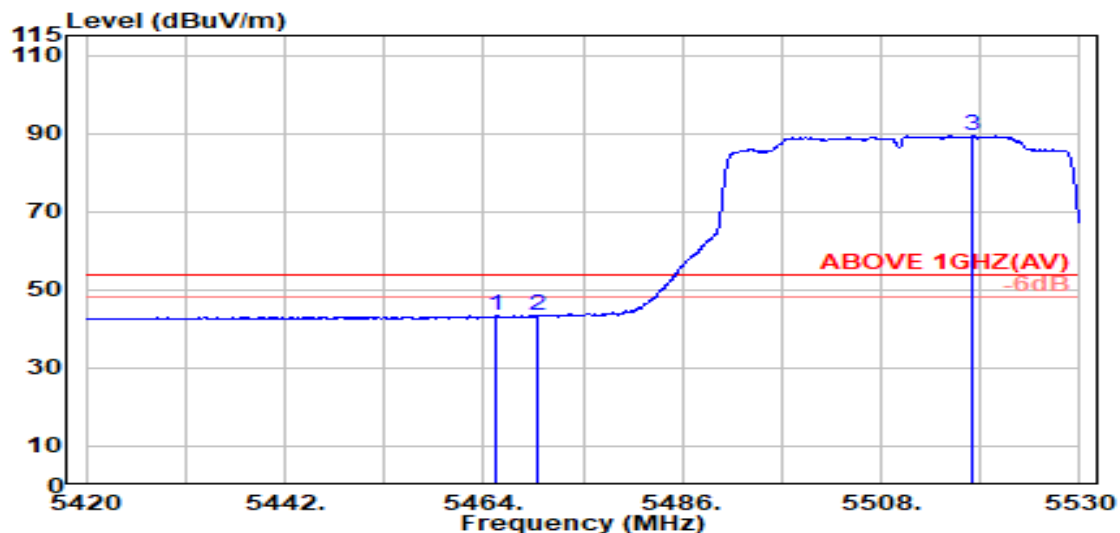


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.03	8.68	39.15	39.81	43.37	54.00	10.63	Average
5470.000	34.04	8.69	39.15	39.90	43.47	54.00	10.53	Average
@ 5518.200	34.06	8.73	39.15	85.80	89.45	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

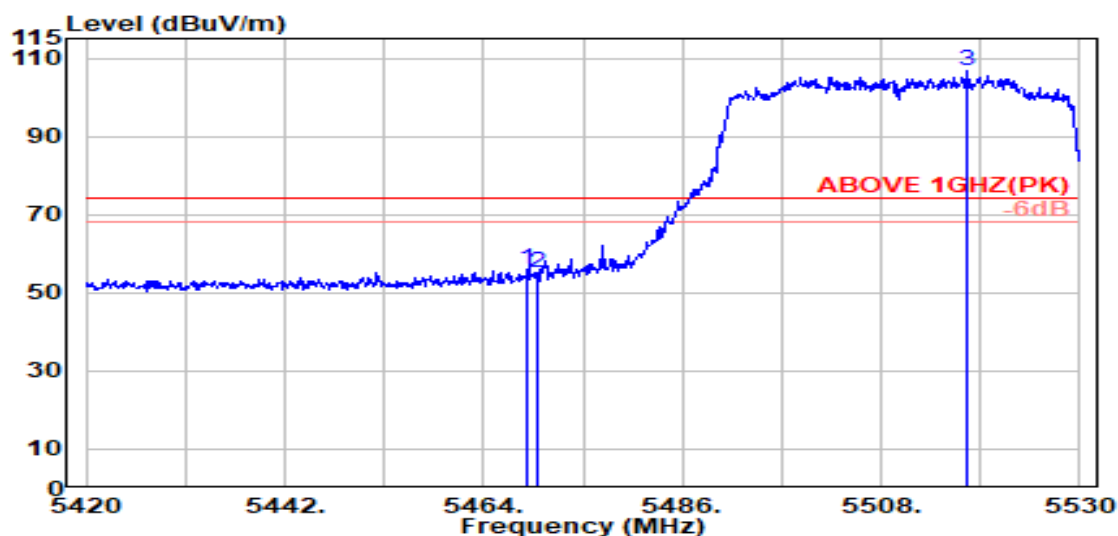

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	52.41	55.99	74.00	18.01	Peak
5470.000	34.04	8.69	39.15	51.73	55.30	74.00	18.70	Peak
@ 5517.400	34.07	8.73	39.15	102.91	106.55	---	---	Peak

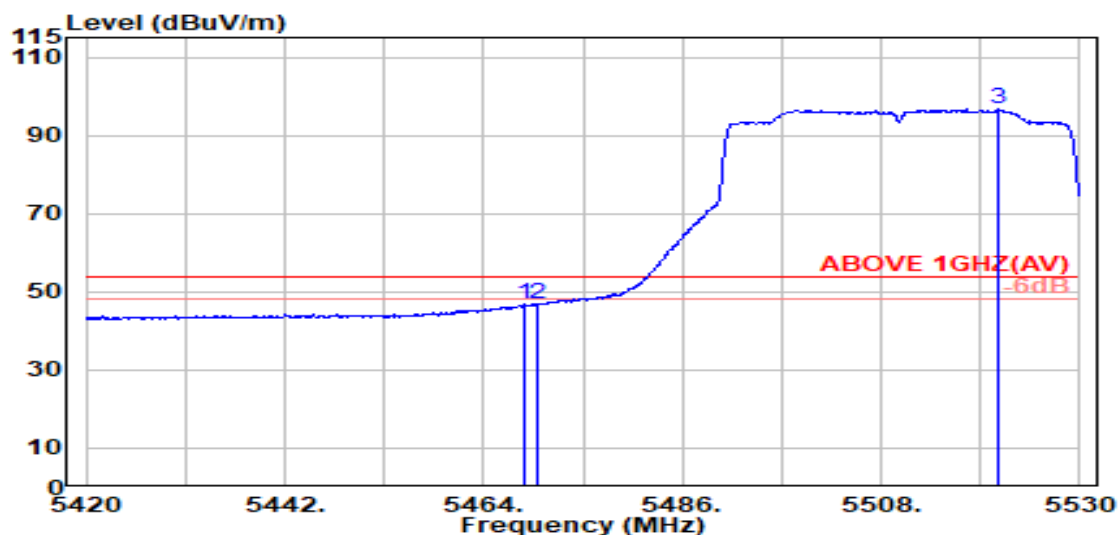


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.04	8.69	39.15	43.08	46.65	54.00	7.35	Average
5470.000	34.04	8.69	39.15	43.27	46.84	54.00	7.16	Average
@ 5521.000	34.06	8.74	39.15	92.96	96.60	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

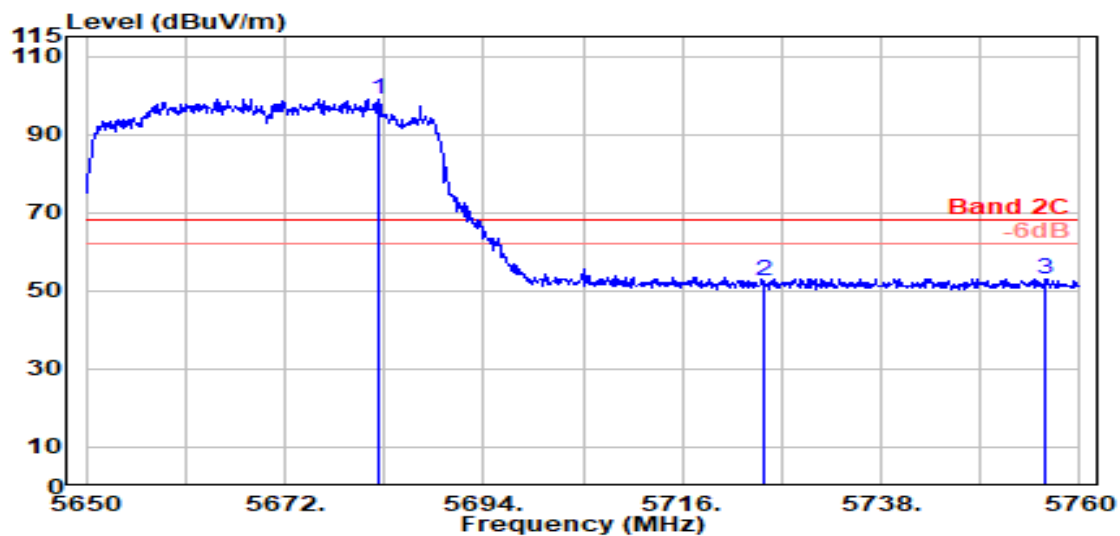

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.500	33.67	8.89	39.19	95.68	99.05	---	---	Peak
5725.000	33.60	8.93	39.20	49.17	52.50	68.20	15.70	Peak
5756.200	33.62	8.95	39.20	49.77	53.15	68.20	15.05	Peak

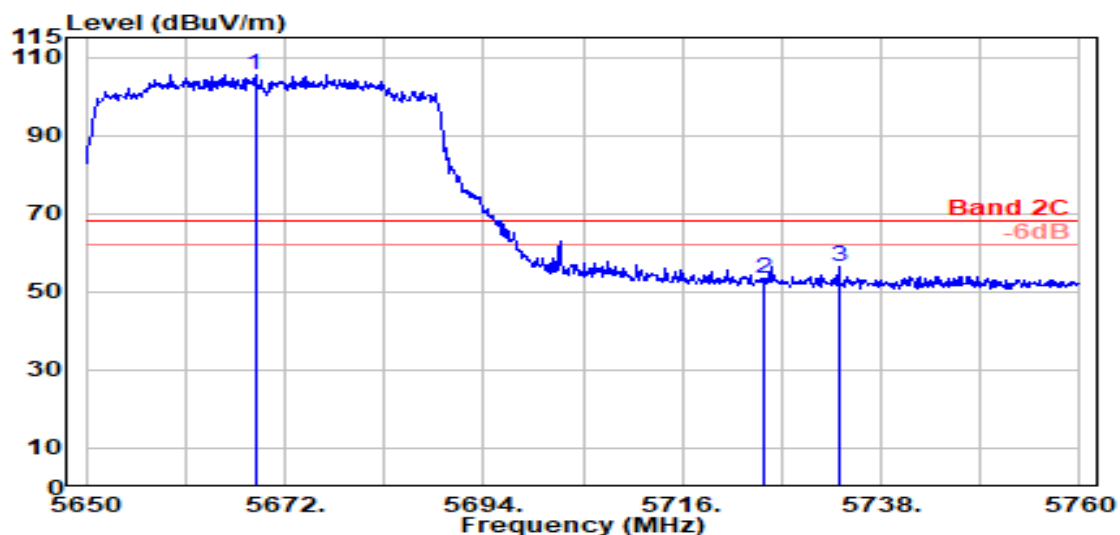


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.700	33.72	8.87	39.18	102.18	105.60	---	---	Peak
5725.000	33.60	8.93	39.20	49.91	53.24	68.20	14.96	Peak
5733.300	33.60	8.93	39.20	53.08	56.41	68.20	11.79	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

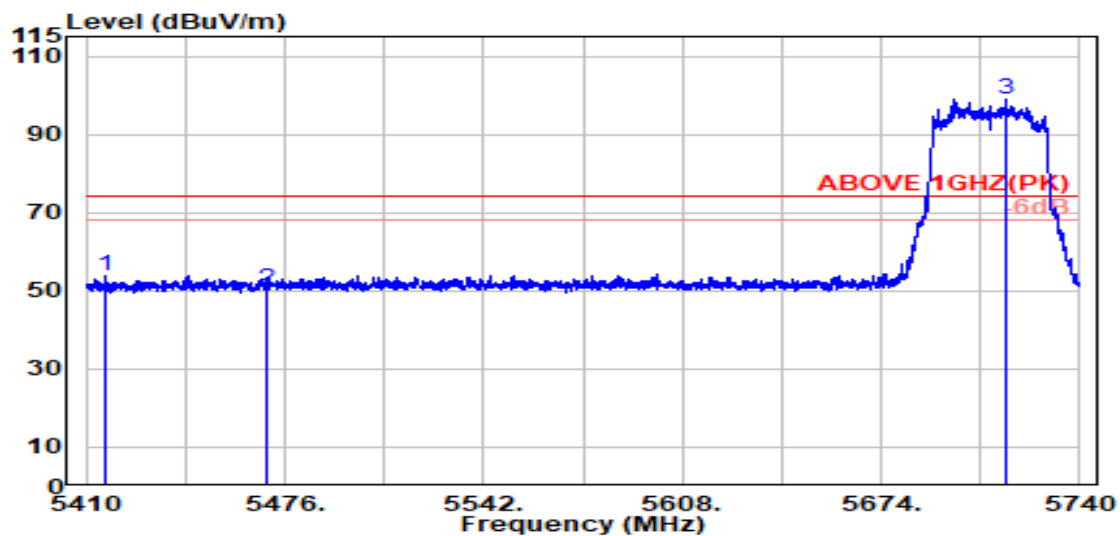

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5416.600	33.93	8.64	39.16	50.49	53.90	74.00	20.10	Peak
5470.000	34.04	8.69	39.15	46.87	50.44	74.00	23.56	Peak
@ 5715.700	33.60	8.92	39.19	95.55	98.87	---	---	Peak

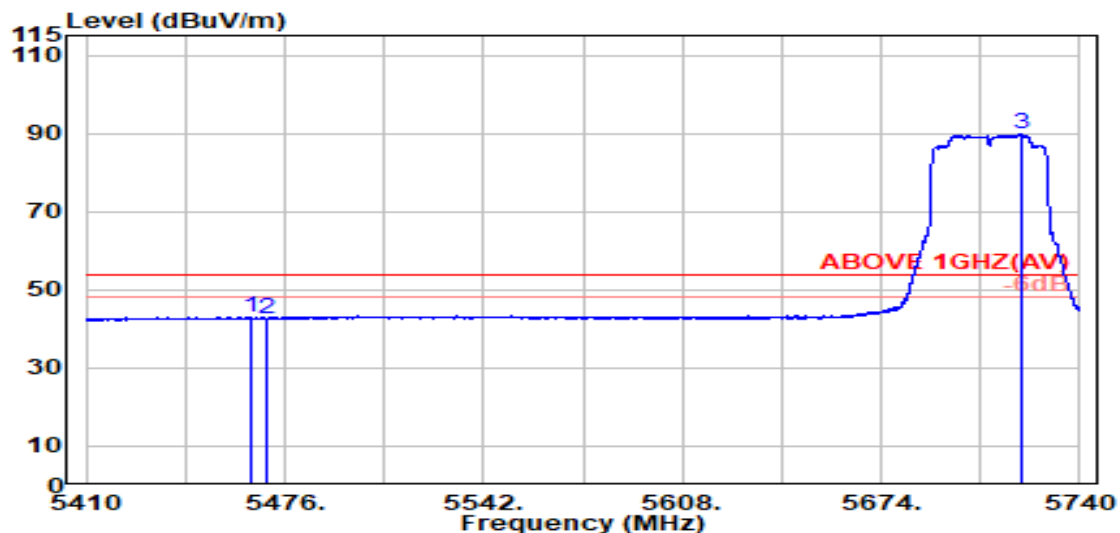


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.03	8.68	39.15	39.42	42.98	54.00	11.02	Average
5470.000	34.04	8.69	39.15	39.11	42.68	54.00	11.32	Average
@ 5720.800	33.60	8.92	39.20	86.42	89.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

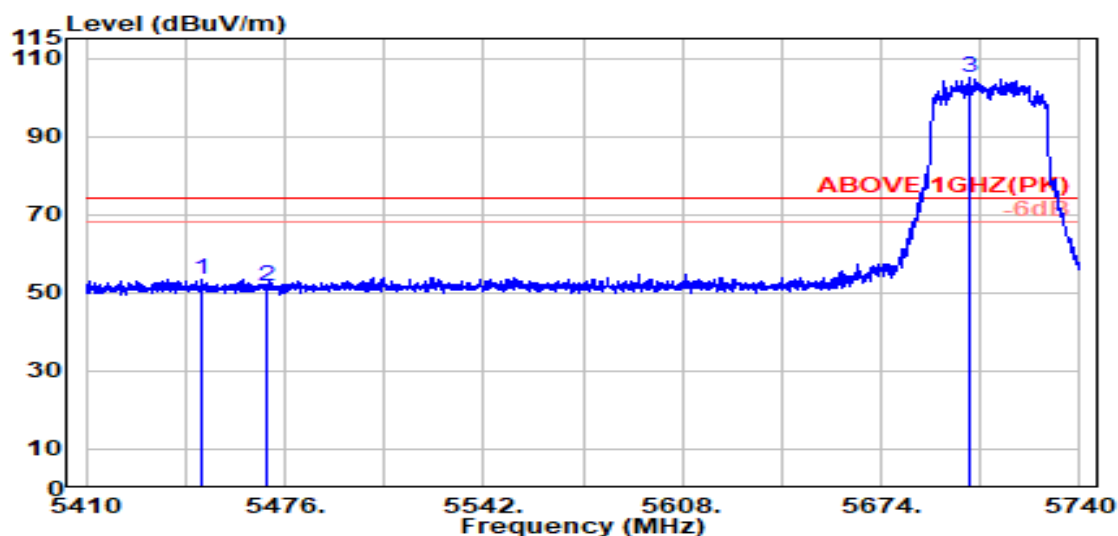

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.500	34.00	8.67	39.16	49.86	53.36	74.00	20.64	Peak
5470.000	34.04	8.69	39.15	48.02	51.60	74.00	22.40	Peak
@ 5703.100	33.60	8.91	39.19	101.57	104.89	---	---	Peak

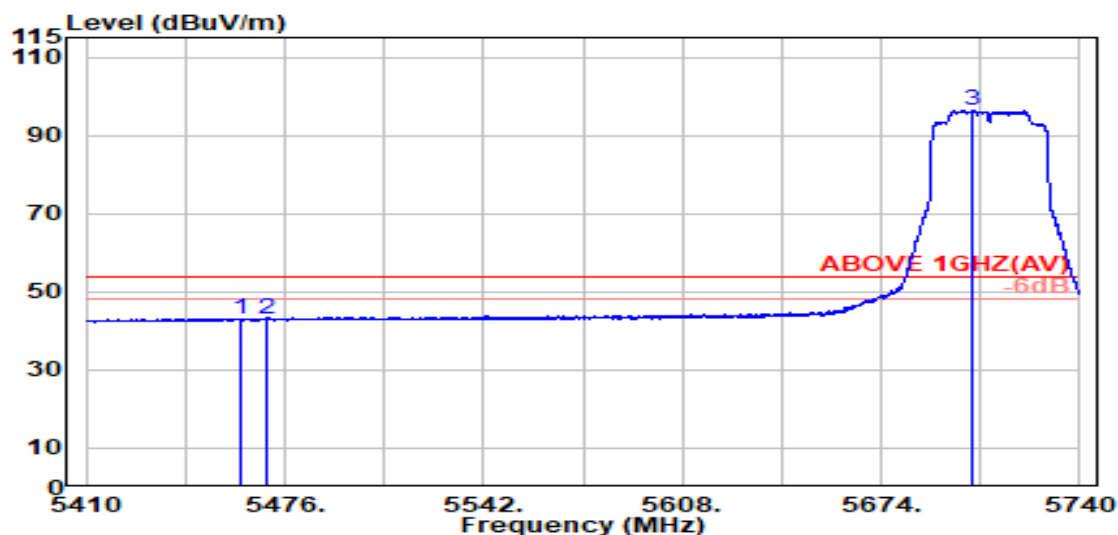


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.700	34.02	8.68	39.15	39.62	43.17	54.00	10.83	Average
5470.000	34.04	8.69	39.15	39.60	43.17	54.00	10.83	Average
@ 5703.900	33.60	8.91	39.19	92.96	96.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

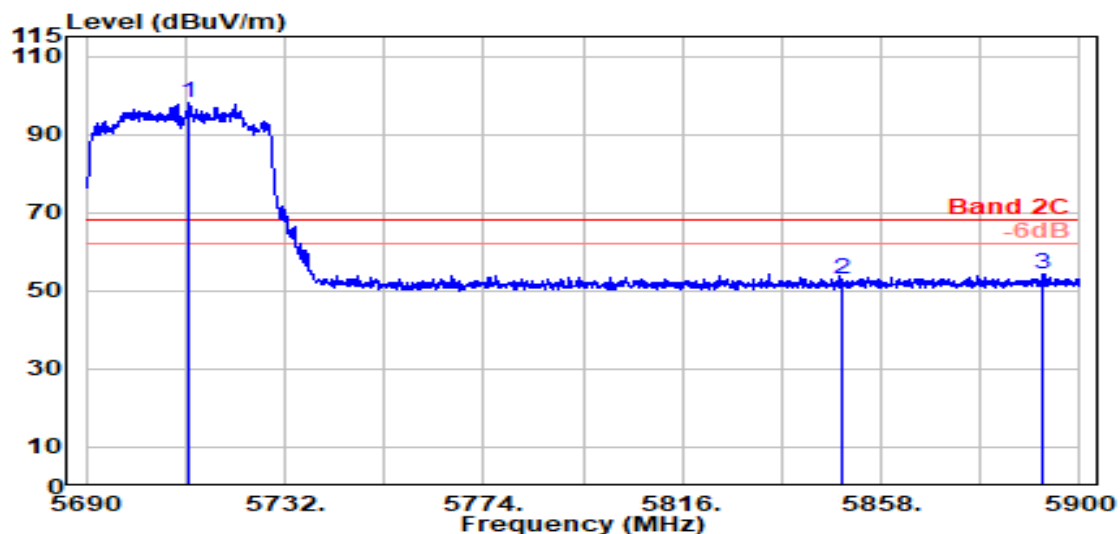

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.900	33.60	8.91	39.19	94.72	98.04	---	---	Peak
5850.000	33.90	9.04	39.22	49.33	53.05	68.20	15.15	Peak
5892.300	34.07	9.08	39.23	50.15	54.07	68.20	14.13	Peak

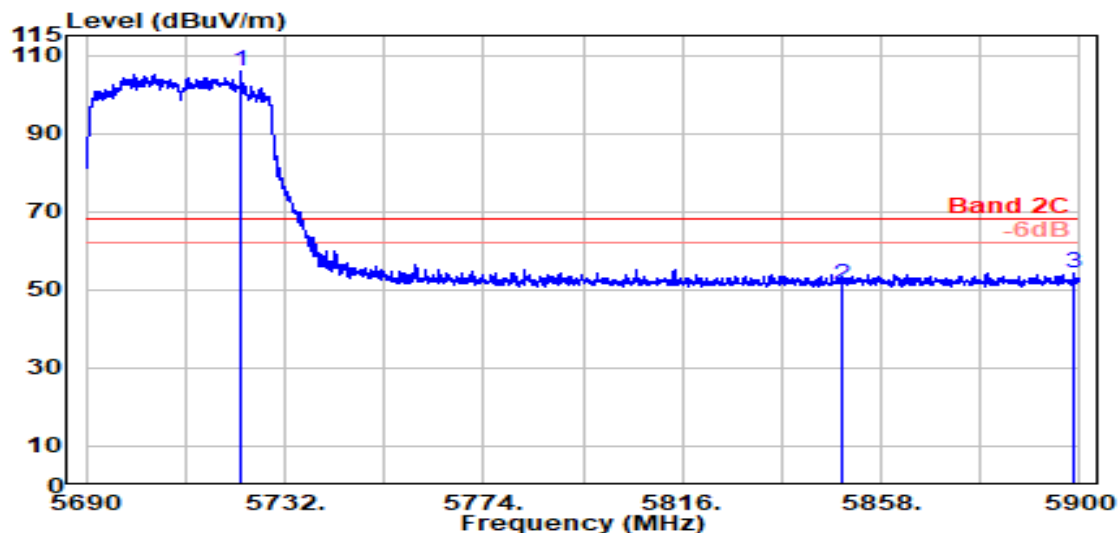


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	33.60	8.92	39.20	102.44	105.76	---	---	Peak
5850.000	33.90	9.04	39.22	47.38	51.09	68.20	17.11	Peak
5898.900	34.10	9.08	39.23	50.39	54.34	68.20	13.86	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

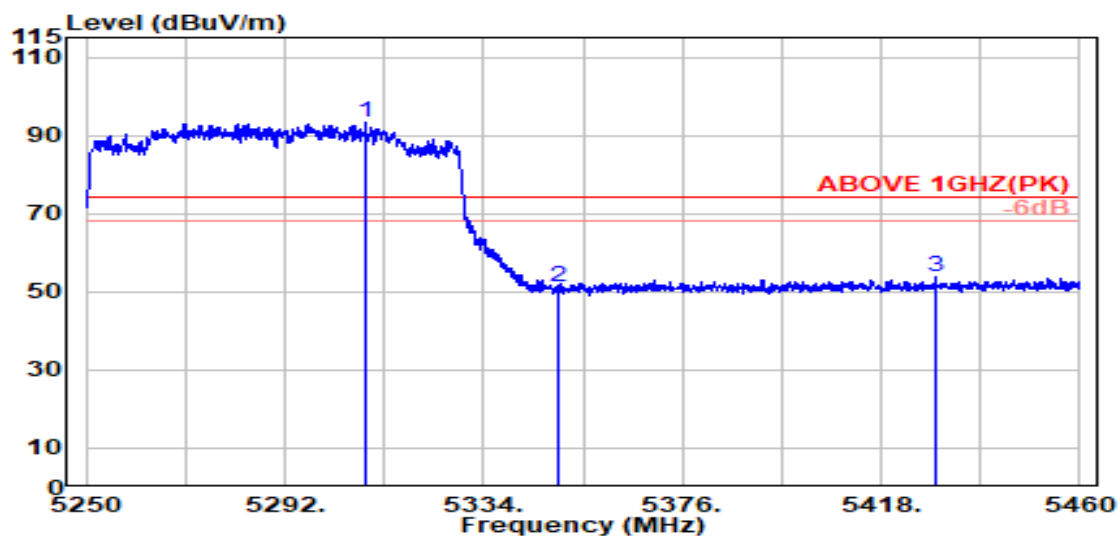

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.100	33.78	8.53	39.17	90.03	93.17	---	---	Peak
5350.000	33.70	8.57	39.17	48.12	51.22	74.00	22.78	Peak
5429.400	33.96	8.65	39.16	50.58	54.03	74.00	19.97	Peak

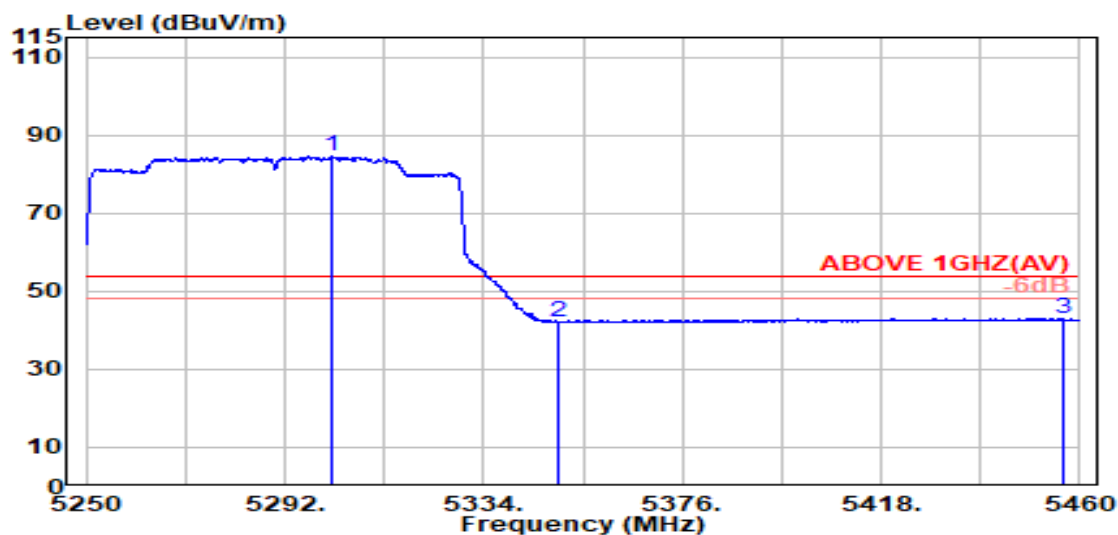


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	33.80	8.53	39.17	81.35	84.49	---	---	Average
5350.000	33.70	8.57	39.17	39.03	42.14	54.00	11.86	Average
5456.600	34.01	8.68	39.15	39.46	42.99	54.00	11.01	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

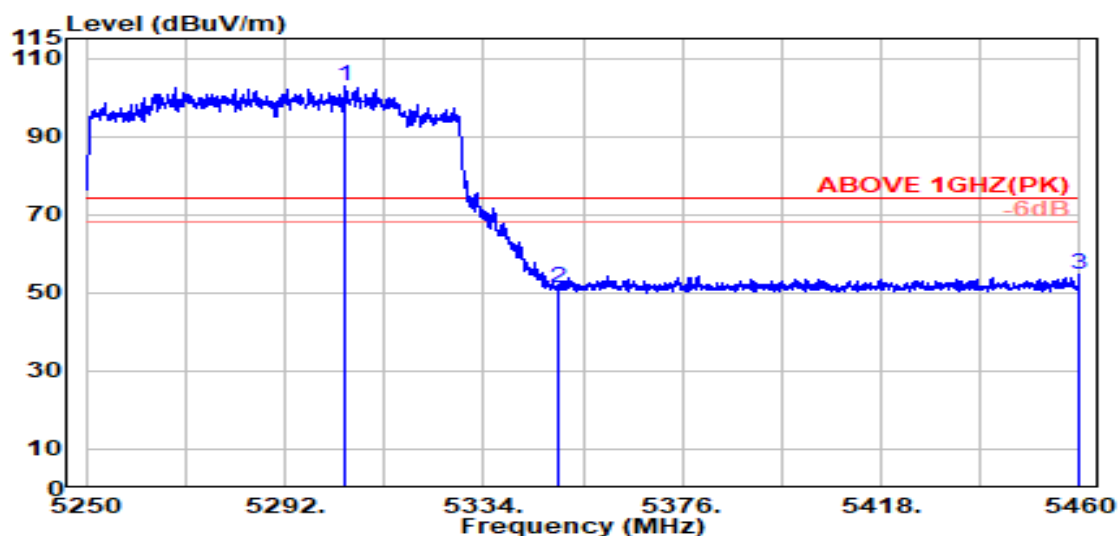

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.900	33.79	8.53	39.17	99.49	102.63	---	---	Peak
5350.000	33.70	8.57	39.17	47.89	50.99	74.00	23.01	Peak
5459.800	34.02	8.68	39.15	50.94	54.48	74.00	19.52	Peak

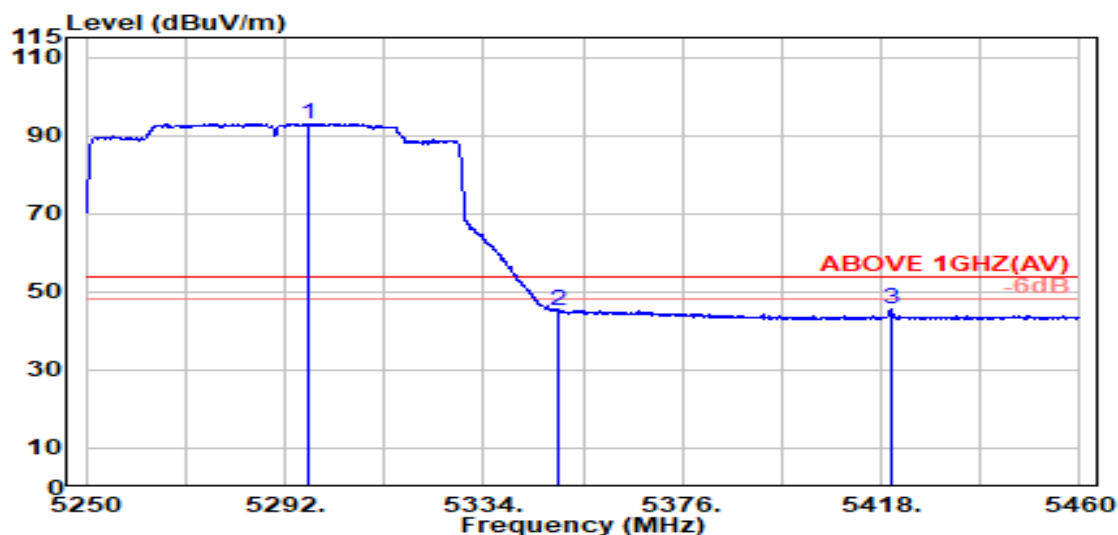


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.100	33.79	8.52	39.17	89.92	93.06	---	---	Average
5350.000	33.70	8.57	39.17	42.22	45.33	54.00	8.67	Average
5420.000	33.94	8.64	39.16	41.95	45.38	54.00	8.62	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

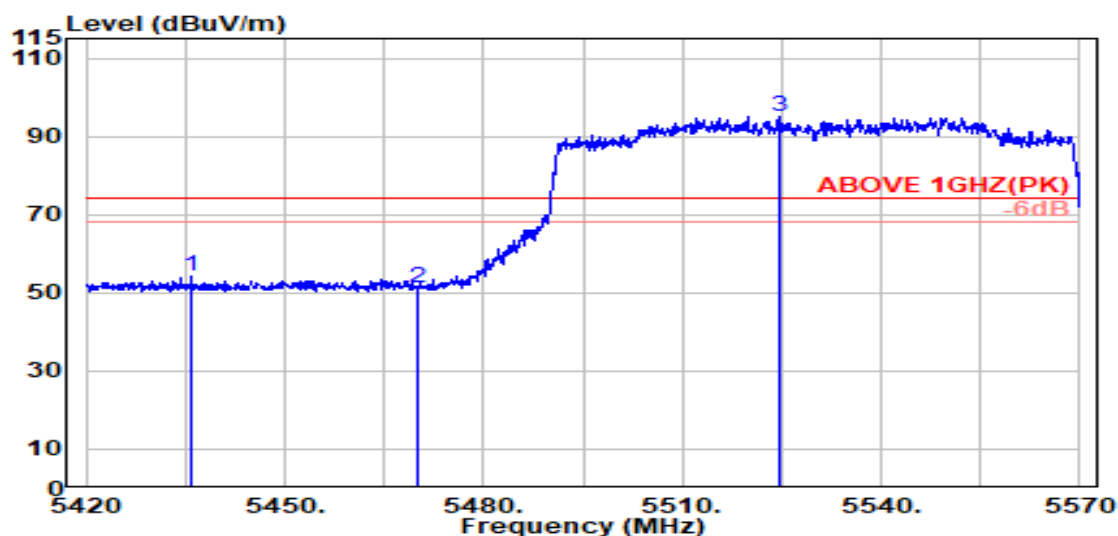

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5436.000	33.97	8.66	39.16	50.69	54.16	74.00	19.84	Peak
5470.000	34.04	8.69	39.15	47.64	51.22	74.00	22.78	Peak
@ 5524.700	34.05	8.74	39.16	91.61	95.25	---	---	Peak

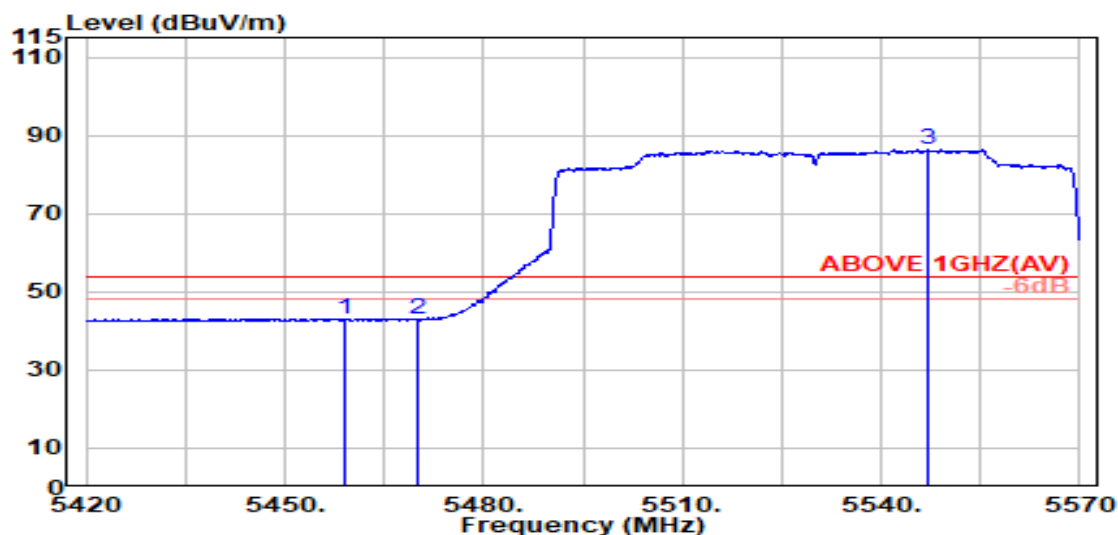


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.900	34.02	8.68	39.15	39.59	43.13	54.00	10.87	Average
5470.000	34.04	8.69	39.15	39.44	43.01	54.00	10.99	Average
@ 5547.000	34.01	8.76	39.16	82.74	86.35	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

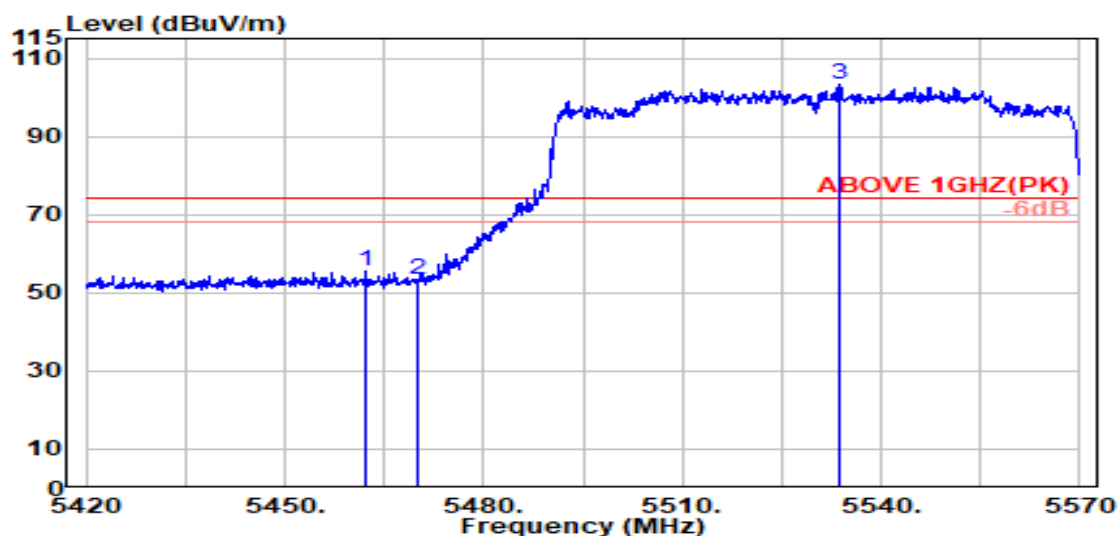

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.02	8.68	39.15	52.14	55.69	74.00	18.31	Peak
5470.000	34.04	8.69	39.15	49.66	53.24	74.00	20.76	Peak
@ 5533.600	34.03	8.75	39.16	99.58	103.21	---	---	Peak

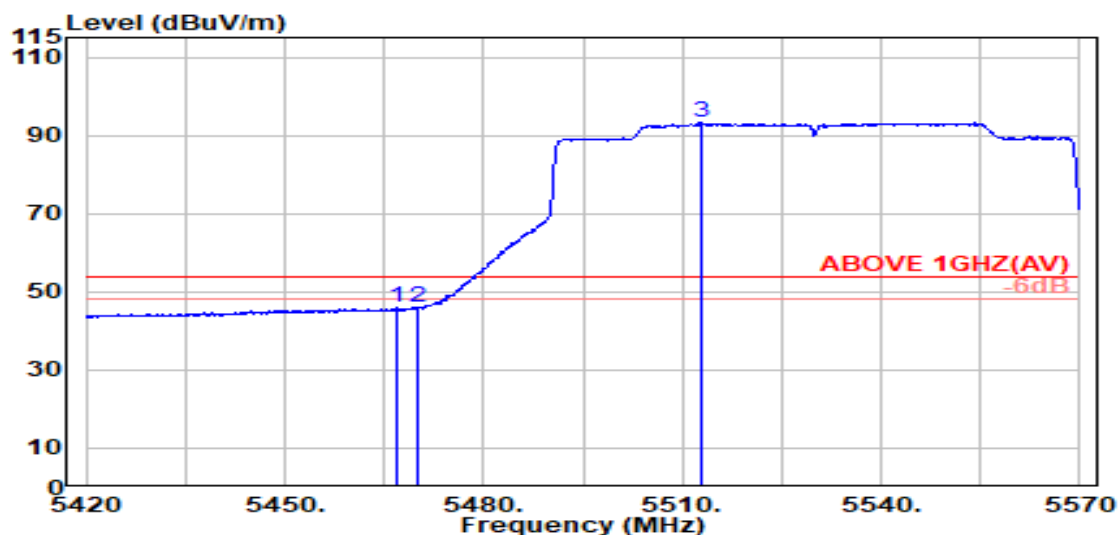


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.03	8.69	39.15	42.23	45.80	54.00	8.20	Average
5470.000	34.04	8.69	39.15	42.33	45.90	54.00	8.10	Average
@ 5512.700	34.07	8.73	39.15	89.52	93.17	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

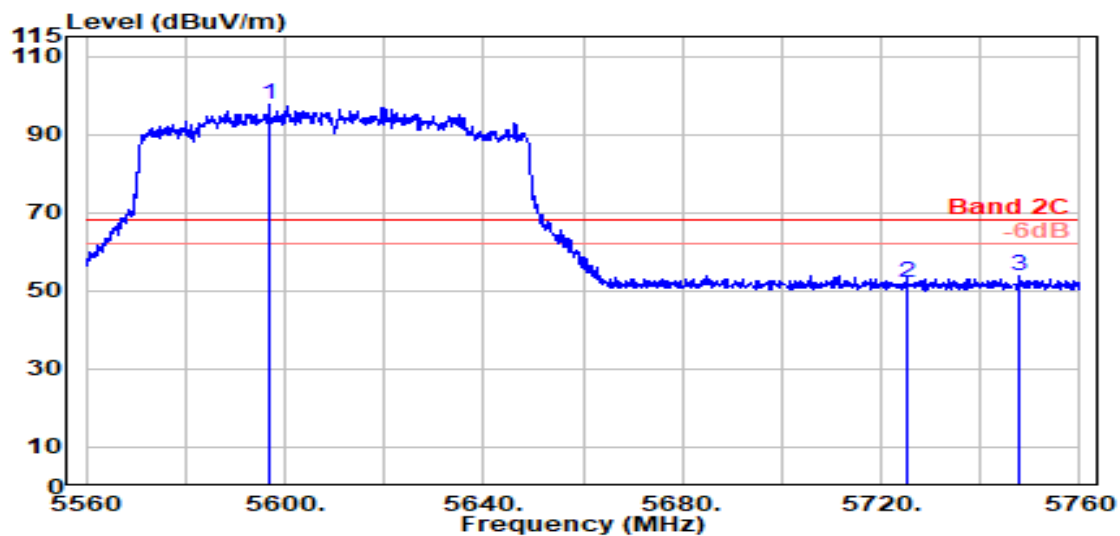

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5596.800	33.81	8.81	39.17	93.99	97.44	---	---	Peak
5725.000	33.60	8.93	39.20	48.60	51.93	68.20	16.27	Peak
5747.800	33.60	8.95	39.20	50.29	53.64	68.20	14.56	Peak

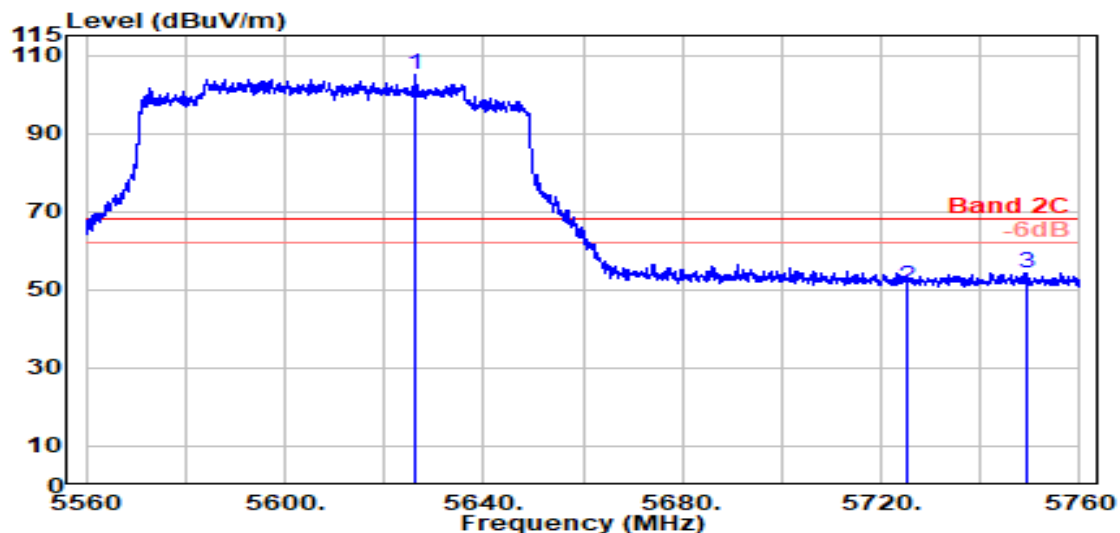


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.300	33.80	8.83	39.18	101.65	105.11	---	---	Peak
5725.000	33.60	8.93	39.20	47.63	50.96	68.20	17.24	Peak
5749.300	33.60	8.95	39.20	50.82	54.17	68.20	14.03	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

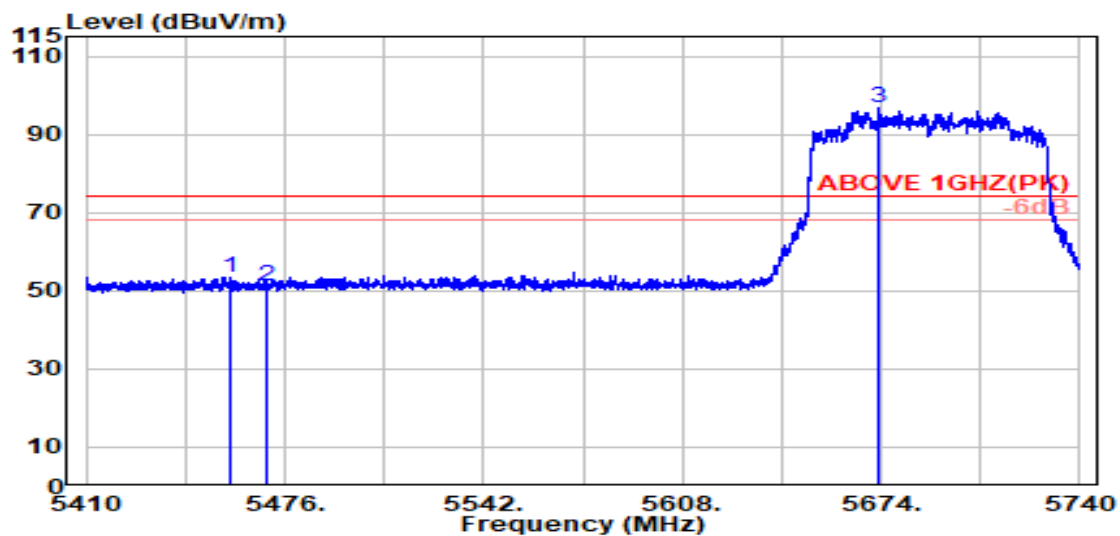

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.02	8.68	39.15	50.05	53.59	74.00	20.41	Peak
5470.000	34.04	8.69	39.15	47.70	51.27	74.00	22.73	Peak
@ 5673.100	33.71	8.88	39.19	93.18	96.58	---	---	Peak

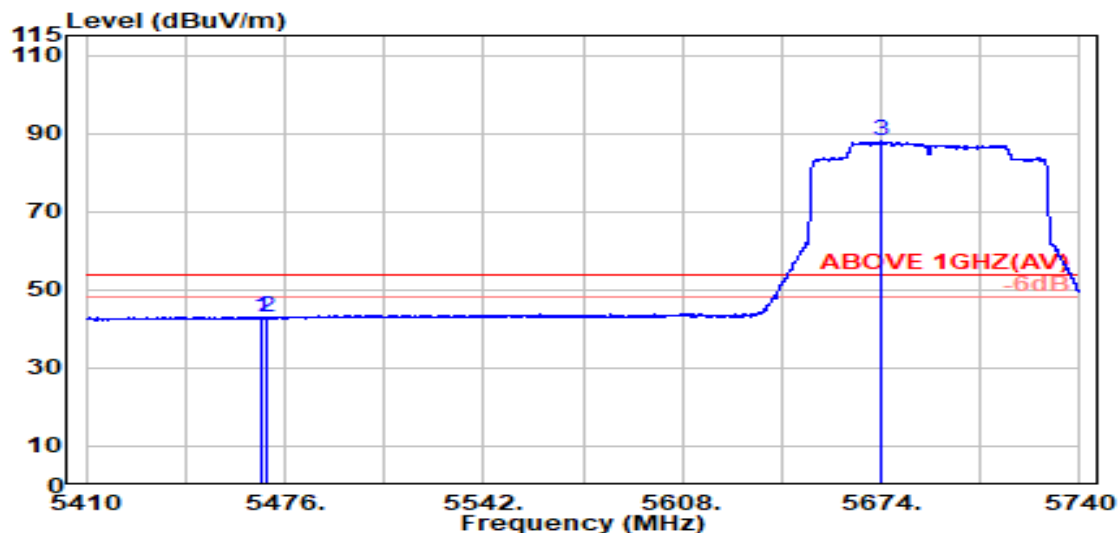


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	39.50	43.07	54.00	10.93	Average
5470.000	34.04	8.69	39.15	39.25	42.83	54.00	11.17	Average
@ 5673.700	33.70	8.88	39.19	84.54	87.94	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

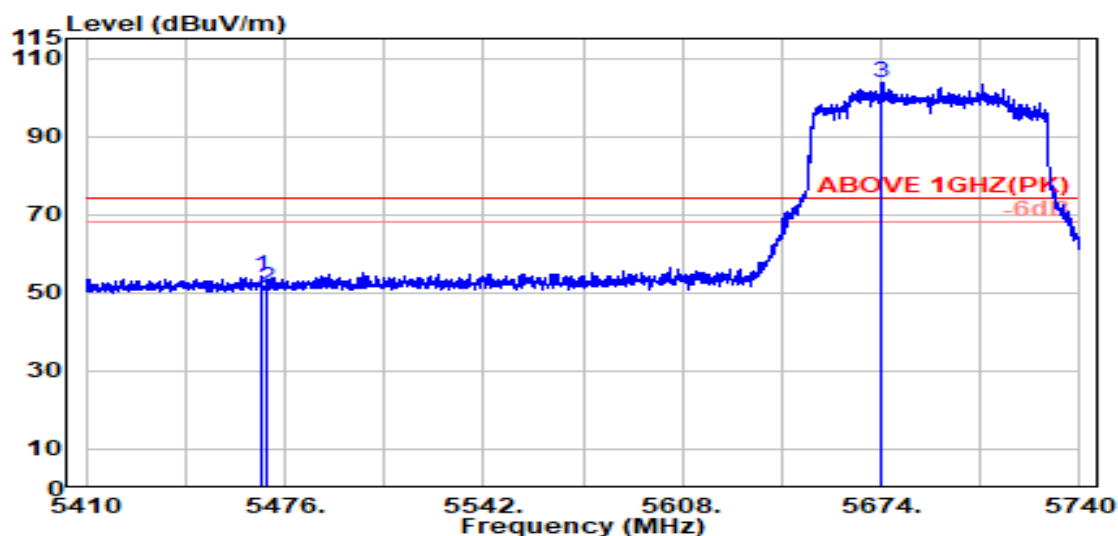

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	50.83	54.40	74.00	19.60	Peak
5470.000	34.04	8.69	39.15	47.71	51.28	74.00	22.72	Peak
@ 5674.400	33.70	8.88	39.19	100.20	103.59	---	---	Peak

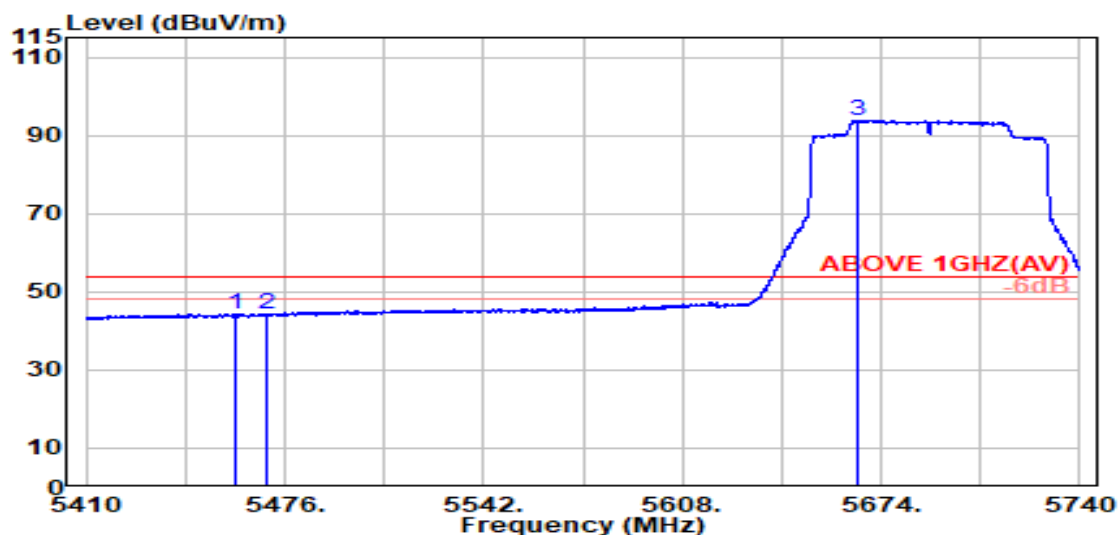


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.02	8.68	39.15	40.77	44.31	54.00	9.69	Average
5470.000	34.04	8.69	39.15	40.57	44.14	54.00	9.86	Average
@ 5666.400	33.73	8.87	39.18	90.45	93.87	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

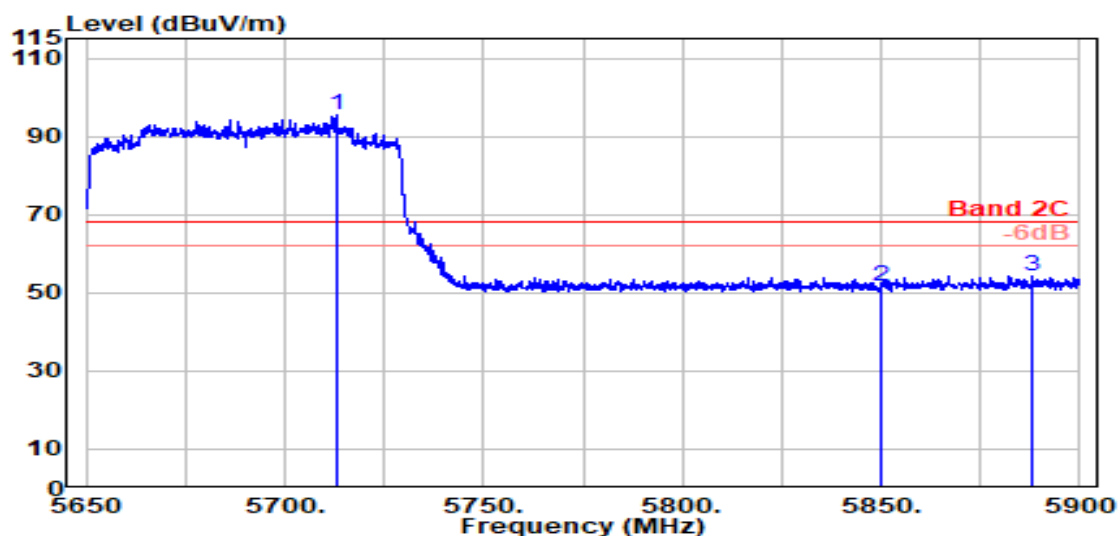

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5713.000	33.60	8.91	39.19	91.96	95.28	---	---	Peak
	5850.000	33.90	9.04	39.22	47.78	51.49	68.20	16.71	Peak
	5888.000	34.05	9.07	39.23	50.56	54.45	68.20	13.75	Peak

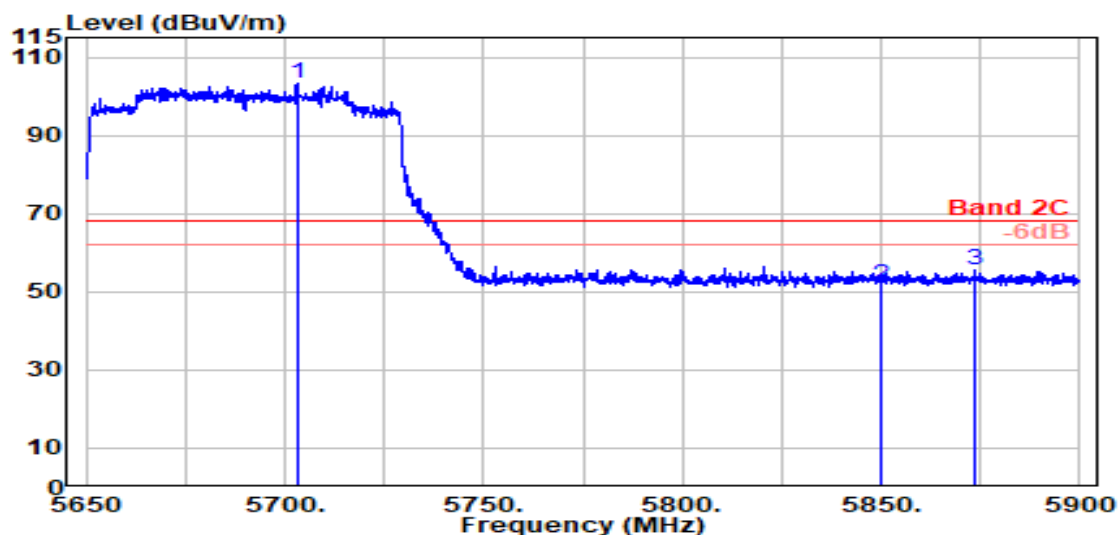


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5703.000	33.60	8.91	39.19	100.05	103.36	---	---	Peak
	5850.000	33.90	9.04	39.22	48.09	51.80	68.20	16.40	Peak
	5873.400	33.99	9.06	39.23	51.76	55.59	68.20	12.61	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

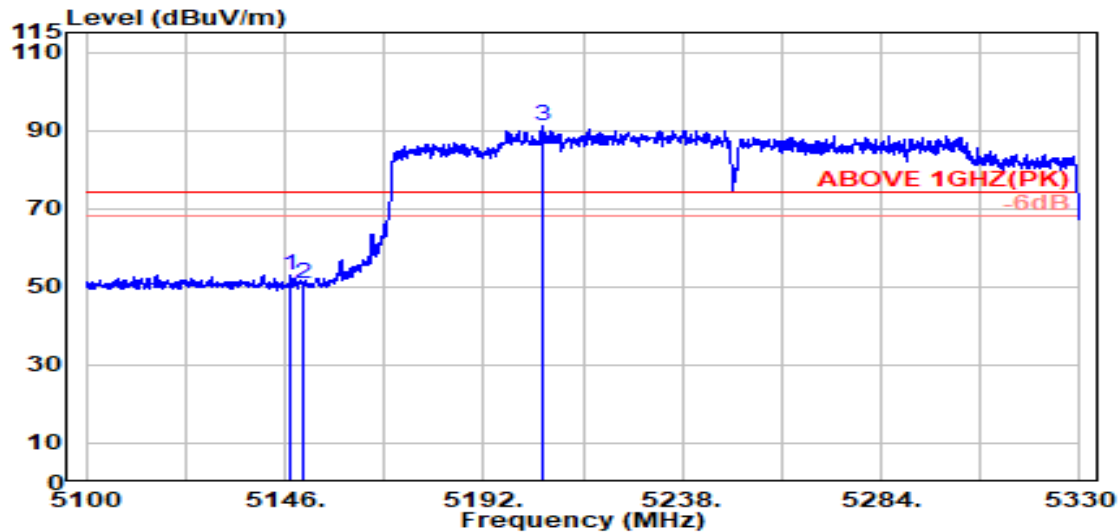

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.50	8.37	39.19	50.41	53.09	74.00	20.91	Peak
5150.000	33.50	8.37	39.19	48.20	50.89	74.00	23.11	Peak
@ 5205.600	33.79	8.43	39.18	87.92	90.95	---	---	Peak

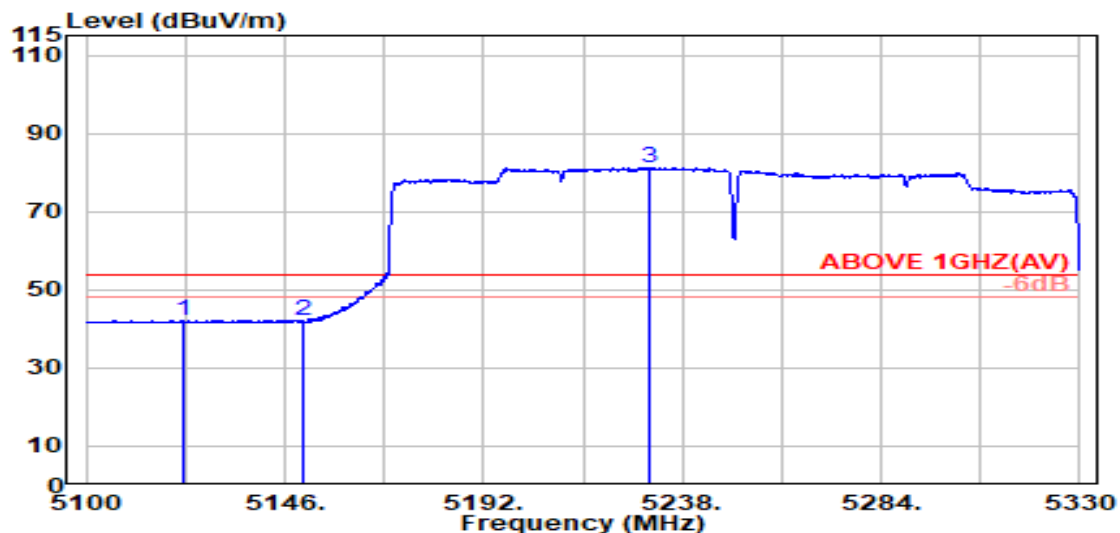


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.800	33.45	8.35	39.19	39.59	42.19	54.00	11.81	Average
5150.000	33.50	8.37	39.19	39.39	42.07	54.00	11.93	Average
@ 5230.100	33.74	8.45	39.18	78.30	81.31	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

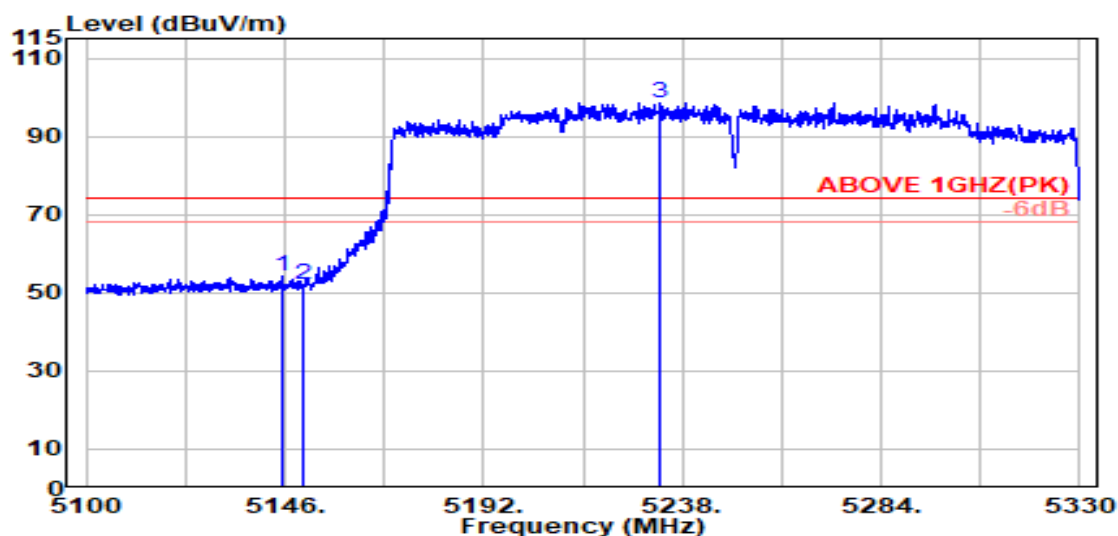

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.200	33.49	8.37	39.19	51.39	54.06	74.00	19.94	Peak
5150.000	33.50	8.37	39.19	49.25	51.94	74.00	22.06	Peak
@ 5232.900	33.73	8.46	39.18	95.56	98.57	---	---	Peak

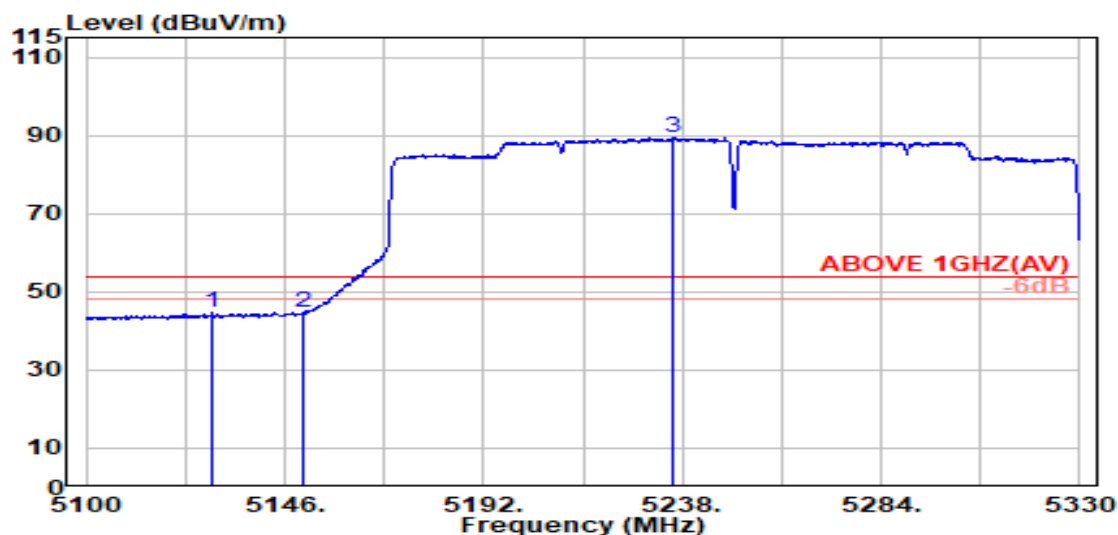


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5129.000	33.46	8.35	39.19	42.06	44.68	54.00	9.32	Average
5150.000	33.50	8.37	39.19	41.96	44.64	54.00	9.36	Average
@ 5236.000	33.73	8.46	39.18	86.39	89.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

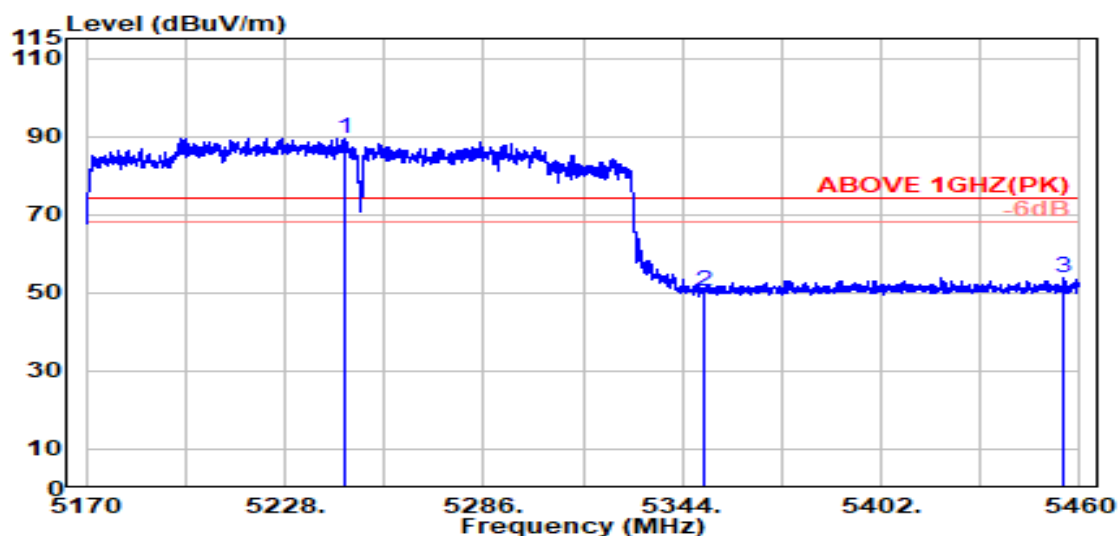

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5245.200	33.71	8.47	39.18	86.53	89.53	---	---	Peak
5350.000	33.70	8.57	39.17	47.24	50.34	74.00	23.66	Peak
5455.400	34.01	8.67	39.16	50.31	53.84	74.00	20.16	Peak

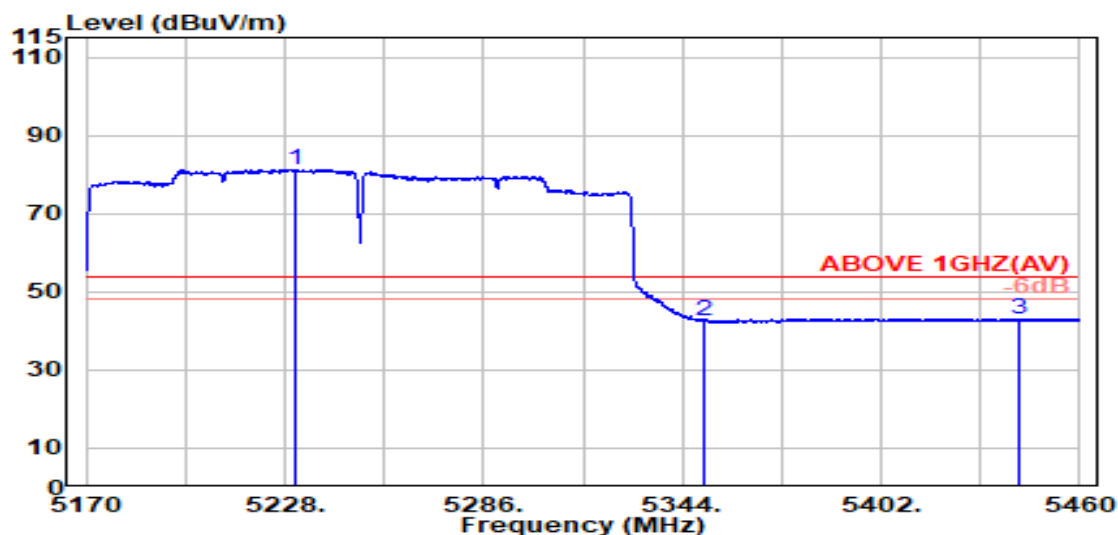


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.000	33.74	8.46	39.18	78.33	81.34	---	---	Average
5350.000	33.70	8.57	39.17	39.54	42.64	54.00	11.36	Average
5442.400	33.98	8.66	39.16	39.67	43.16	54.00	10.84	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

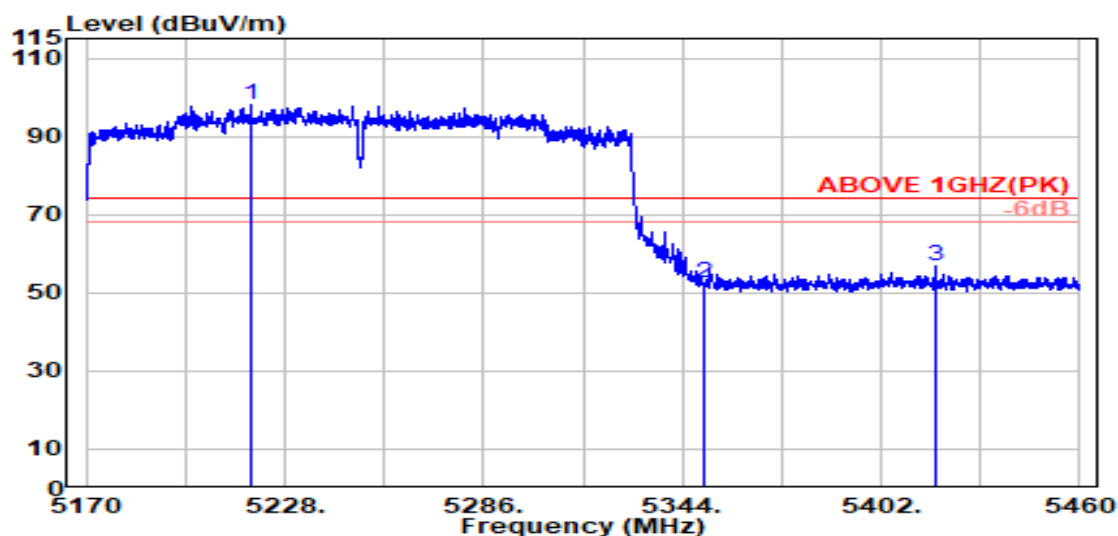

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5218.100	33.76	8.44	39.18	95.01	98.04	---	---	Peak
5350.000	33.70	8.57	39.17	49.54	52.64	74.00	21.36	Peak
5417.700	33.94	8.64	39.16	53.42	56.84	74.00	17.16	Peak

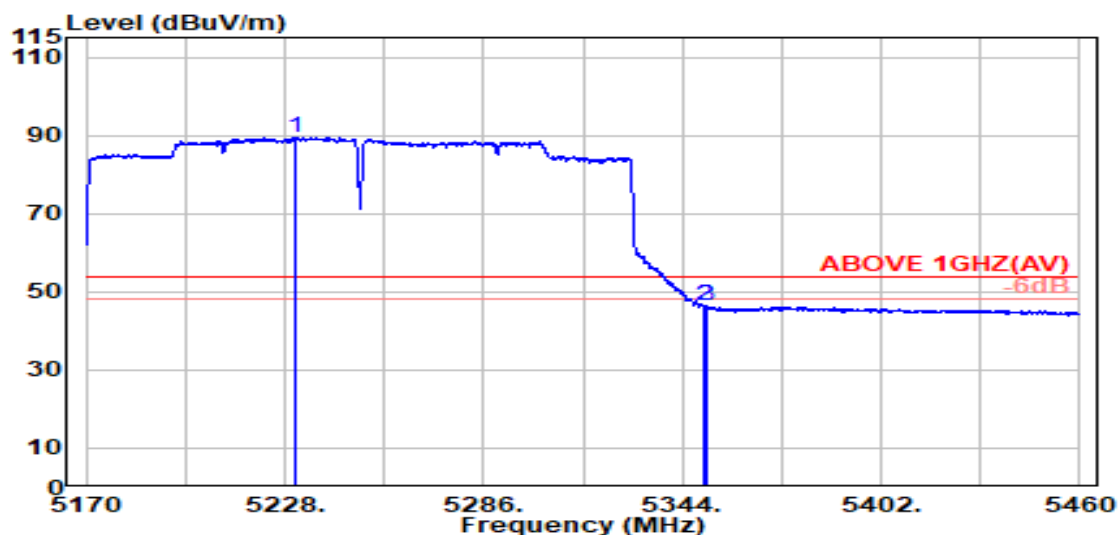


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5230.900	33.74	8.46	39.18	86.41	89.42	---	---	Average
5350.000	33.70	8.57	39.17	43.18	46.29	54.00	7.71	Average
5350.800	33.70	8.57	39.17	43.29	46.40	54.00	7.60	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

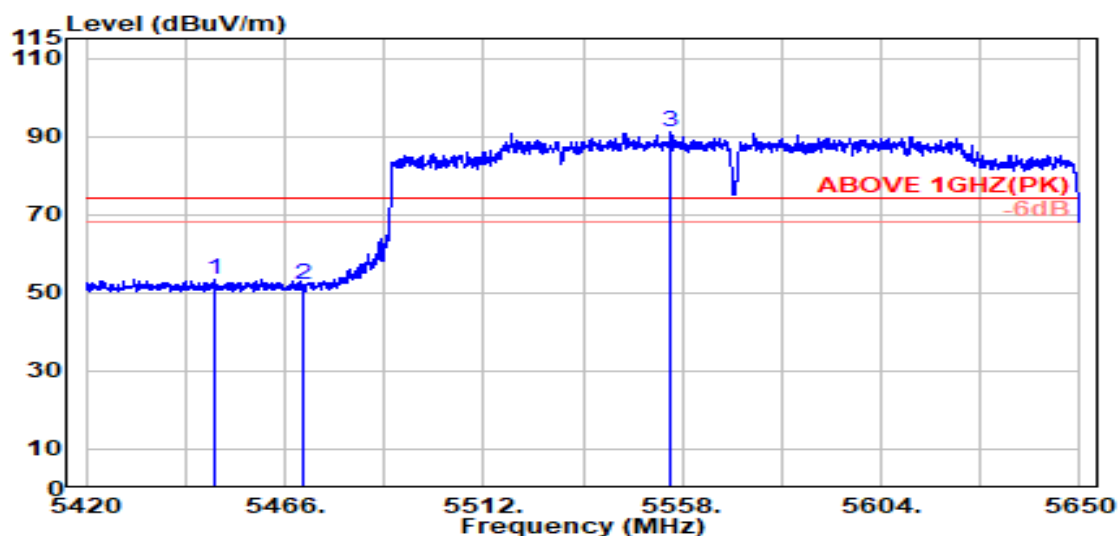

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.700	34.00	8.67	39.16	50.00	53.51	74.00	20.49	Peak
5470.000	34.04	8.69	39.15	48.49	52.07	74.00	21.93	Peak
@ 5555.400	33.98	8.77	39.16	87.37	90.95	---	---	Peak

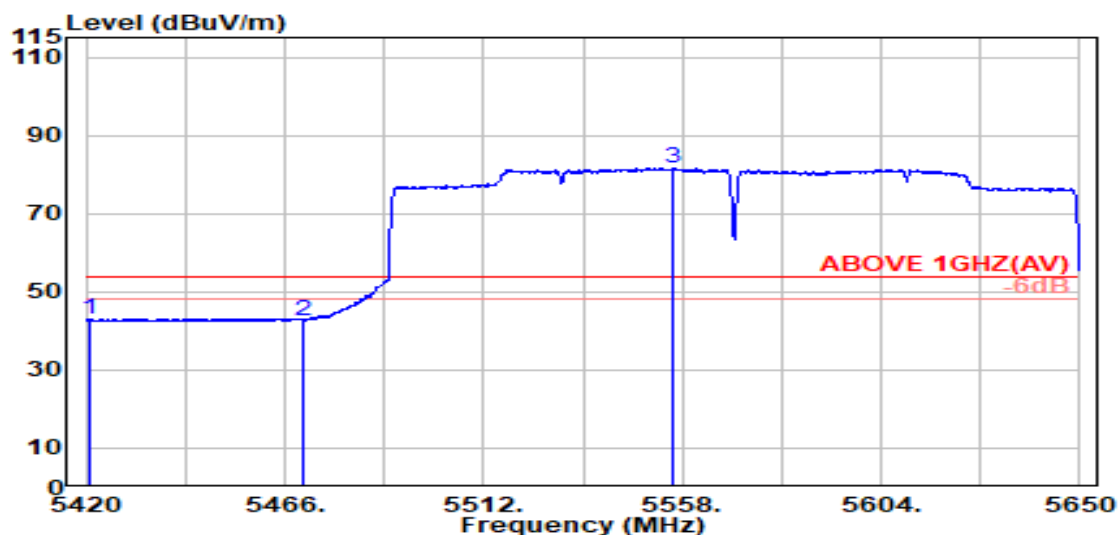


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.700	33.94	8.64	39.16	39.72	43.14	54.00	10.86	Average
5470.000	34.04	8.69	39.15	39.15	42.72	54.00	11.28	Average
@ 5555.900	33.98	8.77	39.16	77.95	81.53	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

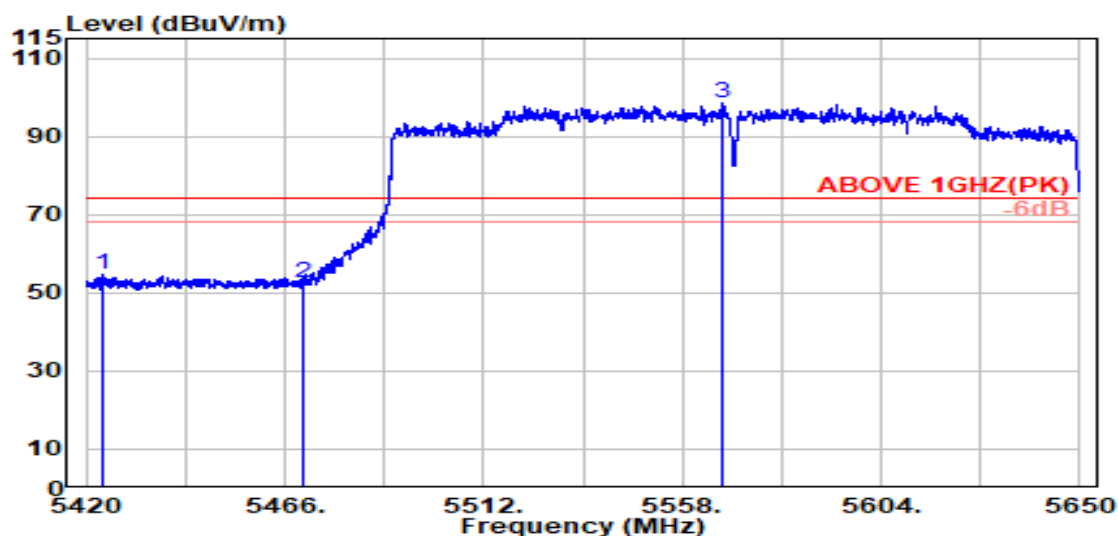

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.600	33.95	8.64	39.16	51.13	54.56	74.00	19.44	Peak
5470.000	34.04	8.69	39.15	49.03	52.60	74.00	21.40	Peak
@ 5567.500	33.93	8.78	39.16	94.81	98.35	---	---	Peak

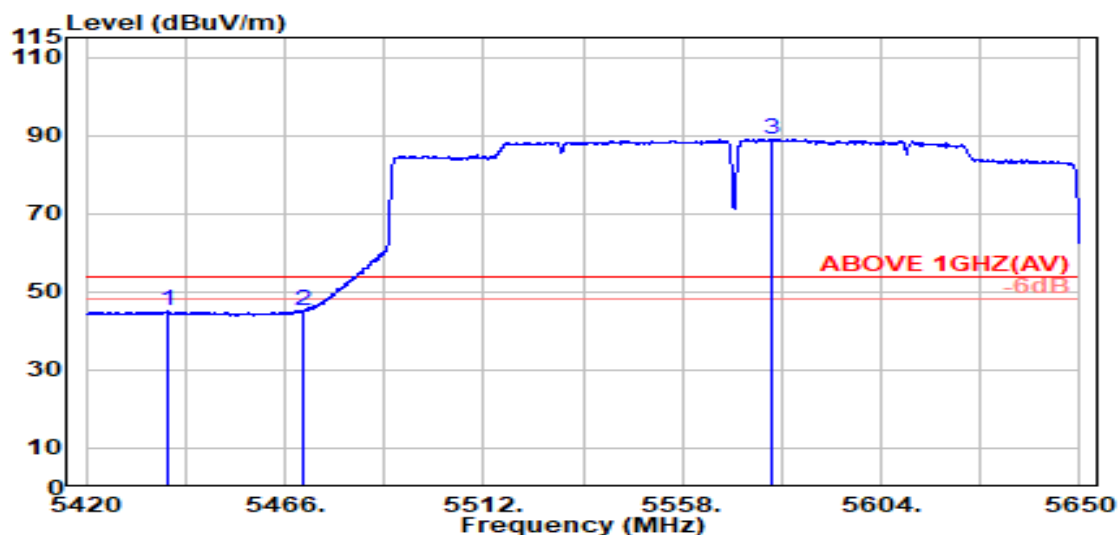


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.100	33.98	8.66	39.16	41.54	45.02	54.00	8.98	Average
5470.000	34.04	8.69	39.15	41.35	44.92	54.00	9.08	Average
@ 5578.900	33.88	8.79	39.17	85.57	89.08	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

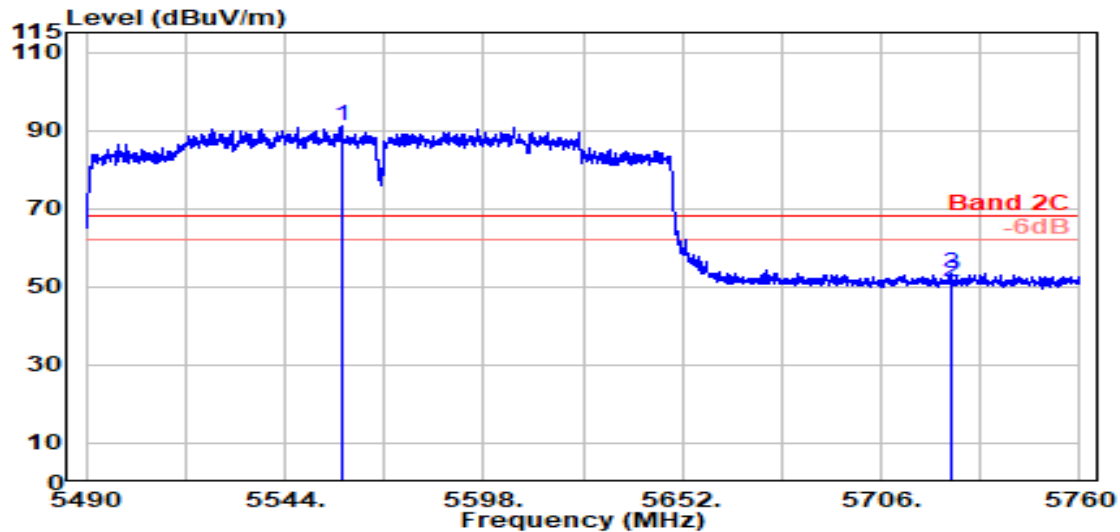

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5559.300	33.96	8.77	39.16	87.40	90.97	---	---	Peak
5725.000	33.60	8.93	39.20	47.72	51.05	68.20	17.15	Peak
5725.300	33.60	8.93	39.20	49.98	53.31	68.20	14.89	Peak

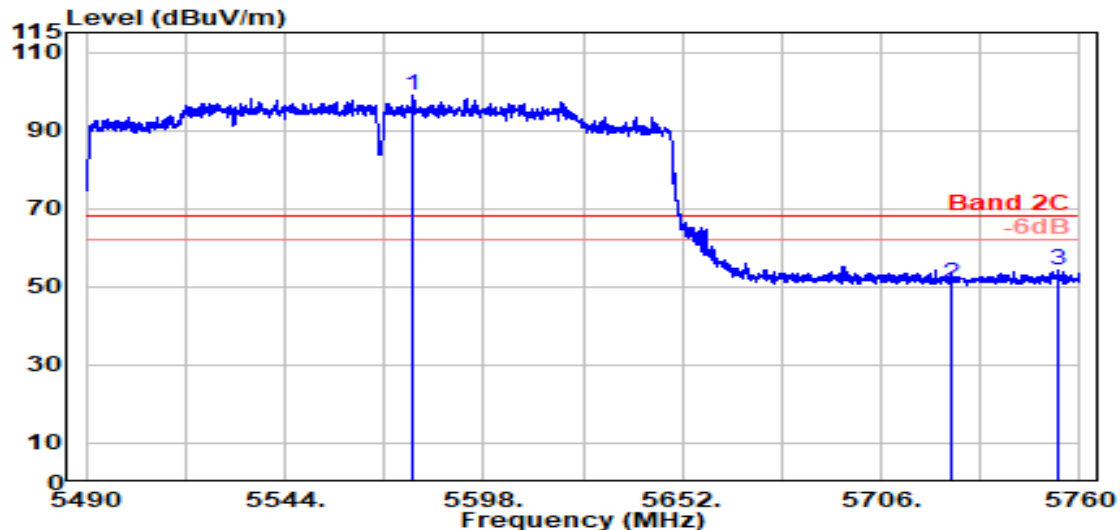


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5578.900	33.88	8.79	39.17	95.39	98.90	---	---	Peak
5725.000	33.60	8.93	39.20	47.64	50.97	68.20	17.23	Peak
5754.100	33.62	8.95	39.20	50.72	54.09	68.20	14.11	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

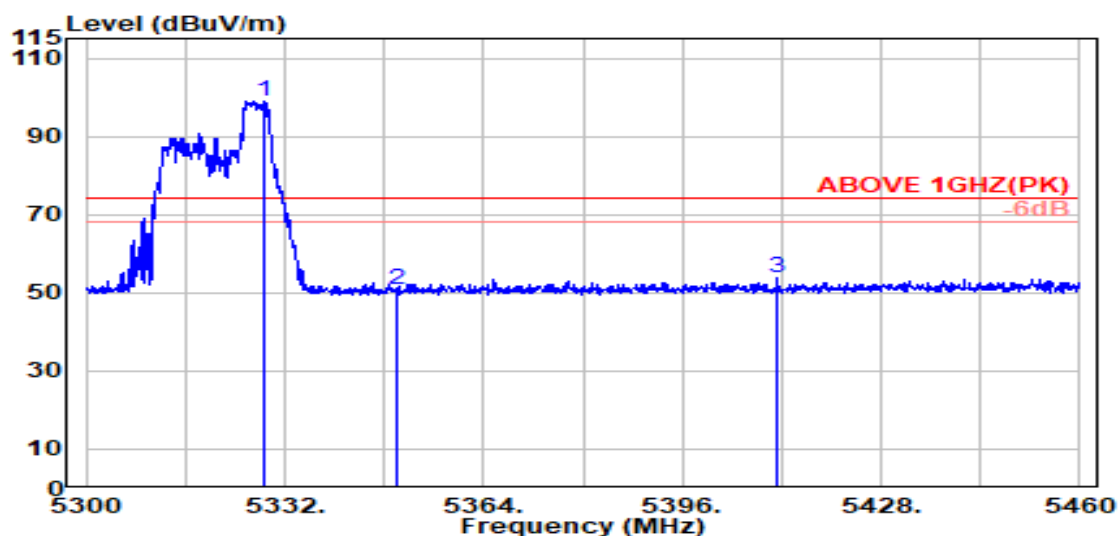

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.74	8.55	39.17	95.93	99.05	---	---	Peak
5350.000	33.70	8.57	39.17	47.48	50.59	74.00	23.41	Peak
5411.300	33.92	8.63	39.16	50.28	53.68	74.00	20.32	Peak

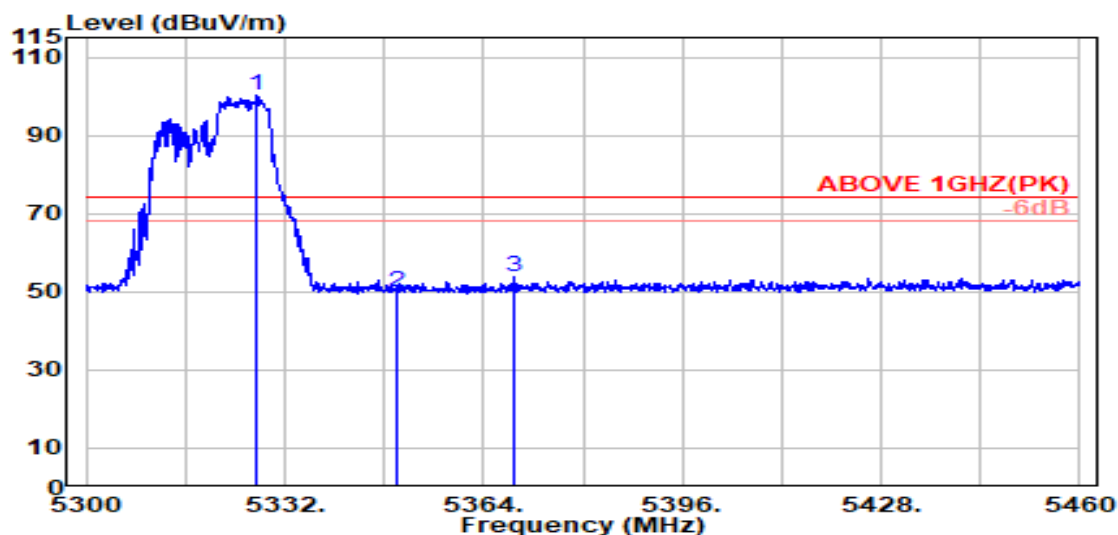


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.74	8.55	39.17	97.08	100.20	---	---	Peak
5350.000	33.70	8.57	39.17	46.67	49.78	74.00	24.22	Peak
5368.800	33.78	8.59	39.17	50.54	53.74	74.00	20.26	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

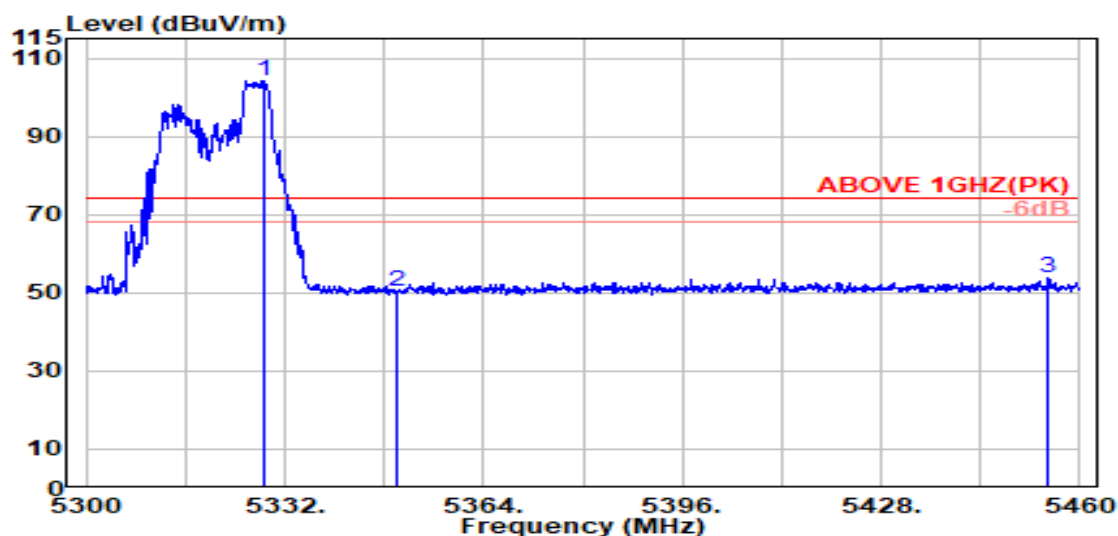

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.74	8.55	39.17	101.13	104.26	---	---	Peak
5350.000	33.70	8.57	39.17	47.16	50.26	74.00	23.74	Peak
5455.000	34.01	8.67	39.16	50.08	53.61	74.00	20.39	Peak

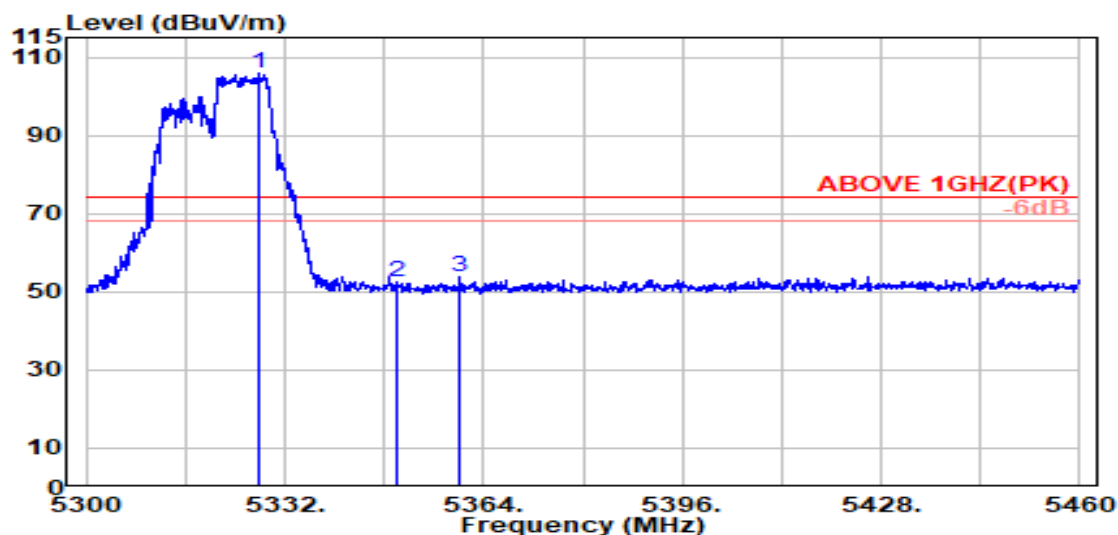


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.74	8.55	39.17	102.83	105.95	---	---	Peak
5350.000	33.70	8.57	39.17	49.40	52.50	74.00	21.50	Peak
5360.000	33.74	8.58	39.17	50.63	53.79	74.00	20.21	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

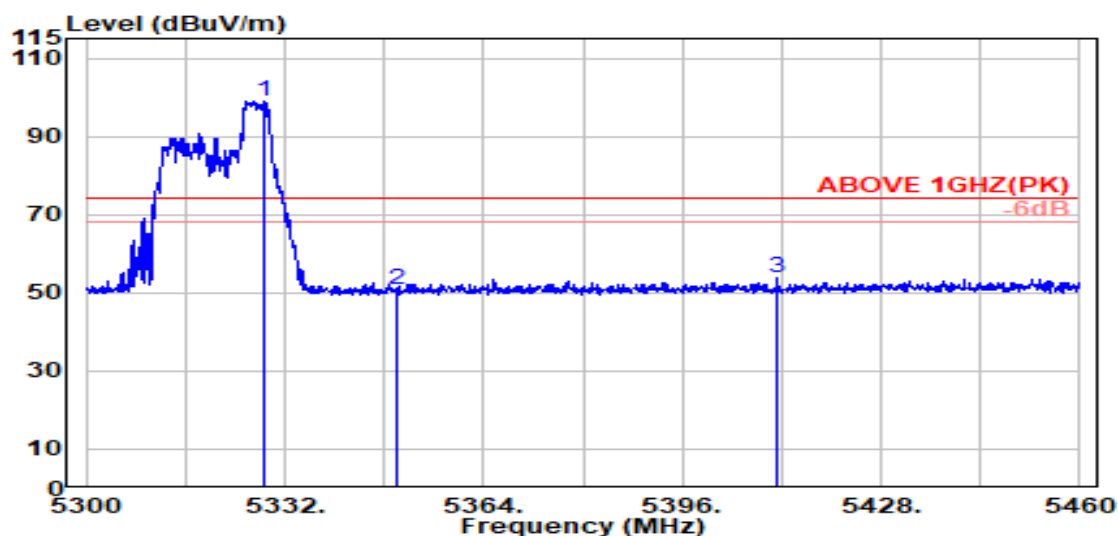

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.74	8.55	39.17	95.93	99.05	---	---	Peak
5350.000	33.70	8.57	39.17	47.48	50.59	74.00	23.41	Peak
5411.300	33.92	8.63	39.16	50.28	53.68	74.00	20.32	Peak

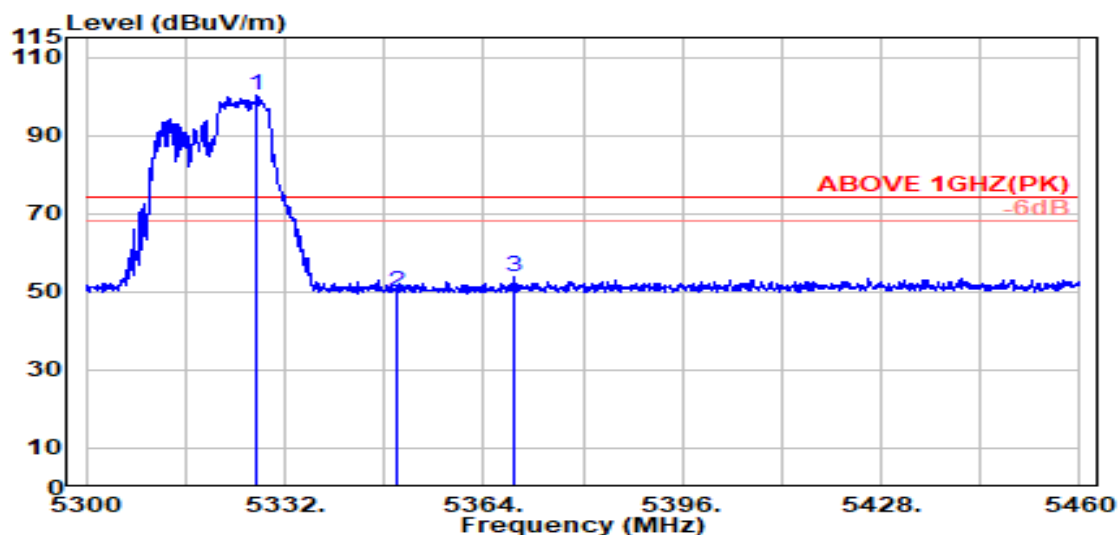


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.74	8.55	39.17	97.08	100.20	---	---	Peak
5350.000	33.70	8.57	39.17	46.67	49.78	74.00	24.22	Peak
5368.800	33.78	8.59	39.17	50.54	53.74	74.00	20.26	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

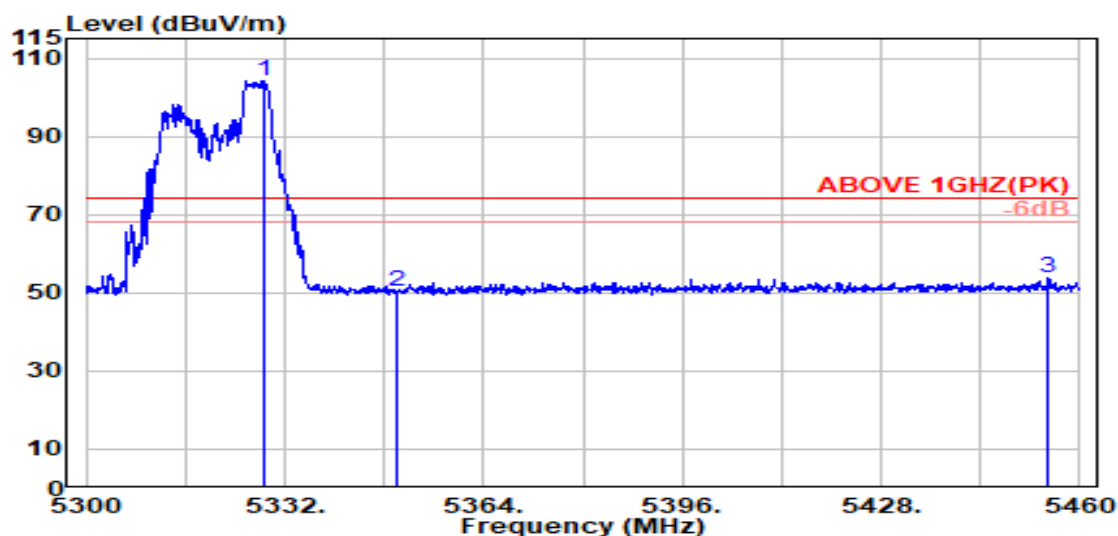

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.74	8.55	39.17	101.13	104.26	---	---	Peak
5350.000	33.70	8.57	39.17	47.16	50.26	74.00	23.74	Peak
5455.000	34.01	8.67	39.16	50.08	53.61	74.00	20.39	Peak

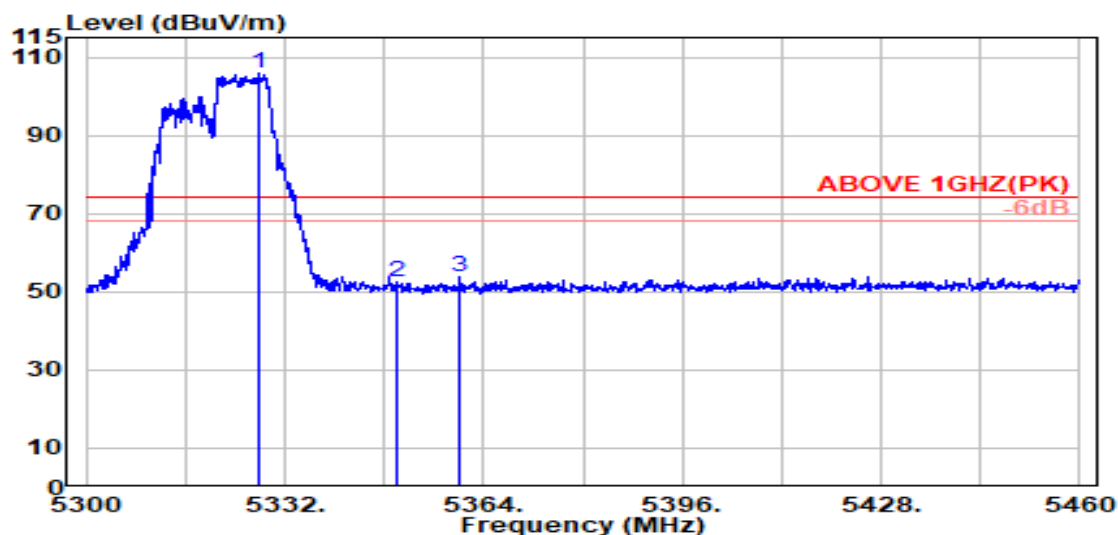


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.74	8.55	39.17	102.83	105.95	---	---	Peak
5350.000	33.70	8.57	39.17	49.40	52.50	74.00	21.50	Peak
5360.000	33.74	8.58	39.17	50.63	53.79	74.00	20.21	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

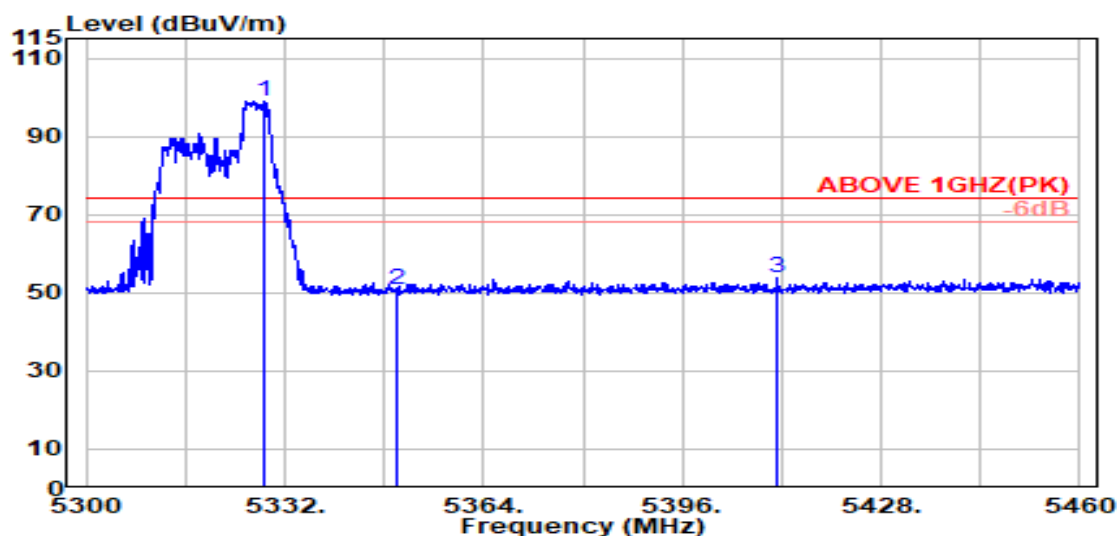

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.74	8.55	39.17	95.93	99.05	---	---	Peak
5350.000	33.70	8.57	39.17	47.48	50.59	74.00	23.41	Peak
5411.300	33.92	8.63	39.16	50.28	53.68	74.00	20.32	Peak

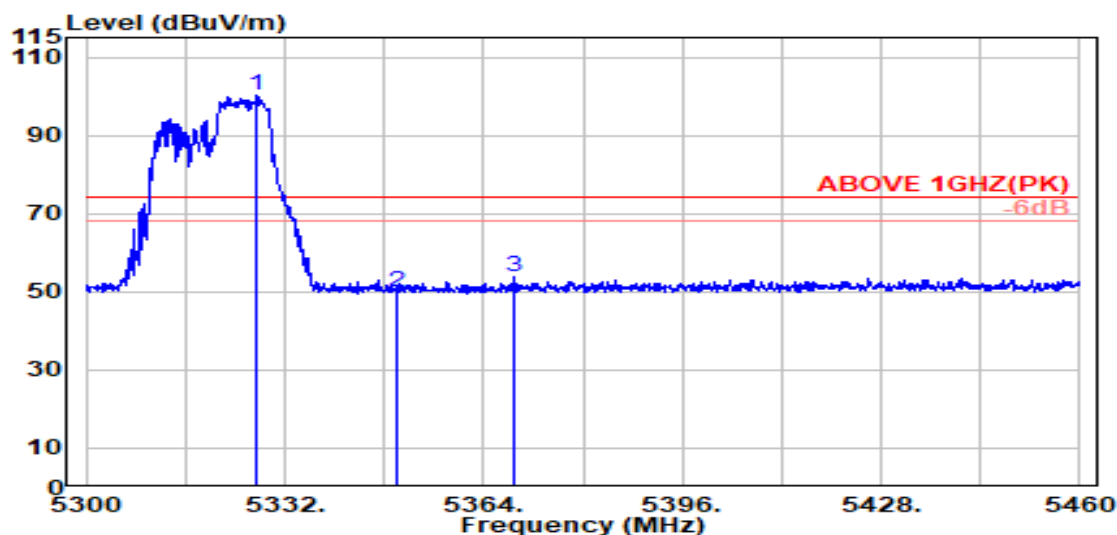


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.74	8.55	39.17	97.08	100.20	---	---	Peak
5350.000	33.70	8.57	39.17	46.67	49.78	74.00	24.22	Peak
5368.800	33.78	8.59	39.17	50.54	53.74	74.00	20.26	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

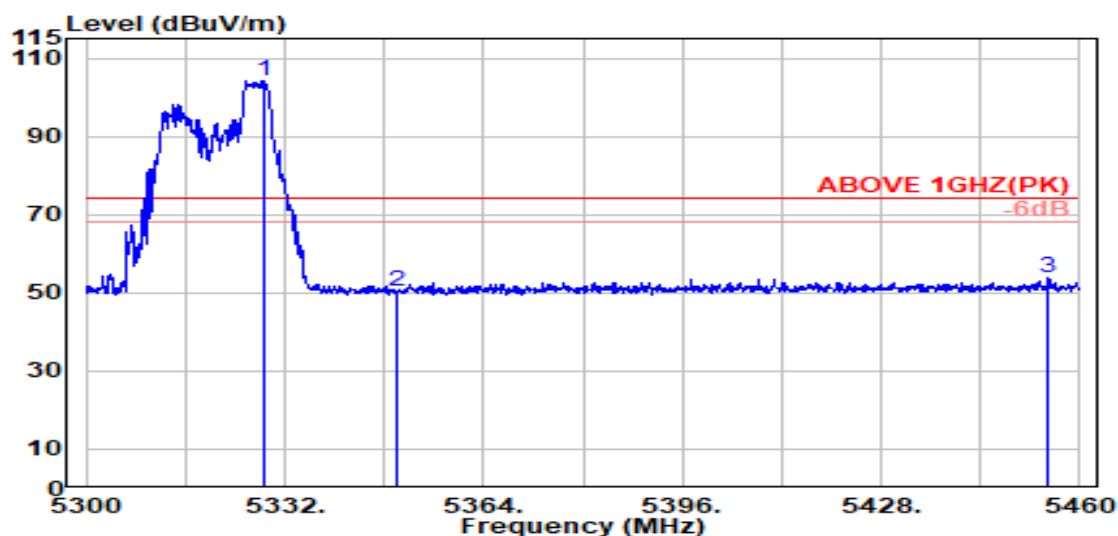

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	33.74	8.55	39.17	101.13	104.26	---	---	Peak
5350.000	33.70	8.57	39.17	47.16	50.26	74.00	23.74	Peak
5455.000	34.01	8.67	39.16	50.08	53.61	74.00	20.39	Peak

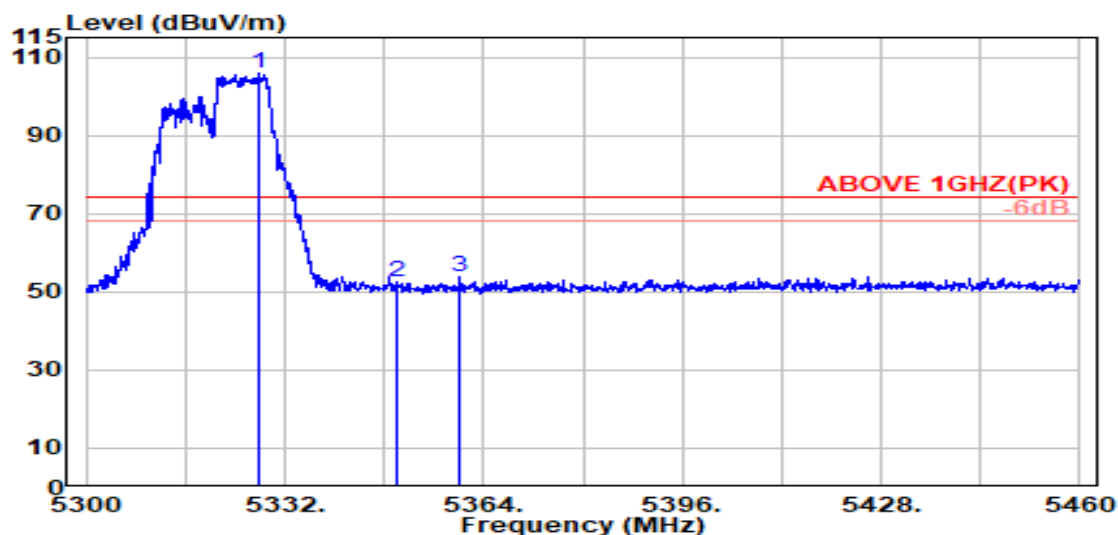


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.74	8.55	39.17	102.83	105.95	---	---	Peak
5350.000	33.70	8.57	39.17	49.40	52.50	74.00	21.50	Peak
5360.000	33.74	8.58	39.17	50.63	53.79	74.00	20.21	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

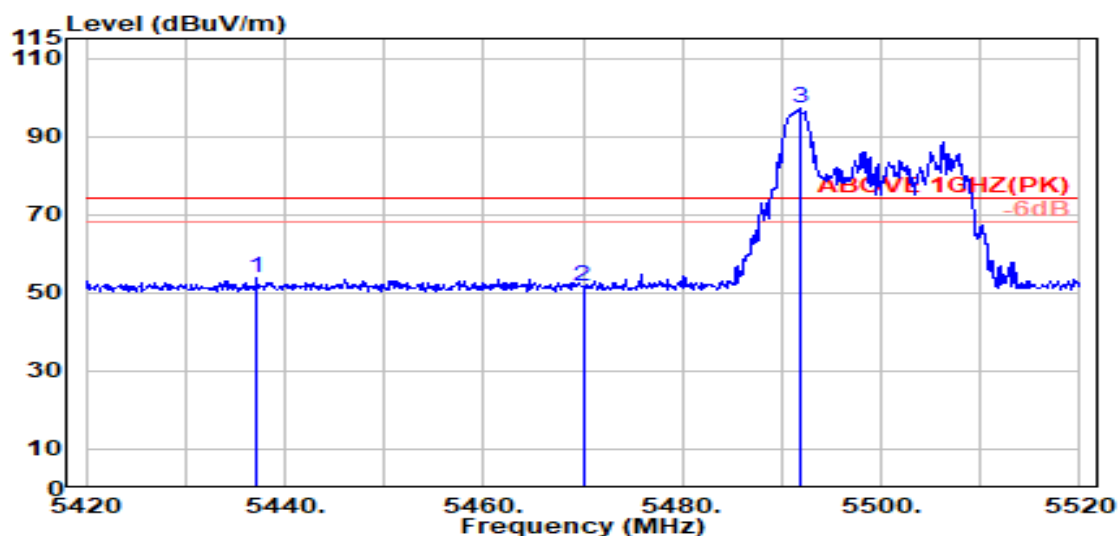

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.100	33.97	8.66	39.16	50.22	53.70	74.00	20.30	Peak
5470.000	34.04	8.69	39.15	48.05	51.62	74.00	22.38	Peak
@ 5491.900	34.08	8.71	39.15	93.52	97.16	---	---	Peak

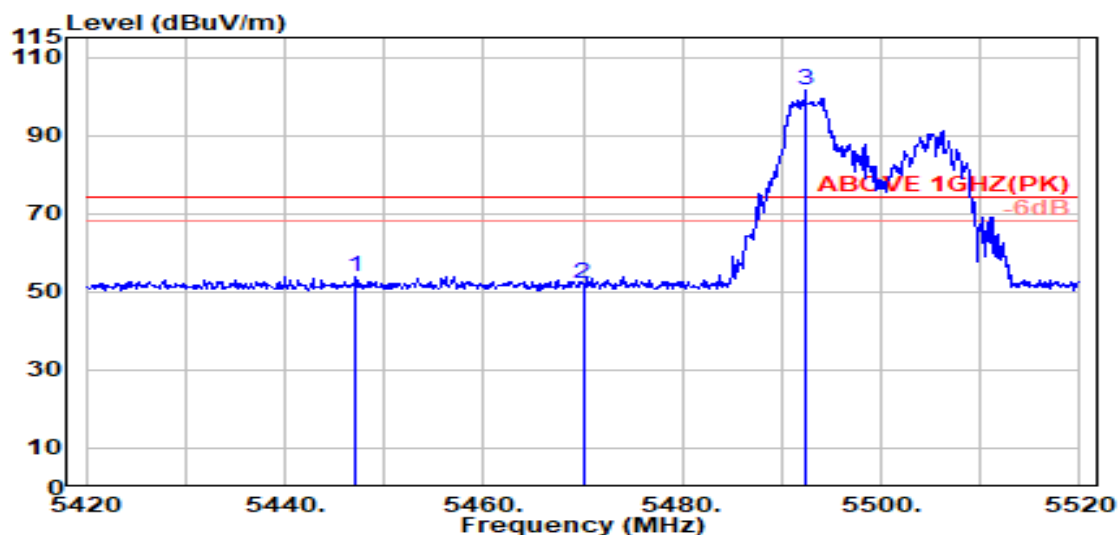


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.200	33.99	8.67	39.16	50.33	53.84	74.00	20.16	Peak
5470.000	34.04	8.69	39.15	48.44	52.02	74.00	21.98	Peak
@ 5492.400	34.08	8.71	39.15	97.81	101.45	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

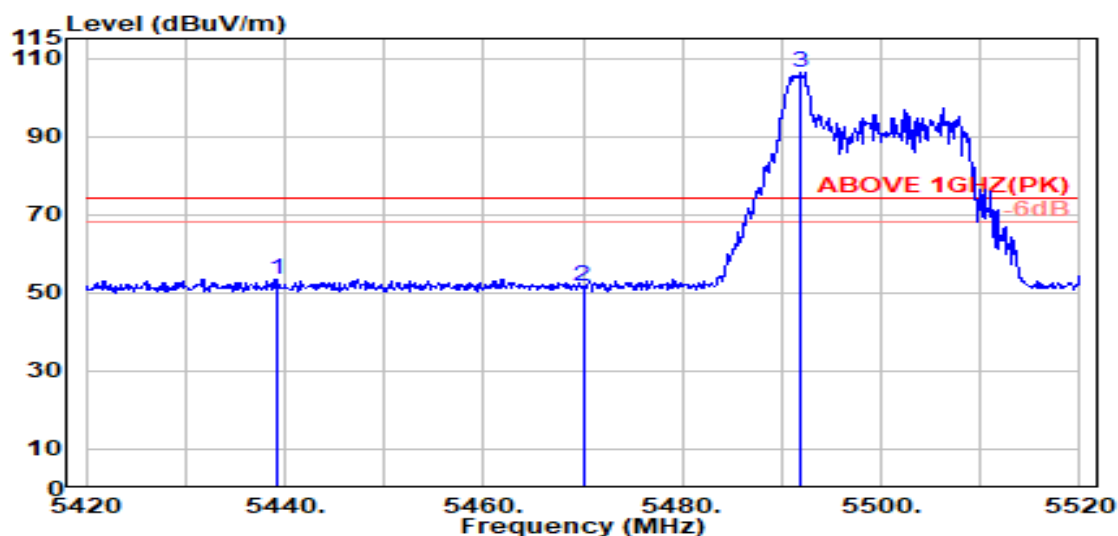

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.100	33.98	8.66	39.16	49.95	53.43	74.00	20.57	Peak
5470.000	34.04	8.69	39.15	47.91	51.48	74.00	22.52	Peak
@ 5491.900	34.08	8.71	39.15	102.74	106.38	---	---	Peak

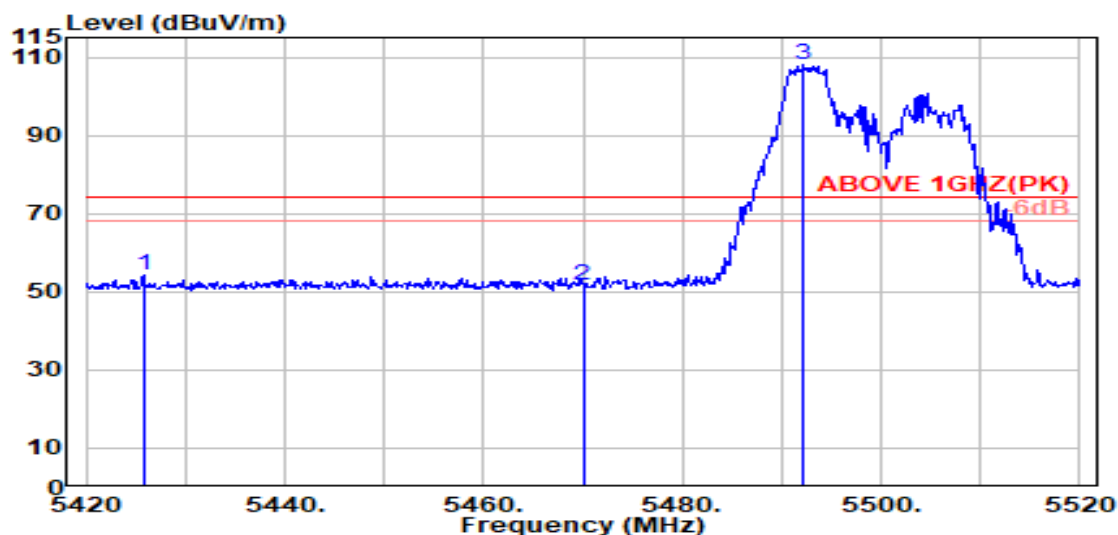


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.800	33.95	8.65	39.16	50.61	54.05	74.00	19.95	Peak
5470.000	34.04	8.69	39.15	47.98	51.55	74.00	22.45	Peak
@ 5492.200	34.08	8.71	39.15	104.62	108.26	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

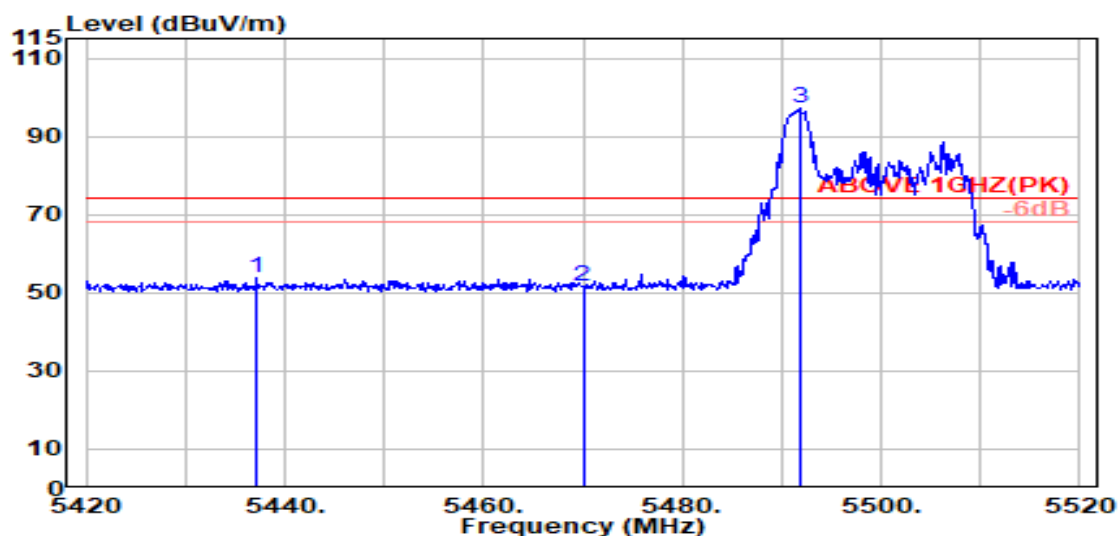

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5437.100	33.97	8.66	39.16	50.22	53.70	74.00	20.30	Peak
5470.000	34.04	8.69	39.15	48.05	51.62	74.00	22.38	Peak
@ 5491.900	34.08	8.71	39.15	93.52	97.16	---	---	Peak

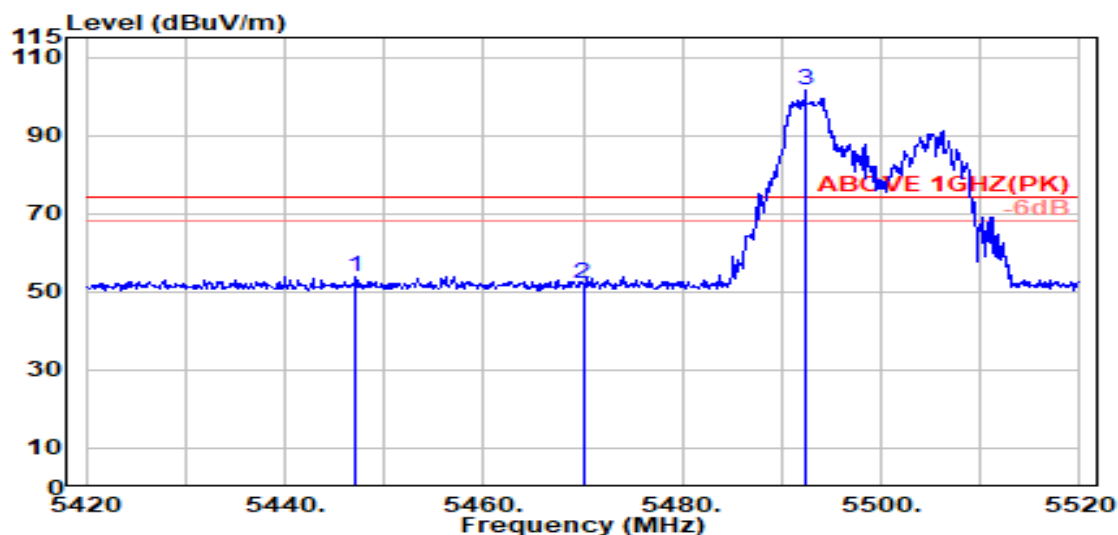


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5447.200	33.99	8.67	39.16	50.33	53.84	74.00	20.16	Peak
5470.000	34.04	8.69	39.15	48.44	52.02	74.00	21.98	Peak
@ 5492.400	34.08	8.71	39.15	97.81	101.45	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

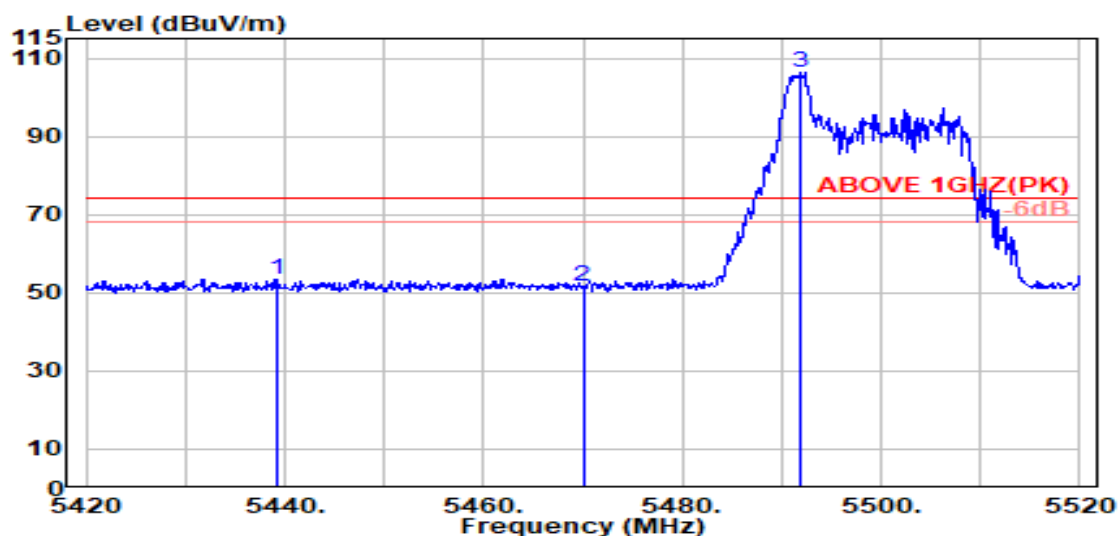

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.100	33.98	8.66	39.16	49.95	53.43	74.00	20.57	Peak
5470.000	34.04	8.69	39.15	47.91	51.48	74.00	22.52	Peak
@ 5491.900	34.08	8.71	39.15	102.74	106.38	---	---	Peak

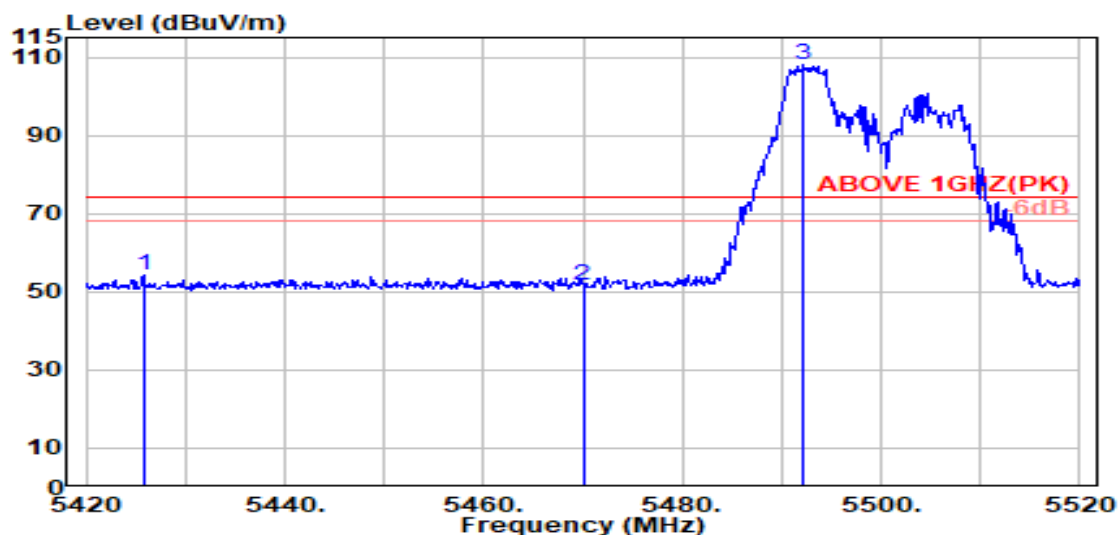


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.800	33.95	8.65	39.16	50.61	54.05	74.00	19.95	Peak
5470.000	34.04	8.69	39.15	47.98	51.55	74.00	22.45	Peak
@ 5492.200	34.08	8.71	39.15	104.62	108.26	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

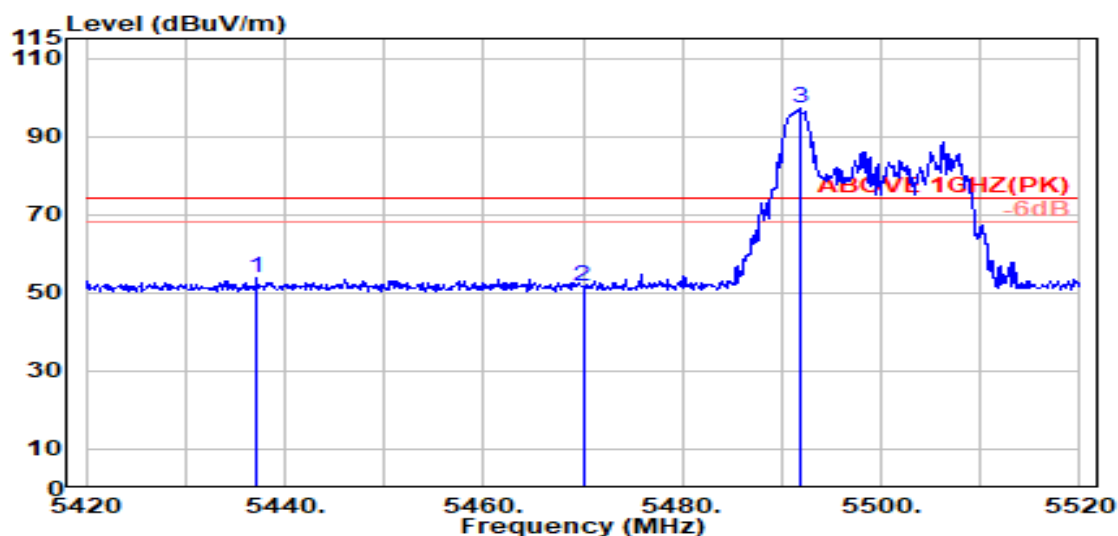

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.100	33.97	8.66	39.16	50.22	53.70	74.00	20.30	Peak
5470.000	34.04	8.69	39.15	48.05	51.62	74.00	22.38	Peak
@ 5491.900	34.08	8.71	39.15	93.52	97.16	---	---	Peak

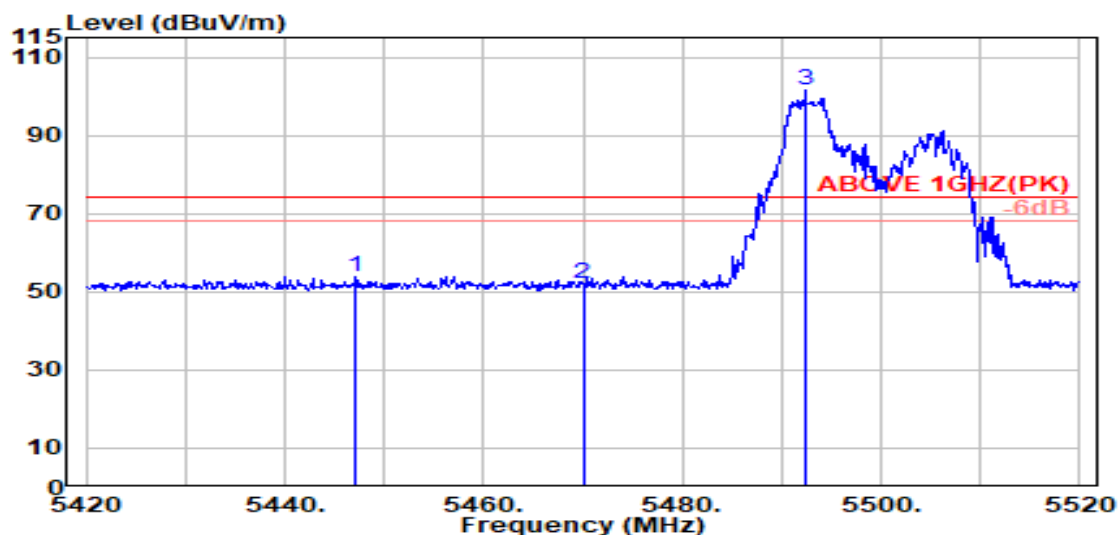


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.200	33.99	8.67	39.16	50.33	53.84	74.00	20.16	Peak
5470.000	34.04	8.69	39.15	48.44	52.02	74.00	21.98	Peak
@ 5492.400	34.08	8.71	39.15	97.81	101.45	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

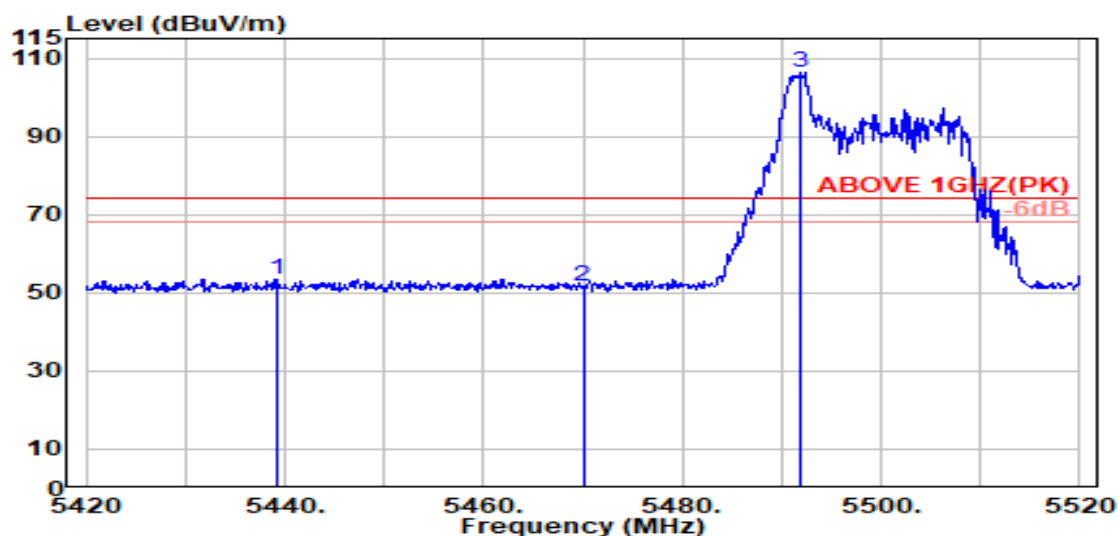

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5439.100	33.98	8.66	39.16	49.95	53.43	74.00	20.57	Peak
5470.000	34.04	8.69	39.15	47.91	51.48	74.00	22.52	Peak
@ 5491.900	34.08	8.71	39.15	102.74	106.38	---	---	Peak

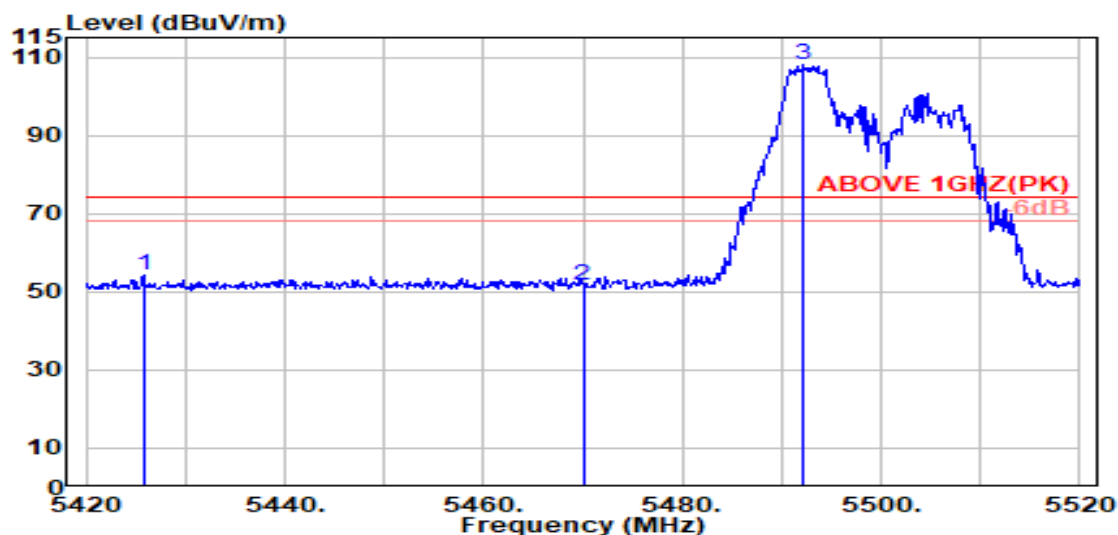


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5425.800	33.95	8.65	39.16	50.61	54.05	74.00	19.95	Peak
5470.000	34.04	8.69	39.15	47.98	51.55	74.00	22.45	Peak
@ 5492.200	34.08	8.71	39.15	104.62	108.26	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

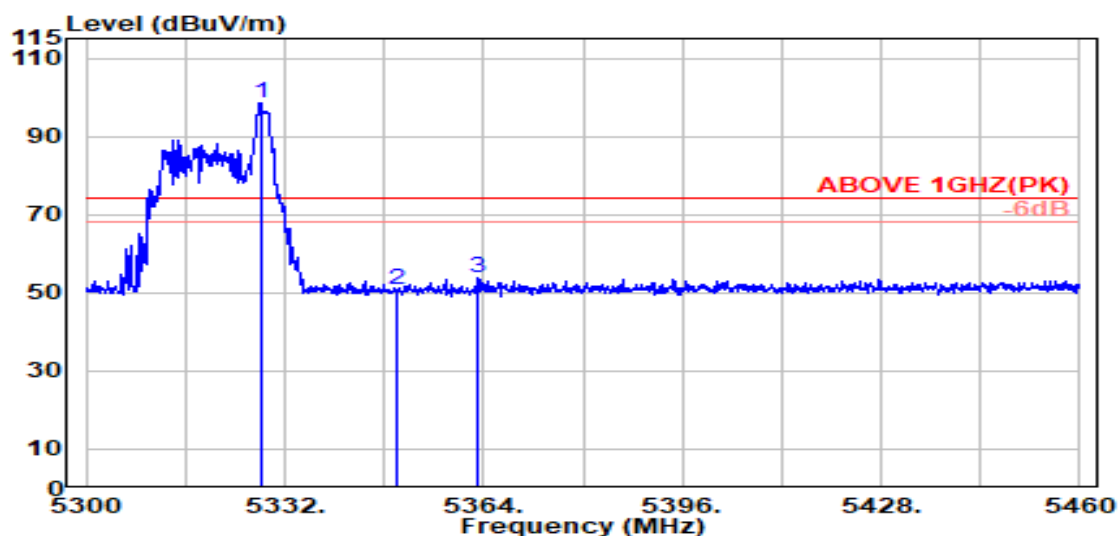

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.100	33.74	8.55	39.17	95.32	98.45	---	---	Peak
	5350.000	33.70	8.57	39.17	47.56	50.67	74.00	23.33	Peak
	5363.200	33.75	8.59	39.17	50.46	53.63	74.00	20.37	Peak

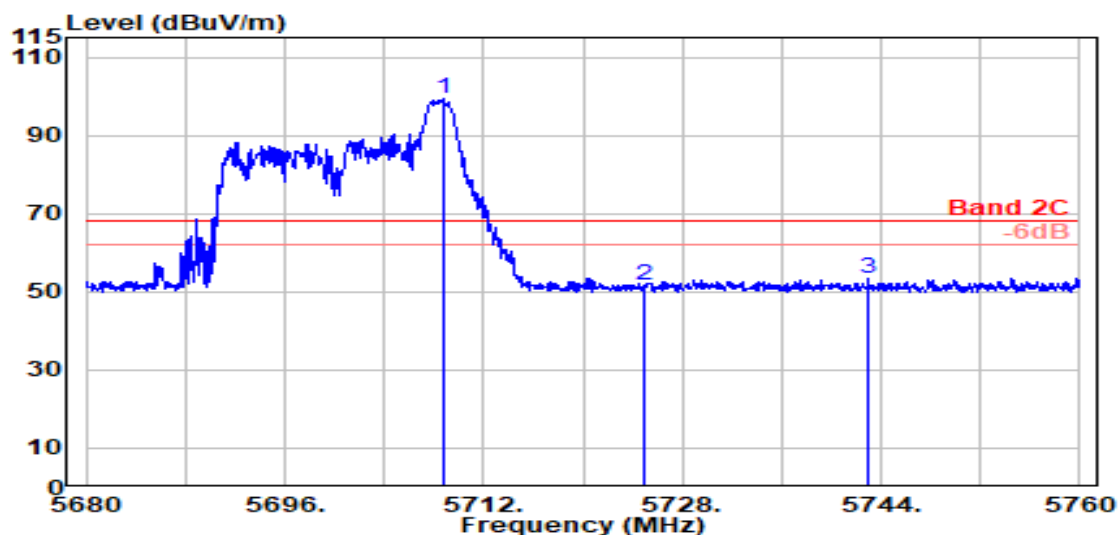


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.700	33.60	8.91	39.19	96.07	99.39	---	---	Peak
	5725.000	33.60	8.93	39.20	48.44	51.77	68.20	16.43	Peak
	5743.000	33.60	8.94	39.20	50.03	53.37	68.20	14.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

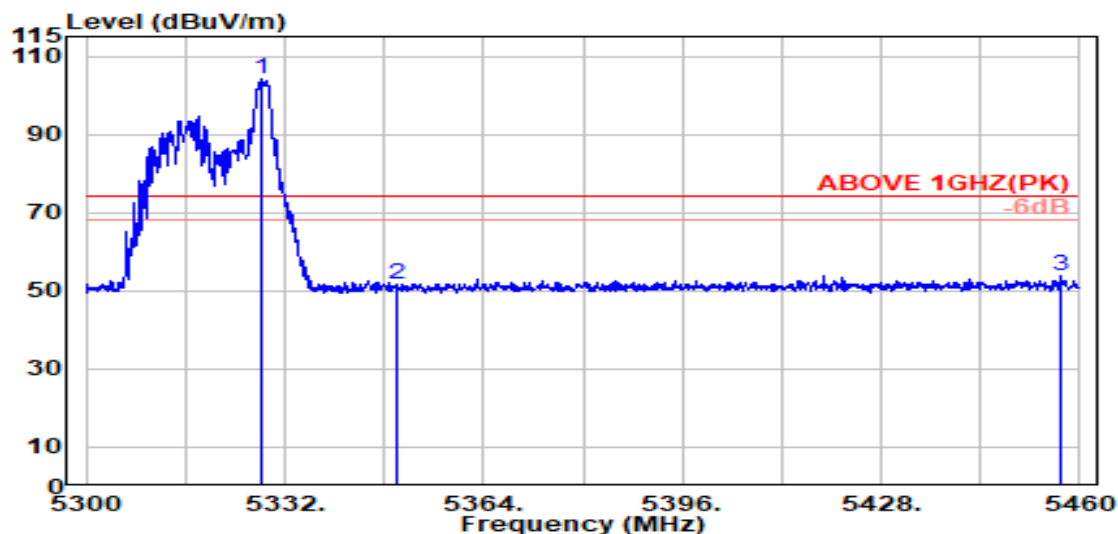

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	100.96	104.09	---	---	Peak
5350.000	33.70	8.57	39.17	48.50	51.61	74.00	22.39	Peak
5457.000	34.01	8.68	39.15	50.29	53.83	74.00	20.17	Peak

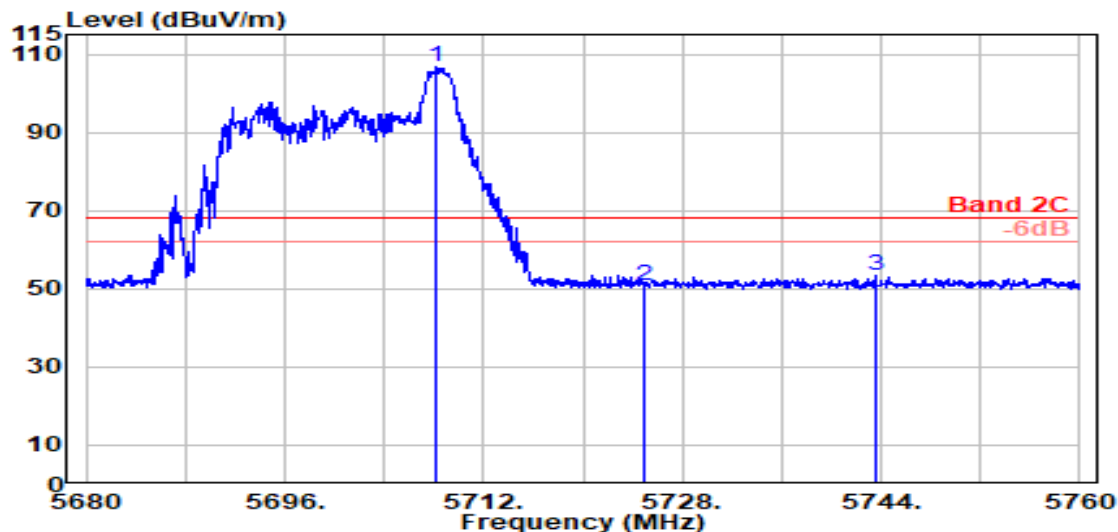


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.60	8.91	39.19	103.27	106.59	---	---	Peak
5725.000	33.60	8.93	39.20	47.32	50.65	68.20	17.55	Peak
5743.550	33.60	8.94	39.20	49.97	53.32	68.20	14.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

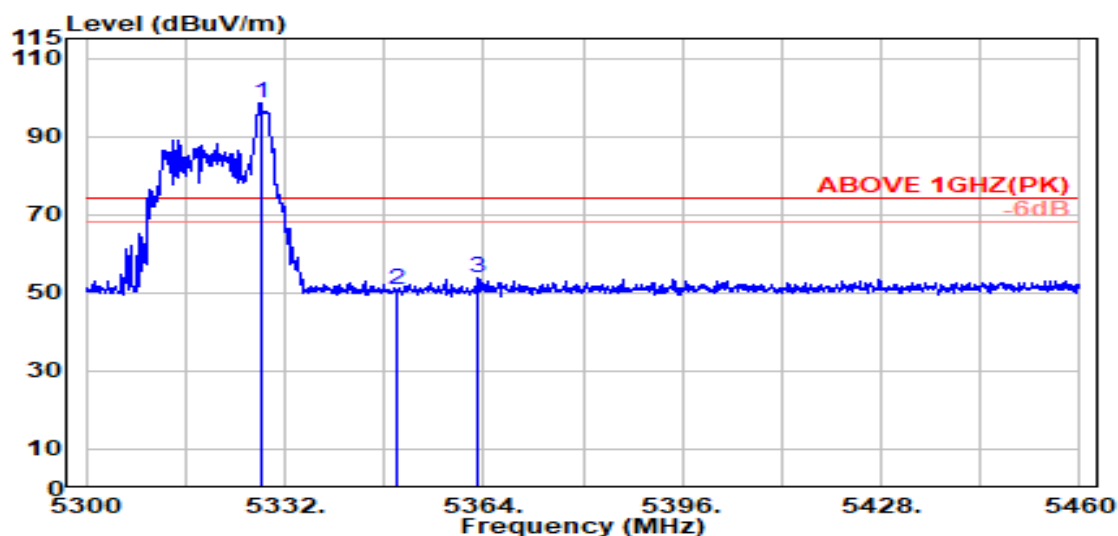

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.100	33.74	8.55	39.17	95.32	98.45	---	---	Peak
	5350.000	33.70	8.57	39.17	47.56	50.67	74.00	23.33	Peak
	5363.200	33.75	8.59	39.17	50.46	53.63	74.00	20.37	Peak

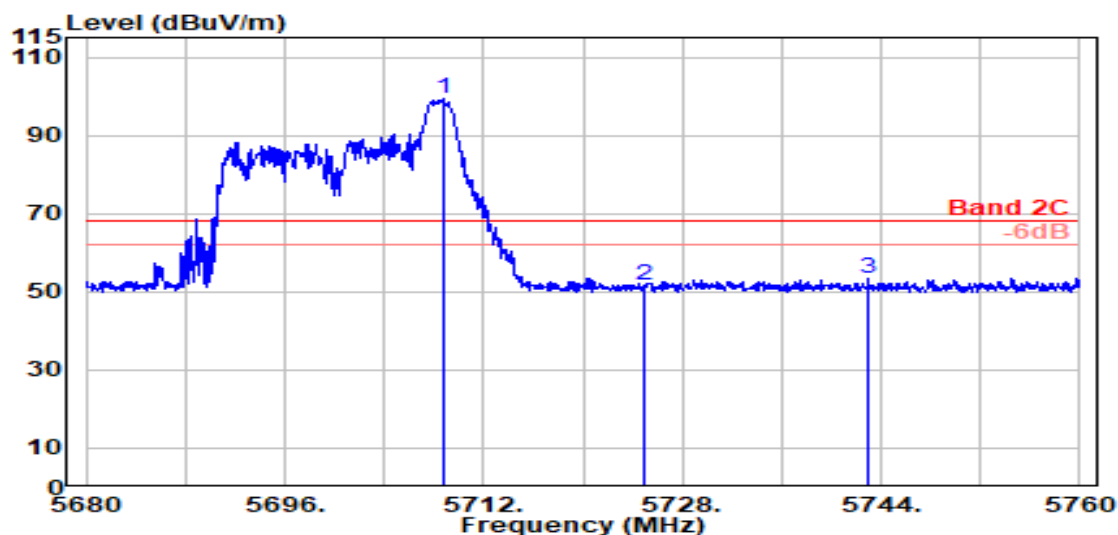


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.700	33.60	8.91	39.19	96.07	99.39	---	---	Peak
	5725.000	33.60	8.93	39.20	48.44	51.77	68.20	16.43	Peak
	5743.000	33.60	8.94	39.20	50.03	53.37	68.20	14.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

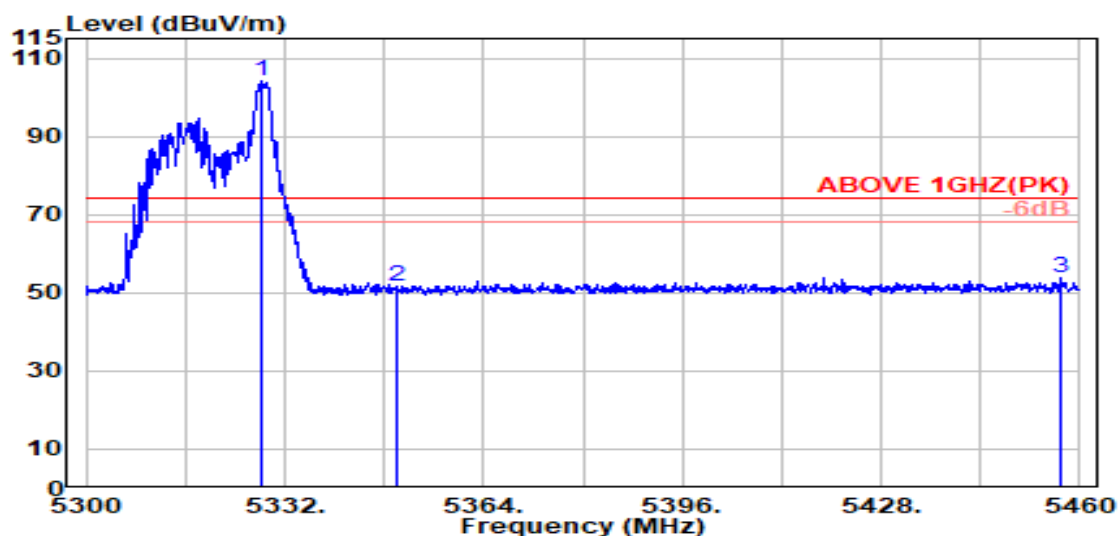

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	100.96	104.09	---	---	Peak
5350.000	33.70	8.57	39.17	48.50	51.61	74.00	22.39	Peak
5457.000	34.01	8.68	39.15	50.29	53.83	74.00	20.17	Peak

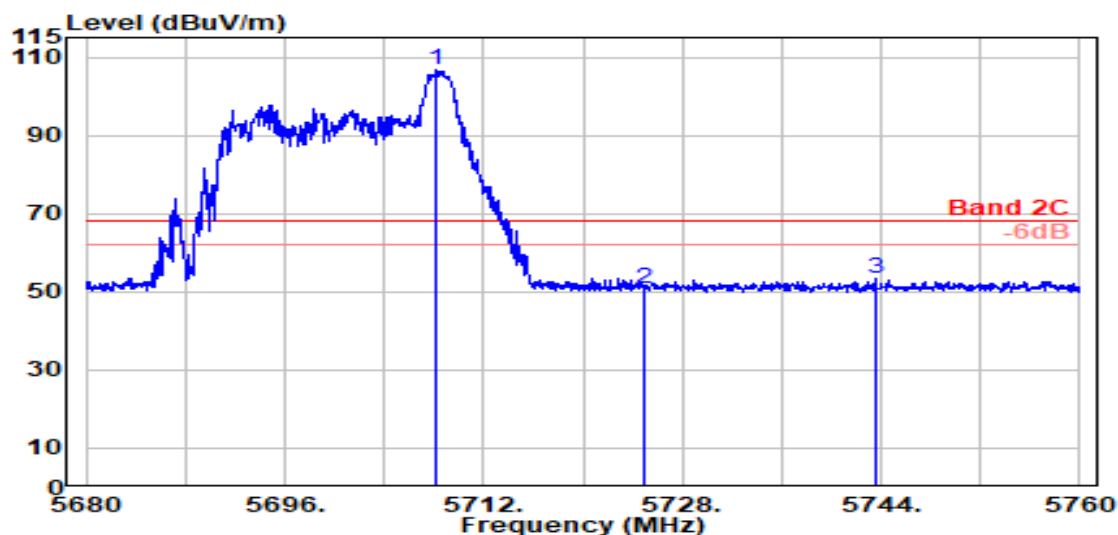


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.60	8.91	39.19	103.27	106.59	---	---	Peak
5725.000	33.60	8.93	39.20	47.32	50.65	68.20	17.55	Peak
5743.550	33.60	8.94	39.20	49.97	53.32	68.20	14.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

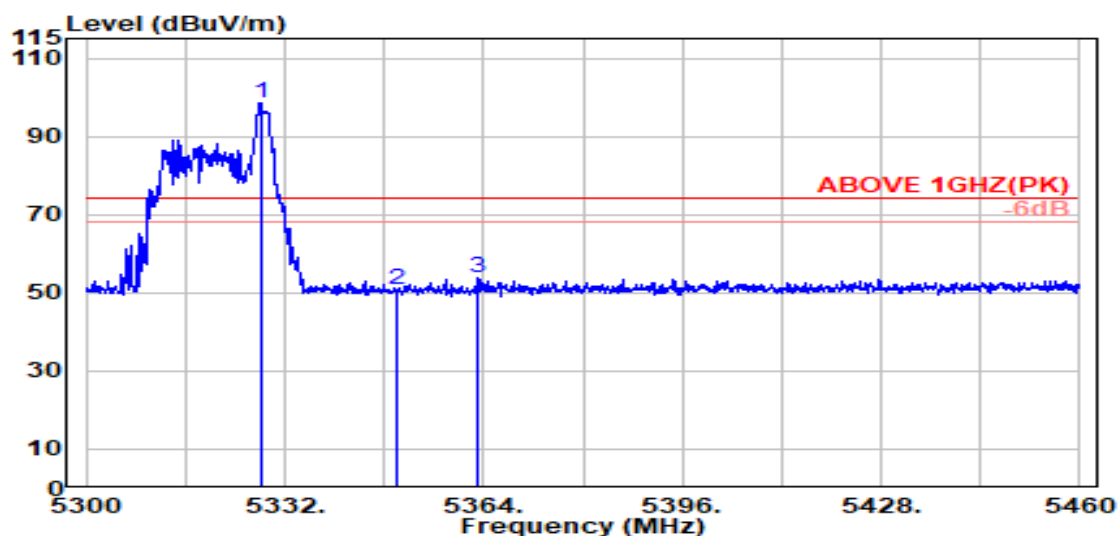

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.100	33.74	8.55	39.17	95.32	98.45	---	---	Peak
	5350.000	33.70	8.57	39.17	47.56	50.67	74.00	23.33	Peak
	5363.200	33.75	8.59	39.17	50.46	53.63	74.00	20.37	Peak

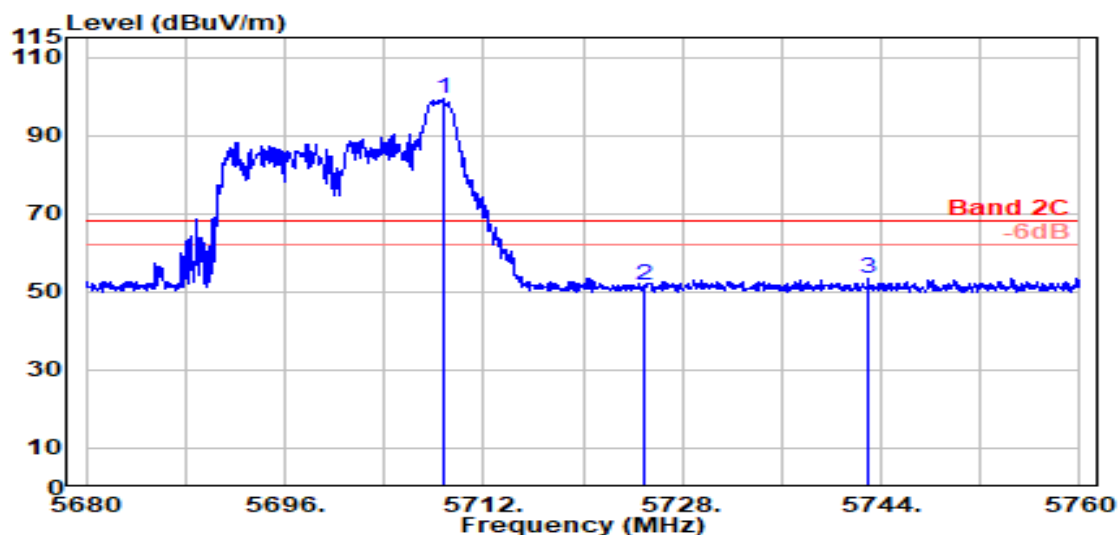


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.700	33.60	8.91	39.19	96.07	99.39	---	---	Peak
	5725.000	33.60	8.93	39.20	48.44	51.77	68.20	16.43	Peak
	5743.000	33.60	8.94	39.20	50.03	53.37	68.20	14.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

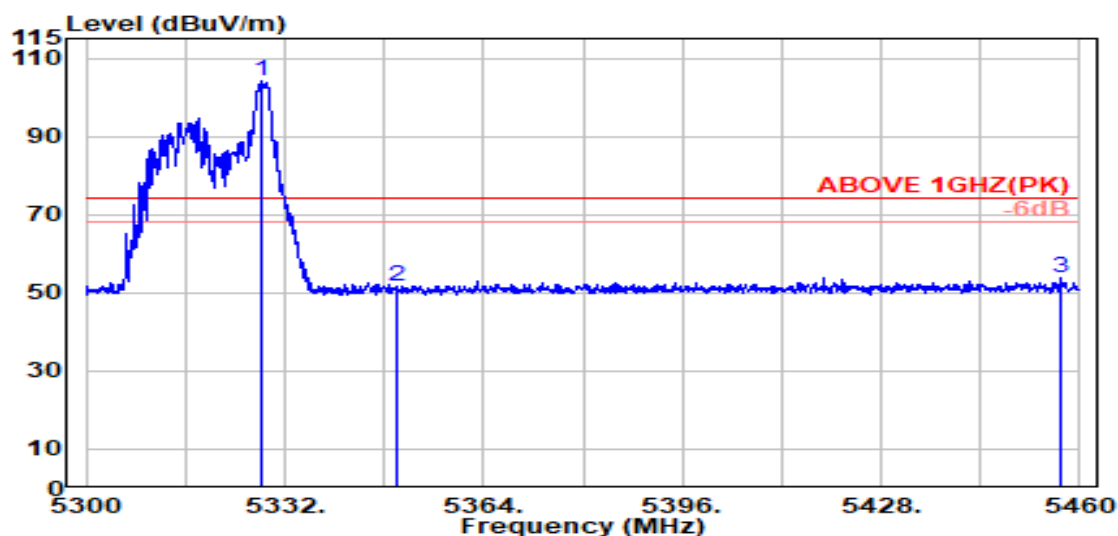

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	100.96	104.09	---	---	Peak
5350.000	33.70	8.57	39.17	48.50	51.61	74.00	22.39	Peak
5457.000	34.01	8.68	39.15	50.29	53.83	74.00	20.17	Peak

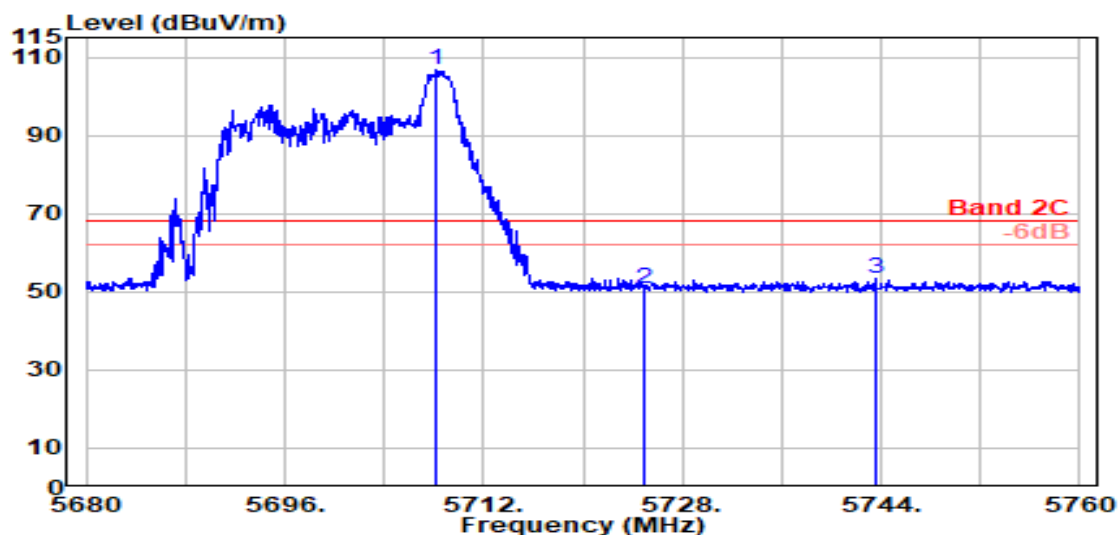


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.150	33.60	8.91	39.19	103.27	106.59	---	---	Peak
5725.000	33.60	8.93	39.20	47.32	50.65	68.20	17.55	Peak
5743.550	33.60	8.94	39.20	49.97	53.32	68.20	14.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

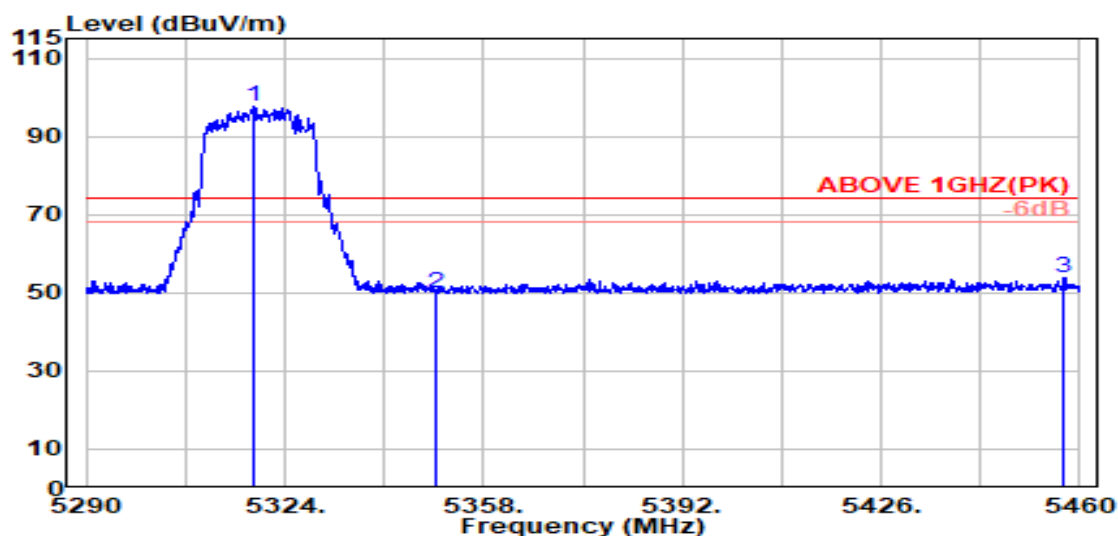

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5318.800	33.76	8.54	39.17	94.32	97.45	---	---	Peak
	5350.000	33.70	8.57	39.17	46.84	49.94	74.00	24.06	Peak
	5457.300	34.01	8.68	39.15	50.41	53.94	74.00	20.06	Peak

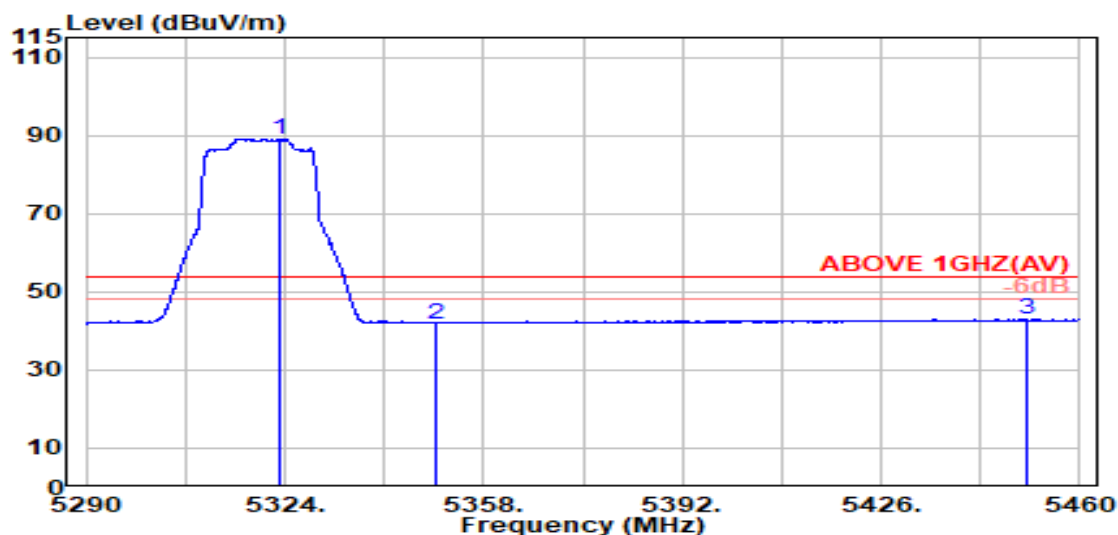


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5323.100	33.75	8.55	39.17	86.05	89.18	---	---	Average
	5350.000	33.70	8.57	39.17	38.75	41.86	54.00	12.14	Average
	5451.000	34.00	8.67	39.16	39.39	42.90	54.00	11.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

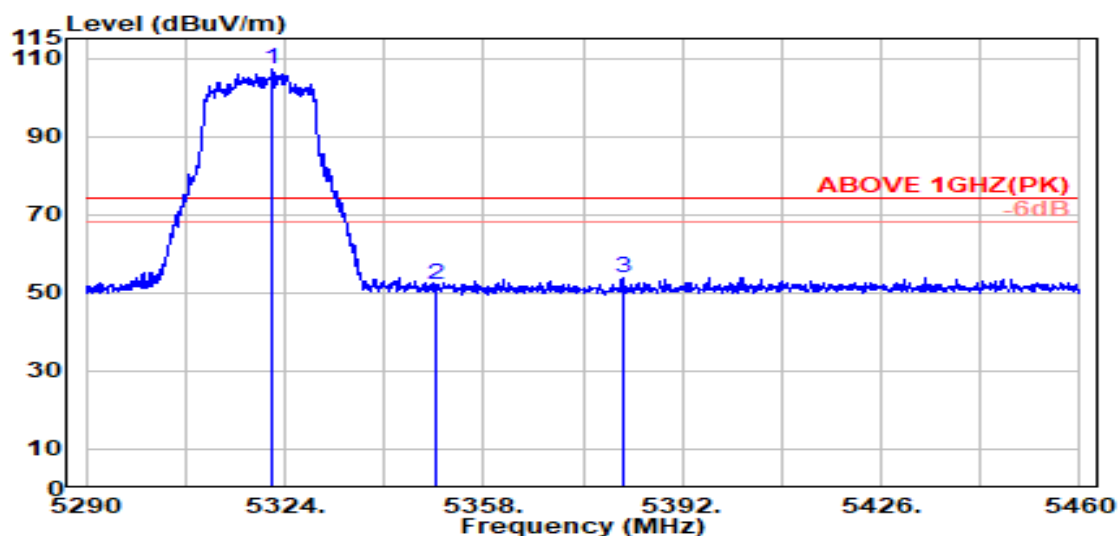

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.000	33.76	8.55	39.17	103.99	107.12	---	---	Peak
5350.000	33.70	8.57	39.17	48.87	51.98	74.00	22.02	Peak
5381.700	33.83	8.60	39.16	50.67	53.94	74.00	20.06	Peak

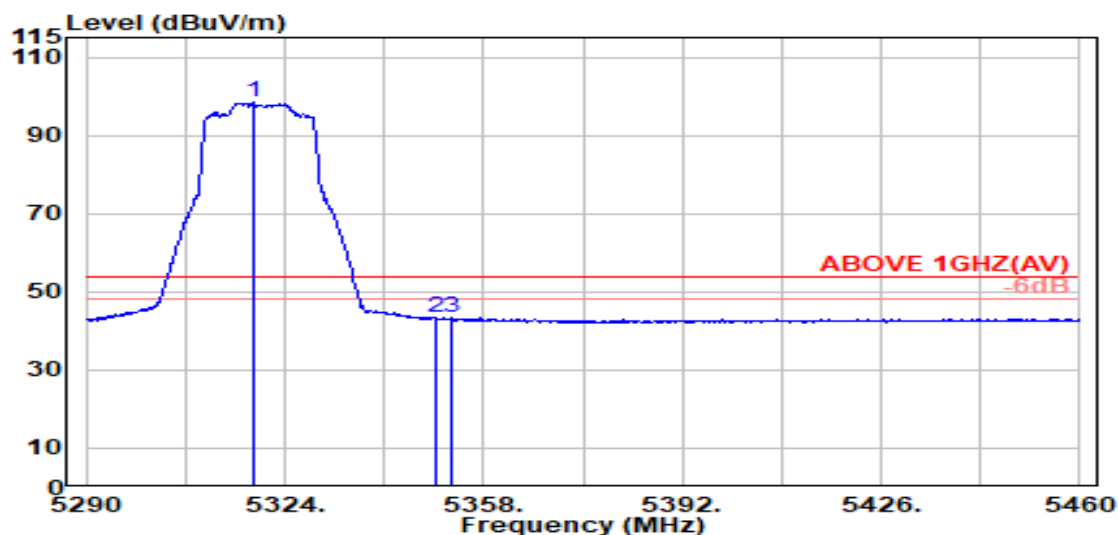


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.500	33.76	8.54	39.17	95.20	98.33	---	---	Average
5350.000	33.70	8.57	39.17	40.14	43.25	54.00	10.75	Average
5352.600	33.71	8.58	39.17	40.20	43.32	54.00	10.68	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

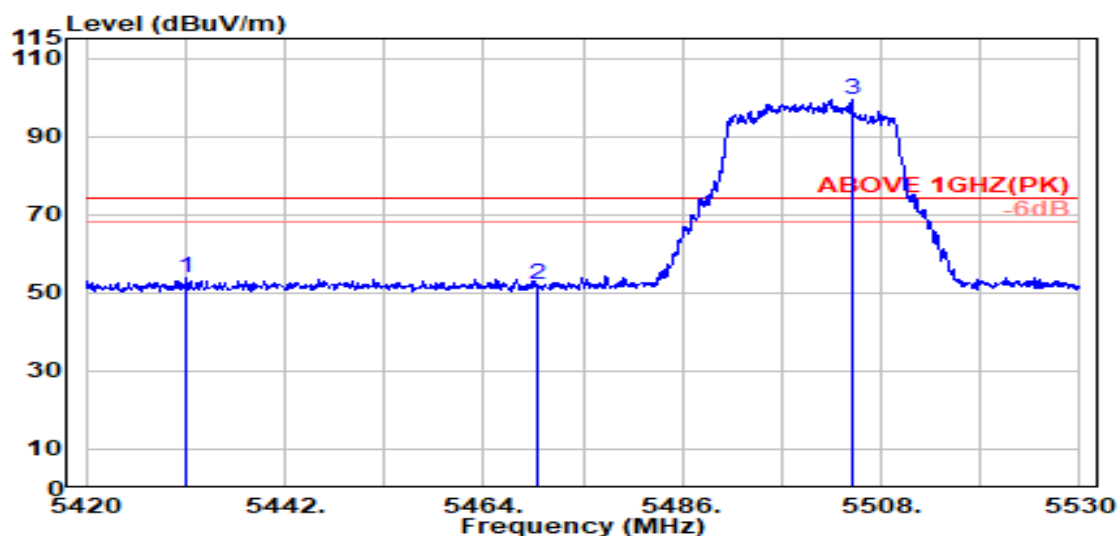

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.100	33.96	8.65	39.16	50.41	53.87	74.00	20.13	Peak
5470.000	34.04	8.69	39.15	48.45	52.03	74.00	21.97	Peak
@ 5504.700	34.09	8.72	39.15	95.89	99.55	---	---	Peak

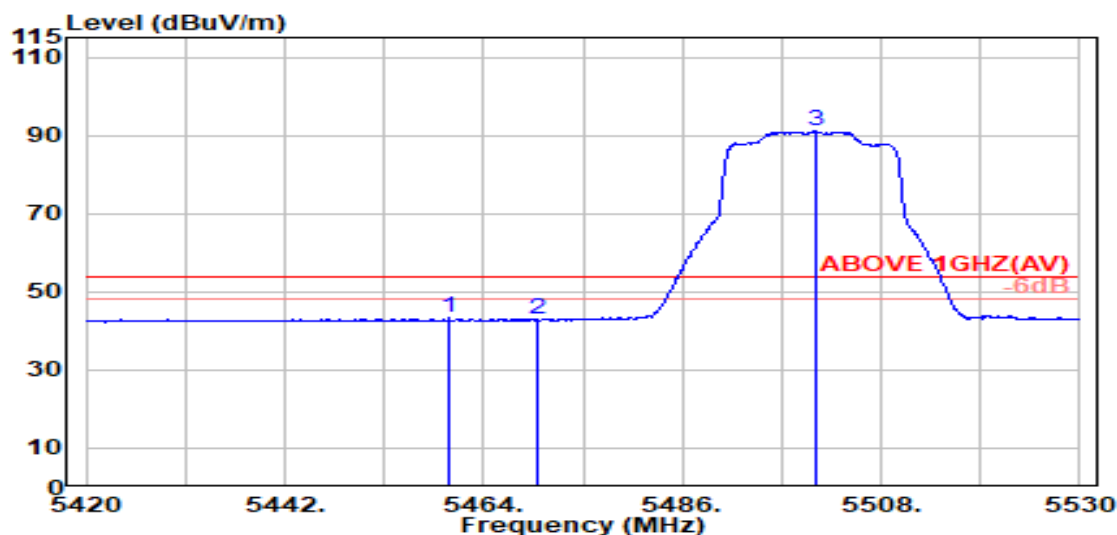


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	34.02	8.68	39.15	39.64	43.18	54.00	10.82	Average
5470.000	34.04	8.69	39.15	39.40	42.97	54.00	11.03	Average
@ 5500.700	34.10	8.72	39.15	87.57	91.23	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

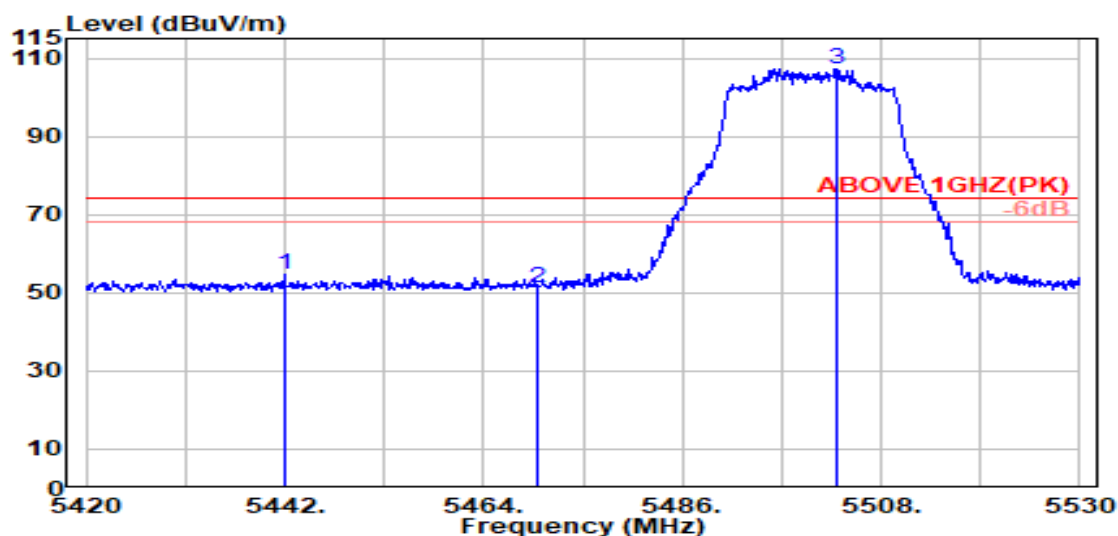

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5441.900	33.98	8.66	39.16	51.05	54.54	74.00	19.46	Peak
5470.000	34.04	8.69	39.15	47.50	51.07	74.00	22.93	Peak
@ 5503.000	34.09	8.72	39.15	103.67	107.33	---	---	Peak

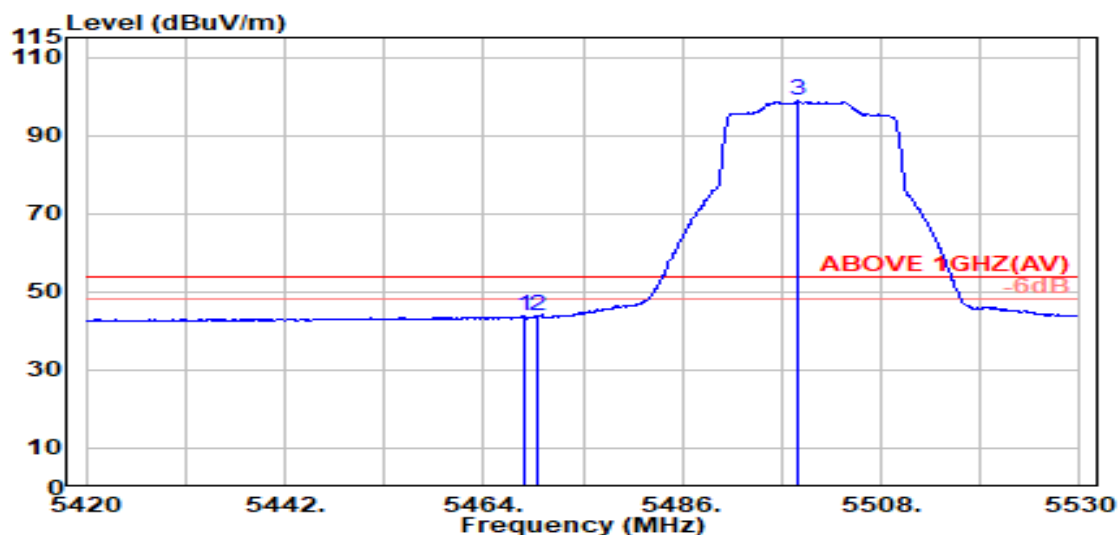


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	40.40	43.97	54.00	10.03	Average
5470.000	34.04	8.69	39.15	40.13	43.70	54.00	10.30	Average
@ 5498.800	34.10	8.72	39.15	95.20	98.86	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

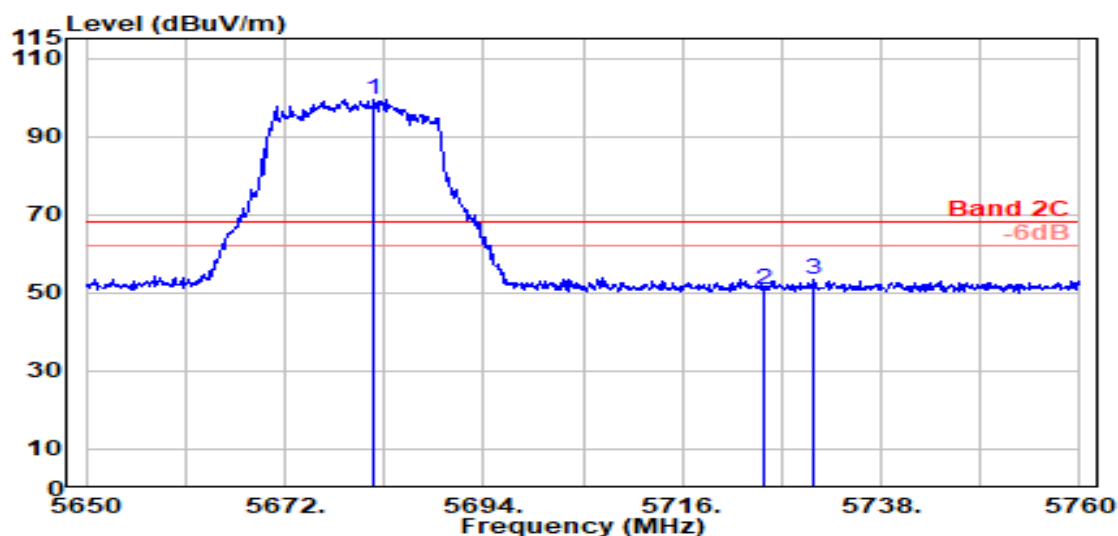

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5681.800	33.67	8.89	39.19	96.21	99.58	---	---	Peak
	5725.000	33.60	8.93	39.20	47.49	50.82	68.20	17.38	Peak
	5730.600	33.60	8.93	39.20	49.90	53.23	68.20	14.97	Peak

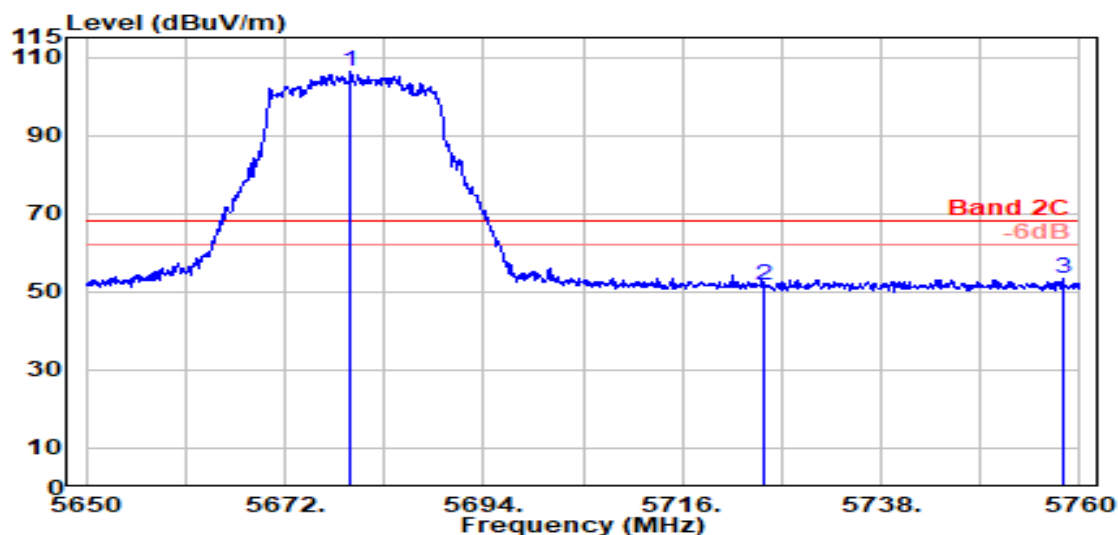


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5679.300	33.68	8.88	39.19	103.15	106.53	---	---	Peak
	5725.000	33.60	8.93	39.20	48.35	51.68	68.20	16.52	Peak
	5758.100	33.63	8.96	39.20	49.95	53.33	68.20	14.87	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

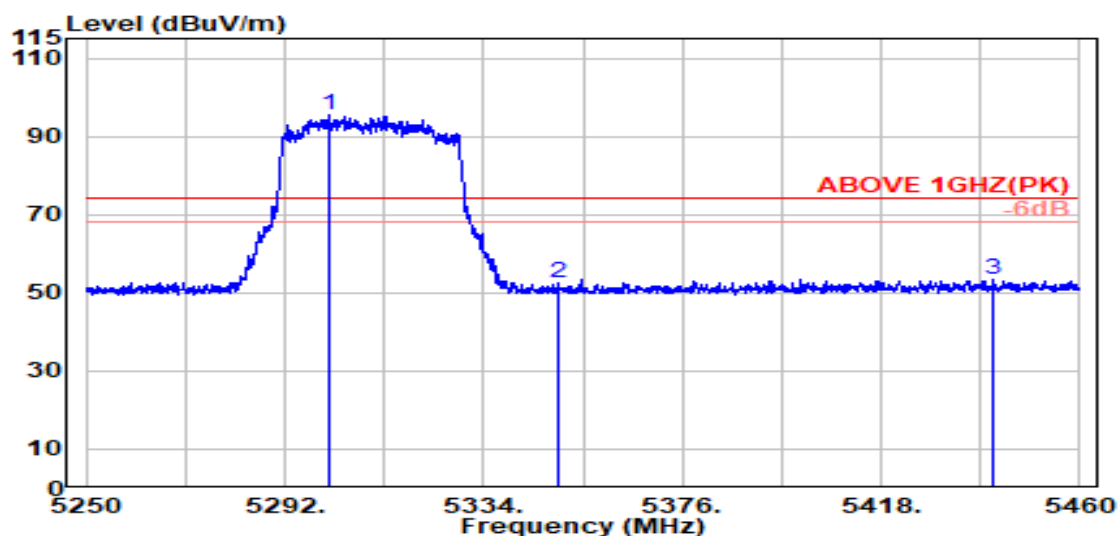

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.200	33.80	8.52	39.17	92.16	95.31	---	---	Peak
5350.000	33.70	8.57	39.17	49.50	52.61	74.00	21.39	Peak
5441.600	33.98	8.66	39.16	50.00	53.49	74.00	20.51	Peak

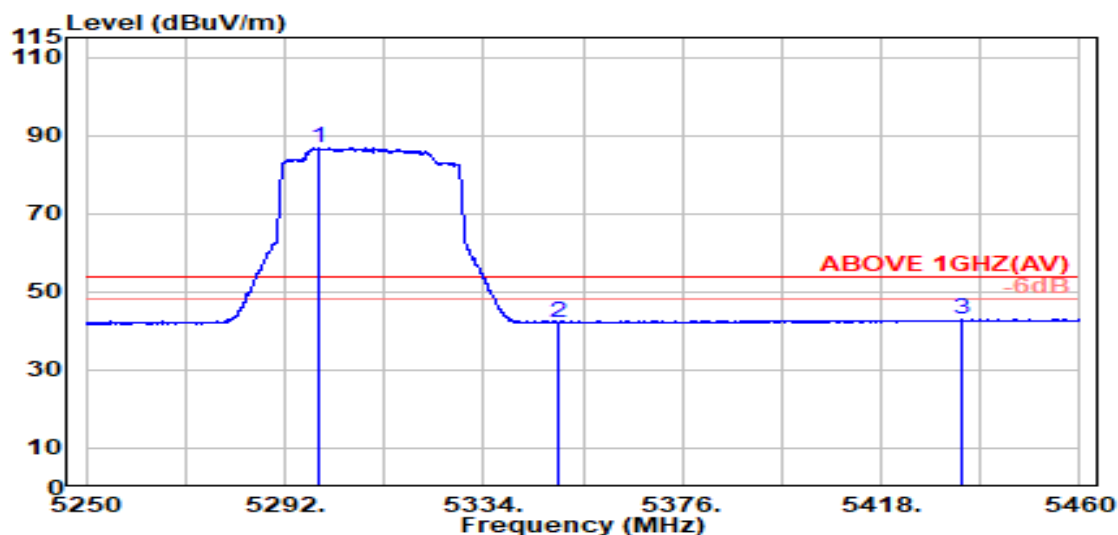


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.300	33.80	8.52	39.17	83.79	86.94	---	---	Average
5350.000	33.70	8.57	39.17	39.12	42.22	54.00	11.78	Average
5434.900	33.97	8.65	39.16	39.52	42.98	54.00	11.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

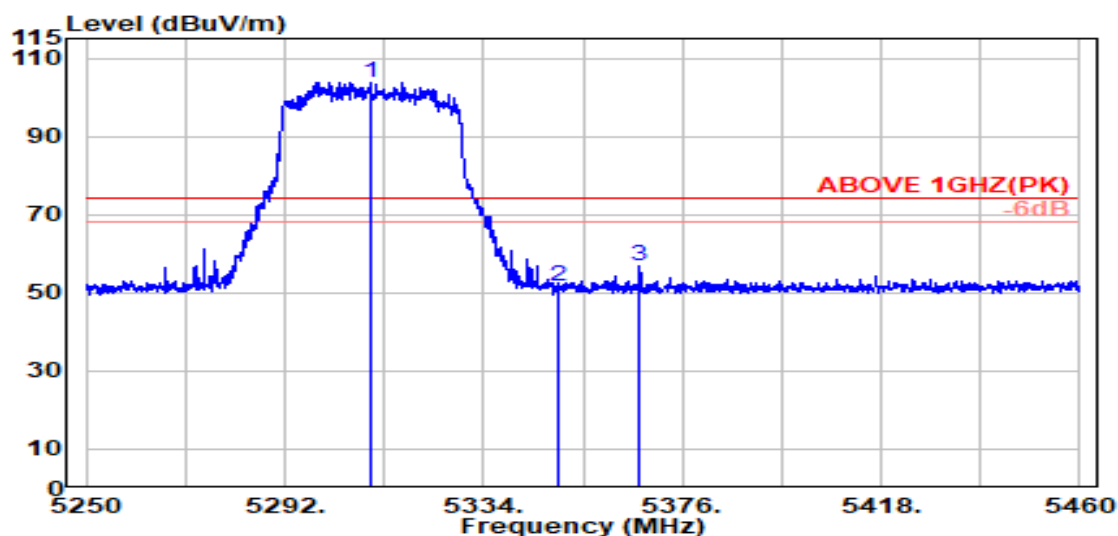

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.200	33.78	8.53	39.17	100.59	103.73	---	---	Peak
5350.000	33.70	8.57	39.17	48.36	51.47	74.00	22.53	Peak
5367.100	33.77	8.59	39.17	53.55	56.74	74.00	17.26	Peak

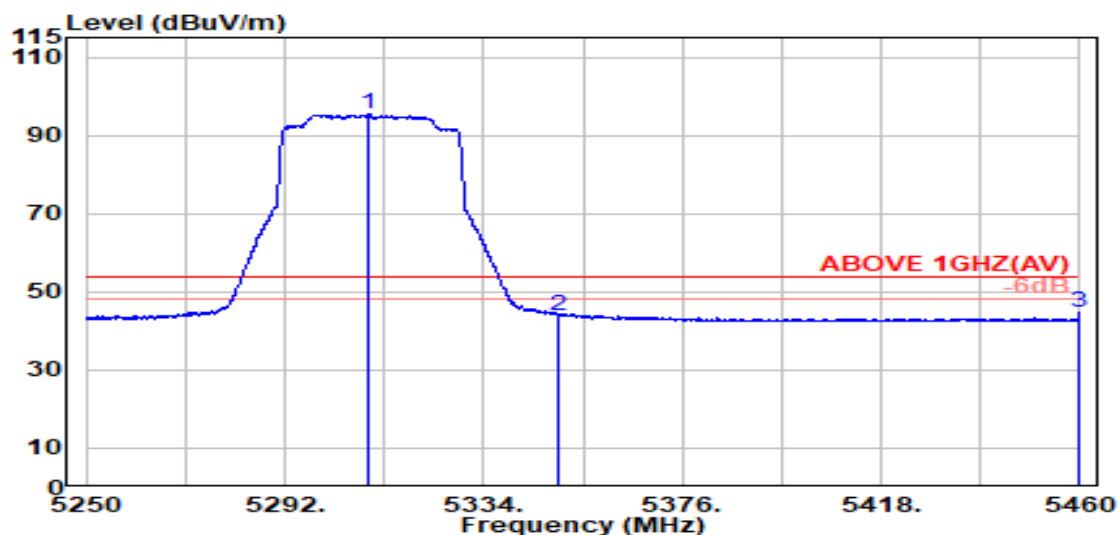


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.700	33.78	8.53	39.17	92.35	95.49	---	---	Average
5350.000	33.70	8.57	39.17	40.81	43.92	54.00	10.08	Average
5459.900	34.02	8.68	39.15	41.00	44.54	54.00	9.46	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

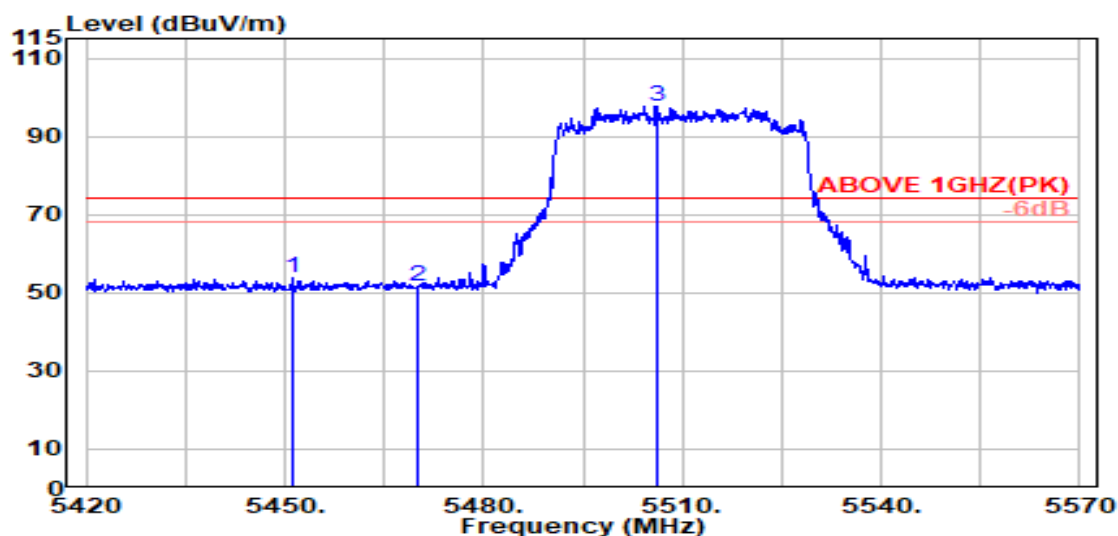

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5451.100	34.00	8.67	39.16	50.21	53.72	74.00	20.28	Peak
5470.000	34.04	8.69	39.15	47.86	51.44	74.00	22.56	Peak
@ 5506.100	34.09	8.72	39.15	93.98	97.64	---	---	Peak

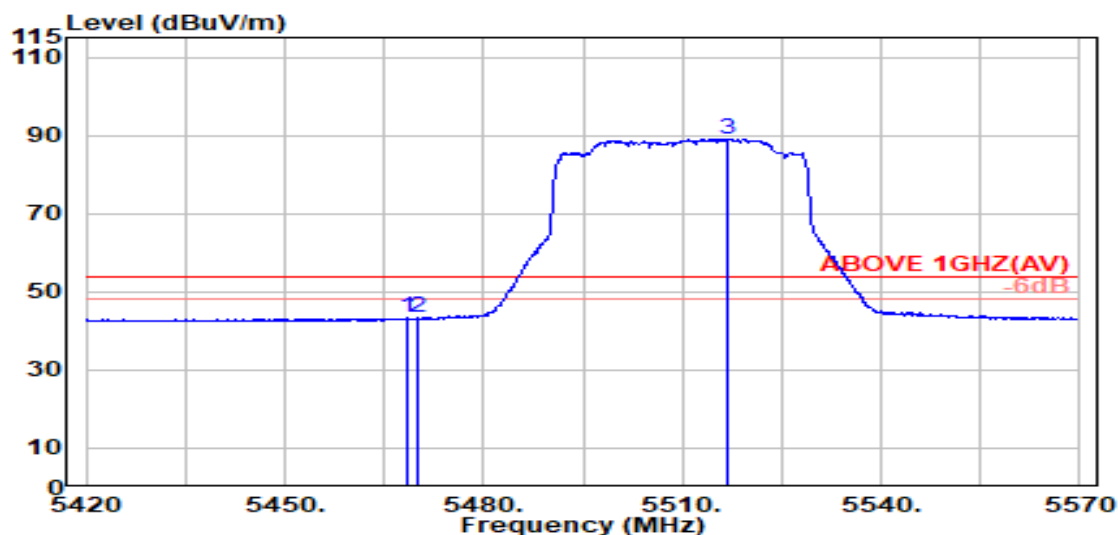


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	39.65	43.22	54.00	10.78	Average
5470.000	34.04	8.69	39.15	39.65	43.22	54.00	10.78	Average
@ 5516.900	34.07	8.73	39.15	85.52	89.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

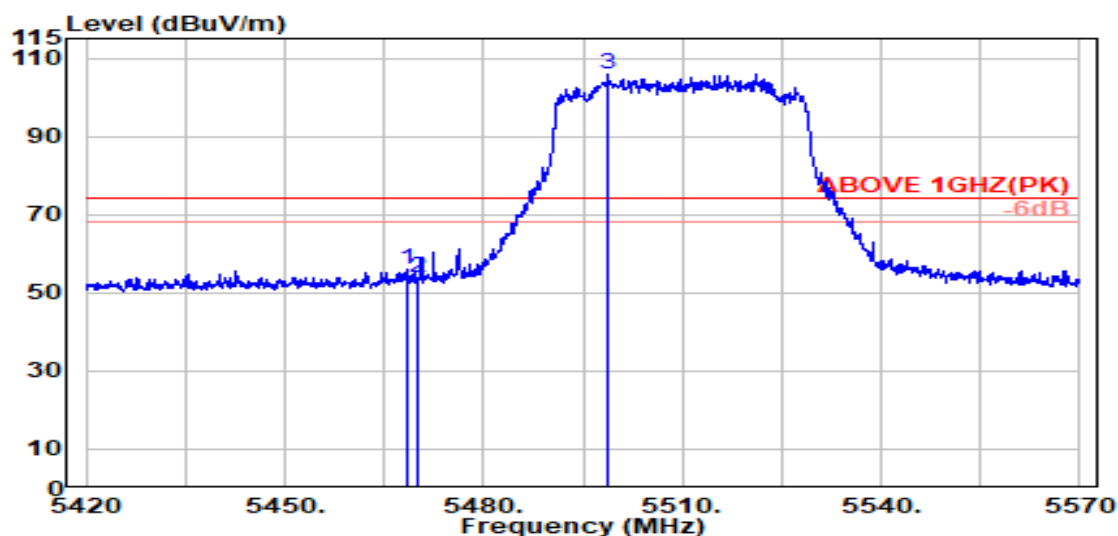

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	52.60	56.17	74.00	17.83	Peak
5470.000	34.04	8.69	39.15	50.33	53.90	74.00	20.10	Peak
@ 5498.800	34.10	8.72	39.15	102.13	105.79	---	---	Peak

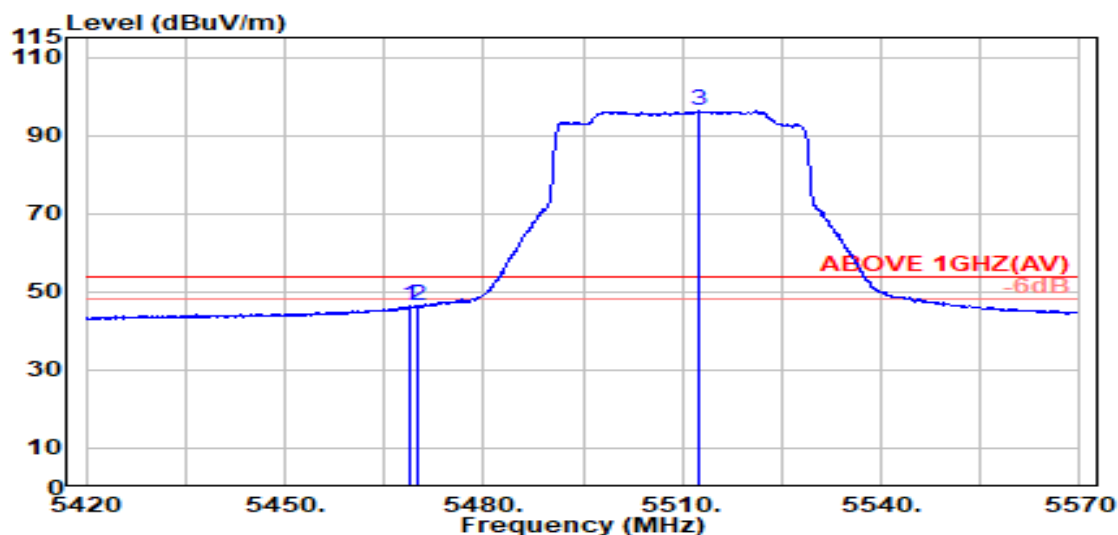


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	42.67	46.24	54.00	7.76	Average
5470.000	34.04	8.69	39.15	42.70	46.28	54.00	7.72	Average
@ 5512.500	34.07	8.73	39.15	92.56	96.21	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

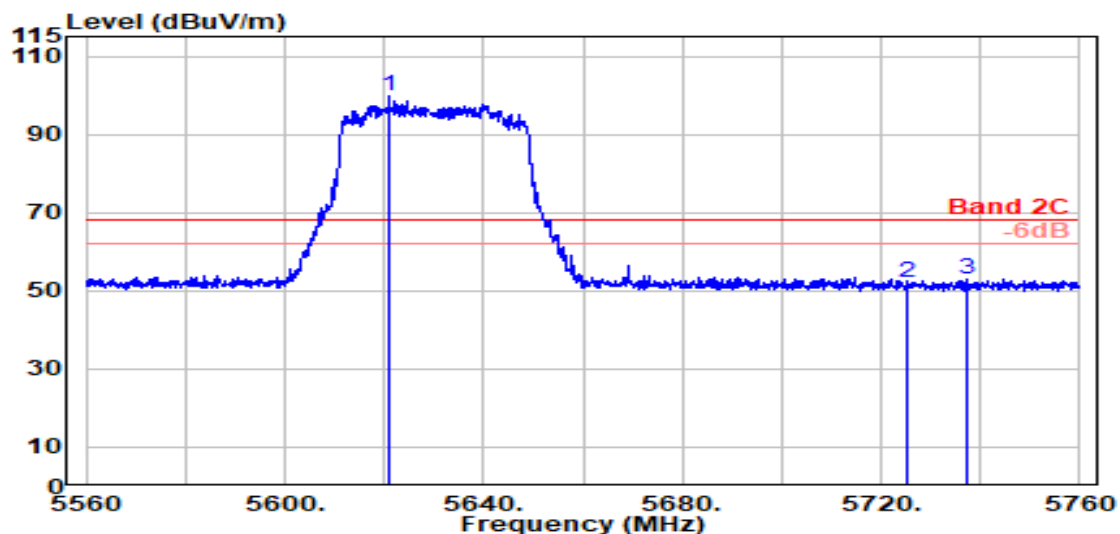

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5621.000	33.80	8.83	39.18	96.57	100.03	---	---	Peak
	5725.000	33.60	8.93	39.20	48.72	52.05	68.20	16.15	Peak
	5737.400	33.60	8.94	39.20	49.65	52.99	68.20	15.21	Peak

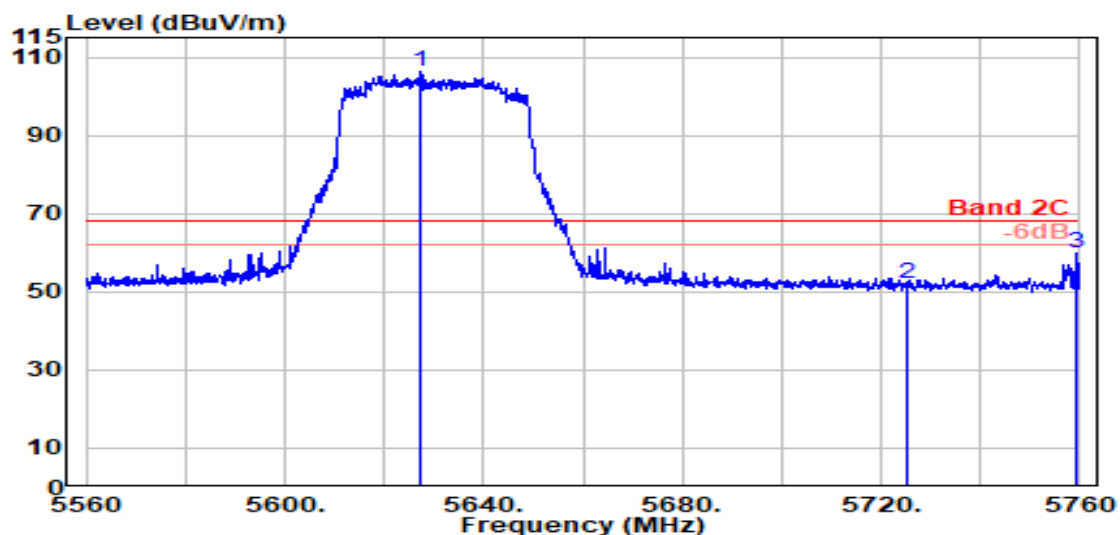


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5627.500	33.80	8.84	39.18	102.81	106.27	---	---	Peak
	5725.000	33.60	8.93	39.20	48.83	52.16	68.20	16.04	Peak
	5759.400	33.64	8.96	39.20	56.70	60.09	68.20	8.11	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

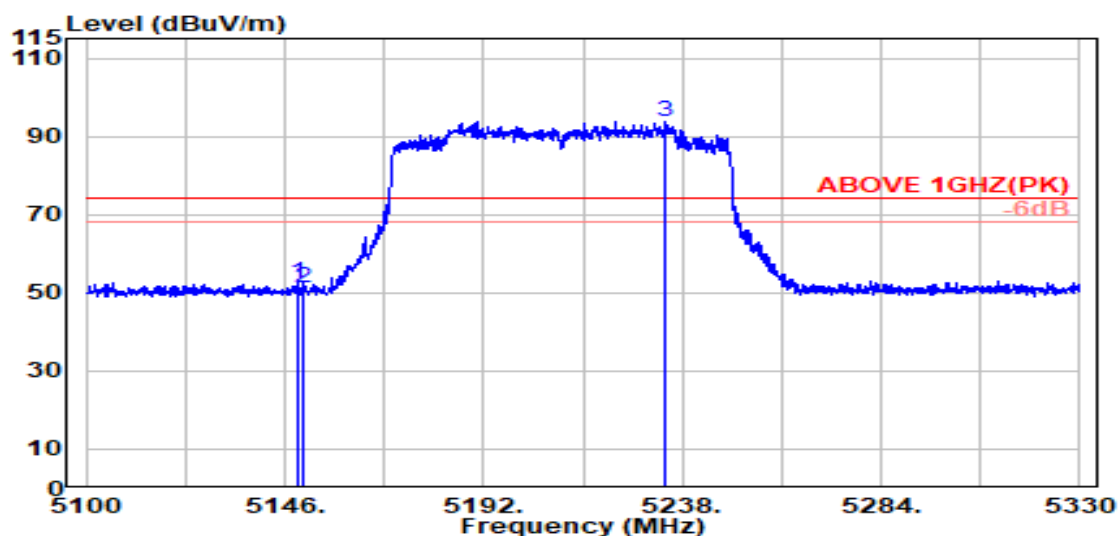

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	50.00	52.68	74.00	21.32	Peak
5150.000	33.50	8.37	39.19	48.57	51.25	74.00	22.75	Peak
@ 5234.200	33.73	8.46	39.18	90.74	93.75	---	---	Peak

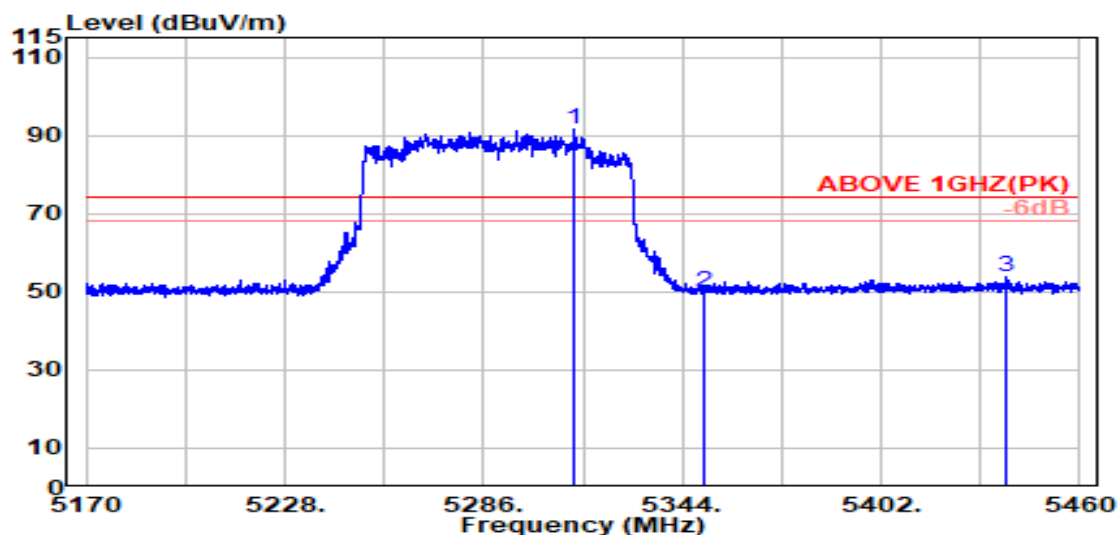


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.600	33.77	8.54	39.17	88.31	91.45	---	---	Peak
5350.000	33.70	8.57	39.17	46.62	49.72	74.00	24.28	Peak
5438.200	33.98	8.66	39.16	50.21	53.69	74.00	20.31	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

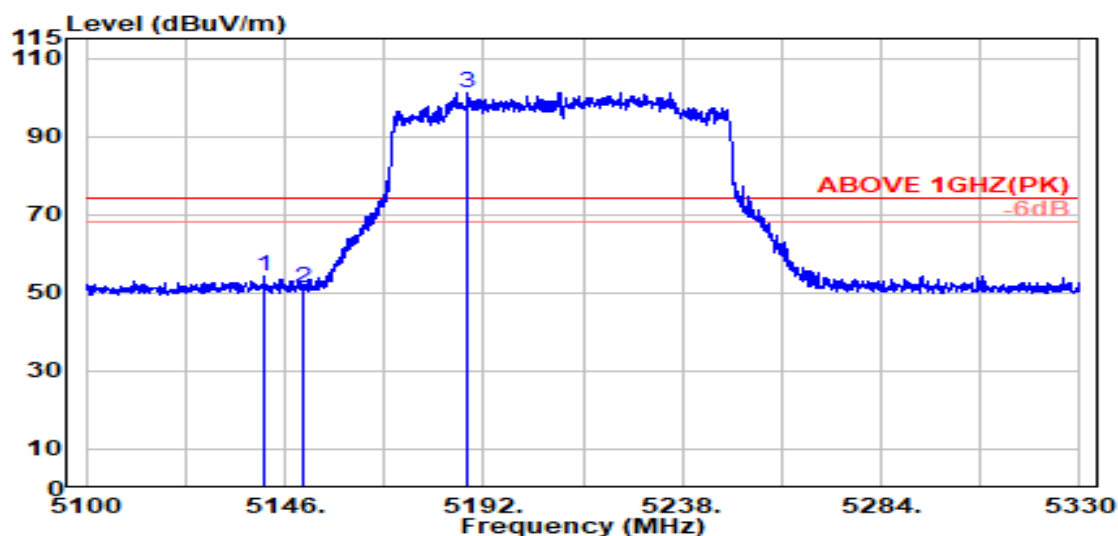

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.100	33.48	8.37	39.19	51.51	54.17	74.00	19.83	Peak
5150.000	33.50	8.37	39.19	48.48	51.16	74.00	22.84	Peak
@ 5188.200	33.73	8.41	39.19	98.11	101.07	---	---	Peak

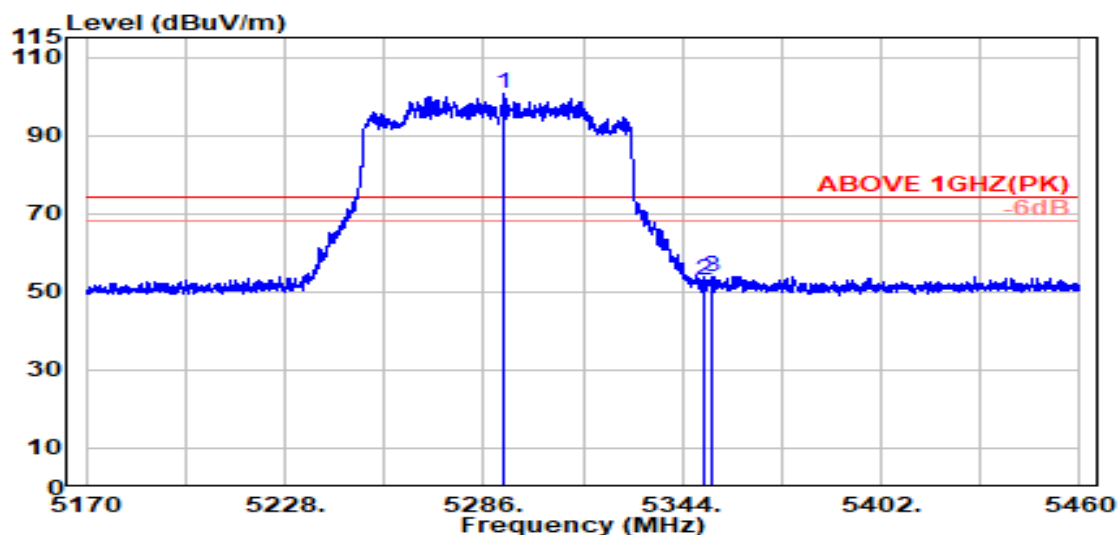


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.200	33.78	8.52	39.17	97.50	100.62	---	---	Peak
5350.000	33.70	8.57	39.17	49.99	53.10	74.00	20.90	Peak
5352.900	33.71	8.58	39.17	50.83	53.95	74.00	20.05	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

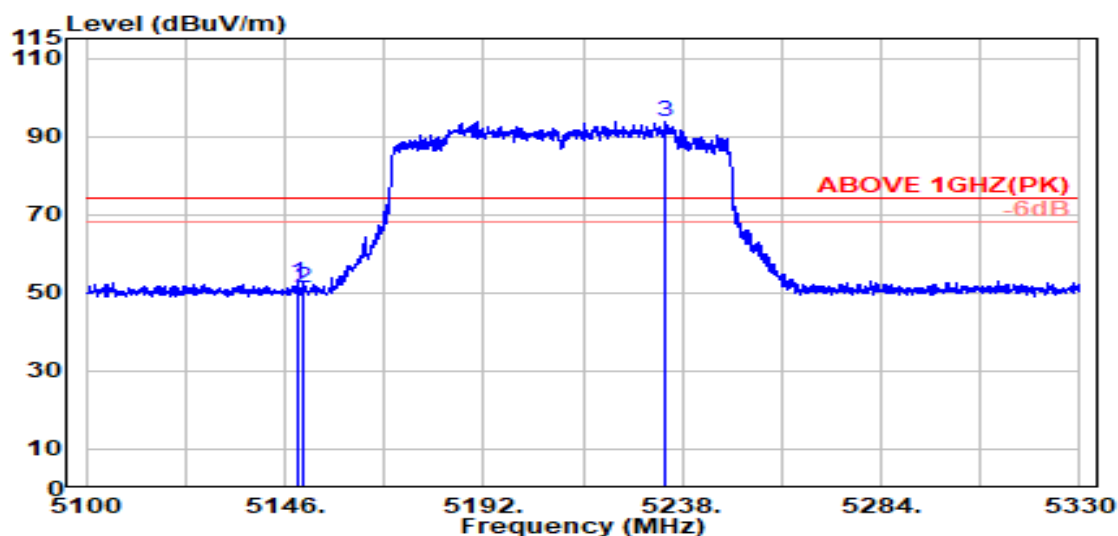

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	50.00	52.68	74.00	21.32	Peak
5150.000	33.50	8.37	39.19	48.57	51.25	74.00	22.75	Peak
@ 5234.200	33.73	8.46	39.18	90.74	93.75	---	---	Peak

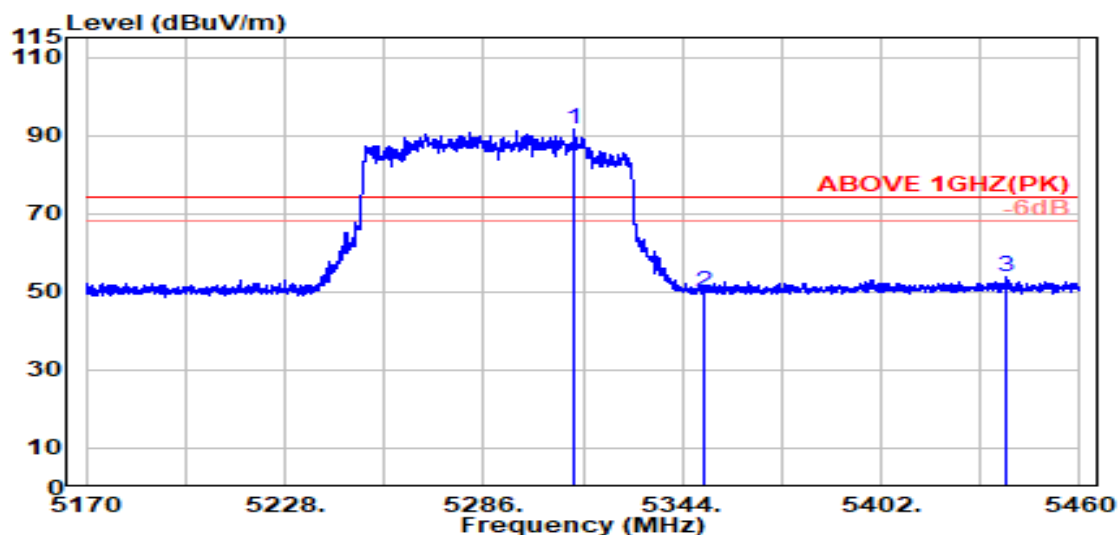


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.600	33.77	8.54	39.17	88.31	91.45	---	---	Peak
5350.000	33.70	8.57	39.17	46.62	49.72	74.00	24.28	Peak
5438.200	33.98	8.66	39.16	50.21	53.69	74.00	20.31	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

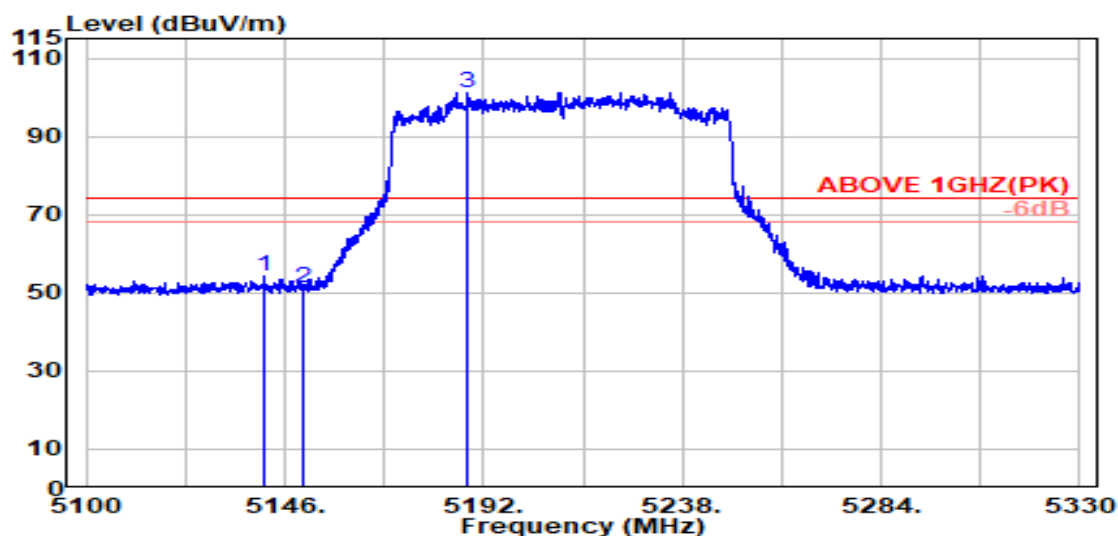

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.100	33.48	8.37	39.19	51.51	54.17	74.00	19.83	Peak
5150.000	33.50	8.37	39.19	48.48	51.16	74.00	22.84	Peak
@ 5188.200	33.73	8.41	39.19	98.11	101.07	---	---	Peak

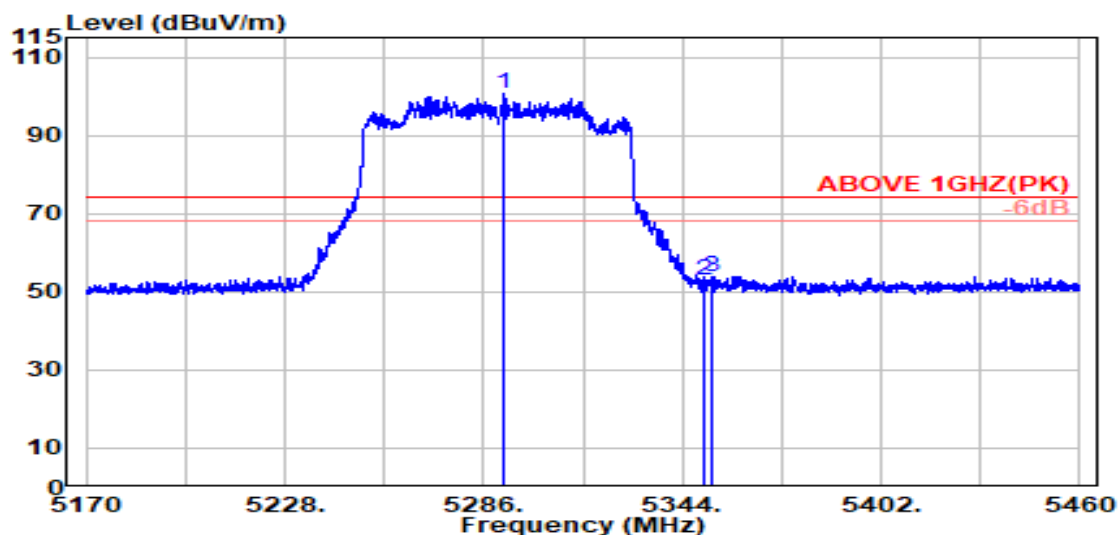


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.200	33.78	8.52	39.17	97.50	100.62	---	---	Peak
5350.000	33.70	8.57	39.17	49.99	53.10	74.00	20.90	Peak
5352.900	33.71	8.58	39.17	50.83	53.95	74.00	20.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

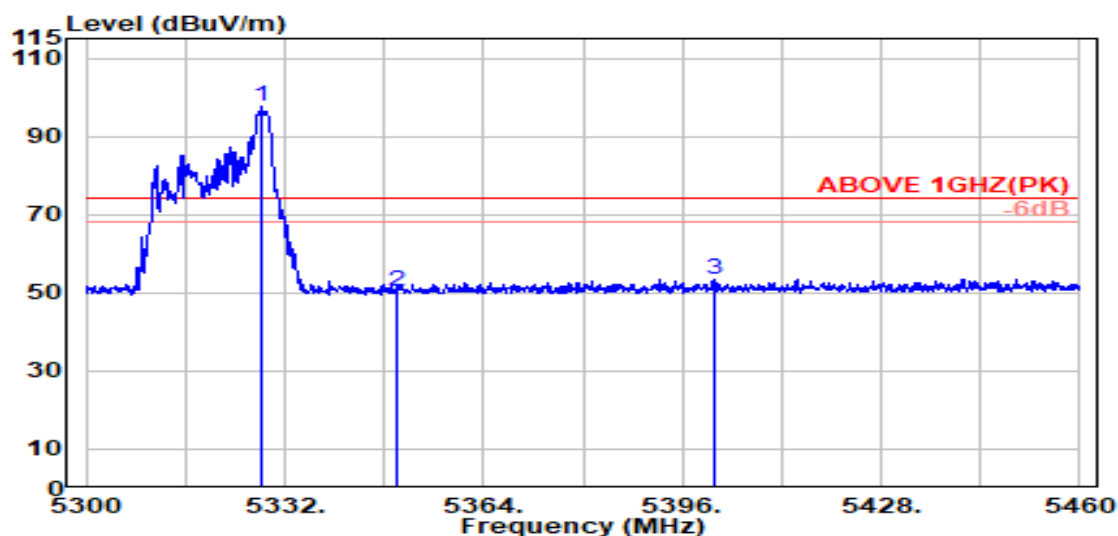

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.300	33.74	8.55	39.17	94.41	97.54	---	---	Peak
	5350.000	33.70	8.57	39.17	47.31	50.42	74.00	23.58	Peak
	5401.000	33.90	8.62	39.16	50.10	53.46	74.00	20.54	Peak

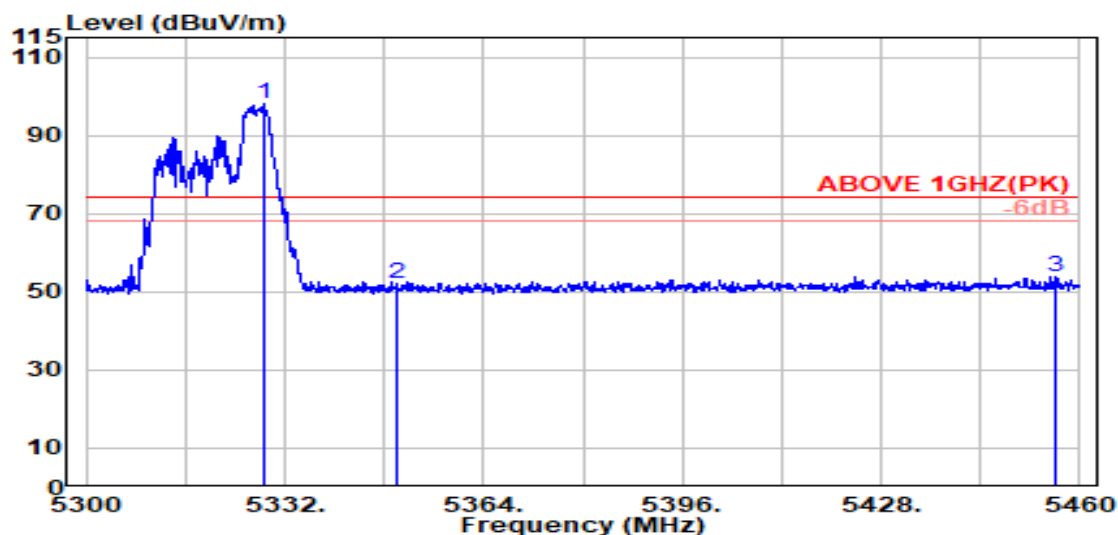


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.500	33.74	8.55	39.17	95.14	98.26	---	---	Peak
	5350.000	33.70	8.57	39.17	48.90	52.00	74.00	22.00	Peak
	5456.200	34.01	8.67	39.16	50.42	53.96	74.00	20.04	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

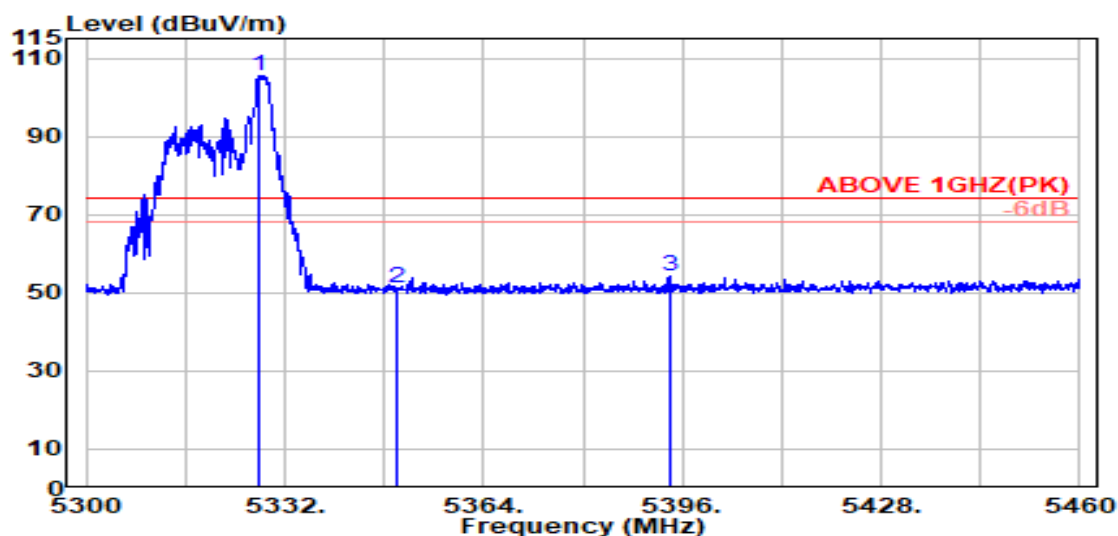

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	102.45	105.58	---	---	Peak
5350.000	33.70	8.57	39.17	47.92	51.03	74.00	22.97	Peak
5393.900	33.88	8.62	39.16	51.03	54.36	74.00	19.64	Peak

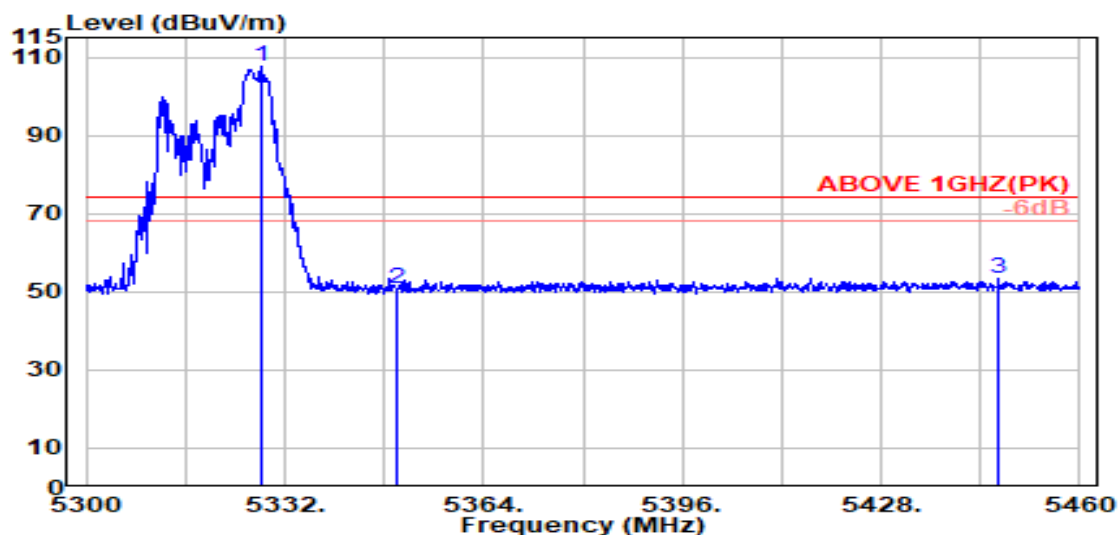


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	104.30	107.42	---	---	Peak
5350.000	33.70	8.57	39.17	47.61	50.71	74.00	23.29	Peak
5446.900	33.99	8.67	39.16	49.98	53.49	74.00	20.51	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

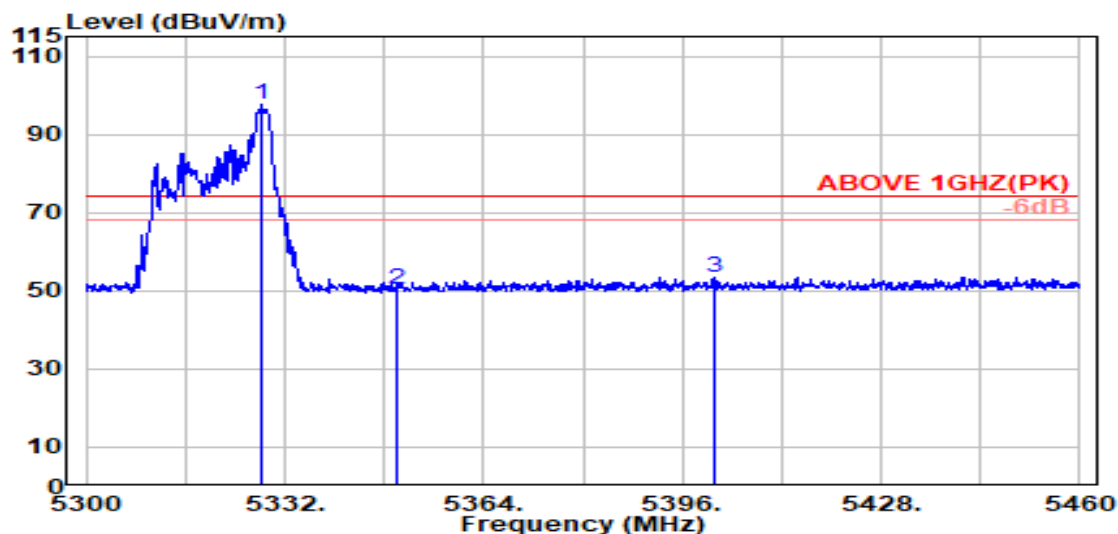

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.300	33.74	8.55	39.17	94.41	97.54	---	---	Peak
	5350.000	33.70	8.57	39.17	47.31	50.42	74.00	23.58	Peak
	5401.000	33.90	8.62	39.16	50.10	53.46	74.00	20.54	Peak

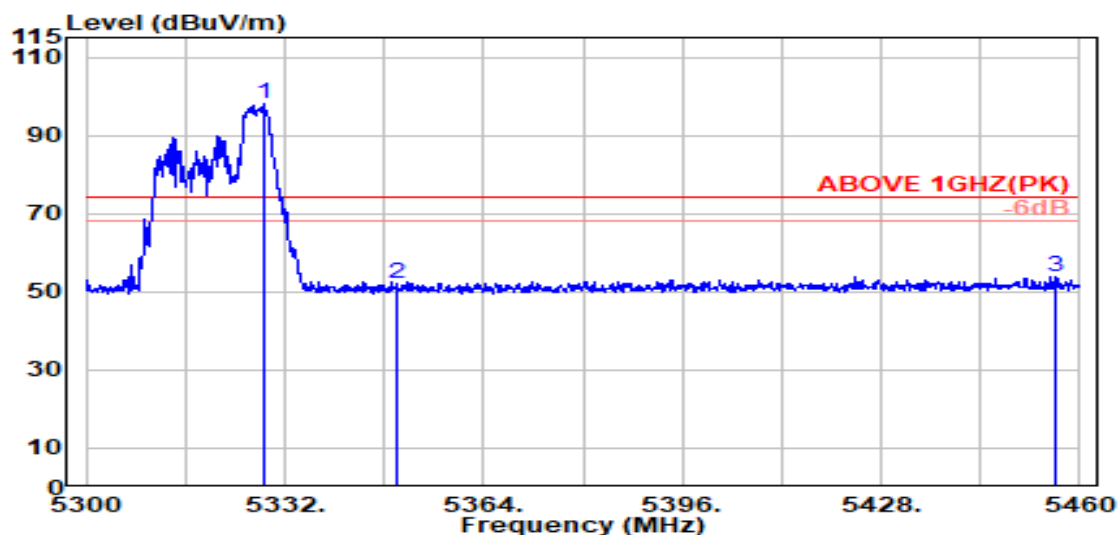


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.500	33.74	8.55	39.17	95.14	98.26	---	---	Peak
	5350.000	33.70	8.57	39.17	48.90	52.00	74.00	22.00	Peak
	5456.200	34.01	8.67	39.16	50.42	53.96	74.00	20.04	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

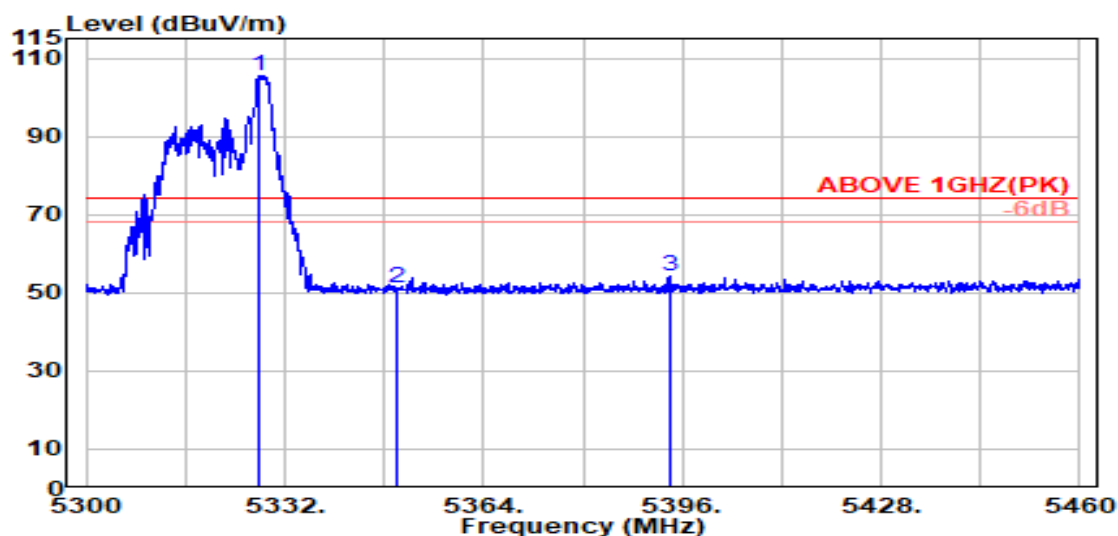

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	102.45	105.58	---	---	Peak
5350.000	33.70	8.57	39.17	47.92	51.03	74.00	22.97	Peak
5393.900	33.88	8.62	39.16	51.03	54.36	74.00	19.64	Peak

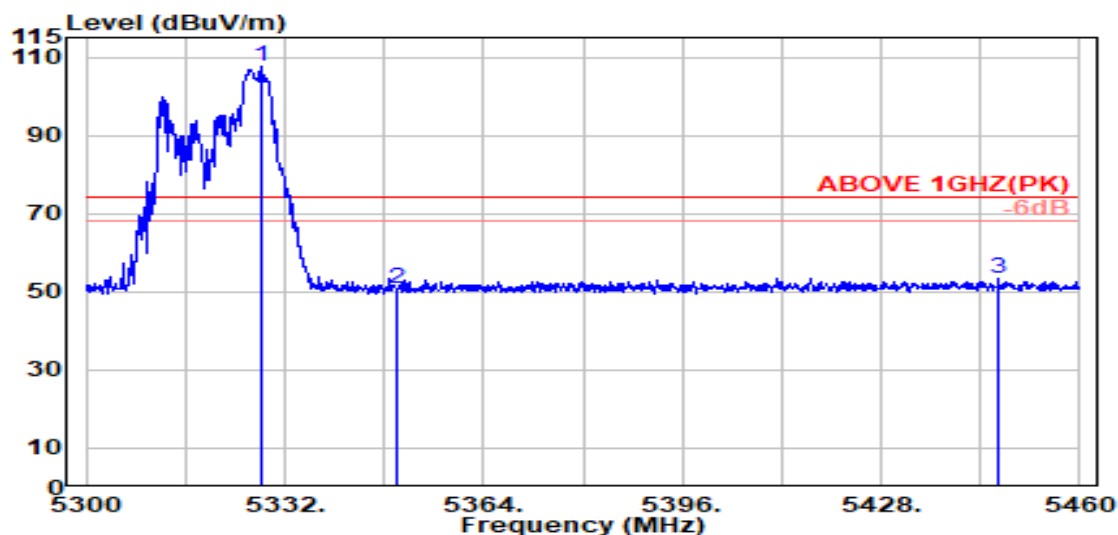


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	104.30	107.42	---	---	Peak
5350.000	33.70	8.57	39.17	47.61	50.71	74.00	23.29	Peak
5446.900	33.99	8.67	39.16	49.98	53.49	74.00	20.51	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

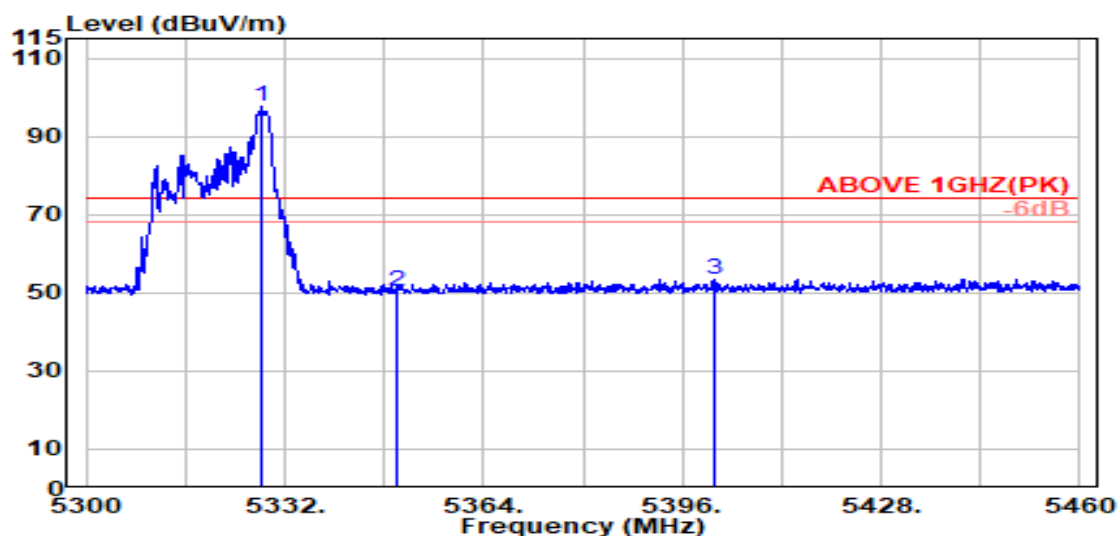

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5328.300	33.74	8.55	39.17	94.41	97.54	---	---	Peak
	5350.000	33.70	8.57	39.17	47.31	50.42	74.00	23.58	Peak
	5401.000	33.90	8.62	39.16	50.10	53.46	74.00	20.54	Peak

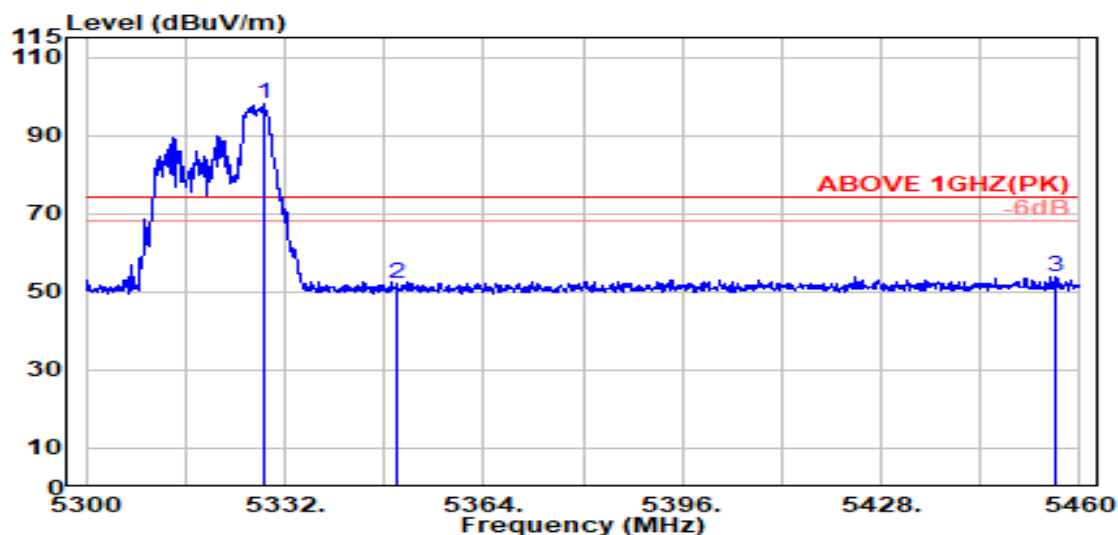


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5328.500	33.74	8.55	39.17	95.14	98.26	---	---	Peak
	5350.000	33.70	8.57	39.17	48.90	52.00	74.00	22.00	Peak
	5456.200	34.01	8.67	39.16	50.42	53.96	74.00	20.04	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

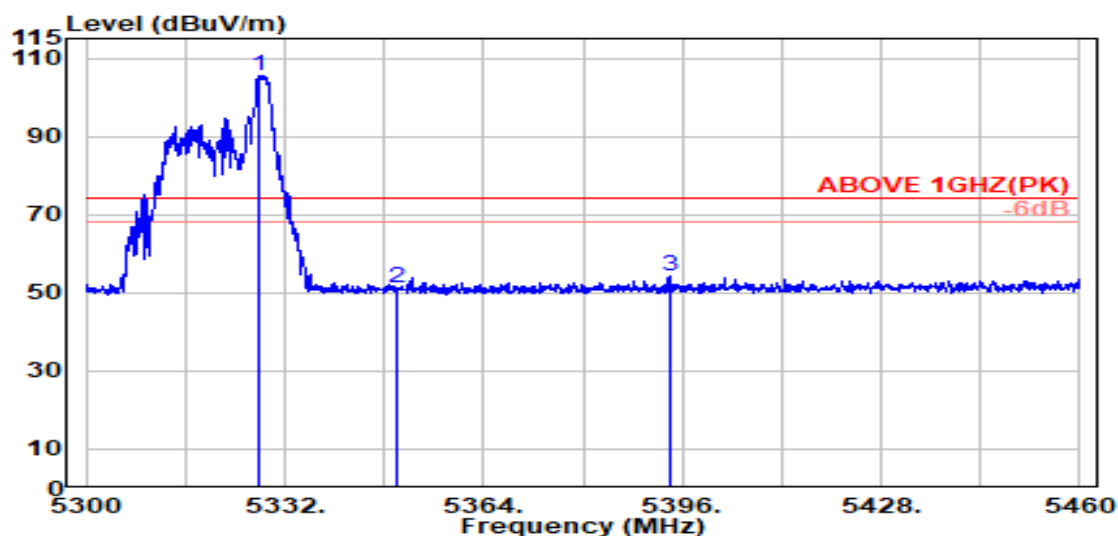

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.74	8.55	39.17	102.45	105.58	---	---	Peak
5350.000	33.70	8.57	39.17	47.92	51.03	74.00	22.97	Peak
5393.900	33.88	8.62	39.16	51.03	54.36	74.00	19.64	Peak

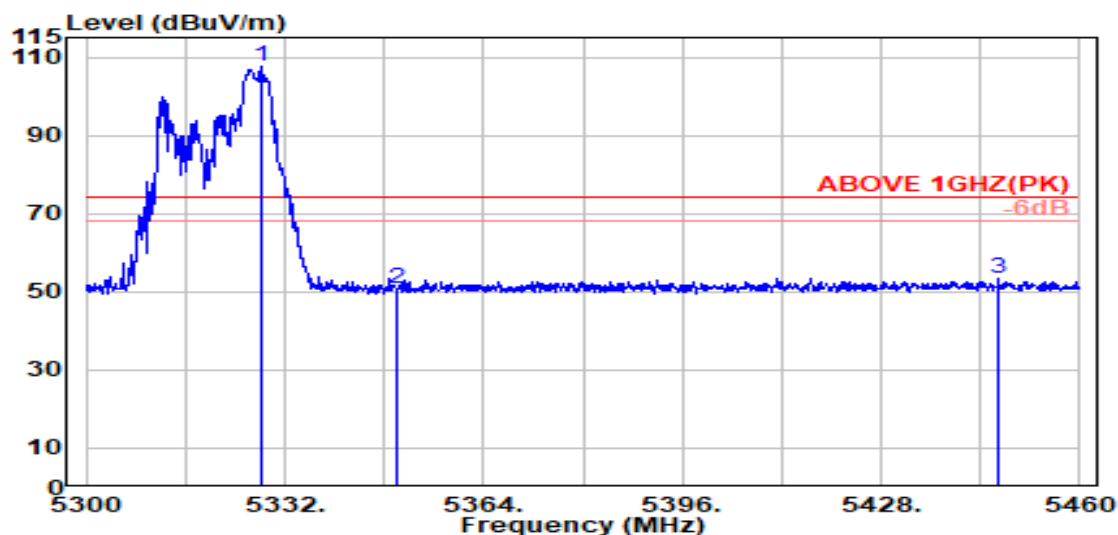


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	104.30	107.42	---	---	Peak
5350.000	33.70	8.57	39.17	47.61	50.71	74.00	23.29	Peak
5446.900	33.99	8.67	39.16	49.98	53.49	74.00	20.51	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

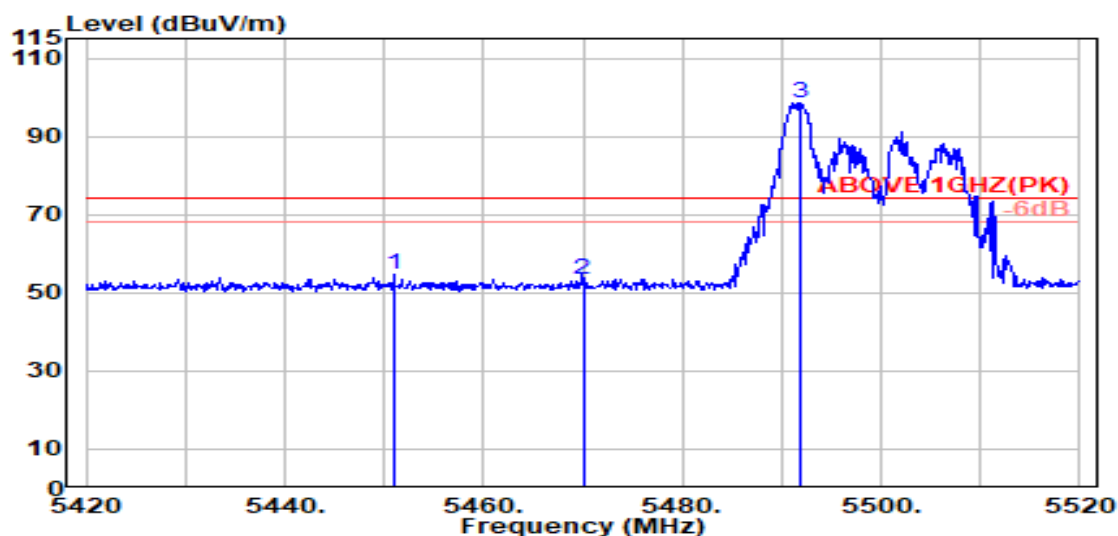

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.900	34.00	8.67	39.16	51.30	54.81	74.00	19.19	Peak
5470.000	34.04	8.69	39.15	49.65	53.23	74.00	20.77	Peak
@ 5491.900	34.08	8.71	39.15	95.03	98.67	---	---	Peak

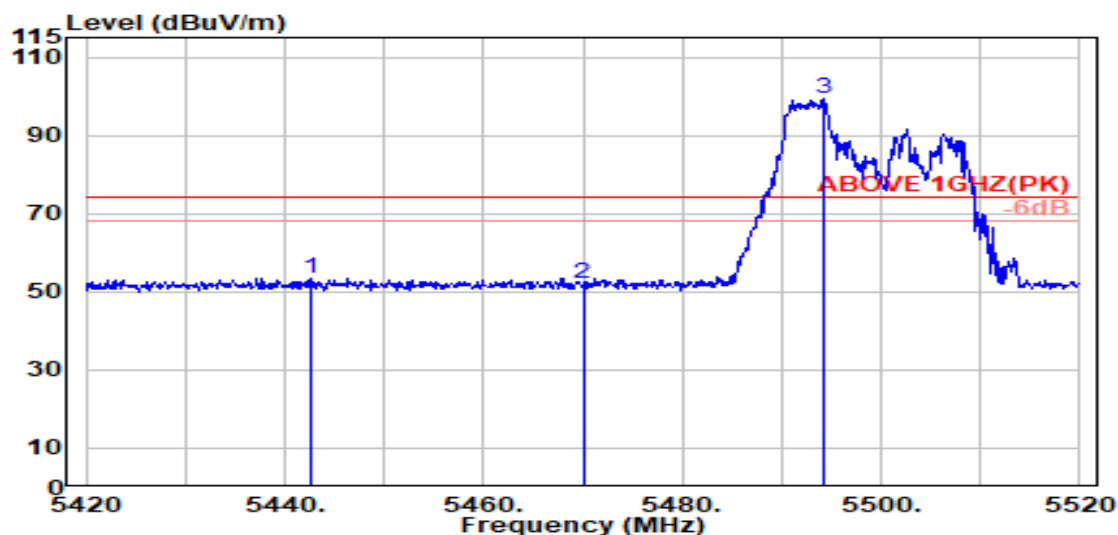


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.700	33.99	8.66	39.16	50.08	53.57	74.00	20.43	Peak
5470.000	34.04	8.69	39.15	48.41	51.98	74.00	22.02	Peak
@ 5494.200	34.09	8.71	39.15	95.61	99.26	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

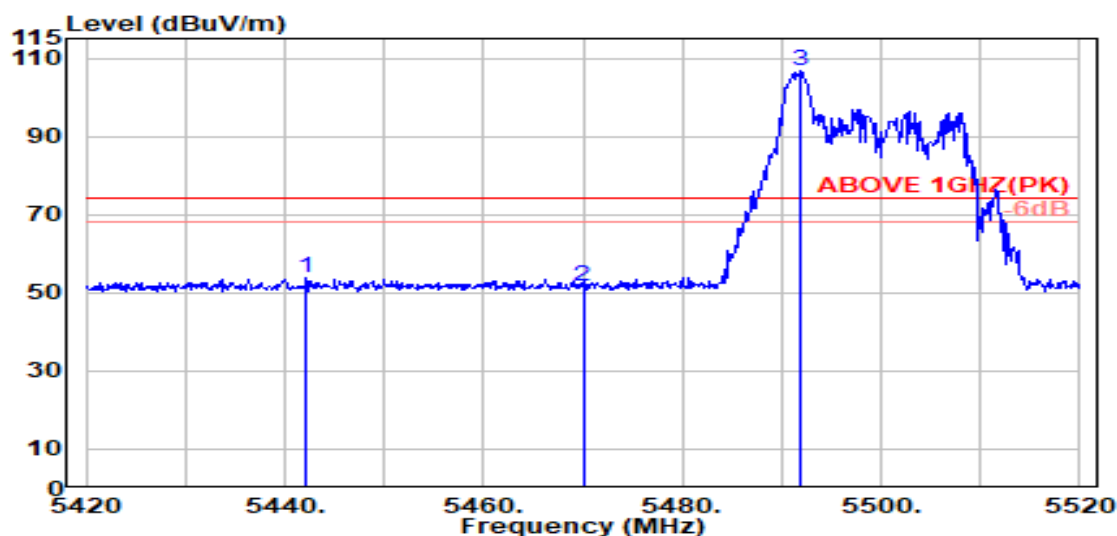

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.100	33.98	8.66	39.16	50.15	53.64	74.00	20.36	Peak
5470.000	34.04	8.69	39.15	48.02	51.59	74.00	22.41	Peak
@ 5492.000	34.08	8.71	39.15	103.00	106.65	---	---	Peak

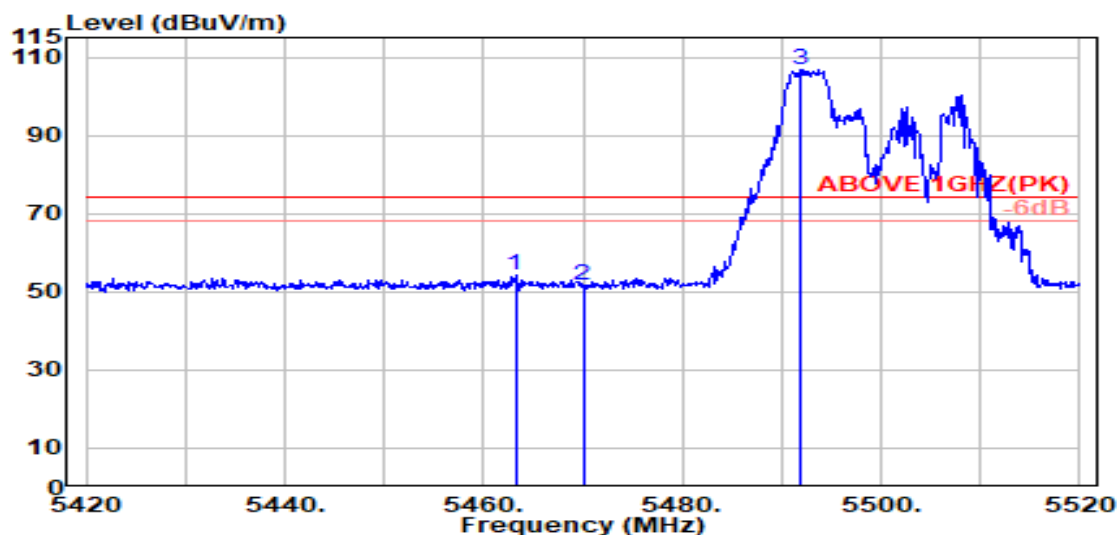


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.200	34.03	8.68	39.15	50.62	54.18	74.00	19.82	Peak
5470.000	34.04	8.69	39.15	47.94	51.51	74.00	22.49	Peak
@ 5492.000	34.08	8.71	39.15	103.32	106.97	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

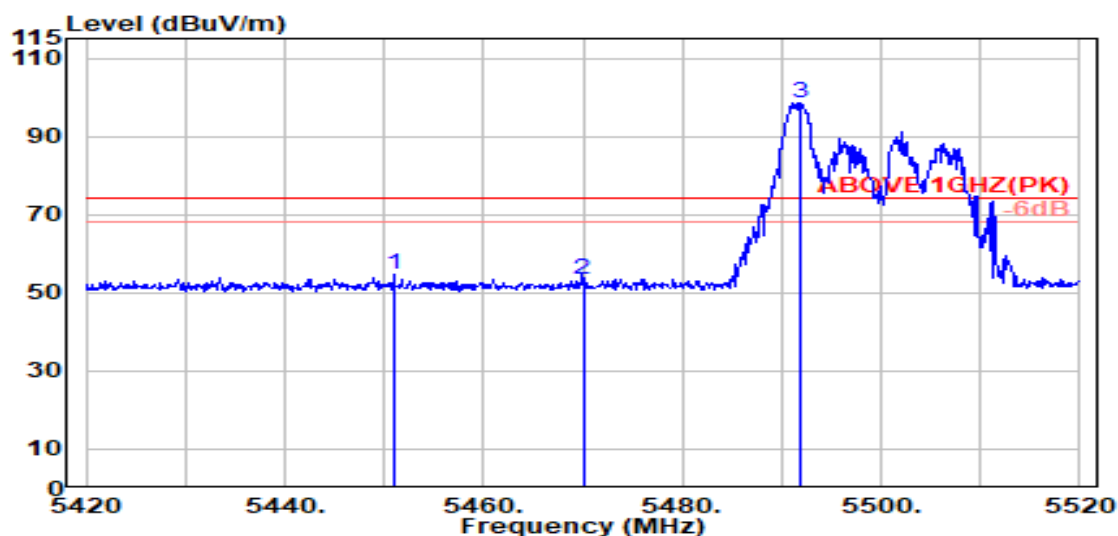

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.900	34.00	8.67	39.16	51.30	54.81	74.00	19.19	Peak
5470.000	34.04	8.69	39.15	49.65	53.23	74.00	20.77	Peak
@ 5491.900	34.08	8.71	39.15	95.03	98.67	---	---	Peak

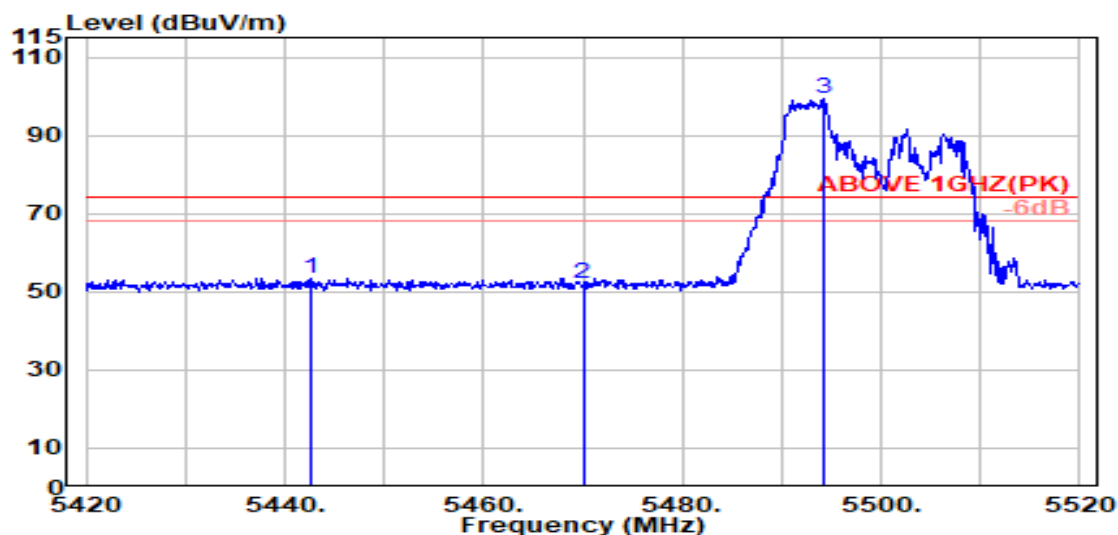


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.700	33.99	8.66	39.16	50.08	53.57	74.00	20.43	Peak
5470.000	34.04	8.69	39.15	48.41	51.98	74.00	22.02	Peak
@ 5494.200	34.09	8.71	39.15	95.61	99.26	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

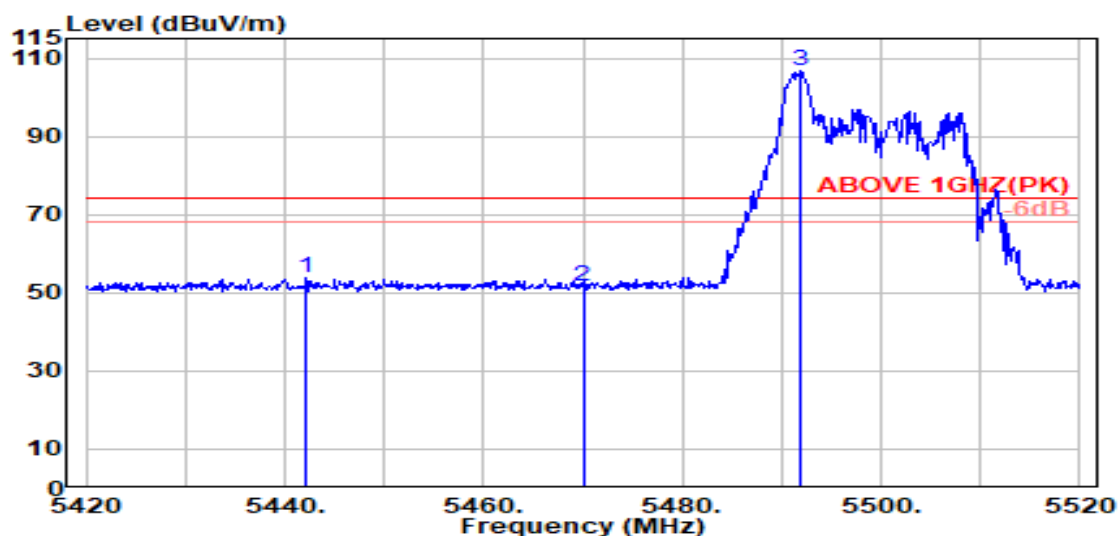

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.100	33.98	8.66	39.16	50.15	53.64	74.00	20.36	Peak
5470.000	34.04	8.69	39.15	48.02	51.59	74.00	22.41	Peak
@ 5492.000	34.08	8.71	39.15	103.00	106.65	---	---	Peak

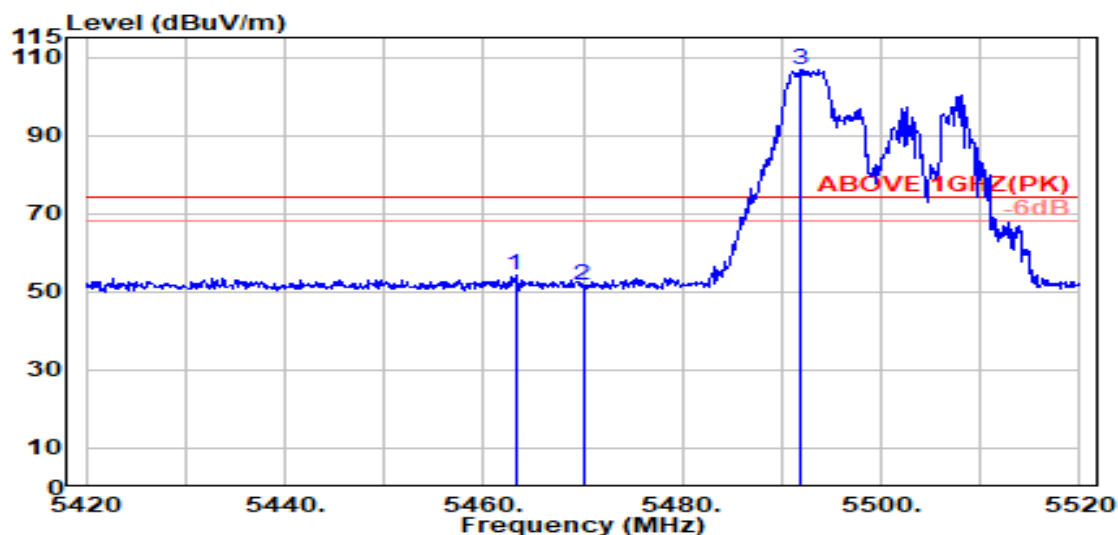


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.200	34.03	8.68	39.15	50.62	54.18	74.00	19.82	Peak
5470.000	34.04	8.69	39.15	47.94	51.51	74.00	22.49	Peak
@ 5492.000	34.08	8.71	39.15	103.32	106.97	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

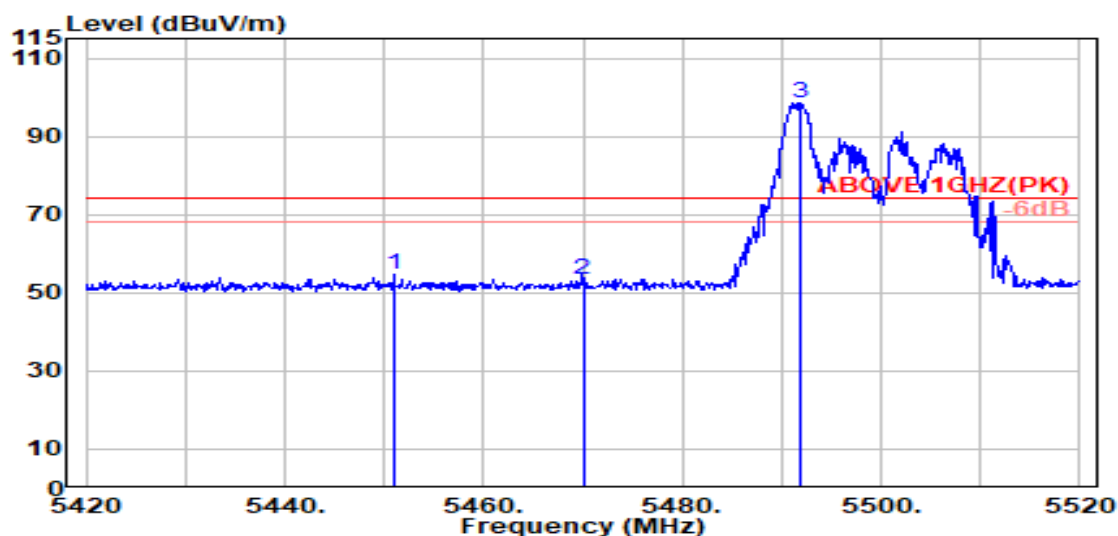

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.900	34.00	8.67	39.16	51.30	54.81	74.00	19.19	Peak
5470.000	34.04	8.69	39.15	49.65	53.23	74.00	20.77	Peak
@ 5491.900	34.08	8.71	39.15	95.03	98.67	---	---	Peak

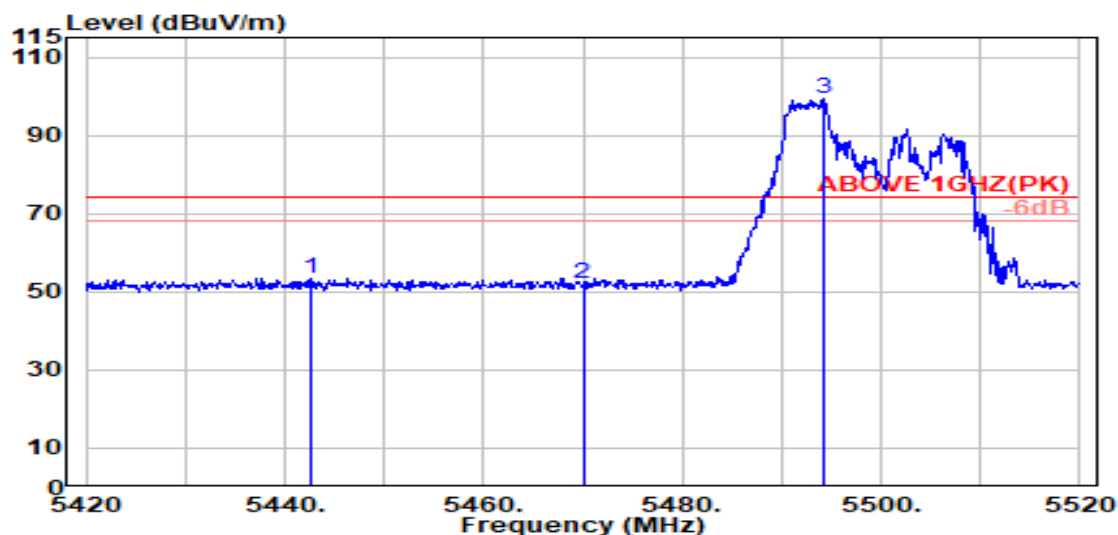


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.700	33.99	8.66	39.16	50.08	53.57	74.00	20.43	Peak
5470.000	34.04	8.69	39.15	48.41	51.98	74.00	22.02	Peak
@ 5494.200	34.09	8.71	39.15	95.61	99.26	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

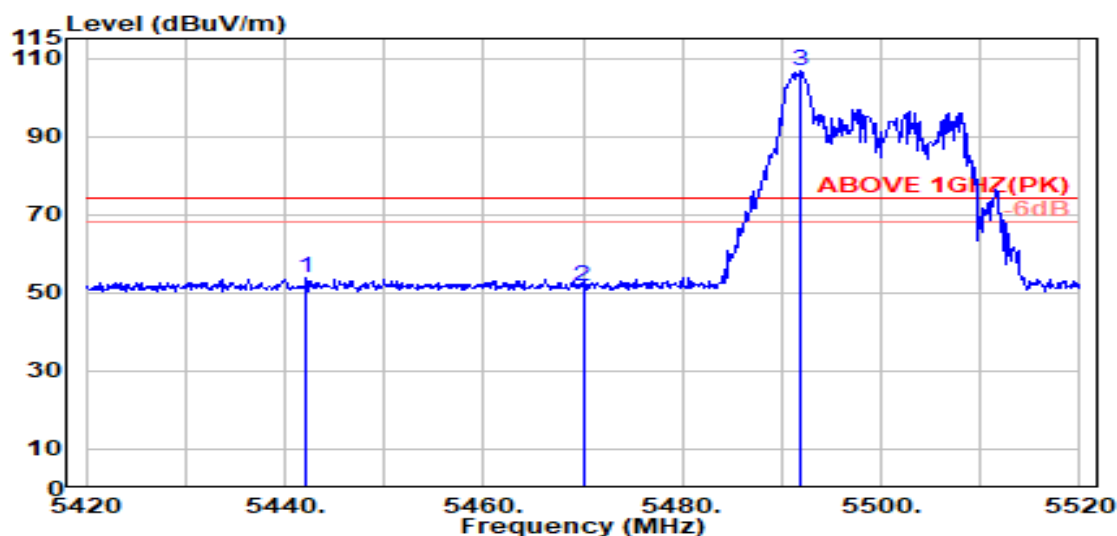

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5442.100	33.98	8.66	39.16	50.15	53.64	74.00	20.36	Peak
5470.000	34.04	8.69	39.15	48.02	51.59	74.00	22.41	Peak
@ 5492.000	34.08	8.71	39.15	103.00	106.65	---	---	Peak

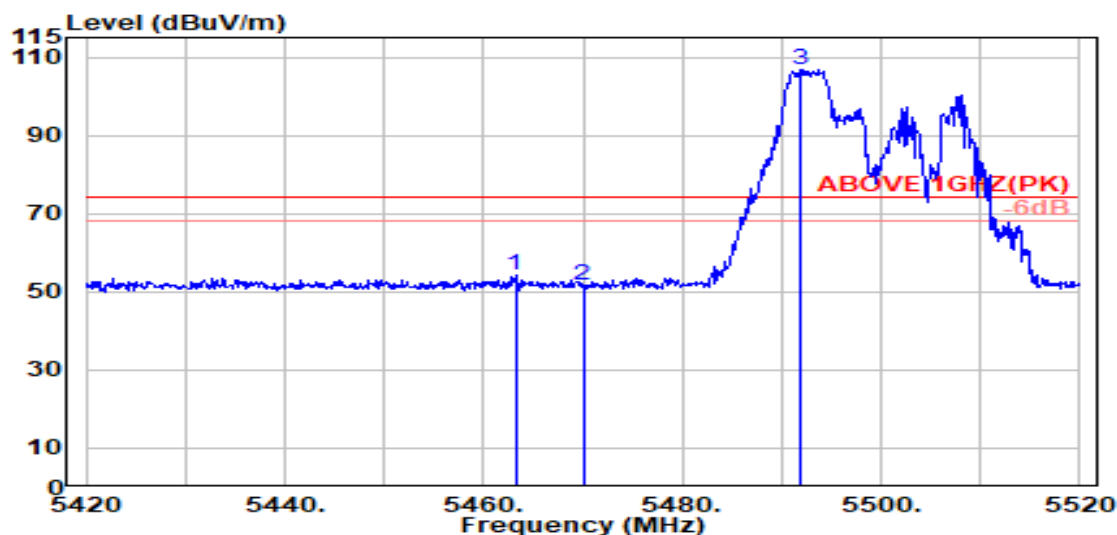


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.200	34.03	8.68	39.15	50.62	54.18	74.00	19.82	Peak
5470.000	34.04	8.69	39.15	47.94	51.51	74.00	22.49	Peak
@ 5492.000	34.08	8.71	39.15	103.32	106.97	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

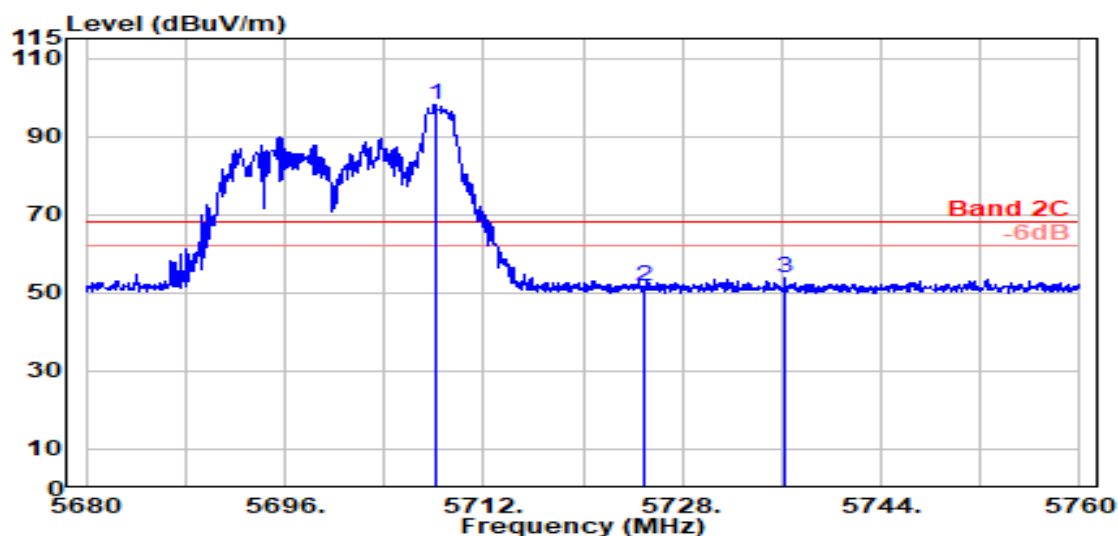

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.60	8.91	39.19	94.84	98.16	---	---	Peak
	5725.000	33.60	8.93	39.20	48.18	51.51	68.20	16.69	Peak
	5736.250	33.60	8.94	39.20	50.38	53.72	68.20	14.48	Peak

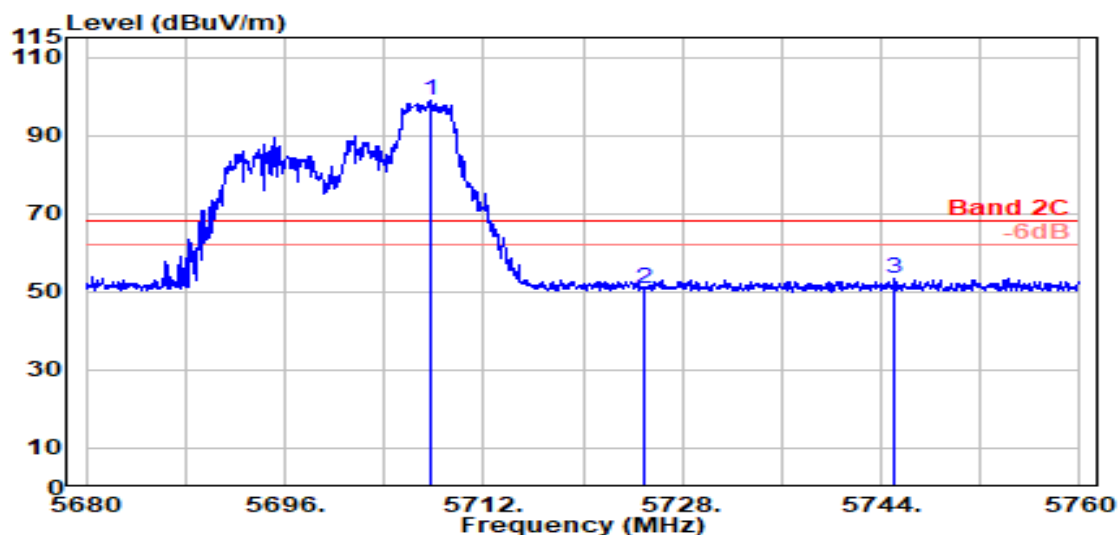


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.700	33.60	8.91	39.19	95.66	98.98	---	---	Peak
	5725.000	33.60	8.93	39.20	47.27	50.59	68.20	17.61	Peak
	5745.100	33.60	8.94	39.20	49.96	53.31	68.20	14.89	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

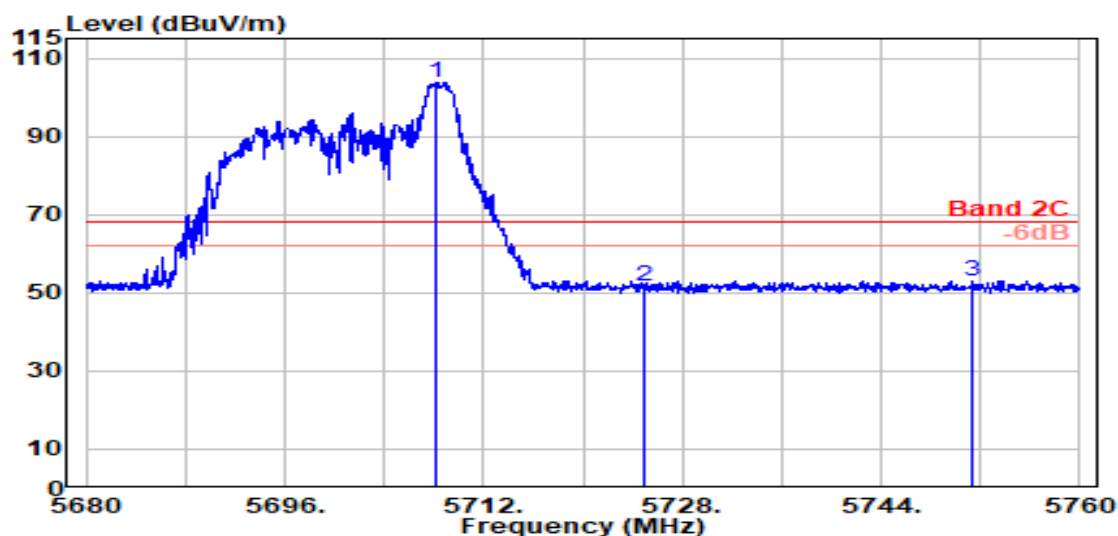

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.60	8.91	39.19	100.52	103.84	---	---	Peak
	5725.000	33.60	8.93	39.20	48.21	51.54	68.20	16.66	Peak
	5751.350	33.61	8.95	39.20	49.78	53.13	68.20	15.07	Peak

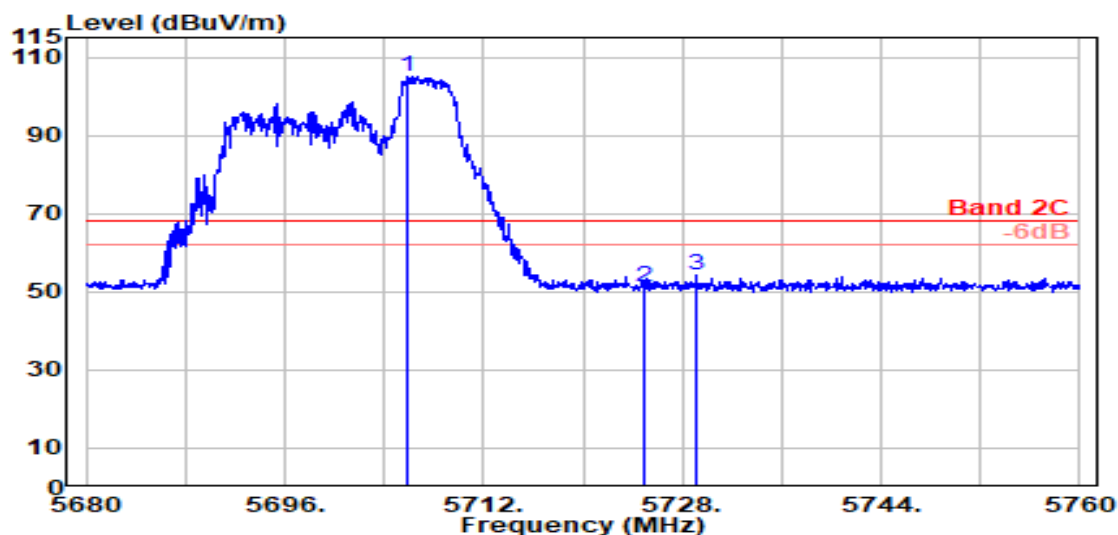


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.950	33.60	8.91	39.19	101.68	104.99	---	---	Peak
	5725.000	33.60	8.93	39.20	48.05	51.38	68.20	16.82	Peak
	5729.150	33.60	8.93	39.20	50.88	54.21	68.20	13.99	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

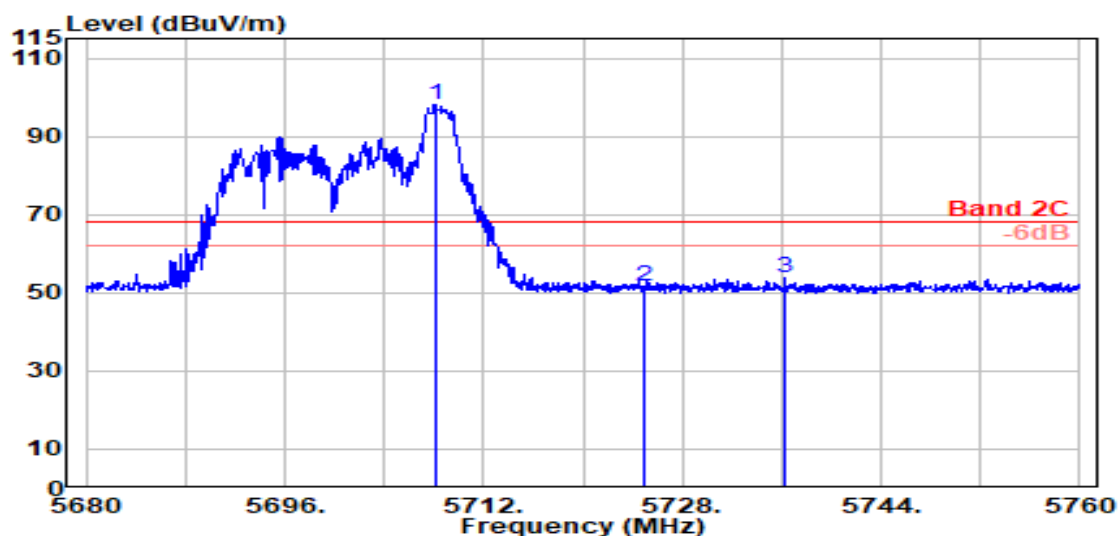

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.60	8.91	39.19	94.84	98.16	---	---	Peak
	5725.000	33.60	8.93	39.20	48.18	51.51	68.20	16.69	Peak
	5736.250	33.60	8.94	39.20	50.38	53.72	68.20	14.48	Peak

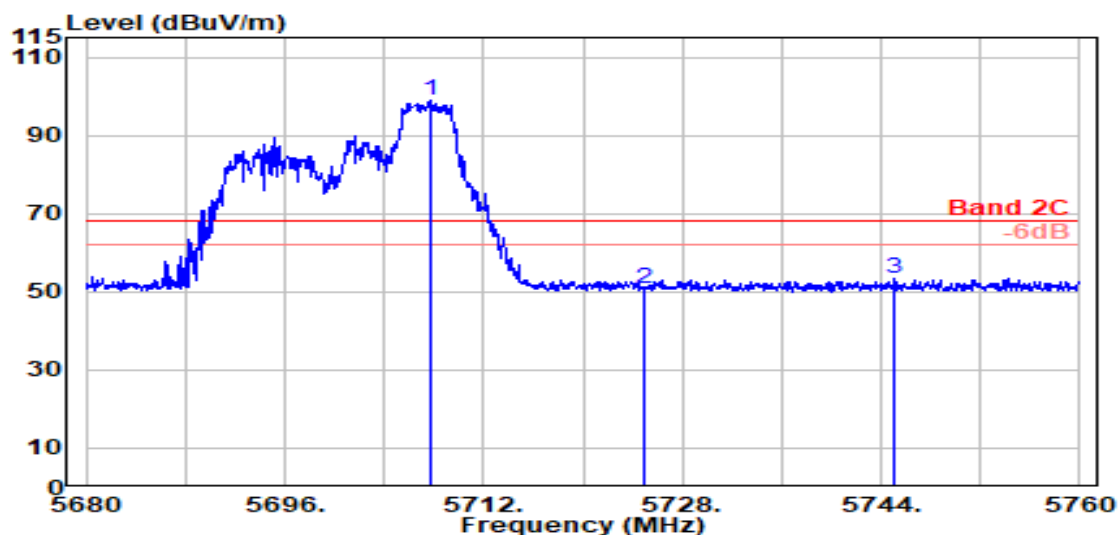


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.700	33.60	8.91	39.19	95.66	98.98	---	---	Peak
	5725.000	33.60	8.93	39.20	47.27	50.59	68.20	17.61	Peak
	5745.100	33.60	8.94	39.20	49.96	53.31	68.20	14.89	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

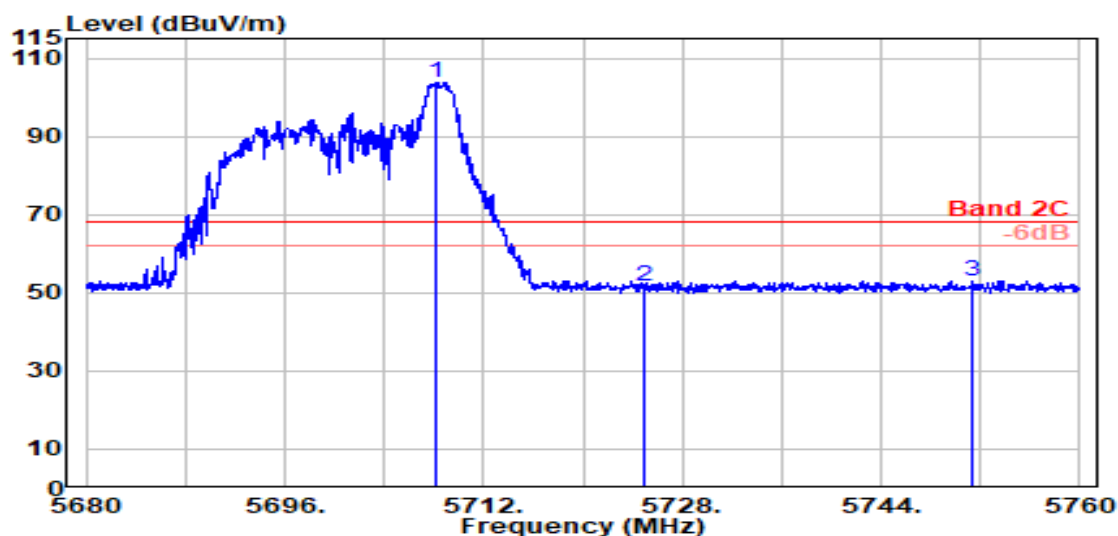

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.60	8.91	39.19	100.52	103.84	---	---	Peak
	5725.000	33.60	8.93	39.20	48.21	51.54	68.20	16.66	Peak
	5751.350	33.61	8.95	39.20	49.78	53.13	68.20	15.07	Peak

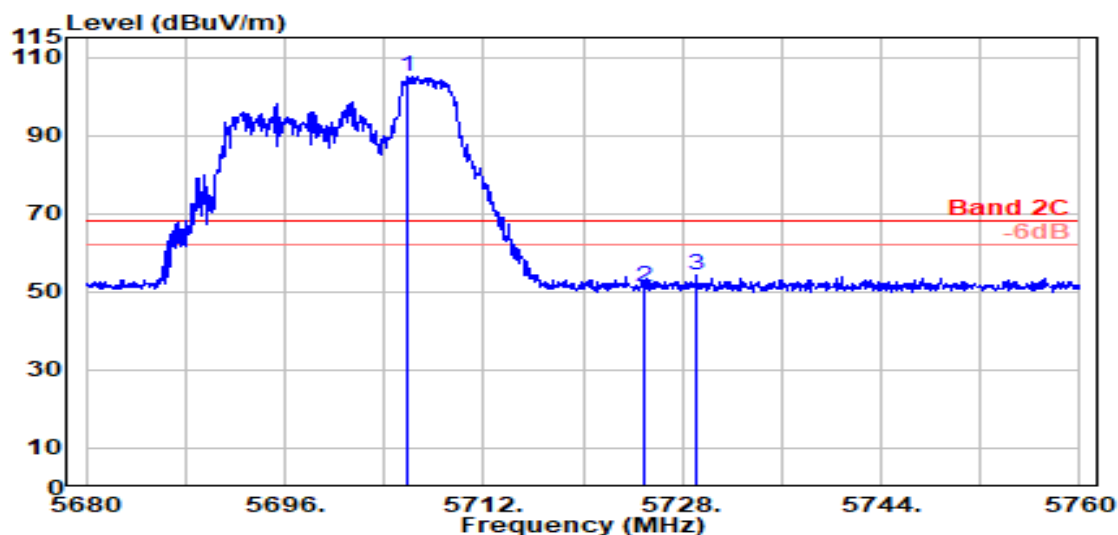


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.950	33.60	8.91	39.19	101.68	104.99	---	---	Peak
	5725.000	33.60	8.93	39.20	48.05	51.38	68.20	16.82	Peak
	5729.150	33.60	8.93	39.20	50.88	54.21	68.20	13.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

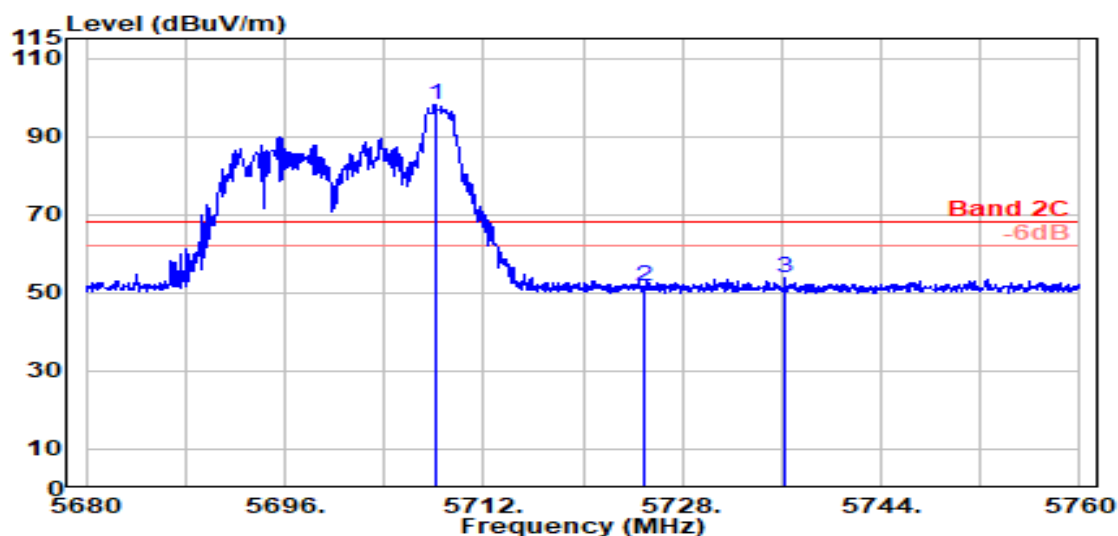

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.100	33.60	8.91	39.19	94.84	98.16	---	---	Peak
5725.000	33.60	8.93	39.20	48.18	51.51	68.20	16.69	Peak
5736.250	33.60	8.94	39.20	50.38	53.72	68.20	14.48	Peak

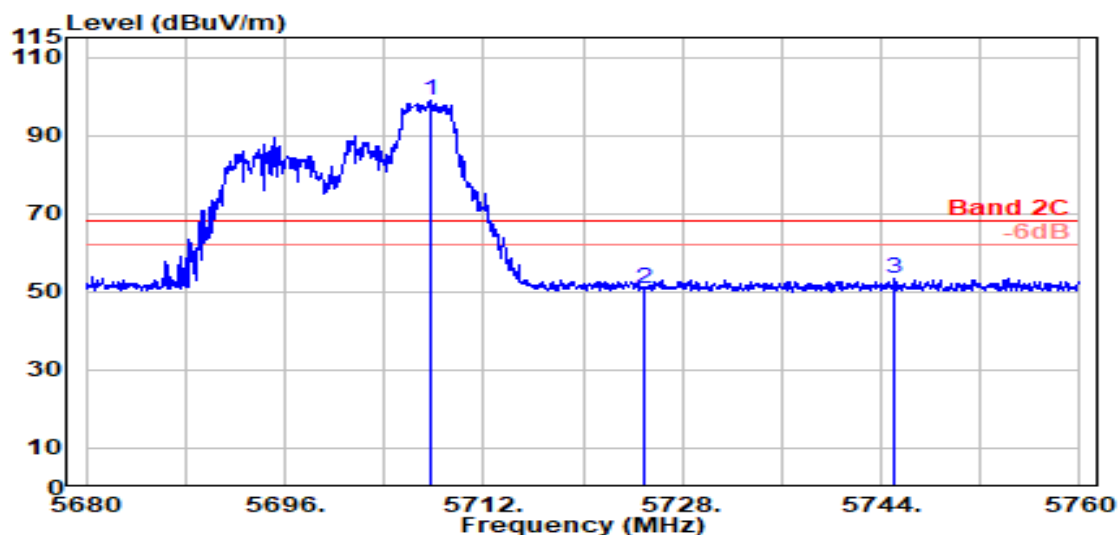


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.700	33.60	8.91	39.19	95.66	98.98	---	---	Peak
5725.000	33.60	8.93	39.20	47.27	50.59	68.20	17.61	Peak
5745.100	33.60	8.94	39.20	49.96	53.31	68.20	14.89	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

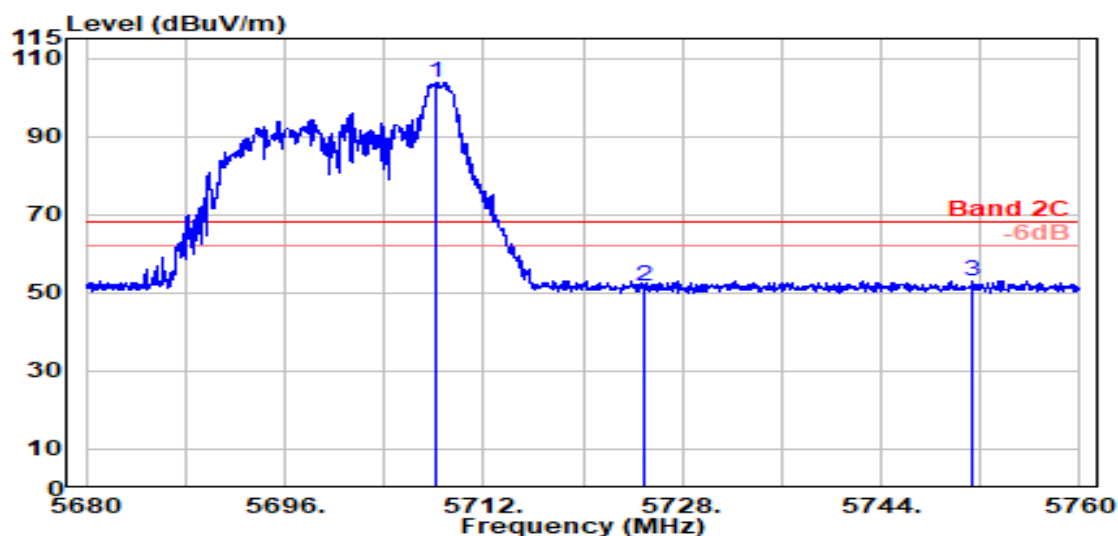

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.60	8.91	39.19	100.52	103.84	---	---	Peak
	5725.000	33.60	8.93	39.20	48.21	51.54	68.20	16.66	Peak
	5751.350	33.61	8.95	39.20	49.78	53.13	68.20	15.07	Peak

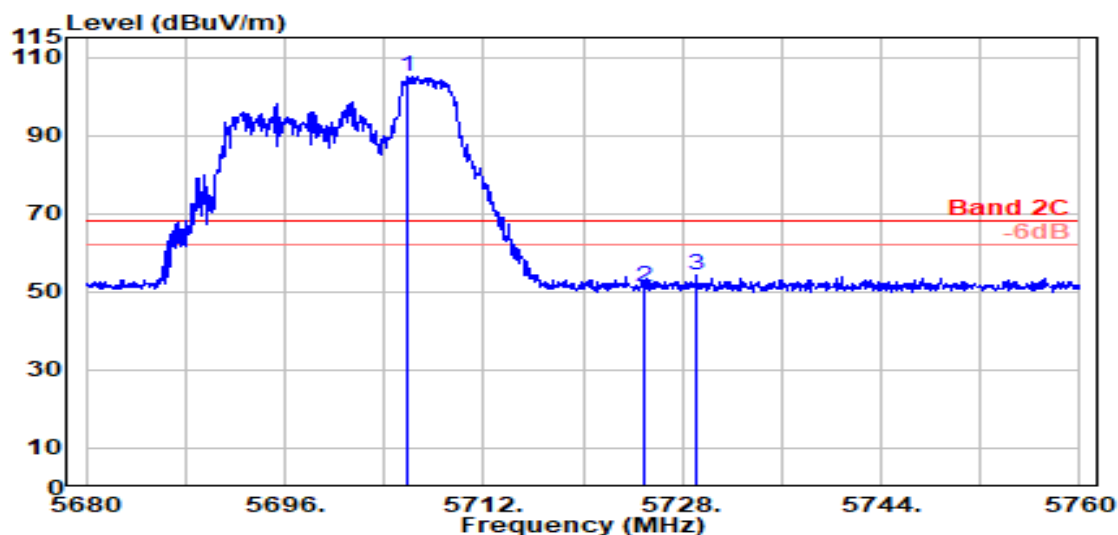


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.950	33.60	8.91	39.19	101.68	104.99	---	---	Peak
	5725.000	33.60	8.93	39.20	48.05	51.38	68.20	16.82	Peak
	5729.150	33.60	8.93	39.20	50.88	54.21	68.20	13.99	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

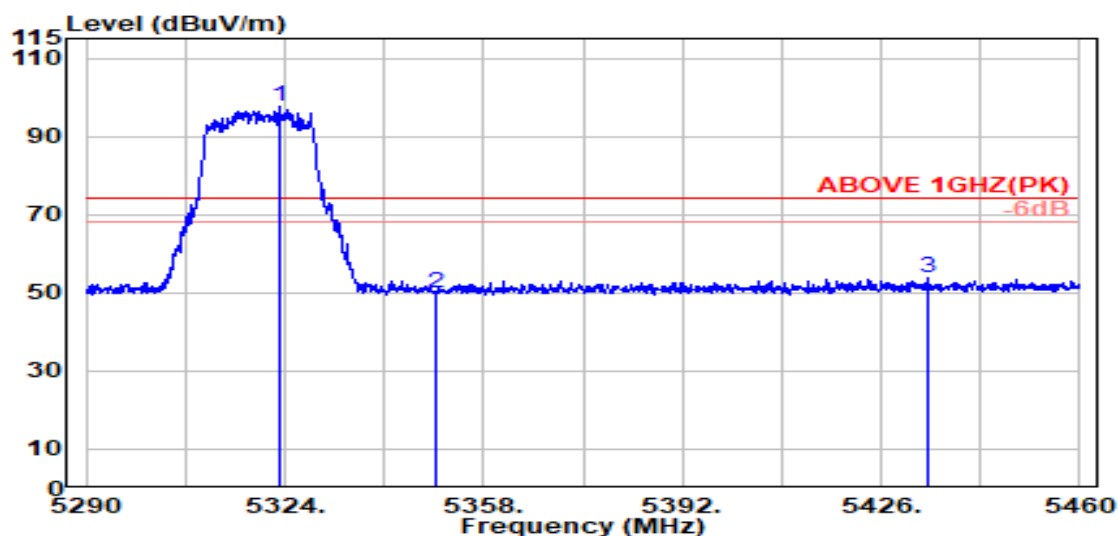

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.75	8.55	39.17	94.39	97.52	---	---	Peak
5350.000	33.70	8.57	39.17	46.91	50.01	74.00	23.99	Peak
5434.100	33.97	8.65	39.16	50.23	53.69	74.00	20.31	Peak

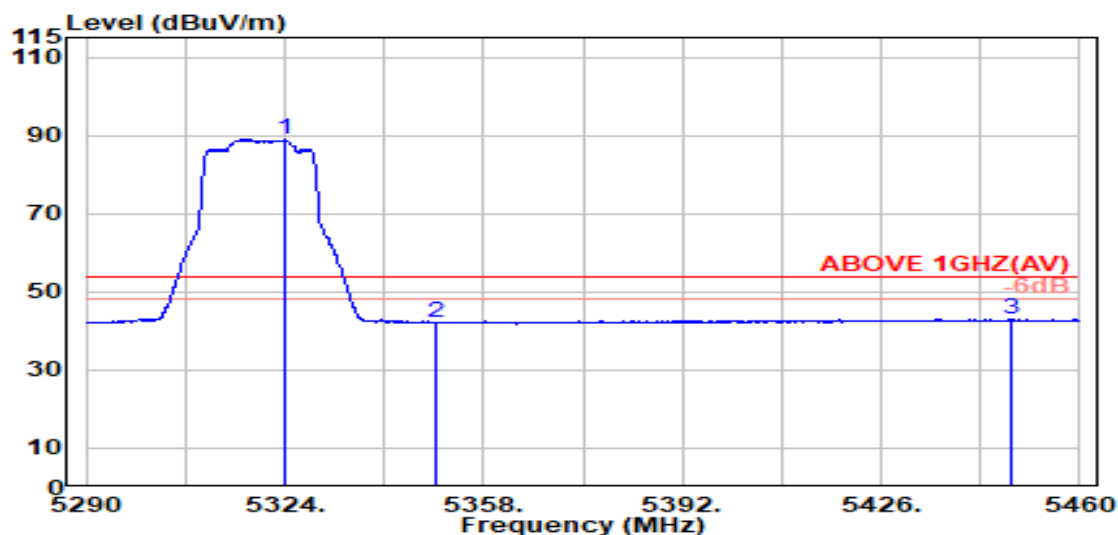


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.100	33.75	8.55	39.17	85.72	88.85	---	---	Average
5350.000	33.70	8.57	39.17	38.81	41.92	54.00	12.08	Average
5448.100	34.00	8.67	39.16	39.43	42.93	54.00	11.07	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

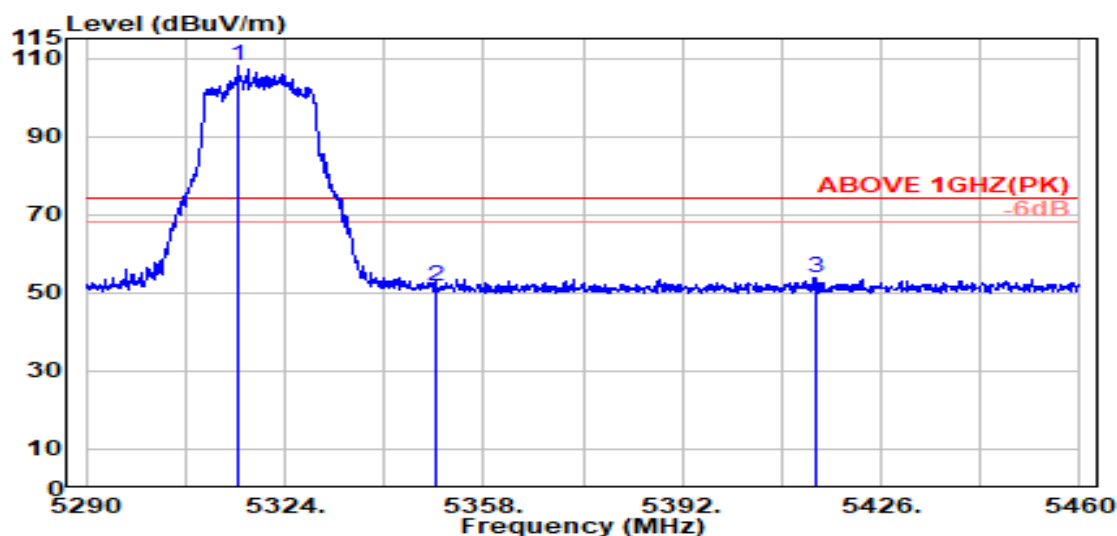

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.100	33.77	8.54	39.17	104.81	107.94	---	---	Peak
	5350.000	33.70	8.57	39.17	48.62	51.72	74.00	22.28	Peak
	5414.700	33.93	8.64	39.16	50.50	53.90	74.00	20.10	Peak

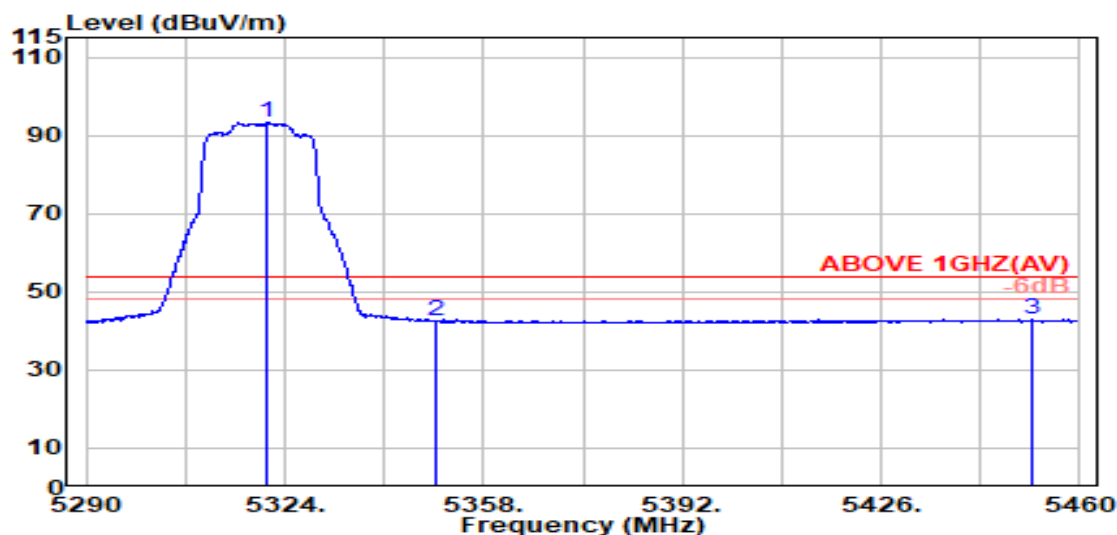


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5321.100	33.76	8.54	39.17	90.19	93.32	---	---	Average
	5350.000	33.70	8.57	39.17	39.55	42.65	54.00	11.35	Average
	5452.000	34.00	8.67	39.16	39.36	42.88	54.00	11.12	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

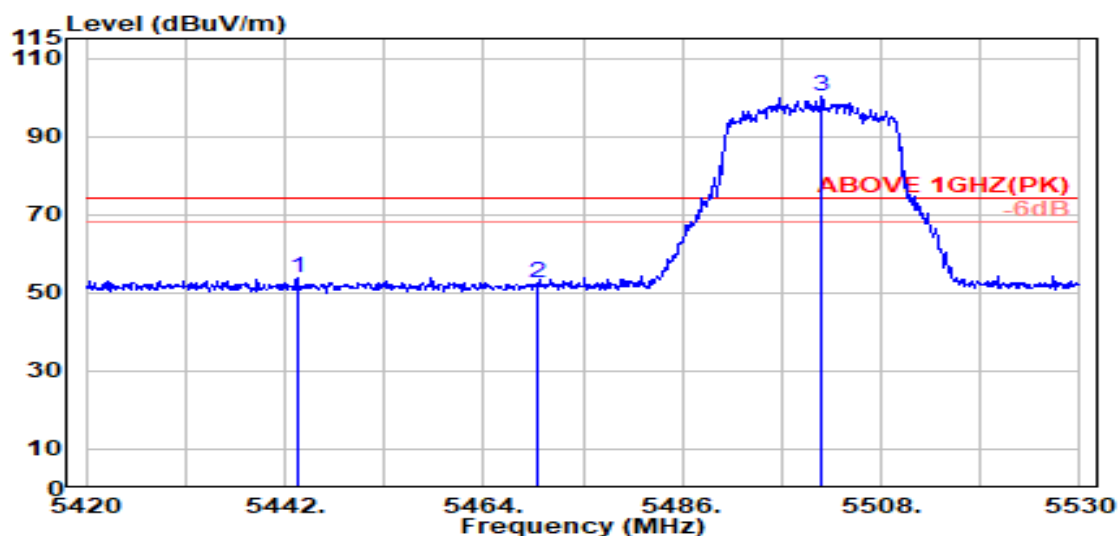

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5443.400	33.99	8.66	39.16	50.41	53.90	74.00	20.10	Peak
5470.000	34.04	8.69	39.15	48.87	52.44	74.00	21.56	Peak
@ 5501.500	34.10	8.72	39.15	96.78	100.44	---	---	Peak

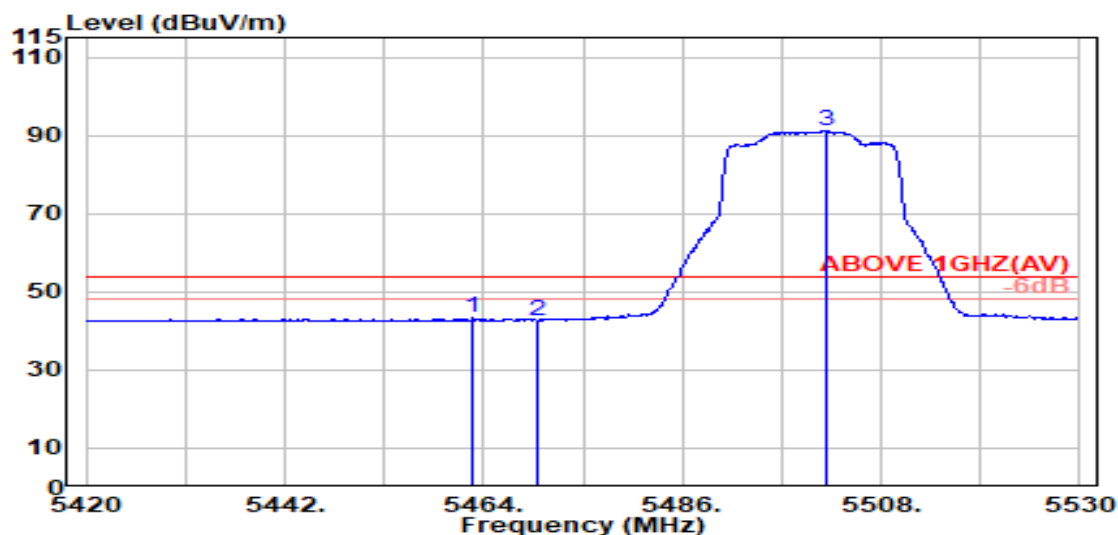


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.800	34.03	8.68	39.15	39.64	43.19	54.00	10.81	Average
5470.000	34.04	8.69	39.15	39.15	42.72	54.00	11.28	Average
@ 5502.000	34.10	8.72	39.15	87.62	91.29	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

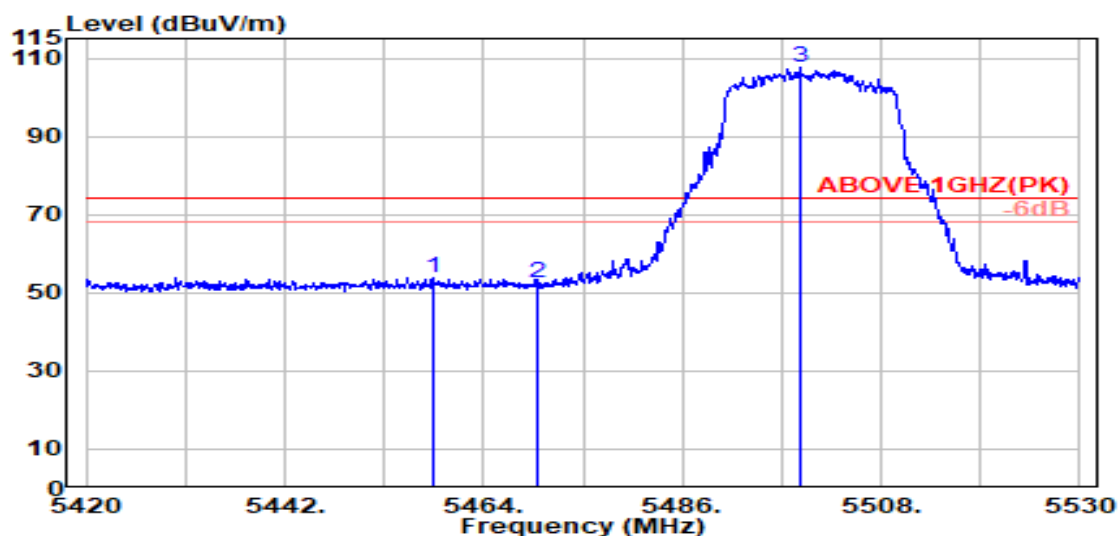

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.300	34.02	8.68	39.15	50.29	53.82	74.00	20.18	Peak
5470.000	34.04	8.69	39.15	49.09	52.67	74.00	21.33	Peak
@ 5499.100	34.10	8.72	39.15	104.16	107.83	---	---	Peak

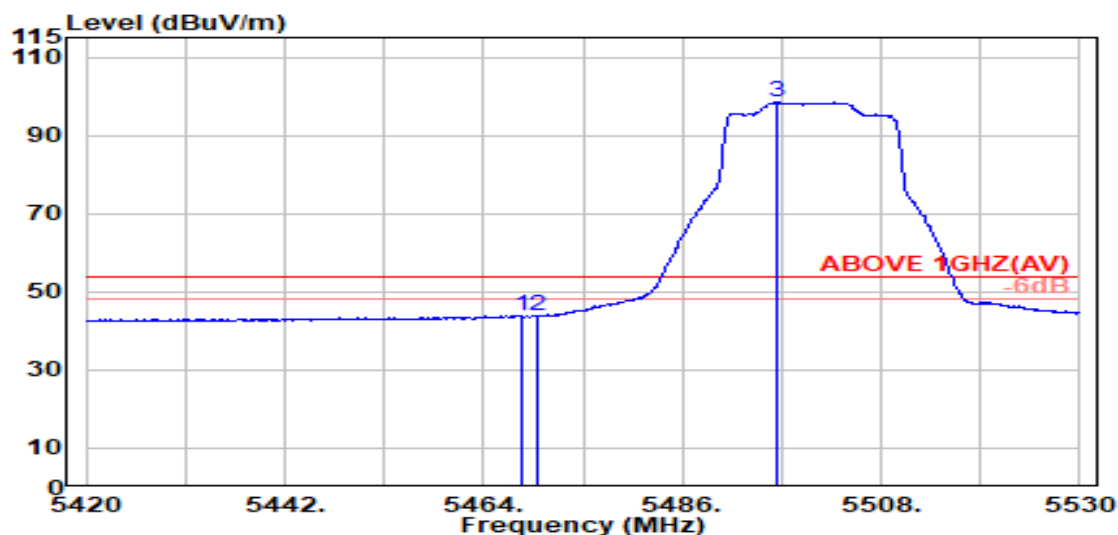


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	40.42	43.99	54.00	10.01	Average
5470.000	34.04	8.69	39.15	40.33	43.91	54.00	10.09	Average
@ 5496.600	34.09	8.71	39.15	94.97	98.62	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

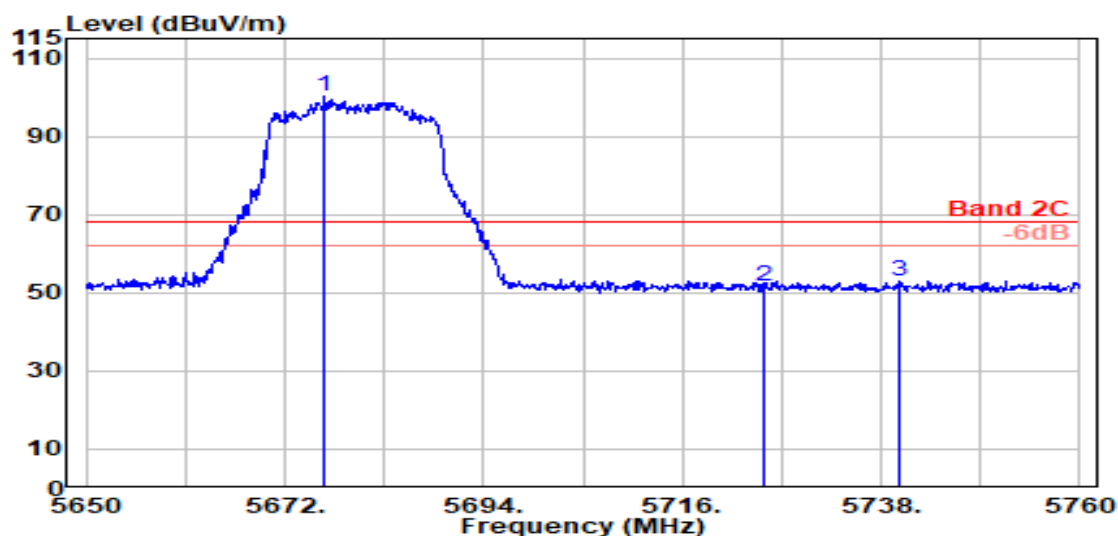

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5676.400	33.69	8.88	39.19	96.73	100.12	---	---	Peak
	5725.000	33.60	8.93	39.20	48.41	51.74	68.20	16.46	Peak
	5739.900	33.60	8.94	39.20	49.70	53.04	68.20	15.16	Peak

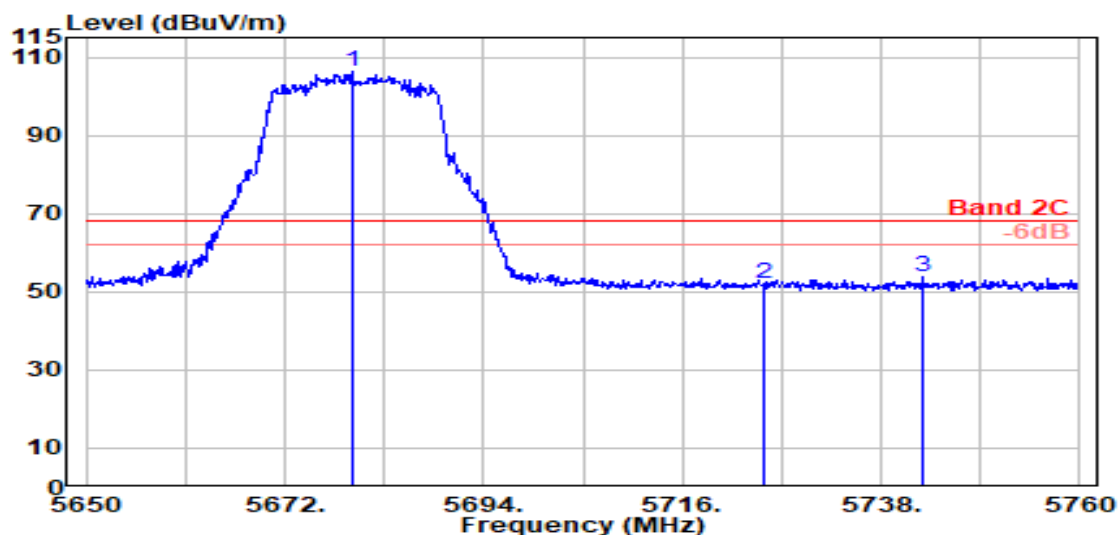


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5679.400	33.68	8.88	39.19	103.03	106.41	---	---	Peak
	5725.000	33.60	8.93	39.20	48.75	52.08	68.20	16.12	Peak
	5742.600	33.60	8.94	39.20	50.39	53.73	68.20	14.47	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

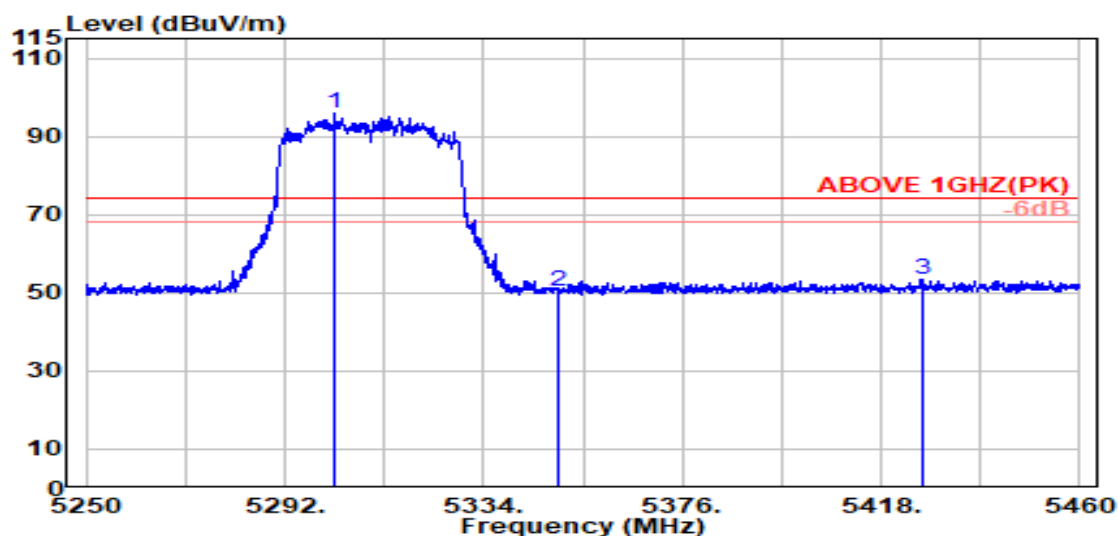

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5302.500	33.79	8.53	39.17	92.55	95.70	---	---	Peak
5350.000	33.70	8.57	39.17	47.20	50.30	74.00	23.70	Peak
5426.600	33.95	8.65	39.16	49.84	53.28	74.00	20.72	Peak

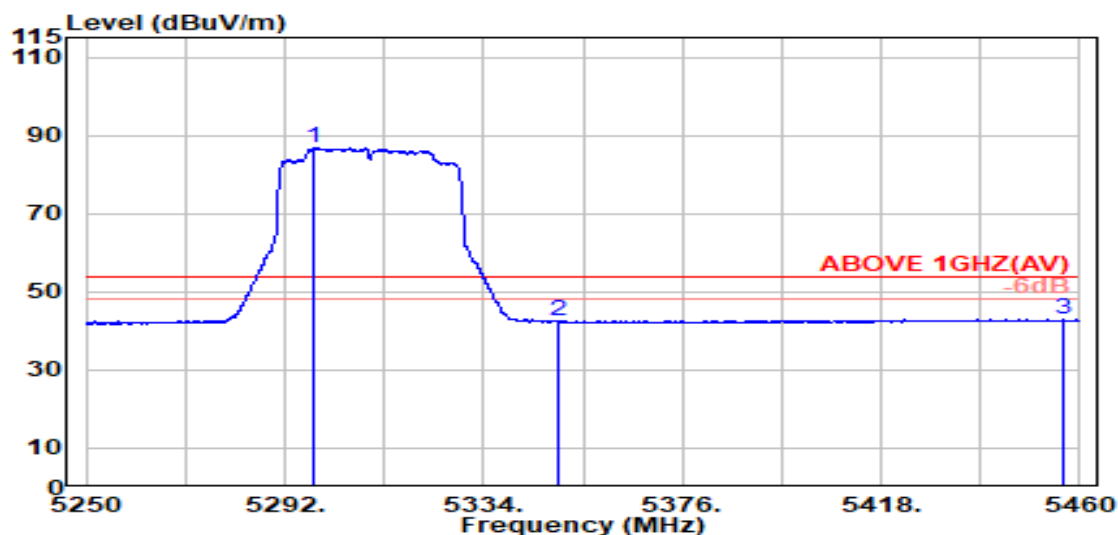


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5298.300	33.80	8.52	39.17	83.63	86.77	---	---	Average
5350.000	33.70	8.57	39.17	39.37	42.47	54.00	11.53	Average
5456.500	34.01	8.68	39.16	39.38	42.91	54.00	11.09	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

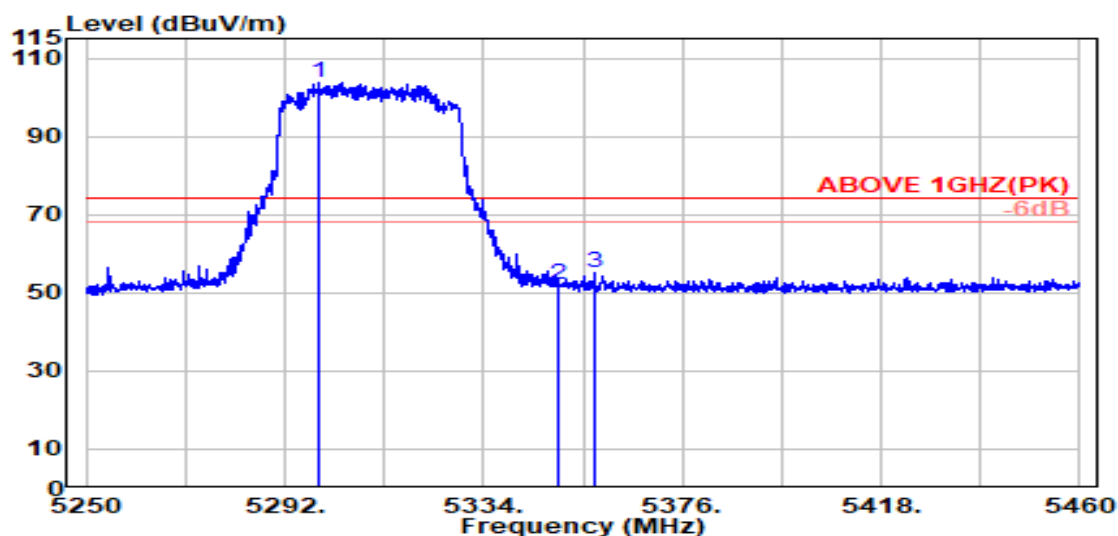

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.200	33.80	8.52	39.17	100.63	103.78	---	---	Peak
5350.000	33.70	8.57	39.17	49.18	52.29	74.00	21.71	Peak
5357.300	33.73	8.58	39.17	51.99	55.14	74.00	18.86	Peak

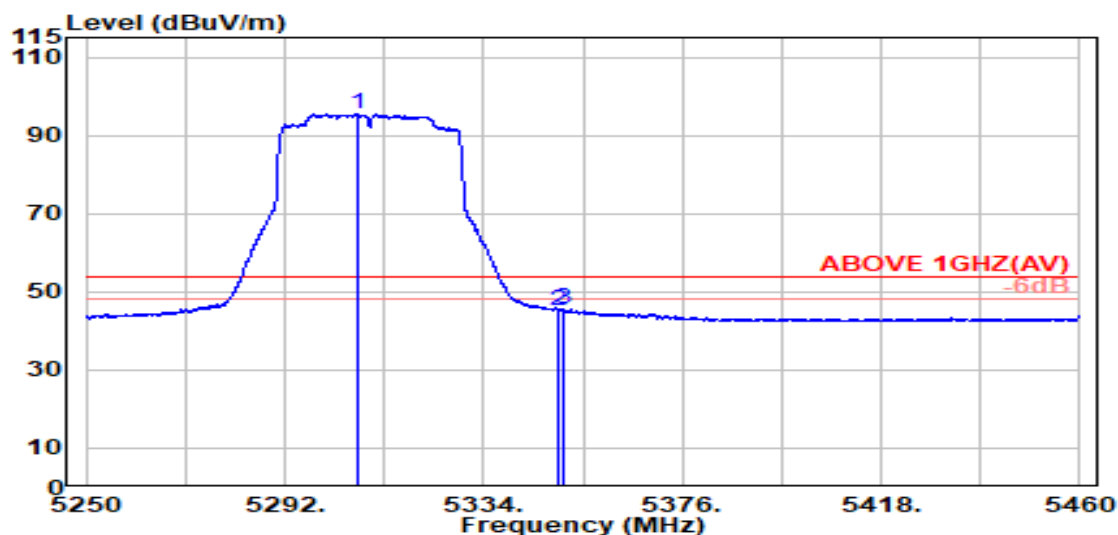


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.300	33.79	8.53	39.17	92.32	95.46	---	---	Average
5350.000	33.70	8.57	39.17	41.83	44.94	54.00	9.06	Average
5351.000	33.70	8.57	39.17	42.35	45.46	54.00	8.54	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

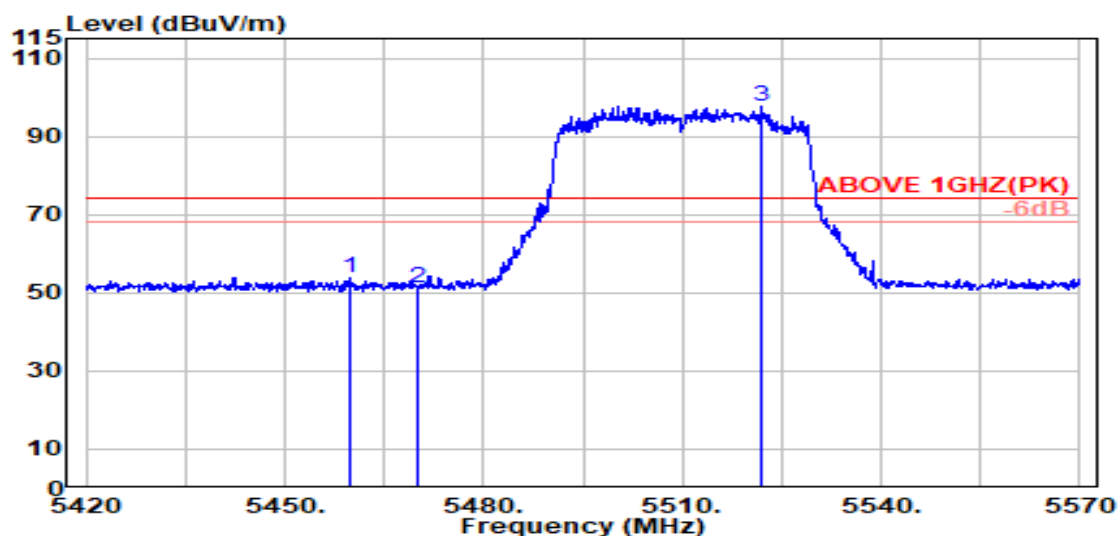

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.02	8.68	39.15	50.40	53.94	74.00	20.06	Peak
5470.000	34.04	8.69	39.15	47.73	51.30	74.00	22.70	Peak
@ 5522.000	34.06	8.74	39.15	93.91	97.55	---	---	Peak

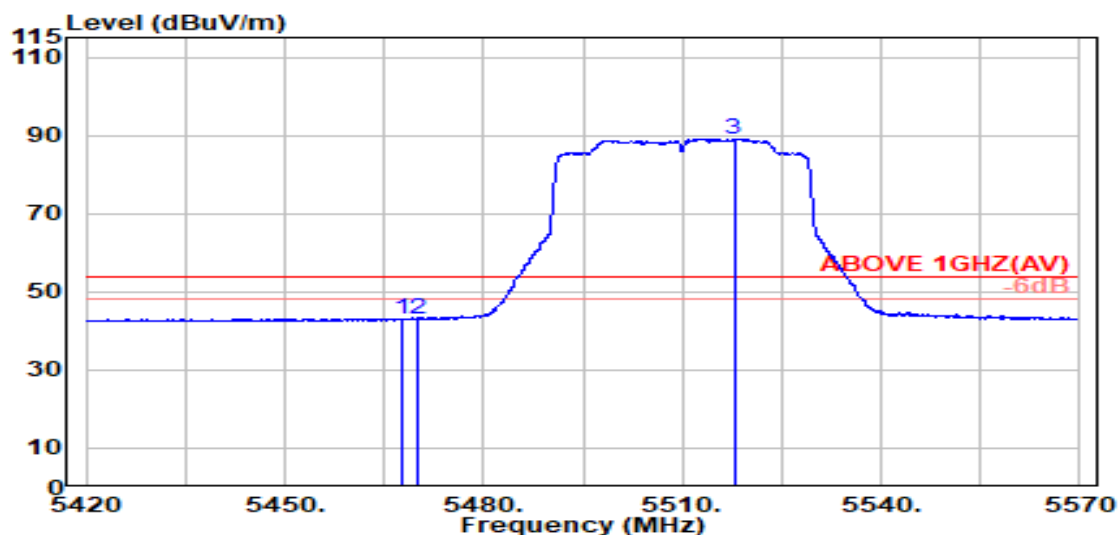


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	39.60	43.17	54.00	10.83	Average
5470.000	34.04	8.69	39.15	39.34	42.91	54.00	11.09	Average
@ 5517.800	34.06	8.73	39.15	85.51	89.16	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

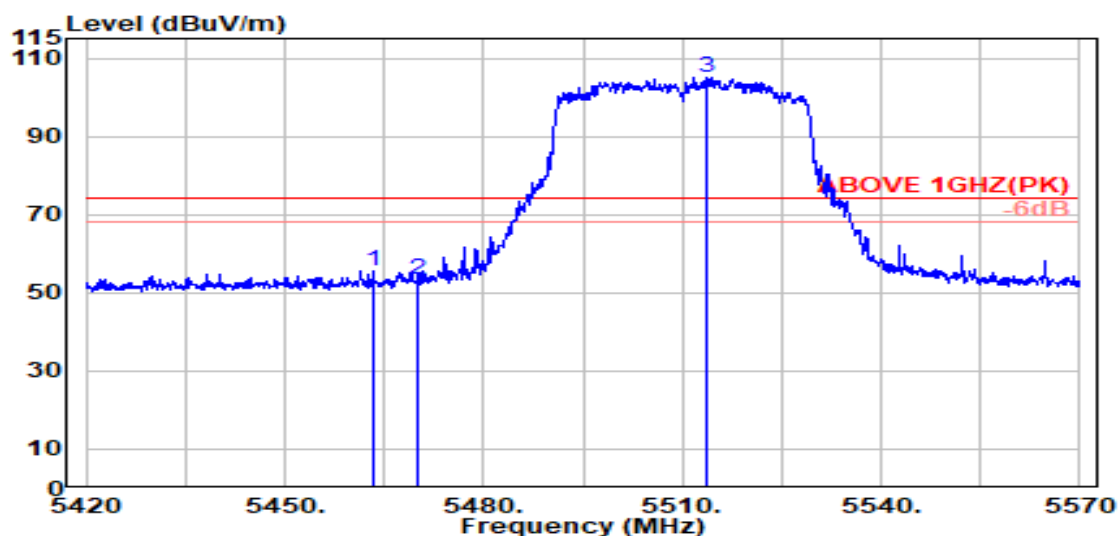

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.03	8.68	39.15	52.12	55.67	74.00	18.33	Peak
5470.000	34.04	8.69	39.15	49.74	53.32	74.00	20.68	Peak
@ 5513.700	34.07	8.73	39.15	101.55	105.20	---	---	Peak

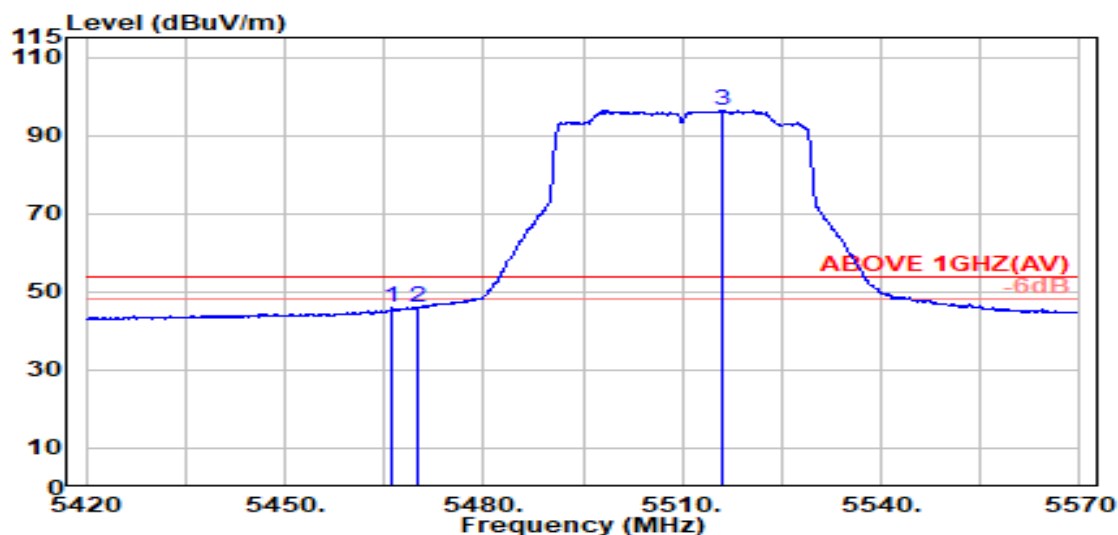


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.03	8.68	39.15	42.35	45.91	54.00	8.09	Average
5470.000	34.04	8.69	39.15	42.34	45.91	54.00	8.09	Average
@ 5516.200	34.07	8.73	39.15	92.78	96.43	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

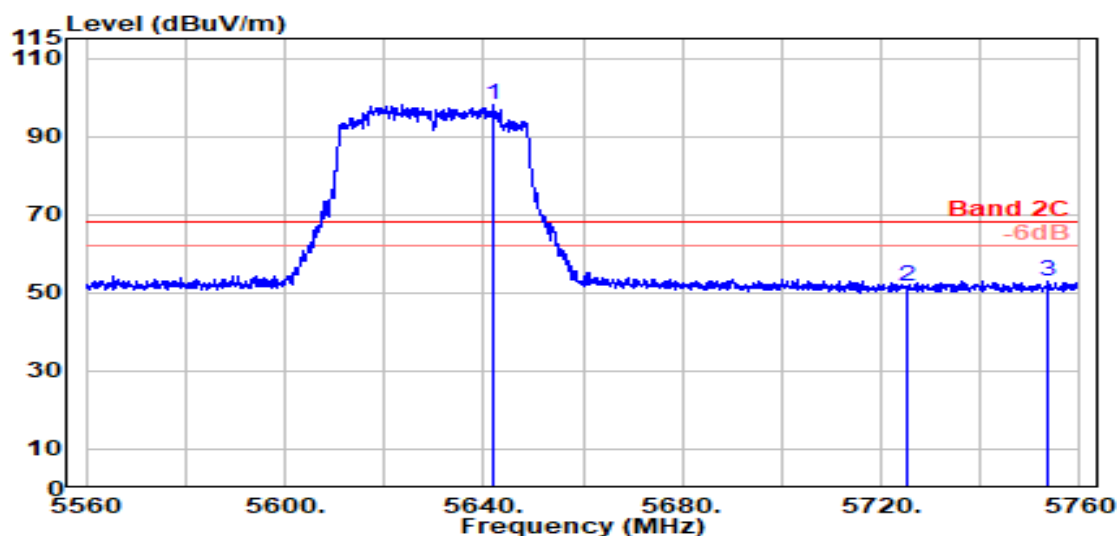

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5641.900	33.80	8.85	39.18	94.69	98.16	---	---	Peak
5725.000	33.60	8.93	39.20	48.34	51.67	68.20	16.53	Peak
5753.600	33.61	8.95	39.20	49.47	52.84	68.20	15.36	Peak

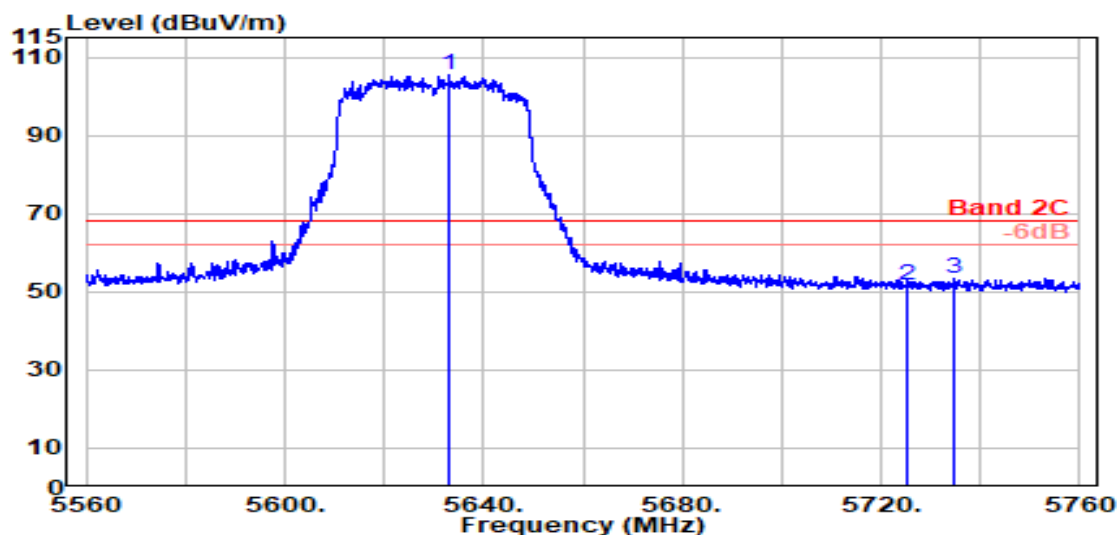


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5632.900	33.80	8.84	39.18	101.86	105.33	---	---	Peak
5725.000	33.60	8.93	39.20	48.52	51.85	68.20	16.35	Peak
5734.700	33.60	8.93	39.20	49.98	53.32	68.20	14.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/67	Frequency	TX 5250MHz

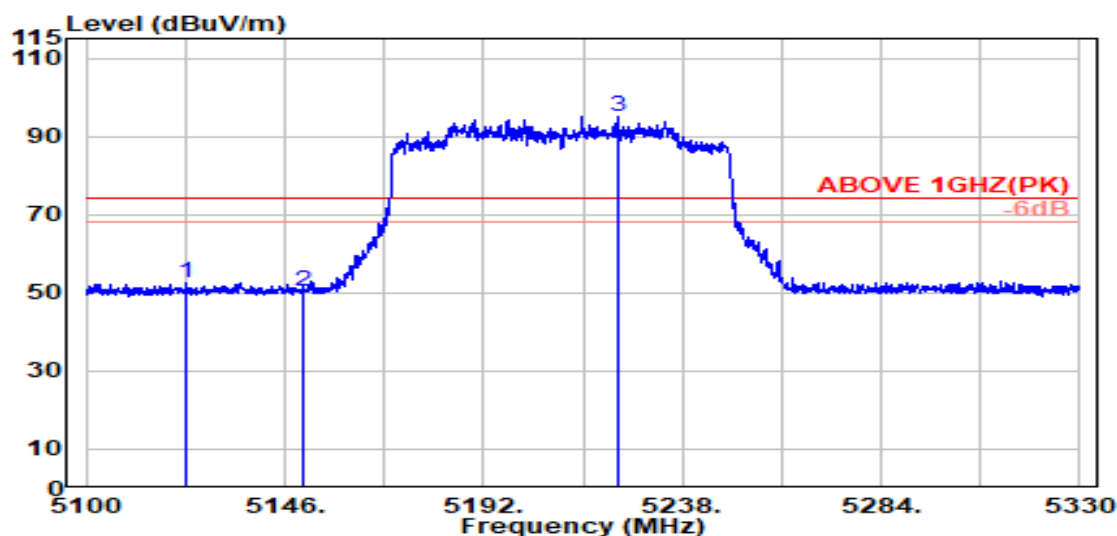

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.000	33.45	8.35	39.19	49.92	52.52	74.00	21.48	Peak
5150.000	33.50	8.37	39.19	47.65	50.34	74.00	23.66	Peak
@ 5223.000	33.75	8.45	39.18	92.18	95.20	---	---	Peak

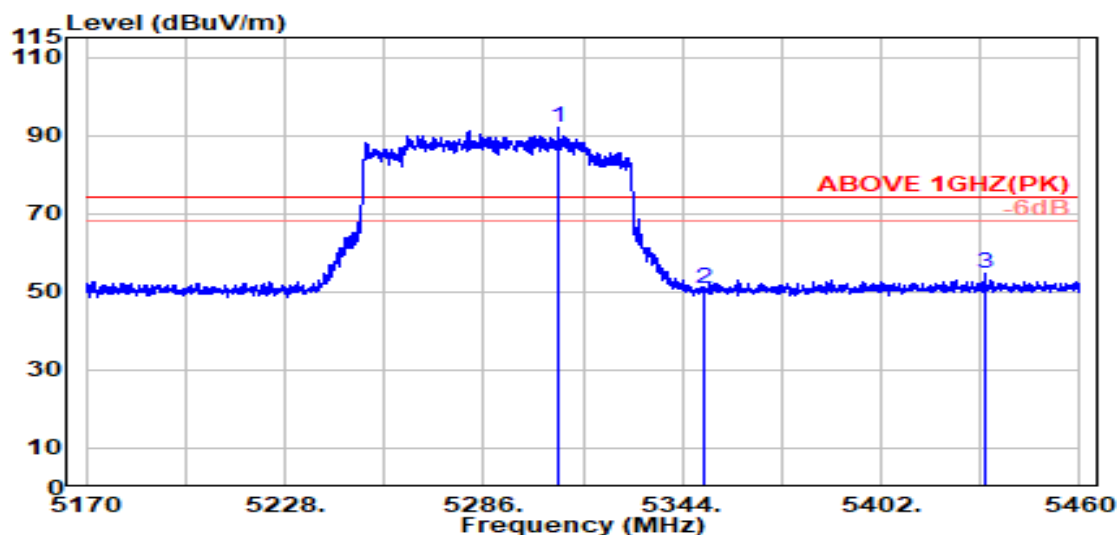


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.800	33.78	8.53	39.17	88.68	91.83	---	---	Peak
5350.000	33.70	8.57	39.17	47.60	50.71	74.00	23.29	Peak
5432.100	33.96	8.65	39.16	51.15	54.61	74.00	19.39	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/67	Frequency	TX 5250MHz

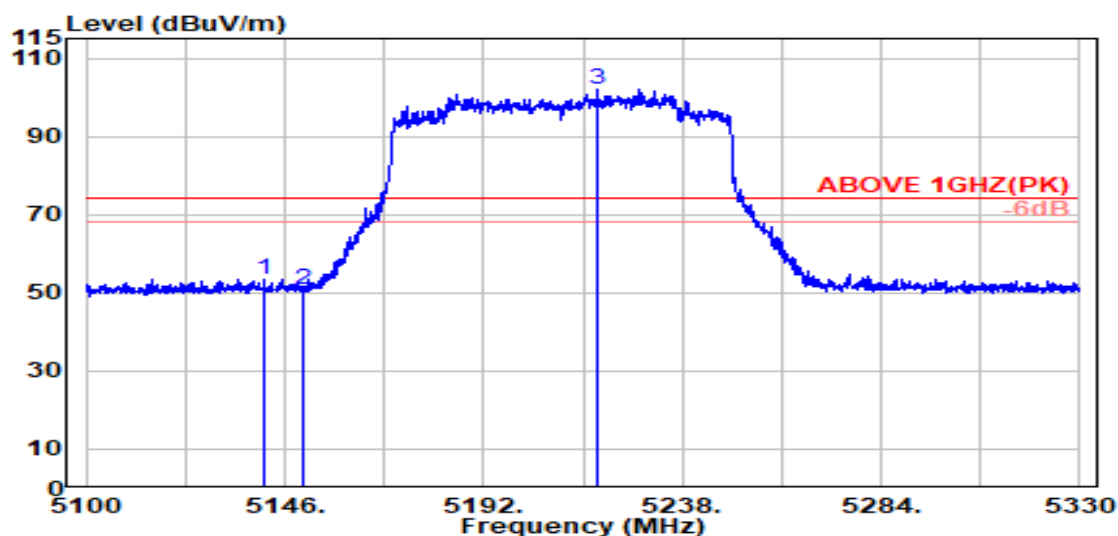

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.300	33.48	8.37	39.19	50.86	53.51	74.00	20.49	Peak
5150.000	33.50	8.37	39.19	47.93	50.61	74.00	23.39	Peak
@ 5218.300	33.76	8.44	39.18	99.16	102.18	---	---	Peak

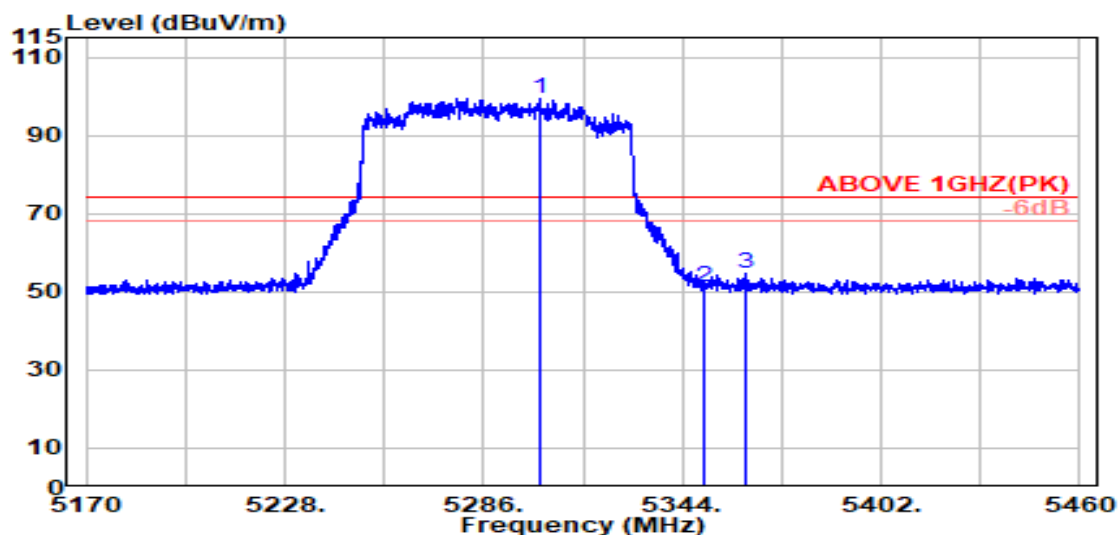


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.600	33.79	8.53	39.17	96.40	99.54	---	---	Peak
5350.000	33.70	8.57	39.17	47.95	51.05	74.00	22.95	Peak
5362.800	33.75	8.58	39.17	51.37	54.54	74.00	19.46	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

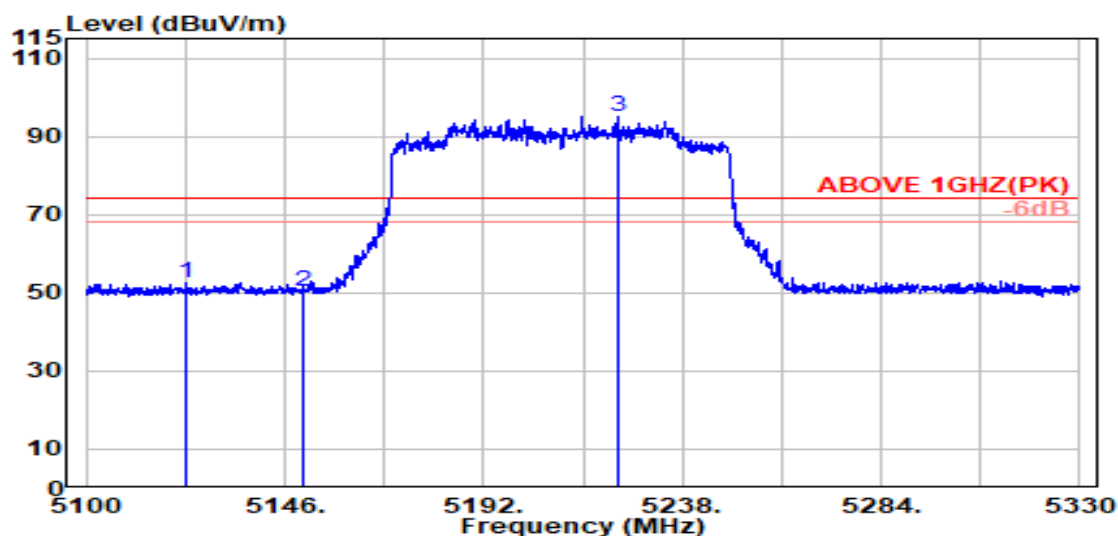

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.000	33.45	8.35	39.19	49.92	52.52	74.00	21.48	Peak
5150.000	33.50	8.37	39.19	47.65	50.34	74.00	23.66	Peak
@ 5223.000	33.75	8.45	39.18	92.18	95.20	---	---	Peak

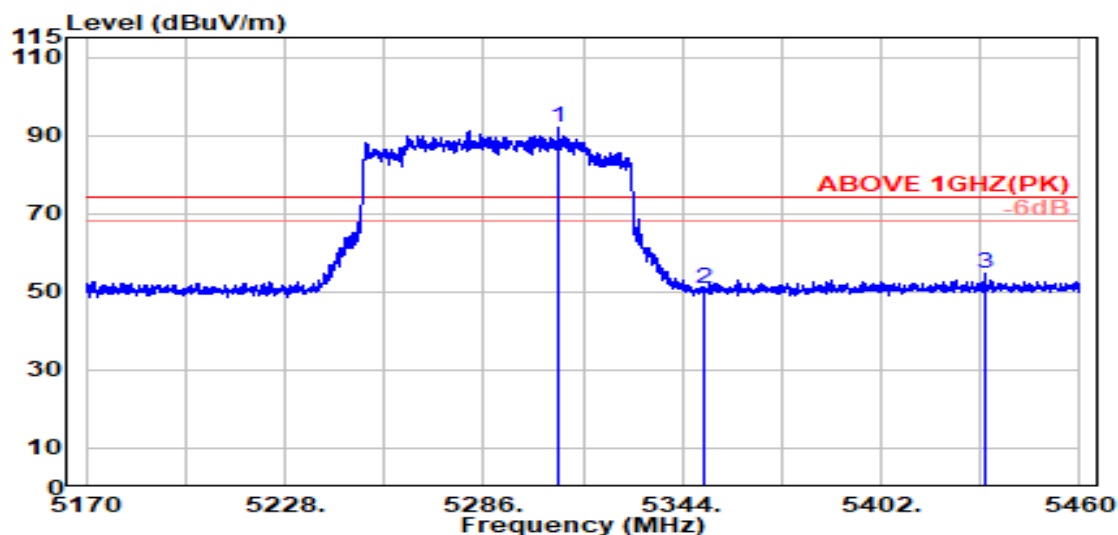


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.800	33.78	8.53	39.17	88.68	91.83	---	---	Peak
5350.000	33.70	8.57	39.17	47.60	50.71	74.00	23.29	Peak
5432.100	33.96	8.65	39.16	51.15	54.61	74.00	19.39	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

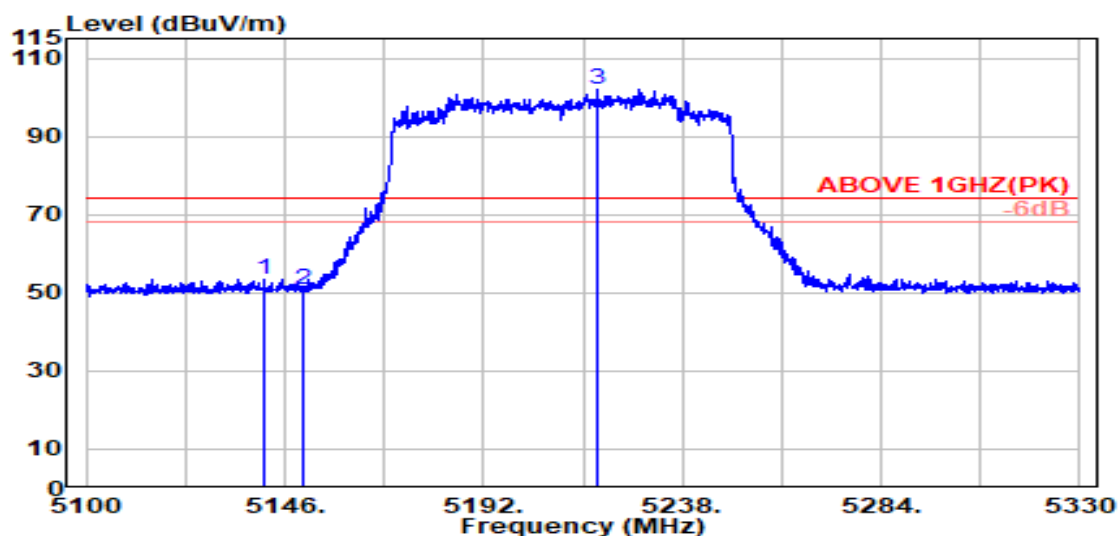

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5141.300	33.48	8.37	39.19	50.86	53.51	74.00	20.49	Peak
5150.000	33.50	8.37	39.19	47.93	50.61	74.00	23.39	Peak
@ 5218.300	33.76	8.44	39.18	99.16	102.18	---	---	Peak

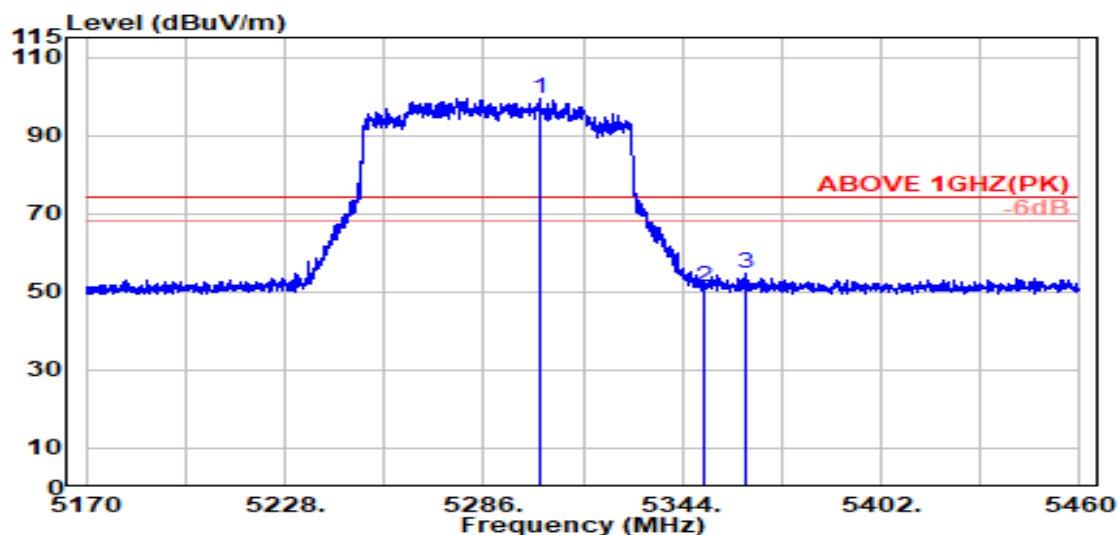


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5302.600	33.79	8.53	39.17	96.40	99.54	---	---	Peak
5350.000	33.70	8.57	39.17	47.95	51.05	74.00	22.95	Peak
5362.800	33.75	8.58	39.17	51.37	54.54	74.00	19.46	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

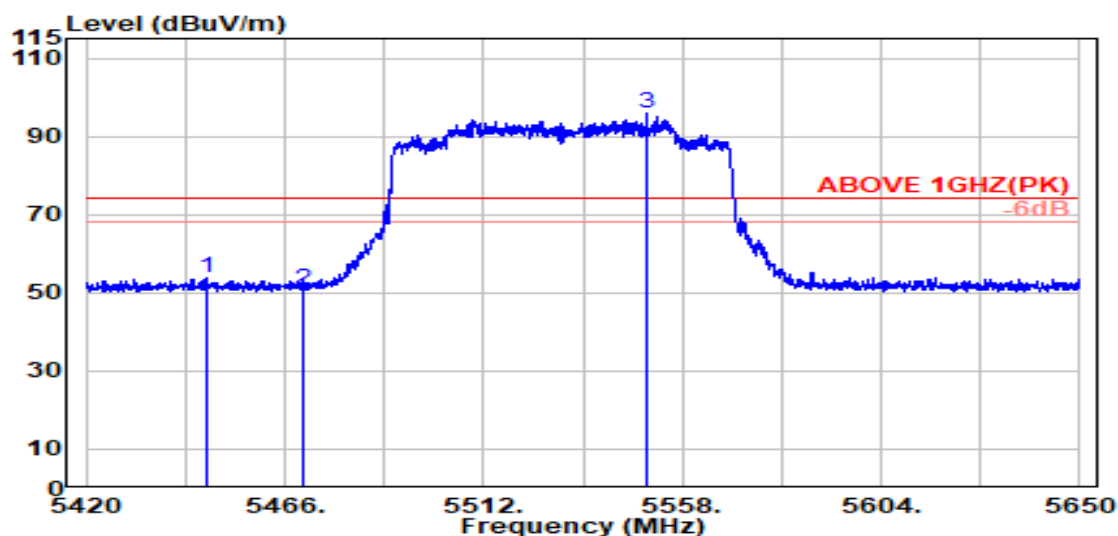

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.700	34.00	8.67	39.16	50.11	53.61	74.00	20.39	Peak
5470.000	34.04	8.69	39.15	47.27	50.84	74.00	23.16	Peak
@ 5549.800	34.00	8.76	39.16	92.18	95.78	---	---	Peak

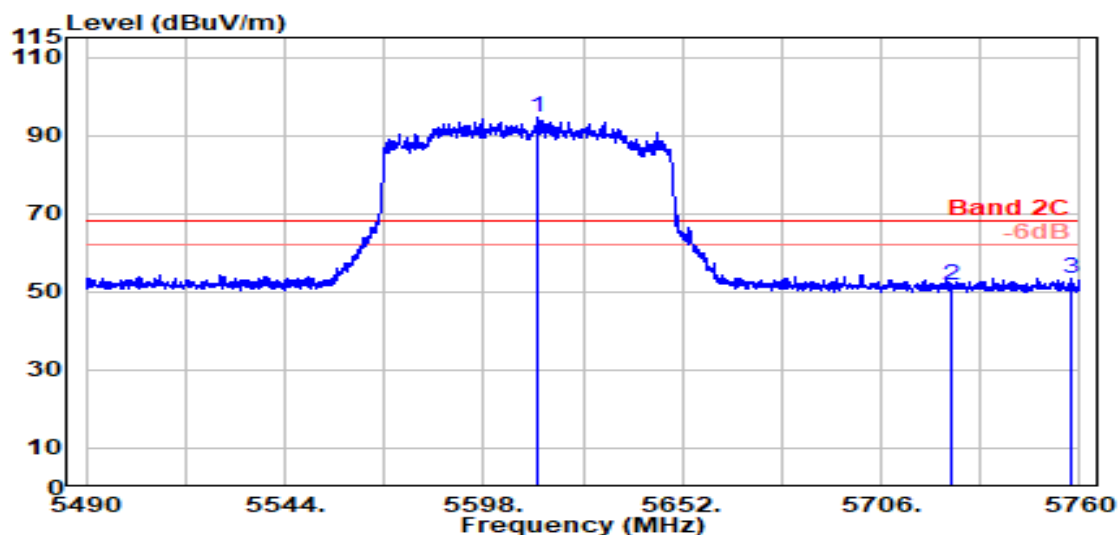


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.600	33.80	8.82	39.17	91.02	94.47	---	---	Peak
5725.000	33.60	8.93	39.20	48.41	51.74	68.20	16.46	Peak
5757.700	33.63	8.96	39.20	50.00	53.38	68.20	14.82	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

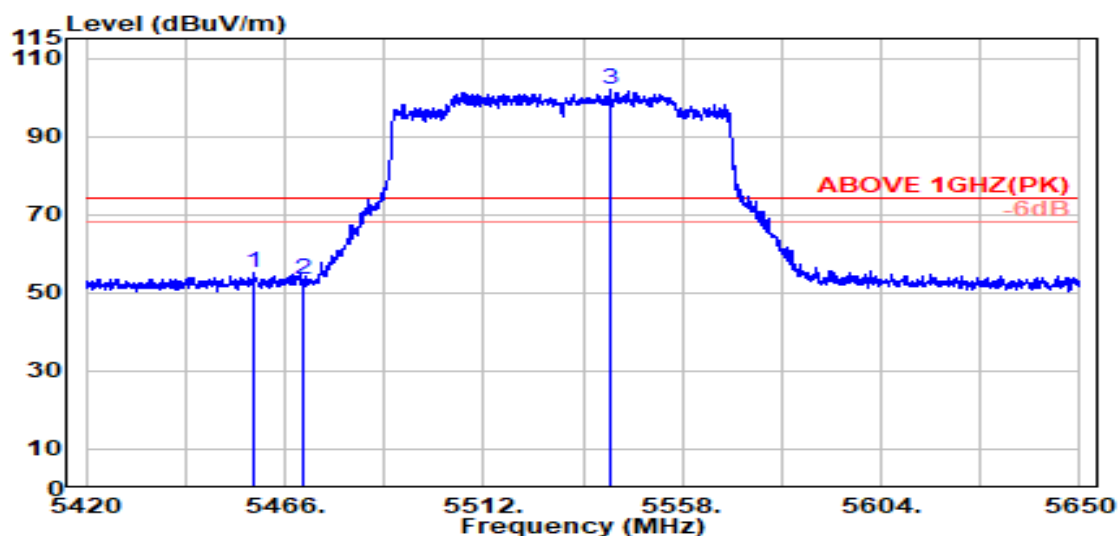

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.000	34.02	8.68	39.15	51.50	55.04	74.00	18.96	Peak
5470.000	34.04	8.69	39.15	49.84	53.41	74.00	20.59	Peak
@ 5541.300	34.02	8.76	39.16	98.19	101.80	---	---	Peak

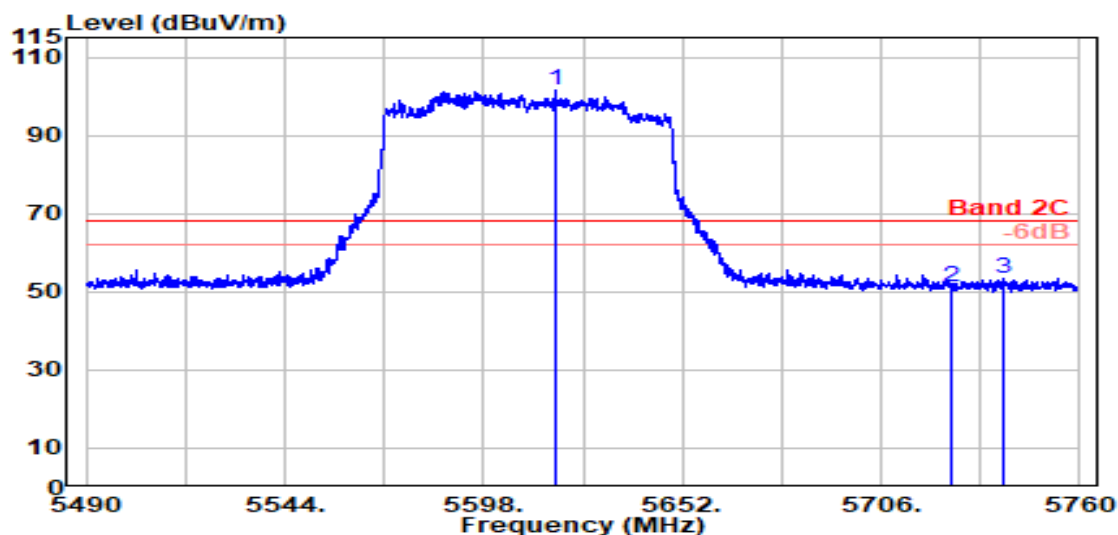


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5617.800	33.80	8.83	39.17	98.20	101.65	---	---	Peak
5725.000	33.60	8.93	39.20	47.77	51.10	68.20	17.10	Peak
5739.200	33.60	8.94	39.20	50.19	53.53	68.20	14.67	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

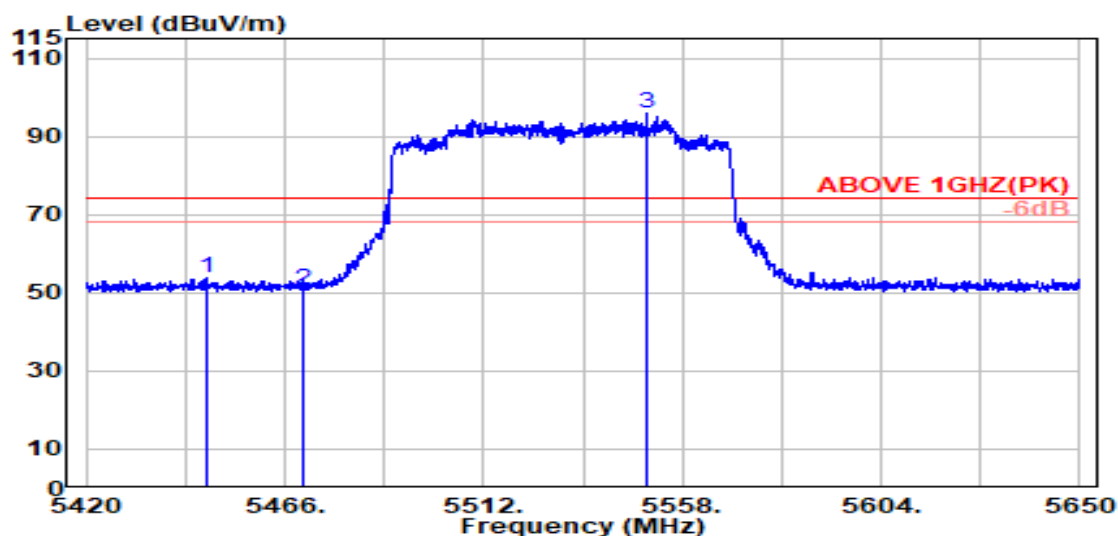

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.700	34.00	8.67	39.16	50.11	53.61	74.00	20.39	Peak
5470.000	34.04	8.69	39.15	47.27	50.84	74.00	23.16	Peak
@ 5549.800	34.00	8.76	39.16	92.18	95.78	---	---	Peak

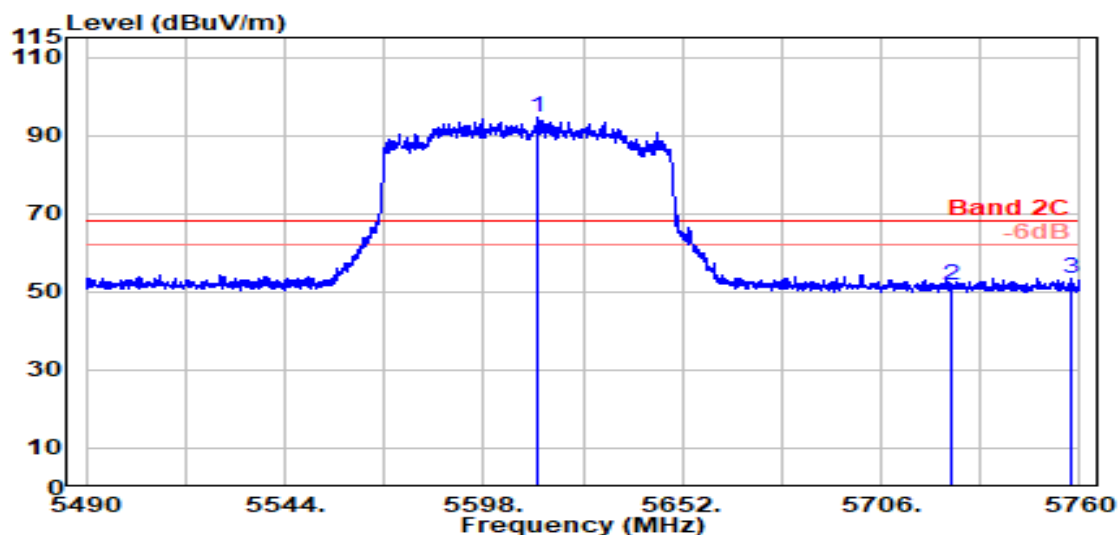


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.600	33.80	8.82	39.17	91.02	94.47	---	---	Peak
5725.000	33.60	8.93	39.20	48.41	51.74	68.20	16.46	Peak
5757.700	33.63	8.96	39.20	50.00	53.38	68.20	14.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

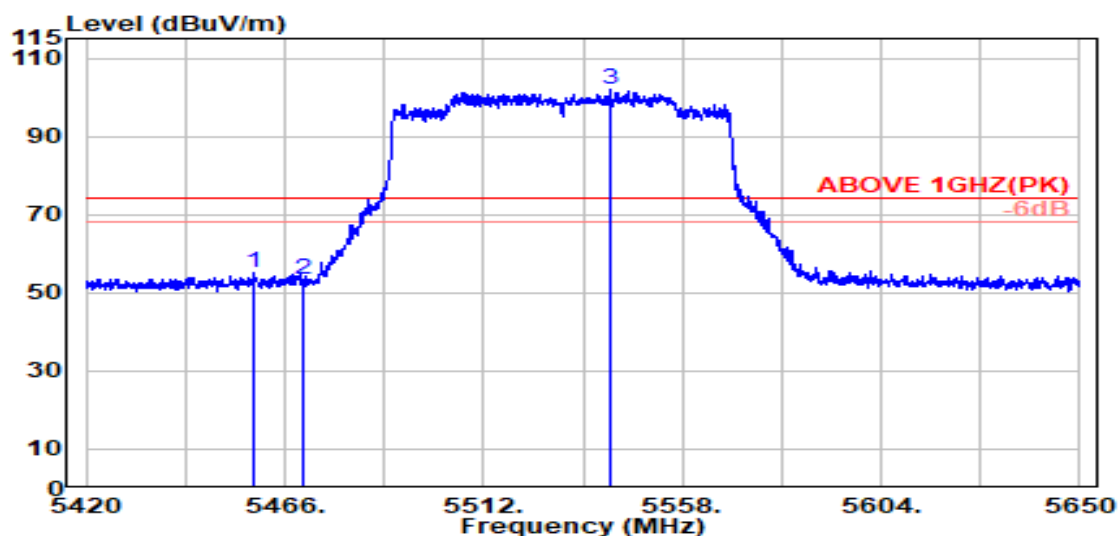

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.000	34.02	8.68	39.15	51.50	55.04	74.00	18.96	Peak
5470.000	34.04	8.69	39.15	49.84	53.41	74.00	20.59	Peak
@ 5541.300	34.02	8.76	39.16	98.19	101.80	---	---	Peak

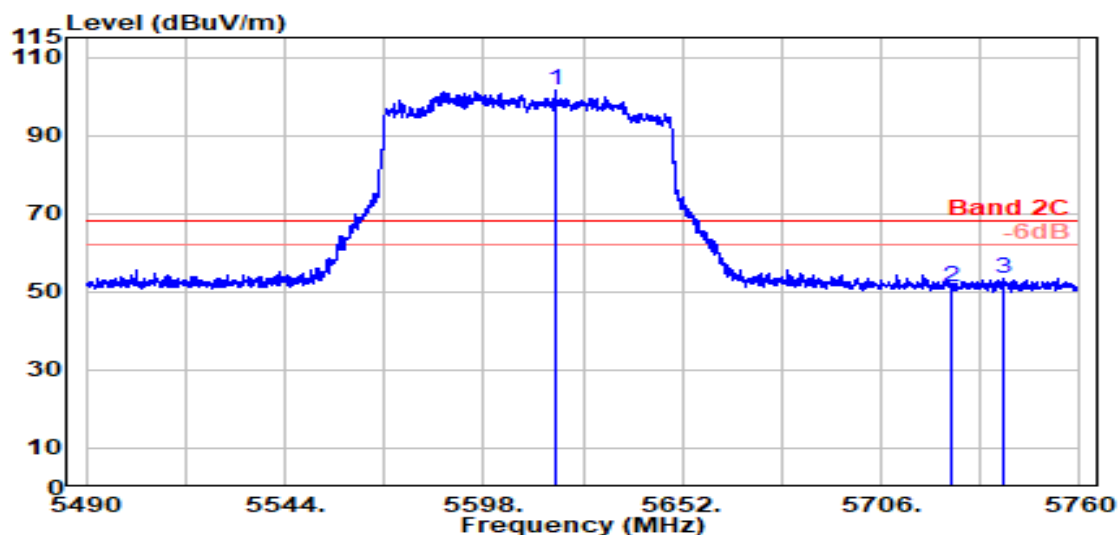


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5617.800	33.80	8.83	39.17	98.20	101.65	---	---	Peak
5725.000	33.60	8.93	39.20	47.77	51.10	68.20	17.10	Peak
5739.200	33.60	8.94	39.20	50.19	53.53	68.20	14.67	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.


With LUXSHARE-ICT Antenna

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

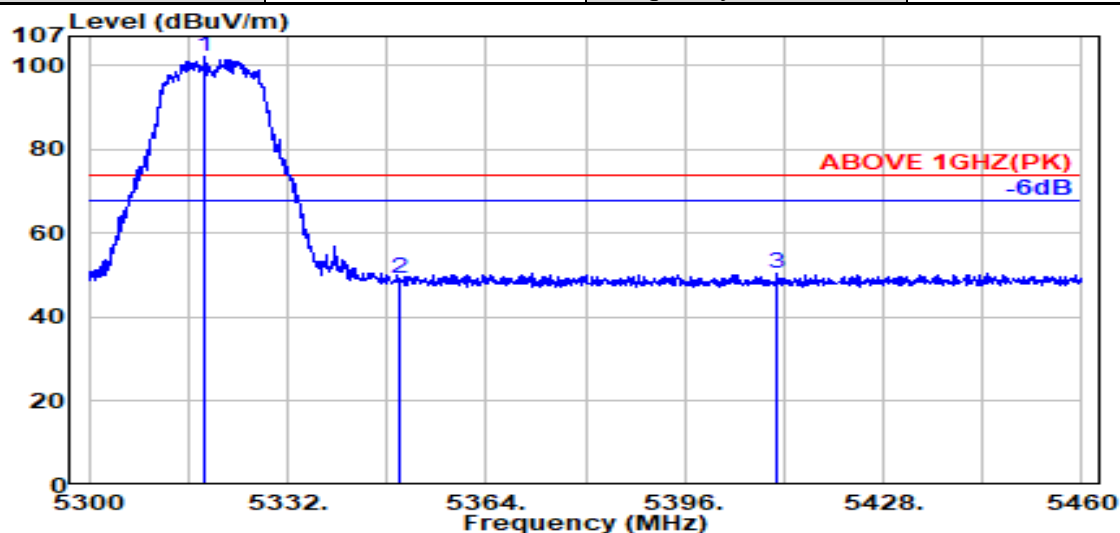

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.800	34.02	8.65	34.23	93.81	102.26	---	---	Peak
5350.000	33.90	8.67	34.22	40.86	49.21	74.00	24.79	Peak
5410.700	34.12	8.70	34.20	41.79	50.41	74.00	23.59	Peak

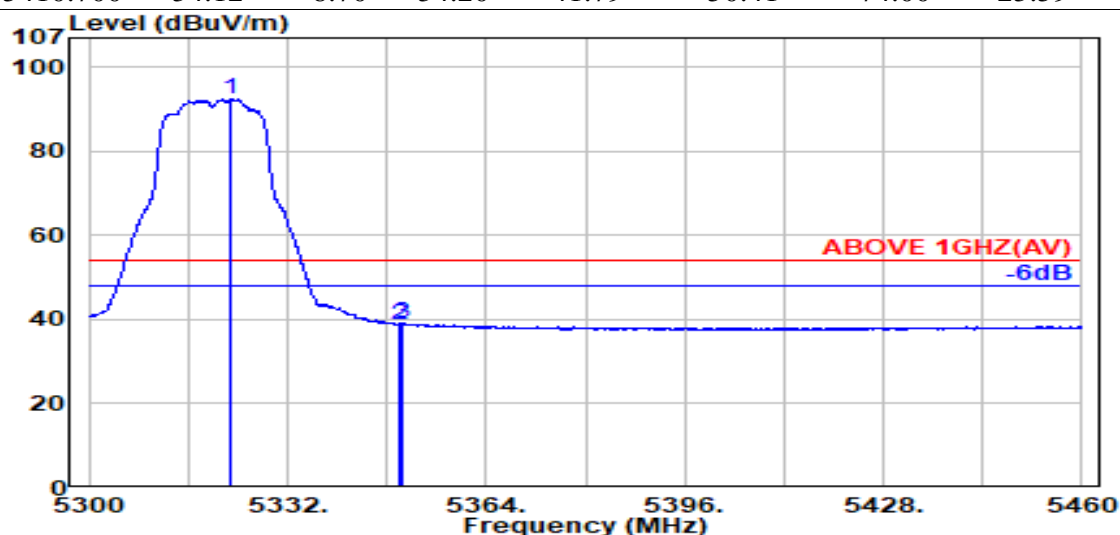


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	34.01	8.65	34.22	84.02	92.46	---	---	Average
5350.000	33.90	8.67	34.22	30.54	38.89	54.00	15.11	Average
5350.500	33.90	8.67	34.22	30.93	39.28	54.00	14.72	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

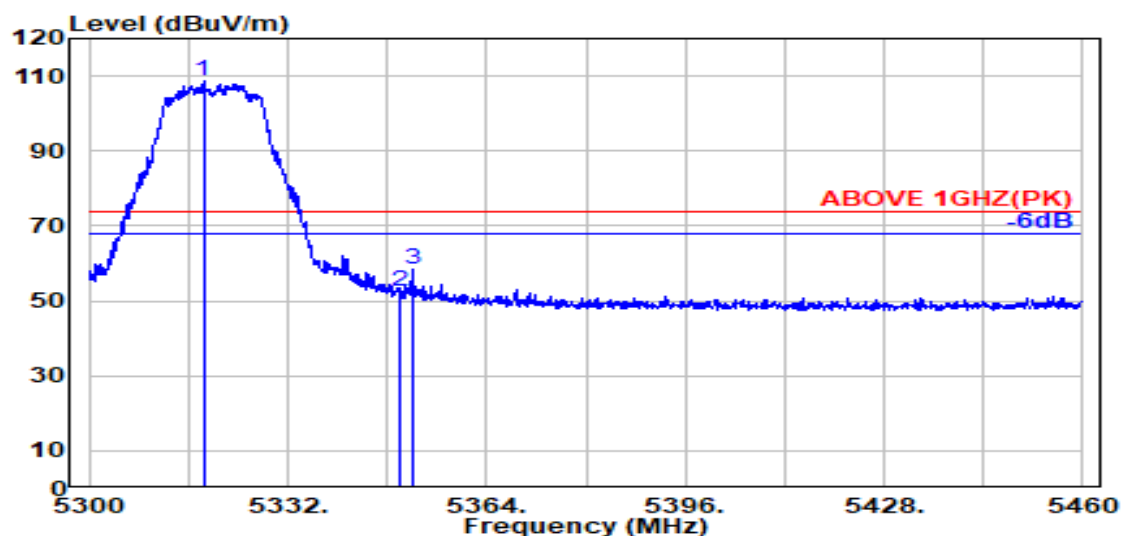

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.400	34.03	8.65	34.23	100.03	108.48	---	---	Peak
5350.000	33.90	8.67	34.22	44.17	52.52	74.00	21.48	Peak
5352.000	33.91	8.67	34.22	50.11	58.47	74.00	15.53	Peak

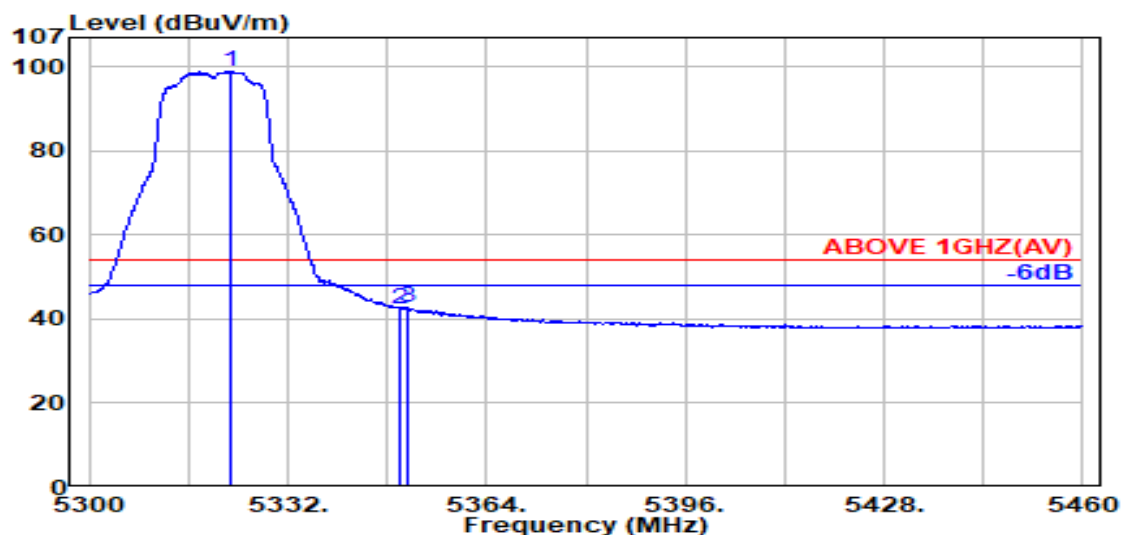


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	34.01	8.65	34.22	90.58	99.02	---	---	Average
5350.000	33.90	8.67	34.22	34.23	42.58	54.00	11.42	Average
5351.200	33.90	8.67	34.22	34.55	42.90	54.00	11.10	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

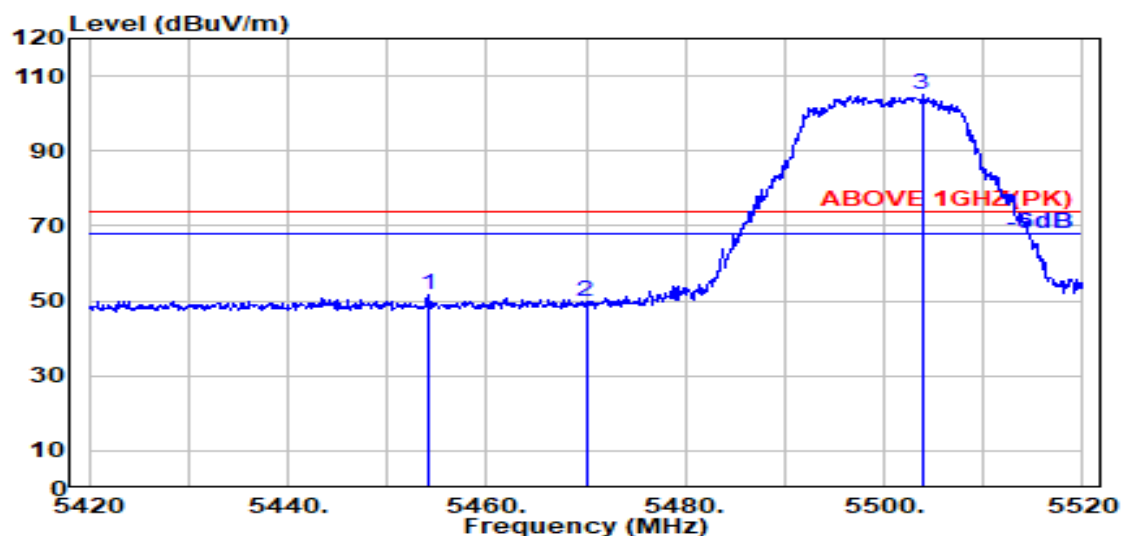

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5454.200	34.19	8.73	34.18	42.78	51.51	74.00	22.49	Peak
5470.000	34.16	8.74	34.18	41.27	49.98	74.00	24.02	Peak
@ 5503.800	34.10	8.76	34.17	96.45	105.13	---	---	Peak

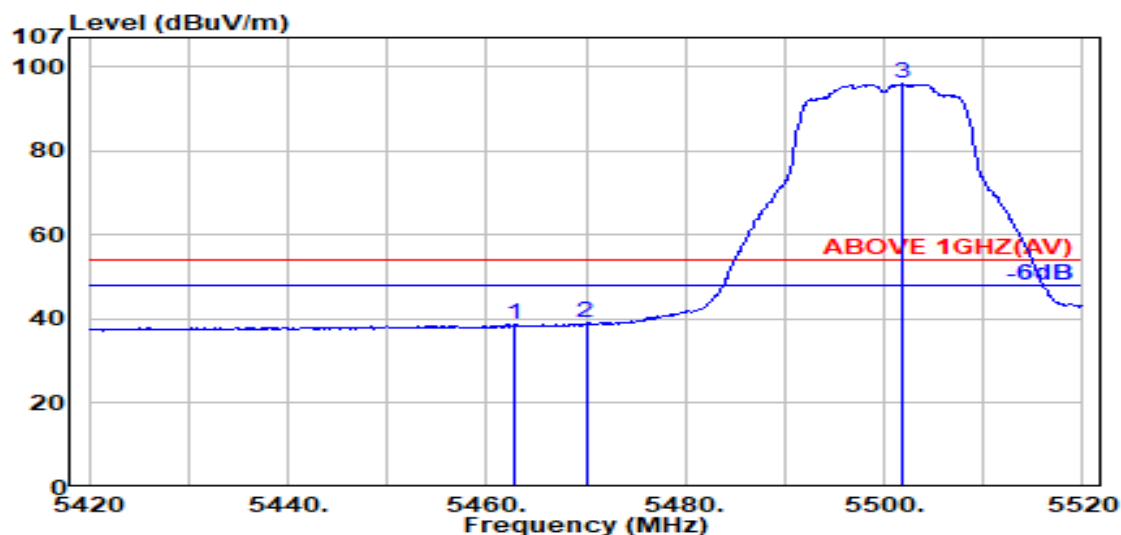


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.900	34.17	8.73	34.18	30.04	38.77	54.00	15.23	Average
5470.000	34.16	8.74	34.18	30.27	38.99	54.00	15.01	Average
@ 5501.800	34.10	8.75	34.17	87.36	96.05	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

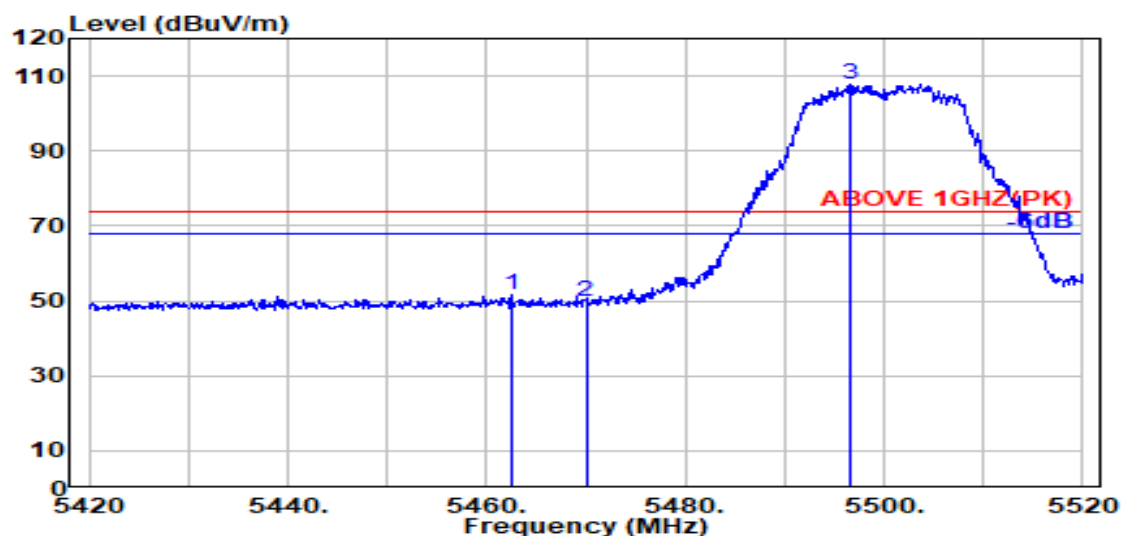

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.17	8.73	34.18	42.89	51.62	74.00	22.38	Peak
5470.000	34.16	8.74	34.18	41.32	50.03	74.00	23.97	Peak
@ 5496.700	34.11	8.75	34.17	99.31	108.00	---	---	Peak

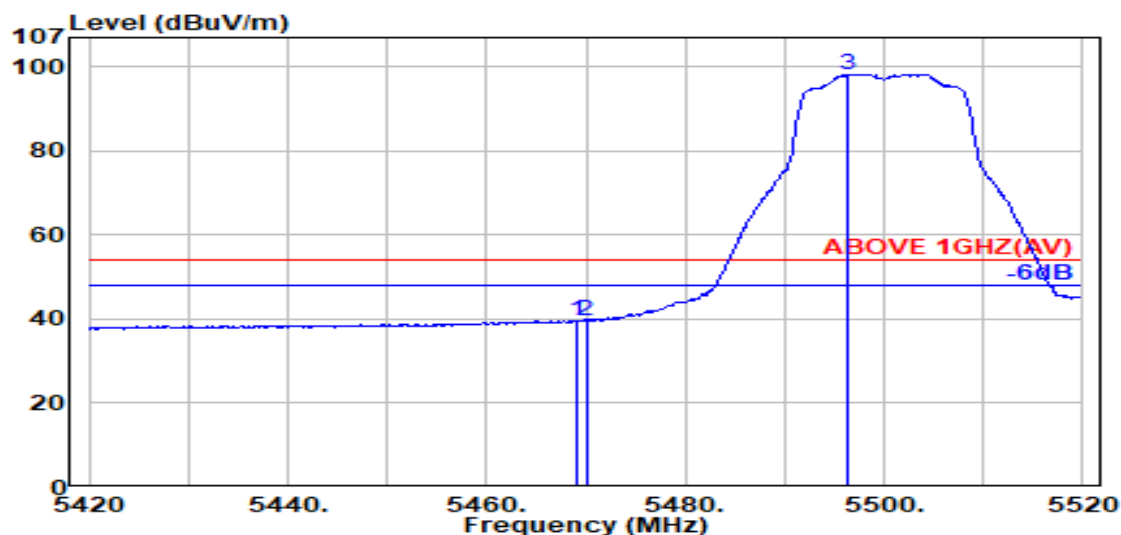


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	30.95	39.66	54.00	14.34	Average
5470.000	34.16	8.74	34.18	30.86	39.57	54.00	14.43	Average
@ 5496.400	34.11	8.75	34.17	89.62	98.31	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

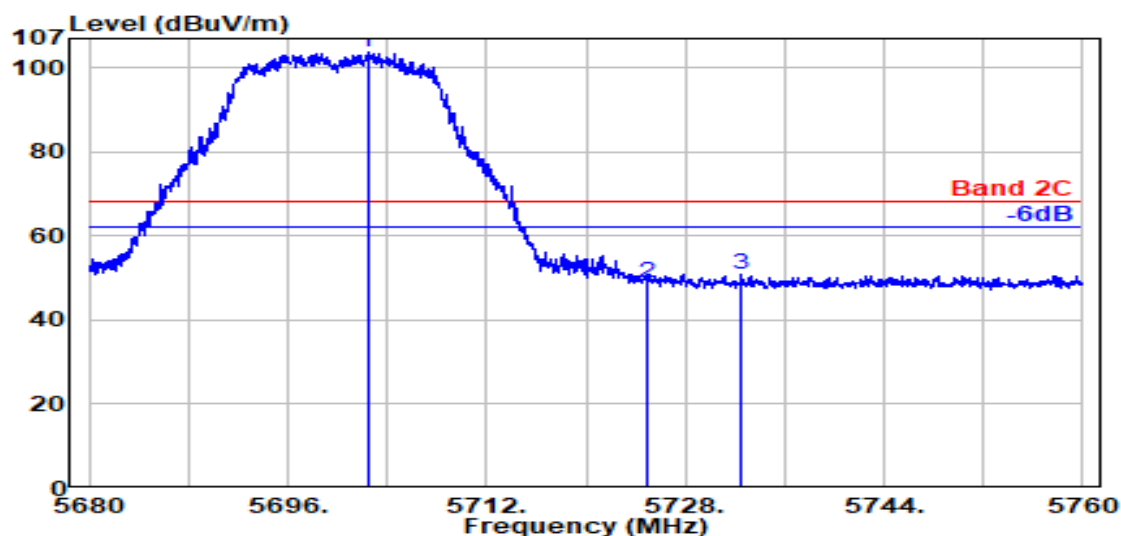

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.400	33.80	8.87	34.27	95.29	103.69	---	---	Peak
5725.000	33.80	8.88	34.28	40.62	49.03	68.20	19.17	Peak
5732.550	33.80	8.88	34.28	42.50	50.91	68.20	17.29	Peak

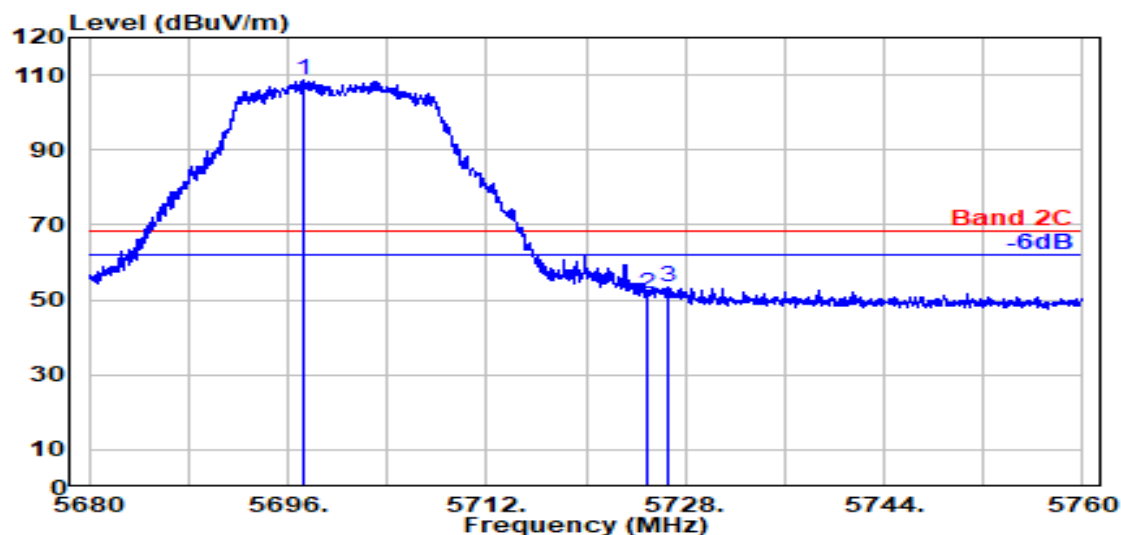


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.350	33.81	8.87	34.26	100.09	108.50	---	---	Peak
5725.000	33.80	8.88	34.28	43.01	51.42	68.20	16.78	Peak
5726.550	33.80	8.88	34.28	45.14	53.55	68.20	14.65	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

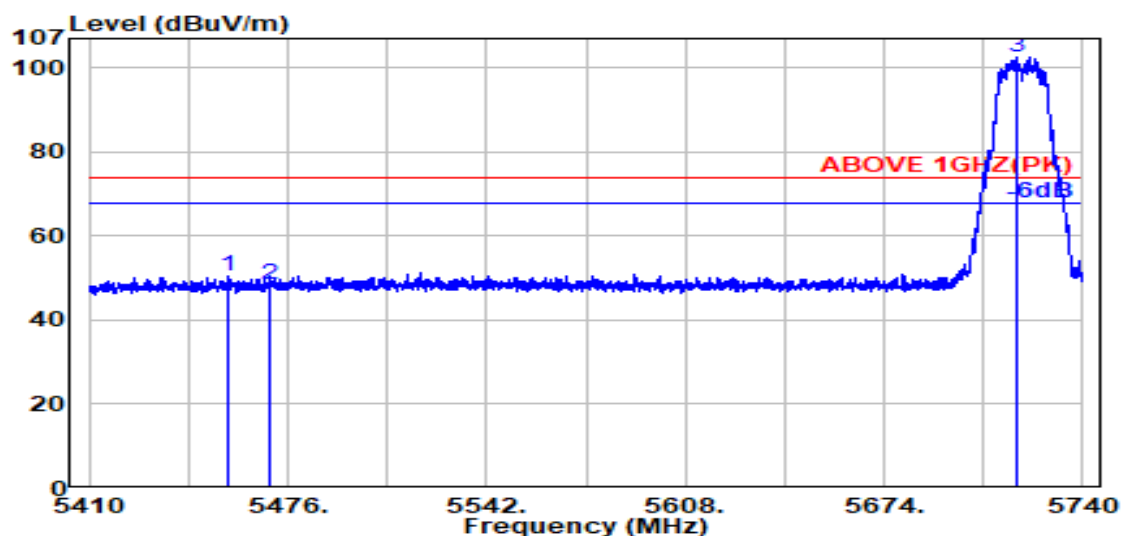

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.200	34.19	8.73	34.18	41.69	50.42	74.00	23.58	Peak
5470.000	34.16	8.74	34.18	39.91	48.62	74.00	25.38	Peak
@ 5718.500	33.80	8.88	34.27	94.07	102.47	---	---	Peak

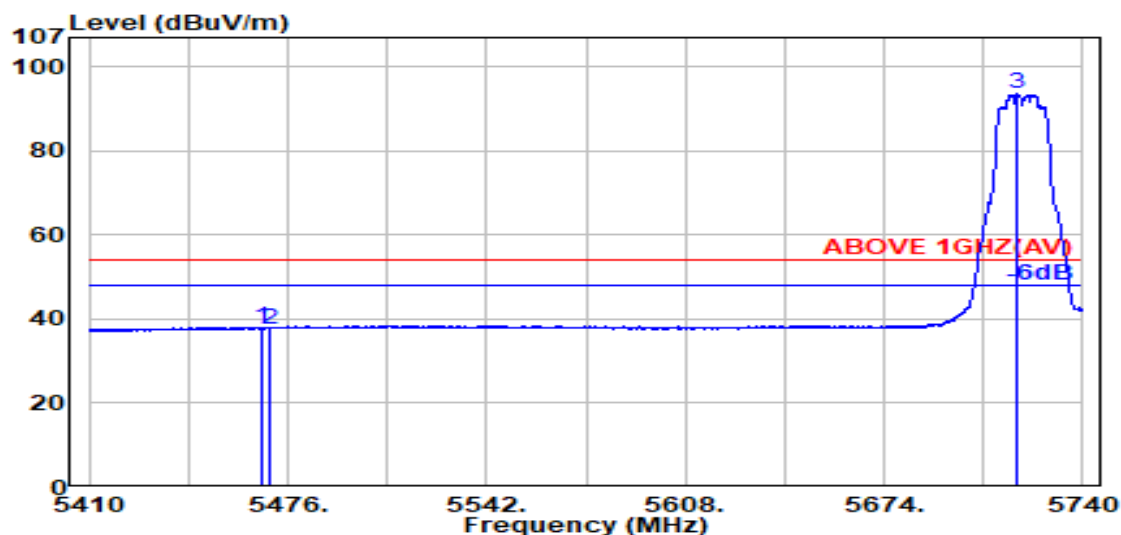


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.200	34.17	8.73	34.18	29.29	38.01	54.00	15.99	Average
5470.000	34.16	8.74	34.18	29.02	37.74	54.00	16.26	Average
@ 5717.800	33.80	8.88	34.27	85.07	93.48	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

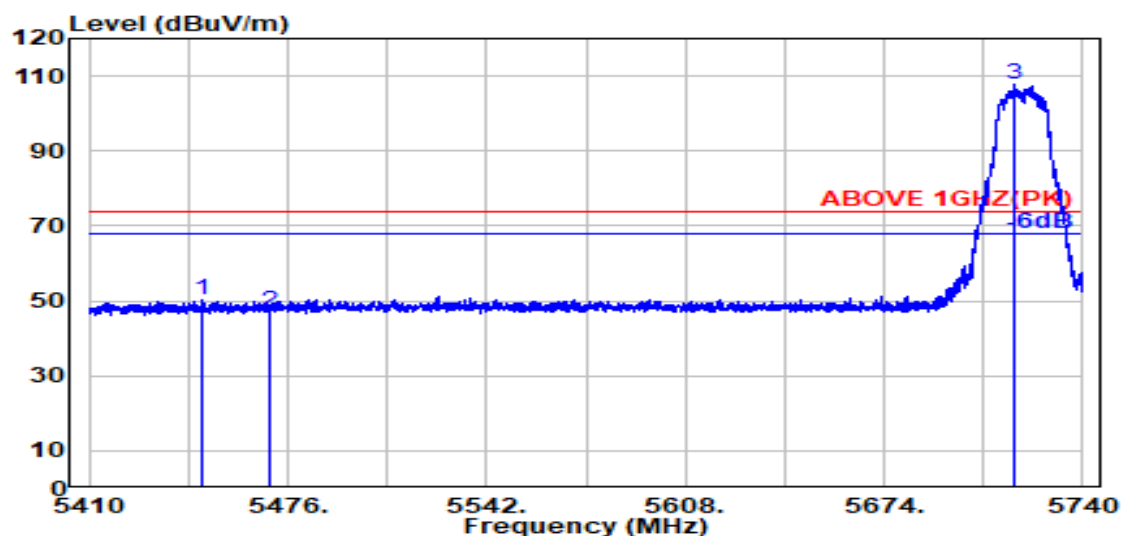

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5447.200	34.19	8.72	34.19	41.53	50.26	74.00	23.74	Peak
5470.000	34.16	8.74	34.18	38.56	47.27	74.00	26.73	Peak
@ 5717.200	33.80	8.88	34.27	99.28	107.68	---	---	Peak

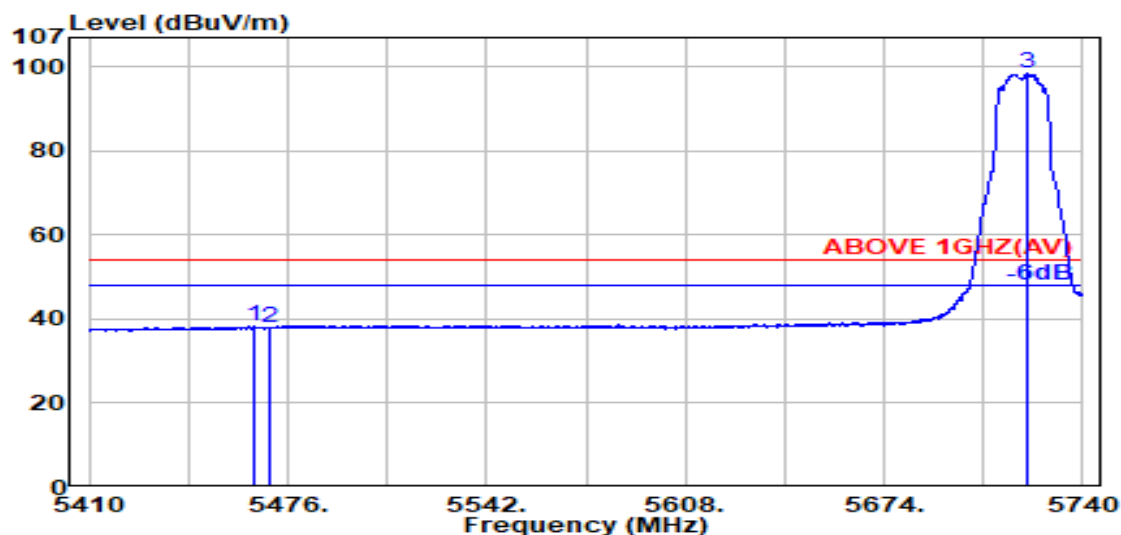


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5464.400	34.17	8.73	34.18	29.51	38.23	54.00	15.77	Average
5470.000	34.16	8.74	34.18	29.19	37.91	54.00	16.09	Average
@ 5721.200	33.80	8.88	34.27	90.18	98.58	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

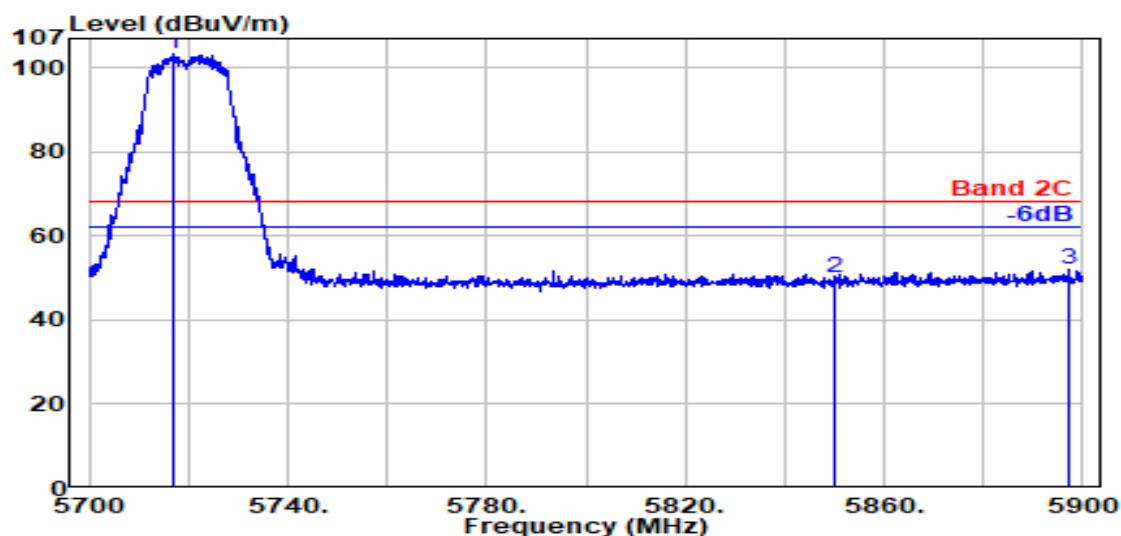

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.100	33.80	8.88	34.27	95.11	103.51	---	---	Peak
	5850.000	34.10	8.95	34.33	41.44	50.16	68.20	18.04	Peak
	5897.300	34.10	8.98	34.35	43.28	52.00	68.20	16.20	Peak

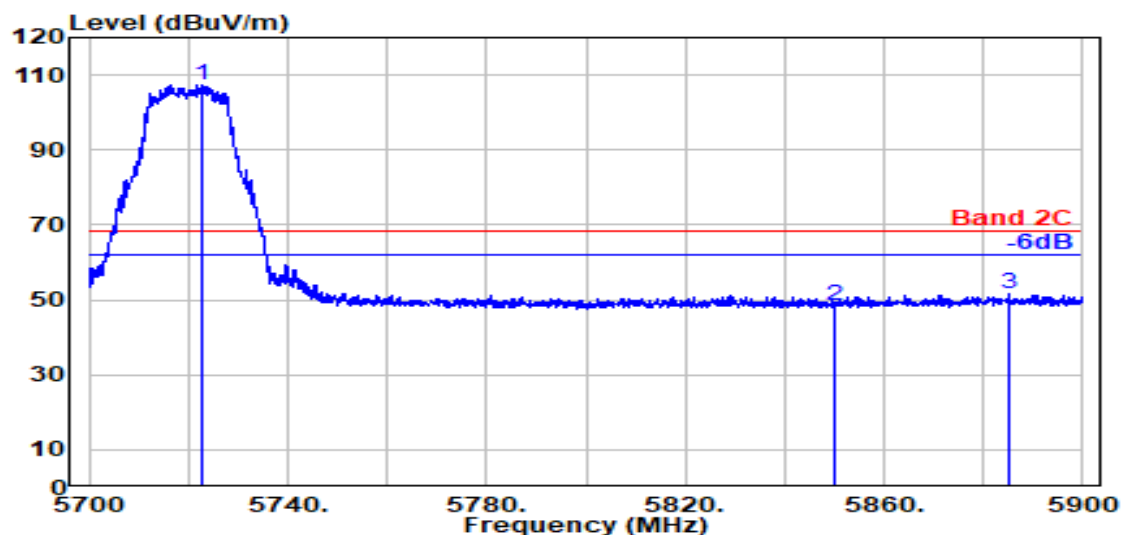


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.800	33.80	8.88	34.27	98.87	107.28	---	---	Peak
	5850.000	34.10	8.95	34.33	39.83	48.55	68.20	19.65	Peak
	5885.000	34.10	8.97	34.35	42.81	51.53	68.20	16.67	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

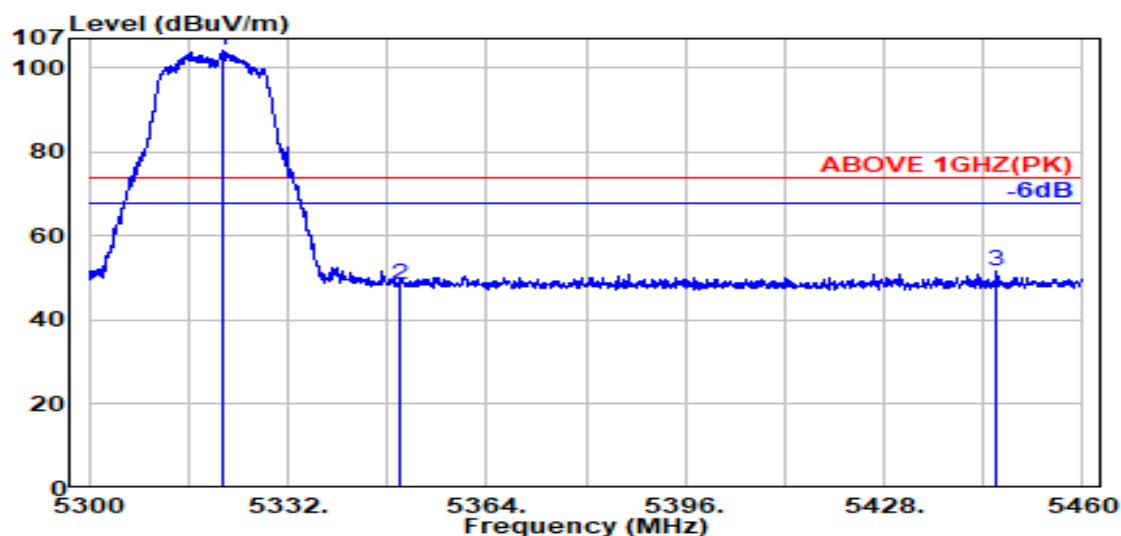

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.500	34.01	8.65	34.23	95.88	104.32	---	---	Peak
5350.000	33.90	8.67	34.22	40.17	48.51	74.00	25.49	Peak
5446.200	34.19	8.72	34.19	42.77	51.50	74.00	22.50	Peak

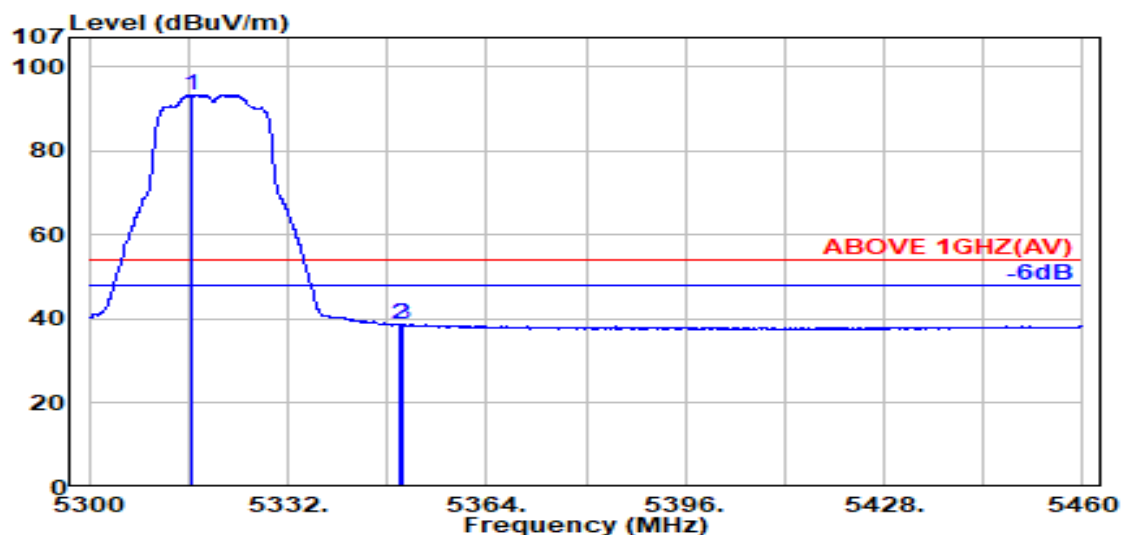


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.600	34.03	8.65	34.23	84.96	93.41	---	---	Average
5350.000	33.90	8.67	34.22	30.25	38.60	54.00	15.40	Average
5350.500	33.90	8.67	34.22	30.36	38.71	54.00	15.29	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

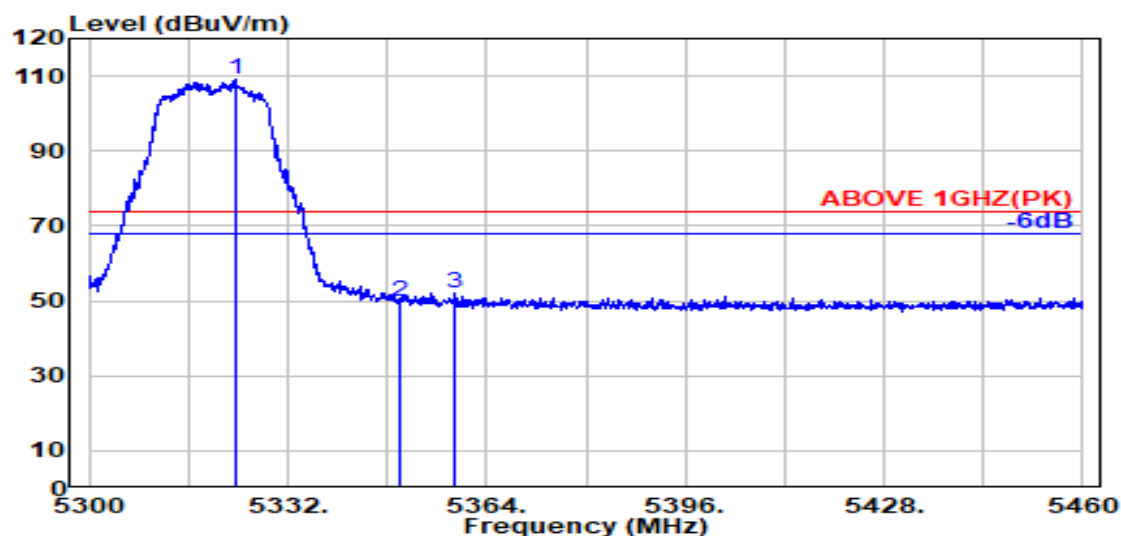

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.600	34.01	8.65	34.22	100.79	109.22	---	---	Peak
5350.000	33.90	8.67	34.22	41.57	49.92	74.00	24.08	Peak
5358.800	33.94	8.67	34.21	43.76	52.15	74.00	21.85	Peak

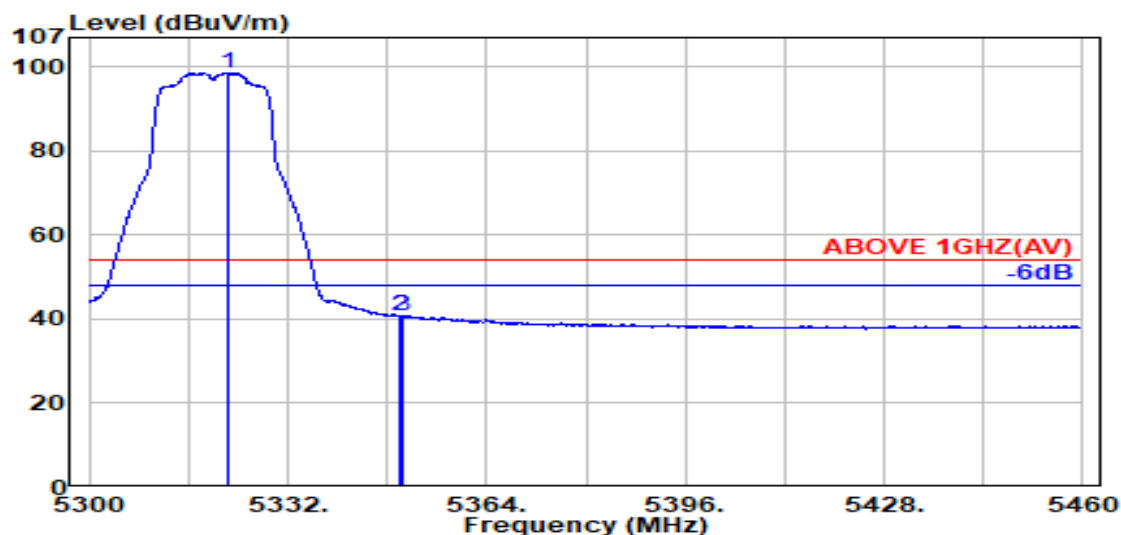


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.300	34.01	8.65	34.23	90.26	98.69	---	---	Average
5350.000	33.90	8.67	34.22	32.40	40.75	54.00	13.25	Average
5350.400	33.90	8.67	34.22	32.39	40.74	54.00	13.26	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

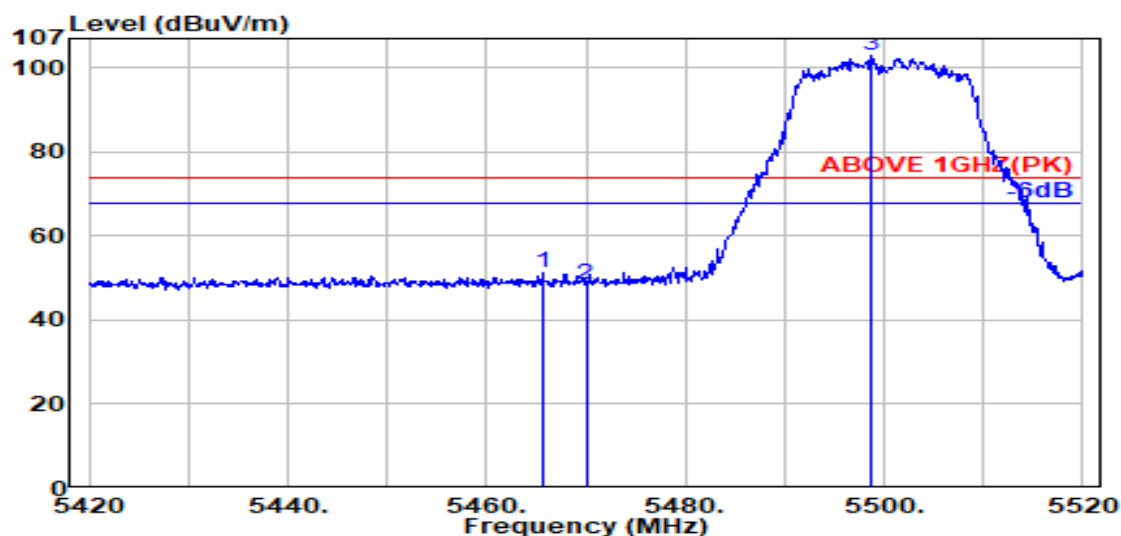

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.17	8.73	34.18	42.42	51.14	74.00	22.86	Peak
5470.000	34.16	8.74	34.18	39.62	48.34	74.00	25.66	Peak
@ 5498.700	34.10	8.75	34.17	94.09	102.77	---	---	Peak

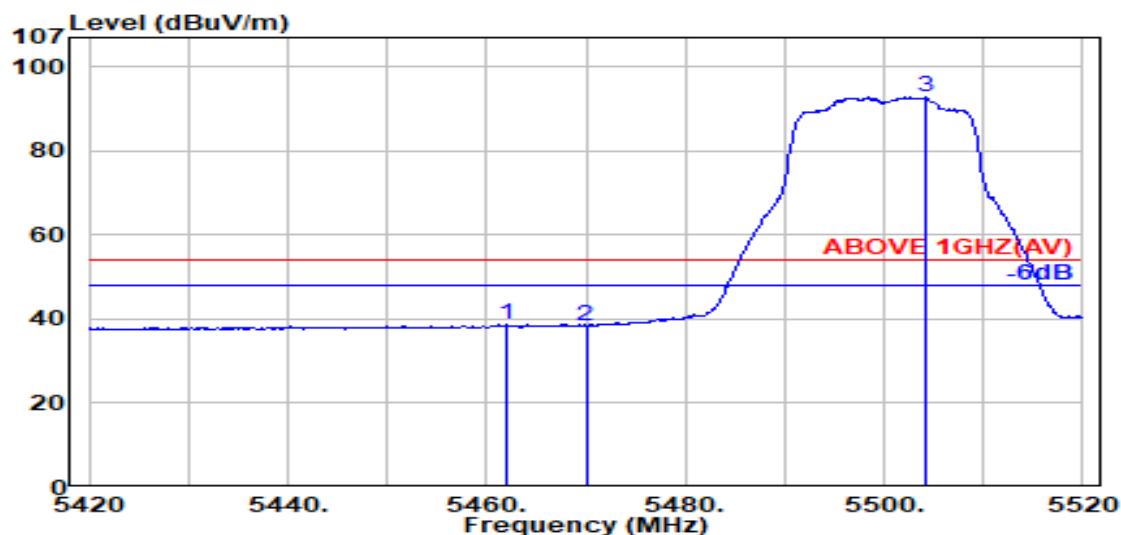


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.900	34.18	8.73	34.18	30.02	38.74	54.00	15.26	Average
5470.000	34.16	8.74	34.18	29.78	38.50	54.00	15.50	Average
@ 5504.200	34.10	8.76	34.17	84.14	92.83	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

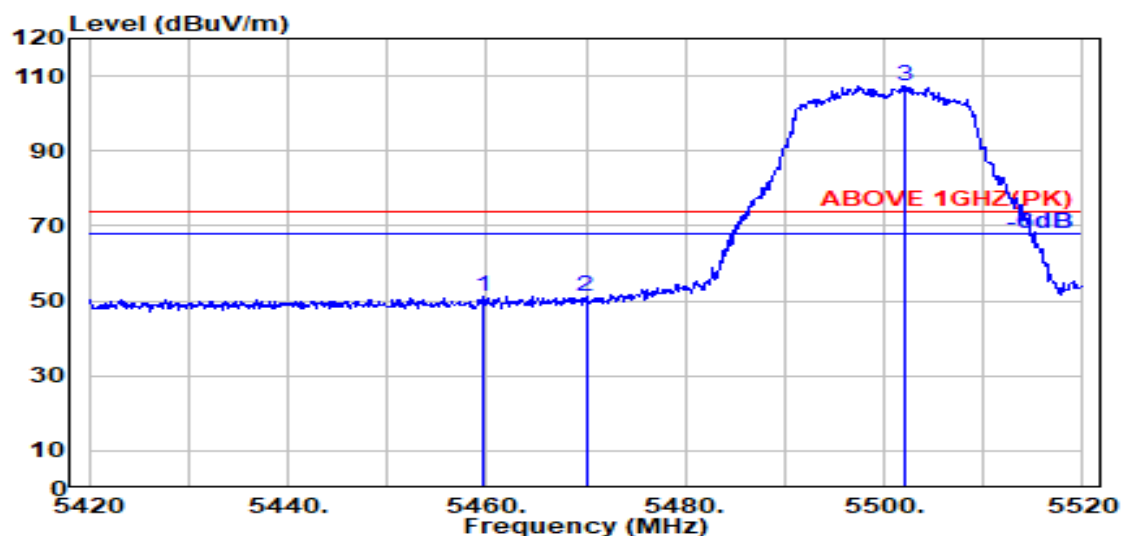

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.18	8.73	34.18	42.52	51.25	74.00	22.75	Peak
5470.000	34.16	8.74	34.18	42.25	50.97	74.00	23.03	Peak
@ 5502.100	34.10	8.75	34.17	98.78	107.46	---	---	Peak

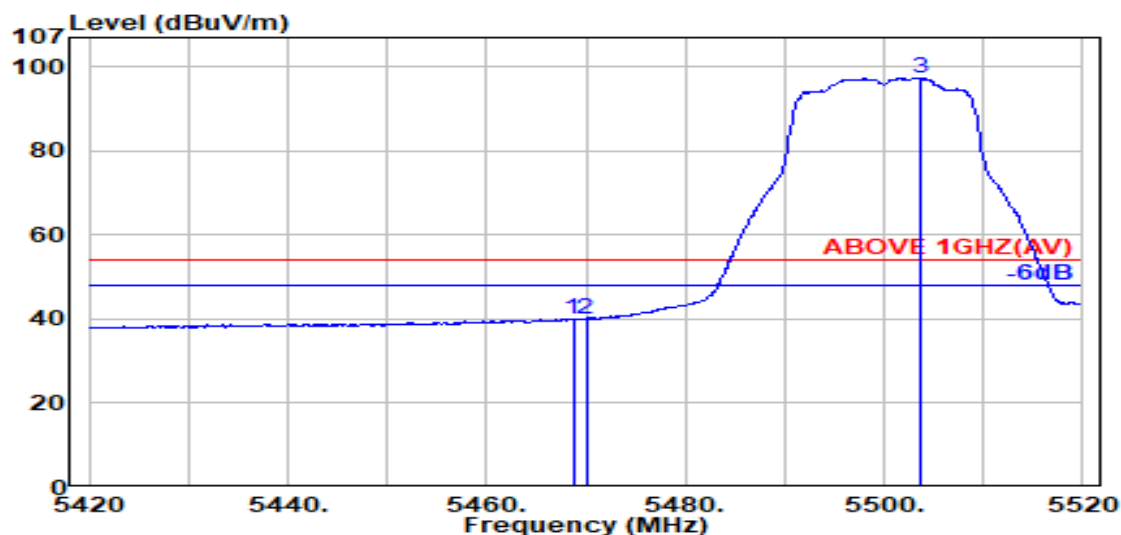


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.37	40.09	54.00	13.91	Average
5470.000	34.16	8.74	34.18	31.21	39.92	54.00	14.08	Average
@ 5503.700	34.10	8.76	34.17	88.72	97.41	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

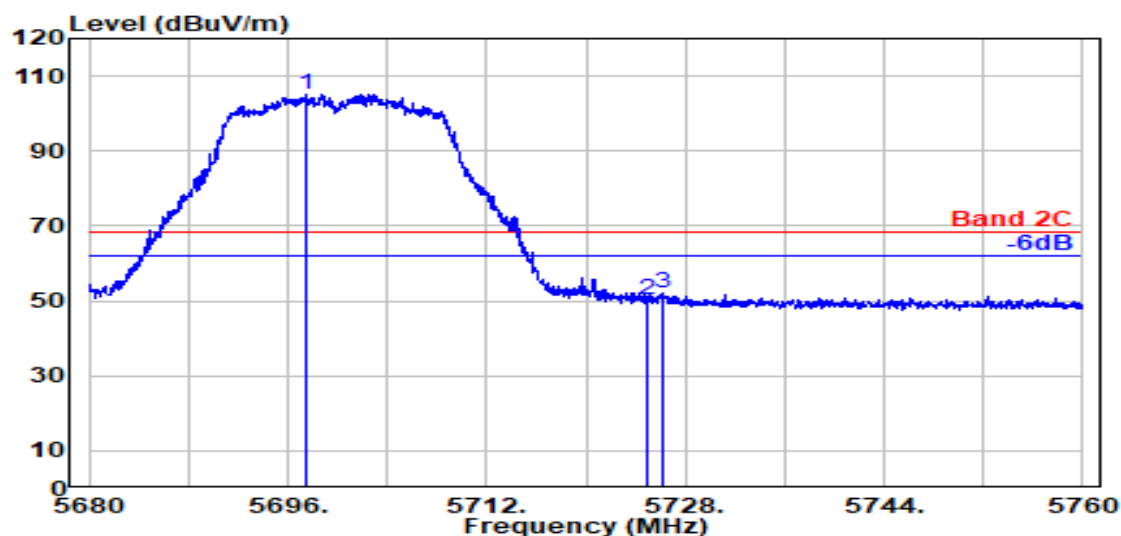

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.500	33.81	8.87	34.26	96.81	105.22	---	---	Peak
5725.000	33.80	8.88	34.28	41.91	50.31	68.20	17.89	Peak
5726.100	33.80	8.88	34.28	43.58	51.98	68.20	16.22	Peak

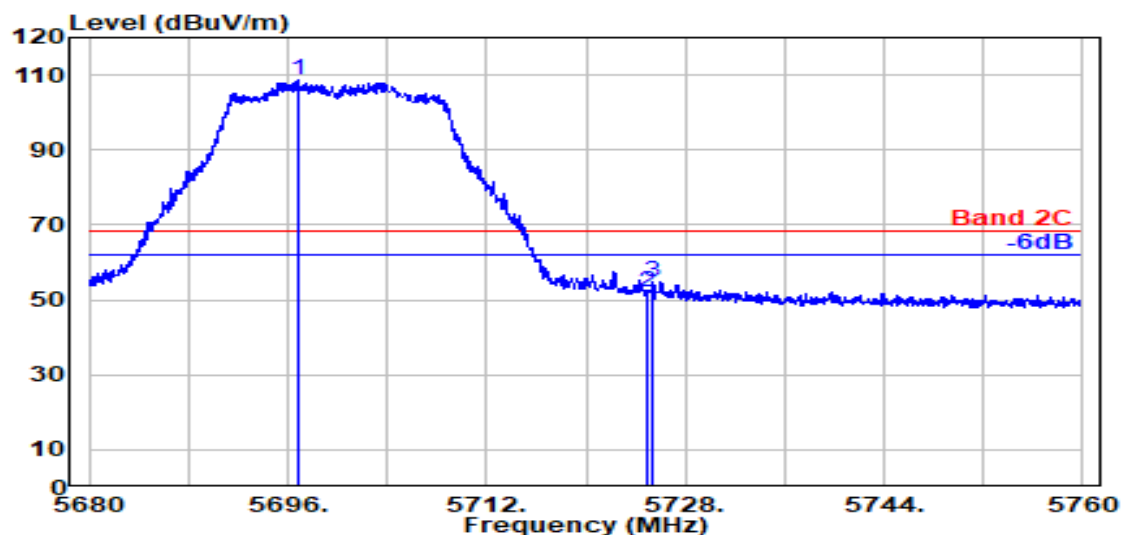


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.750	33.81	8.87	34.26	100.11	108.53	---	---	Peak
5725.000	33.80	8.88	34.28	43.65	52.05	68.20	16.15	Peak
5725.400	33.80	8.88	34.28	46.40	54.80	68.20	13.40	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

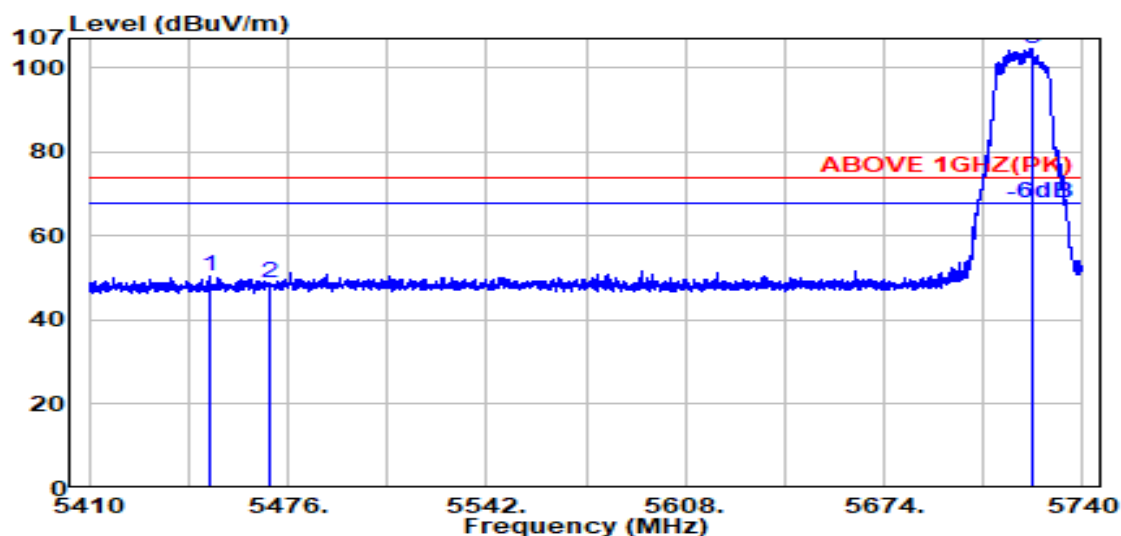

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.400	34.20	8.72	34.19	41.61	50.35	74.00	23.65	Peak
5470.000	34.16	8.74	34.18	39.98	48.70	74.00	25.30	Peak
@ 5722.900	33.80	8.88	34.28	96.17	104.58	---	---	Peak

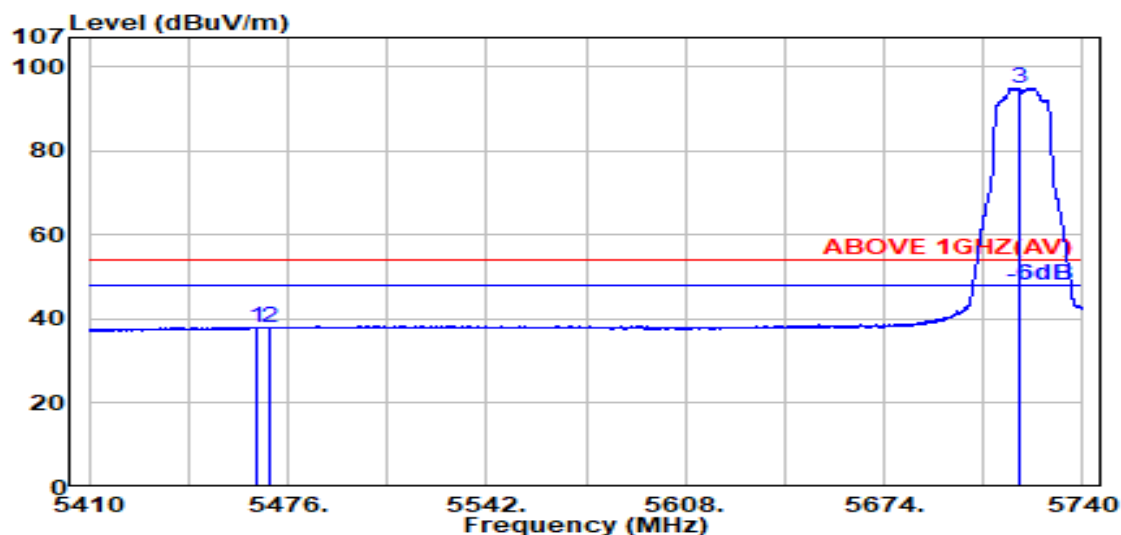


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.400	34.17	8.73	34.18	29.35	38.07	54.00	15.93	Average
5470.000	34.16	8.74	34.18	29.11	37.83	54.00	16.17	Average
@ 5718.600	33.80	8.88	34.27	86.60	95.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

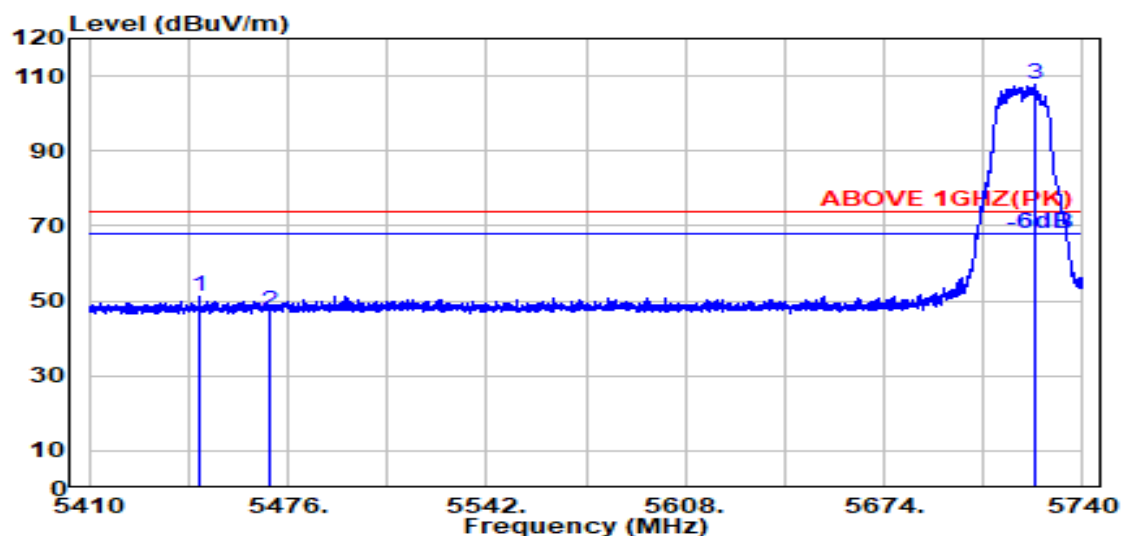

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5446.400	34.19	8.72	34.19	42.27	51.00	74.00	23.00	Peak
5470.000	34.16	8.74	34.18	38.53	47.24	74.00	26.76	Peak
@ 5723.800	33.80	8.88	34.28	99.16	107.56	---	---	Peak

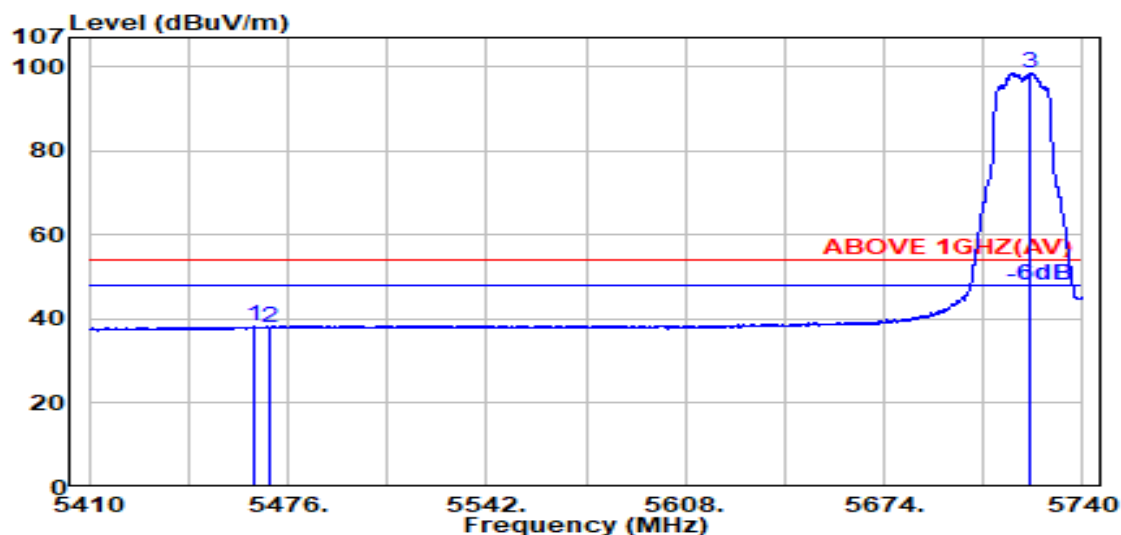


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.000	34.17	8.73	34.18	29.48	38.20	54.00	15.80	Average
5470.000	34.16	8.74	34.18	29.29	38.01	54.00	15.99	Average
@ 5722.800	33.80	8.88	34.27	90.10	98.51	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

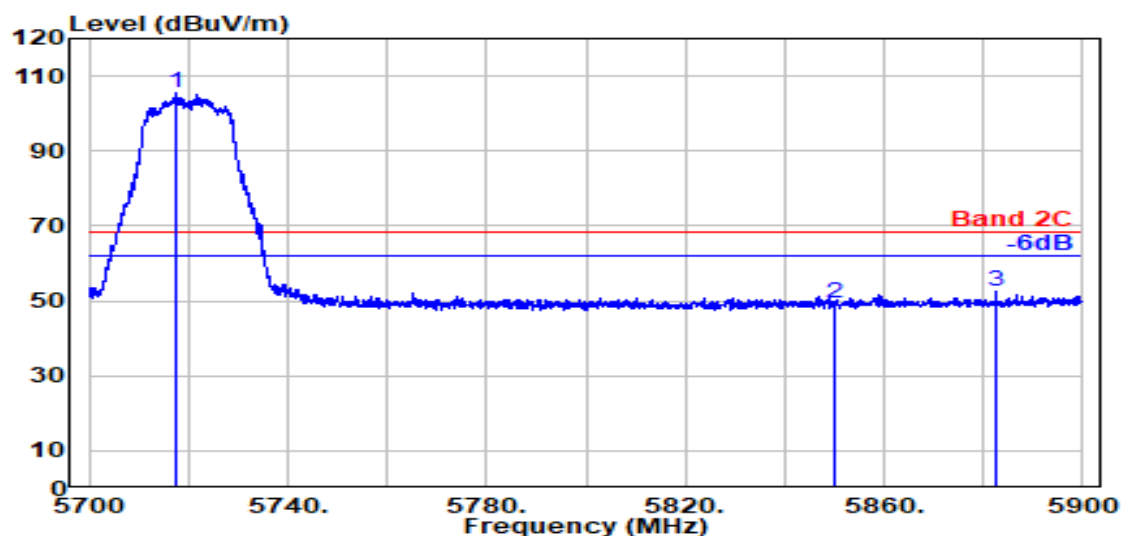

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5717.600	33.80	8.88	34.27	96.97	105.38	---	---	Peak
	5850.000	34.10	8.95	34.33	40.44	49.16	68.20	19.04	Peak
	5882.600	34.10	8.97	34.35	43.91	52.63	68.20	15.57	Peak

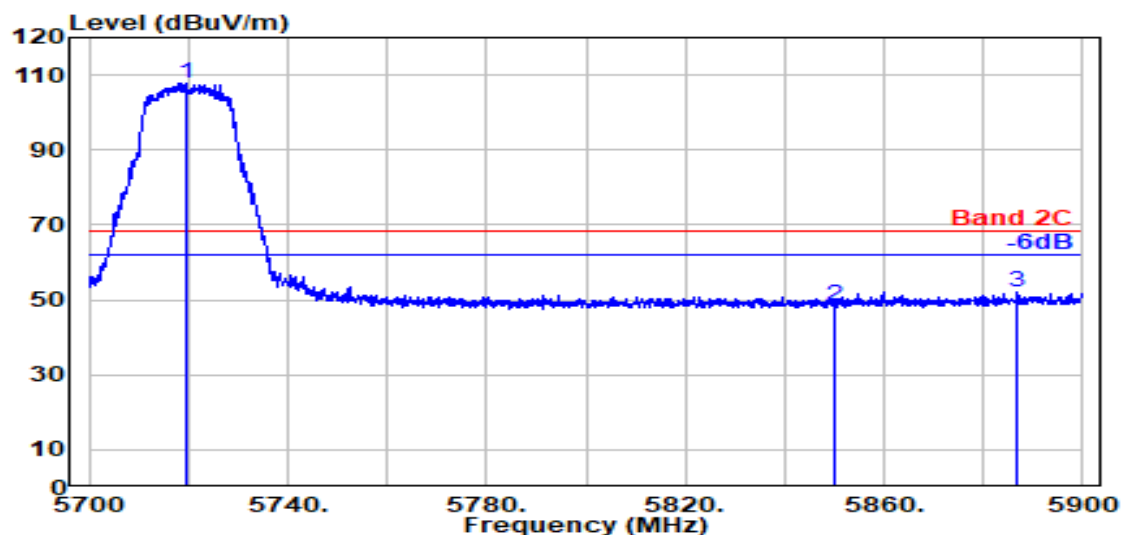


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5719.500	33.80	8.88	34.27	99.31	107.71	---	---	Peak
	5850.000	34.10	8.95	34.33	39.92	48.64	68.20	19.56	Peak
	5886.900	34.10	8.97	34.35	43.29	52.01	68.20	16.19	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

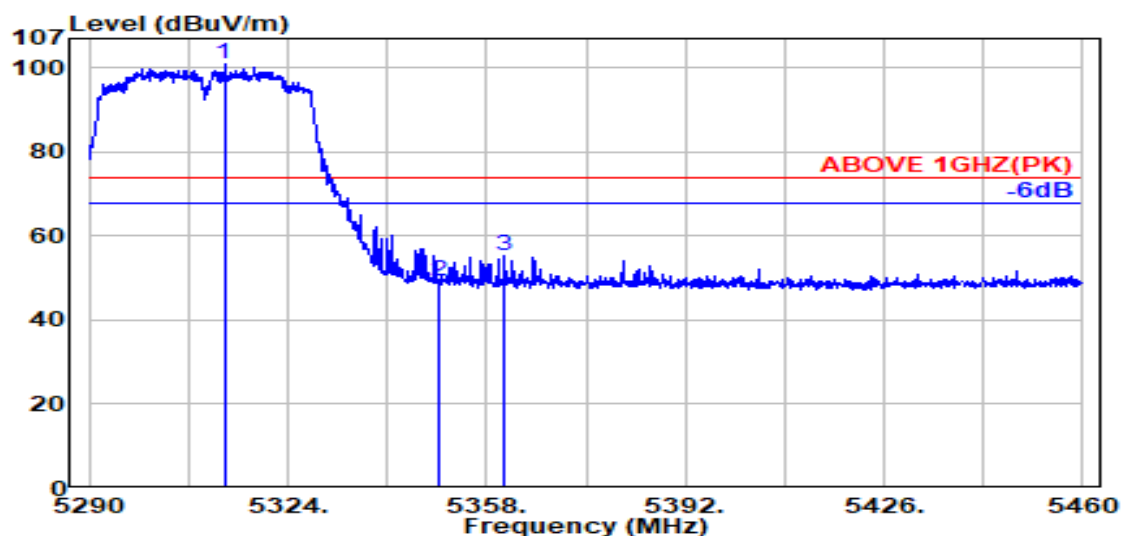

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5313.100	34.05	8.64	34.23	92.61	101.08	---	---	Peak
5350.000	33.90	8.67	34.22	40.74	49.09	74.00	24.91	Peak
5361.100	33.94	8.67	34.21	47.00	55.41	74.00	18.59	Peak

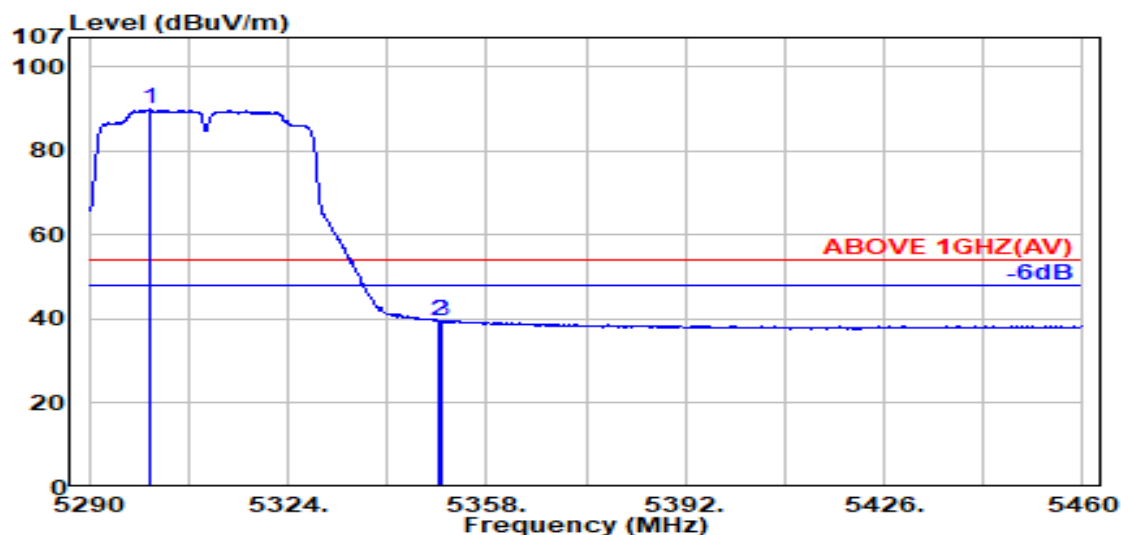


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5300.300	34.10	8.64	34.23	81.38	89.89	---	---	Average
5350.000	33.90	8.67	34.22	31.42	39.77	54.00	14.23	Average
5350.400	33.90	8.67	34.22	31.22	39.57	54.00	14.43	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

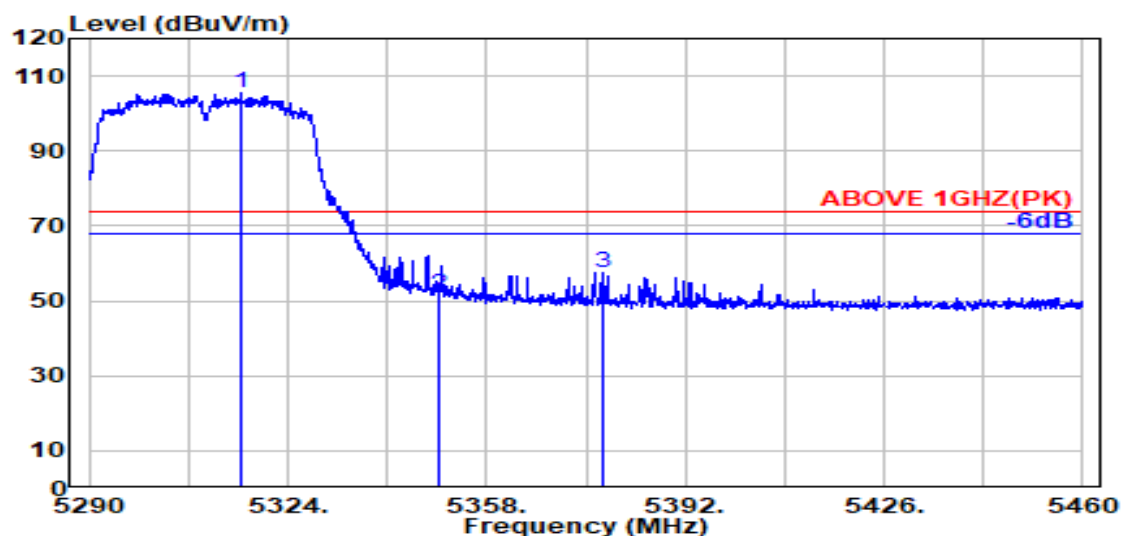

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.900	34.04	8.64	34.23	97.18	105.63	---	---	Peak
5350.000	33.90	8.67	34.22	43.44	51.79	74.00	22.21	Peak
5377.700	34.01	8.68	34.21	49.22	57.71	74.00	16.29	Peak

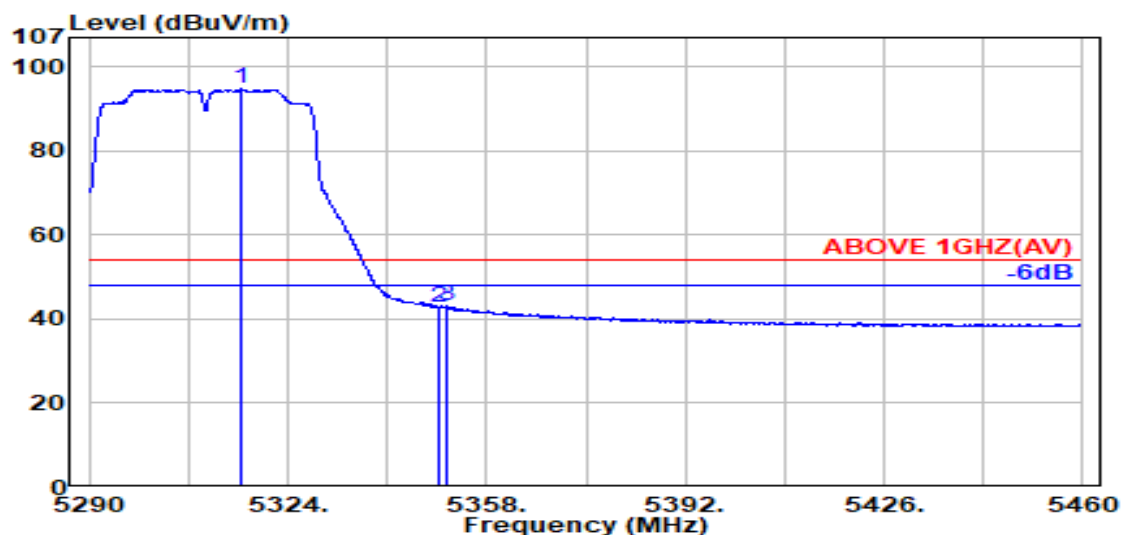


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.800	34.04	8.64	34.23	86.28	94.73	---	---	Average
5350.000	33.90	8.67	34.22	34.39	42.73	54.00	11.27	Average
5351.100	33.90	8.67	34.22	34.96	43.32	54.00	10.68	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

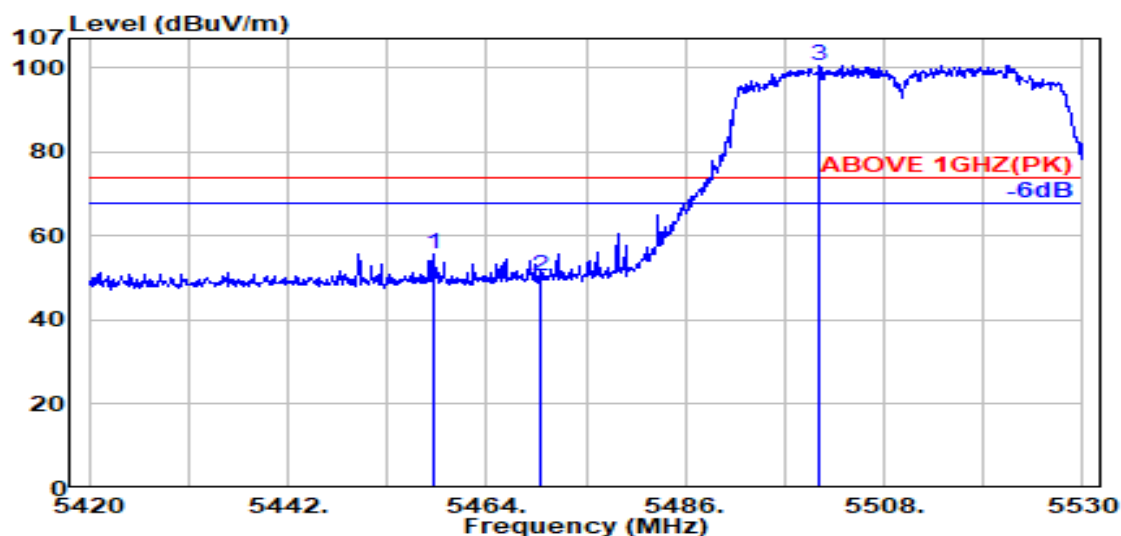

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.18	8.73	34.18	46.97	55.70	74.00	18.30	Peak
5470.000	34.16	8.74	34.18	41.69	50.41	74.00	23.59	Peak
@ 5500.900	34.10	8.75	34.17	92.04	100.73	---	---	Peak

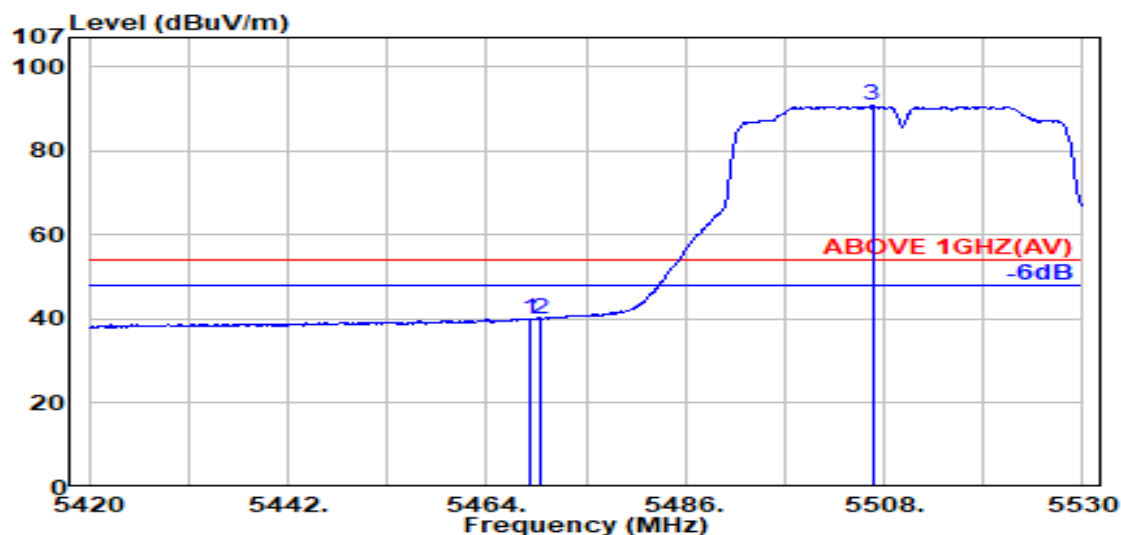


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	31.42	40.13	54.00	13.87	Average
5470.000	34.16	8.74	34.18	31.39	40.11	54.00	13.89	Average
@ 5506.700	34.10	8.76	34.17	82.14	90.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

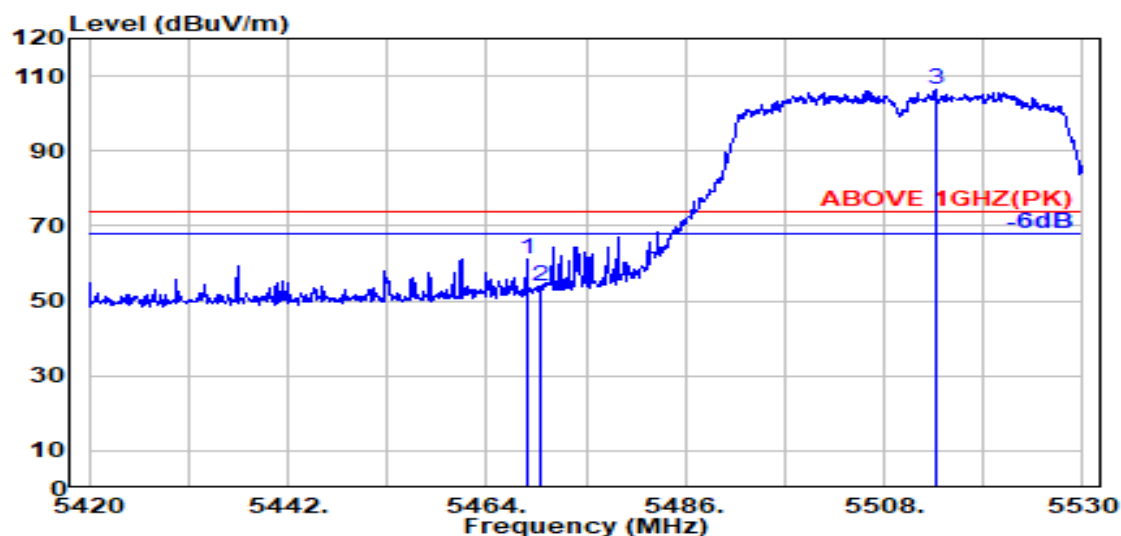

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.16	8.73	34.18	52.39	61.11	74.00	12.89	Peak
5470.000	34.16	8.74	34.18	45.17	53.88	74.00	20.12	Peak
@ 5513.800	34.10	8.76	34.18	97.69	106.37	---	---	Peak

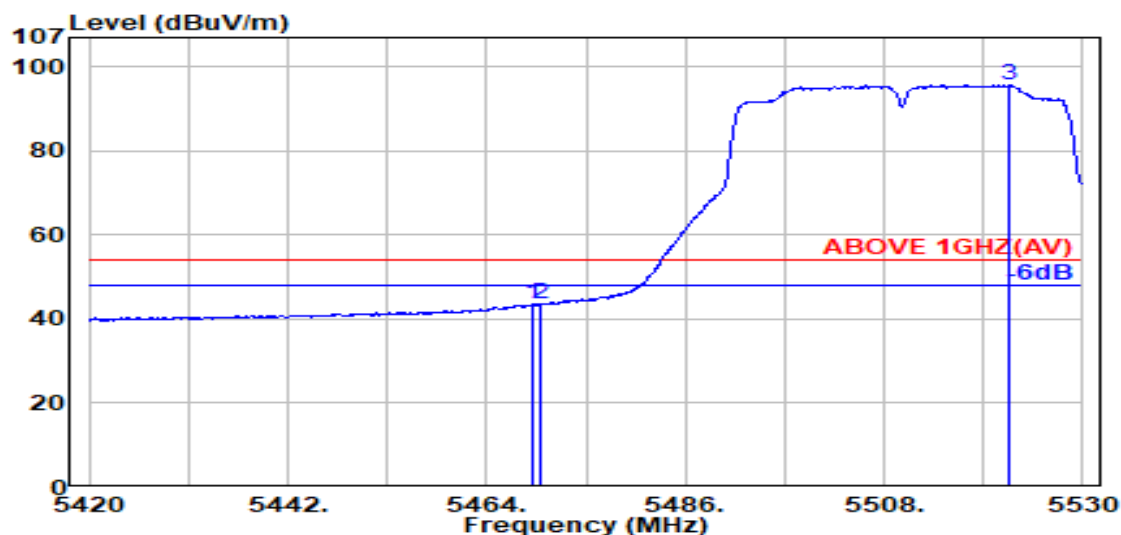


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	34.98	43.70	54.00	10.30	Average
5470.000	34.16	8.74	34.18	34.86	43.58	54.00	10.42	Average
@ 5521.900	34.10	8.77	34.18	86.97	95.66	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

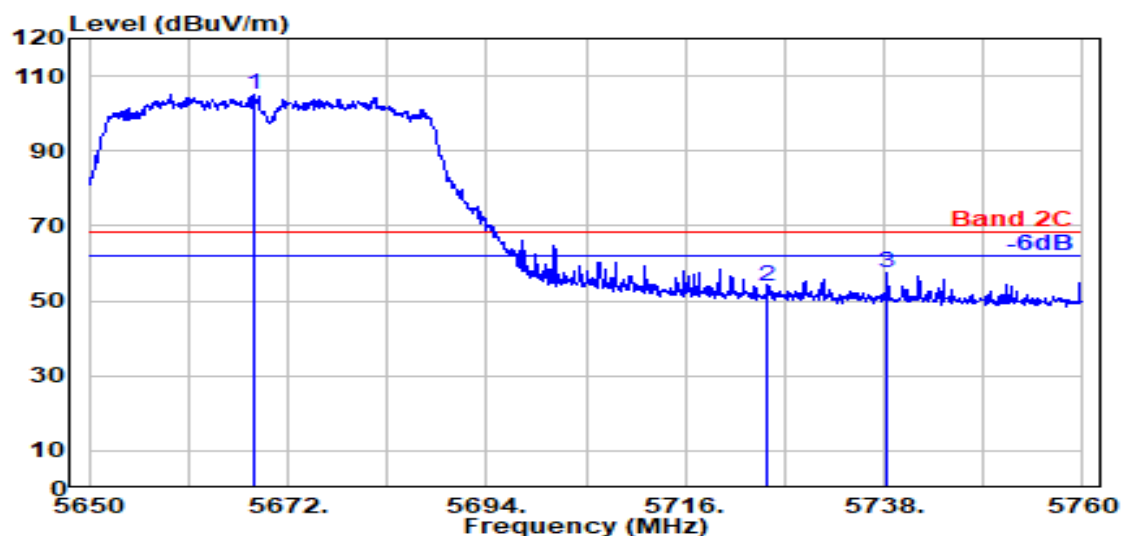

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5668.300	33.93	8.85	34.25	96.73	105.25	---	---	Peak
	5725.000	33.80	8.88	34.28	45.47	53.87	68.20	14.33	Peak
	5738.400	33.80	8.89	34.28	48.90	57.30	68.20	10.90	Peak

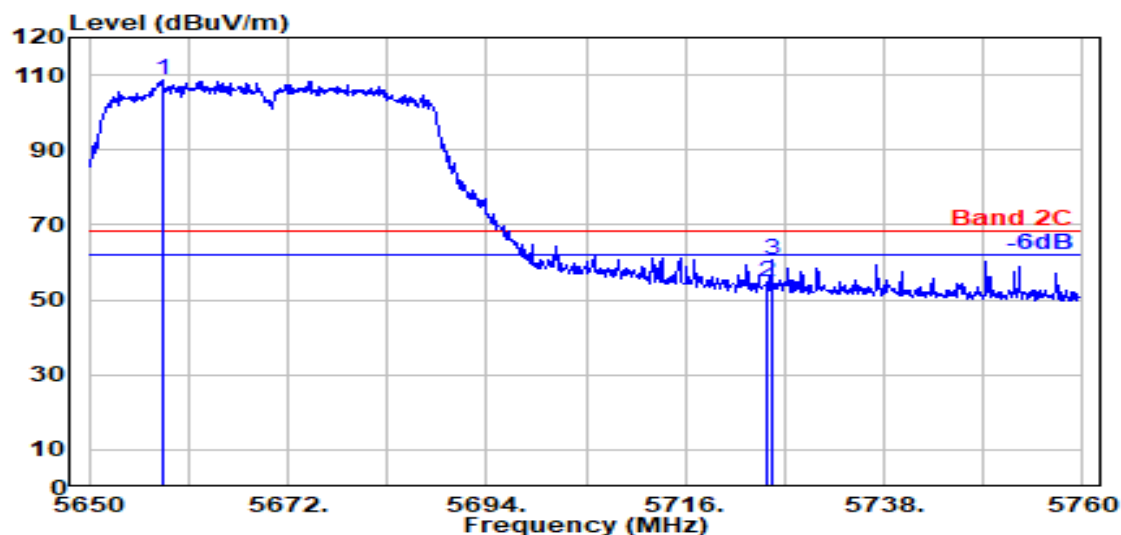


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5658.100	33.97	8.84	34.24	100.20	108.76	---	---	Peak
	5725.000	33.80	8.88	34.28	46.22	54.62	68.20	13.58	Peak
	5725.500	33.80	8.88	34.28	52.47	60.88	68.20	7.32	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

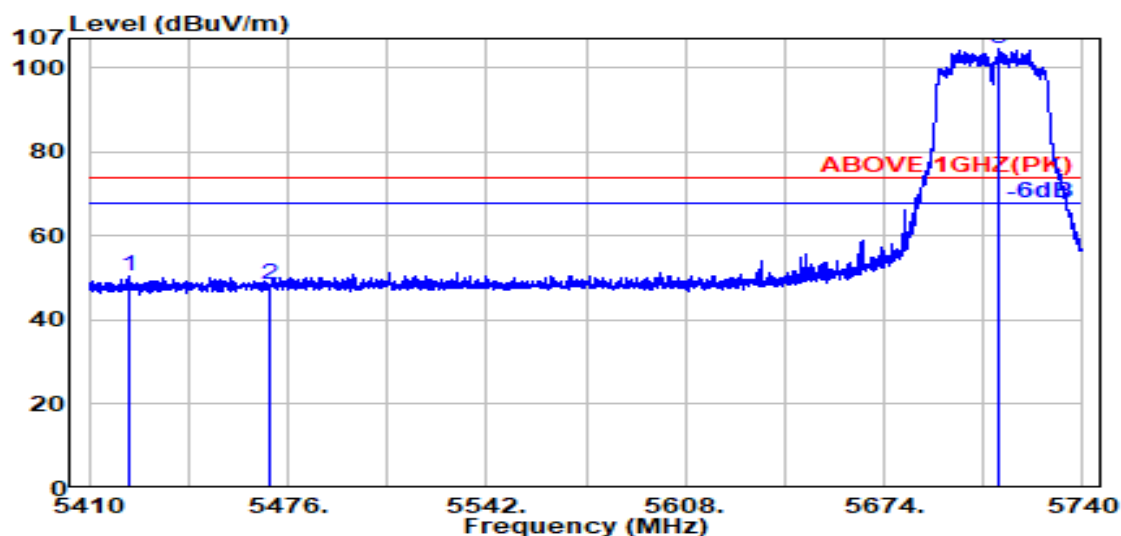

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.500	34.15	8.71	34.19	41.64	50.30	74.00	23.70	Peak
5470.000	34.16	8.74	34.18	39.54	48.26	74.00	25.74	Peak
@ 5712.400	33.80	8.87	34.27	96.08	104.48	---	---	Peak

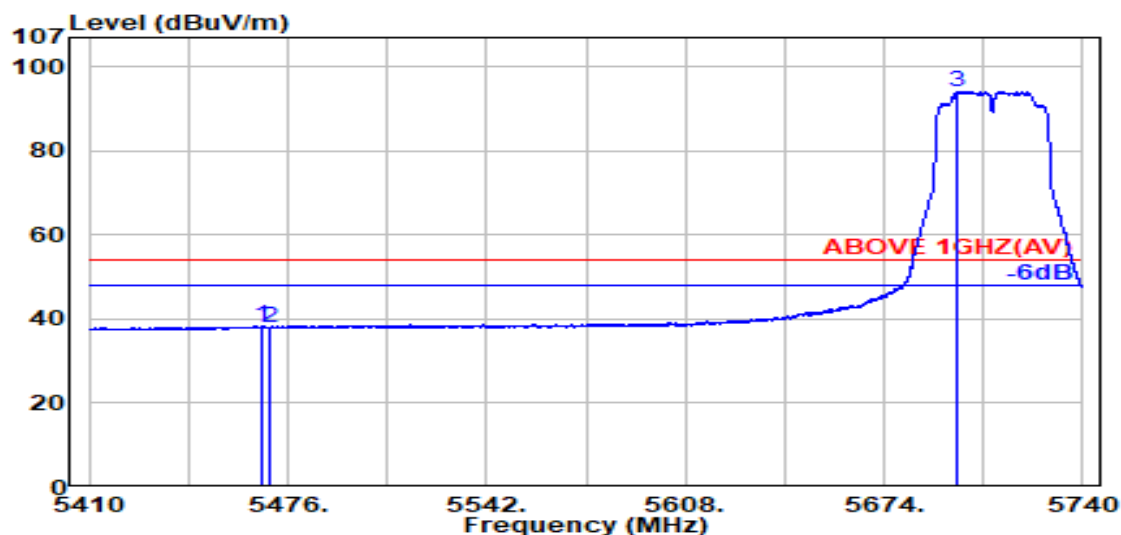


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	29.58	38.30	54.00	15.70	Average
5470.000	34.16	8.74	34.18	29.19	37.91	54.00	16.09	Average
@ 5698.500	33.81	8.87	34.26	85.80	94.21	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

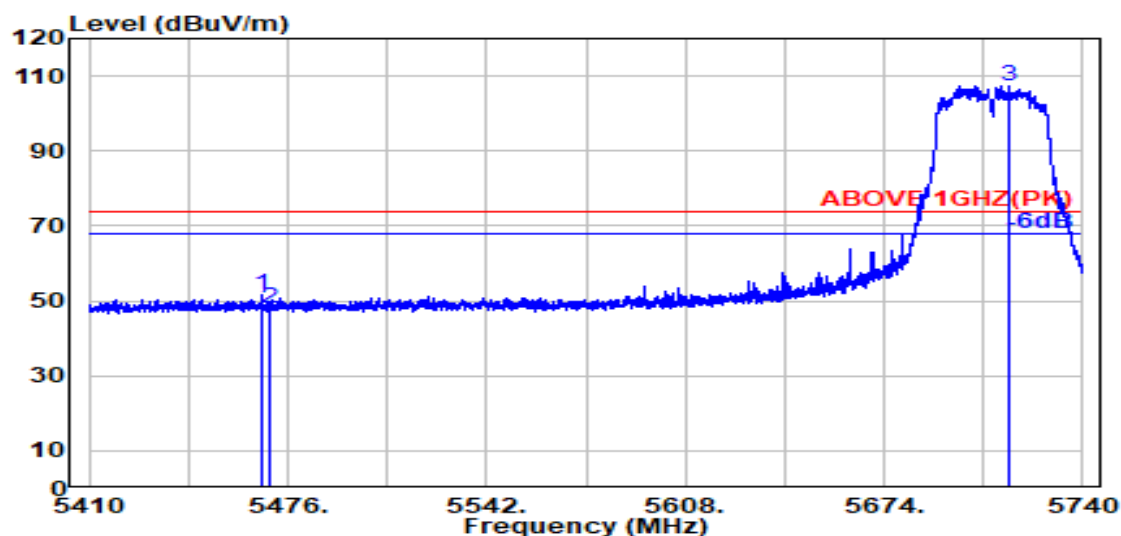

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.16	8.73	34.18	42.80	51.52	74.00	22.48	Peak
5470.000	34.16	8.74	34.18	39.47	48.19	74.00	25.81	Peak
@ 5715.800	33.80	8.88	34.27	99.08	107.48	---	---	Peak

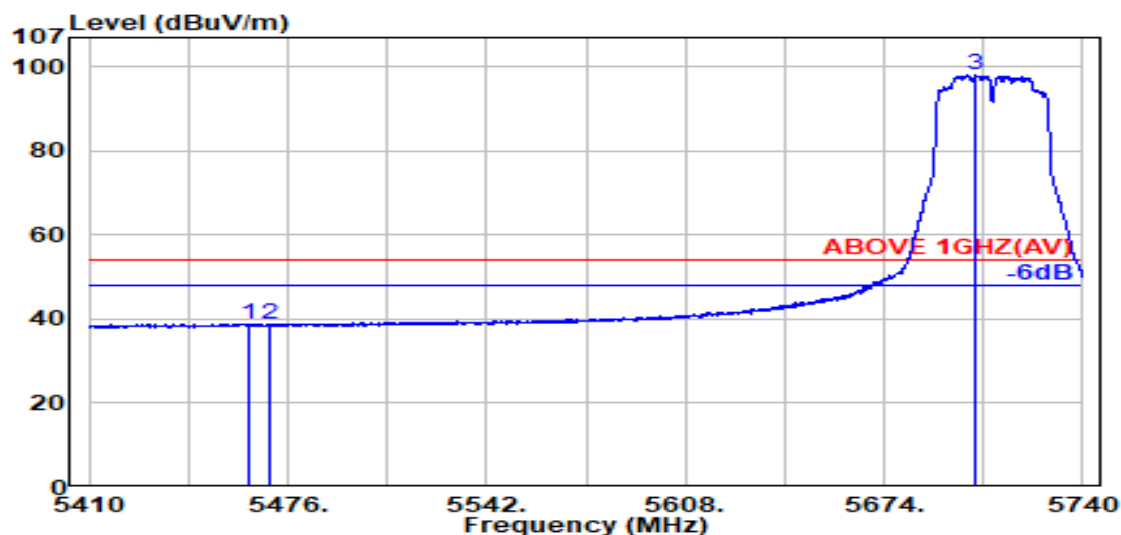


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.17	8.73	34.18	30.23	38.95	54.00	15.05	Average
5470.000	34.16	8.74	34.18	29.95	38.67	54.00	15.33	Average
@ 5704.400	33.80	8.87	34.27	89.64	98.05	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

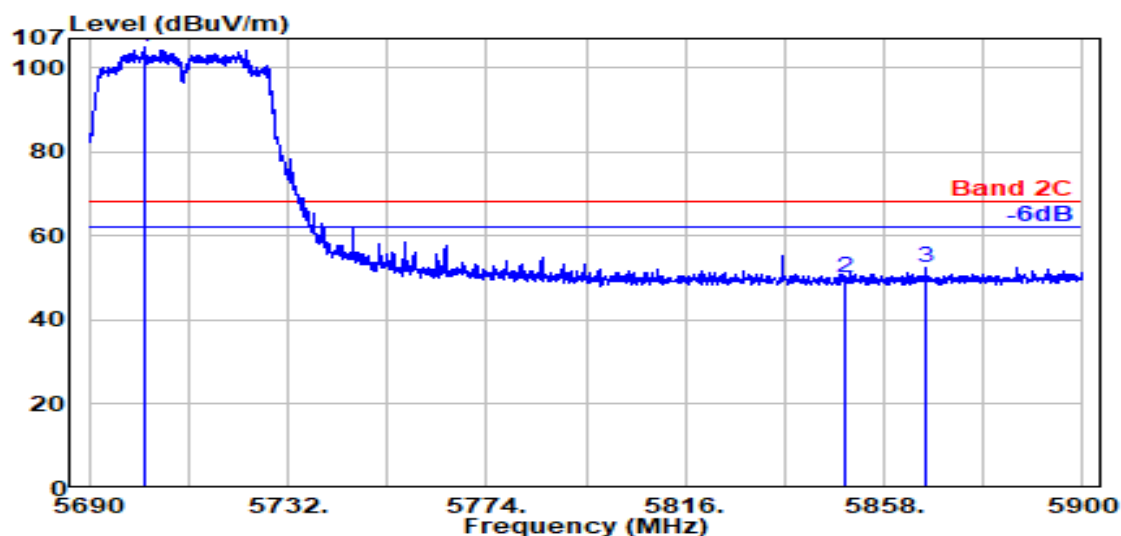

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.800	33.80	8.87	34.27	96.46	104.86	---	---	Peak
5850.000	34.10	8.95	34.33	41.38	50.10	68.20	18.10	Peak
5866.800	34.10	8.96	34.34	43.85	52.57	68.20	15.63	Peak

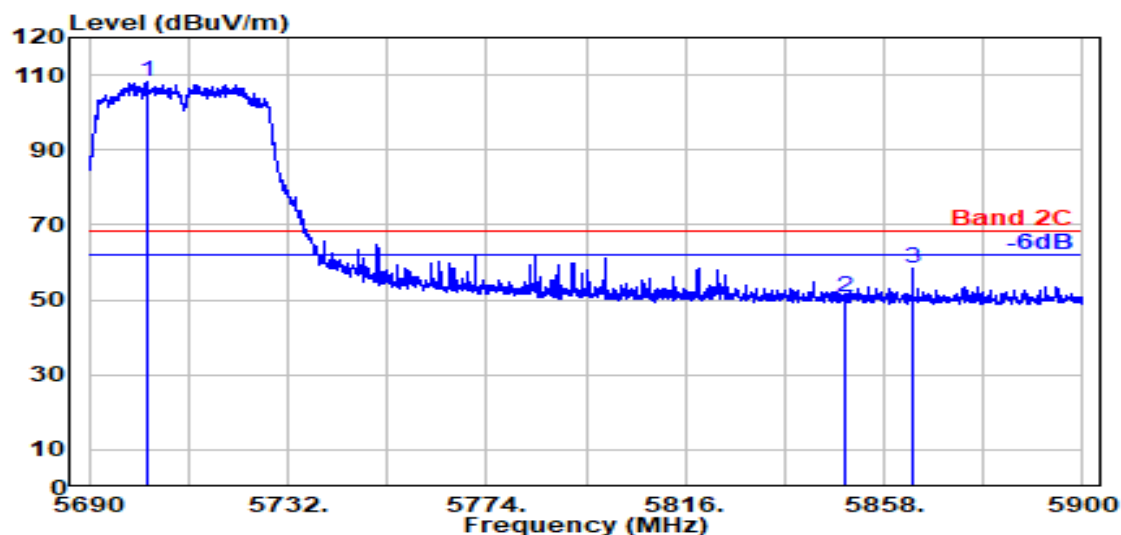


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.300	33.80	8.87	34.27	99.80	108.20	---	---	Peak
5850.000	34.10	8.95	34.33	42.11	50.83	68.20	17.37	Peak
5864.100	34.10	8.96	34.34	49.57	58.29	68.20	9.91	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

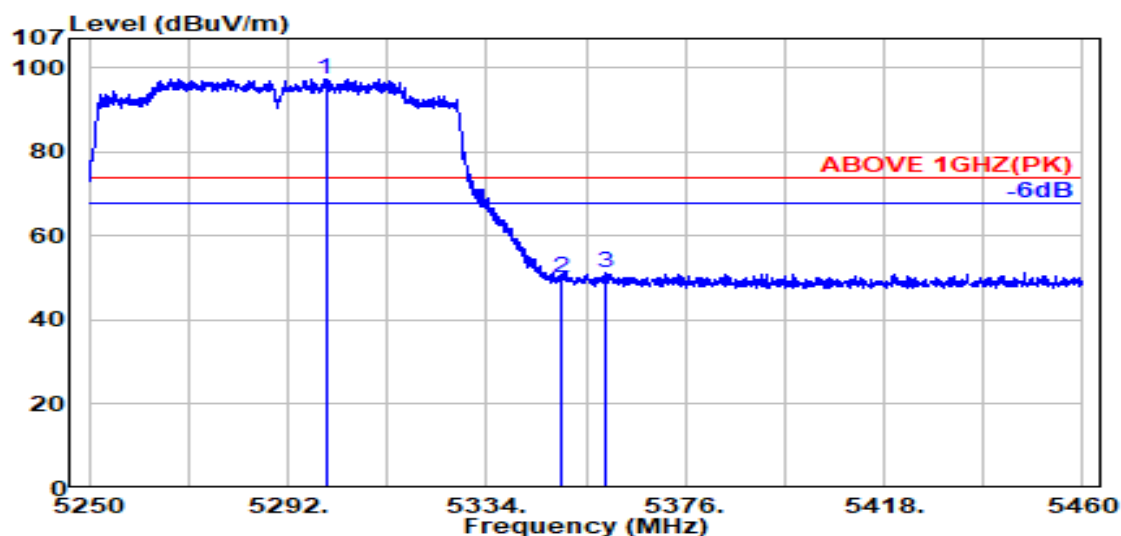

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.000	34.10	8.64	34.23	88.97	97.47	---	---	Peak
5350.000	33.90	8.67	34.22	41.68	50.03	74.00	23.97	Peak
5359.200	33.94	8.67	34.21	42.91	51.30	74.00	22.70	Peak

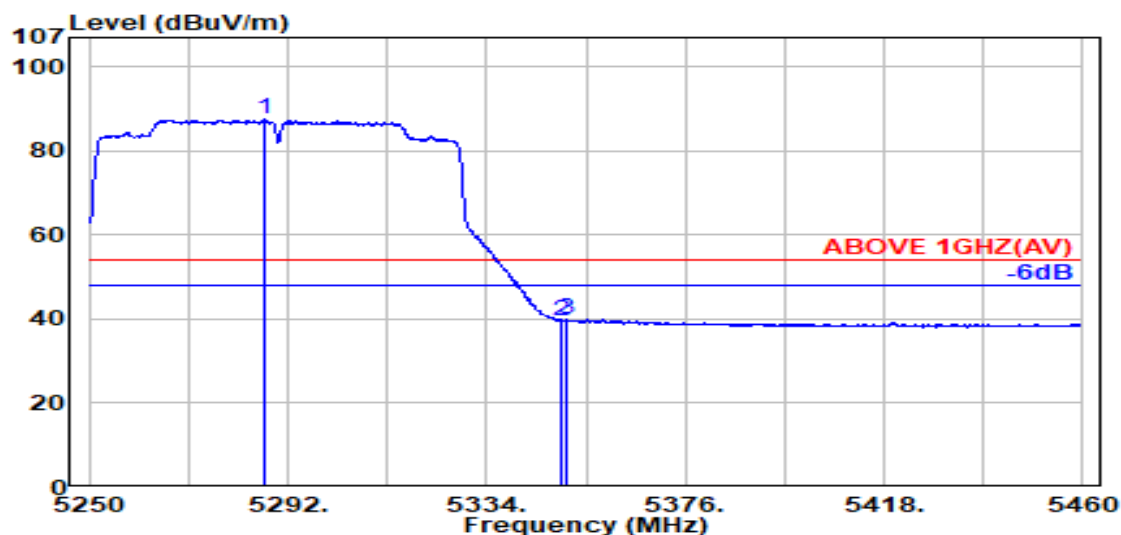


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.900	34.02	8.63	34.24	79.03	87.44	---	---	Average
5350.000	33.90	8.67	34.22	31.28	39.63	54.00	14.37	Average
5350.700	33.90	8.67	34.22	31.48	39.83	54.00	14.17	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

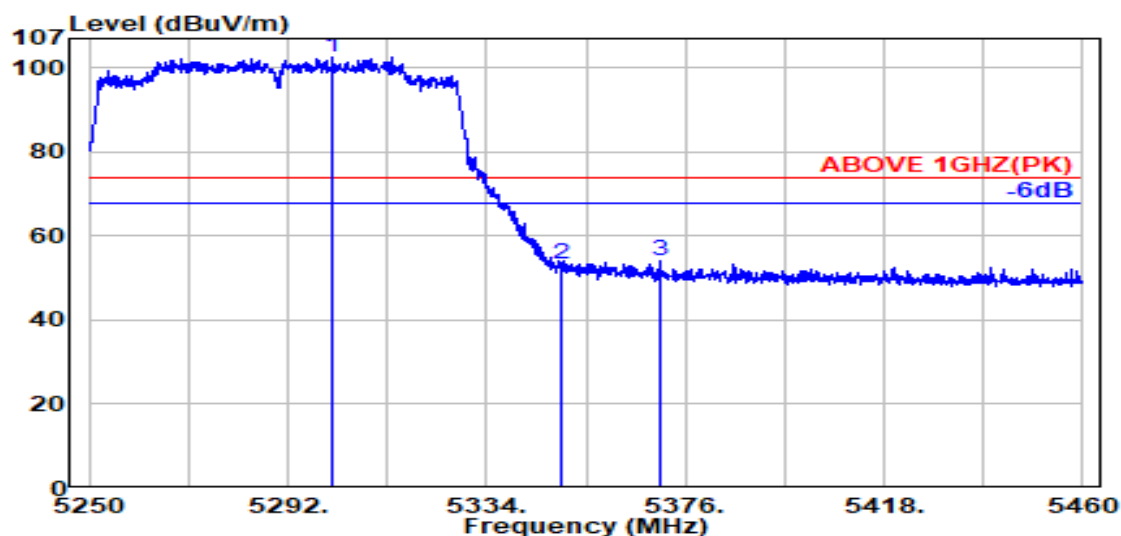

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5301.400	34.09	8.64	34.23	93.92	102.41	---	---	Peak
	5350.000	33.90	8.67	34.22	45.10	53.45	74.00	20.55	Peak
	5370.700	33.98	8.68	34.21	45.54	53.99	74.00	20.01	Peak

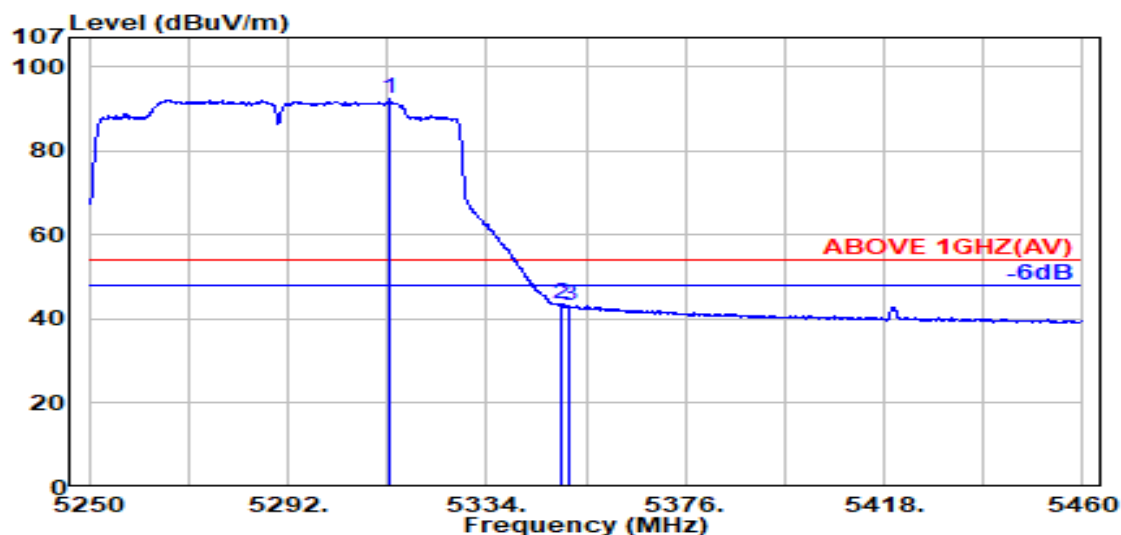


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.400	34.05	8.64	34.23	83.82	92.29	---	---	Average
	5350.000	33.90	8.67	34.22	35.15	43.50	54.00	10.50	Average
	5351.300	33.91	8.67	34.22	34.74	43.09	54.00	10.91	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

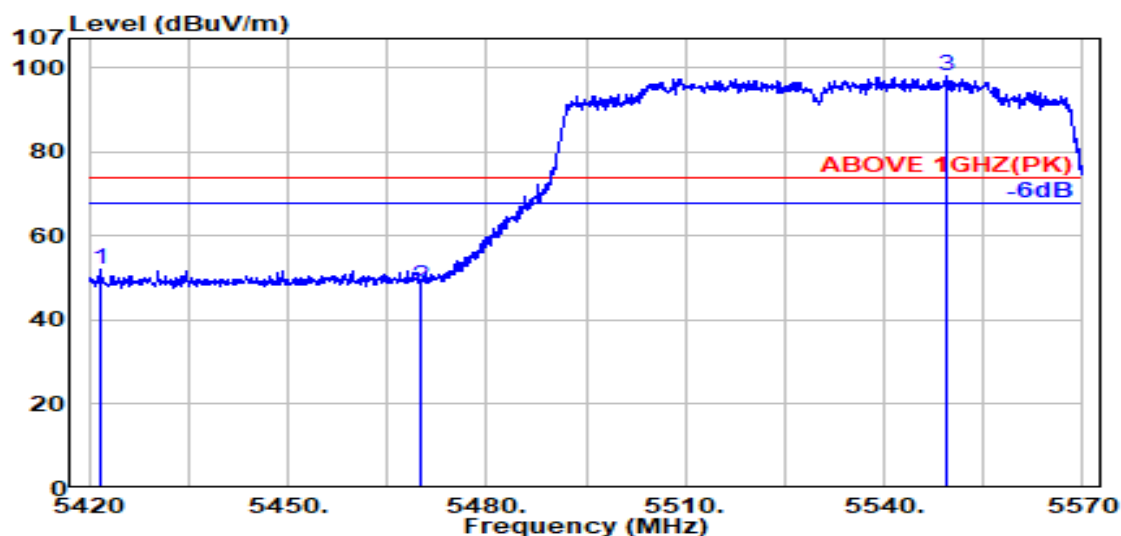

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.600	34.14	8.71	34.19	43.37	52.03	74.00	21.97	Peak
5470.000	34.16	8.74	34.18	39.49	48.20	74.00	25.80	Peak
@ 5549.300	34.10	8.78	34.19	89.26	97.95	---	---	Peak

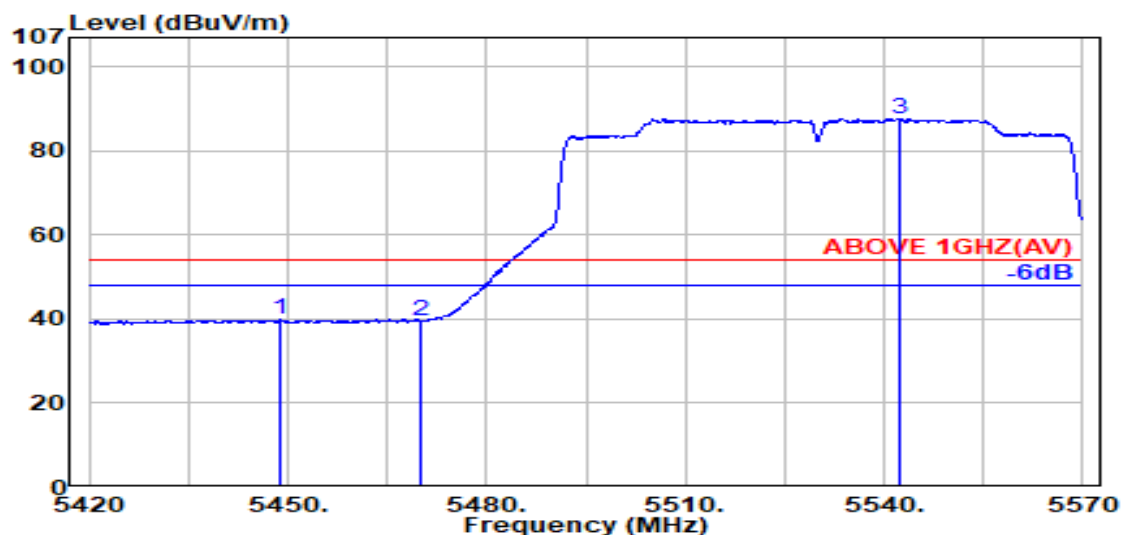


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.800	34.20	8.72	34.19	31.21	39.94	54.00	14.06	Average
5470.000	34.16	8.74	34.18	30.65	39.37	54.00	14.63	Average
@ 5542.300	34.10	8.78	34.19	79.10	87.79	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

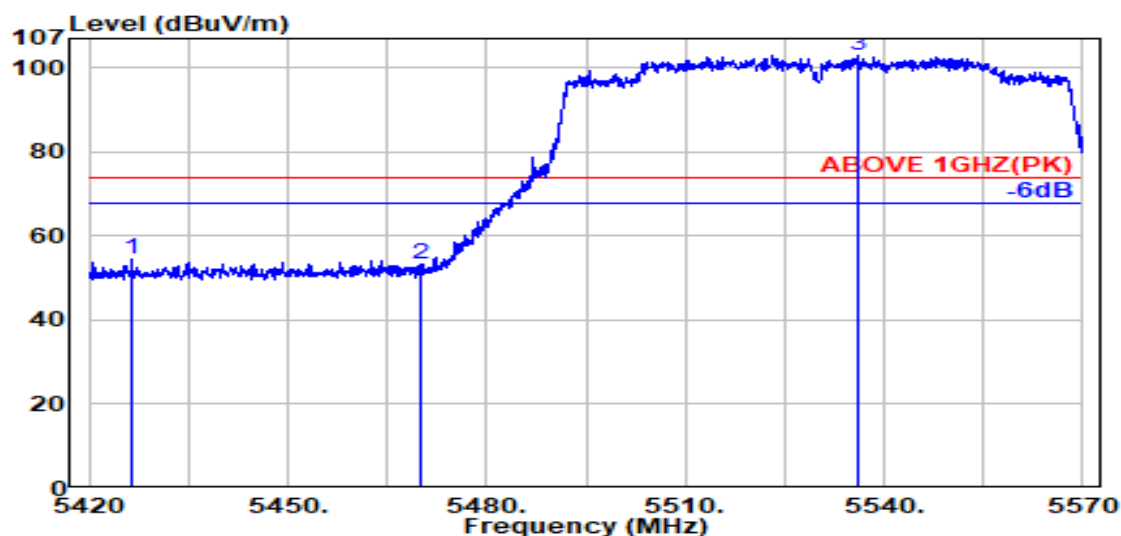

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.500	34.15	8.71	34.19	45.97	54.64	74.00	19.36	Peak
5470.000	34.16	8.74	34.18	44.60	53.32	74.00	20.68	Peak
@ 5535.900	34.10	8.77	34.19	94.28	102.97	---	---	Peak

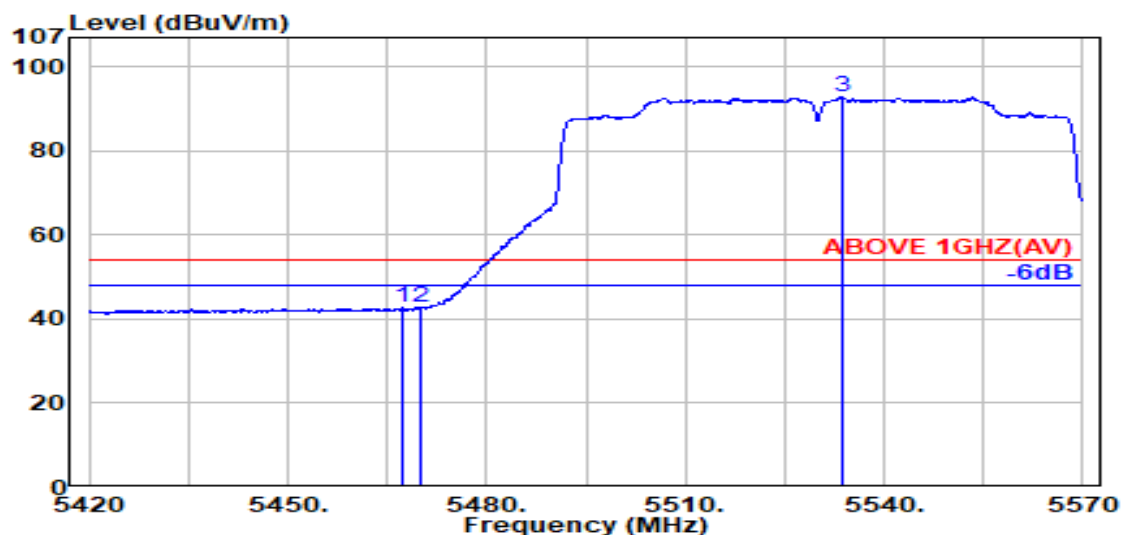


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.17	8.73	34.18	33.90	42.62	54.00	11.38	Average
5470.000	34.16	8.74	34.18	34.01	42.73	54.00	11.27	Average
@ 5533.600	34.10	8.77	34.19	84.14	92.83	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

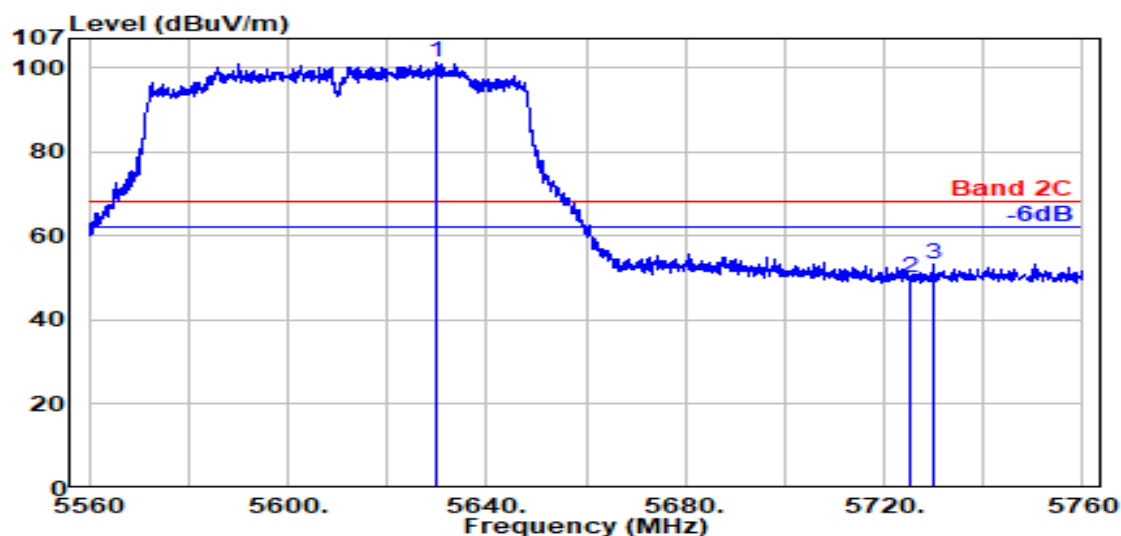

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5629.800	34.00	8.83	34.23	92.60	101.19	---	---	Peak
	5725.000	33.80	8.88	34.28	41.81	50.21	68.20	17.99	Peak
	5730.000	33.80	8.88	34.28	44.95	53.36	68.20	14.84	Peak

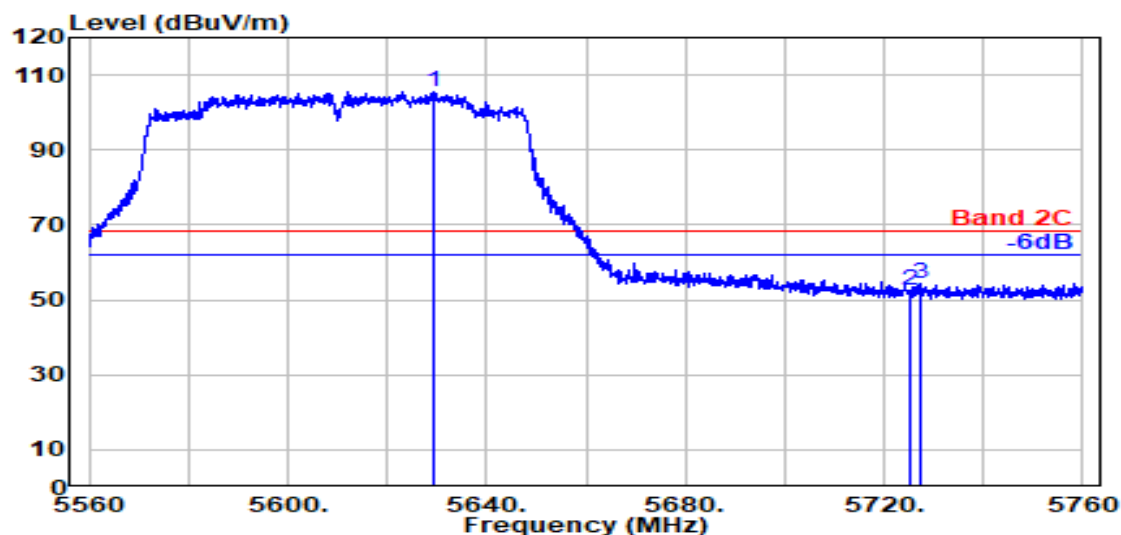


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5629.600	34.00	8.83	34.23	97.10	105.70	---	---	Peak
	5725.000	33.80	8.88	34.28	44.32	52.73	68.20	15.47	Peak
	5727.100	33.80	8.88	34.28	46.01	54.41	68.20	13.79	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

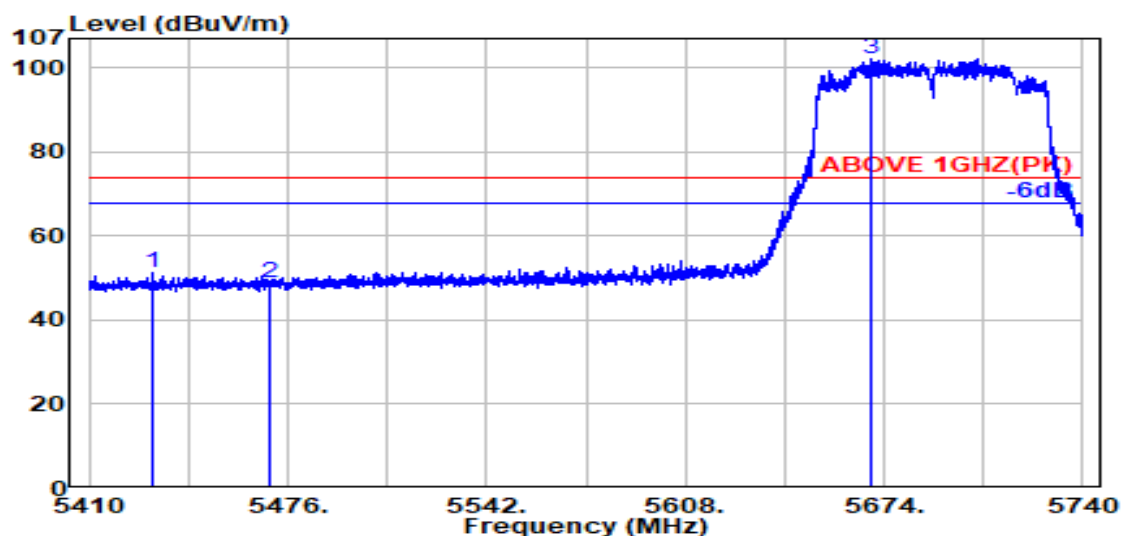

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.200	34.16	8.71	34.19	42.68	51.37	74.00	22.63	Peak
5470.000	34.16	8.74	34.18	40.30	49.02	74.00	24.98	Peak
@ 5670.000	33.92	8.85	34.25	93.81	102.33	---	---	Peak

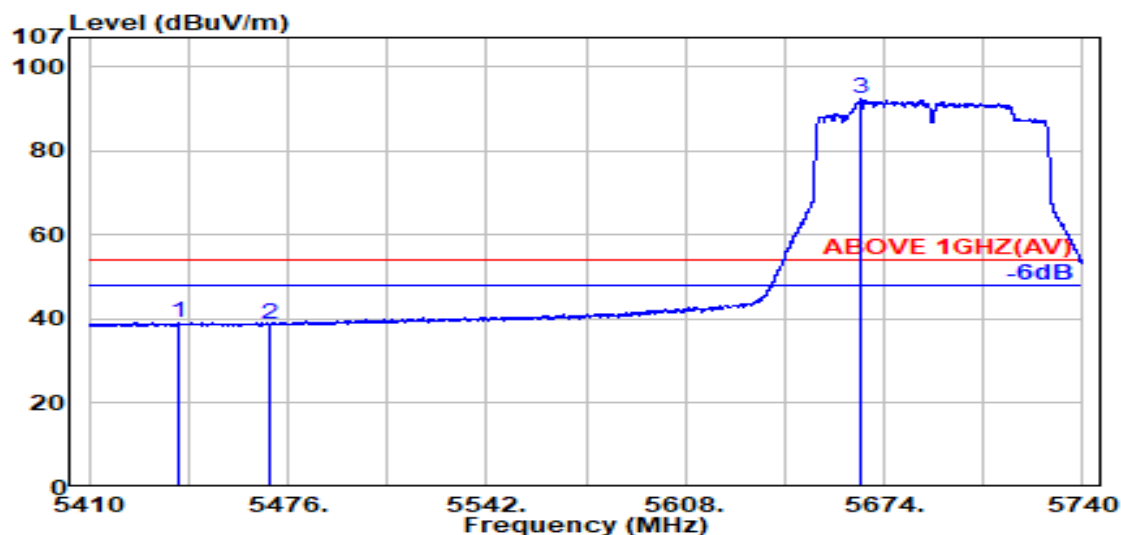


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.800	34.18	8.72	34.19	30.36	39.07	54.00	14.93	Average
5470.000	34.16	8.74	34.18	30.06	38.77	54.00	15.23	Average
@ 5666.600	33.93	8.85	34.25	83.74	92.27	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

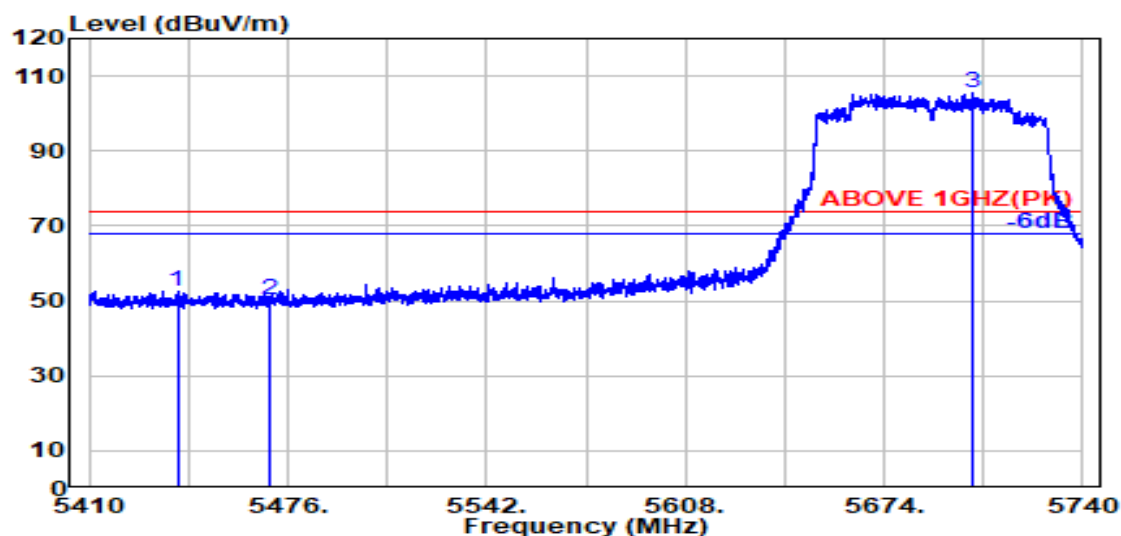

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5439.300	34.18	8.72	34.19	43.93	52.64	74.00	21.36	Peak
5470.000	34.16	8.74	34.18	41.39	50.11	74.00	23.89	Peak
@ 5703.600	33.80	8.87	34.27	97.31	105.71	---	---	Peak

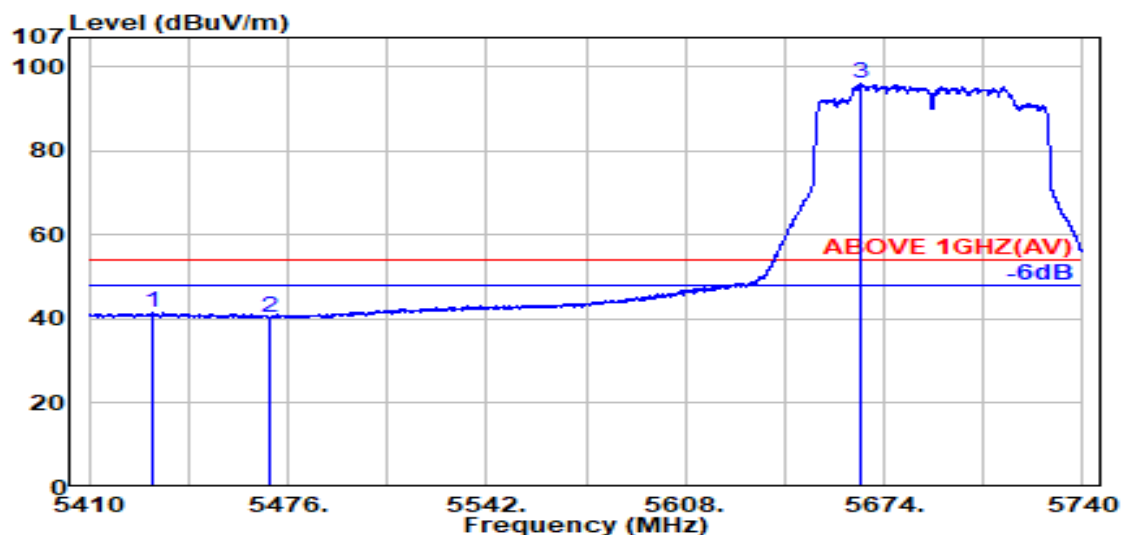


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5430.800	34.16	8.71	34.19	32.71	41.39	54.00	12.61	Average
5470.000	34.16	8.74	34.18	31.58	40.29	54.00	13.71	Average
@ 5666.400	33.93	8.85	34.25	87.38	95.92	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

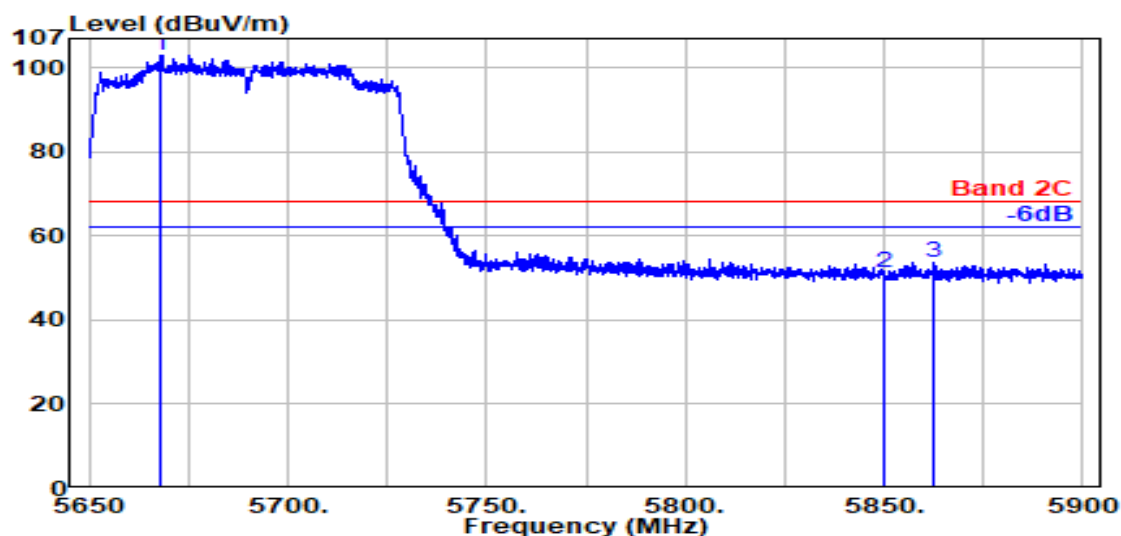

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5668.200	33.93	8.85	34.25	94.47	103.00	---	---	Peak
	5850.000	34.10	8.95	34.33	42.45	51.17	68.20	17.03	Peak
	5862.700	34.10	8.96	34.34	44.93	53.65	68.20	14.55	Peak

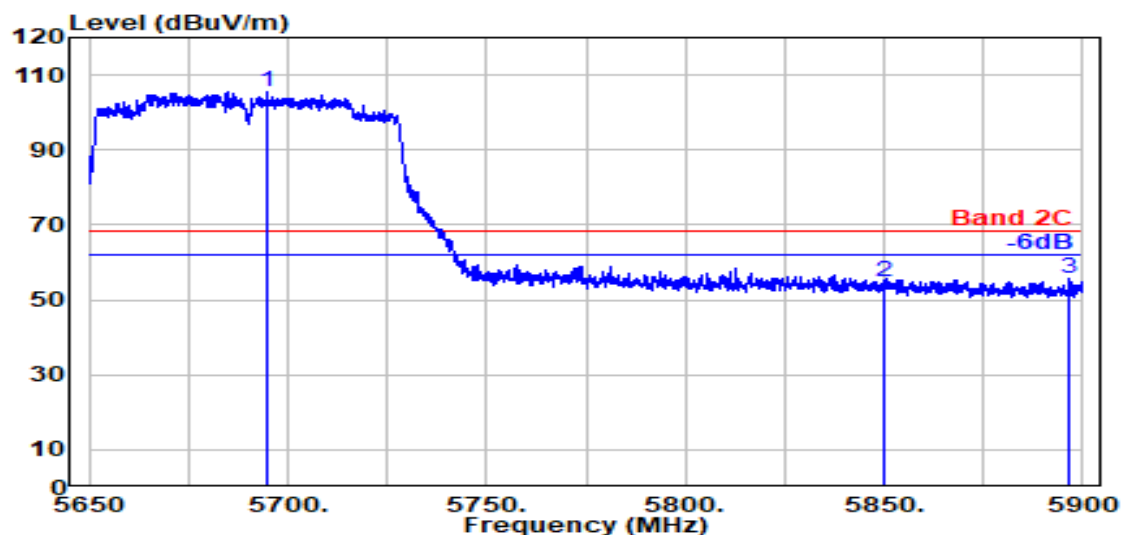


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5694.900	33.82	8.86	34.26	97.12	105.54	---	---	Peak
	5850.000	34.10	8.95	34.33	45.90	54.61	68.20	13.59	Peak
	5896.600	34.10	8.97	34.35	47.07	55.79	68.20	12.41	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

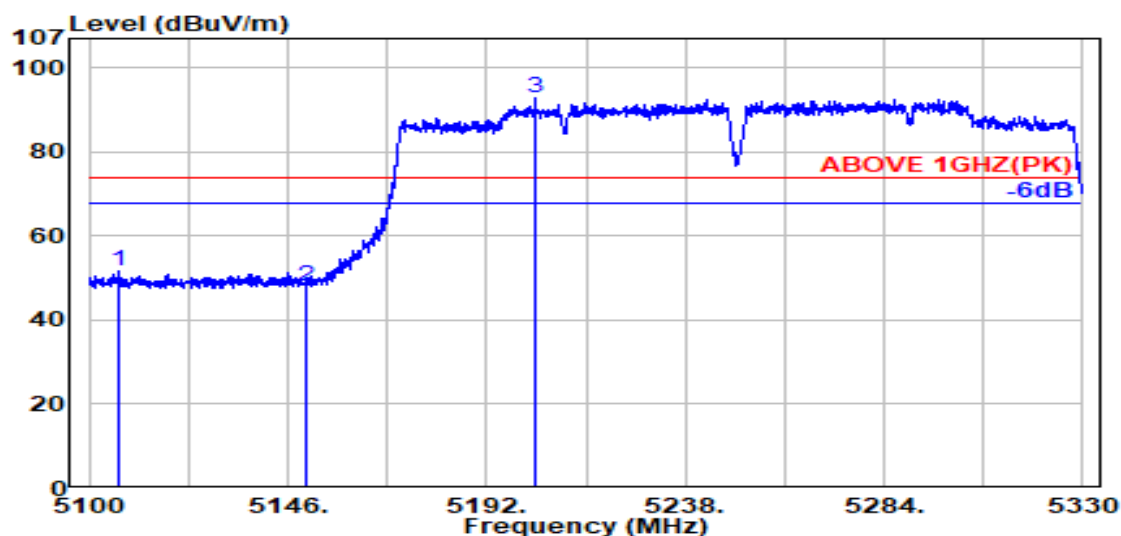

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.800	33.70	8.52	34.29	43.61	51.53	74.00	22.47	Peak
5150.000	33.70	8.54	34.28	40.28	48.24	74.00	25.76	Peak
@ 5203.200	33.71	8.58	34.26	84.71	92.73	---	---	Peak

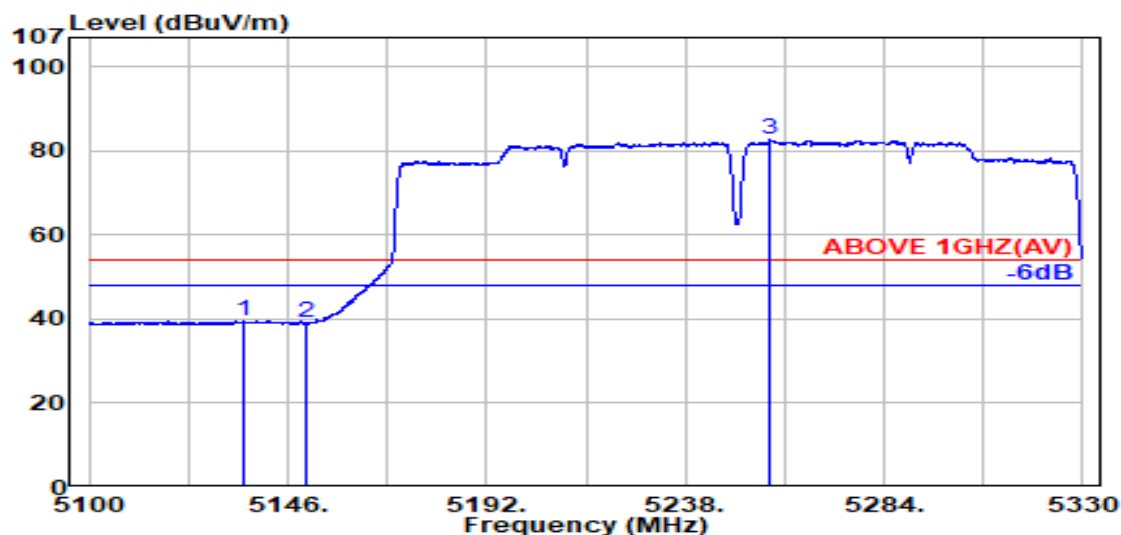


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.800	33.70	8.54	34.29	31.68	39.63	54.00	14.37	Average
5150.000	33.70	8.54	34.28	31.19	39.15	54.00	14.85	Average
@ 5257.500	33.85	8.61	34.25	74.45	82.66	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

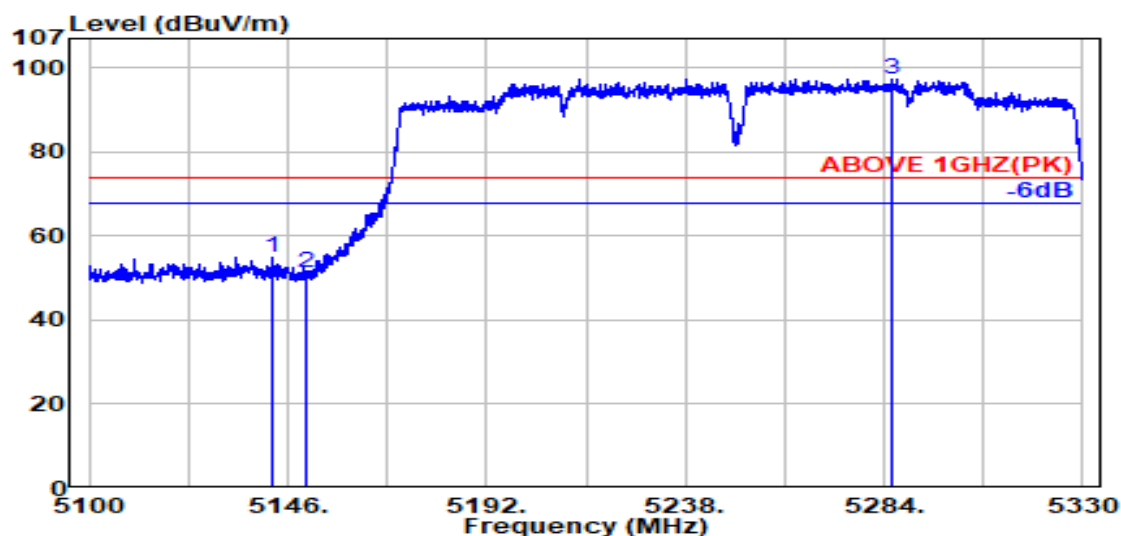

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.200	33.70	8.54	34.28	46.88	54.84	74.00	19.16	Peak
5150.000	33.70	8.54	34.28	43.19	51.15	74.00	22.85	Peak
@ 5285.900	34.02	8.63	34.24	89.09	97.49	---	---	Peak

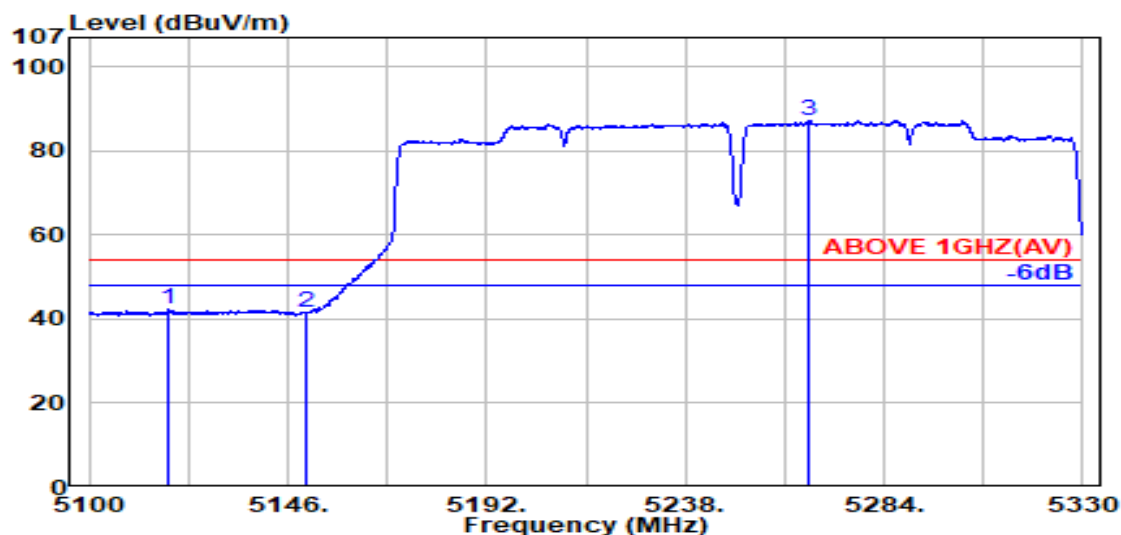


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.500	33.70	8.52	34.29	34.28	42.21	54.00	11.79	Average
5150.000	33.70	8.54	34.28	33.77	41.73	54.00	12.27	Average
@ 5266.700	33.90	8.62	34.24	79.09	87.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

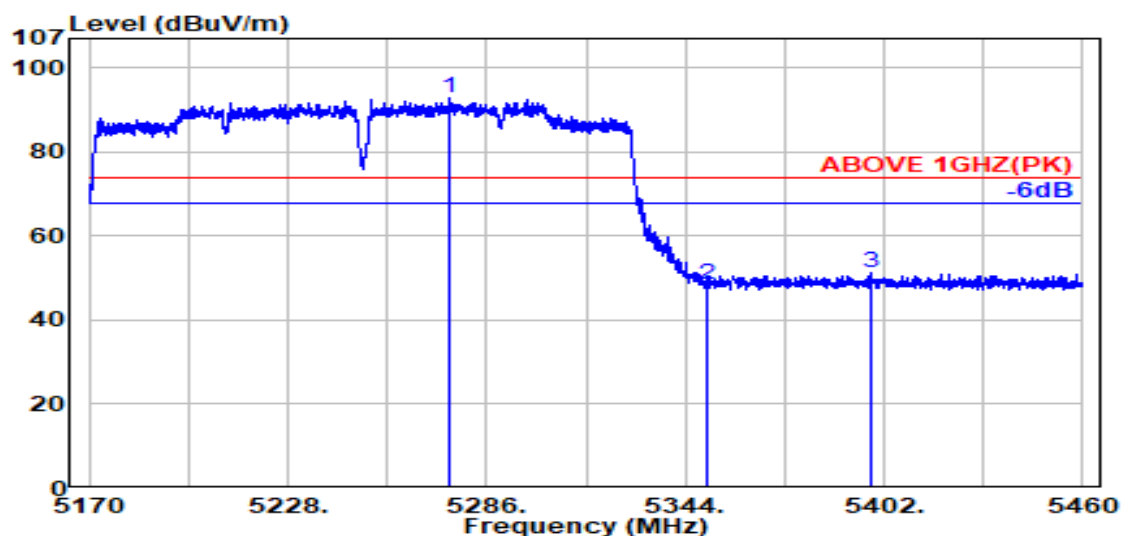

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.000	33.95	8.62	34.24	84.35	92.68	---	---	Peak
5350.000	33.90	8.67	34.22	40.14	48.48	74.00	25.52	Peak
5397.900	34.09	8.69	34.20	42.60	51.19	74.00	22.81	Peak

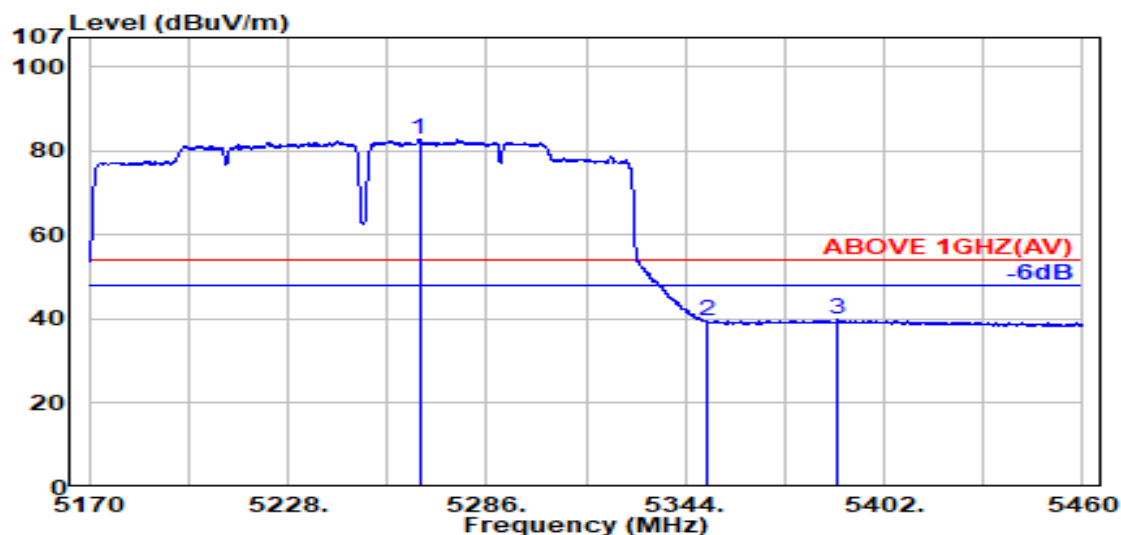


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.400	33.90	8.62	34.24	74.60	82.87	---	---	Average
5350.000	33.90	8.67	34.22	31.21	39.55	54.00	14.45	Average
5388.600	34.05	8.69	34.20	31.26	39.79	54.00	14.21	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

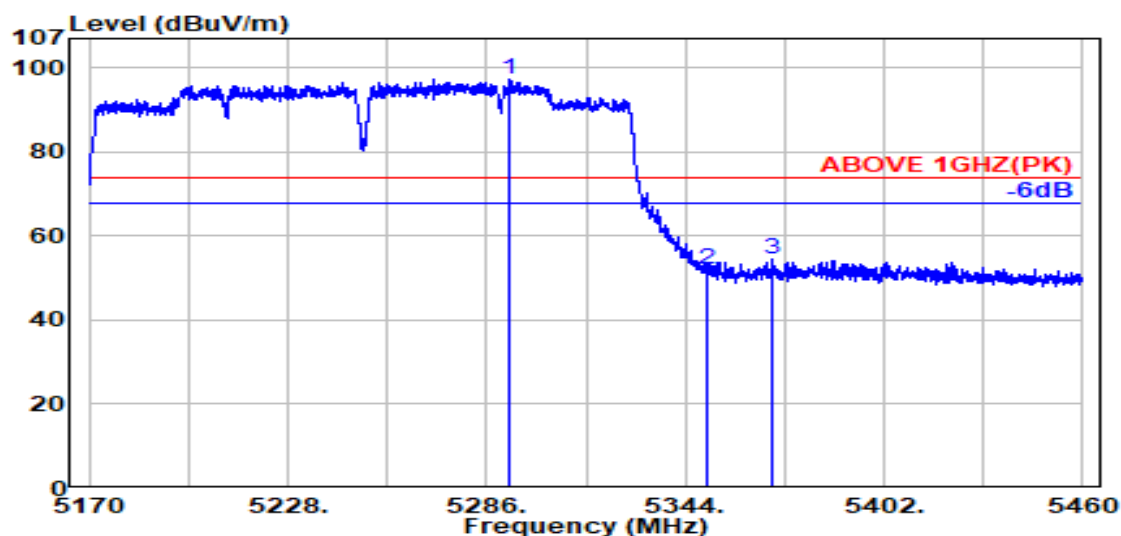

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.500	34.06	8.63	34.23	89.01	97.47	---	---	Peak
5350.000	33.90	8.67	34.22	43.83	52.18	74.00	21.82	Peak
5369.400	33.98	8.68	34.21	46.01	54.45	74.00	19.55	Peak

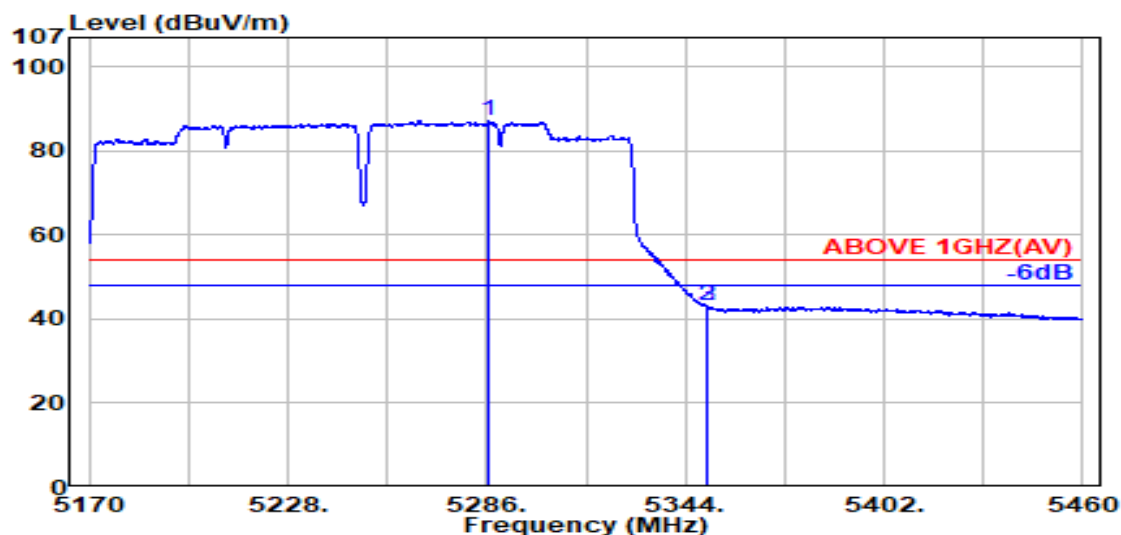


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.500	34.02	8.63	34.24	78.73	87.14	---	---	Average
5350.000	33.90	8.67	34.22	34.88	43.23	54.00	10.77	Average
5350.200	33.90	8.67	34.22	34.94	43.29	54.00	10.71	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

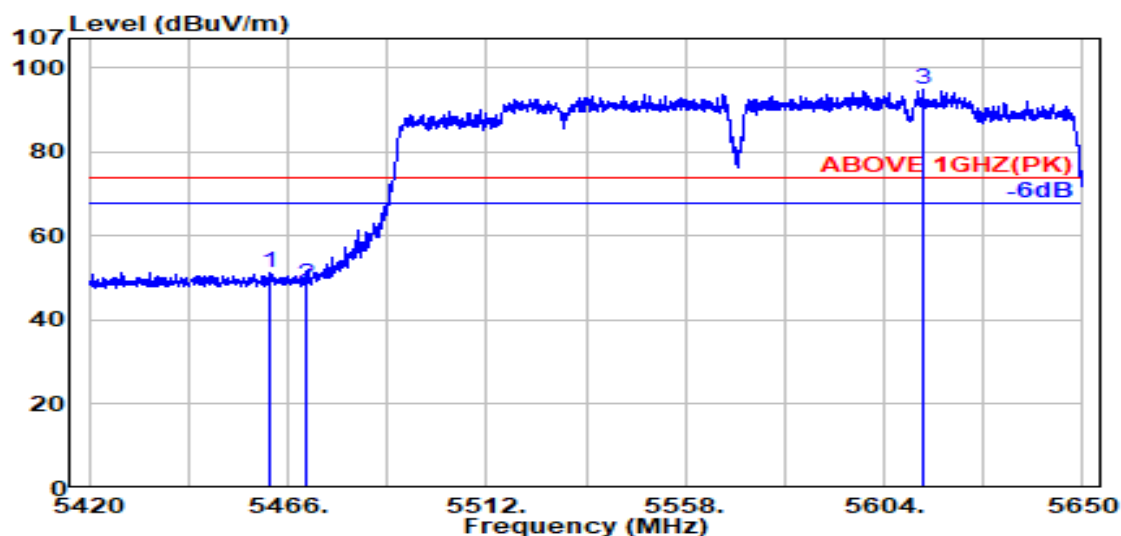

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.18	8.73	34.18	42.69	51.41	74.00	22.59	Peak
5470.000	34.16	8.74	34.18	39.59	48.30	74.00	25.70	Peak
@ 5612.800	34.00	8.82	34.22	86.19	94.78	---	---	Peak

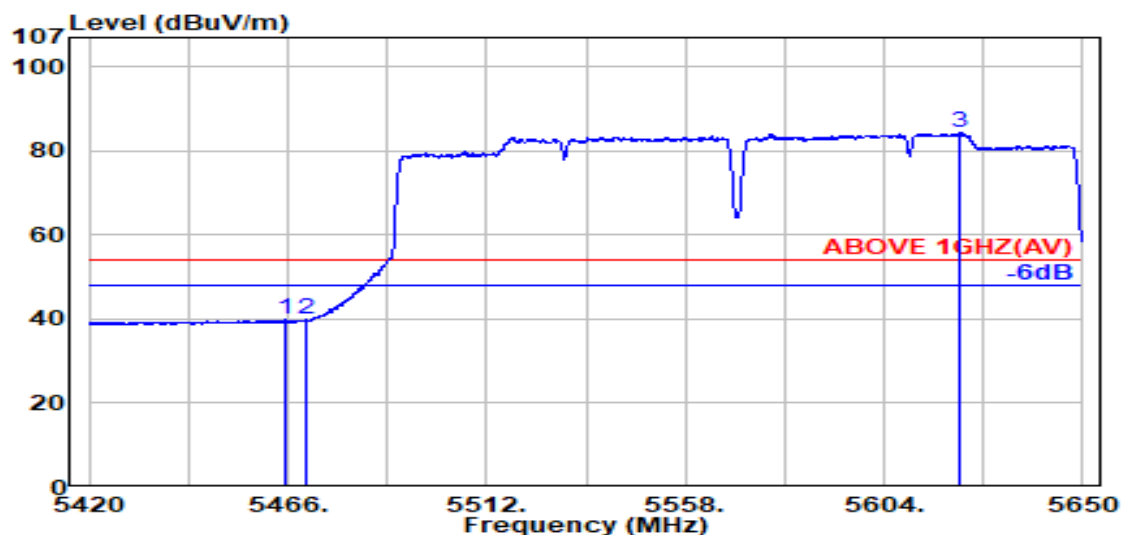


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.17	8.73	34.18	31.07	39.79	54.00	14.21	Average
5470.000	34.16	8.74	34.18	31.09	39.81	54.00	14.19	Average
@ 5621.700	34.00	8.82	34.23	75.82	84.42	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

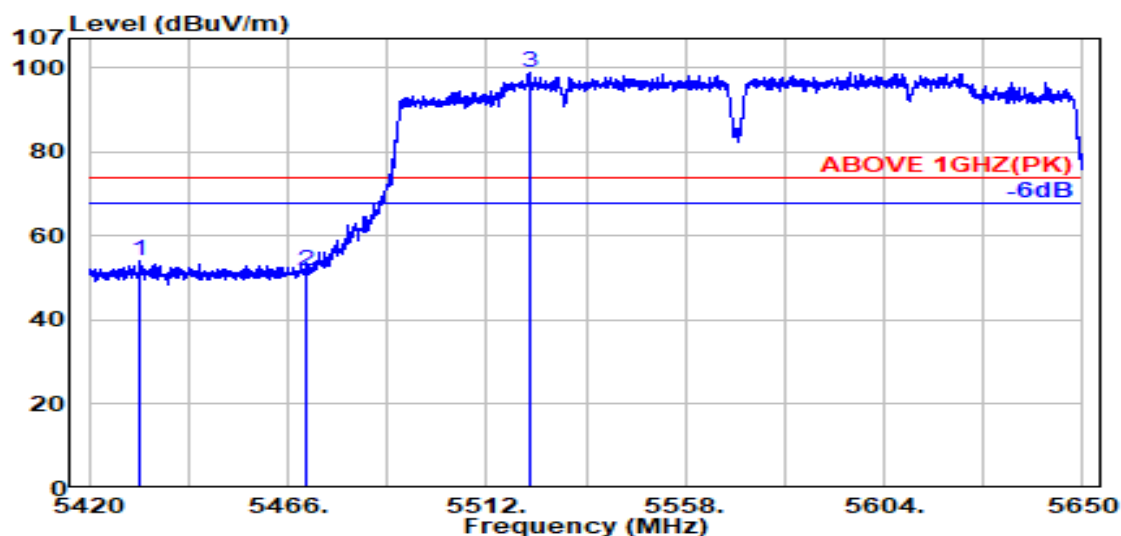

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.500	34.16	8.71	34.19	45.28	53.96	74.00	20.04	Peak
5470.000	34.16	8.74	34.18	42.93	51.65	74.00	22.35	Peak
@ 5522.000	34.10	8.77	34.18	90.16	98.85	---	---	Peak

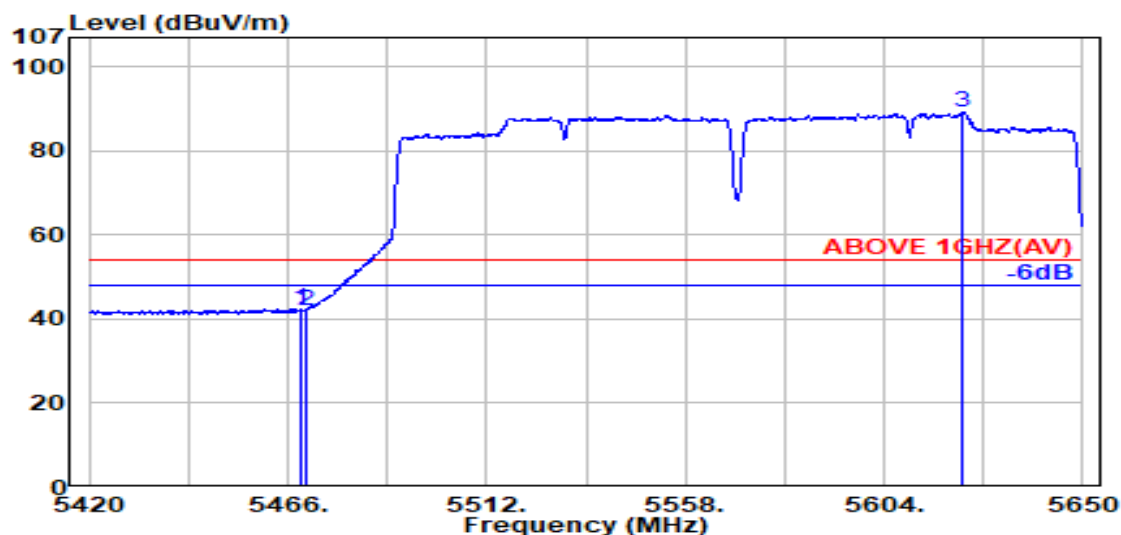


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.16	8.74	34.18	33.78	42.50	54.00	11.50	Average
5470.000	34.16	8.74	34.18	33.42	42.13	54.00	11.87	Average
@ 5622.200	34.00	8.82	34.23	80.71	89.30	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

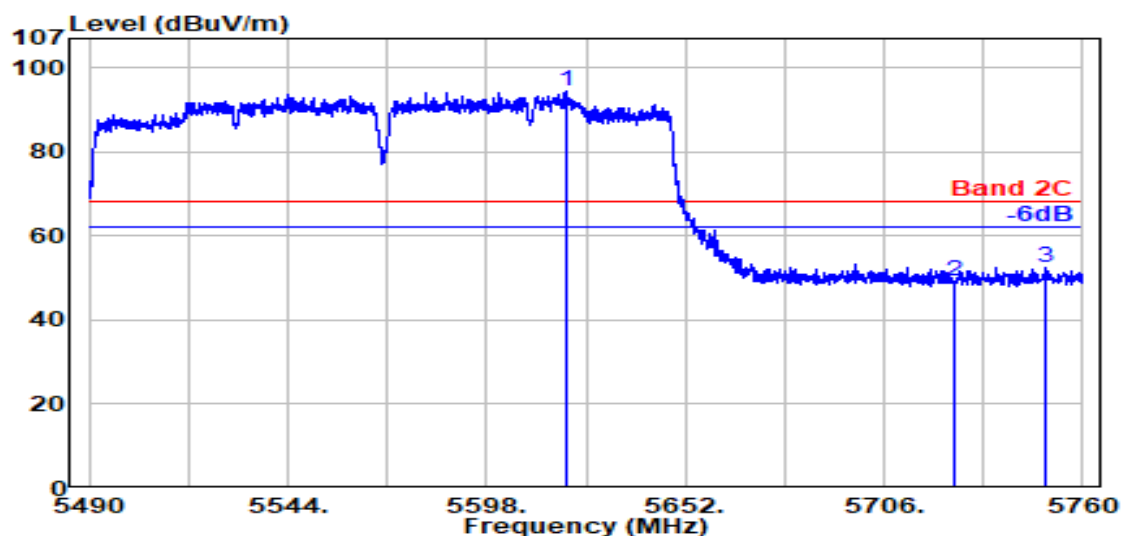

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5619.800	34.00	8.82	34.23	85.88	94.48	---	---	Peak
	5725.000	33.80	8.88	34.28	40.78	49.18	68.20	19.02	Peak
	5749.700	33.80	8.89	34.29	44.23	52.64	68.20	15.56	Peak

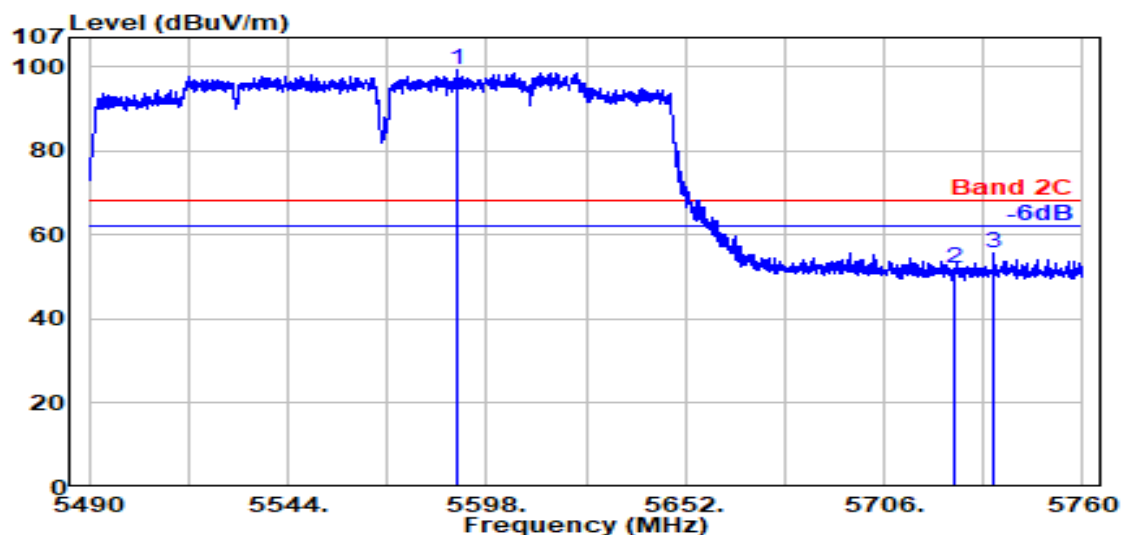


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5590.300	34.02	8.81	34.21	90.56	99.17	---	---	Peak
	5725.000	33.80	8.88	34.28	43.56	51.97	68.20	16.23	Peak
	5735.700	33.80	8.89	34.28	47.36	55.76	68.20	12.44	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

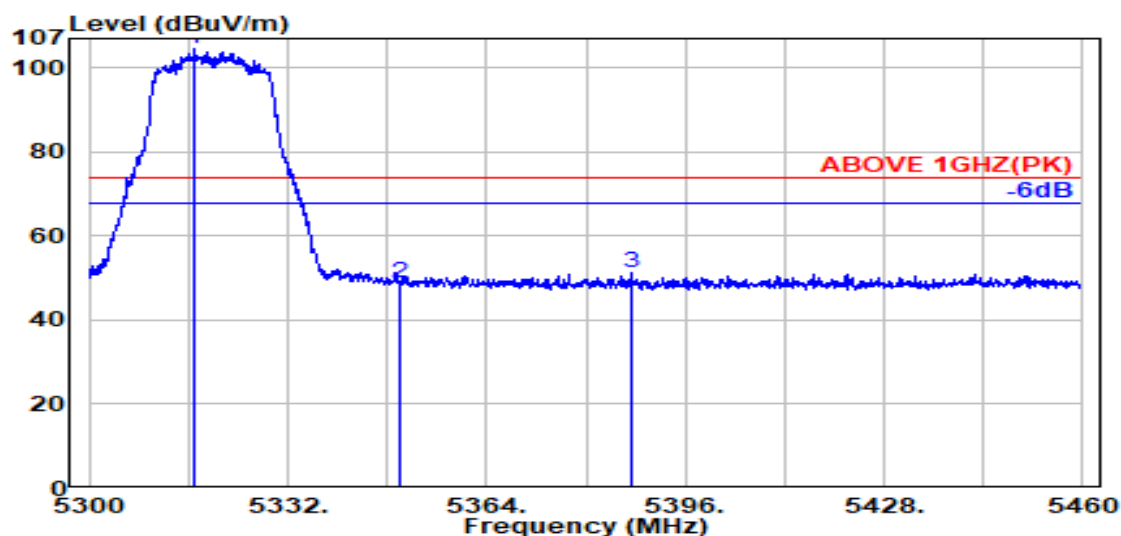

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.000	34.03	8.65	34.23	96.10	104.55	---	---	Peak
5350.000	33.90	8.67	34.22	40.38	48.73	74.00	25.27	Peak
5387.300	34.05	8.69	34.20	42.76	51.30	74.00	22.70	Peak

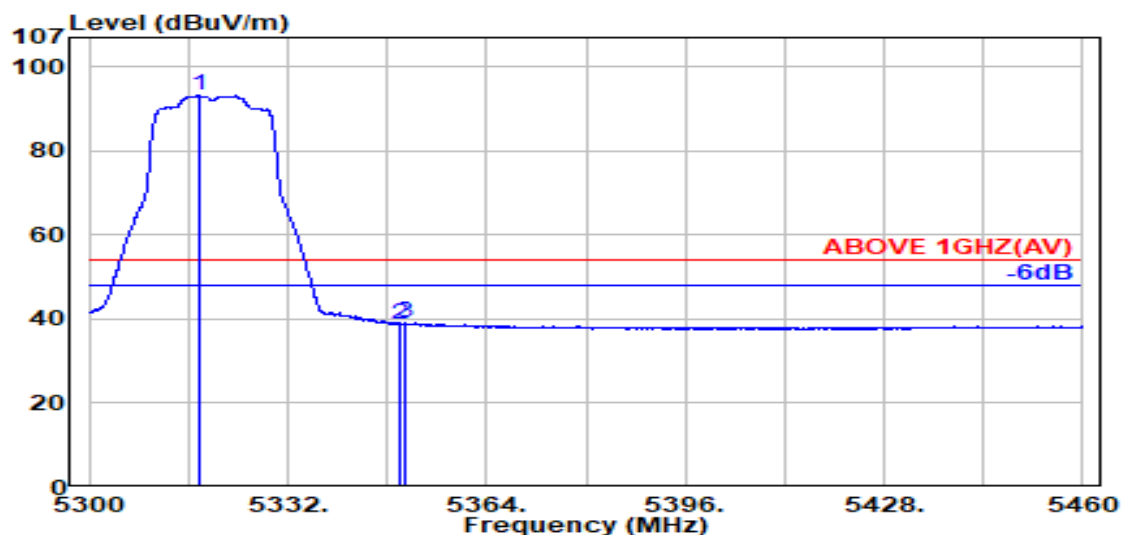


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.03	8.65	34.23	84.80	93.25	---	---	Average
5350.000	33.90	8.67	34.22	30.58	38.93	54.00	15.07	Average
5350.900	33.90	8.67	34.22	30.77	39.13	54.00	14.87	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

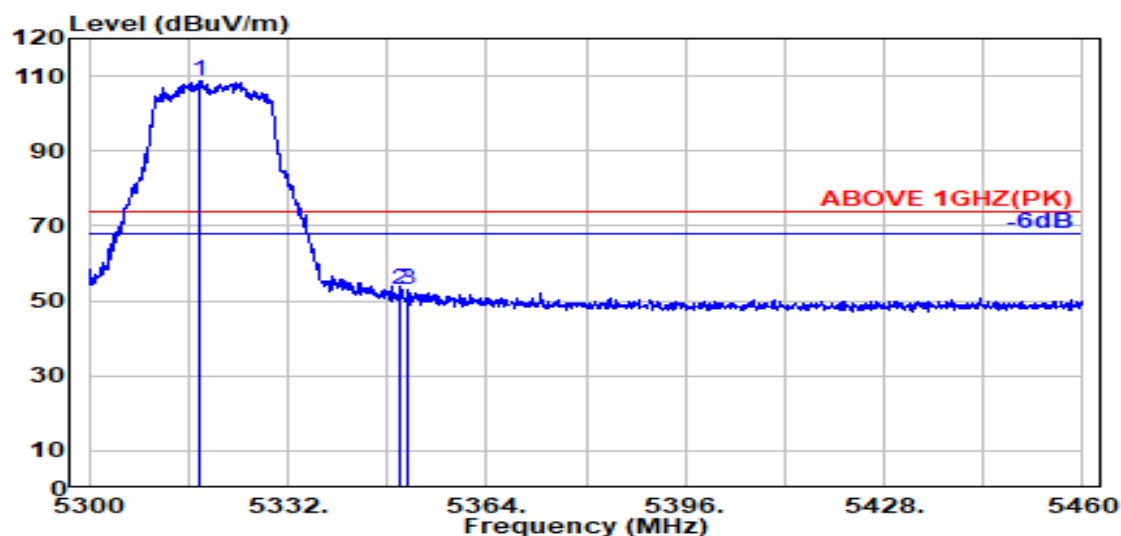

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.600	34.03	8.65	34.23	100.05	108.50	---	---	Peak
5350.000	33.90	8.67	34.22	44.85	53.20	74.00	20.80	Peak
5351.400	33.91	8.67	34.22	44.44	52.80	74.00	21.20	Peak

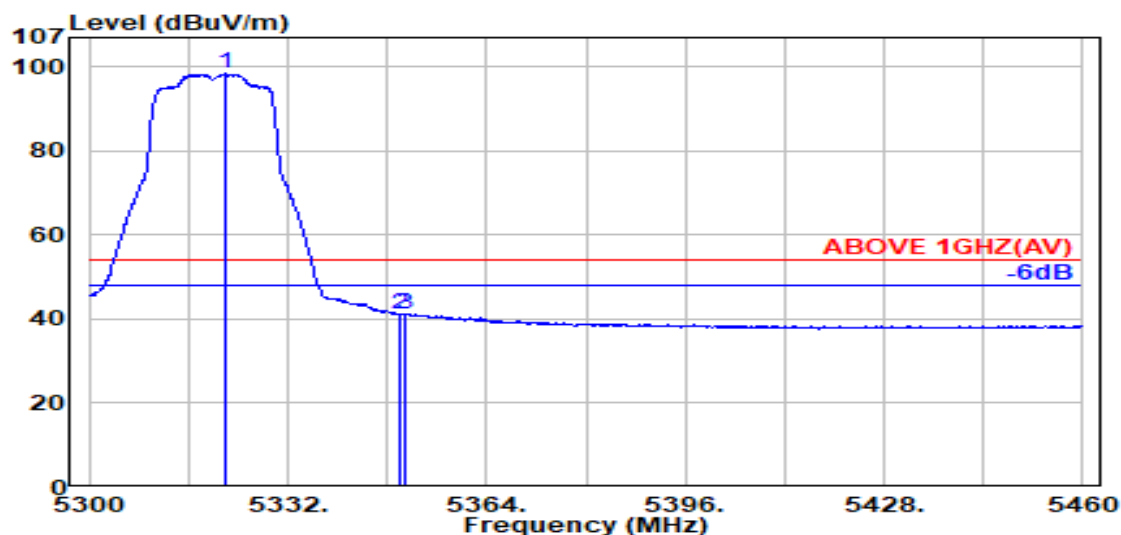


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	34.01	8.65	34.23	89.89	98.32	---	---	Average
5350.000	33.90	8.67	34.22	32.90	41.25	54.00	12.75	Average
5350.900	33.90	8.67	34.22	32.96	41.31	54.00	12.69	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

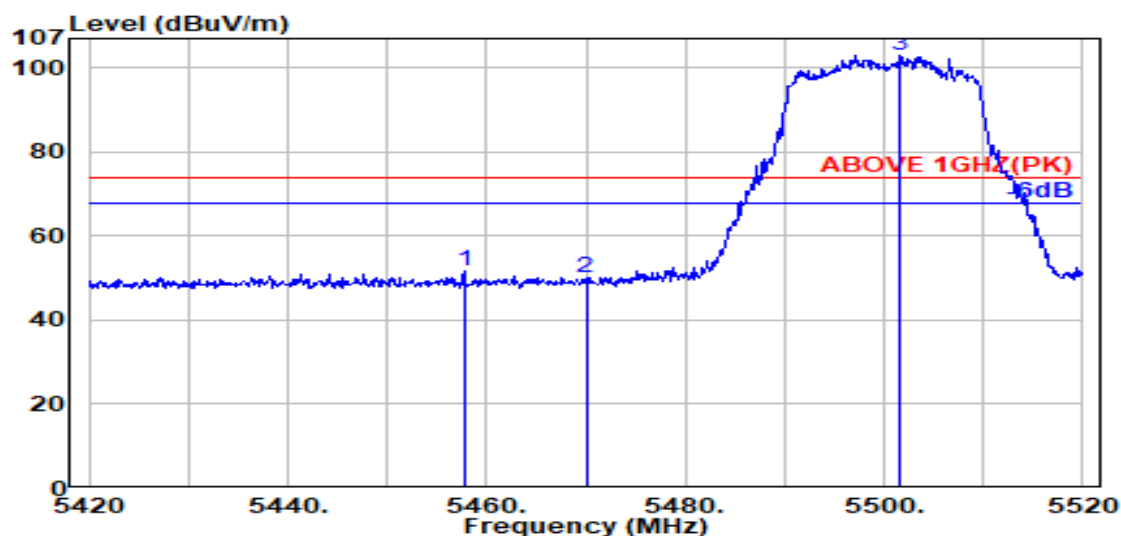

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.700	34.18	8.73	34.18	42.84	51.57	74.00	22.43	Peak
5470.000	34.16	8.74	34.18	41.29	50.01	74.00	23.99	Peak
@ 5501.600	34.10	8.75	34.17	94.19	102.87	---	---	Peak

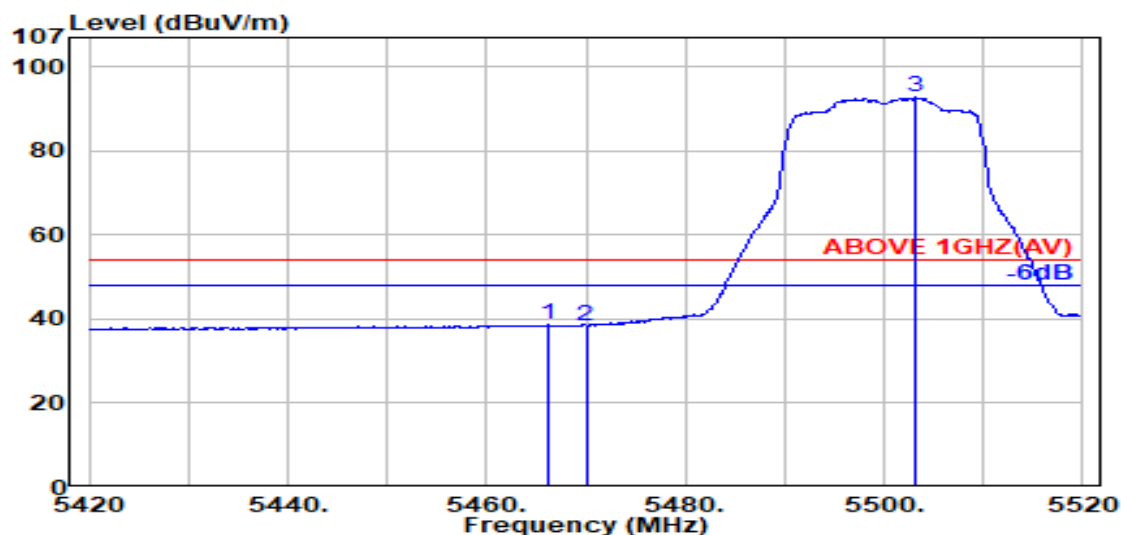


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	29.86	38.58	54.00	15.42	Average
5470.000	34.16	8.74	34.18	29.80	38.51	54.00	15.49	Average
@ 5503.100	34.10	8.75	34.17	84.01	92.69	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

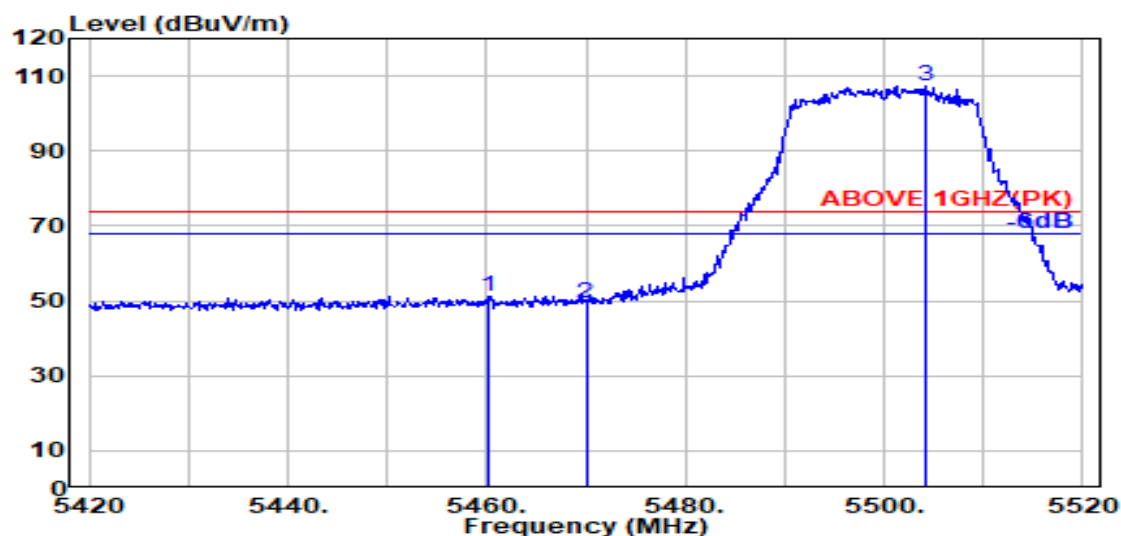

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.100	34.18	8.73	34.18	42.53	51.26	74.00	22.74	Peak
5470.000	34.16	8.74	34.18	40.74	49.46	74.00	24.54	Peak
@ 5504.300	34.10	8.76	34.17	98.68	107.36	---	---	Peak

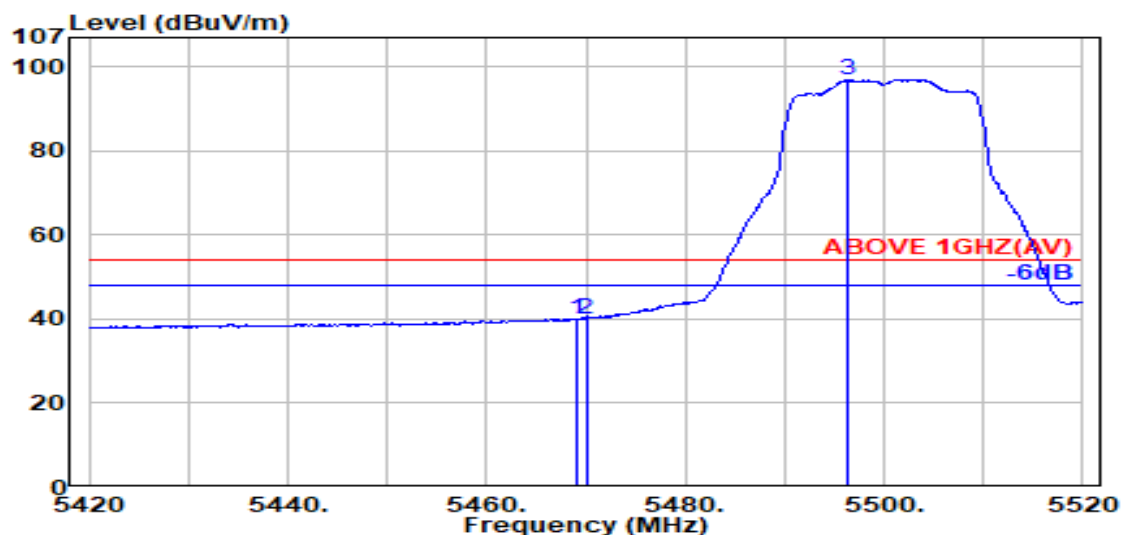


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	31.38	40.10	54.00	13.90	Average
5470.000	34.16	8.74	34.18	31.38	40.09	54.00	13.91	Average
@ 5496.400	34.11	8.75	34.17	88.40	97.09	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

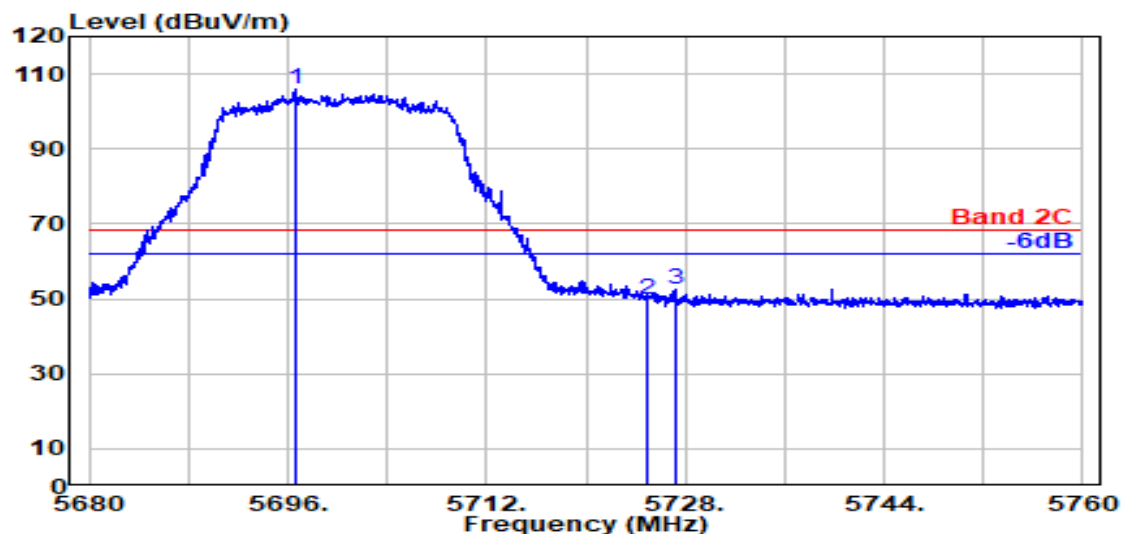

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5696.550	33.81	8.86	34.26	97.36	105.77	---	---	Peak
	5725.000	33.80	8.88	34.28	41.49	49.90	68.20	18.30	Peak
	5727.250	33.80	8.88	34.28	44.01	52.41	68.20	15.79	Peak

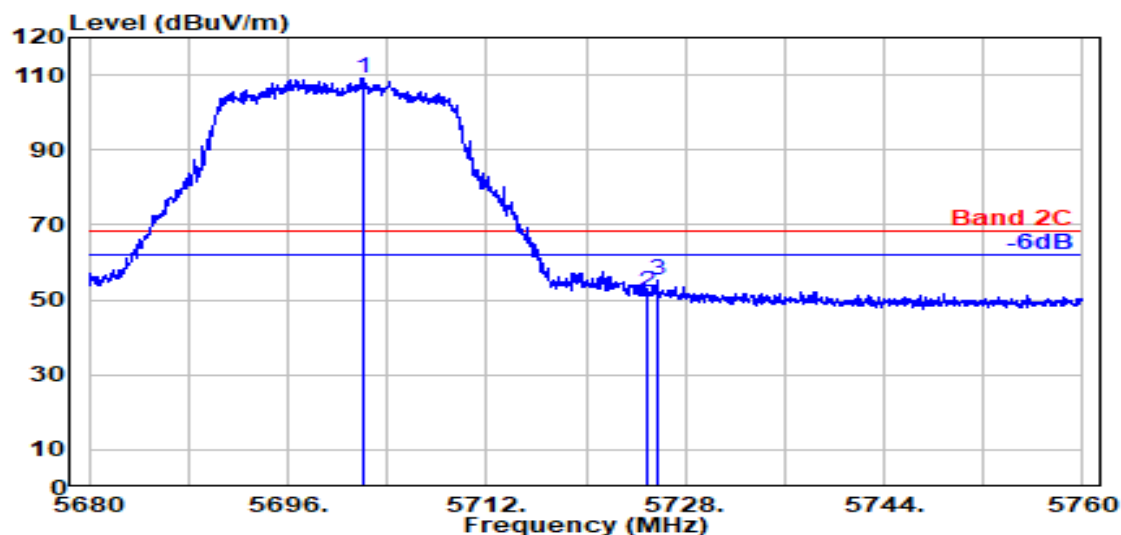


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.000	33.80	8.87	34.27	100.81	109.21	---	---	Peak
	5725.000	33.80	8.88	34.28	43.78	52.18	68.20	16.02	Peak
	5725.800	33.80	8.88	34.28	46.65	55.05	68.20	13.15	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

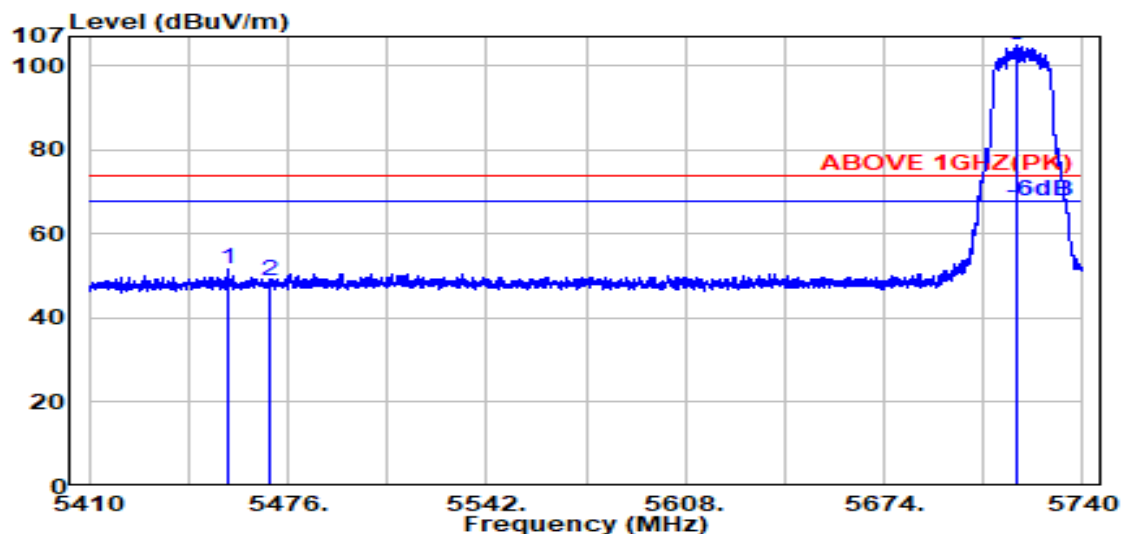

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.900	34.19	8.73	34.18	42.92	51.65	74.00	22.35	Peak
5470.000	34.16	8.74	34.18	40.24	48.96	74.00	25.04	Peak
@ 5718.100	33.80	8.88	34.27	96.60	105.00	---	---	Peak

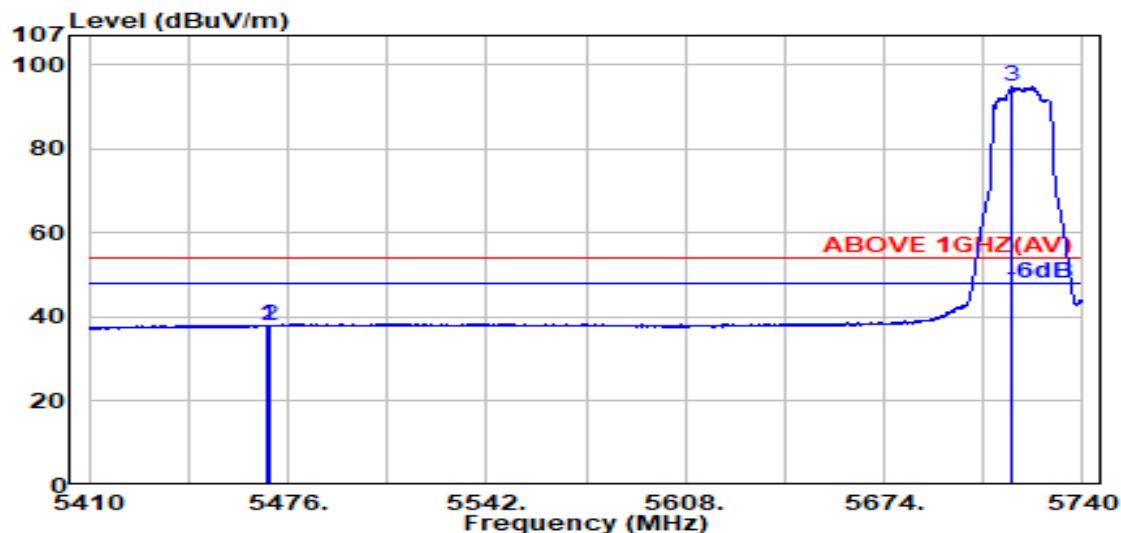


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	29.33	38.05	54.00	15.95	Average
5470.000	34.16	8.74	34.18	29.21	37.93	54.00	16.07	Average
@ 5716.300	33.80	8.88	34.27	86.43	94.83	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

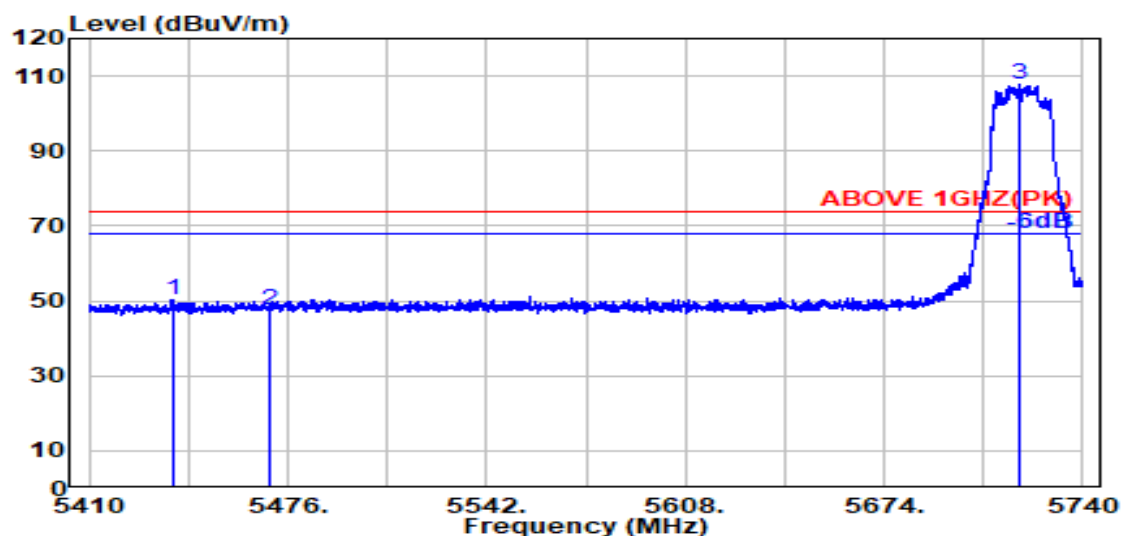

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5437.600	34.18	8.72	34.19	41.40	50.10	74.00	23.90	Peak
5470.000	34.16	8.74	34.18	38.98	47.69	74.00	26.31	Peak
@ 5719.100	33.80	8.88	34.27	99.54	107.95	---	---	Peak

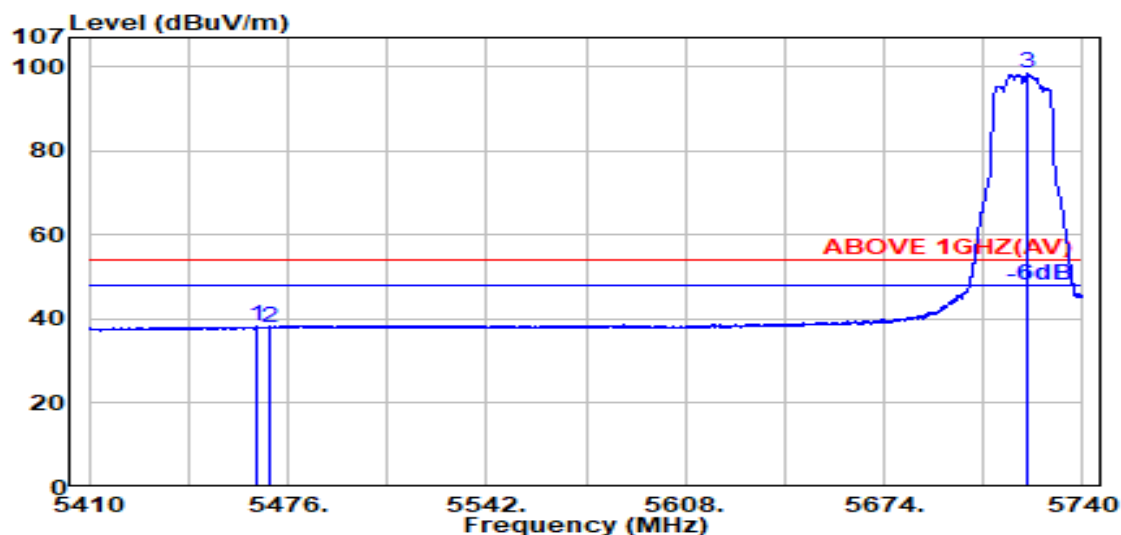


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.000	34.17	8.73	34.18	29.44	38.16	54.00	15.84	Average
5470.000	34.16	8.74	34.18	29.16	37.88	54.00	16.12	Average
@ 5721.700	33.80	8.88	34.27	89.92	98.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

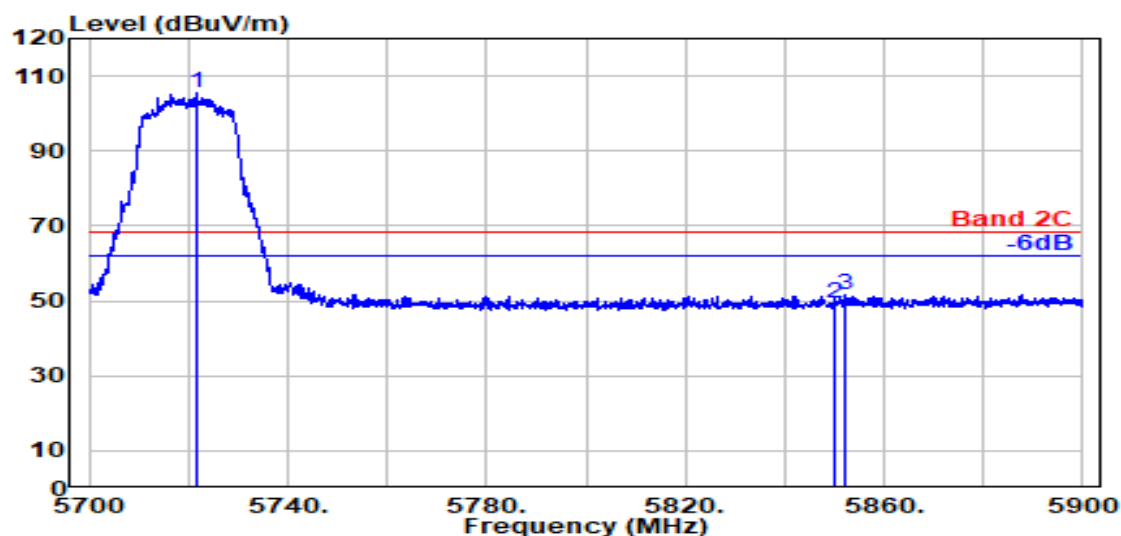

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5721.800	33.80	8.88	34.27	96.96	105.36	---	---	Peak
	5850.000	34.10	8.95	34.33	40.72	49.44	68.20	18.76	Peak
	5851.900	34.10	8.95	34.33	42.81	51.53	68.20	16.67	Peak

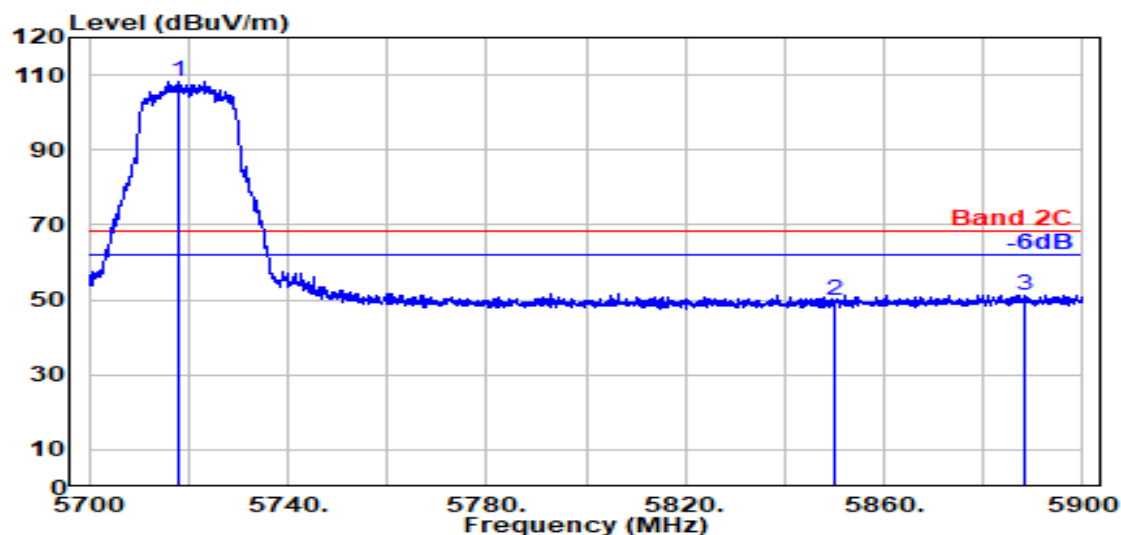


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.900	33.80	8.88	34.27	99.99	108.40	---	---	Peak
	5850.000	34.10	8.95	34.33	40.91	49.63	68.20	18.57	Peak
	5888.400	34.10	8.97	34.35	42.67	51.39	68.20	16.81	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

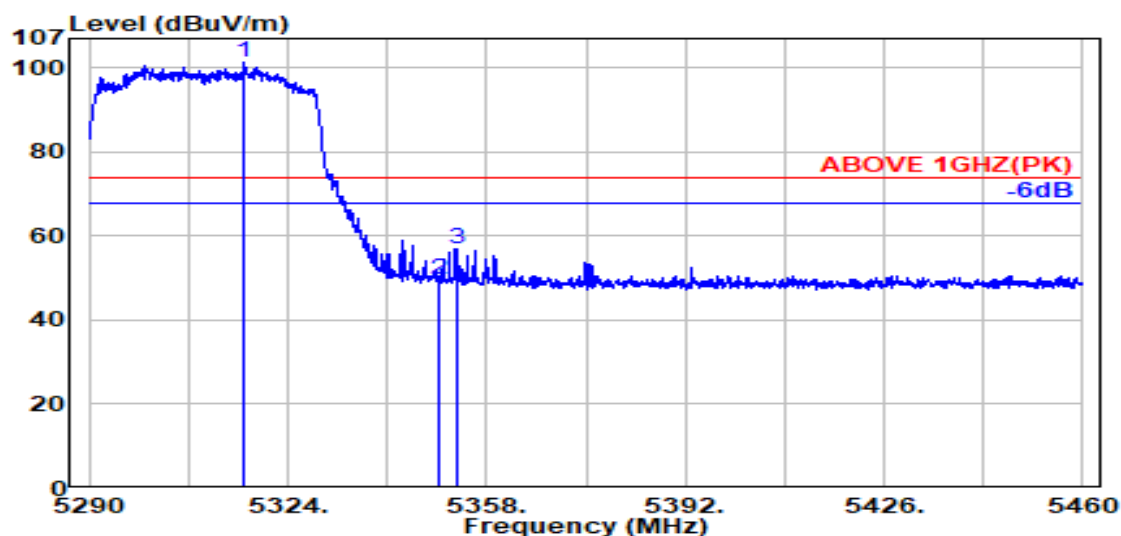

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.400	34.03	8.65	34.23	92.85	101.30	---	---	Peak
	5350.000	33.90	8.67	34.22	41.51	49.86	74.00	24.14	Peak
	5352.800	33.91	8.67	34.22	48.62	56.98	74.00	17.02	Peak

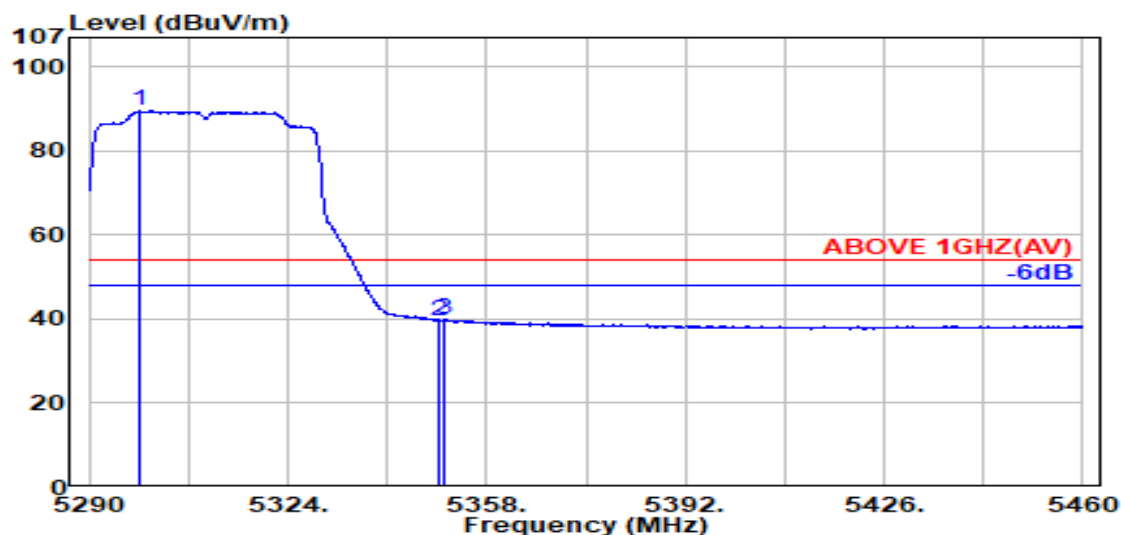


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5298.500	34.09	8.63	34.23	81.01	89.50	---	---	Average
	5350.000	33.90	8.67	34.22	31.38	39.73	54.00	14.27	Average
	5350.900	33.90	8.67	34.22	31.47	39.82	54.00	14.18	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

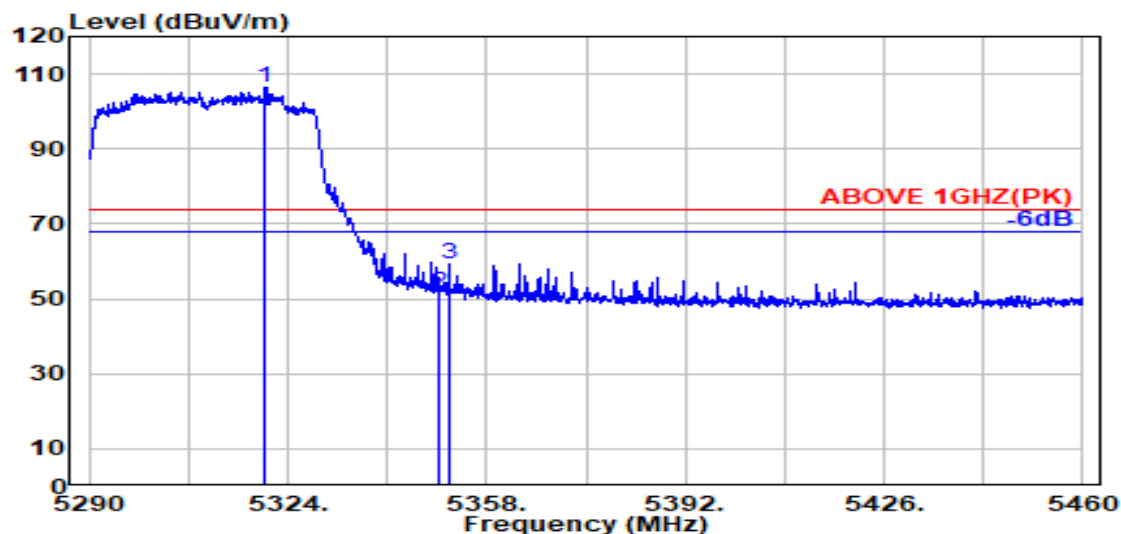

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5320.200	34.02	8.65	34.23	97.83	106.27	---	---	Peak
5350.000	33.90	8.67	34.22	43.39	51.74	74.00	22.26	Peak
5351.600	33.91	8.67	34.22	50.99	59.35	74.00	14.65	Peak

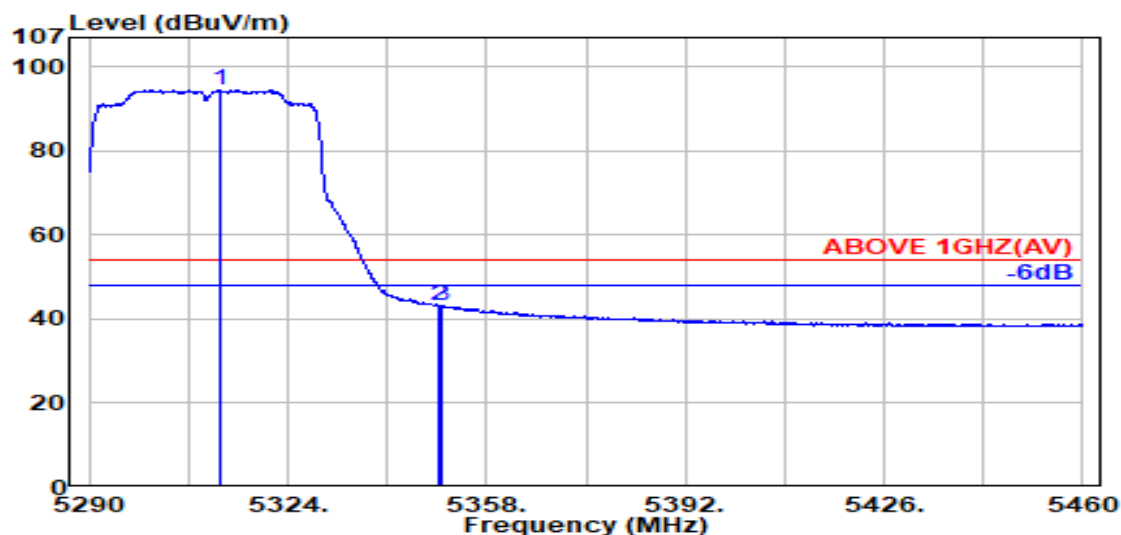


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5312.400	34.05	8.64	34.23	86.03	94.50	---	---	Average
5350.000	33.90	8.67	34.22	34.82	43.17	54.00	10.83	Average
5350.500	33.90	8.67	34.22	34.77	43.12	54.00	10.88	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

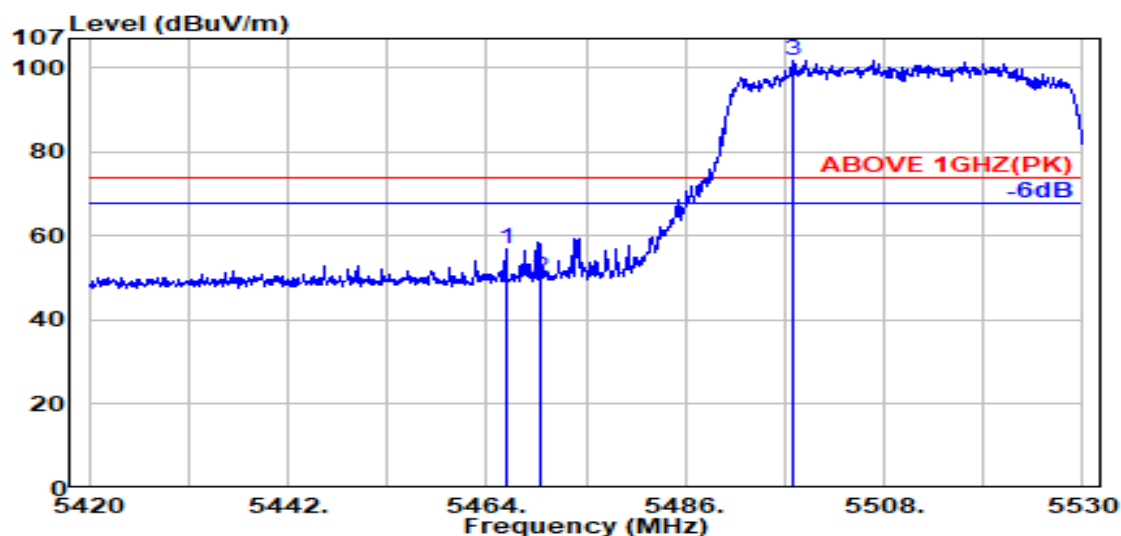

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	48.06	56.79	74.00	17.21	Peak
5470.000	34.16	8.74	34.18	41.49	50.21	74.00	23.79	Peak
@ 5497.800	34.10	8.75	34.17	93.08	101.76	---	---	Peak

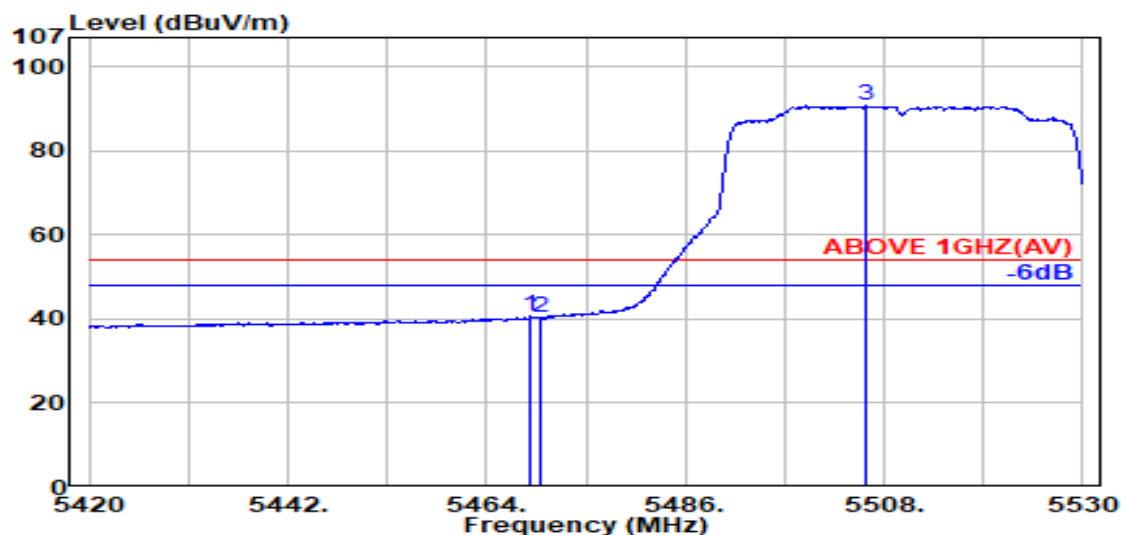


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	31.89	40.61	54.00	13.39	Average
5470.000	34.16	8.74	34.18	31.77	40.48	54.00	13.52	Average
@ 5506.000	34.10	8.76	34.17	82.15	90.84	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

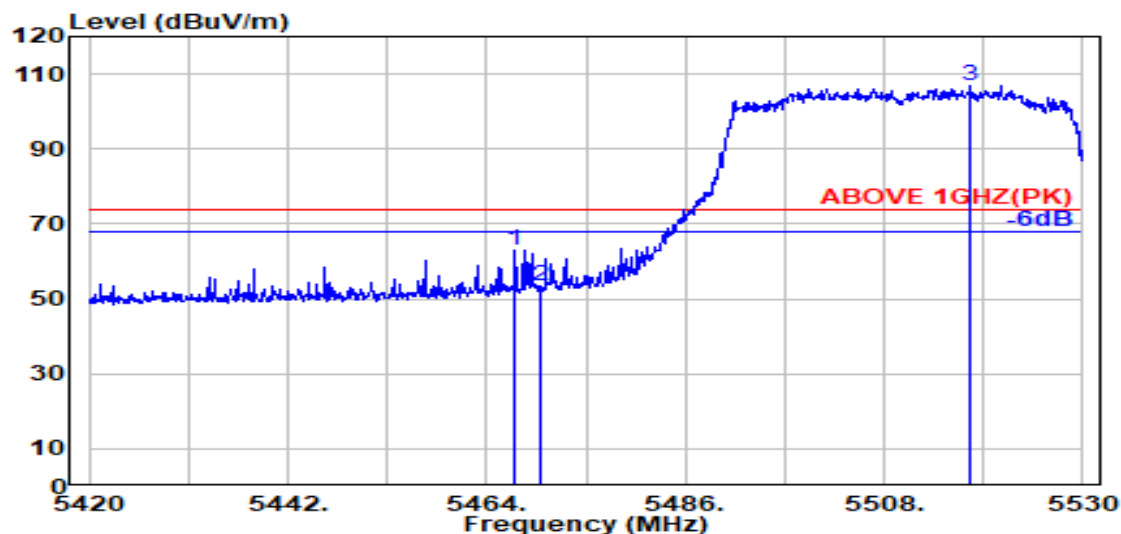

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.17	8.73	34.18	54.38	63.10	74.00	10.90	Peak
5470.000	34.16	8.74	34.18	44.71	53.43	74.00	20.57	Peak
@ 5517.500	34.10	8.76	34.18	98.40	107.09	---	---	Peak

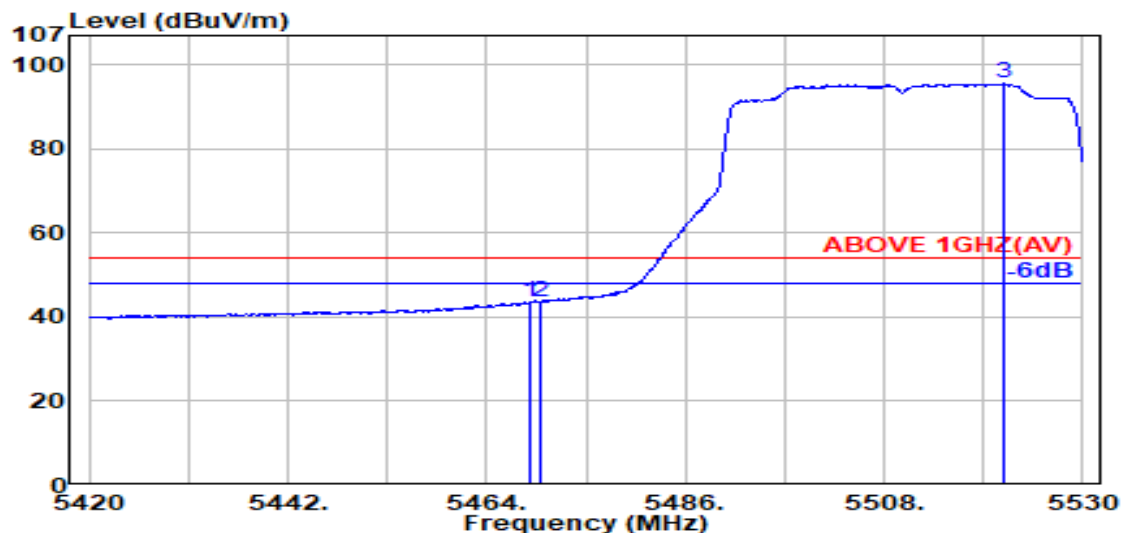


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	34.91	43.62	54.00	10.38	Average
5470.000	34.16	8.74	34.18	35.02	43.73	54.00	10.27	Average
@ 5521.300	34.10	8.77	34.18	86.90	95.58	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

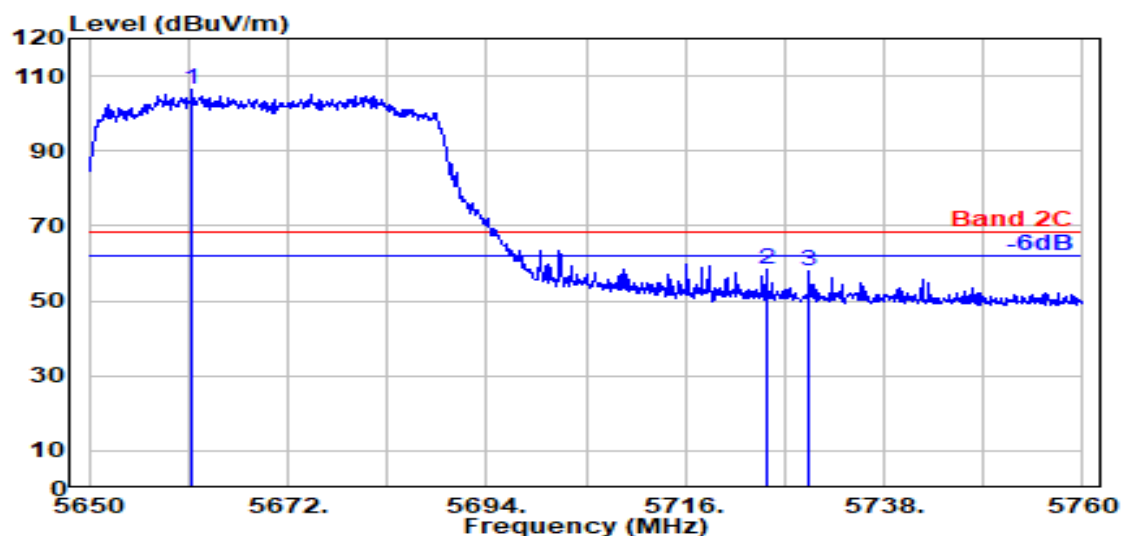

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5661.400	33.95	8.85	34.25	97.81	106.36	---	---	Peak
	5725.000	33.80	8.88	34.28	50.20	58.61	68.20	9.59	Peak
	5729.700	33.80	8.88	34.28	49.40	57.81	68.20	10.39	Peak

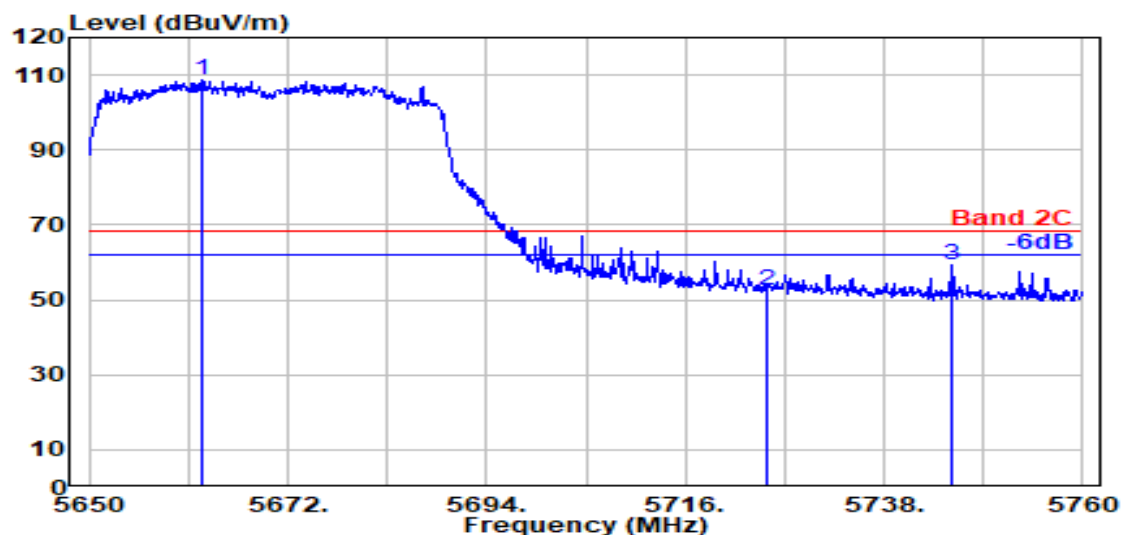


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5662.600	33.95	8.85	34.25	100.34	108.89	---	---	Peak
	5725.000	33.80	8.88	34.28	43.94	52.34	68.20	15.86	Peak
	5745.600	33.80	8.89	34.29	50.92	59.33	68.20	8.87	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

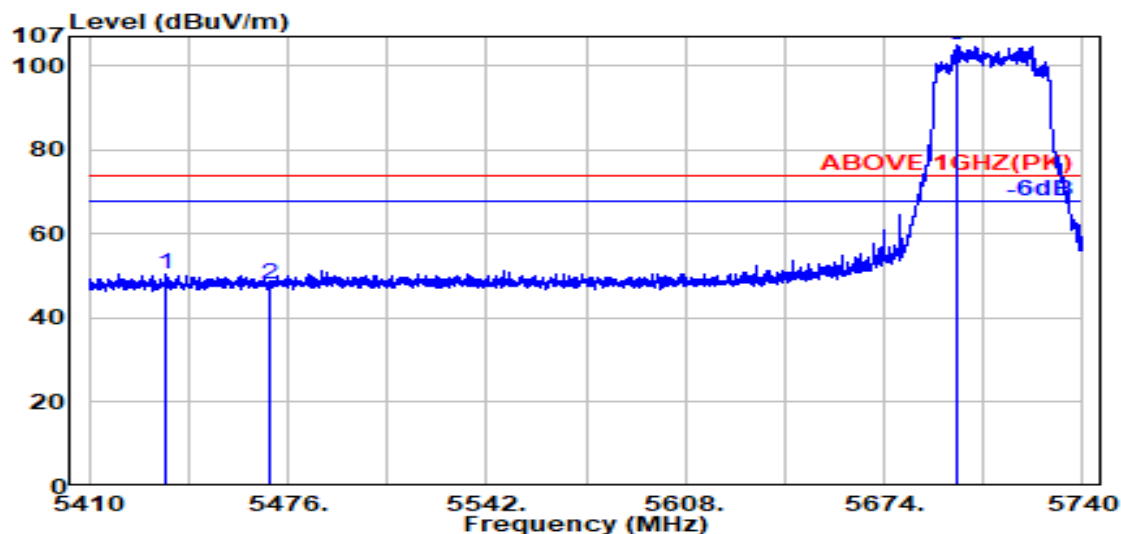

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.200	34.17	8.72	34.19	41.73	50.42	74.00	23.58	Peak
5470.000	34.16	8.74	34.18	39.33	48.05	74.00	25.95	Peak
@ 5698.600	33.81	8.87	34.26	96.46	104.87	---	---	Peak

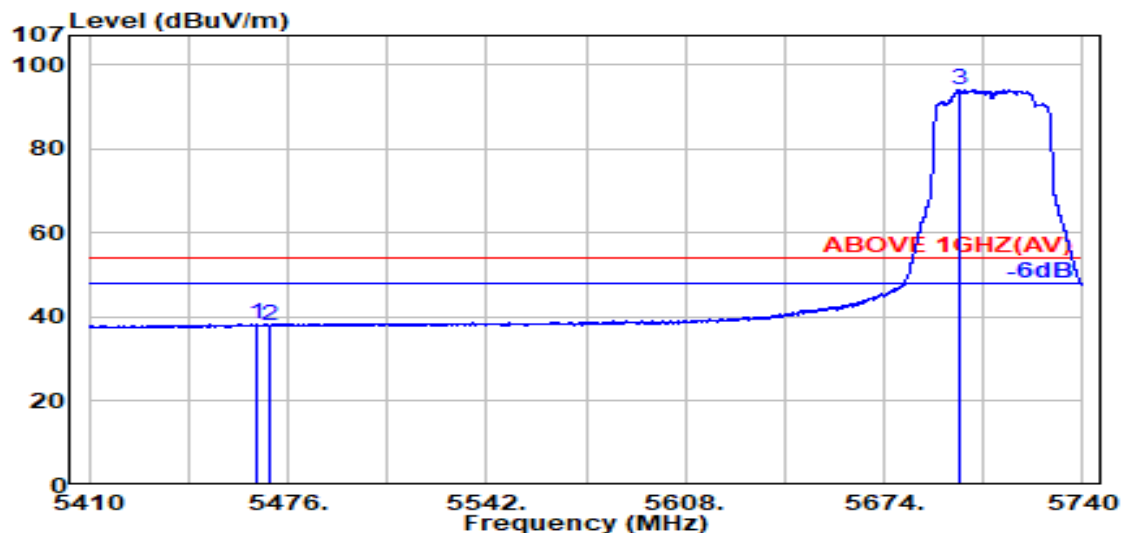


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.17	8.73	34.18	29.61	38.33	54.00	15.67	Average
5470.000	34.16	8.74	34.18	29.24	37.96	54.00	16.04	Average
@ 5698.700	33.81	8.87	34.26	85.65	94.06	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

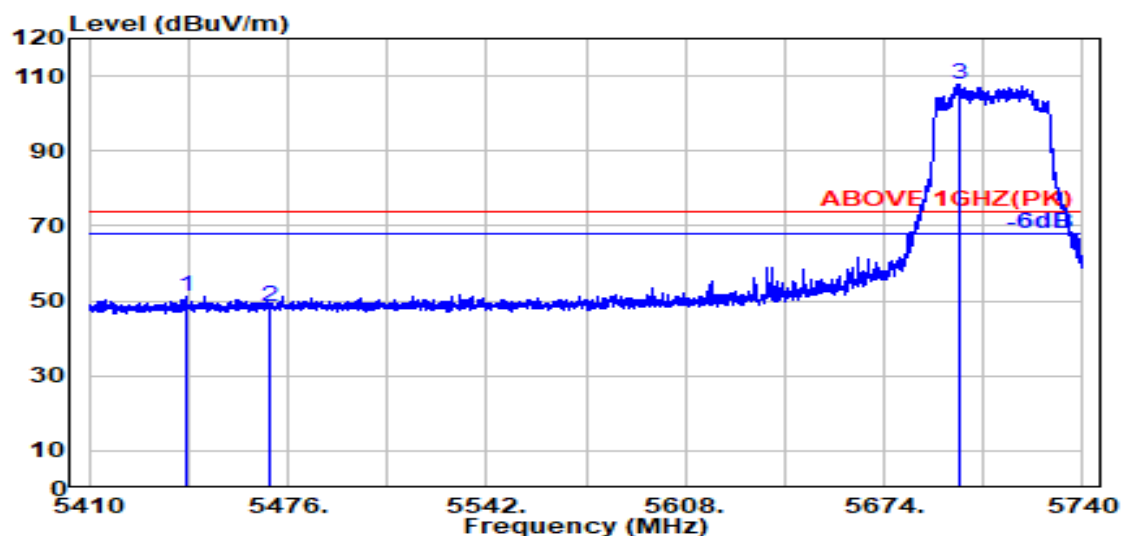

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.200	34.18	8.72	34.19	42.49	51.21	74.00	22.79	Peak
5470.000	34.16	8.74	34.18	39.62	48.34	74.00	25.66	Peak
@ 5699.400	33.80	8.87	34.26	99.39	107.80	---	---	Peak

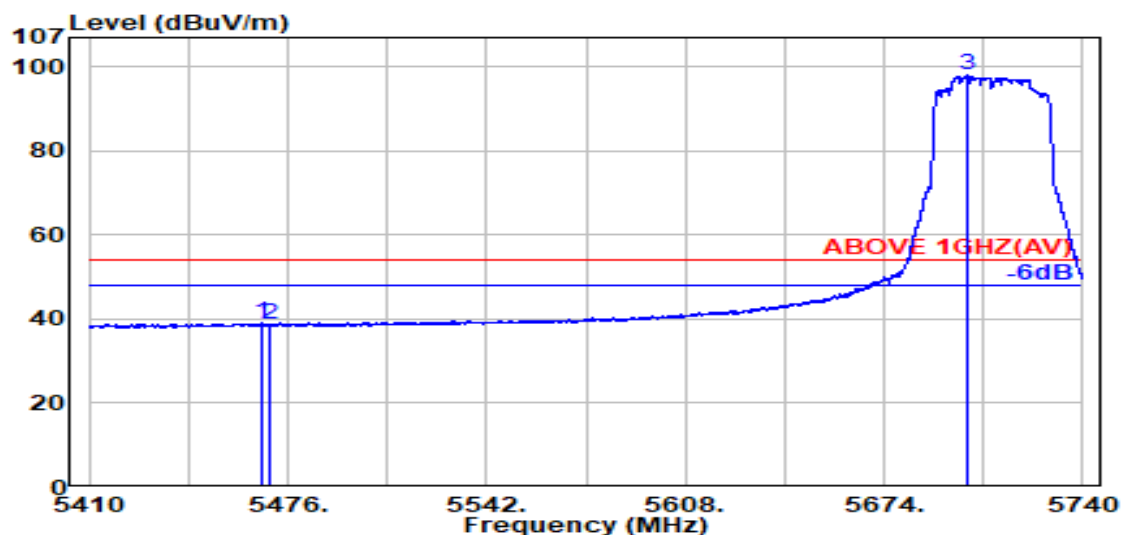


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.17	8.73	34.18	30.32	39.04	54.00	14.96	Average
5470.000	34.16	8.74	34.18	29.94	38.66	54.00	15.34	Average
@ 5702.000	33.80	8.87	34.27	89.62	98.03	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

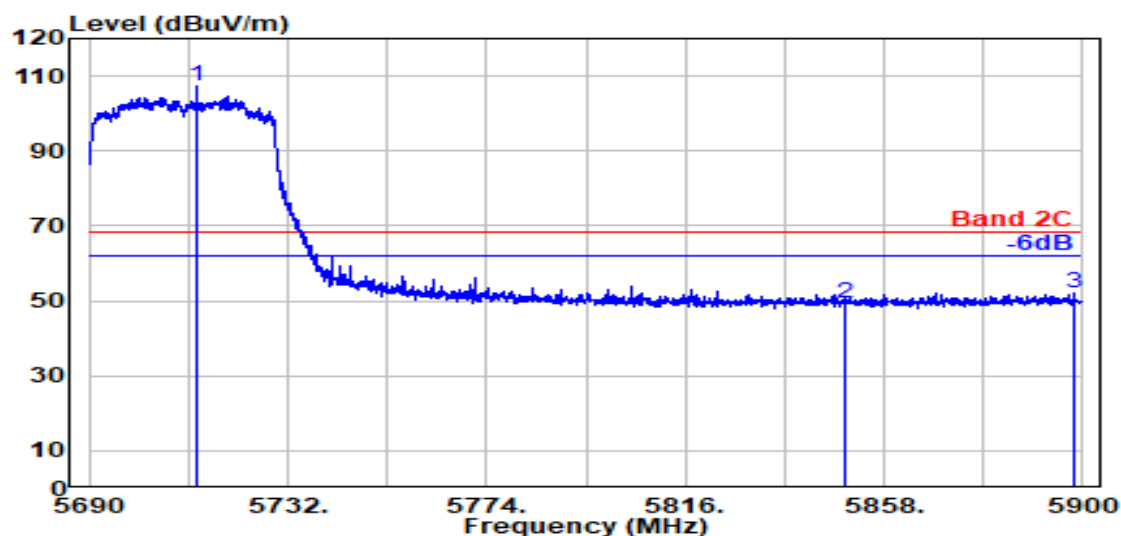

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.600	33.80	8.87	34.27	98.70	107.11	---	---	Peak
5850.000	34.10	8.95	34.33	40.84	49.56	68.20	18.64	Peak
5898.200	34.10	8.98	34.35	43.32	52.04	68.20	16.16	Peak

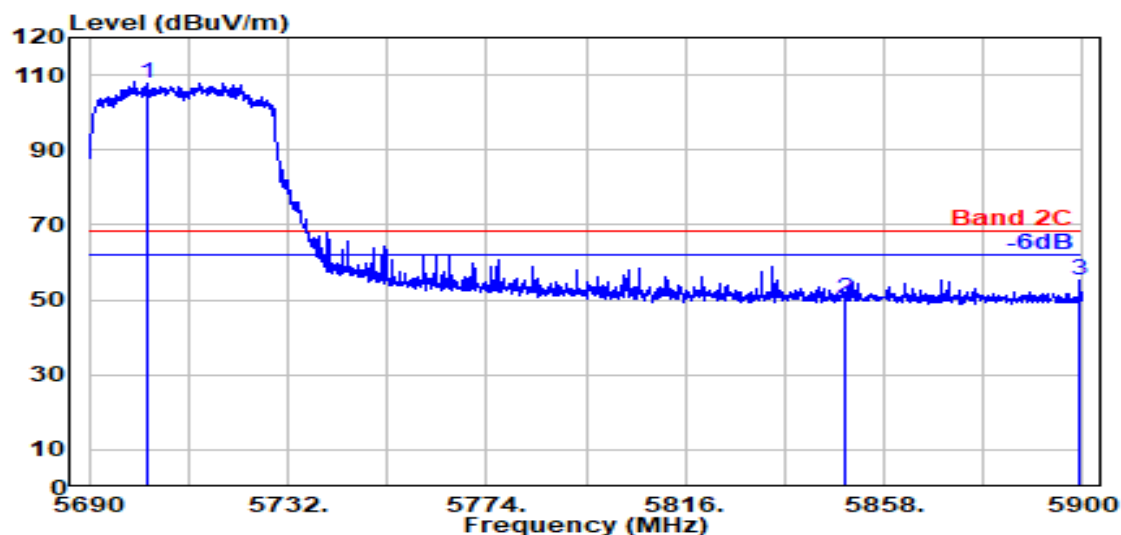


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.100	33.80	8.87	34.27	99.52	107.92	---	---	Peak
5850.000	34.10	8.95	34.33	41.76	50.48	68.20	17.72	Peak
5899.400	34.10	8.98	34.36	46.58	55.30	68.20	12.90	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

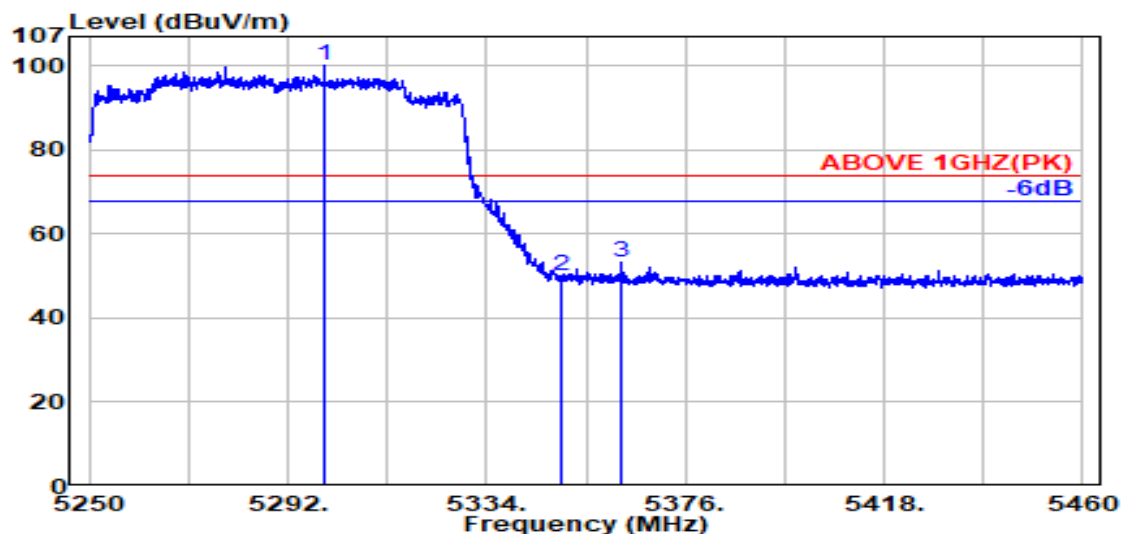

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.700	34.10	8.64	34.23	91.48	99.99	---	---	Peak
5350.000	33.90	8.67	34.22	41.72	50.07	74.00	23.93	Peak
5362.600	33.95	8.67	34.21	44.84	53.25	74.00	20.75	Peak

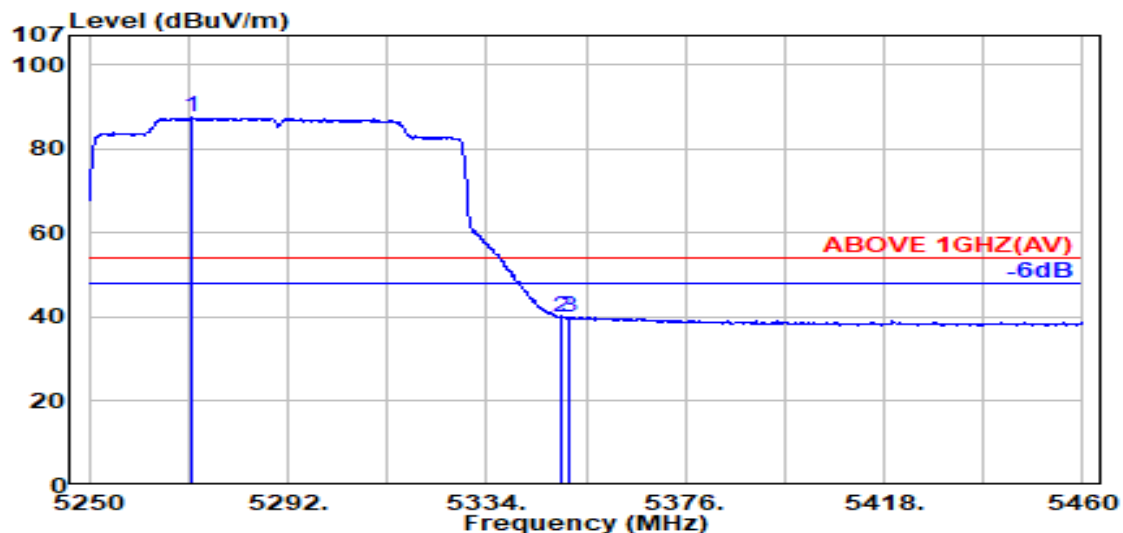


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.700	33.93	8.62	34.24	79.14	87.44	---	---	Average
5350.000	33.90	8.67	34.22	31.65	40.00	54.00	14.00	Average
5351.400	33.91	8.67	34.22	31.68	40.03	54.00	13.97	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

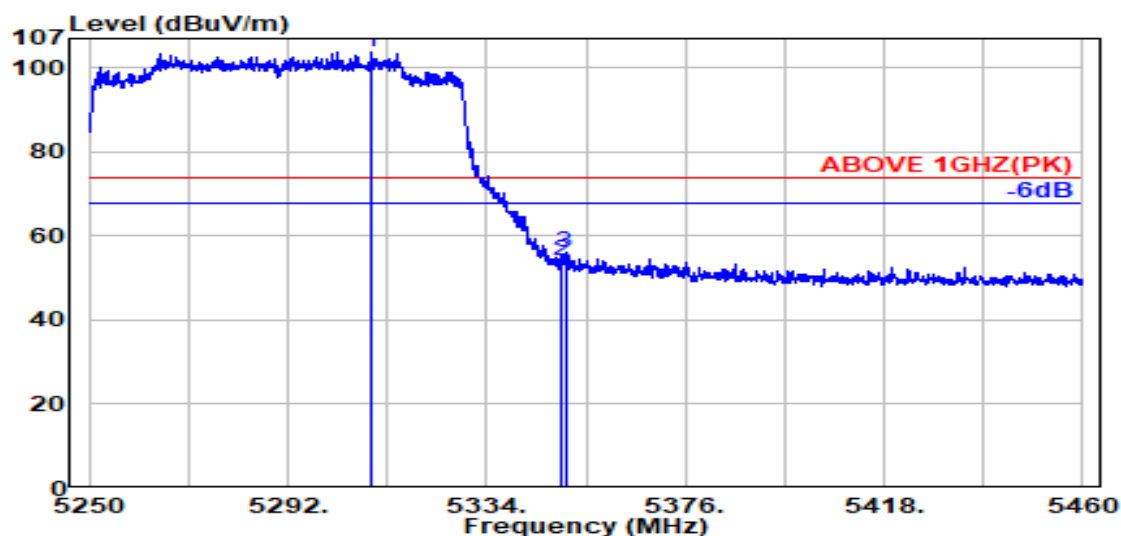

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.800	34.06	8.64	34.23	95.43	103.91	---	---	Peak
5350.000	33.90	8.67	34.22	45.88	54.23	74.00	19.77	Peak
5350.600	33.90	8.67	34.22	47.62	55.98	74.00	18.02	Peak

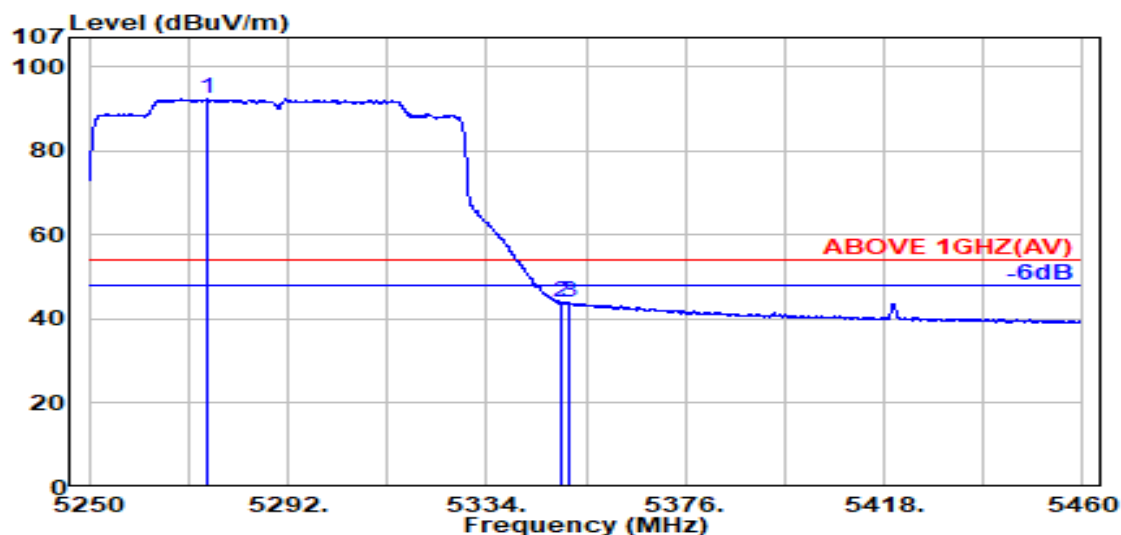


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.000	33.95	8.62	34.24	84.10	92.43	---	---	Average
5350.000	33.90	8.67	34.22	35.59	43.94	54.00	10.06	Average
5351.500	33.91	8.67	34.22	35.76	44.11	54.00	9.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

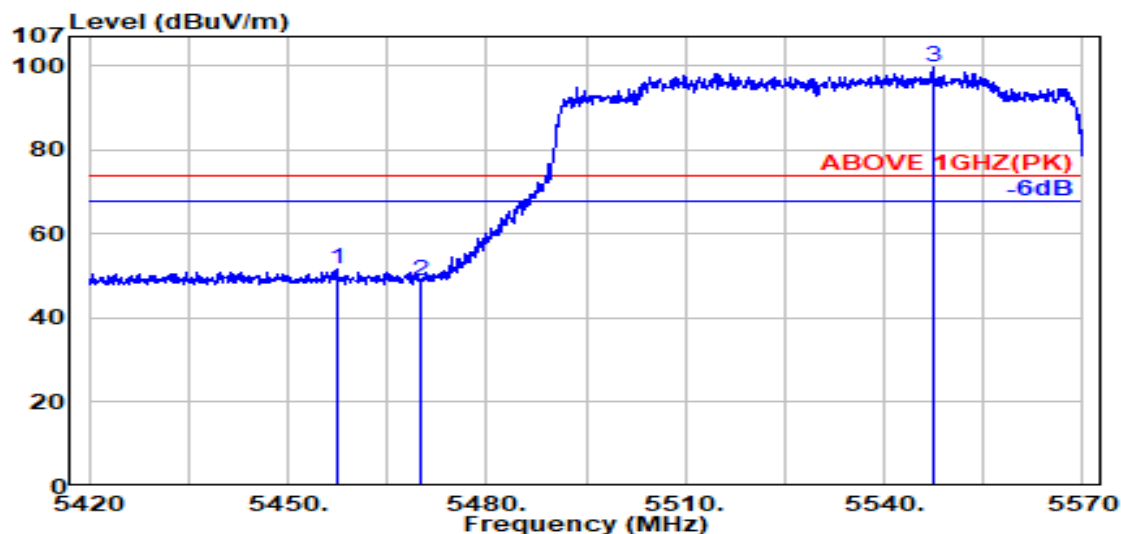

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.300	34.19	8.73	34.18	42.82	51.55	74.00	22.45	Peak
5470.000	34.16	8.74	34.18	39.99	48.71	74.00	25.29	Peak
@ 5547.400	34.10	8.78	34.19	91.16	99.85	---	---	Peak

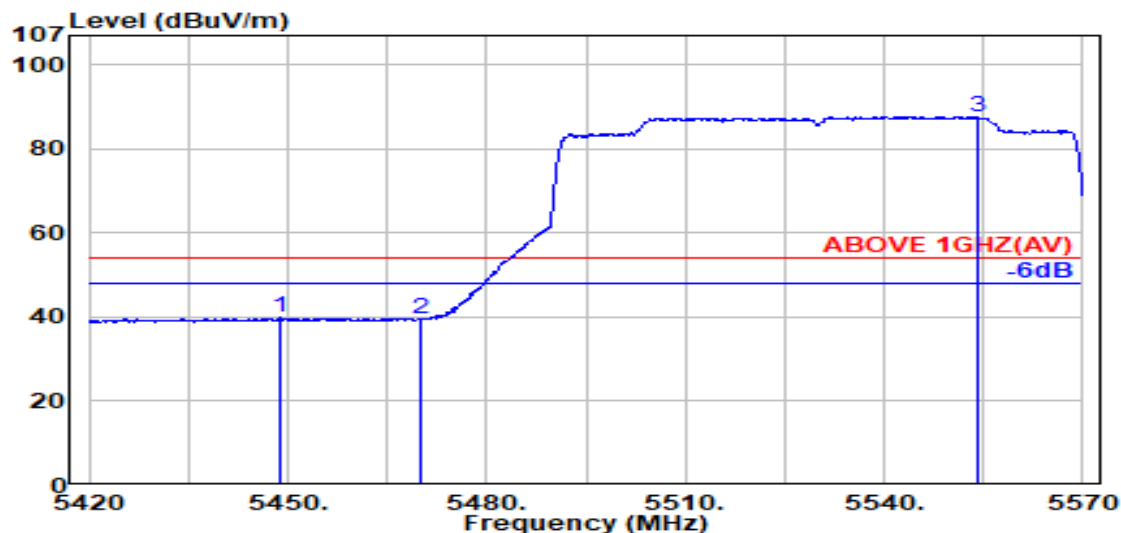


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.700	34.20	8.72	34.19	31.04	39.78	54.00	14.22	Average
5470.000	34.16	8.74	34.18	30.82	39.54	54.00	14.46	Average
@ 5554.200	34.09	8.78	34.20	79.11	87.79	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

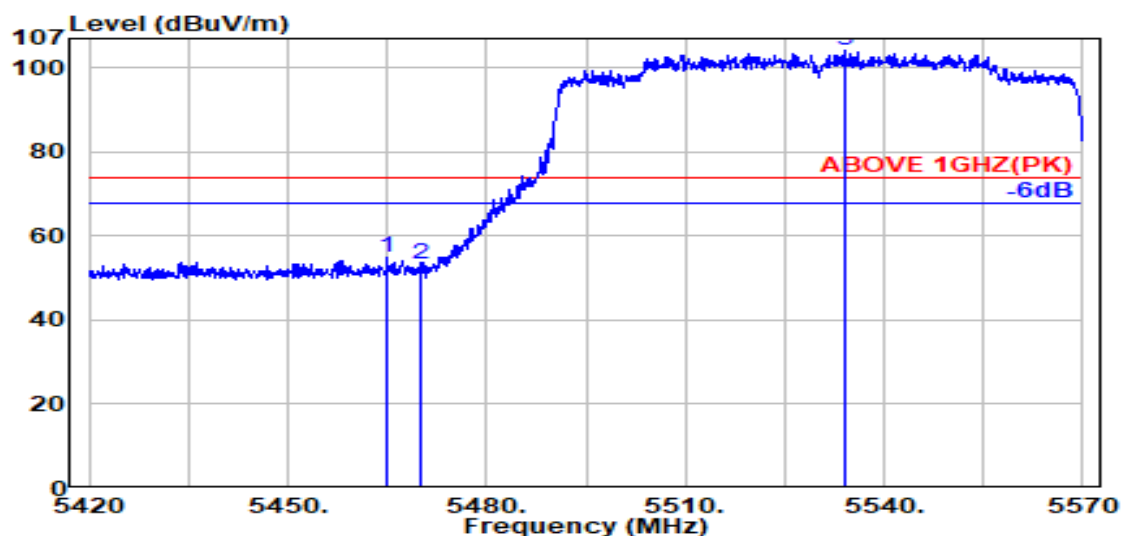

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.17	8.73	34.18	46.20	54.92	74.00	19.08	Peak
5470.000	34.16	8.74	34.18	44.51	53.23	74.00	20.77	Peak
@ 5534.000	34.10	8.77	34.19	95.44	104.12	---	---	Peak

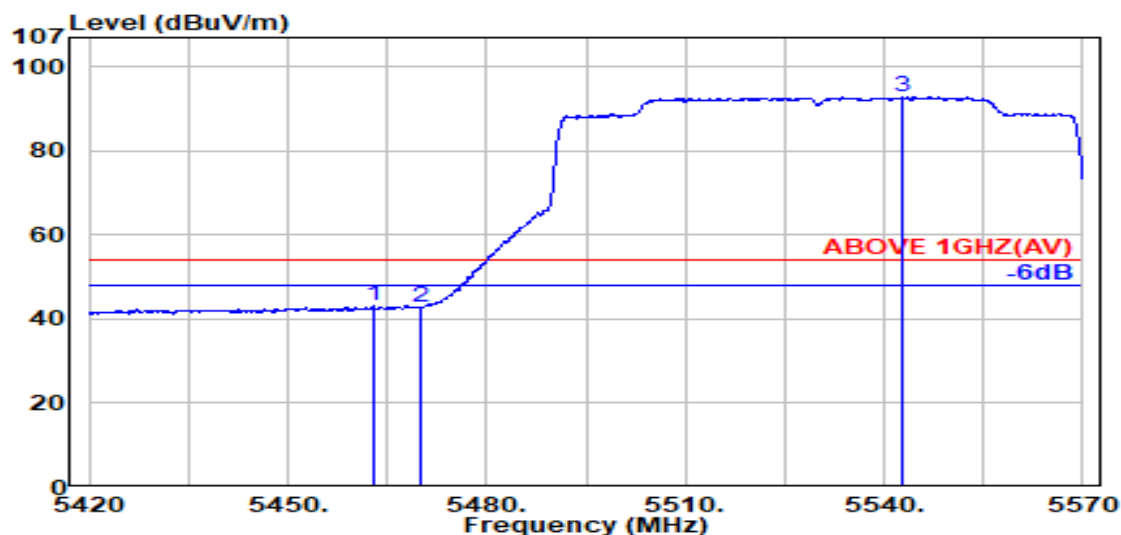


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	34.17	8.73	34.18	34.40	43.12	54.00	10.88	Average
5470.000	34.16	8.74	34.18	34.09	42.81	54.00	11.19	Average
@ 5542.700	34.10	8.78	34.19	84.17	92.86	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

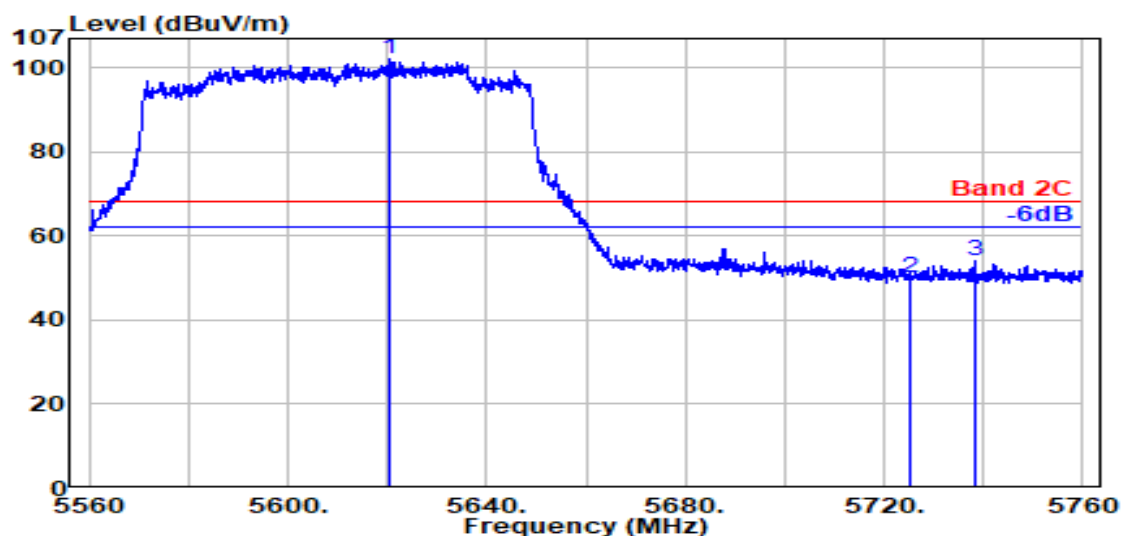

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5620.700	34.00	8.82	34.23	93.37	101.96	---	---	Peak
	5725.000	33.80	8.88	34.28	41.51	49.92	68.20	18.28	Peak
	5738.100	33.80	8.89	34.28	45.60	54.01	68.20	14.19	Peak

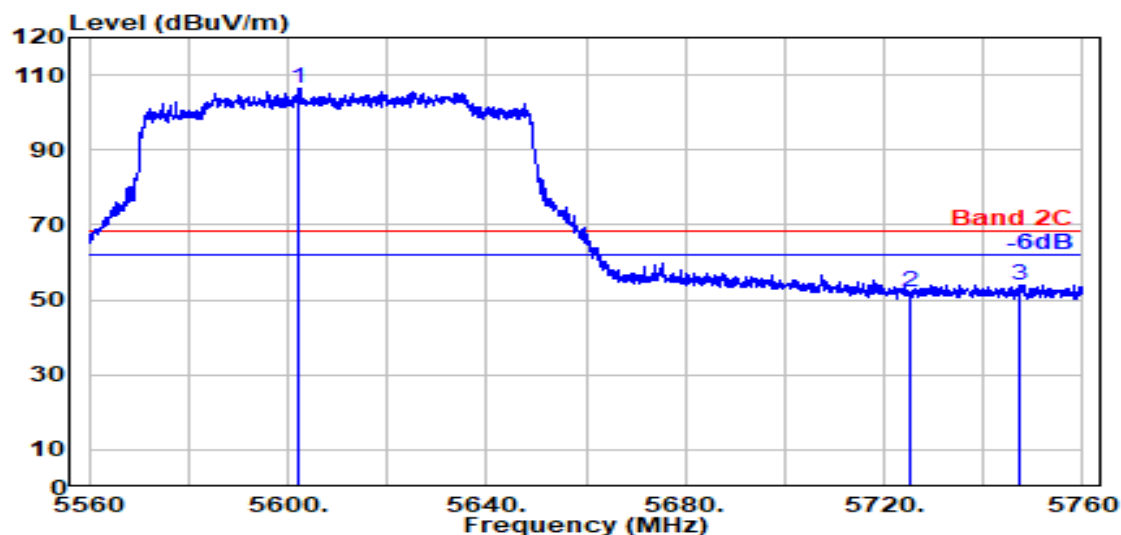


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5602.300	34.00	8.81	34.22	98.04	106.64	---	---	Peak
	5725.000	33.80	8.88	34.28	43.72	52.12	68.20	16.08	Peak
	5747.400	33.80	8.89	34.29	45.65	54.06	68.20	14.14	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

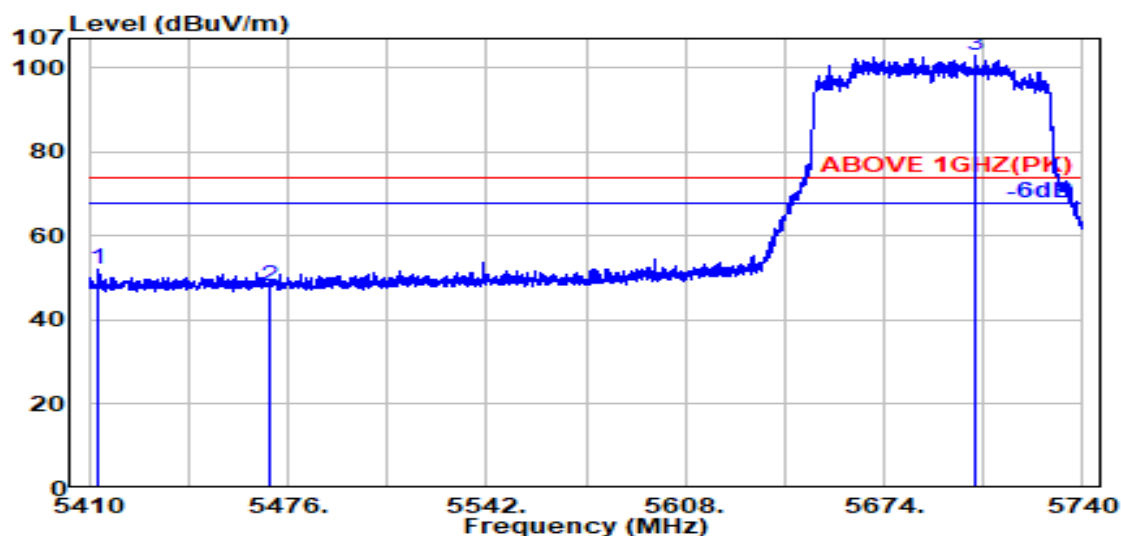

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.700	34.13	8.70	34.20	43.51	52.14	74.00	21.86	Peak
5470.000	34.16	8.74	34.18	39.47	48.18	74.00	25.82	Peak
@ 5704.300	33.80	8.87	34.27	94.44	102.85	---	---	Peak

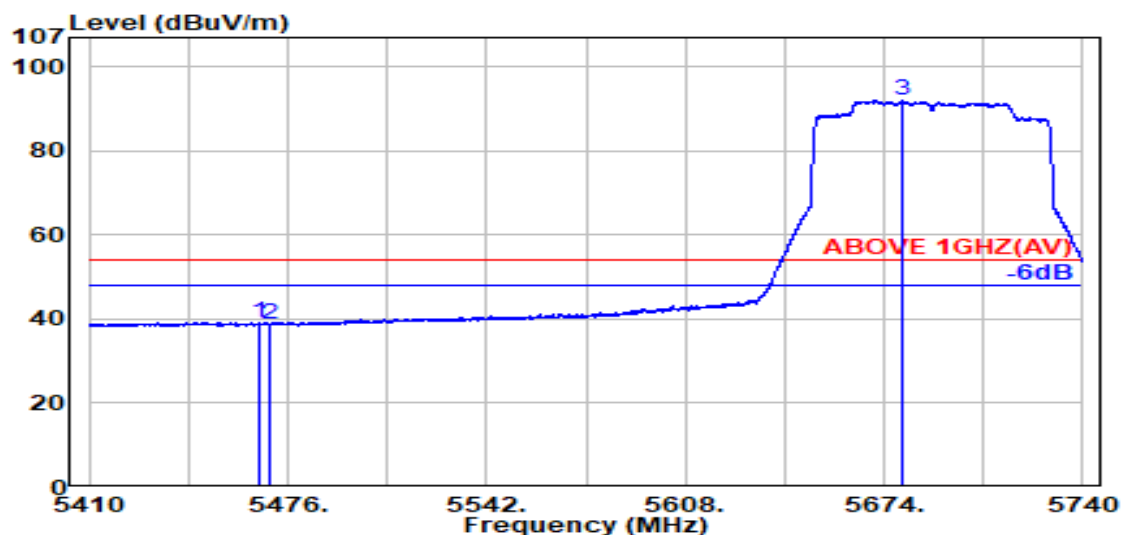


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.17	8.73	34.18	30.45	39.17	54.00	14.83	Average
5470.000	34.16	8.74	34.18	30.01	38.73	54.00	15.27	Average
@ 5680.000	33.88	8.86	34.26	83.44	91.92	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

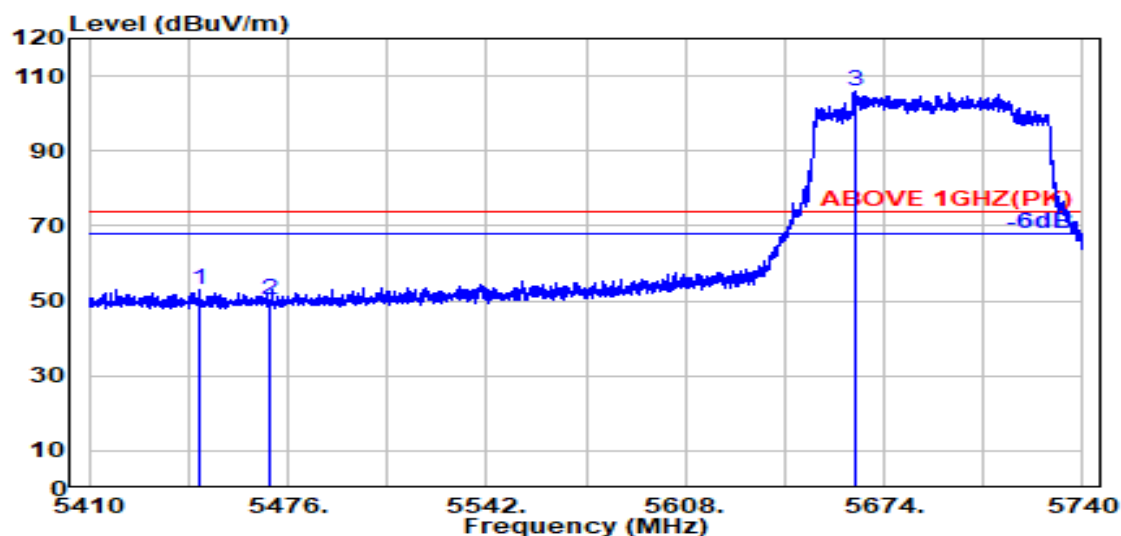

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.500	34.19	8.72	34.19	44.23	52.96	74.00	21.04	Peak
5470.000	34.16	8.74	34.18	41.43	50.15	74.00	23.85	Peak
@ 5664.100	33.94	8.85	34.25	97.21	105.76	---	---	Peak

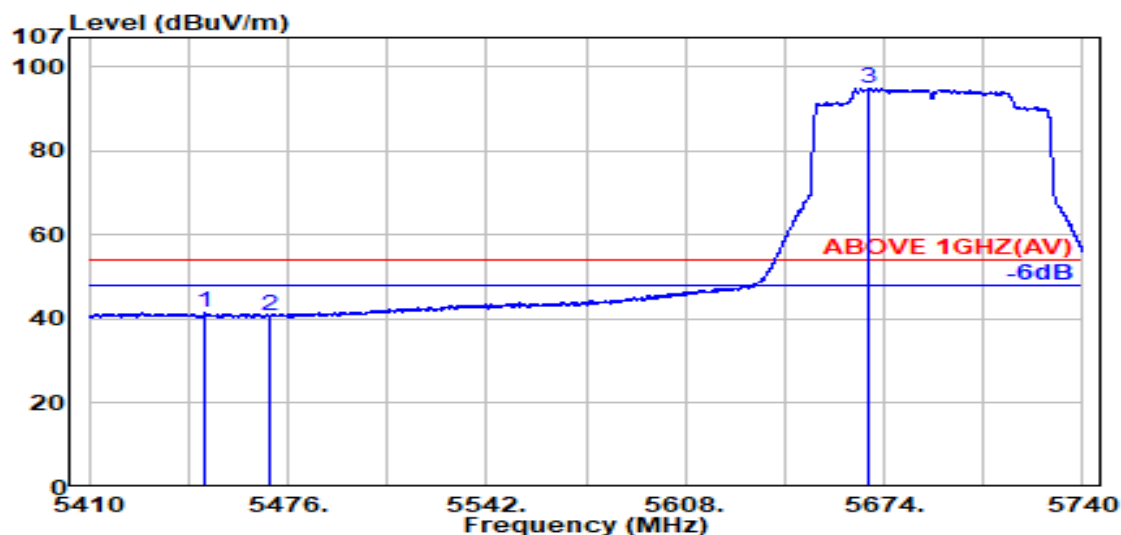


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.400	34.20	8.72	34.19	32.70	41.44	54.00	12.56	Average
5470.000	34.16	8.74	34.18	32.07	40.78	54.00	13.22	Average
@ 5669.000	33.92	8.85	34.25	86.32	94.85	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

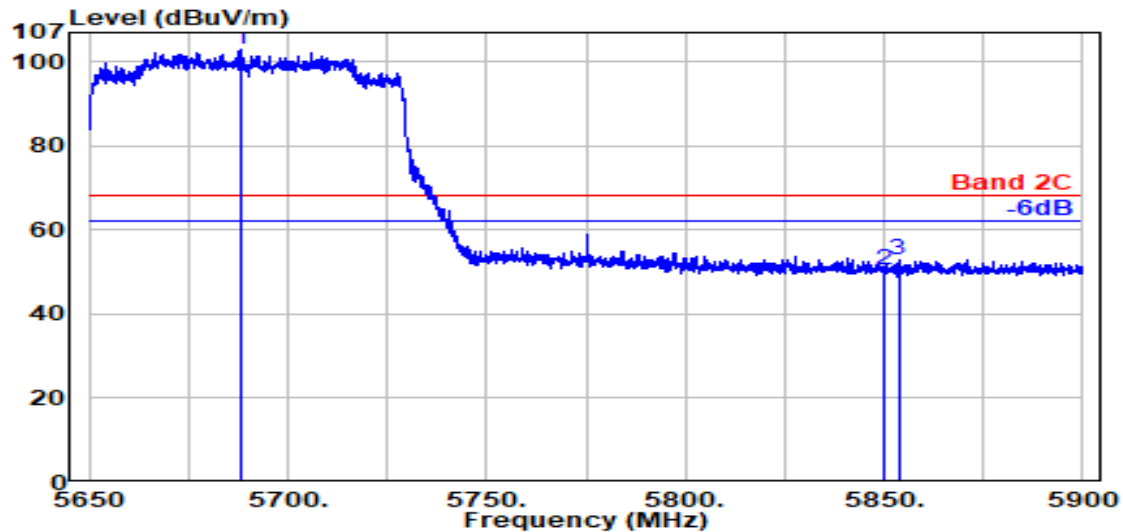

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.500	33.85	8.86	34.26	94.61	103.06	---	---	Peak
5850.000	34.10	8.95	34.33	41.56	50.27	68.20	17.93	Peak
5853.600	34.10	8.95	34.33	44.07	52.79	68.20	15.41	Peak

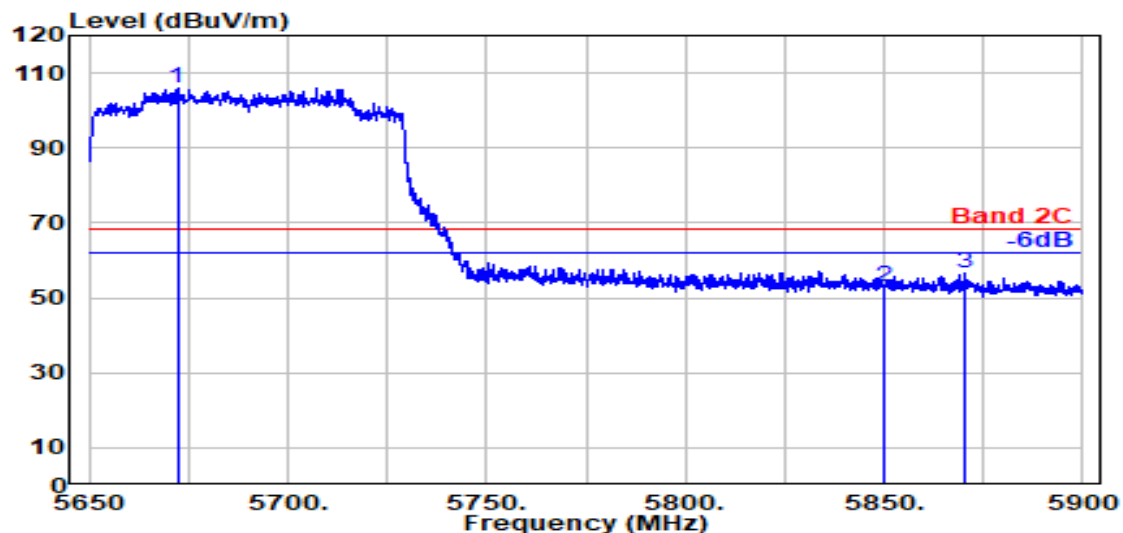


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.200	33.91	8.85	34.25	97.41	105.92	---	---	Peak
5850.000	34.10	8.95	34.33	44.26	52.98	68.20	15.22	Peak
5870.400	34.10	8.96	34.34	48.03	56.75	68.20	11.45	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

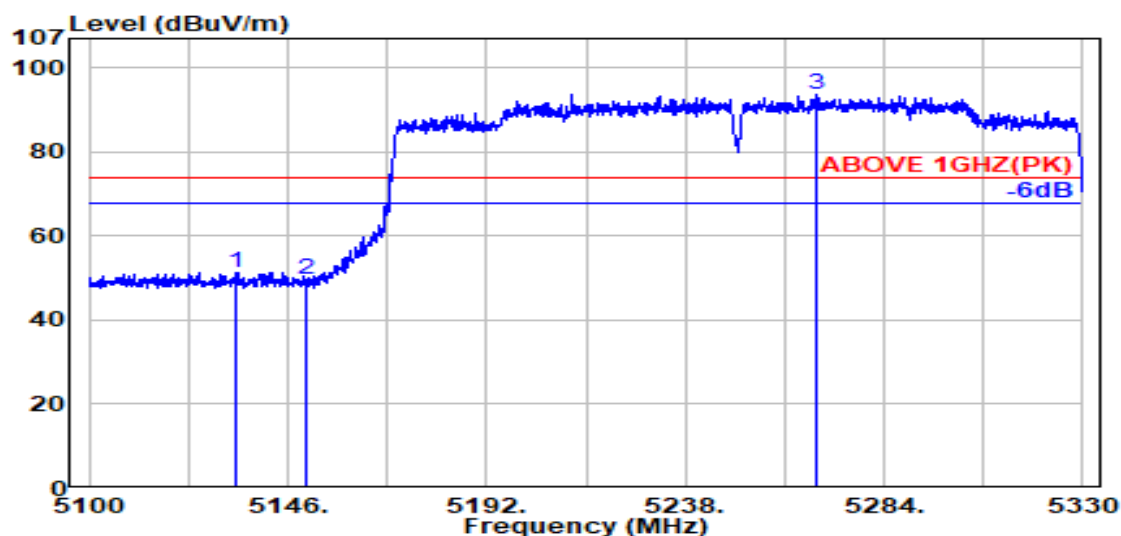

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.200	33.70	8.53	34.29	43.37	51.32	74.00	22.68	Peak
5150.000	33.70	8.54	34.28	41.70	49.66	74.00	24.34	Peak
@ 5268.200	33.91	8.62	34.24	85.40	93.69	---	---	Peak

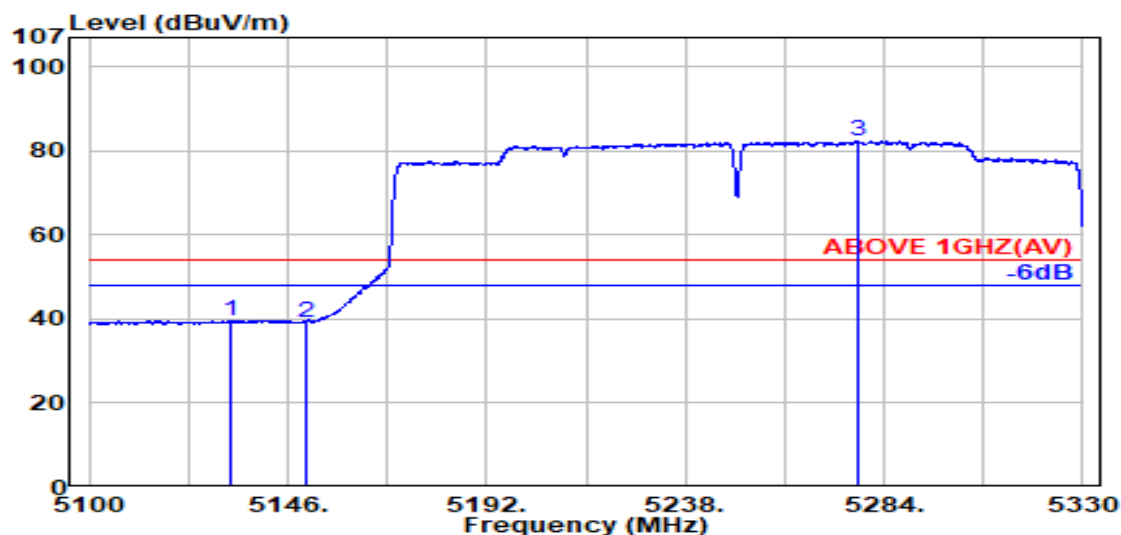


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.500	33.70	8.53	34.29	31.80	39.74	54.00	14.26	Average
5150.000	33.70	8.54	34.28	31.18	39.15	54.00	14.85	Average
@ 5277.900	33.97	8.62	34.24	74.06	82.41	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

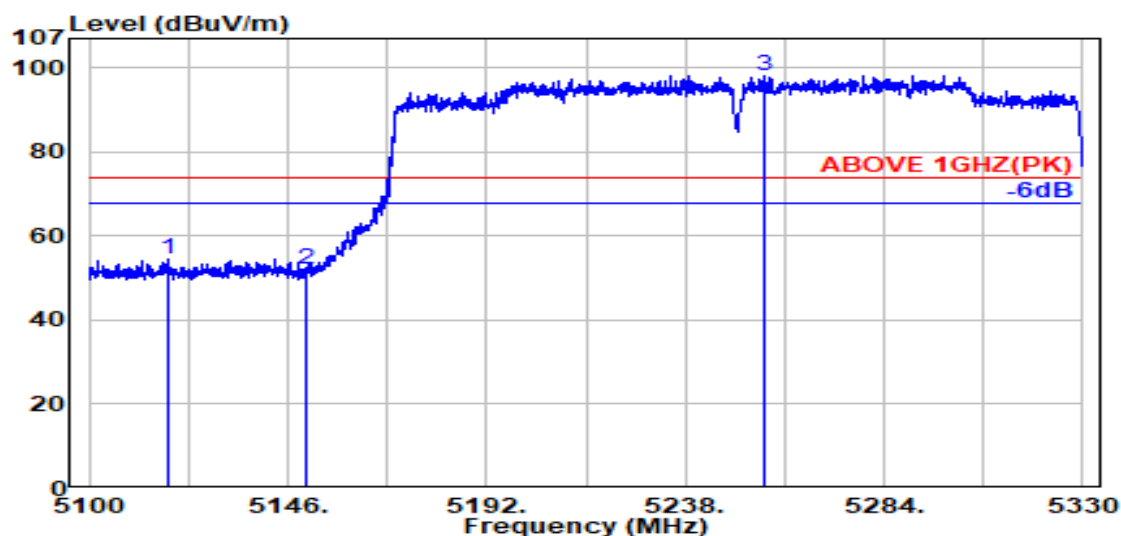

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5118.200	33.70	8.52	34.29	46.57	54.51	74.00	19.49	Peak
5150.000	33.70	8.54	34.28	43.94	51.90	74.00	22.10	Peak
@ 5256.400	33.84	8.61	34.25	90.03	98.23	---	---	Peak

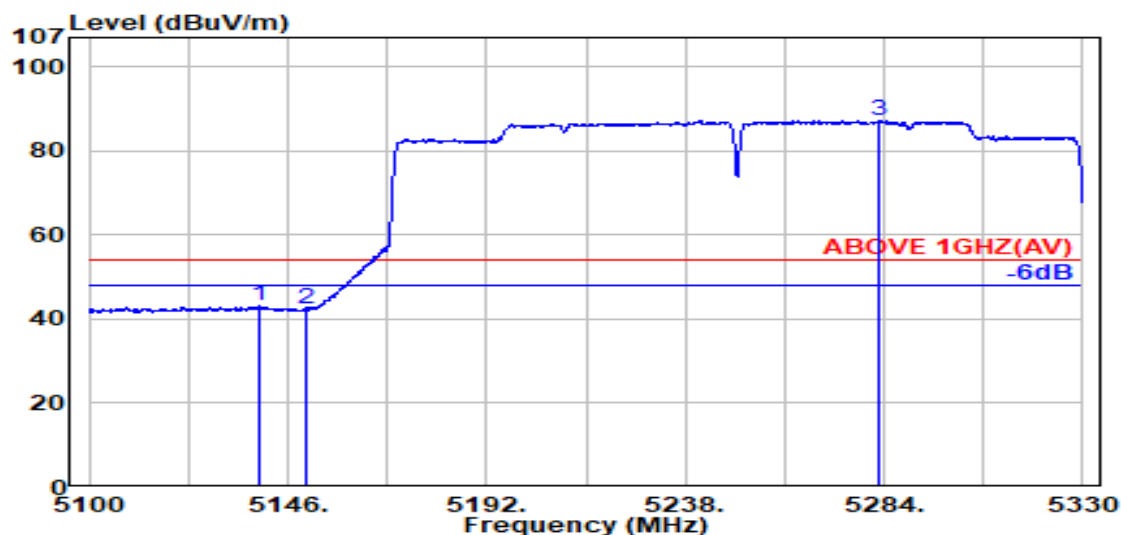


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.300	33.70	8.54	34.28	35.08	43.04	54.00	10.96	Average
5150.000	33.70	8.54	34.28	34.25	42.22	54.00	11.78	Average
@ 5283.000	34.00	8.63	34.24	78.98	87.37	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

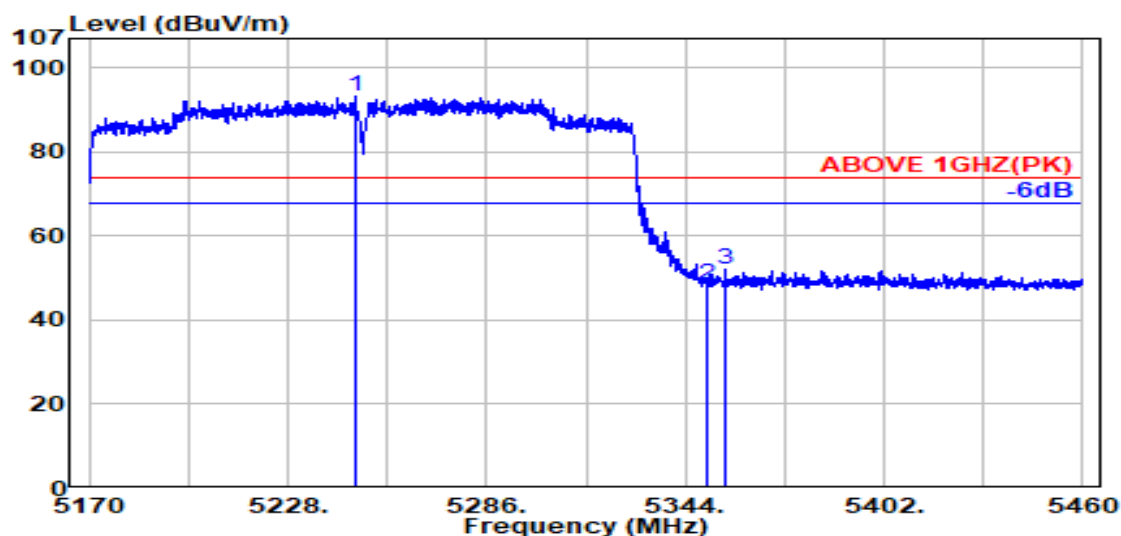

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5247.700	33.80	8.60	34.25	84.95	93.10	---	---	Peak
5350.000	33.90	8.67	34.22	40.20	48.55	74.00	25.45	Peak
5355.500	33.92	8.67	34.21	43.87	52.24	74.00	21.76	Peak

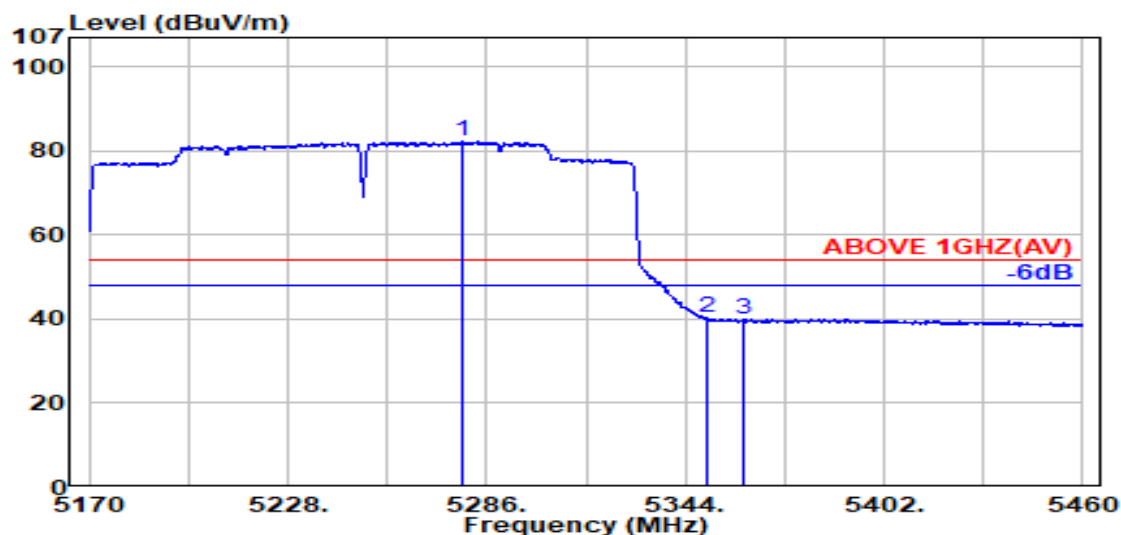


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.200	33.98	8.62	34.24	73.86	82.22	---	---	Average
5350.000	33.90	8.67	34.22	31.98	40.32	54.00	13.68	Average
5361.000	33.94	8.67	34.21	31.74	40.14	54.00	13.86	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

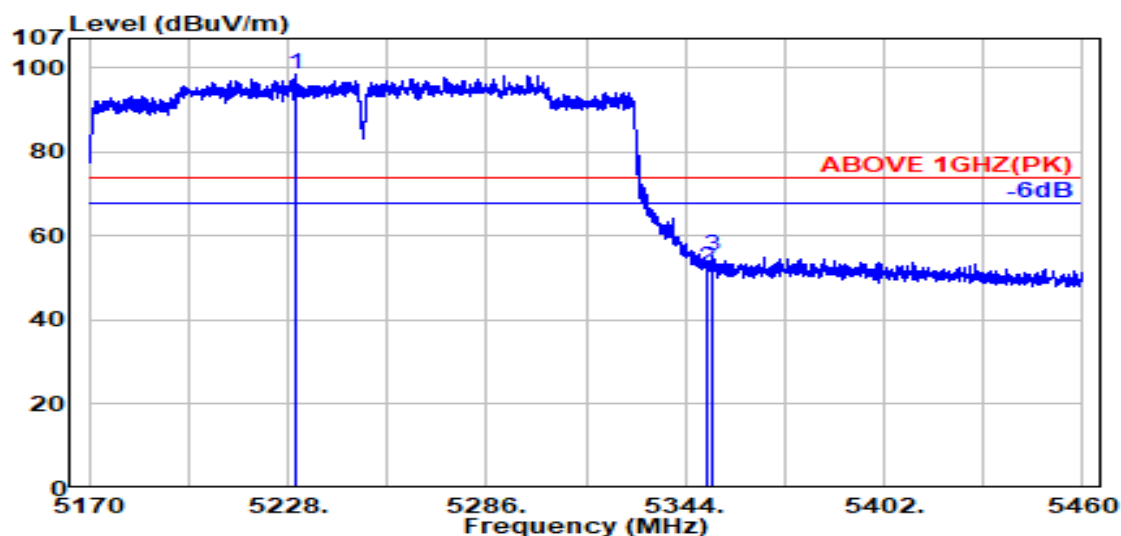

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5230.200	33.76	8.59	34.25	90.44	98.54	---	---	Peak
5350.000	33.90	8.67	34.22	44.33	52.68	74.00	21.32	Peak
5351.800	33.91	8.67	34.22	47.06	55.42	74.00	18.58	Peak

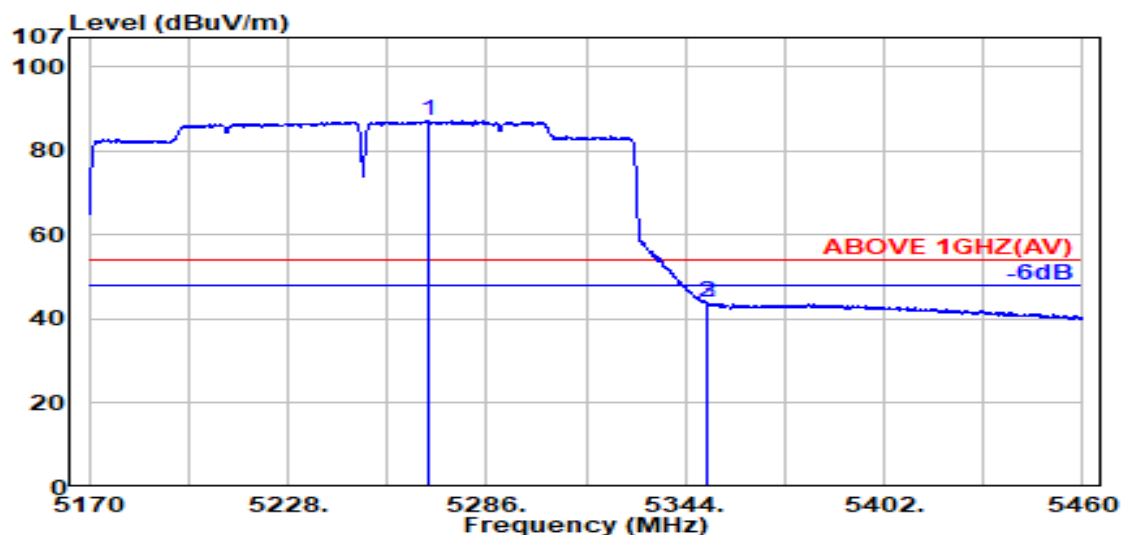


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.400	33.92	8.62	34.24	78.89	87.18	---	---	Average
5350.000	33.90	8.67	34.22	35.54	43.89	54.00	10.11	Average
5350.500	33.90	8.67	34.22	35.58	43.93	54.00	10.07	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

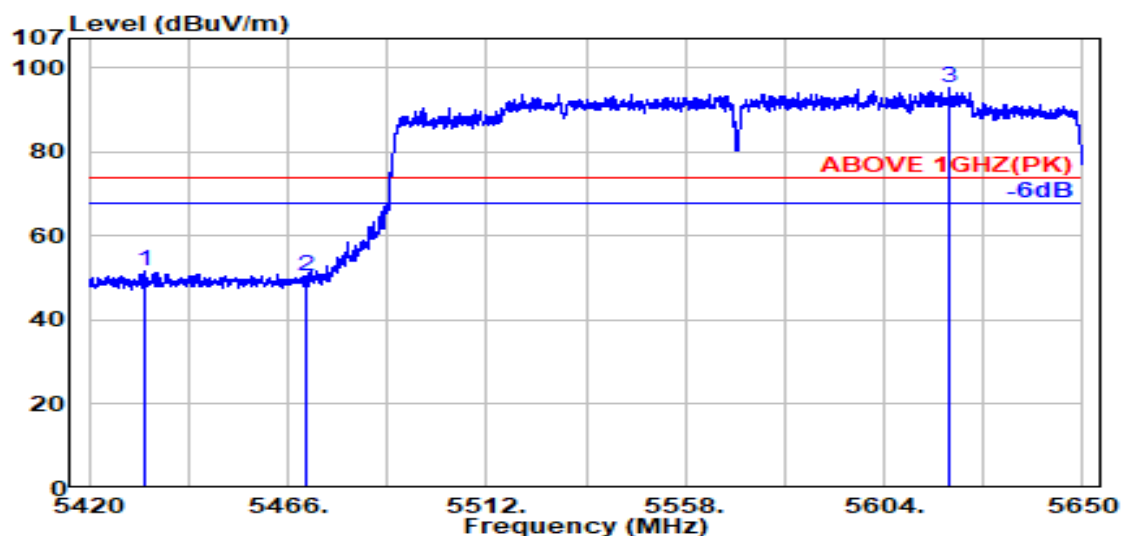

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.600	34.17	8.71	34.19	42.96	51.65	74.00	22.35	Peak
5470.000	34.16	8.74	34.18	41.71	50.43	74.00	23.57	Peak
@ 5619.300	34.00	8.82	34.23	86.71	95.30	---	---	Peak

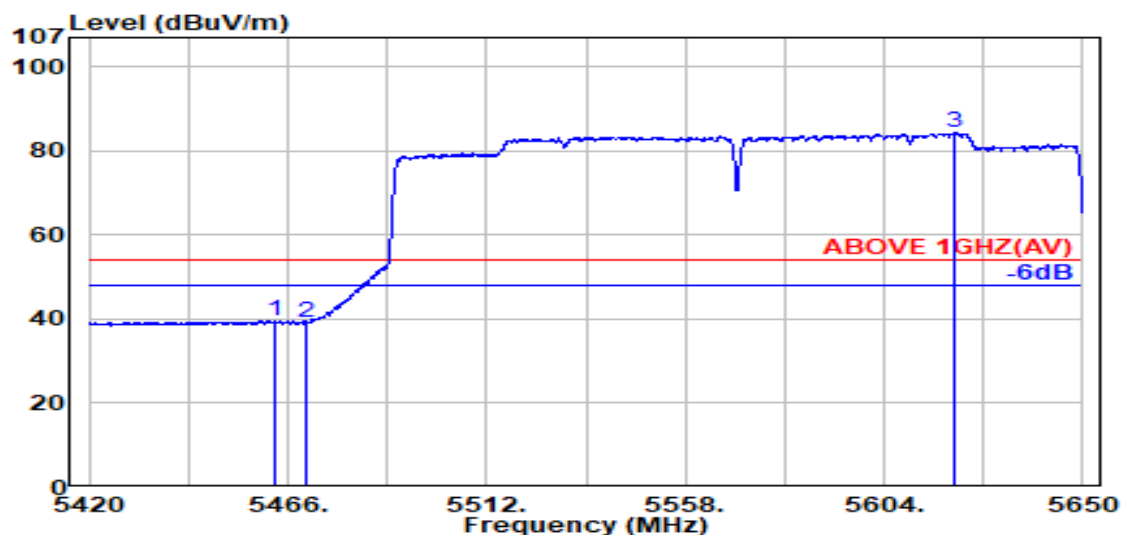


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.000	34.17	8.73	34.18	30.91	39.64	54.00	14.36	Average
5470.000	34.16	8.74	34.18	30.56	39.28	54.00	14.72	Average
@ 5620.300	34.00	8.82	34.23	75.85	84.44	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

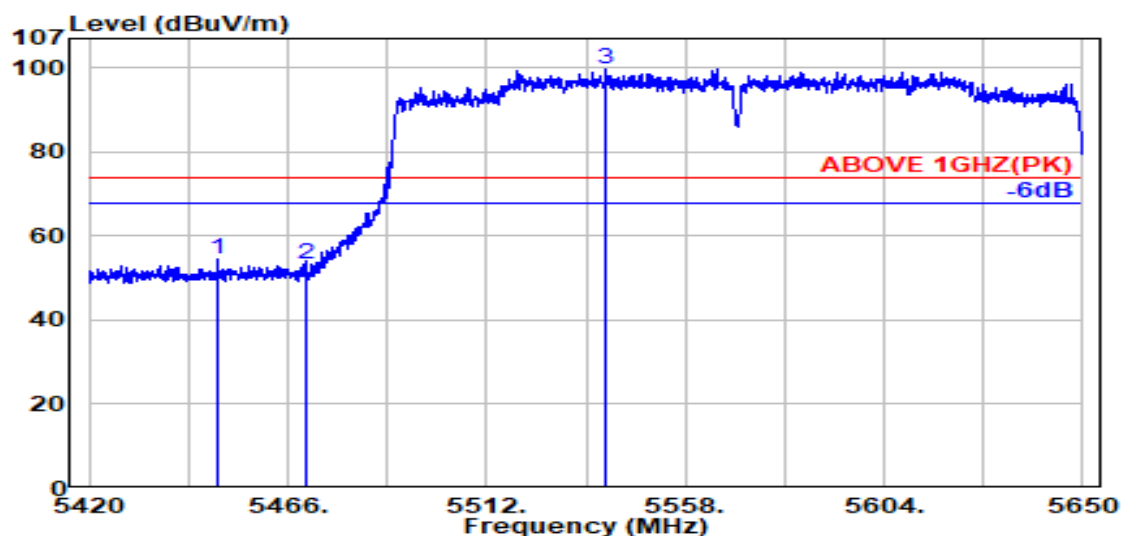

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.700	34.20	8.72	34.19	45.70	54.43	74.00	19.57	Peak
5470.000	34.16	8.74	34.18	44.51	53.22	74.00	20.78	Peak
@ 5539.600	34.10	8.78	34.19	91.15	99.84	---	---	Peak

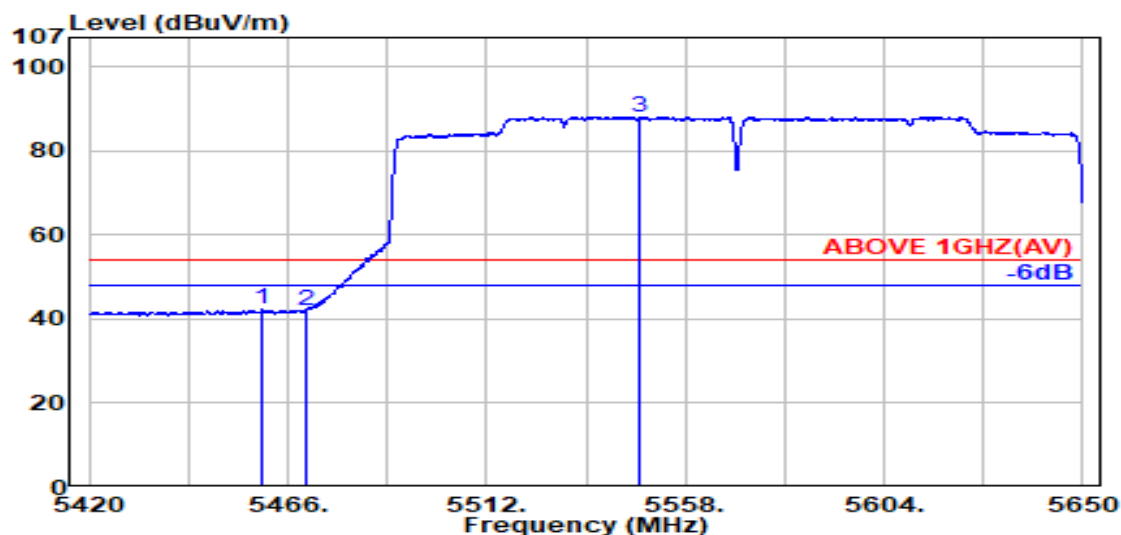


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	34.18	8.73	34.18	33.48	42.21	54.00	11.79	Average
5470.000	34.16	8.74	34.18	33.44	42.16	54.00	11.84	Average
@ 5547.600	34.10	8.78	34.19	79.51	88.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

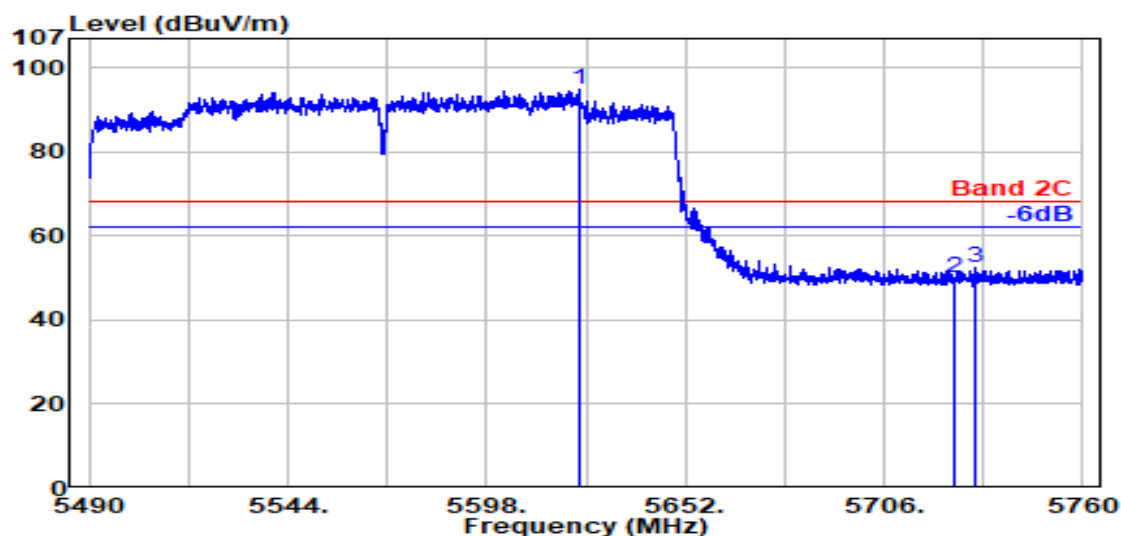

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.300	34.00	8.82	34.23	86.28	94.88	---	---	Peak
5725.000	33.80	8.88	34.28	41.69	50.10	68.20	18.10	Peak
5730.600	33.80	8.88	34.28	43.98	52.39	68.20	15.81	Peak

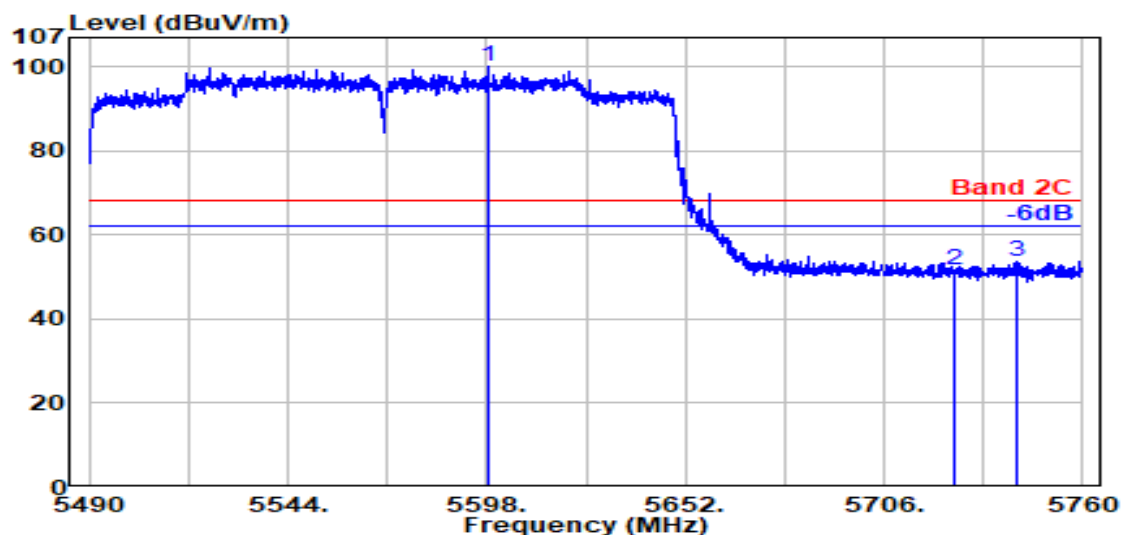


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5598.600	34.00	8.81	34.22	91.35	99.95	---	---	Peak
5725.000	33.80	8.88	34.28	43.44	51.85	68.20	16.35	Peak
5742.300	33.80	8.89	34.28	45.23	53.64	68.20	14.56	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

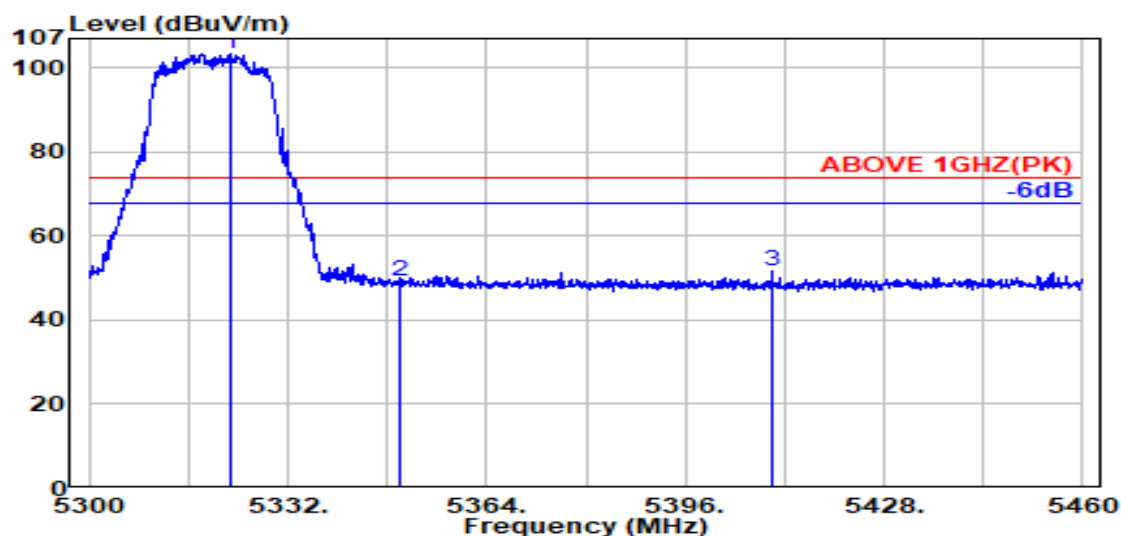

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.600	34.01	8.65	34.23	94.86	103.29	---	---	Peak
5350.000	33.90	8.67	34.22	40.74	49.09	74.00	24.91	Peak
5410.000	34.12	8.70	34.20	42.87	51.50	74.00	22.50	Peak

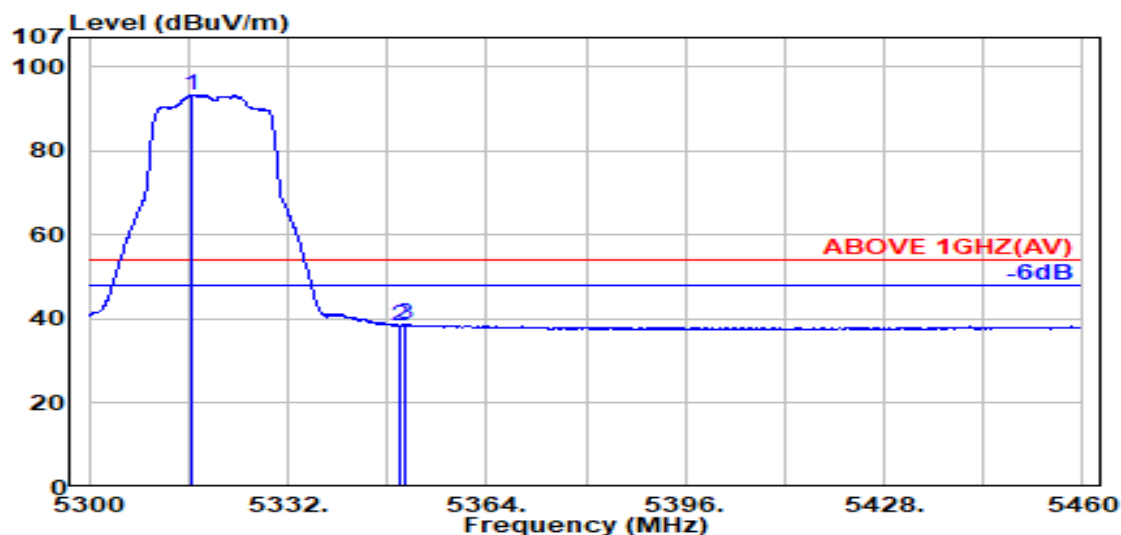


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.400	34.03	8.65	34.23	84.85	93.31	---	---	Average
5350.000	33.90	8.67	34.22	30.19	38.54	54.00	15.46	Average
5351.000	33.90	8.67	34.22	30.33	38.68	54.00	15.32	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

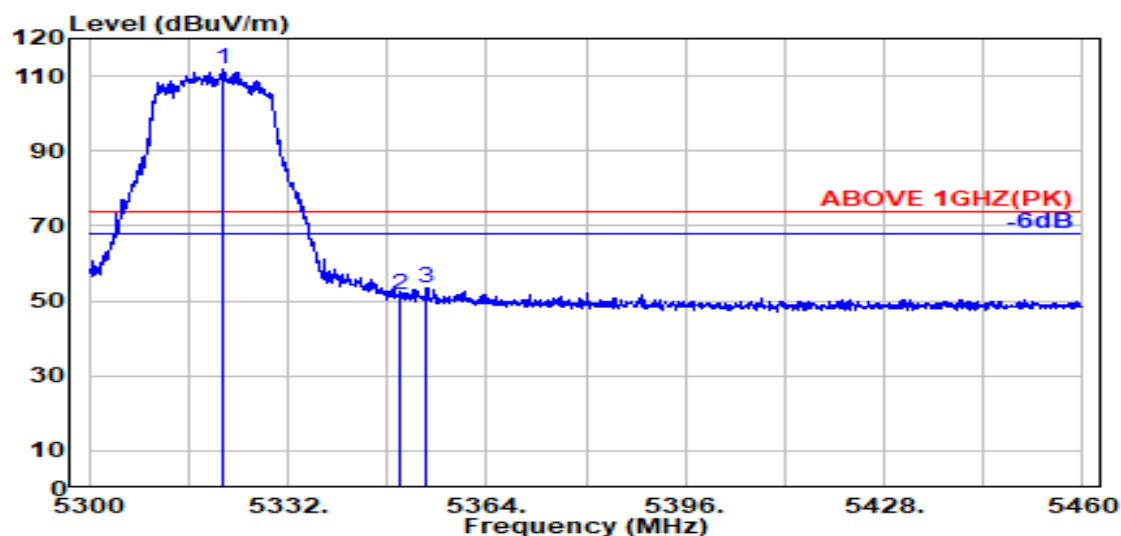

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	34.01	8.65	34.23	103.28	111.72	---	---	Peak
5350.000	33.90	8.67	34.22	43.38	51.72	74.00	22.28	Peak
5354.400	33.92	8.67	34.22	45.22	53.59	74.00	20.41	Peak

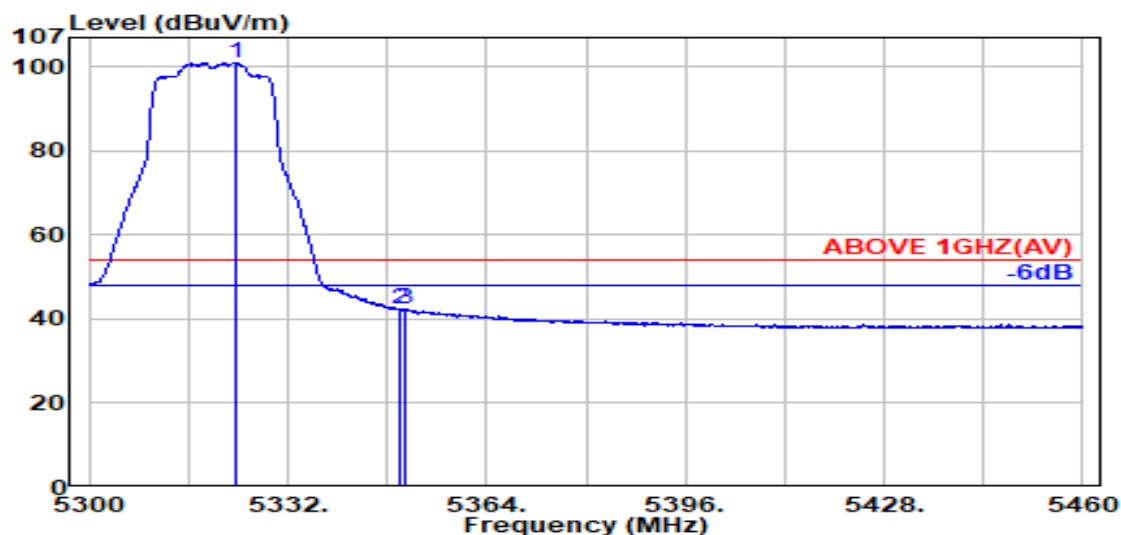


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.22	92.66	101.09	---	---	Average
5350.000	33.90	8.67	34.22	33.89	42.24	54.00	11.76	Average
5350.700	33.90	8.67	34.22	33.99	42.34	54.00	11.66	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

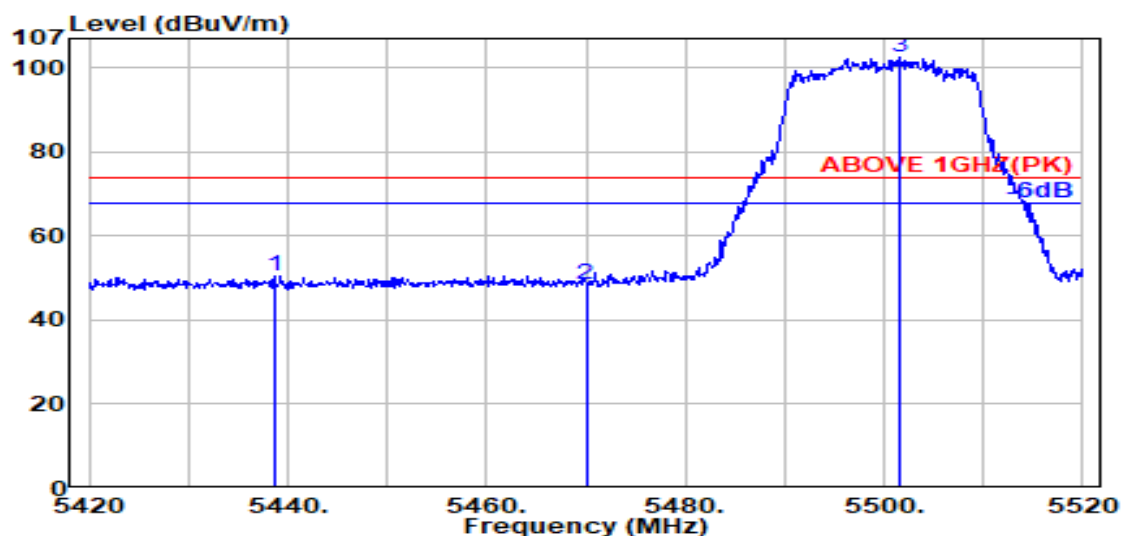

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.600	34.18	8.72	34.19	41.92	50.63	74.00	23.37	Peak
5470.000	34.16	8.74	34.18	39.58	48.30	74.00	25.70	Peak
@ 5501.500	34.10	8.75	34.17	93.79	102.47	---	---	Peak

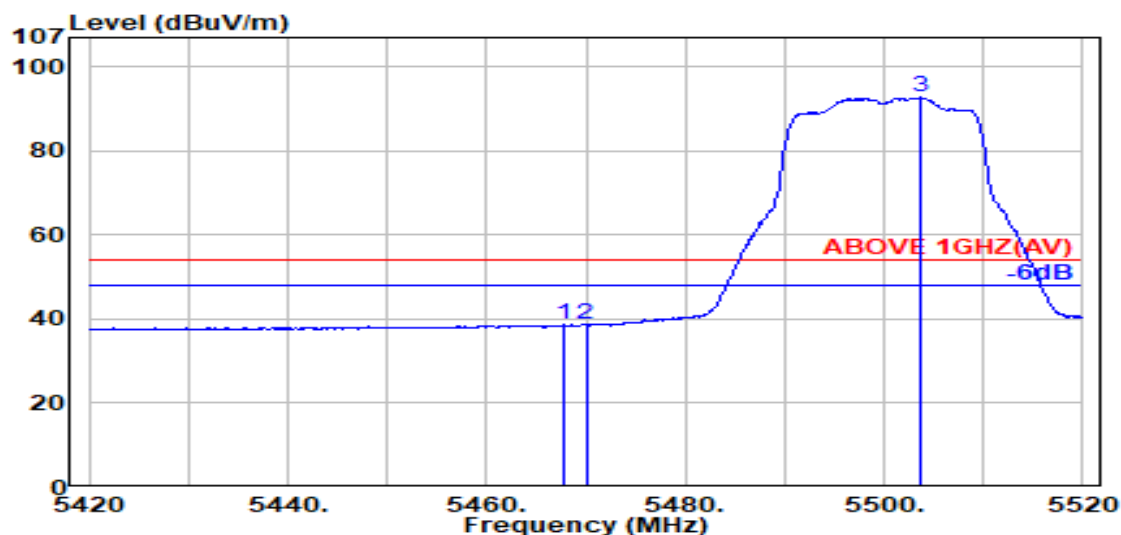


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	30.05	38.77	54.00	15.23	Average
5470.000	34.16	8.74	34.18	30.00	38.72	54.00	15.28	Average
@ 5503.600	34.10	8.76	34.17	84.05	92.73	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

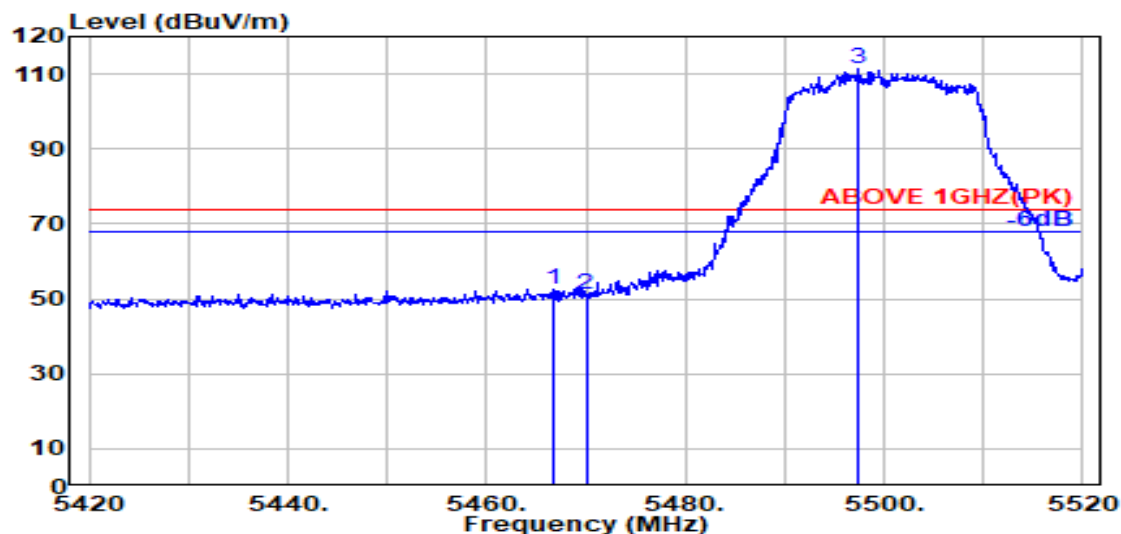

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.17	8.73	34.18	43.83	52.55	74.00	21.45	Peak
5470.000	34.16	8.74	34.18	42.56	51.28	74.00	22.72	Peak
@ 5497.400	34.11	8.75	34.17	102.80	111.49	---	---	Peak

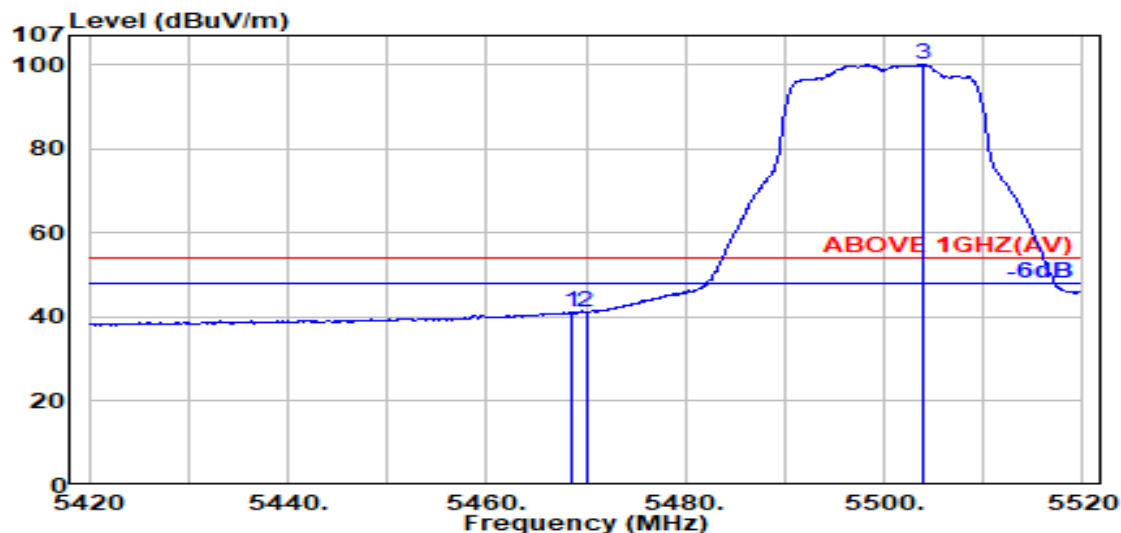


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	32.57	41.28	54.00	12.72	Average
5470.000	34.16	8.74	34.18	32.52	41.24	54.00	12.76	Average
@ 5504.000	34.10	8.76	34.17	91.52	100.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

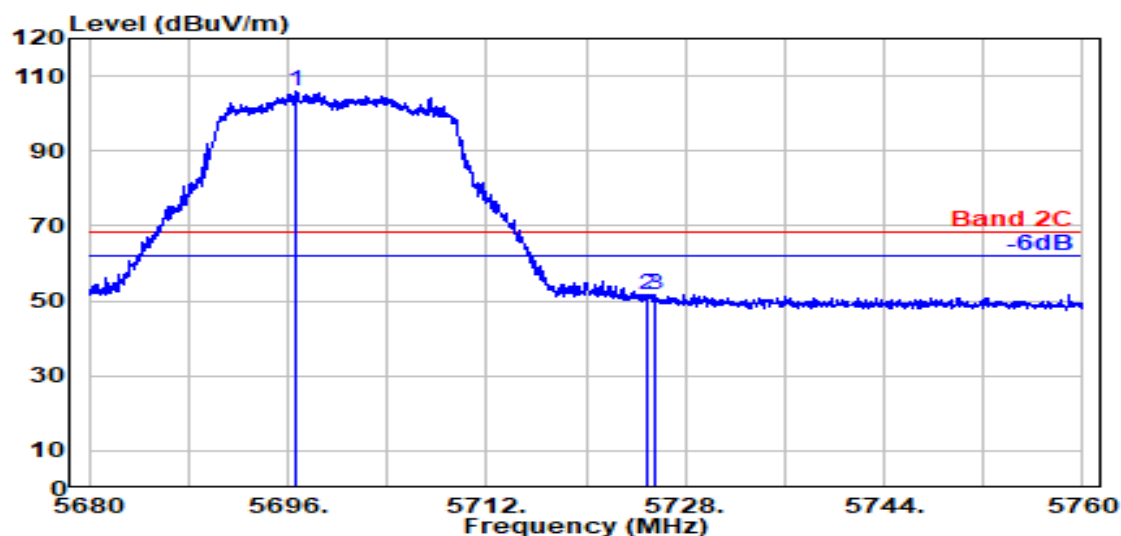

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.700	33.81	8.86	34.26	97.60	106.02	---	---	Peak
5725.000	33.80	8.88	34.28	43.10	51.50	68.20	16.70	Peak
5725.600	33.80	8.88	34.28	43.34	51.74	68.20	16.46	Peak

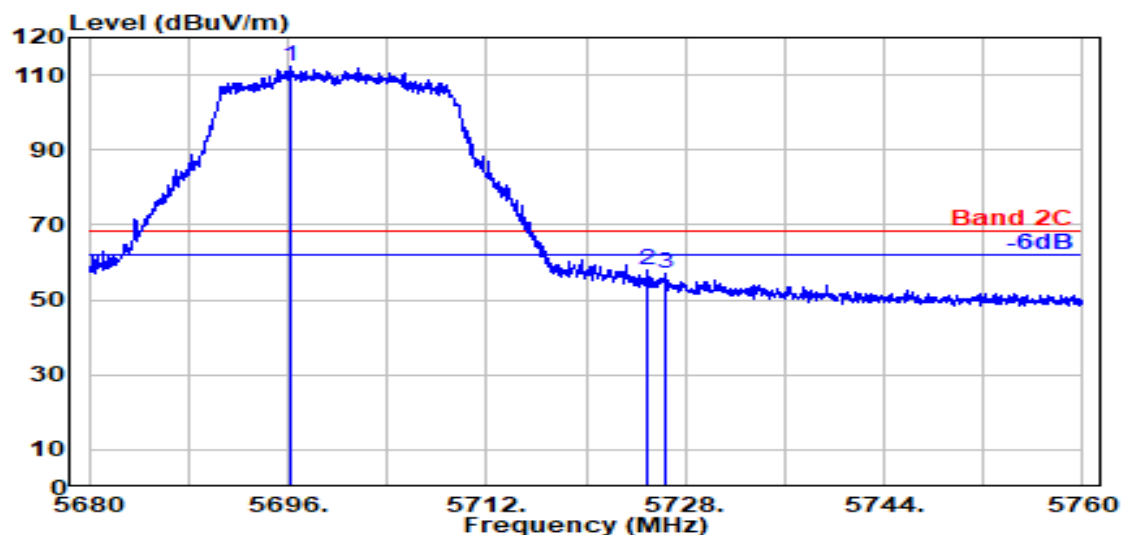


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.150	33.82	8.86	34.26	103.80	112.22	---	---	Peak
5725.000	33.80	8.88	34.28	49.38	57.78	68.20	10.42	Peak
5726.400	33.80	8.88	34.28	48.61	57.02	68.20	11.18	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

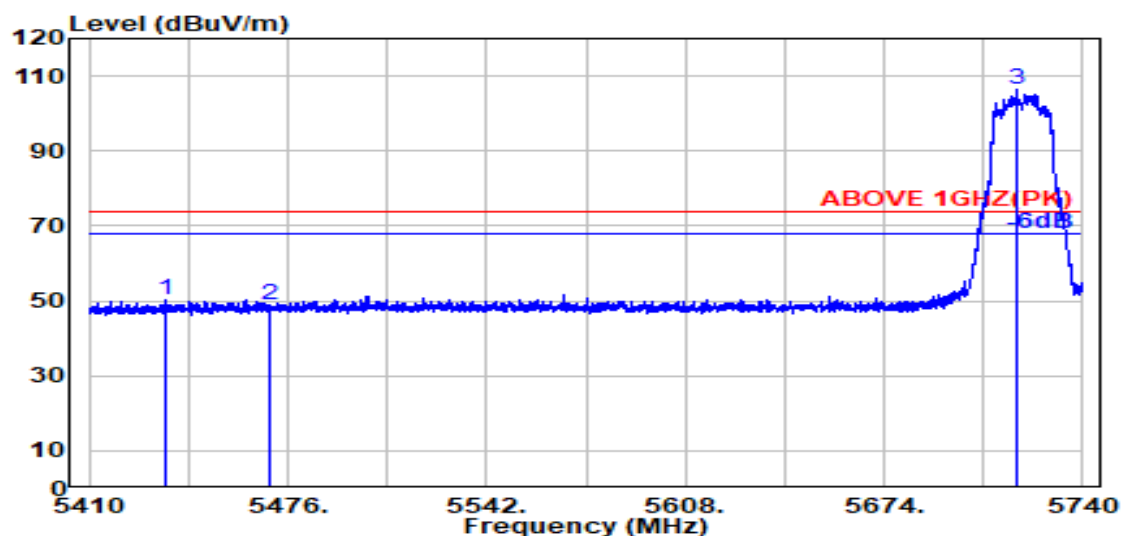

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.600	34.17	8.72	34.19	41.57	50.27	74.00	23.73	Peak
5470.000	34.16	8.74	34.18	40.03	48.75	74.00	25.25	Peak
@ 5718.400	33.80	8.88	34.27	98.03	106.44	---	---	Peak

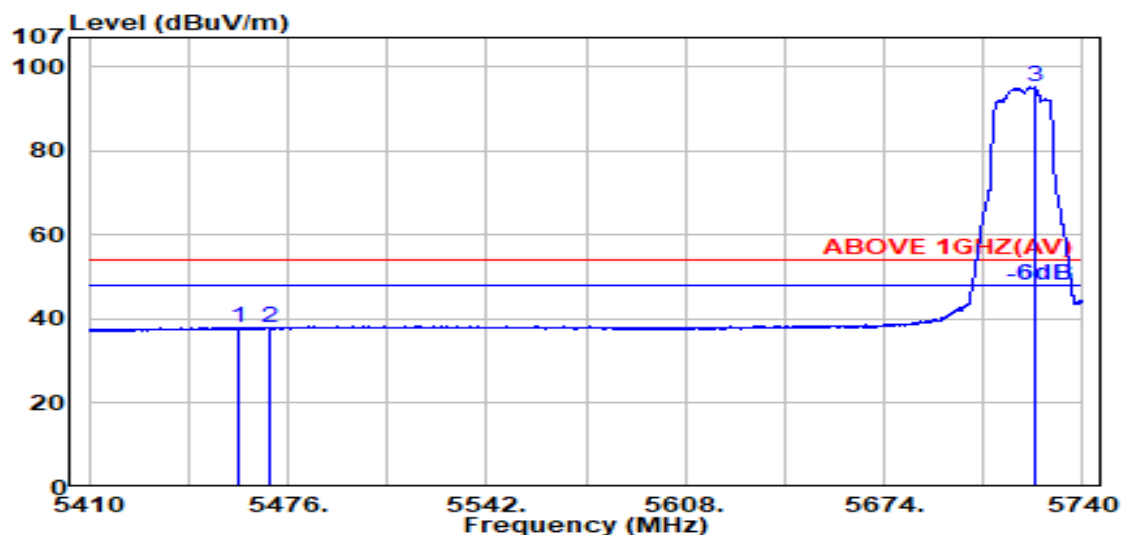


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.18	8.73	34.18	29.28	38.01	54.00	15.99	Average
5470.000	34.16	8.74	34.18	29.18	37.90	54.00	16.10	Average
@ 5723.900	33.80	8.88	34.28	86.92	95.33	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

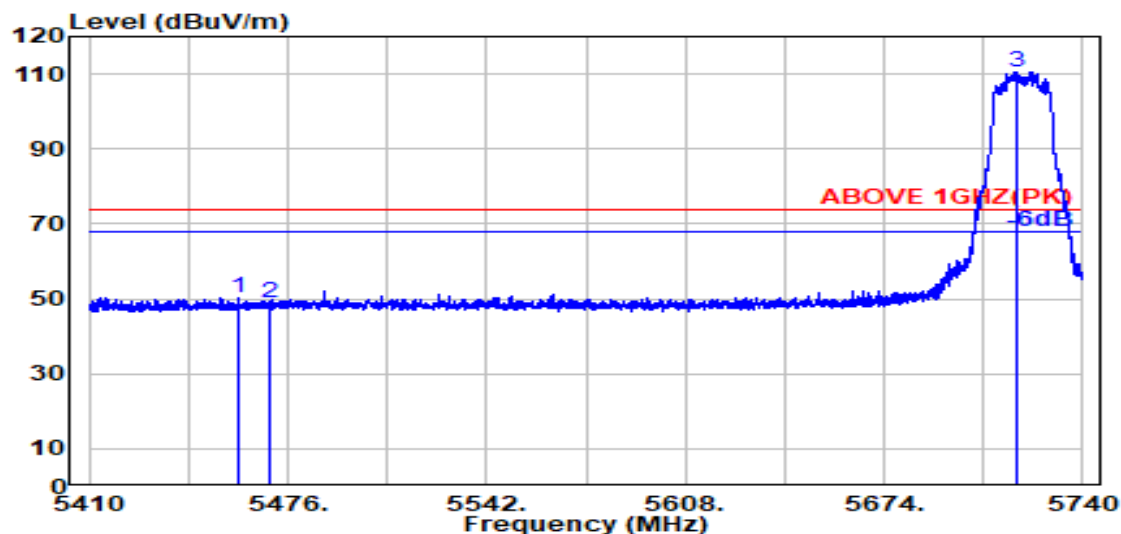

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.700	34.18	8.73	34.18	41.60	50.33	74.00	23.67	Peak
5470.000	34.16	8.74	34.18	40.24	48.96	74.00	25.04	Peak
@ 5718.000	33.80	8.88	34.27	102.20	110.60	---	---	Peak

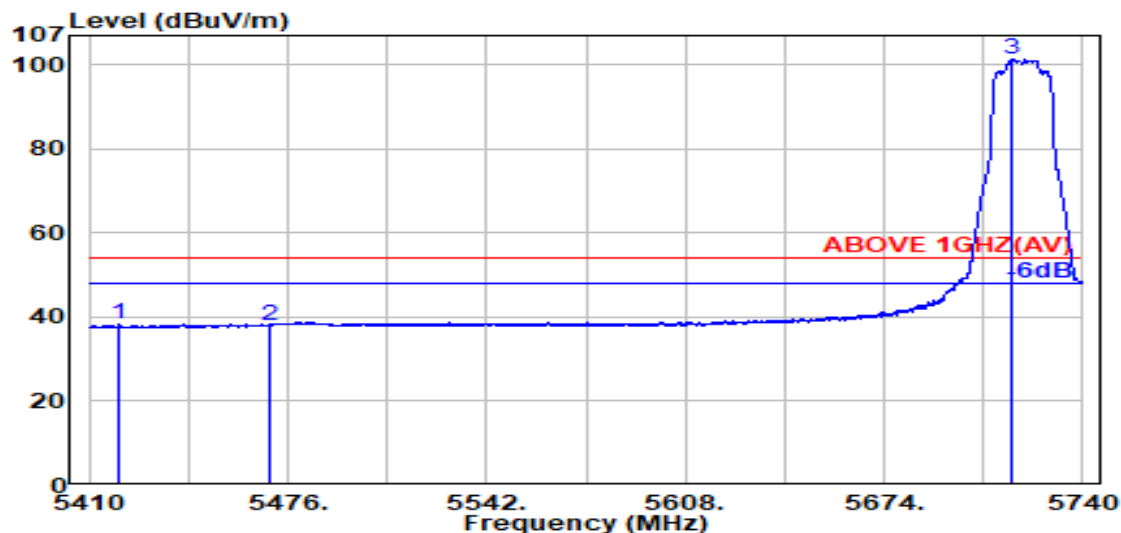


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.900	34.14	8.71	34.19	29.63	38.28	54.00	15.72	Average
5470.000	34.16	8.74	34.18	29.26	37.98	54.00	16.02	Average
@ 5716.400	33.80	8.88	34.27	93.10	101.50	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

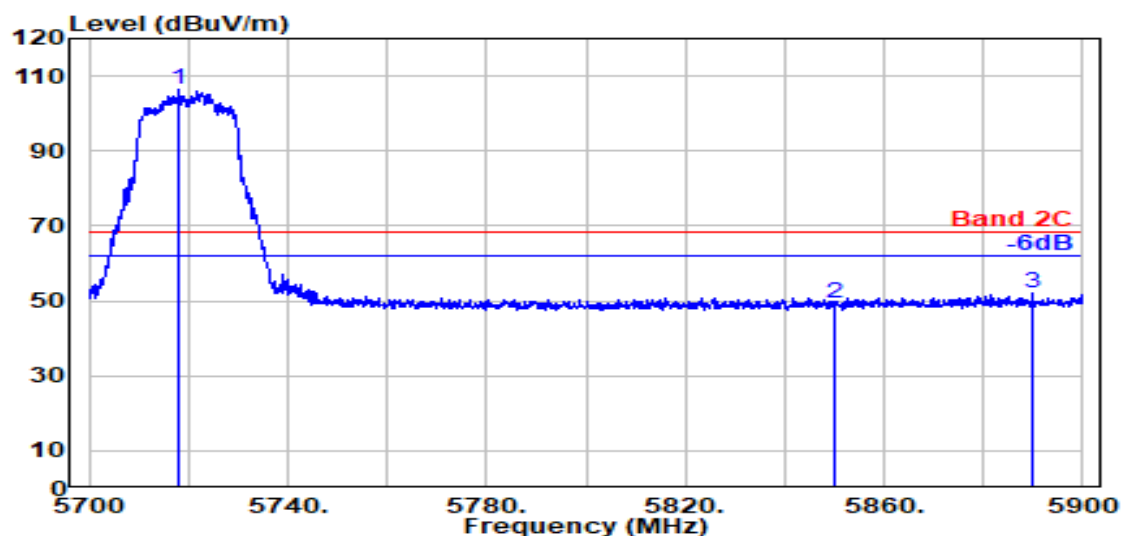

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5717.900	33.80	8.88	34.27	97.94	106.34	---	---	Peak
	5850.000	34.10	8.95	34.33	40.76	49.48	68.20	18.72	Peak
	5889.900	34.10	8.97	34.35	43.45	52.17	68.20	16.03	Peak

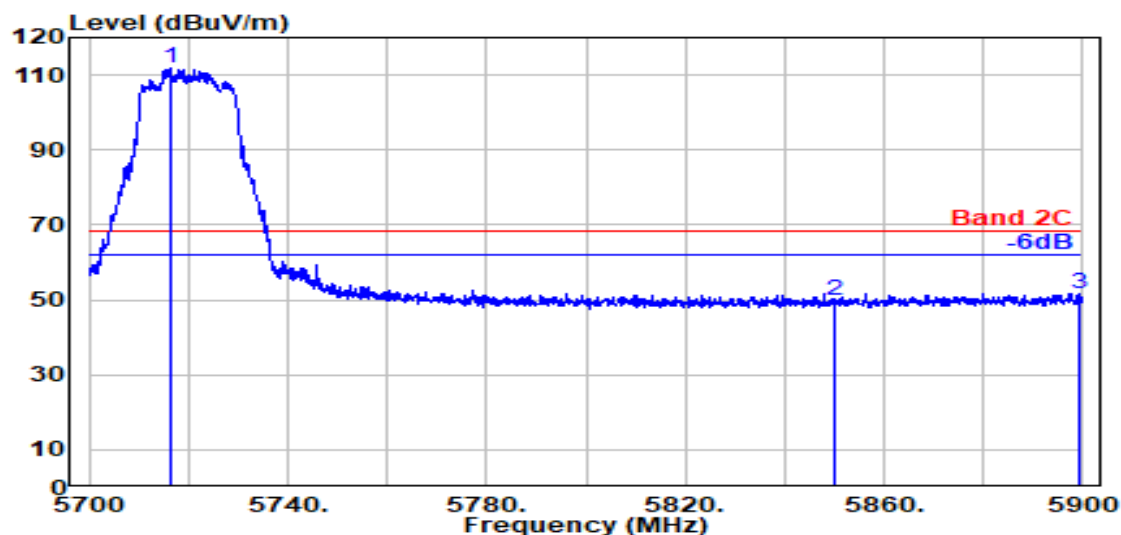


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5716.500	33.80	8.88	34.27	103.40	111.80	---	---	Peak
	5850.000	34.10	8.95	34.33	41.18	49.90	68.20	18.30	Peak
	5899.300	34.10	8.98	34.36	43.03	51.75	68.20	16.45	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

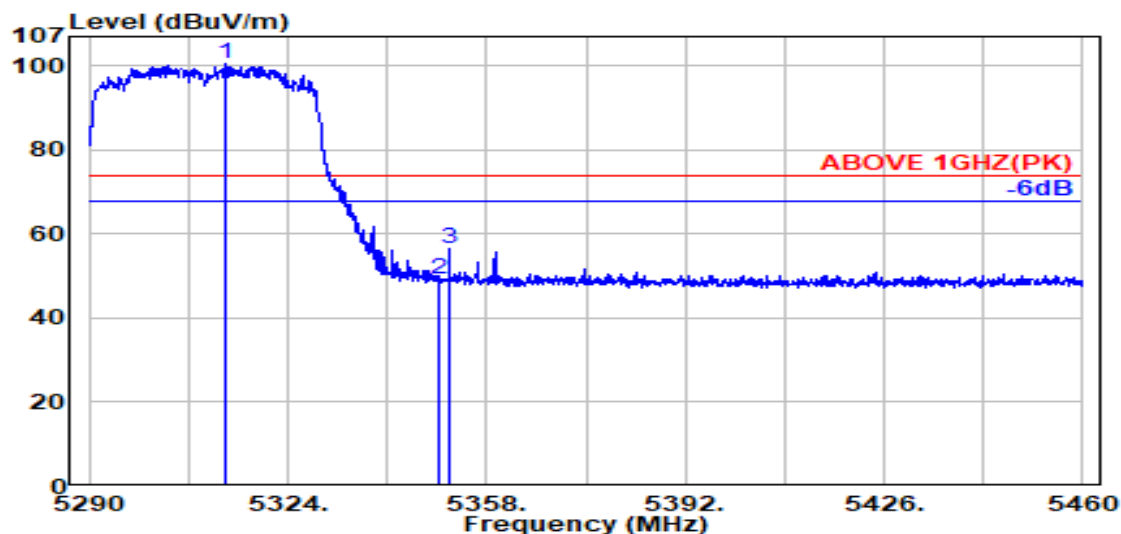

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.400	34.05	8.64	34.23	92.04	100.50	---	---	Peak
5350.000	33.90	8.67	34.22	40.78	49.13	74.00	24.87	Peak
5351.600	33.91	8.67	34.22	47.99	56.34	74.00	17.66	Peak

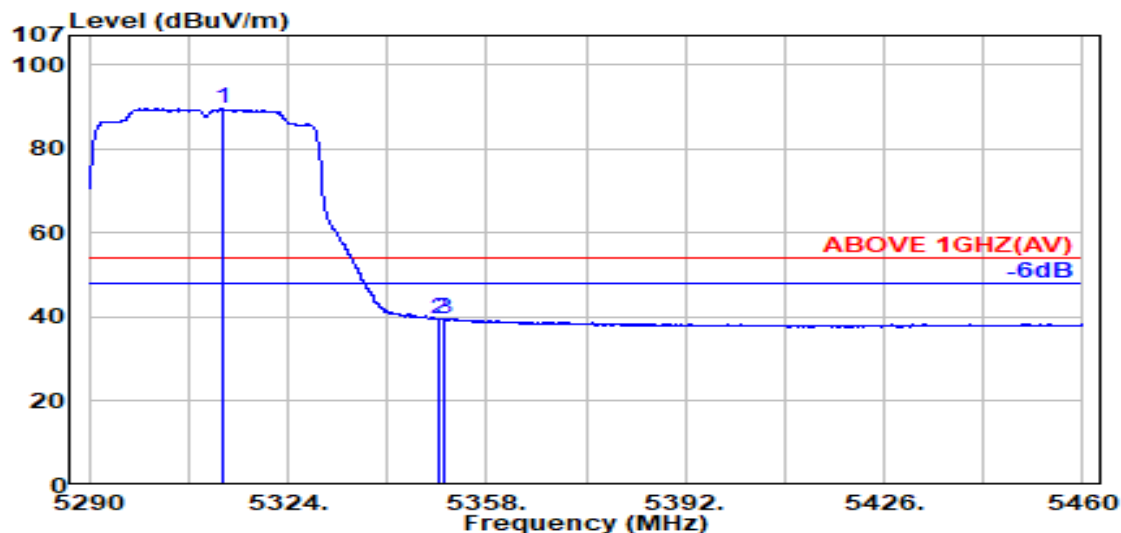


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.900	34.05	8.64	34.23	81.21	89.67	---	---	Average
5350.000	33.90	8.67	34.22	31.15	39.50	54.00	14.50	Average
5350.900	33.90	8.67	34.22	31.40	39.75	54.00	14.25	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

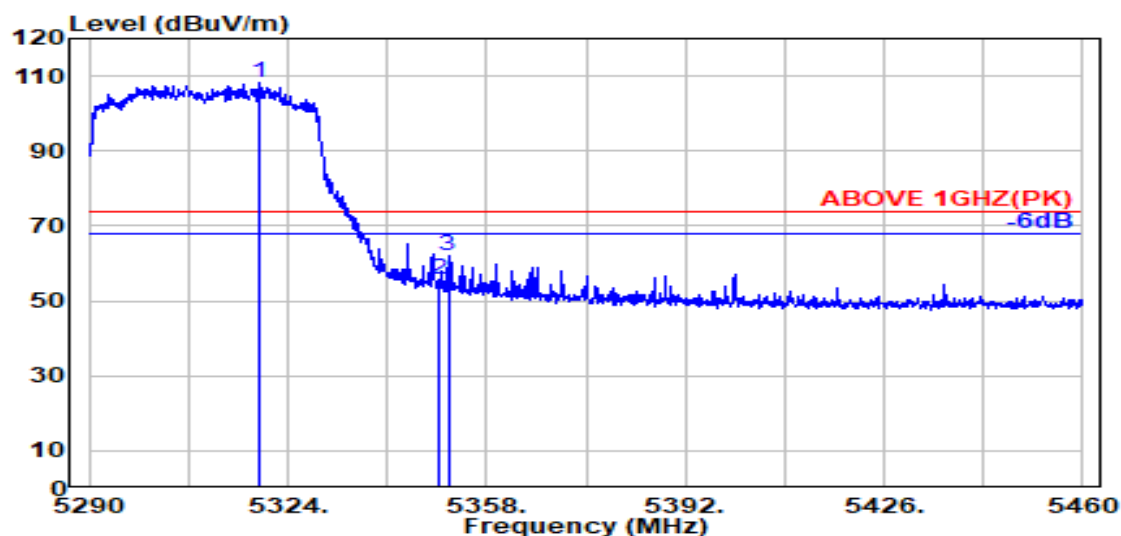

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5319.100	34.02	8.65	34.23	99.69	108.14	---	---	Peak
	5350.000	33.90	8.67	34.22	47.15	55.50	74.00	18.50	Peak
	5351.400	33.91	8.67	34.22	53.67	62.02	74.00	11.98	Peak

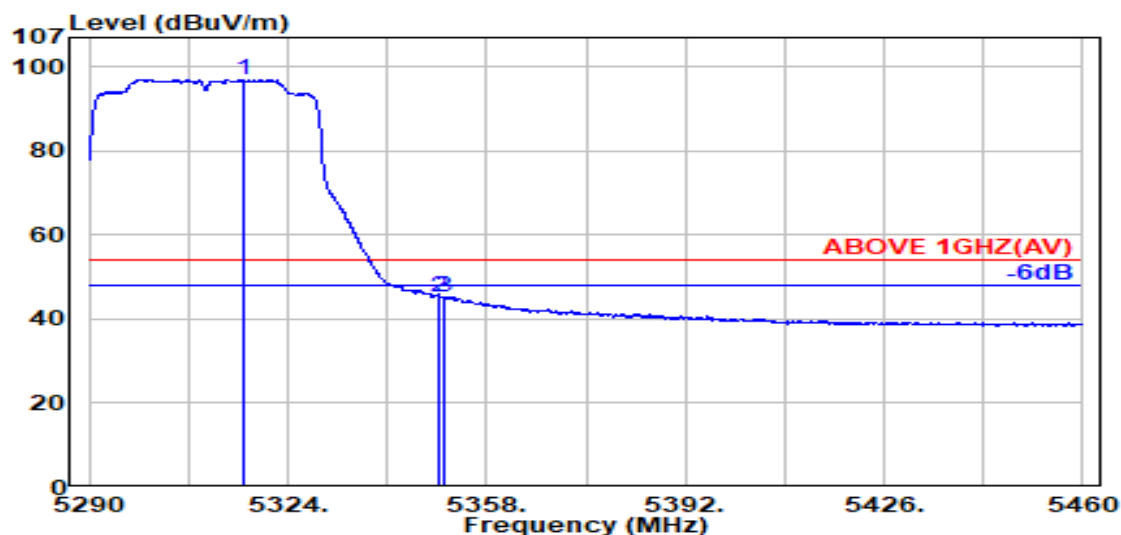


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.400	34.03	8.65	34.23	88.54	96.99	---	---	Average
	5350.000	33.90	8.67	34.22	37.07	45.42	54.00	8.58	Average
	5350.800	33.90	8.67	34.22	36.99	45.34	54.00	8.66	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

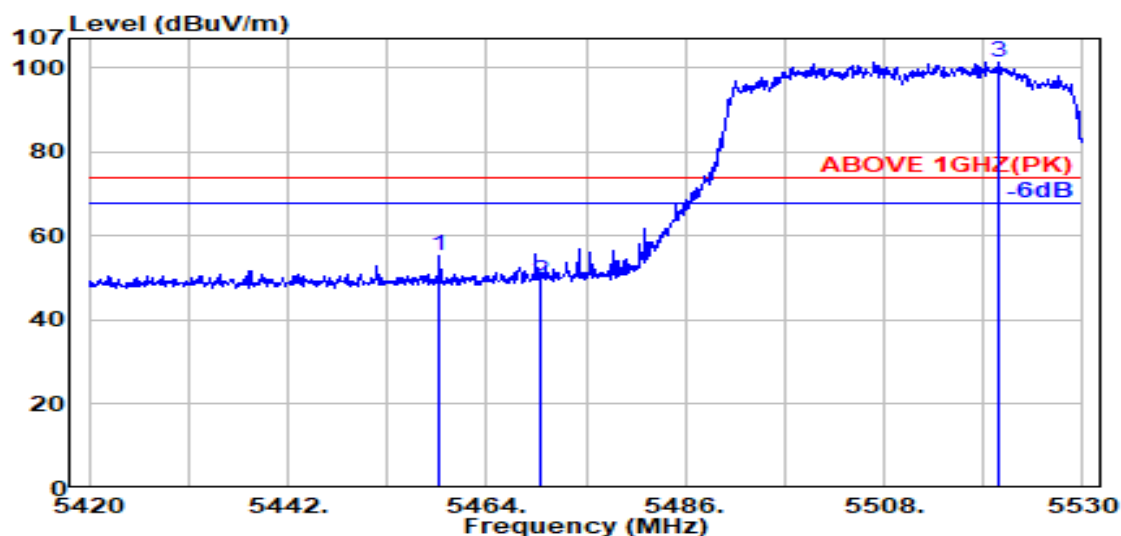

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.800	34.18	8.73	34.18	46.64	55.37	74.00	18.63	Peak
5470.000	34.16	8.74	34.18	40.73	49.44	74.00	24.56	Peak
@ 5520.600	34.10	8.77	34.18	92.70	101.39	---	---	Peak

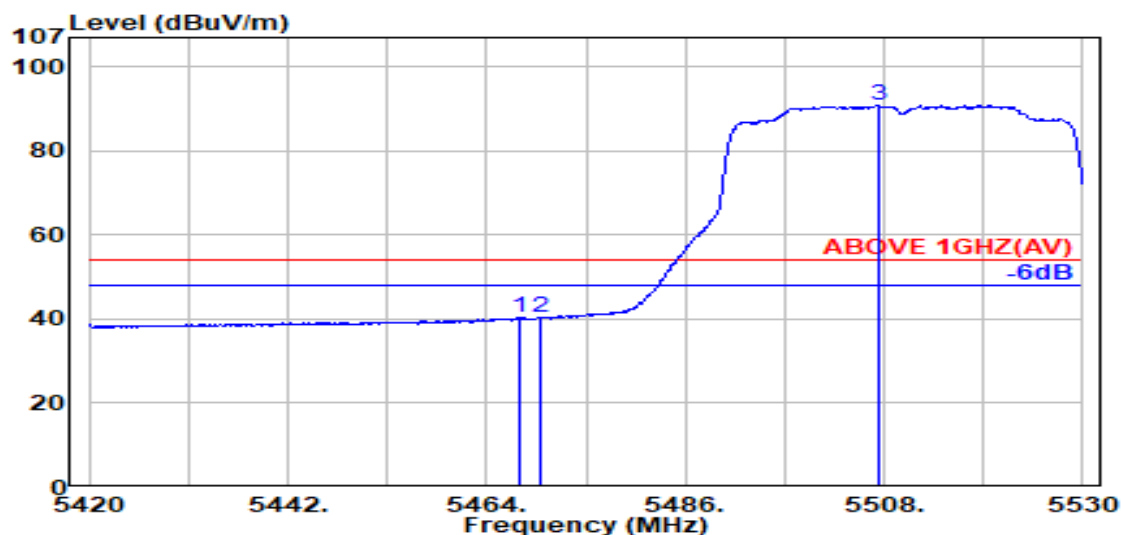


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	31.56	40.28	54.00	13.72	Average
5470.000	34.16	8.74	34.18	31.61	40.33	54.00	13.67	Average
@ 5507.300	34.10	8.76	34.17	82.14	90.83	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

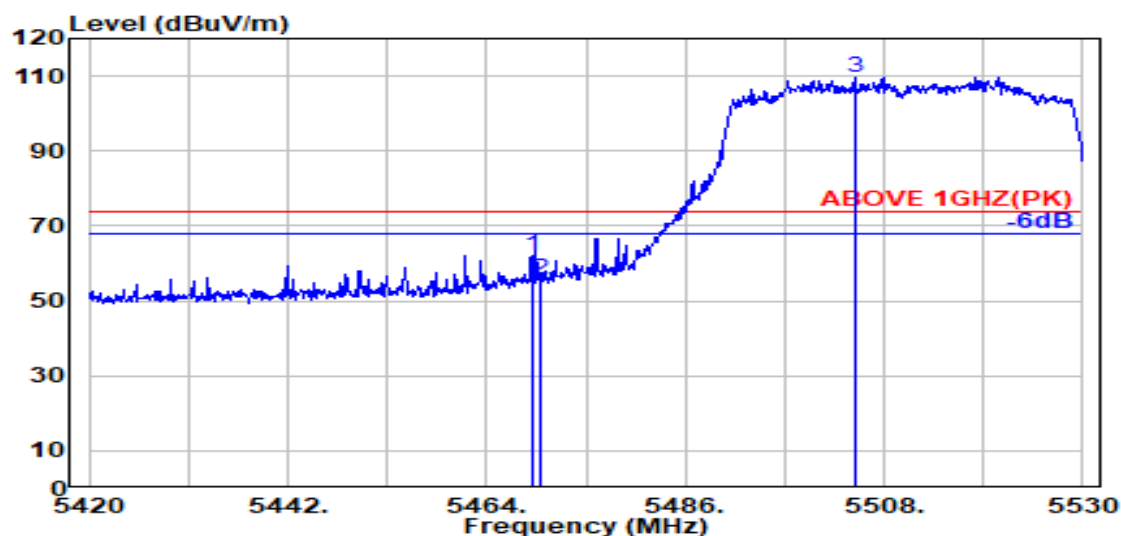

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	53.48	62.20	74.00	11.80	Peak
5470.000	34.16	8.74	34.18	47.15	55.86	74.00	18.14	Peak
@ 5504.700	34.10	8.76	34.17	100.98	109.67	---	---	Peak

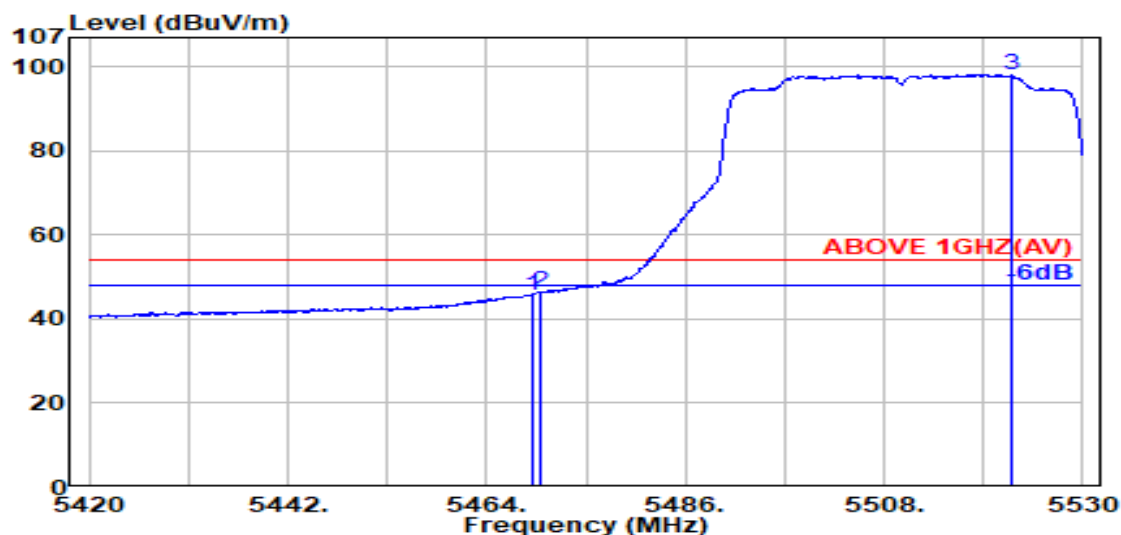


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	37.09	45.80	54.00	8.20	Average
5470.000	34.16	8.74	34.18	37.62	46.34	54.00	7.66	Average
@ 5522.100	34.10	8.77	34.18	89.39	98.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

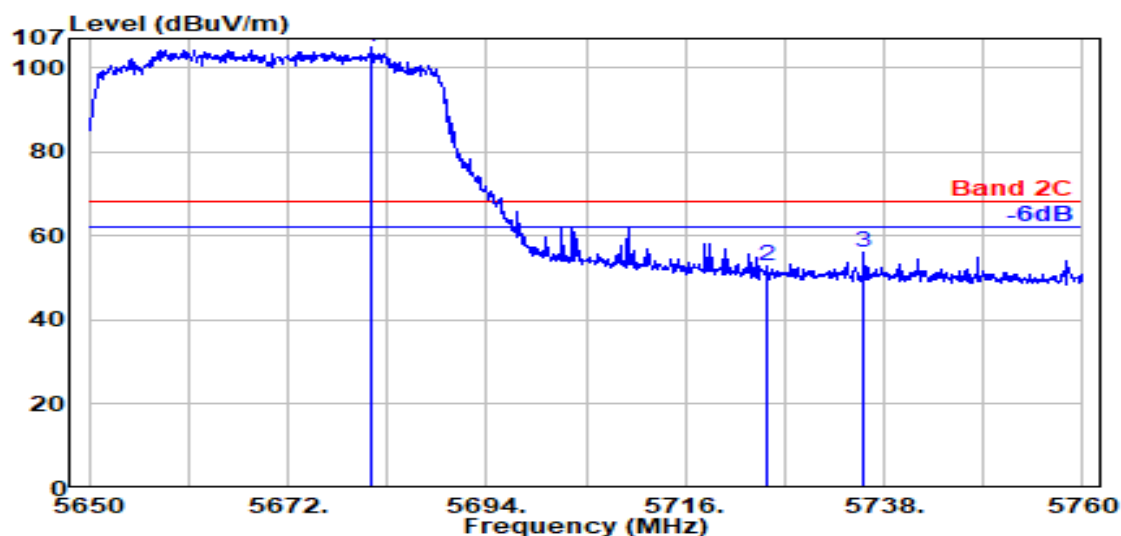

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.300	33.87	8.86	34.26	96.39	104.87	---	---	Peak
5725.000	33.80	8.88	34.28	44.30	52.70	68.20	15.50	Peak
5735.700	33.80	8.89	34.28	47.74	56.15	68.20	12.05	Peak

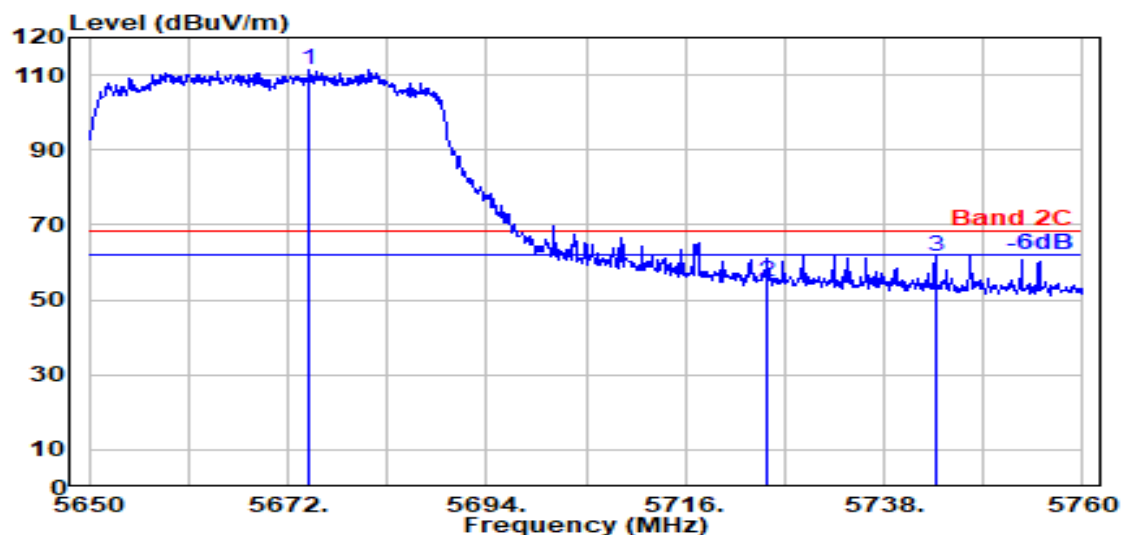


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.400	33.90	8.85	34.25	102.97	111.47	---	---	Peak
5725.000	33.80	8.88	34.28	46.57	54.97	68.20	13.23	Peak
5743.800	33.80	8.89	34.28	53.23	61.64	68.20	6.56	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

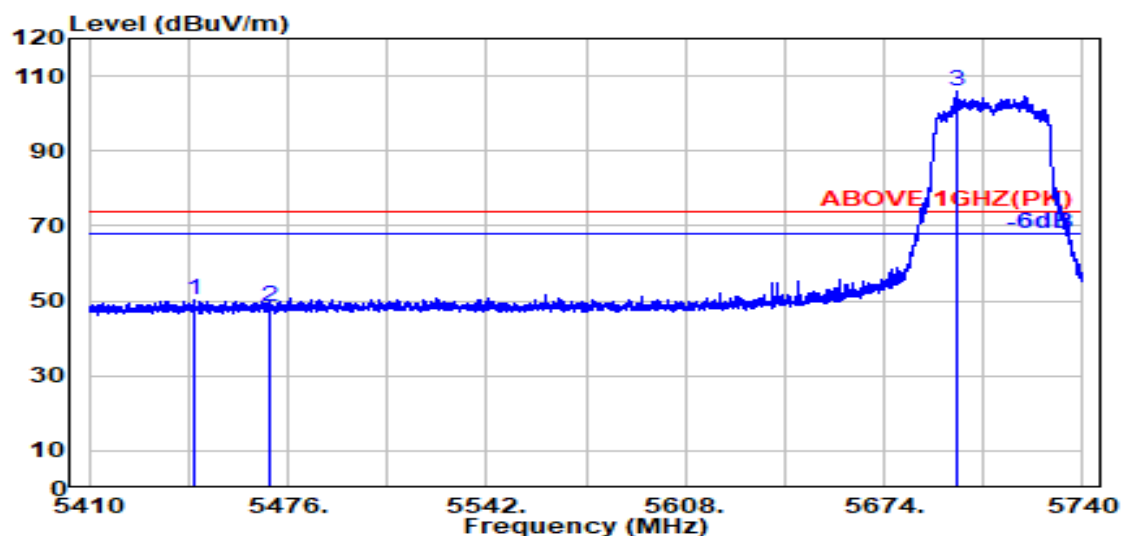

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5444.600	34.19	8.72	34.19	41.41	50.13	74.00	23.87	Peak
5470.000	34.16	8.74	34.18	39.53	48.25	74.00	25.75	Peak
@ 5698.000	33.81	8.87	34.26	97.41	105.82	---	---	Peak

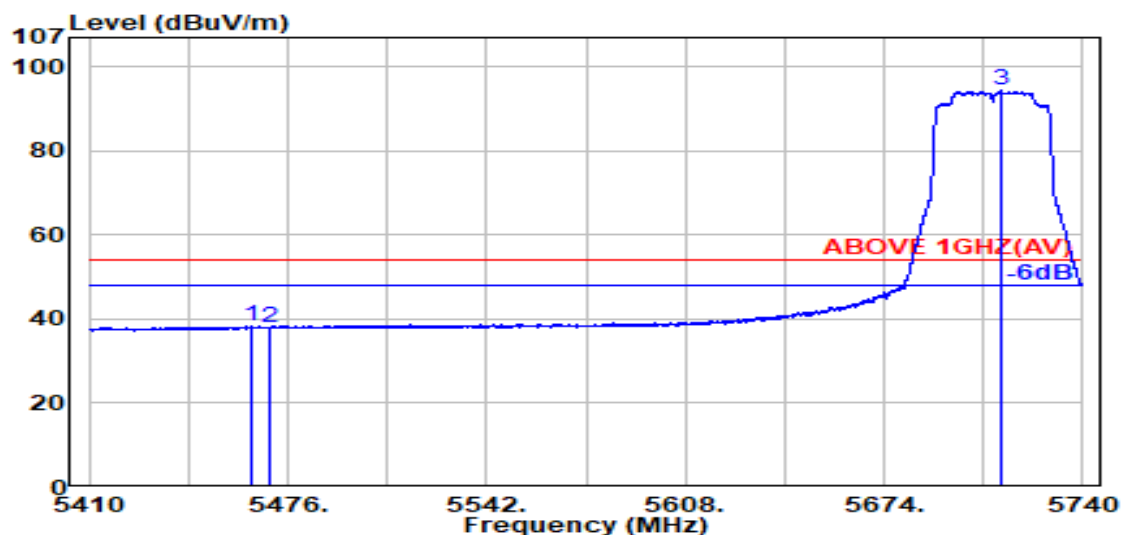


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.800	34.17	8.73	34.18	29.53	38.25	54.00	15.75	Average
5470.000	34.16	8.74	34.18	29.28	37.99	54.00	16.01	Average
@ 5712.600	33.80	8.87	34.27	85.97	94.37	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

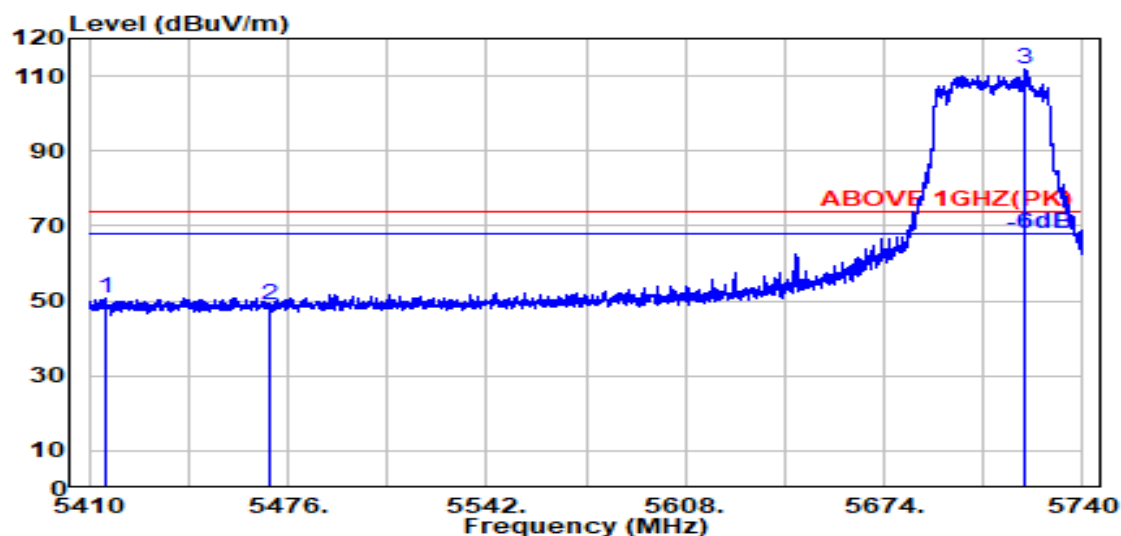

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5415.500	34.13	8.70	34.20	42.27	50.91	74.00	23.09	Peak
5470.000	34.16	8.74	34.18	40.26	48.98	74.00	25.02	Peak
@ 5721.000	33.80	8.88	34.27	103.37	111.78	---	---	Peak

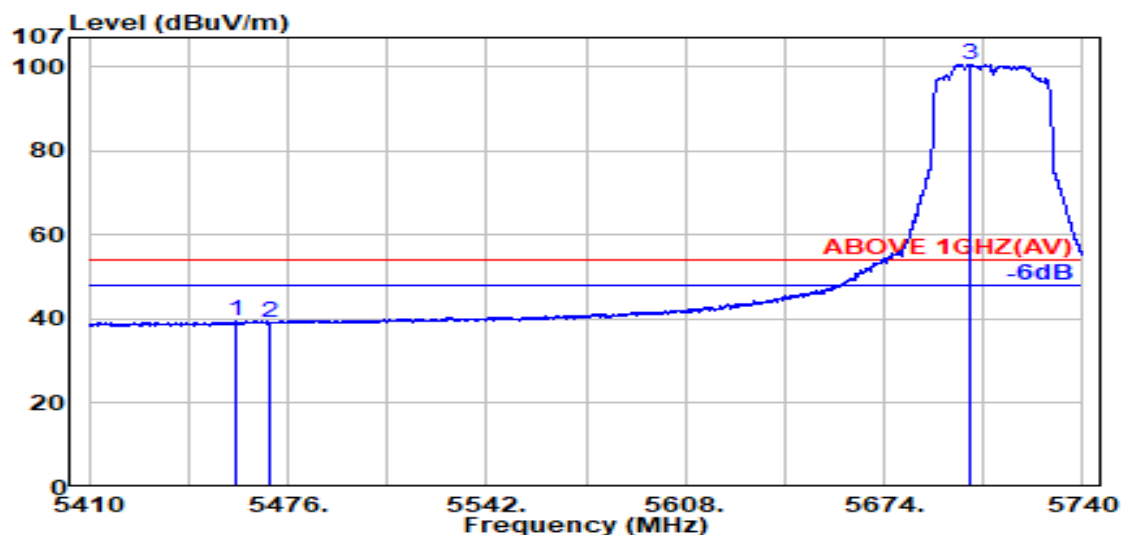


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.900	34.18	8.73	34.18	30.78	39.51	54.00	14.49	Average
5470.000	34.16	8.74	34.18	30.44	39.16	54.00	14.84	Average
@ 5702.800	33.80	8.87	34.27	92.27	100.68	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

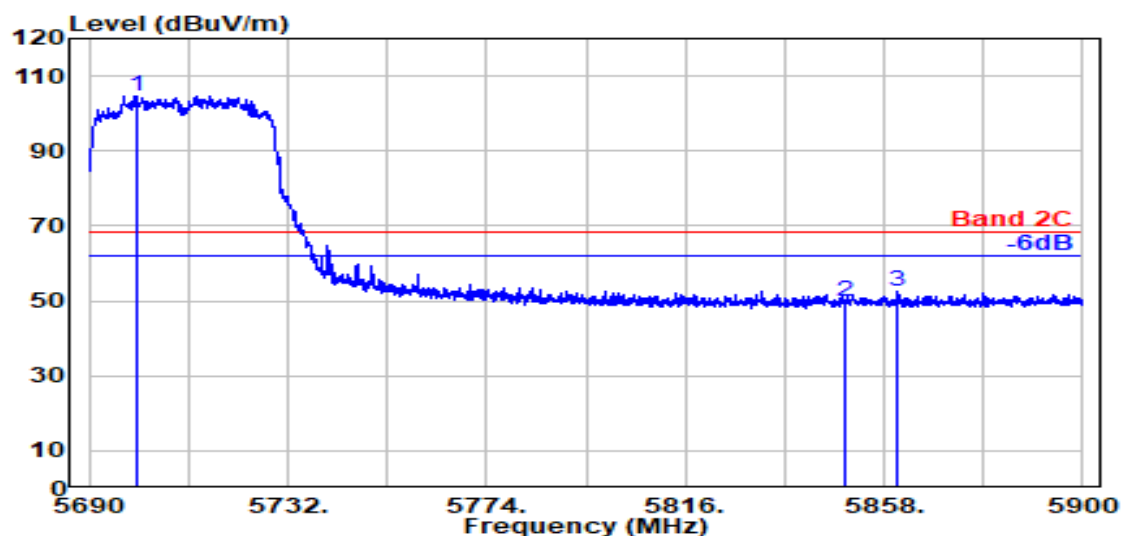

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5700.200	33.80	8.87	34.26	96.37	104.77	---	---	Peak
	5850.000	34.10	8.95	34.33	40.95	49.66	68.20	18.54	Peak
	5860.600	34.10	8.96	34.34	43.70	52.42	68.20	15.78	Peak

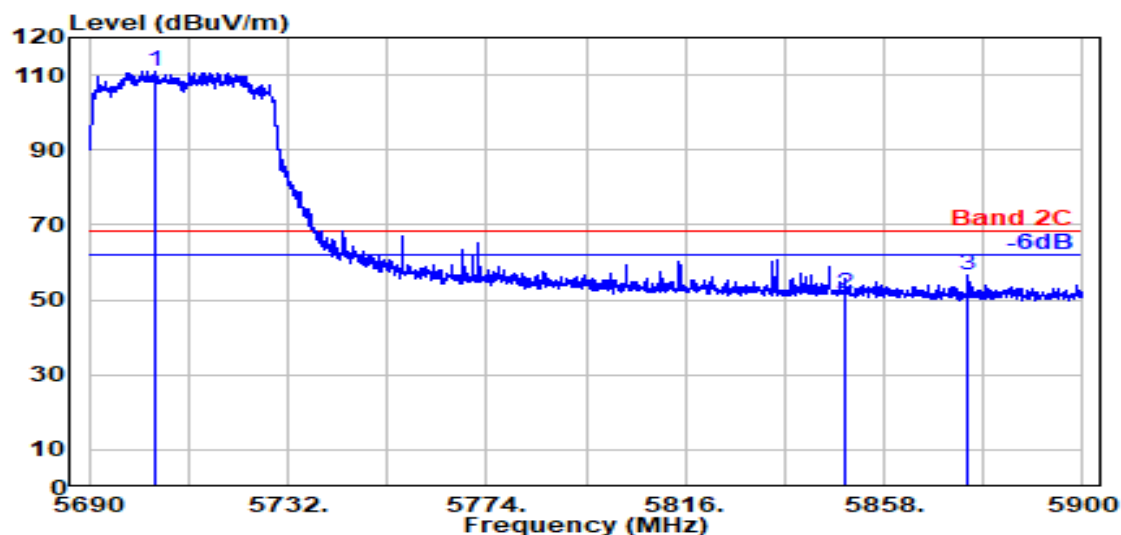


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5704.100	33.80	8.87	34.27	102.76	111.16	---	---	Peak
	5850.000	34.10	8.95	34.33	42.92	51.64	68.20	16.56	Peak
	5875.600	34.10	8.96	34.34	47.89	56.61	68.20	11.59	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

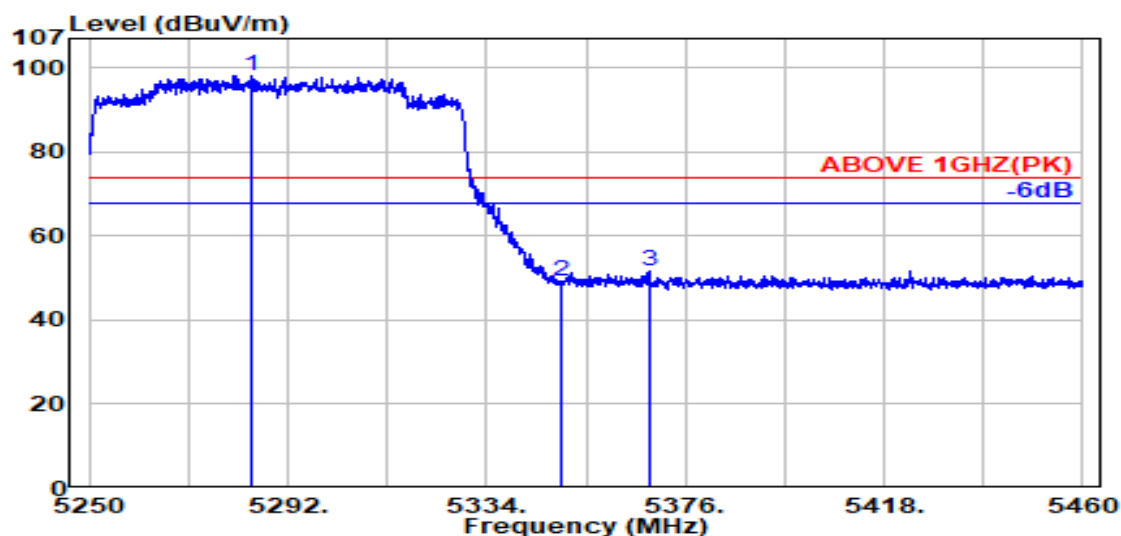

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.200	34.01	8.63	34.24	89.83	98.22	---	---	Peak
5350.000	33.90	8.67	34.22	40.92	49.27	74.00	24.73	Peak
5368.300	33.97	8.68	34.21	43.33	51.76	74.00	22.24	Peak

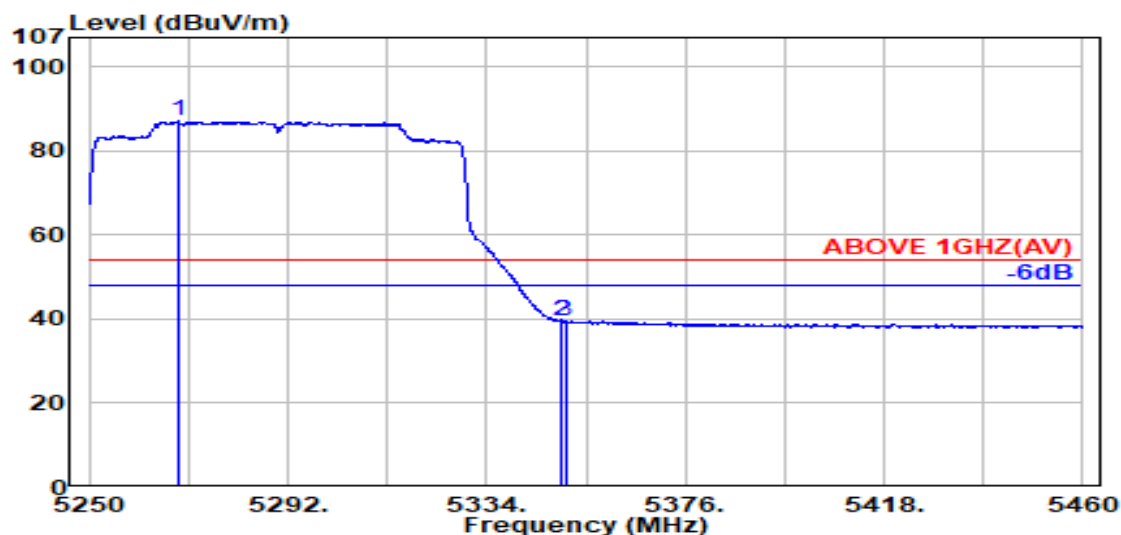


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.700	33.91	8.62	34.24	78.81	87.10	---	---	Average
5350.000	33.90	8.67	34.22	31.39	39.74	54.00	14.26	Average
5350.600	33.90	8.67	34.22	31.22	39.58	54.00	14.42	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

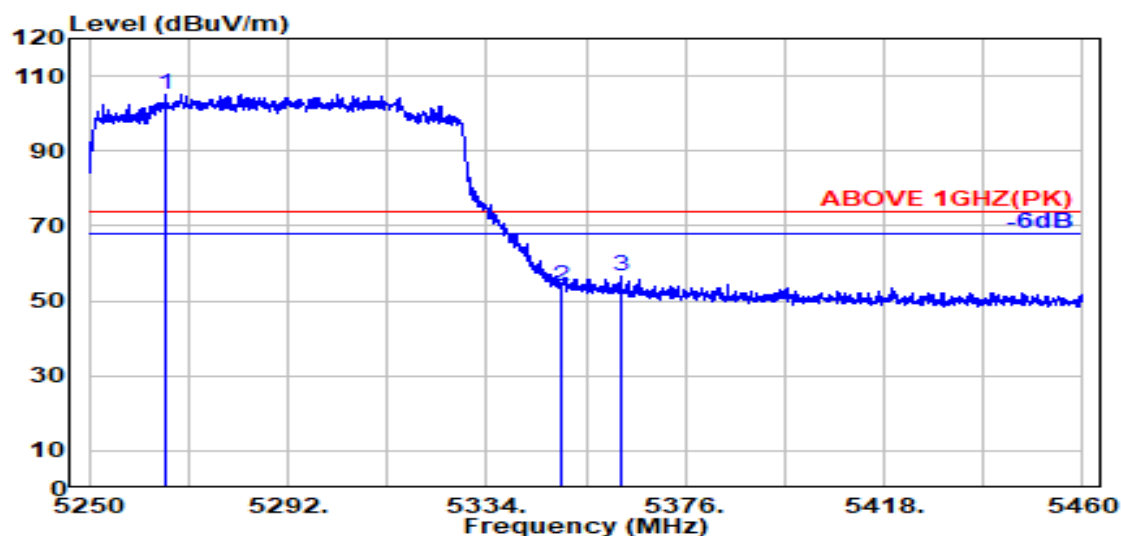

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5266.200	33.90	8.62	34.24	96.92	105.19	---	---	Peak
	5350.000	33.90	8.67	34.22	45.33	53.68	74.00	20.32	Peak
	5362.300	33.95	8.67	34.21	48.23	56.64	74.00	17.36	Peak

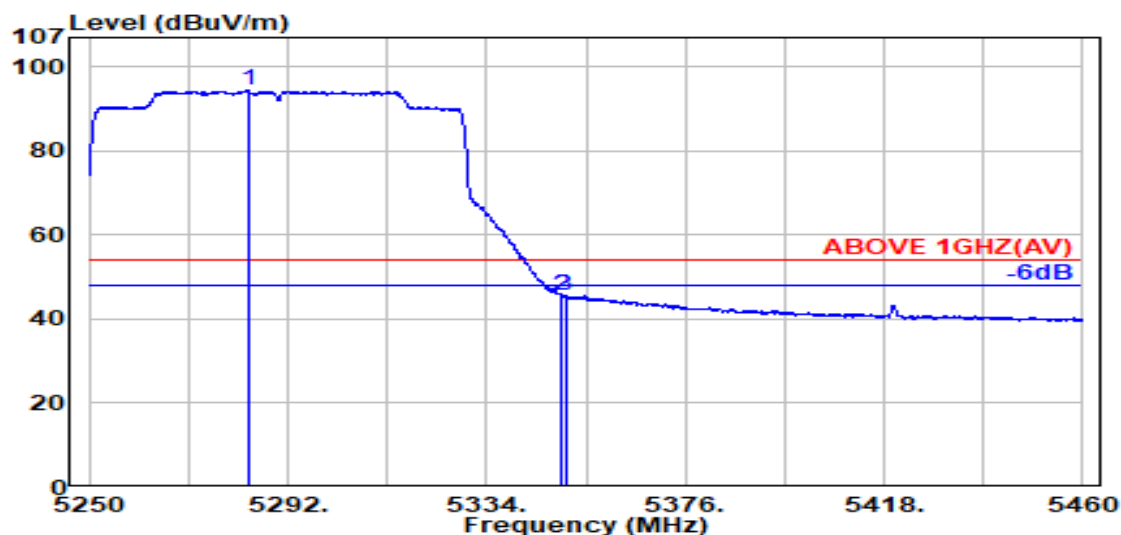


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5283.600	34.00	8.63	34.24	85.99	94.38	---	---	Average
	5350.000	33.90	8.67	34.22	37.29	45.64	54.00	8.36	Average
	5350.600	33.90	8.67	34.22	37.41	45.76	54.00	8.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

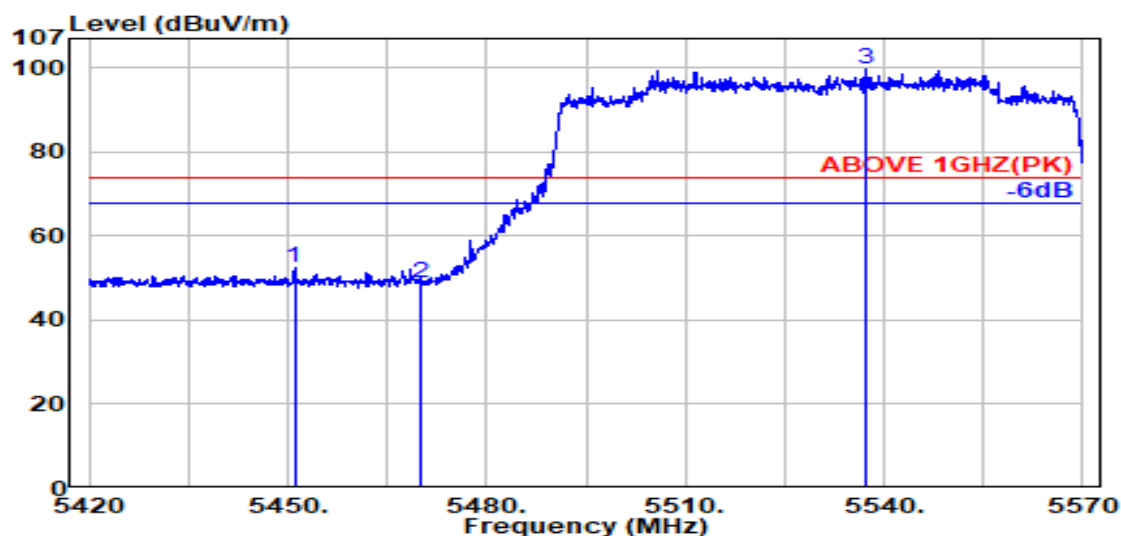

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	34.20	8.72	34.19	43.58	52.32	74.00	21.68	Peak
5470.000	34.16	8.74	34.18	40.32	49.04	74.00	24.96	Peak
@ 5537.100	34.10	8.77	34.19	91.07	99.76	---	---	Peak

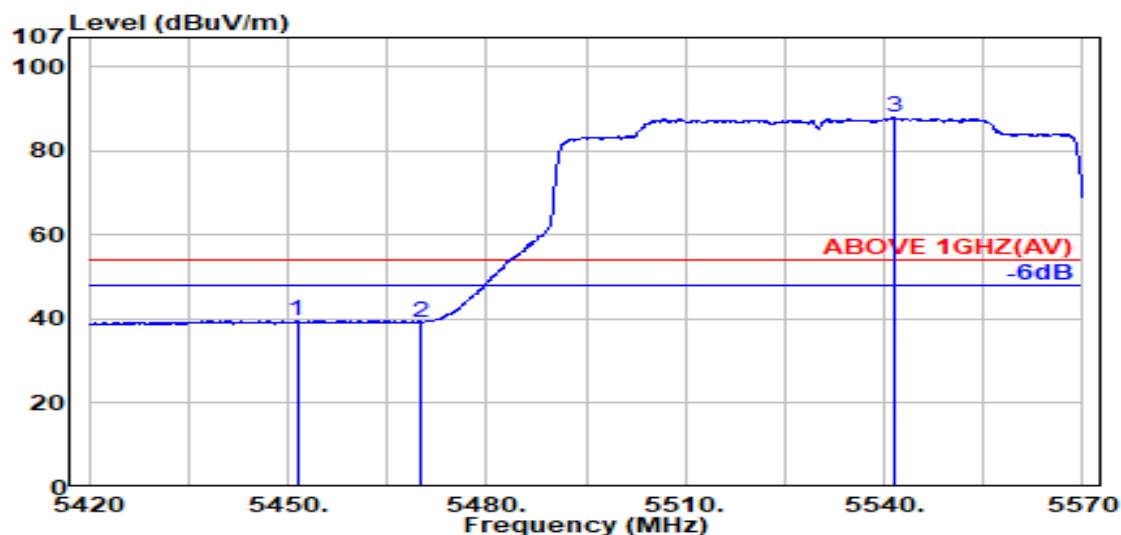


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.400	34.20	8.72	34.18	30.84	39.58	54.00	14.42	Average
5470.000	34.16	8.74	34.18	30.64	39.35	54.00	14.65	Average
@ 5541.500	34.10	8.78	34.19	79.25	87.94	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

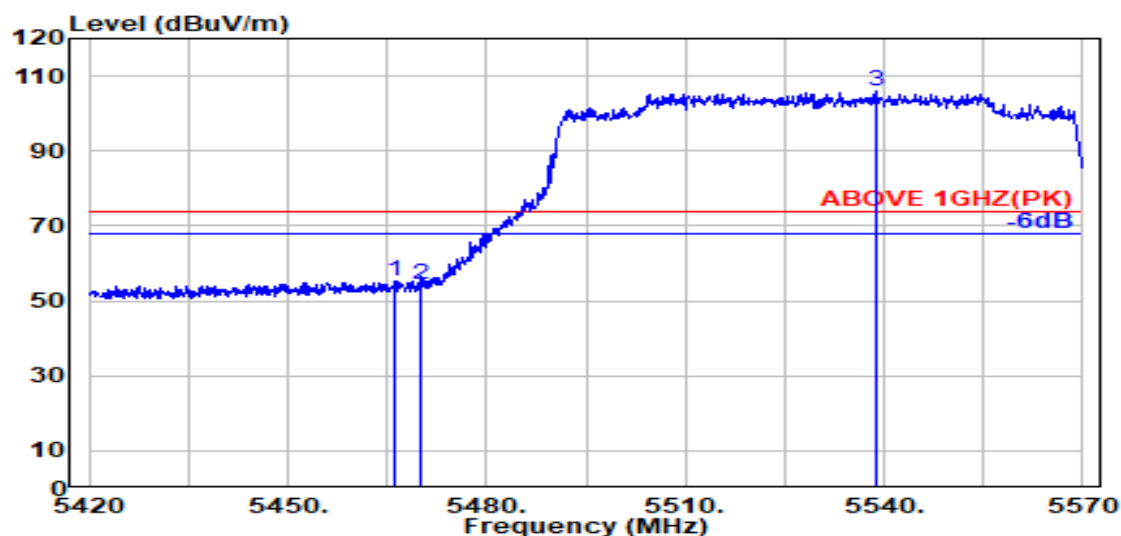

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	46.56	55.28	74.00	18.72	Peak
5470.000	34.16	8.74	34.18	45.70	54.42	74.00	19.58	Peak
@ 5538.700	34.10	8.78	34.19	97.43	106.12	---	---	Peak

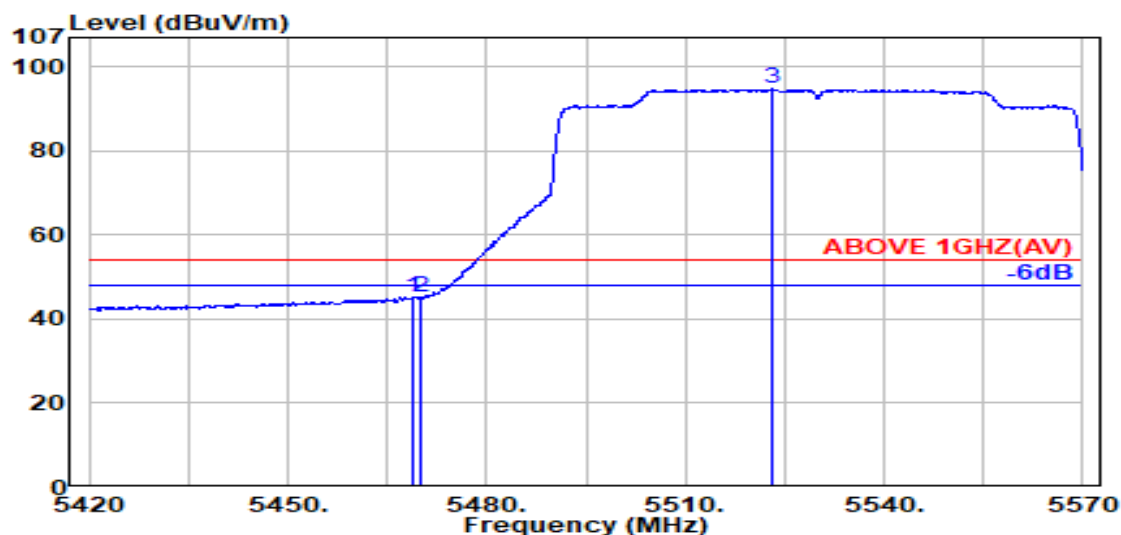


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	36.54	45.26	54.00	8.74	Average
5470.000	34.16	8.74	34.18	36.34	45.06	54.00	8.94	Average
@ 5523.200	34.10	8.77	34.18	86.03	94.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

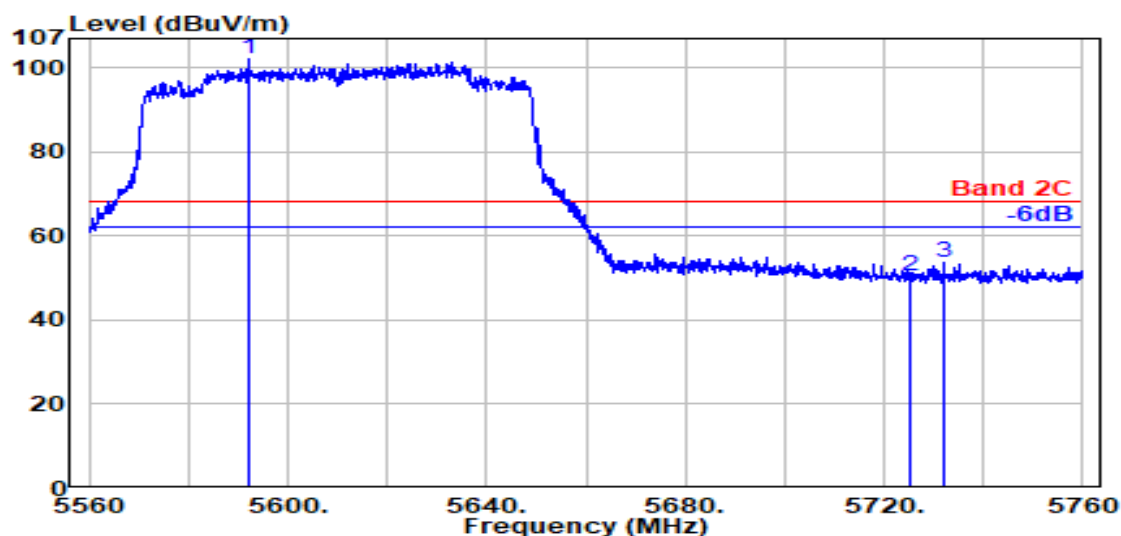

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5592.000	34.02	8.81	34.21	93.55	102.15	---	---	Peak
	5725.000	33.80	8.88	34.28	41.92	50.33	68.20	17.87	Peak
	5731.900	33.80	8.88	34.28	45.24	53.64	68.20	14.56	Peak

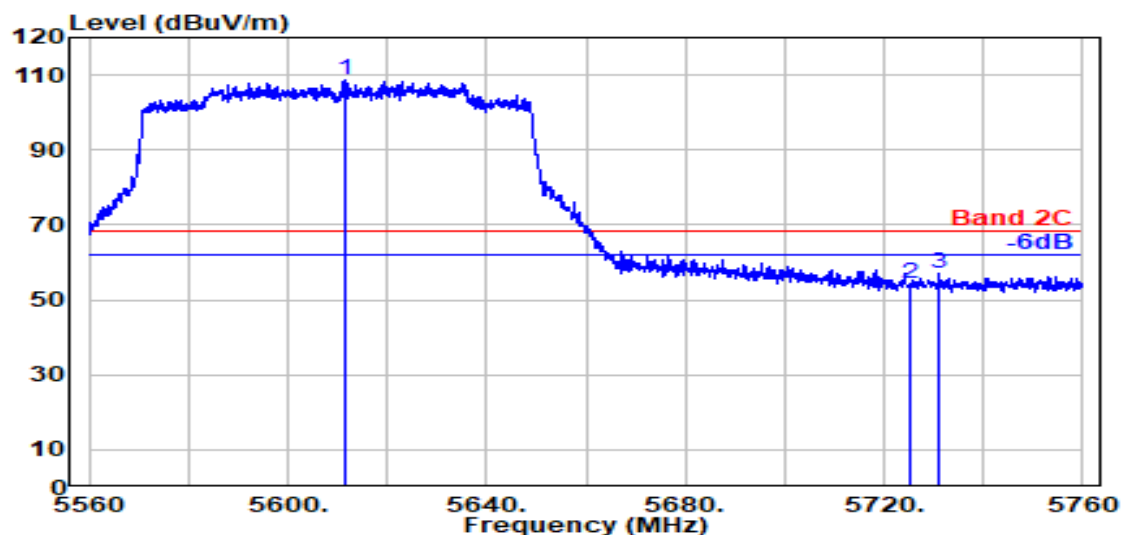


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5611.300	34.00	8.82	34.22	100.27	108.86	---	---	Peak
	5725.000	33.80	8.88	34.28	45.77	54.17	68.20	14.03	Peak
	5731.200	33.80	8.88	34.28	48.49	56.90	68.20	11.30	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

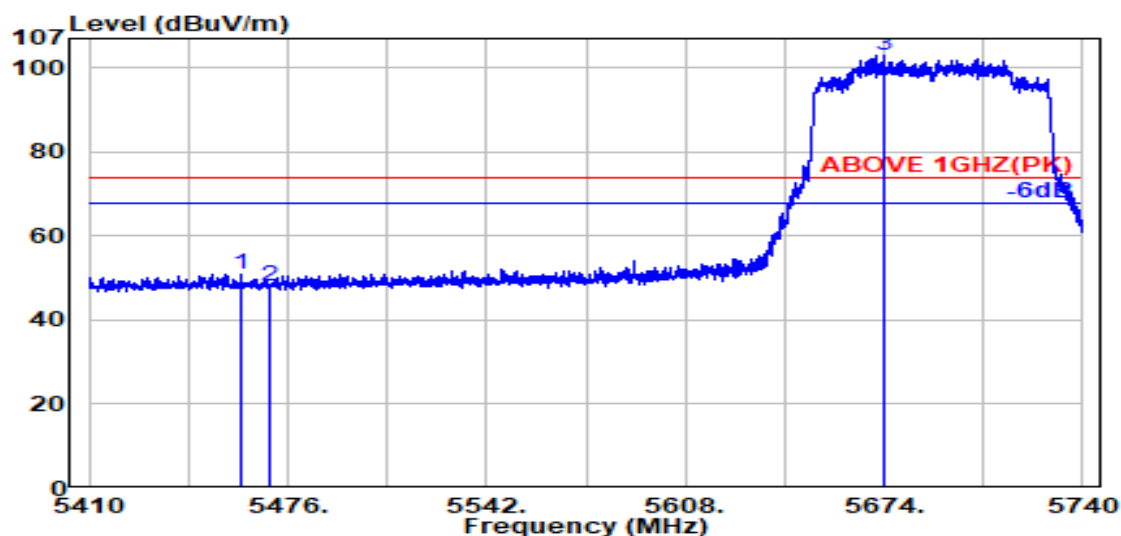

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.18	8.73	34.18	42.19	50.92	74.00	23.08	Peak
5470.000	34.16	8.74	34.18	39.45	48.16	74.00	25.84	Peak
@ 5673.800	33.90	8.85	34.25	94.61	103.12	---	---	Peak

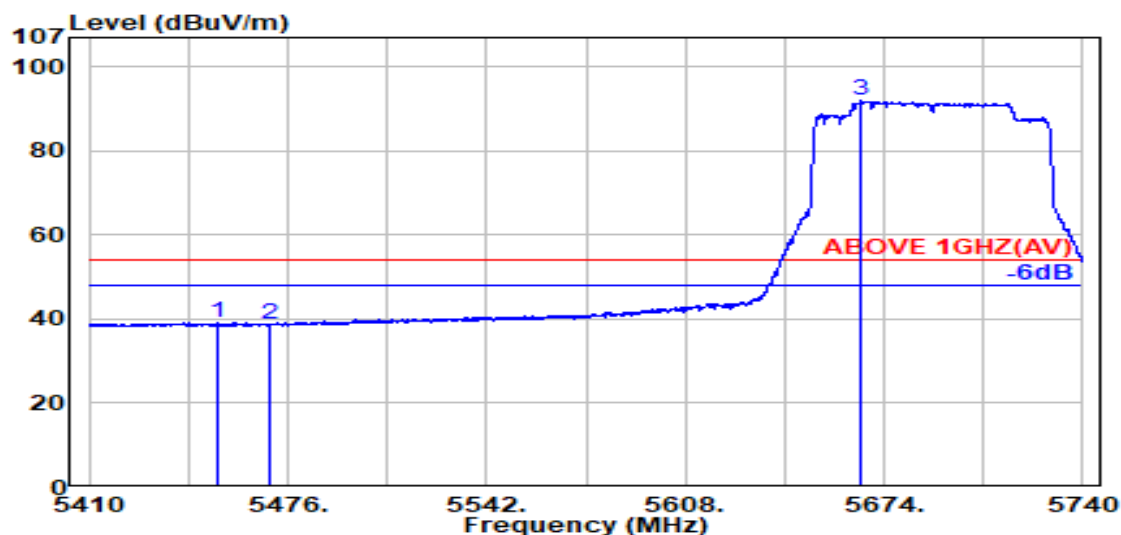


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.900	34.19	8.73	34.18	30.37	39.10	54.00	14.90	Average
5470.000	34.16	8.74	34.18	30.08	38.80	54.00	15.20	Average
@ 5666.400	33.93	8.85	34.25	83.57	92.10	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

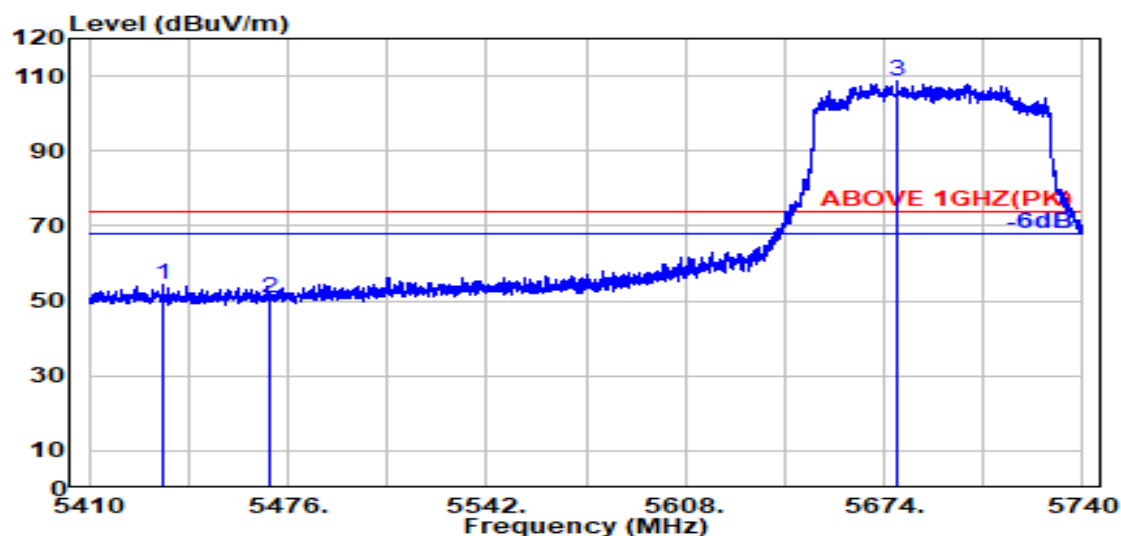

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.400	34.17	8.72	34.19	45.49	54.18	74.00	19.82	Peak
5470.000	34.16	8.74	34.18	41.88	50.60	74.00	23.40	Peak
@ 5678.600	33.89	8.85	34.25	100.38	108.87	---	---	Peak

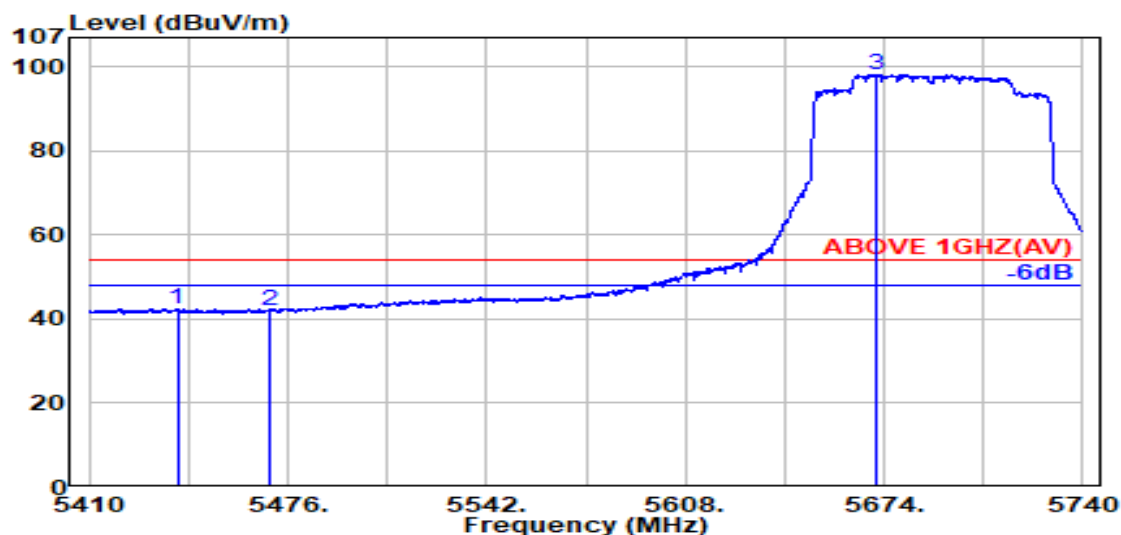


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.300	34.18	8.72	34.19	33.79	42.50	54.00	11.50	Average
5470.000	34.16	8.74	34.18	33.33	42.05	54.00	11.95	Average
@ 5671.500	33.91	8.85	34.25	89.63	98.14	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

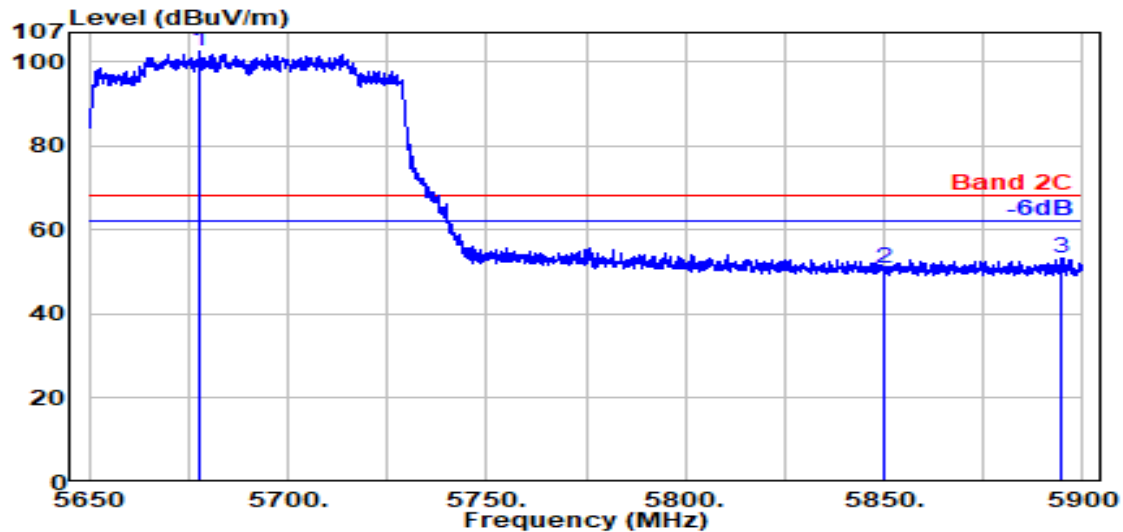

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5677.800	33.89	8.85	34.25	94.16	102.65	---	---	Peak
	5850.000	34.10	8.95	34.33	42.03	50.75	68.20	17.45	Peak
	5894.800	34.10	8.97	34.35	44.67	53.39	68.20	14.81	Peak

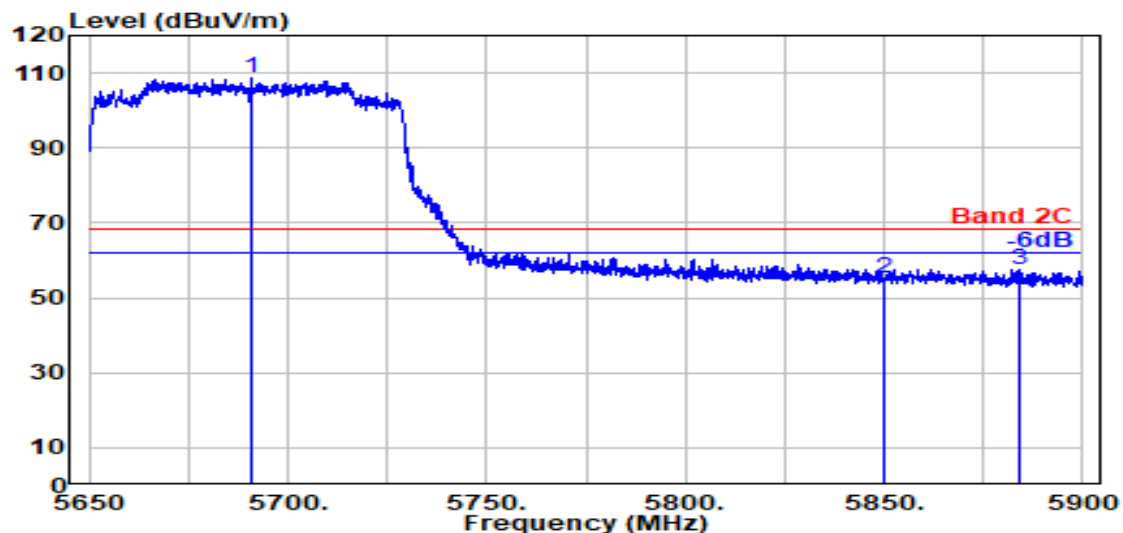


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5690.800	33.84	8.86	34.26	100.29	108.73	---	---	Peak
	5850.000	34.10	8.95	34.33	46.62	55.33	68.20	12.87	Peak
	5884.000	34.10	8.97	34.35	48.72	57.44	68.20	10.76	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

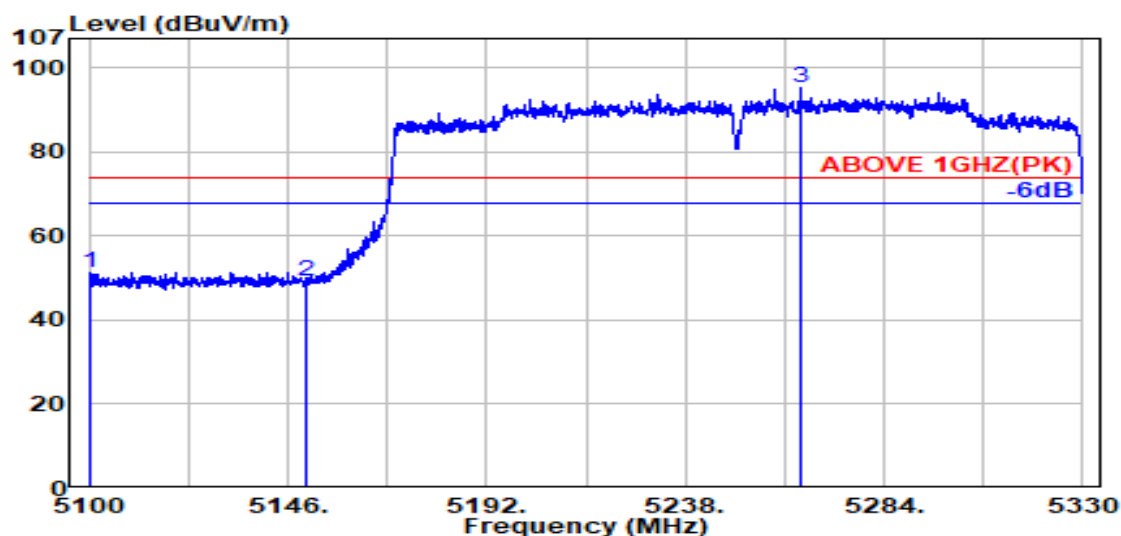

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5100.000	33.70	8.51	34.30	43.48	51.40	74.00	22.60	Peak
5150.000	33.70	8.54	34.28	41.15	49.11	74.00	24.89	Peak
@ 5264.600	33.89	8.61	34.24	87.04	95.30	---	---	Peak

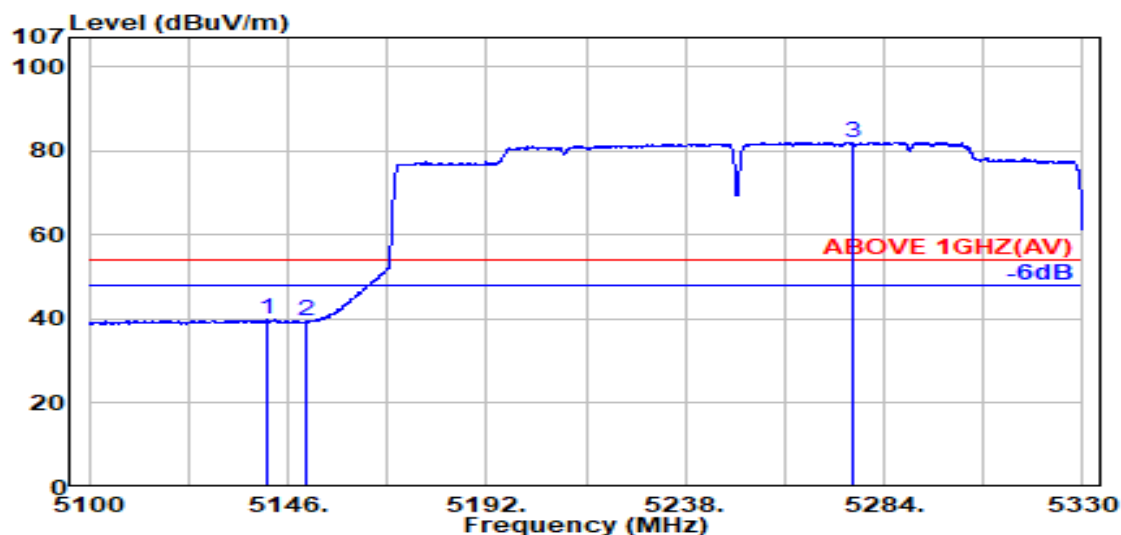


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.300	33.70	8.54	34.28	31.84	39.80	54.00	14.20	Average
5150.000	33.70	8.54	34.28	31.42	39.39	54.00	14.61	Average
@ 5276.500	33.96	8.62	34.24	73.77	82.11	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

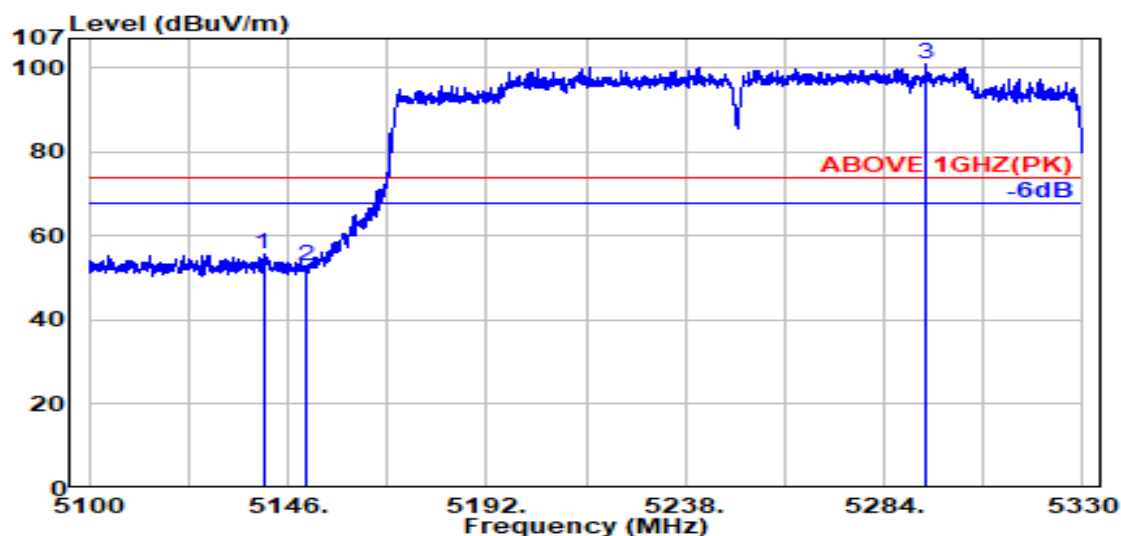

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.300	33.70	8.54	34.28	47.96	55.92	74.00	18.08	Peak
5150.000	33.70	8.54	34.28	44.93	52.89	74.00	21.11	Peak
@ 5293.600	34.06	8.63	34.23	92.30	100.76	---	---	Peak

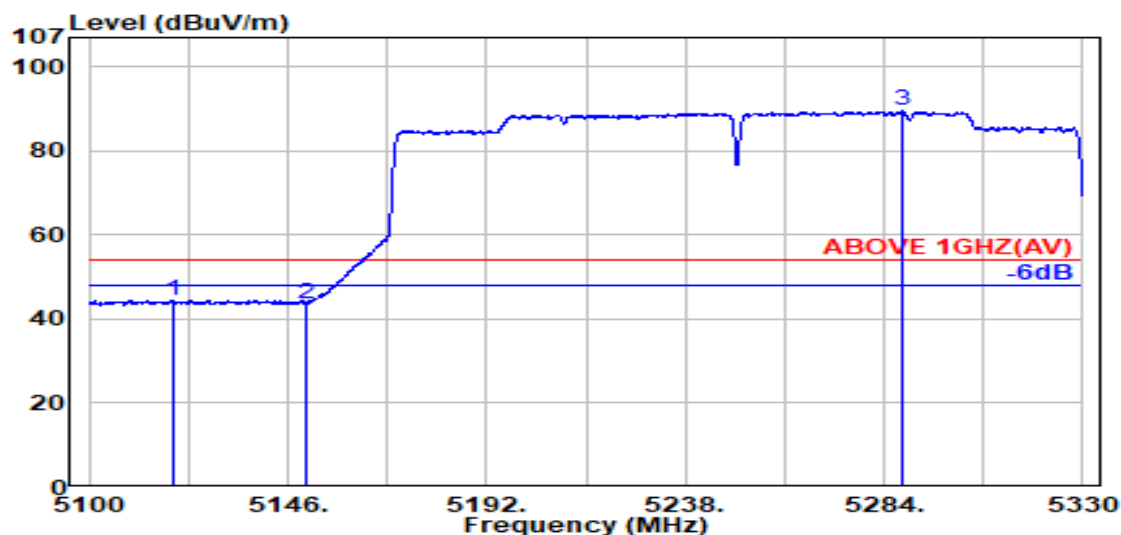


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.300	33.70	8.53	34.29	36.51	44.45	54.00	9.55	Average
5150.000	33.70	8.54	34.28	35.77	43.73	54.00	10.27	Average
@ 5288.300	34.03	8.63	34.24	81.14	89.56	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

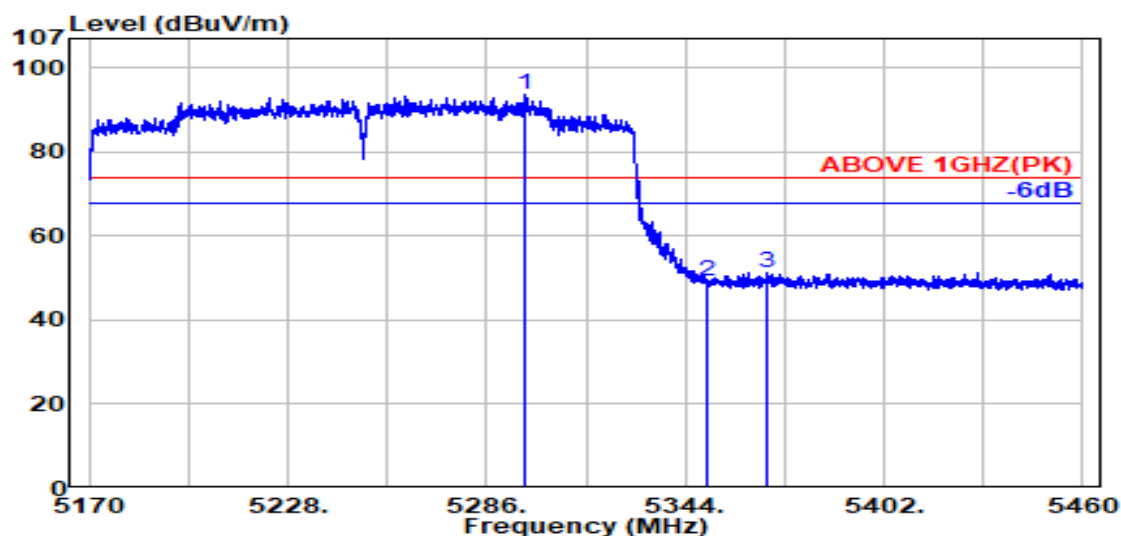

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.500	34.09	8.63	34.23	85.29	93.77	---	---	Peak
5350.000	33.90	8.67	34.22	41.02	49.37	74.00	24.63	Peak
5367.800	33.97	8.68	34.21	42.98	51.42	74.00	22.58	Peak

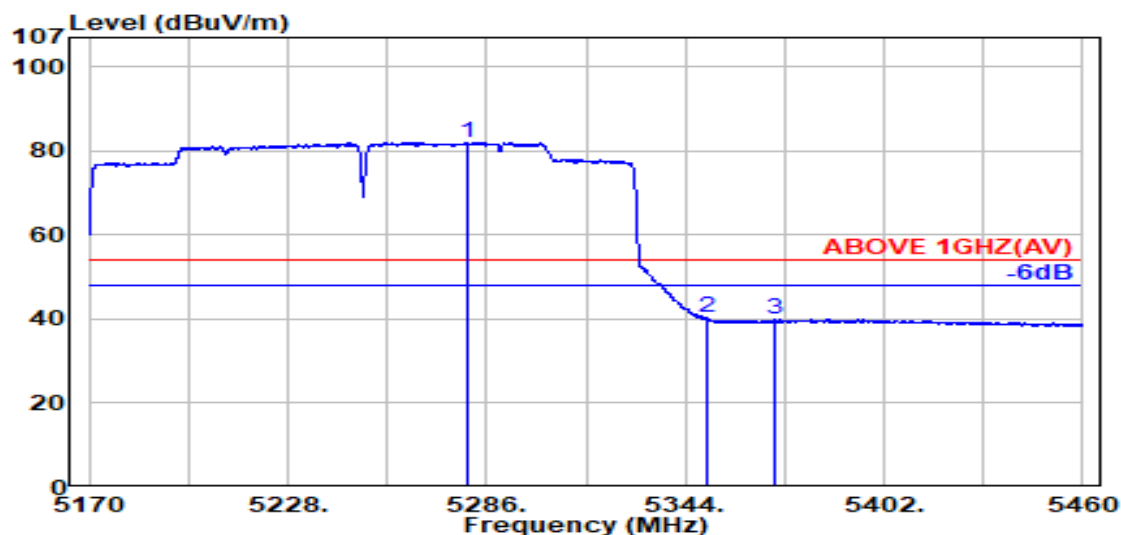


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5280.400	33.98	8.62	34.24	73.71	82.08	---	---	Average
5350.000	33.90	8.67	34.22	31.83	40.18	54.00	13.82	Average
5370.300	33.98	8.68	34.21	31.50	39.95	54.00	14.05	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

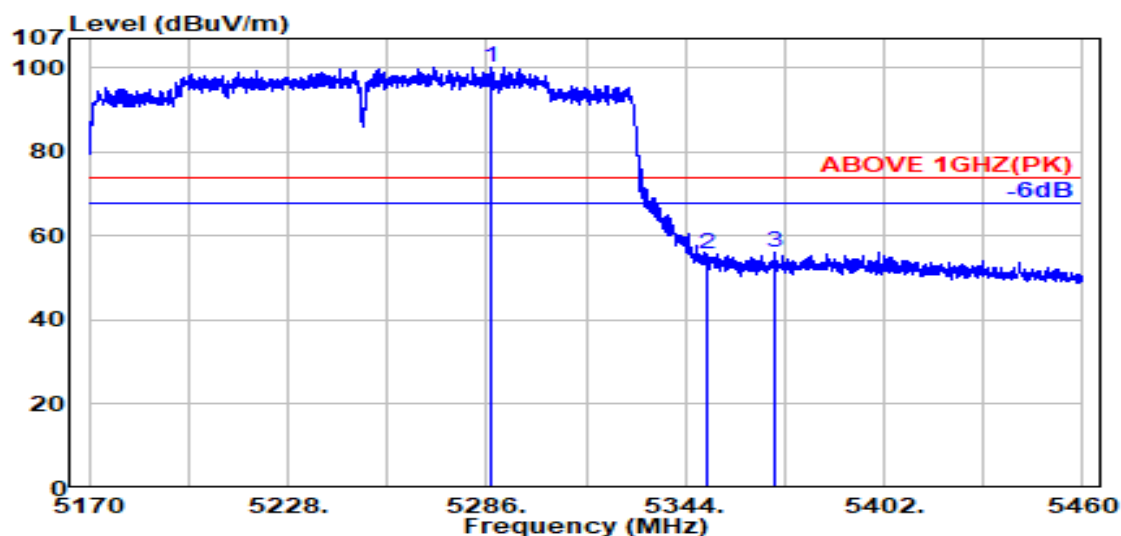

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.000	34.02	8.63	34.24	91.90	100.31	---	---	Peak
5350.000	33.90	8.67	34.22	47.36	55.71	74.00	18.29	Peak
5370.000	33.98	8.68	34.21	47.70	56.14	74.00	17.86	Peak

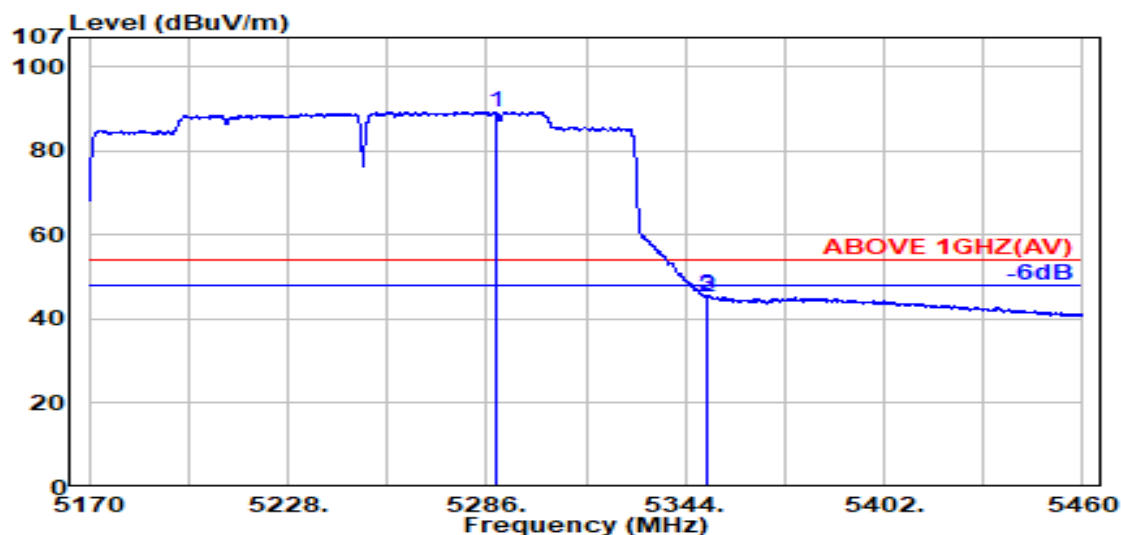


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.700	34.03	8.63	34.24	81.00	89.43	---	---	Average
5350.000	33.90	8.67	34.22	37.04	45.39	54.00	8.61	Average
5350.200	33.90	8.67	34.22	37.15	45.50	54.00	8.50	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

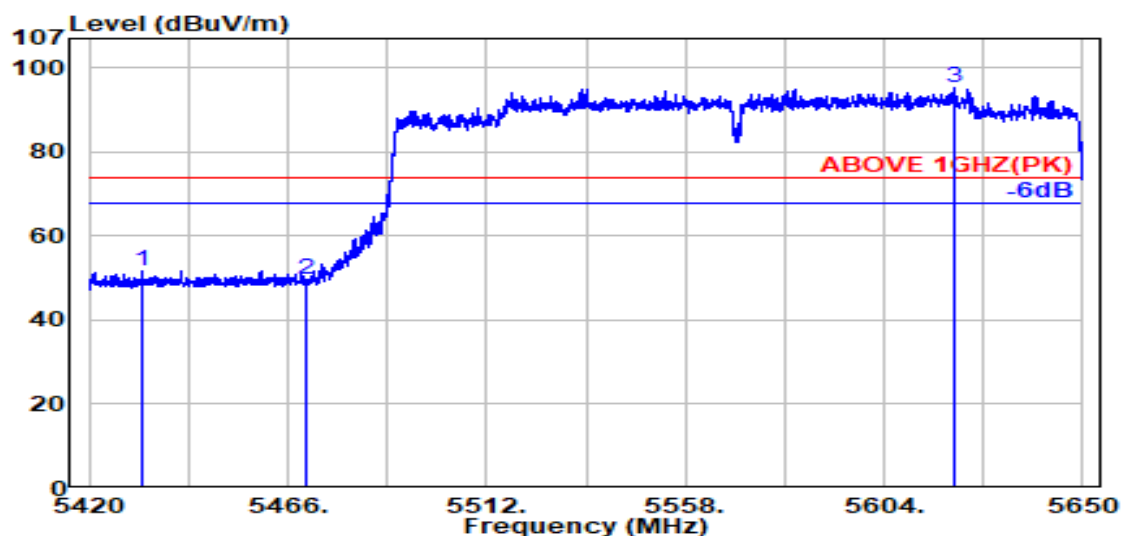

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.200	34.16	8.71	34.19	43.13	51.82	74.00	22.18	Peak
5470.000	34.16	8.74	34.18	40.78	49.50	74.00	24.50	Peak
@ 5620.100	34.00	8.82	34.23	86.52	95.11	---	---	Peak

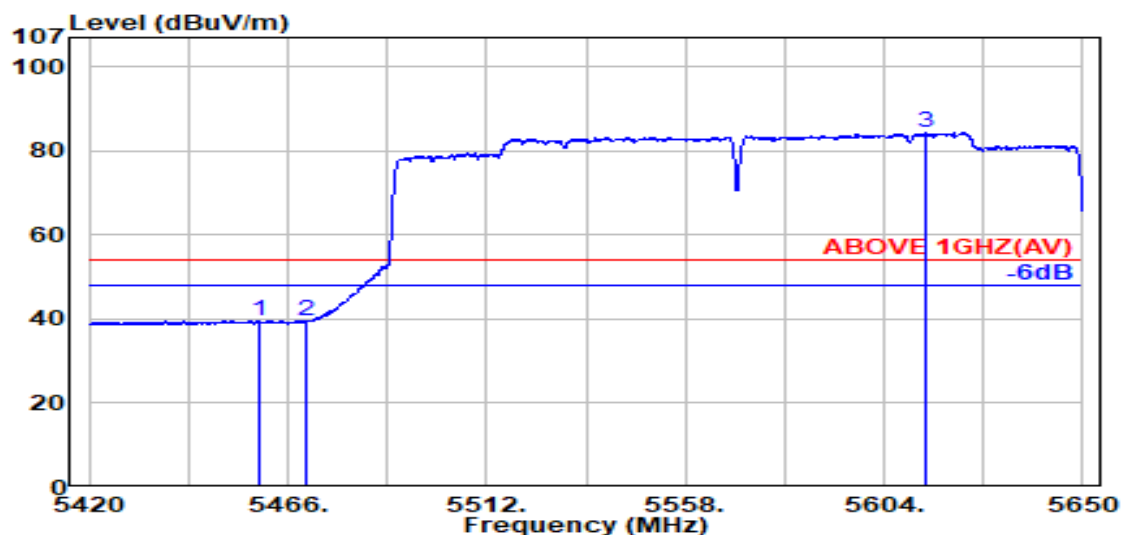


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.18	8.73	34.18	30.95	39.68	54.00	14.32	Average
5470.000	34.16	8.74	34.18	30.76	39.48	54.00	14.52	Average
@ 5613.500	34.00	8.82	34.22	75.68	84.28	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

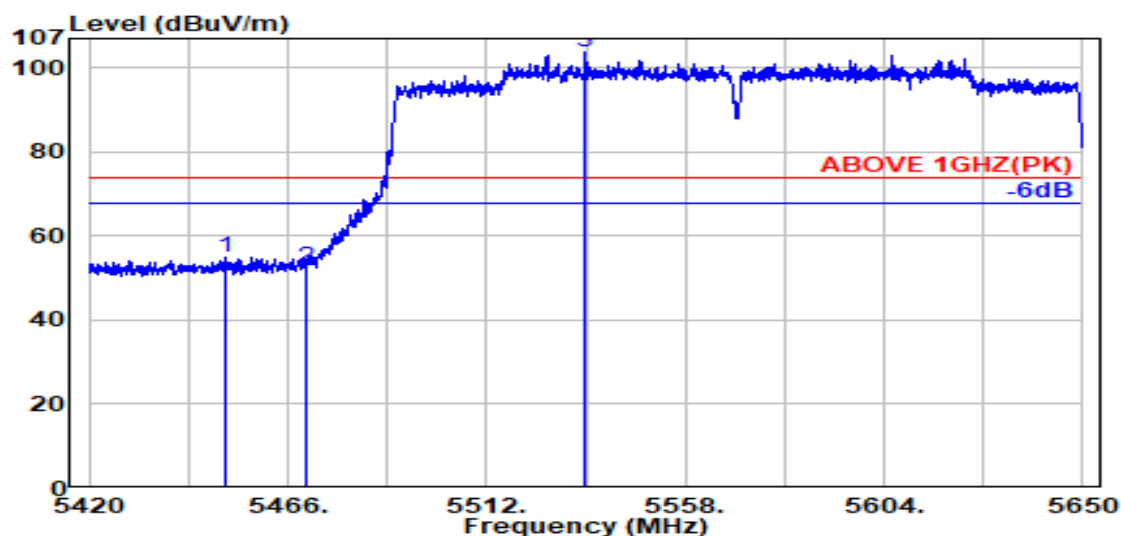

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.300	34.20	8.72	34.18	46.29	55.03	74.00	18.97	Peak
5470.000	34.16	8.74	34.18	43.85	52.57	74.00	21.43	Peak
@ 5534.700	34.10	8.77	34.19	94.89	103.58	---	---	Peak

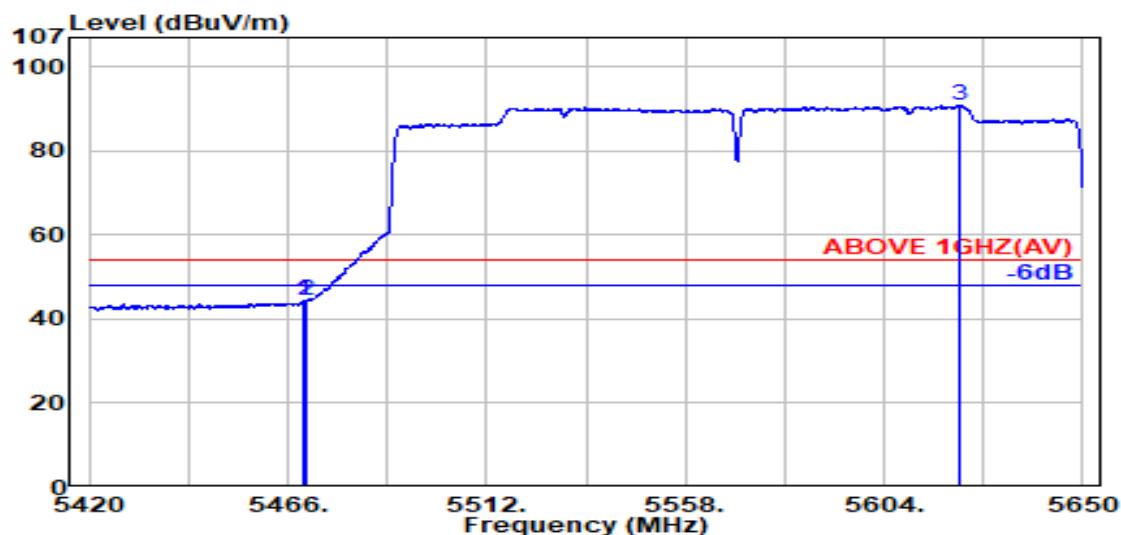


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.16	8.74	34.18	35.71	44.43	54.00	9.57	Average
5470.000	34.16	8.74	34.18	35.65	44.37	54.00	9.63	Average
@ 5621.200	34.00	8.82	34.23	82.22	90.82	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

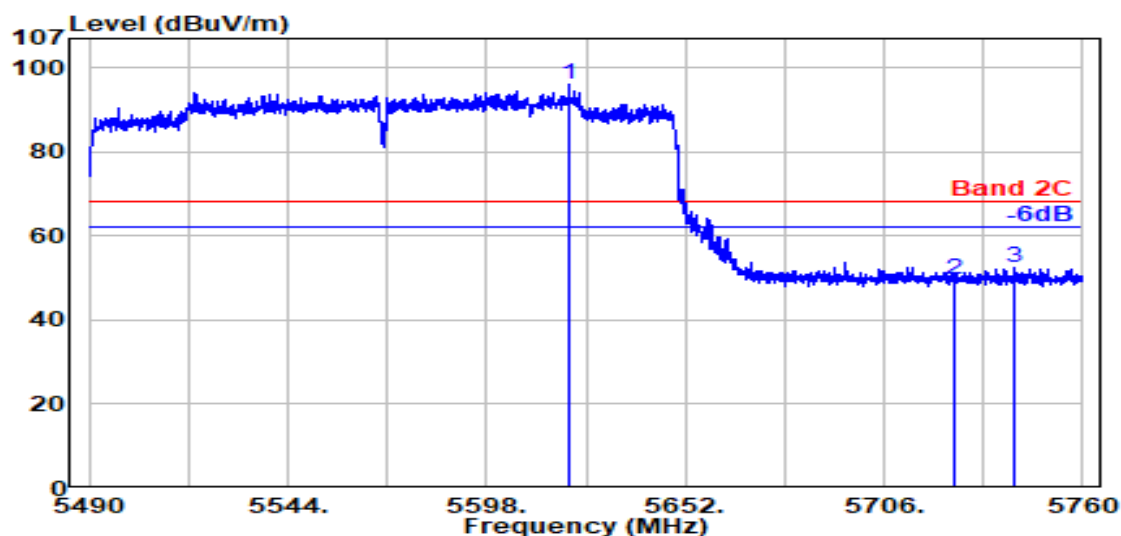

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5620.200	34.00	8.82	34.23	87.59	96.18	---	---	Peak
	5725.000	33.80	8.88	34.28	41.38	49.79	68.20	18.41	Peak
	5741.700	33.80	8.89	34.28	44.07	52.48	68.20	15.72	Peak

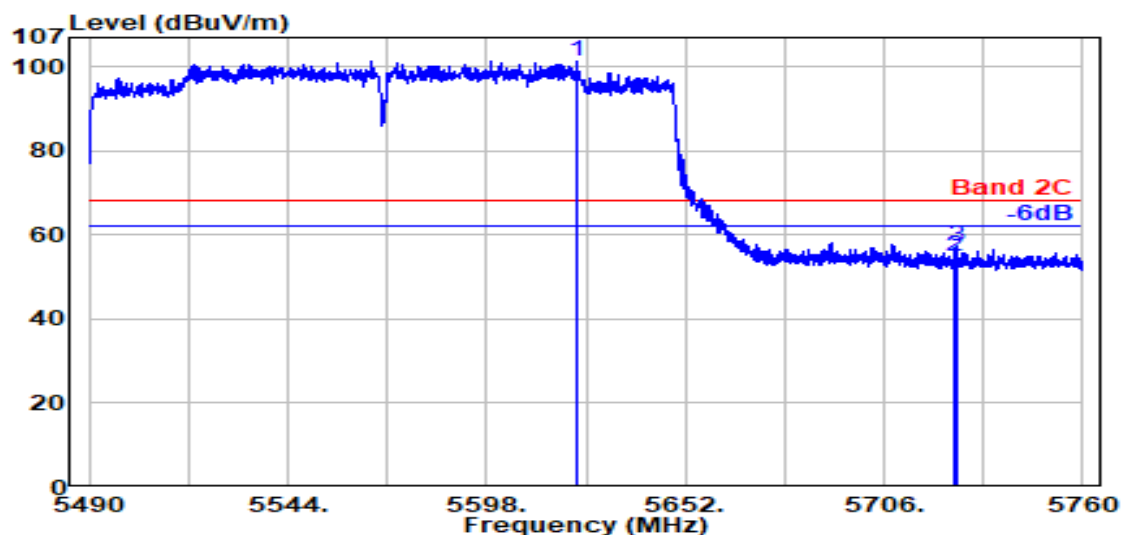


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5622.500	34.00	8.82	34.23	92.87	101.46	---	---	Peak
	5725.000	33.80	8.88	34.28	46.46	54.87	68.20	13.33	Peak
	5725.800	33.80	8.88	34.28	48.83	57.24	68.20	10.96	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

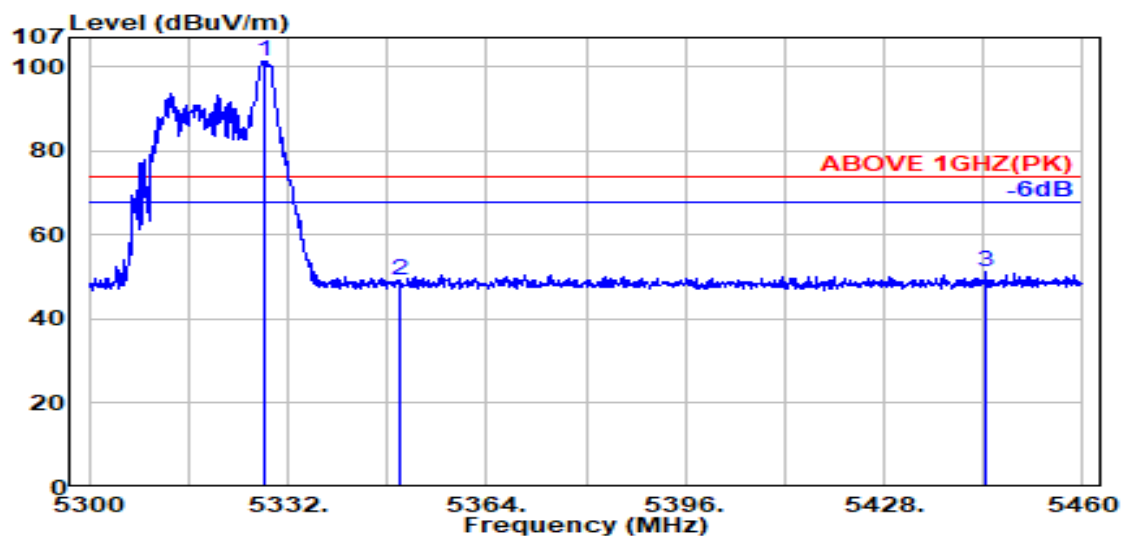

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5328.100	33.99	8.65	34.22	93.09	101.51	---	---	Peak
	5350.000	33.90	8.67	34.22	40.90	49.25	74.00	24.75	Peak
	5444.500	34.19	8.72	34.19	42.48	51.20	74.00	22.80	Peak

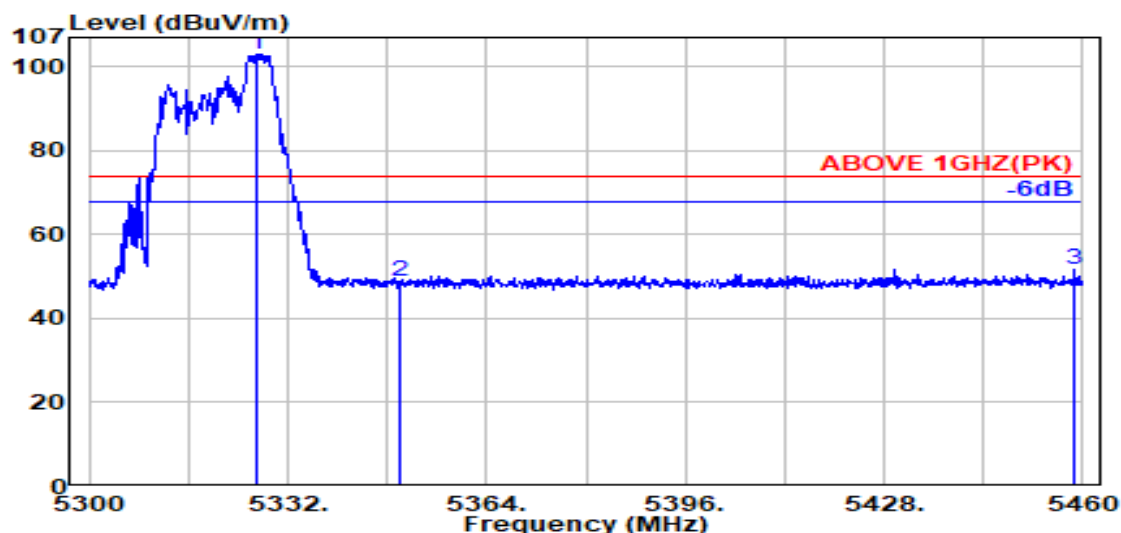


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5326.800	33.99	8.65	34.22	94.66	103.08	---	---	Peak
	5350.000	33.90	8.67	34.22	40.47	48.82	74.00	25.18	Peak
	5458.700	34.18	8.73	34.18	43.10	51.83	74.00	22.17	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

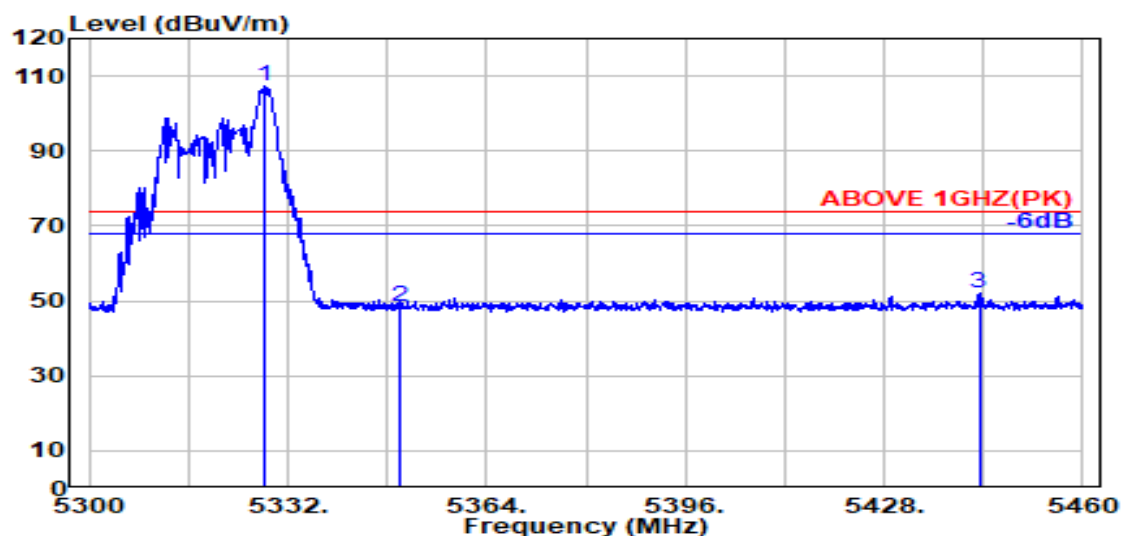

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.300	33.99	8.65	34.22	98.98	107.40	---	---	Peak
	5350.000	33.90	8.67	34.22	40.27	48.62	74.00	25.38	Peak
	5443.300	34.19	8.72	34.19	43.31	52.03	74.00	21.97	Peak

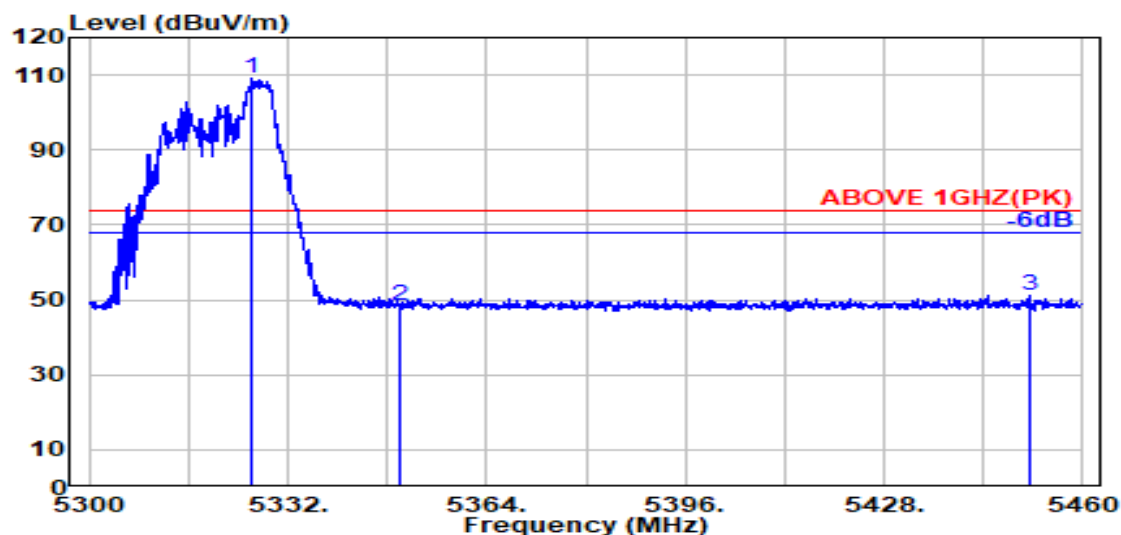


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.200	33.99	8.65	34.22	100.51	108.93	---	---	Peak
	5350.000	33.90	8.67	34.22	40.03	48.38	74.00	25.62	Peak
	5451.300	34.20	8.72	34.18	42.30	51.04	74.00	22.96	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

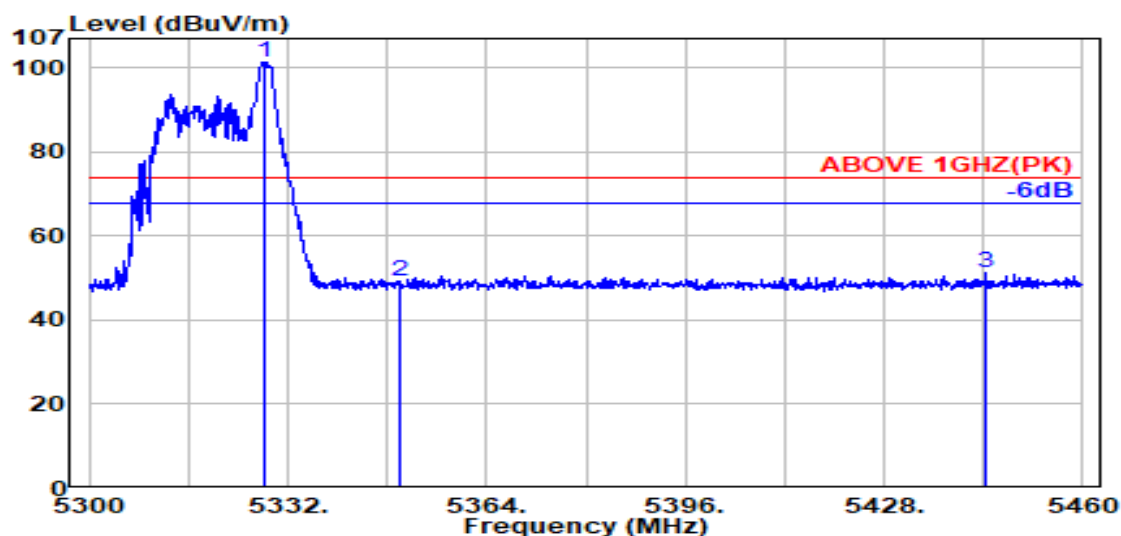

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.99	8.65	34.22	93.09	101.51	---	---	Peak
5350.000	33.90	8.67	34.22	40.90	49.25	74.00	24.75	Peak
5444.500	34.19	8.72	34.19	42.48	51.20	74.00	22.80	Peak

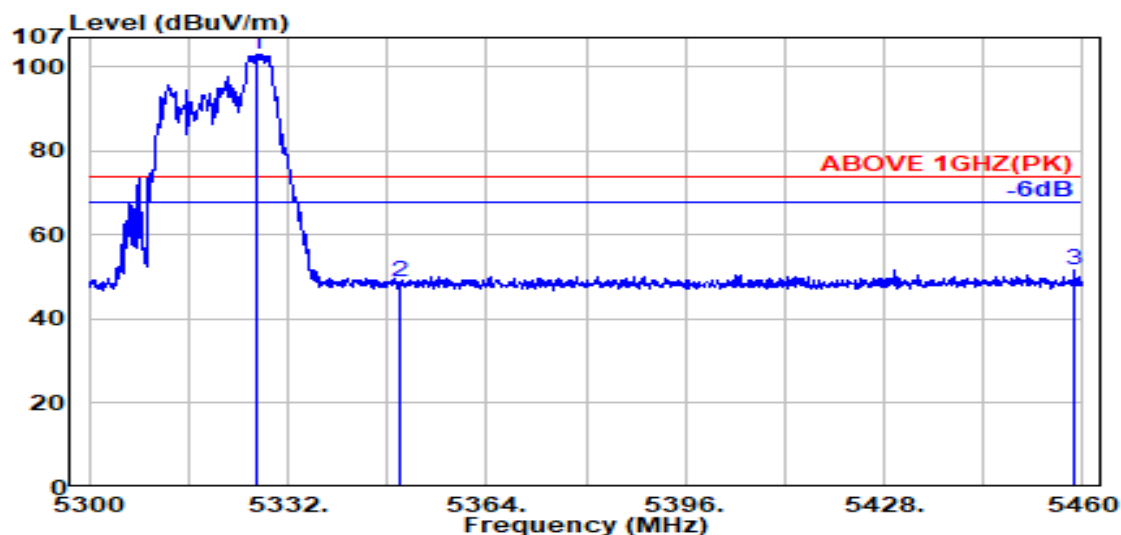


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.800	33.99	8.65	34.22	94.66	103.08	---	---	Peak
5350.000	33.90	8.67	34.22	40.47	48.82	74.00	25.18	Peak
5458.700	34.18	8.73	34.18	43.10	51.83	74.00	22.17	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

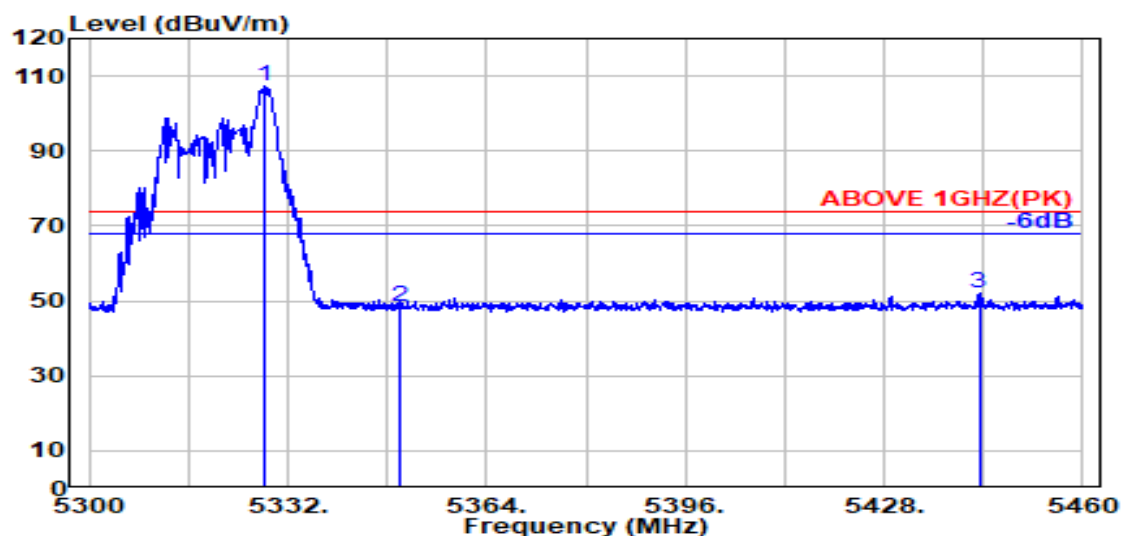

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.300	33.99	8.65	34.22	98.98	107.40	---	---	Peak
	5350.000	33.90	8.67	34.22	40.27	48.62	74.00	25.38	Peak
	5443.300	34.19	8.72	34.19	43.31	52.03	74.00	21.97	Peak

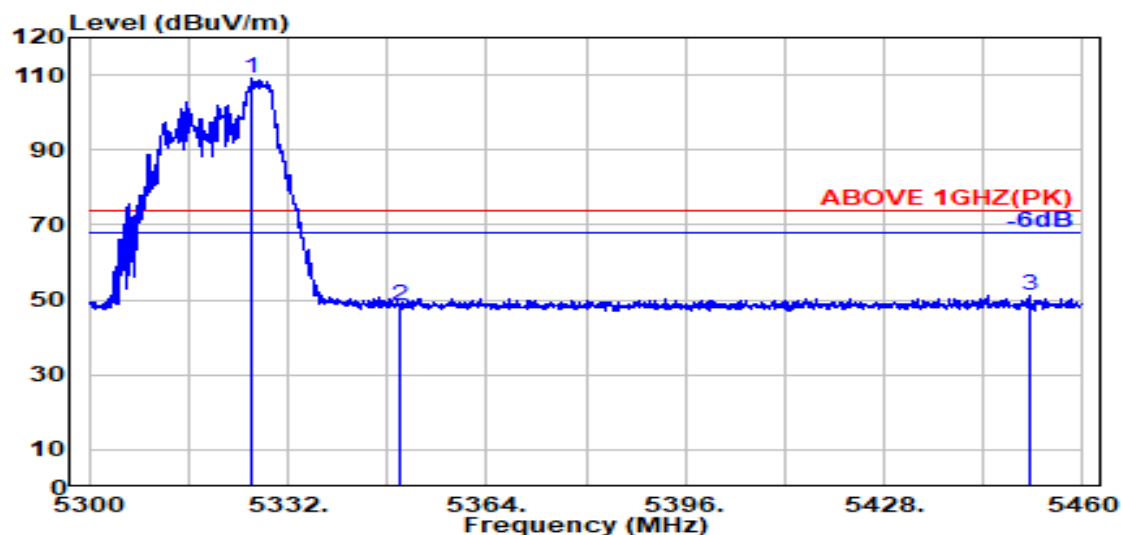


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.200	33.99	8.65	34.22	100.51	108.93	---	---	Peak
	5350.000	33.90	8.67	34.22	40.03	48.38	74.00	25.62	Peak
	5451.300	34.20	8.72	34.18	42.30	51.04	74.00	22.96	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

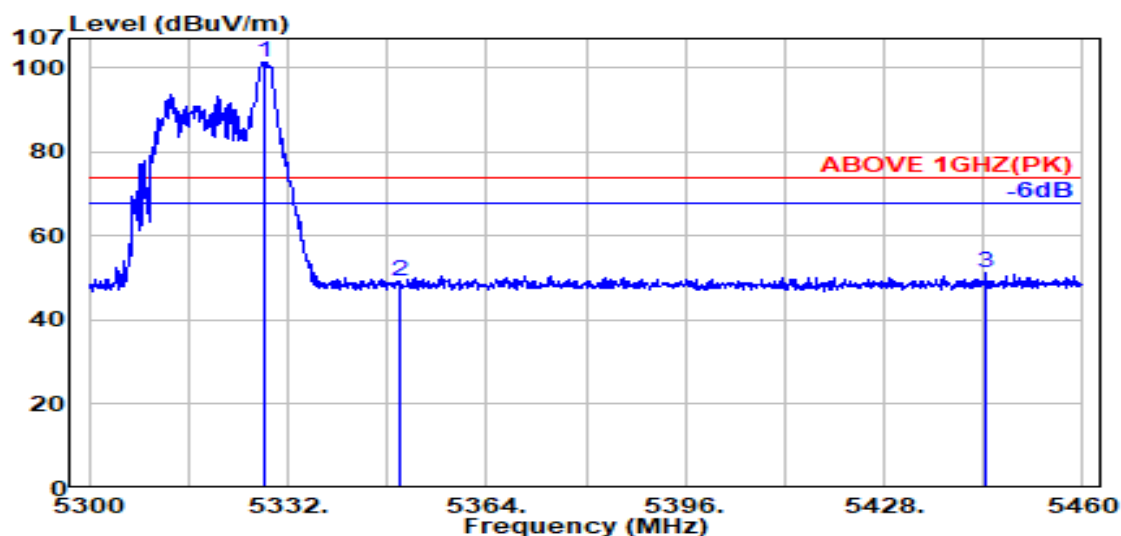

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.99	8.65	34.22	93.09	101.51	---	---	Peak
5350.000	33.90	8.67	34.22	40.90	49.25	74.00	24.75	Peak
5444.500	34.19	8.72	34.19	42.48	51.20	74.00	22.80	Peak

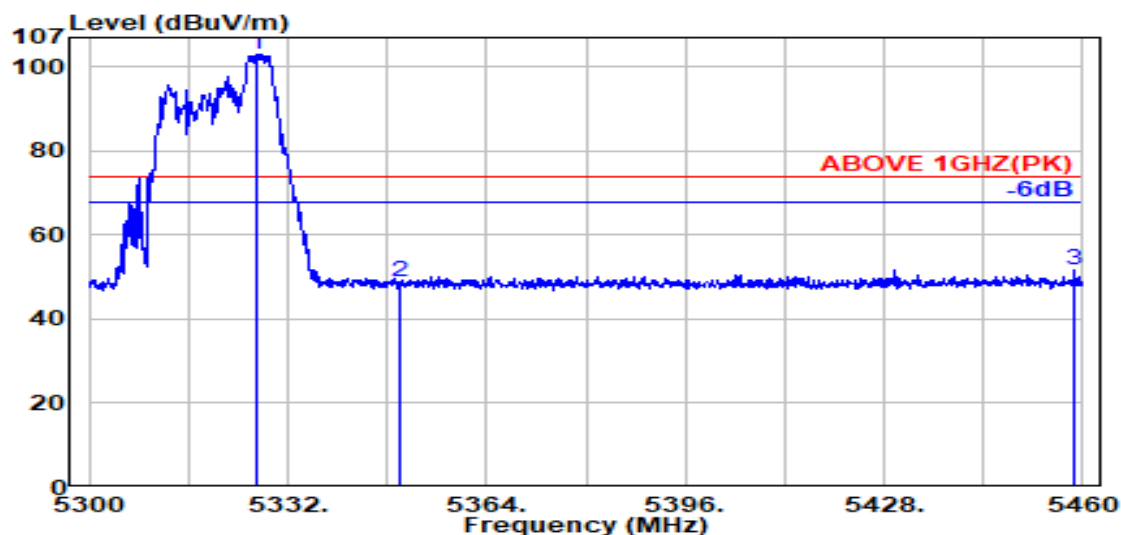


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.800	33.99	8.65	34.22	94.66	103.08	---	---	Peak
5350.000	33.90	8.67	34.22	40.47	48.82	74.00	25.18	Peak
5458.700	34.18	8.73	34.18	43.10	51.83	74.00	22.17	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

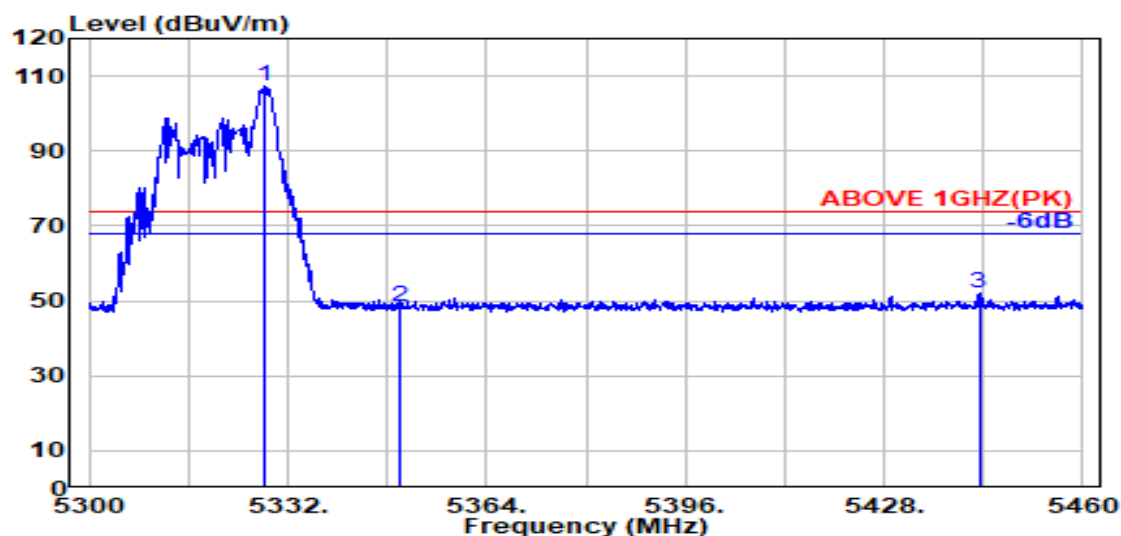

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.300	33.99	8.65	34.22	98.98	107.40	---	---	Peak
	5350.000	33.90	8.67	34.22	40.27	48.62	74.00	25.38	Peak
	5443.300	34.19	8.72	34.19	43.31	52.03	74.00	21.97	Peak

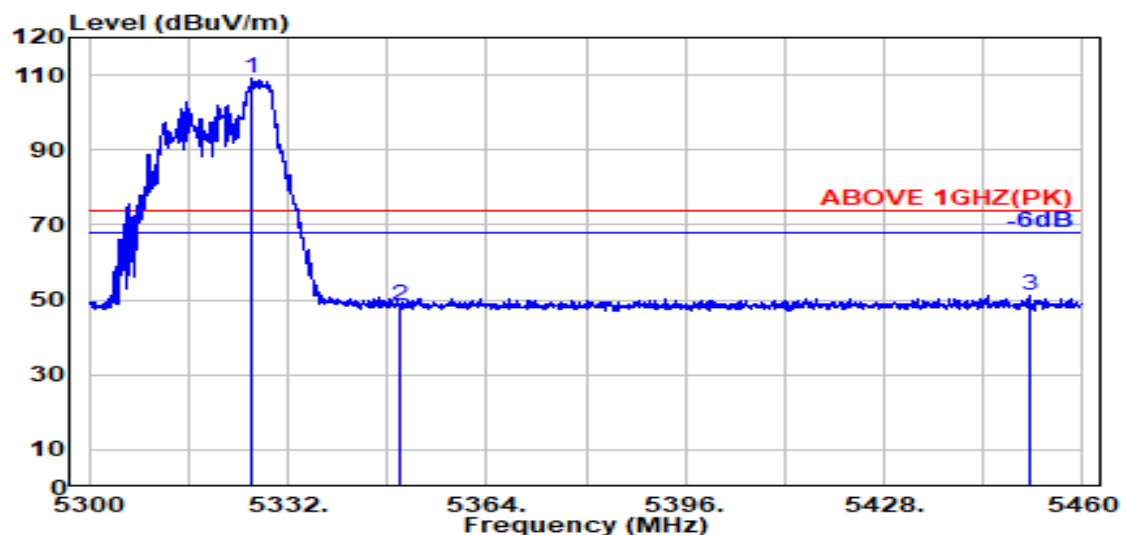


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.200	33.99	8.65	34.22	100.51	108.93	---	---	Peak
	5350.000	33.90	8.67	34.22	40.03	48.38	74.00	25.62	Peak
	5451.300	34.20	8.72	34.18	42.30	51.04	74.00	22.96	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

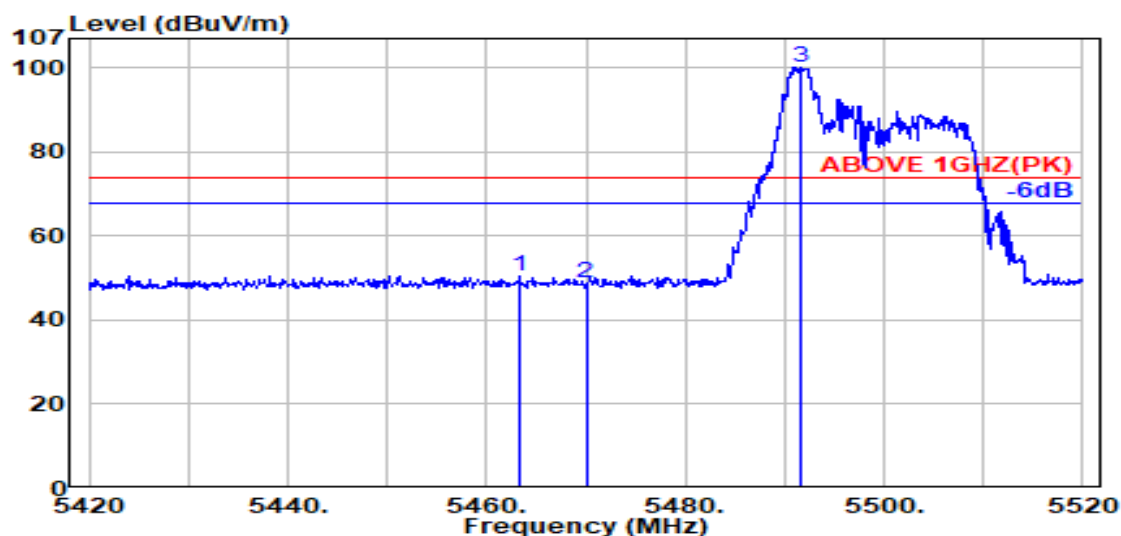

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.17	8.73	34.18	41.81	50.53	74.00	23.47	Peak
5470.000	34.16	8.74	34.18	40.23	48.94	74.00	25.06	Peak
@ 5491.600	34.12	8.75	34.17	91.47	100.17	---	---	Peak

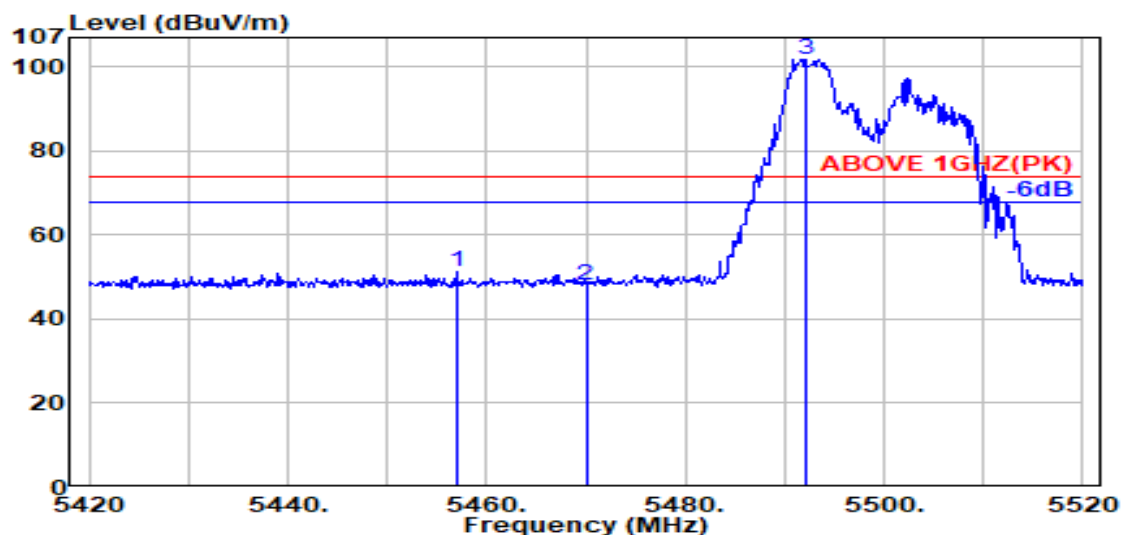


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.000	34.19	8.73	34.18	42.68	51.41	74.00	22.59	Peak
5470.000	34.16	8.74	34.18	39.22	47.93	74.00	26.07	Peak
@ 5492.100	34.12	8.75	34.17	93.23	101.93	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

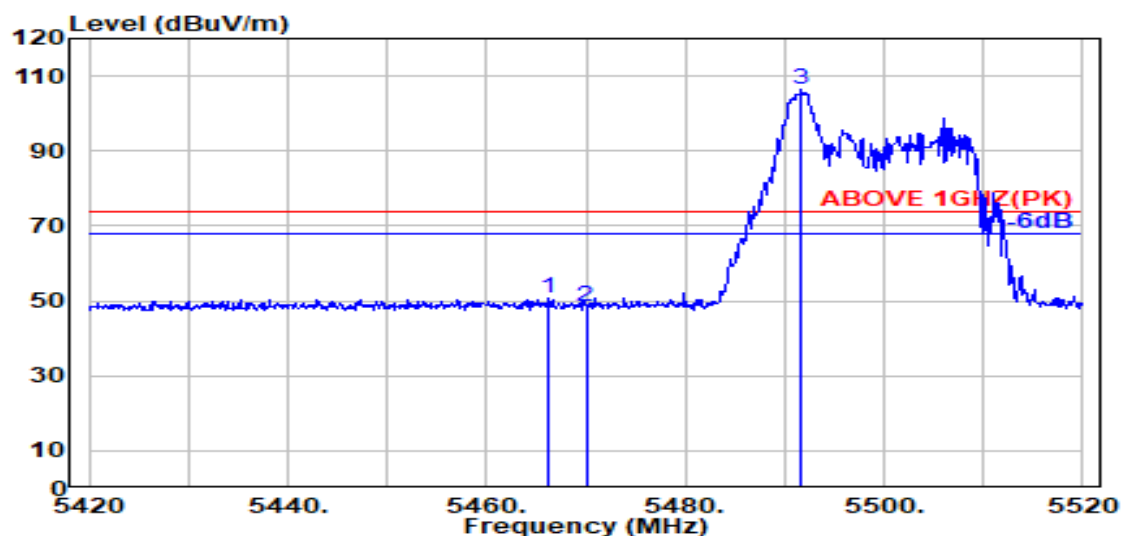

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.300	34.17	8.73	34.18	41.81	50.53	74.00	23.47	Peak
5470.000	34.16	8.74	34.18	39.95	48.67	74.00	25.33	Peak
@ 5491.700	34.12	8.75	34.17	97.55	106.25	---	---	Peak

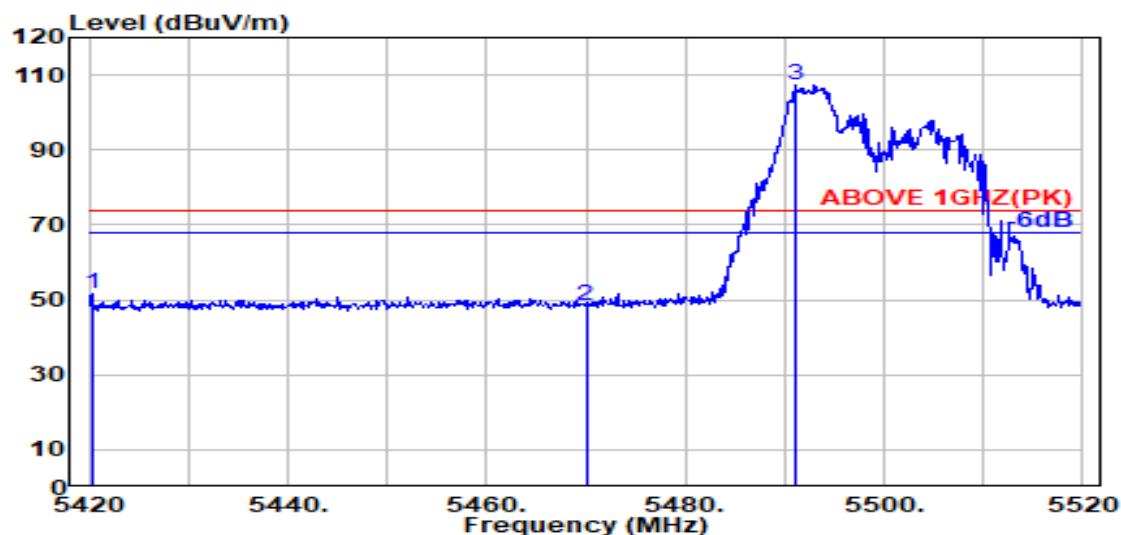


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5420.300	34.14	8.71	34.19	43.04	51.69	74.00	22.31	Peak
5470.000	34.16	8.74	34.18	39.59	48.31	74.00	25.69	Peak
@ 5491.200	34.12	8.75	34.17	98.68	107.38	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

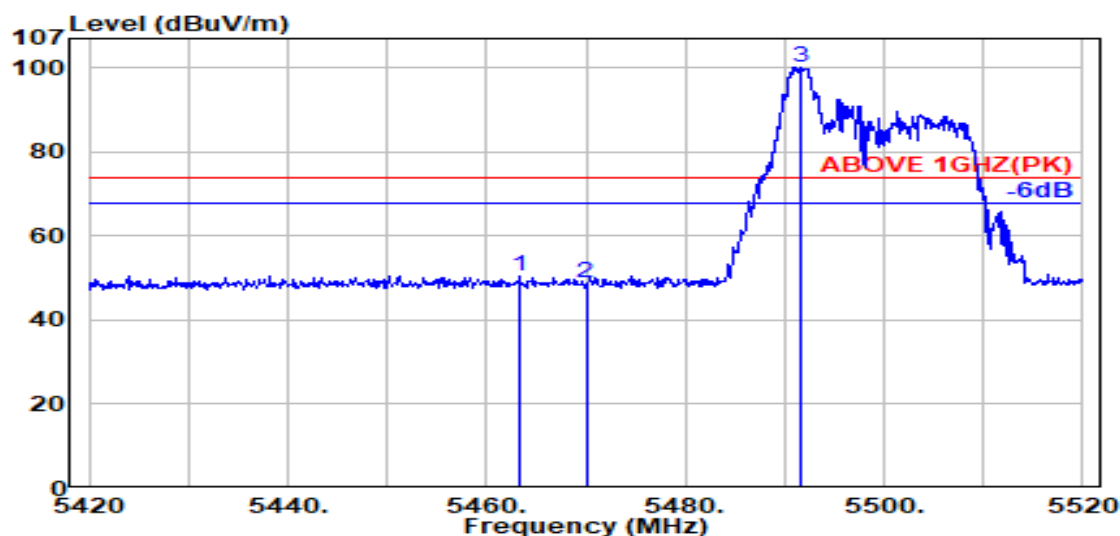

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.300	34.17	8.73	34.18	41.81	50.53	74.00	23.47	Peak
5470.000	34.16	8.74	34.18	40.23	48.94	74.00	25.06	Peak
@ 5491.600	34.12	8.75	34.17	91.47	100.17	---	---	Peak

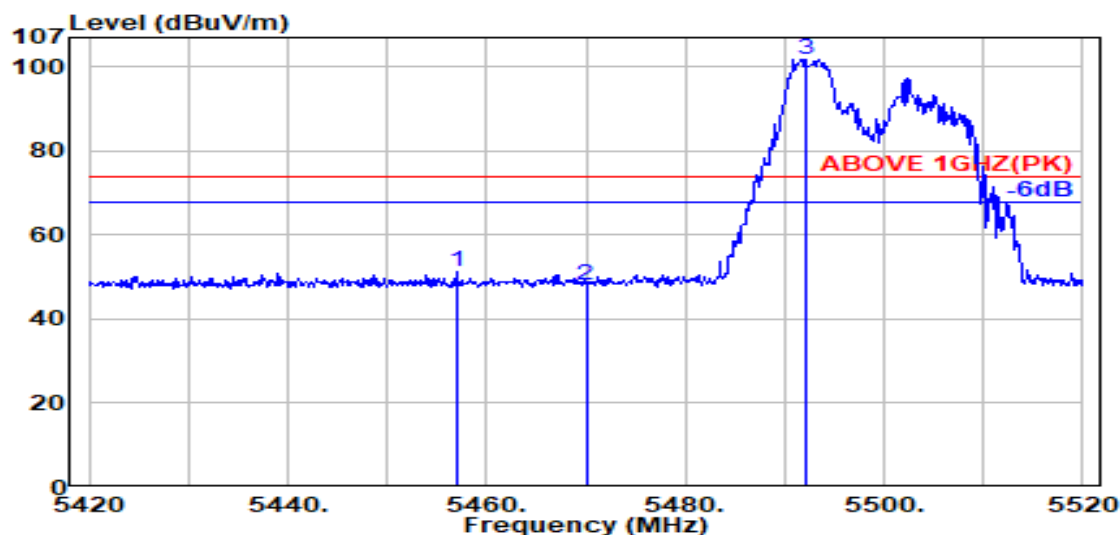


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.000	34.19	8.73	34.18	42.68	51.41	74.00	22.59	Peak
5470.000	34.16	8.74	34.18	39.22	47.93	74.00	26.07	Peak
@ 5492.100	34.12	8.75	34.17	93.23	101.93	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

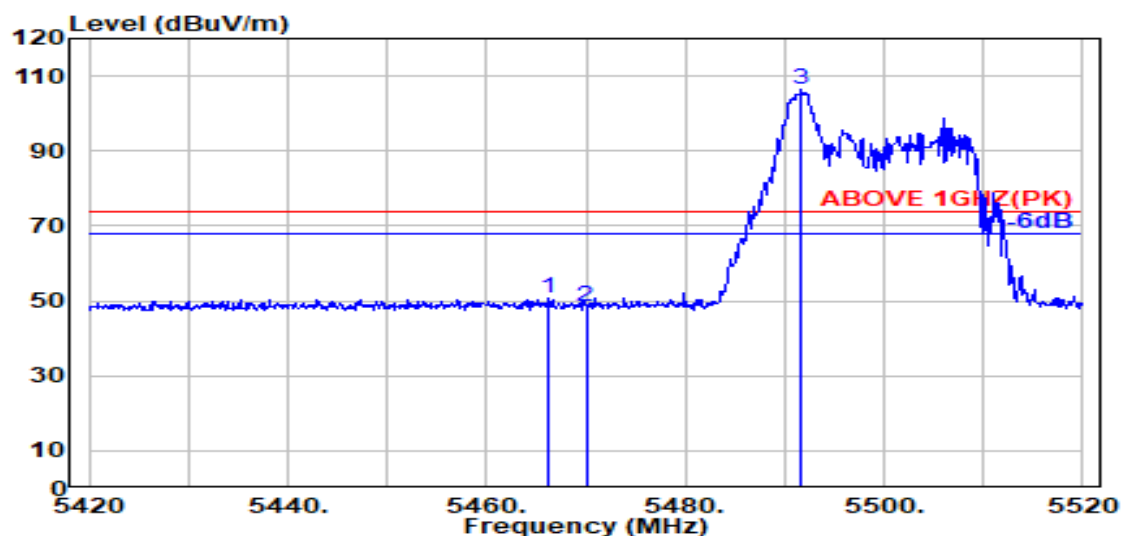

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.17	8.73	34.18	41.81	50.53	74.00	23.47	Peak
5470.000	34.16	8.74	34.18	39.95	48.67	74.00	25.33	Peak
@ 5491.700	34.12	8.75	34.17	97.55	106.25	---	---	Peak

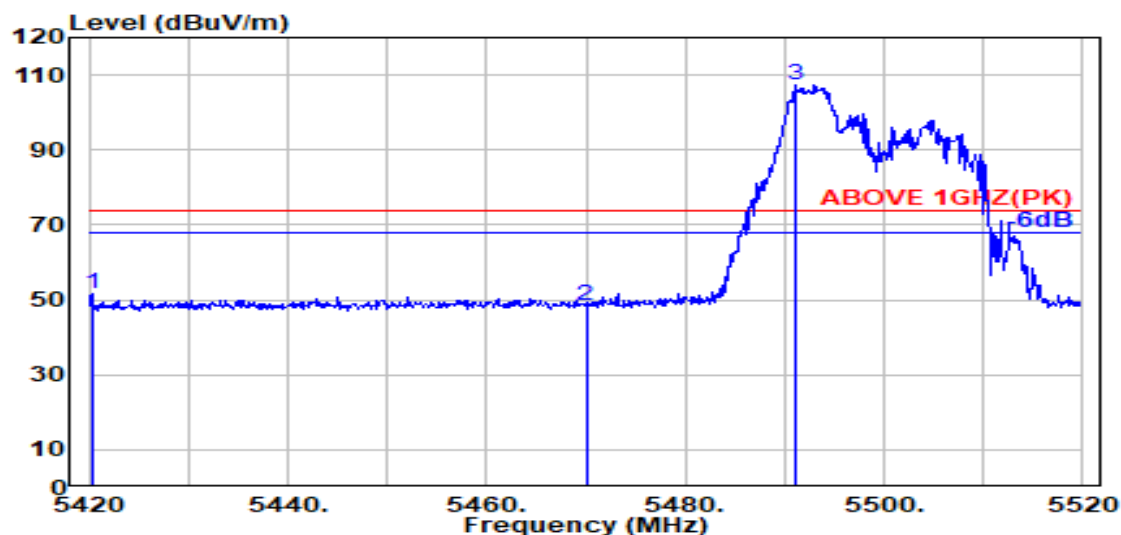


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.300	34.14	8.71	34.19	43.04	51.69	74.00	22.31	Peak
5470.000	34.16	8.74	34.18	39.59	48.31	74.00	25.69	Peak
@ 5491.200	34.12	8.75	34.17	98.68	107.38	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

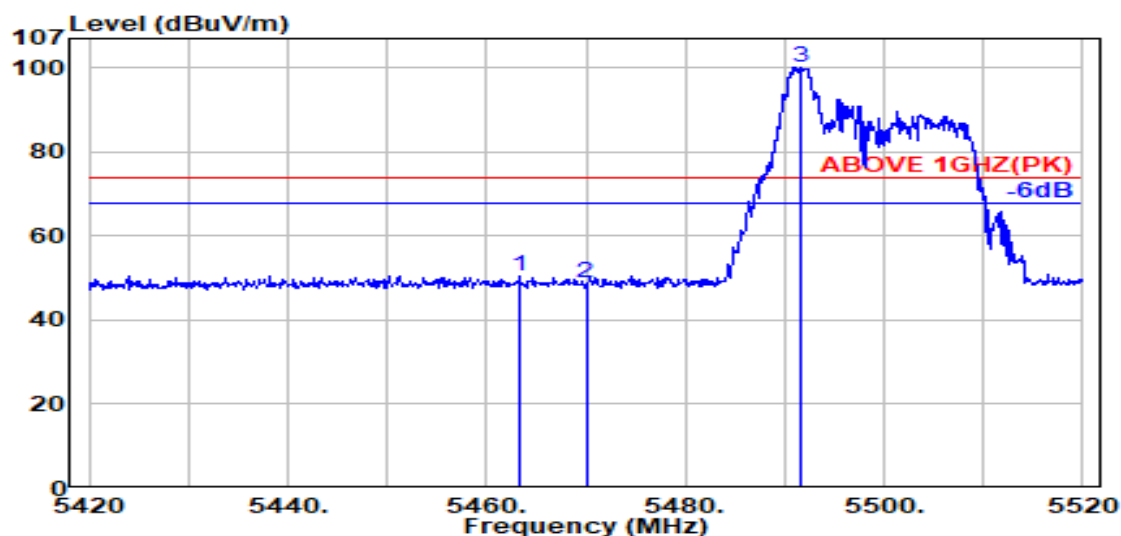

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.300	34.17	8.73	34.18	41.81	50.53	74.00	23.47	Peak
5470.000	34.16	8.74	34.18	40.23	48.94	74.00	25.06	Peak
@ 5491.600	34.12	8.75	34.17	91.47	100.17	---	---	Peak

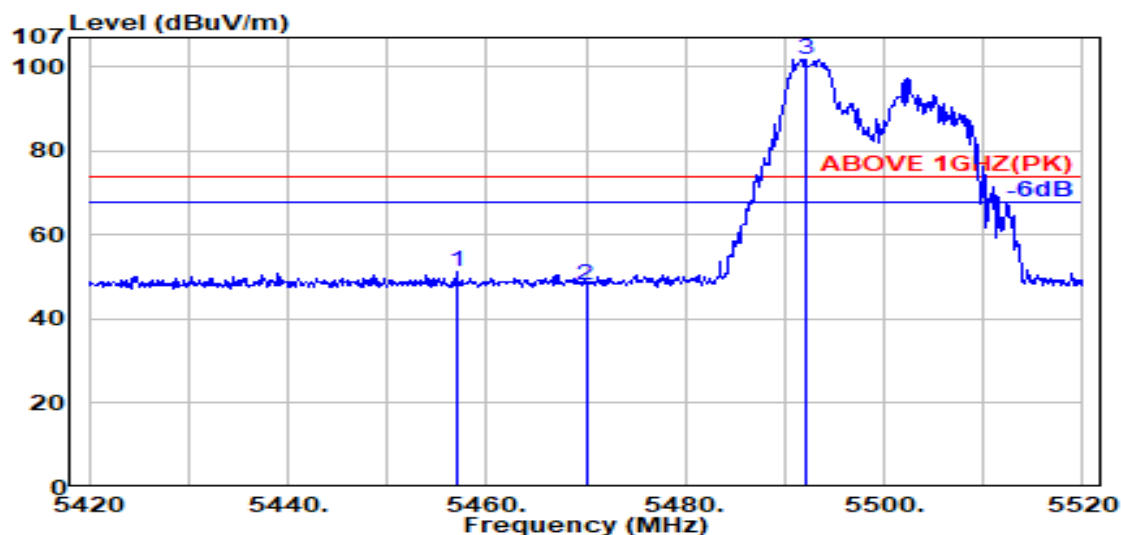


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.000	34.19	8.73	34.18	42.68	51.41	74.00	22.59	Peak
5470.000	34.16	8.74	34.18	39.22	47.93	74.00	26.07	Peak
@ 5492.100	34.12	8.75	34.17	93.23	101.93	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

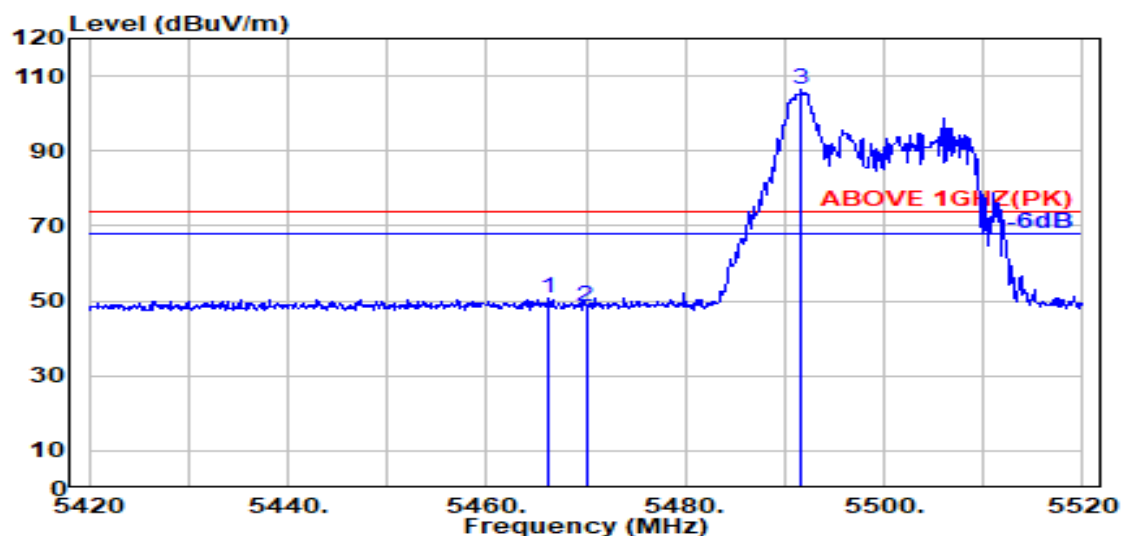

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.300	34.17	8.73	34.18	41.81	50.53	74.00	23.47	Peak
5470.000	34.16	8.74	34.18	39.95	48.67	74.00	25.33	Peak
@ 5491.700	34.12	8.75	34.17	97.55	106.25	---	---	Peak

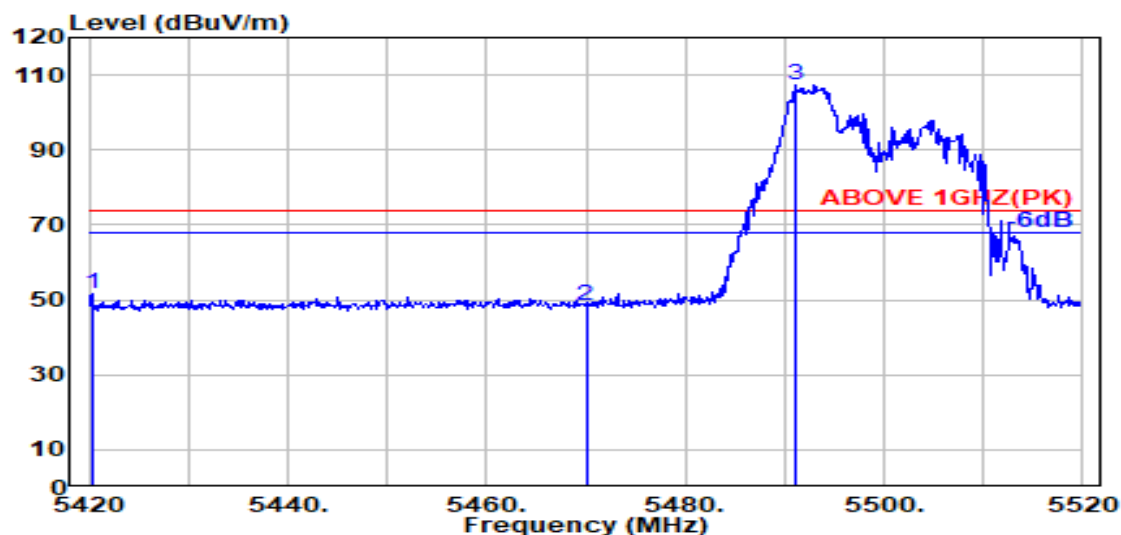


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5420.300	34.14	8.71	34.19	43.04	51.69	74.00	22.31	Peak
5470.000	34.16	8.74	34.18	39.59	48.31	74.00	25.69	Peak
@ 5491.200	34.12	8.75	34.17	98.68	107.38	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

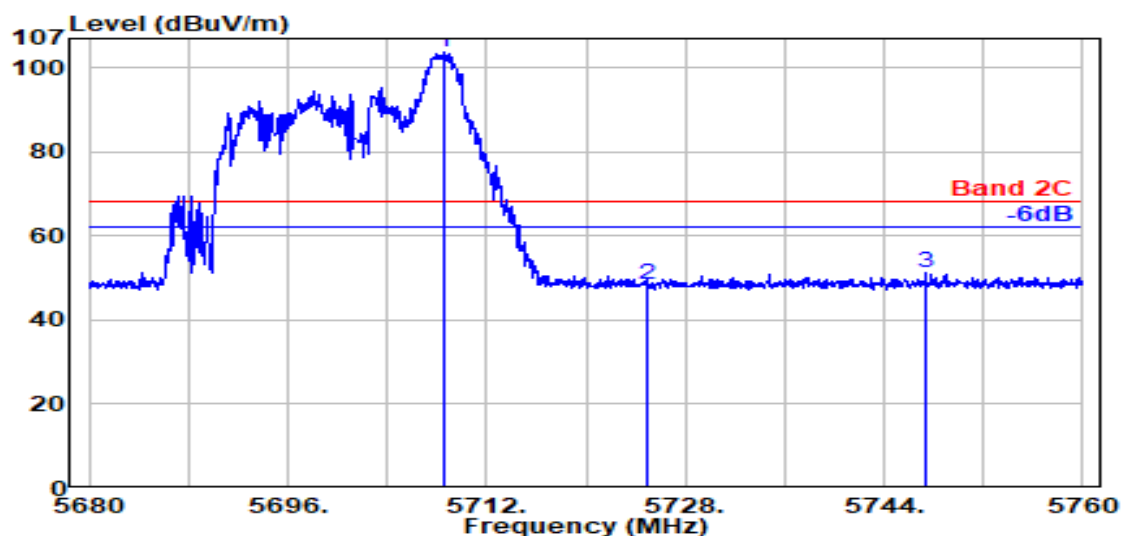

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.550	33.80	8.87	34.27	95.25	103.65	---	---	Peak
	5725.000	33.80	8.88	34.28	39.92	48.32	68.20	19.88	Peak
	5747.350	33.80	8.89	34.29	42.85	51.26	68.20	16.94	Peak

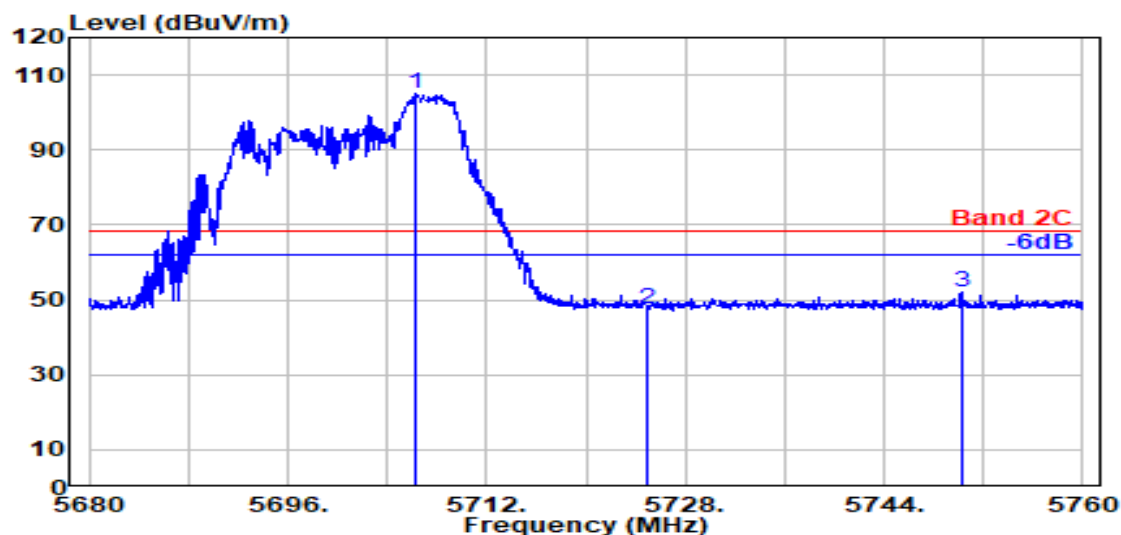


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.250	33.80	8.87	34.27	96.66	105.06	---	---	Peak
	5725.000	33.80	8.88	34.28	39.25	47.65	68.20	20.55	Peak
	5750.200	33.80	8.89	34.29	43.73	52.14	68.20	16.06	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

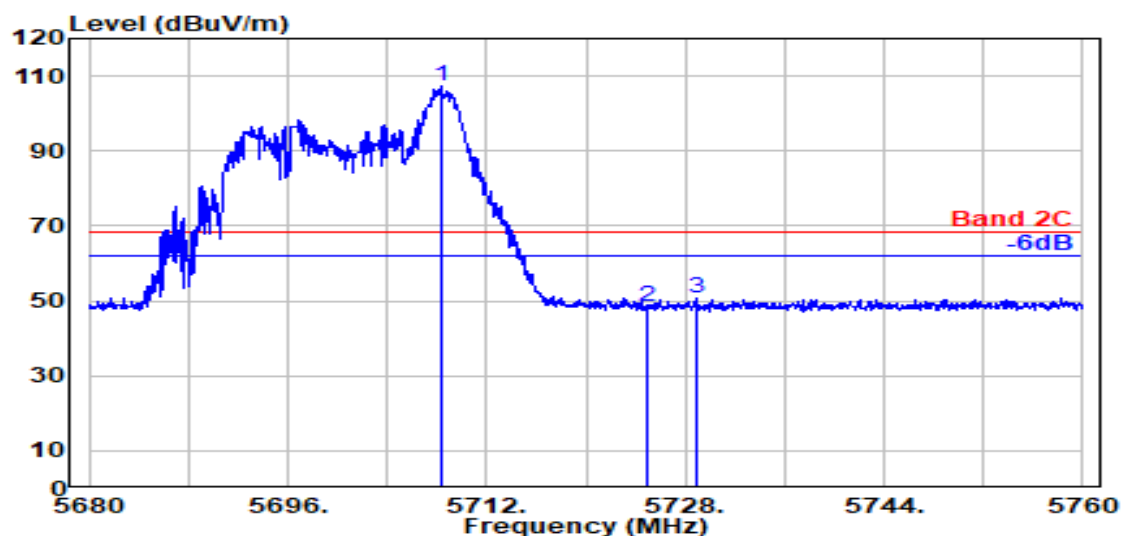

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.300	33.80	8.87	34.27	98.74	107.14	---	---	Peak
	5725.000	33.80	8.88	34.28	39.98	48.39	68.20	19.81	Peak
	5728.900	33.80	8.88	34.28	42.38	50.79	68.20	17.41	Peak

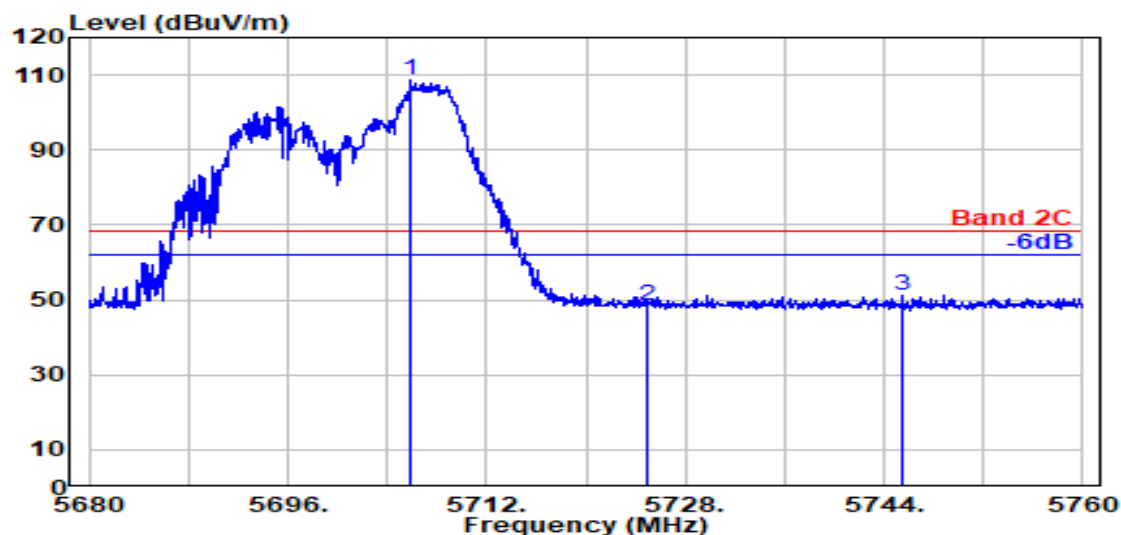


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.900	33.80	8.87	34.27	100.13	108.54	---	---	Peak
	5725.000	33.80	8.88	34.28	39.89	48.30	68.20	19.90	Peak
	5745.450	33.80	8.89	34.29	42.83	51.23	68.20	16.97	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

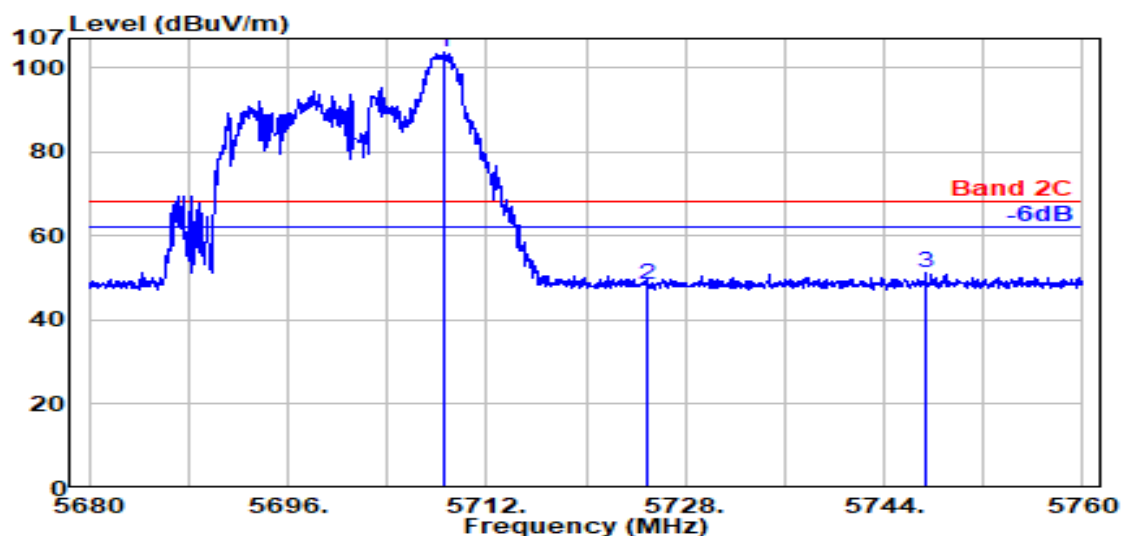

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.550	33.80	8.87	34.27	95.25	103.65	---	---	Peak
	5725.000	33.80	8.88	34.28	39.92	48.32	68.20	19.88	Peak
	5747.350	33.80	8.89	34.29	42.85	51.26	68.20	16.94	Peak

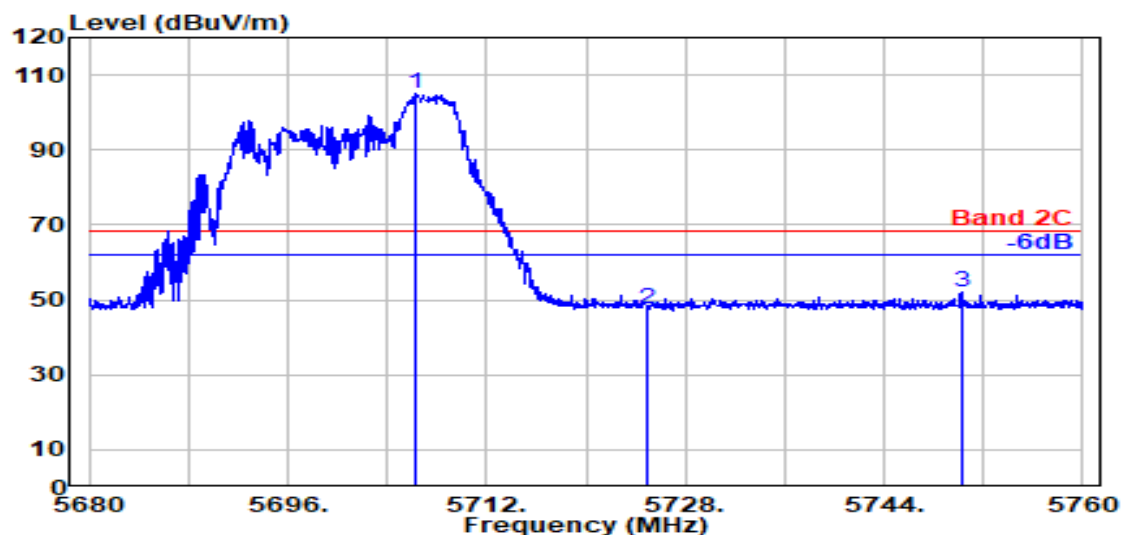


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.250	33.80	8.87	34.27	96.66	105.06	---	---	Peak
	5725.000	33.80	8.88	34.28	39.25	47.65	68.20	20.55	Peak
	5750.200	33.80	8.89	34.29	43.73	52.14	68.20	16.06	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

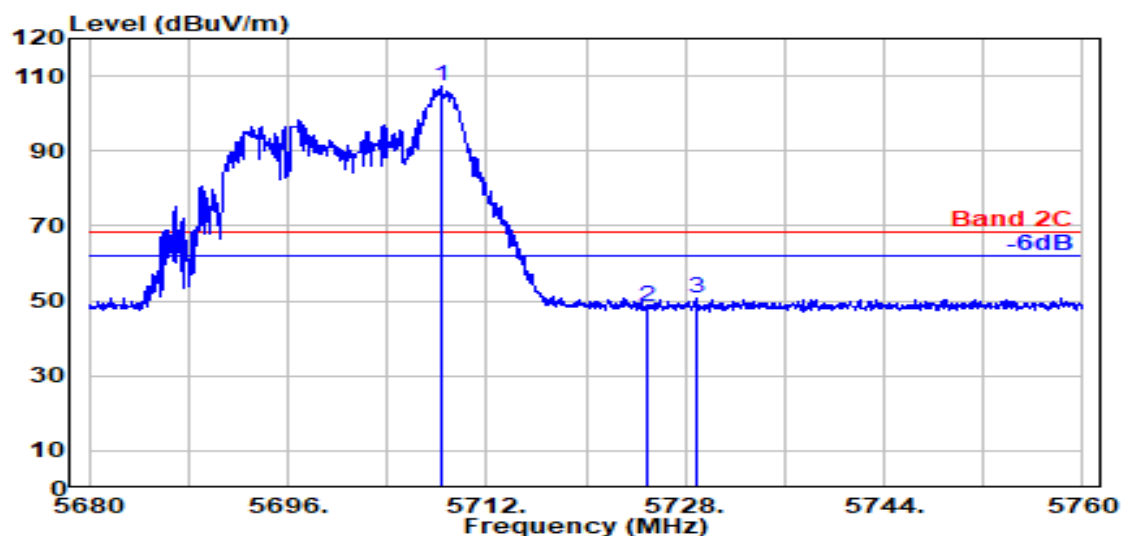

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.300	33.80	8.87	34.27	98.74	107.14	---	---	Peak
5725.000	33.80	8.88	34.28	39.98	48.39	68.20	19.81	Peak
5728.900	33.80	8.88	34.28	42.38	50.79	68.20	17.41	Peak

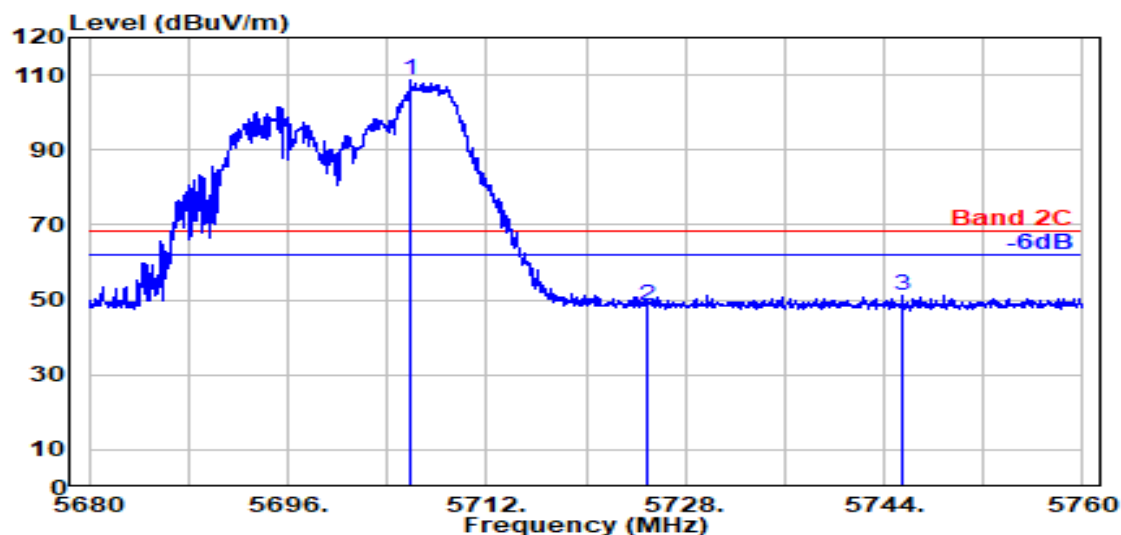


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.900	33.80	8.87	34.27	100.13	108.54	---	---	Peak
5725.000	33.80	8.88	34.28	39.89	48.30	68.20	19.90	Peak
5745.450	33.80	8.89	34.29	42.83	51.23	68.20	16.97	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

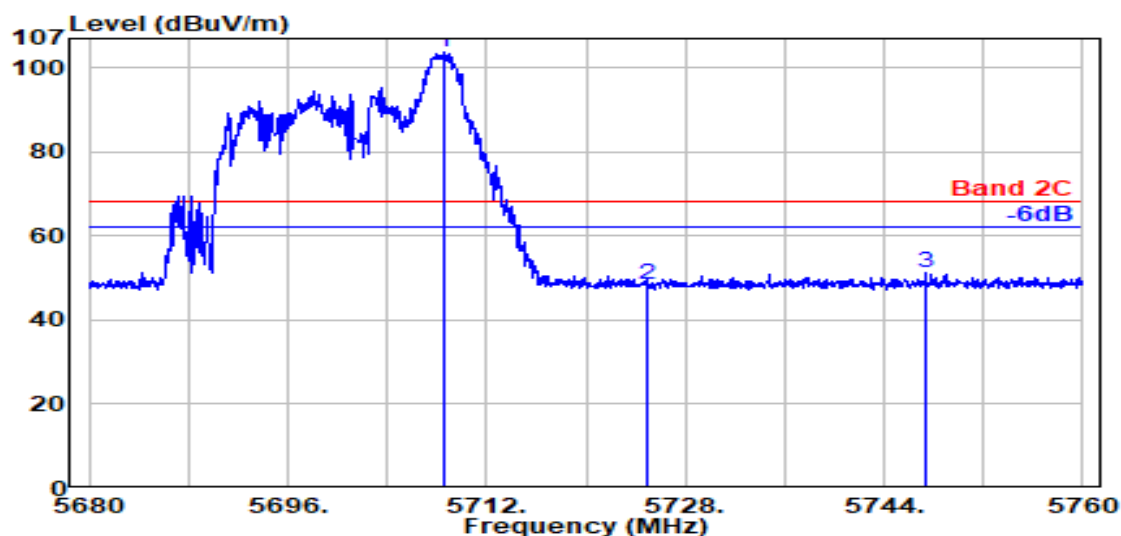

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.550	33.80	8.87	34.27	95.25	103.65	---	---	Peak
	5725.000	33.80	8.88	34.28	39.92	48.32	68.20	19.88	Peak
	5747.350	33.80	8.89	34.29	42.85	51.26	68.20	16.94	Peak

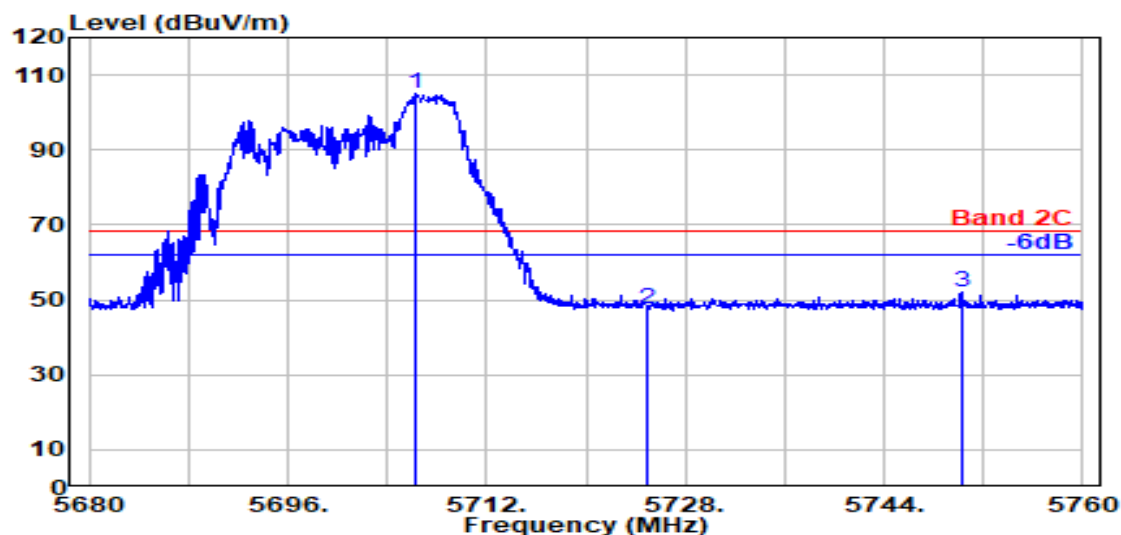


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.250	33.80	8.87	34.27	96.66	105.06	---	---	Peak
	5725.000	33.80	8.88	34.28	39.25	47.65	68.20	20.55	Peak
	5750.200	33.80	8.89	34.29	43.73	52.14	68.20	16.06	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

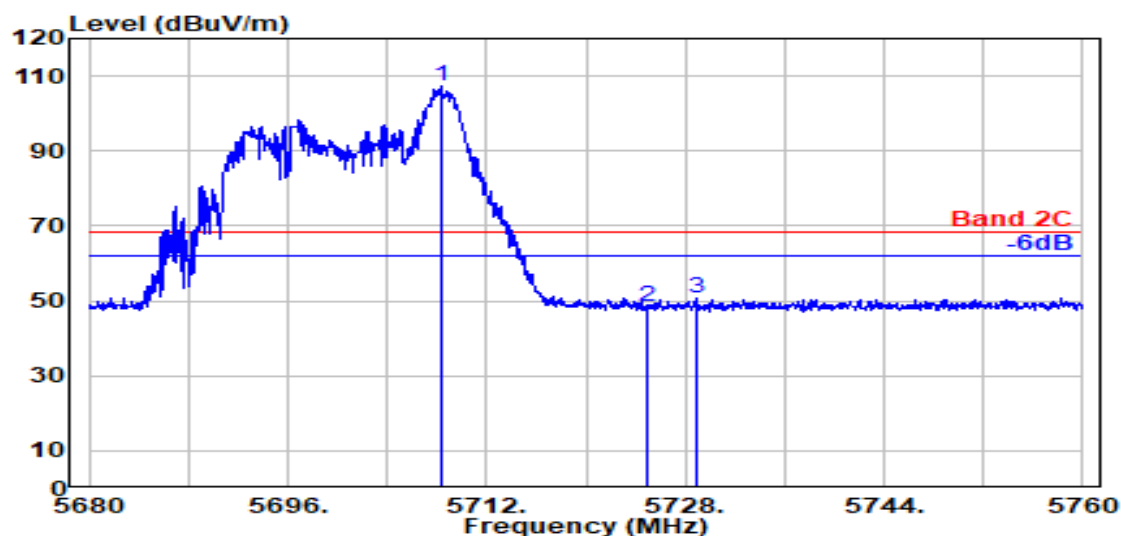

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.300	33.80	8.87	34.27	98.74	107.14	---	---	Peak
5725.000	33.80	8.88	34.28	39.98	48.39	68.20	19.81	Peak
5728.900	33.80	8.88	34.28	42.38	50.79	68.20	17.41	Peak

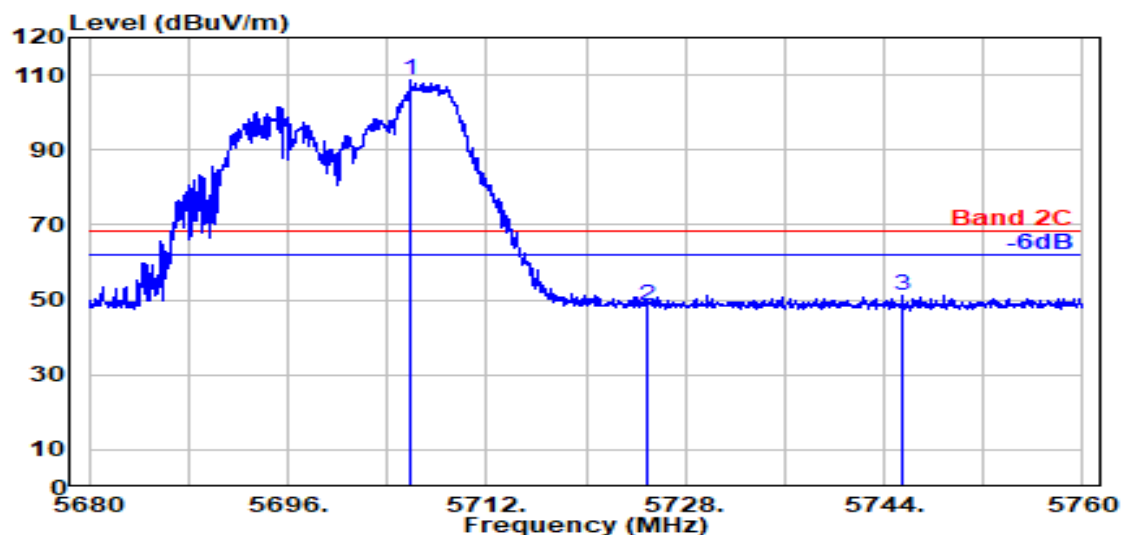


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.900	33.80	8.87	34.27	100.13	108.54	---	---	Peak
5725.000	33.80	8.88	34.28	39.89	48.30	68.20	19.90	Peak
5745.450	33.80	8.89	34.29	42.83	51.23	68.20	16.97	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

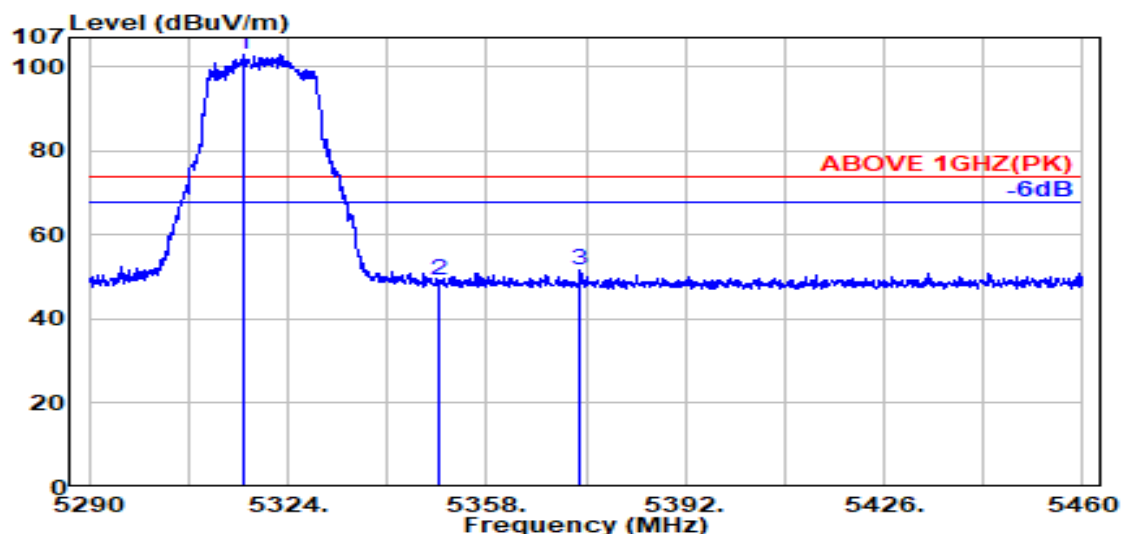

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.500	34.03	8.65	34.23	94.57	103.02	---	---	Peak
	5350.000	33.90	8.67	34.22	40.87	49.21	74.00	24.79	Peak
	5374.100	34.00	8.68	34.21	43.27	51.73	74.00	22.27	Peak

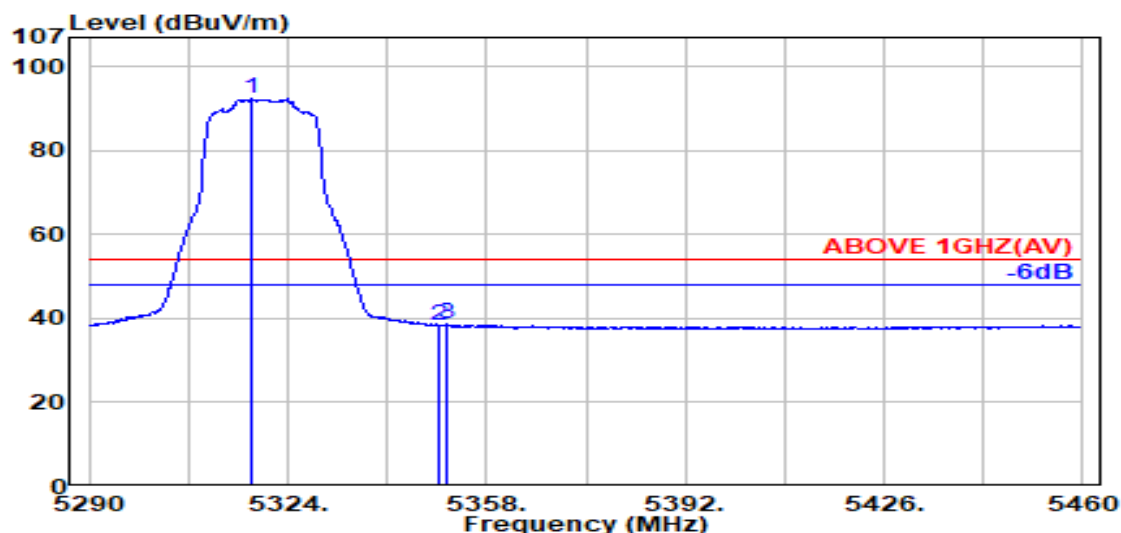


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.900	34.03	8.65	34.23	83.93	92.38	---	---	Average
	5350.000	33.90	8.67	34.22	29.93	38.28	54.00	15.72	Average
	5351.200	33.90	8.67	34.22	30.23	38.59	54.00	15.41	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

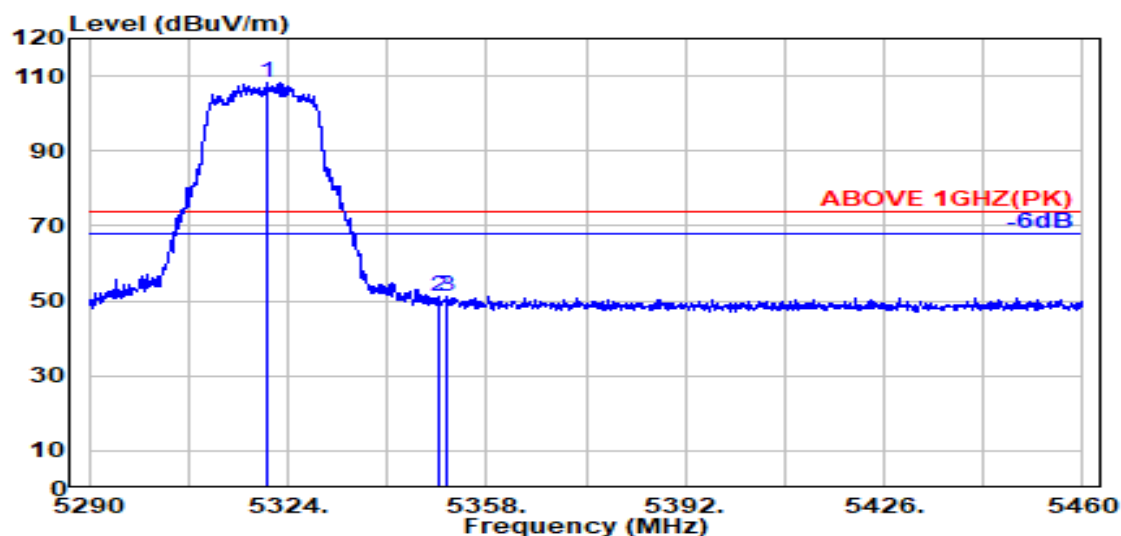

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5320.400	34.02	8.65	34.23	99.85	108.29	---	---	Peak
	5350.000	33.90	8.67	34.22	42.66	51.01	74.00	22.99	Peak
	5351.200	33.90	8.67	34.22	42.75	51.10	74.00	22.90	Peak

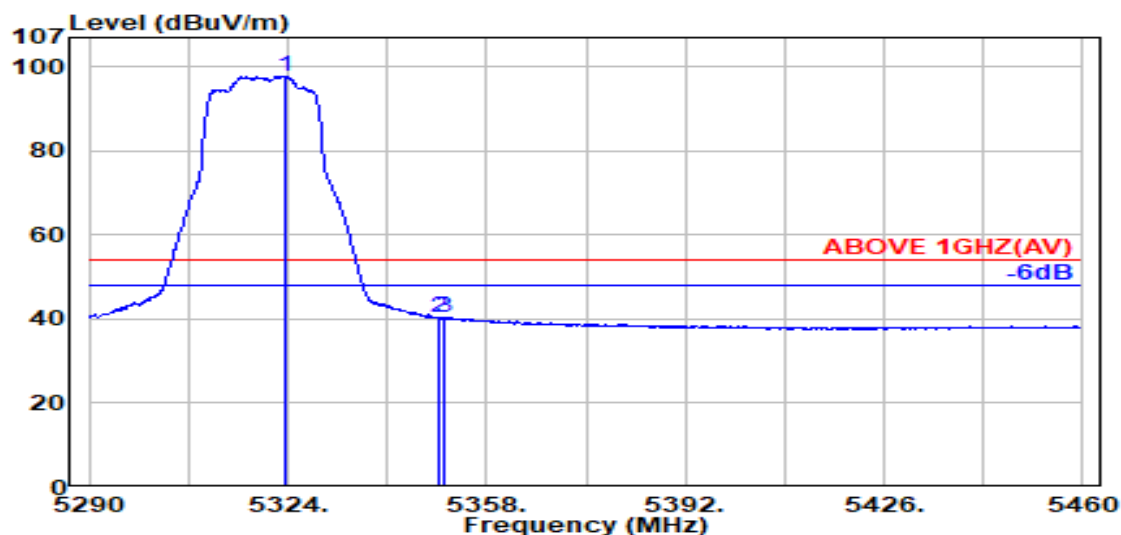


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.500	34.01	8.65	34.22	89.40	97.83	---	---	Average
	5350.000	33.90	8.67	34.22	31.97	40.32	54.00	13.68	Average
	5350.700	33.90	8.67	34.22	32.01	40.36	54.00	13.64	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

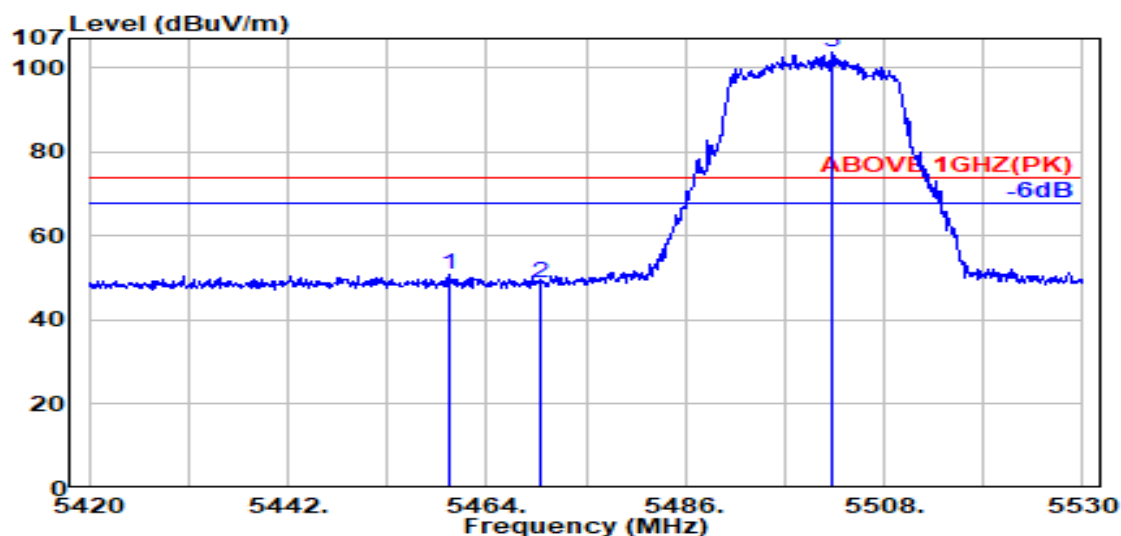

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.000	34.18	8.73	34.18	41.97	50.70	74.00	23.30	Peak
5470.000	34.16	8.74	34.18	40.33	49.04	74.00	24.96	Peak
@ 5502.300	34.10	8.75	34.17	95.03	103.72	---	---	Peak

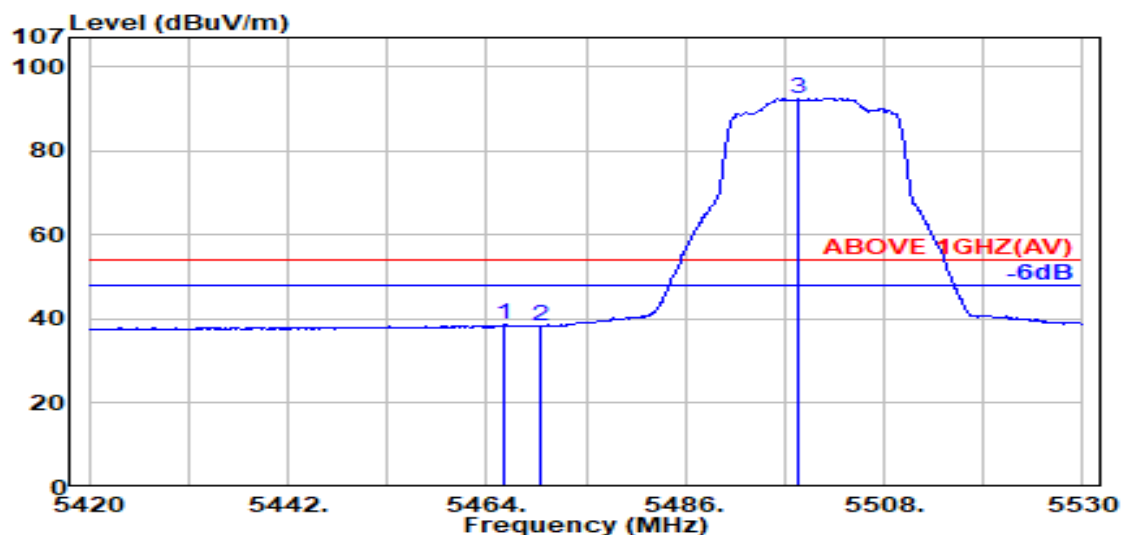


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.000	34.17	8.73	34.18	30.06	38.78	54.00	15.22	Average
5470.000	34.16	8.74	34.18	29.58	38.29	54.00	15.71	Average
@ 5498.600	34.10	8.75	34.17	83.85	92.54	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

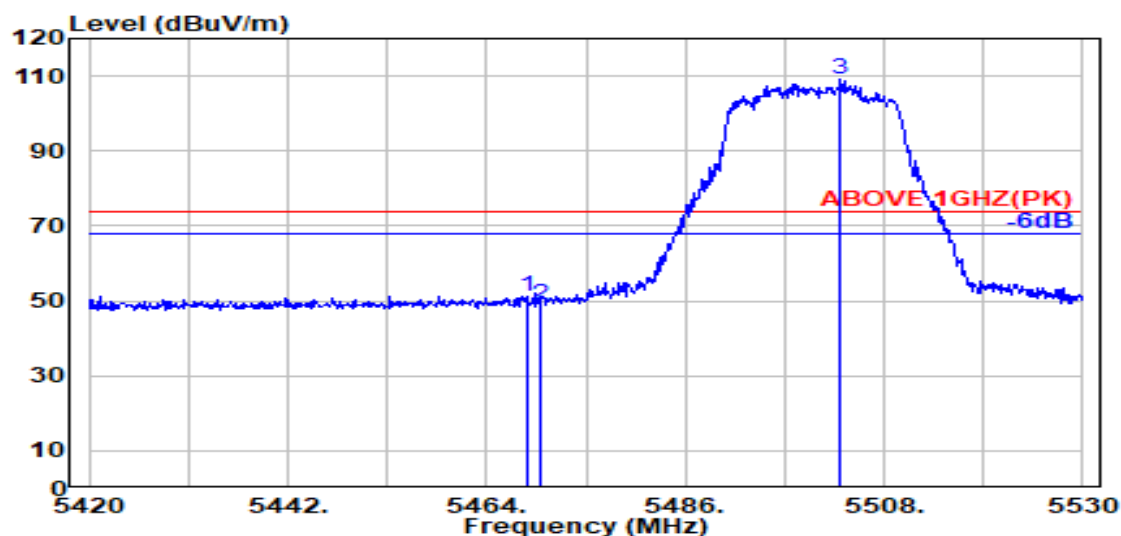

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.400	34.16	8.73	34.18	42.61	51.33	74.00	22.67	Peak
5470.000	34.16	8.74	34.18	40.39	49.10	74.00	24.90	Peak
@ 5503.100	34.10	8.75	34.17	100.54	109.23	---	---	Peak

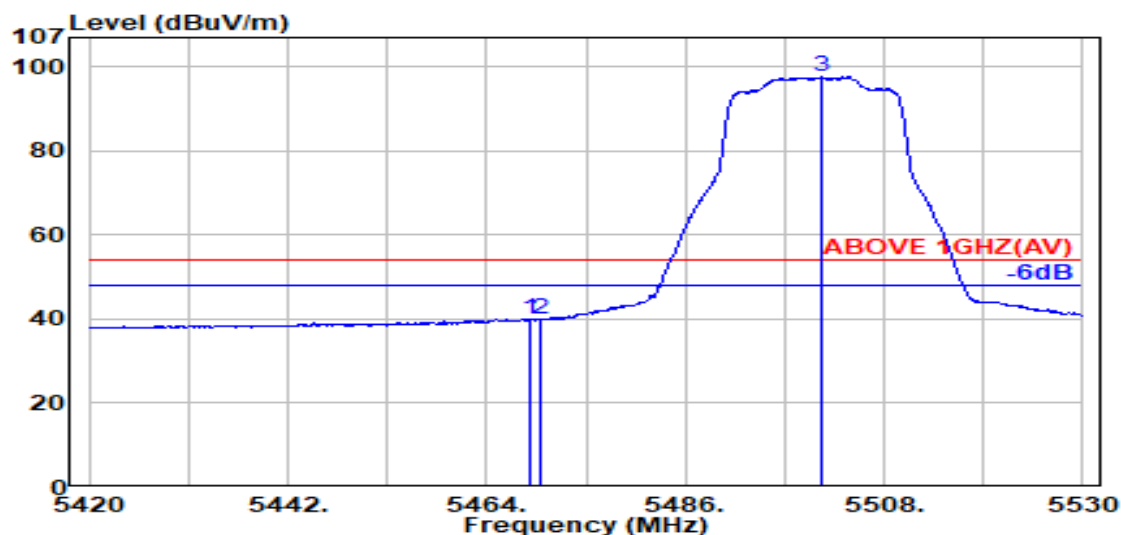


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.29	40.01	54.00	13.99	Average
5470.000	34.16	8.74	34.18	31.30	40.01	54.00	13.99	Average
@ 5501.200	34.10	8.75	34.17	88.90	97.59	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

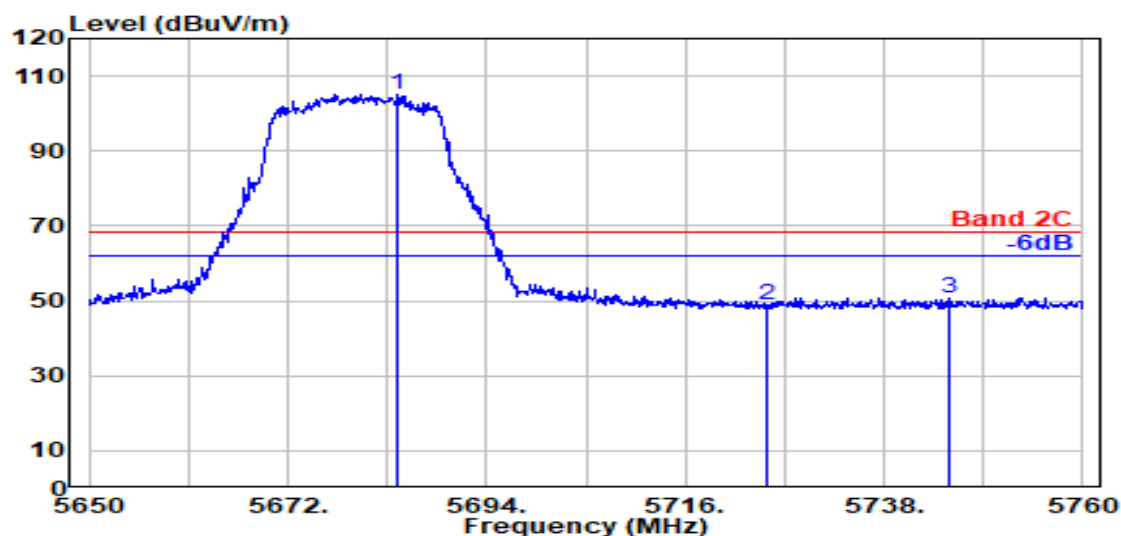

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5684.100	33.86	8.86	34.26	96.47	104.93	---	---	Peak
	5725.000	33.80	8.88	34.28	40.34	48.74	68.20	19.46	Peak
	5745.300	33.80	8.89	34.29	42.38	50.79	68.20	17.41	Peak

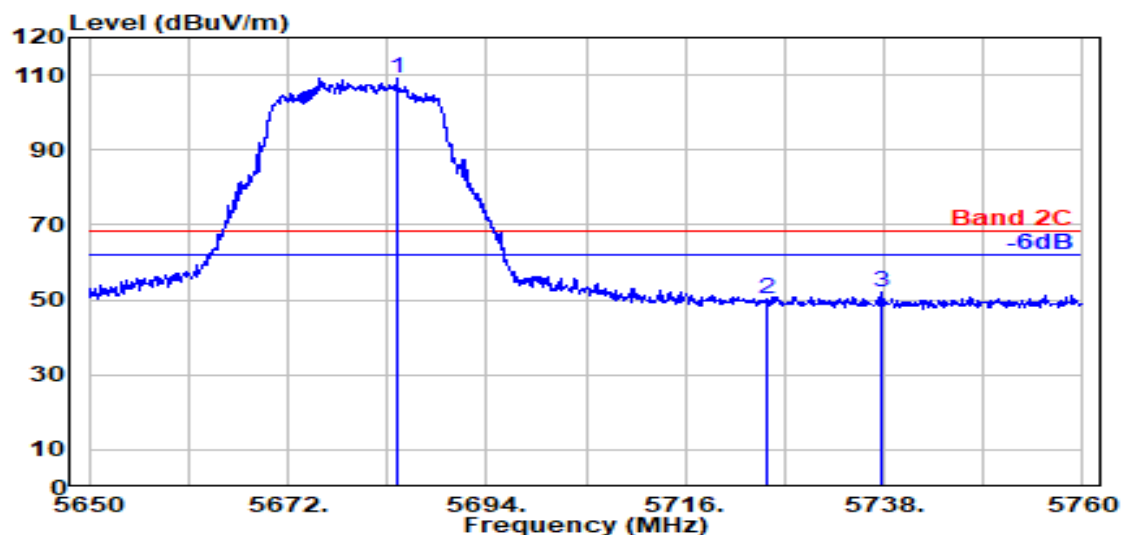


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5684.000	33.86	8.86	34.26	100.86	109.33	---	---	Peak
	5725.000	33.80	8.88	34.28	41.83	50.24	68.20	17.96	Peak
	5737.600	33.80	8.89	34.28	43.83	52.23	68.20	15.97	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

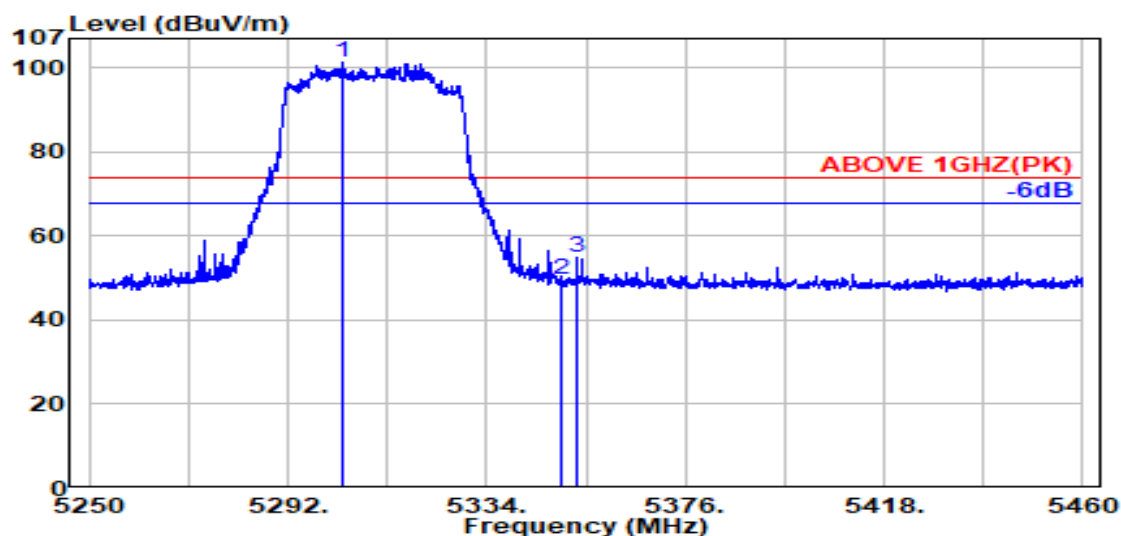

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.600	34.09	8.64	34.23	92.77	101.26	---	---	Peak
5350.000	33.90	8.67	34.22	41.41	49.76	74.00	24.24	Peak
5353.000	33.91	8.67	34.22	46.70	55.06	74.00	18.94	Peak

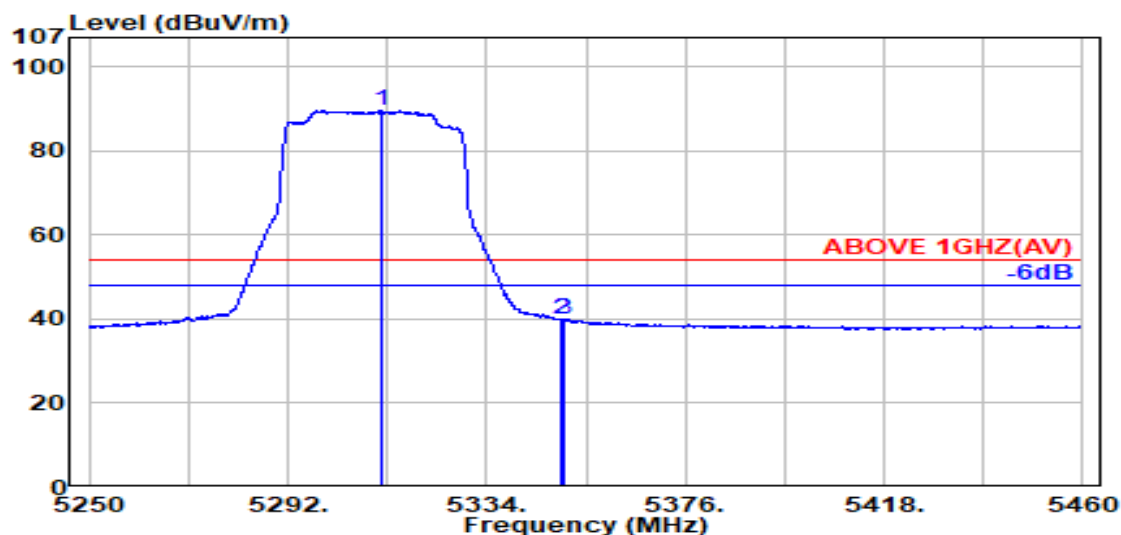


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.600	34.05	8.64	34.23	81.37	89.84	---	---	Average
5350.000	33.90	8.67	34.22	31.56	39.91	54.00	14.09	Average
5350.400	33.90	8.67	34.22	31.66	40.01	54.00	13.99	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

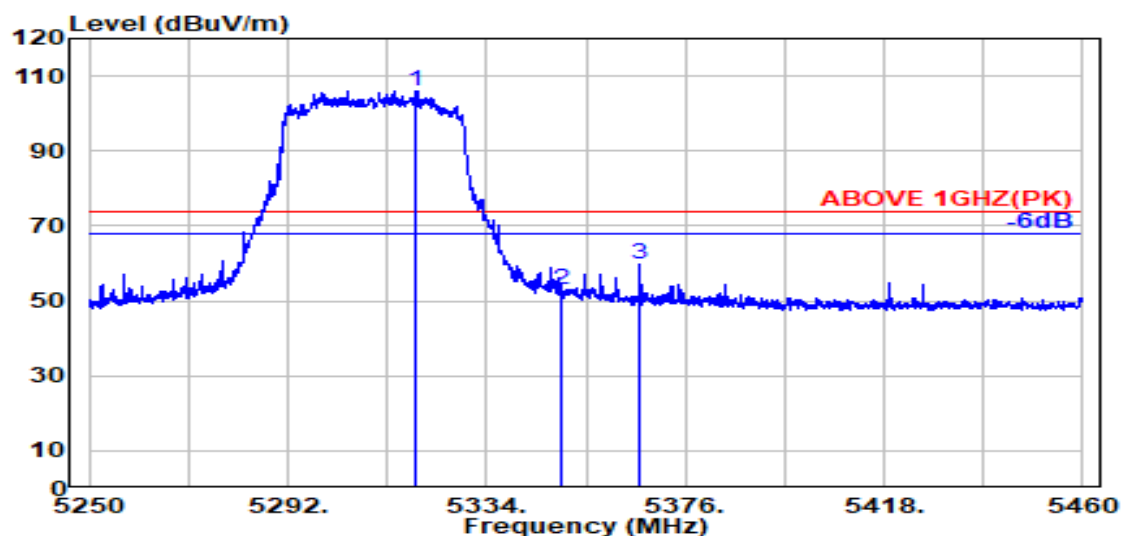

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5319.200	34.02	8.65	34.23	97.54	105.99	---	---	Peak
	5350.000	33.90	8.67	34.22	44.57	52.92	74.00	21.08	Peak
	5366.400	33.97	8.67	34.21	51.41	59.84	74.00	14.16	Peak

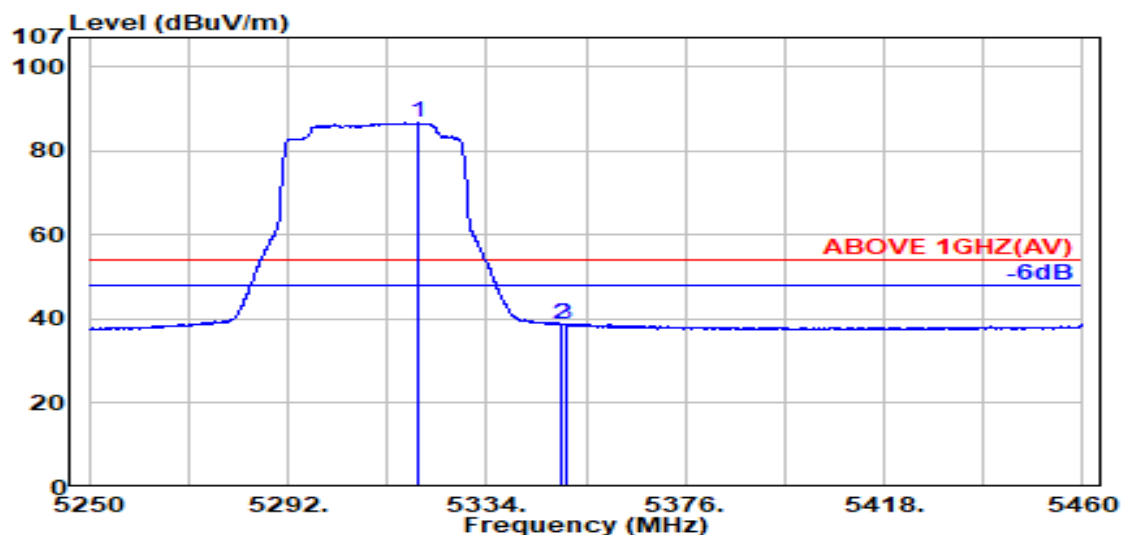


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5319.300	34.02	8.65	34.23	78.23	86.68	---	---	Average
	5350.000	33.90	8.67	34.22	30.27	38.62	54.00	15.38	Average
	5350.600	33.90	8.67	34.22	30.48	38.83	54.00	15.17	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

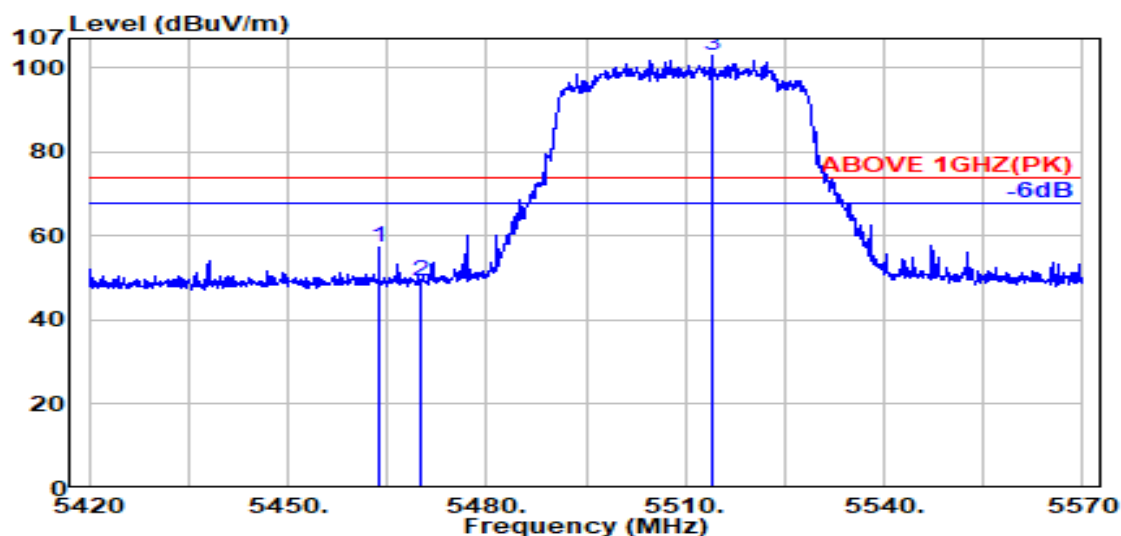

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.800	34.17	8.73	34.18	48.57	57.29	74.00	16.71	Peak
5470.000	34.16	8.74	34.18	40.53	49.25	74.00	24.75	Peak
@ 5514.000	34.10	8.76	34.18	94.12	102.81	---	---	Peak

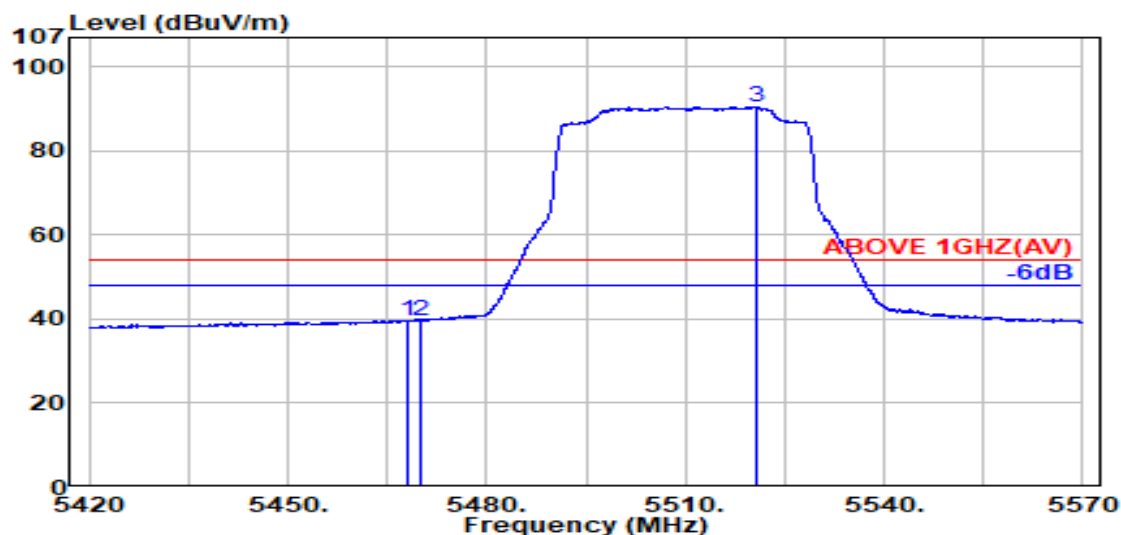


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	30.97	39.69	54.00	14.31	Average
5470.000	34.16	8.74	34.18	30.92	39.64	54.00	14.36	Average
@ 5520.700	34.10	8.77	34.18	81.96	90.65	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

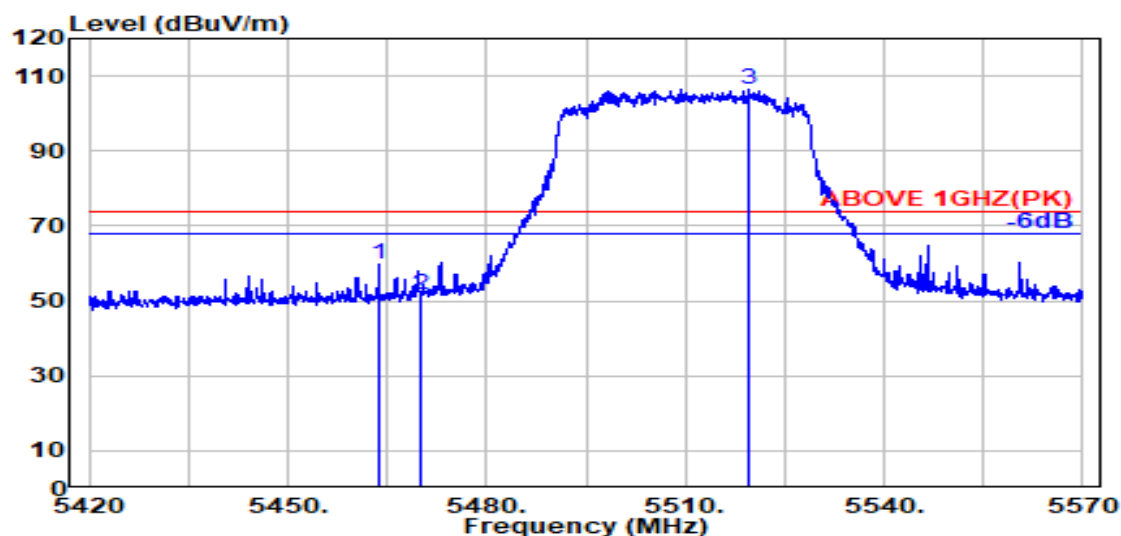

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.700	34.17	8.73	34.18	50.93	59.65	74.00	14.35	Peak
5470.000	34.16	8.74	34.18	42.70	51.42	74.00	22.58	Peak
@ 5519.600	34.10	8.76	34.18	97.69	106.38	---	---	Peak

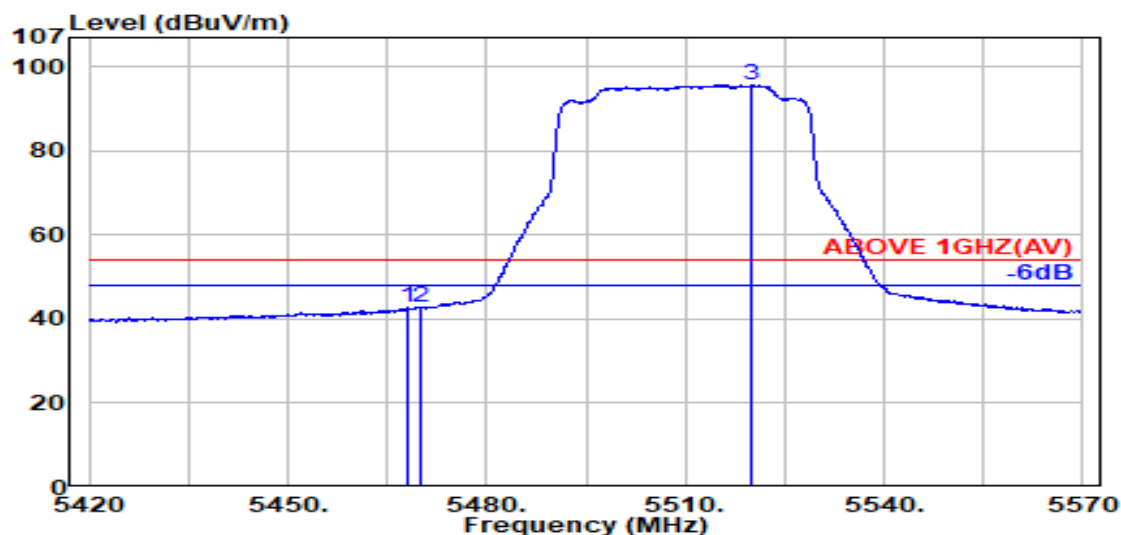


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	34.00	42.72	54.00	11.28	Average
5470.000	34.16	8.74	34.18	33.90	42.61	54.00	11.39	Average
@ 5520.000	34.10	8.76	34.18	87.04	95.72	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

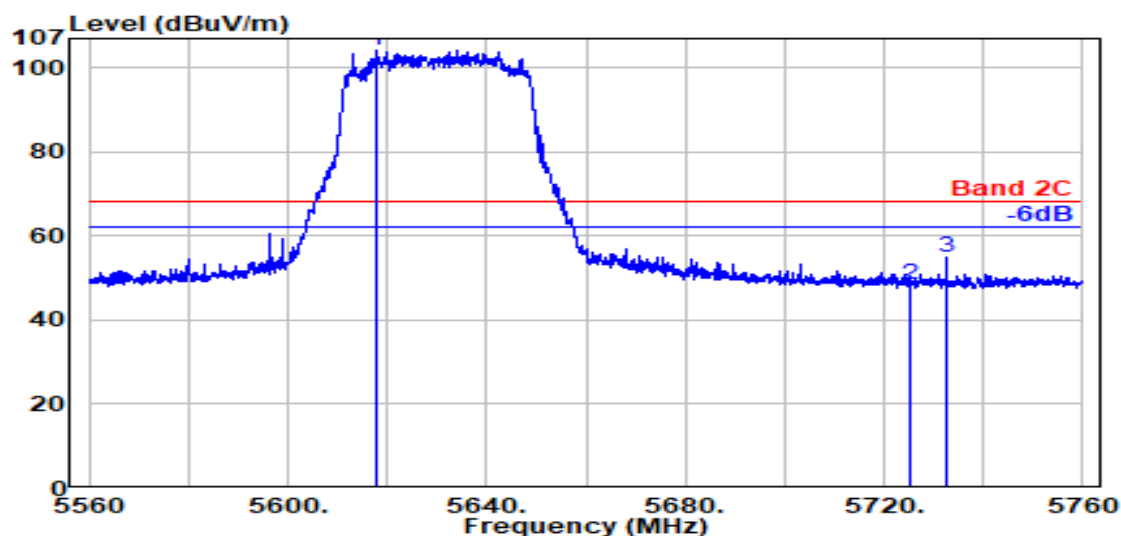

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5617.800	34.00	8.82	34.23	95.70	104.30	---	---	Peak
	5725.000	33.80	8.88	34.28	39.88	48.29	68.20	19.91	Peak
	5732.600	33.80	8.88	34.28	46.42	54.82	68.20	13.38	Peak

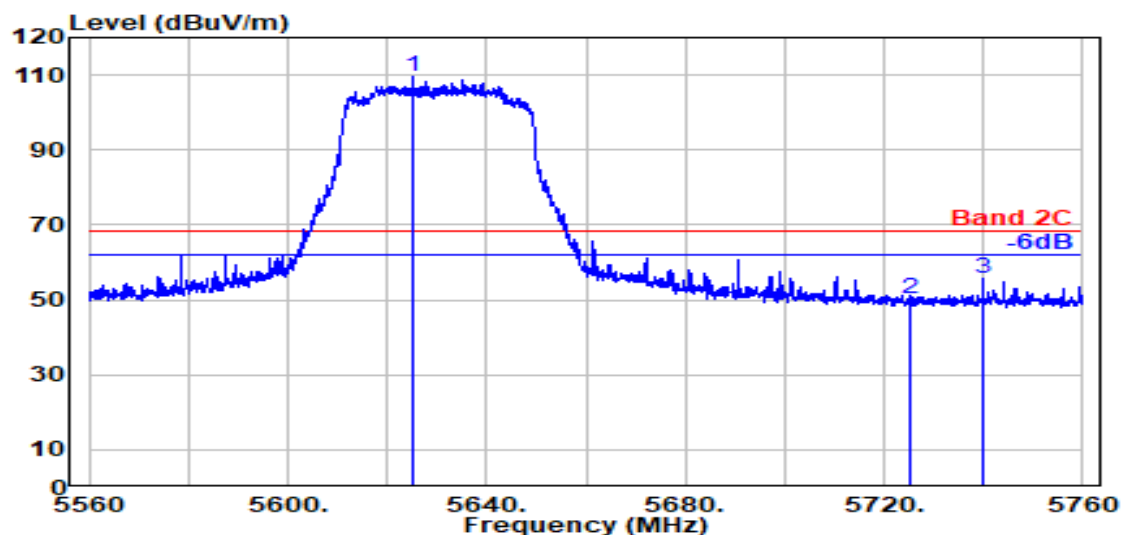


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5625.300	34.00	8.82	34.23	100.94	109.54	---	---	Peak
	5725.000	33.80	8.88	34.28	41.90	50.30	68.20	17.90	Peak
	5739.900	33.80	8.89	34.28	47.42	55.83	68.20	12.37	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

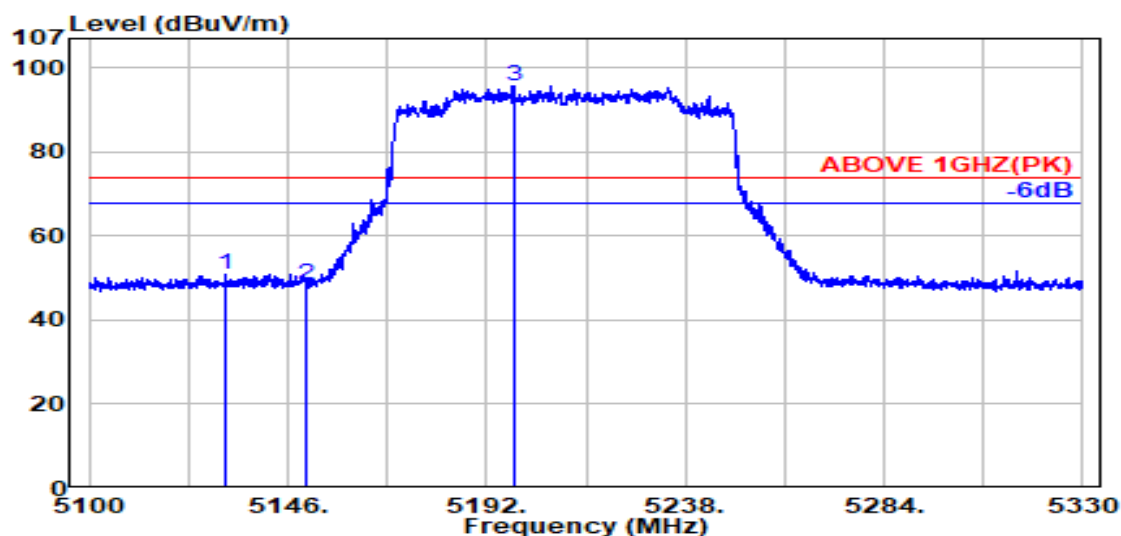

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.500	33.70	8.53	34.29	43.08	51.02	74.00	22.98	Peak
5150.000	33.70	8.54	34.28	40.48	48.44	74.00	25.56	Peak
@ 5198.200	33.70	8.57	34.26	87.82	95.83	---	---	Peak

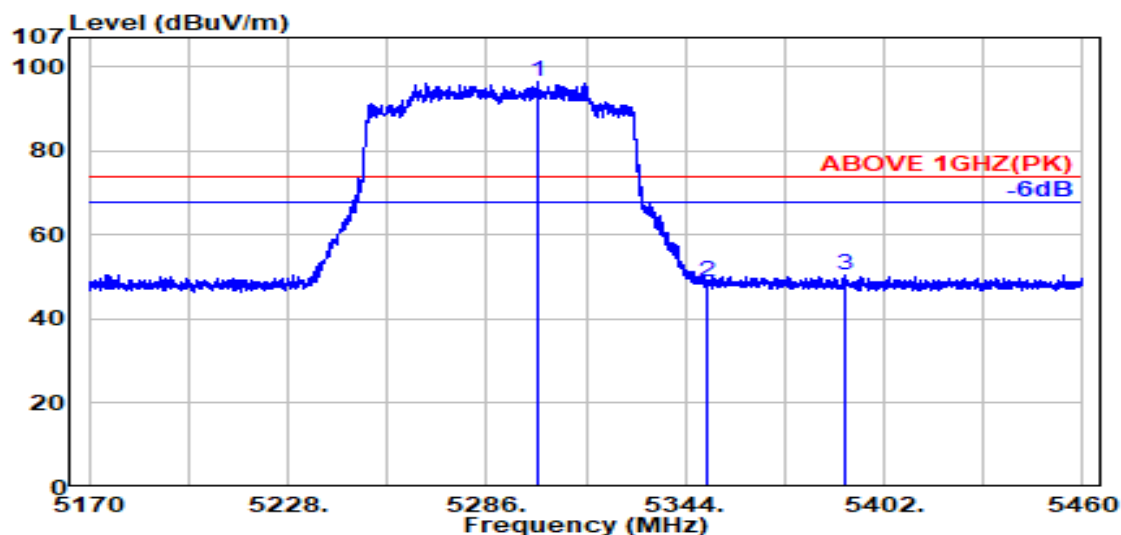


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.800	34.10	8.64	34.23	88.09	96.59	---	---	Peak
5350.000	33.90	8.67	34.22	40.58	48.93	74.00	25.07	Peak
5390.300	34.06	8.69	34.20	41.78	50.33	74.00	23.67	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

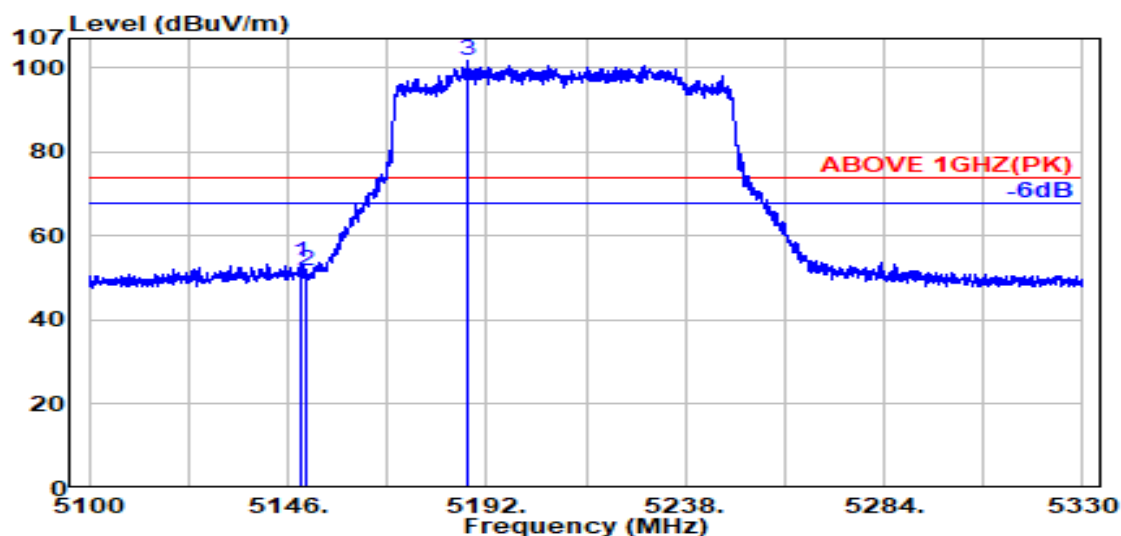

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.28	45.69	53.66	74.00	20.34	Peak
5150.000	33.70	8.54	34.28	43.52	51.49	74.00	22.51	Peak
@ 5187.500	33.70	8.57	34.27	93.70	101.69	---	---	Peak

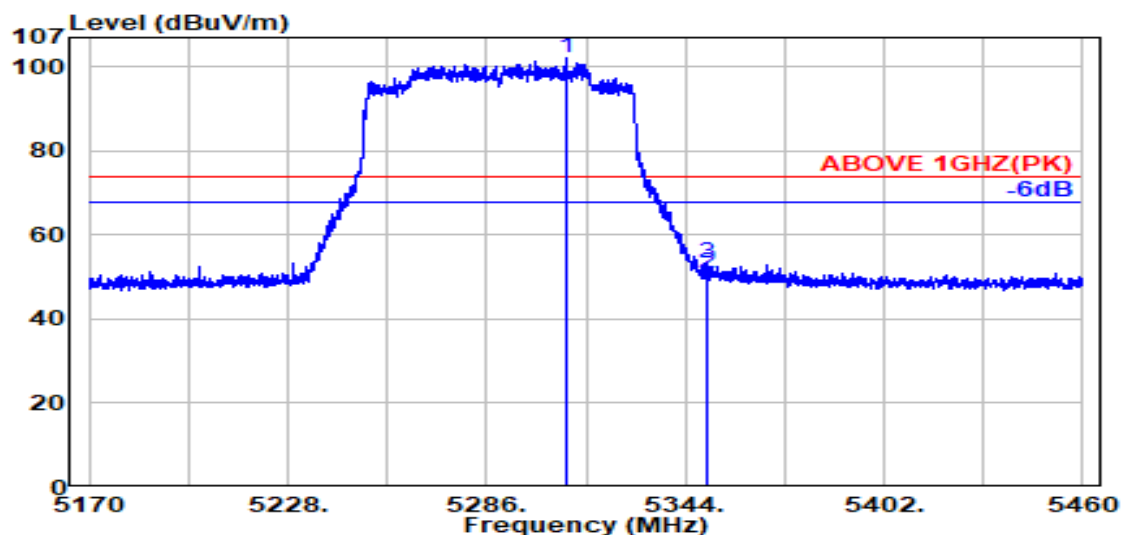


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.100	34.06	8.64	34.23	93.53	102.00	---	---	Peak
5350.000	33.90	8.67	34.22	42.38	50.73	74.00	23.27	Peak
5350.500	33.90	8.67	34.22	44.75	53.10	74.00	20.90	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

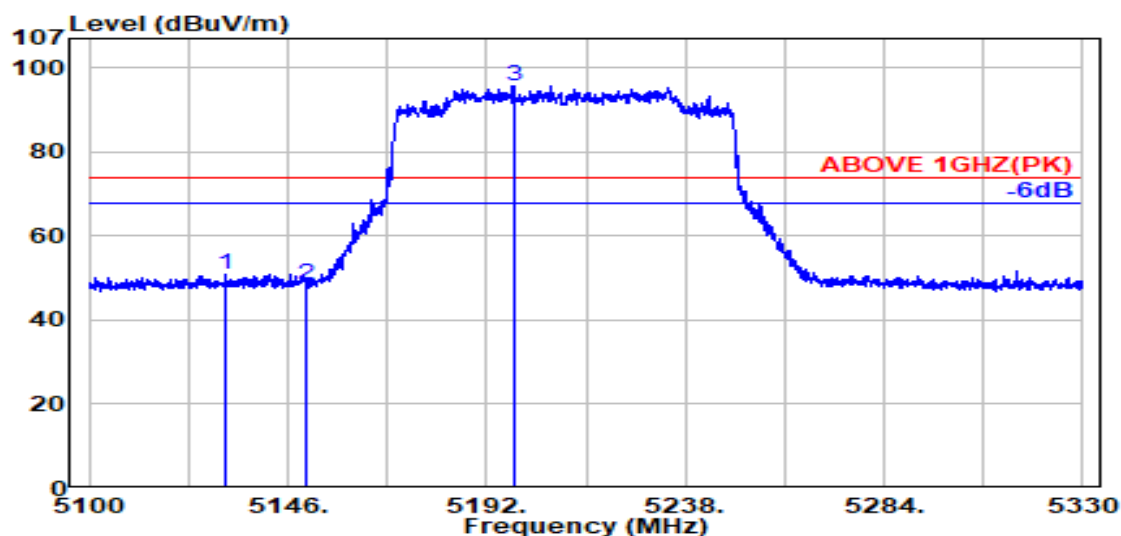

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.500	33.70	8.53	34.29	43.08	51.02	74.00	22.98	Peak
5150.000	33.70	8.54	34.28	40.48	48.44	74.00	25.56	Peak
@ 5198.200	33.70	8.57	34.26	87.82	95.83	---	---	Peak

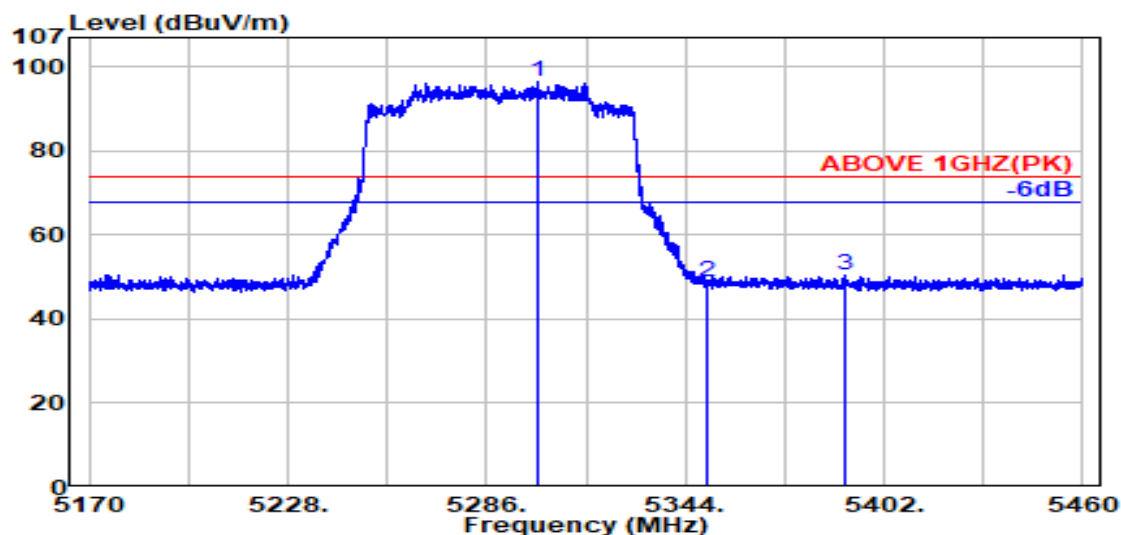


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.800	34.10	8.64	34.23	88.09	96.59	---	---	Peak
5350.000	33.90	8.67	34.22	40.58	48.93	74.00	25.07	Peak
5390.300	34.06	8.69	34.20	41.78	50.33	74.00	23.67	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
RU Configuration	U-NII Band 1/2A	Frequency	TX 5250MHz

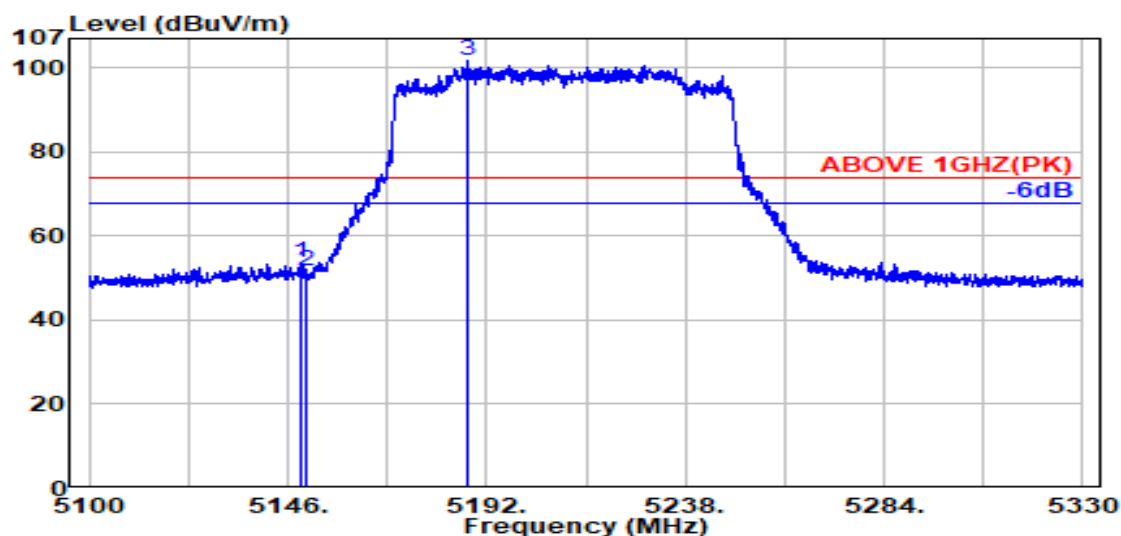

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.28	45.69	53.66	74.00	20.34	Peak
5150.000	33.70	8.54	34.28	43.52	51.49	74.00	22.51	Peak
@ 5187.500	33.70	8.57	34.27	93.70	101.69	---	---	Peak

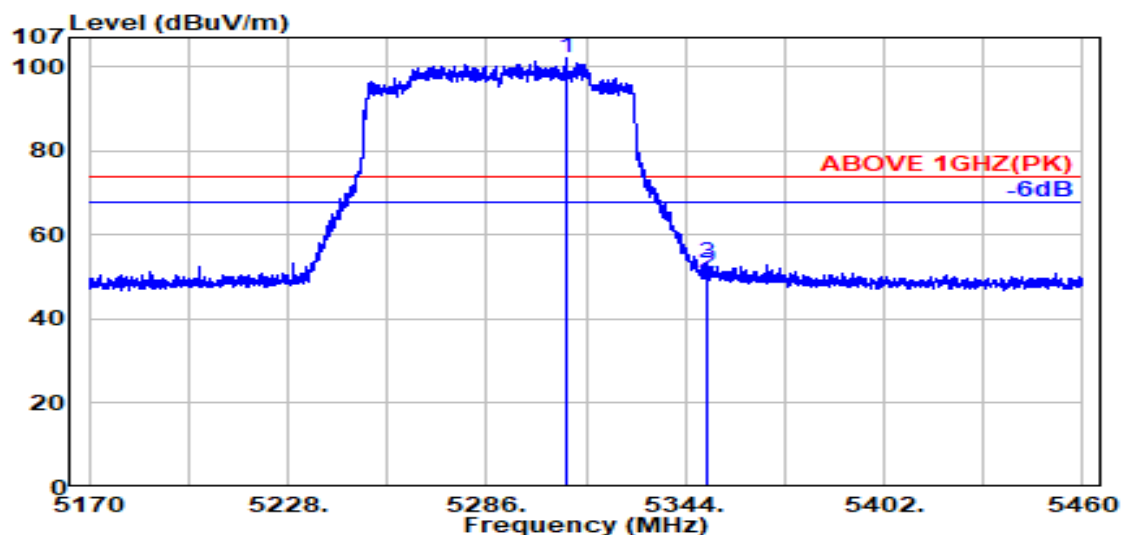


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.100	34.06	8.64	34.23	93.53	102.00	---	---	Peak
5350.000	33.90	8.67	34.22	42.38	50.73	74.00	23.27	Peak
5350.500	33.90	8.67	34.22	44.75	53.10	74.00	20.90	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

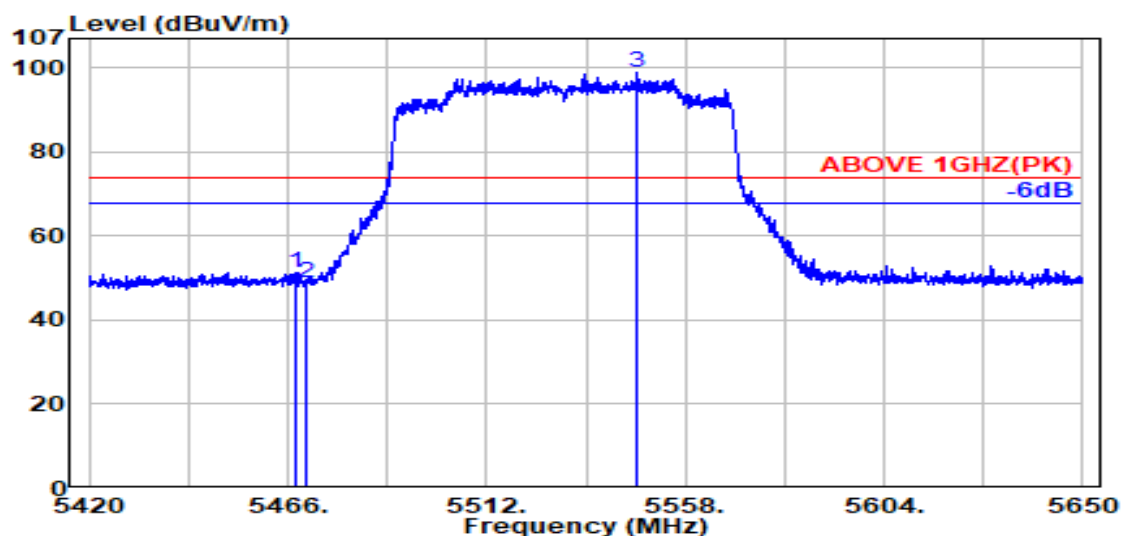

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	42.67	51.39	74.00	22.61	Peak
5470.000	34.16	8.74	34.18	40.28	49.00	74.00	25.00	Peak
@ 5546.700	34.10	8.78	34.19	90.23	98.92	---	---	Peak

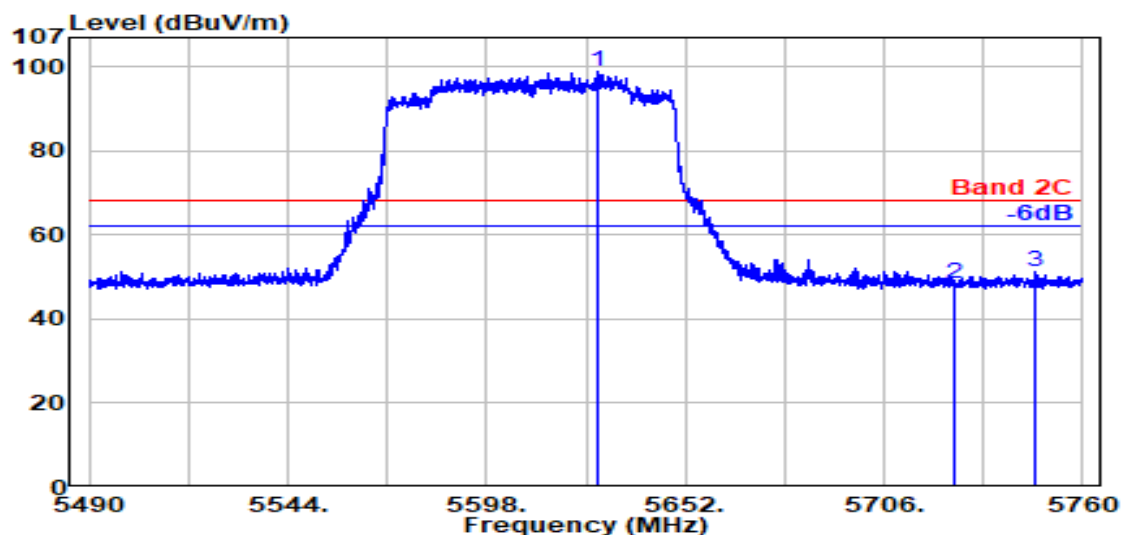


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5628.100	34.00	8.83	34.23	90.41	99.00	---	---	Peak
5725.000	33.80	8.88	34.28	39.94	48.35	68.20	19.85	Peak
5747.200	33.80	8.89	34.29	42.68	51.09	68.20	17.11	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

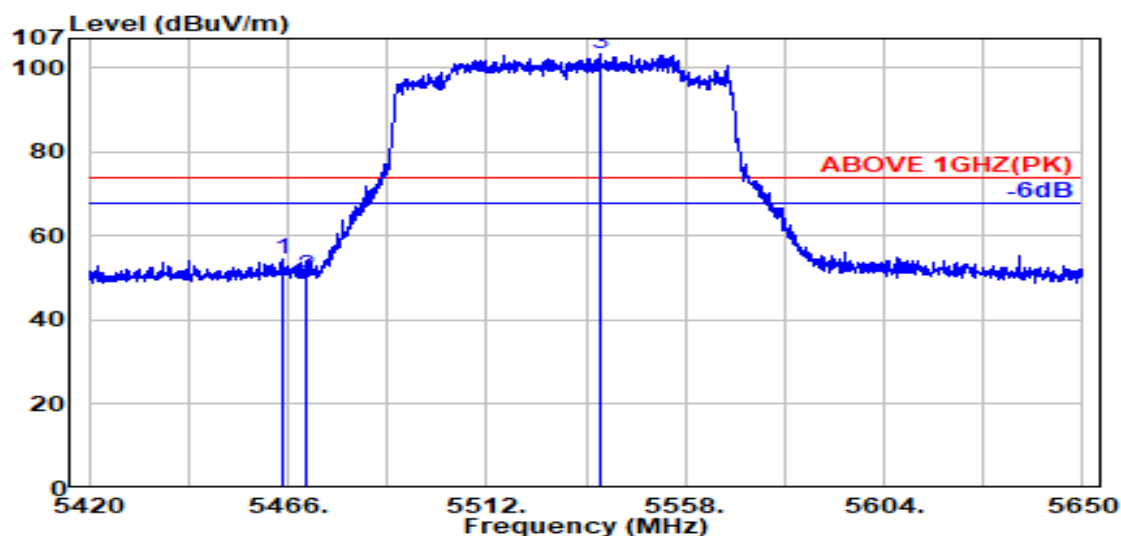

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.17	8.73	34.18	45.98	54.70	74.00	19.30	Peak
5470.000	34.16	8.74	34.18	41.93	50.65	74.00	23.35	Peak
@ 5538.500	34.10	8.78	34.19	94.77	103.46	---	---	Peak

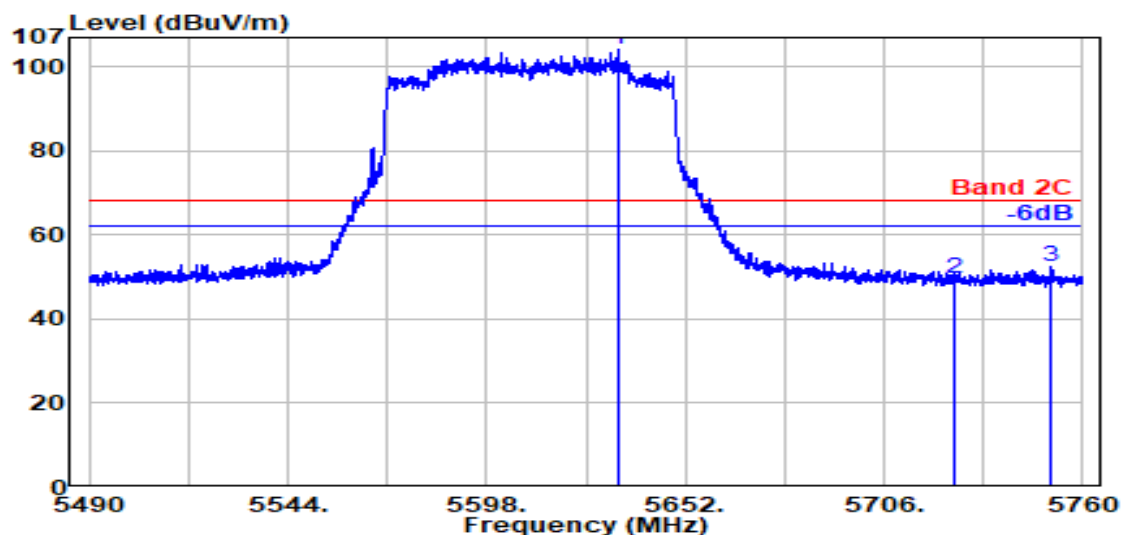


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5633.600	34.00	8.83	34.23	95.50	104.10	---	---	Peak
5725.000	33.80	8.88	34.28	41.42	49.82	68.20	18.38	Peak
5751.100	33.80	8.90	34.29	44.04	52.45	68.20	15.75	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

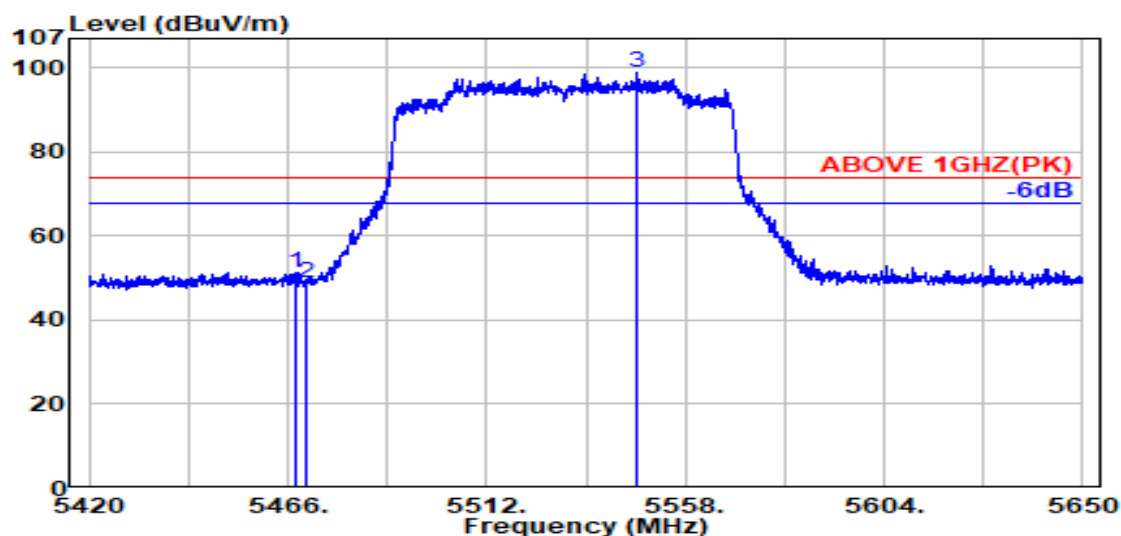

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	42.67	51.39	74.00	22.61	Peak
5470.000	34.16	8.74	34.18	40.28	49.00	74.00	25.00	Peak
@ 5546.700	34.10	8.78	34.19	90.23	98.92	---	---	Peak

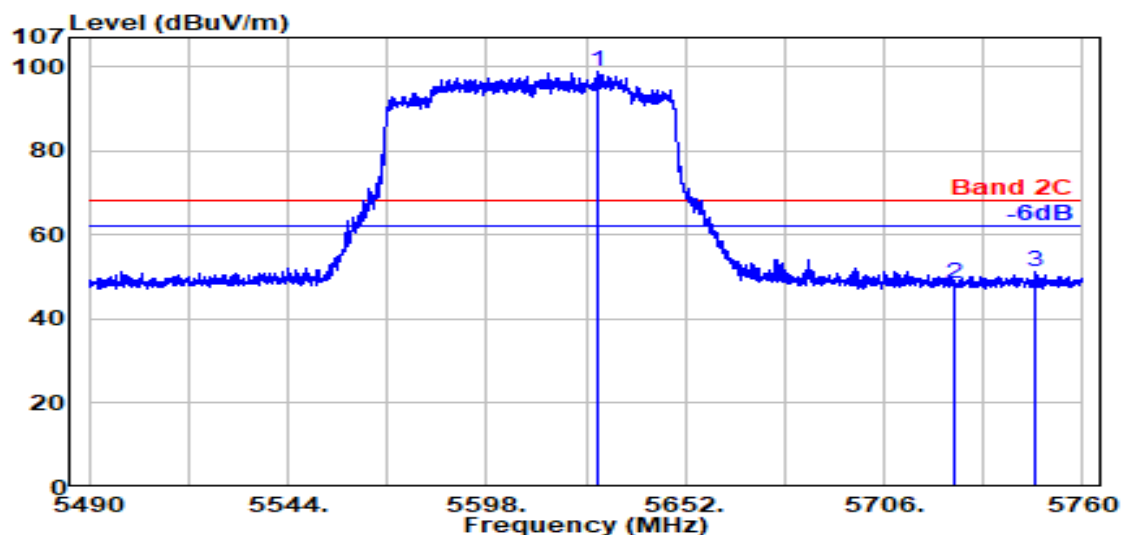


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5628.100	34.00	8.83	34.23	90.41	99.00	---	---	Peak
5725.000	33.80	8.88	34.28	39.94	48.35	68.20	19.85	Peak
5747.200	33.80	8.89	34.29	42.68	51.09	68.20	17.11	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

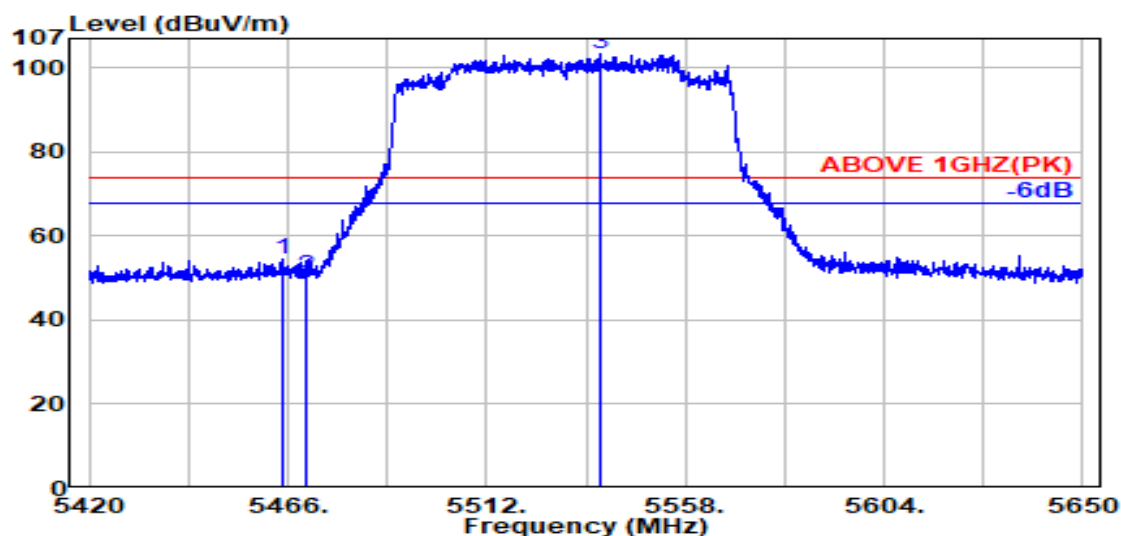

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.17	8.73	34.18	45.98	54.70	74.00	19.30	Peak
5470.000	34.16	8.74	34.18	41.93	50.65	74.00	23.35	Peak
@ 5538.500	34.10	8.78	34.19	94.77	103.46	---	---	Peak

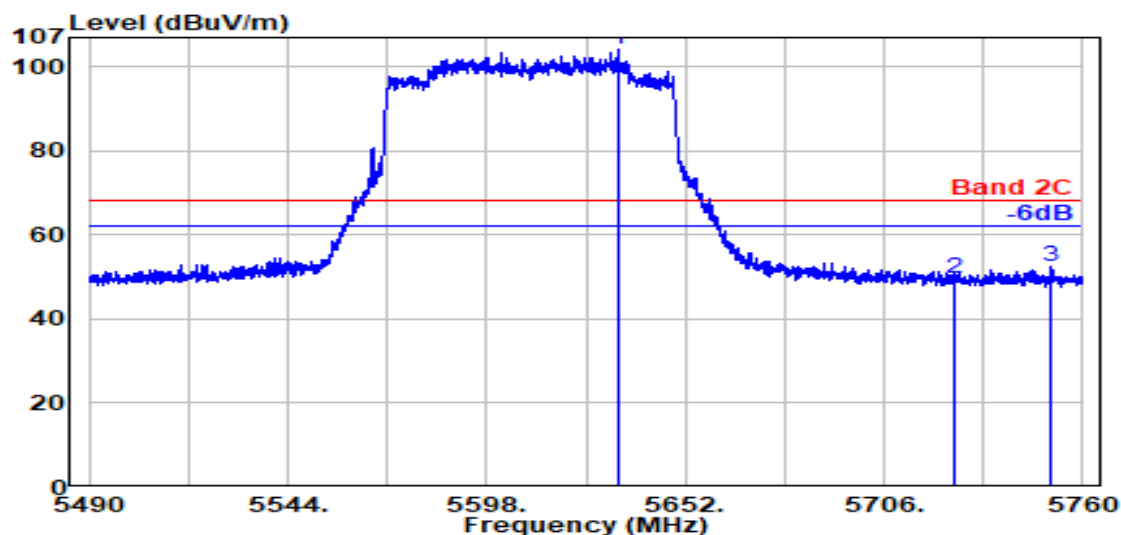


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5633.600	34.00	8.83	34.23	95.50	104.10	---	---	Peak
5725.000	33.80	8.88	34.28	41.42	49.82	68.20	18.38	Peak
5751.100	33.80	8.90	34.29	44.04	52.45	68.20	15.75	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

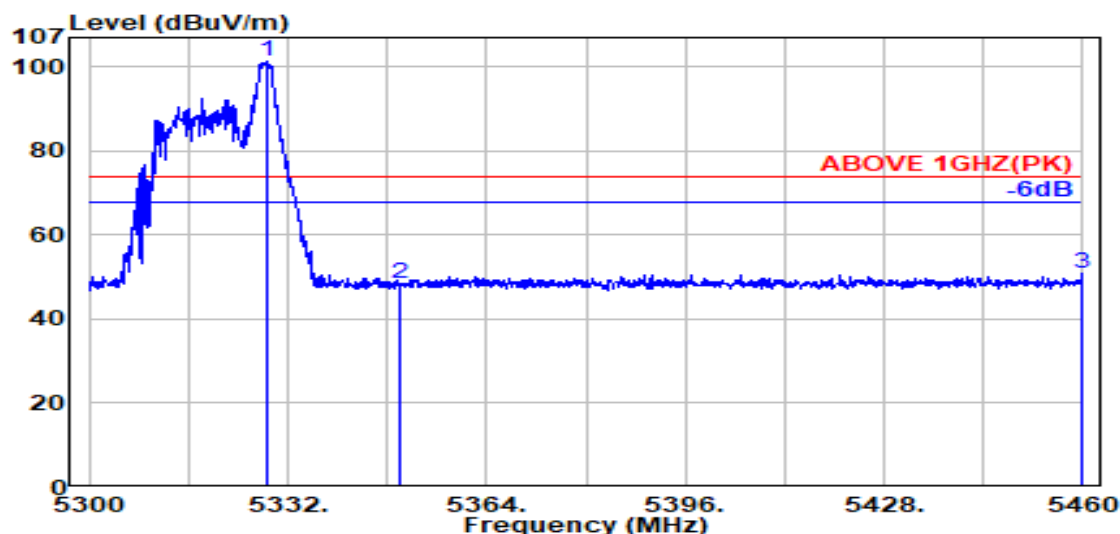

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	33.98	8.65	34.22	93.02	101.44	---	---	Peak
5350.000	33.90	8.67	34.22	40.10	48.45	74.00	25.55	Peak
5459.800	34.18	8.73	34.18	42.18	50.91	74.00	23.09	Peak

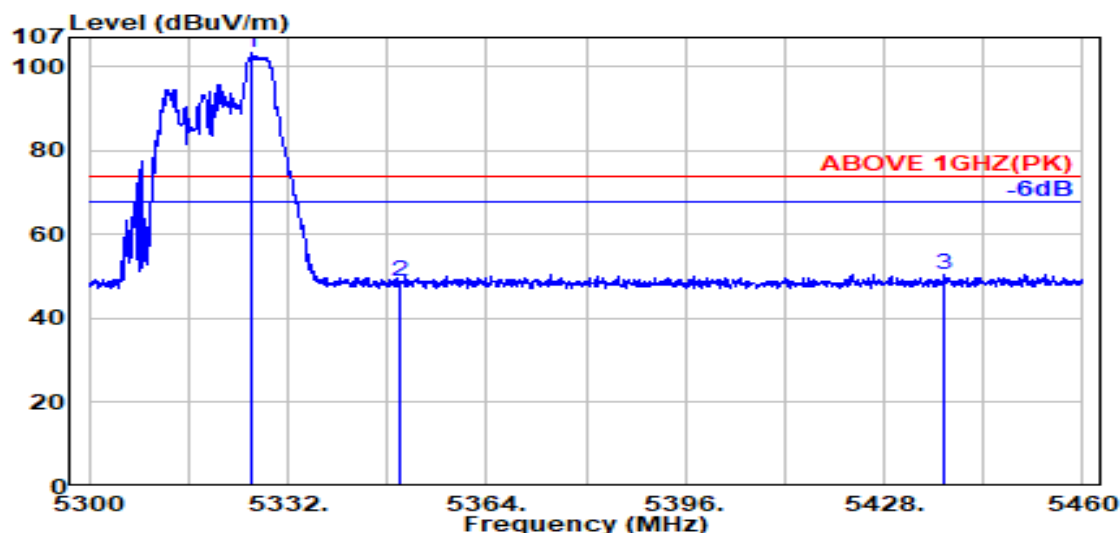


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	34.00	8.65	34.22	94.76	103.18	---	---	Peak
5350.000	33.90	8.67	34.22	40.39	48.74	74.00	25.26	Peak
5437.700	34.18	8.72	34.19	41.93	50.63	74.00	23.37	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

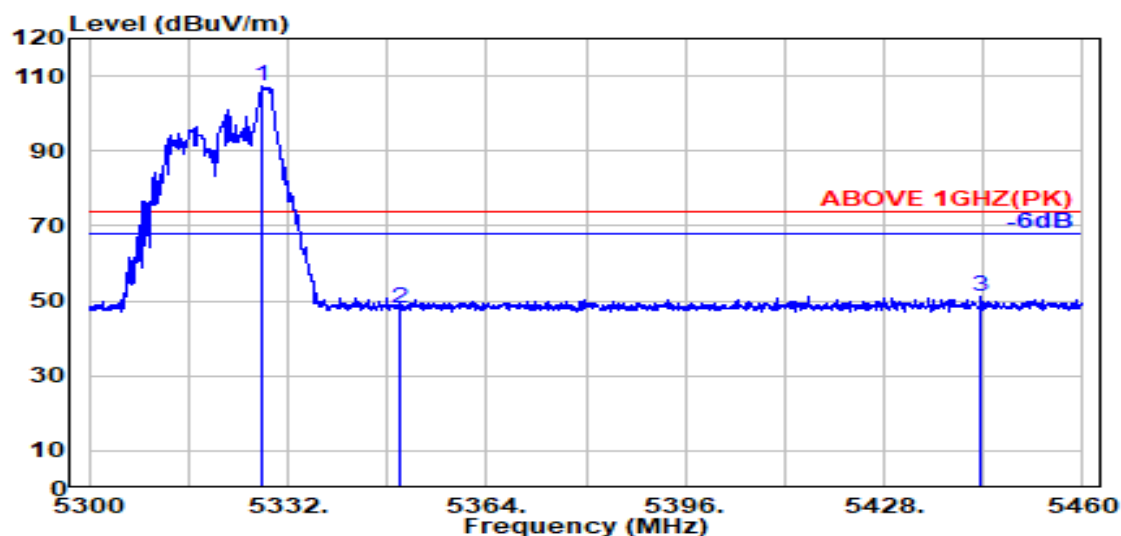

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.000	33.99	8.65	34.22	98.89	107.31	---	---	Peak
	5350.000	33.90	8.67	34.22	39.67	48.02	74.00	25.98	Peak
	5443.700	34.19	8.72	34.19	42.51	51.23	74.00	22.77	Peak

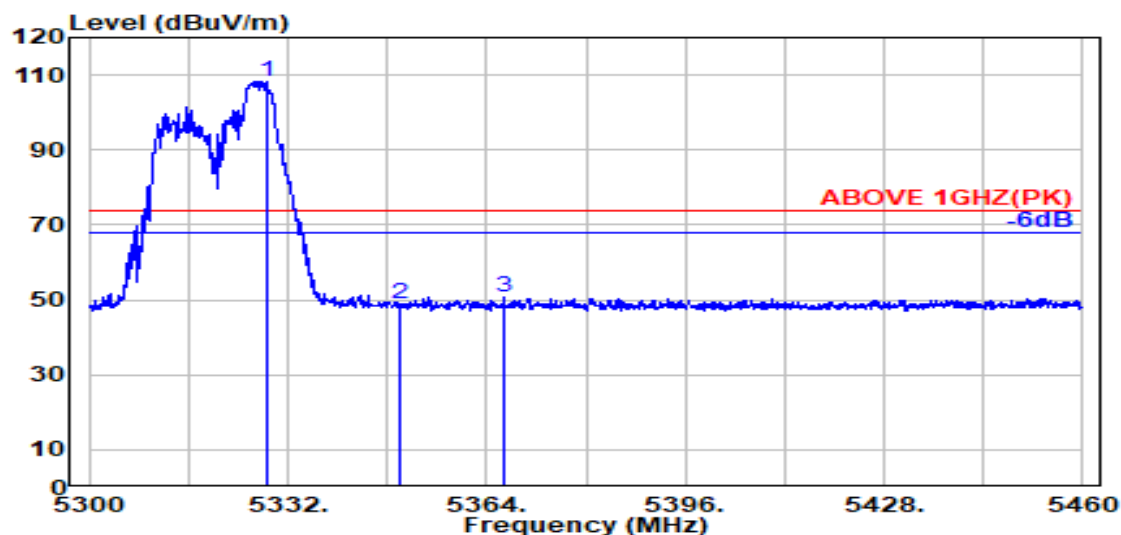


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.600	33.99	8.65	34.22	99.96	108.37	---	---	Peak
	5350.000	33.90	8.67	34.22	40.51	48.86	74.00	25.14	Peak
	5366.700	33.97	8.68	34.21	42.46	50.89	74.00	23.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

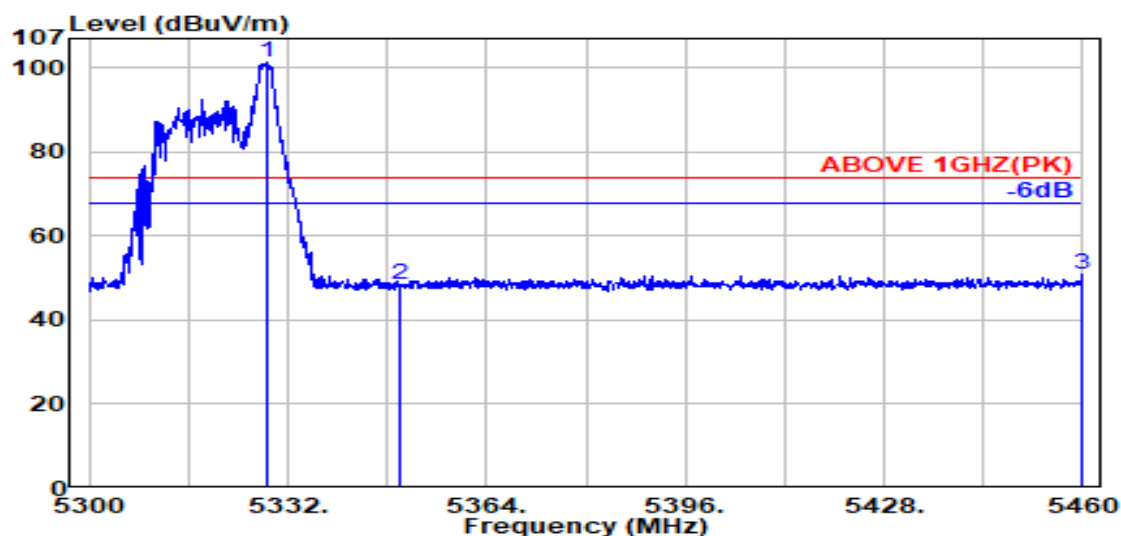

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5328.700	33.98	8.65	34.22	93.02	101.44	---	---	Peak
5350.000	33.90	8.67	34.22	40.10	48.45	74.00	25.55	Peak
5459.800	34.18	8.73	34.18	42.18	50.91	74.00	23.09	Peak

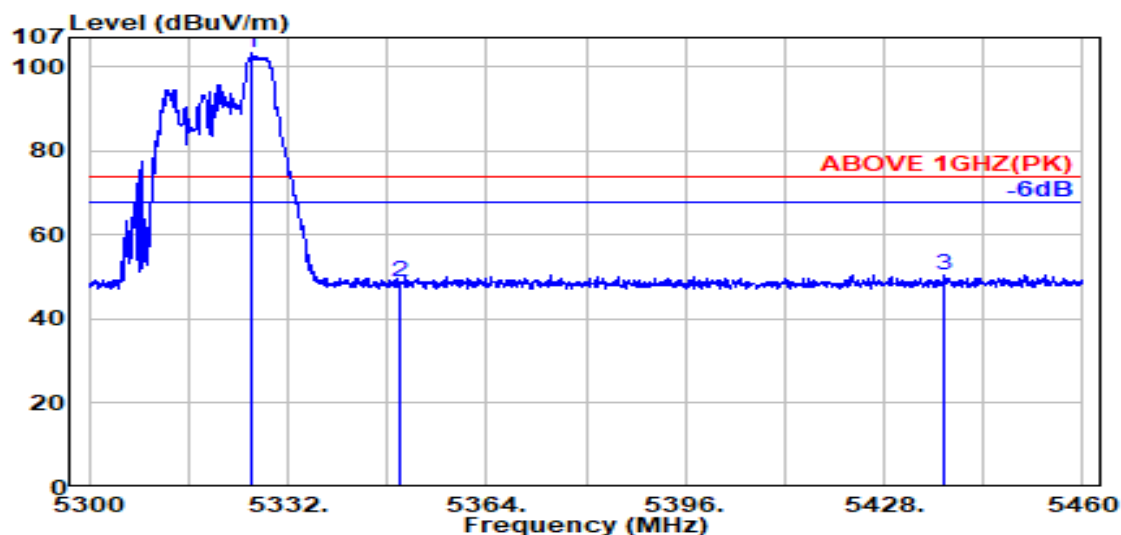


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5326.100	34.00	8.65	34.22	94.76	103.18	---	---	Peak
5350.000	33.90	8.67	34.22	40.39	48.74	74.00	25.26	Peak
5437.700	34.18	8.72	34.19	41.93	50.63	74.00	23.37	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

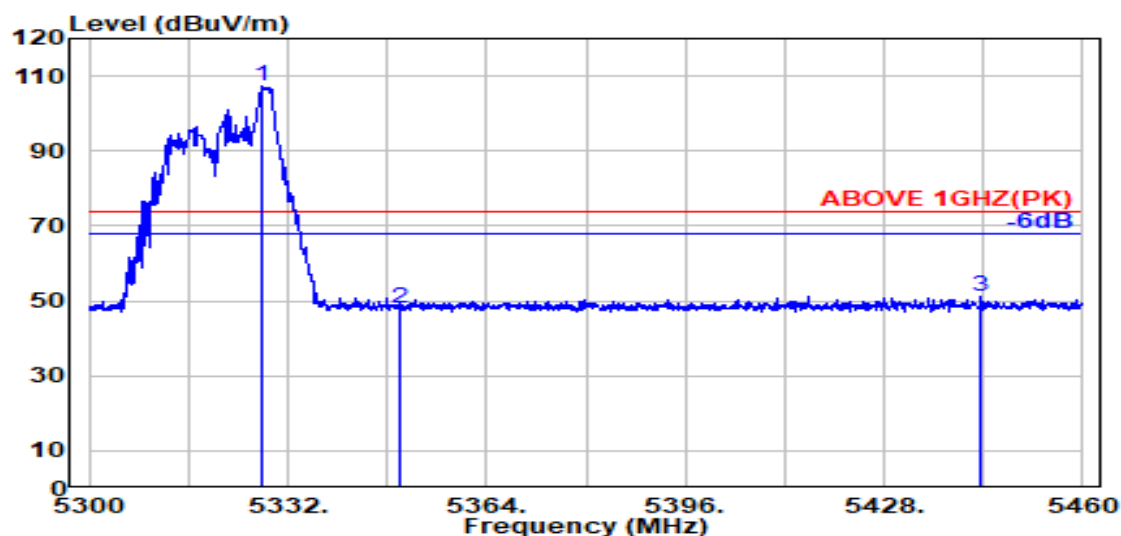

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.000	33.99	8.65	34.22	98.89	107.31	---	---	Peak
	5350.000	33.90	8.67	34.22	39.67	48.02	74.00	25.98	Peak
	5443.700	34.19	8.72	34.19	42.51	51.23	74.00	22.77	Peak

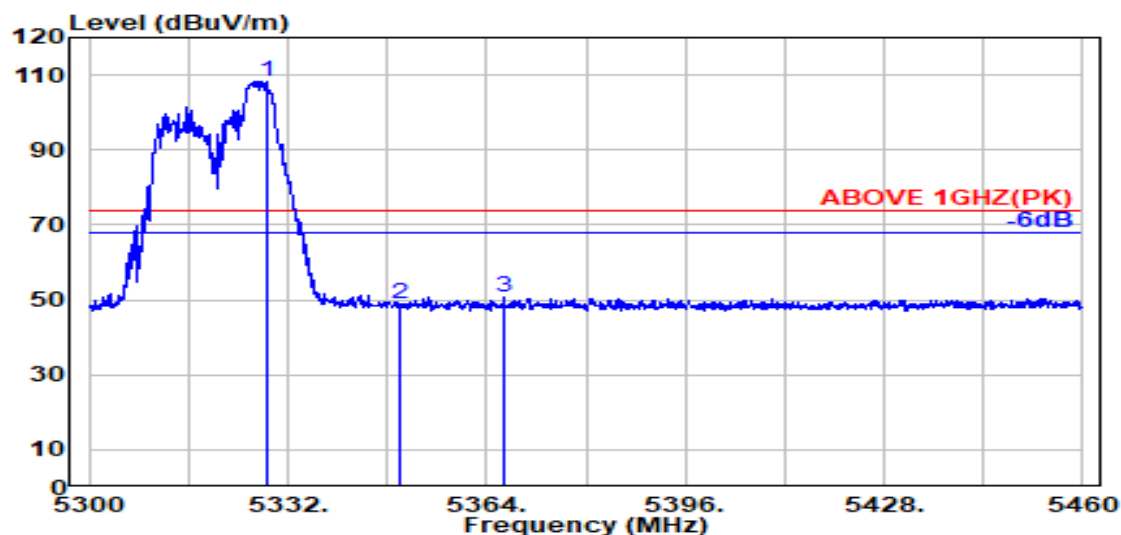


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.600	33.99	8.65	34.22	99.96	108.37	---	---	Peak
	5350.000	33.90	8.67	34.22	40.51	48.86	74.00	25.14	Peak
	5366.700	33.97	8.68	34.21	42.46	50.89	74.00	23.11	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

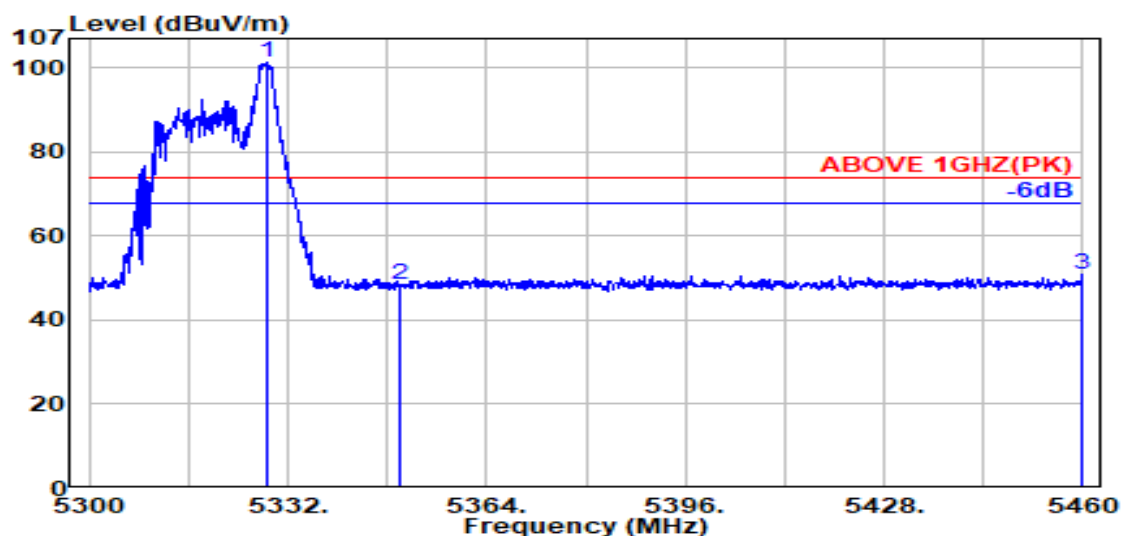

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.700	33.98	8.65	34.22	93.02	101.44	---	---	Peak
5350.000	33.90	8.67	34.22	40.10	48.45	74.00	25.55	Peak
5459.800	34.18	8.73	34.18	42.18	50.91	74.00	23.09	Peak

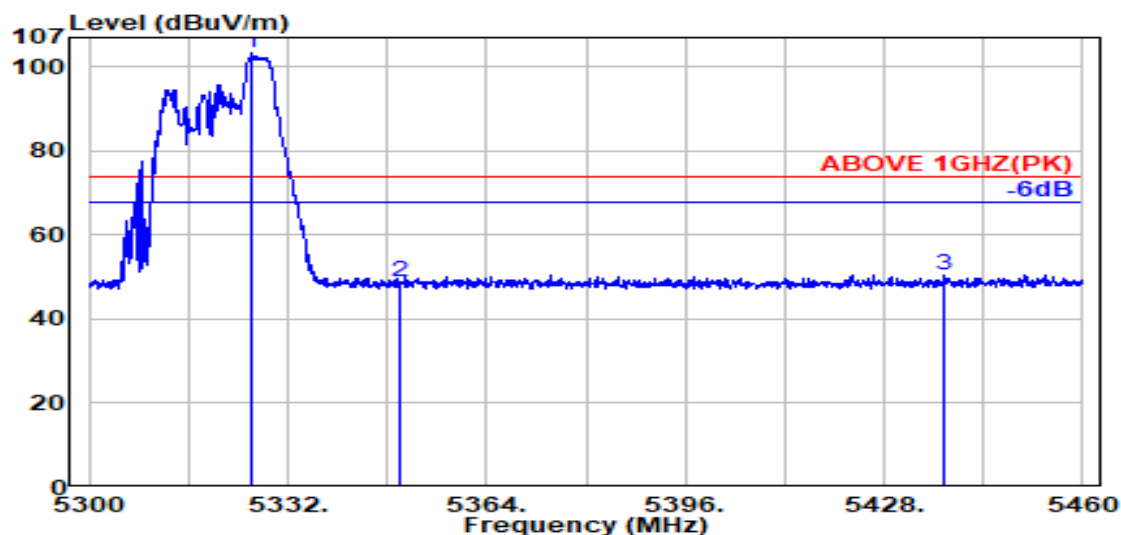


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	34.00	8.65	34.22	94.76	103.18	---	---	Peak
5350.000	33.90	8.67	34.22	40.39	48.74	74.00	25.26	Peak
5437.700	34.18	8.72	34.19	41.93	50.63	74.00	23.37	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

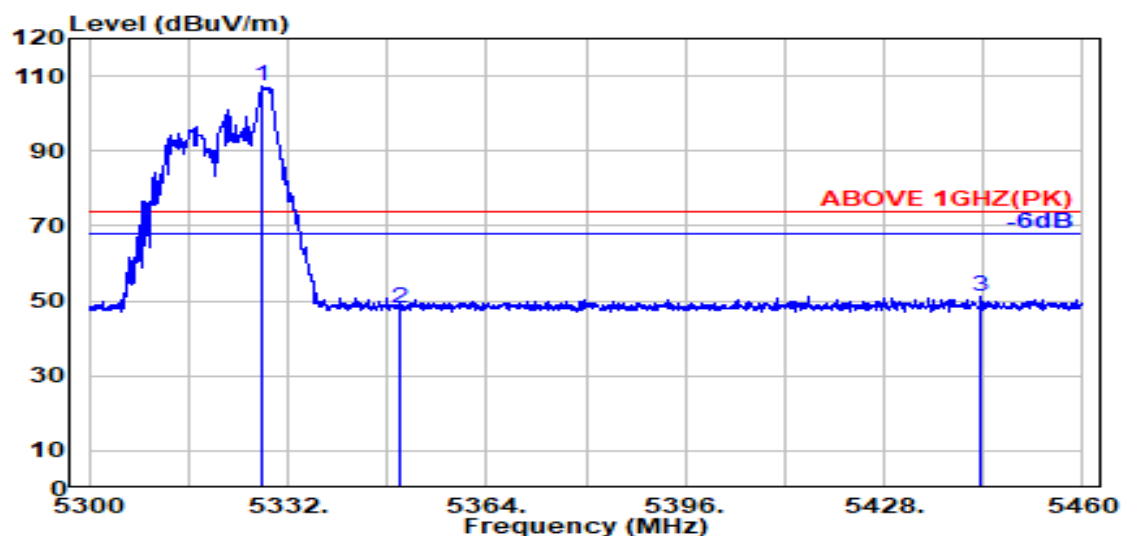

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.000	33.99	8.65	34.22	98.89	107.31	---	---	Peak
	5350.000	33.90	8.67	34.22	39.67	48.02	74.00	25.98	Peak
	5443.700	34.19	8.72	34.19	42.51	51.23	74.00	22.77	Peak

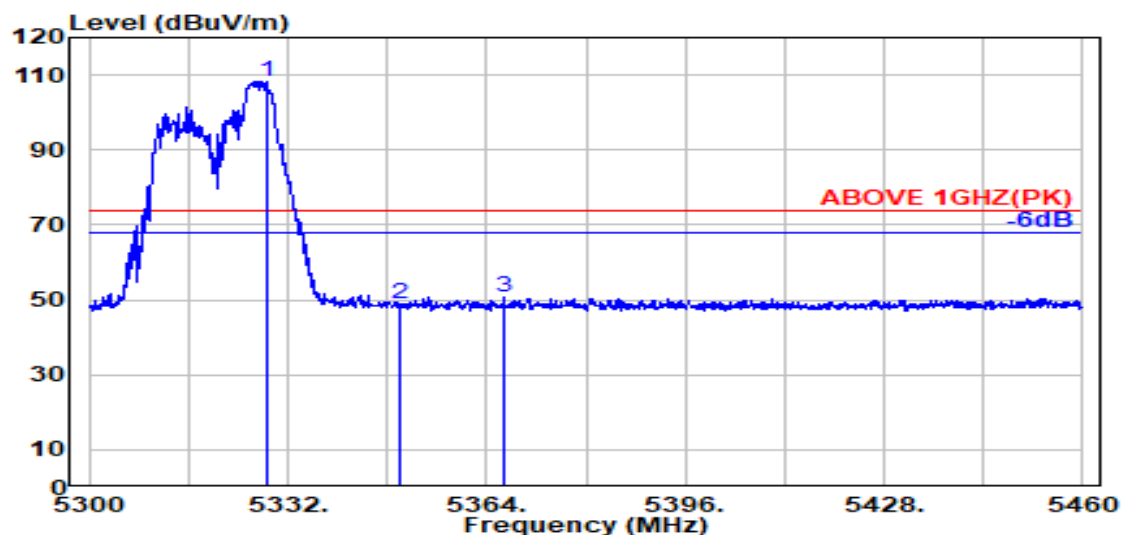


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.600	33.99	8.65	34.22	99.96	108.37	---	---	Peak
	5350.000	33.90	8.67	34.22	40.51	48.86	74.00	25.14	Peak
	5366.700	33.97	8.68	34.21	42.46	50.89	74.00	23.11	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

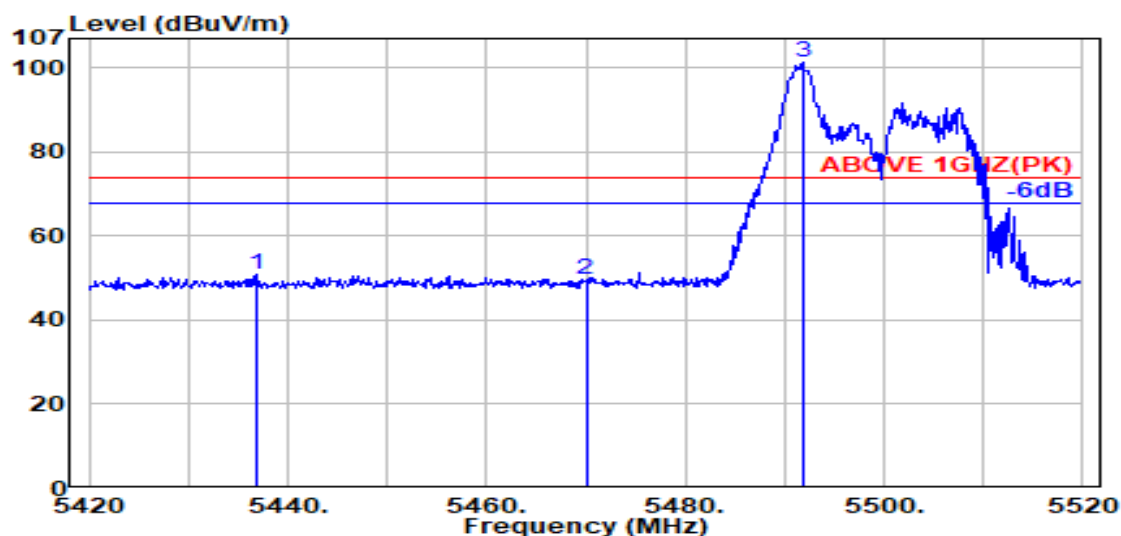

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5436.800	34.17	8.72	34.19	42.05	50.75	74.00	23.25	Peak
5470.000	34.16	8.74	34.18	40.90	49.61	74.00	24.39	Peak
@ 5491.800	34.12	8.75	34.17	92.60	101.29	---	---	Peak

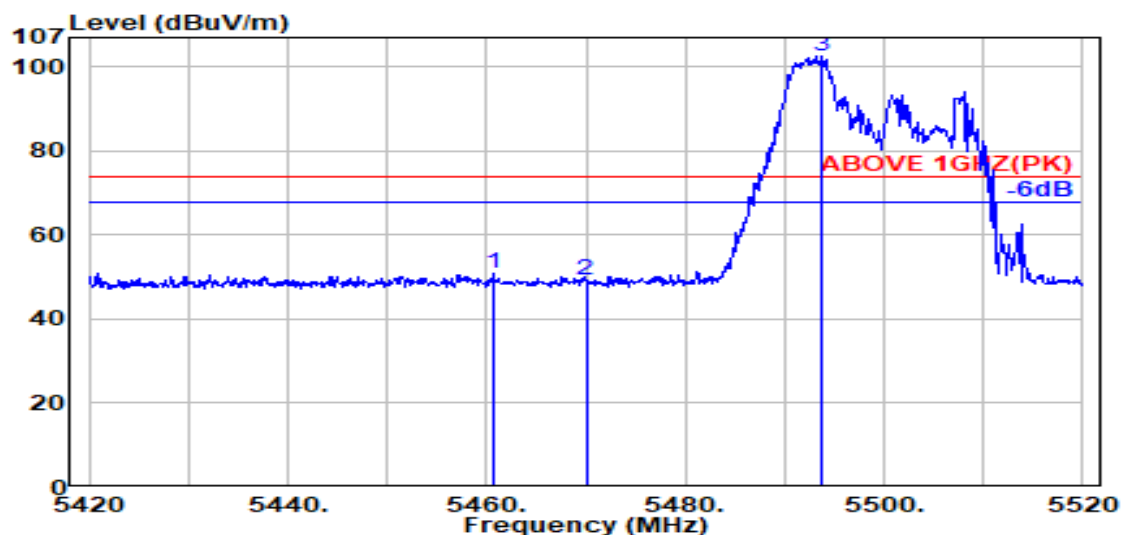


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.600	34.18	8.73	34.18	42.31	51.04	74.00	22.96	Peak
5470.000	34.16	8.74	34.18	40.40	49.12	74.00	24.88	Peak
@ 5493.700	34.11	8.75	34.17	93.80	102.49	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

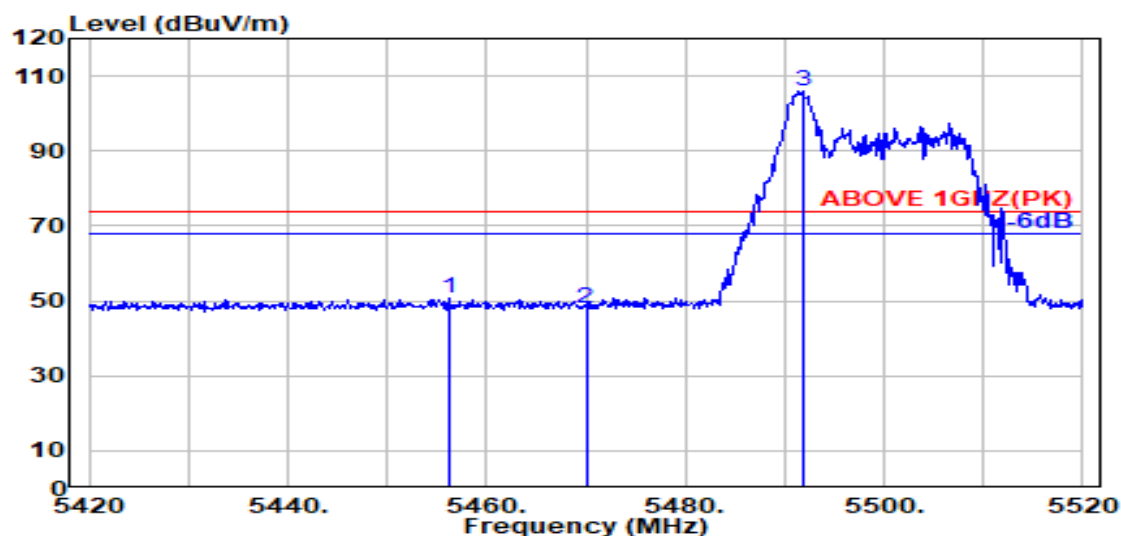

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.200	34.19	8.73	34.18	42.14	50.87	74.00	23.13	Peak
5470.000	34.16	8.74	34.18	39.37	48.09	74.00	25.91	Peak
@ 5491.900	34.12	8.75	34.17	97.18	105.88	---	---	Peak

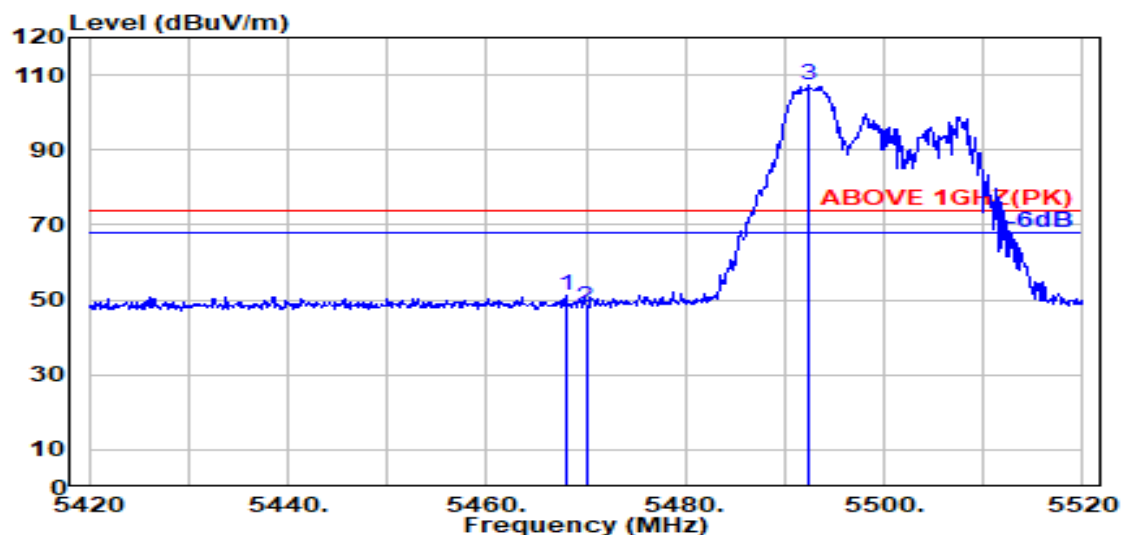


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	42.35	51.07	74.00	22.93	Peak
5470.000	34.16	8.74	34.18	39.32	48.04	74.00	25.96	Peak
@ 5492.500	34.11	8.75	34.17	98.83	107.52	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

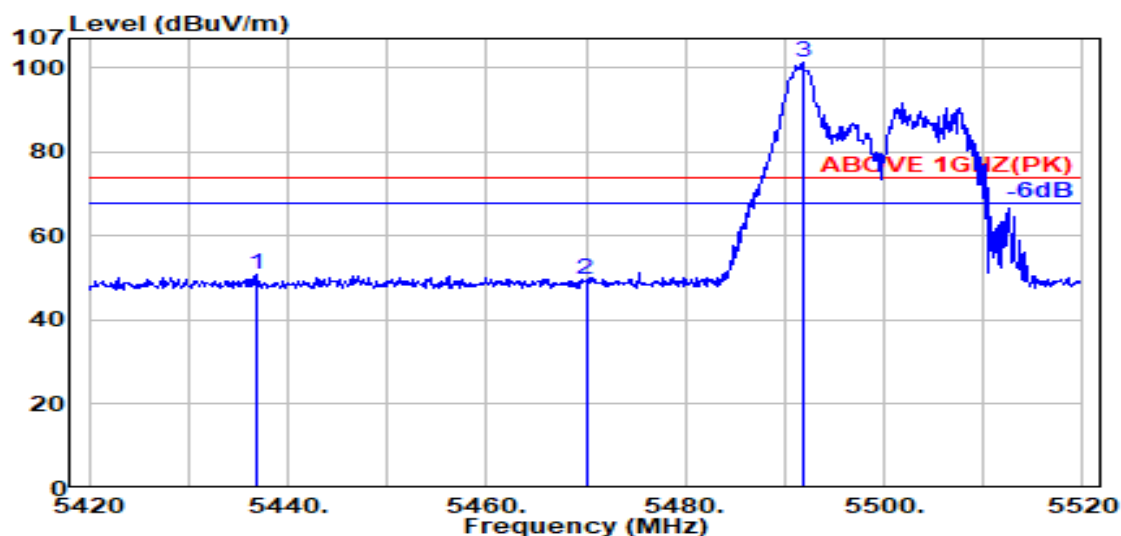

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5436.800	34.17	8.72	34.19	42.05	50.75	74.00	23.25	Peak
5470.000	34.16	8.74	34.18	40.90	49.61	74.00	24.39	Peak
@ 5491.800	34.12	8.75	34.17	92.60	101.29	---	---	Peak

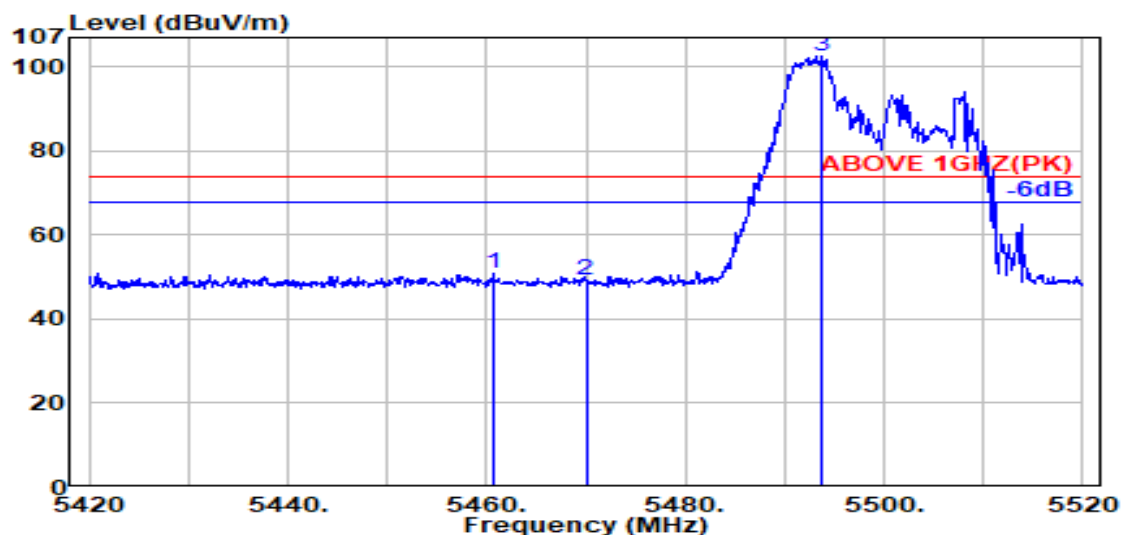


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.600	34.18	8.73	34.18	42.31	51.04	74.00	22.96	Peak
5470.000	34.16	8.74	34.18	40.40	49.12	74.00	24.88	Peak
@ 5493.700	34.11	8.75	34.17	93.80	102.49	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

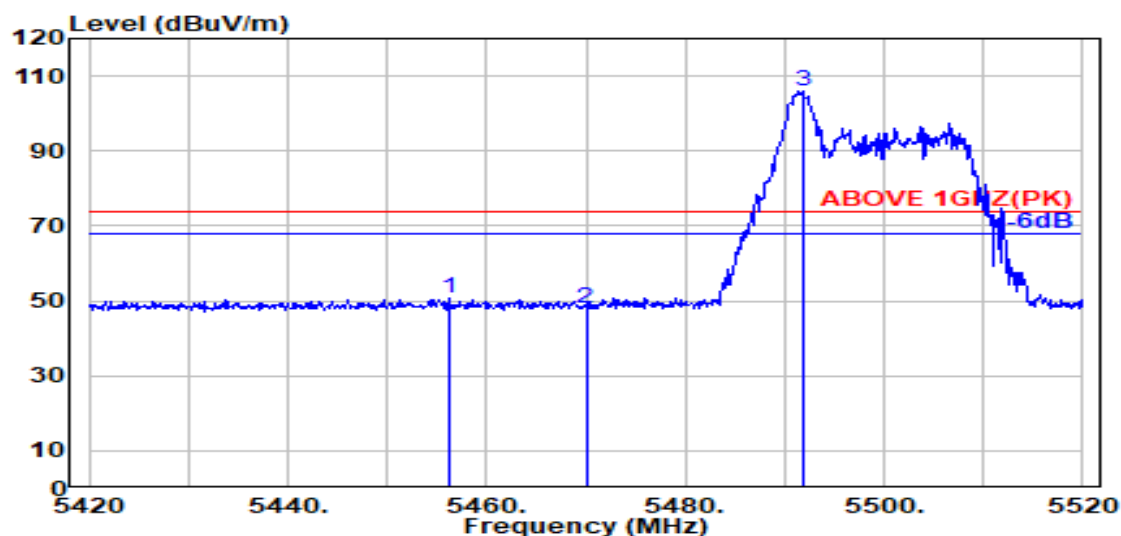

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.200	34.19	8.73	34.18	42.14	50.87	74.00	23.13	Peak
5470.000	34.16	8.74	34.18	39.37	48.09	74.00	25.91	Peak
@ 5491.900	34.12	8.75	34.17	97.18	105.88	---	---	Peak

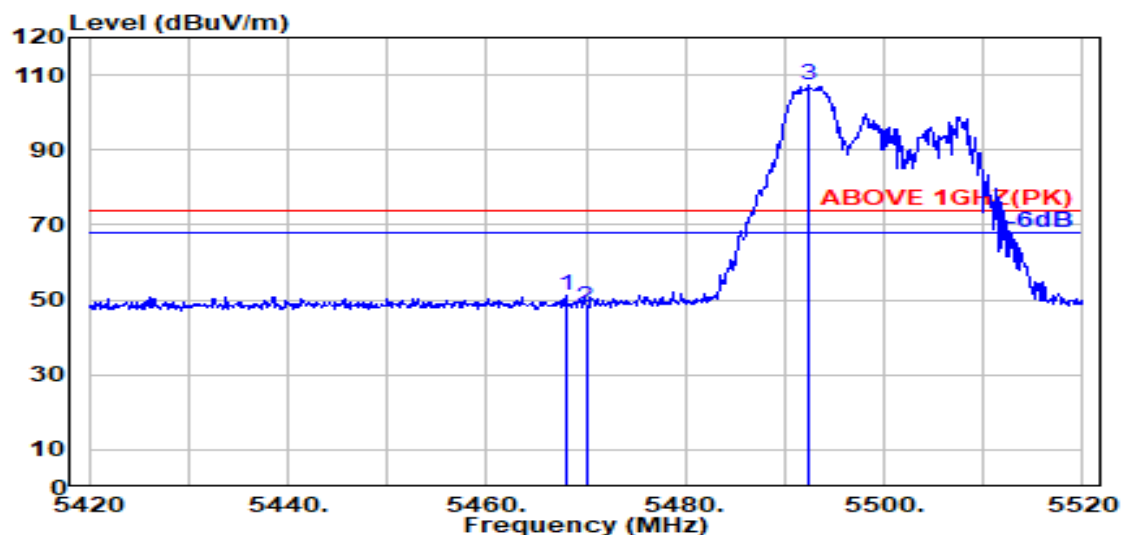


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	42.35	51.07	74.00	22.93	Peak
5470.000	34.16	8.74	34.18	39.32	48.04	74.00	25.96	Peak
@ 5492.500	34.11	8.75	34.17	98.83	107.52	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

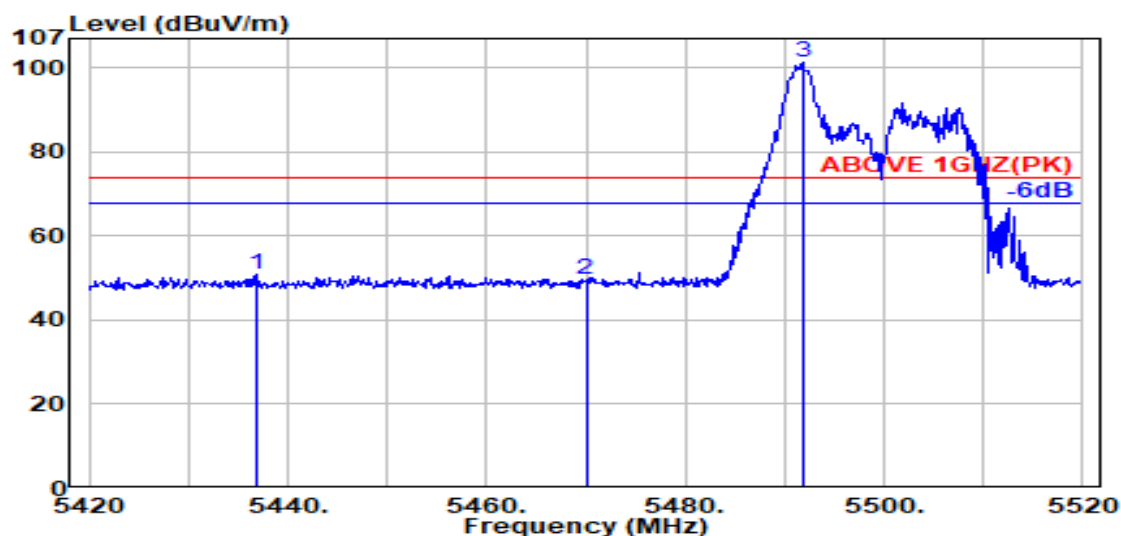

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5436.800	34.17	8.72	34.19	42.05	50.75	74.00	23.25	Peak
5470.000	34.16	8.74	34.18	40.90	49.61	74.00	24.39	Peak
@ 5491.800	34.12	8.75	34.17	92.60	101.29	---	---	Peak

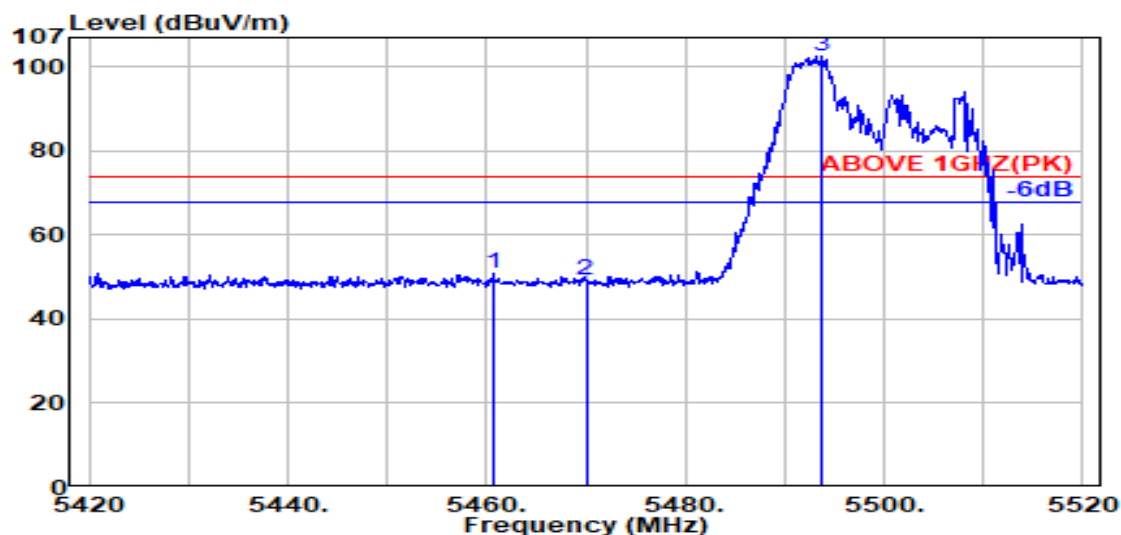


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5460.600	34.18	8.73	34.18	42.31	51.04	74.00	22.96	Peak
5470.000	34.16	8.74	34.18	40.40	49.12	74.00	24.88	Peak
@ 5493.700	34.11	8.75	34.17	93.80	102.49	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

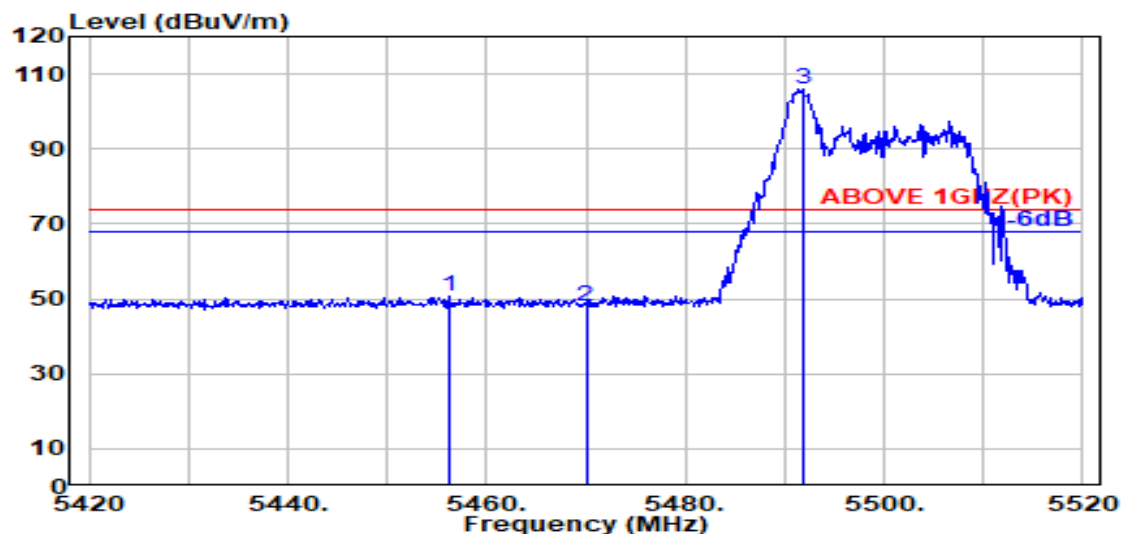

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.19	8.73	34.18	42.14	50.87	74.00	23.13	Peak
5470.000	34.16	8.74	34.18	39.37	48.09	74.00	25.91	Peak
@ 5491.900	34.12	8.75	34.17	97.18	105.88	---	---	Peak

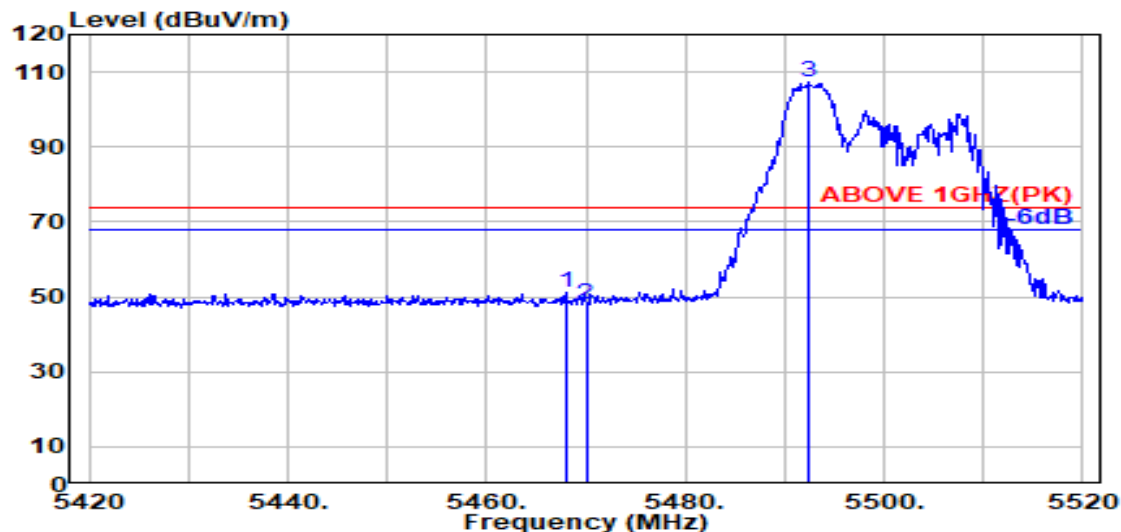


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	42.35	51.07	74.00	22.93	Peak
5470.000	34.16	8.74	34.18	39.32	48.04	74.00	25.96	Peak
@ 5492.500	34.11	8.75	34.17	98.83	107.52	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

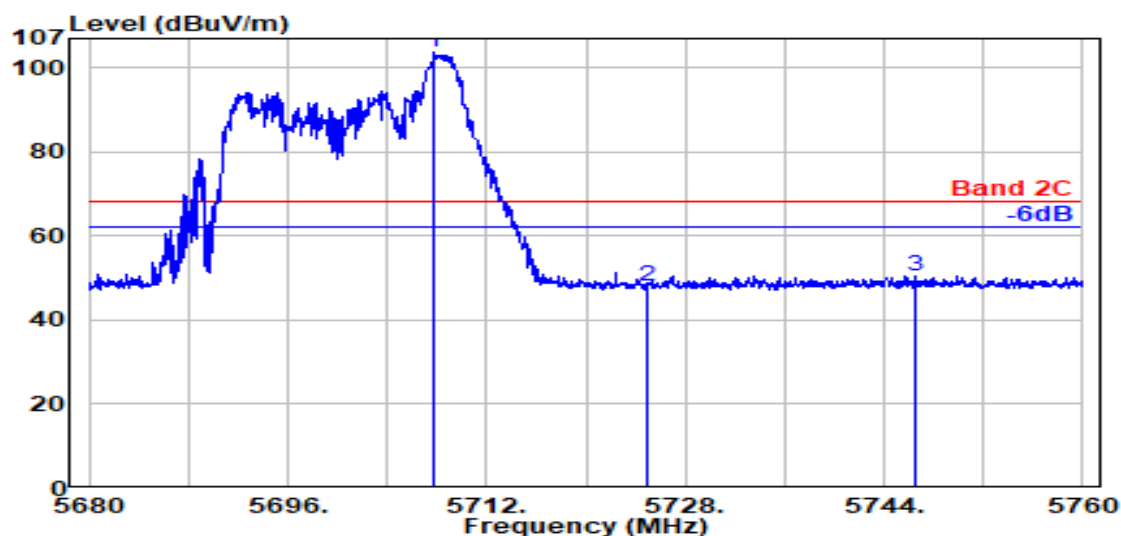

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.800	33.80	8.87	34.27	95.32	103.73	---	---	Peak
	5725.000	33.80	8.88	34.28	39.61	48.01	68.20	20.19	Peak
	5746.500	33.80	8.89	34.29	42.14	50.54	68.20	17.66	Peak

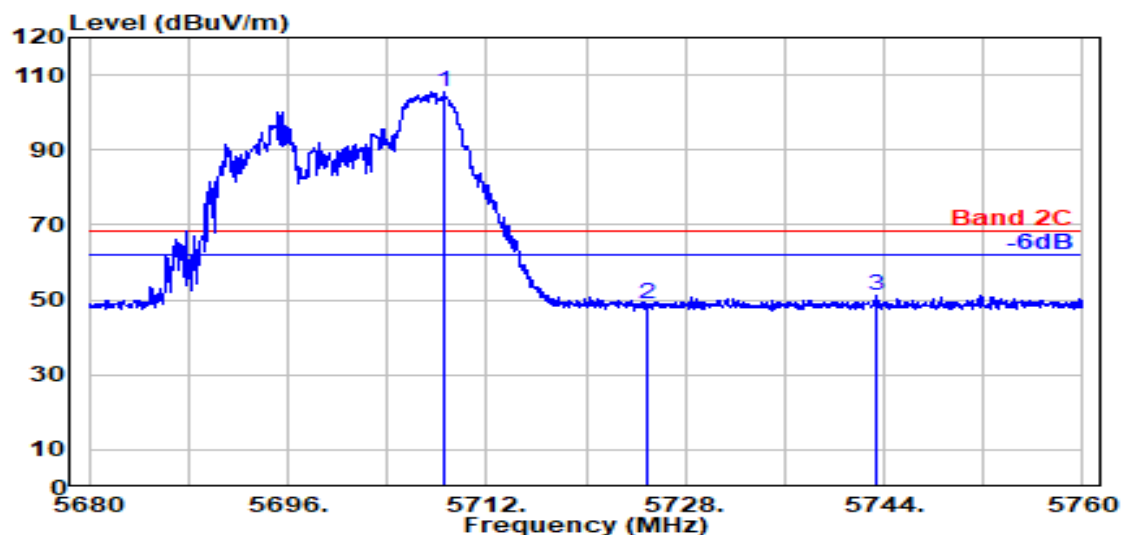


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.600	33.80	8.87	34.27	97.28	105.69	---	---	Peak
	5725.000	33.80	8.88	34.28	40.69	49.10	68.20	19.10	Peak
	5743.450	33.80	8.89	34.28	42.97	51.37	68.20	16.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

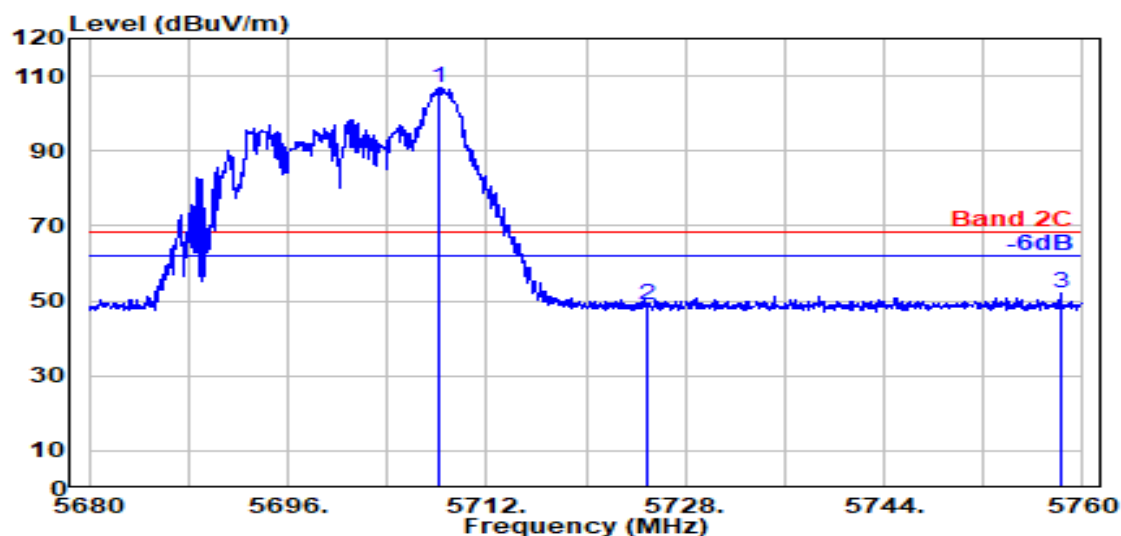

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.80	8.87	34.27	98.54	106.95	---	---	Peak
	5725.000	33.80	8.88	34.28	40.71	49.12	68.20	19.08	Peak
	5758.200	33.83	8.90	34.29	43.48	51.92	68.20	16.28	Peak

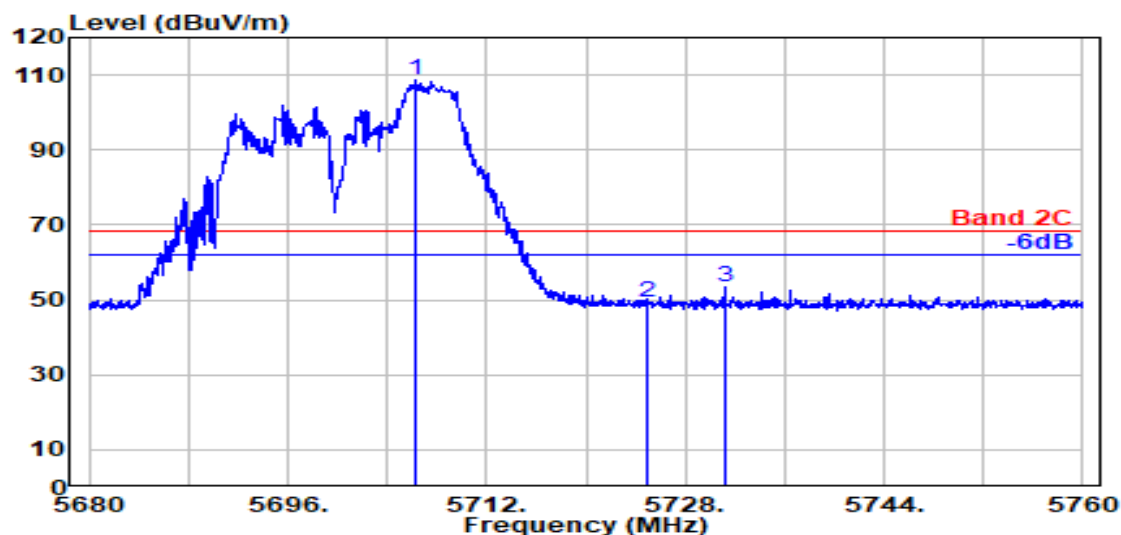


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.250	33.80	8.87	34.27	100.47	108.87	---	---	Peak
	5725.000	33.80	8.88	34.28	40.75	49.15	68.20	19.05	Peak
	5731.200	33.80	8.88	34.28	44.88	53.28	68.20	14.92	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

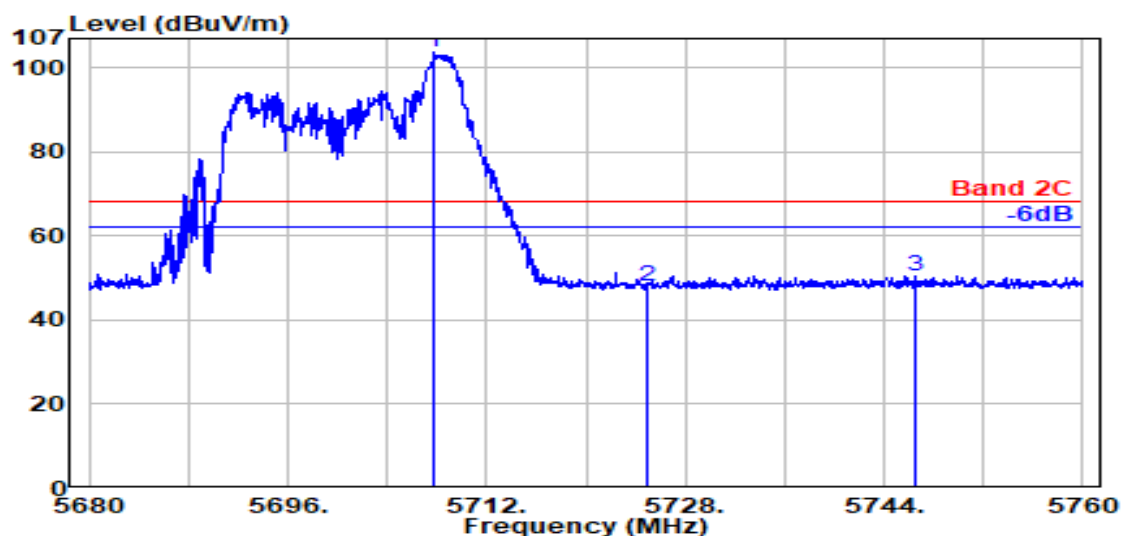

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.800	33.80	8.87	34.27	95.32	103.73	---	---	Peak
	5725.000	33.80	8.88	34.28	39.61	48.01	68.20	20.19	Peak
	5746.500	33.80	8.89	34.29	42.14	50.54	68.20	17.66	Peak

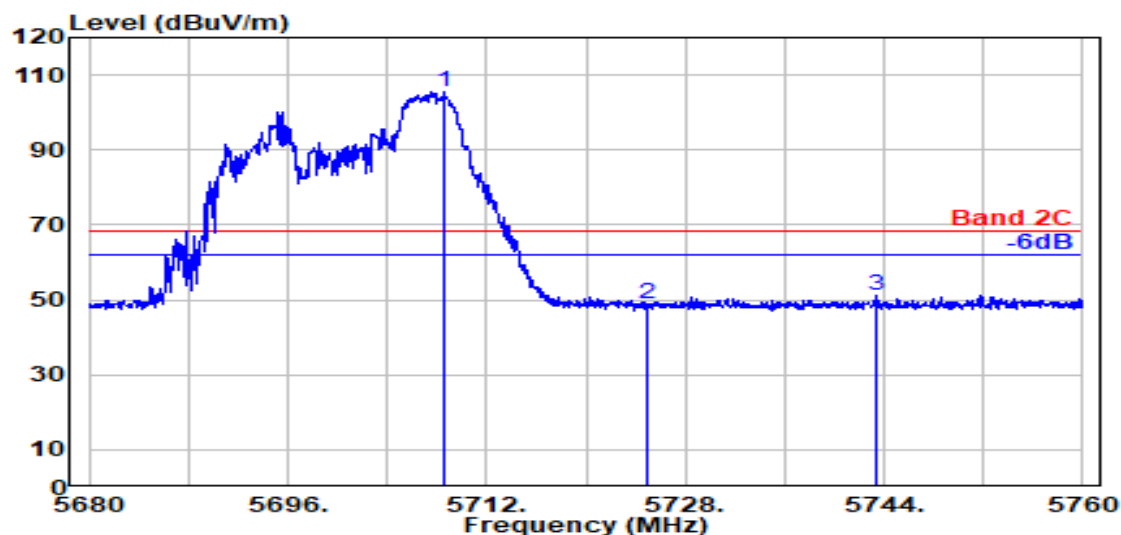


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.600	33.80	8.87	34.27	97.28	105.69	---	---	Peak
	5725.000	33.80	8.88	34.28	40.69	49.10	68.20	19.10	Peak
	5743.450	33.80	8.89	34.28	42.97	51.37	68.20	16.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

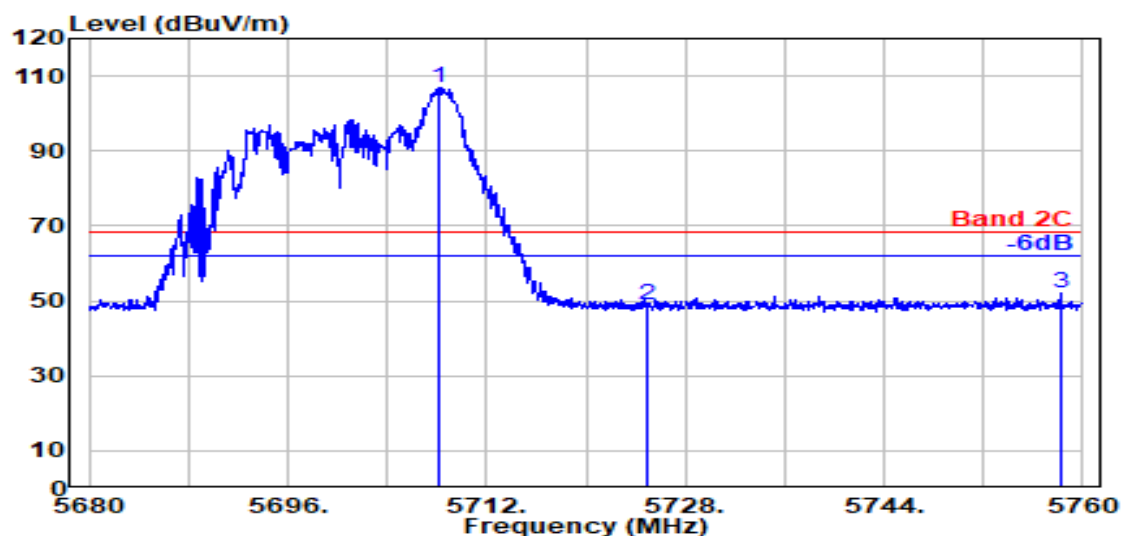

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.80	8.87	34.27	98.54	106.95	---	---	Peak
	5725.000	33.80	8.88	34.28	40.71	49.12	68.20	19.08	Peak
	5758.200	33.83	8.90	34.29	43.48	51.92	68.20	16.28	Peak

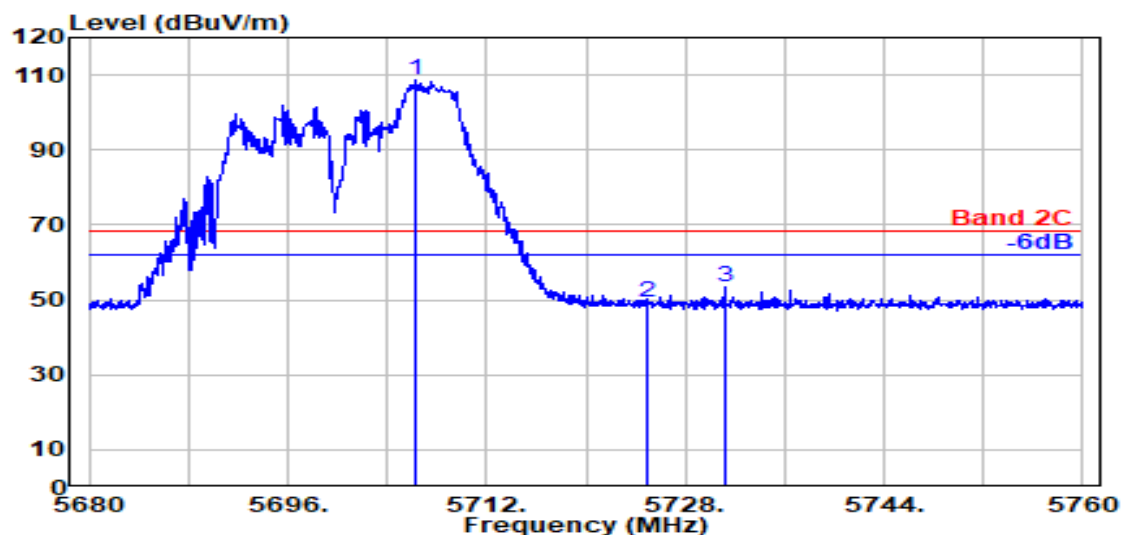


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.250	33.80	8.87	34.27	100.47	108.87	---	---	Peak
	5725.000	33.80	8.88	34.28	40.75	49.15	68.20	19.05	Peak
	5731.200	33.80	8.88	34.28	44.88	53.28	68.20	14.92	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

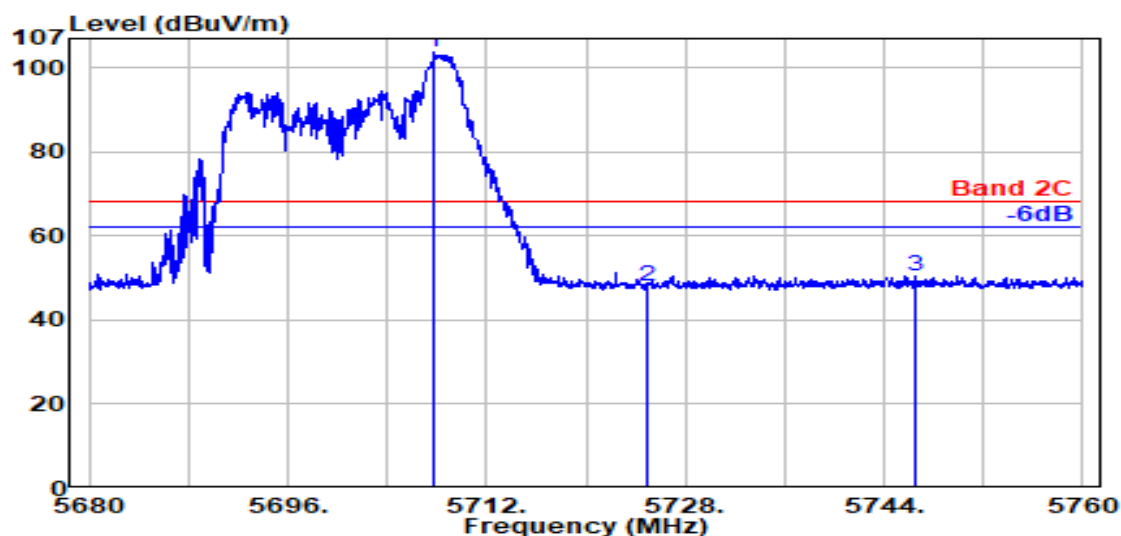

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.800	33.80	8.87	34.27	95.32	103.73	---	---	Peak
	5725.000	33.80	8.88	34.28	39.61	48.01	68.20	20.19	Peak
	5746.500	33.80	8.89	34.29	42.14	50.54	68.20	17.66	Peak

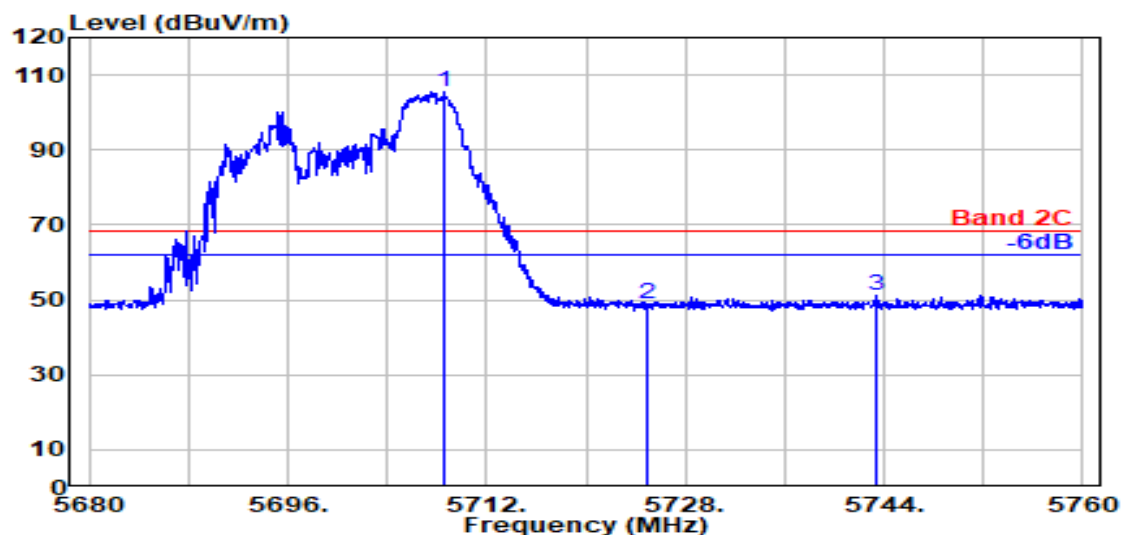


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.600	33.80	8.87	34.27	97.28	105.69	---	---	Peak
	5725.000	33.80	8.88	34.28	40.69	49.10	68.20	19.10	Peak
	5743.450	33.80	8.89	34.28	42.97	51.37	68.20	16.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

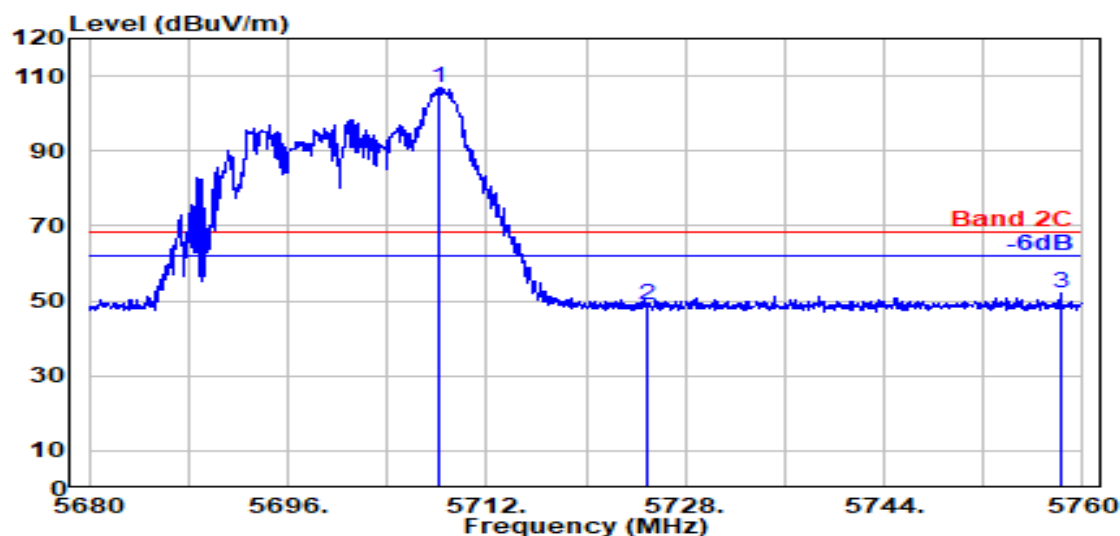

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.100	33.80	8.87	34.27	98.54	106.95	---	---	Peak
	5725.000	33.80	8.88	34.28	40.71	49.12	68.20	19.08	Peak
	5758.200	33.83	8.90	34.29	43.48	51.92	68.20	16.28	Peak

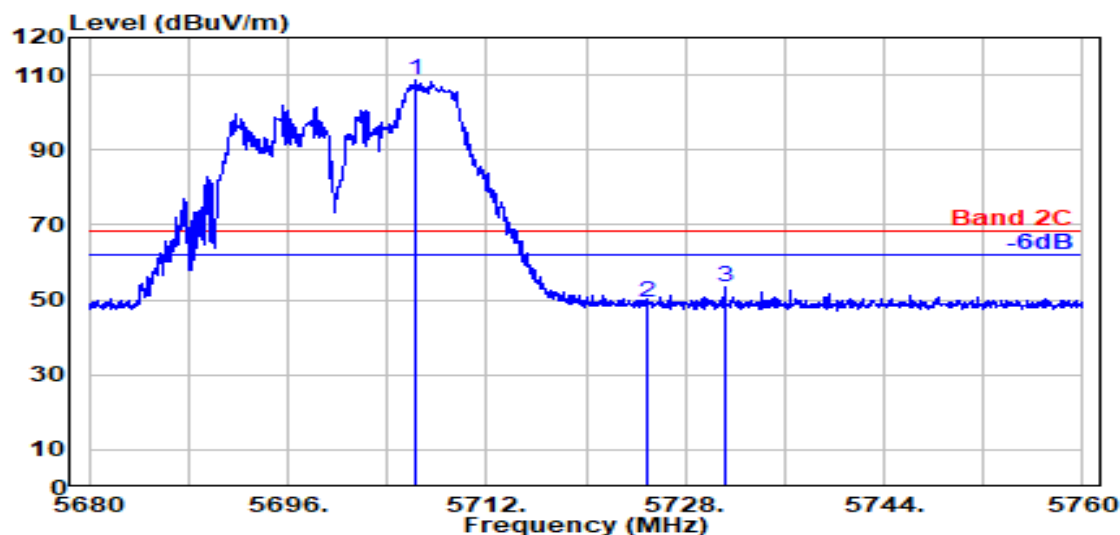


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5706.250	33.80	8.87	34.27	100.47	108.87	---	---	Peak
	5725.000	33.80	8.88	34.28	40.75	49.15	68.20	19.05	Peak
	5731.200	33.80	8.88	34.28	44.88	53.28	68.20	14.92	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

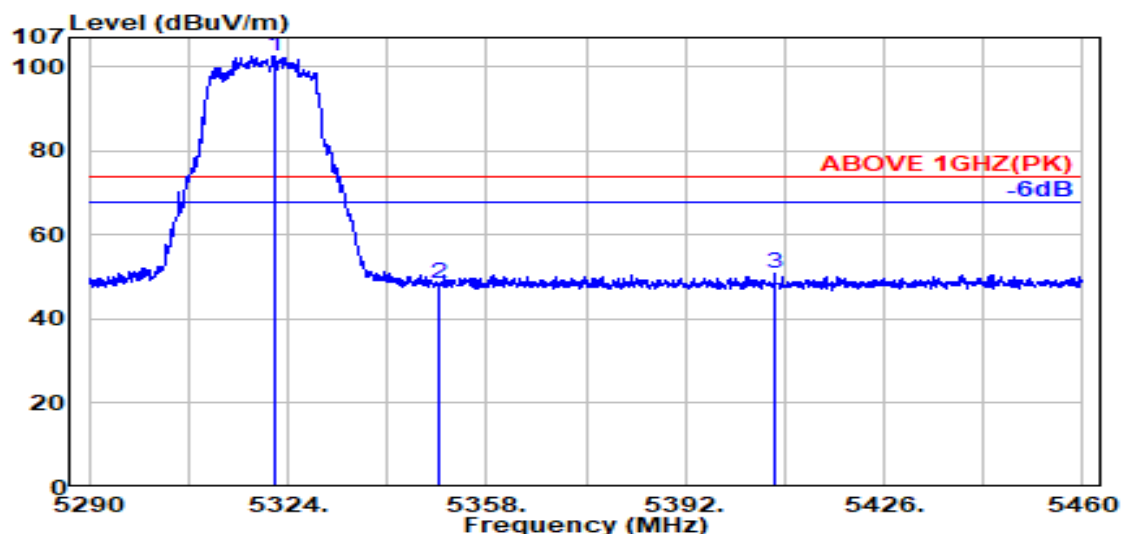

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5321.600	34.01	8.65	34.23	94.11	102.55	---	---	Peak
5350.000	33.90	8.67	34.22	39.95	48.30	74.00	25.70	Peak
5407.400	34.11	8.70	34.20	42.10	50.72	74.00	23.28	Peak

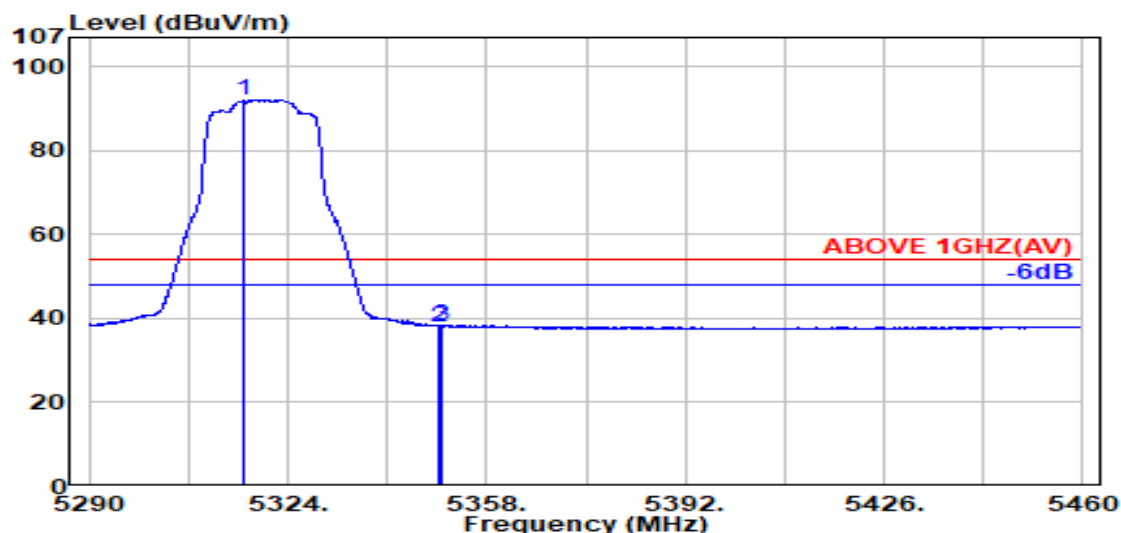


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5316.400	34.03	8.65	34.23	83.70	92.15	---	---	Average
5350.000	33.90	8.67	34.22	29.80	38.15	54.00	15.85	Average
5350.400	33.90	8.67	34.22	30.00	38.35	54.00	15.65	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

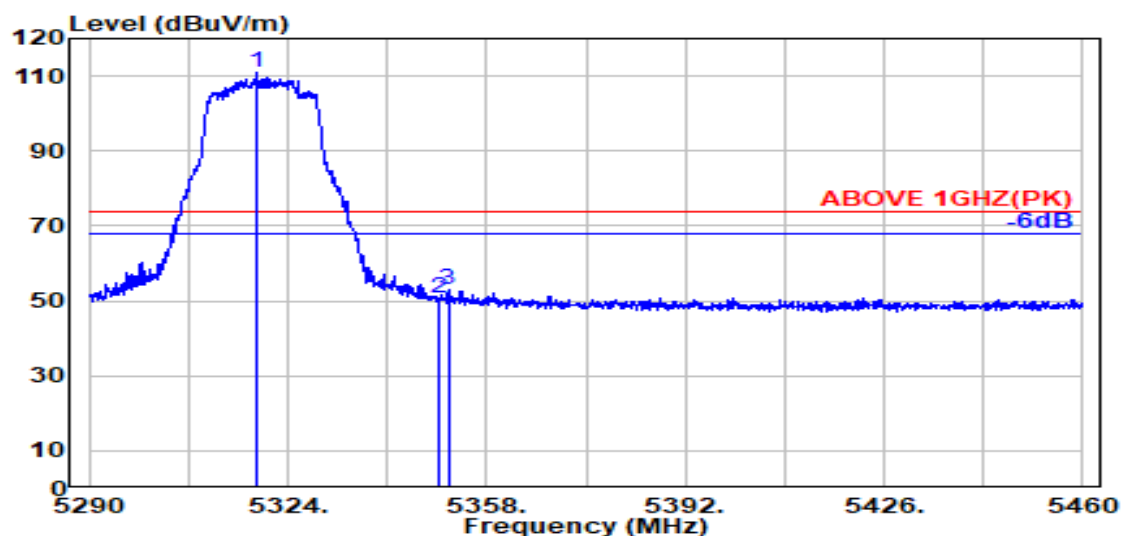

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.600	34.03	8.65	34.23	102.62	111.07	---	---	Peak
	5350.000	33.90	8.67	34.22	42.18	50.53	74.00	23.47	Peak
	5351.400	33.91	8.67	34.22	44.75	53.10	74.00	20.90	Peak

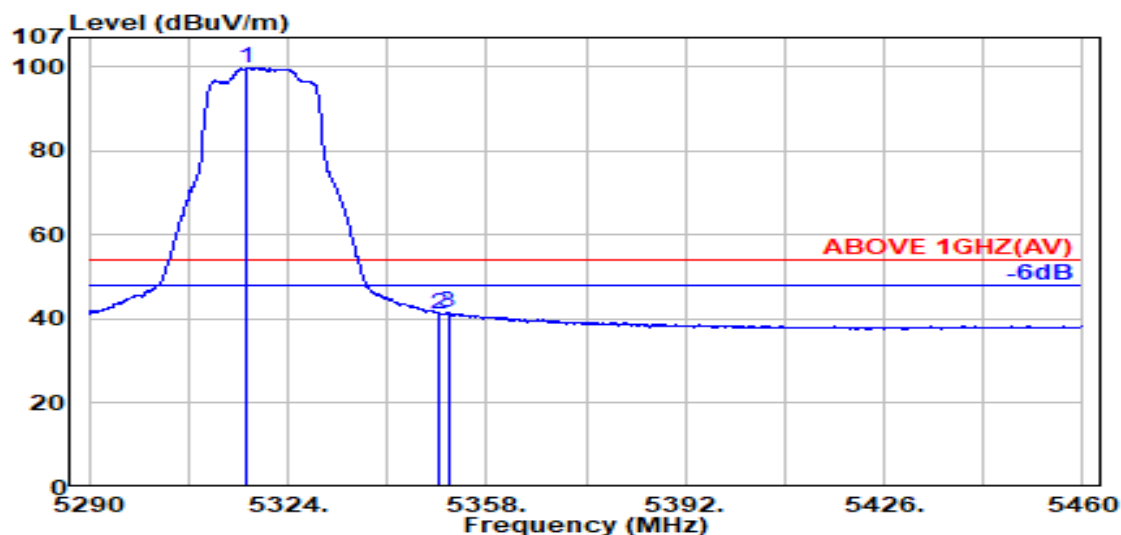


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.100	34.03	8.65	34.23	91.29	99.74	---	---	Average
	5350.000	33.90	8.67	34.22	32.74	41.09	54.00	12.91	Average
	5351.400	33.91	8.67	34.22	33.22	41.58	54.00	12.42	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

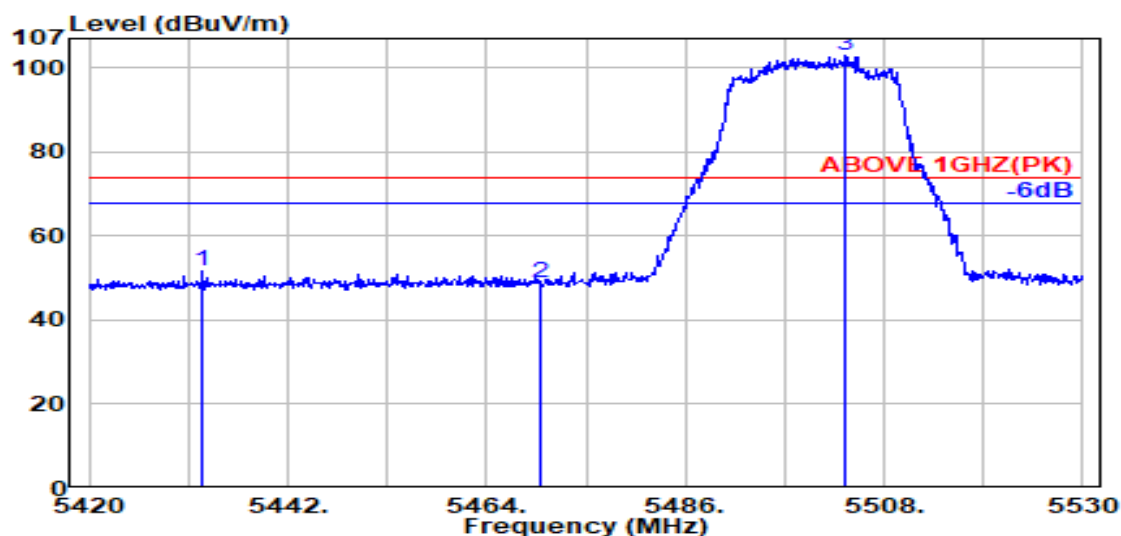

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5432.500	34.17	8.71	34.19	42.79	51.48	74.00	22.52	Peak
5470.000	34.16	8.74	34.18	40.12	48.83	74.00	25.17	Peak
@ 5503.800	34.10	8.76	34.17	94.48	103.16	---	---	Peak

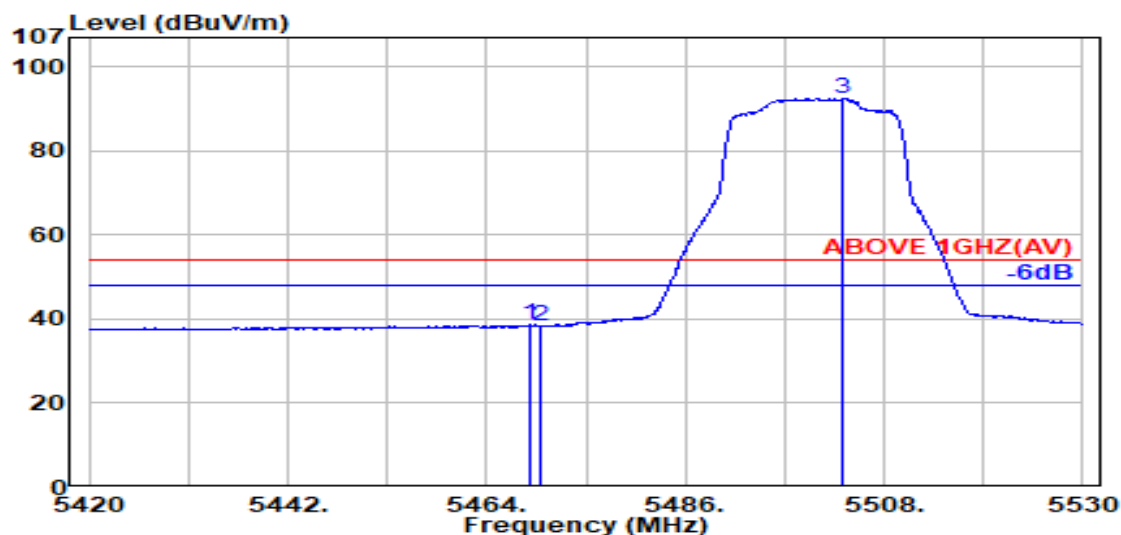


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	29.98	38.69	54.00	15.31	Average
5470.000	34.16	8.74	34.18	29.61	38.33	54.00	15.67	Average
@ 5503.400	34.10	8.76	34.17	83.91	92.59	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

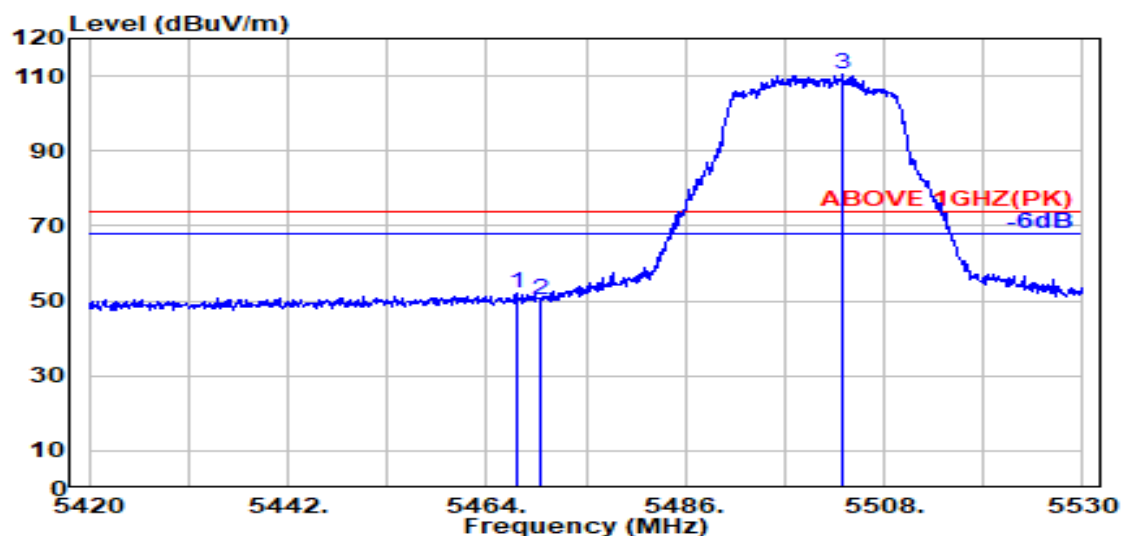

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.17	8.73	34.18	43.22	51.94	74.00	22.06	Peak
5470.000	34.16	8.74	34.18	41.33	50.05	74.00	23.95	Peak
@ 5503.400	34.10	8.76	34.17	101.63	110.32	---	---	Peak

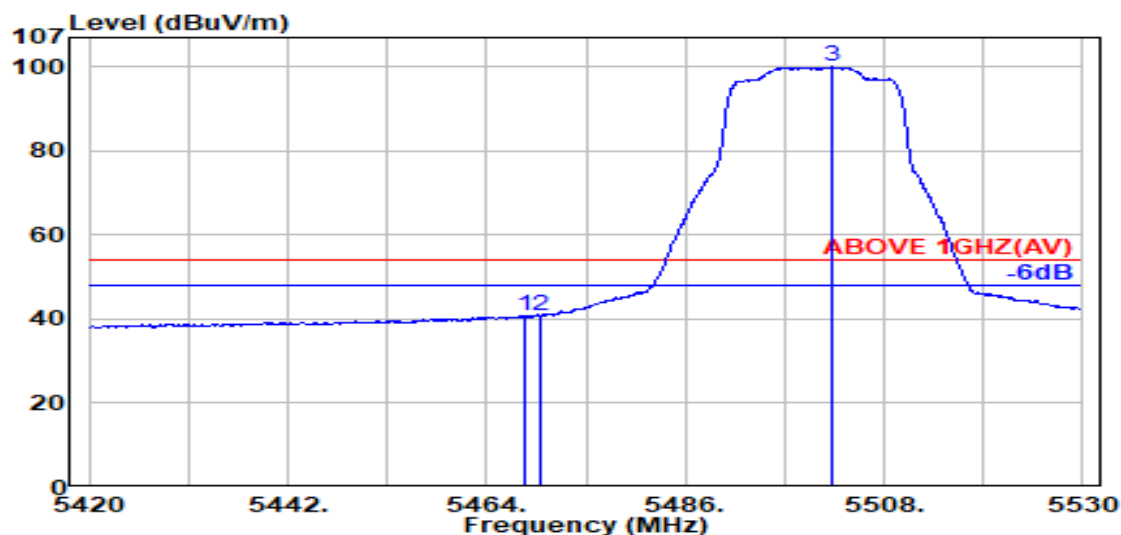


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	32.21	40.93	54.00	13.07	Average
5470.000	34.16	8.74	34.18	32.09	40.81	54.00	13.19	Average
@ 5502.100	34.10	8.75	34.17	91.27	99.95	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

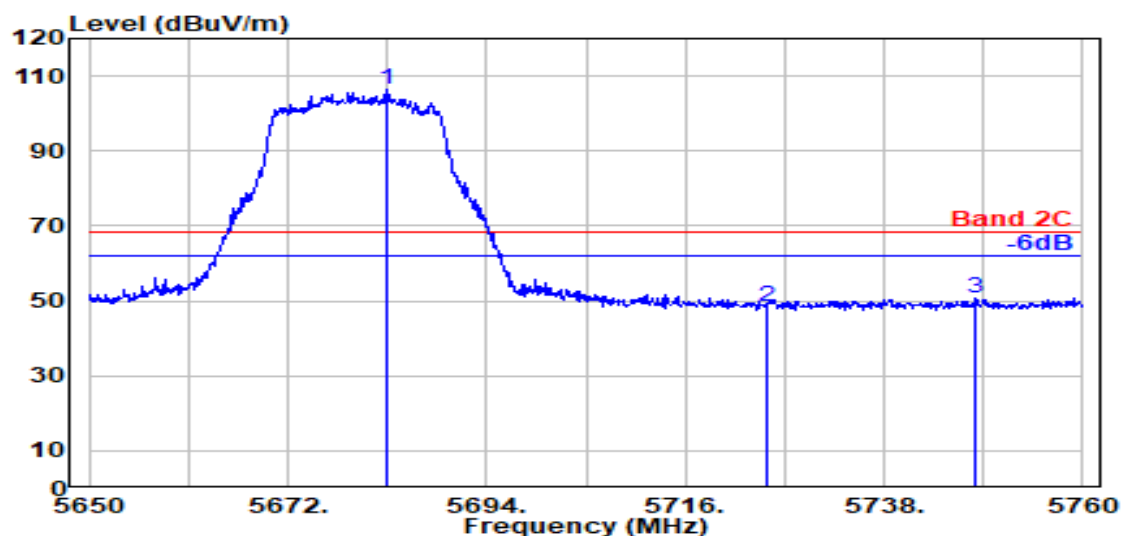

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5682.900	33.87	8.86	34.26	97.91	106.38	---	---	Peak
	5725.000	33.80	8.88	34.28	39.98	48.39	68.20	19.81	Peak
	5748.100	33.80	8.89	34.29	42.34	50.74	68.20	17.46	Peak

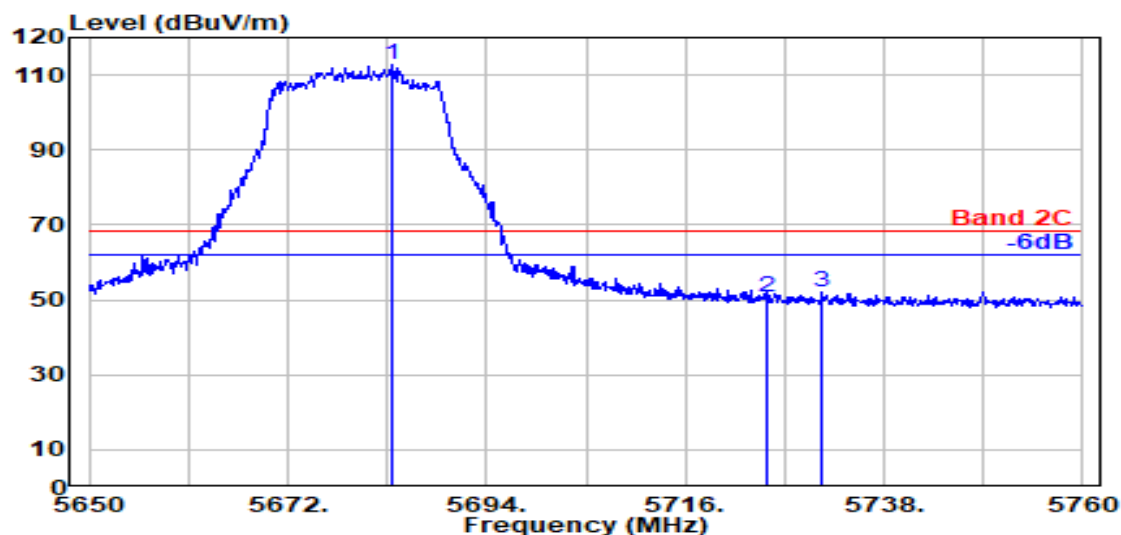


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5683.600	33.87	8.86	34.26	104.37	112.84	---	---	Peak
	5725.000	33.80	8.88	34.28	42.25	50.65	68.20	17.55	Peak
	5731.200	33.80	8.88	34.28	43.65	52.06	68.20	16.14	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

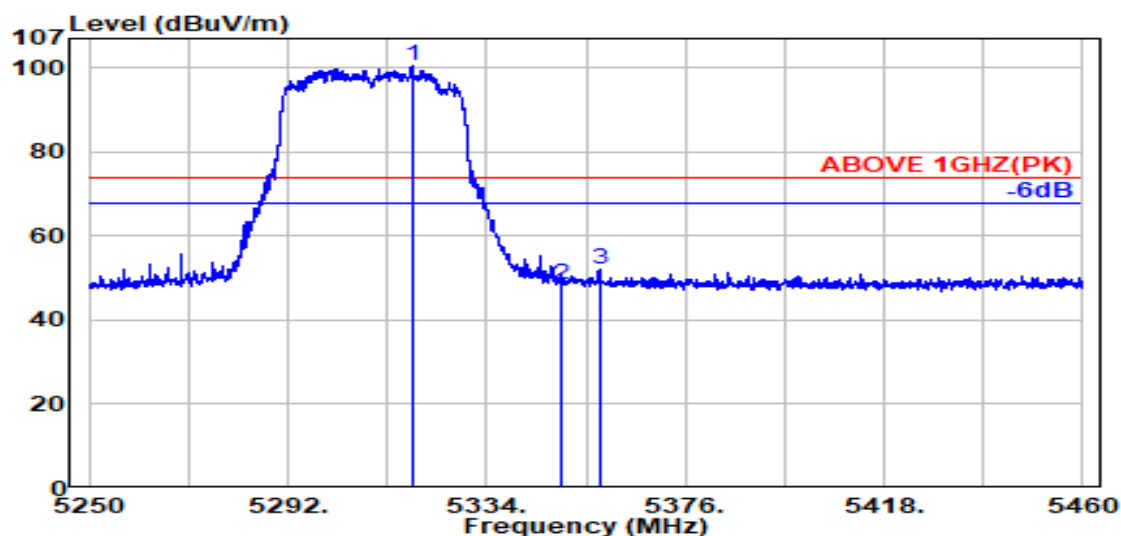

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	34.03	8.65	34.23	92.15	100.60	---	---	Peak
5350.000	33.90	8.67	34.22	40.19	48.54	74.00	25.46	Peak
5357.800	33.93	8.67	34.21	43.65	52.03	74.00	21.97	Peak

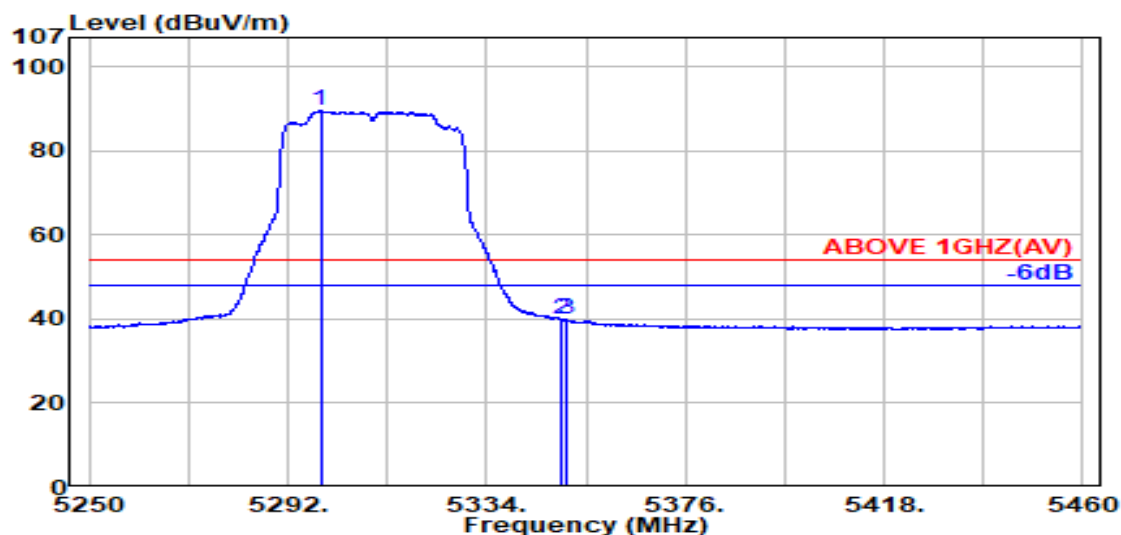


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.900	34.09	8.63	34.23	81.06	89.56	---	---	Average
5350.000	33.90	8.67	34.22	31.58	39.92	54.00	14.08	Average
5350.700	33.90	8.67	34.22	31.58	39.93	54.00	14.07	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

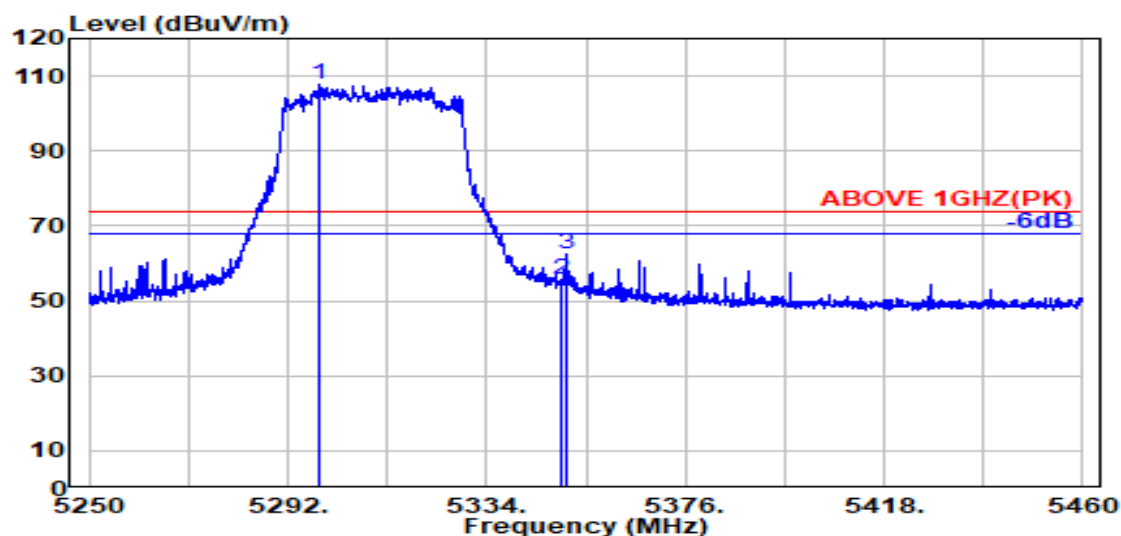

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5298.600	34.09	8.63	34.23	99.25	107.74	---	---	Peak
5350.000	33.90	8.67	34.22	47.57	55.92	74.00	18.08	Peak
5351.000	33.90	8.67	34.22	54.05	62.41	74.00	11.59	Peak

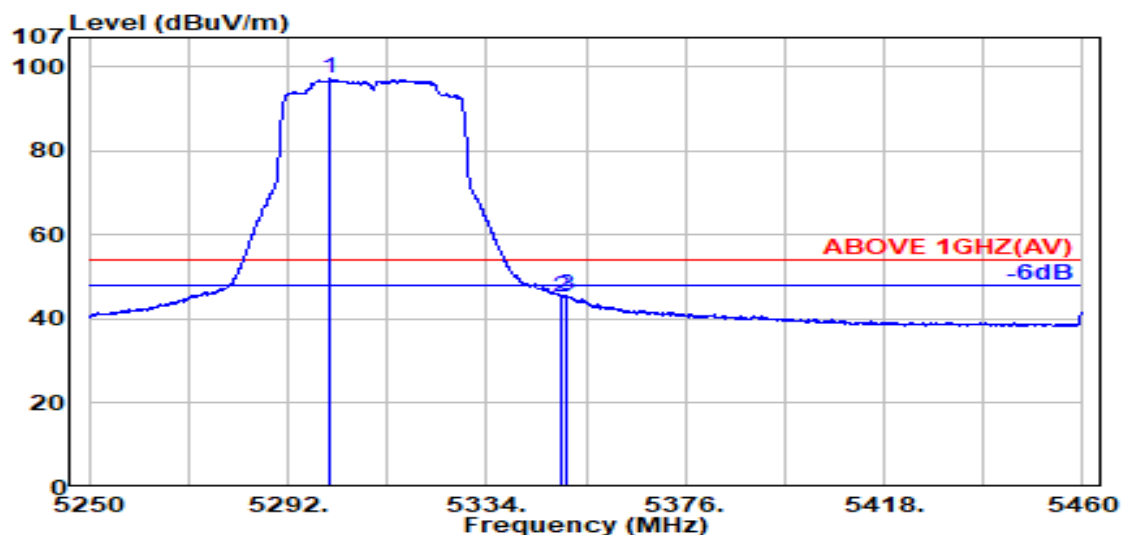


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5300.900	34.10	8.64	34.23	88.61	97.11	---	---	Average
5350.000	33.90	8.67	34.22	36.97	45.32	54.00	8.68	Average
5350.900	33.90	8.67	34.22	37.17	45.53	54.00	8.47	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

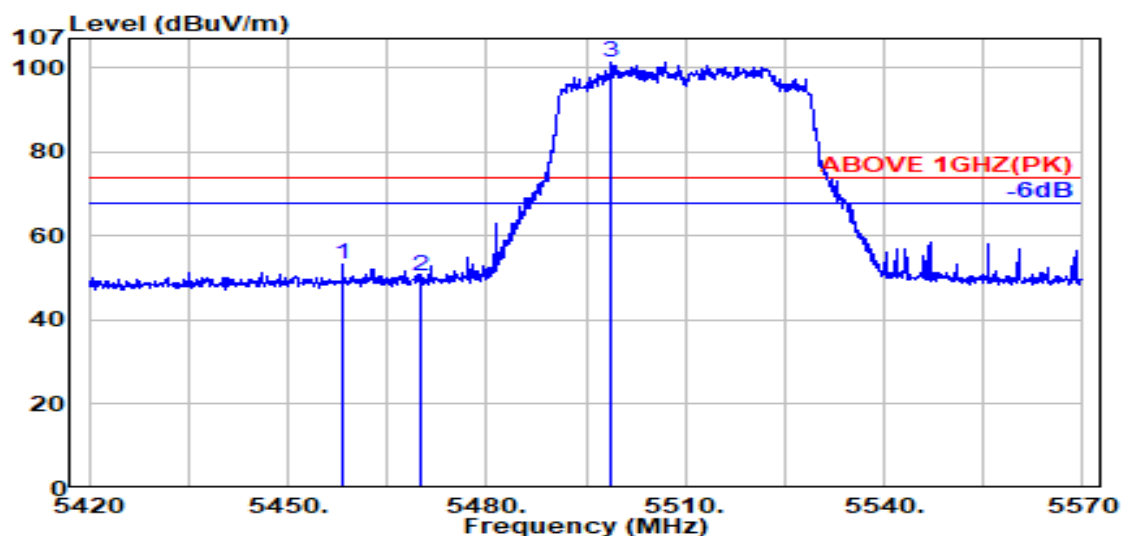

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.200	34.18	8.73	34.18	44.56	53.29	74.00	20.71	Peak
5470.000	34.16	8.74	34.18	41.57	50.29	74.00	23.71	Peak
@ 5498.900	34.10	8.75	34.17	92.61	101.30	---	---	Peak

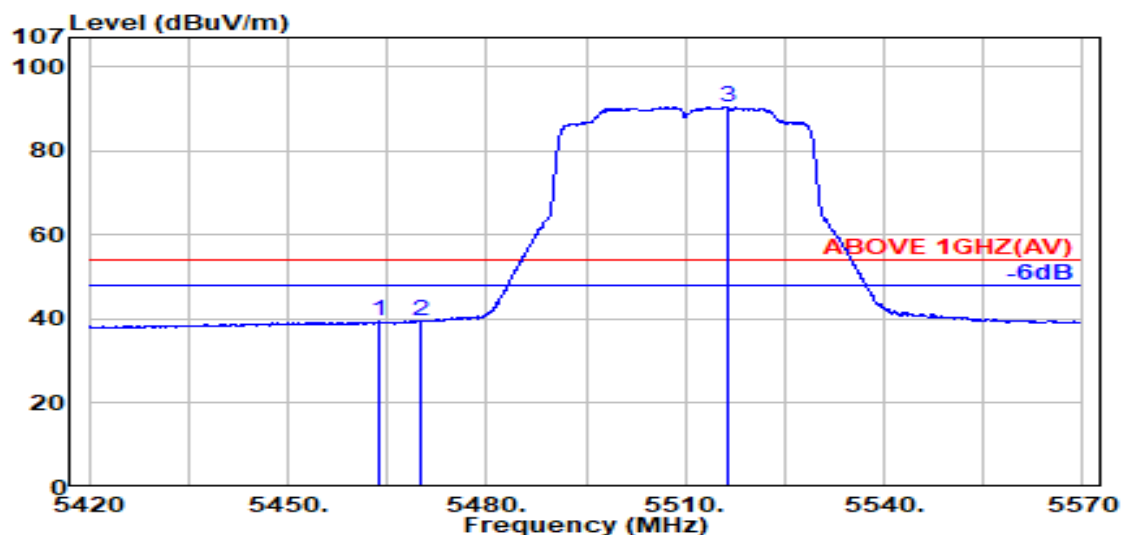


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.800	34.17	8.73	34.18	30.74	39.46	54.00	14.54	Average
5470.000	34.16	8.74	34.18	30.70	39.42	54.00	14.58	Average
@ 5516.300	34.10	8.76	34.18	81.74	90.42	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

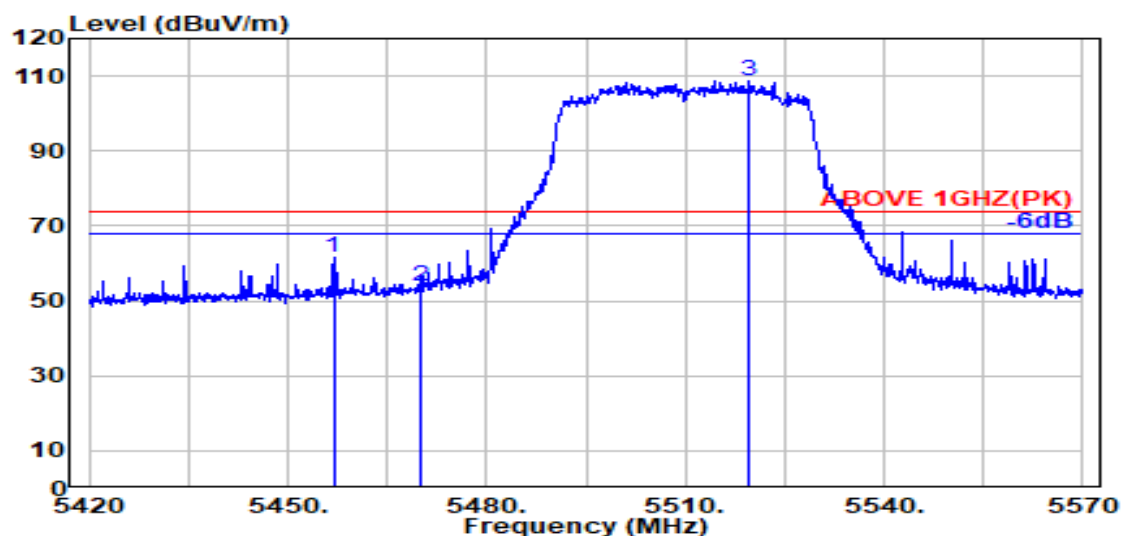

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5456.900	34.19	8.73	34.18	52.88	61.61	74.00	12.39	Peak
5470.000	34.16	8.74	34.18	45.32	54.04	74.00	19.96	Peak
@ 5519.600	34.10	8.76	34.18	100.01	108.69	---	---	Peak

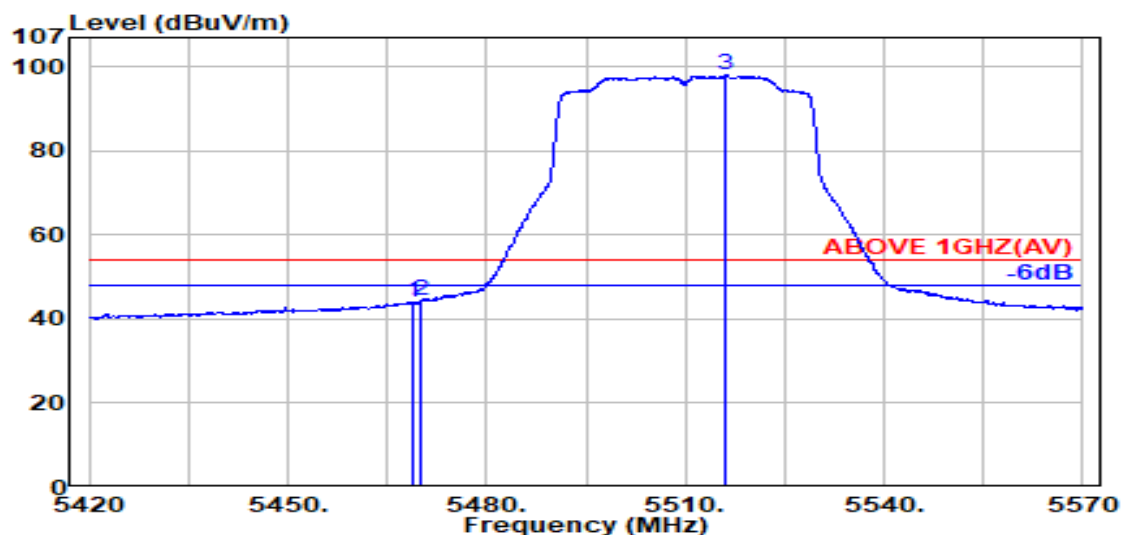


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	35.44	44.16	54.00	9.84	Average
5470.000	34.16	8.74	34.18	35.55	44.27	54.00	9.73	Average
@ 5516.100	34.10	8.76	34.18	89.29	97.97	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

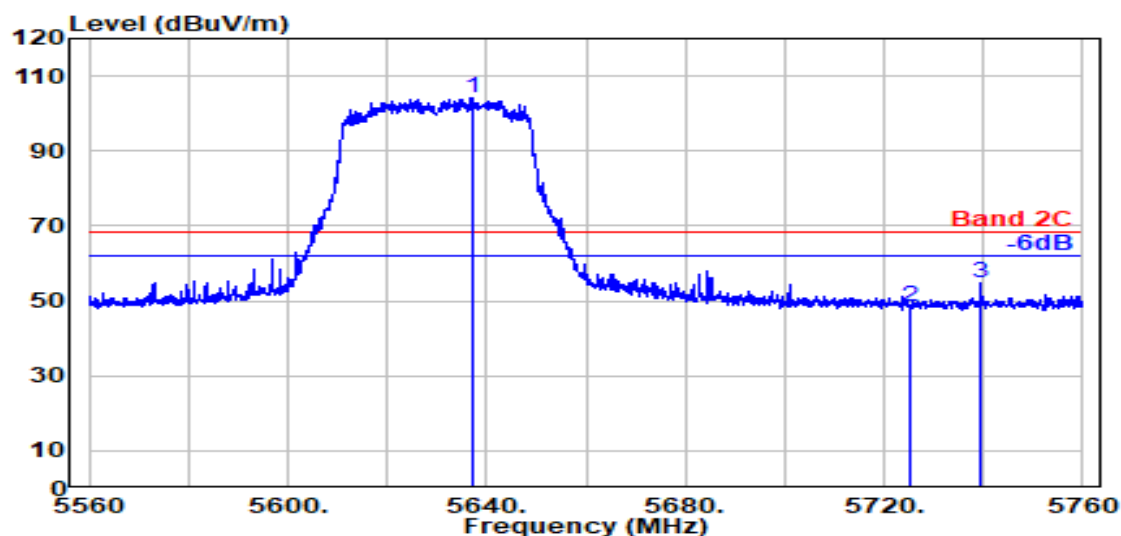

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5637.100	34.00	8.83	34.24	95.77	104.37	---	---	Peak
	5725.000	33.80	8.88	34.28	40.15	48.55	68.20	19.65	Peak
	5739.500	33.80	8.89	34.28	46.31	54.71	68.20	13.49	Peak

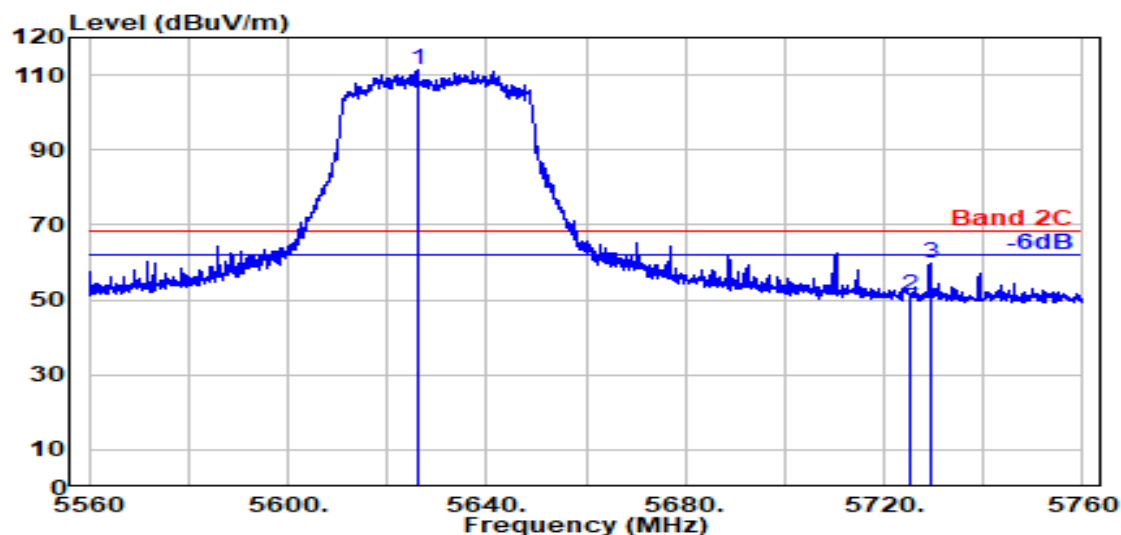


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5626.200	34.00	8.83	34.23	102.60	111.19	---	---	Peak
	5725.000	33.80	8.88	34.28	42.82	51.22	68.20	16.98	Peak
	5729.200	33.80	8.88	34.28	51.17	59.58	68.20	8.62	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/67	Frequency	TX 5250MHz

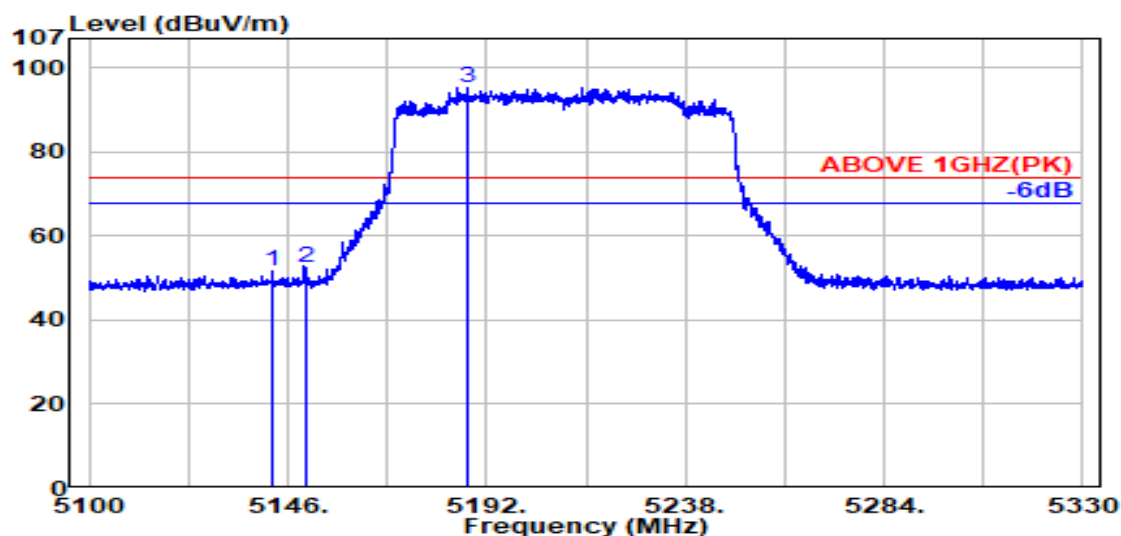

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.70	8.54	34.28	43.57	51.52	74.00	22.48	Peak
5150.000	33.70	8.54	34.28	44.50	52.46	74.00	21.54	Peak
@ 5187.800	33.70	8.57	34.27	87.38	95.38	---	---	Peak

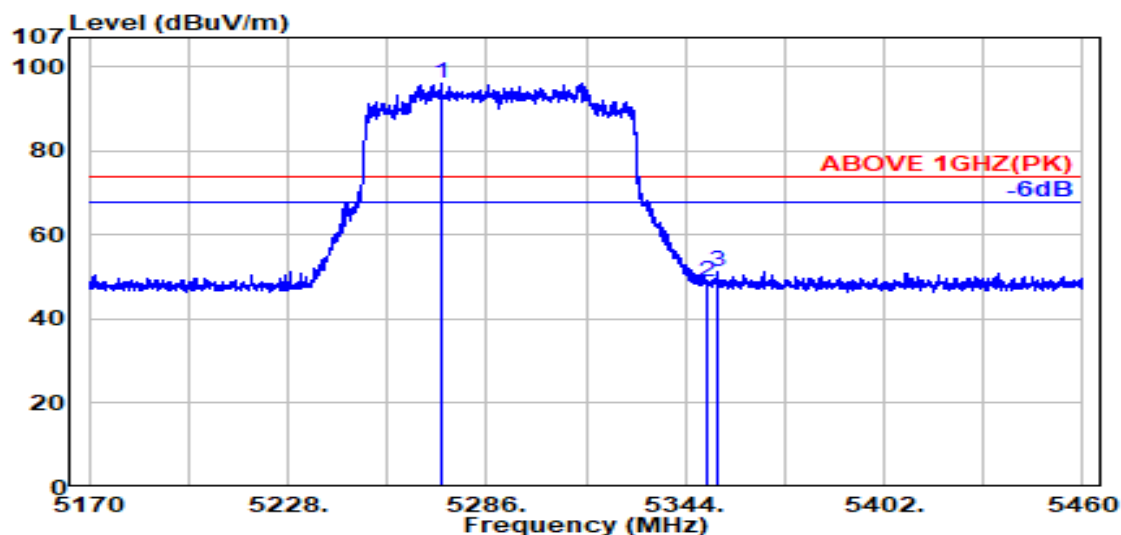


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.700	33.94	8.62	34.24	87.88	96.19	---	---	Peak
5350.000	33.90	8.67	34.22	40.32	48.67	74.00	25.33	Peak
5353.300	33.91	8.67	34.22	42.99	51.35	74.00	22.65	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/67	Frequency	TX 5250MHz

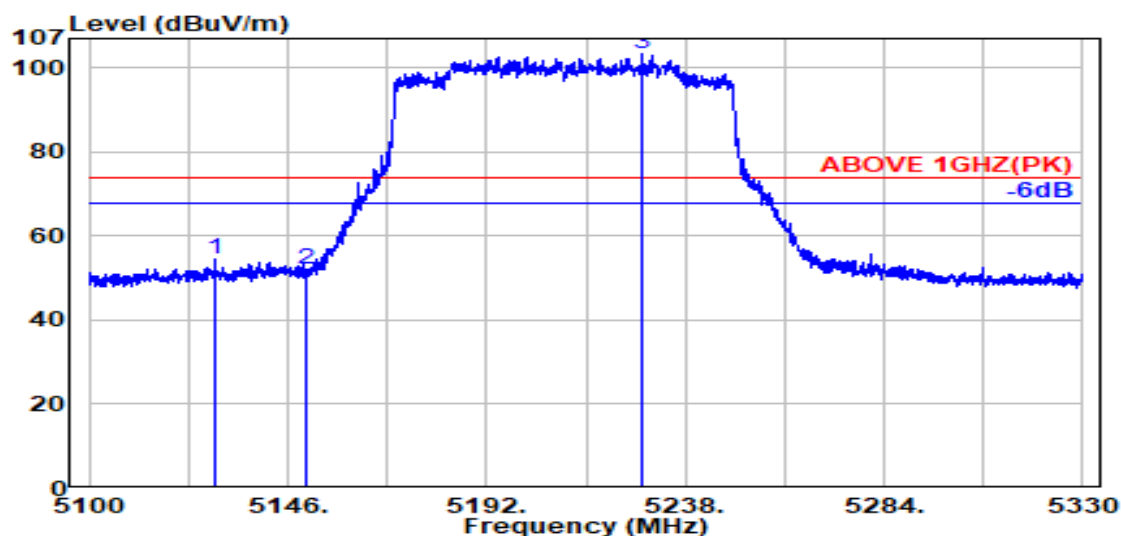

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.100	33.70	8.53	34.29	46.63	54.57	74.00	19.43	Peak
5150.000	33.70	8.54	34.28	44.17	52.13	74.00	21.87	Peak
@ 5227.900	33.76	8.59	34.26	95.29	103.38	---	---	Peak

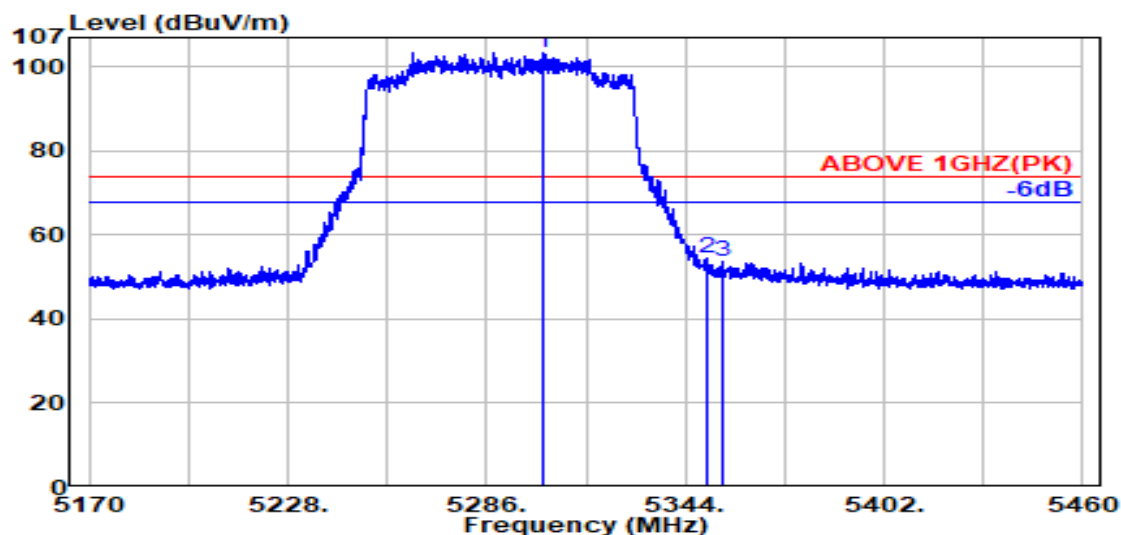


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.800	34.09	8.64	34.23	94.97	103.46	---	---	Peak
5350.000	33.90	8.67	34.22	46.01	54.36	74.00	19.64	Peak
5354.800	33.92	8.67	34.21	45.21	53.58	74.00	20.42	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

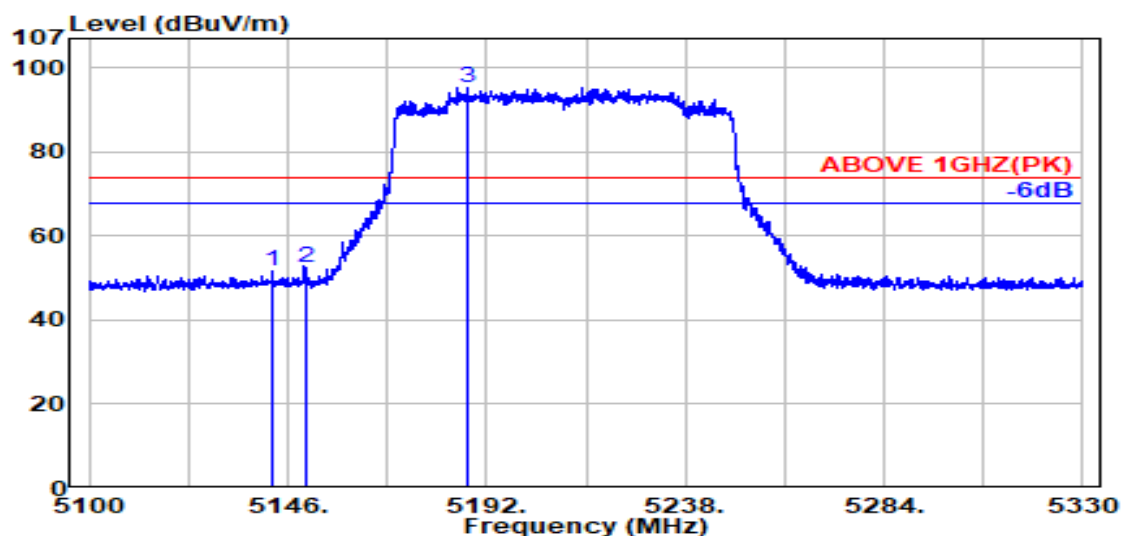

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.70	8.54	34.28	43.57	51.52	74.00	22.48	Peak
5150.000	33.70	8.54	34.28	44.50	52.46	74.00	21.54	Peak
@ 5187.800	33.70	8.57	34.27	87.38	95.38	---	---	Peak

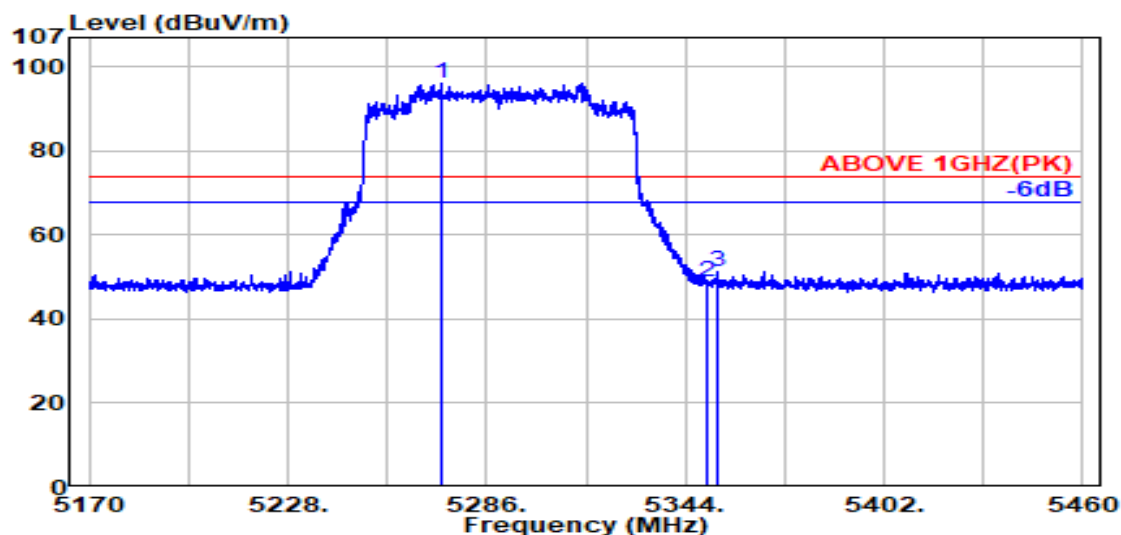


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.700	33.94	8.62	34.24	87.88	96.19	---	---	Peak
5350.000	33.90	8.67	34.22	40.32	48.67	74.00	25.33	Peak
5353.300	33.91	8.67	34.22	42.99	51.35	74.00	22.65	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

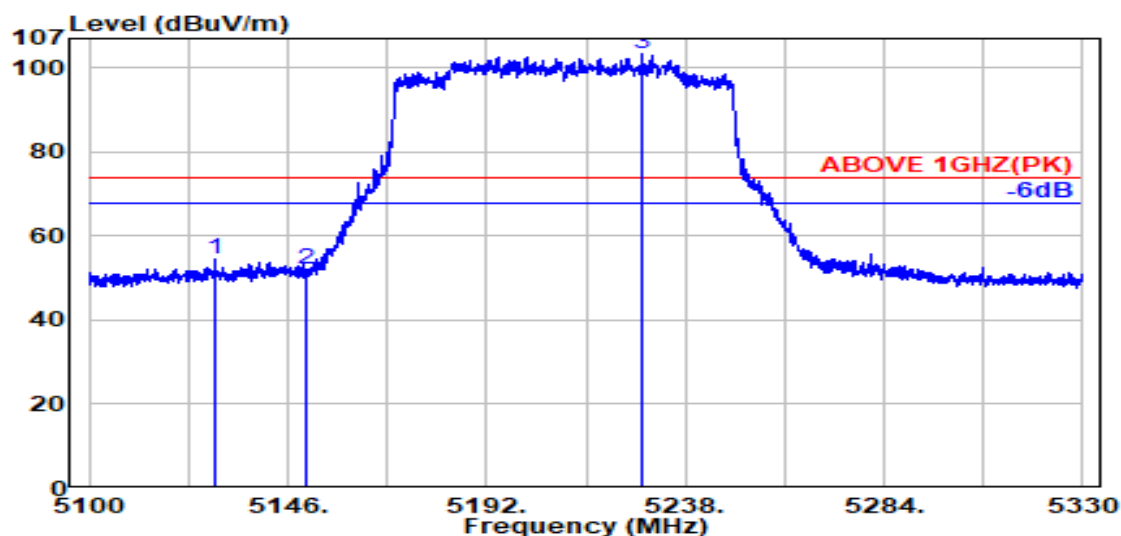

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.100	33.70	8.53	34.29	46.63	54.57	74.00	19.43	Peak
5150.000	33.70	8.54	34.28	44.17	52.13	74.00	21.87	Peak
@ 5227.900	33.76	8.59	34.26	95.29	103.38	---	---	Peak

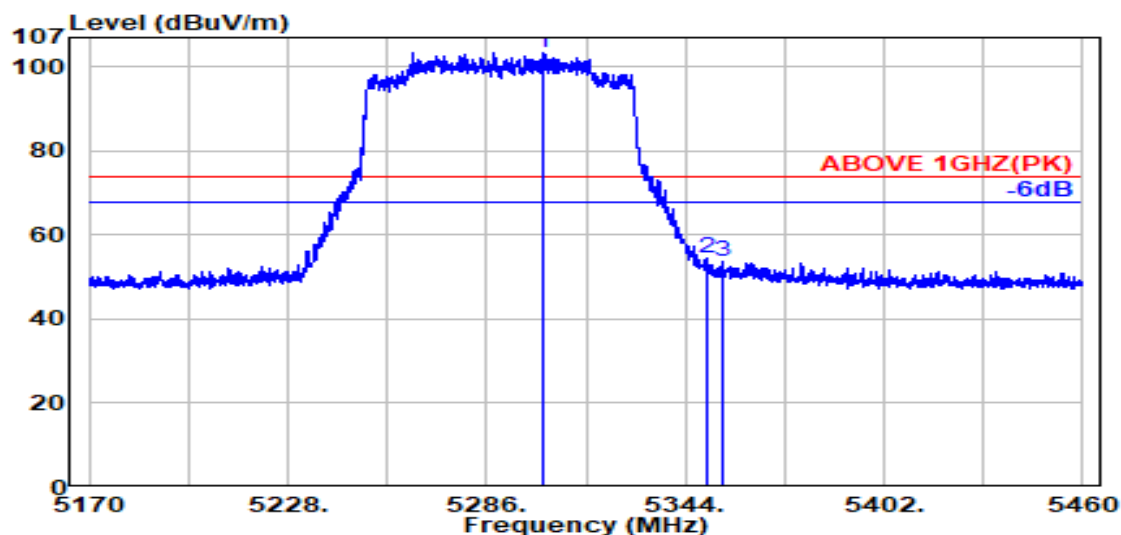


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.800	34.09	8.64	34.23	94.97	103.46	---	---	Peak
5350.000	33.90	8.67	34.22	46.01	54.36	74.00	19.64	Peak
5354.800	33.92	8.67	34.21	45.21	53.58	74.00	20.42	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

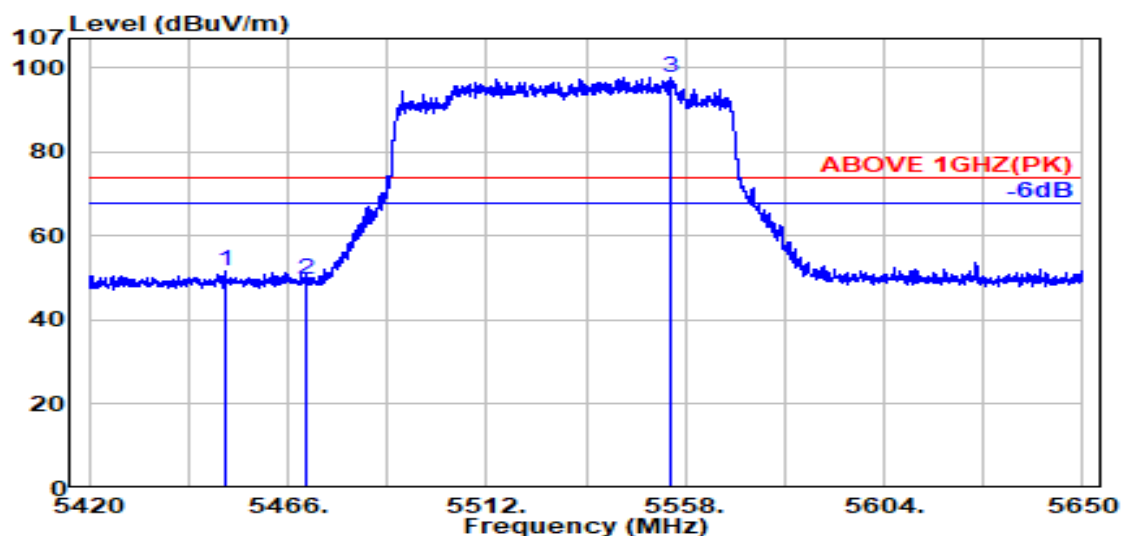

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.500	34.20	8.73	34.18	42.80	51.54	74.00	22.46	Peak
5470.000	34.16	8.74	34.18	41.05	49.76	74.00	24.24	Peak
@ 5554.800	34.09	8.78	34.20	89.20	97.88	---	---	Peak

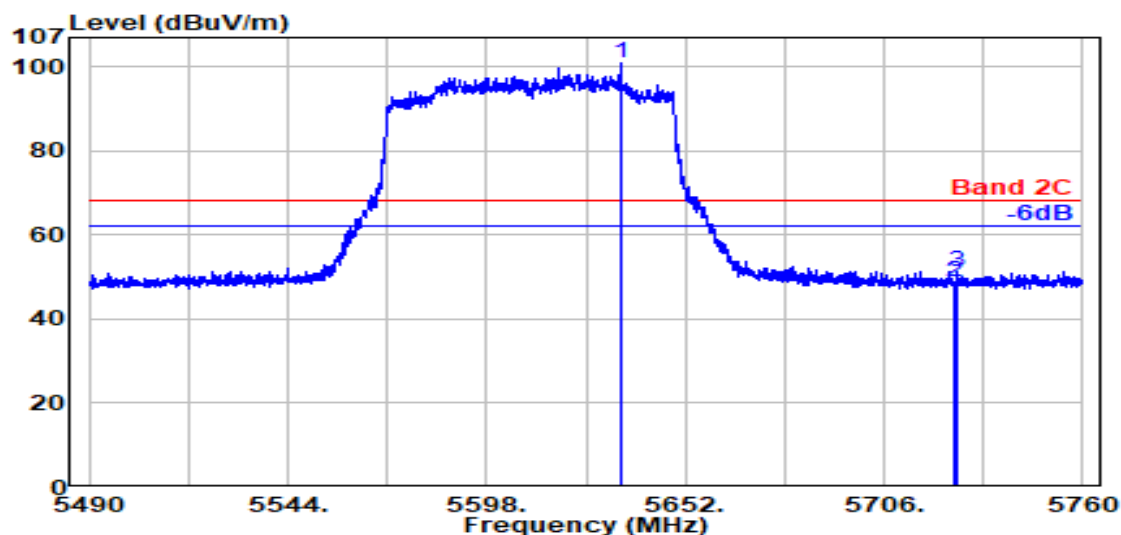


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5634.300	34.00	8.83	34.23	92.42	101.01	---	---	Peak
5725.000	33.80	8.88	34.28	40.47	48.88	68.20	19.32	Peak
5725.700	33.80	8.88	34.28	42.71	51.12	68.20	17.08	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

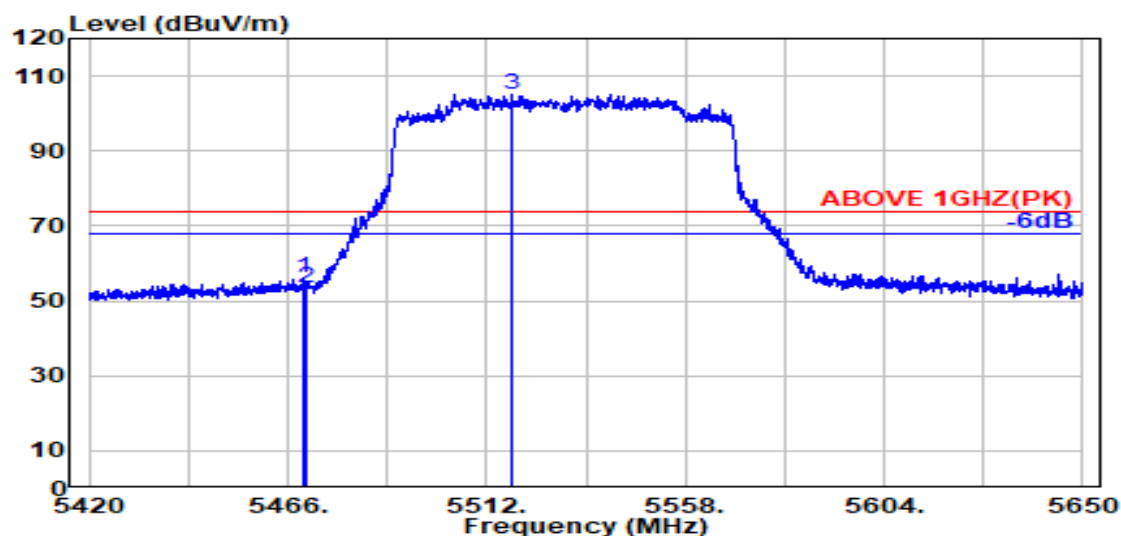

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.800	34.16	8.74	34.18	47.33	56.04	74.00	17.96	Peak
5470.000	34.16	8.74	34.18	44.87	53.58	74.00	20.42	Peak
@ 5518.000	34.10	8.76	34.18	96.36	105.04	---	---	Peak

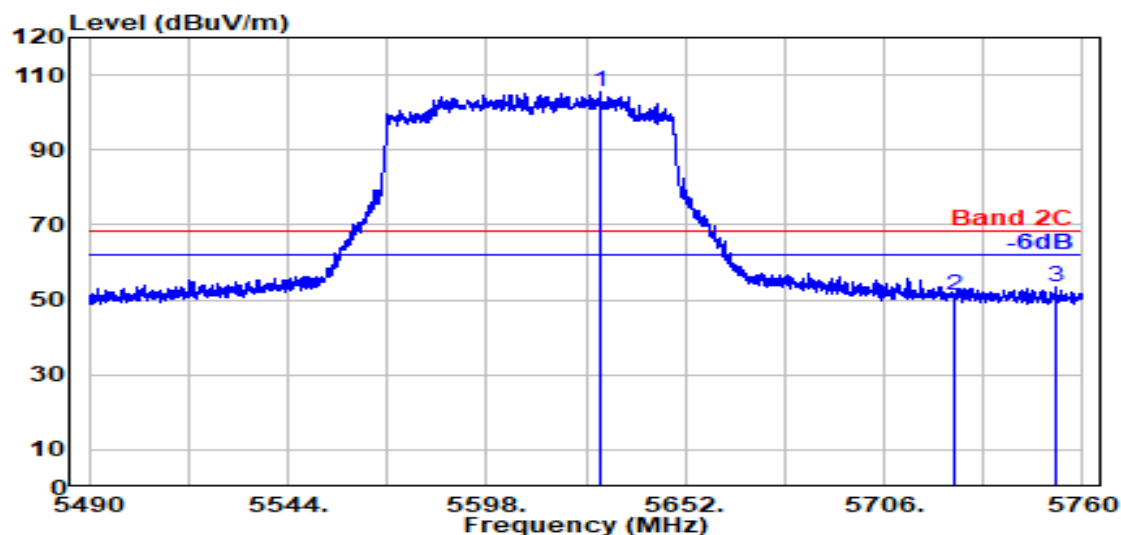


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5628.900	34.00	8.83	34.23	96.98	105.58	---	---	Peak
5725.000	33.80	8.88	34.28	42.68	51.09	68.20	17.11	Peak
5752.500	33.81	8.90	34.29	45.02	53.44	68.20	14.76	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

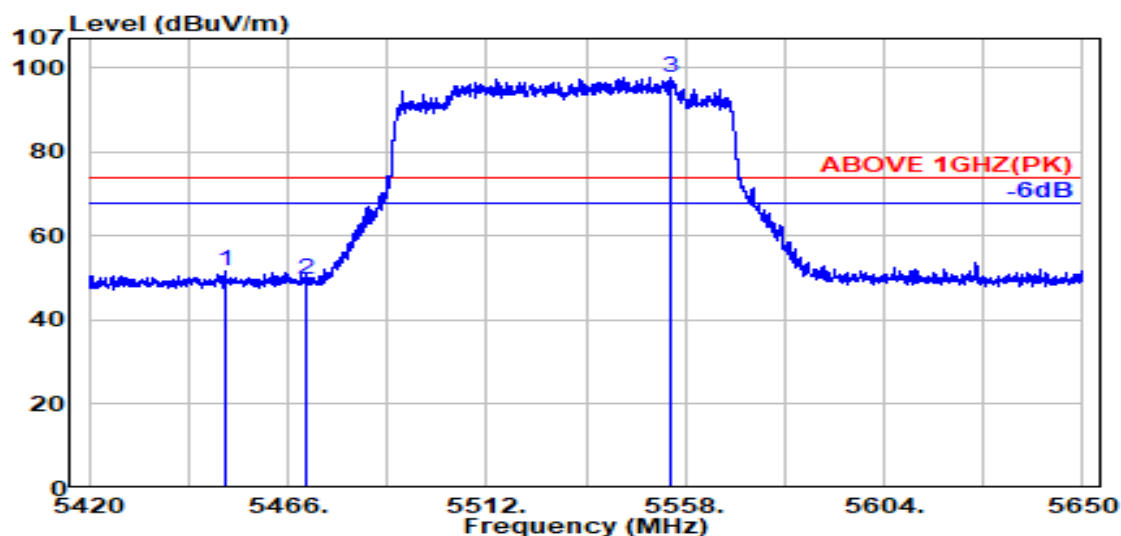

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.500	34.20	8.73	34.18	42.80	51.54	74.00	22.46	Peak
5470.000	34.16	8.74	34.18	41.05	49.76	74.00	24.24	Peak
@ 5554.800	34.09	8.78	34.20	89.20	97.88	---	---	Peak

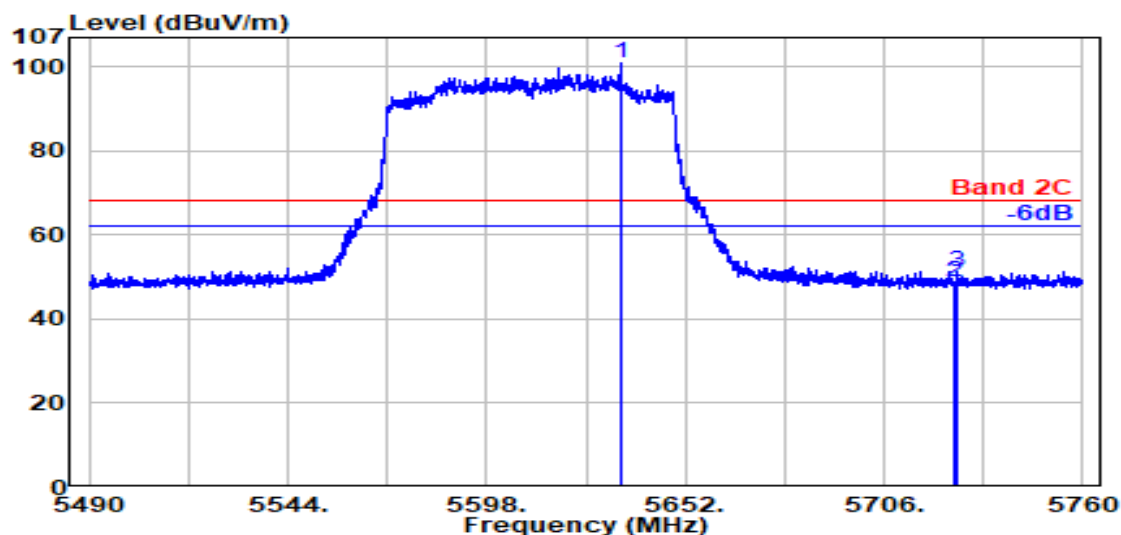


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5634.300	34.00	8.83	34.23	92.42	101.01	---	---	Peak
5725.000	33.80	8.88	34.28	40.47	48.88	68.20	19.32	Peak
5725.700	33.80	8.88	34.28	42.71	51.12	68.20	17.08	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

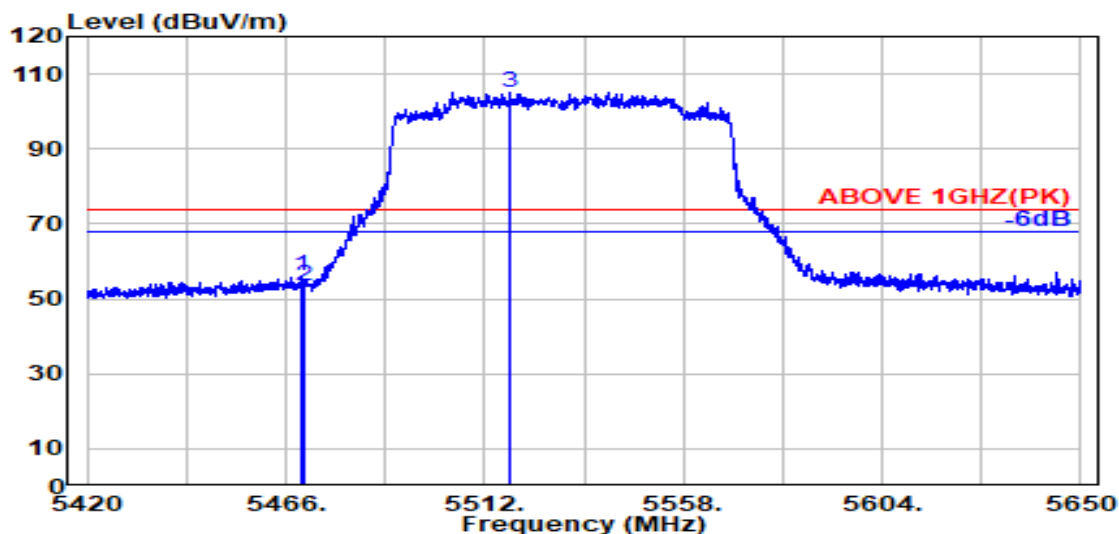

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.16	8.74	34.18	47.33	56.04	74.00	17.96	Peak
5470.000	34.16	8.74	34.18	44.87	53.58	74.00	20.42	Peak
@ 5518.000	34.10	8.76	34.18	96.36	105.04	---	---	Peak

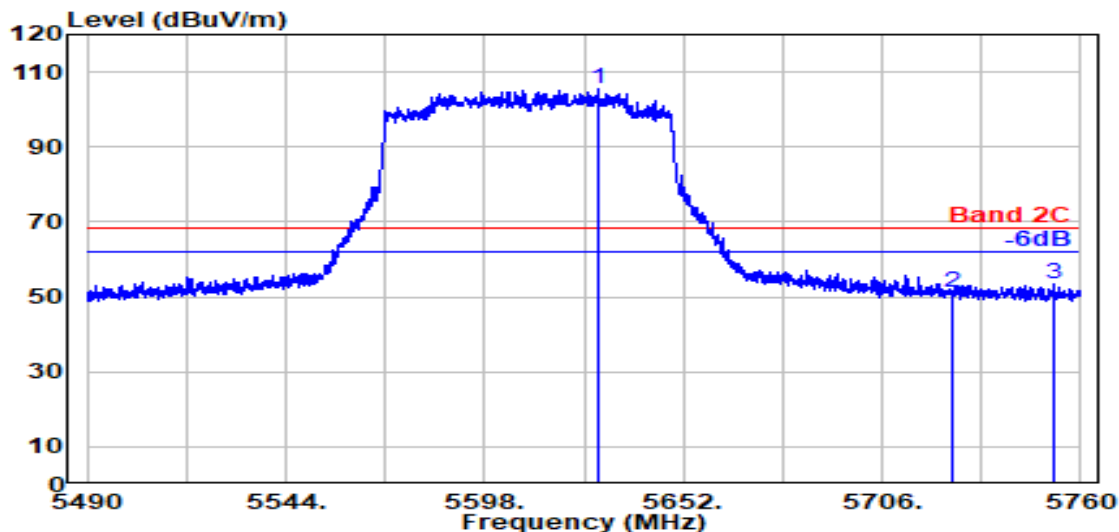

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5628.900	34.00	8.83	34.23	96.98	105.58	---	---	Peak
5725.000	33.80	8.88	34.28	42.68	51.09	68.20	17.11	Peak
5752.500	33.81	8.90	34.29	45.02	53.44	68.20	14.76	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2. Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

With INPAQ Antenna

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.55	51.60	54.00	2.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.87	51.92	54.00	2.08	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	38.98	51.75	54.00	2.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	38.91	51.68	54.00	2.32	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	39.34	52.16	54.00	1.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	38.89	51.71	54.00	2.29	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.70	51.75	54.00	2.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	41.42	52.47	54.00	1.53	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	39.07	51.84	54.00	2.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	39.45	52.22	54.00	1.78	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	38.78	51.60	54.00	2.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	40.70	51.79	54.00	2.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	41.14	52.24	54.00	1.76	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	39.43	51.94	54.00	2.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	39.58	52.10	54.00	1.90	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	39.61	52.40	54.00	1.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	39.24	52.03	54.00	1.97	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	40.94	52.13	54.00	1.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	40.42	51.61	54.00	2.39	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	40.42	52.46	54.00	1.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	39.51	51.55	54.00	2.45	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	39.46	52.14	54.00	1.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	40.86	51.86	54.00	2.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	40.74	51.74	54.00	2.26	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	39.56	51.70	54.00	2.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	39.40	51.54	54.00	2.46	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.70	51.74	54.00	2.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.74	51.79	54.00	2.21	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	39.01	51.78	54.00	2.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	39.57	52.33	54.00	1.67	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	38.93	51.75	54.00	2.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	41.11	52.21	54.00	1.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	40.85	51.94	54.00	2.06	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	39.68	52.19	54.00	1.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	39.92	52.43	54.00	1.57	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	39.24	52.03	54.00	1.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	39.48	52.27	54.00	1.73	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	40.69	51.87	54.00	2.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	40.47	51.65	54.00	2.35	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	40.26	52.30	54.00	1.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	40.11	52.15	54.00	1.85	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	39.11	51.79	54.00	2.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	41.38	52.38	54.00	1.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	40.64	51.64	54.00	2.36	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	39.42	51.56	54.00	2.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	40.02	52.15	54.00	1.85	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.66	51.70	54.00	2.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.12	12.11	39.19	40.95	52.00	54.00	2.00	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	38.82	51.59	54.00	2.41	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.70	13.04	38.97	39.55	52.32	54.00	1.68	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.70	13.10	38.98	39.55	52.37	54.00	1.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	40.53	51.62	54.00	2.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.14	12.13	39.18	40.51	51.61	54.00	2.39	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	39.48	51.99	54.00	2.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.52	12.96	38.96	39.36	51.87	54.00	2.13	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	39.70	52.49	54.00	1.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.70	13.07	38.98	39.02	51.82	54.00	2.18	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	40.35	51.53	54.00	2.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.18	12.16	39.15	41.17	52.36	54.00	1.64	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	39.89	51.93	54.00	2.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.40	12.56	38.92	39.55	51.59	54.00	2.41	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.64	13.01	38.97	39.79	52.47	54.00	1.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	40.78	51.77	54.00	2.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.10	12.10	39.20	41.00	52.00	54.00	2.00	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.40	12.67	38.93	39.68	51.82	54.00	2.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1	11140.000	38.40	12.67	38.93	40.30	52.44	54.00	1.56

With LUXSHARE-ICT Antenna

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.23	34.60	30.15	46.19	54.00	7.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.23	34.60	31.42	47.45	54.00	6.55	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.21	34.53	31.47	49.05	54.00	4.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.21	34.53	30.43	48.01	54.00	5.99	Peak

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	31.63	49.33	54.00	4.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.32	12.12	34.62	30.45	46.27	54.00	7.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.32	12.12	34.62	30.35	46.18	54.00	7.82	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.21	34.53	30.90	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.21	34.53	32.17	49.74	54.00	4.26	Peak

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	30.08	47.78	54.00	6.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	30.31	48.01	54.00	5.99	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.34	12.15	34.61	31.22	47.10	54.00	6.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.34	12.15	34.61	31.08	46.96	54.00	7.04	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.78	13.14	34.53	30.41	47.81	54.00	6.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.78	13.14	34.53	30.85	48.25	54.00	5.75	Peak

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.94	13.23	34.53	31.68	49.32	54.00	4.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
--------------------------	-----------------------	-----------------	------------------------	-------------------	-------------------------	-----------------	-------------	----------

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.38	12.20	34.60	30.96	46.94	54.00	7.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.38	12.20	34.60	31.32	47.30	54.00	6.70	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	12.82	34.50	30.85	47.86	54.00	6.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	12.82	34.50	31.46	48.48	54.00	5.52	Peak

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.86	13.19	34.53	30.59	48.11	54.00	5.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.86	13.19	34.53	30.57	48.08	54.00	5.92	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.10	34.62	30.91	46.69	54.00	7.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.10	34.62	30.47	46.24	54.00	7.76	Peak

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	12.91	34.51	30.66	47.80	54.00	6.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	12.91	34.51	31.45	48.59	54.00	5.41	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.23	34.60	30.89	46.92	54.00	7.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	38.40	12.23	34.60	31.74	47.77	54.00	6.23	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.70	12.75	34.50	31.02	47.97	54.00	6.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.70	12.75	34.50	29.57	46.52	54.00	7.48	Peak

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	31.84	49.54	54.00	4.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	30.78	48.48	54.00	5.52	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.34	12.15	34.61	31.84	47.72	54.00	6.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.34	12.15	34.61	30.38	46.26	54.00	7.74	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.78	13.14	34.53	31.03	48.42	54.00	5.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.78	13.14	34.53	30.60	47.99	54.00	6.01	Peak

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.94	13.23	34.53	30.58	48.21	54.00	5.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.38	12.20	34.60	31.19	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.38	12.20	34.60	31.76	47.74	54.00	6.26	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	12.82	34.50	29.93	46.94	54.00	7.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	12.82	34.50	30.01	47.02	54.00	6.98	Peak

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.86	13.19	34.53	31.54	49.06	54.00	4.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.86	13.19	34.53	30.16	47.68	54.00	6.32	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.10	34.62	30.79	46.57	54.00	7.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.10	34.62	31.31	47.09	54.00	6.91	Peak

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	12.91	34.51	30.04	47.18	54.00	6.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	12.91	34.51	29.89	47.03	54.00	6.97	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.32	12.12	34.62	30.83	46.66	54.00	7.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	38.32	12.12	34.62	30.28	46.11	54.00	7.89	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.21	34.53	31.04	48.62	54.00	5.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11400.000	38.90	13.21	34.53	30.47	48.05	54.00	5.95	Peak

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	31.50	49.20	54.00	4.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.98	13.25	34.54	30.06	47.76	54.00	6.24	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.34	12.15	34.61	31.91	47.79	54.00	6.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.34	12.15	34.61	31.74	47.61	54.00	6.39	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.70	12.77	34.50	29.90	46.87	54.00	7.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11020.000	38.70	12.77	34.50	30.41	47.38	54.00	6.62	Peak

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.94	13.23	34.53	30.53	48.17	54.00	5.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.38	12.20	34.60	31.37	47.35	54.00	6.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.38	12.20	34.60	31.79	47.78	54.00	6.22	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	12.82	34.50	30.41	47.42	54.00	6.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	38.70	12.82	34.50	30.35	47.37	54.00	6.63	Peak

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.86	13.19	34.53	31.12	48.64	54.00	5.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.86	13.19	34.53	30.83	48.35	54.00	5.65	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.10	34.62	30.12	45.90	54.00	8.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.30	12.10	34.62	31.55	47.32	54.00	6.68	Peak

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	12.91	34.51	30.73	47.88	54.00	6.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.74	12.91	34.51	29.37	46.51	54.00	7.49	Peak

A.2.3. Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209/ RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.