

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	100
A.2.3 Emissions in Non-restricted Frequency Bands:.....	105
A.3 DTS/OCCUPIED BANDWIDTH.....	106
A.3.1 DTS/Occupied Bandwidth Result.....	106
A.3.2 Measurement Plots	108
A.4 MAXIMUM PEAK OUTPUT POWER	116
A.4.1 Peak Output Power	116
A.4.2 Average Output Power (Reporting only).....	121
A.5 EMISSION LIMITATIONS	125
A.6 POWER SPECTRAL DENSITY	159
A.6.1 Power Spectral Density Result	159
A.6.2 Measurement Plots	162

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

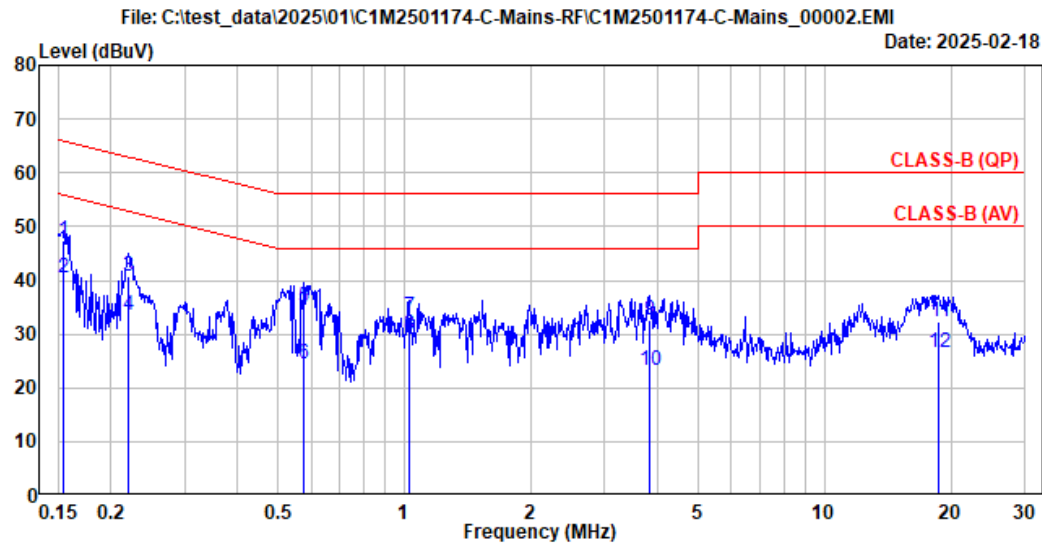

Site No. : No.8 Shielded Room Data No. : 2
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567) (A) | CE-08 | ESH3-Z2 (354)
Limit : CLASS-B (QP) Phase : Neutral
Environment : 20°C/52% Test Rating : 120Vac/60Hz
EUT Model : 17Z90TR Engineer : Nick Du
Test Mode : OPERATING


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.27	0.03	9.87	27.19	47.36	65.79	18.43	QP
2	0.154	10.27	0.03	9.87	20.40	40.57	55.79	15.22	Average
3	0.220	10.26	0.03	9.86	20.73	40.88	62.81	21.93	QP
4	0.220	10.26	0.03	9.86	13.36	33.51	52.81	19.30	Average
5	0.576	10.26	0.03	9.88	14.88	35.05	56.00	20.95	QP
6	0.576	10.26	0.03	9.88	4.14	24.31	46.00	21.69	Average
7	1.027	10.27	0.04	9.89	12.88	33.08	56.00	22.92	QP
8	1.027	10.27	0.04	9.89	9.55	29.75	46.00	16.25	Average
9	3.829	10.34	0.08	9.90	12.36	32.68	56.00	23.32	QP
10	3.829	10.34	0.08	9.90	2.89	23.21	46.00	22.79	Average
11	18.778	10.86	0.19	10.00	11.25	32.30	60.00	27.70	QP
12	18.778	10.86	0.19	10.00	5.55	26.60	50.00	23.40	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

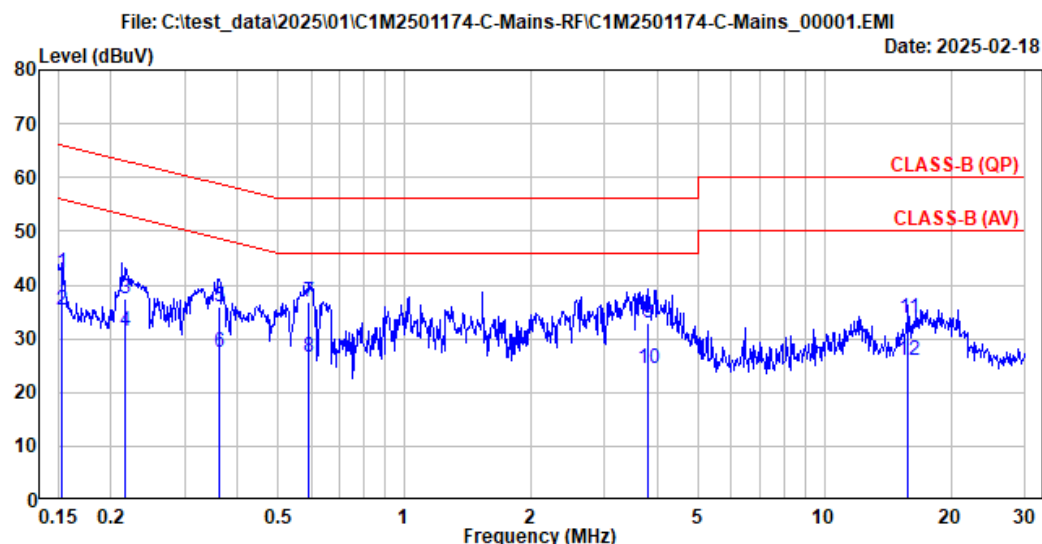

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 20°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90TR	Engineer	: Nick Du
Test Mode	: OPERATING		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.26	0.03	9.87	22.05	42.21	65.83	23.62	QP
2	0.153	10.26	0.03	9.87	15.28	35.44	55.83	20.39	Average
3	0.217	10.25	0.03	9.86	17.37	37.51	62.94	25.43	QP
4	0.217	10.25	0.03	9.86	11.32	31.46	52.94	21.48	Average
5	0.362	10.25	0.03	9.88	15.69	35.85	58.67	22.82	QP
6	0.362	10.25	0.03	9.88	7.30	27.46	48.67	21.21	Average
7	0.594	10.25	0.03	9.88	16.77	36.93	56.00	19.07	QP
8	0.594	10.25	0.03	9.88	6.47	26.63	46.00	19.37	Average
9	3.810	10.31	0.08	9.90	12.68	32.97	56.00	23.03	QP
10	3.810	10.31	0.08	9.90	4.26	24.55	46.00	21.45	Average
11	15.851	10.57	0.18	9.99	13.01	33.75	60.00	26.25	QP
12	15.851	10.57	0.18	9.99	5.10	25.84	50.00	24.16	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/02/07 ~ 18	Temp./Hum.	20 ~ 25°C/51 ~ 56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Mode	802.11be-EHT40	Frequency	TX 2437MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.46	32.74	29.76	40.00	10.24	Peak
153.000	16.06	3.09	25.98	35.58	28.76	43.50	14.74	Peak
445.500	21.93	6.20	26.73	38.43	39.82	46.00	6.18	Peak
594.000	24.00	6.80	27.36	33.35	36.79	46.00	9.21	Peak
742.500	24.75	7.53	27.32	38.07	43.03	46.00	2.97	Peak
973.500	26.78	8.86	26.78	28.30	37.18	54.00	16.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.46	40.95	37.97	40.00	2.03	Peak
162.500	15.48	3.19	25.93	37.25	29.99	43.50	13.51	Peak
445.500	21.93	6.20	26.73	34.76	36.16	46.00	9.84	Peak
594.000	24.00	6.80	27.36	31.87	35.31	46.00	10.69	Peak
742.500	24.75	7.53	27.32	35.65	40.61	46.00	5.39	Peak
975.500	26.80	8.88	26.77	27.13	36.03	54.00	17.97	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.46	33.88	30.90	40.00	9.10	Peak
195.000	14.88	3.50	25.81	34.20	26.78	43.50	16.72	Peak
445.500	21.93	6.20	26.73	37.81	39.20	46.00	6.80	Peak
594.000	24.00	6.80	27.36	31.69	35.12	46.00	10.88	Peak
742.500	24.75	7.53	27.32	38.05	43.01	46.00	2.99	Peak
995.500	26.97	8.99	26.71	26.89	36.14	54.00	17.86	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.000	22.69	1.41	26.47	40.43	38.06	40.00	1.94	Peak
90.500	14.83	2.38	26.30	39.76	30.67	43.50	12.83	Peak
445.500	21.93	6.20	26.73	35.25	36.64	46.00	9.36	Peak
594.000	24.00	6.80	27.36	32.00	35.44	46.00	10.56	Peak
742.500	24.75	7.53	27.32	36.26	41.21	46.00	4.79	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

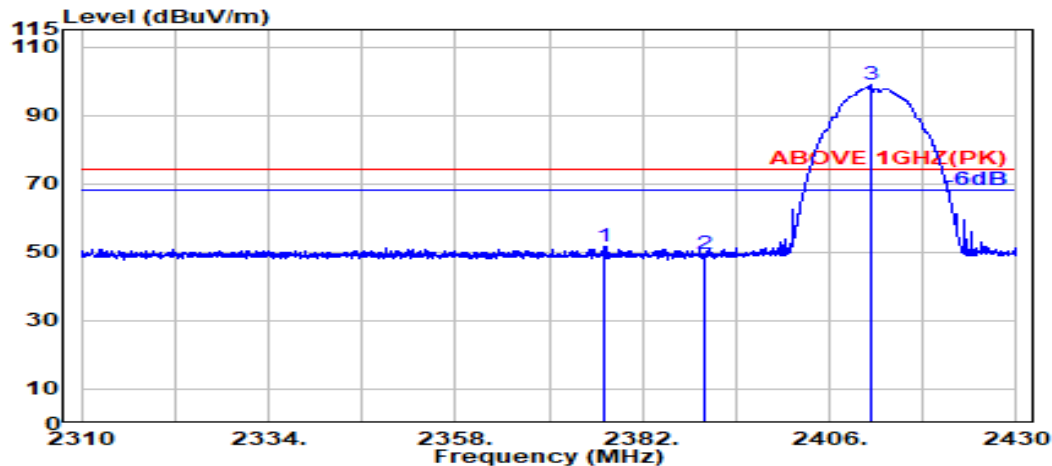

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.200	28.19	5.71	39.88	57.52	51.54	74.00	22.46	Peak
2390.000	28.14	5.72	39.88	55.59	49.57	74.00	24.43	Peak
@ 2411.200	28.15	5.75	39.88	104.76	98.77	---	---	Peak

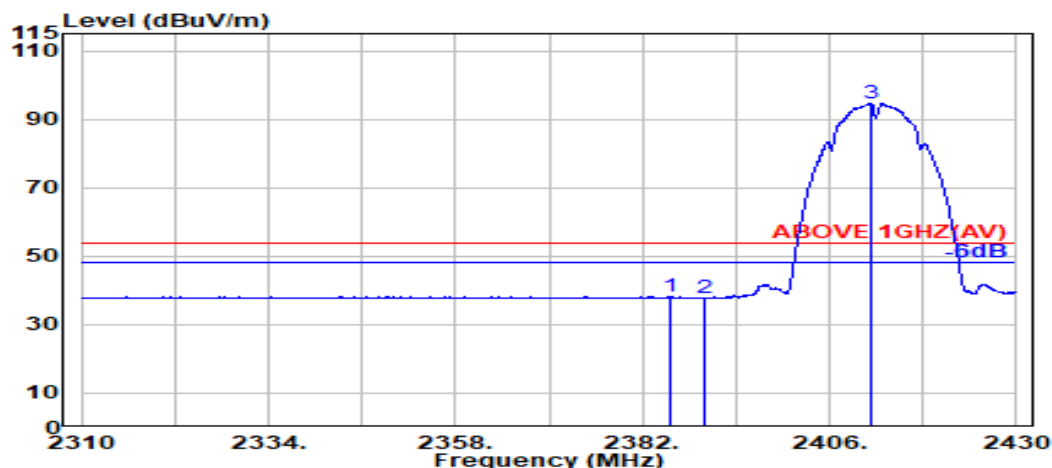


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.650	28.16	5.72	39.88	44.20	38.19	54.00	15.81	Average
2390.000	28.14	5.72	39.88	43.81	37.79	54.00	16.21	Average
@ 2411.250	28.15	5.75	39.88	100.70	94.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

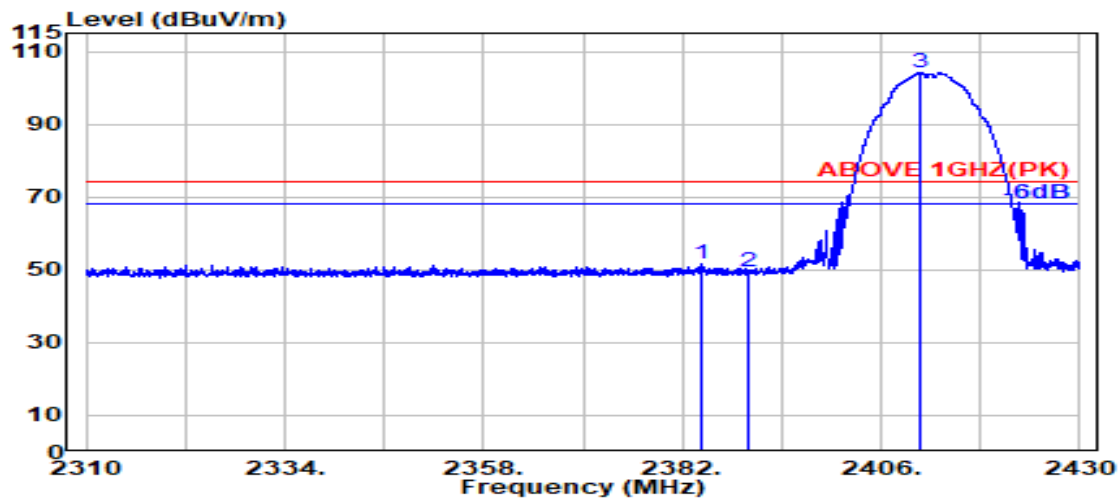

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.450	28.16	5.71	39.88	57.79	51.79	74.00	22.21	Peak
2390.000	28.14	5.72	39.88	55.41	49.40	74.00	24.60	Peak
@ 2410.850	28.14	5.75	39.88	110.12	104.13	---	---	Peak

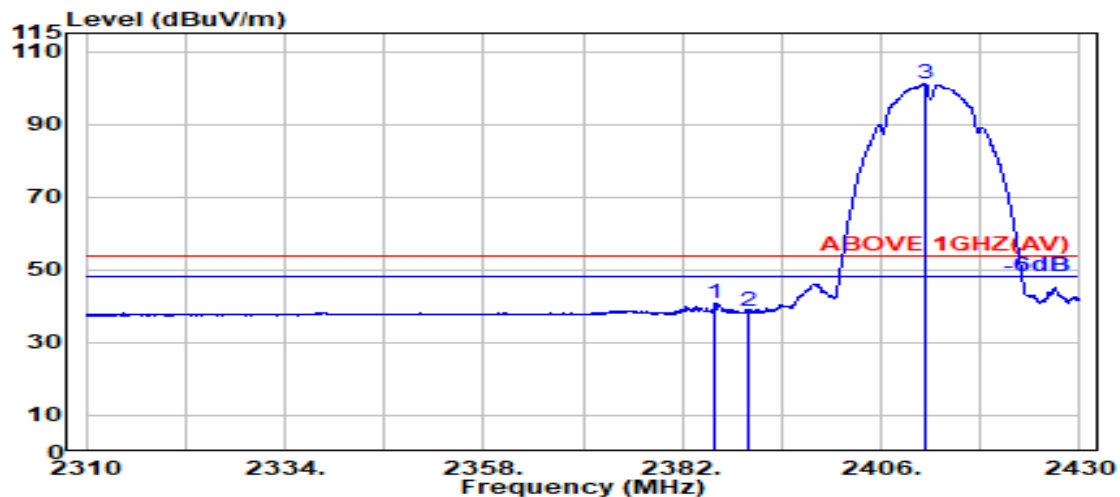

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.000	28.16	5.72	39.88	46.88	40.87	54.00	13.13	Average
2390.000	28.14	5.72	39.88	44.57	38.55	54.00	15.45	Average
@ 2411.200	28.15	5.75	39.88	107.04	101.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

File Number: C1M2501174


Report Number: EM-F250103

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

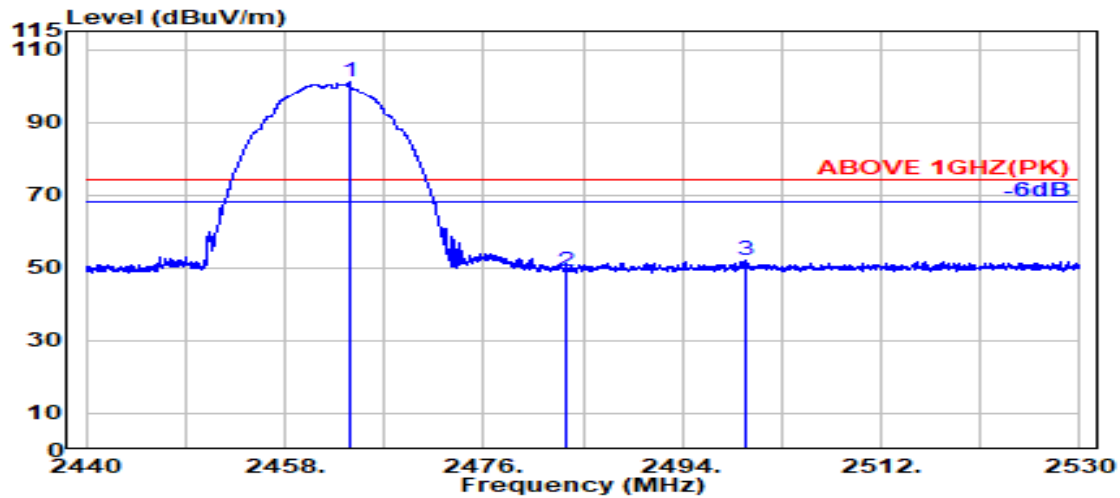

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.850	28.33	5.81	39.87	106.69	100.96	---	---	Peak
	2483.500	28.37	5.83	39.87	54.93	49.25	74.00	24.75	Peak
	2499.750	28.40	5.85	39.87	57.54	51.92	74.00	22.08	Peak

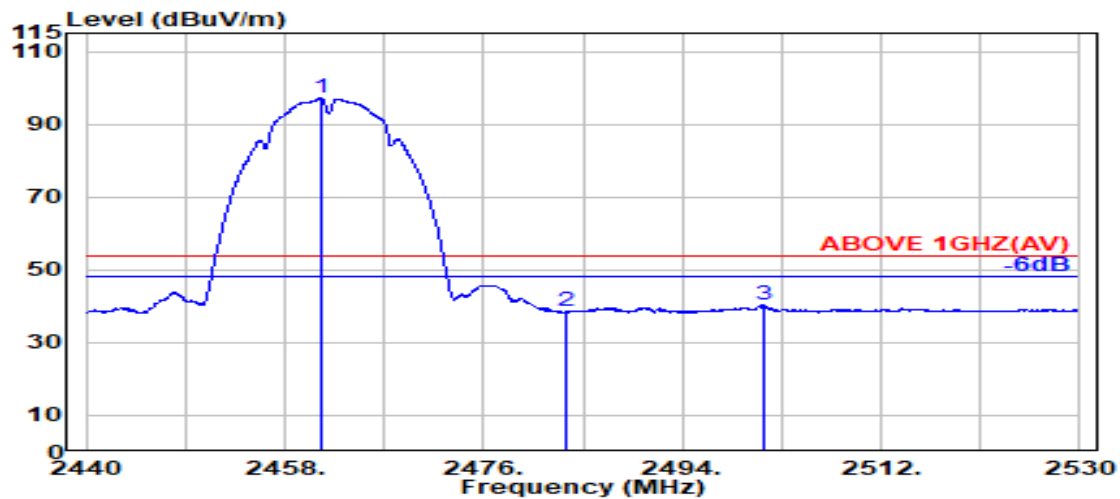

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.250	28.32	5.81	39.87	102.92	97.17	---	---	Average
	2483.500	28.37	5.83	39.87	44.39	38.71	54.00	15.29	Average
	2501.300	28.41	5.85	39.87	46.06	40.45	54.00	13.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

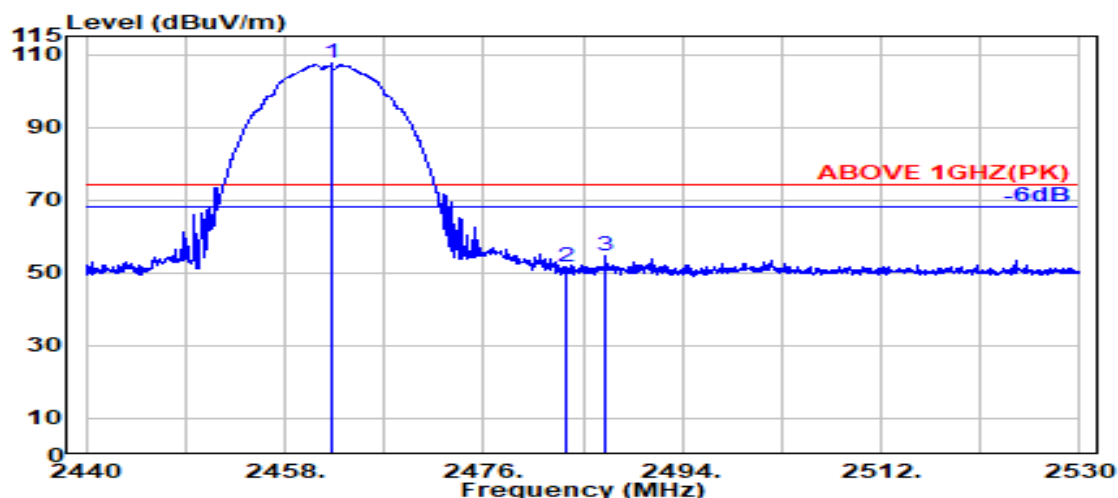

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.250	28.32	5.81	39.87	113.27	107.53	---	---	Peak
	2483.500	28.37	5.83	39.87	57.15	51.48	74.00	22.52	Peak
	2487.000	28.37	5.84	39.87	60.15	54.49	74.00	19.51	Peak

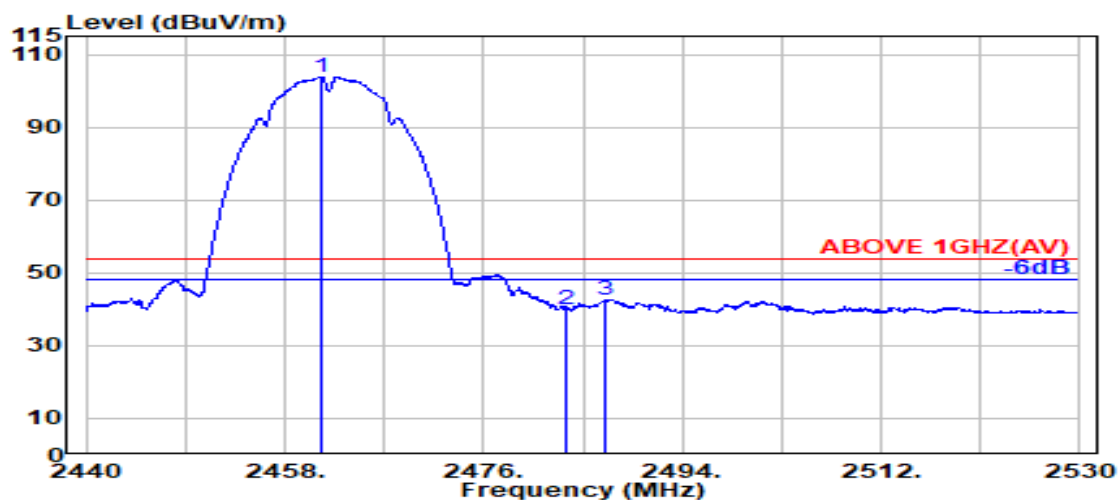


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.250	28.32	5.81	39.87	109.67	103.92	---	---	Average
	2483.500	28.37	5.83	39.87	45.75	40.08	54.00	13.92	Average
	2487.100	28.37	5.84	39.87	48.39	42.73	54.00	11.27	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

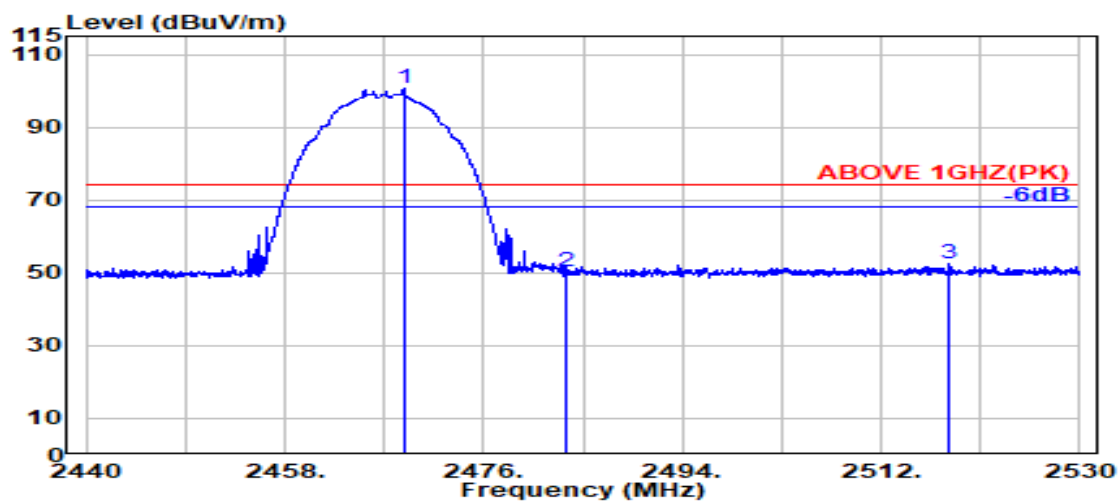

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.750	28.34	5.81	39.87	106.40	100.68	---	---	Peak
2483.500	28.37	5.83	39.87	56.22	50.55	74.00	23.45	Peak
2518.200	28.51	5.87	39.88	58.07	52.57	74.00	21.43	Peak

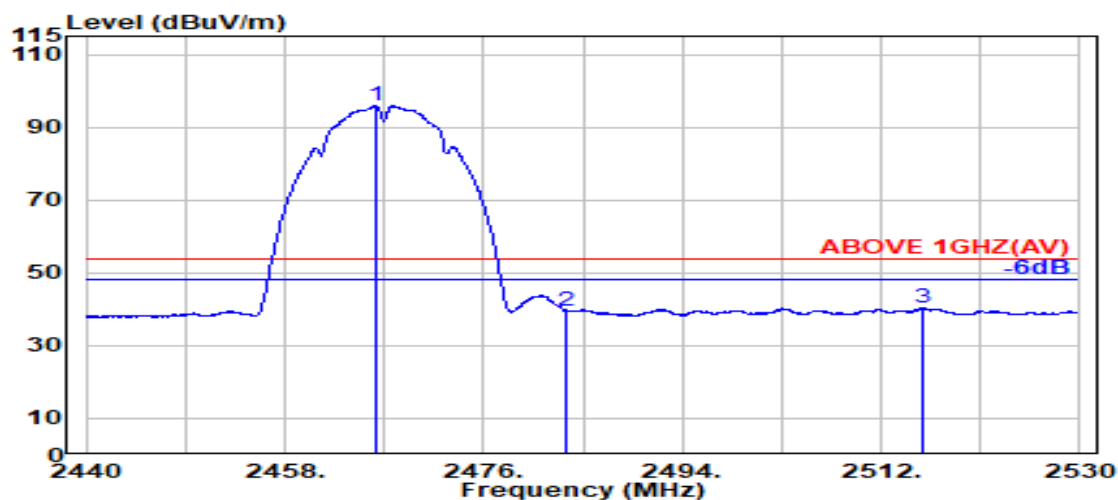


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.81	39.87	101.66	95.93	---	---	Average
2483.500	28.37	5.83	39.87	45.19	39.51	54.00	14.49	Average
2515.850	28.50	5.87	39.88	45.96	40.45	54.00	13.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

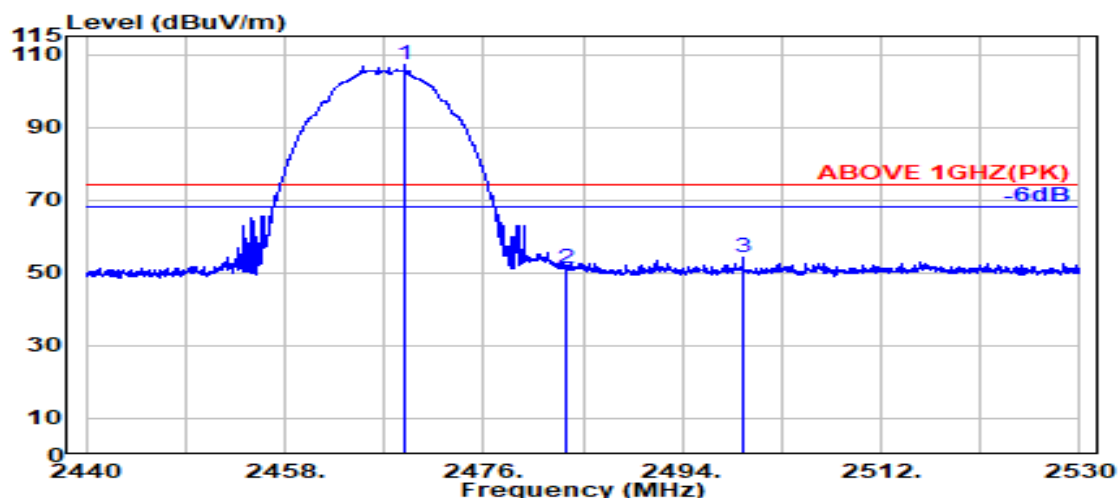

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.900	28.34	5.81	39.87	112.77	107.05	---	---	Peak
	2483.500	28.37	5.83	39.87	57.03	51.35	74.00	22.65	Peak
	2499.450	28.40	5.85	39.87	59.69	54.07	74.00	19.93	Peak

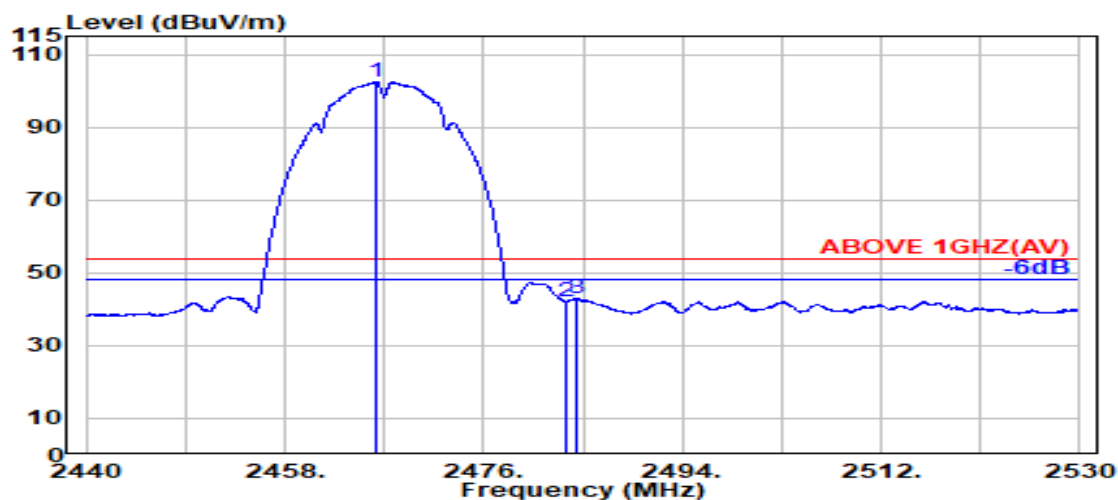

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.200	28.33	5.81	39.87	108.23	102.50	---	---	Average
	2483.500	28.37	5.83	39.87	47.65	41.97	54.00	12.03	Average
	2484.450	28.37	5.83	39.87	48.60	42.93	54.00	11.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

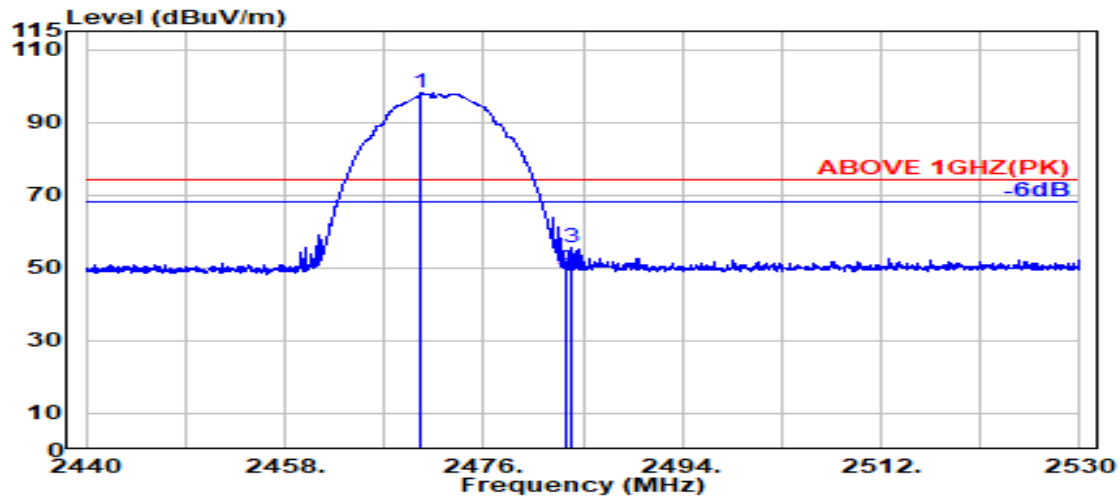

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.350	28.34	5.82	39.87	103.99	98.28	---	---	Peak
	2483.500	28.37	5.83	39.87	55.35	49.67	74.00	24.33	Peak
	2484.050	28.37	5.83	39.87	61.31	55.64	74.00	18.36	Peak

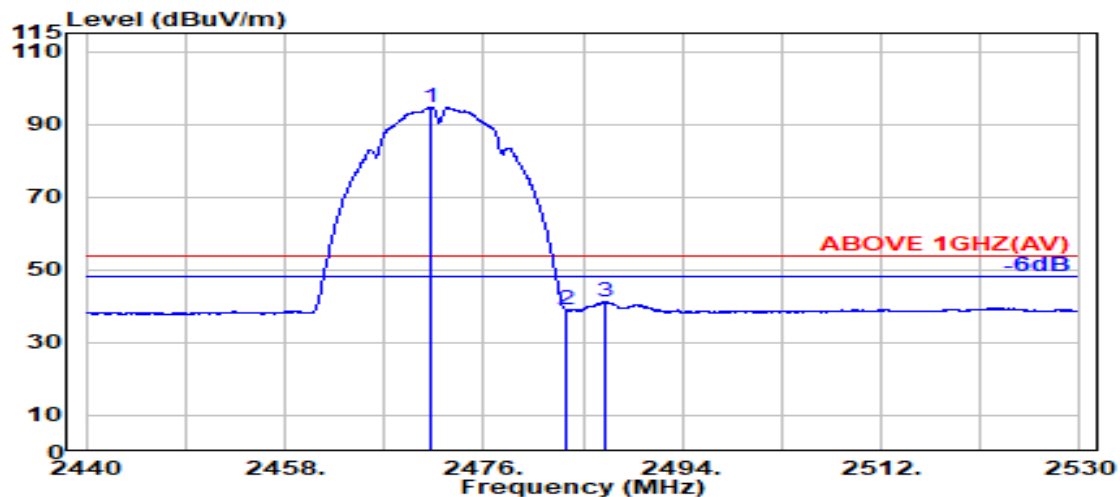

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2471.250	28.34	5.82	39.87	100.35	94.64	---	---	Average
	2483.500	28.37	5.83	39.87	44.62	38.94	54.00	15.06	Average
	2486.950	28.37	5.83	39.87	46.87	41.21	54.00	12.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

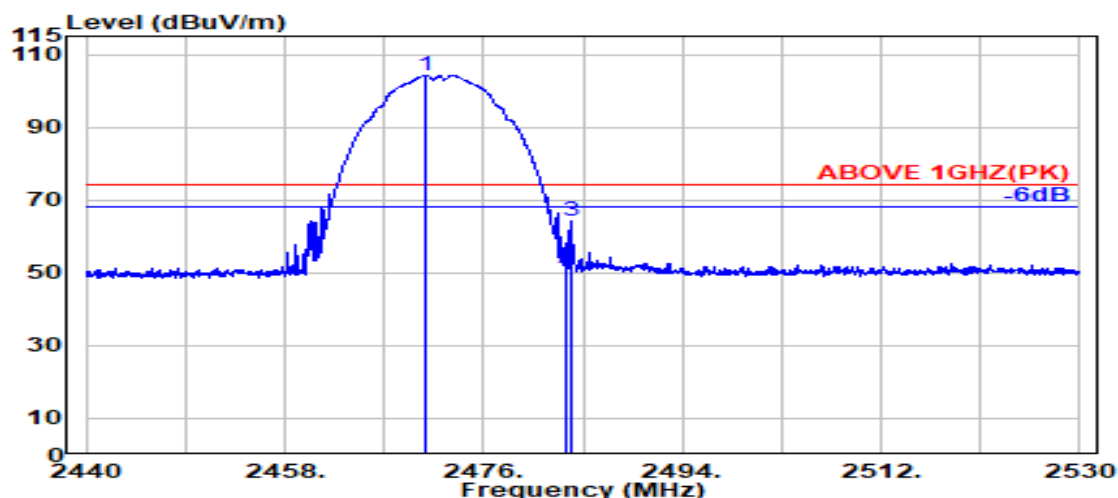

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.34	5.82	39.87	109.92	104.20	---	---	Peak
2483.500	28.37	5.83	39.87	57.06	51.39	74.00	22.61	Peak
2483.850	28.37	5.83	39.87	69.84	64.17	74.00	9.83	Peak

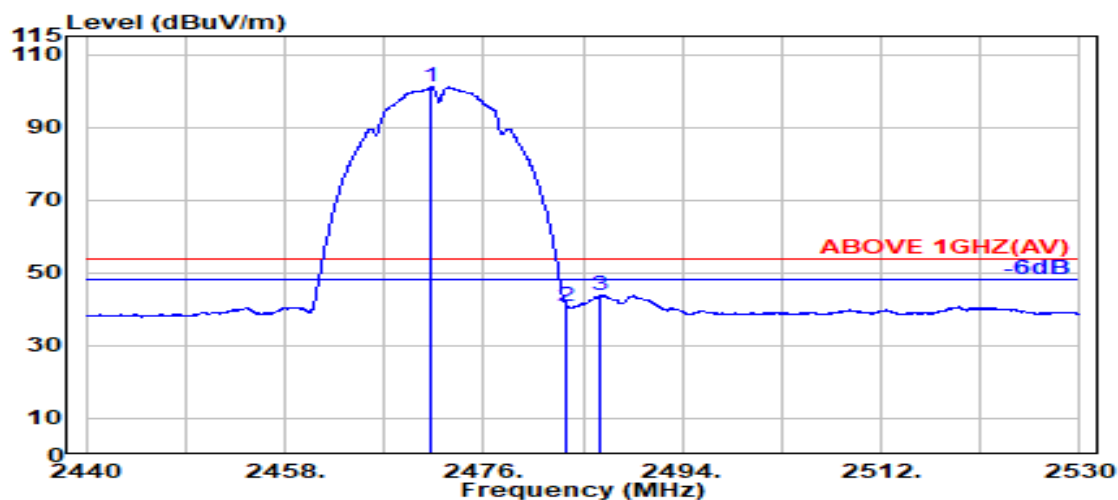

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.34	5.82	39.87	106.79	101.08	---	---	Average
2483.500	28.37	5.83	39.87	46.66	40.99	54.00	13.01	Average
2486.600	28.37	5.83	39.87	49.60	43.94	54.00	10.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

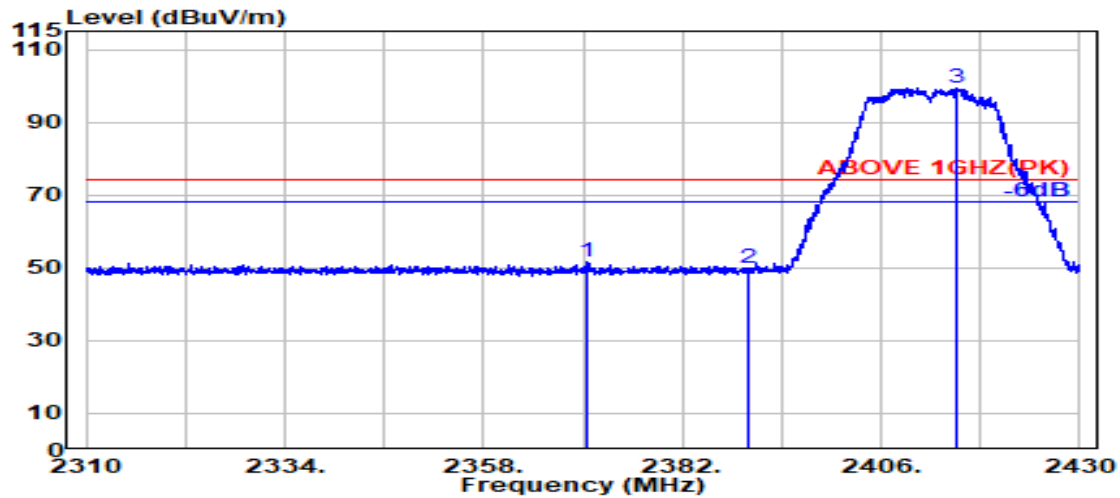

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.450	28.22	5.70	39.88	57.42	51.46	74.00	22.54	Peak
2390.000	28.14	5.72	39.88	55.78	49.77	74.00	24.23	Peak
@ 2415.100	28.16	5.75	39.88	105.53	99.56	---	---	Peak

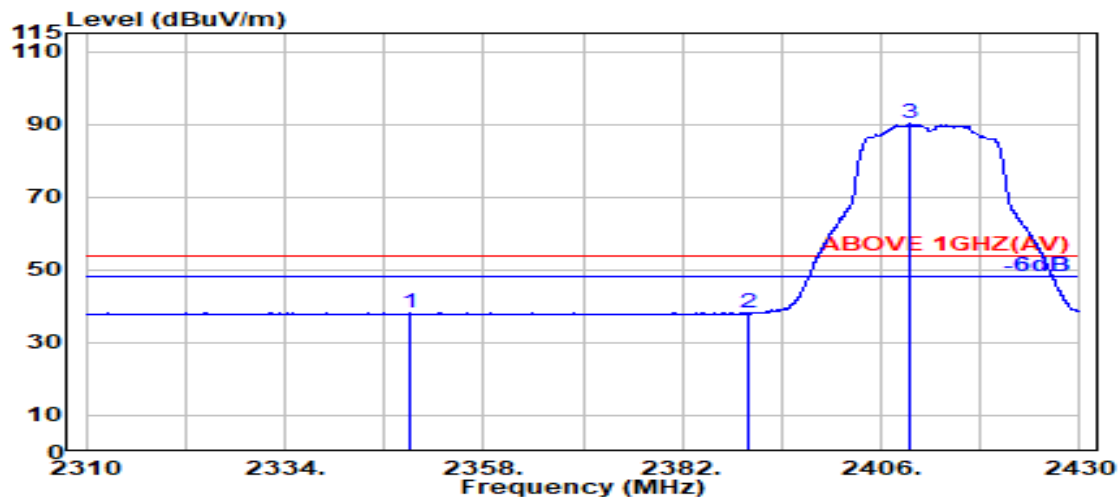

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2349.200	28.30	5.67	39.88	44.07	38.15	54.00	15.85	Average
2390.000	28.14	5.72	39.88	44.21	38.19	54.00	15.81	Average
@ 2409.450	28.14	5.74	39.88	96.13	90.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

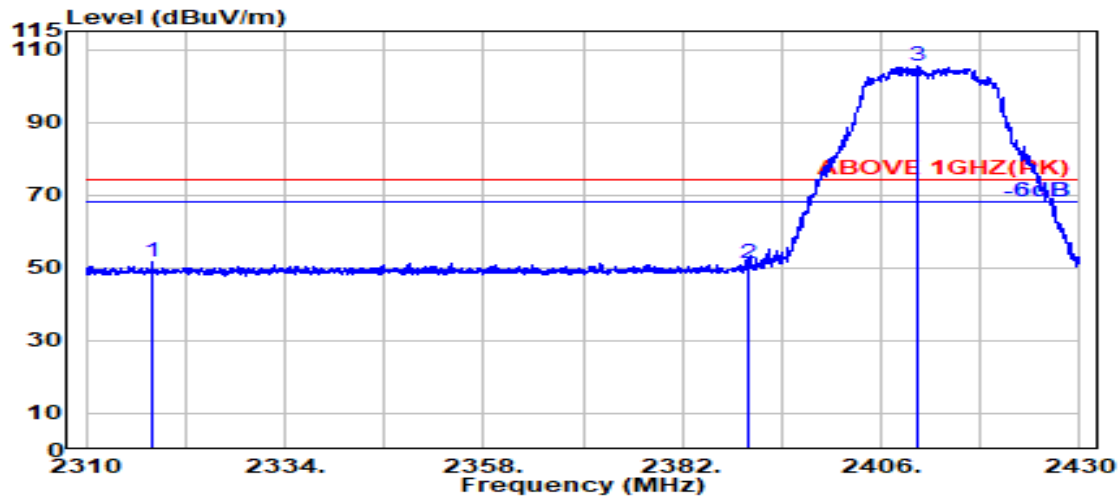

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2318.000	28.11	5.63	39.88	57.61	51.47	74.00	22.53	Peak
2390.000	28.14	5.72	39.88	57.09	51.07	74.00	22.93	Peak
@ 2410.450	28.14	5.75	39.88	111.58	105.59	---	---	Peak

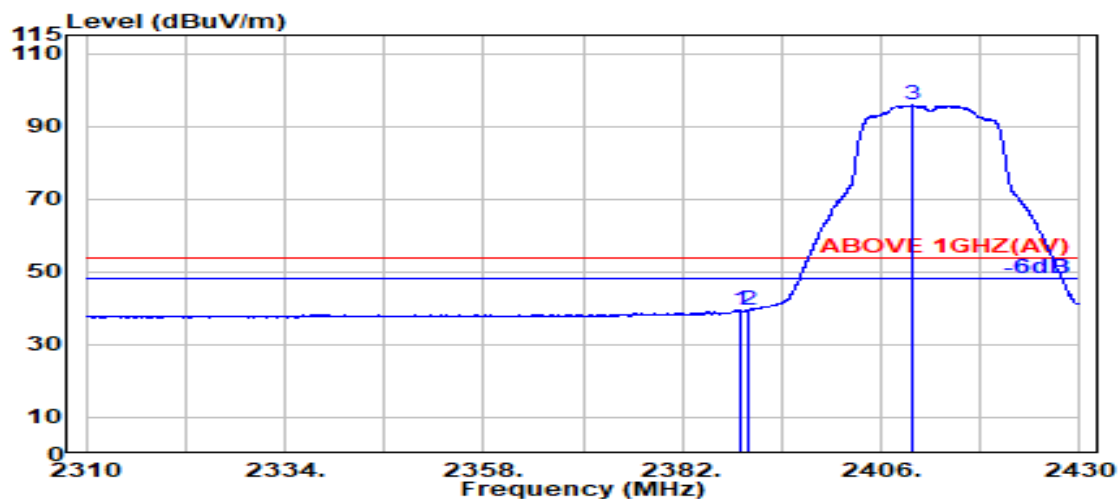


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.14	5.72	39.88	45.57	39.55	54.00	14.45	Average
2390.000	28.14	5.72	39.88	45.46	39.44	54.00	14.56	Average
@ 2409.750	28.14	5.74	39.88	101.75	95.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

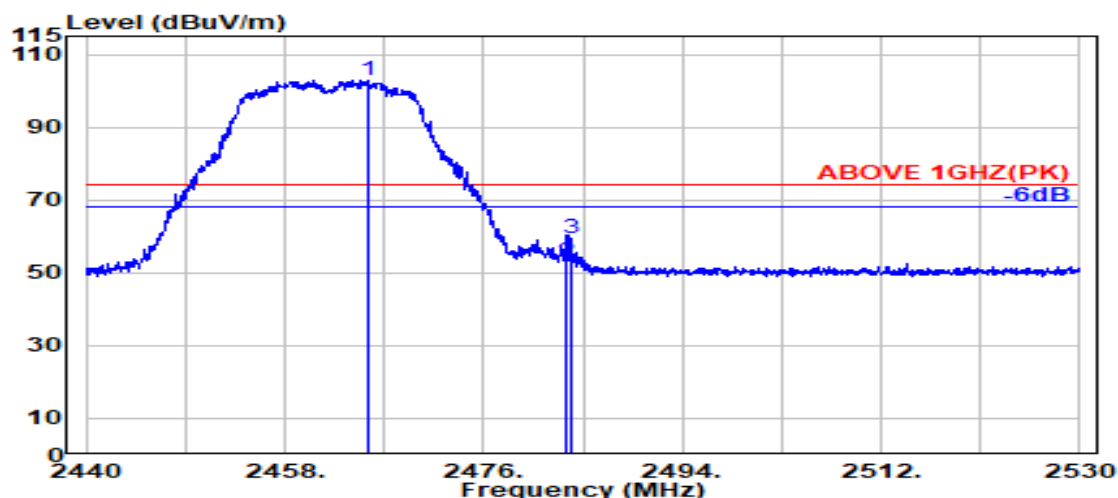

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.450	28.33	5.81	39.87	108.74	103.01	---	---	Peak
2483.500	28.37	5.83	39.87	58.82	53.15	74.00	20.85	Peak
2483.900	28.37	5.83	39.87	64.99	59.32	74.00	14.68	Peak

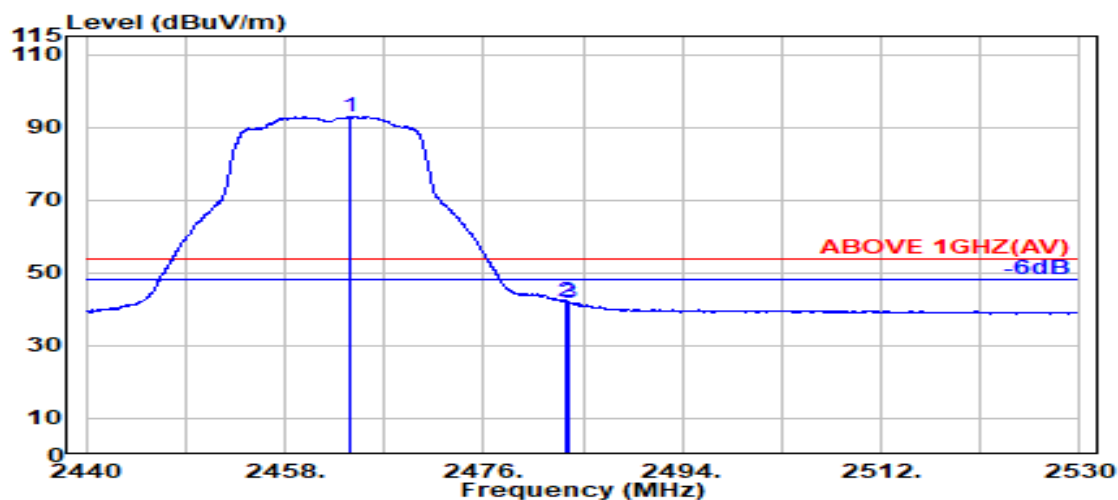

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	98.75	93.01	---	---	Average
2483.500	28.37	5.83	39.87	47.66	41.99	54.00	12.01	Average
2483.700	28.37	5.83	39.87	47.47	41.79	54.00	12.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

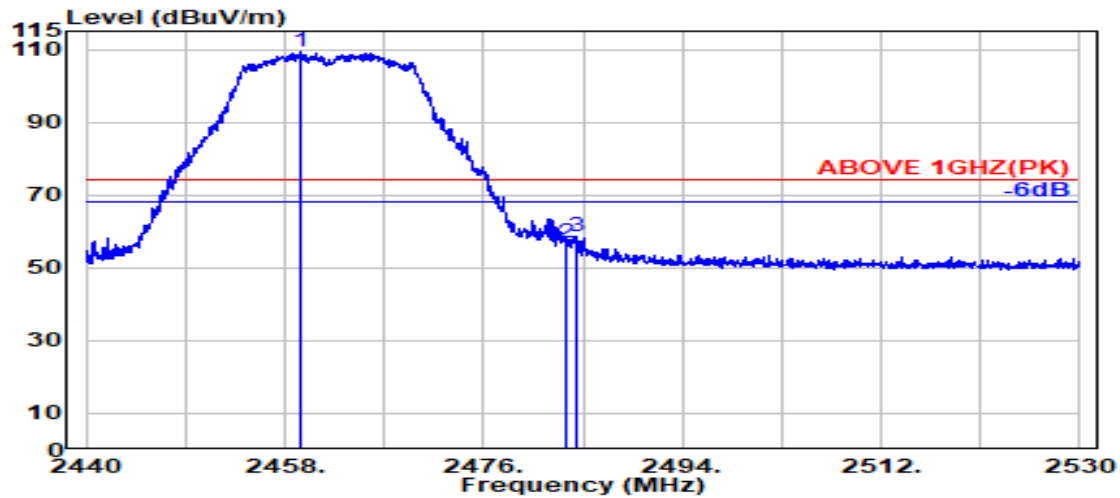

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	28.32	5.80	39.87	115.07	109.32	---	---	Peak
2483.500	28.37	5.83	39.87	62.31	56.63	74.00	17.37	Peak
2484.350	28.37	5.83	39.87	64.35	58.68	74.00	15.32	Peak

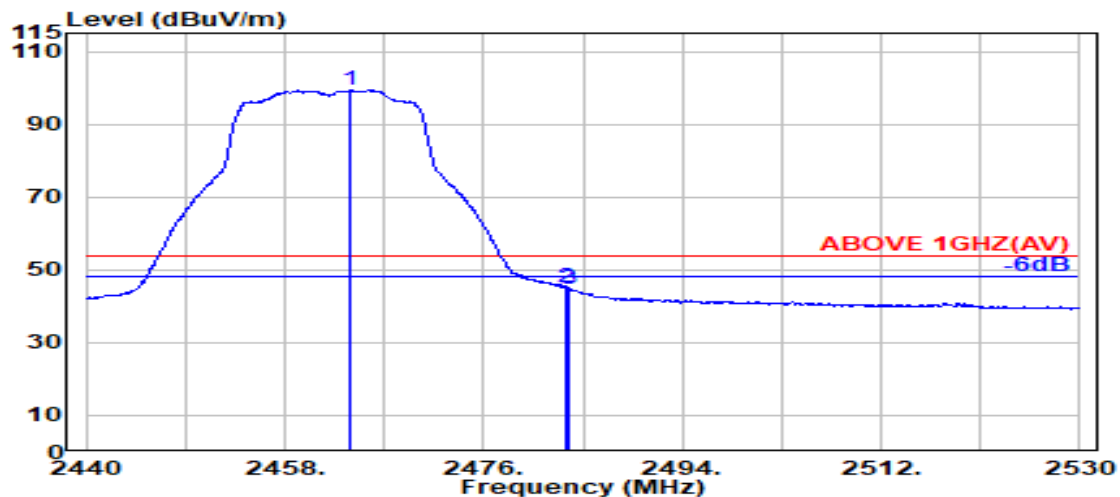

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.950	28.33	5.81	39.87	105.16	99.42	---	---	Average
2483.500	28.37	5.83	39.87	50.98	45.31	54.00	8.69	Average
2483.700	28.37	5.83	39.87	50.42	44.75	54.00	9.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

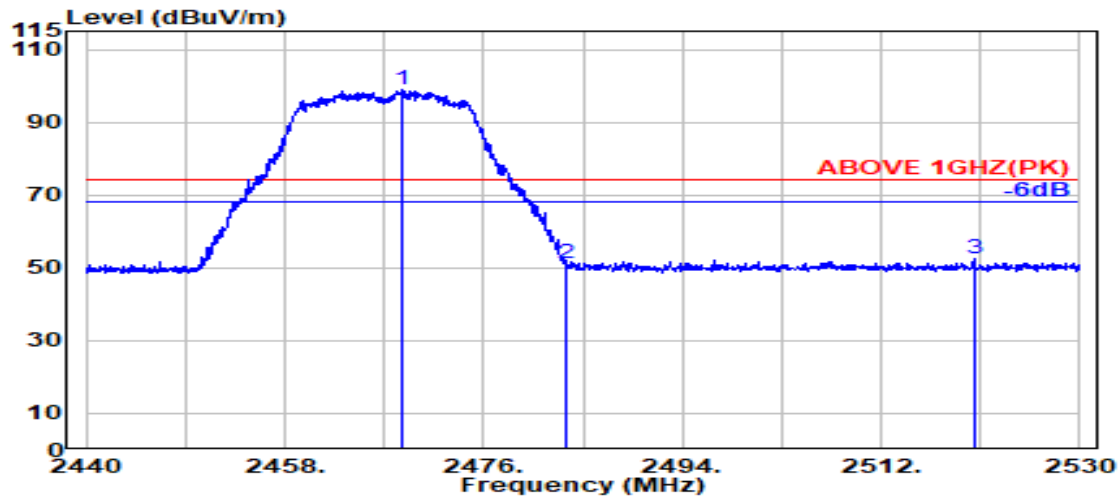

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.550	28.34	5.81	39.87	104.52	98.80	---	---	Peak
2483.500	28.37	5.83	39.87	56.86	51.19	74.00	22.81	Peak
2520.400	28.52	5.87	39.88	58.11	52.63	74.00	21.37	Peak

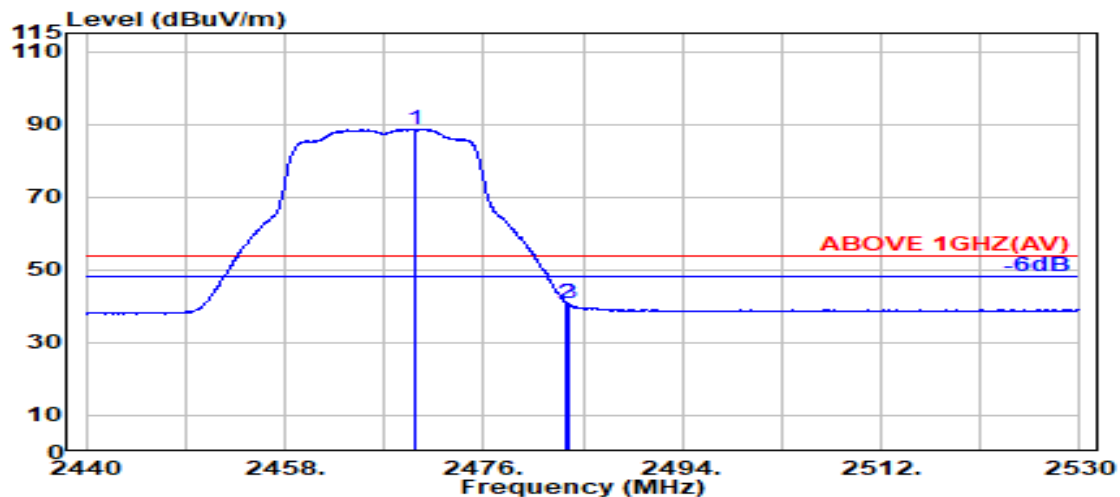

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.750	28.34	5.82	39.87	94.42	88.70	---	---	Average
2483.500	28.37	5.83	39.87	46.57	40.89	54.00	13.11	Average
2483.700	28.37	5.83	39.87	46.33	40.66	54.00	13.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

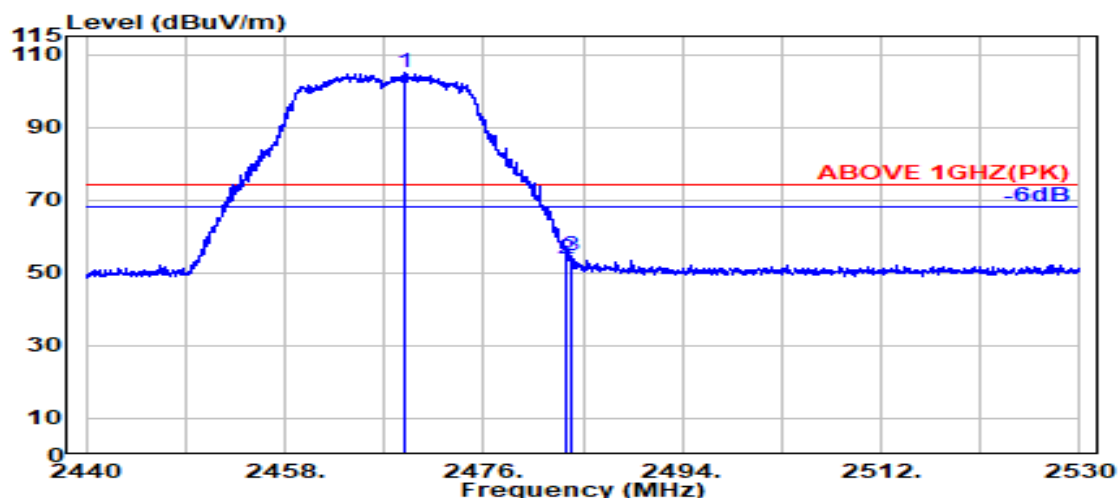

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.34	5.81	39.87	110.56	104.84	---	---	Peak
2483.500	28.37	5.83	39.87	59.54	53.86	74.00	20.14	Peak
2483.950	28.37	5.83	39.87	60.31	54.64	74.00	19.36	Peak

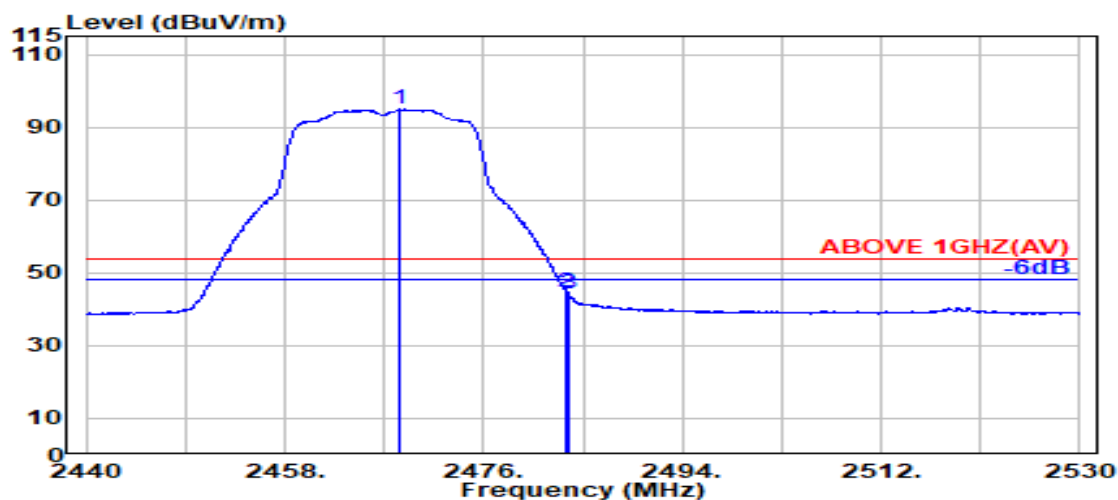

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.400	28.34	5.81	39.87	100.72	95.00	---	---	Average
2483.500	28.37	5.83	39.87	50.41	44.74	54.00	9.26	Average
2483.700	28.37	5.83	39.87	49.99	44.31	54.00	9.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

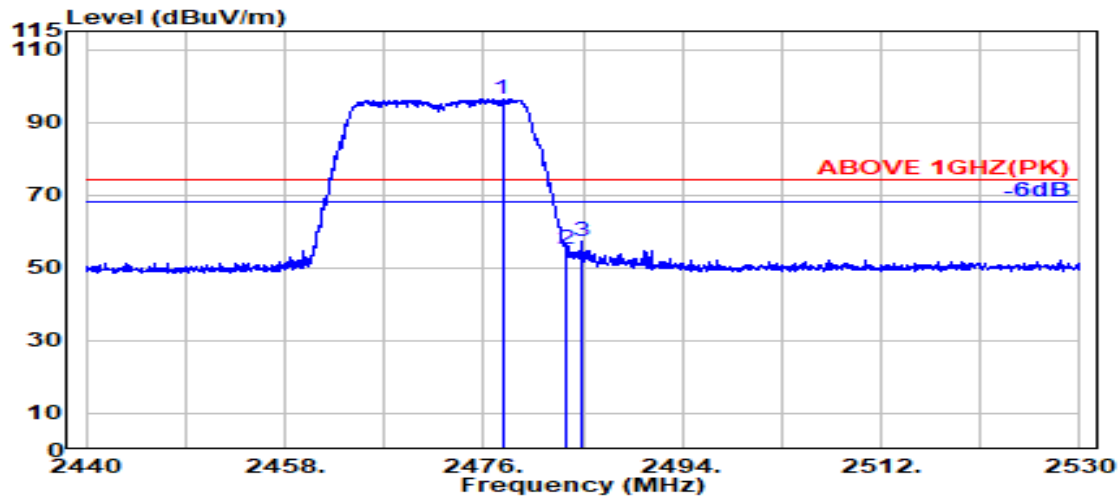

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.700	28.36	5.82	39.87	102.10	96.41	---	---	Peak
2483.500	28.37	5.83	39.87	60.83	55.16	74.00	18.84	Peak
2484.900	28.37	5.83	39.87	63.11	57.44	74.00	16.56	Peak

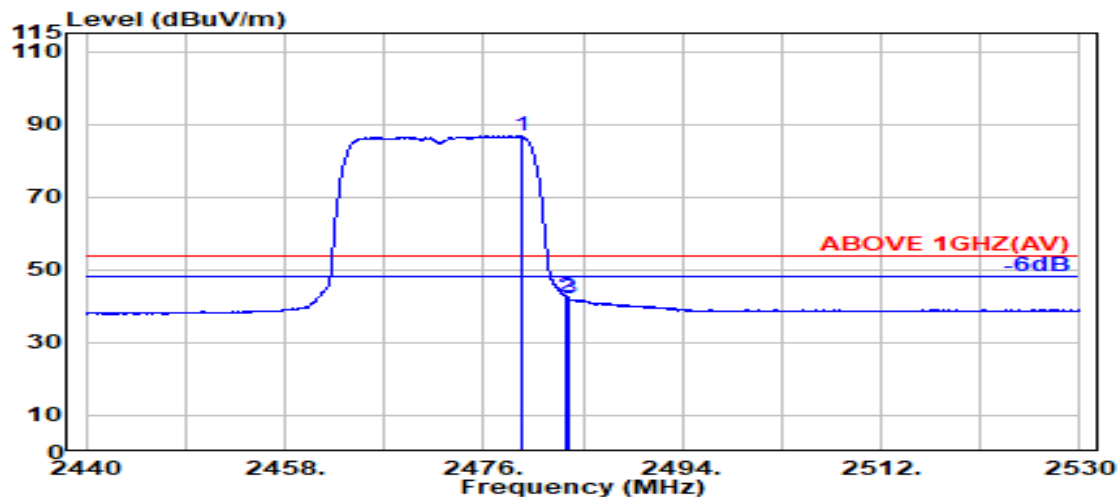

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.450	28.36	5.83	39.87	92.55	86.87	---	---	Average
2483.500	28.37	5.83	39.87	48.17	42.50	54.00	11.50	Average
2483.700	28.37	5.83	39.87	47.71	42.03	54.00	11.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

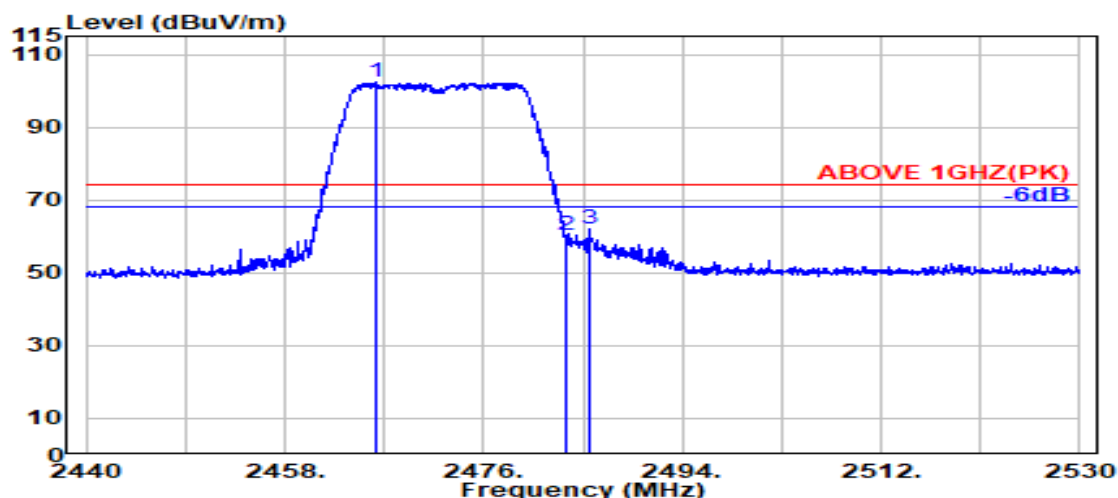

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.33	5.81	39.87	108.34	102.61	---	---	Peak
2483.500	28.37	5.83	39.87	65.86	60.18	74.00	13.82	Peak
2485.500	28.37	5.83	39.87	67.85	62.18	74.00	11.82	Peak

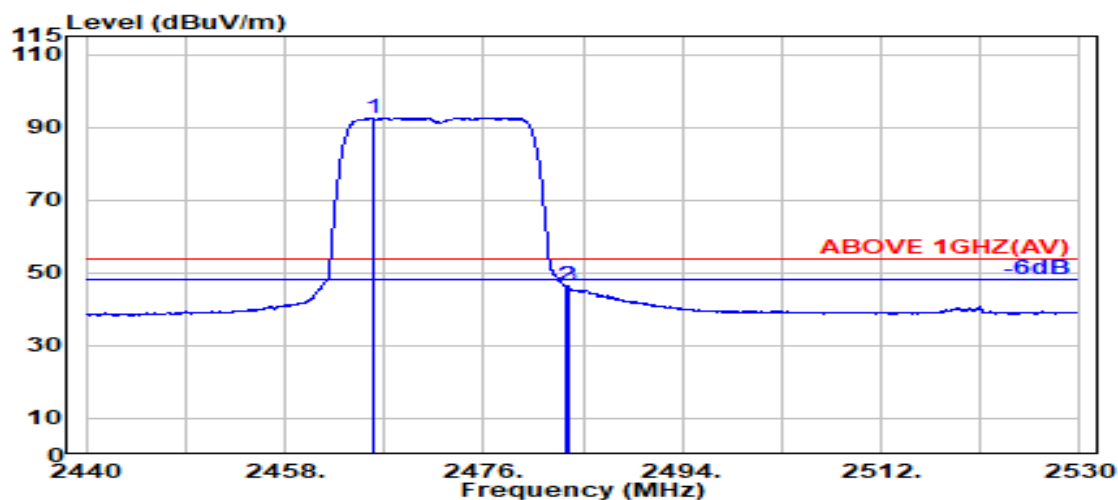

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.33	5.81	39.87	98.31	92.58	---	---	Average
2483.500	28.37	5.83	39.87	52.18	46.50	54.00	7.50	Average
2483.700	28.37	5.83	39.87	52.15	46.48	54.00	7.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

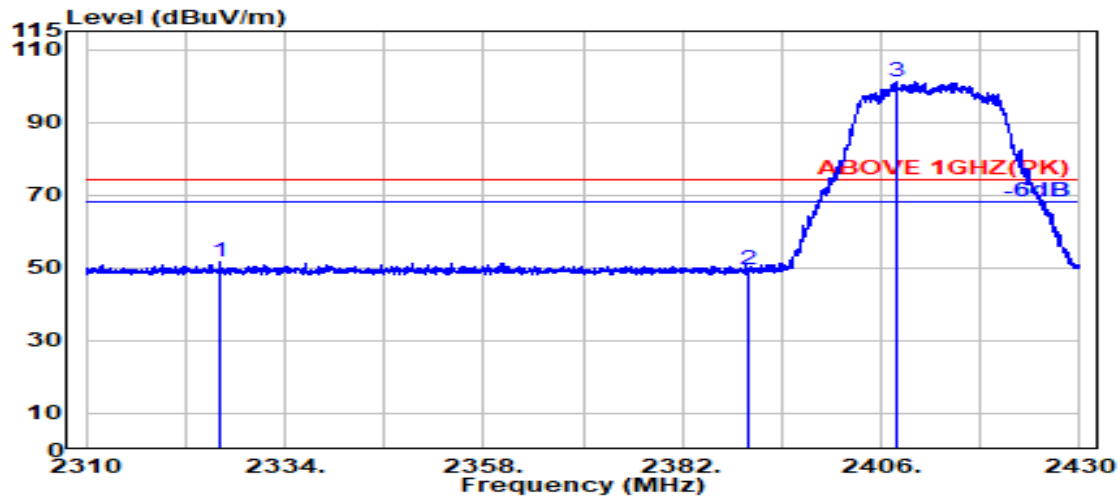

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2326.150	28.16	5.64	39.88	57.55	51.47	74.00	22.53	Peak
2390.000	28.14	5.72	39.88	55.60	49.58	74.00	24.42	Peak
@ 2407.850	28.13	5.74	39.88	107.18	101.18	---	---	Peak

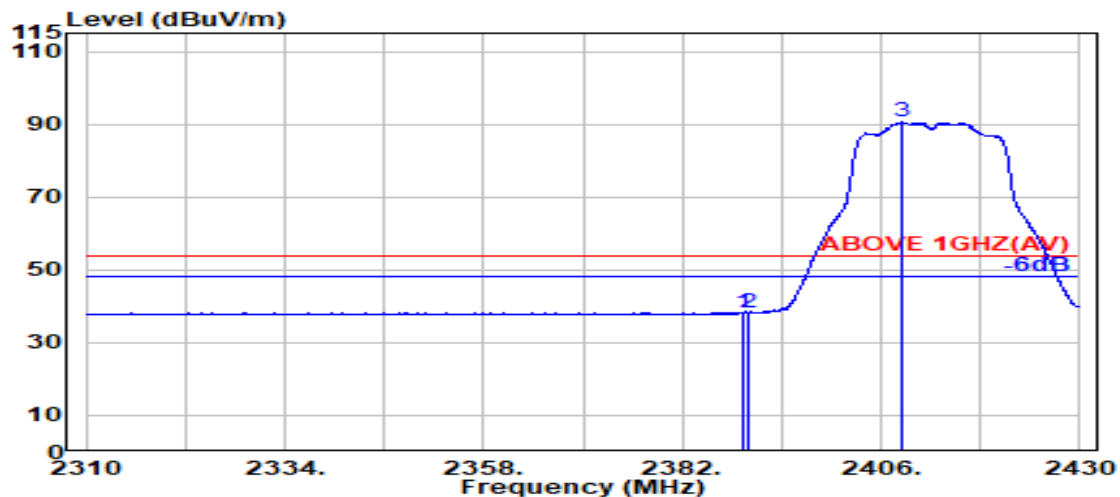

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	44.32	38.30	54.00	15.70	Average
2390.000	28.14	5.72	39.88	44.22	38.20	54.00	15.80	Average
@ 2408.400	28.13	5.74	39.88	96.48	90.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

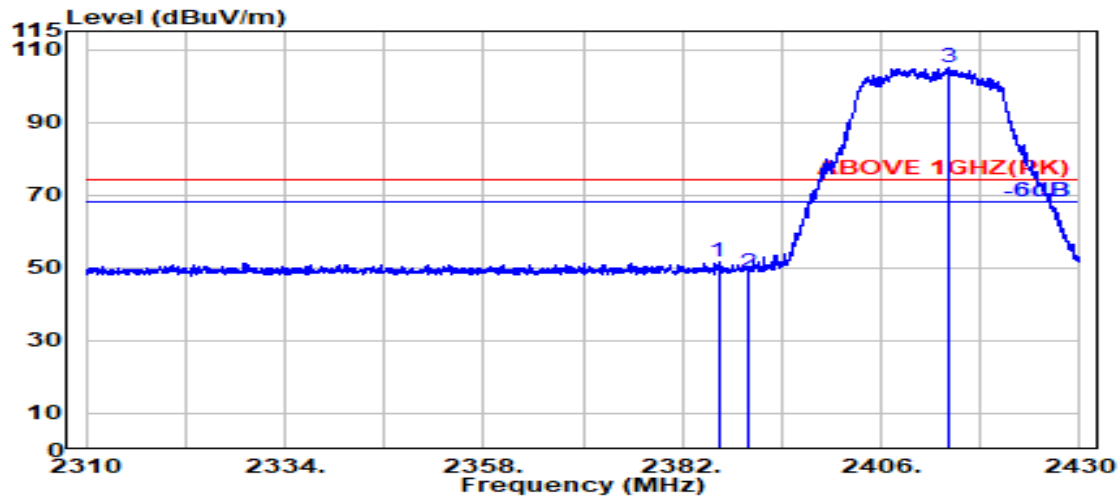

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.350	28.15	5.72	39.88	57.53	51.53	74.00	22.47	Peak
2390.000	28.14	5.72	39.88	54.83	48.81	74.00	25.19	Peak
@ 2414.050	28.16	5.75	39.88	111.12	105.15	---	---	Peak

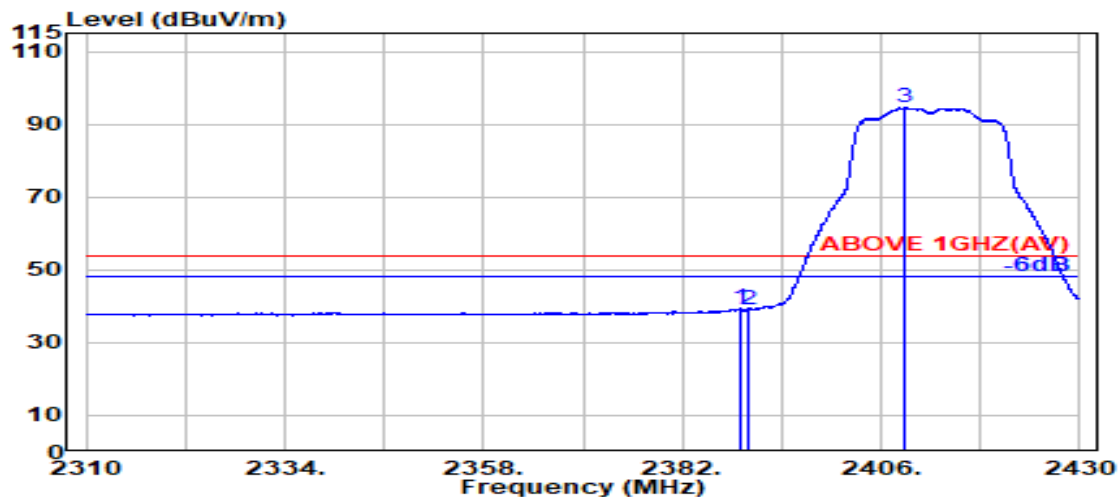

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.14	5.72	39.88	45.35	39.33	54.00	14.67	Average
2390.000	28.14	5.72	39.88	45.15	39.14	54.00	14.86	Average
@ 2408.950	28.14	5.74	39.88	100.70	94.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

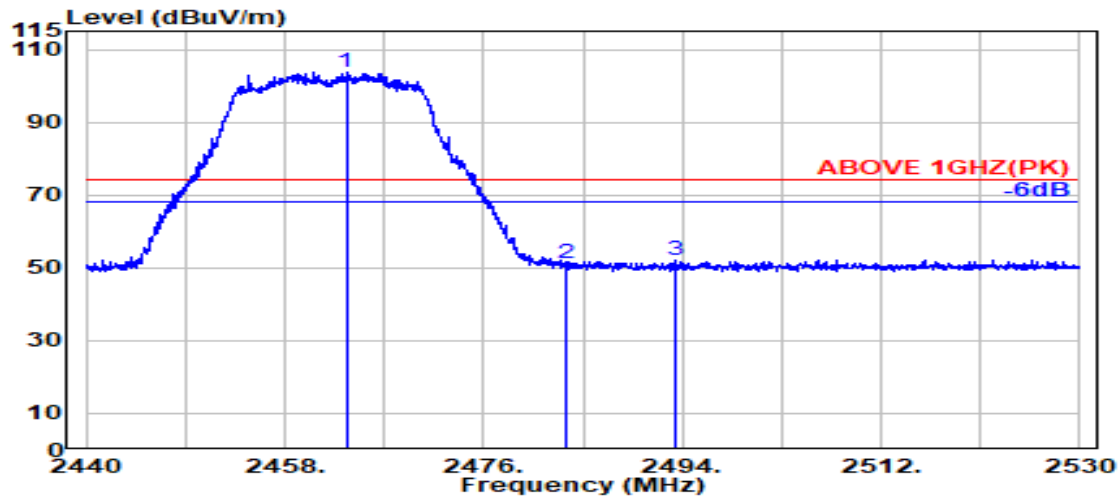

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.550	28.33	5.81	39.87	109.57	103.83	---	---	Peak
2483.500	28.37	5.83	39.87	56.94	51.27	74.00	22.73	Peak
2493.450	28.39	5.84	39.87	57.73	52.09	74.00	21.91	Peak

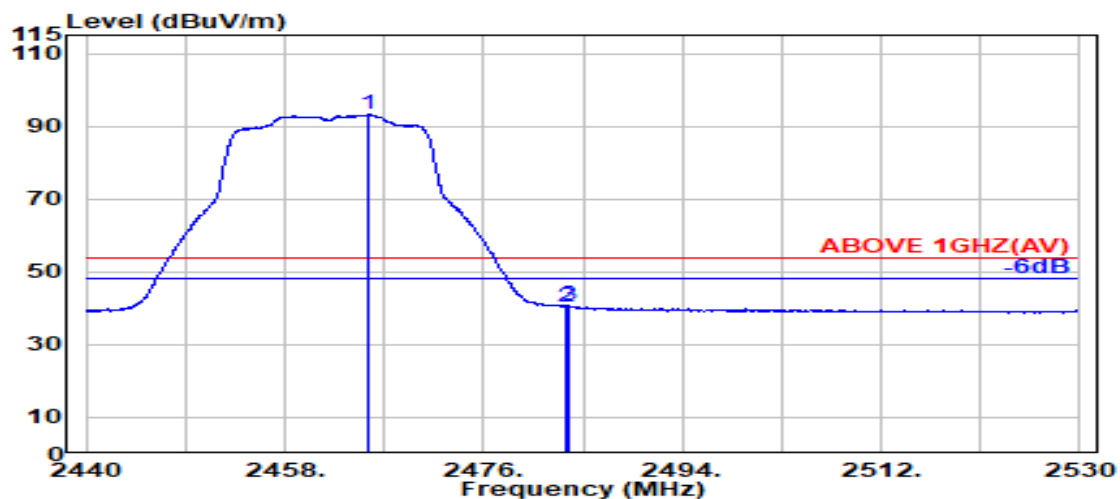

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.650	28.33	5.81	39.87	98.97	93.24	---	---	Average
2483.500	28.37	5.83	39.87	46.02	40.35	54.00	13.65	Average
2483.750	28.37	5.83	39.87	46.37	40.70	54.00	13.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

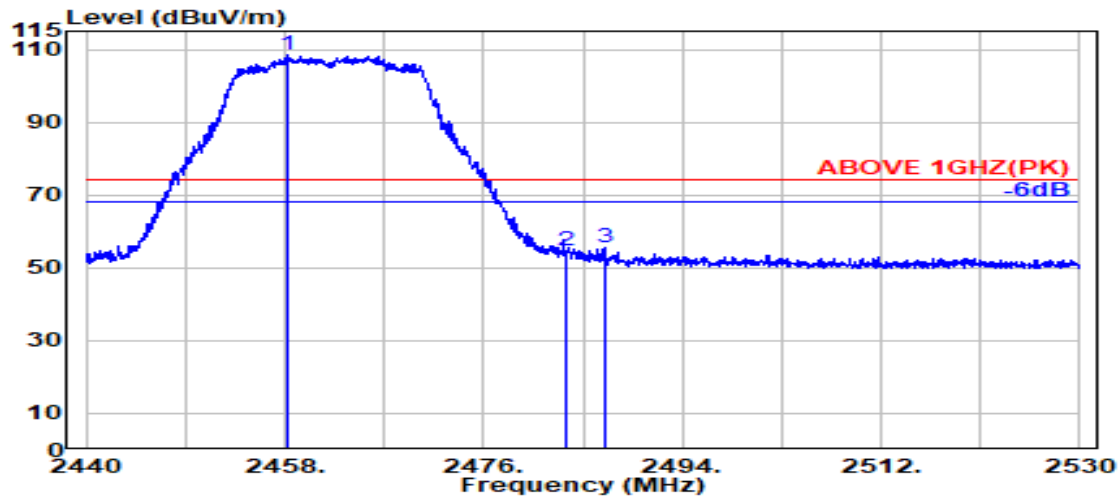

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.250	28.32	5.80	39.87	114.11	108.35	---	---	Peak
2483.500	28.37	5.83	39.87	60.17	54.50	74.00	19.50	Peak
2486.900	28.37	5.83	39.87	61.21	55.55	74.00	18.45	Peak

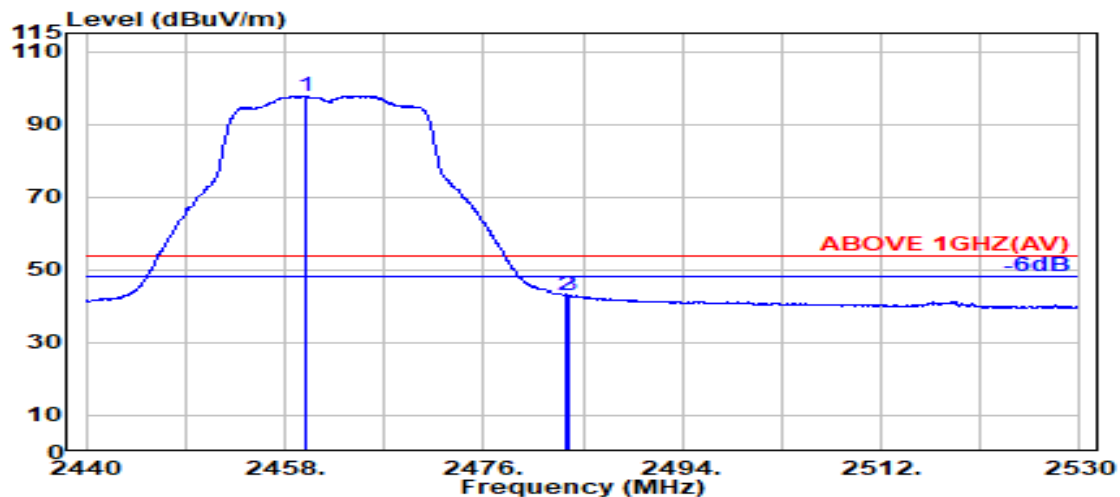

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.850	28.32	5.80	39.87	103.61	97.86	---	---	Average
2483.500	28.37	5.83	39.87	48.71	43.03	54.00	10.97	Average
2483.700	28.37	5.83	39.87	48.67	43.00	54.00	11.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

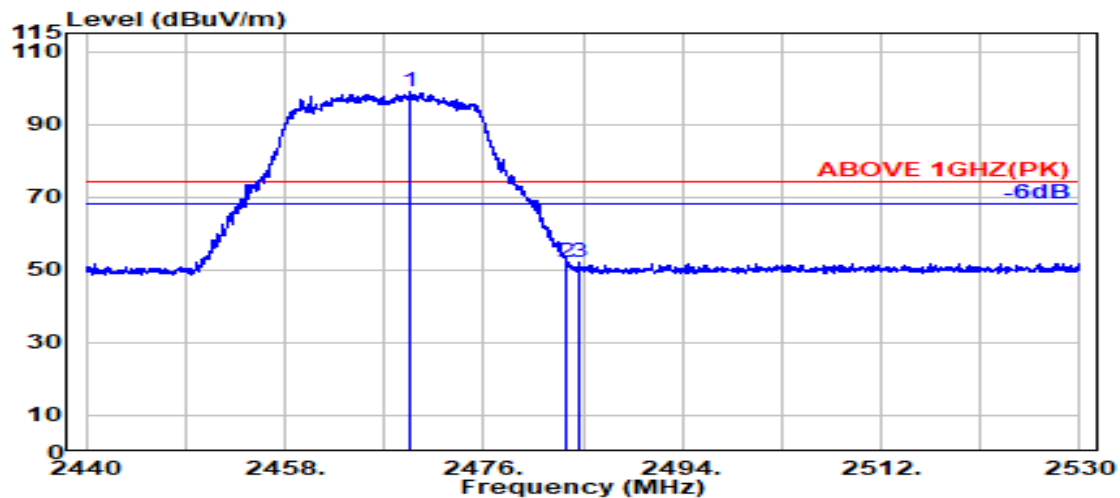

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.400	28.34	5.81	39.87	104.48	98.76	---	---	Peak
2483.500	28.37	5.83	39.87	57.93	52.25	74.00	21.75	Peak
2484.650	28.37	5.83	39.87	57.65	51.98	74.00	22.02	Peak

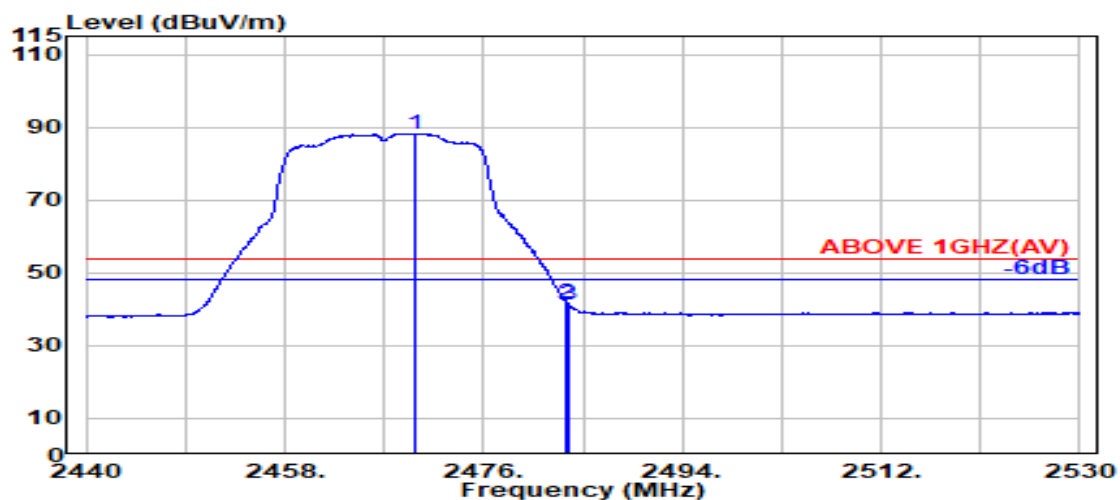

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.850	28.34	5.82	39.87	93.96	88.24	---	---	Average
2483.500	28.37	5.83	39.87	47.47	41.79	54.00	12.21	Average
2483.700	28.37	5.83	39.87	46.97	41.30	54.00	12.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

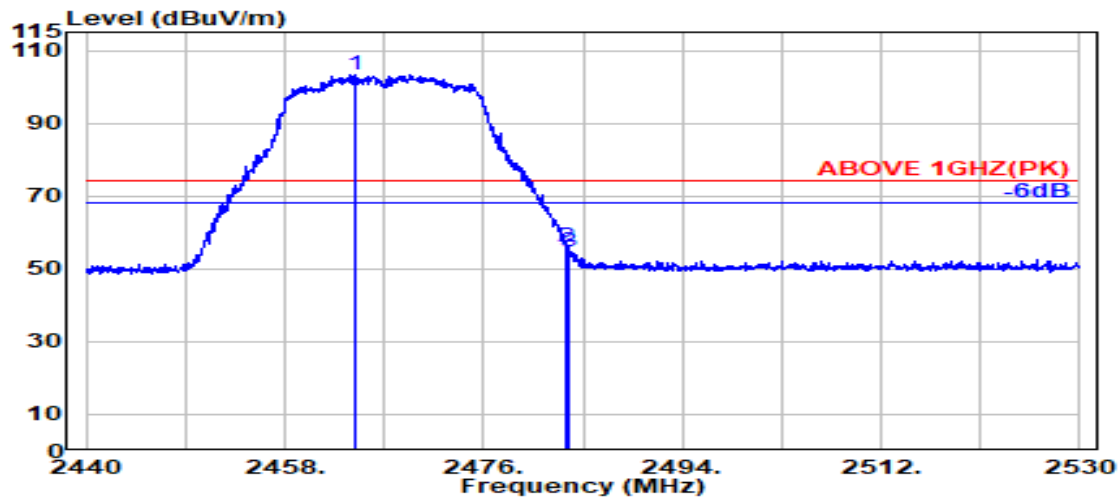

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.33	5.81	39.87	109.12	103.39	---	---	Peak
2483.500	28.37	5.83	39.87	61.78	56.10	74.00	17.90	Peak
2483.750	28.37	5.83	39.87	60.51	54.84	74.00	19.16	Peak

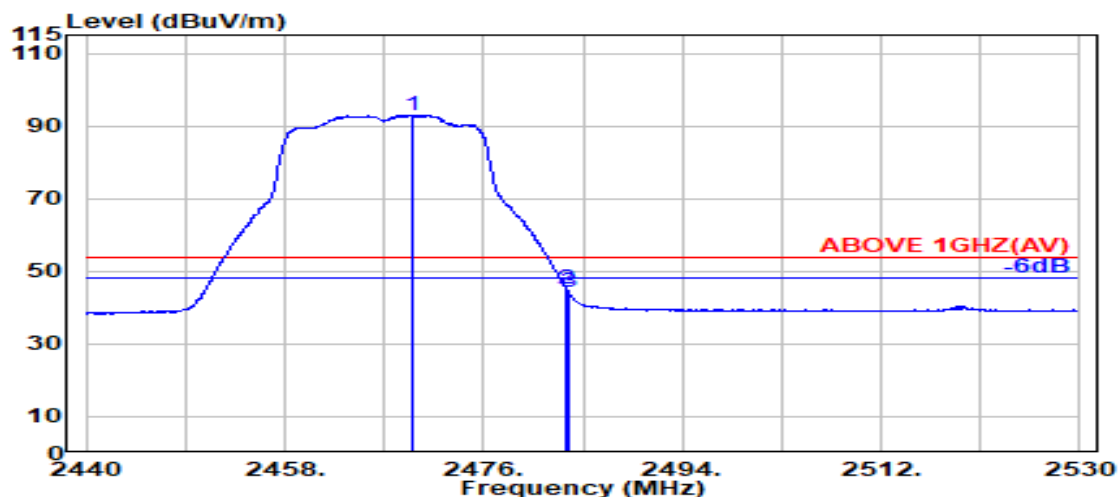

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.550	28.34	5.81	39.87	98.70	92.99	---	---	Average
2483.500	28.37	5.83	39.87	50.68	45.01	54.00	8.99	Average
2483.700	28.37	5.83	39.87	49.86	44.19	54.00	9.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

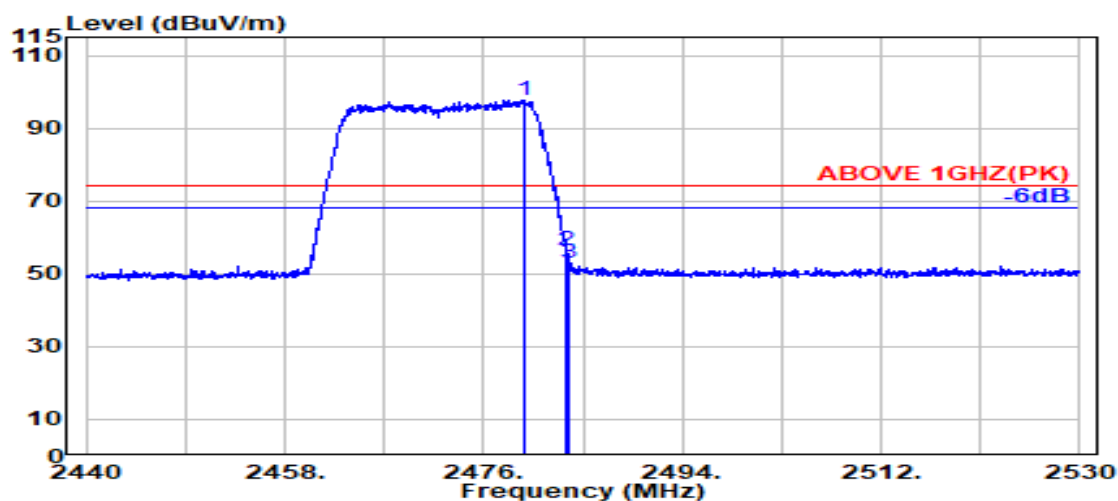

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.36	5.83	39.87	103.27	97.58	---	---	Peak
2483.500	28.37	5.83	39.87	62.30	56.62	74.00	17.38	Peak
2483.700	28.37	5.83	39.87	58.81	53.13	74.00	20.87	Peak

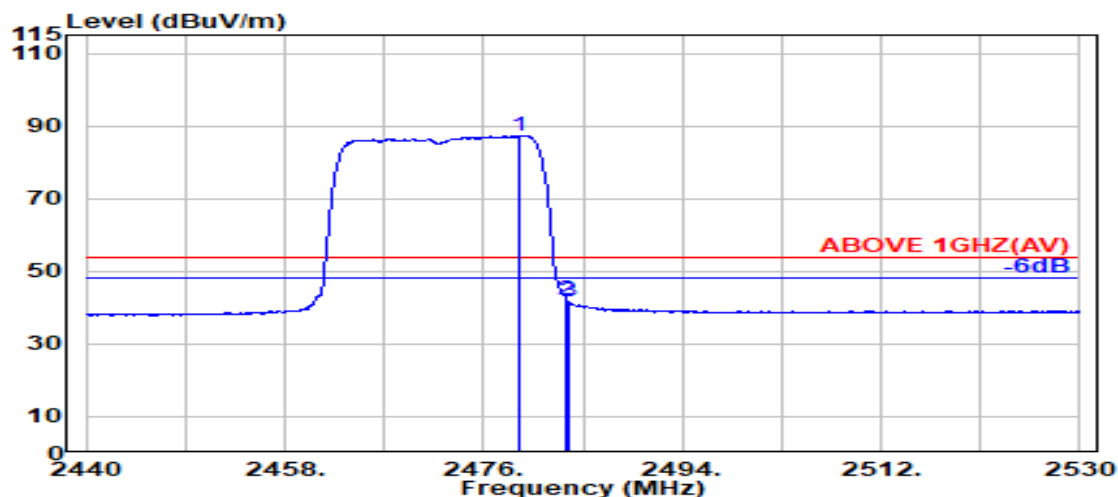


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.250	28.36	5.83	39.87	93.02	87.34	---	---	Average
2483.500	28.37	5.83	39.87	47.97	42.30	54.00	11.70	Average
2483.700	28.37	5.83	39.87	47.35	41.67	54.00	12.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

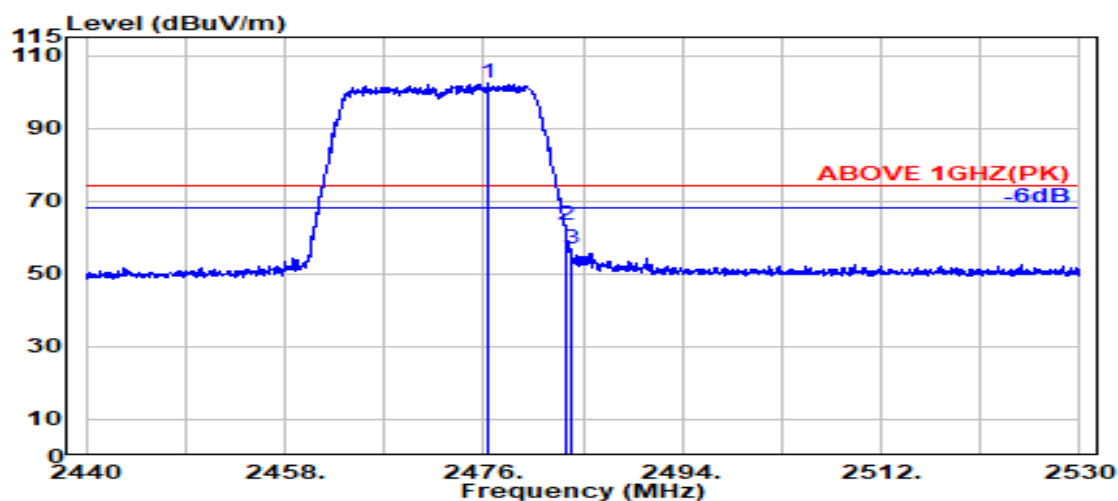

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2476.450	28.35	5.82	39.87	107.99	102.29	---	---	Peak
2483.500	28.37	5.83	39.87	68.99	63.32	74.00	10.68	Peak
2483.950	28.37	5.83	39.87	62.60	56.92	74.00	17.08	Peak

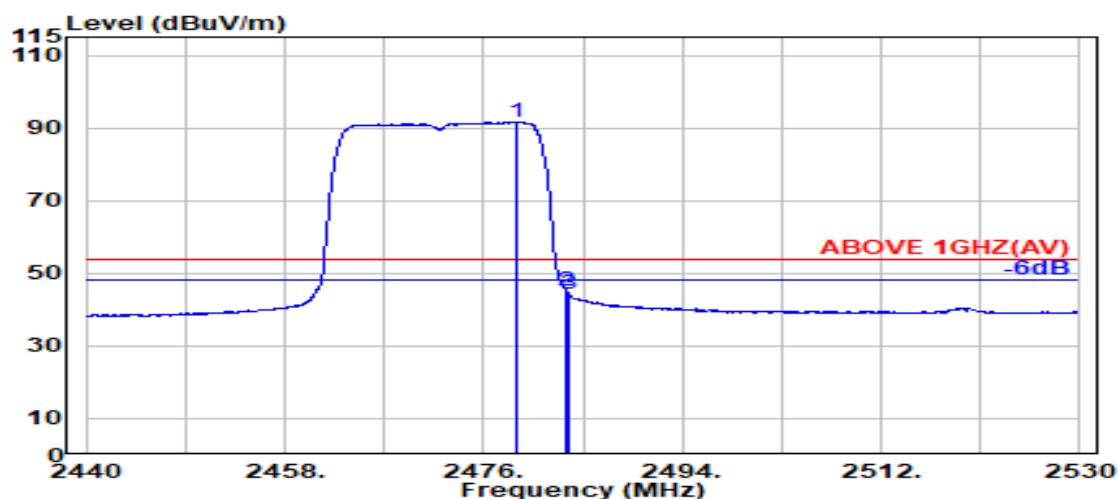

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	97.36	91.67	---	---	Average
2483.500	28.37	5.83	39.87	50.79	45.11	54.00	8.89	Average
2483.700	28.37	5.83	39.87	49.91	44.23	54.00	9.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

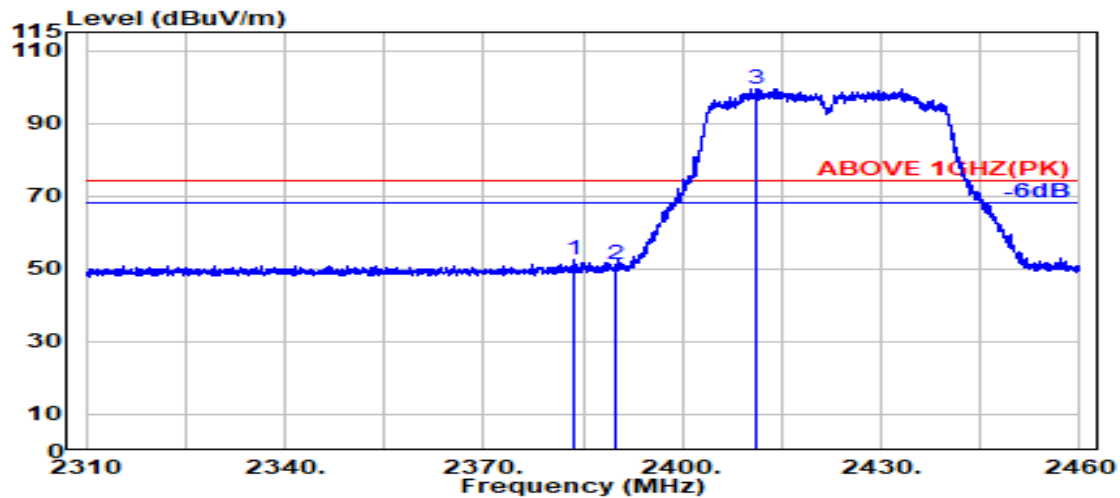

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.500	28.17	5.71	39.88	58.43	52.43	74.00	21.57	Peak
2389.800	28.14	5.72	39.88	57.24	51.23	74.00	22.77	Peak
@ 2411.300	28.15	5.75	39.88	105.56	99.57	---	---	Peak

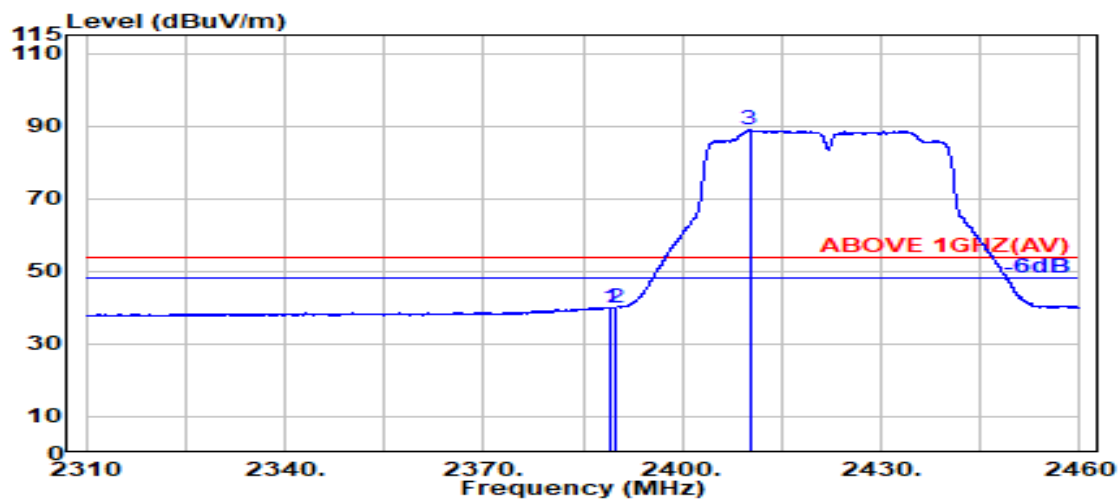

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	46.16	40.14	54.00	13.86	Average
2389.800	28.14	5.72	39.88	45.96	39.94	54.00	14.06	Average
@ 2410.150	28.14	5.75	39.88	94.86	88.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

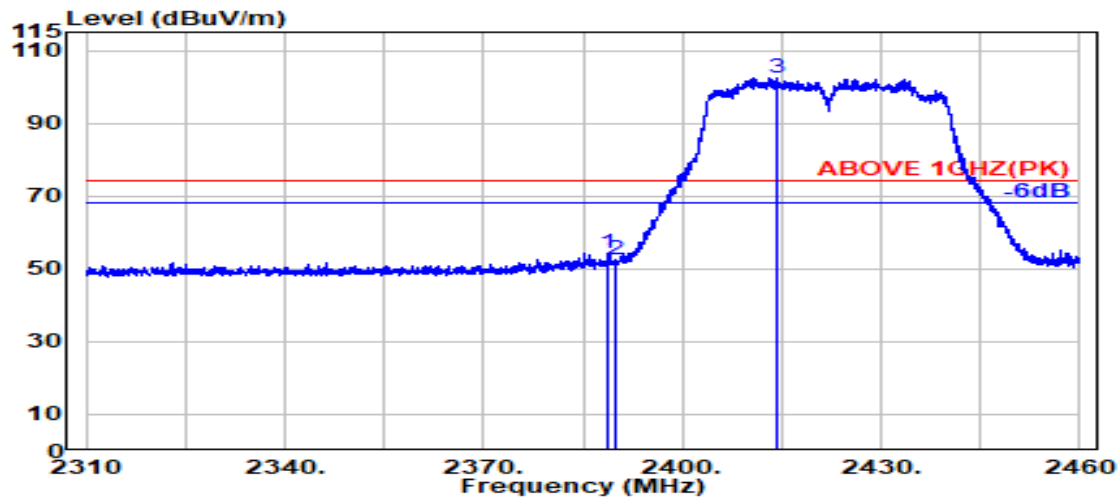

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.15	5.72	39.88	60.24	54.23	74.00	19.77	Peak
2389.800	28.14	5.72	39.88	58.39	52.37	74.00	21.63	Peak
@ 2414.150	28.16	5.75	39.88	108.53	102.56	---	---	Peak

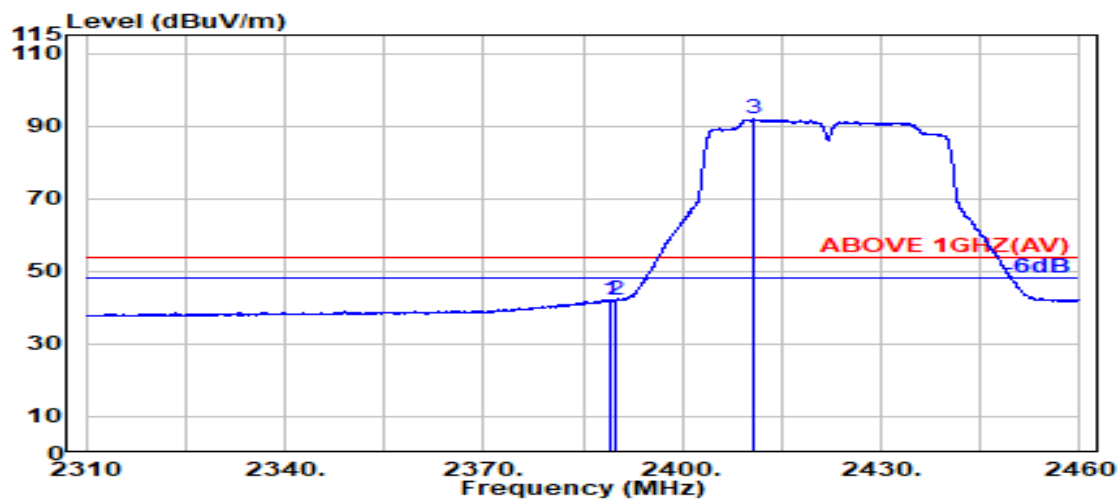


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.14	5.72	39.88	48.19	42.18	54.00	11.82	Average
2389.800	28.14	5.72	39.88	47.96	41.95	54.00	12.05	Average
@ 2410.900	28.14	5.75	39.88	97.78	91.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

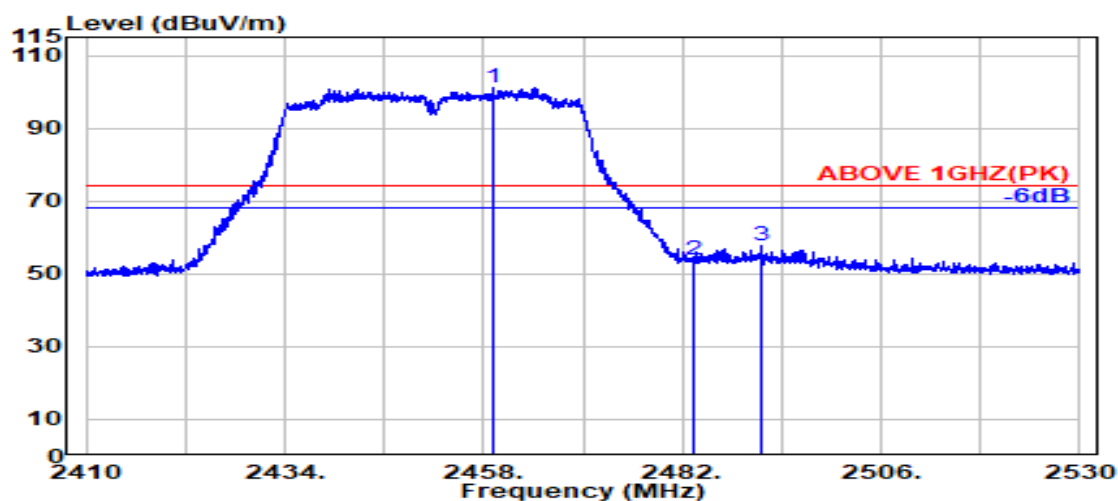

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.250	28.32	5.80	39.87	106.72	100.97	---	---	Peak
2483.500	28.37	5.83	39.87	59.34	53.67	74.00	20.33	Peak
2491.600	28.38	5.84	39.87	63.51	57.86	74.00	16.14	Peak

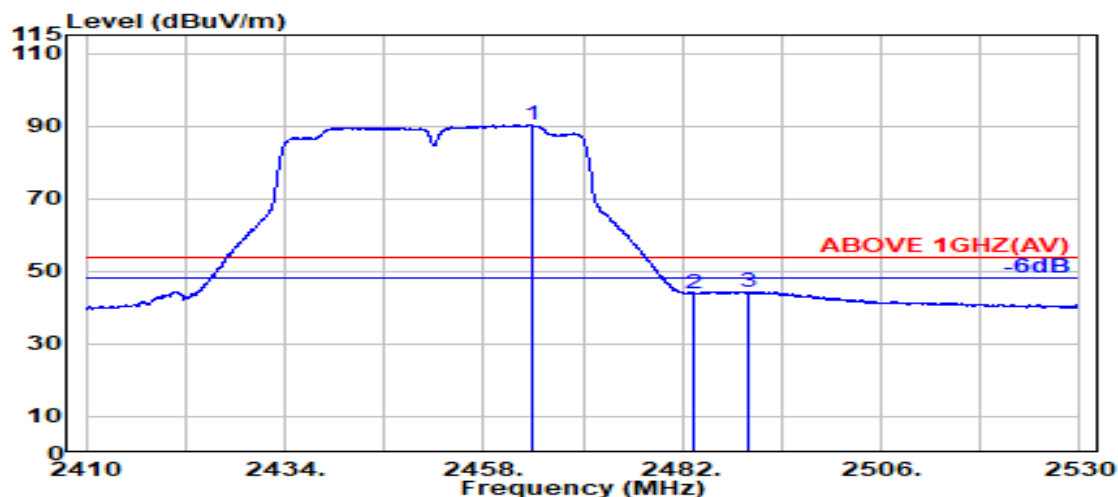

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	96.15	90.42	---	---	Average
2483.500	28.37	5.83	39.87	49.58	43.90	54.00	10.10	Average
2489.950	28.38	5.84	39.87	50.13	44.48	54.00	9.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

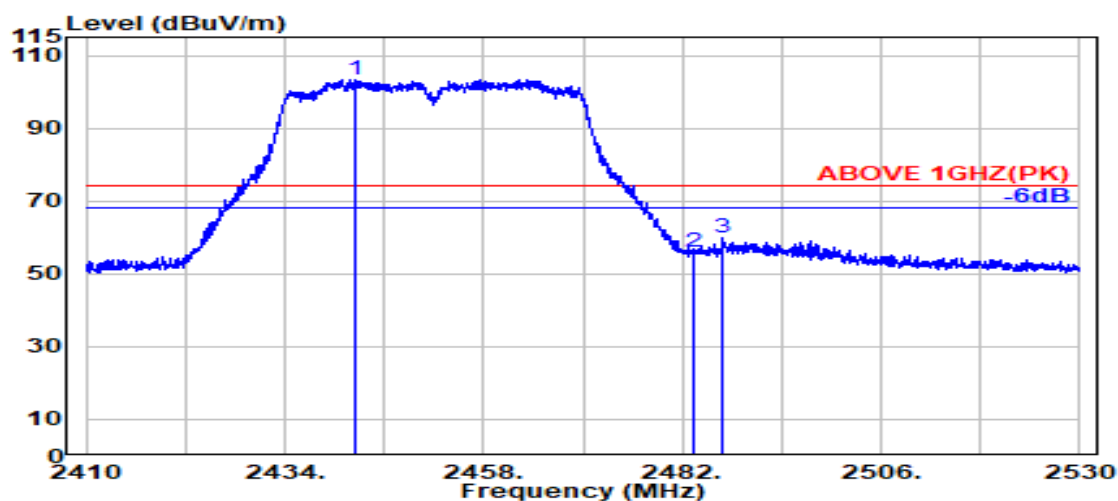

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2442.500	28.27	5.78	39.87	109.21	103.39	---	---	Peak
2483.500	28.37	5.83	39.87	61.56	55.89	74.00	18.11	Peak
2486.850	28.37	5.83	39.87	65.70	60.04	74.00	13.96	Peak

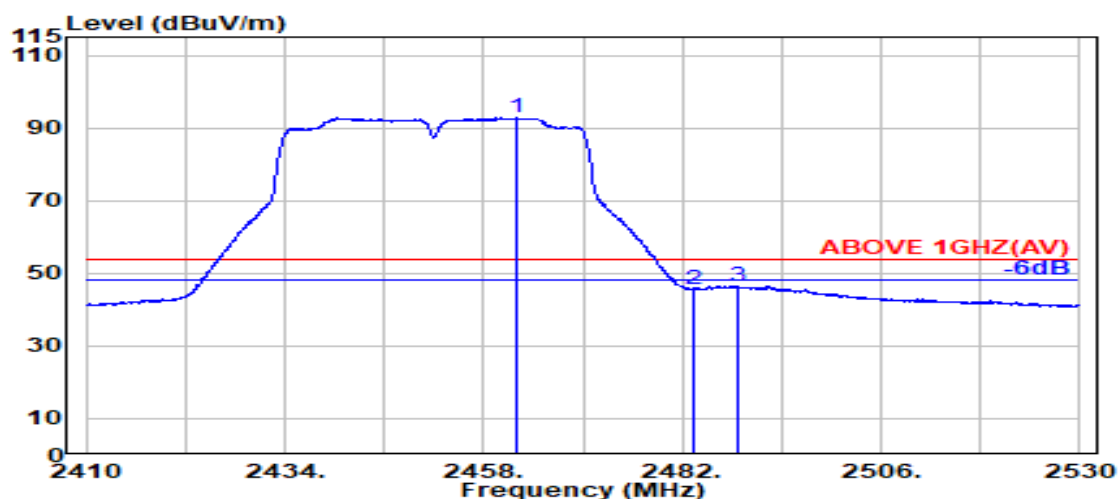

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.000	28.32	5.81	39.87	98.43	92.69	---	---	Average
2483.500	28.37	5.83	39.87	51.20	45.53	54.00	8.47	Average
2488.650	28.38	5.84	39.87	52.17	46.51	54.00	7.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

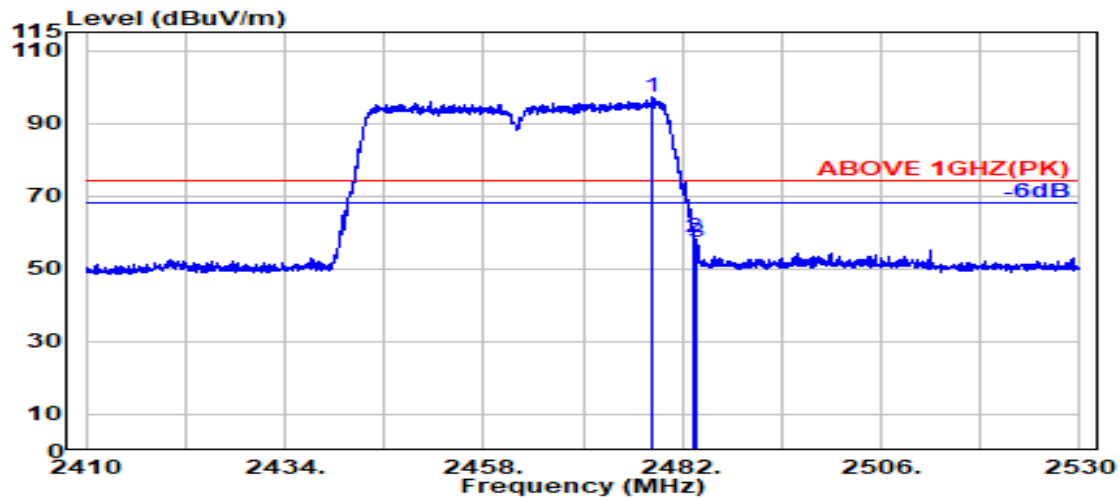

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.450	28.36	5.83	39.87	102.91	97.22	---	---	Peak
2483.500	28.37	5.83	39.87	64.40	58.73	74.00	15.27	Peak
2483.700	28.37	5.83	39.87	63.05	57.38	74.00	16.62	Peak

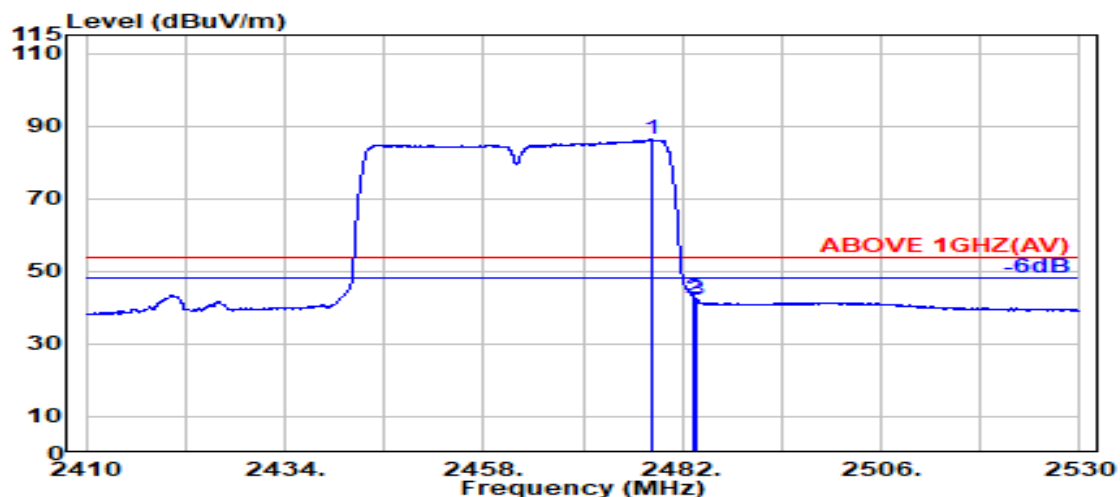

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.300	28.36	5.82	39.87	91.86	86.17	---	---	Average
2483.500	28.37	5.83	39.87	48.27	42.59	54.00	11.41	Average
2483.700	28.37	5.83	39.87	47.91	42.24	54.00	11.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

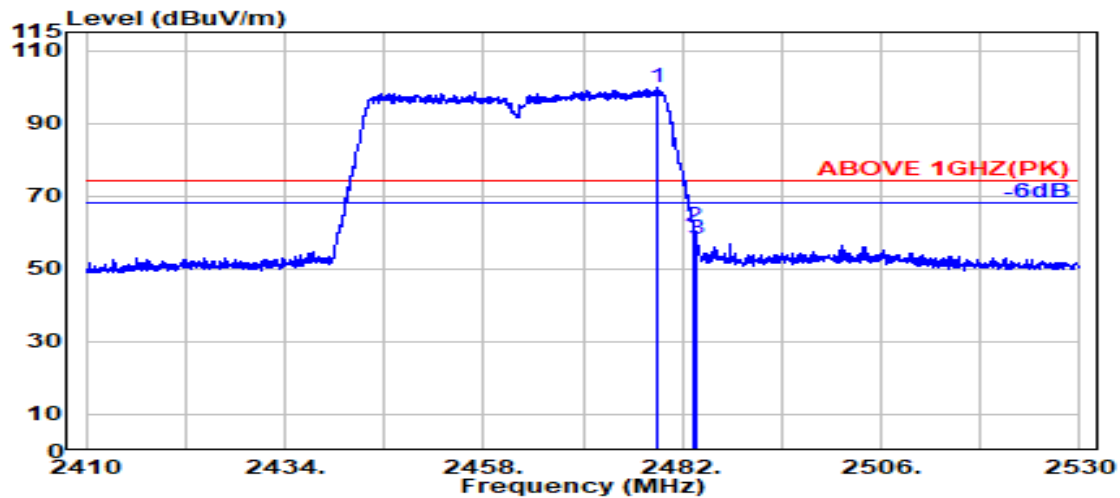

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.87	105.29	99.61	---	---	Peak
2483.500	28.37	5.83	39.87	67.42	61.75	74.00	12.25	Peak
2483.700	28.37	5.83	39.87	63.66	57.98	74.00	16.02	Peak

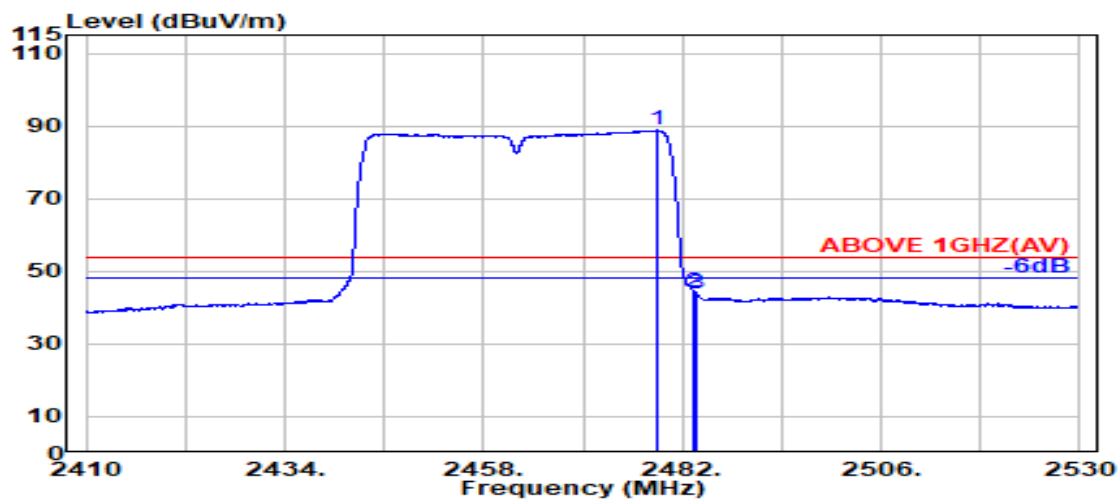


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	94.44	88.76	---	---	Average
2483.500	28.37	5.83	39.87	50.11	44.44	54.00	9.56	Average
2483.700	28.37	5.83	39.87	49.58	43.90	54.00	10.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

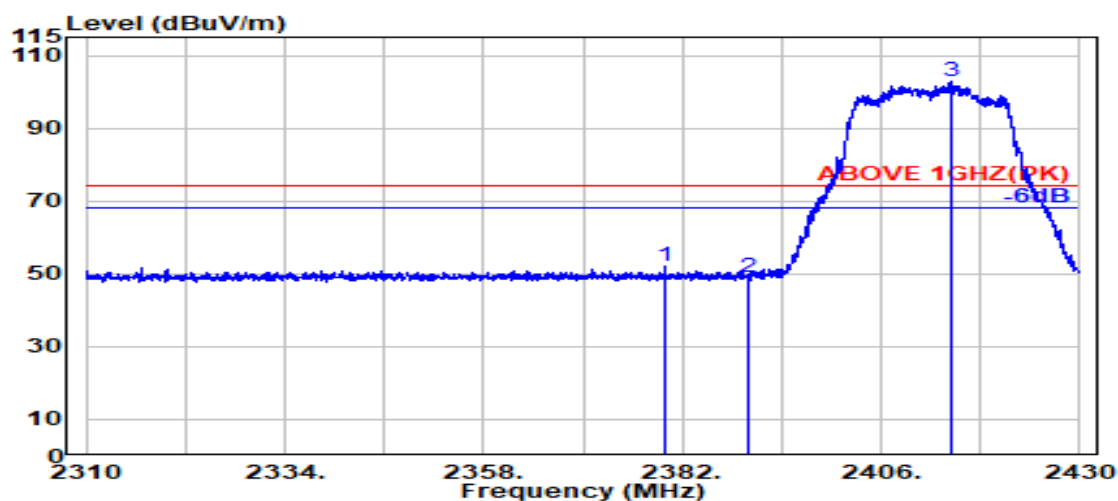

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.850	28.18	5.71	39.88	57.89	51.90	74.00	22.10	Peak
2390.000	28.14	5.72	39.88	54.97	48.95	74.00	25.05	Peak
@ 2414.450	28.16	5.75	39.88	108.91	102.94	---	---	Peak

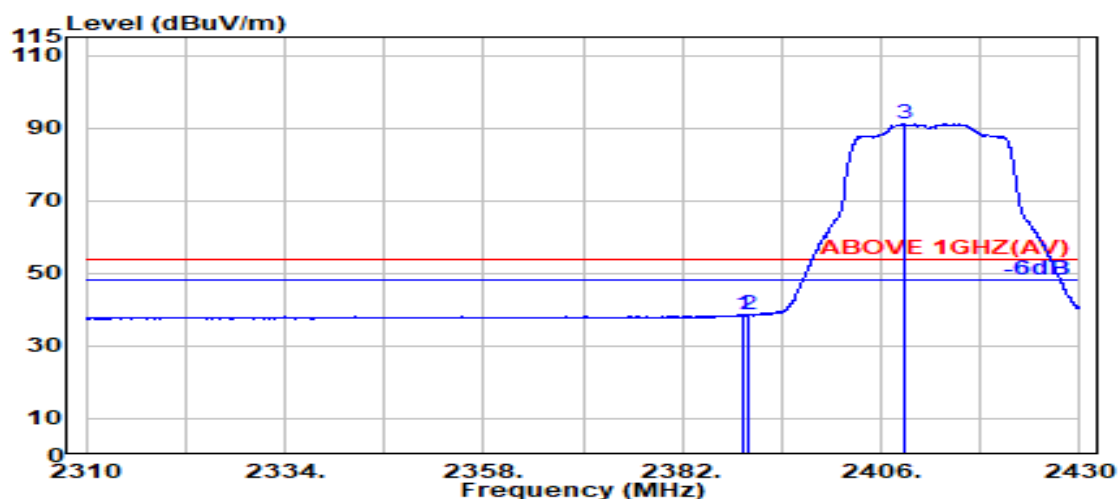

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	44.60	38.59	54.00	15.41	Average
2390.000	28.14	5.72	39.88	44.78	38.76	54.00	15.24	Average
@ 2408.700	28.14	5.74	39.88	97.21	91.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

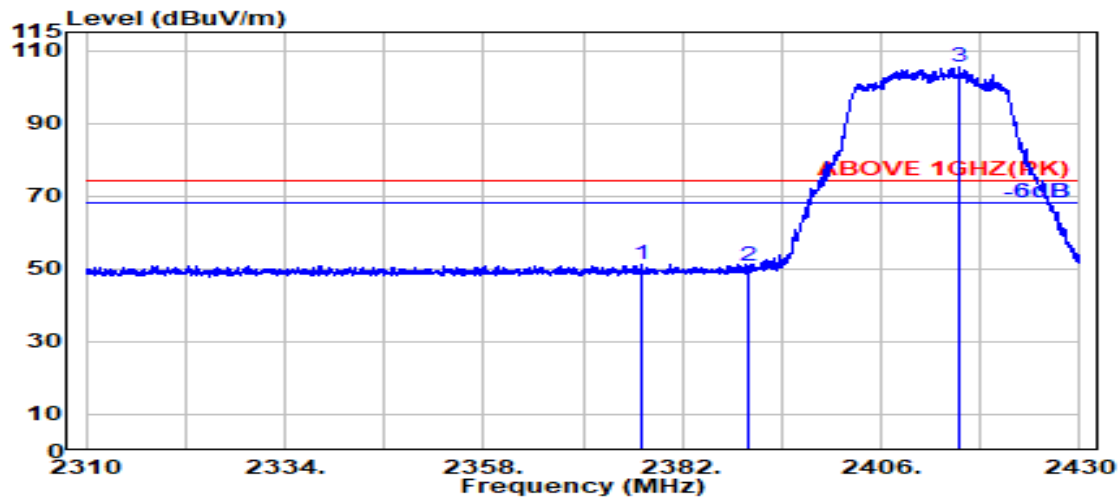

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2377.100	28.19	5.71	39.88	57.12	51.14	74.00	22.86	Peak
2390.000	28.14	5.72	39.88	56.78	50.77	74.00	23.23	Peak
@ 2415.350	28.16	5.75	39.88	111.58	105.62	---	---	Peak

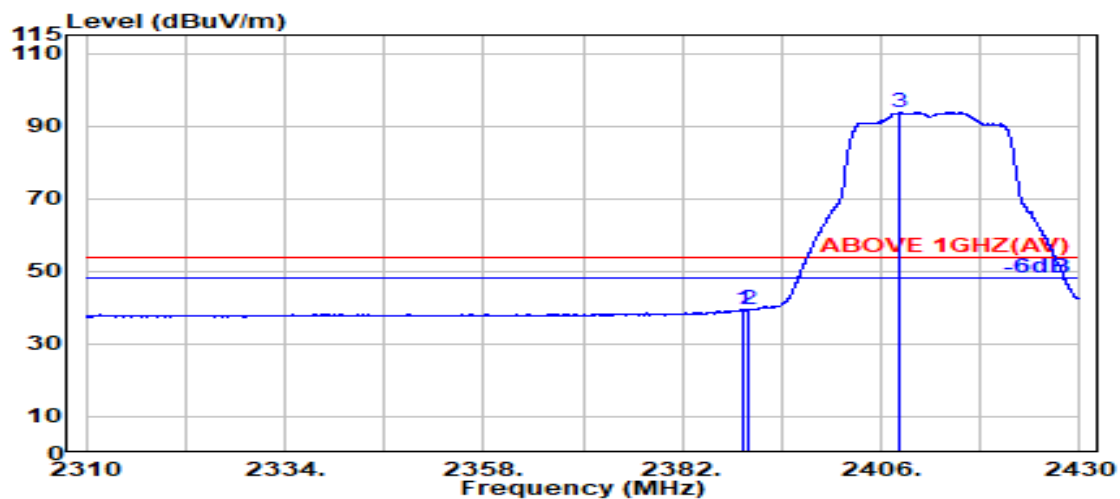

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.14	5.72	39.88	45.36	39.35	54.00	14.65	Average
2390.000	28.14	5.72	39.88	45.52	39.50	54.00	14.50	Average
@ 2408.350	28.13	5.74	39.88	99.76	93.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

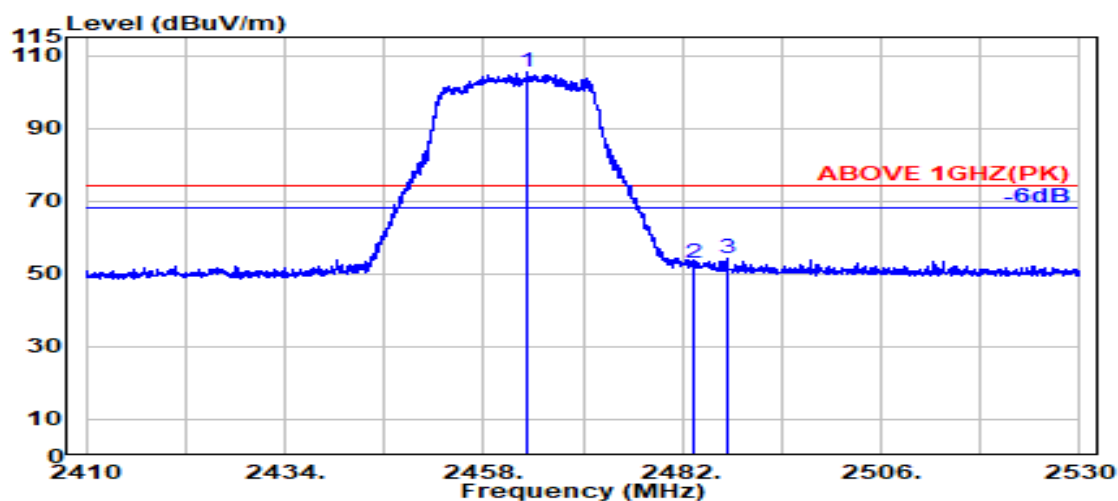

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.150	28.33	5.81	39.87	111.19	105.45	---	---	Peak
2483.500	28.37	5.83	39.87	58.59	52.92	74.00	21.08	Peak
2487.350	28.37	5.84	39.87	59.71	54.05	74.00	19.95	Peak

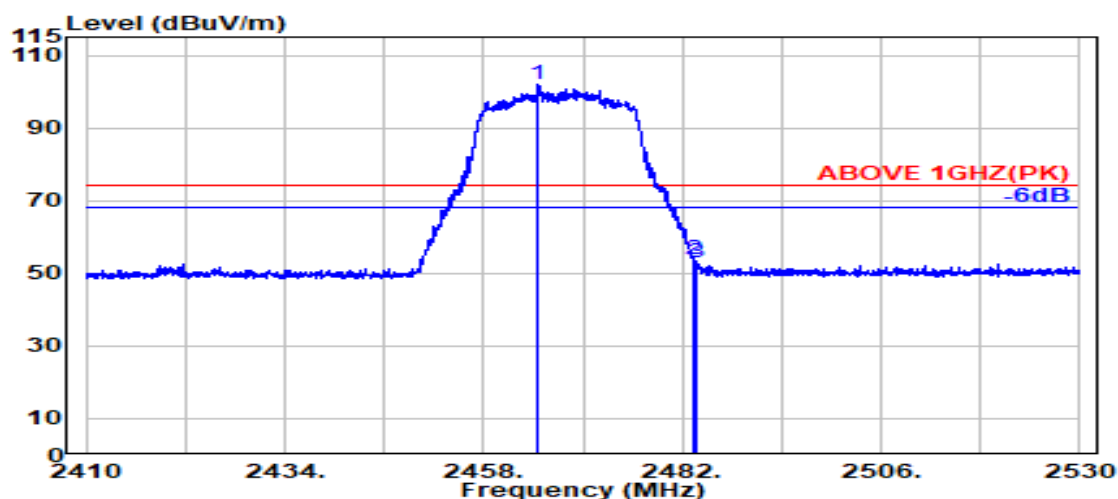

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.550	28.33	5.81	39.87	107.75	102.02	---	---	Peak
2483.500	28.37	5.83	39.87	59.30	53.62	74.00	20.38	Peak
2483.750	28.37	5.83	39.87	58.70	53.02	74.00	20.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

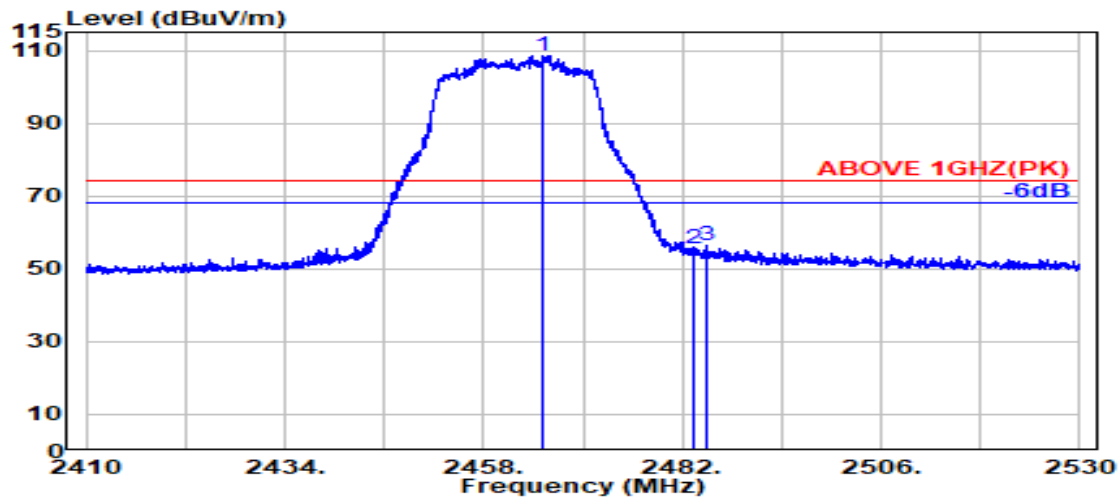

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.200	28.33	5.81	39.87	114.39	108.66	---	---	Peak
2483.500	28.37	5.83	39.87	61.04	55.37	74.00	18.63	Peak
2485.000	28.37	5.83	39.87	62.27	56.60	74.00	17.40	Peak

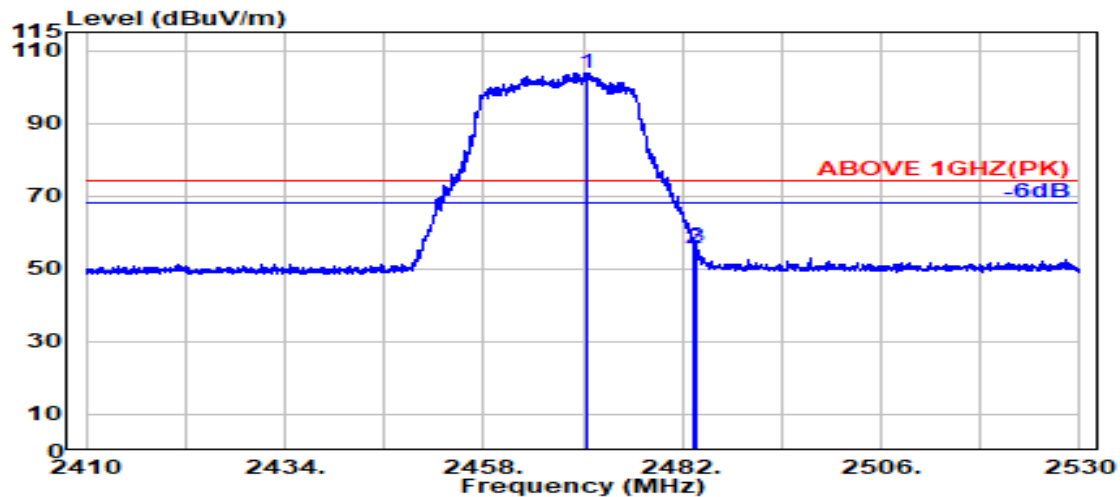

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.450	28.34	5.82	39.87	109.54	103.83	---	---	Peak
2483.500	28.37	5.83	39.87	61.36	55.69	74.00	18.31	Peak
2483.800	28.37	5.83	39.87	61.80	56.13	74.00	17.87	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

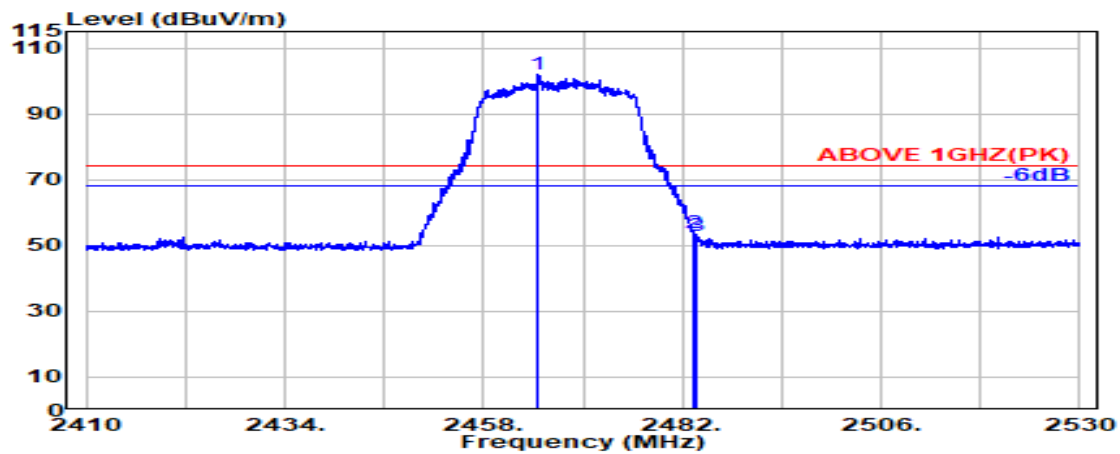

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.550	28.33	5.81	39.87	107.75	102.02	---	---	Peak
2483.500	28.37	5.83	39.87	59.30	53.62	74.00	20.38	Peak
2483.750	28.37	5.83	39.87	58.70	53.02	74.00	20.98	Peak

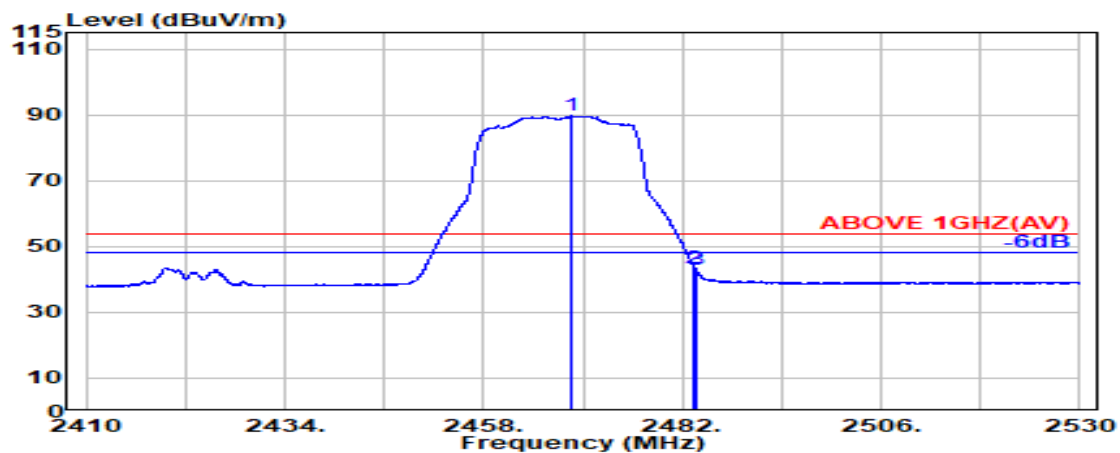

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.700	28.34	5.81	39.87	95.38	89.66	---	---	Peak
2483.500	28.37	5.83	39.87	49.26	43.59	74.00	10.41	Peak
2483.700	28.37	5.83	39.87	48.55	42.88	74.00	11.12	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

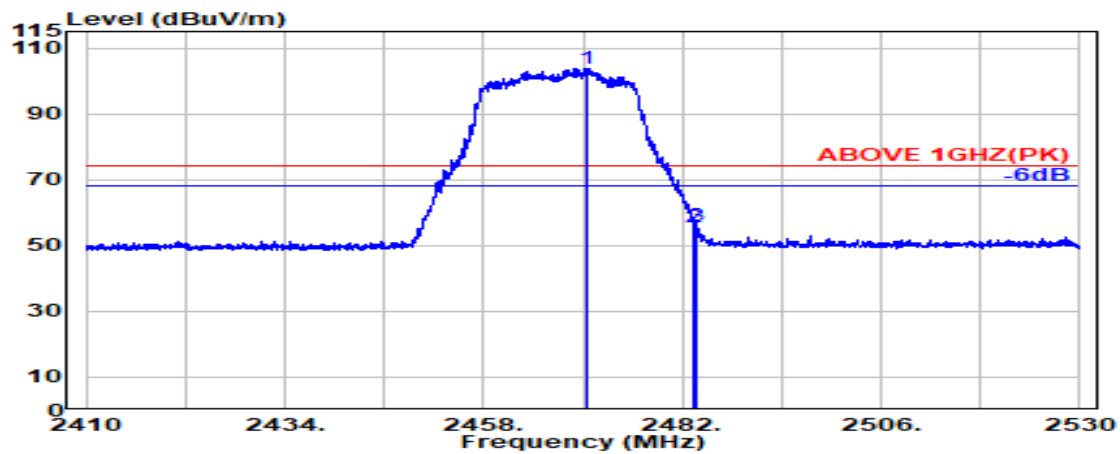

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.450	28.34	5.82	39.87	109.54	103.83	---	---	Peak
2483.500	28.37	5.83	39.87	61.36	55.69	74.00	18.31	Peak
2483.800	28.37	5.83	39.87	61.80	56.13	74.00	17.87	Peak

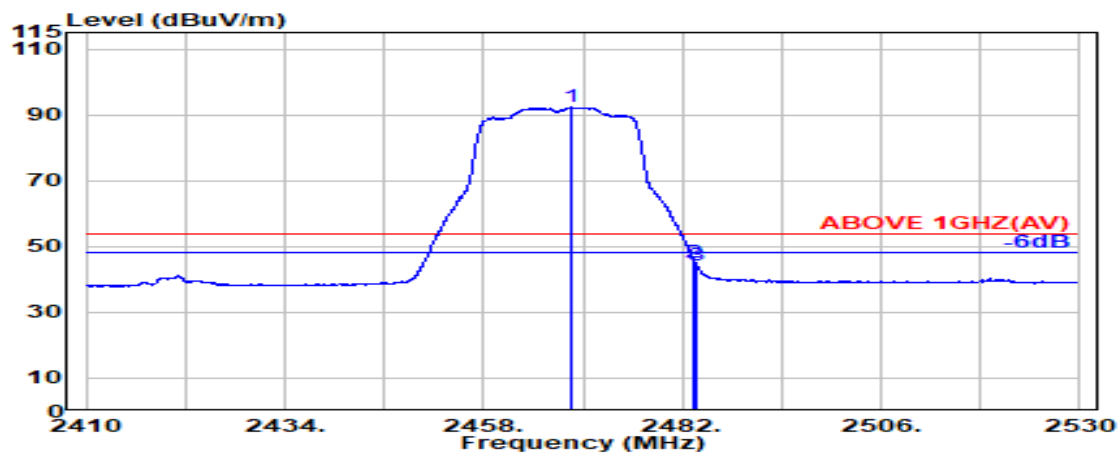

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.650	28.34	5.81	39.87	98.02	92.30	---	---	Peak
2483.500	28.37	5.83	39.87	50.92	45.24	74.00	8.76	Peak
2483.700	28.37	5.83	39.87	50.12	44.44	74.00	9.56	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

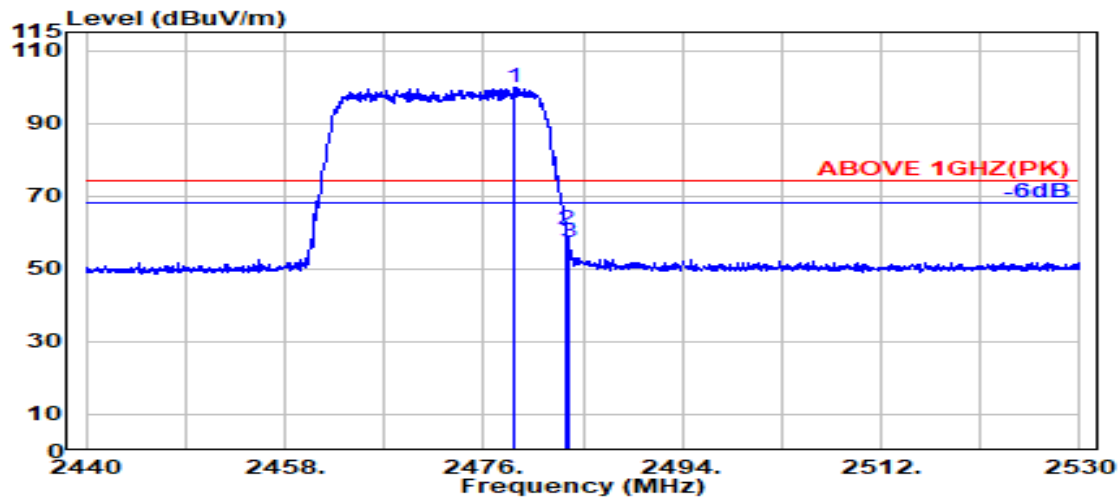

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.750	28.36	5.83	39.87	105.41	99.72	---	---	Peak
2483.500	28.37	5.83	39.87	66.43	60.76	74.00	13.24	Peak
2483.700	28.37	5.83	39.87	62.87	57.19	74.00	16.81	Peak

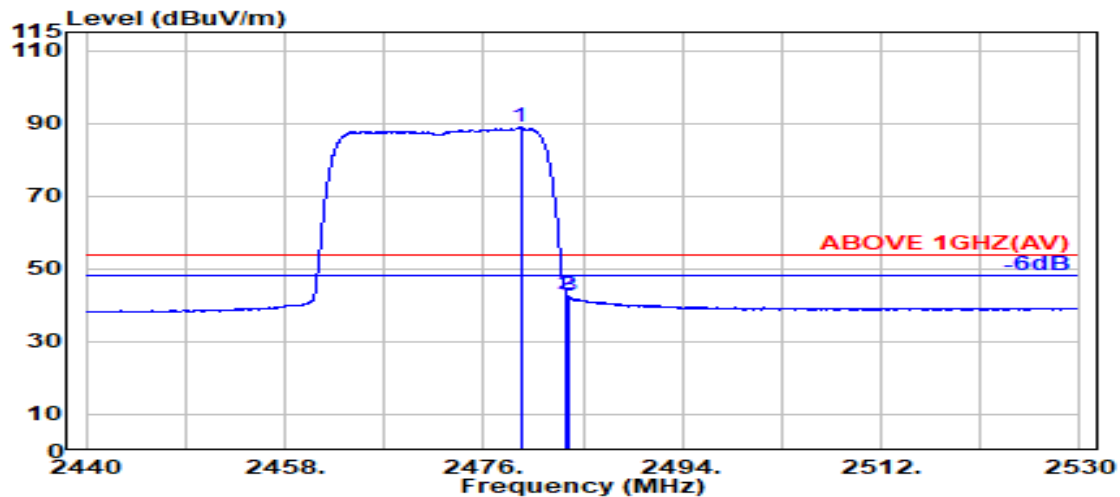

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.350	28.36	5.83	39.87	94.48	88.80	---	---	Average
2483.500	28.37	5.83	39.87	48.77	43.10	54.00	10.90	Average
2483.700	28.37	5.83	39.87	48.07	42.40	54.00	11.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

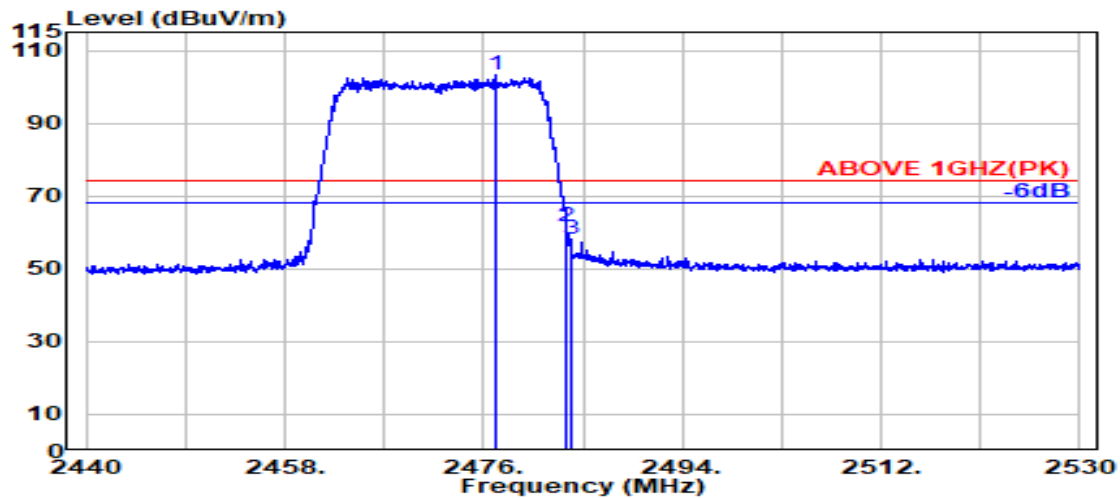

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.35	5.82	39.87	108.98	103.29	---	---	Peak
2483.500	28.37	5.83	39.87	67.28	61.61	74.00	12.39	Peak
2483.900	28.37	5.83	39.87	63.75	58.08	74.00	15.92	Peak

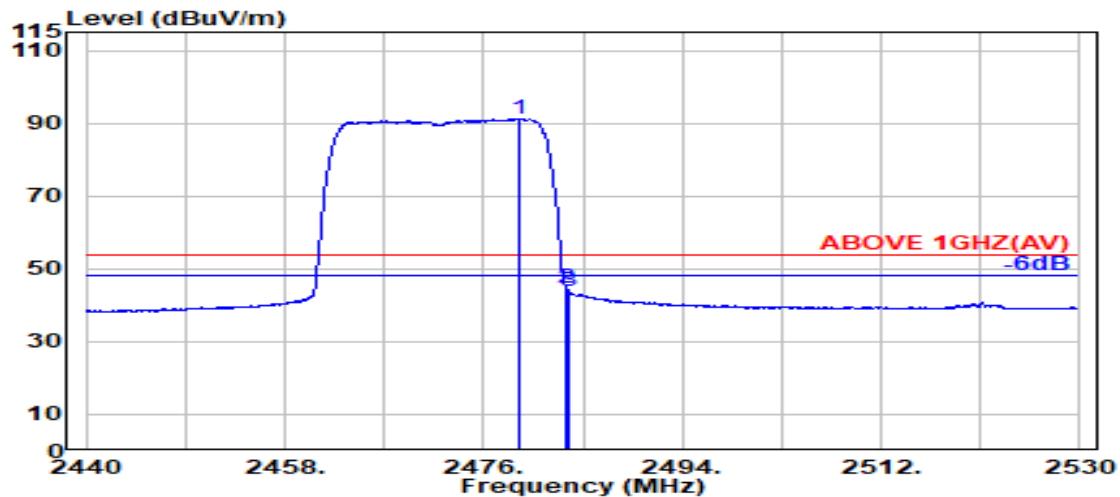

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.36	5.83	39.87	96.91	91.22	---	---	Average
2483.500	28.37	5.83	39.87	50.48	44.81	54.00	9.19	Average
2483.700	28.37	5.83	39.87	49.63	43.96	54.00	10.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

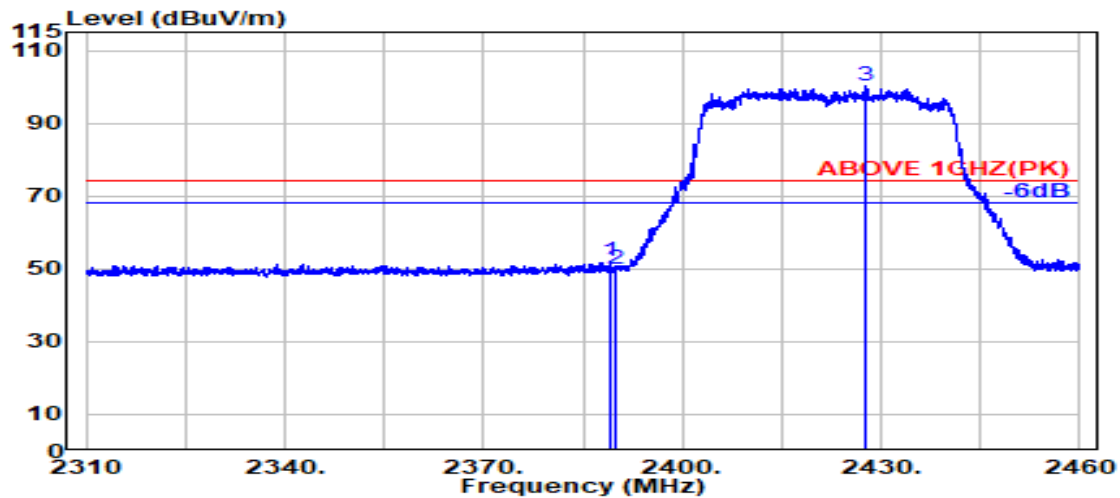

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.14	5.72	39.88	57.94	51.93	74.00	22.07	Peak
2389.800	28.14	5.72	39.88	56.05	50.03	74.00	23.97	Peak
@ 2427.800	28.21	5.77	39.88	106.26	100.37	---	---	Peak

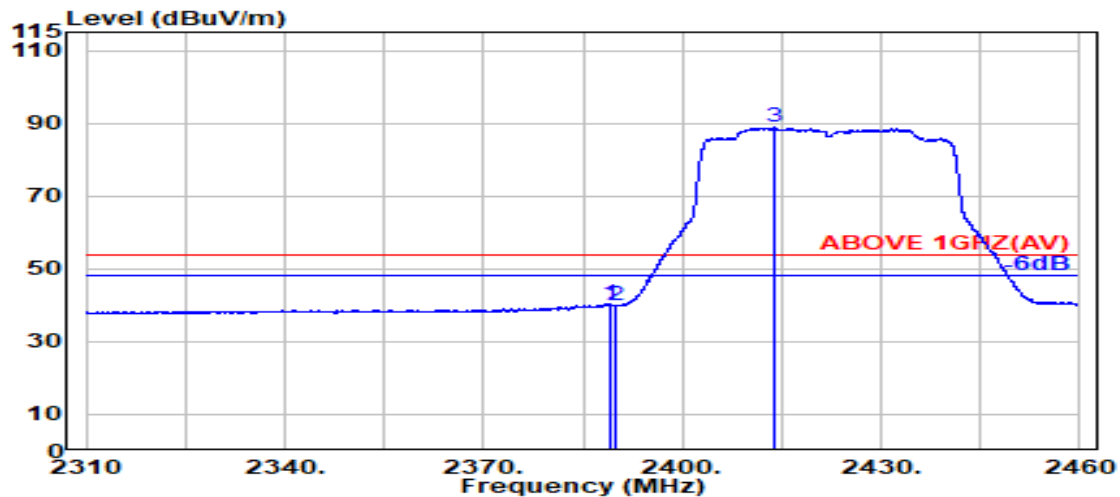

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.14	5.72	39.88	46.35	40.34	54.00	13.66	Average
2389.800	28.14	5.72	39.88	45.94	39.92	54.00	14.08	Average
@ 2413.800	28.16	5.75	39.88	94.74	88.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

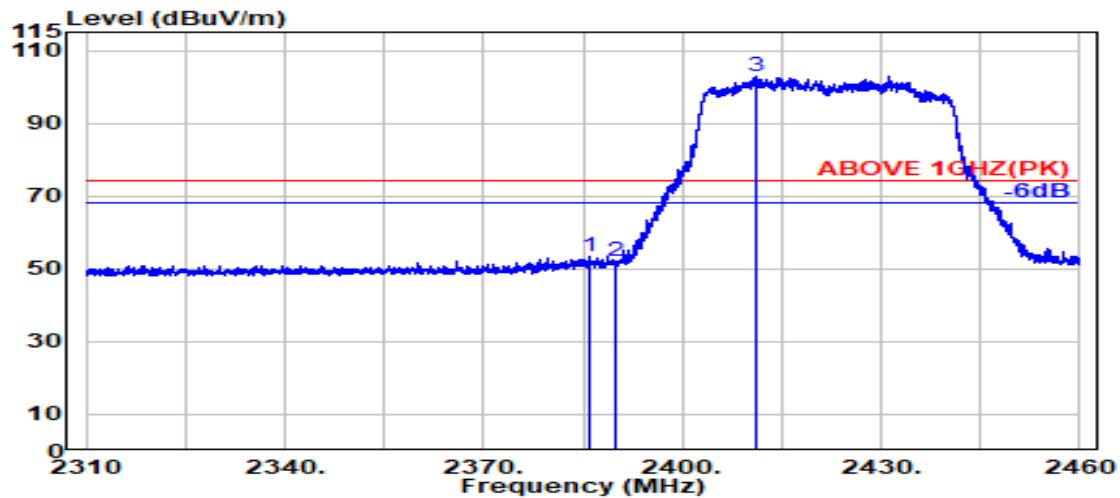

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.000	28.16	5.72	39.88	59.49	53.48	74.00	20.52	Peak
2389.800	28.14	5.72	39.88	58.13	52.11	74.00	21.89	Peak
@ 2411.150	28.14	5.75	39.88	108.81	102.83	---	---	Peak

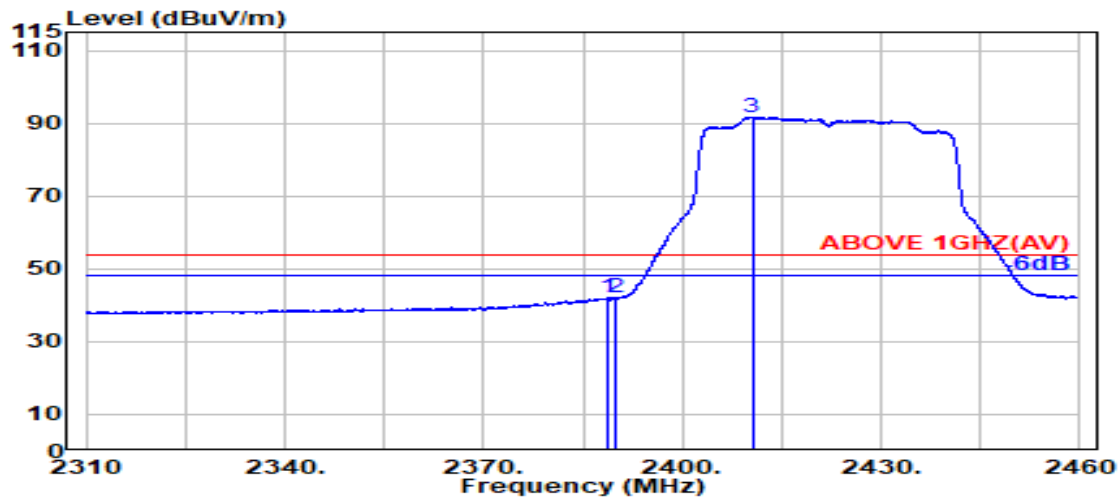

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	48.01	42.00	54.00	12.00	Average
2389.800	28.14	5.72	39.88	47.93	41.91	54.00	12.09	Average
@ 2410.550	28.14	5.75	39.88	97.54	91.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

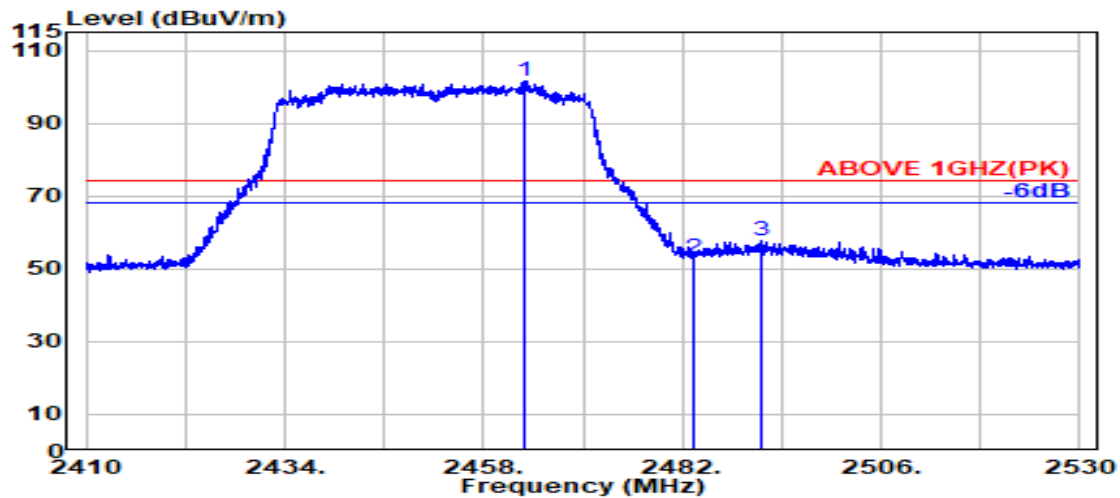

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.050	28.33	5.81	39.87	107.40	101.66	---	---	Peak
2483.500	28.37	5.83	39.87	58.82	53.15	74.00	20.85	Peak
2491.650	28.38	5.84	39.87	63.21	57.56	74.00	16.44	Peak

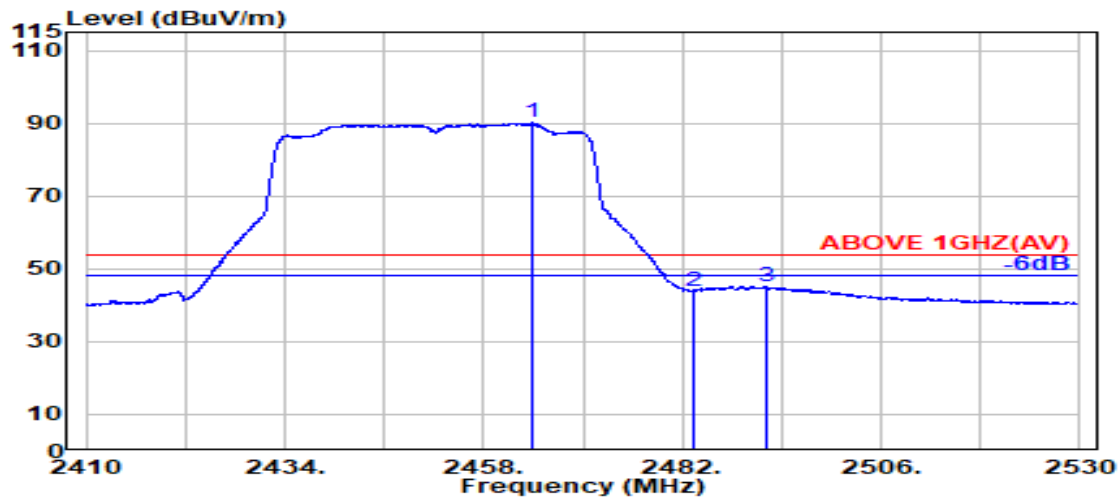

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.850	28.33	5.81	39.87	95.88	90.14	---	---	Average
2483.500	28.37	5.83	39.87	49.63	43.96	54.00	10.04	Average
2492.050	28.38	5.84	39.87	50.92	45.28	54.00	8.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

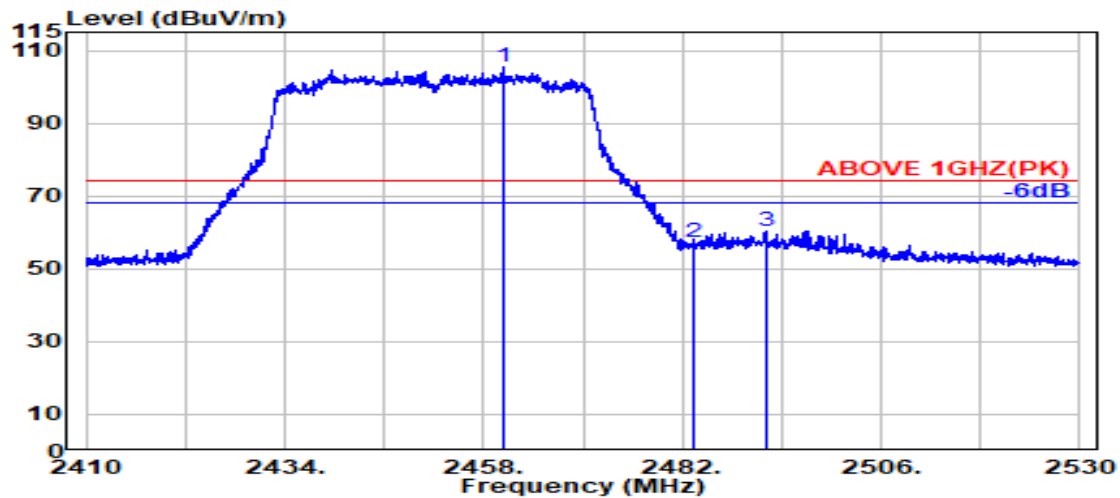

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.450	28.32	5.80	39.87	111.34	105.59	---	---	Peak
2483.500	28.37	5.83	39.87	62.84	57.17	74.00	16.83	Peak
2492.050	28.38	5.84	39.87	66.16	60.52	74.00	13.48	Peak

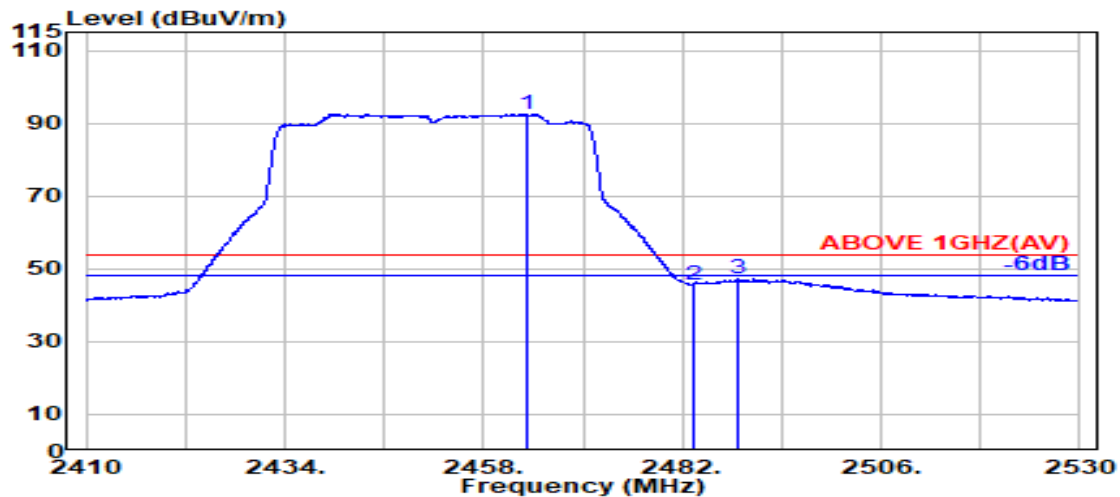

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.33	5.81	39.87	98.22	92.48	---	---	Average
2483.500	28.37	5.83	39.87	51.38	45.71	54.00	8.29	Average
2488.600	28.38	5.84	39.87	52.83	47.18	54.00	6.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

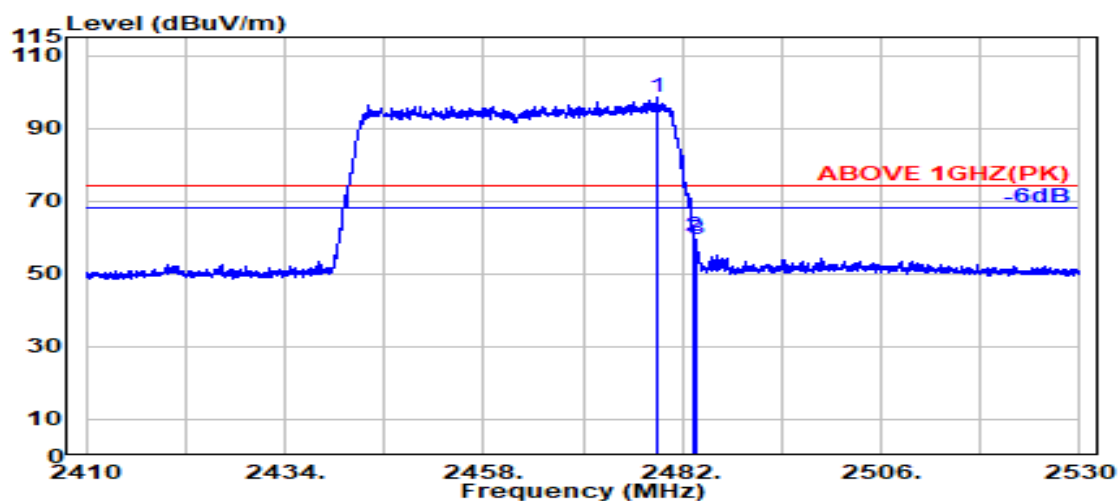

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.36	5.83	39.87	104.11	98.42	---	---	Peak
2483.500	28.37	5.83	39.87	65.83	60.16	74.00	13.84	Peak
2483.700	28.37	5.83	39.87	64.98	59.30	74.00	14.70	Peak

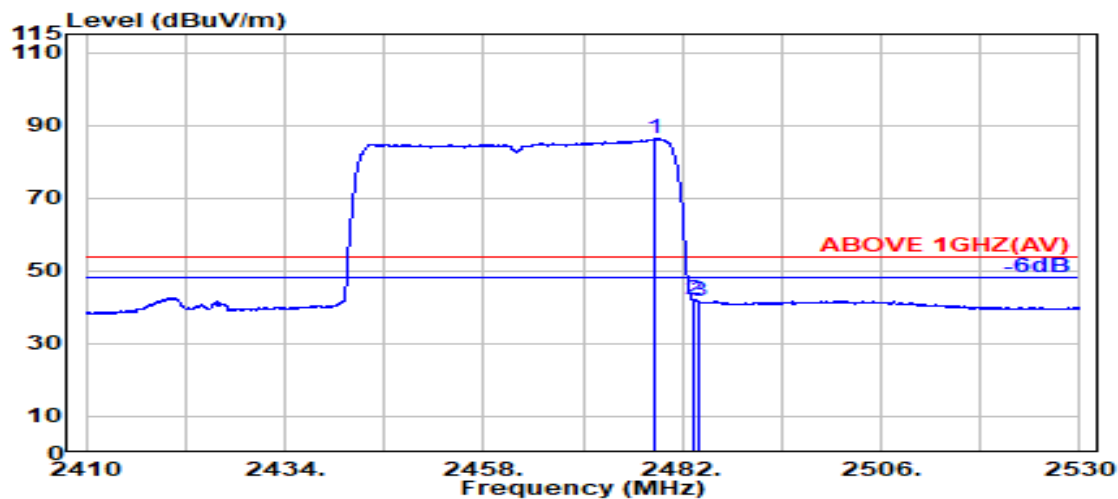

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.750	28.36	5.83	39.87	91.92	86.24	---	---	Average
2483.500	28.37	5.83	39.87	47.78	42.11	54.00	11.89	Average
2483.850	28.37	5.83	39.87	47.53	41.85	54.00	12.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

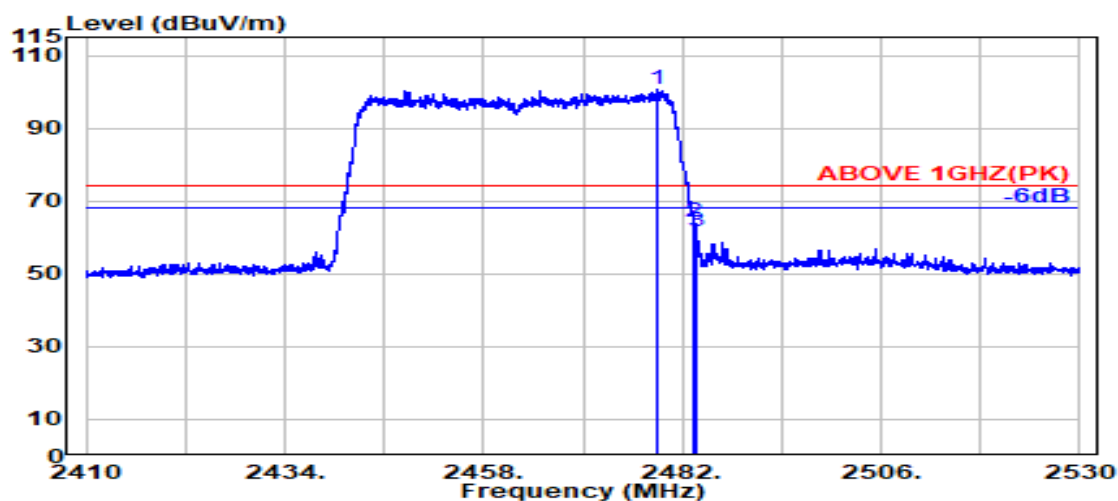

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.950	28.36	5.83	39.87	106.48	100.79	---	---	Peak
2483.500	28.37	5.83	39.87	70.04	64.37	74.00	9.63	Peak
2483.750	28.37	5.83	39.87	67.16	61.49	74.00	12.51	Peak

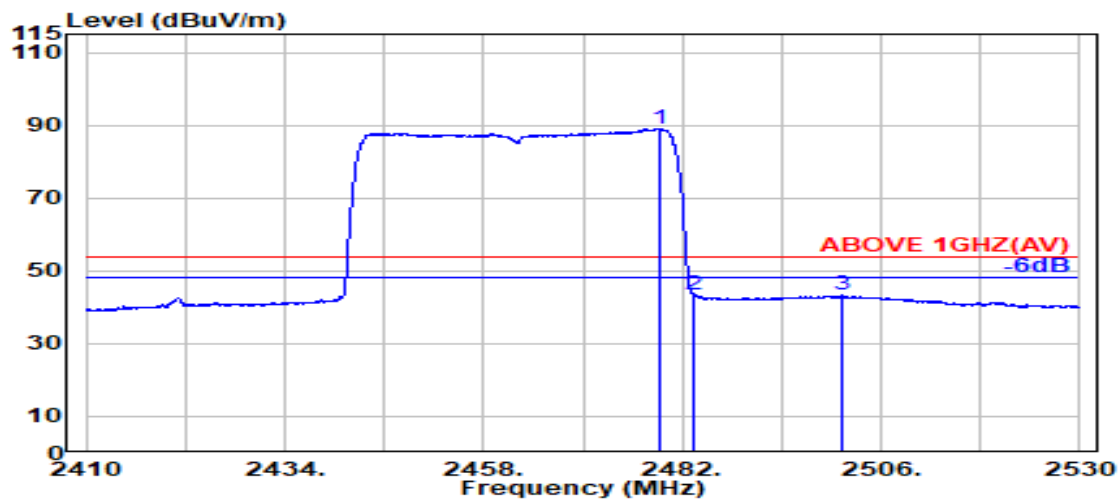

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.400	28.36	5.83	39.87	94.63	88.94	---	---	Average
2483.500	28.37	5.83	39.87	49.08	43.41	54.00	10.59	Average
2501.150	28.41	5.85	39.87	48.89	43.28	54.00	10.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

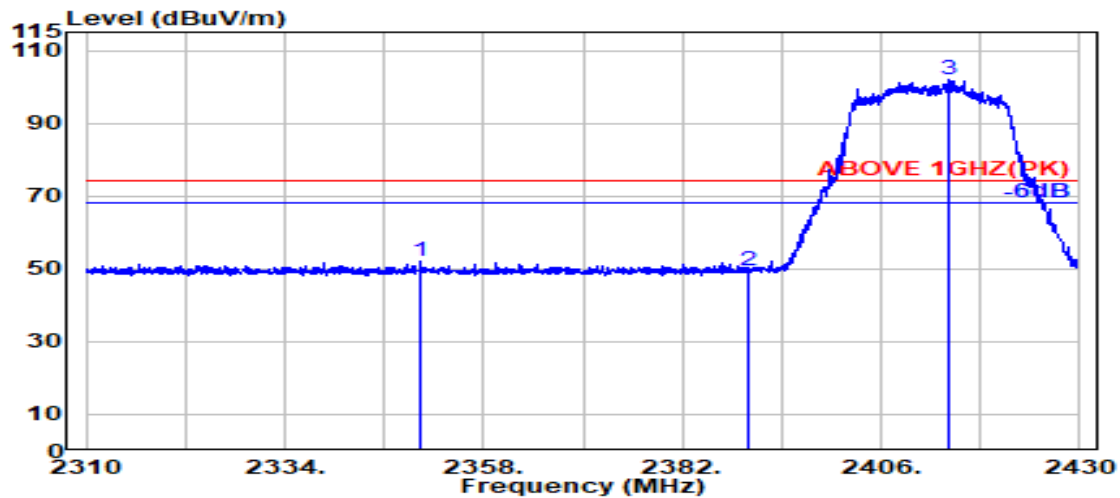

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2350.450	28.30	5.67	39.88	57.81	51.90	74.00	22.10	Peak
2390.000	28.14	5.72	39.88	55.44	49.42	74.00	24.58	Peak
@ 2414.300	28.16	5.75	39.88	107.98	102.01	---	---	Peak

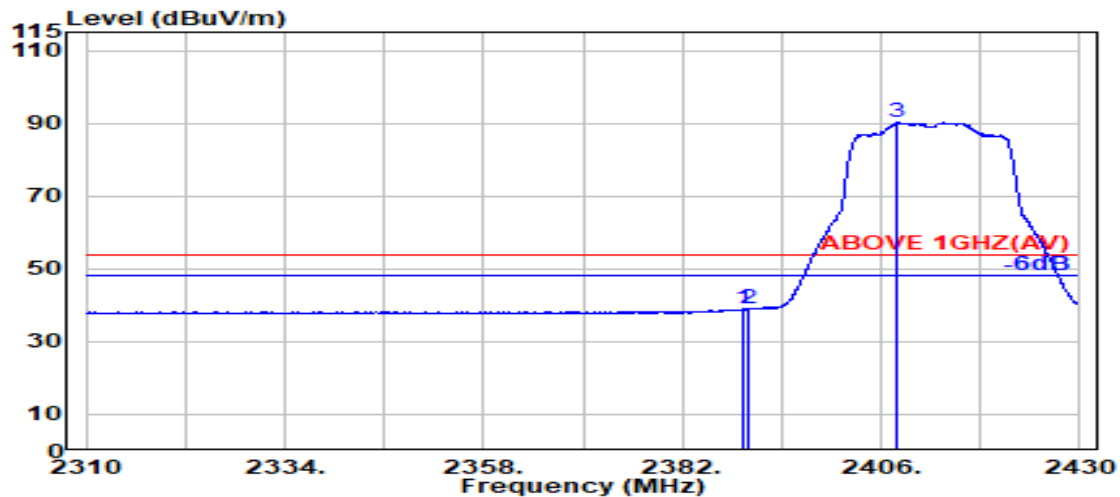

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.14	5.72	39.88	45.01	39.00	54.00	15.00	Average
2390.000	28.14	5.72	39.88	45.07	39.05	54.00	14.95	Average
@ 2408.000	28.13	5.74	39.88	96.19	90.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

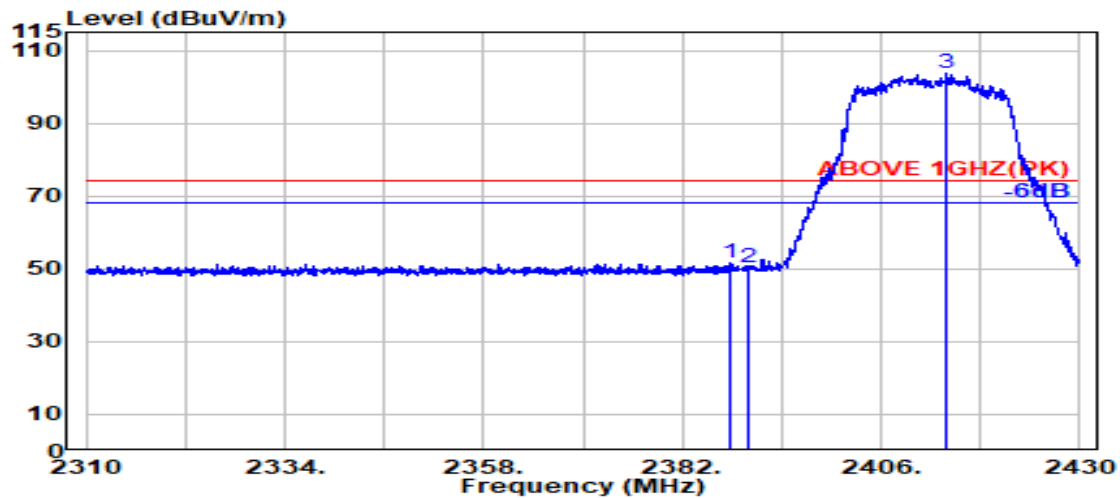

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.750	28.15	5.72	39.88	57.59	51.58	74.00	22.42	Peak
2390.000	28.14	5.72	39.88	56.42	50.40	74.00	23.60	Peak
@ 2413.950	28.16	5.75	39.88	109.57	103.60	---	---	Peak

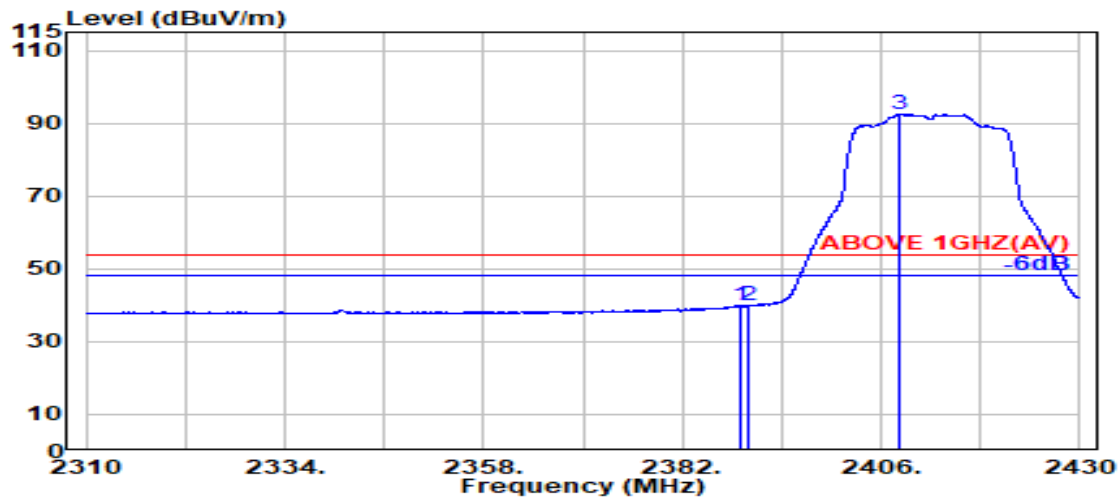

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.14	5.72	39.88	46.05	40.03	54.00	13.97	Average
2390.000	28.14	5.72	39.88	46.08	40.06	54.00	13.94	Average
@ 2408.150	28.13	5.74	39.88	98.55	92.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

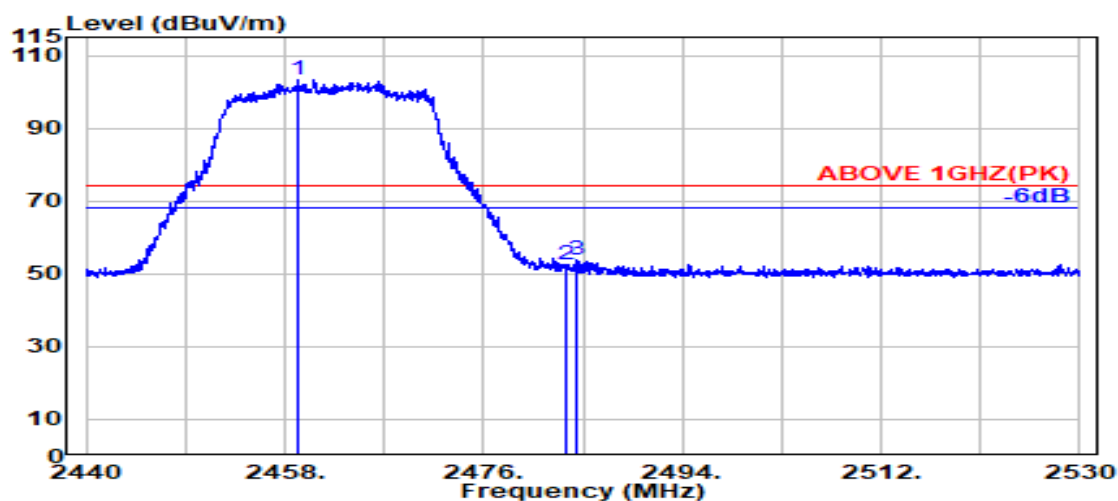

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.250	28.32	5.80	39.87	109.23	103.48	---	---	Peak
	2483.500	28.37	5.83	39.87	58.39	52.72	74.00	21.28	Peak
	2484.350	28.37	5.83	39.87	59.54	53.87	74.00	20.13	Peak

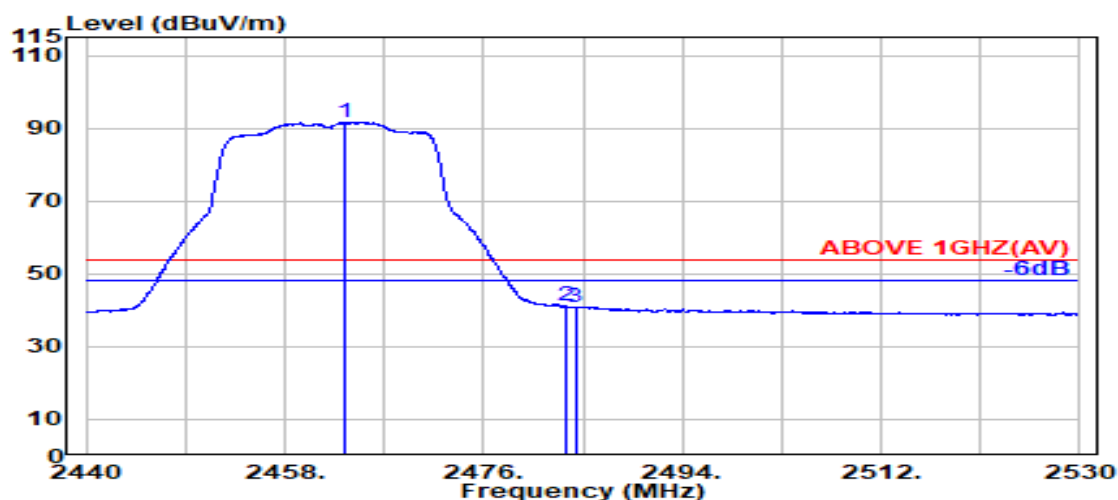

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.500	28.33	5.81	39.87	97.31	91.57	---	---	Average
	2483.500	28.37	5.83	39.87	46.76	41.09	54.00	12.91	Average
	2484.300	28.37	5.83	39.87	46.68	41.01	54.00	12.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

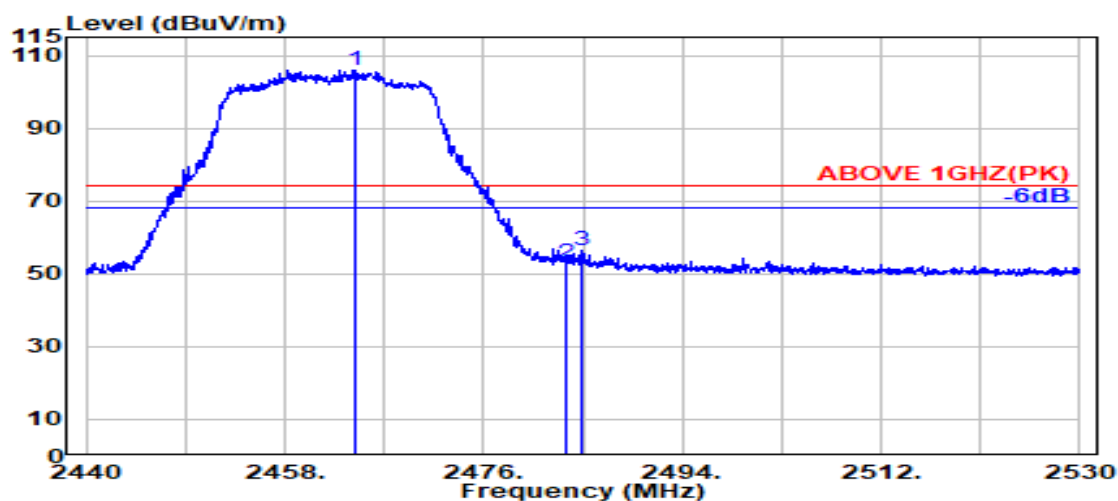

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.450	28.33	5.81	39.87	111.77	106.04	---	---	Peak
	2483.500	28.37	5.83	39.87	58.66	52.98	74.00	21.02	Peak
	2484.950	28.37	5.83	39.87	62.01	56.34	74.00	17.66	Peak

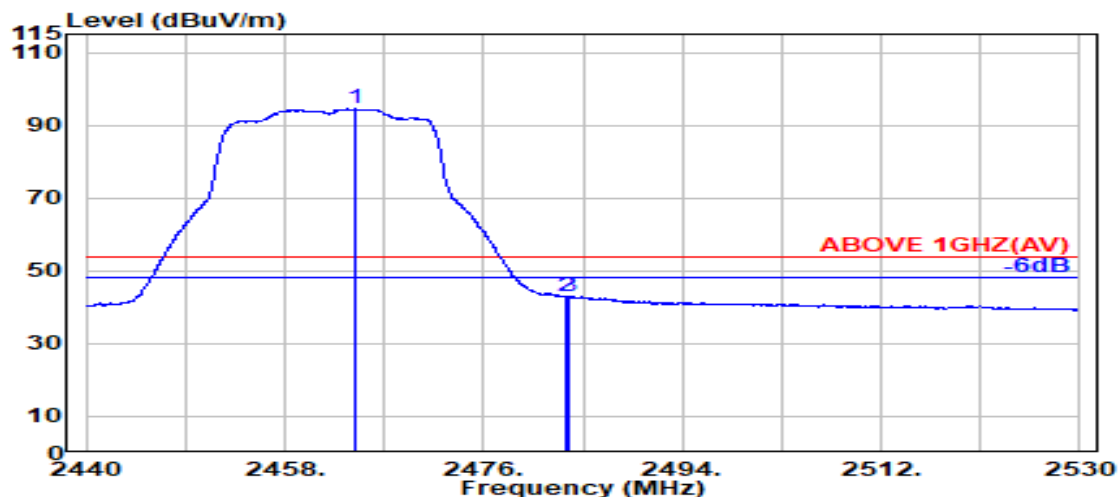

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.400	28.33	5.81	39.87	100.24	94.50	---	---	Average
	2483.500	28.37	5.83	39.87	48.77	43.09	54.00	10.91	Average
	2483.800	28.37	5.83	39.87	48.77	43.09	54.00	10.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

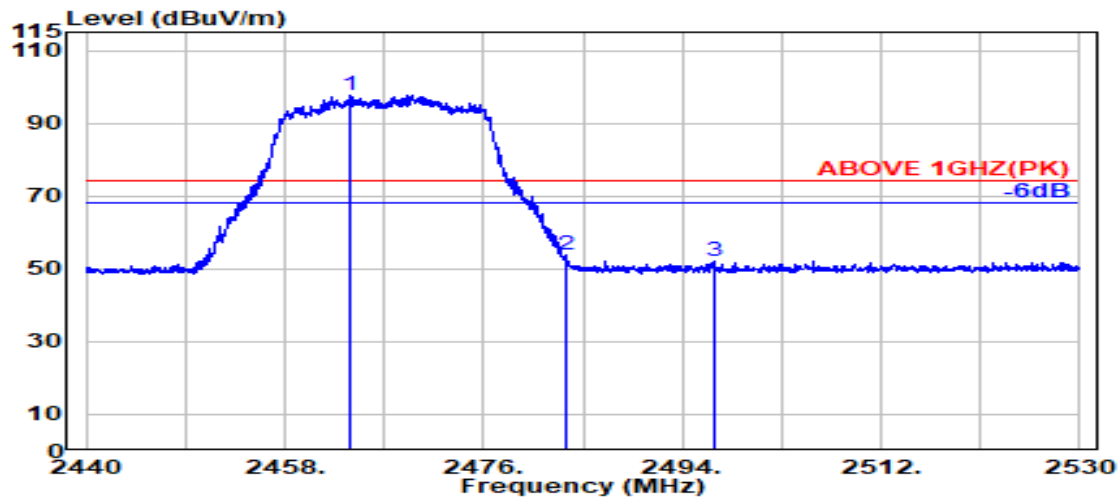

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.33	5.81	39.87	103.45	97.72	---	---	Peak
2483.500	28.37	5.83	39.87	59.30	53.63	74.00	20.37	Peak
2496.800	28.39	5.85	39.87	57.91	52.28	74.00	21.72	Peak

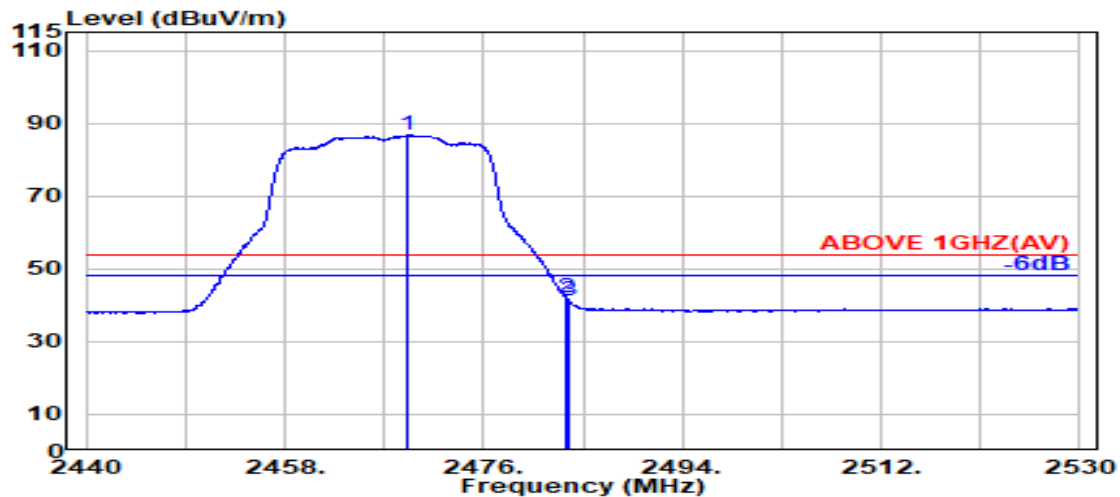

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.050	28.34	5.81	39.87	92.46	86.74	---	---	Average
2483.500	28.37	5.83	39.87	47.60	41.92	54.00	12.08	Average
2483.700	28.37	5.83	39.87	47.10	41.43	54.00	12.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

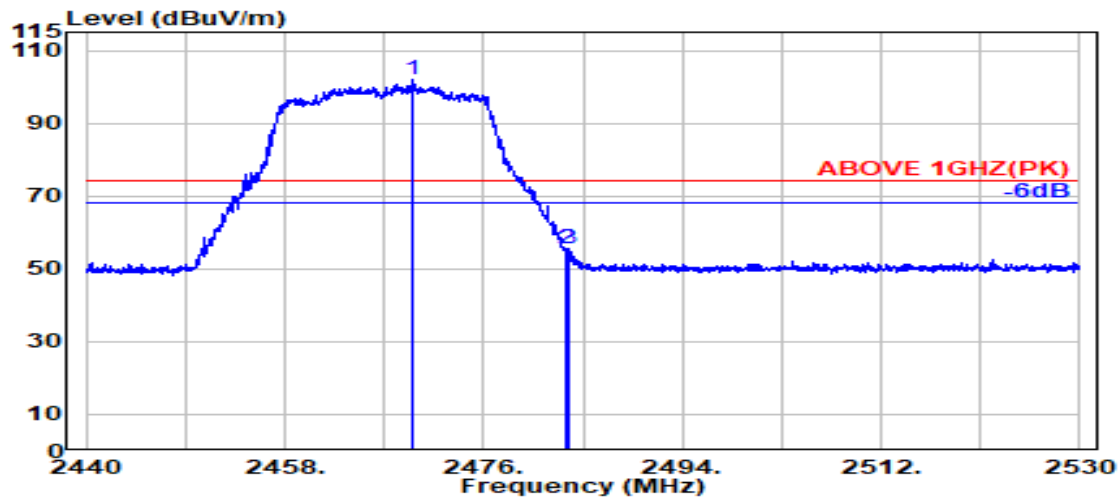

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.600	28.34	5.81	39.87	107.67	101.95	---	---	Peak
2483.500	28.37	5.83	39.87	61.11	55.43	74.00	18.57	Peak
2483.750	28.37	5.83	39.87	61.41	55.74	74.00	18.26	Peak

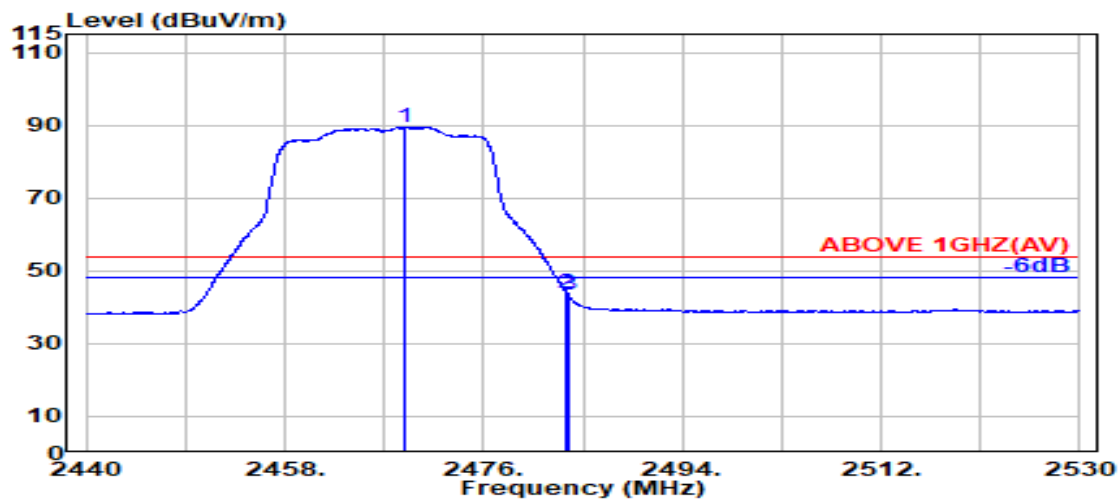

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.850	28.34	5.81	39.87	95.30	89.58	---	---	Average
2483.500	28.37	5.83	39.87	49.70	44.03	54.00	9.97	Average
2483.700	28.37	5.83	39.87	49.19	43.51	54.00	10.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
------	----------------	-----------	-------------

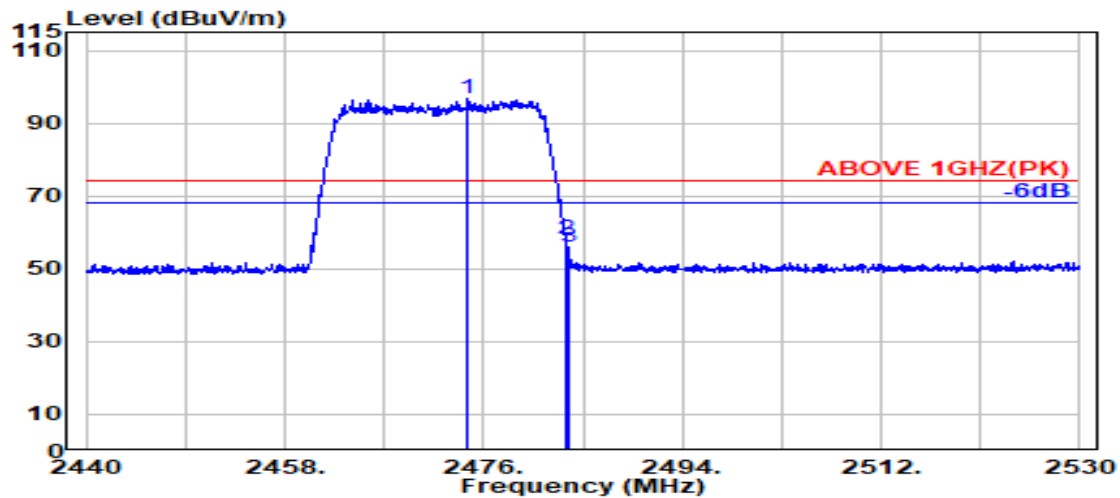

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.550	28.35	5.82	39.87	102.52	96.82	---	---	Peak
2483.500	28.37	5.83	39.87	63.81	58.14	74.00	15.86	Peak
2483.750	28.37	5.83	39.87	61.66	55.99	74.00	18.01	Peak

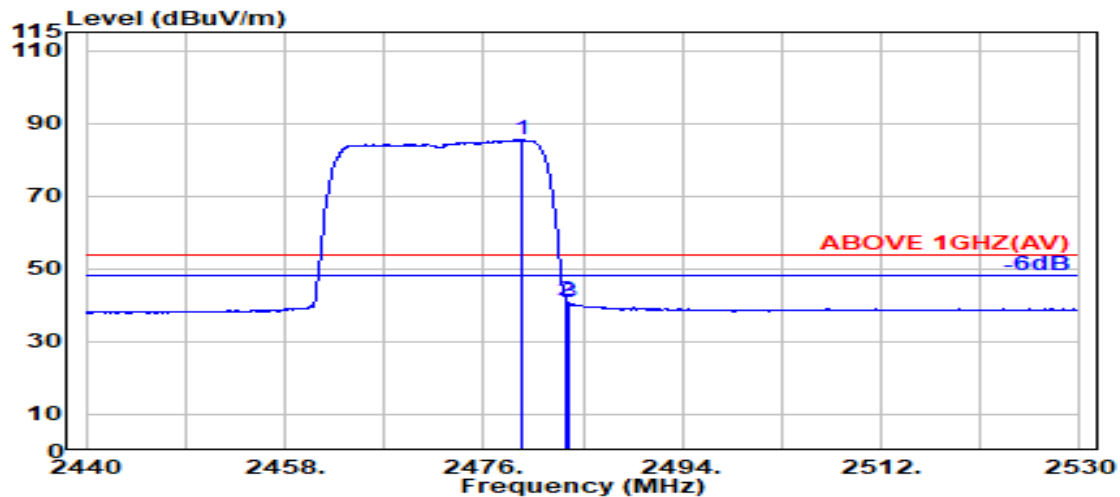

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.550	28.36	5.83	39.87	91.17	85.48	---	---	Average
2483.500	28.37	5.83	39.87	46.91	41.24	54.00	12.76	Average
2483.700	28.37	5.83	39.87	46.29	40.61	54.00	13.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
------	----------------	-----------	-------------

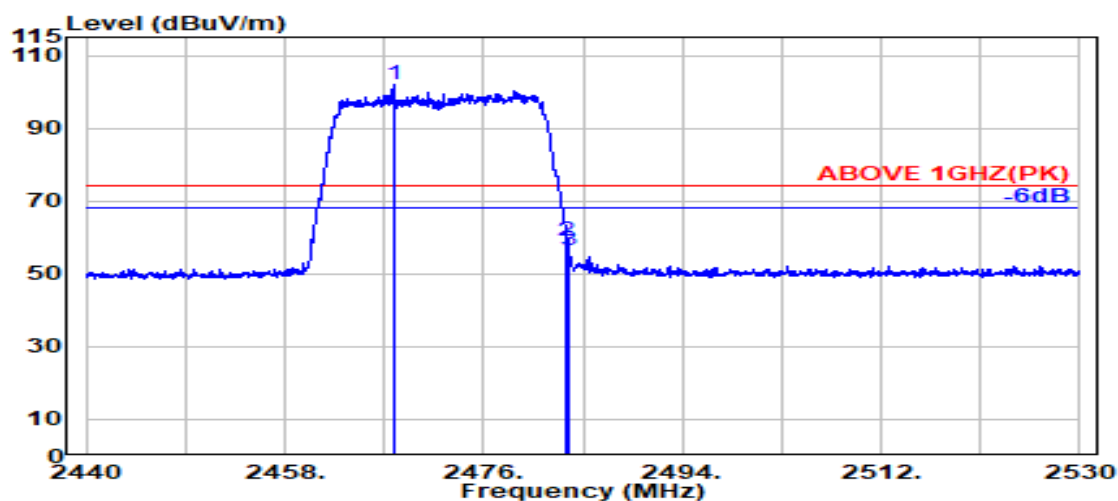

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.800	28.34	5.81	39.87	107.86	102.14	---	---	Peak
	2483.500	28.37	5.83	39.87	64.69	59.02	74.00	14.98	Peak
	2483.700	28.37	5.83	39.87	62.19	56.51	74.00	17.49	Peak

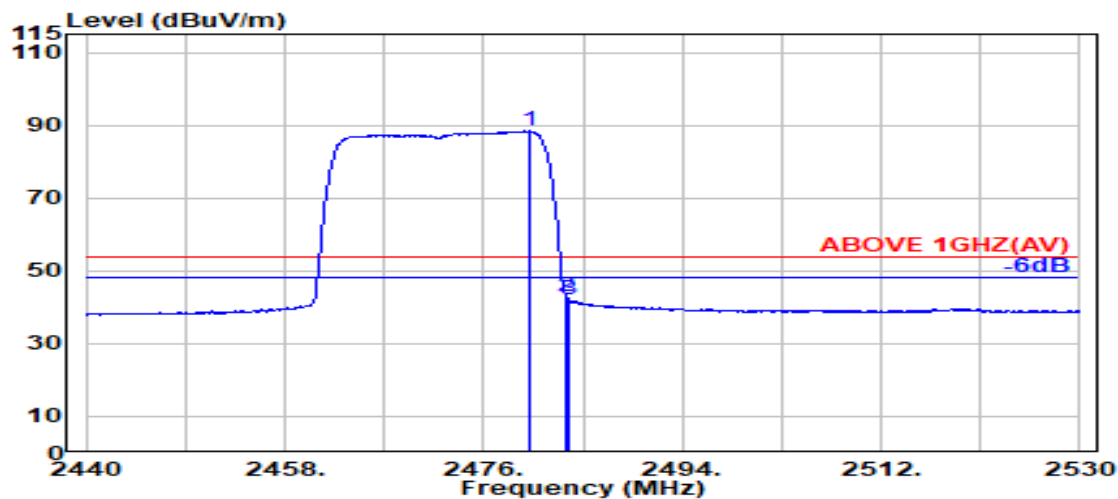

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.200	28.36	5.83	39.87	94.11	88.42	---	---	Average
	2483.500	28.37	5.83	39.87	48.47	42.80	54.00	11.20	Average
	2483.700	28.37	5.83	39.87	47.80	42.12	54.00	11.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

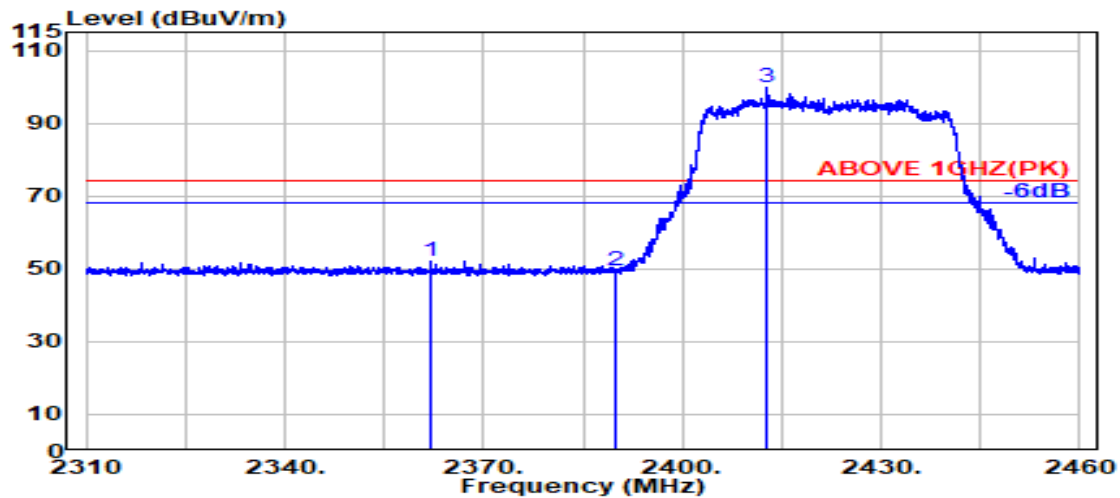

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2362.100	28.25	5.69	39.88	57.84	51.90	74.00	22.10	Peak
2389.800	28.14	5.72	39.88	55.54	49.53	74.00	24.47	Peak
@ 2412.750	28.15	5.75	39.88	105.76	99.78	---	---	Peak

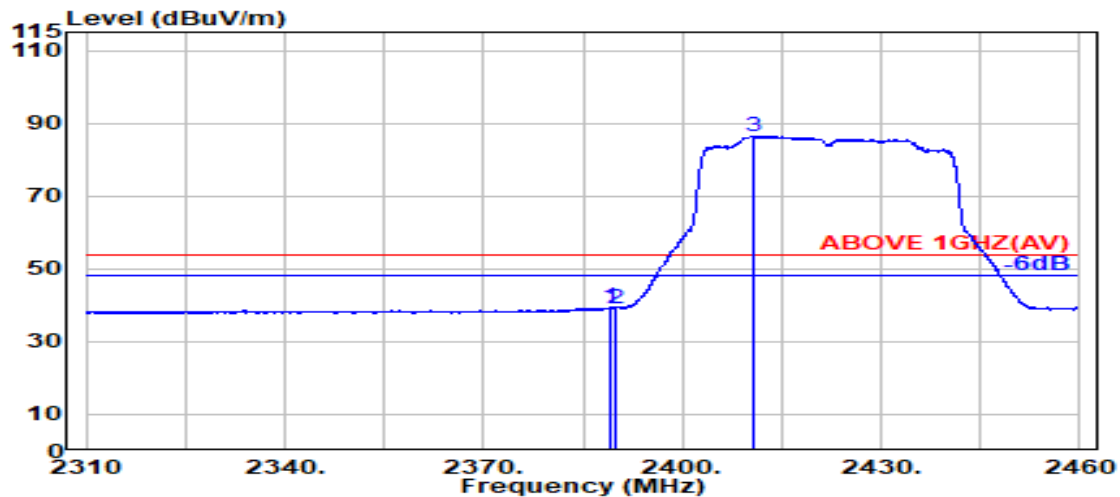

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.14	5.72	39.88	45.31	39.30	54.00	14.70	Average
2389.800	28.14	5.72	39.88	45.29	39.27	54.00	14.73	Average
@ 2410.650	28.14	5.75	39.88	92.52	86.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

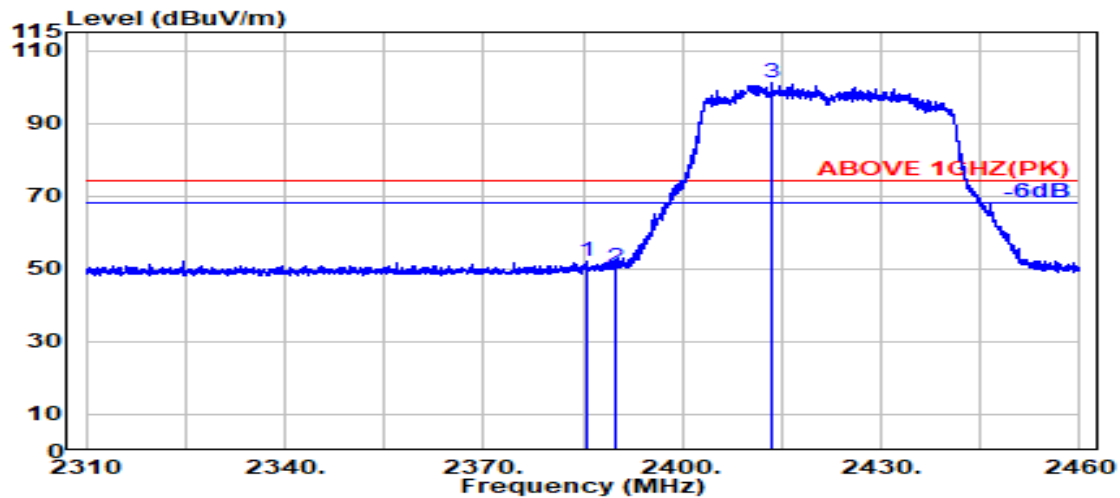

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.550	28.16	5.72	39.88	58.12	52.12	74.00	21.88	Peak
2389.800	28.14	5.72	39.88	56.46	50.44	74.00	23.56	Peak
@ 2413.500	28.15	5.75	39.88	106.89	100.92	---	---	Peak

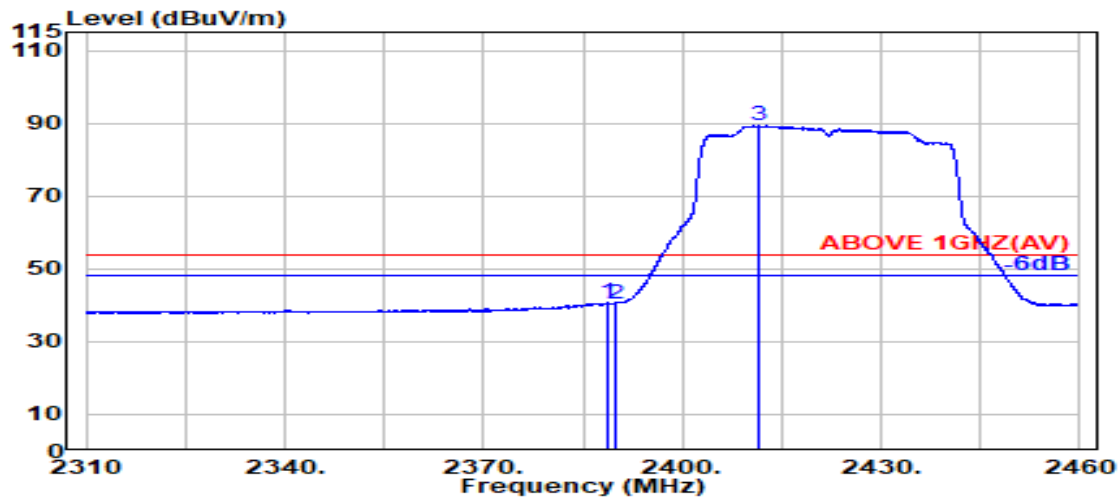

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.14	5.72	39.88	46.66	40.64	54.00	13.36	Average
2389.800	28.14	5.72	39.88	46.53	40.51	54.00	13.49	Average
@ 2411.650	28.15	5.75	39.88	95.50	89.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

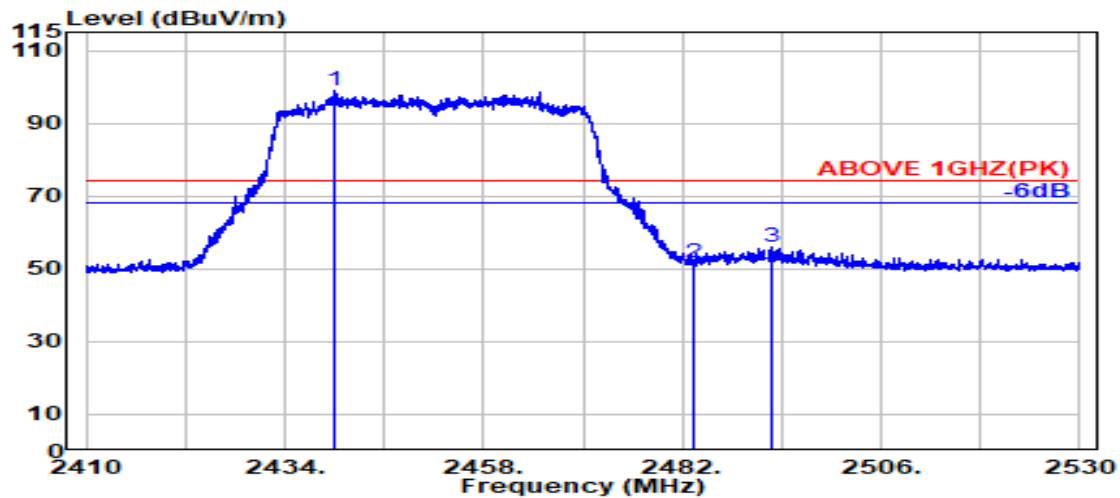

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.100	28.26	5.78	39.87	104.90	99.07	---	---	Peak
2483.500	28.37	5.83	39.87	57.27	51.59	74.00	22.41	Peak
2492.900	28.39	5.84	39.87	61.41	55.77	74.00	18.23	Peak

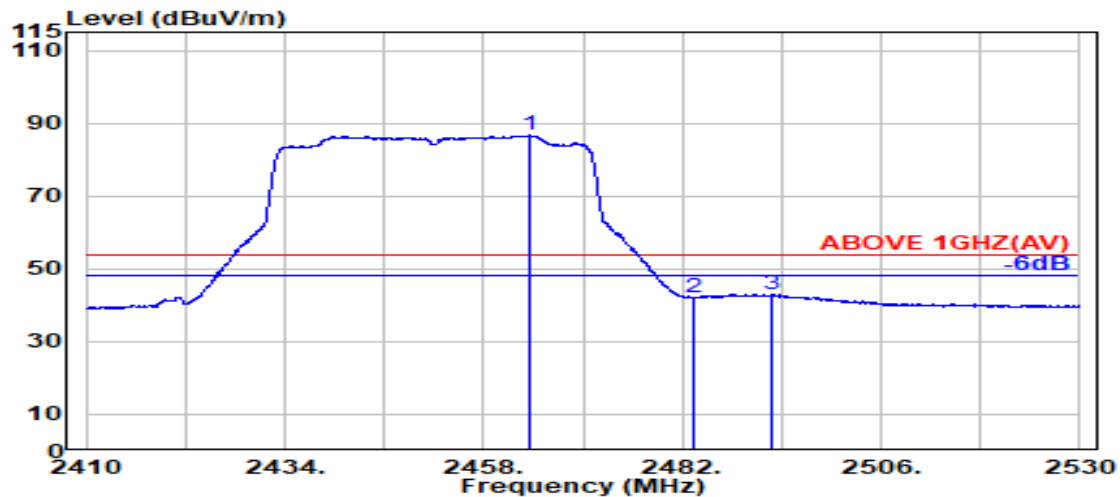

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.550	28.33	5.81	39.87	92.33	86.59	---	---	Average
2483.500	28.37	5.83	39.87	47.68	42.01	54.00	11.99	Average
2492.900	28.39	5.84	39.87	48.57	42.93	54.00	11.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

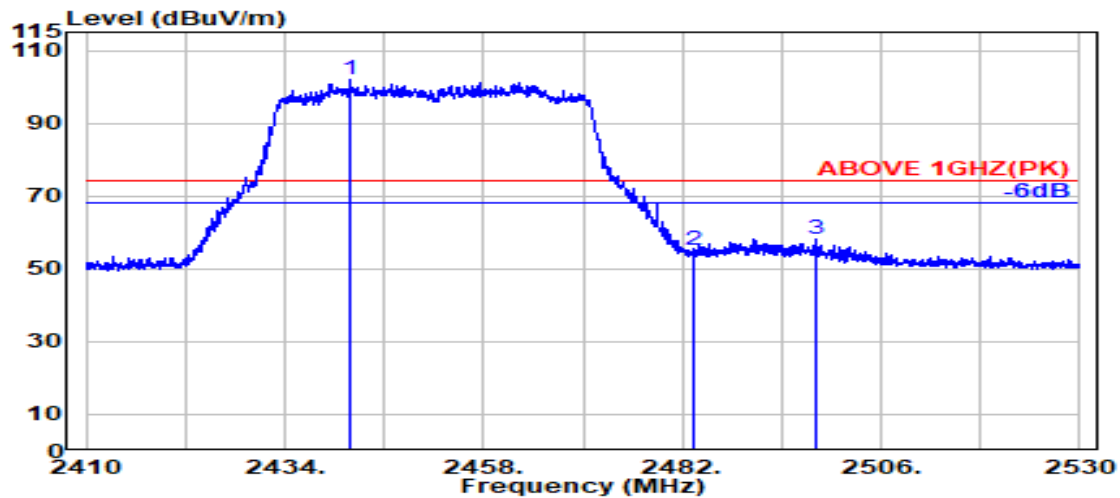

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2441.900	28.27	5.78	39.87	107.95	102.13	---	---	Peak
	2483.500	28.37	5.83	39.87	60.97	55.29	74.00	18.71	Peak
	2498.050	28.40	5.85	39.87	63.93	58.30	74.00	15.70	Peak

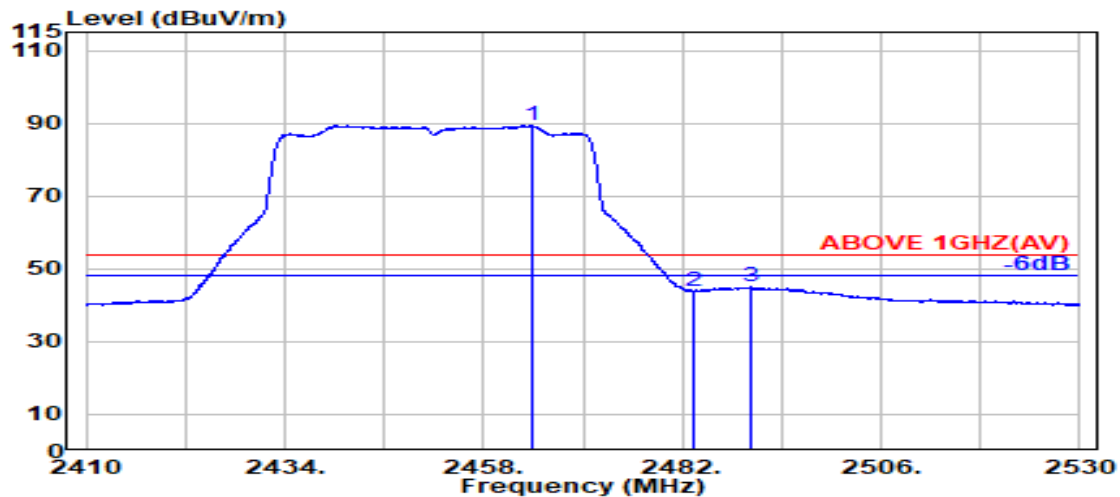

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2463.850	28.33	5.81	39.87	95.09	89.35	---	---	Average
	2483.500	28.37	5.83	39.87	49.64	43.96	54.00	10.04	Average
	2490.250	28.38	5.84	39.87	50.62	44.97	54.00	9.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------



Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	100.12	94.44	---	---	Peak
2483.500	28.37	5.83	39.87	61.81	56.13	74.00	17.87	Peak
2483.700	28.37	5.83	39.87	61.99	56.32	74.00	17.68	Peak

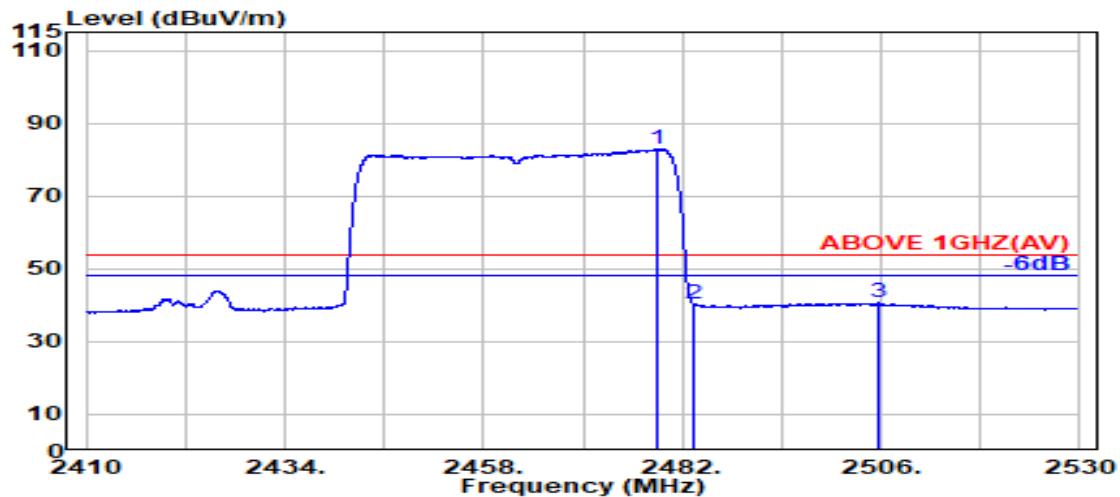

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.87	88.55	82.86	---	---	Average
2483.500	28.37	5.83	39.87	45.96	40.28	54.00	13.72	Average
2505.650	28.43	5.86	39.87	46.35	40.77	54.00	13.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

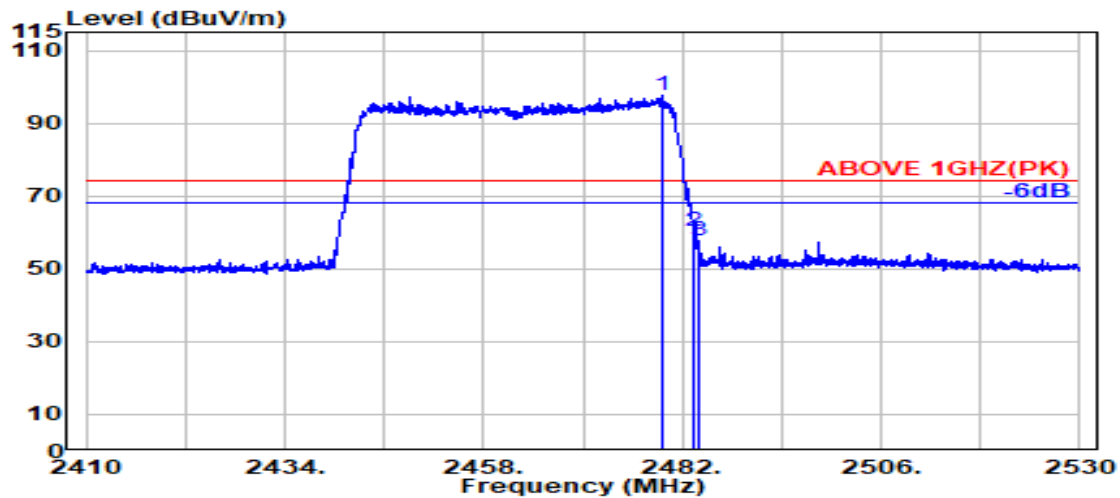

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.36	5.83	39.87	103.41	97.72	---	---	Peak
2483.500	28.37	5.83	39.87	66.08	60.41	74.00	13.59	Peak
2483.850	28.37	5.83	39.87	63.24	57.57	74.00	16.43	Peak

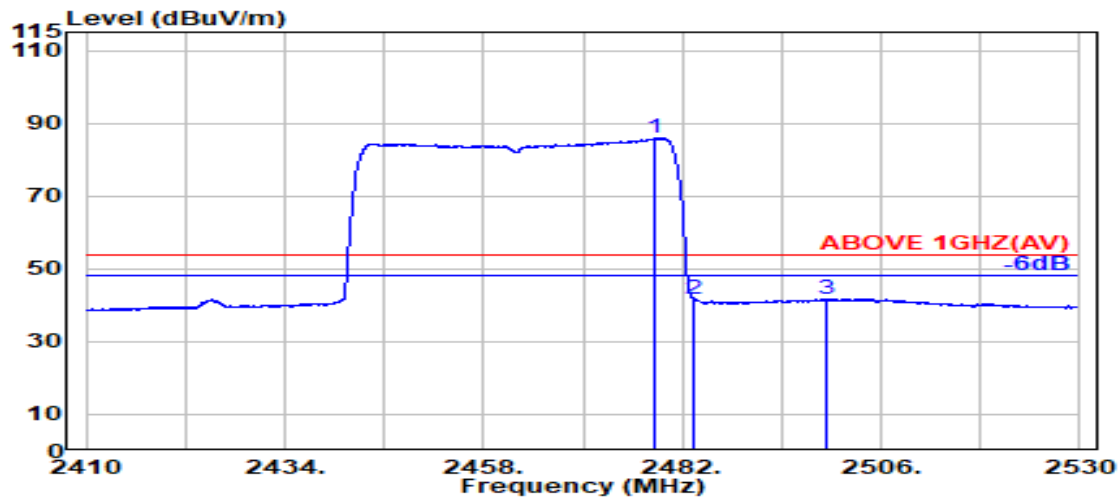

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.36	5.83	39.87	91.50	85.81	---	---	Average
2483.500	28.37	5.83	39.87	47.14	41.46	54.00	12.54	Average
2499.300	28.40	5.85	39.87	47.39	41.77	54.00	12.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

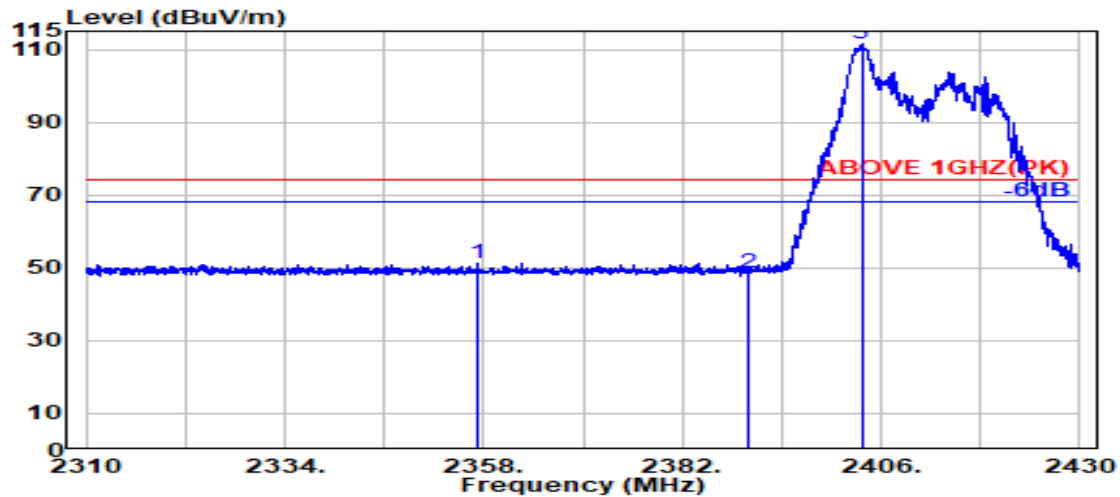

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2357.350	28.27	5.68	39.88	57.16	51.24	74.00	22.76	Peak
2390.000	28.14	5.72	39.88	54.82	48.80	74.00	25.20	Peak
@ 2403.650	28.11	5.74	39.88	117.39	111.36	---	---	Peak

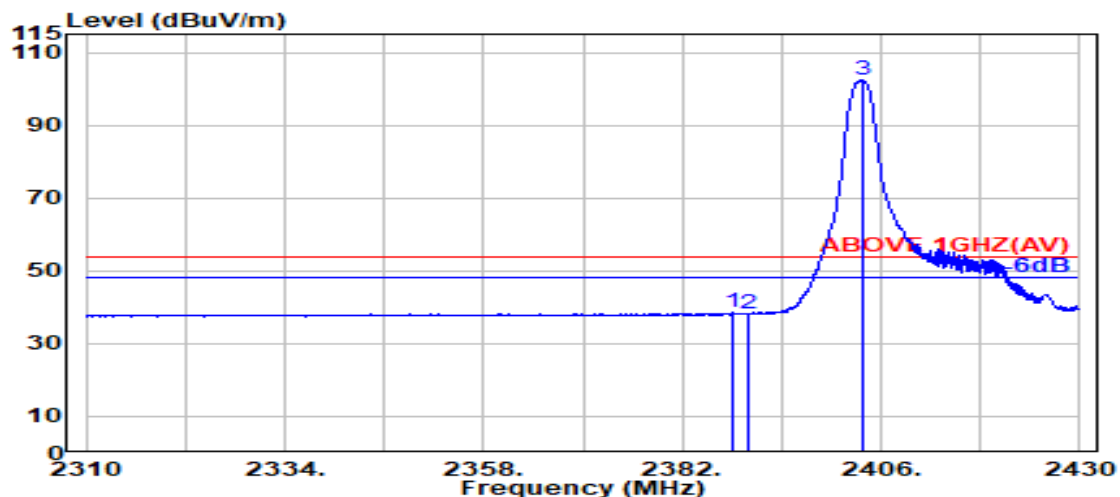

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.200	28.15	5.72	39.88	44.49	38.48	54.00	15.52	Average
2390.000	28.14	5.72	39.88	44.26	38.25	54.00	15.75	Average
@ 2403.800	28.12	5.74	39.88	108.51	102.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

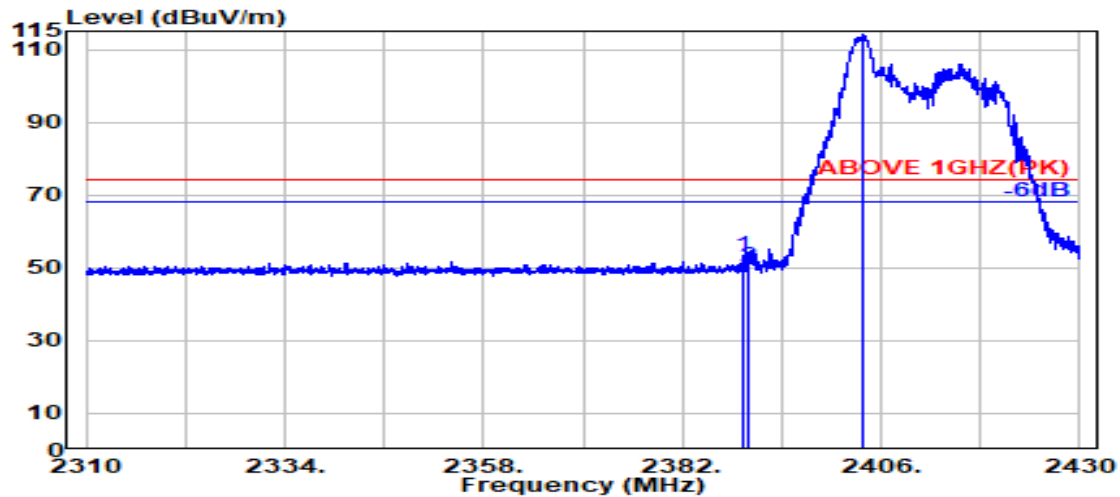

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	59.36	53.35	74.00	20.65	Peak
2390.000	28.14	5.72	39.88	56.26	50.25	74.00	23.75	Peak
@ 2403.900	28.12	5.74	39.88	120.13	114.11	---	---	Peak

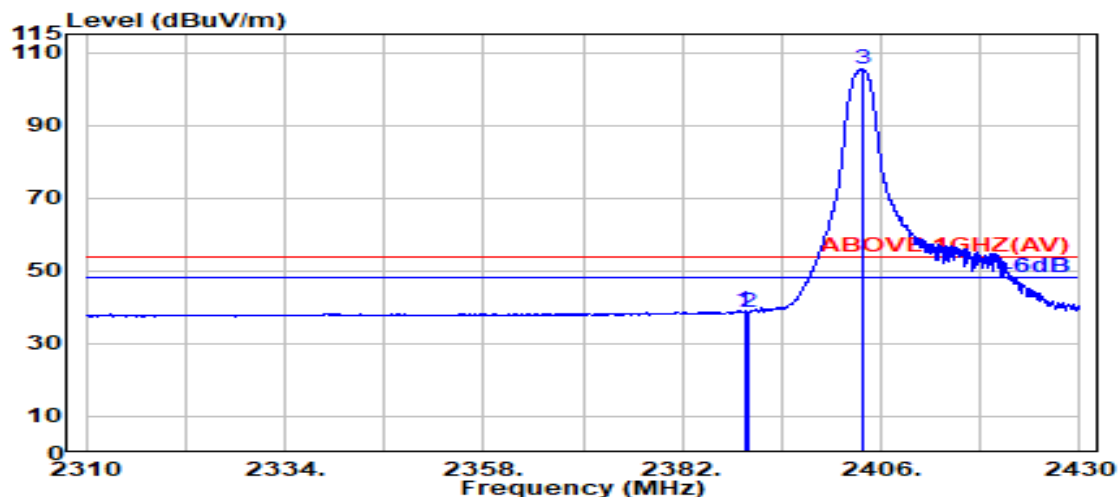

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	44.93	38.92	54.00	15.08	Average
2390.000	28.14	5.72	39.88	44.73	38.72	54.00	15.28	Average
@ 2403.800	28.12	5.74	39.88	111.56	105.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

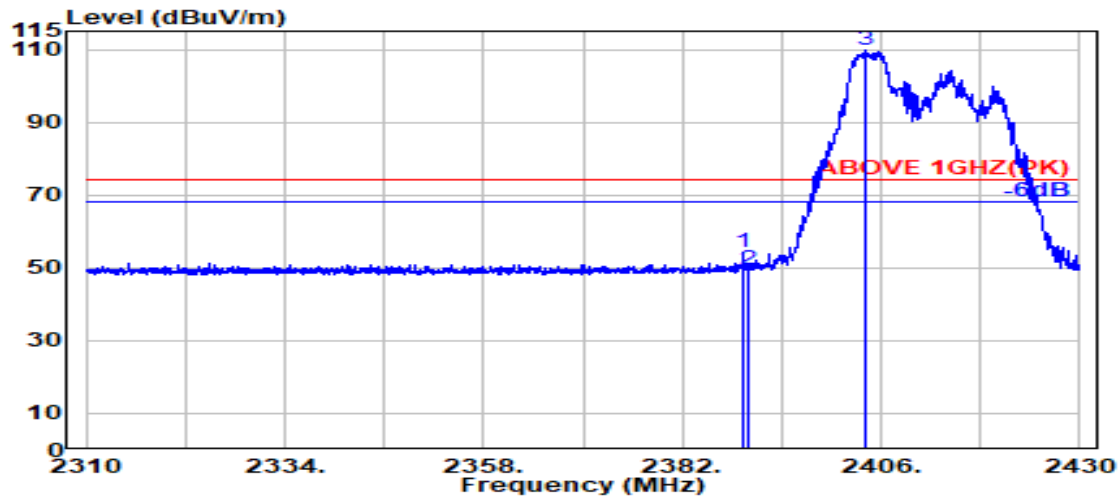

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	60.23	54.22	74.00	19.78	Peak
2390.000	28.14	5.72	39.88	55.68	49.66	74.00	24.34	Peak
@ 2404.000	28.12	5.74	39.88	115.62	109.60	---	---	Peak

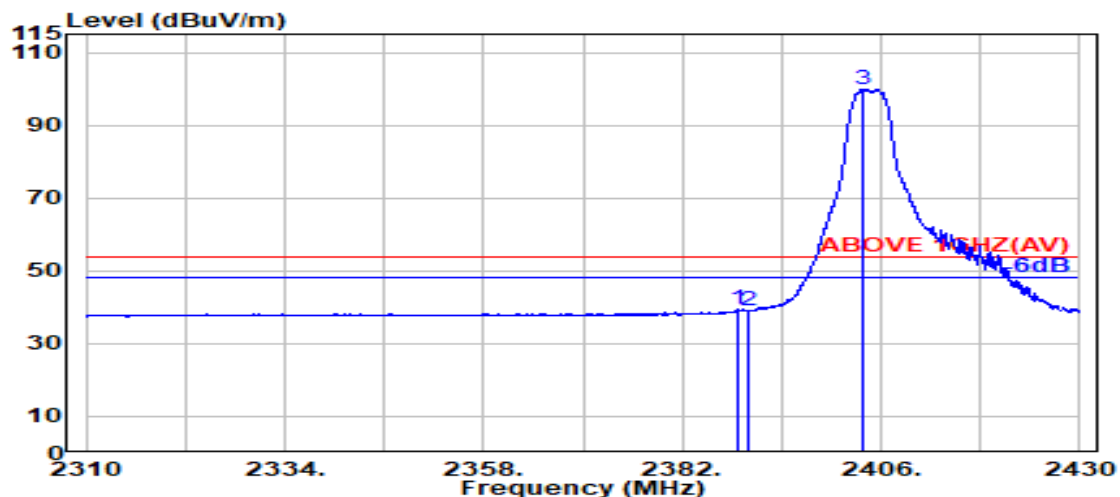

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.850	28.14	5.72	39.88	45.32	39.31	54.00	14.69	Average
2390.000	28.14	5.72	39.88	45.00	38.99	54.00	15.01	Average
@ 2403.900	28.12	5.74	39.88	105.95	99.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

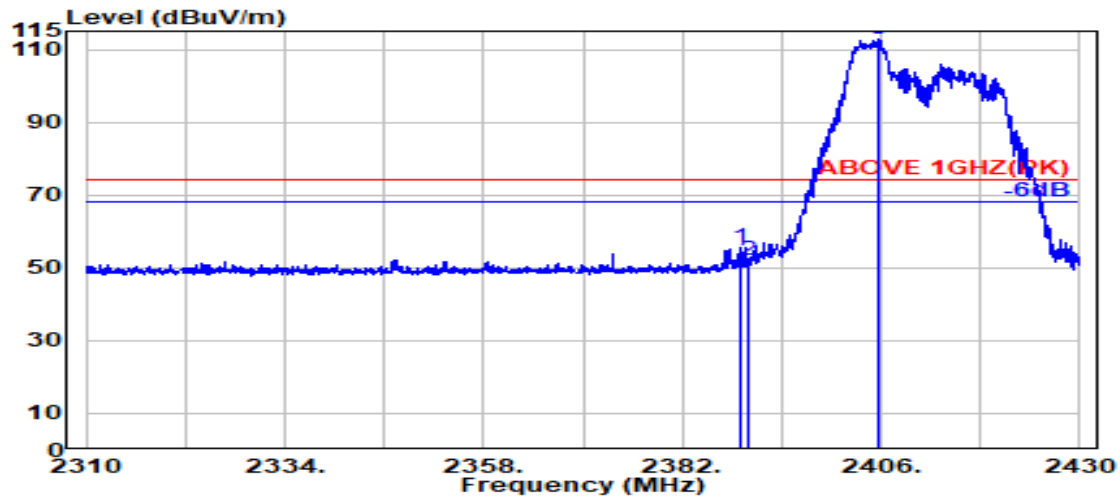

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.14	5.72	39.88	61.41	55.40	74.00	18.60	Peak
2390.000	28.14	5.72	39.88	58.30	52.28	74.00	21.72	Peak
@ 2405.750	28.12	5.74	39.88	118.64	112.63	---	---	Peak

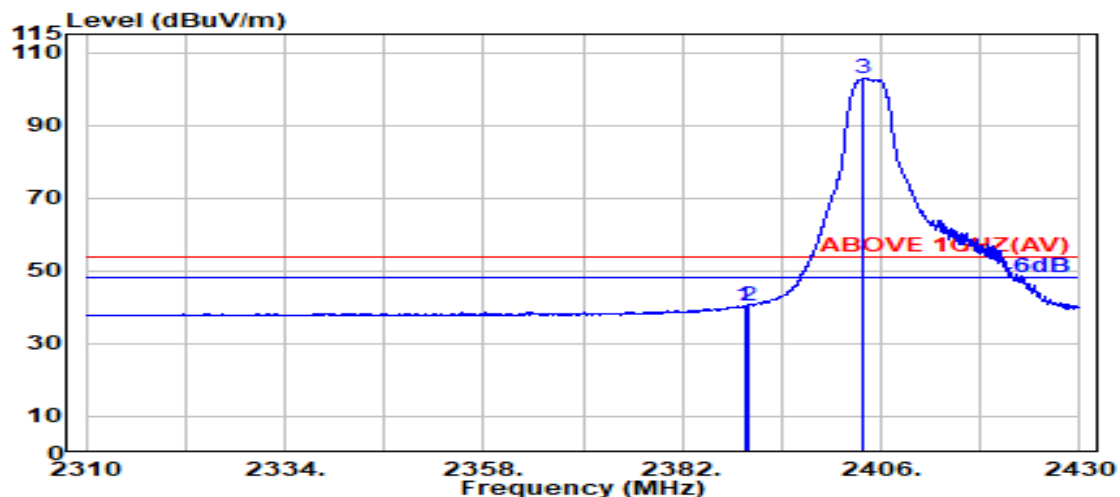

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	46.44	40.42	54.00	13.58	Average
2390.000	28.14	5.72	39.88	46.20	40.18	54.00	13.82	Average
@ 2403.900	28.12	5.74	39.88	108.93	102.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

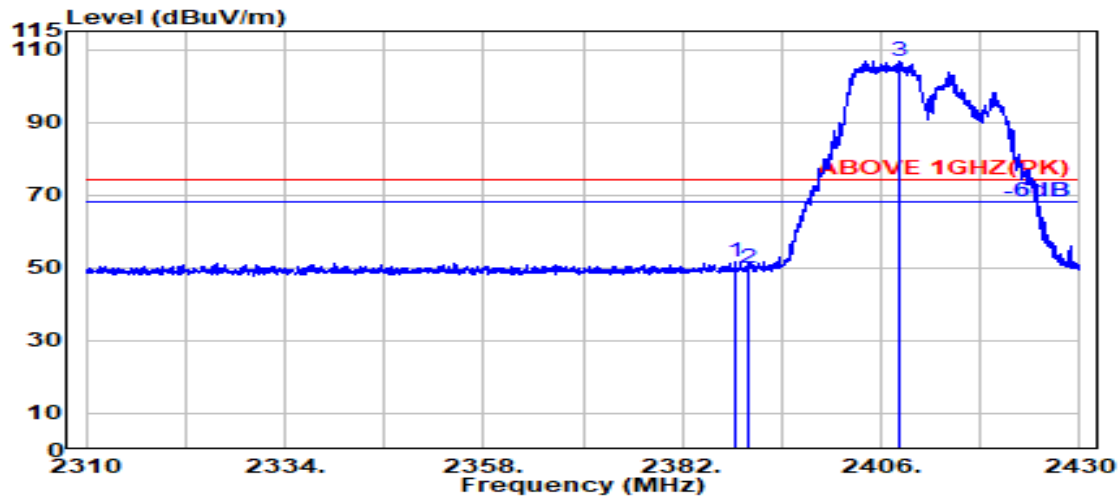

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.400	28.15	5.72	39.88	57.82	51.80	74.00	22.20	Peak
2390.000	28.14	5.72	39.88	55.97	49.95	74.00	24.05	Peak
@ 2408.200	28.13	5.74	39.88	112.83	106.83	---	---	Peak

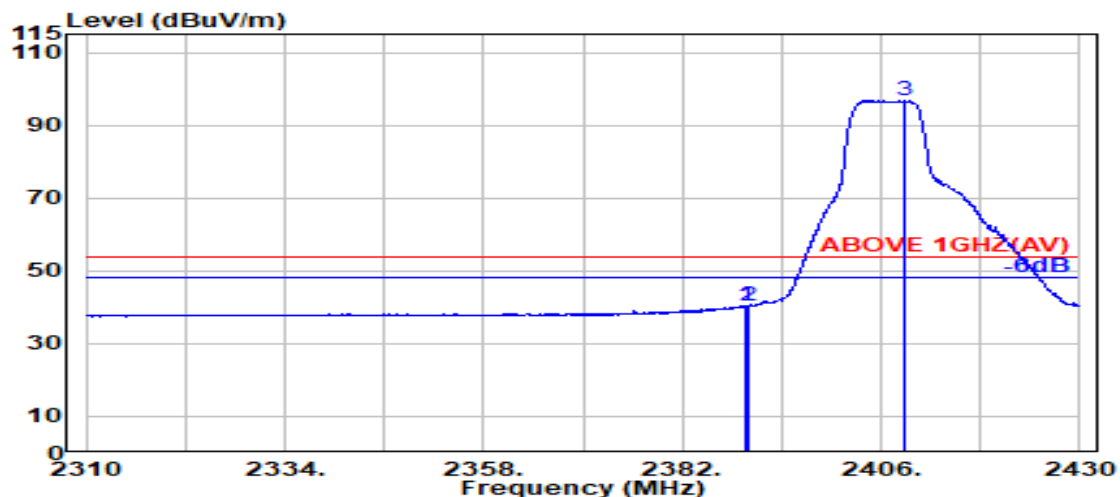

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	46.32	40.31	54.00	13.69	Average
2390.000	28.14	5.72	39.88	46.45	40.43	54.00	13.57	Average
@ 2408.850	28.14	5.74	39.88	102.74	96.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

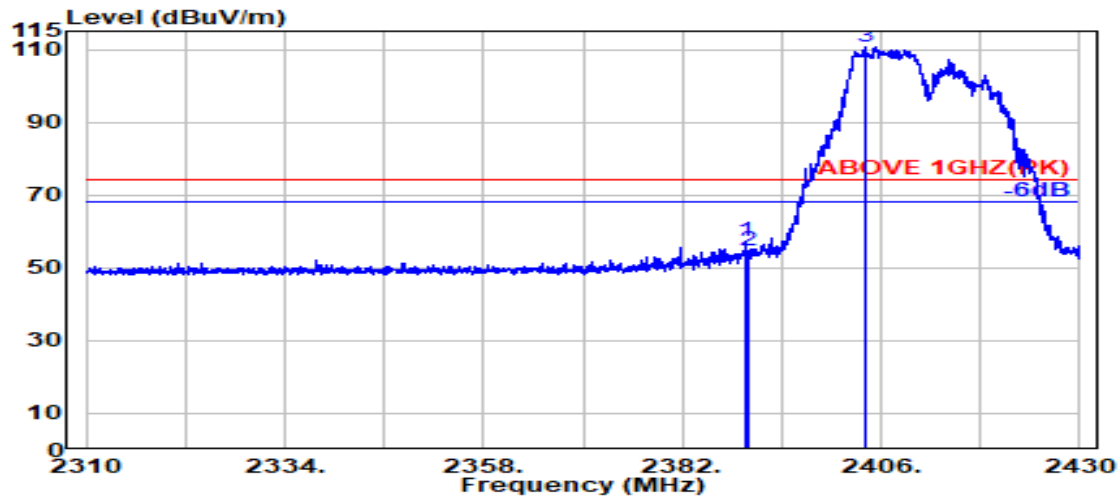

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	63.35	57.34	74.00	16.66	Peak
2390.000	28.14	5.72	39.88	60.87	54.85	74.00	19.15	Peak
@ 2404.050	28.12	5.74	39.88	116.80	110.78	---	---	Peak

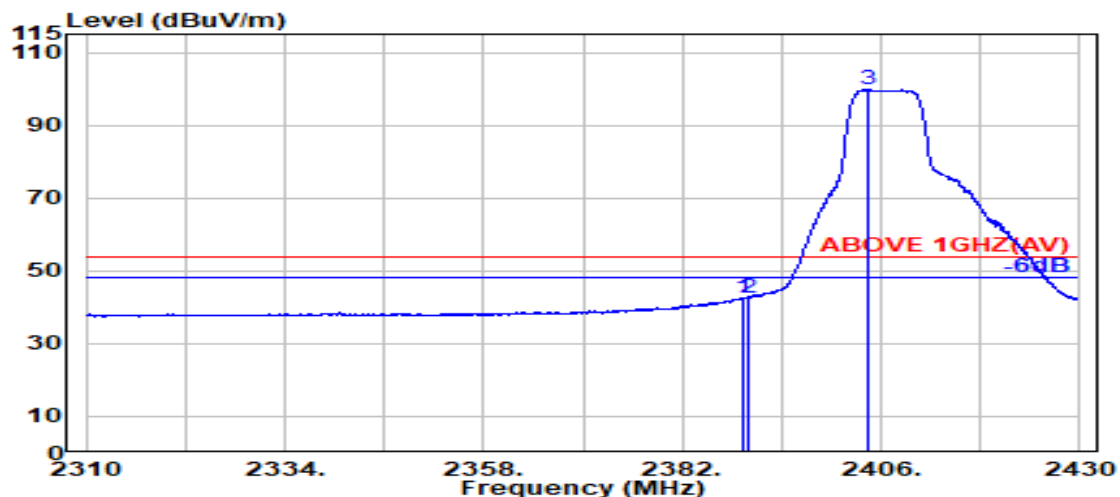

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	48.73	42.72	54.00	11.28	Average
2390.000	28.14	5.72	39.88	48.52	42.50	54.00	11.50	Average
@ 2404.400	28.12	5.74	39.88	105.71	99.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

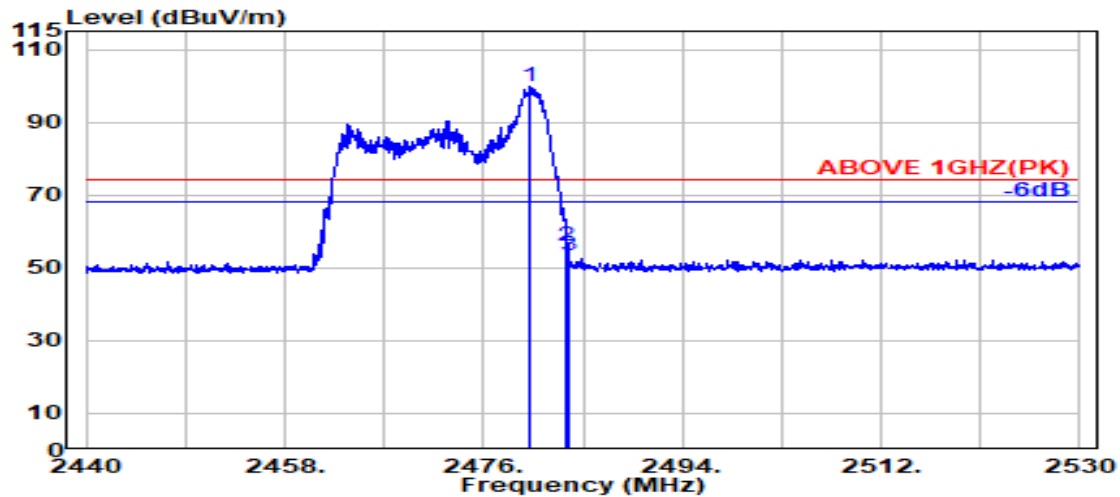

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.36	5.83	39.87	105.47	99.79	---	---	Peak
2483.500	28.37	5.83	39.87	61.77	56.10	74.00	17.90	Peak
2483.700	28.37	5.83	39.87	59.01	53.34	74.00	20.66	Peak

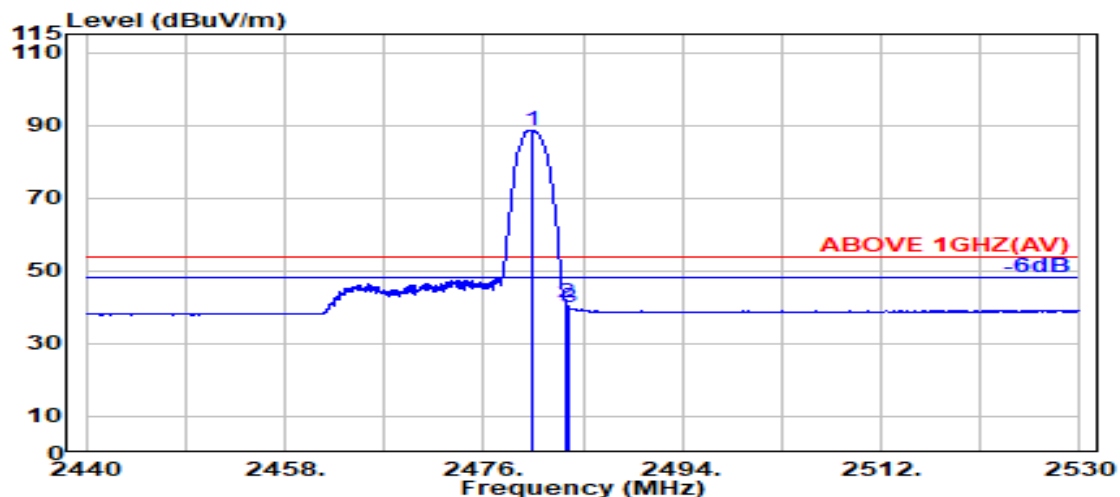

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	94.40	88.72	---	---	Average
2483.500	28.37	5.83	39.87	46.71	41.03	54.00	12.97	Average
2483.700	28.37	5.83	39.87	45.71	40.03	54.00	13.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

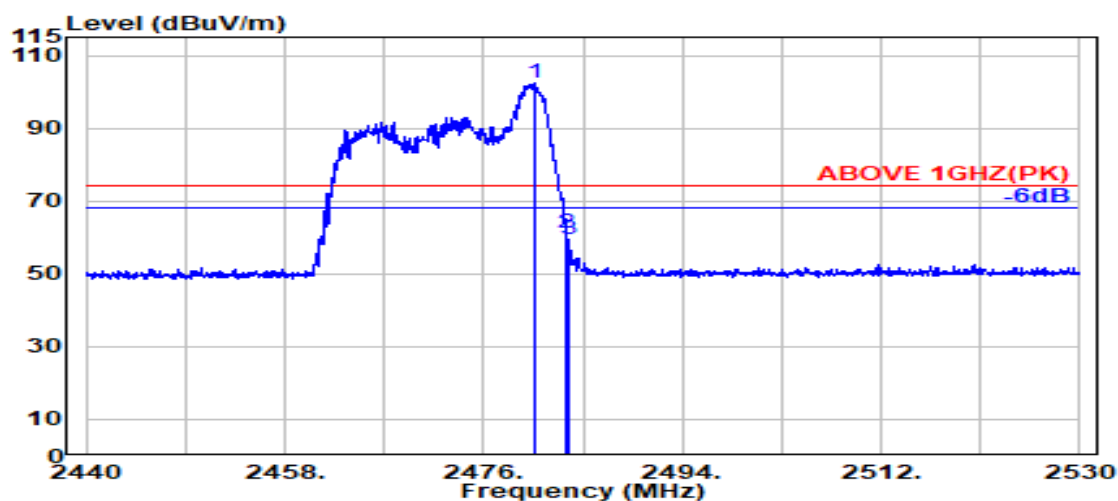

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.550	28.36	5.83	39.87	107.91	102.23	---	---	Peak
2483.500	28.37	5.83	39.87	66.93	61.26	74.00	12.74	Peak
2483.700	28.37	5.83	39.87	64.97	59.29	74.00	14.71	Peak

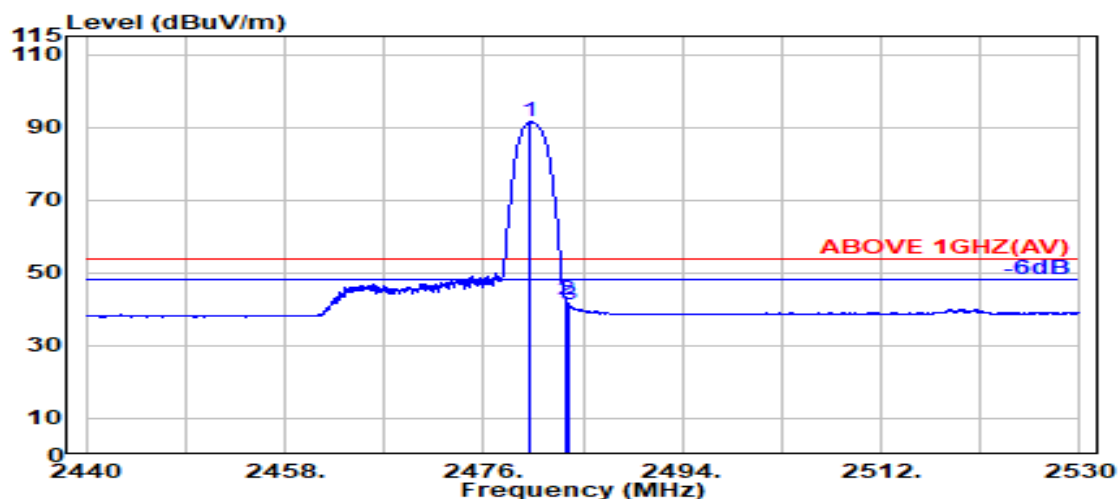

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	97.11	91.43	---	---	Average
2483.500	28.37	5.83	39.87	48.33	42.66	54.00	11.34	Average
2483.700	28.37	5.83	39.87	47.06	41.39	54.00	12.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

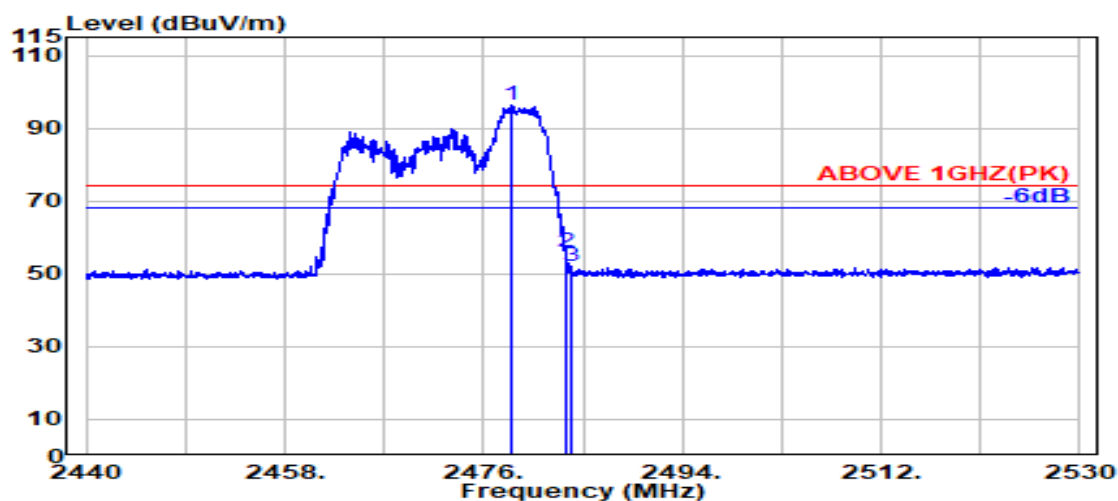

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.550	28.36	5.83	39.87	101.82	96.13	---	---	Peak
2483.500	28.37	5.83	39.87	61.44	55.77	74.00	18.23	Peak
2483.850	28.37	5.83	39.87	57.78	52.10	74.00	21.90	Peak

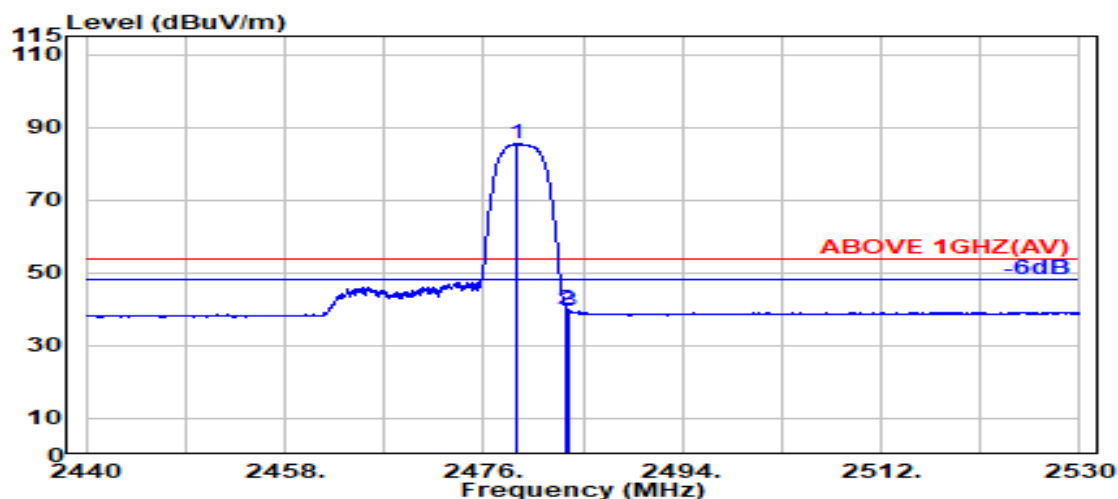

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.36	5.83	39.87	91.15	85.47	---	---	Average
2483.500	28.37	5.83	39.87	45.57	39.90	54.00	14.10	Average
2483.700	28.37	5.83	39.87	45.31	39.64	54.00	14.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

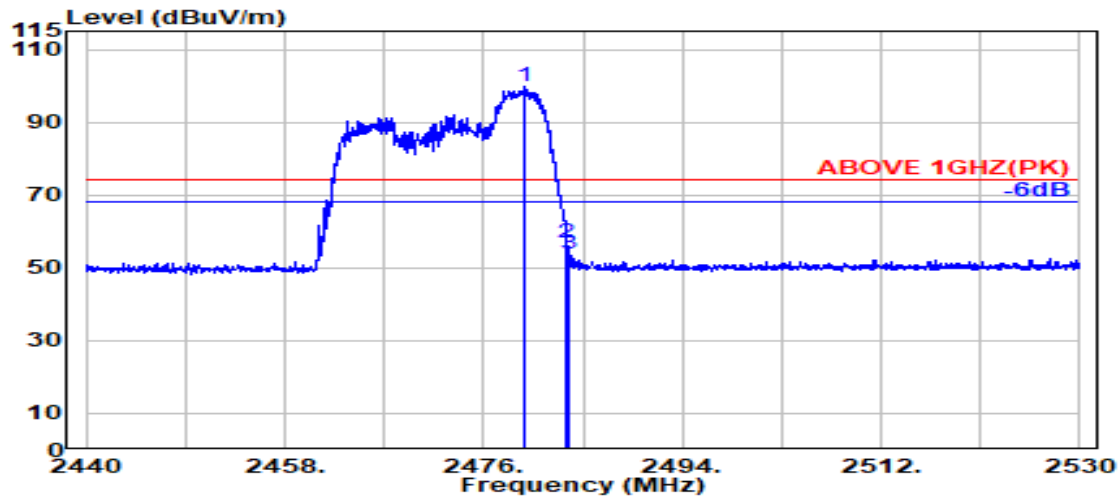

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.750	28.36	5.83	39.87	105.32	99.64	---	---	Peak
	2483.500	28.37	5.83	39.87	62.36	56.69	74.00	17.31	Peak
	2483.700	28.37	5.83	39.87	59.41	53.73	74.00	20.27	Peak

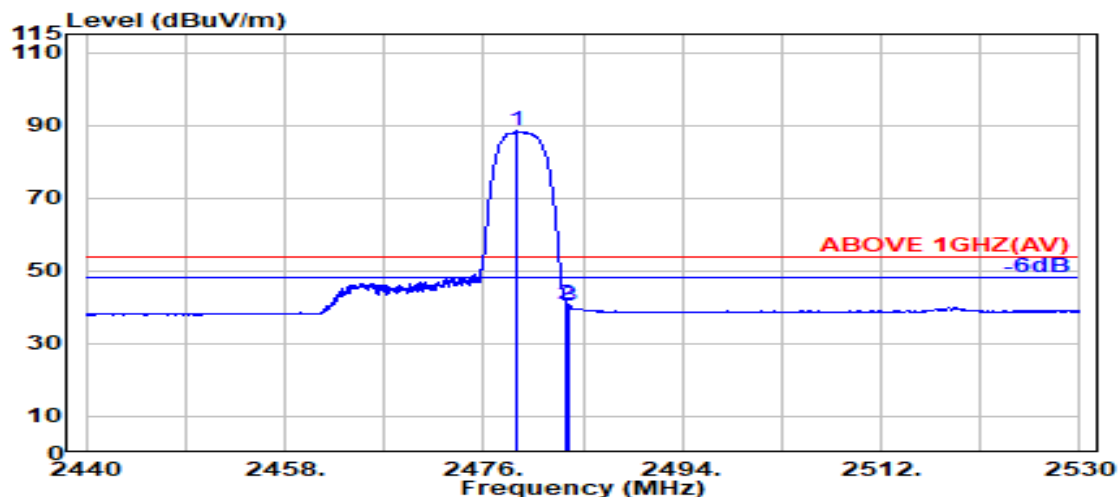

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2478.950	28.36	5.83	39.87	94.06	88.37	---	---	Average
	2483.500	28.37	5.83	39.87	46.59	40.92	54.00	13.08	Average
	2483.700	28.37	5.83	39.87	46.13	40.46	54.00	13.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

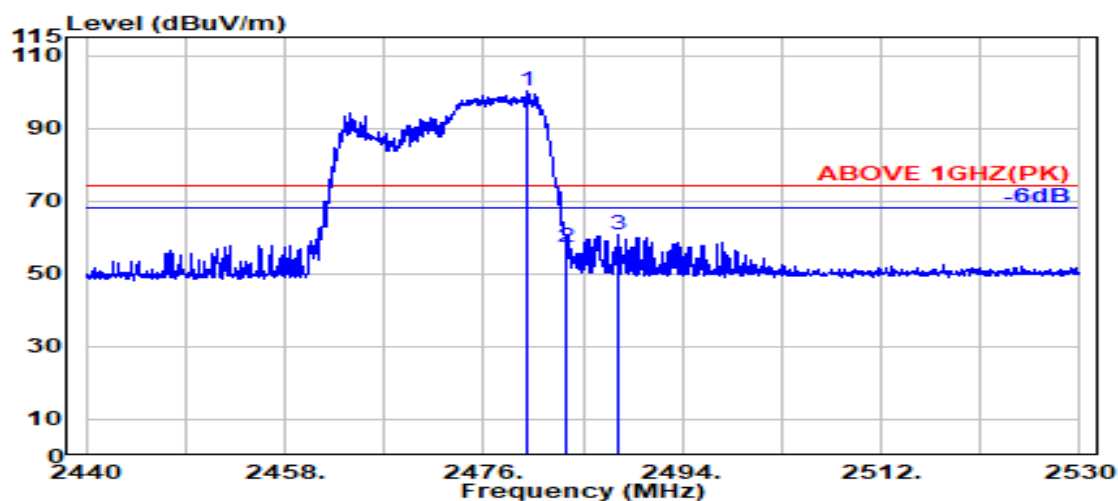

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.36	5.83	39.87	105.73	100.04	---	---	Peak
2483.500	28.37	5.83	39.87	63.11	57.44	74.00	16.56	Peak
2488.300	28.38	5.84	39.87	66.30	60.64	74.00	13.36	Peak

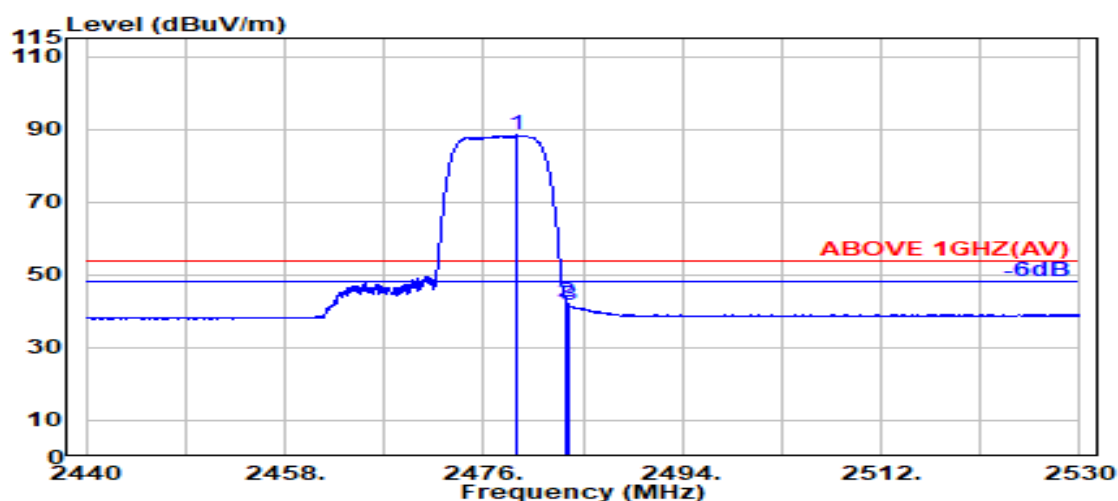

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.36	5.83	39.87	94.04	88.36	---	---	Average
2483.500	28.37	5.83	39.87	48.16	42.49	54.00	11.51	Average
2483.700	28.37	5.83	39.87	47.25	41.58	54.00	12.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

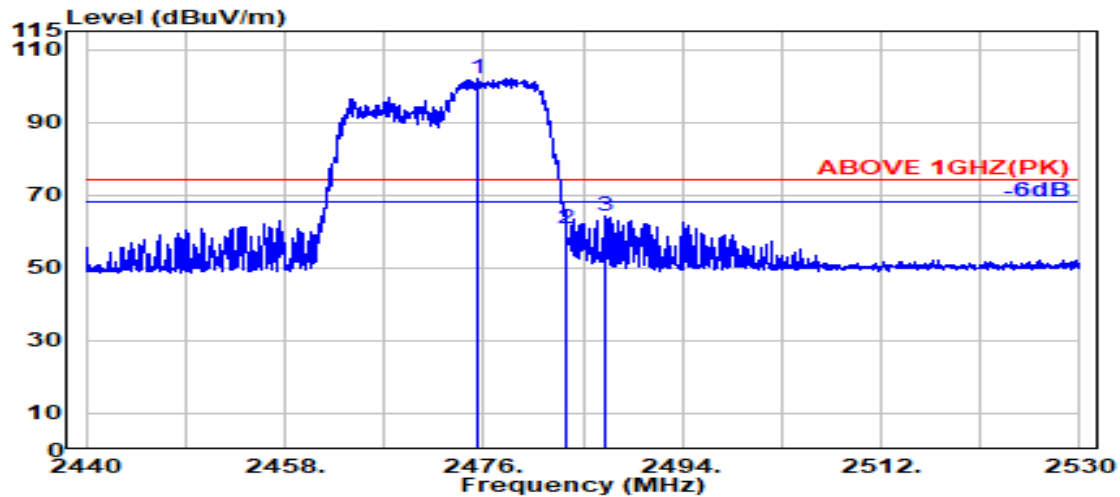

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.400	28.35	5.82	39.87	107.71	102.01	---	---	Peak
2483.500	28.37	5.83	39.87	66.64	60.97	74.00	13.03	Peak
2487.050	28.37	5.84	39.87	69.88	64.22	74.00	9.78	Peak

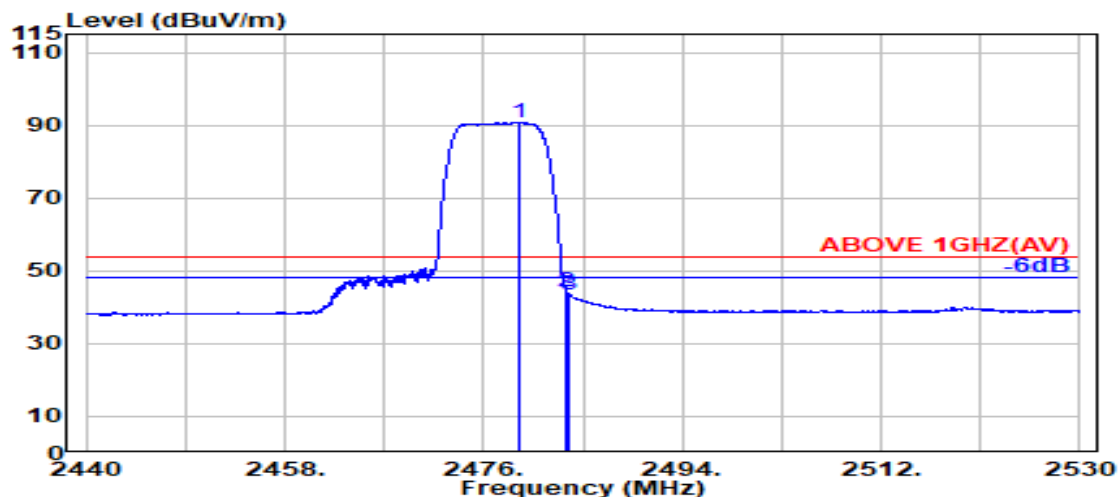

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.36	5.83	39.87	96.58	90.89	---	---	Average
2483.500	28.37	5.83	39.87	50.10	44.42	54.00	9.58	Average
2483.700	28.37	5.83	39.87	49.22	43.55	54.00	10.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

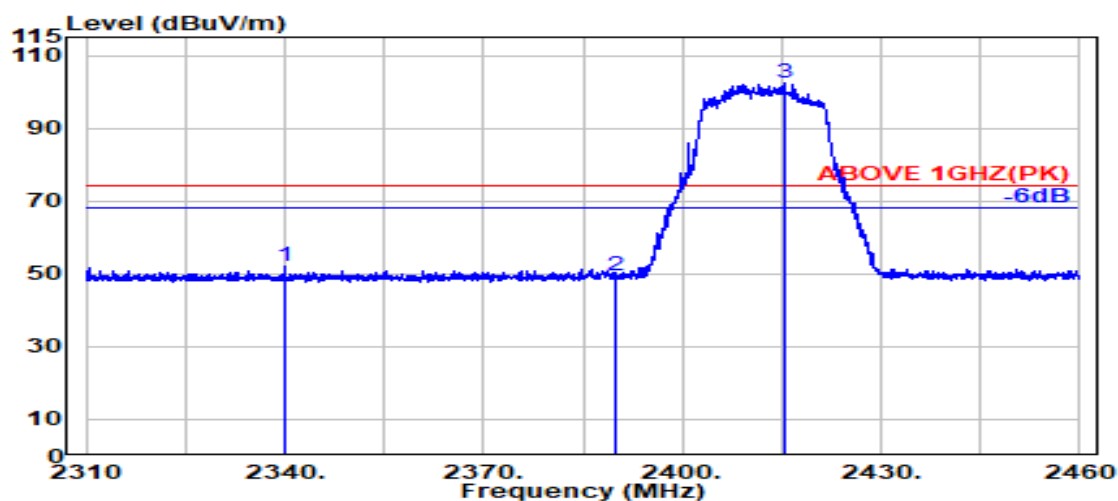

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2340.100	28.24	5.66	39.88	58.10	52.12	74.00	21.88	Peak
2389.800	28.14	5.72	39.88	55.53	49.51	74.00	24.49	Peak
@ 2415.450	28.16	5.75	39.88	108.46	102.49	---	---	Peak

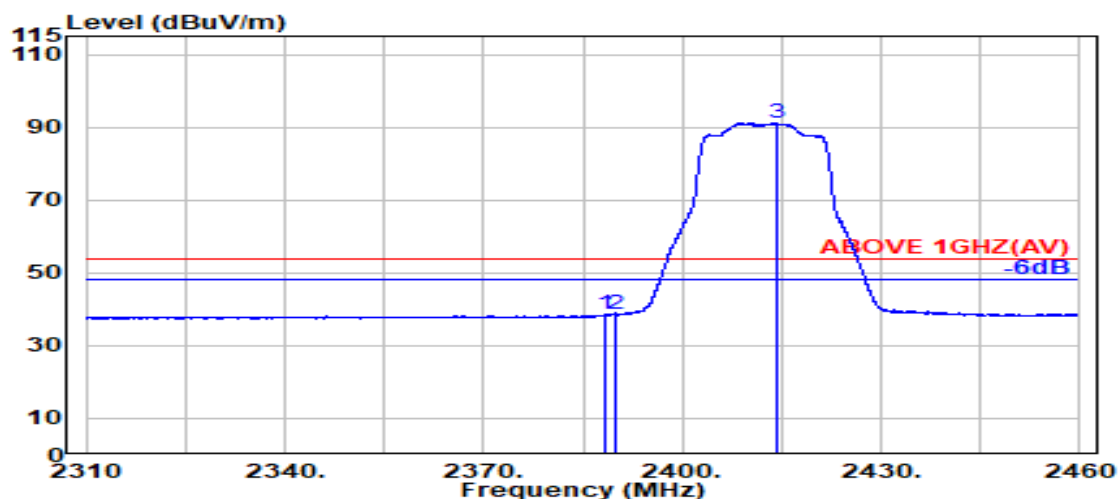

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.15	5.72	39.88	44.66	38.64	54.00	15.36	Average
2389.800	28.14	5.72	39.88	44.62	38.60	54.00	15.40	Average
@ 2414.300	28.16	5.75	39.88	97.19	91.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

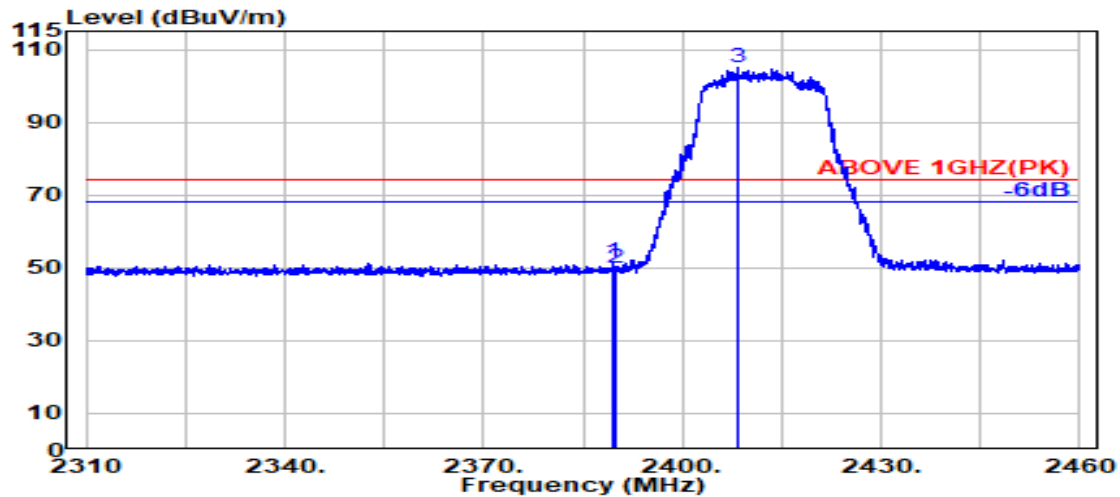

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	57.64	51.62	74.00	22.38	Peak
2389.800	28.14	5.72	39.88	55.90	49.88	74.00	24.12	Peak
@ 2408.250	28.13	5.74	39.88	110.84	104.84	---	---	Peak

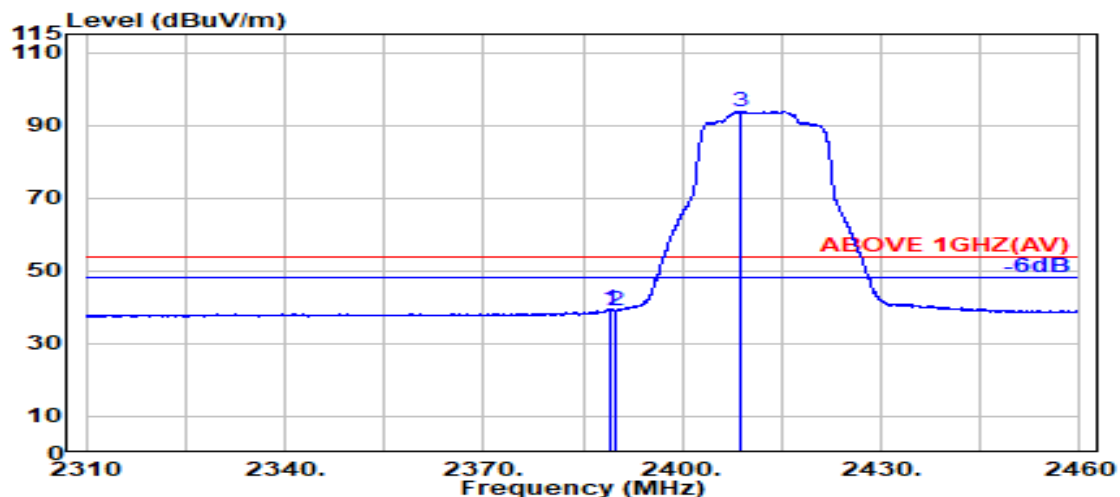


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	45.32	39.31	54.00	14.69	Average
2389.800	28.14	5.72	39.88	45.11	39.10	54.00	14.90	Average
@ 2408.650	28.13	5.74	39.88	99.88	93.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

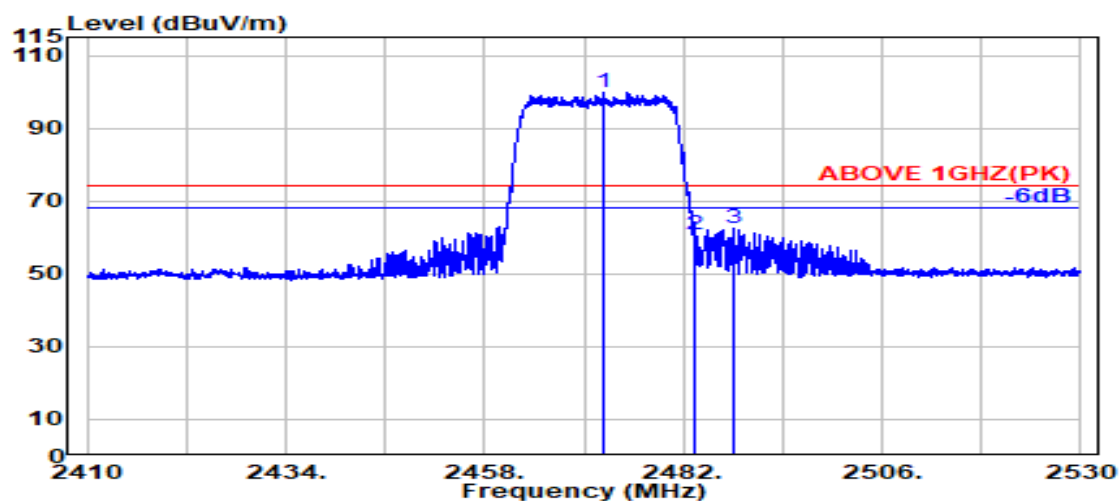

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.450	28.35	5.82	39.87	105.36	99.66	---	---	Peak
	2483.500	28.37	5.83	39.87	66.49	60.82	74.00	13.18	Peak
	2487.950	28.38	5.84	39.87	67.95	62.29	74.00	11.71	Peak

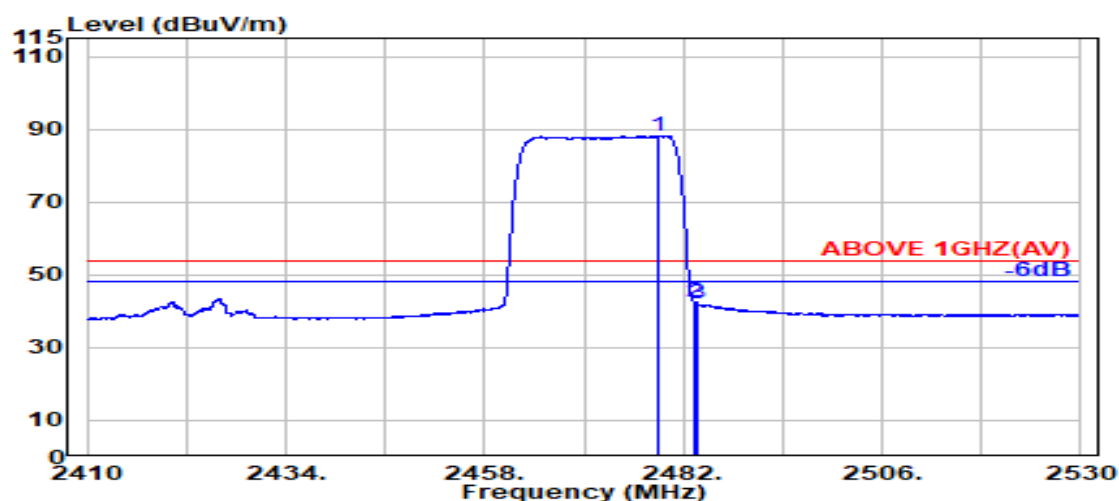

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.000	28.36	5.83	39.87	93.90	88.22	---	---	Average
	2483.500	28.37	5.83	39.87	48.02	42.35	54.00	11.65	Average
	2483.750	28.37	5.83	39.87	47.82	42.14	54.00	11.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

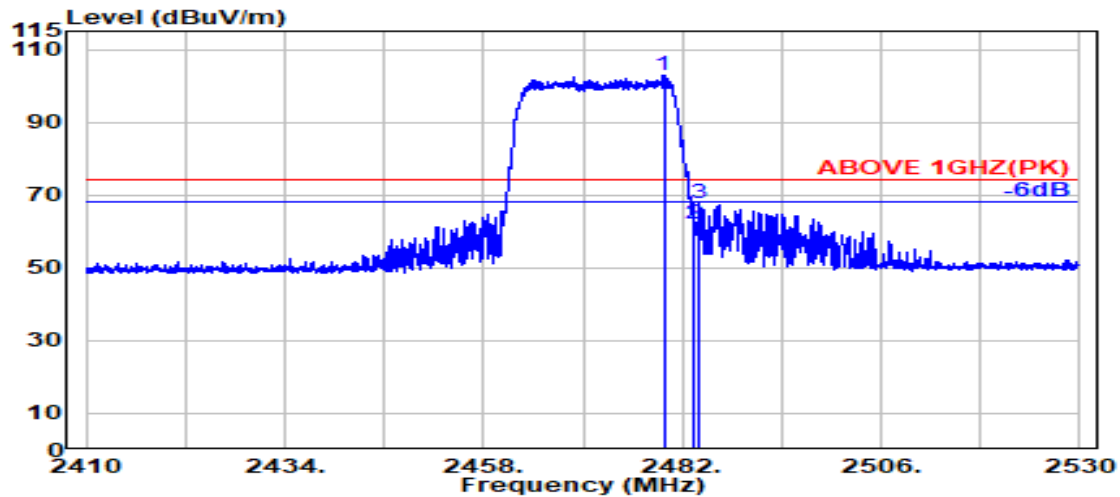

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.750	28.36	5.83	39.87	108.55	102.87	---	---	Peak
	2483.500	28.37	5.83	39.87	67.76	62.08	74.00	11.92	Peak
	2484.050	28.37	5.83	39.87	73.34	67.66	74.00	6.34	Peak

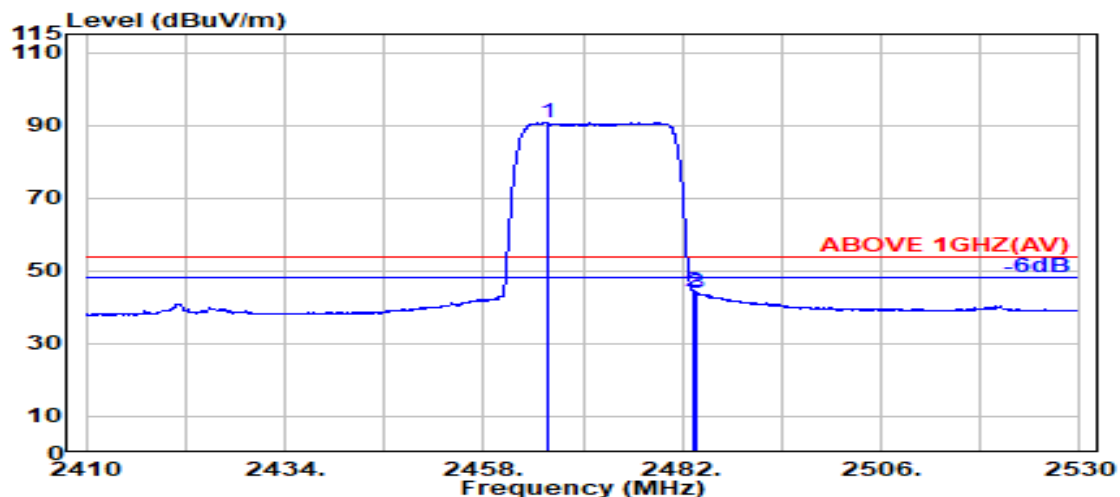

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.850	28.33	5.81	39.87	96.57	90.84	---	---	Average
	2483.500	28.37	5.83	39.87	50.08	44.41	54.00	9.59	Average
	2483.700	28.37	5.83	39.87	49.58	43.91	54.00	10.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

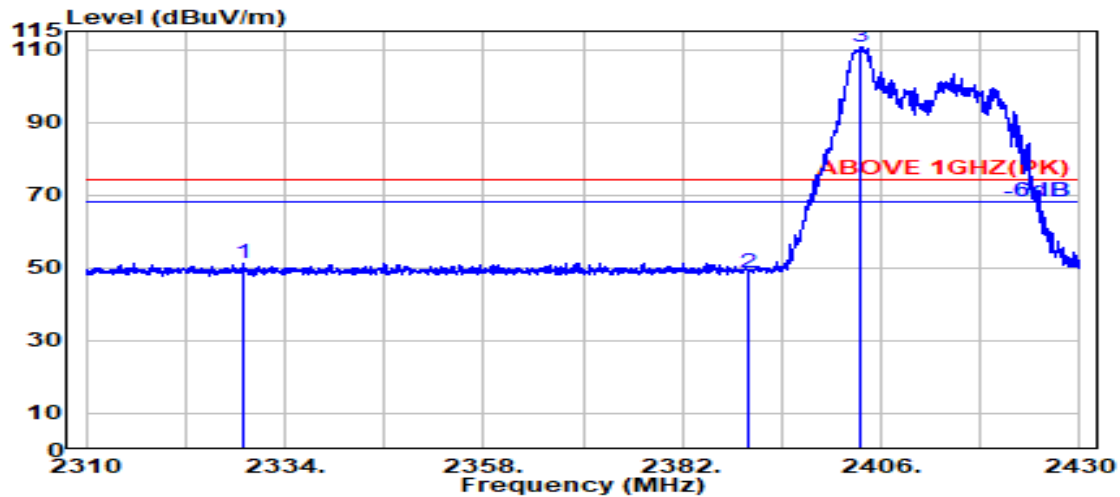

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.850	28.17	5.65	39.88	57.47	51.41	74.00	22.59	Peak
2390.000	28.14	5.72	39.88	54.63	48.61	74.00	25.39	Peak
@ 2403.550	28.11	5.74	39.88	116.82	110.79	---	---	Peak

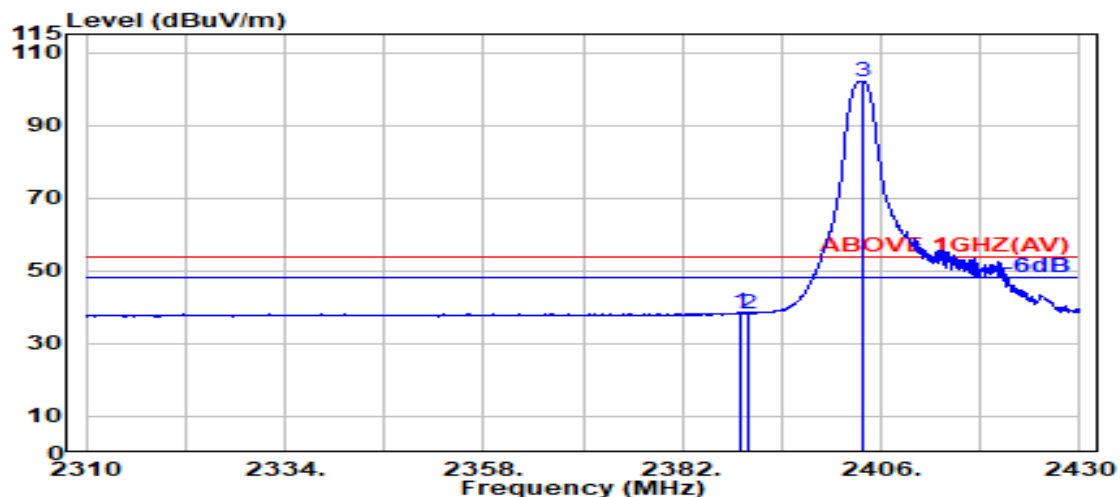

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.14	5.72	39.88	44.60	38.58	54.00	15.42	Average
2390.000	28.14	5.72	39.88	44.31	38.29	54.00	15.71	Average
@ 2403.750	28.12	5.74	39.88	108.12	102.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

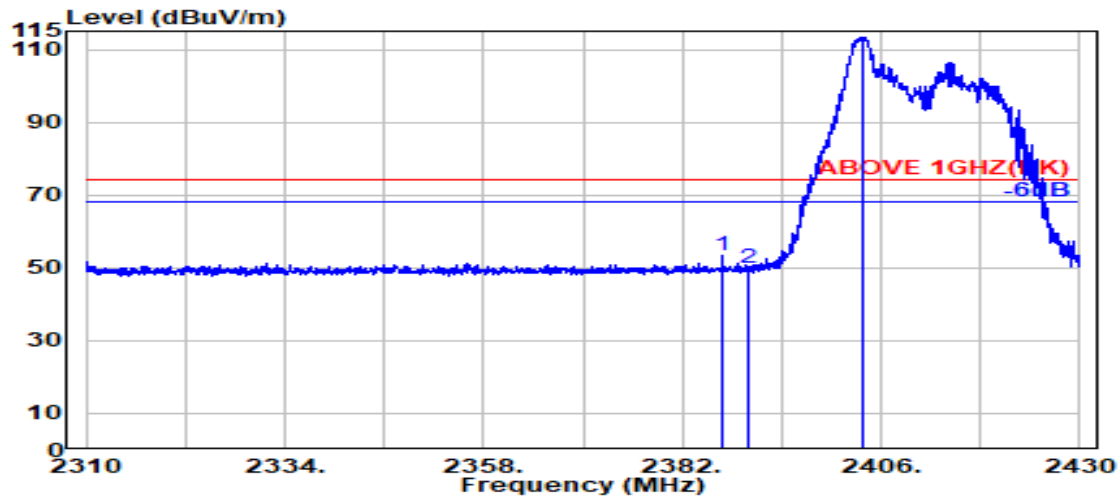

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.15	5.72	39.88	59.45	53.44	74.00	20.56	Peak
2390.000	28.14	5.72	39.88	55.86	49.84	74.00	24.16	Peak
@ 2403.800	28.12	5.74	39.88	119.50	113.48	---	---	Peak

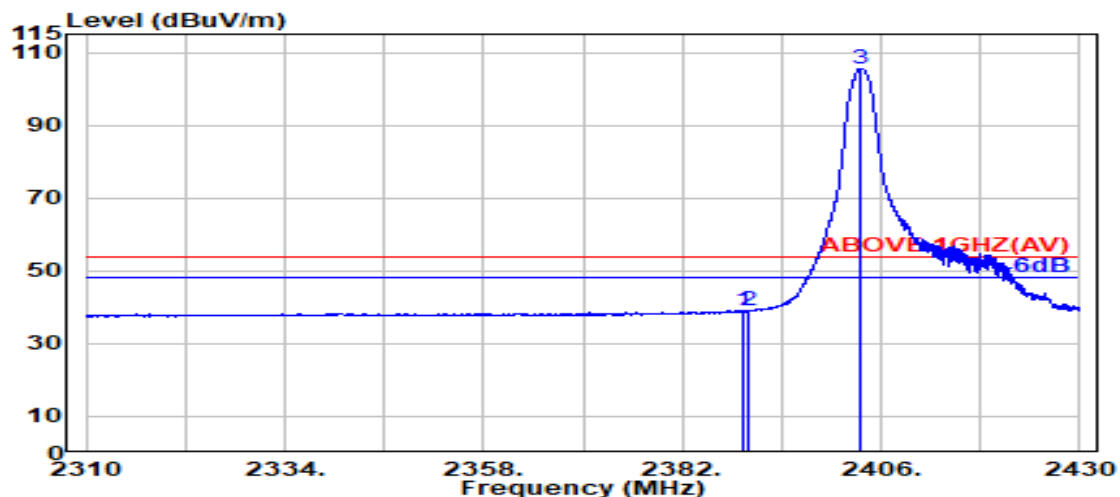

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	45.18	39.16	54.00	14.84	Average
2390.000	28.14	5.72	39.88	44.92	38.91	54.00	15.09	Average
@ 2403.550	28.11	5.74	39.88	111.40	105.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

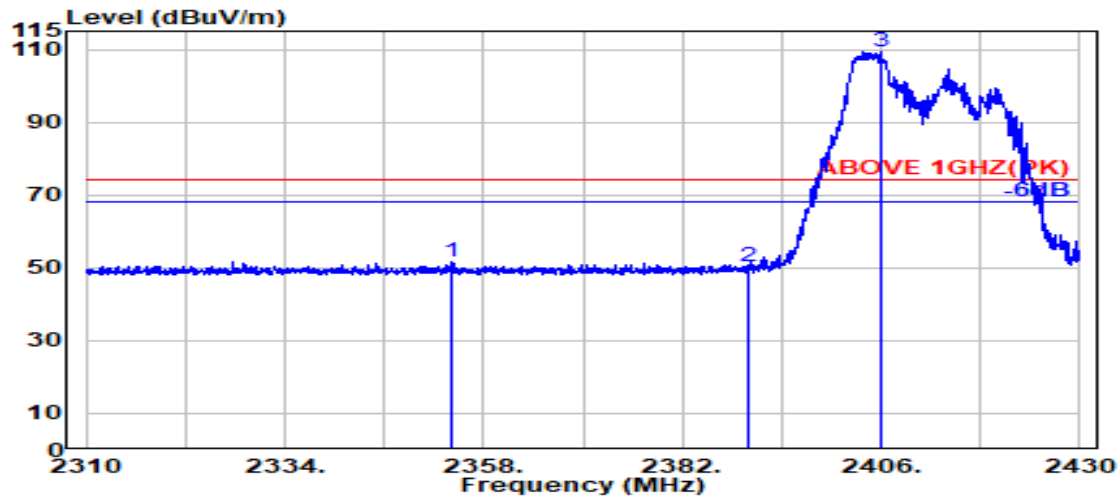

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.250	28.28	5.68	39.88	57.45	51.53	74.00	22.47	Peak
2390.000	28.14	5.72	39.88	56.45	50.43	74.00	23.57	Peak
@ 2405.950	28.12	5.74	39.88	115.57	109.56	---	---	Peak

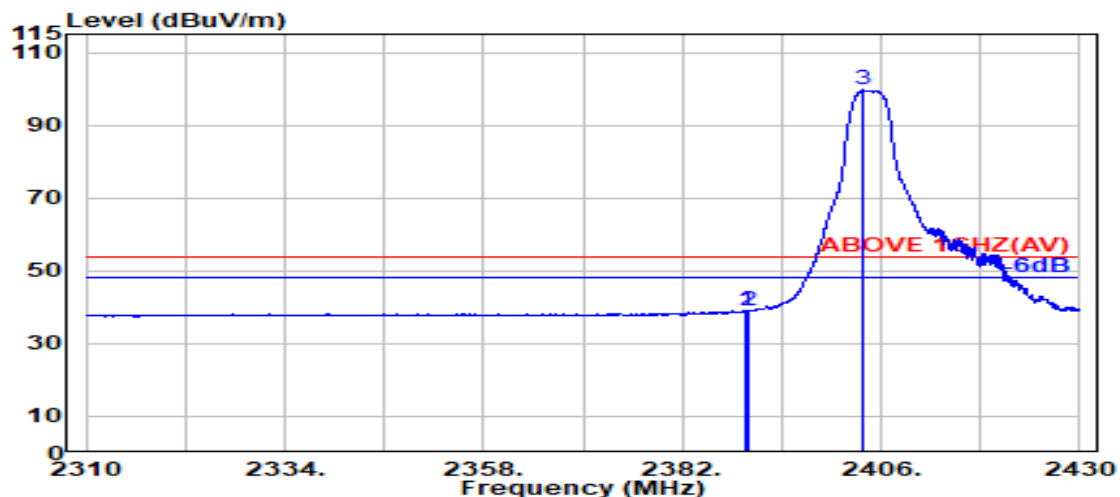

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.14	5.72	39.88	44.97	38.95	54.00	15.05	Average
2390.000	28.14	5.72	39.88	44.91	38.89	54.00	15.11	Average
@ 2403.950	28.12	5.74	39.88	105.70	99.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

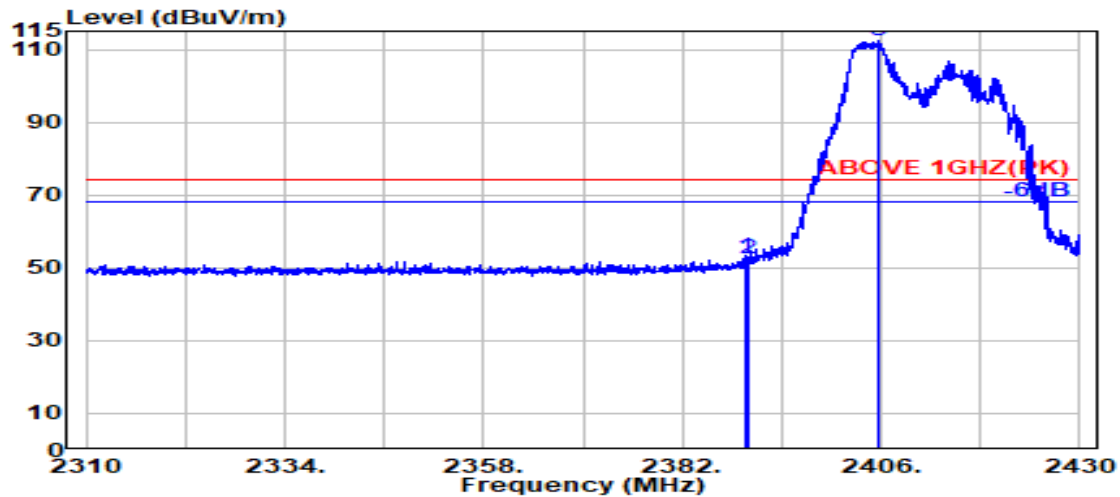

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	58.90	52.88	74.00	21.12	Peak
2390.000	28.14	5.72	39.88	58.62	52.60	74.00	21.40	Peak
@ 2405.750	28.12	5.74	39.88	118.51	112.50	---	---	Peak

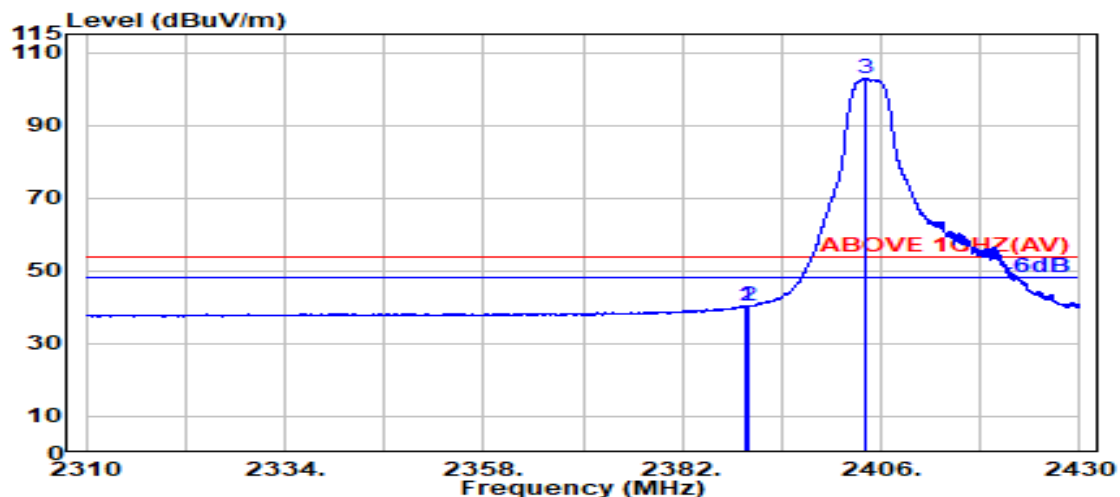

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	46.41	40.39	54.00	13.61	Average
2390.000	28.14	5.72	39.88	46.36	40.34	54.00	13.66	Average
@ 2404.250	28.12	5.74	39.88	108.74	102.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

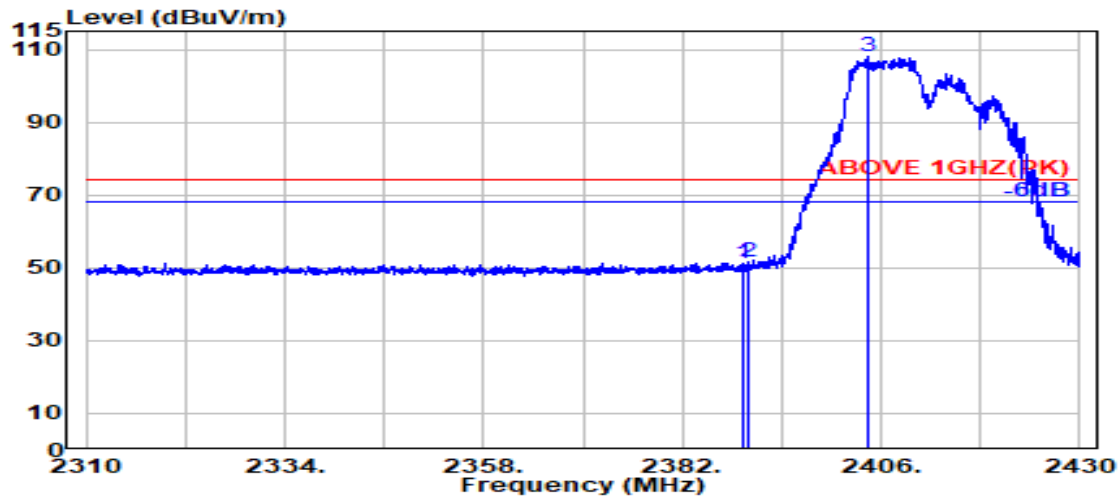

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.14	5.72	39.88	57.44	51.42	74.00	22.58	Peak
2390.000	28.14	5.72	39.88	57.51	51.49	74.00	22.51	Peak
@ 2404.300	28.12	5.74	39.88	114.21	108.19	---	---	Peak

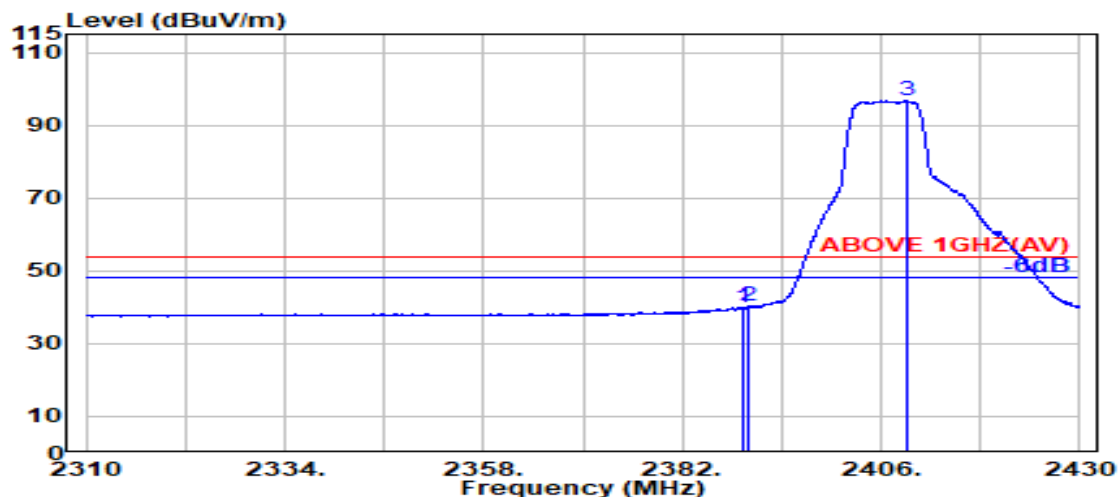

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	45.95	39.93	54.00	14.07	Average
2390.000	28.14	5.72	39.88	46.23	40.21	54.00	13.79	Average
@ 2409.000	28.14	5.74	39.88	102.88	96.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

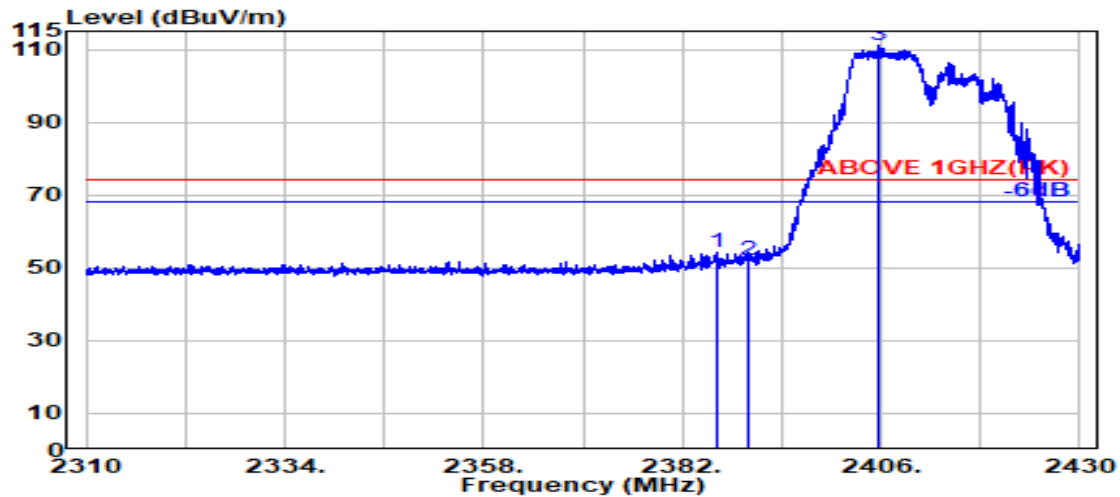

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.250	28.15	5.72	39.88	60.22	54.21	74.00	19.79	Peak
2390.000	28.14	5.72	39.88	58.20	52.18	74.00	21.82	Peak
@ 2405.800	28.12	5.74	39.88	117.00	110.98	---	---	Peak

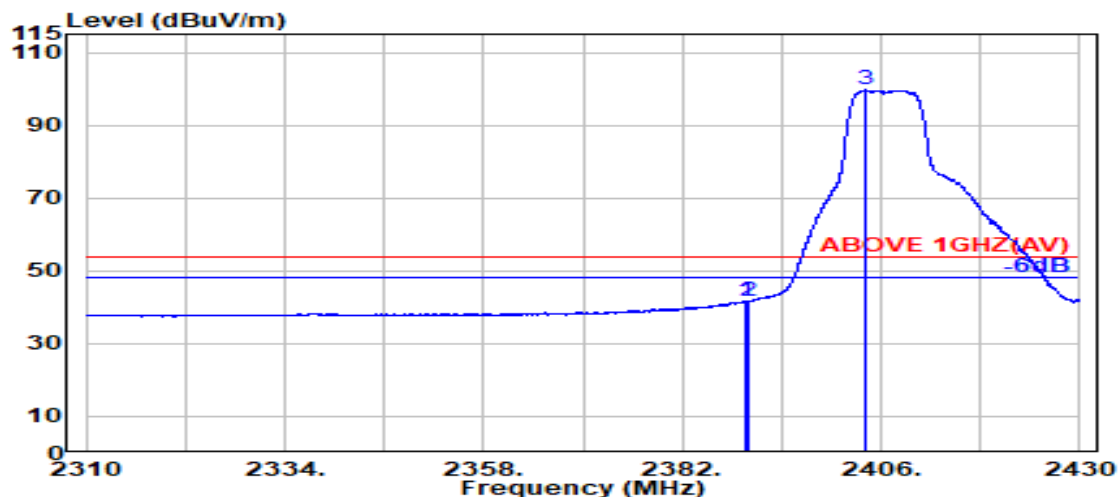

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	47.69	41.67	54.00	12.33	Average
2390.000	28.14	5.72	39.88	47.64	41.62	54.00	12.38	Average
@ 2404.050	28.12	5.74	39.88	105.62	99.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

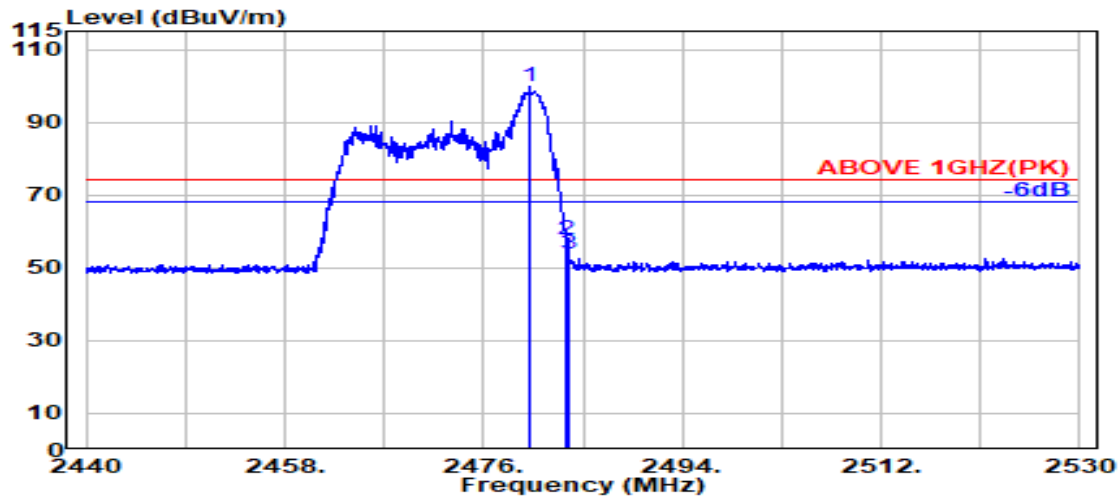

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.36	5.83	39.87	105.49	99.80	---	---	Peak
2483.500	28.37	5.83	39.87	63.44	57.77	74.00	16.23	Peak
2483.700	28.37	5.83	39.87	59.69	54.02	74.00	19.98	Peak

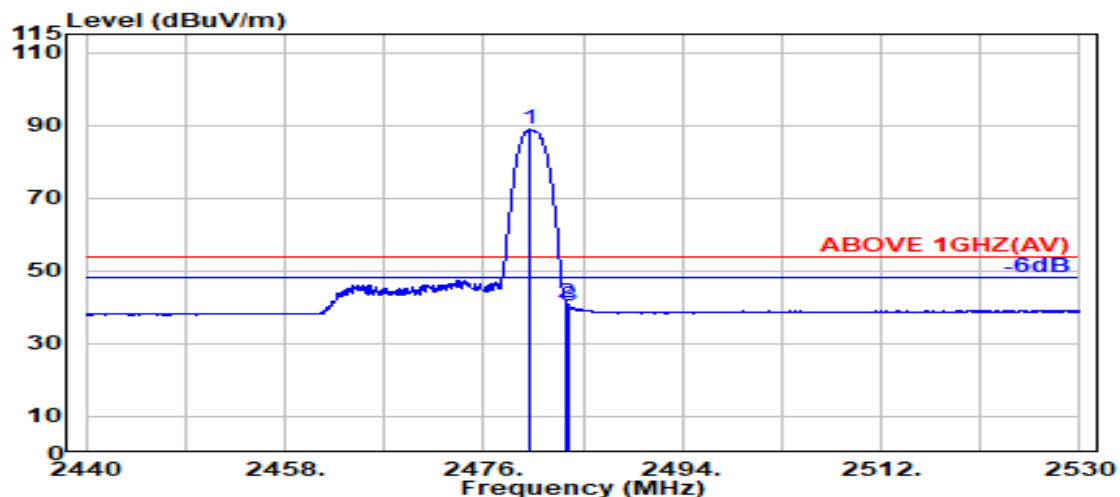

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.36	5.83	39.87	94.53	88.84	---	---	Average
2483.500	28.37	5.83	39.87	46.98	41.31	54.00	12.69	Average
2483.750	28.37	5.83	39.87	46.03	40.36	54.00	13.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

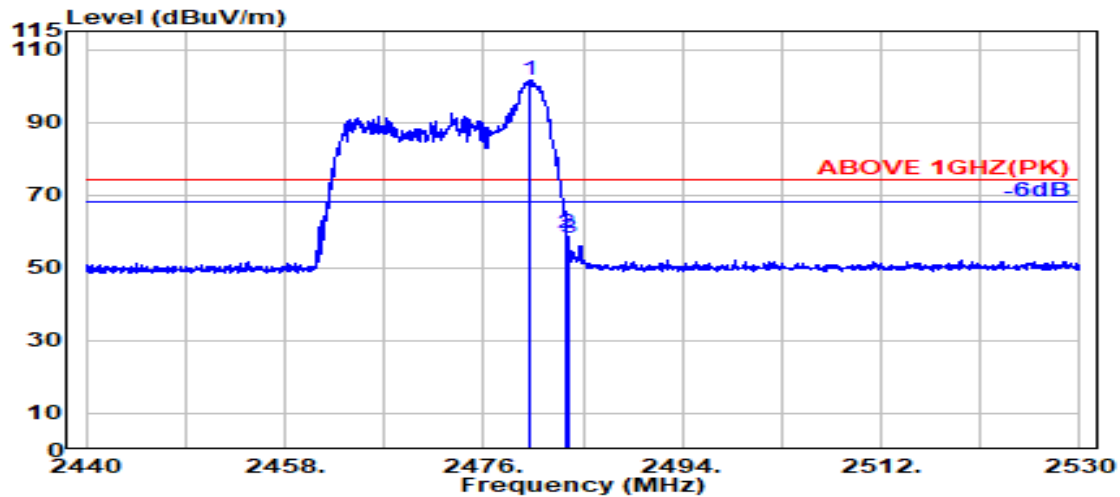

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.36	5.83	39.87	107.06	101.37	---	---	Peak
2483.500	28.37	5.83	39.87	64.92	59.25	74.00	14.75	Peak
2483.700	28.37	5.83	39.87	63.92	58.25	74.00	15.75	Peak

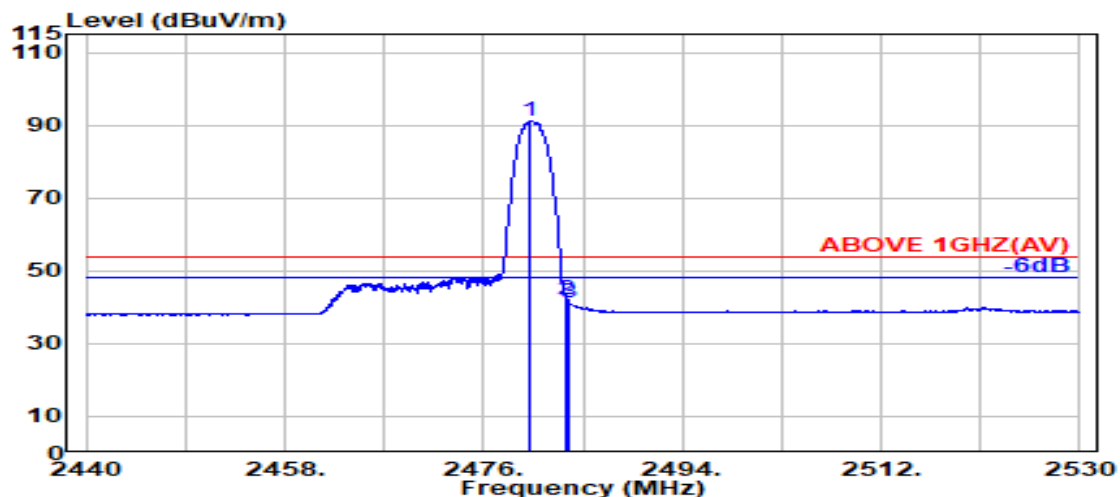

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.83	39.87	96.83	91.15	---	---	Average
2483.500	28.37	5.83	39.87	47.91	42.24	54.00	11.76	Average
2483.700	28.37	5.83	39.87	47.01	41.34	54.00	12.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

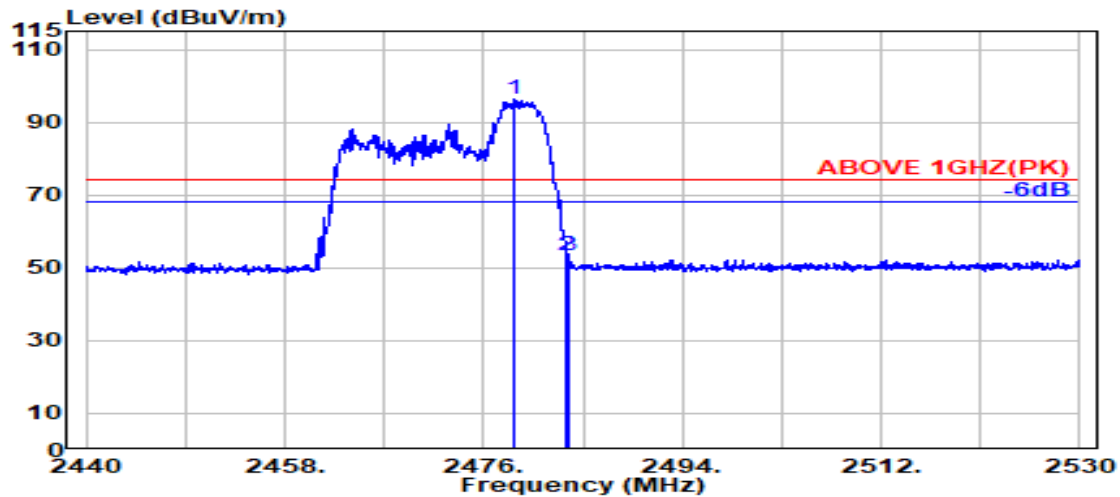

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	102.16	96.47	---	---	Peak
2483.500	28.37	5.83	39.87	59.23	53.55	74.00	20.45	Peak
2483.750	28.37	5.83	39.87	58.99	53.32	74.00	20.68	Peak

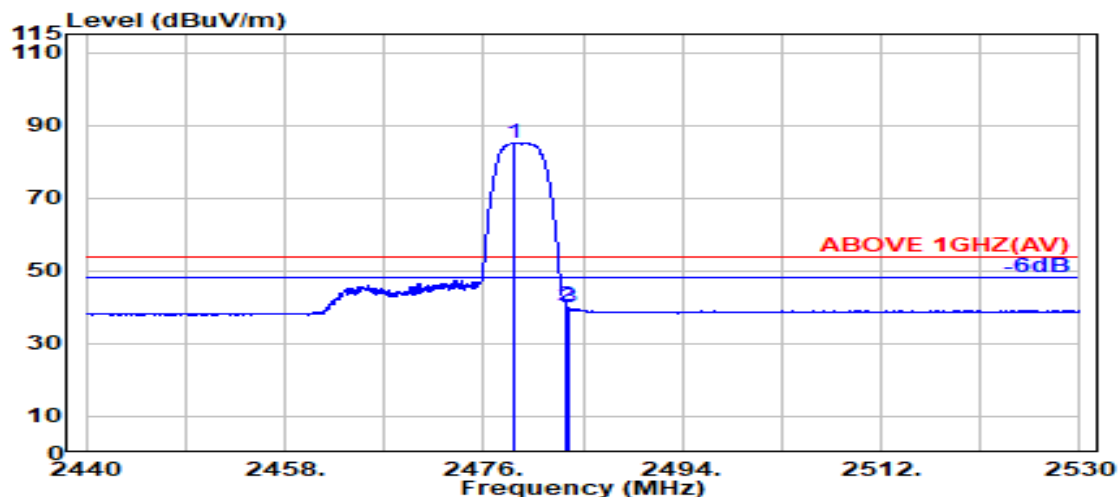

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	90.93	85.24	---	---	Average
2483.500	28.37	5.83	39.87	46.03	40.36	54.00	13.64	Average
2483.700	28.37	5.83	39.87	45.43	39.75	54.00	14.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

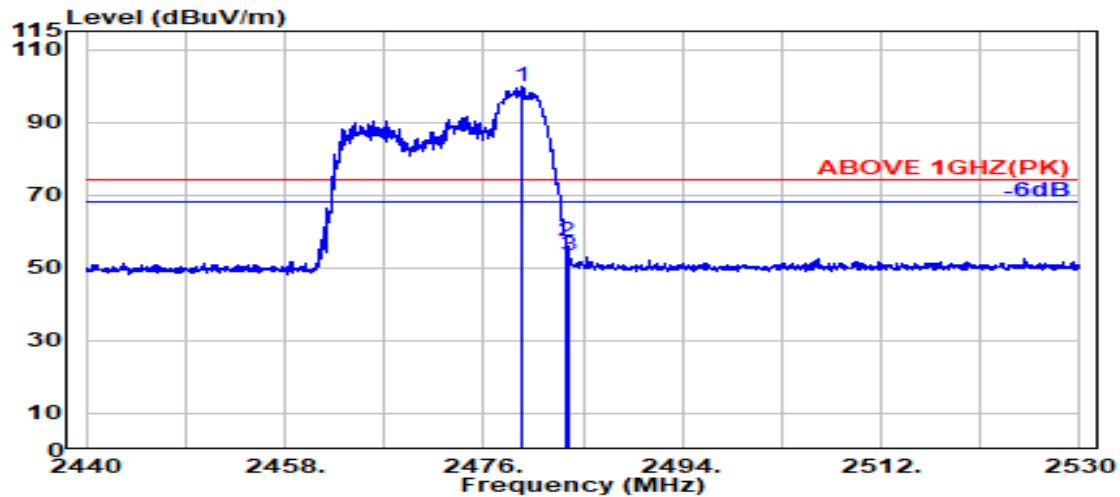

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	28.36	5.83	39.87	105.40	99.72	---	---	Peak
2483.500	28.37	5.83	39.87	62.83	57.16	74.00	16.84	Peak
2483.700	28.37	5.83	39.87	59.00	53.33	74.00	20.67	Peak

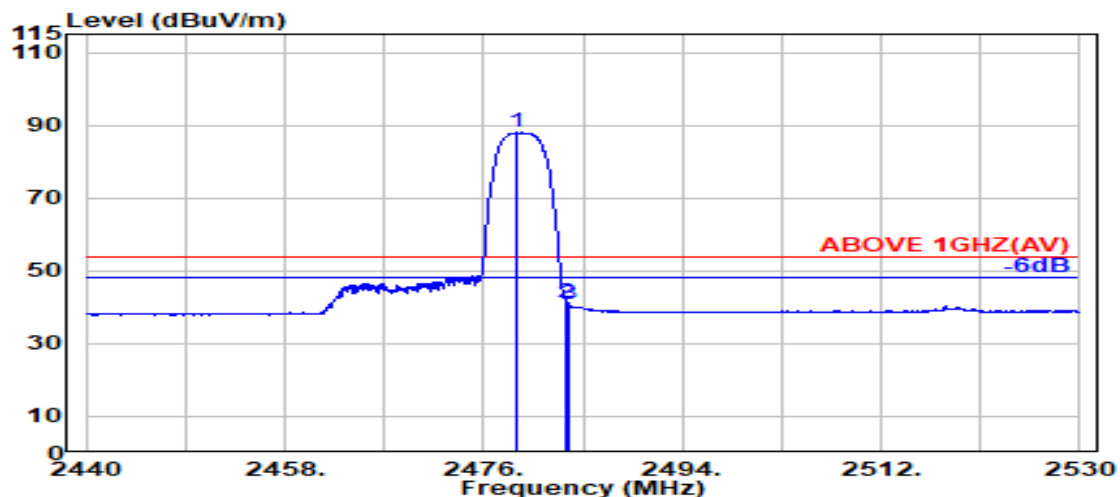

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	93.61	87.92	---	---	Average
2483.500	28.37	5.83	39.87	47.09	41.42	54.00	12.58	Average
2483.700	28.37	5.83	39.87	46.37	40.69	54.00	13.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

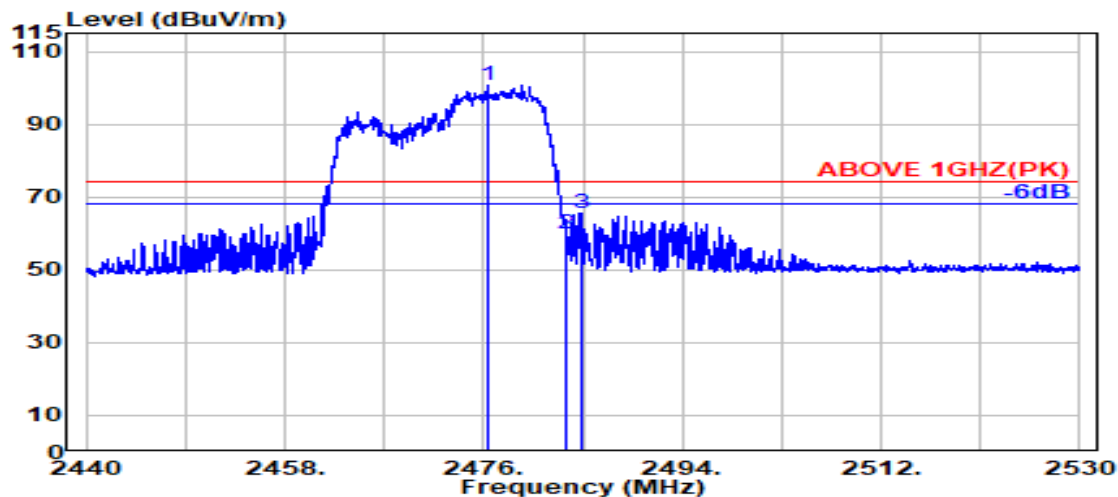

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.300	28.35	5.82	39.87	106.36	100.66	---	---	Peak
	2483.500	28.37	5.83	39.87	65.71	60.04	74.00	13.96	Peak
	2484.950	28.37	5.83	39.87	71.19	65.53	74.00	8.47	Peak

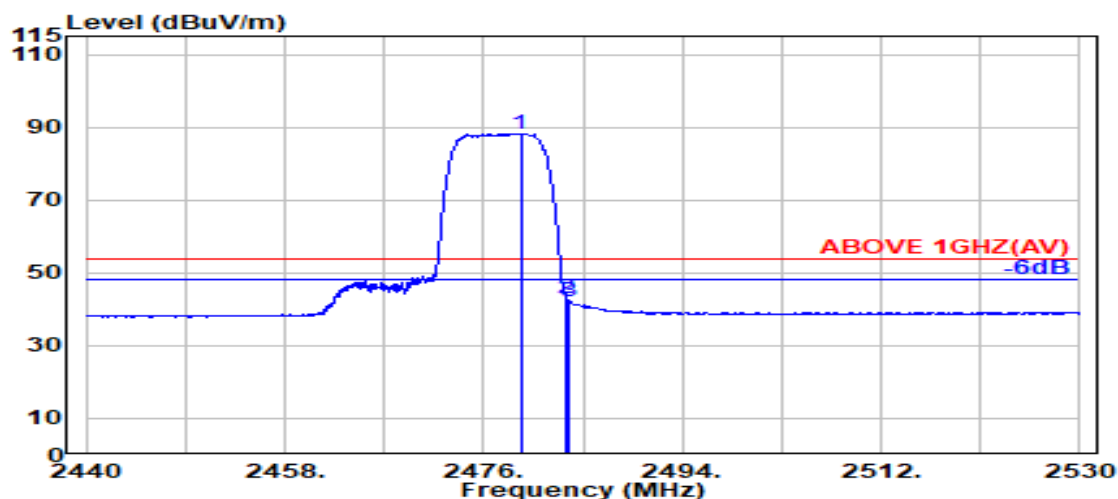

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.350	28.36	5.83	39.87	93.99	88.31	---	---	Average
	2483.500	28.37	5.83	39.87	48.49	42.82	54.00	11.18	Average
	2483.700	28.37	5.83	39.87	47.81	42.13	54.00	11.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

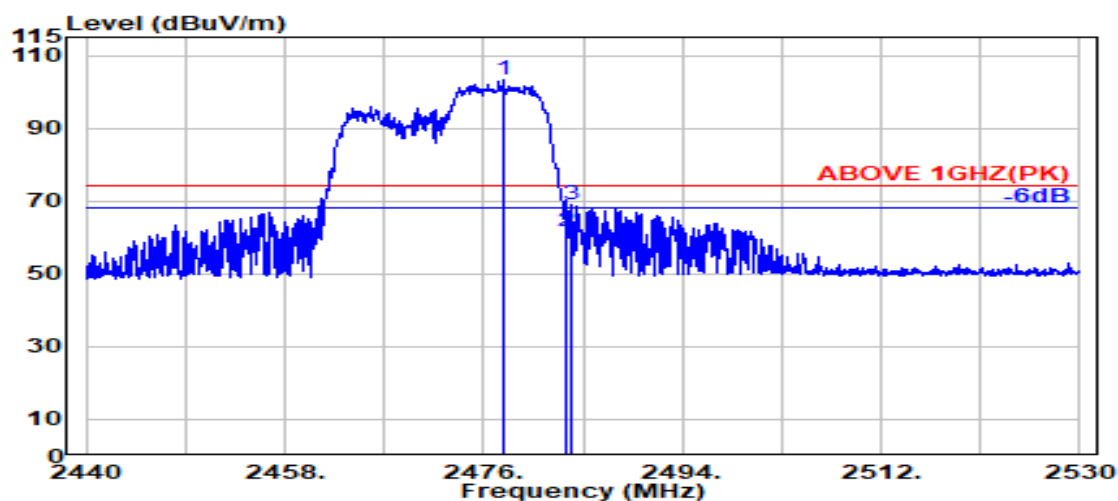

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.800	28.36	5.82	39.87	109.17	103.48	---	---	Peak
2483.500	28.37	5.83	39.87	67.51	61.83	74.00	12.17	Peak
2483.900	28.37	5.83	39.87	74.70	69.03	74.00	4.97	Peak

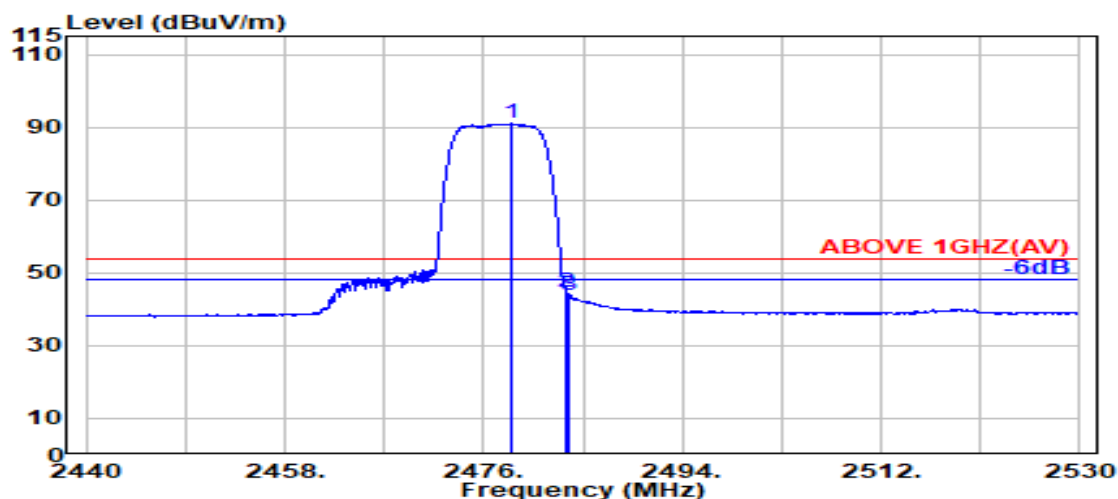

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.36	5.83	39.87	96.62	90.93	---	---	Average
2483.500	28.37	5.83	39.87	50.38	44.70	54.00	9.30	Average
2483.700	28.37	5.83	39.87	49.67	44.00	54.00	10.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

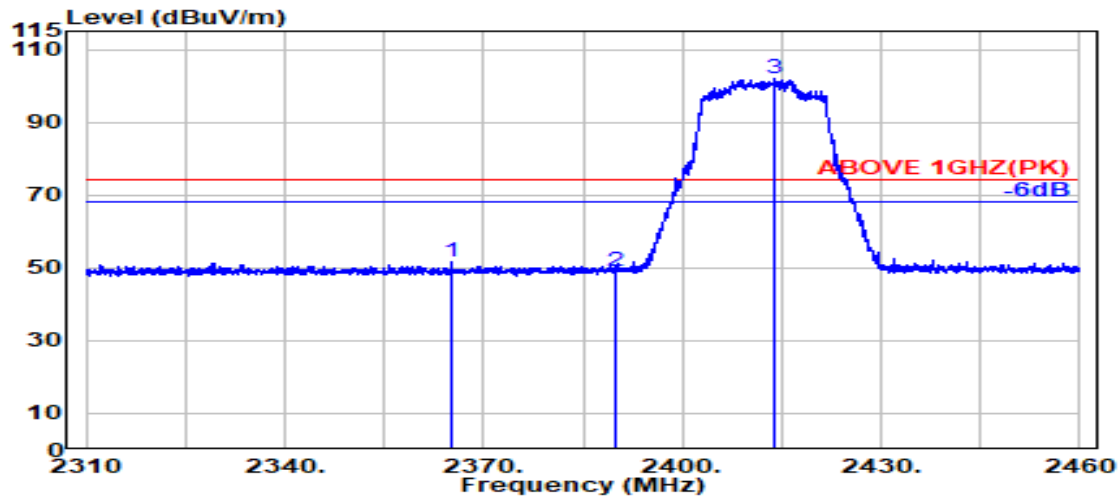

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2365.100	28.24	5.69	39.88	57.49	51.54	74.00	22.46	Peak
2389.800	28.14	5.72	39.88	55.13	49.11	74.00	24.89	Peak
@ 2414.050	28.16	5.75	39.88	107.86	101.89	---	---	Peak

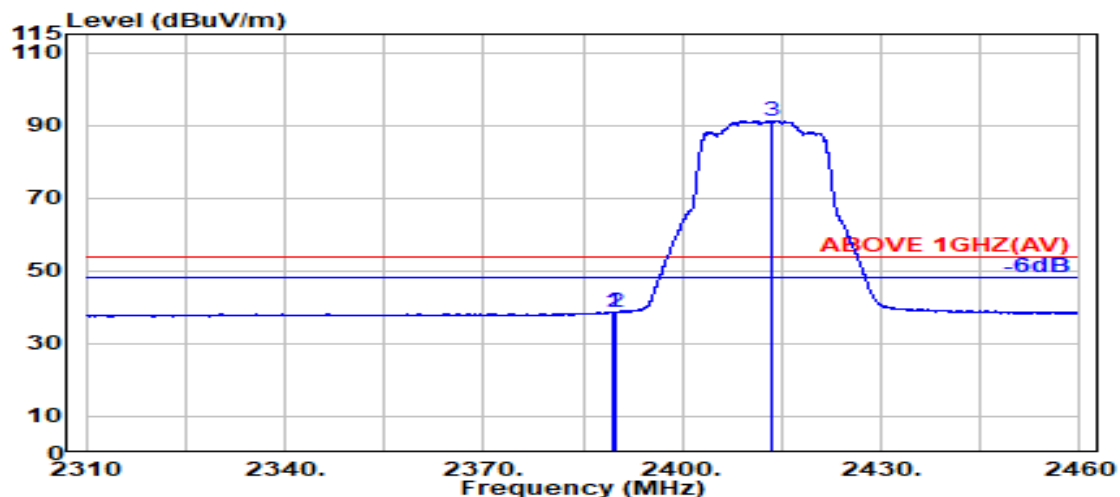

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.14	5.72	39.88	44.83	38.82	54.00	15.18	Average
2389.800	28.14	5.72	39.88	44.68	38.67	54.00	15.33	Average
@ 2413.550	28.15	5.75	39.88	97.30	91.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

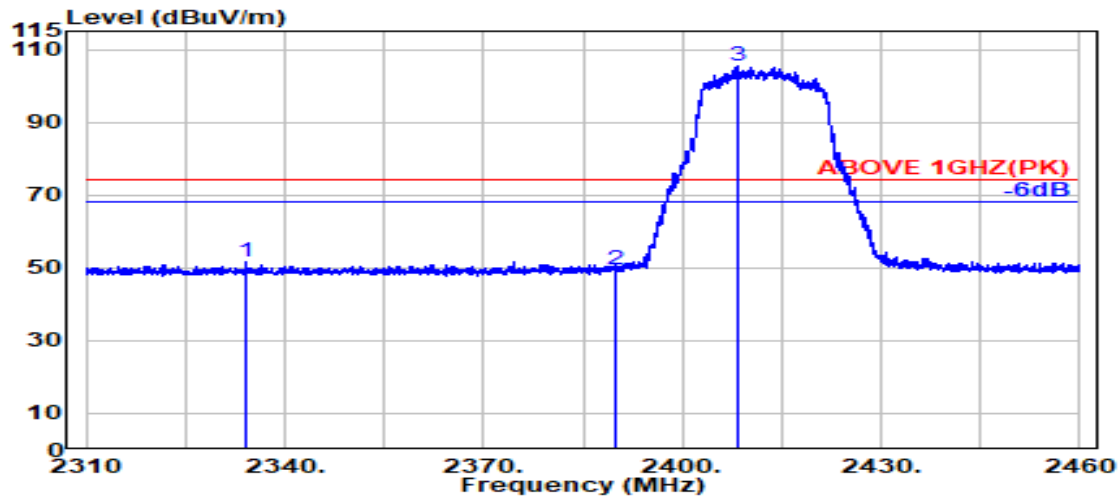

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.150	28.21	5.65	39.88	57.46	51.43	74.00	22.57	Peak
2389.800	28.14	5.72	39.88	55.50	49.48	74.00	24.52	Peak
@ 2408.300	28.13	5.74	39.88	111.44	105.44	---	---	Peak

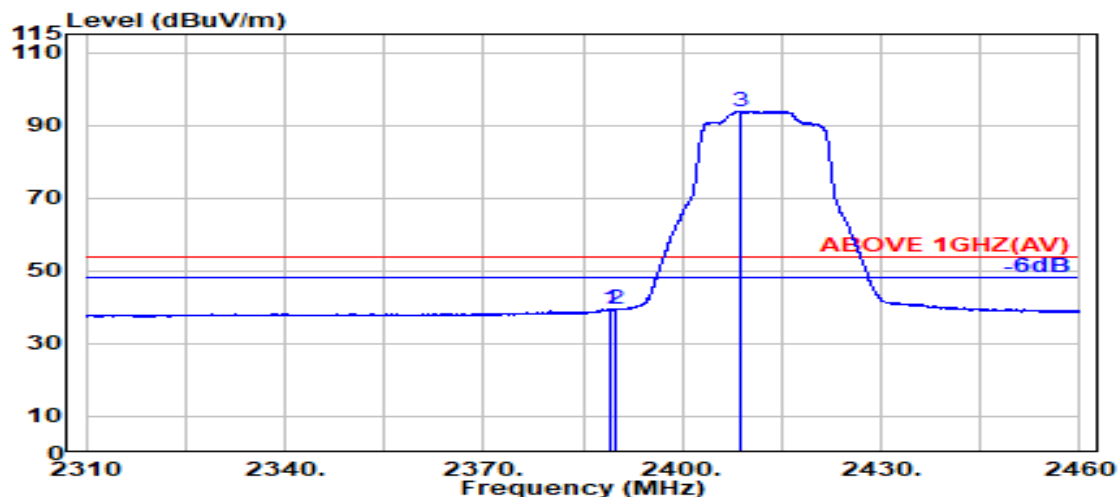


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	45.51	39.50	54.00	14.50	Average
2389.800	28.14	5.72	39.88	45.61	39.60	54.00	14.40	Average
@ 2408.700	28.14	5.74	39.88	99.87	93.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

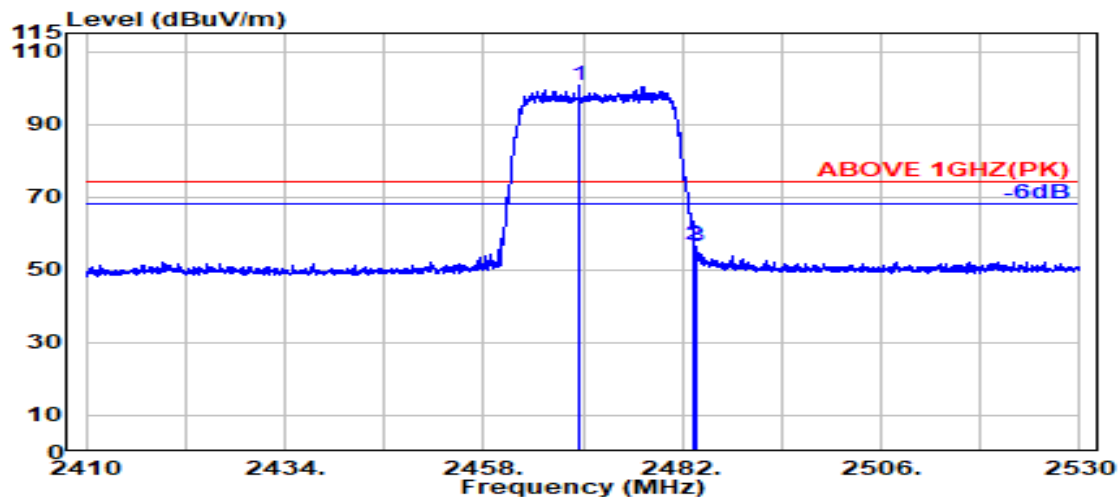

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.34	5.81	39.87	106.43	100.71	---	---	Peak
2483.500	28.37	5.83	39.87	62.47	56.80	74.00	17.20	Peak
2483.700	28.37	5.83	39.87	62.15	56.47	74.00	17.53	Peak

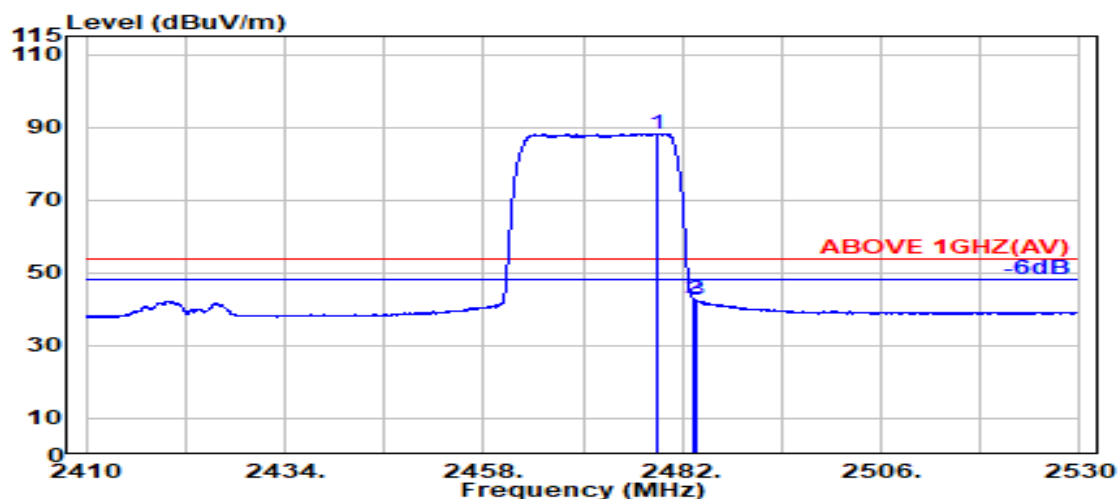

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	93.97	88.29	---	---	Average
2483.500	28.37	5.83	39.87	48.47	42.80	54.00	11.20	Average
2483.700	28.37	5.83	39.87	48.27	42.60	54.00	11.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

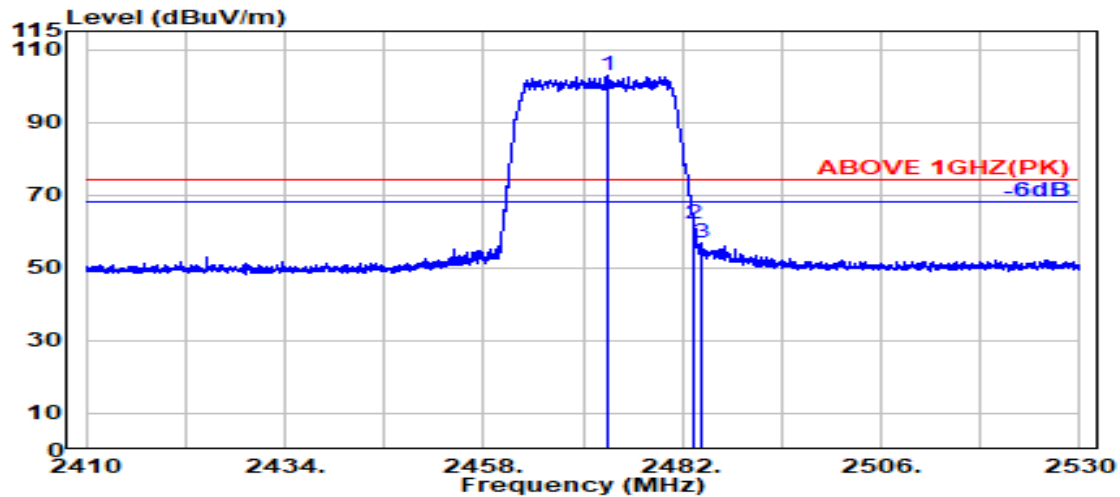

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.850	28.35	5.82	39.87	108.76	103.06	---	---	Peak
2483.500	28.37	5.83	39.87	67.70	62.03	74.00	11.97	Peak
2484.300	28.37	5.83	39.87	62.34	56.67	74.00	17.33	Peak

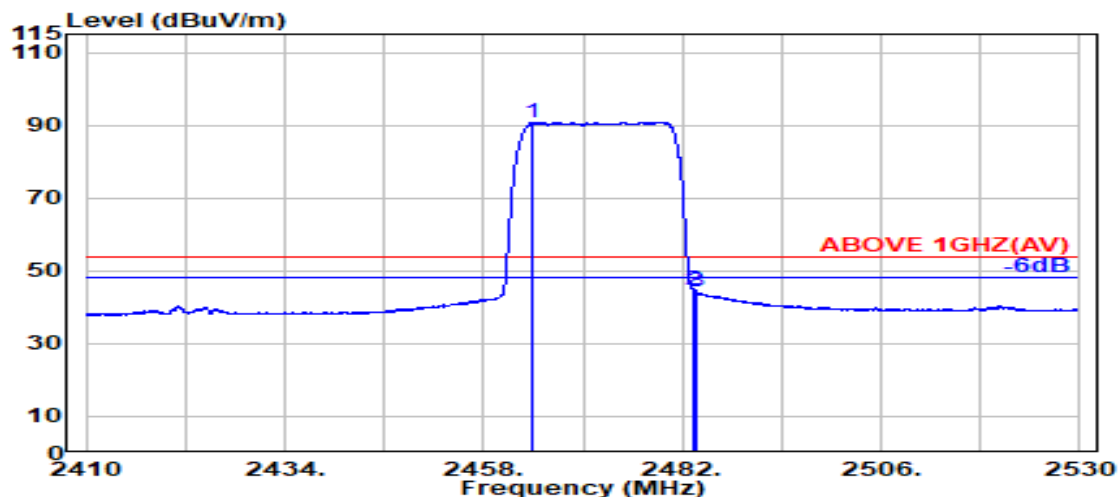

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.33	5.81	39.87	96.54	90.81	---	---	Average
2483.500	28.37	5.83	39.87	50.42	44.75	54.00	9.25	Average
2483.700	28.37	5.83	39.87	49.84	44.17	54.00	9.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

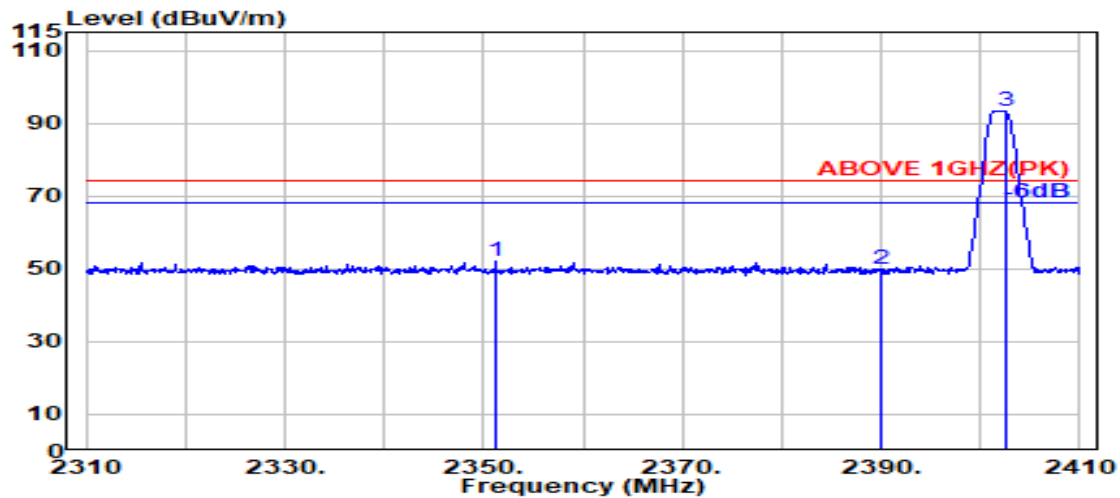

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2351.200	28.30	5.67	39.88	57.87	51.96	74.00	22.04	Peak
2390.000	28.14	5.72	39.88	55.88	49.86	74.00	24.14	Peak
@ 2402.500	28.11	5.74	39.88	99.54	93.51	---	---	Peak

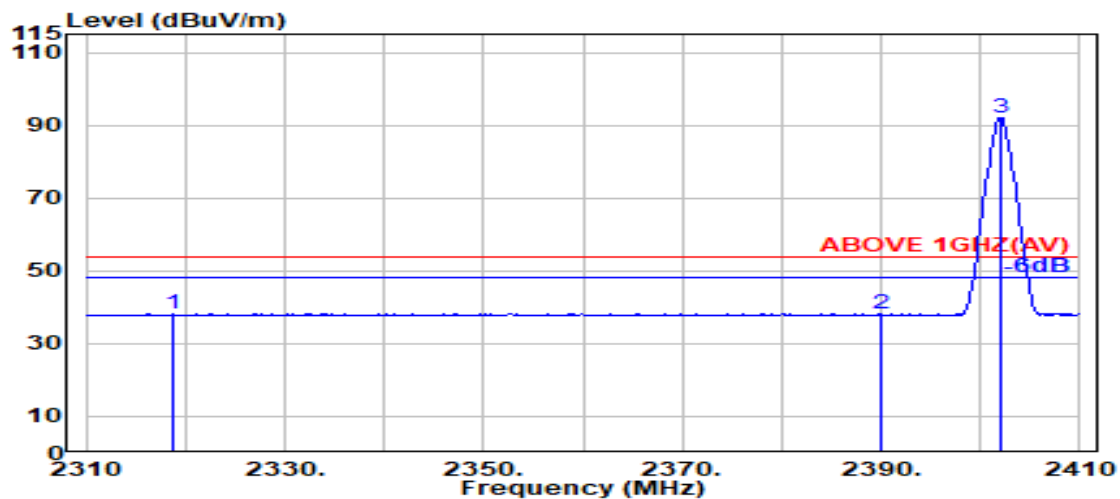

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2318.800	28.11	5.63	39.88	44.35	38.22	54.00	15.78	Average
2390.000	28.14	5.72	39.88	44.00	37.98	54.00	16.02	Average
@ 2402.100	28.11	5.74	39.88	98.24	92.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

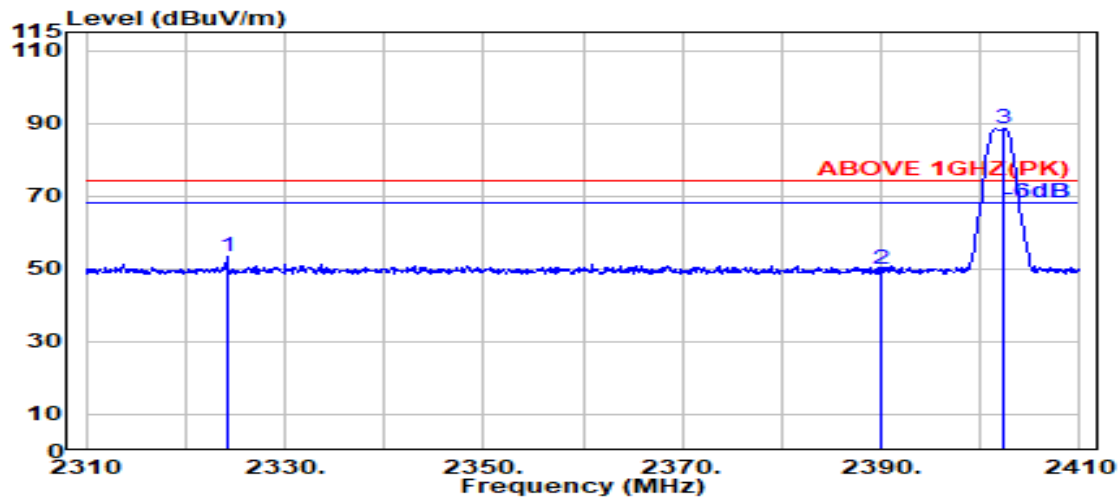

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.200	28.15	5.64	39.88	59.35	53.25	74.00	20.75	Peak
2390.000	28.14	5.72	39.88	56.00	49.98	74.00	24.02	Peak
@ 2402.400	28.11	5.74	39.88	94.63	88.60	---	---	Peak

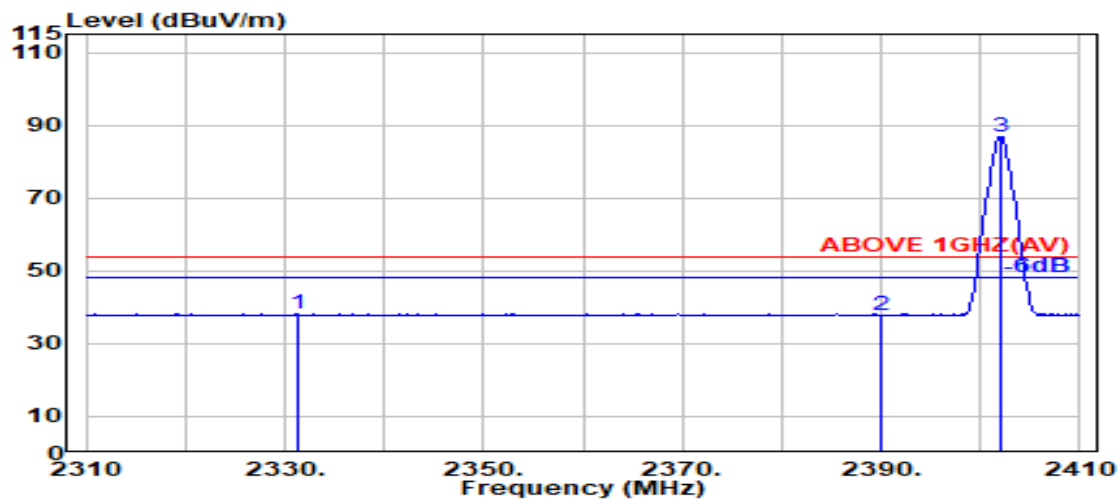

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2331.200	28.19	5.65	39.88	44.22	38.18	54.00	15.82	Average
2390.000	28.14	5.72	39.88	43.79	37.77	54.00	16.23	Average
@ 2402.100	28.11	5.74	39.88	92.99	86.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

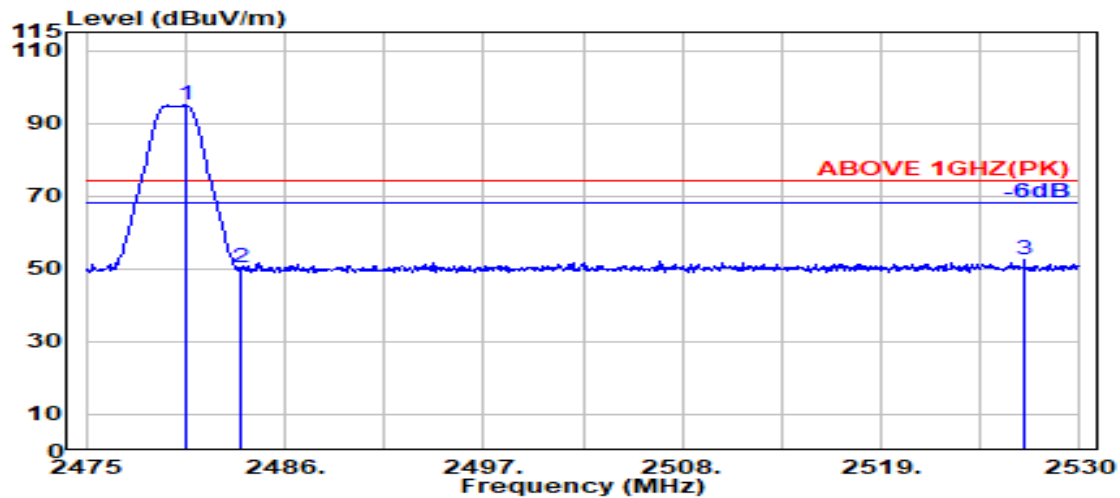

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.500	28.36	5.83	39.87	100.55	94.87	---	---	Peak
	2483.500	28.37	5.83	39.87	55.99	50.32	74.00	23.68	Peak
	2526.900	28.56	5.88	39.88	57.88	52.44	74.00	21.56	Peak

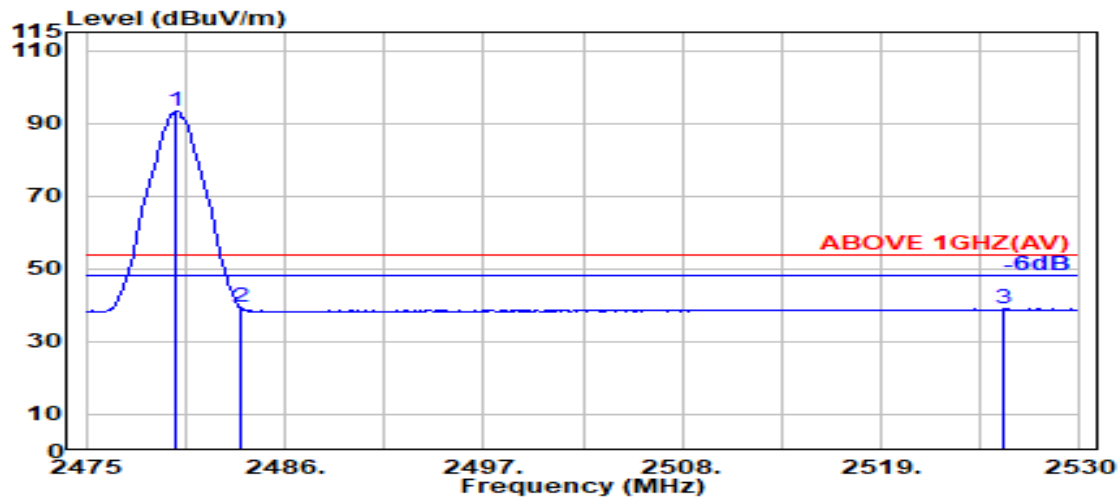

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.950	28.36	5.83	39.87	98.89	93.20	---	---	Average
	2483.500	28.37	5.83	39.87	45.12	39.44	54.00	14.56	Average
	2525.800	28.56	5.88	39.88	44.42	38.98	54.00	15.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

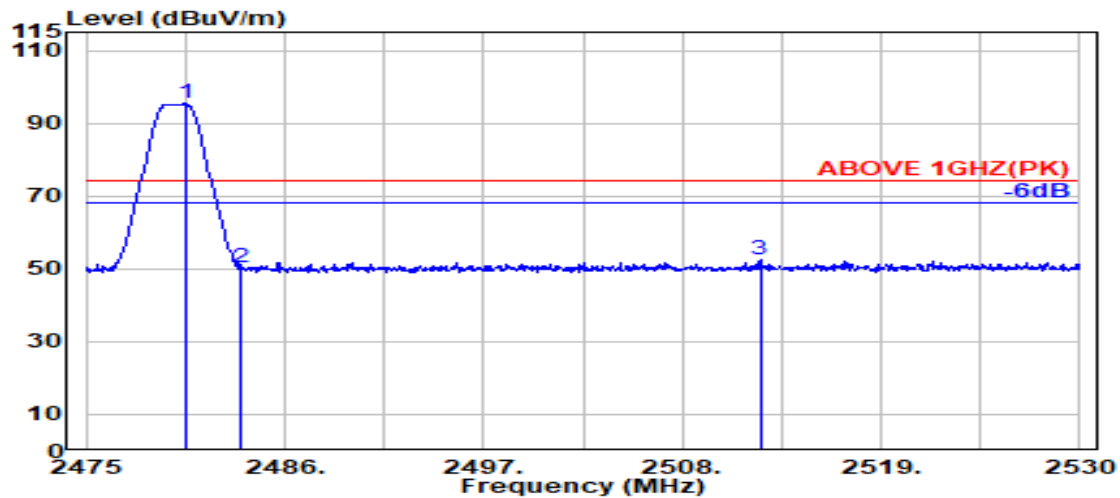

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.500	28.36	5.83	39.87	100.98	95.29	---	---	Peak
	2483.500	28.37	5.83	39.87	55.82	50.14	74.00	23.86	Peak
	2512.300	28.47	5.87	39.87	57.90	52.36	74.00	21.64	Peak

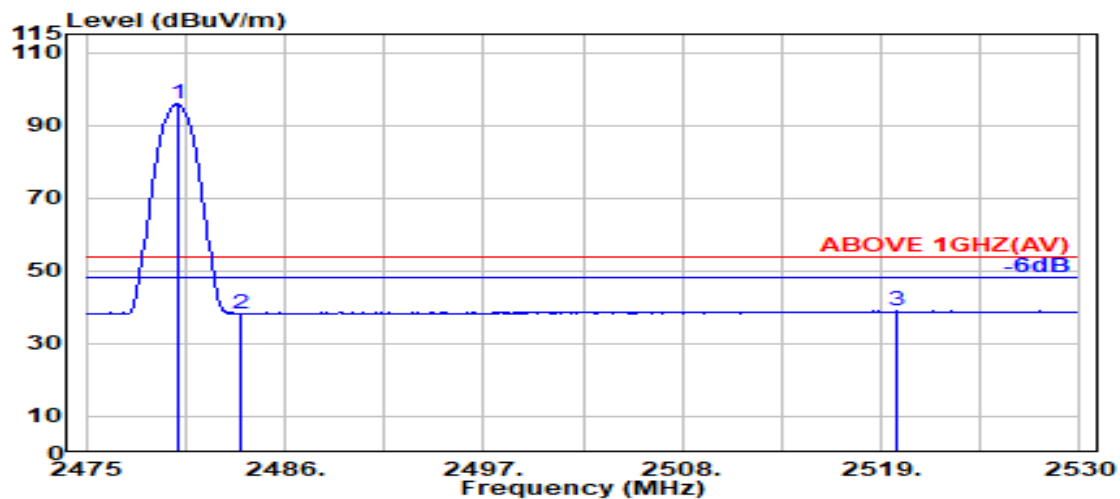

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.050	28.36	5.83	39.87	101.52	95.84	---	---	Average
	2483.500	28.37	5.83	39.87	43.89	38.22	54.00	15.78	Average
	2519.800	28.52	5.87	39.88	44.41	38.92	54.00	15.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.20	8.18	39.24	39.23	41.37	54.00	12.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.20	8.18	39.24	39.29	41.43	54.00	12.57	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	39.65	41.81	54.00	12.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.20	8.19	39.24	40.04	42.20	54.00	11.80	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.24	41.31	54.00	12.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.38	41.45	54.00	12.55	Peak

Mode	802.11n-HT40	Frequency	TX 2437 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	39.39	41.43	54.00	12.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	38.35	40.39	54.00	13.61	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.97	42.04	54.00	11.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.16	39.26	39.45	41.52	54.00	12.48	Peak

Mode	802.11ax-HE40	Frequency	TX 2437 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	40.04	42.08	54.00	11.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	38.93	40.97	54.00	13.03	Peak

Mode	802.11be-EHT20	Frequency	TX 2417 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.04	8.14	39.29	39.33	41.22	54.00	12.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.04	8.14	39.29	41.33	43.21	54.00	10.79	Peak

Mode	802.11be-EHT40	Frequency	TX 2437 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	39.50	41.54	54.00	12.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.15	8.16	39.27	39.78	41.82	54.00	12.18	Peak

● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.03	40.77	54.00	13.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.92	8.13	39.30	39.02	40.76	54.00	13.24	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	38.17	40.23	54.00	13.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.16	8.16	39.27	38.97	41.03	54.00	12.97	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	39.25	41.46	54.00	12.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.24	8.20	39.23	39.74	41.96	54.00	12.04	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 DTS/OCCUPIED BANDWIDTH

Test Date	2025/02/06 ~ 18	Temp./Hum.	19 ~ 20°C/56 ~ 64%
Cable Loss	2.35dB	Tested By	Ryan Chiang
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		AUX	Main	AUX	Main	
802.11b	2412	8.577	9.035	13.433	13.413	>500kHz
	2442	9.031	9.036	13.450	13.457	
	2462	9.033	9.036	13.420	13.479	
	2472	9.033	9.039	13.444	13.478	
802.11g	2412	15.51	15.13	16.933	16.872	
	2442	15.33	15.12	16.692	16.906	
	2462	15.46	15.33	16.719	16.670	
	2472	16.38	16.37	16.393	16.391	
802.11n-HT20	2412	15.69	17.51	17.948	17.863	
	2442	15.33	17.51	17.823	17.835	
	2462	16.53	17.54	17.759	17.814	
	2472	17.64	17.64	17.553	17.584	
802.11n-HT40	2422	35.68	35.42	36.032	36.032	
	2442	35.40	36.30	36.060	36.082	
	2452	36.03	35.67	36.101	36.012	
	2462	36.43	36.45	36.165	36.170	
802.11ax-HE20	2412	16.70	17.48	18.944	18.917	
	2442	16.61	18.07	18.955	18.909	
	2462	17.43	17.86	18.972	18.923	
	2472	18.61	18.78	18.745	18.756	
802.11ax-HE40	2422	36.46	35.90	37.548	37.567	
	2442	36.36	35.89	37.574	37.577	
	2452	36.11	35.88	37.563	37.601	
	2462	37.35	37.60	37.642	37.629	
802.11be-EHT20	2412	15.20	15.13	18.958	18.963	
	2442	17.64	17.14	18.927	18.951	
	2462	17.12	16.37	18.970	18.957	
	2472	18.58	18.49	18.738	18.754	
802.11be-EHT40	2422	36.72	35.81	37.572	37.555	
	2442	36.05	36.20	37.600	37.622	
	2452	36.41	35.19	37.566	37.548	
	2462	37.62	37.69	37.639	37.611	




Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE (1Mbps)	2402	0.6907	1.0131	>500kHz
	2440	0.6830	1.0133	
	2480	0.6903	1.0131	
BLE (2Mbps)	2402	1.116	2.0249	
	2440	1.141	2.0216	
	2480	1.134	2.0177	
BLE (PHY Coded S2)	2402	0.6567	1.0032	
	2440	0.6565	1.0050	
	2480	0.6572	1.0024	
BLE (PHY Coded S8)	2402	0.6393	1.0343	
	2440	0.6415	1.0368	
	2480	0.6408	1.0364	

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots

● DTS (6dB) Bandwidth

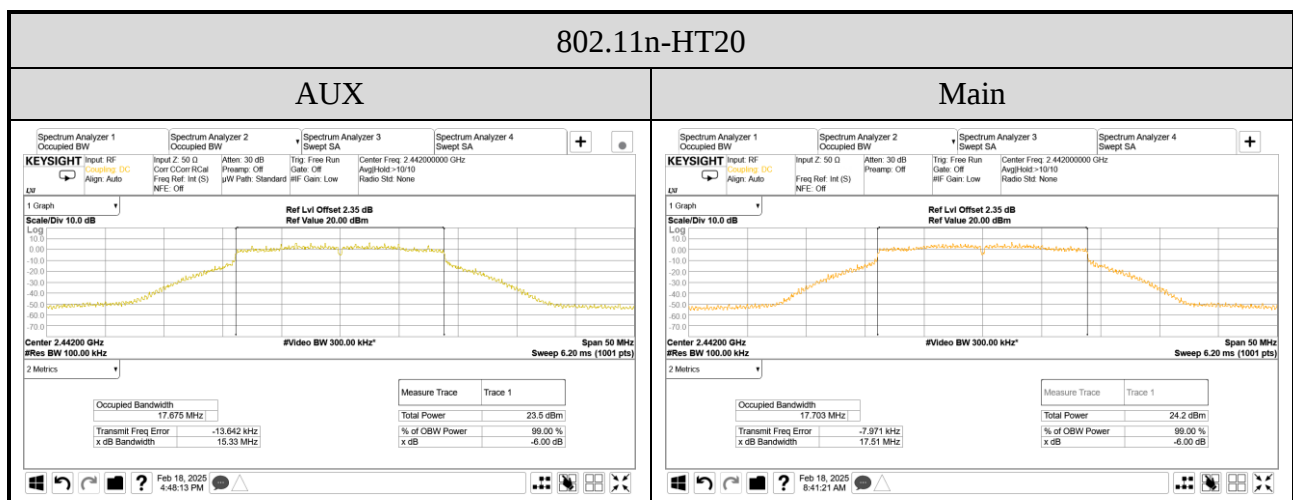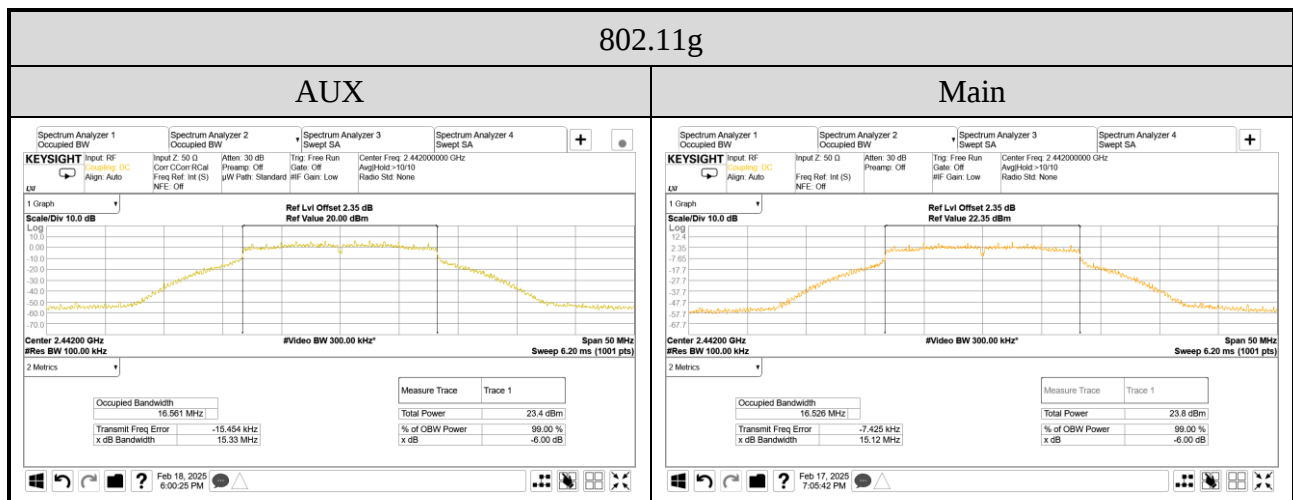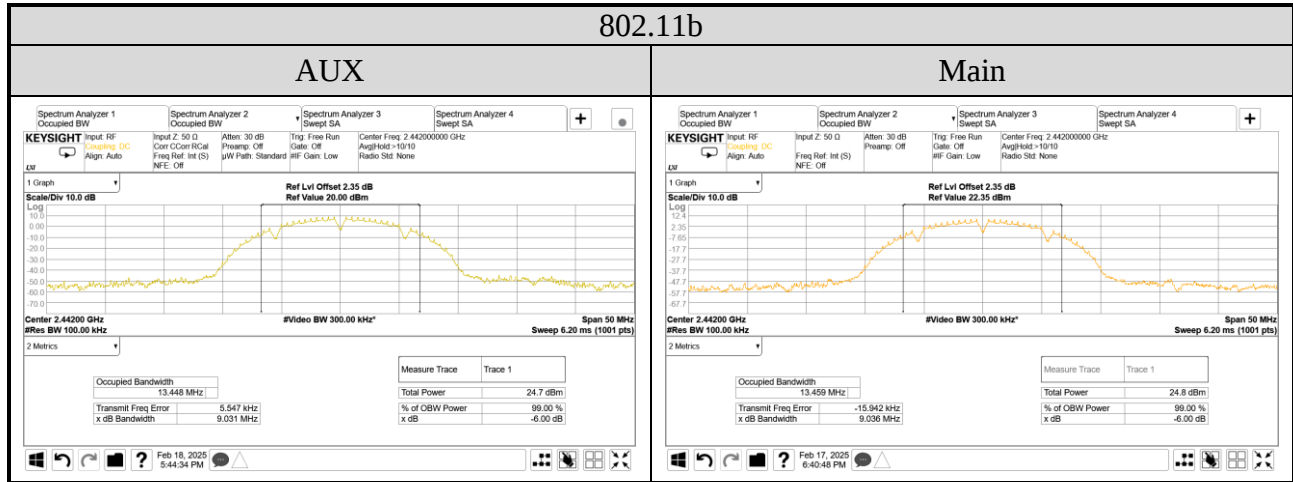


802.11n-HT40

AUX

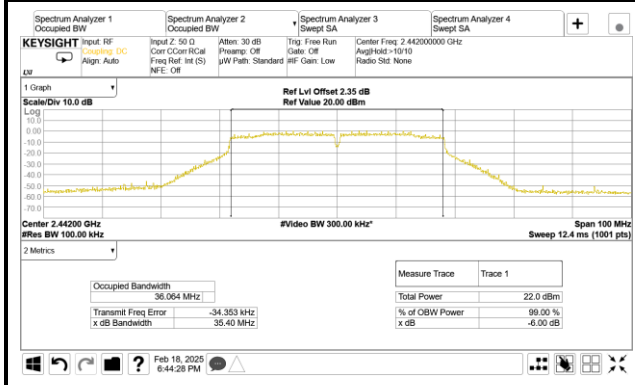


Main

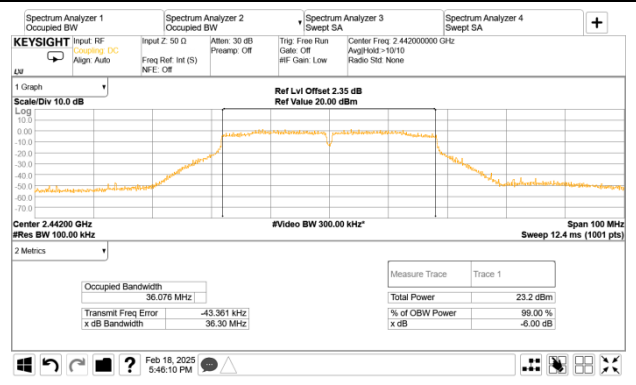


802.11ax-HE20

AUX

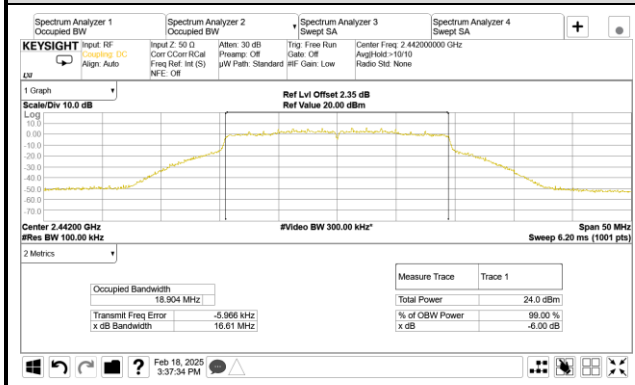


Main

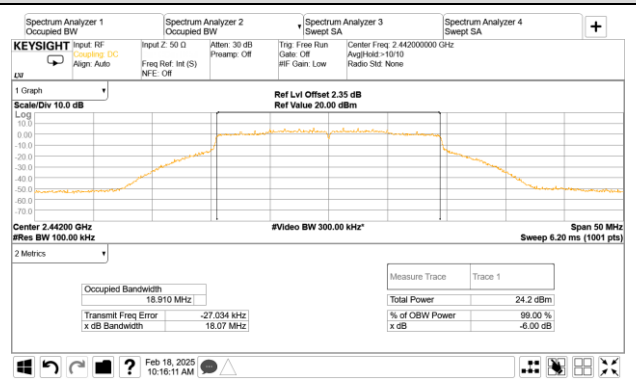


802.11ax-HE40

AUX

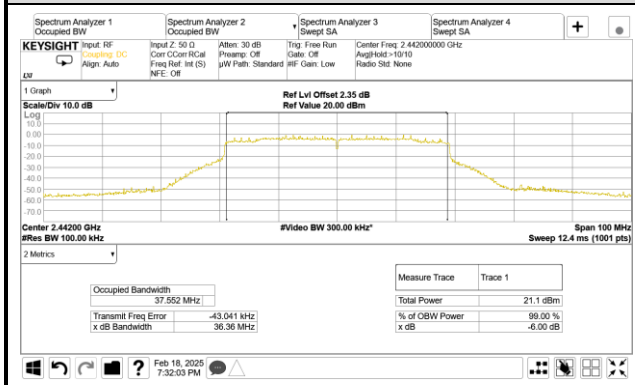


Main

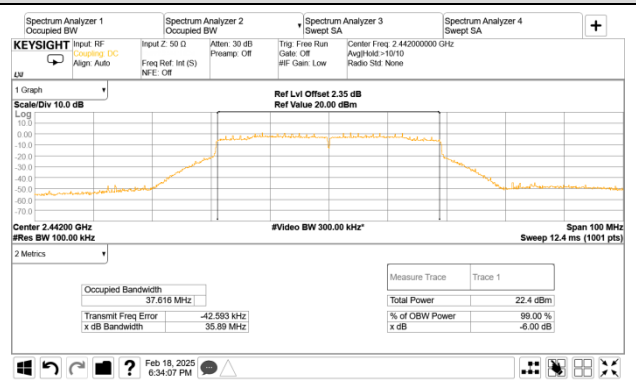



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

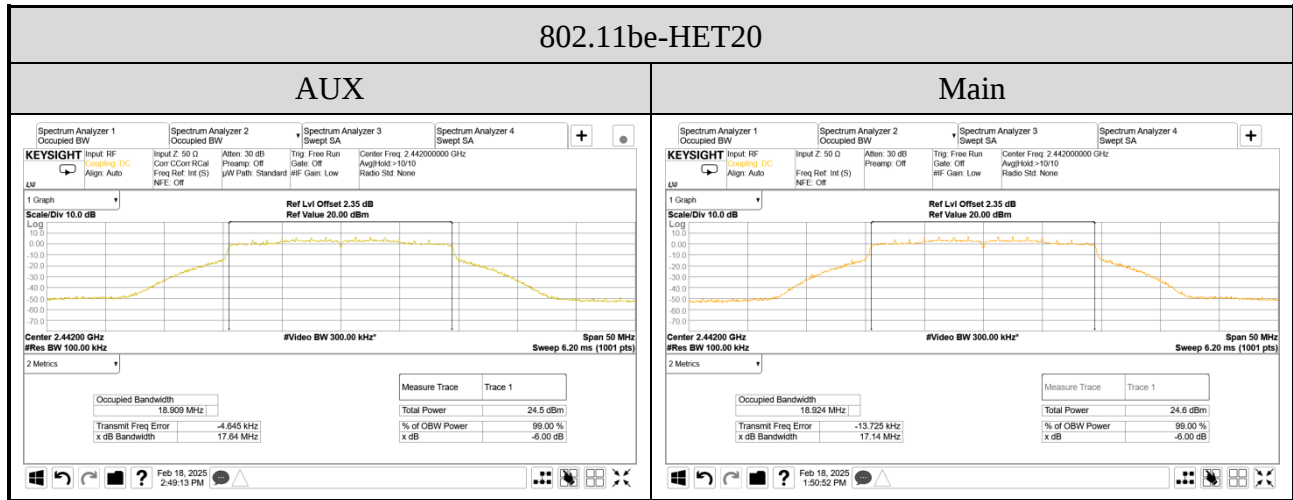

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan




Tel: +886 2 26099301
Fax: +886 2 26099303

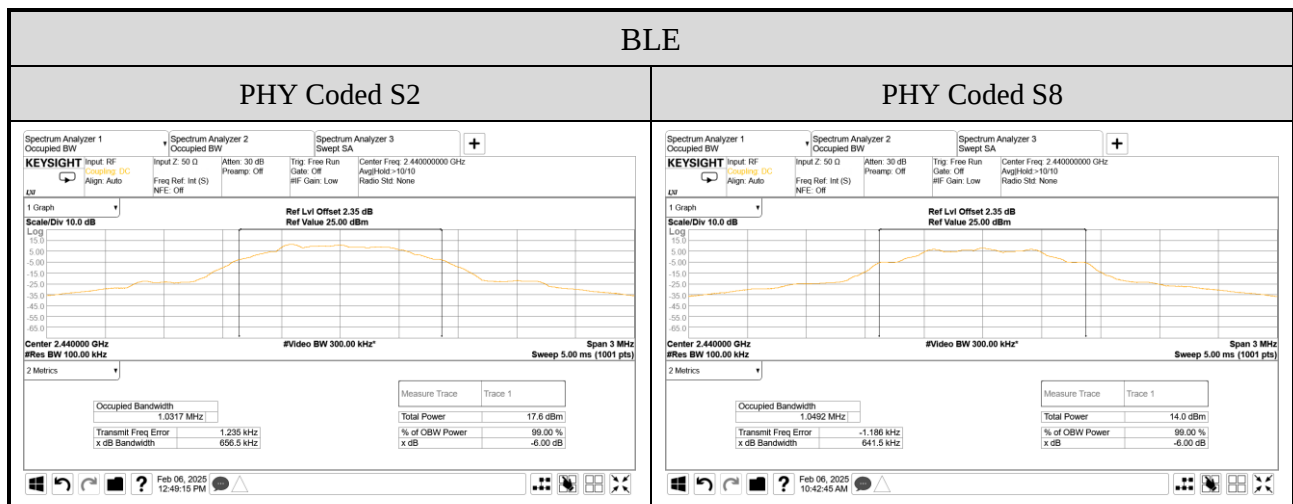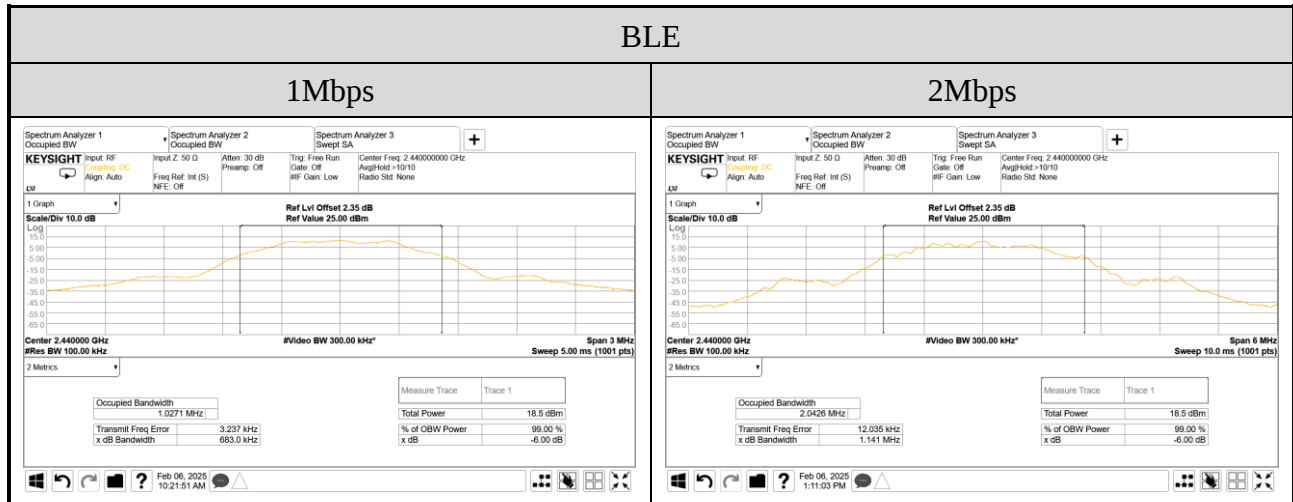

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

● Occupied (99%) Bandwidth

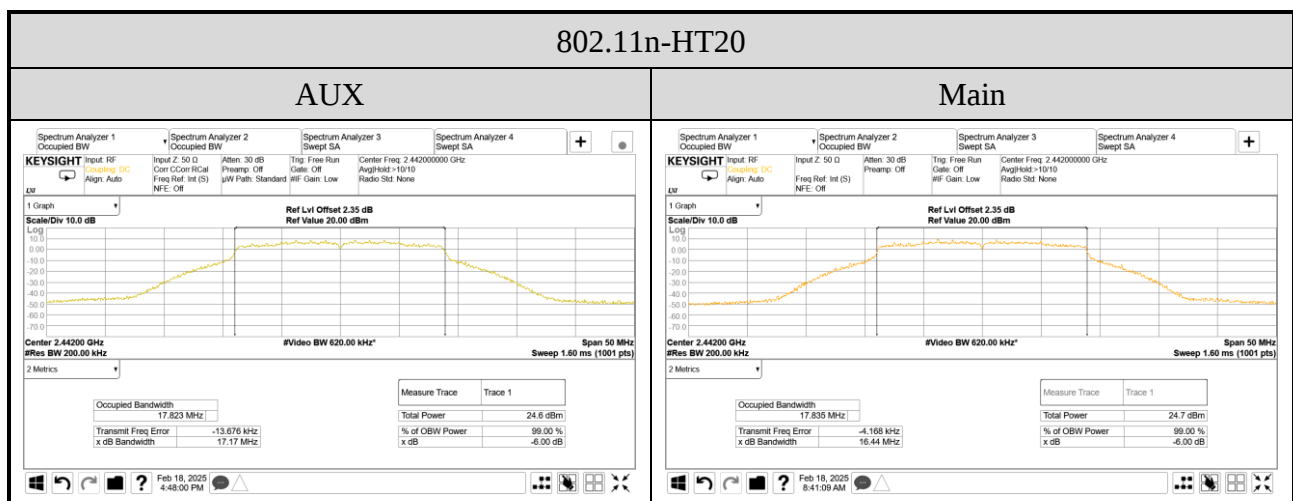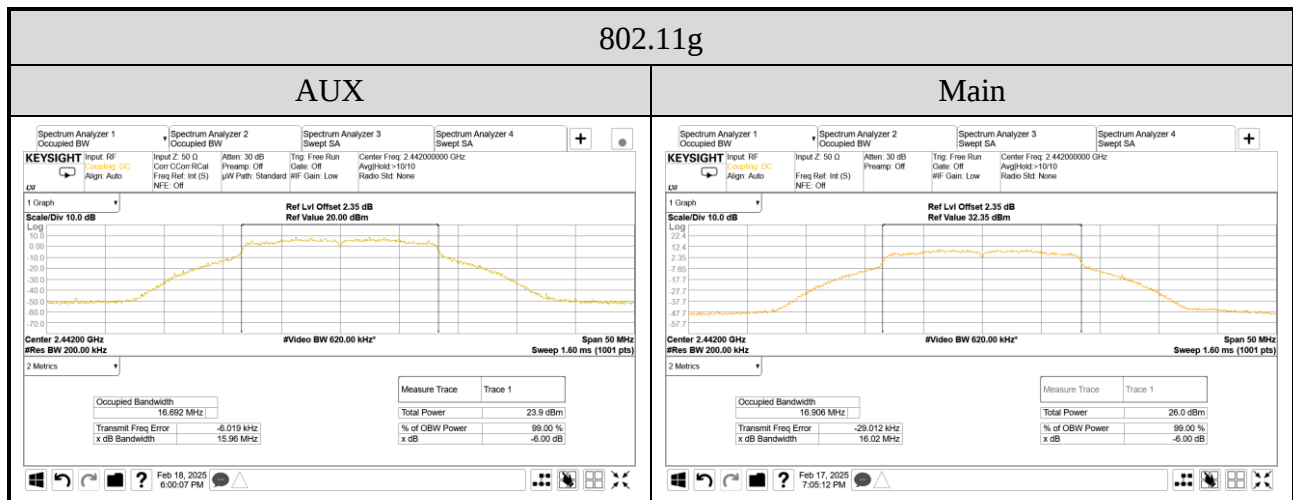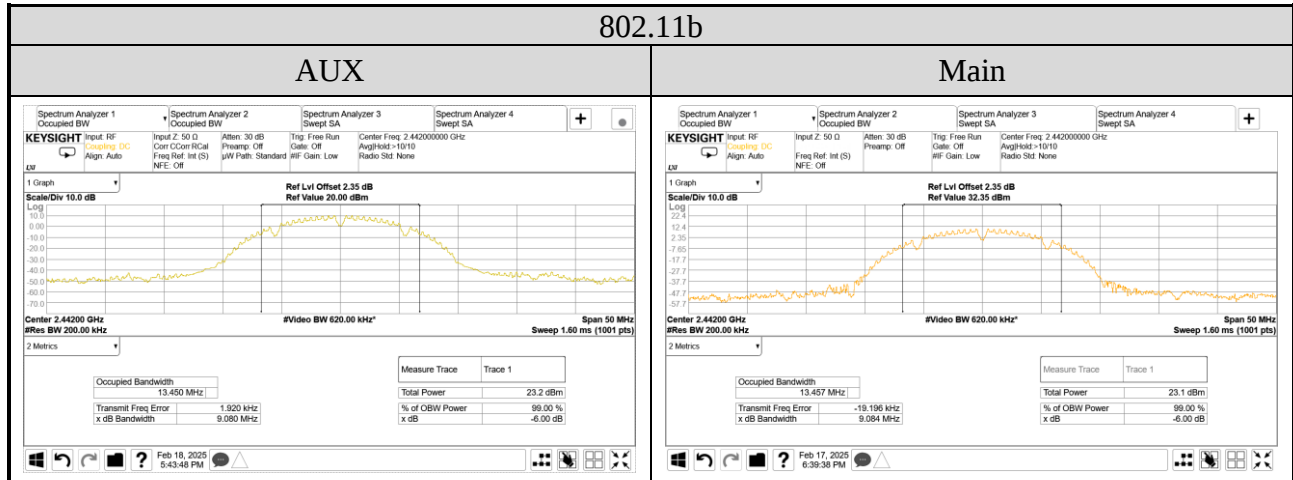


802.11n-HT40

AUX

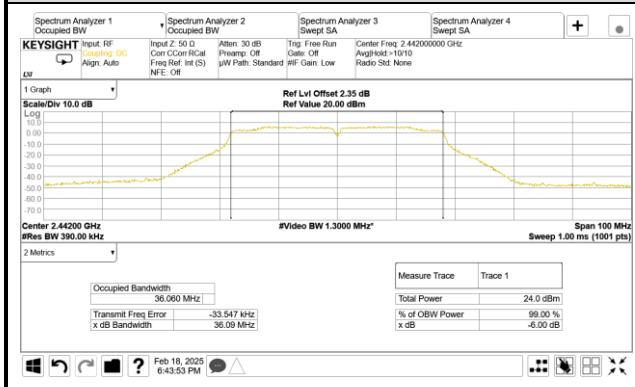

Main

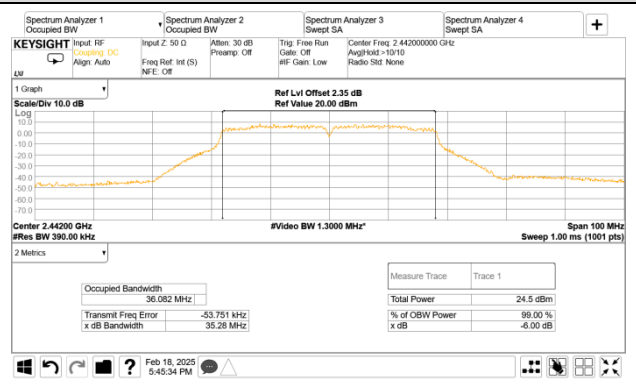


802.11ax-HE20

AUX




Main

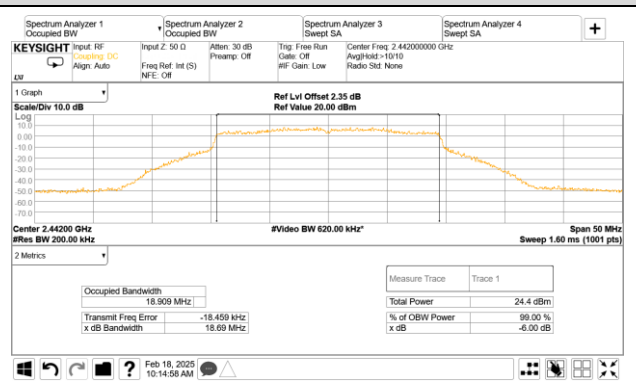


802.11ax-HE40

AUX


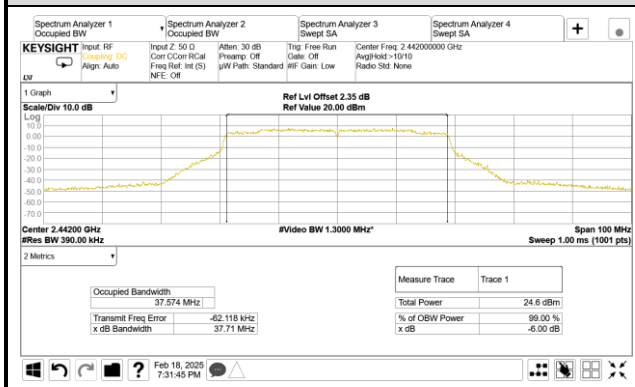




Main

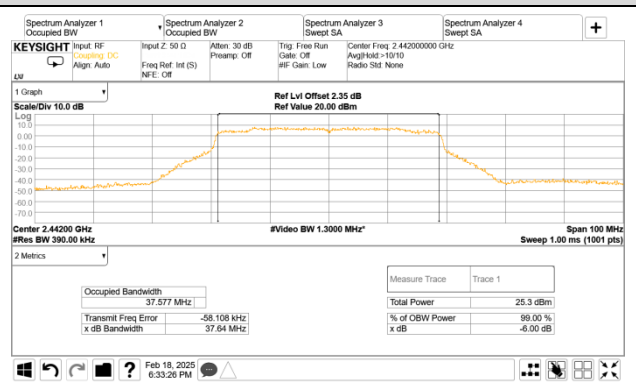

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

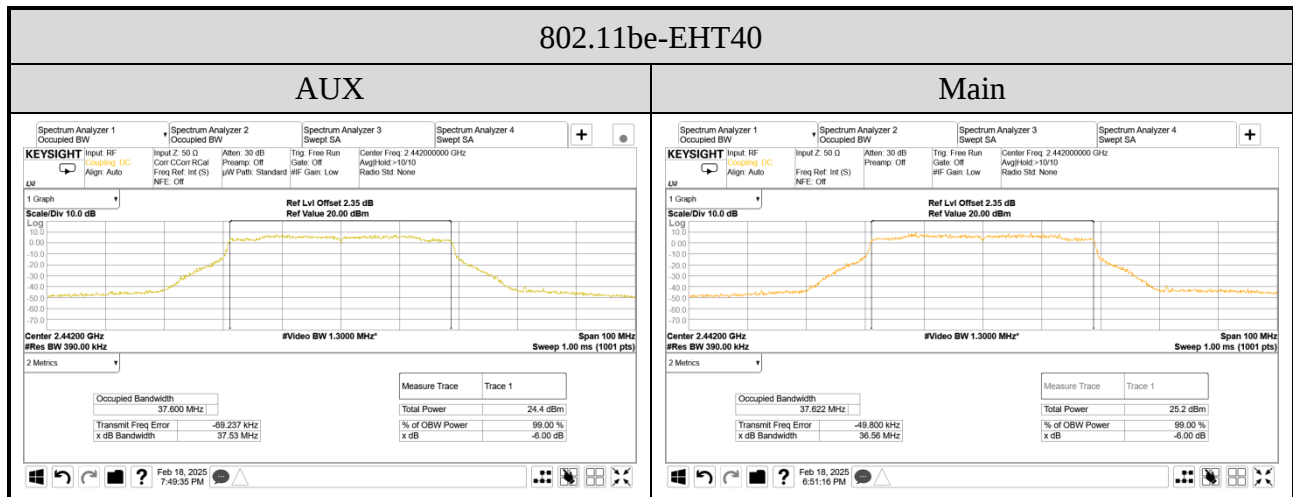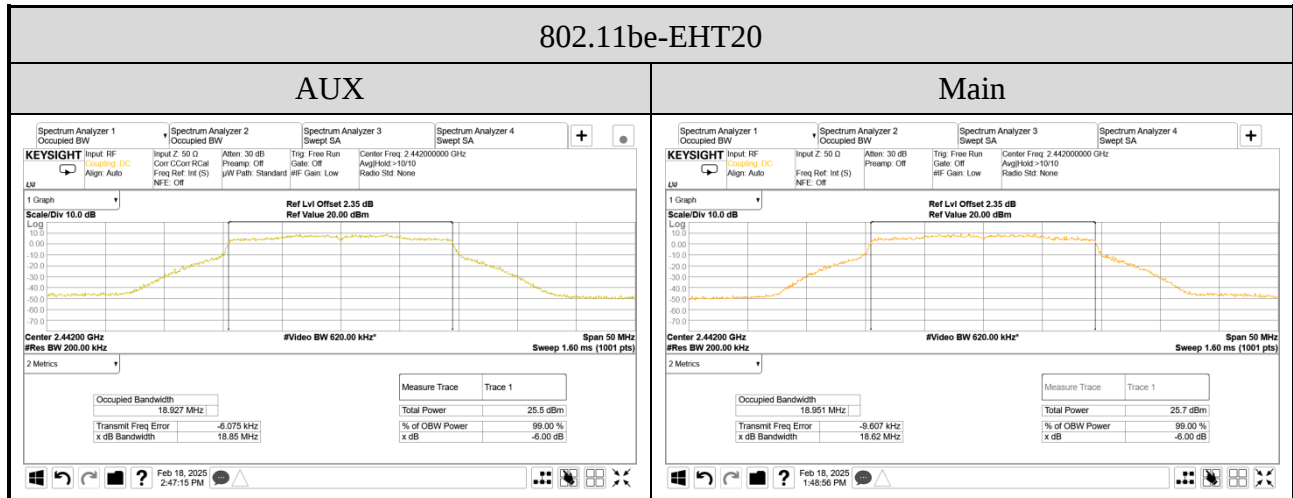

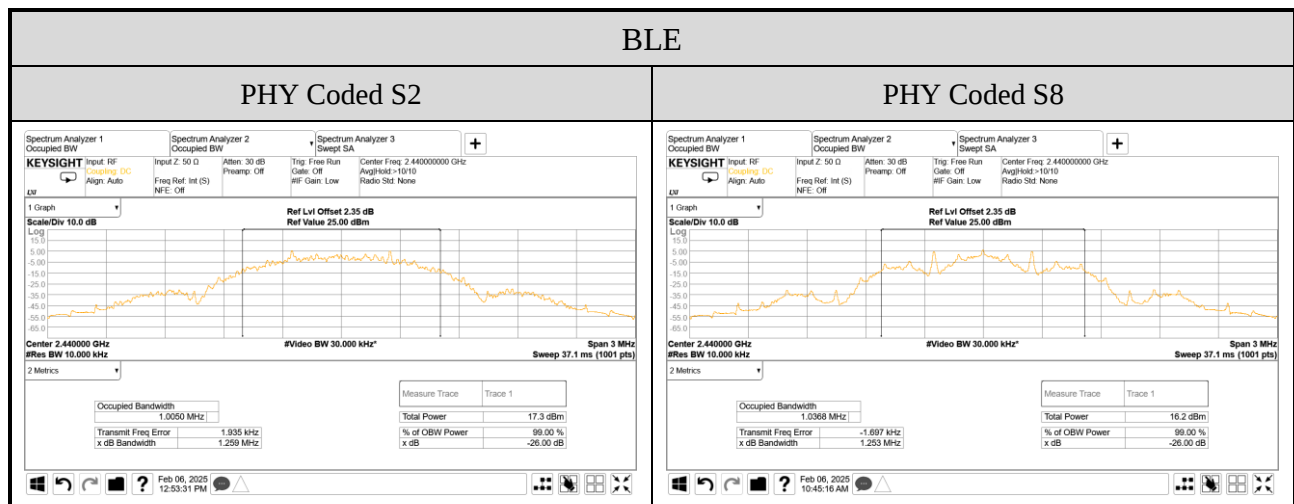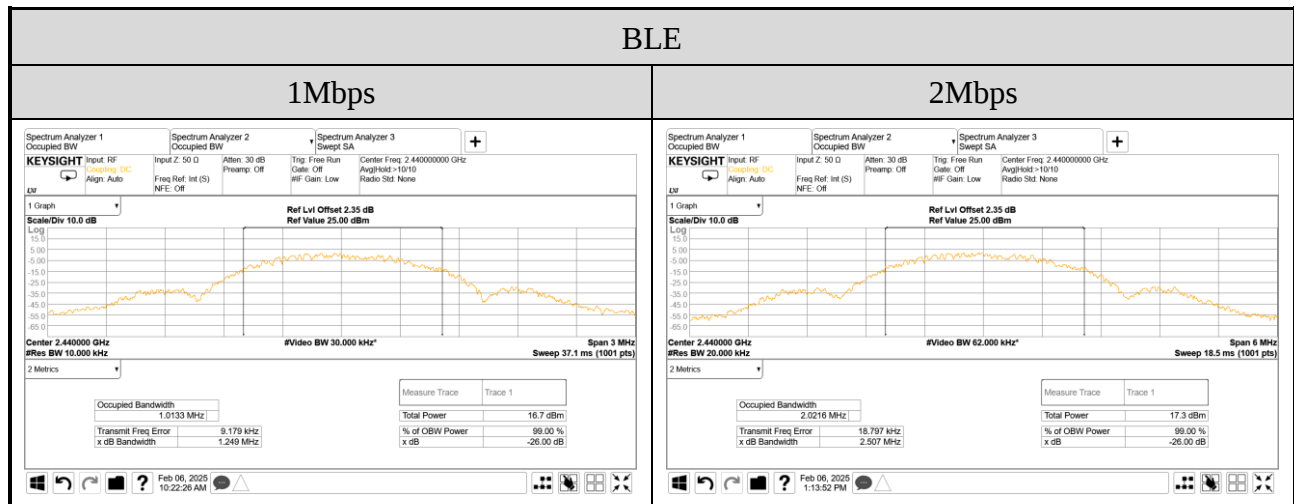

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2025/02/05 ~ 13	Temp./Hum.	18 ~ 20°C/58 ~ 62%
Cable Loss	2.35dB	Tested By	Ryan Chiang
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power (dBm)	Antenna Gain (dBi)		E.I.R.P. (dBm) ^{Note 2}	Limit
		Aux	Main		Aux	Main		
802.11b	2412	18.05	21.01	21.01	2.70	1.50	22.51	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	18.36	21.04	21.04	2.70	1.50	22.54	
	2422	19.15	20.79	20.79	2.70	1.50	22.29	
	2442	20.33	21.48	21.48	2.70	1.50	23.03	
	2467	20.74	20.95	20.95	2.70	1.50	23.44	
	2472	18.47	19.72	19.72	2.70	1.50	21.22	
802.11g	2412	22.34	23.77	23.77	2.70	1.50	25.27	
	2417	22.84	23.80	23.80	2.70	1.50	25.54	
	2442	22.89	23.51	23.51	2.70	1.50	25.59	
	2462	23.07	23.66	23.66	2.70	1.50	25.77	
	2467	18.82	20.29	20.29	2.70	1.50	21.79	
	2472	23.10	24.55	24.55	2.70	1.50	26.05	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power Note 2 (dBm)	Directional Gain Note 3 (dBi)	E.I.R.P. ^{Note 4} (dBm)	Limit
		Aux	Main				
802.11n-HT20	2412	21.31	21.91	24.63	2.14	26.77	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	22.84	23.68	26.29	2.14	28.43	
	2442	23.13	23.70	26.43	2.14	28.57	
	2462	22.39	22.95	25.69	2.14	27.83	
	2467	17.59	17.92	20.77	2.14	22.91	
	2472	23.02	23.19	26.12	2.14	28.26	
802.11n-HT40	2422	22.30	23.00	25.67	2.14	27.81	
	2427	22.94	23.66	26.33	2.14	28.47	
	2432	23.21	23.85	26.55	2.14	28.69	
	2437	23.37	23.88	26.64	2.14	28.78	
	2442	23.32	23.63	26.49	2.14	28.63	
	2447	22.34	22.94	25.66	2.14	27.80	
	2452	22.41	22.97	25.71	2.14	27.85	
	2462	22.54	23.20	25.89	2.14	28.03	
802.11ax- HE20	2412	21.15	21.87	24.54	2.14	26.68	
	2417	22.84	23.56	26.23	2.14	28.37	
	2442	22.88	23.58	26.25	2.14	28.39	
	2462	22.31	22.86	25.60	2.14	27.74	
	2467	17.37	17.56	20.48	2.14	22.62	
	2472	21.90	22.28	25.10	2.14	27.24	
802.11ax- HE40	2422	22.23	22.84	25.56	2.14	27.70	
	2427	22.73	23.67	26.24	2.14	28.38	
	2432	23.18	23.86	26.54	2.14	28.68	
	2437	23.12	23.86	26.52	2.14	28.66	
	2442	23.16	23.55	26.37	2.14	28.51	
	2447	22.27	22.85	25.58	2.14	27.72	
	2452	22.25	22.96	25.63	2.14	27.77	
	2462	22.14	22.57	25.37	2.14	27.51	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{1.5/10} + 10^{2.7/10})/2] = 2.14 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power Note 2 (dBm)	Directional Gain Note 3 (dBi)	E.I.R.P ^{Note 4} (dBm)	Limit
		Aux	Main				
802.11be- EHT20	2412	21.09	21.88	24.51	2.14	26.65	
	2417	23.25	23.61	26.44	2.14	28.58	
	2442	22.96	23.56	26.28	2.14	28.42	
	2462	22.35	22.82	25.60	2.14	27.74	
	2467	17.45	17.76	20.62	2.14	22.76	
	2472	22.14	22.43	25.30	2.14	27.44	
802.11be- EHT40	2422	22.24	22.96	25.63	2.14	27.77	
	2427	23.10	23.77	26.46	2.14	28.60	
	2432	23.31	23.88	26.61	2.14	28.75	
	2437	23.38	23.87	26.64	2.14	28.78	
	2442	23.39	23.76	26.59	2.14	28.73	
	2447	22.24	22.78	25.53	2.14	27.67	
	2452	22.57	23.17	25.89	2.14	28.03	
	2462	22.49	22.72	25.62	2.14	27.76	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{1.5/10} + 10^{2.7/10})/2] = 2.14 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Peak Output Power (dBm)		Total Peak Output Power Note 2 (dBm)	Directional Gain Note 3 (dBi)	E.I.R.P. ^{Note 4} (dBm)	Limit
			Aux	Main				
802.11ax-HE20	2412	26/0	22.39	23.00	25.72	2.14	27.86	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	22.54	22.99	25.78	2.14	27.92	
		106/53	22.42	23.00	25.73	2.14	27.87	
	2472	26/8	15.78	16.32	19.07	2.14	21.21	
		52/40	15.05	15.40	18.24	2.14	20.38	
		106/54	20.02	20.61	23.34	2.14	25.48	
802.11ax-HE40	2422	242/61	21.35	21.84	24.61	2.14	26.75	
	2462	242/62	22.79	23.30	26.06	2.14	28.20	
802.11be-EHT20	2412	26/0	22.88	23.43	26.17	2.14	28.31	
		52/37	22.81	23.21	26.02	2.14	28.16	
		106/53	22.94	23.35	26.16	2.14	28.30	
	2472	26/8	16.07	16.68	19.40	2.14	21.54	
		52/40	15.49	15.95	18.74	2.14	20.88	
		106/54	20.40	20.61	23.52	2.14	25.66	
802.11be-EHT40	2422	242/61	21.43	21.90	24.68	2.14	26.82	
	2462	242/62	21.72	22.10	24.92	2.14	27.06	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{1.5/10} + 10^{2.7/10})/2] = 2.14 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm) ^{Note 2}	Limit
		Aux	Aux		
BLE (1Mbps)	2402	13.03	2.70	15.73	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	13.19	2.70	15.89	
	2480	13.05	2.70	15.75	
BLE (2Mbps)	2402	12.92	2.70	15.62	
	2440	13.32	2.70	16.02	
	2480	13.32	2.70	16.02	
BLE (PHY Coded S2)	2402	11.47	2.70	14.17	
	2440	11.76	2.70	14.46	
	2480	11.63	2.70	14.33	
BLE (PHY Coded S8)	2402	10.69	2.70	13.39	
	2440	10.22	2.70	12.92	
	2480	10.97	2.70	13.67	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Peak Output Power (dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Average Output Power (Reporting only)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Max Average Output Power (dBm)	Antenna Gain (dBi)		E.I.R.P (dBm) ^{Note 2}	Limit
		Aux	Main			Aux	Main		
802.11b	2412	15.95	18.85	N/A	18.85	1.50	2.70	21.55	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	16.24	18.81		18.81	1.50	2.70	21.51	
	2422	17.03	18.67		18.67	1.50	2.70	21.37	
	2442	18.23	18.85		18.85	1.50	2.70	21.55	
	2467	18.57	18.79		18.79	1.50	2.70	21.49	
	2472	16.35	17.59		17.59	1.50	2.70	20.29	
802.11g	2412	17.60	18.82	N/A	18.82	1.50	2.70	21.62	
	2417	18.13	18.85		18.85	1.50	2.70	21.65	
	2442	18.17	18.74		18.74	1.50	2.70	21.54	
	2462	18.28	18.88		18.88	1.50	2.70	21.68	
	2467	14.11	15.28		15.28	1.50	2.70	18.08	
	2472	12.53	13.69		13.69	1.50	2.70	16.49	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Average Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power Note 2 (dBm)	Directional Gain Note 3 (dBi)	Average Output Power (E.I.R.P.) Note 4 (dBm)	Limit
		Aux	Main					
802.11n- HT20	2412	16.24	16.93	N/A	19.61	2.14	21.75	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	18.01	18.68		21.37	2.14	23.51	
	2442	18.07	18.60		21.35	2.14	23.49	
	2462	17.37	17.94		20.67	2.14	22.81	
	2467	12.50	12.64		15.58	2.14	17.72	
	2472	11.53	11.75		14.65	2.14	16.79	
802.11n- HT40	2422	16.51	17.13	N/A	19.84	2.14	21.98	
	2427	17.20	17.89		20.57	2.14	22.71	
	2432	17.44	18.00		20.74	2.14	22.88	
	2437	17.48	18.03		20.77	2.14	22.91	
	2442	17.37	17.83		20.62	2.14	22.76	
	2447	16.43	17.02		19.75	2.14	21.89	
	2452	16.55	17.14		19.87	2.14	22.01	
	2462	11.81	12.15		14.99	2.14	17.13	
802.11ax- HE20	2412	16.19	16.88	N/A	19.56	2.14	21.70	
	2417	17.95	18.62		21.31	2.14	23.45	
	2442	18.03	18.55		21.31	2.14	23.45	
	2462	17.32	17.85		20.60	2.14	22.74	
	2467	12.40	12.57		15.50	2.14	17.64	
	2472	11.49	11.65		14.58	2.14	16.72	
802.11ax- HE40	2422	16.47	17.02	N/A	19.76	2.14	21.90	
	2427	17.09	17.78		20.46	2.14	22.60	
	2432	17.35	17.91		20.65	2.14	22.79	
	2437	17.40	17.94		20.69	2.14	22.83	
	2442	17.30	17.74		20.54	2.14	22.68	
	2447	16.33	16.90		19.63	2.14	21.77	
	2452	16.49	17.04		19.78	2.14	21.92	
	2462	11.77	12.07		14.93	2.14	17.07	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total Ave power = sum to individual output power + duty cycle factor (dB), when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.10 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power Note 2 (dBm)	Directional Gain Note 3 (dBi)	Average Output Power (E.I.R.P.) ^{Note 4} (dBm)	Limit
		Aux	Main					
802.11be-EHT20	2412	16.18	16.85	N/A	19.54	2.14	21.68	
	2417	17.94	18.56		21.27	2.14	23.41	
	2442	17.96	18.46		21.23	2.14	23.37	
	2462	17.31	17.83		20.59	2.14	22.73	
	2467	12.42	12.53		15.49	2.14	17.63	
	2472	11.48	11.60		14.55	2.14	16.69	
802.11be-EHT40	2422	16.46	17.03	N/A	19.76	2.14	21.90	
	2427	17.13	17.82		20.50	2.14	22.64	
	2432	17.39	17.90		20.66	2.14	22.80	
	2437	17.39	17.94		20.68	2.14	22.82	
	2442	17.31	17.70		20.52	2.14	22.66	
	2447	16.33	16.89		19.63	2.14	21.77	
	2452	16.50	17.07		19.80	2.14	21.94	
	2462	11.79	12.04		14.93	2.14	17.07	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total Ave power = sum to individual output power + duty cycle factor (dB), when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.1 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power (dBm)		Duty cycle factor (dB) 10log	Total Average Output Power Note 2 (dBm)	Directional Gain Note 3 (dBi)	Average Output Power (E.I.R.P) Note 4	Limit
			Aux	Main					
802.11ax-HE20	2412	26/0	17.86	18.51	N/A	21.21	2.14	23.35	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	18.03	18.70	0.097	21.49	2.14	23.63	
		106/53	18.03	18.69	N/A	21.38	2.14	23.52	
	2472	26/8	1.95	2.20	N/A	5.09	2.14	7.23	
		52/40	1.32	1.57	0.097	4.55	2.14	6.69	
		106/54	7.34	7.82	N/A	10.60	2.14	12.74	
802.11ax-HE40	2422	242/61	16.06	16.74	0.097	19.52	2.14	21.66	
	2462	242/62	10.23	10.38	0.097	13.41	2.14	15.55	
802.11be-EHT20	2412	26/0	17.83	18.49	0.097	21.28	2.14	23.42	
		52/37	18.05	18.70	0.097	21.49	2.14	23.63	
		106/53	18.04	18.69	N/A	21.39	2.14	23.53	
	2472	26/8	2.10	2.34	0.097	5.33	2.14	7.47	
		52/40	1.46	1.73	0.097	4.70	2.14	6.84	
		106/54	7.52	7.96	N/A	10.76	2.14	12.90	
802.11be-EHT40	2422	242/61	16.05	16.71	0.097	19.50	2.14	21.64	
	2462	242/62	10.25	10.40	0.097	13.43	2.14	15.57	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total Ave power = sum to individual output power + duty cycle factor (dB), when duty cycle is less than 98%.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.10 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).