

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics Inc.

Address:
19-1 Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do,
451-713, Korea

Date of Issue:

September 21, 2012

Test Site/Location:

HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea

Report No.: HCTR1209FR10-1

HCT FRN: 0005866421

FCC ID : BEJTWFM006D

APPLICANT : LG Electronics Inc.

FCC Model(s): TWFM-B006D

EUT Type: Wi-Fi module

Max. RF Output Power: Ant.0: Wi-Fi 802.11a (5180~5240) (13.57 dBm)/ Wi-Fi 802.11n_20 MHz (5180~5240) (13.30 dBm)/ Wi-Fi 802.11n_40 MHz (5190~5230) (13.01 dBm)

Ant.1: Wi-Fi 802.11a (5180~5240) (13.94 dBm)/ Wi-Fi 802.11n_20 MHz (5180~5240) (14.03 dBm)/ Wi-Fi 802.11n_40 MHz (5190~5230) (13.71 dBm)

Frequency Range: 20 MHz BW: 5180 MHz - 5240 MHz (UNII Band 1)

40 MHz BW: 5190 MHz - 5230 MHz (UNII Band 1)

Modulation type DSSS/OFDM

FCC Classification: Unlicensed National Information Infrastructure(UNII)

FCC Rule Part(s): Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)



Report prepared by

: Jong Seok Lee

Test engineer of RF Team



Approved by

: Chang Seok Choi

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFM006D

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1209FR10	September 19, 2012	- First Approval Report
HCTR1209FR10-1	September 21, 2012	- Add Directional Gain Calculation (Page.7)

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. SUMMARY OF TEST RESULTS	8
8. TEST RESULT	9
8.1 26 dB BANDWIDTH MEASUREMENT	9
8.2 OUTPUT POWER MEASUREMENT	20
8.3 POWER SPECTRAL DENSITY	95
8.4 PEAK EXCURSION RATIO.....	106
8.5 FREQUENCY STABILITY.	115
8.6 RADIATED MEASUREMENT.....	117
8.6.1 RADIATED SPURIOUS EMISSIONS.....	117
8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	129
8.7 POWERLINE CONDUCTED EMISSIONS	130
9. LIST OF TEST EQUIPMENT	131



1. GENERAL INFORMATION

Applicant: LG Electronics Inc.
Address: 19-1 Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, 451-713, Korea
FCC ID: BEJTWFM006D
EUT Type: Wi-Fi module
Model name(s): TWFM-B006D
Date(s) of Tests: August 26, 2012 ~ September 12, 2012
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Wi-Fi module		
FCC Model Name	TWFM-B006D		
Power Supply	DC 3.5 V		
Frequency Range	TX_20 MHz BW	5180 MHz - 5240 MHz (UNII 1)	
	40 MHz BW	5190 MHz - 5230 MHz (UNII 1)	
	RX_20 MHz BW	5180 MHz - 5240 MHz (UNII 1)	
	40 MHz BW	5190 MHz - 5230 MHz (UNII 1)	
Max. RF Output Power:	Ant.0:	Wi-Fi 802.11a (5180~5240) (13.57 dBm)/ Wi-Fi 802.11n_20 MHz (5180~5240) (13.30 dBm)/ Wi-Fi 802.11n_40 MHz (5190~5230) (13.01 dBm)	
	Ant.1:	Wi-Fi 802.11a (5180~5240) (13.94 dBm)/ Wi-Fi 802.11n_20 MHz (5180~5240) (14.03 dBm)/ Wi-Fi 802.11n_40 MHz (5190~5230) (13.71 dBm)	
Modulation Type	OFDM(802.11a, 802.11n)		
Antenna Specification	Ant.0:	Manufacturer: LG Innotek Antenna type: PIFA Antenna Peak Gain : 2.46 dBi	
	Ant.1:	Manufacturer: LG Innotek Antenna type: PIFA Antenna Peak Gain : 2.47 dBi	
	Directional Antenna Gain	5.475 dBi(802.11a_5.2 GHz) 2.465 dBi(802.11n_5.2 GHz)	

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) and FCC KDB 789033 D01 General UNII Test Procedures v01r01 dated March 05, 2012 entitled “ Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

▣ Directional Gain Calculations

- If any transmit signals are correlated with each other(802.11a),

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

- If all transmit signals are completely uncorrelated with each other(802.11n)

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N] \text{ dBi}$$

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

7. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
TRANSMITTER MODE(TX)				
26dB Bandwidth	NA	NA	CONDUCTED	PASS
Maximum Conducted Output Power	§15.407(a)(1)	$< 4+10 \log_{10} (BW) \text{ dBm}$ (5150-5250 MHz) $< 11+10 \log_{10} (BW) \text{ dBm}$ (5250-5350 MHz) $< 11+10 \log_{10} (BW) \text{ dBm}$ (5470-5725 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1), (5)	$< 4 \text{ dBm/ MHz}$ (5150-5250) $< 11 \text{ dBm/ MHz}$ (5250-5350) $< 11 \text{ dBm/ MHz}$ (5470-5725)		PASS
Peak Excursion	§15.407(a)(6)	$< 13 \text{ dB/ MHz}$ maximum difference		PASS
Frequency Stability	§15.407(g)	NA		PASS
Undesirable Emissions	§15.407(b)(1), (2), (3)	$< -27 \text{ dBm/ MHz EIRP}$ (5150-5350 MHz, 5470-5725 MHz)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 5.407(b)(1), (5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	$< \text{FCC 15.207 limits}$	LINE CONDUCTED	PASS


8. TEST RESULT

8.1 26 dB BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

▣ TEST CONFIGURATION

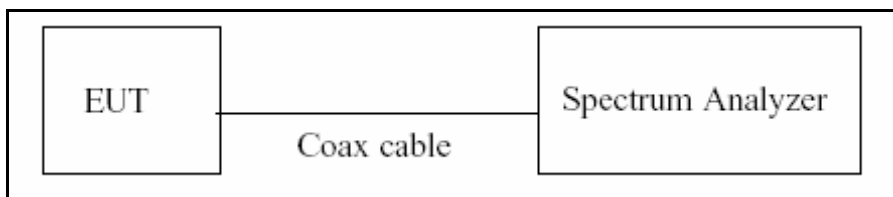

▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: approximately 1 % of the emission bandwidth

VBW: >RBW

SPAN: 40 MHz

Detector = Peak

Trace mode = max hold

■ TEST RESULTS_Ant.0

Conducted 26dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	19.72	N/A	Pass
5200	40	19.26	N/A	Pass
5240	48	19.32	N/A	Pass

Conducted 26dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	19.88	N/A	Pass
5200	40	19.70	N/A	Pass
5240	48	19.69	N/A	Pass

Conducted 26dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.86	N/A	Pass
5230	46	44.42	N/A	Pass

■ TEST RESULTS_Ant.1

Conducted 26dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	19.60	N/A	Pass
5200	40	19.42	N/A	Pass
5240	48	19.55	N/A	Pass

Conducted 26dB Bandwidth Measurements for 802.11n_20 MHz BW


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	19.44	N/A	Pass
5200	40	19.87	N/A	Pass
5240	48	19.72	N/A	Pass

Conducted 26dB Bandwidth Measurements for 802.11n_40 MHz BW


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.73	N/A	Pass
5230	46	43.47	N/A	Pass

RESULT PLOTS_Ant.0

26dB Bandwidth plot (802.11a-CH 36)

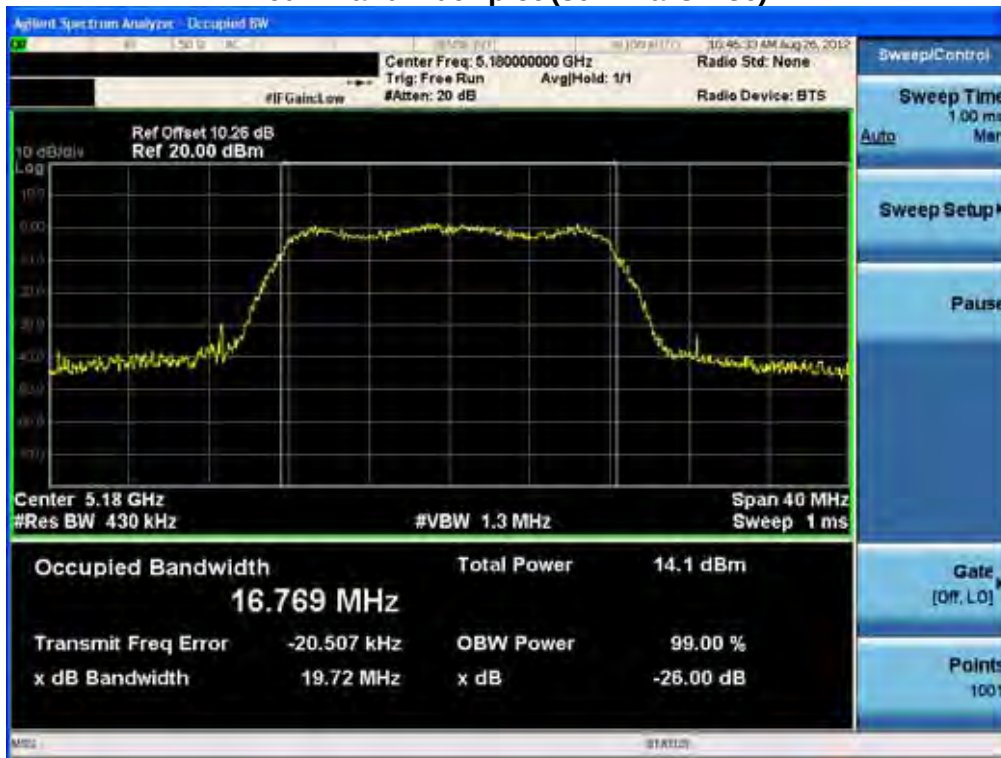

26dB Bandwidth plot (802.11a-CH 40)

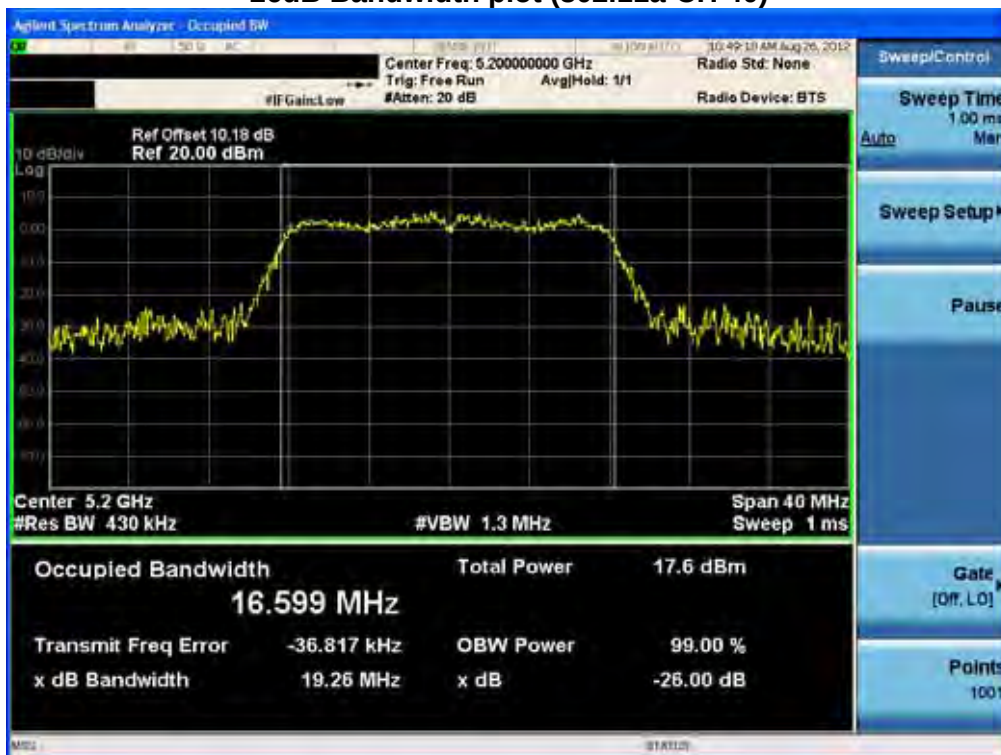

26dB Bandwidth plot (802.11a-CH 48)



26dB Bandwidth plot (802.11n-CH 36)_20 MHz BW



26dB Bandwidth plot (802.11n-CH 40) _20 MHz BW



26dB Bandwidth plot (802.11n-CH 48) _20 MHz BW



26dB Bandwidth plot (802.11n-CH 38)_40 MHz BW




26dB Bandwidth plot (802.11n-CH 46)_40 MHz BW



RESULT PLOTS_Ant.1

26dB Bandwidth plot (802.11a-CH 36)

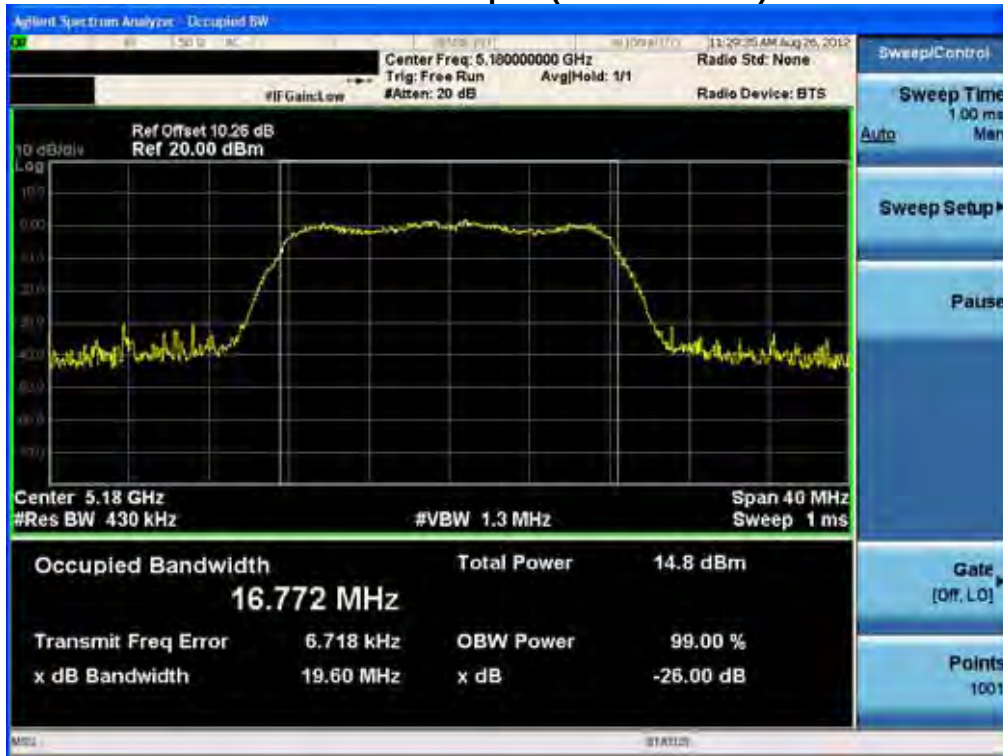

26dB Bandwidth plot (802.11a-CH 40)




26dB Bandwidth plot (802.11a-CH 48)




26dB Bandwidth plot (802.11n-CH 36)_20 MHz BW



26dB Bandwidth plot (802.11n-CH 40) _20 MHz BW

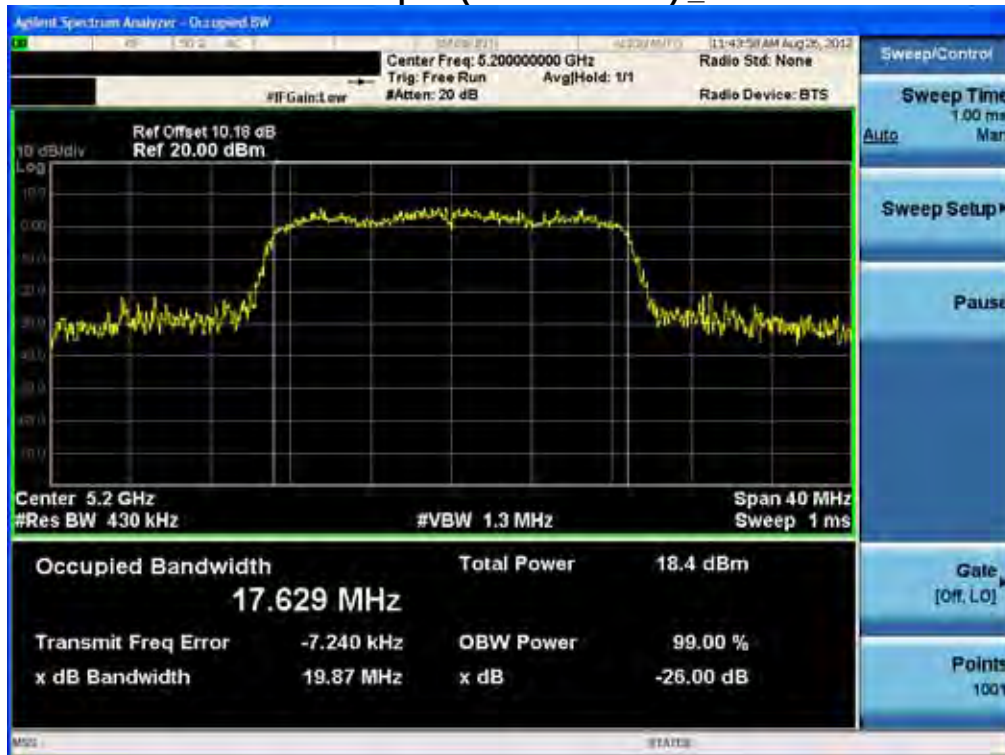

26dB Bandwidth plot (802.11n-CH 48) _20 MHz BW

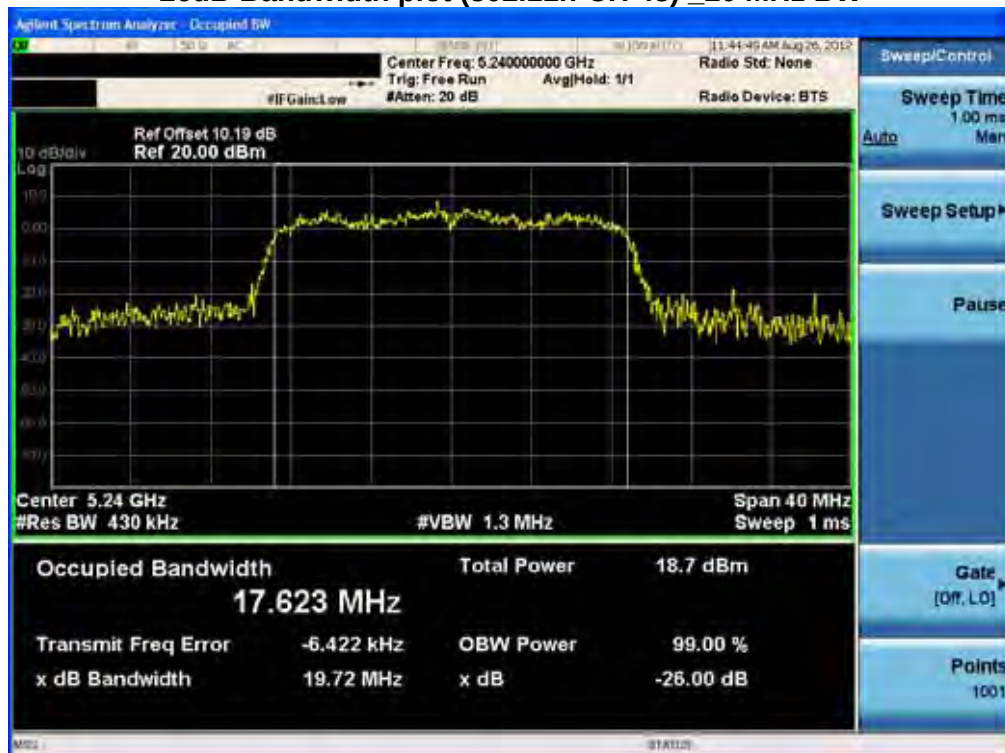

26dB Bandwidth plot (802.11n-CH 38)_40 MHz BW



26dB Bandwidth plot (802.11n-CH 46)_40 MHz BW



8.2 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate

frequencies. In the 5.15 – 5.25 GHz band, the maximum permissible conducted output power is the lesser of 50 mW (16.99 dBm) and $4 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

frequencies. In the 5.25 – 5.35 GHz band, the maximum permissible conducted output power is the lesser of 250 mW (23.98 dBm) and $11 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

frequencies. In the 5.47 – 5.725 GHz band, the maximum permissible conducted output power is the lesser of 250 mW (23.98 dBm) and $11 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

Limit : Ant.0 : 802.11a_UNII-1 = 16.85 dBm

802.11n_UNII-1_20 MHz BW = 16.94 dBm


802.11n_UNII-1_40 MHz BW = 16.99 dBm

Ant.1 : 802.11a_UNII-1 = 16.88 dBm

802.11n_UNII-1_20 MHz BW = 16.89 dBm

802.11n_UNII-1_40 MHz BW = 16.99 dBm

■ TEST CONFIGURATION

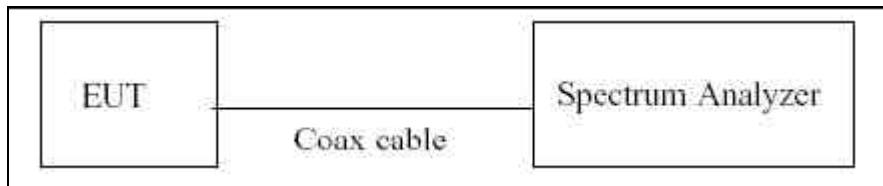

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-1 in KDB 789033(issued 3/05/2012).

This EUT TX condition is actual operating mode(not near 100 % duty cycle) by WLAN test program.

The Spectrum Analyzer is set to

- Average Power

RBW = 1 MHz

VBW = 3 MHz

Sweep Point = 1001

SPAN = to encompass the entire EBW of the signal

Sweep Time = auto

Detector Mode = RMS(i.e., power averaging)

Trace average at least 100 traces in power averaging(RMS) mode

Integrated bandwidth = 26 dB EBW

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

▣ Sample Calculation

$$\begin{aligned} \text{Output Power} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss(1 ea)} \\ &= 10 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 20.8 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset that actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	10.26
	5200	10.18
	5240	10.19
	5190	10.22
	5230	10.19

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6 Mbps	8.04	16.85
		9 Mbps	8.01	16.85
		12 Mbps	7.93	16.85
		18 Mbps	7.87	16.85
		24 Mbps	7.51	16.85
		36 Mbps	7.22	16.85
		48 Mbps	6.97	16.85
		54 Mbps	6.86	16.85
5200	40	6 Mbps	13.01	16.85
		9 Mbps	12.95	16.85
		12 Mbps	12.85	16.85
		18 Mbps	12.92	16.85
		24 Mbps	12.58	16.85
		36 Mbps	12.25	16.85
		48 Mbps	11.99	16.85
		54 Mbps	11.87	16.85
5240	48	6 Mbps	13.57	16.85
		9 Mbps	13.42	16.85
		12 Mbps	13.32	16.85
		18 Mbps	13.19	16.85
		24 Mbps	13.05	16.85
		36 Mbps	12.81	16.85
		48 Mbps	12.52	16.85
		54 Mbps	12.44	16.85

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6 Mbps	8.12	16.88
		9 Mbps	8.03	16.88
		12 Mbps	7.67	16.88
		18 Mbps	7.42	16.88
		24 Mbps	7.14	16.88
		36 Mbps	7.03	16.88
		48 Mbps	6.82	16.88
		54 Mbps	6.74	16.88
5200	40	6 Mbps	13.76	16.88
		9 Mbps	13.68	16.88
		12 Mbps	13.53	16.88
		18 Mbps	12.90	16.88
		24 Mbps	13.23	16.88
		36 Mbps	12.76	16.88
		48 Mbps	12.38	16.88
		54 Mbps	12.28	16.88
5240	48	6 Mbps	13.94	16.88
		9 Mbps	13.86	16.88
		12 Mbps	13.78	16.88
		18 Mbps	13.59	16.88
		24 Mbps	13.45	16.88
		36 Mbps	12.99	16.88
		48 Mbps	12.84	16.88
		54 Mbps	12.67	16.88

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(W)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6 Mbps	11.09	16.85
		9 Mbps	11.03	16.85
		12 Mbps	10.81	16.85
		18 Mbps	10.66	16.85
		24 Mbps	10.34	16.85
		36 Mbps	10.14	16.85
		48 Mbps	9.91	16.85
		54 Mbps	9.81	16.85
5200	40	6 Mbps	16.41	16.85
		9 Mbps	16.34	16.85
		12 Mbps	16.21	16.85
		18 Mbps	15.92	16.85
		24 Mbps	15.93	16.85
		36 Mbps	15.52	16.85
		48 Mbps	15.20	16.85
		54 Mbps	15.09	16.85
5240	48	6 Mbps	16.77	16.85
		9 Mbps	16.66	16.85
		12 Mbps	16.57	16.85
		18 Mbps	16.40	16.85
		24 Mbps	16.26	16.85
		36 Mbps	15.91	16.85
		48 Mbps	15.69	16.85
		54 Mbps	15.57	16.85

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6.5 Mbps	7.92	16.94
		13 Mbps	7.81	16.94
		19.5 Mbps	7.68	16.94
		26 Mbps	7.50	16.94
		39 Mbps	7.03	16.94
		52 Mbps	6.73	16.94
		58.5 Mbps	6.66	16.94
		65 Mbps	6.50	16.94
5200	40	6.5 Mbps	13.00	16.94
		13 Mbps	12.87	16.94
		19.5 Mbps	12.61	16.94
		26 Mbps	12.43	16.94
		39 Mbps	12.13	16.94
		52 Mbps	11.89	16.94
		58.5 Mbps	11.68	16.94
		65 Mbps	11.60	16.94
5240	48	6.5 Mbps	13.30	16.94
		13 Mbps	13.12	16.94
		19.5 Mbps	12.85	16.94
		26 Mbps	12.71	16.94
		39 Mbps	12.36	16.94
		52 Mbps	12.24	16.94
		58.5 Mbps	11.99	16.94
		65 Mbps	11.93	16.94

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11n _20 MHz BW Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6.5 Mbps	7.88	16.89
		13 Mbps	7.74	16.89
		19.5 Mbps	7.59	16.89
		26 Mbps	7.41	16.89
		39 Mbps	6.96	16.89
		52 Mbps	6.75	16.89
		58.5 Mbps	6.08	16.89
		65 Mbps	6.57	16.89
5200	40	6.5 Mbps	13.70	16.89
		13 Mbps	13.53	16.89
		19.5 Mbps	13.31	16.89
		26 Mbps	12.86	16.89
		39 Mbps	12.64	16.89
		52 Mbps	12.43	16.89
		58.5 Mbps	12.31	16.89
		65 Mbps	12.12	16.89
5240	48	6.5 Mbps	14.03	16.89
		13 Mbps	13.70	16.89
		19.5 Mbps	13.58	16.89
		26 Mbps	13.35	16.89
		39 Mbps	13.10	16.89
		52 Mbps	12.84	16.89
		58.5 Mbps	12.60	16.89
		65 Mbps	12.55	16.89

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n _20 MHz BW Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(W)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6.5 Mbps	10.91	16.89
		13 Mbps	10.79	16.89
		19.5 Mbps	10.65	16.89
		26 Mbps	10.47	16.89
		39 Mbps	10.01	16.89
		52 Mbps	9.75	16.89
		58.5 Mbps	9.39	16.89
		65 Mbps	9.55	16.89
5200	40	6.5 Mbps	16.37	16.89
		13 Mbps	16.22	16.89
		19.5 Mbps	15.98	16.89
		26 Mbps	15.66	16.89
		39 Mbps	15.40	16.89
		52 Mbps	15.18	16.89
		58.5 Mbps	15.02	16.89
		65 Mbps	14.88	16.89
5240	48	6.5 Mbps	16.69	16.89
		13 Mbps	16.43	16.89
		19.5 Mbps	16.24	16.89
		26 Mbps	16.05	16.89
		39 Mbps	15.76	16.89
		52 Mbps	15.56	16.89
		58.5 Mbps	15.32	16.89
		65 Mbps	15.26	16.89

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5190	38	13.5 Mbps	4.35	16.99
		27 Mbps	3.99	16.99
		40.5 Mbps	3.73	16.99
		54 Mbps	3.44	16.99
		81 Mbps	3.66	16.99
		108 Mbps	2.93	16.99
		121.5 Mbps	2.78	16.99
		135 Mbps	2.58	16.99
5230	46	13.5 Mbps	13.01	16.99
		27 Mbps	12.62	16.99
		40.5 Mbps	12.34	16.99
		54 Mbps	12.04	16.99
		81 Mbps	11.46	16.99
		108 Mbps	11.06	16.99
		121.5 Mbps	10.90	16.99
		135 Mbps	10.71	16.99

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11n_40 MHz BW Mode:5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5190	38	13.5 Mbps	2.45	16.99
		27 Mbps	2.10	16.99
		40.5 Mbps	1.71	16.99
		54 Mbps	1.38	16.99
		81 Mbps	0.91	16.99
		108 Mbps	0.61	16.99
		121.5 Mbps	0.46	16.99
		135 Mbps	0.27	16.99
5230	46	13.5 Mbps	13.71	16.99
		27 Mbps	13.37	16.99
		40.5 Mbps	13.03	16.99
		54 Mbps	12.77	16.99
		81 Mbps	12.25	16.99
		108 Mbps	11.95	16.99
		121.5 Mbps	11.92	16.99
		135 Mbps	11.60	16.99

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n_40 MHz BW Mode:5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(W)	Limit (dBm)
Frequency[MHz]	Channel No.			
5190	38	13.5 Mbps	6.51	16.99
		27 Mbps	6.16	16.99
		40.5 Mbps	5.85	16.99
		54 Mbps	5.54	16.99
		81 Mbps	5.51	16.99
		108 Mbps	4.93	16.99
		121.5 Mbps	4.78	16.99
		135 Mbps	4.59	16.99
5230	46	13.5 Mbps	16.38	16.99
		27 Mbps	16.02	16.99
		40.5 Mbps	15.71	16.99
		54 Mbps	15.43	16.99
		81 Mbps	14.88	16.99
		108 Mbps	14.54	16.99
		121.5 Mbps	14.45	16.99
		135 Mbps	14.19	16.99

RESULT PLOTS_Ant.0 (5180 MHz ~5240 MHz)

Conducted Output Power (802.11a-CH 36) 6 Mbps



Conducted Output Power (802.11a-CH 36) 9 Mbps



Conducted Output Power (802.11a-CH 36) 12 Mbps



Conducted Output Power (802.11a-CH 36) 18 Mbps



Conducted Output Power (802.11a-CH 36) 24 Mbps



Conducted Output Power (802.11a-CH 36) 36 Mbps



Conducted Output Power (802.11a-CH 36) 48 Mbps



Conducted Output Power (802.11a-CH 36) 54 Mbps



Conducted Output Power (802.11a-CH 40) 6 Mbps



Conducted Output Power (802.11a-CH 40) 9 Mbps



Conducted Output Power (802.11a-CH 40) 12 Mbps



Conducted Output Power (802.11a-CH 40) 18 Mbps



Conducted Output Power (802.11a-CH 40) 24 Mbps



Conducted Output Power (802.11a-CH 40) 36 Mbps



Conducted Output Power (802.11a-CH 40) 48 Mbps



Conducted Output Power (802.11a-CH 40) 54 Mbps



Conducted Output Power (802.11a-CH 48) 6 Mbps



Conducted Output Power (802.11a-CH 48) 9 Mbps



Conducted Output Power (802.11a-CH 48) 12 Mbps



Conducted Output Power (802.11a-CH 48) 18 Mbps



Conducted Output Power (802.11a-CH 48) 24 Mbps



Conducted Output Power (802.11a-CH 48) 36 Mbps



Conducted Output Power (802.11a-CH 48) 48 Mbps



Conducted Output Power (802.11a-CH 48) 54 Mbps



RESULT PLOTS_Ant.1 (5180 MHz ~5240 MHz)

Conducted Output Power (802.11a-CH 36) 6 Mbps



Conducted Output Power (802.11a-CH 36) 9 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFM006D

Conducted Output Power (802.11a-CH 36) 12 Mbps



Conducted Output Power (802.11a-CH 36) 18 Mbps



Conducted Output Power (802.11a-CH 36) 24 Mbps



Conducted Output Power (802.11a-CH 36) 36 Mbps



Conducted Output Power (802.11a-CH 36) 48 Mbps



Conducted Output Power (802.11a-CH 36) 54 Mbps



Conducted Output Power (802.11a-CH 40) 6 Mbps



Conducted Output Power (802.11a-CH 40) 9 Mbps



Conducted Output Power (802.11a-CH 40) 12 Mbps



Conducted Output Power (802.11a-CH 40) 18 Mbps



Conducted Output Power (802.11a-CH 40) 24 Mbps



Conducted Output Power (802.11a-CH 40) 36 Mbps



Conducted Output Power (802.11a-CH 40) 48 Mbps



Conducted Output Power (802.11a-CH 40) 54 Mbps



Conducted Output Power (802.11a-CH 48) 6 Mbps



Conducted Output Power (802.11a-CH 48) 9 Mbps



Conducted Output Power (802.11a-CH 48) 12 Mbps



Conducted Output Power (802.11a-CH 48) 18 Mbps



Conducted Output Power (802.11a-CH 48) 24 Mbps



Conducted Output Power (802.11a-CH 48) 36 Mbps



Conducted Output Power (802.11a-CH 48) 48 Mbps



Conducted Output Power (802.11a-CH 48) 54 Mbps



RESULT PLOTS_Ant.0 (5180 MHz ~5240 MHz)_20 MHz BW
Conducted Output Power (802.11n-CH 36) 6.5 Mbps



Conducted Output Power (802.11n-CH 36) 13 Mbps



Conducted Output Power (802.11n-CH 36) 19.5 Mbps



Conducted Output Power (802.11n-CH 36) 26 Mbps



Conducted Output Power (802.11n-CH 36) 39 Mbps



Conducted Output Power (802.11n-CH 36) 52 Mbps



Conducted Output Power (802.11n-CH 36) 58.5 Mbps



Conducted Output Power (802.11n-CH 36) 65 Mbps



Conducted Output Power (802.11n-CH 40) 6.5 Mbps



Conducted Output Power (802.11n-CH 40) 13 Mbps



Conducted Output Power (802.11n-CH 40) 19.5 Mbps



Conducted Output Power (802.11n-CH 40) 26 Mbps



Conducted Output Power (802.11n-CH 40) 39 Mbps



Conducted Output Power (802.11n-CH 40) 52 Mbps



Conducted Output Power (802.11n-CH 40) 58.5 Mbps



Conducted Output Power (802.11n-CH 40) 65 Mbps



Conducted Output Power (802.11n-CH 48) 6.5 Mbps



Conducted Output Power (802.11n-CH 48) 13 Mbps



Conducted Output Power (802.11n-CH 48) 19.5 Mbps



Conducted Output Power (802.11n-CH 48) 26 Mbps



Conducted Output Power (802.11n-CH 48) 39 Mbps



Conducted Output Power (802.11n-CH 48) 52 Mbps



Conducted Output Power (802.11n-CH 48) 58.5 Mbps



Conducted Output Power (802.11n-CH 48) 65 Mbps



RESULT PLOTS_Ant.1 (5180 MHz ~5240 MHz) _20 MHz BW
Conducted Output Power (802.11n-CH 36) 6.5 Mbps



Conducted Output Power (802.11n-CH 36) 13 Mbps



Conducted Output Power (802.11n-CH 36) 19.5 Mbps



Conducted Output Power (802.11n-CH 36) 26 Mbps



Conducted Output Power (802.11n-CH 36) 39 Mbps



Conducted Output Power (802.11n-CH 36) 52 Mbps



Conducted Output Power (802.11n-CH 36) 58.5 Mbps



Conducted Output Power (802.11n-CH 36) 65 Mbps



Conducted Output Power (802.11n-CH 40) 6.5 Mbps



Conducted Output Power (802.11n-CH 40) 13 Mbps



Conducted Output Power (802.11n-CH 40) 19.5 Mbps



Conducted Output Power (802.11n-CH 40) 26 Mbps



Conducted Output Power (802.11n-CH 40) 39 Mbps



Conducted Output Power (802.11n-CH 40) 52 Mbps



Conducted Output Power (802.11n-CH 40) 58.5 Mbps



Conducted Output Power (802.11n-CH 40) 65 Mbps



Conducted Output Power (802.11n-CH 48) 6.5 Mbps



Conducted Output Power (802.11n-CH 48) 13 Mbps



Conducted Output Power (802.11n-CH 48) 19.5 Mbps



Conducted Output Power (802.11n-CH 48) 26 Mbps



Conducted Output Power (802.11n-CH 48) 39 Mbps



Conducted Output Power (802.11n-CH 48) 52 Mbps



Conducted Output Power (802.11n-CH 48) 58.5 Mbps



Conducted Output Power (802.11n-CH 48) 65 Mbps



RESULT PLOTS_Ant.0 (5190 MHz~5230 MHz) _40 MHz BW
 Conducted Output Power (802.11n-CH 38) 13.5 Mbps



Conducted Output Power (802.11n-CH 38) 27 Mbps



Conducted Output Power (802.11n-CH 38) 40.5 Mbps



Conducted Output Power (802.11n-CH 38) 54 Mbps



Conducted Output Power (802.11n-CH 38) 81 Mbps



Conducted Output Power (802.11n-CH 38) 108 Mbps



Conducted Output Power (802.11n-CH 38) 121.5 Mbps



Conducted Output Power (802.11n-CH 38) 135 Mbps



Conducted Output Power (802.11n-CH 46) 13.5 Mbps



Conducted Output Power (802.11n-CH 46) 27 Mbps



Conducted Output Power (802.11n-CH 46) 40.5 Mbps



Conducted Output Power (802.11n-CH 46) 54 Mbps



Conducted Output Power (802.11n-CH 46) 81 Mbps



Conducted Output Power (802.11n-CH 46) 108 Mbps



Conducted Output Power (802.11n-CH 46) 121.5 Mbps



Conducted Output Power (802.11n-CH 46) 135 Mbps



RESULT PLOTS_Ant.1 (5190 MHz~5230 MHz) _40 MHz BW
Conducted Output Power (802.11n-CH 38) 13.5 Mbps



Conducted Output Power (802.11n-CH 38) 27 Mbps



Conducted Output Power (802.11n-CH 38) 40.5 Mbps



Conducted Output Power (802.11n-CH 38) 54 Mbps



Conducted Output Power (802.11n-CH 38) 81 Mbps



Conducted Output Power (802.11n-CH 38) 108 Mbps



Conducted Output Power (802.11n-CH 38) 121.5 Mbps



Conducted Output Power (802.11n-CH 38) 135 Mbps



Conducted Output Power (802.11n-CH 46) 13.5 Mbps



Conducted Output Power (802.11n-CH 46) 27 Mbps



Conducted Output Power (802.11n-CH 46) 40.5 Mbps



Conducted Output Power (802.11n-CH 46) 54 Mbps



Conducted Output Power (802.11n-CH 46) 81 Mbps



Conducted Output Power (802.11n-CH 46) 108 Mbps



Conducted Output Power (802.11n-CH 46) 121.5 Mbps




Conducted Output Power (802.11n-CH 46) 135 Mbps



8.3 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 4 dBm/ MHz in the 5.15 GHz – 5.25 GHz band and 11 dBm/ MHz in the 5.25 GHz – 5.35 GHz and 5.47 GHz – 5.725 GHz bands

▣ TEST CONFIGURATION

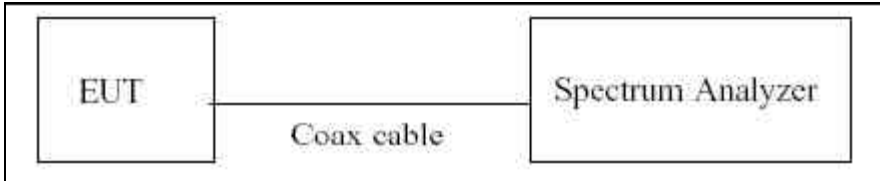

▣ TEST PROCEDURE

The spectrum analyzer is set to :

RBW = 1 MHz

VBW = 3 MHz

SPAN = to encompass the entire EBW of the signal

Sweep Time = auto

Sweep Point = 601

Detector Mode = Average

Trace average at least 100 traces in power averaging(RMS) mode

▣ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 15.8 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset that actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	10.26
	5200	10.18
	5240	10.19
	5190	10.22
	5230	10.19

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

■ TEST RESULTS_Ant.0

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	802.11a	-3.827	4	Pass
5200	40		0.932	4	Pass
5240	48		0.809	4	Pass
5180	36	802.11n (20 MHz BW)	-4.093	4	Pass
5200	40		0.671	4	Pass
5240	48		0.810	4	Pass
5190	38	802.11n (40 MHz BW)	-10.991	4	Pass
5230	46		-2.795	4	Pass

■ TEST RESULTS_Ant.1

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	802.11a	-5.798	4	Pass
5200	40		-0.308	4	Pass
5240	48		-0.610	4	Pass
5180	36	802.11n (20 MHz BW)	-5.820	4	Pass
5200	40		-0.311	4	Pass
5240	48		-0.764	4	Pass
5190	38	802.11n (40 MHz BW)	-14.276	4	Pass
5230	46		-4.018	4	Pass

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	802.11a	-1.691	4	Pass
5200	40		3.366	4	Pass
5240	48		3.167	4	Pass
5180	36	802.11n (20 MHz BW)	-1.861	4	Pass
5200	40		3.218	4	Pass
5240	48		3.104	4	Pass
5190	38	802.11n (40 MHz BW)	-9.320	4	Pass
5230	46		-0.353	4	Pass

RESULT PLOTS_Ant.0

Power Spectral Density (802.11a-CH 36)



Power Spectral Density (802.11a-CH 40)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFBM006D

Power Spectral Density (802.11a-CH 48)



Power Spectral Density (802.11n-CH 36)_20 MHz BW



Power Spectral Density (802.11n-CH 40) _20 MHz BW



Power Spectral Density (802.11n-CH48) _20 MHz BW



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFBM006D

Power Spectral Density (802.11n-CH 38)_40 MHz BW



Power Spectral Density (802.11n-CH 46)_40 MHz BW



RESULT PLOTS_Ant.1

Power Spectral Density (802.11a-CH 36)



Power Spectral Density (802.11a-CH 40)



Power Spectral Density (802.11a-CH 48)



Power Spectral Density (802.11n-CH 36)_20 MHz BW



Power Spectral Density (802.11n-CH 40) _20 MHz BW



Power Spectral Density (802.11n-CH48) _20 MHz BW



Power Spectral Density (802.11n-CH 38)_40 MHz BW




Power Spectral Density (802.11n-CH 46)_40 MHz BW



8.4 PEAK EXCURSION RATIO

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. The largest permissible difference between the modulation envelope(measured using a peak hold function) and the maximum conducted output power 13 dB/MHz.

▣ TEST CONFIGURATION

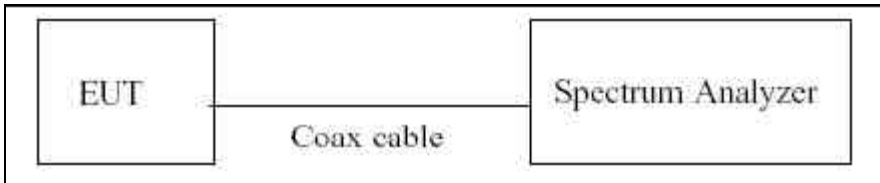

▣ TEST PROCEDURE

We tested according to KDB 789033(issued 03/05/2012).

The spectrum analyzer is set to :

1. Span = Set the span to view the entire emission bandwidth.
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Sweep = Auto couple
5. Detector Mode = Peak
6. Trace Mode = Max hold
7. Use the procedure to measure the PPSD
8. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

Note :

1. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset that actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	10.26
	5200	10.18
	5240	10.19
	5190	10.22
	5230	10.19

(Actual value of loss for the attenuator and cable combination)


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

RESULT PLOTS_Ant.0

Peak Excursion Ratio (802.11a-CH36)



Peak Excursion Ratio (802.11a-CH40)

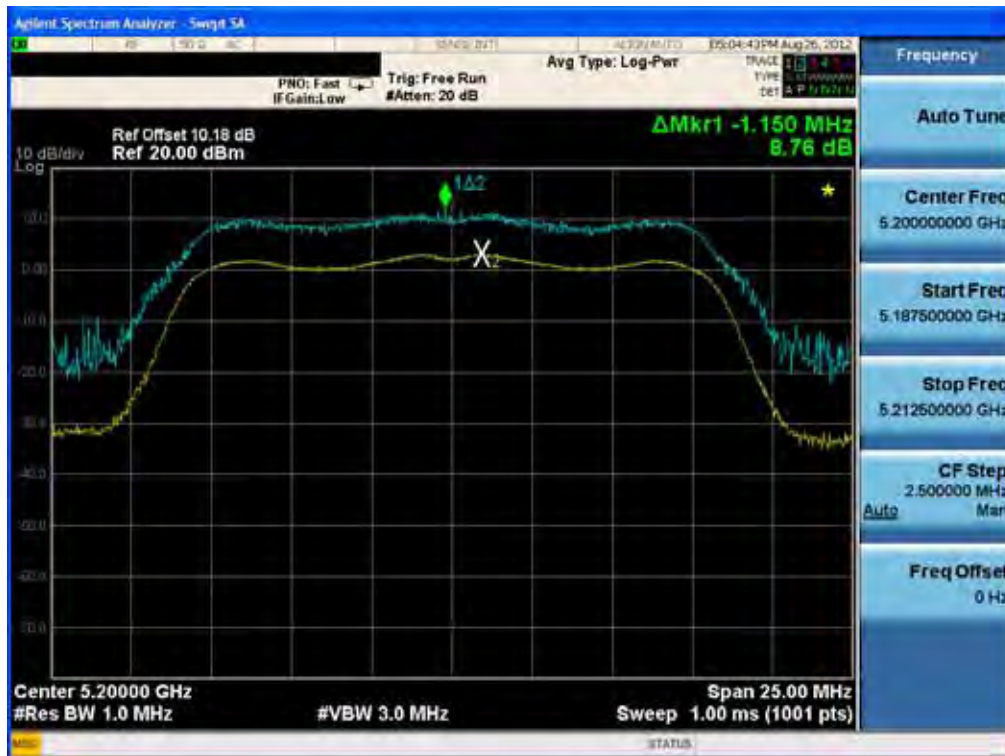

Peak Excursion Ratio (802.11a-CH48)



Peak Excursion Ratio (802.11n-CH36)_20 MHz BW



Peak Excursion Ratio (802.11n-CH40) _20 MHz BW



Peak Excursion Ratio (802.11n-CH48) _20 MHz BW



Peak Excursion Ratio (802.11n-CH38) _40 MHz BW



Peak Excursion Ratio (802.11n-CH46) _40 MHz BW



RESULT PLOTS_Ant.1

Peak Excursion Ratio (802.11a-CH36)



Peak Excursion Ratio (802.11a-CH40)



Peak Excursion Ratio (802.11a-CH48)



Peak Excursion Ratio (802.11n-CH36)_20 MHz BW



Peak Excursion Ratio (802.11n-CH40) _20 MHz BW



Peak Excursion Ratio (802.11n-CH48) _20 MHz BW



Peak Excursion Ratio (802.11n-CH38) _40 MHz BW



Peak Excursion Ratio (802.11n-CH46) _40 MHz BW



8.5 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

OPERATING FREQUENCY: 5,200,000 kHz
 CHANNEL: 40
 REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.5	+25(Ref)	5199998	-2.33
100%		0	5200004	4.29
100%		+10	5200004	3.99
100%		+20	5199998	-2.10
100%		+30	5199999	-1.32
100%		+40	5199996	-4.40
100%		+50	5199995	-5.12
100%		+60	5199994	-6.23
100%		+65	5199994	-6.08
Extreme upper	3.67	+25	5199997	-2.64
Extreme lower	3.32	+25	5199997	-3.11

OPERATING FREQUENCY: 5,190,000 kHz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.5	+25(Ref)	5199998	-2.45
100%		0	5200005	4.51
100%		+10	5200004	4.12
100%		+20	5199997	-2.78
100%		+30	5199998	-1.76
100%		+40	5199995	-4.97
100%		+50	5199995	-5.32
100%		+60	5199993	-6.55
100%		+65	5199993	-6.77
Extreme upper	3.67	+25	5199997	-2.89
Extreme lower	3.32	+25	5199997	-3.23

8.6 RADIATED MEASUREMENT.

8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

▣ §15.407, KDB 789033


All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBμV/m.

Test Configuration


Below 30 MHz

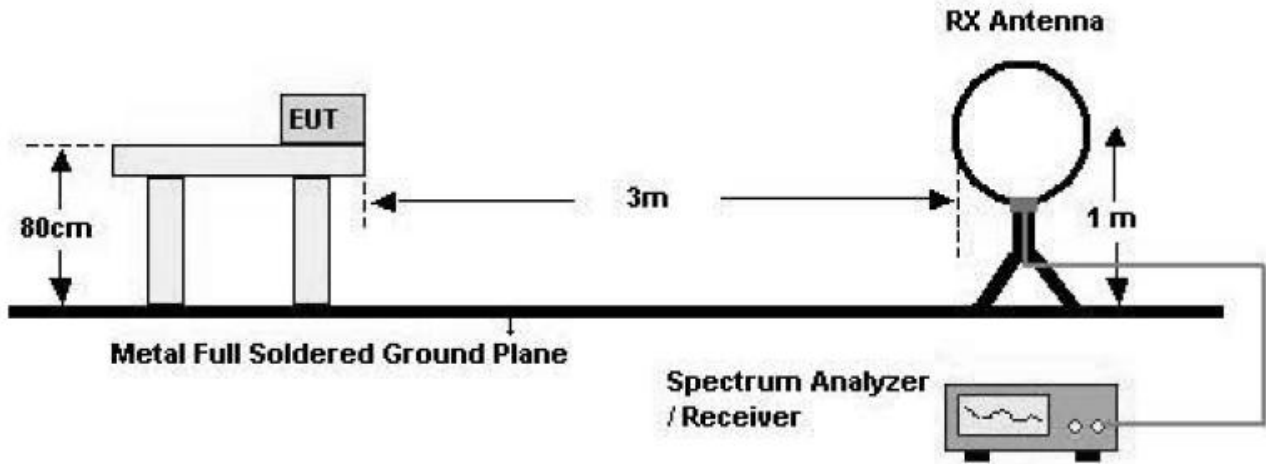

30 MHz - 1 GHz

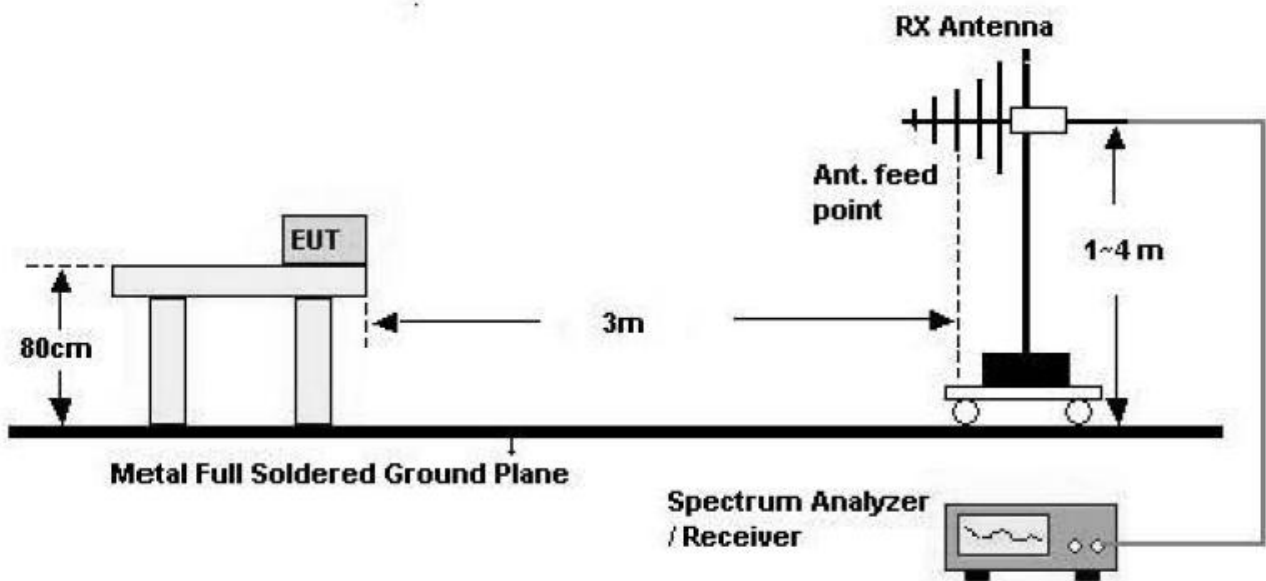

Above 1 GHz

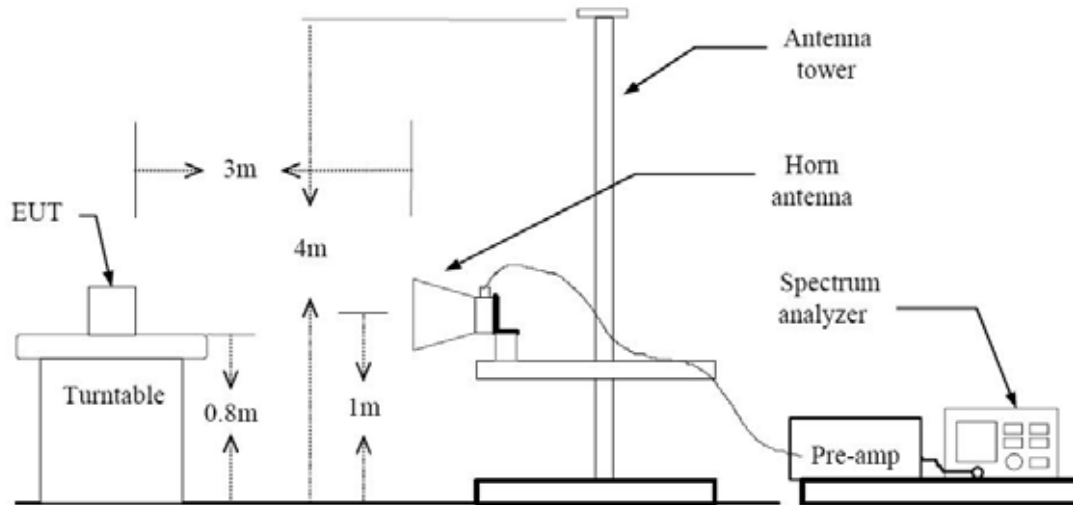

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR10-1	Date of Issue: September 21, 2012	EUT Type: Wi-Fi module	FCC ID: BEJTWFB006D

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

MIMO

Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10360	45.18	9.33	V	54.51	68.2	13.69	PK
10360	30.14	9.33	V	39.47	54.0	14.53	AV
15540	47.01	14.61	V	61.62	74.0	12.38	PK
15540	32.03	14.61	V	46.64	54.0	7.36	AV
10360	51.27	9.33	H	60.60	68.2	7.60	PK
10360	35.09	9.33	H	44.42	54.0	9.58	AV
15540	46.89	14.61	H	61.50	74.0	12.50	PK
15540	31.85	14.61	H	46.46	54.0	7.54	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a and 802.11n_20 MHz BW test at Ant.0, Ant.1 and MIMO. Worst case of EUT is 6 Mbps in 802.11a at MIMO.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

MIMO

Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10400	50.29	10.13	V	60.42	68.2	7.78	PK
10400	34.99	10.13	V	45.12	54.0	8.88	AV
15600	50.52	14.60	V	65.12	74.0	8.88	PK
15600	37.21	14.60	V	51.81	54.0	2.19	AV
10400	55.14	10.13	H	65.27	68.2	2.93	PK
10400	38.54	10.13	H	48.67	54.0	5.33	AV
15600	50.14	14.60	H	64.74	74.0	9.26	PK
15600	36.40	14.60	H	51.00	54.0	3.00	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a and 802.11n_20 MHz BW test at Ant.0, Ant.1 and MIMO. Worst case of EUT is 6 Mbps in 802.11a at MIMO.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

MIMO

Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10480	51.81	10.20	V	62.01	68.2	6.19	PK
10480	35.91	10.20	V	46.11	54.0	7.89	AV
15720	52.36	13.47	V	65.83	74.0	8.17	PK
15720	37.68	13.47	V	51.15	54.0	2.85	AV
10480	54.49	10.20	H	64.69	68.2	3.51	PK
10480	39.16	10.20	H	49.36	54.0	4.64	AV
15720	52.46	13.47	H	65.93	74.0	8.07	PK
15720	38.12	13.47	H	51.59	54.0	2.41	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a and 802.11n_20 MHz BW test at Ant.0, Ant.1 and MIMO. Worst case of EUT is 6 Mbps in 802.11a at MIMO.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Ant.1

Operation Mode:	802.11 n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5180 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10380	40.08	9.70	V	49.78	68.20	18.42	PK
10380	26.35	9.70	V	36.05	54.00	17.95	AV
15570	44.01	14.62	V	58.63	74.00	15.37	PK
15570	31.11	14.62	V	45.73	54.00	8.27	AV
10380	40.13	9.70	H	49.83	68.20	18.37	PK
10380	26.71	9.70	H	36.41	54.00	17.59	AV
15570	44.72	14.62	H	59.34	74.00	14.66	PK
15570	31.12	14.62	H	45.74	54.00	8.26	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW at Ant.0 and Ant.1. Worst case of EUT is 13.5 Mbps in 802.11n_40 MHz BW at Ant.1.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode:	802.11 n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5240 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10460	43.62	10.26	V	53.88	68.20	14.32	PK
10460	29.53	10.26	V	39.79	54.00	14.21	AV
15690	46.33	14.33	V	60.66	74.00	13.34	PK
15690	32.76	14.33	V	47.09	54.00	6.91	AV
10460	50.88	10.26	H	61.14	68.20	7.06	PK
10460	35.91	10.26	H	46.17	54.00	7.83	AV
15690	45.76	14.33	H	60.09	74.00	13.91	PK
15690	33.12	14.33	H	47.45	54.00	6.55	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW at Ant.0 and Ant.1. Worst case of EUT is 13.5 Mbps in 802.11n_40 MHz BW at Ant.1.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

MIMO

Operation Mode:	802.11 n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5180 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10380	38.62	9.70	V	48.32	68.20	19.88	PK
10380	25.84	9.70	V	35.54	54.00	18.46	AV
15570	44.08	14.62	V	58.7	74.00	15.30	PK
15570	30.77	14.62	V	45.39	54.00	8.61	AV
10380	38.94	9.70	H	48.64	68.20	19.56	PK
10380	25.96	9.70	H	35.66	54.00	18.34	AV
15570	44.42	14.62	H	59.04	74.00	14.96	PK
15570	30.81	14.62	H	45.43	54.00	8.57	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW at MIMO. Worst case of EUT is 13.5 Mbps in 802.11n_40 MHz BW at MIMO.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

MIMO

Operation Mode:	802.11 n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5240 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10460	42.22	10.26	V	52.48	68.20	15.72	PK
10460	28.16	10.26	V	38.42	54.00	15.58	AV
15690	47.70	14.33	V	62.03	74.00	11.97	PK
15690	33.61	14.33	V	47.94	54.00	6.06	AV
10460	50.10	10.26	H	60.36	68.20	7.84	PK
10460	34.36	10.26	H	44.62	54.00	9.38	AV
15690	47.18	14.33	H	61.51	74.00	12.49	PK
15690	33.39	14.33	H	47.72	54.00	6.28	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW at MIMO. Worst case of EUT is 13.5 Mbps in 802.11n_40 MHz BW at MIMO.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	66.06	3.63	H	69.69	74	4.31	PK
5150	46.72	3.63	H	50.35	54	3.65	AV
5150	67.17	3.63	V	70.80	74	3.20	PK
5150	48.12	3.63	V	51.75	54	2.25	AV

Notes:

- Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
- Spectrum setting:
 - Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
- We have done 802.11a, 802.11n_20 MHz BW and 802.11n_40 MHz BW test at Ant.0, Ant.1 and MIMO. Worst case is 6 Mbps in 802.11a at MIMO.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Note : We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/09/2013	100073
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/03/2013	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2013	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	07/31/2013	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/11/2013	10094
MITEQ	AMF-6B-180265-35-10P / POWER AMP	Annual	04/16/2013	667624
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2013	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	10/17/2013	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/26/2012	BBHA9170342
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4416A /Power Meter	Annual	11/07/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2013	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	Annual	05/02/2013	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2013	1
Hewlett Packard	11636B/Power Divider	Annual	11/07/2012	11377
Hewlett Packard	11667B / Power Splitter	Annual	06/05/2013	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2012	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	11/14/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2013	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/11/2014	9009-2536
MITEQ	AMF-6D-001180-35-20P/ POWER AMP	Annual	07/30/2013	990893
Agilent	8493C / Attenuator(10 dB)	Annual	07/30/2013	76649
WEINSCHL	2-3 / Attenuator(3 dB)	Annual	11/07/2013	BR0617
CERNEX	CBLU1183540 / POWER AMP	Annual	07/27/2013	21691