

## TABLE OF CONTENTS LIST

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.

FCC ID: BESFRS-1400

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE  
PAGE 2.....TECHNICAL DESCRIPTION CNTD. AND RF POWER OUTPUT  
PAGE 3.....RF POWER OUTPUT AND MODULATION CHARACTERISTICS  
PAGE 4.....OCCUPIED BANDWIDTH  
PAGE 5.....FIELD STRENGTH OF SPURIOUS EMISSIONS  
PAGE 6.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 7.....FREQUENCY STABILITY  
PAGE 8.....CERTIFICATION OF TECHNICAL DATA AND  
LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER  
EXHIBIT 2.....FCC ID LABEL SAMPLE  
EXHIBIT 3.....SKETCH OF FCC ID LABEL LOCATION  
EXHIBIT 4A.....EXTERNAL FRONT VIEW PHOTOGRAPH  
EXHIBIT 4B.....EXTERNAL REAR VIEW PHOTO  
EXHIBIT 4C.....INTERNAL COMPONENT SIDE PHOTOGRAPH  
EXHIBIT 4D.....INTERNAL SOLDER SIDE PHOTOGRAPH  
EXHIBIT 5.....BLOCK DIAGRAM  
EXHIBIT 6A-6C.....PARTS LIST  
EXHIBIT 7A-7B.....SCHEMATICS  
EXHIBIT 8A-8K.....USER'S MANUAL AND TECHNICAL MANUAL  
EXHIBIT 9.....AUDIO FREQUENCY RESPONSE GRAPH  
EXHIBIT 10.....AUDIO INPUT VS DEVIATION GRAPH  
EXHIBIT 11.....AUDIO LOW PASS FILTER GRAPH  
EXHIBIT 12.....OCCUPIED BANDWIDTH CW PLOT  
EXHIBIT 13.....OCCUPIED BANDWIDTH WITH DEVIATION PLOT  
..EXHIBIT 13b.....OCCUPIED BANDWIDTH PLOT

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.

FCC ID: BESFRS-1400

REPORT #: F:\CUS\T\TIC\TIC357K8.RPT

PAGE: TABLE OF CONTENTS

GENERAL\_INFORMATION\_REQUIRED  
FOR\_TYPE\_ACCEPTANCE

2.983 (a,b,c) TAEKWANG INDUSTRIAL CO., LTD. will manufacture the  
FCCID: BESFRS-1400 FAMILY RADIO SERVICES 14 CHANNEL  
TRANSCEIVER in quantity, for use under FCC RULES  
PART 95.

2.983 (d) TECHNICAL\_DESCRIPTION

2.983 (d) (1) Type of Emission: 10K8F3E  
95.629

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 2.4K \\ B_n &= 2(3.0) + 2(2.4) = 10.8K \end{aligned}$$

Authorized Bandwidth 12.5KHz

2.983 (d) (2) Frequency Range: 1. 462.5625 8. 467.5625  
95.627 2. 462.5875 9. 467.5875  
3. 462.6125 10. 467.6125  
4. 462.6375 11. 467.6375  
5. 462.6625 12. 467.6625  
6. 462.6875 13. 467.6875  
7. 462.7125 14. 467.7125 MHz

2.983 (d) (3) Power Output shall not exceed 0.500Watts effective  
95.637 radiated power. There can be no provisions for  
95.647 increasing the power.

2.983 (d) (4) Maximum Output Power Rating: 500 milliWatts  
95.637 effective radiated power.

95.645 The antenna is an intergral part to the unit, it cannot  
be removed without rendering the unit inoperative. In  
order to remove the antenna the case must unscrewed,  
then the PCB assemblies must be removed then the  
antenna can be removed.

2.983 (d) (5) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY  
Vce = 4.5 Volts DC Ice = 0.12A.  
Pin = 0.54 Watts

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.  
FCC ID: BESFRS-1400  
REPORT #: F:\CUS\T\TIC\TIC357K8.RPT  
PAGE #: 1

2.983 (d) (6) Function of each electron tube or semiconductor device or other active circuit device:

SEE EXHIBIT 6C

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 7A-7B of this report. The block diagrams are included as EXHIBIT 5 of this report.

2.983(d) (8) Instruction book. A draft copy of the instruction manual is included as EXHIBIT 8.

2.983 (d) (9) Tune-up procedure. The tune-up procedure is included INCLUDED IN USER'S MANUAL.

(10) Description of all circuitry and devices provided for determining and stabilizing frequency is given in EXHIBIT 8. The crystal specifications are included as PAGES NA.

2.983 (d)(11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power will be INCLUDED IN USER'S MANUAL.

(12) Digital modulation. This unit does not use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF\_power\_output.

95.637 RF power is measured by measuring the radiated power at 3 meters and then replacing the transmitter with a signal generator to determine the effective radiated power. The ERP shall not exceed 0.500 Watts.


MEASURED POWER OUTPUT = 500 milliWatts ERP

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.

FCC ID: BESFRS-1400

REPORT #: F:\CUS\T\TIC\TIC357K8.RPT

PAGE #: 2

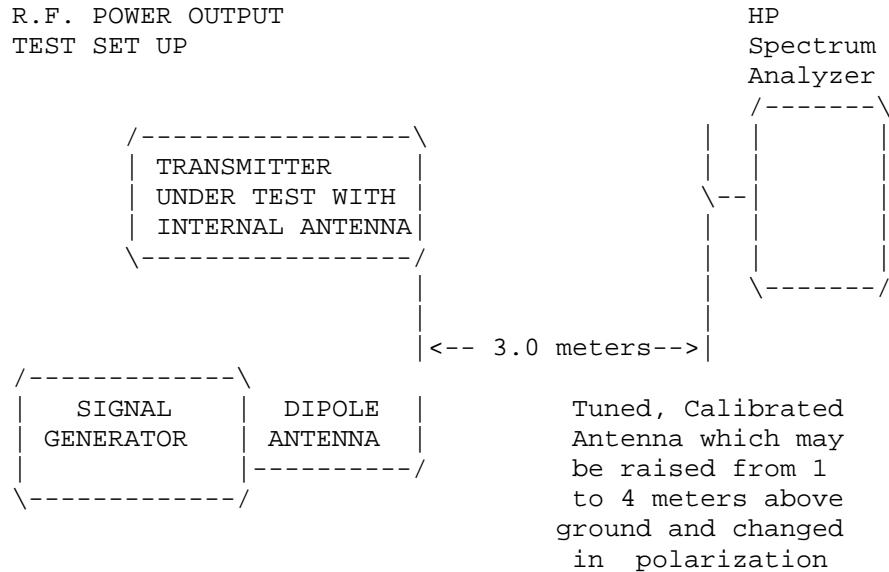

Equipment placed 1 meter above ground  
on a rotatable platform.

2.987(a)(b) Modulation\_characteristics:

AUDIO\_FREQUENCY\_RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

2.987(b) 1 Audio\_input\_versus\_modulation  
The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

95.635(b) Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1KHz. see the proceeding page.


2.989(c) EMISSION BANDWIDTH:  
95.633(b)(1)(3)(7)

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least  $43+\log_{10}(TP)$ . The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth PLOTS follow.

Radiotelephone transmitter with modulation limiter.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

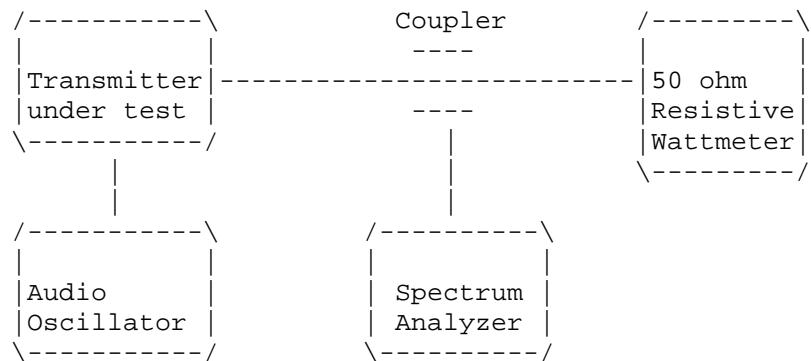

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.  
FCC ID: BESFRS-1400  
REPORT #: F:\CUS\T\TIC\TIC357K8.RPT  
PAGE #: 4

2.991 Not Applicable, no antenna terminal allowed.

2.993(a)(b) UNWANTED\_RADIATION:  
95.635(b)(7)

REQUIREMENTS: Emissions must be attenuated by at least the following below the output of the transmitter.

$$43 + 10\log(\text{TP}) = 43 + 10\log(0.5) = 40.00\text{dB}$$

## TEST DATA:

EMISSION FREQ. MHz	METER READING @ 3m	COAX LOSS dB	FIELD ACF dB	STRNGTH dBuV/m	ATT. dBuV/m	MARGIN dB	ANT.
462.56	103.70	1.60	18.44	123.74	0.0	0.63	V
925.14	42.20	2.90	24.10	69.20	54.54	14.54	V
925.14	44.20	2.90	24.10	71.20	52.54	12.54	V
1387.00R	26.00	1.00	25.55	52.55	71.19	31.19	H
1850.25	24.40	1.01	27.40	52.81	70.93	30.93	V
2312.83R	14.10	1.08	28.78	43.96	79.78	39.78	V
2775.37R	32.00	1.15	29.94	63.08	60.66	20.66	H
3237.95	33.60	1.22	31.09	65.91	57.83	17.83	H
3700.51R	22.10	1.29	32.25	55.64	68.70	28.70	H
4163.05R	23.00	1.35	33.18	57.54	66.20	26.20	H
4625.62R	18.90	1.42	33.70	54.03	69.71	29.71	H

MARGIN = (Field strength of Fund - 40dB) - FS OF EMISSION


METHOD OF MEASUREMENT: The procedure used was C63.4-1992 for intentional radiators. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 and RGA-180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane, Gainesville, FL. 32605.

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.  
FCC ID: BESFRS-1400  
REPORT #: F:\CUS\T\TIC\TIC357K8.RPT  
PAGE #: 5

2.993(a)(b) UNWANTED\_RADIATION:  
95.631(b)(8)(9)

Method of Measuring Radiated Spurious Emissions

Hewlett Packard  
Spectrum  
Analyzer  
HP8566B

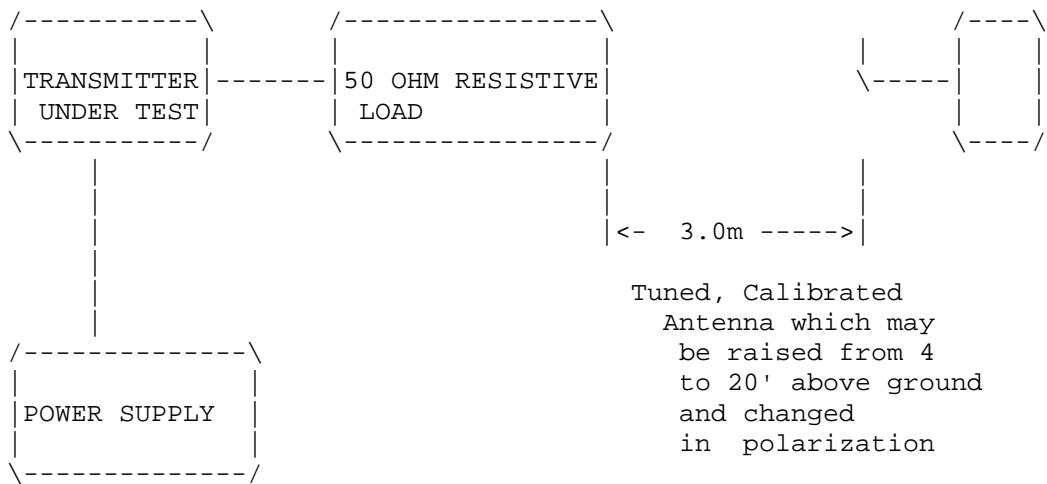

Equipment placed 4' above ground  
on a rotatable platform.

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.  
FCC ID: BESFRS-1400  
REPORT #: F:\CUS\T\TIC\TIC357K8.RPT  
PAGE #: 6

2.995(a)(b)(d) Frequency\_stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 4.5 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.562 500

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	462.562 500	00.00
-20_____	462.561 480	-2.20
-10_____	462.562 880	+0.82
0_____	462.563 260	+1.64
+10_____	462.563 310	+1.75
+20_____	462.563 070	+1.23
+30_____	462.562 200	-0.64
+40_____	462.561 930	-1.23
+50_____	462.561 740	-1.64
20c BATT. End-Point 4.5V/dc	462.562 800	+0.82

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was 1.75 to -2.20 ppm. The maximum frequency variation with voltage was +0.82ppm.

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.

FCC ID: BESFRS-1400

REPORT #: F:\CUS\T\TIC\TIC357K8.RPT

PAGE #: 6

2.983(f)            Photo\_or\_Drawing\_of\_Label:  
                  See EXHIBIT 2.

2.983(g)            Photos\_of\_Equipment:  
                  See EXHIBIT 4A-4D.

2.999                Measurement\_Procedures\_for\_Type\_Acceptance:  
  
                  Measurement techniques have been in accordance  
                  with EIA specifications and the FCC requirements.

2.909                Certification\_of\_Technical\_Data\_by\_Engineers  
  
                  We, the undersigned, certify that the enclosed  
                  measurements and enclosed data are true and  
                  correct.

S.S. Sanders  
Engineer

#### LIST\_OF\_TEST\_EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/  
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP  
8449B - OPT H02 Cal. 6/26/98
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Eaton Biconnical Antenna Model 94455-1  
20-200 MHz Serial No. 0997 Cal. 5/15/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/15/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 8/15/98
6. Electro-Metric Antennas Model TDS-25-1, TDS-25-2, 5/15/97
7. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. 12/3/97
8. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. 12/3/97
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: TAEKWANG INDUSTRIAL CO., LTD.  
FCC ID: BESFRS-1400  
REPORT #: F:\CUS\T\TIC\TIC357K8.RPT  
PAGE #: 7