

Designated by Ministry of International Trade and Industry

# KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE

6-8-7 NISHITENMA

KITA-KU OSAKA 530-0047 JAPAN



IKOMA TESTING LABORATORY

12128 TAKAYAMA-CHO

IKOMA-CITY NARA 630-0101 JAPAN

Corporate Juridical Person

## TEST REPORT

Report No.A-023-02-A

Date: 30 April 2002

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 15 Subpart B Unintentional Radiators.

All the tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

### 1. Applicant

Company Name : MITSUBISHI ELECTRIC CORP.  
Kyoto Works Imaging Storage Products Department

Mailing Address : 1 Baba-Zusyo Nagaokakyo-City Kyoto 617-8550 Japan

### 2. Identification of Tested Device

Type of Device	: Digital Device
Kind of Equipment Authorization	: <input type="checkbox"/> DoC <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification
FCC ID	: BGB485
Device Name	: Continuous Video Cassette Recorder
Trade Name	: Ultrak
Model Number	: SR40CTCN-A
Serial Number	: M001 <input checked="" type="checkbox"/> Prototype <input type="checkbox"/> Pre-production <input type="checkbox"/> Production
Date of Manufacture	: March 2002

### 3. Test Items and Procedure

AC Power Line Conducted Emission Measurement  
 Radiated Emission Measurement

Above all tests were performed under: ANSI C63.4 – 1992

without deviation,  with deviation(details are found inside of this report)

### 4. Date of Test

Receipt of Test Sample : 9 April 2002  
Test Completed on : 22 April 2002

Seiichi Izumi  
General Manager / Ikoma Testing Laboratory

Table of Contents

<b>0. LABORATORY ACCREDITATION AND MEASUREMENT UNCERTAINTY</b>	<b>3</b>
0.1. Laboratory Accreditation	3
0.2. Measurement Uncertainty	3
<b>1. CERTIFICATION OF THE COMPLIANCE</b>	<b>3</b>
<b>2. GENERAL INFORMATION</b>	<b>4</b>
2.1. Product Description	4
2.2. Description for Equipment Authorization	5
2.3. Test Facility	5
<b>3. TESTED SYSTEM</b>	<b>6</b>
3.1. Operation of EUT System	6
3.2. Characterization and Condition of EUT System	6
3.3. Block Diagram of EUT System	7
3.4. List of EUT System	8
3.5. List of Cables	9
<b>4 AC POWER LINE CONDUCTED EMISSION MEASUREMENT</b>	<b>10</b>
4.1. Test Procedure	10
4.2. Test Results	11
<b>5 RADIATED EMISSION MEASUREMENT</b>	<b>13</b>
5.1. Test Procedure	13
5.2. Test Results	14
<b>6 USED EQUIPMENTS AND CALIBRATION STATUS</b>	<b>17</b>

## 0. LABORATORY ACCREDITATION AND MEASUREMENT UNCERTAINTY

### 0.1. Laboratory Accreditation

KEC is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP) for the specific scope of accreditation under Lab Code: 200207-0.

When the test report concerns with the NVLAP accreditation test, the first page of the test report is signed by NVLAP Approved Signatory accompanied by the NVLAP logo.

The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

### 0.2. Measurement Uncertainty

The result of a measurement is only an approximation or estimate of the value of a specific quantity. And thus the measurand is complete only when a statement of uncertainty is given.

KEC quotes Measurement Uncertainty (U) of +/- 4.9 dB for Radiated Emissions and of +/- 2.2 dB for AC Power Line Conducted Emissions.

## 1. CERTIFICATION OF THE COMPLIANCE

This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart B Unintentional Radiators.

KEC evaluation criteria for compliance:

The Product complies, if

the measured results are below the specification limit by a margin more than or equal

1/2 U (2.5 dB) for Radiated Emissions and

U (2.2 dB) for AC Power Line Conducted Emissions.

## 2. GENERAL INFORMATION

### 2.1. Product Description

The Ultrak Model No. SR40CTCN-A (referred to as the EUT in this report) is a Continuous Video Cassette Recorders. It is possible to control the EUT from the control device or by using the RS485.

#### (1) Technical Specification

Video tape	: VHS
RS485 bound Rate	: 1200 – 19200 bps

#### (2) Used Oscillating Frequencies

0.032768 MHz	: Microcomputer clock
0.07 ~ 0.130 MHz	: Switching Frequency
0.072 MHz	: Audio oscillator
3.579545 MHz	: Y/C/A clock
7.3728 MHz	: Microcomputer clock (RS485-REMO circuit)
12.0 MHz	: Microcomputer clock

#### (3) Equipped Interface terminals

RS485 IN	: RJ-45 female connector
RS485 OUT	: RJ-45 female connector
VIDEO IN terminal	: BNC 75Ω type
VIDEO OUT terminal	: BNC 75Ω type
AUDIO IN terminal	: RCA type
AUDIO OUT terminal	: RCA type
ALM IN terminal	: Input terminal for alarm recording.
RST IN terminal	: Input terminal to stop alarm recording when the "ALARM REC DURATION" of MAIN MENU is set to "MAN 1".
REC IN terminal	: Input terminal to start/stop recording.
GND(GROUND) terminal	: When a lead connected to other terminals requires a ground, connect the ground lead here.
ALM (ALARM) OUT terminal	: Output terminal to relay alarm recording to an outside alarm
MODE OUT terminal	: Output terminal to relay the VCR mode selected by the "MODE OUT" of MAIN MENU.
CLK(CLOCK)OUT terminal	: Output terminal for the camera switching time.
CALL OUT terminal	: Output terminal to relay tape finishing and/or internal abnormality during recording.

#### (4) Rated Power Supply

: AC 100 ~ 230 V, 50/60 Hz

## 2.2. Description for Equipment Authorization

(1) Category	:	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B
(2) Reference Rule and Specification	:	FCC Rule Part 15	
		<input checked="" type="checkbox"/> Section 15.107 (a), 15.109 (a) and (c)	<input type="checkbox"/> Section 15.107 (b), 15.109 (b) and (c)
(3) Type of device	:	<input checked="" type="checkbox"/> Personal Computer & Peripherals	
		<input type="checkbox"/> Other Digital Device	
(4) Kind of Equipment Authorization	:	<input type="checkbox"/> DoC	<input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification
(5) Procedure of Application	:	<input checked="" type="checkbox"/> Original Equipment <input type="checkbox"/> Modification	
(6) Highest Frequency used in the Device	:	12.0 MHz	
(7) Upper Frequency of Radiated Emission Measurement Range	:	<input checked="" type="checkbox"/> 1000 MHz	<input type="checkbox"/> 2000 MHz <input type="checkbox"/> 5000 MHz

## 2.3. Test Facility

All tests described in this report were performed by:

Name: KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)  
IKOMA TESTING LABORATORY

OpenArea Test Site	<input type="checkbox"/> No.1	<input type="checkbox"/> No.3	<input type="checkbox"/> No.4
Anechoic Chamber	<input checked="" type="checkbox"/> No.1	<input type="checkbox"/> No.3	
Shielded Room	<input type="checkbox"/> No.1	<input checked="" type="checkbox"/> No.2	<input type="checkbox"/> No.4 <input type="checkbox"/> No.5

Address: 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

These test facilities have been filed with the FCC under the criteria of ANSI C63.4-1992. The KEC has been accredited by the NVLAP (Lab. Code: 200207-0) based on ISO17025.

Also the laboratory has been authorized by TUV Product Service (GER) and TUV Rheinland (GER) based on their criteria for testing laboratory (EN45001).

### 3. TESTED SYSTEM

#### 3.1. Operation of EUT System

- (1) Set the recording and playback speed mode of EUT to “6H”.
- (2) RS485 of the EUT port setting is set as following by menu display  
RATE : 19200bps
- (3) Insert the VHS video cassette (120 minutes type ) to the EUT.
- (4) Execute the test program(\*1) on floppy disk
- (5) Execute “WIZARD.EXE”(\*2) and Test 1.bat (\*3).

Then following operations (a) – (l) were repeated and parallel.

- (a) The EUT was operated forwarding the video cassette for 3 seconds.
- (b) The EUT was operated stopping the video cassette.
- (c) The EUT was operated recording both of a visual and aural on the video cassette by using the color CCD camera for 15 seconds, its condition were appeared on the color video monitor.
- (d) The EUT was operated stopping the video cassette.
- (e) The EUT was operated rewinding the video cassette for 4 seconds.
- (f) The EUT was operated playback the video cassette for 10 seconds, ant its condition were appeared on the color video monitor.
- (g) The EUT was operated stopping the video cassette.
- (h) The EUT was operated the video tape rewinding for 3 seconds.
- (i) “H” pattern, one line 80 characters were printed by printer.
- (j) FDD of personal computer was operated (Read/write/delete).
- (k) HDD of personal computer was operated (Read/write/delete).
- (l) “H” pattern (Font size:14, Font name : Arial, 800×600 dot true color 24 bit) were appeared at full screen and scrolled on the LCD display of personal computer.


#### [ Note ]

- 1) EUT operations were controlled by using the personal computer via the serial interface cable.
- 2) (\*1) : this test program was prepared by the applicant, and it is the EUT control program.
- 3) (\*2) : this test program was displaying the “H” pattern on LCD monitor.
- 4) (\*3) : this test program was FDD, HDD of personal computer and printer operation.
- 5) OS : Windows98

#### 3.2. Characterization and Condition of EUT System

: normal ,  : not normal (that is )

### 3.3 Block Diagram of EUT System

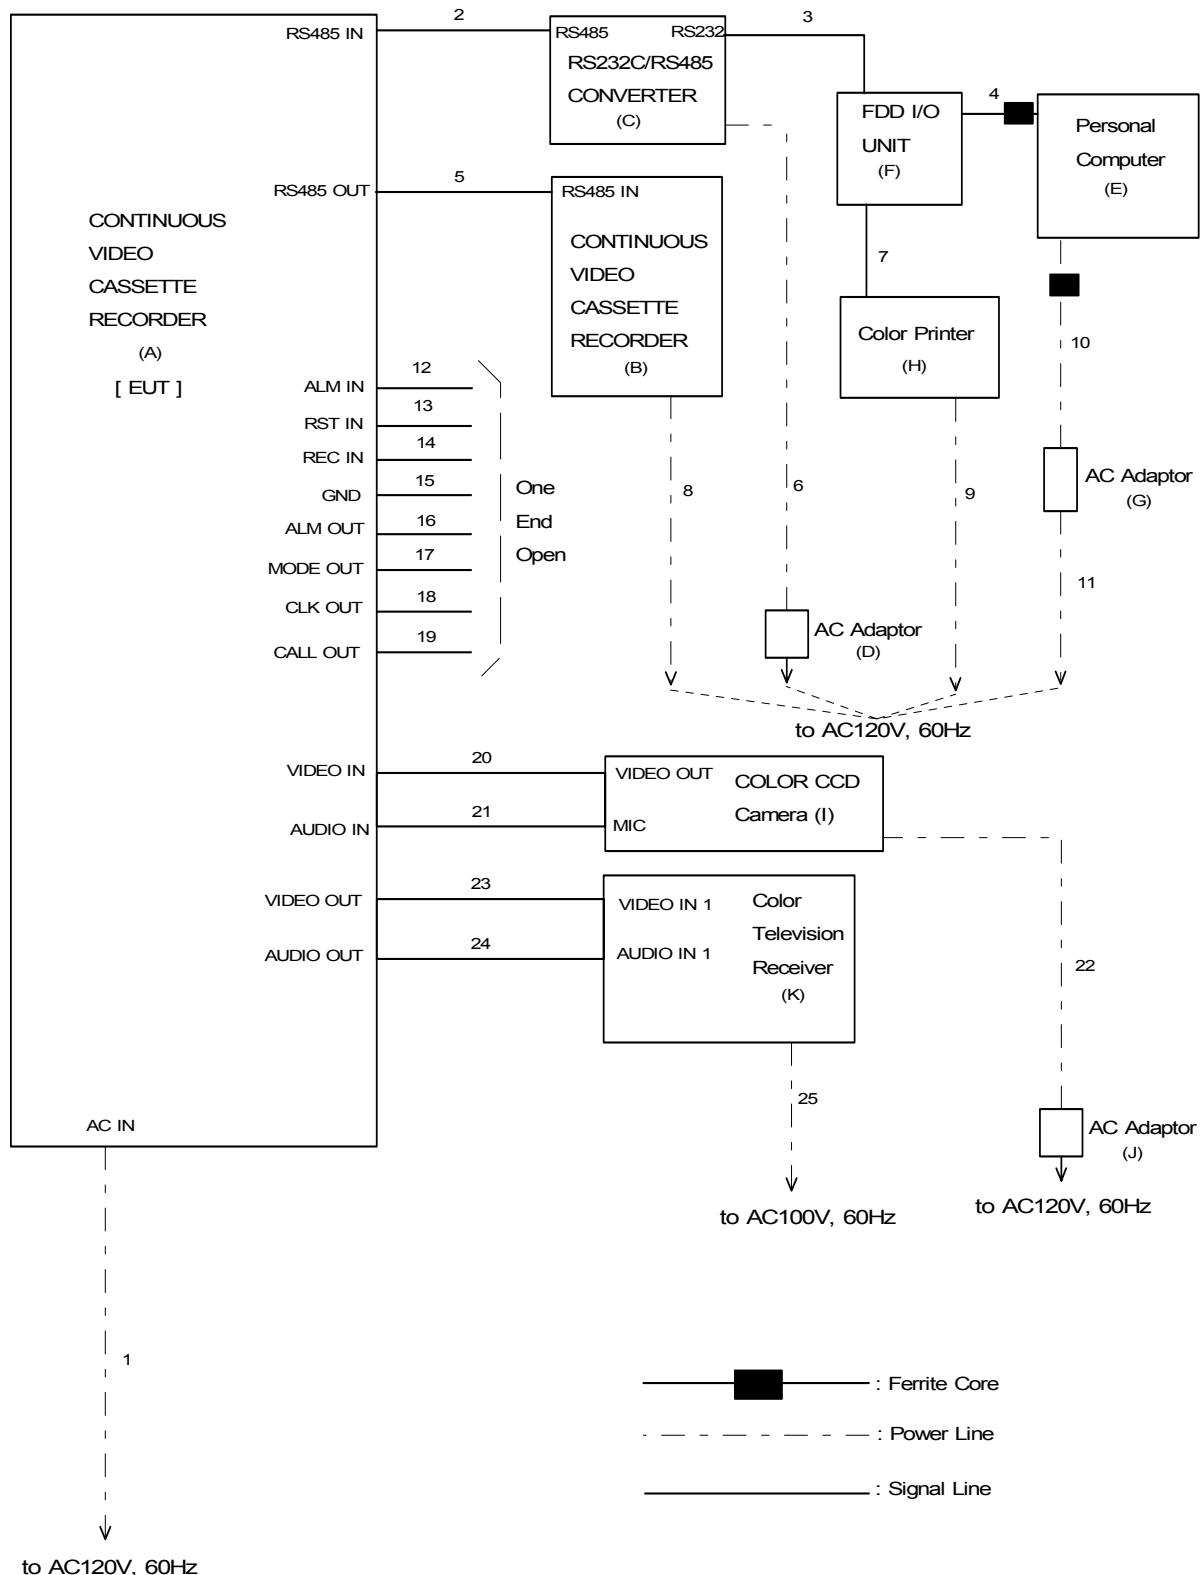

[ Note ]

See 3.4 List of EUT System and 3.5 List of Cables.

### 3.4 List of EUT System

No	Device Name (Interface)	Model Number (Serial Number)	FCC ID (Trade Name)	Note	Remark
A	Continuous Video Cassette Recorder (RS485)	SR40CTCN-A (M001)	BGB485 (Ultrak)		(1)
B	Continuous Video Cassette Recorder (RS485)	SR40CTCN-A (M002)	BGB485 (Ultrak)		
C	RS232C/RS485 Converter (Serial)	RSFC24W ( - )	N/A (R.E.SMITH)		
D	AC Adaptor of RS232C/RS485 Converter (C)	DV-9300S (0201)	N/A (CONDOR)	Input 120VAC, 60Hz Output 9VDC, 300mA	
E	Personal Computer	PC-A150 (89019990)	N/A (SHARP)	FCC : Declaration of Comformity	
F	FDD I/O Unit	CE-FD02 ( - )	N/A (SHARP)		(2)
G	AC Adaptor of Personal Computer (E)	EA-J01V (C980705264A)	N/A (SHARP)		(2)
H	Color Printer (Parallel)	C6429A (MY04Q150VR)	N/A (Hewlett Packard)	FCC : Declaration of Comformity	
I	Color CCD Camera	YH-7B67 (000091)	N/A (SHARP)		
J	AC Adaptor of Color CCD Camera (I)	RADP-A015SDEO ( - )	N/A (SHARP)		
K	Color Television Receiver	KV-14PS1 (2009233)	N/A (SONY)		

[Attention]

N/A: Not Applicable

[Remark]

(1): EUT

(2): Accessory of Personal Computer (E)

### 3.5 List of Cables

No	Cable Name	Shielded (Y/N)	Length ( m )	Note	Remark
1	AC Power Cord of EUT	Y	1.9	3-wires type	(1)
2	RS485 Interface Cable	N	2.55		
3	RS232C Interface Cable	N	2.15		
4	FDD I/O Unit Cable	Y	0.1	with one ferrite core	(2)
5	RS485 Interface Cable	N	4.95		
6	DC Output Cord of AC Adaptor (D)	N	1.9	2-wires type	(2)
7	Parallel Interface Cable	Y	2.0		
8	AC Power Cord of Continuous Video Cassette Recorder (B)	Y	1.9	3-wires type, Accessory Cable of Continuous Video Cassette Recorder (B)	
9	AC Power Cord of Color Printer (H)	N	1.8	2-wires type	
10	DC Output Cord of AC Adaptor (G)	N	2.0	with one ferrite core	(2)
11	AC Input Cord of AC Adaptor (G)	N	2.0	2-wires type	(2)
12	Lead for ALM IN terminal	N	2.1	one end open	
13	Lead for RST IN terminal	N	2.1	one end open	
14	Lead for REC IN terminal	N	2.1	one end open	
15	Lead for GND terminal	N	2.1	one end open	
16	Lead for ALM OUT terminal	N	2.1	one end open	
17	Lead for MODE OUT terminal	N	2.1	one end open	
18	Lead for CLK OUT terminal	N	2.1	one end open	
19	Lead for CALL OUT terminal	N	2.1	one end open	
20	Video Signal Cable	Y	1.7	RCA type	(3)
21	Audio Signal Cable	Y	1.7	RCA type	(3)
22	DC Output Cord of AC Adaptor (J)	N	1.9	2-wires type	(2)
23	Video Signal Cable	Y	2.0	3C-2V type	
24	Audio Signal Cable	Y	1.4		

#### [Remark]

- (1): Accessory of EUT
- (2): Permanently attached to each peripheral device
- (3): Accessory of Color CCD Camera (I)

## 4 AC POWER LINE CONDUCTED EMISSION MEASUREMENT

### 4.1 Test Procedure

- (1) Configure the EUT System in accordance with ANSI C63.4-1992 section 7.  
 without deviation,  with deviation(details are found below)  
See also the block diagram and the photographs of EUT System configuration in this report.
- (2) Connect the EUT's AC power cord to one Line Impedance Stabilization Network (LISN).
- (3) Any other power cord of other equipment is connected to a LISN different from the LISN used for the EUT.
- (4) Warm up the EUT System.
- (5) Activate the EUT System and run the software prepared for the test, if necessary.
- (6) Connect the spectrum analyzer (\*1) to the measuring port of the LISN for the EUT, using a calibrated coaxial cable.
- (7) To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT.
- (8) The spectrums are scanned from 450 kHz to 30 MHz and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.
- (9) The test receiver (\*2) is connected to the LISN for the EUT, and the six highest emissions minimum recorded above are measured.

#### [Note]

(\*1) Spectrum Analyzer Set Up Conditions

Frequency range	: 450 kHz - 30 MHz
Resolution bandwidth	: 10 kHz
Video bandwidth	: 1 MHz
Detector function	: Peak mode

(\*2) Test Receiver Set Up Conditions

Detector function	: Quasi-Peak/ Average (if necessary)
IF bandwidth	: 10 kHz

## 4.2 Test Results

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading		Maximum RF Voltage (dBuV)	Limit (dBuV)	Margin for Limit (dB)
		Va (dBuV)	Vb (dBuV)			
0.611	0.1	37.5	36.8	37.6	48.0	10.4
1.121	0.1	38.2	37.8	38.3	48.0	9.7
1.140	0.1	40.0	38.5	40.1	48.0	7.9
1.375	0.1	38.6	38.0	38.7	48.0	9.3
1.685	0.1	38.4	38.6	38.7	48.0	9.3
10.739	0.6	36.0	36.2	36.8	48.0	11.2

[Note]

LISN Correction Factor includes the cable loss.

[Calculation method]

Maximum RF Voltage (dB $\mu$ V)

= Meter Reading ( at maximum level of Va or Vb ) + LISN Factor (dB)

[Environment]


Temperature: 24°C

Humidity: 44%

[Tested Date/ Tester]


22 April 2002

Signature

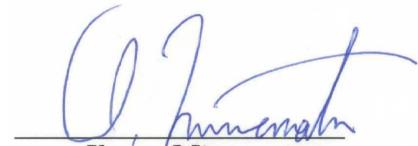

Ikuya Minematsu

## Test Results in Graph

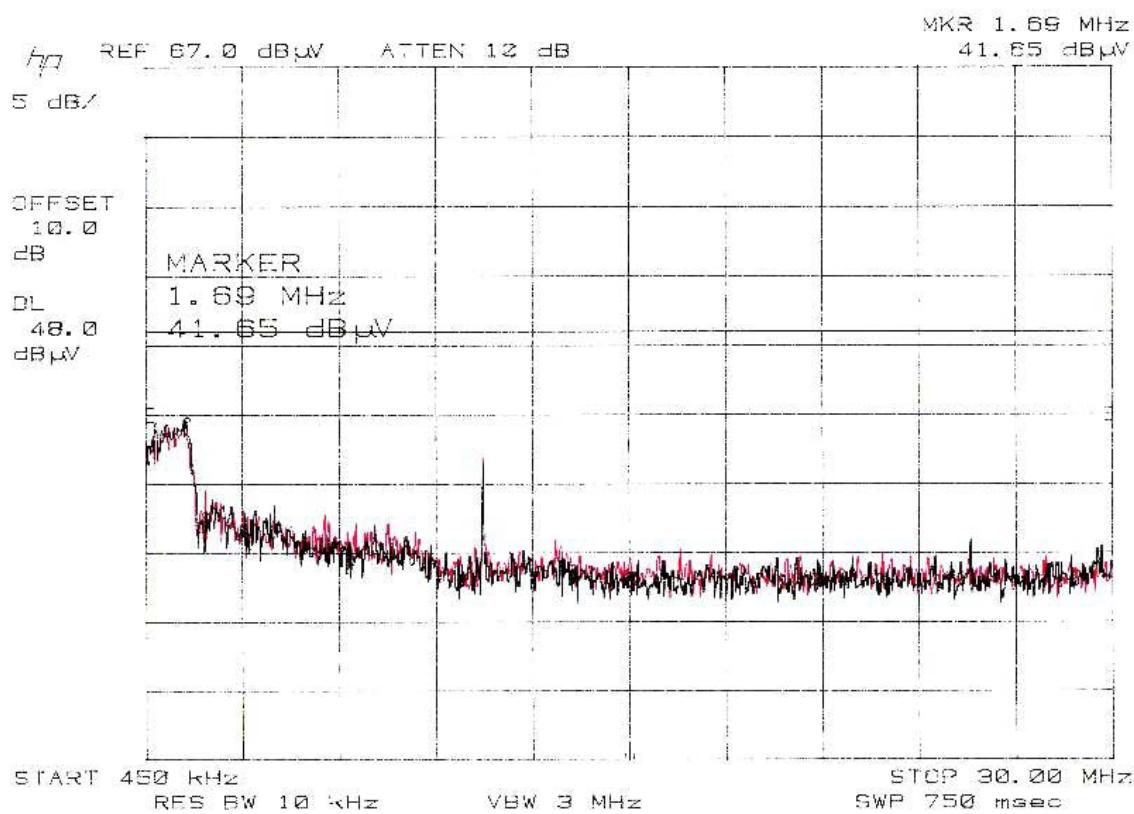

## 5 RADIATED EMISSION MEASUREMENT

### 5.1 Test Procedure

(1) Configure the EUT System in accordance with ANSI C63.4-1992 section 8.  
 without deviation,  with deviation(details are found below)  
 See also the block diagram and the photographs of EUT System configuration in this report.

(2) If the EUT system is connected to a public power network, all power cords for the EUT System are connected the receptacle on the turntable.

(3) Warm up the EUT System.

(4) Activate the EUT System and run the prepared software for the test, if necessary.

(5) To find out the emissions of the EUT System, preliminary radiated measurement are performed at a closer distance than that specified for final radiated measurement using the spectrum analyzer (\*1) and the broad band antenna.  
 In the frequency above 1 GHz, it is performed using the spectrum analyzer (\*2) and the horn antenna.

(6) To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT.

(7) The spectrums are scanned from 30 MHz to the upper frequency of measurement range, and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.

(8) In final compliance test, the six highest emissions minimum, recorded above, are measured at the specified distance using the broad band antenna or the tuned dipole antenna and the test receiver (\*3).  
 In the frequency above 1 GHz, the measurements are performed by the horn antenna and  
 the test receiver (\*4).  
 the spectrum analyzer(\*2) with pre-amplifier.

[Note]

(\*1) Spectrum Analyzer Set Up Conditions

Frequency range	: 30 - 1000 MHz
Resolution bandwidth	: 100 kHz
Detector function	: Peak mode

(\*2) Spectrum Analyzer Set Up Conditions

Frequency range	: 1 GHz - Upper frequency of measurement range
Resolution bandwidth	: 1 MHz
Video bandwidth	: 1 MHz
Attenuator	: 10 dB
Detector function	: Peak mode

(\*3) Test Receiver Set Up Conditions

Detector function	: Quasi-Peak
IF bandwidth	: 120 kHz

(\*4) Test Receiver Set Up Conditions

Detector function	: Average
IF bandwidth	: 1 MHz

## 5.2 Test Results

Measurement Distance  3m  10m

Measured Frequency ( MHz )	Antenna Factor ( dB/m )	Meter Reading		Maximum Field Strength ( dBuV/m )	Limit ( dBuV/m )	Margin for Limit ( dB )
		Horizontal Polarization ( dBuV )	Vertical Polarization ( dBuV )			
38.20	16.8	4.3	8.9	25.7	40.0	14.3
57.27	10.2	8.0	20.2	30.4	40.0	9.6
72.00	8.4	12.4	24.1	32.5	40.0	7.5
85.93	10.3	15.8	23.8	34.1	40.0	5.9
116.24	15.1	18.1	15.6	33.2	43.5	10.3
120.00	15.6	14.8	17.0	32.6	43.5	10.9
176.56	19.3	10.0	13.9	33.2	43.5	10.3
211.89	20.3	14.5	12.7	34.8	43.5	8.7
229.09	20.9	11.8	13.4	34.3	46.0	11.7
458.18	23.3	15.0	9.0	38.3	46.0	7.7
467.76	23.6	6.7	5.4	30.3	46.0	15.7
540.00	25.1	9.0	6.0	34.1	46.0	11.9
579.20	25.8	8.8	7.2	34.6	46.0	11.4

## [Note]

(1) Antenna Factor includes the cable loss.  
 (2) \* mark in Measured Frequency : Measured with the tuned dipole antenna.  
 no mark in Measured Frequency : Measured with the broadband antenna.

## [Calculation method]

Maximum Field Strength (dB $\mu$ V/m)  
 = Meter Reading (at maximum level of Horizontal or Vertical) (dB $\mu$ V) + Antenna Factor (dB/m)

## [Environment]

Temperature: 20°C

Humidity: 35%

## [Tested Date/ Tester]


19 April 2002

Signature


  
 Ikuya Minematsu

## Test Results in Graph

### Horizontal Polarization

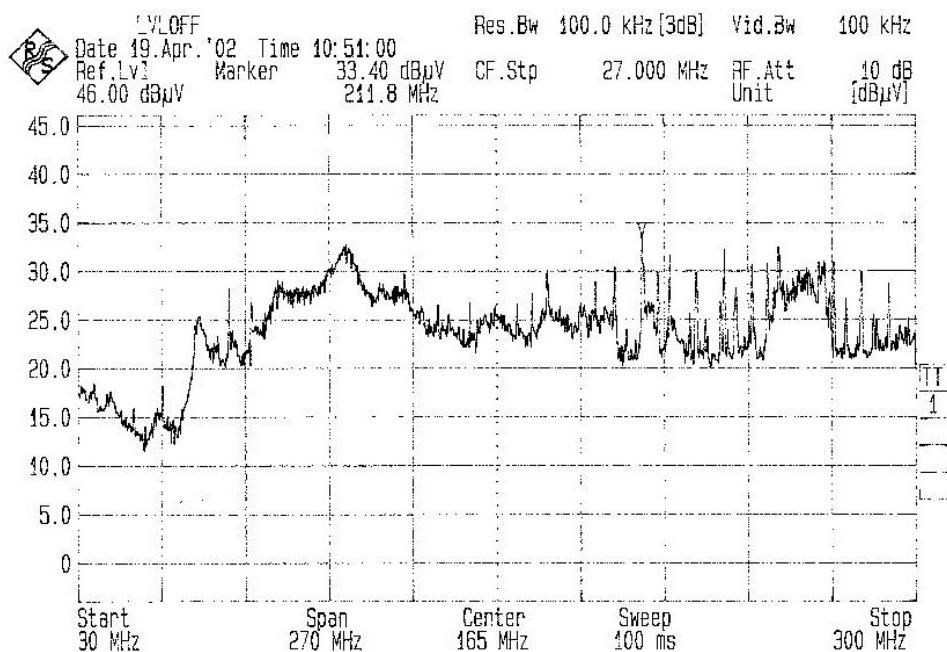


30 MHz – 300 MHz

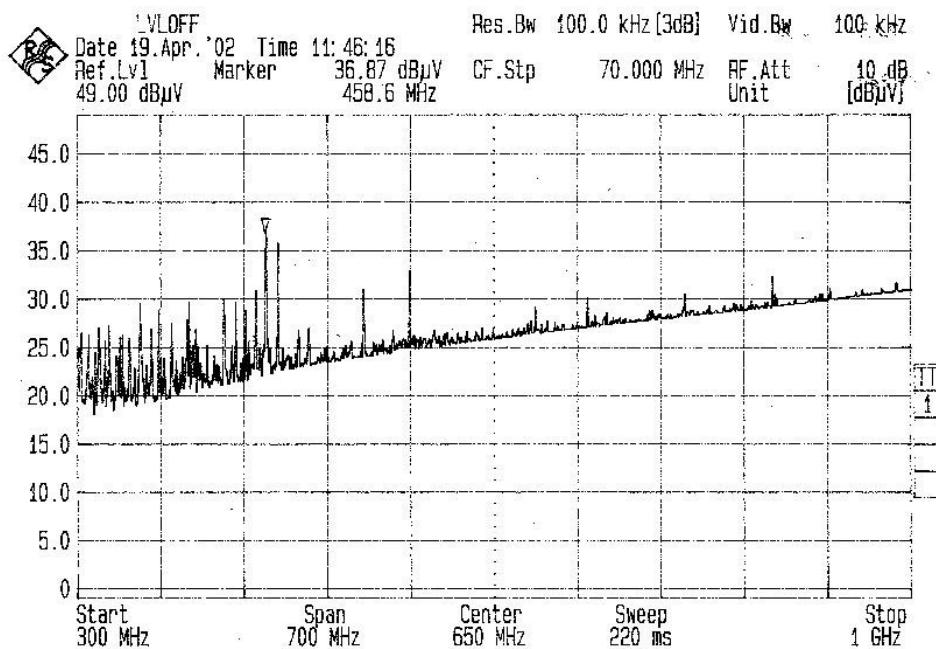


300 MHz – 1000 MHz

## Vertical Polarization

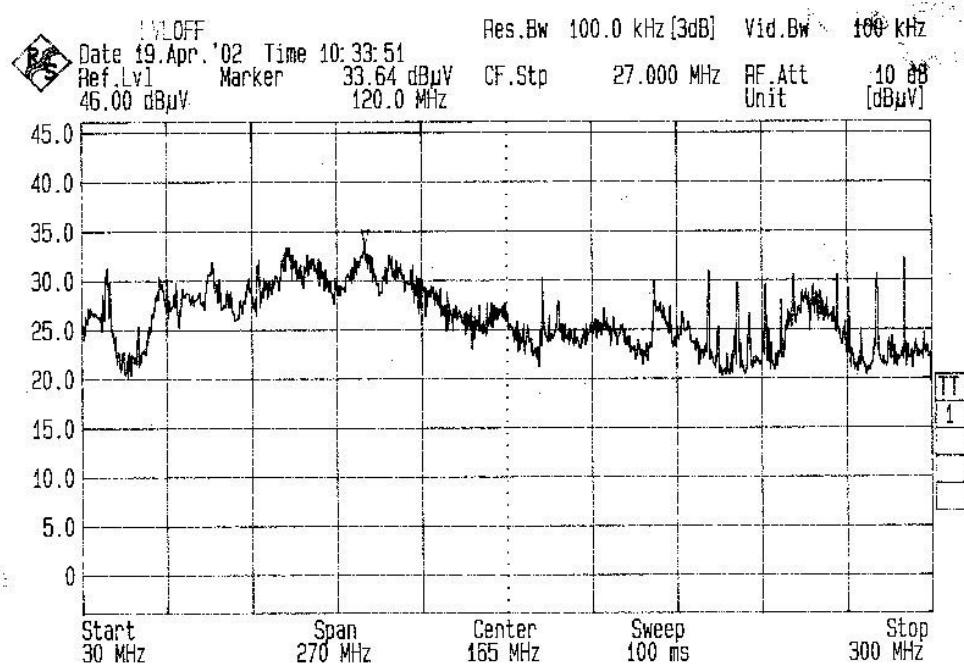

30 MHz – 300 MHz

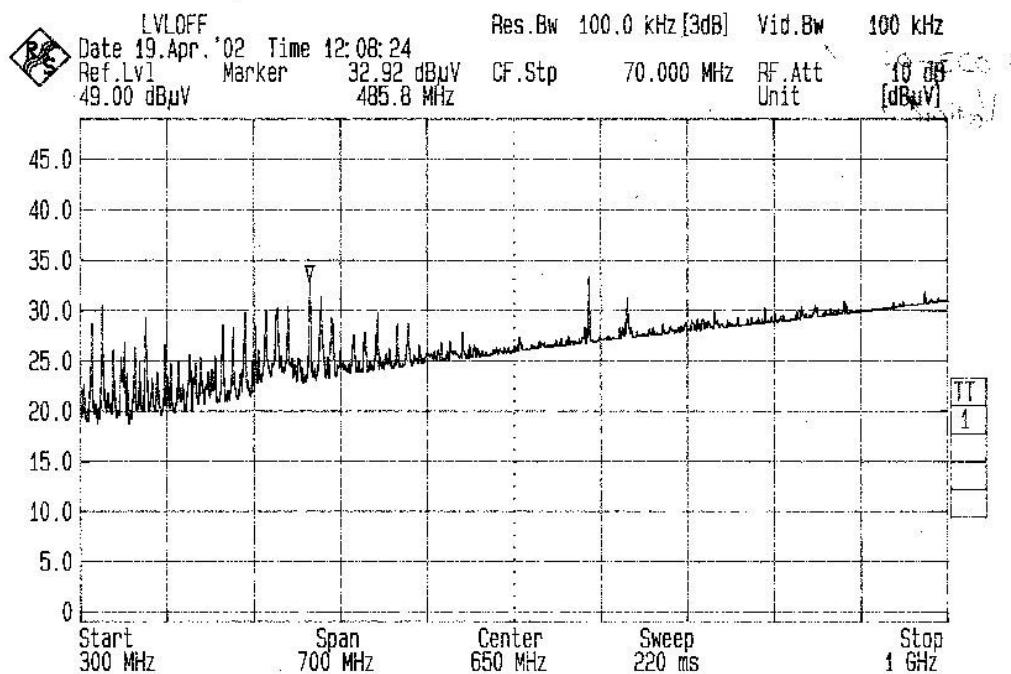

300 MHz – 1000 MHz

## 6 USED EQUIPMENTS AND CALIBRATION STATUS

Equipment	Manufacturer	Model No.	Specifications	KEC Control No.	Test Item (*)	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESHS10	Frequency Range 9kHz-30MHz	FS-67	1	2001/12	2002/12
		ESVS10	Frequency Range 20MHz-1GHz	FS-60	2	2001/6	2002/6
Spectrum Analyzer	Rohde & Schwarz	FSA	Frequency Range 100Hz-1.8GHz	SA-35	2	2002/4	2003/4
	Hewlett Packard	8568B	Frequency Range 100Hz-1.5 GHz	SA-16	1	2001/5	2002/5
Pre-Amplifier	Hewlett Packard	8449B	Frequency Range 1GHz-26.5GHz	AM-52	N/A	2002/2	2003/2
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30MHz-300MHz	AN-218	2	2002/3	2003/3
Log-Periodic Antenna	Schwarzbeck	UHALP9108A	Frequency Range 300MHz-1GHz	AN-219	2	2002/3	2003/3
Tuned Dipole Antenna	Kyoritsu	KBA-511AS	Frequency Range 25MHz-500MHz	AN-132	N/A	2002/4	2003/4
		KBA-611S	Frequency Range 500MHz-1GHz	AN-115	N/A	2002/4	2003/4
Horn Antenna	Raven	91888-2	Frequency Range 1GHz-2GHz	AN-168	N/A	2001/4	2003/4
LISN for EUT	Kyoritsu	KNW-407	Frequency Range 150kHz-30MHz	FL-106	1	2001/4	2002/4
LISN For Peripherals	Kyoritsu	KNW-242	Frequency Range 10kHz-30MHz	FL-110	1	2001/4	2002/4
		KNW-407	Frequency Range 150kHz-30MHz	FL-72	1	2001/4	2002/4
RF Switch	Rohde & Schwarz	PSU-S	Frequency Range 30MHz-1GHz	MM-123	2	2002/3	2003/3

[Note]

Test Item (\*):

- 1: Conducted Emission Measurement
- 2: Radiated Emission Measurement (30 MHz – 1 GHz)
- 3: Radiated Emission Measurement (1 GHz <      )
- N/A: Not Applicable

The overall program of calibration and verification of equipment is designed and operated so as to ensure that measurements made by KEC are traceable to national standards of measurement or equivalent abroad.