


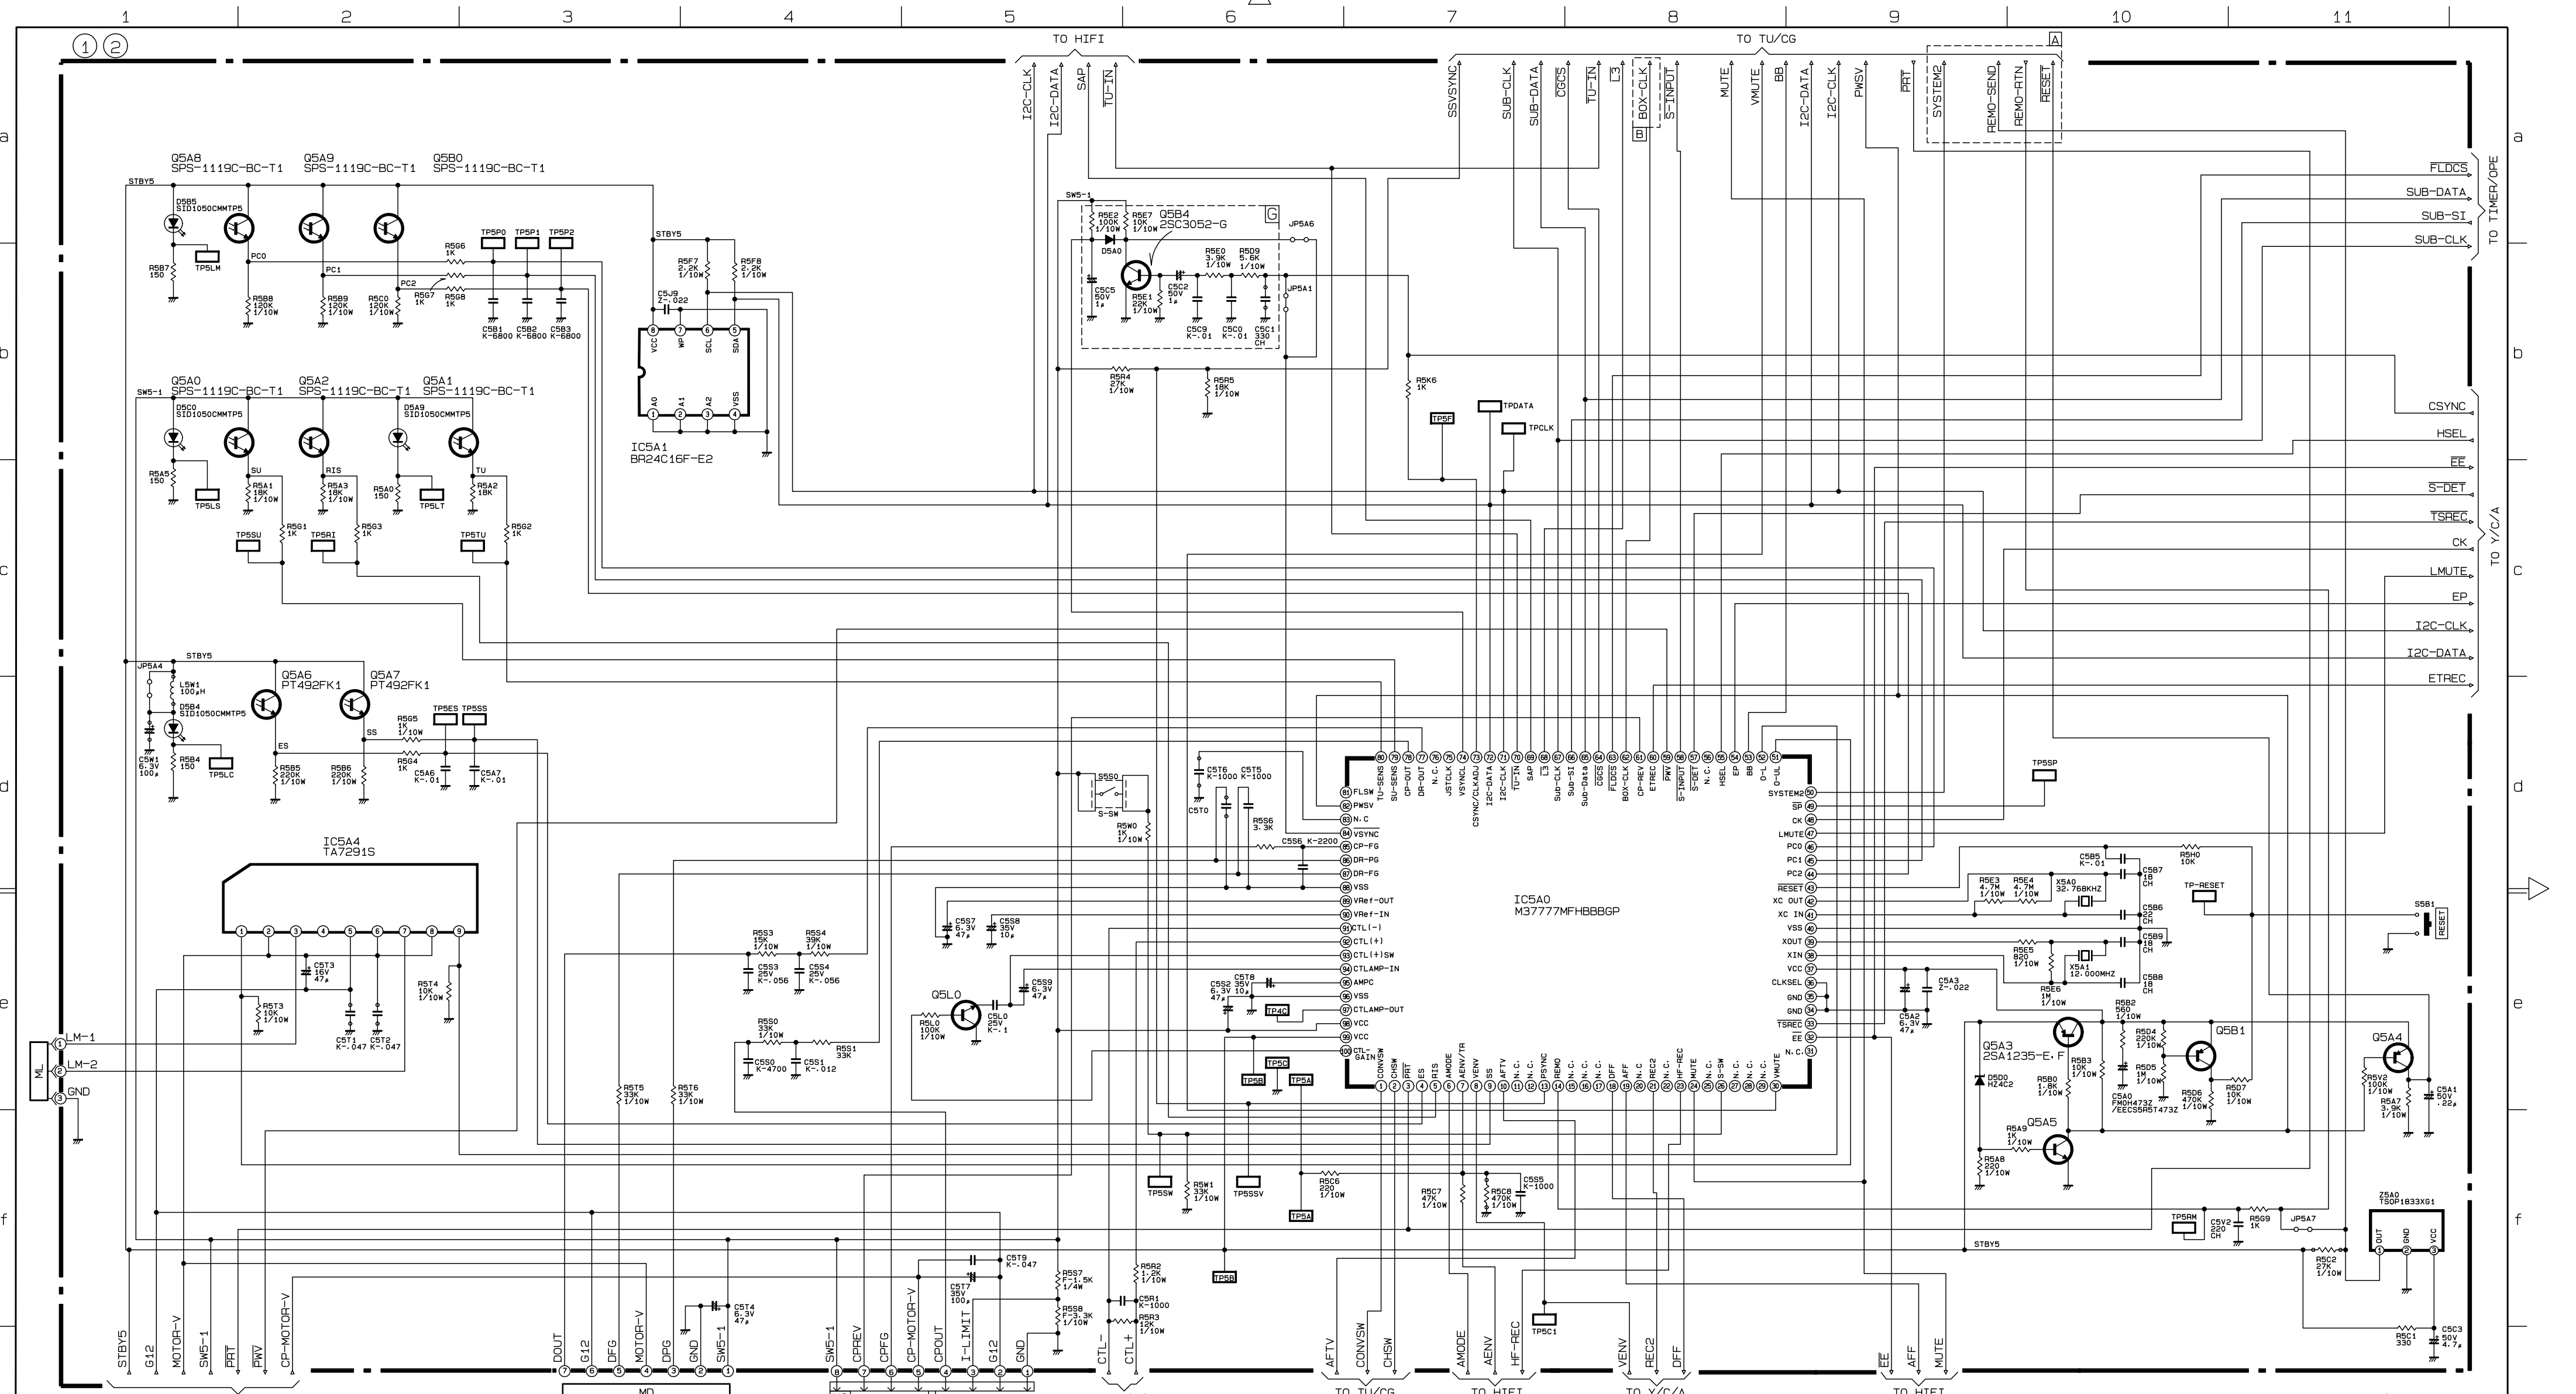

|            |      |              |
|------------|------|--------------|
| ○ employed | ×    | not employed |
| 7          | A    | B            |
| 1          | a-10 | a-8          |
| 2          |      |              |
| 3          |      |              |
| 4          |      |              |
| 5          |      |              |
| 6          |      |              |
| 7          |      |              |
| 8          |      |              |
| 9          |      |              |

|   |      |     |
|---|------|-----|
| 7 | A    | B   |
| 1 | a-10 | a-8 |
| 2 |      |     |
| 3 |      |     |
| 4 |      |     |
| 5 |      |     |
| 6 |      |     |
| 7 |      |     |
| 8 |      |     |
| 9 |      |     |

NOTE:  
All registers are 1/6 or 1/4W unless otherwise specified.  
All diodes are 1SS354 unless otherwise specified.  
All NPN transistors are 2SC2412K-R/S/2SD601A1-R/S unless otherwise specified.  
All PNP transistors are 2SA1037AK-R/S unless otherwise specified.  
All PNP digital transistors are DTA124EKA/RT1P241C  
All NPN digital transistors are DTC124EKA/RT1N241C

CONT

CONT

HS-U776

HS-U746

50X

50X

規格

MATERIAL AND DIMENSIONS

(MI) UNIT

5 ~

TITLE OF DRAWING

~ 24

第 3 角 法 3RD ANGLE PROJECTION

DIM IN mm

NTS

1999.11.19

作成

DATE

MITSUBISHI ELECTRIC CORPORATION

北村 菅野 北村 小坪

25 26 27 28 29 30 31

983B830