

Designated by Ministry of International Trade and Industry

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE

6-8-7 NISHITENMA

KITA-KU OSAKA 530-0047 JAPAN



IKOMA TESTING LABORATORY

12128 TAKAYAMA-CHO

IKOMA-CITY NARA 630-0101 JAPAN

Corporate Juridical Person

TEST REPORT

Report No. A-012-00-A

Date: 18 April 2000

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 15 Subpart B Unintentional Radiators.

All the tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : MITSUBISHI ELECTRIC CORP.
 Audio-Visual Systems Business Division Imaging Storage Products
 Department

Mailing Address : 1 Baba-Zusyo Nagaokakyo-City Kyoto 617-8550 Japan

2. Identification of Tested Device

Type of Device : Digital Device
 Kind of Equipment Authorization : DoC Certification Verification
 FCC ID : BGBR-9000RS
 Device Name : INTERFACE BOARD
 Trade Name : MITSUBISHI
 Model Number : R-9000RS
 Serial Number : P001 Prototype Pre-production Production
 Date of Manufacture : March 2000

3. Test Items and Procedure

AC Power Line Conducted Emission Measurement
 Radiated Emission Measurement

Above all tests were performed under: ANSI C63.4 – 1992

without deviation, with deviation(details are found inside of this report)

4. Date of Test

Receipt of Test Sample : 21 March 2000
 Test Completed on : 7 April 2000

Fumitoshi Nagaoka
 Associate Director/ Ikoma Testing Laboratory

Table of Contents

0.	NVLAP ACCREDITATION AND MEASUREMENT UNCERTAINTY	3
0.1.	NVLAP Accreditation	3
0.2.	Measurement Uncertainty	3
1.	CERTIFICATION OF THE COMPLIANCE	3
2.	GENERAL INFORMATION	4
2.1.	Product Description	4
2.2.	Description for Equipment Authorization	4
2.3.	Test Facility	5
3.	TESTED SYSTEM	6
3.1.	Operation of EUT System	6
3.2.	Characterization and Condition of EUT System	6
3.3	Block Diagram of EUT System	7
3.4	List of EUT System	8
3.5	List of Cables	9
4	AC POWER LINE CONDUCTED EMISSION MEASUREMENT	10
4.1	Test Procedure	10
4.2	Test Results	11
4.3	Photographs of EUT System Configuration	13
5	RADIATED EMISSION MEASUREMENT	16
5.1	Test Procedure	16
5.2	Test Results	17
5.3	Photographs of EUT System Configuration	19
6	USED EQUIPMENTS AND CALIBRATION STATUS	22

0. NVLAP ACCREDITATION AND MEASUREMENT UNCERTAINTY

0.1. NVLAP Accreditation

KEC is accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code: 200207-0.

When a test report concerns with the NVLAP Accreditation test, the first page of the test report is signed by NVLAP Approved Signatory together with the expression.

The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

0.2. Measurement Uncertainty

The result of a measurement is only an approximation or estimate of the value of a specific quantity. And thus the measurand is complete only when a statement of uncertainty is given.

KEC quotes Measurement Uncertainty (U) of +/- 4.9 dB for Radiated Emissions and of +/- 2.2 dB for Conducted Emissions.

1. CERTIFICATION OF THE COMPLIANCE

This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart B Unintentional Radiators.

KEC evaluation criteria for compliance:

The Product complies, if

the measured results are below the specification limit by a margin more than or equal

1/2 U (2.5 dB) for Radiated Emissions and

U (2.2 dB) for Conducted Emissions.

2. GENERAL INFORMATION

2.1. Product Description

The MITSUBISHI Model No. R-9000RS (referred to as the EUT in this report) is a Optional RS-232C Interface Board for MITSUBISHI Time Lapse Video Cassette Recorders. By the use of the EUT, it is possible to control the Time Lapse Video Cassette Recorders from the computer.

Specification are as follows.

Communication Speed : 1200,2400,4800 or 9600bps

Provided terminals

- (1) RS-232C IN connector of option board : For connecting computer.
- (2) RS-232C OUT connector of option board : For connecting other Time Lapse VCR.

Contained Oscillators : 7.3728 MHz(RS-232C Micro computer clock)

Rated Power Supply : DC 5V (supplied from a Time Lapse VCR)

2.2. Description for Equipment Authorization

(1) Category	:	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B
(2) Reference Rule and Specification	:	FCC Rule Part 15	
		<input checked="" type="checkbox"/> Section 15.107 (a), 15.109 (a) and (c)	<input type="checkbox"/> Section 15.107 (b), 15.109 (b) and (c)
(3) Type of device	:	<input checked="" type="checkbox"/> Personal Computer & Peripherals	<input type="checkbox"/> Other Digital Device
(4) Kind of Equipment Authorization	:	<input type="checkbox"/> DoC	<input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification
(5) Procedure of Application	:	<input checked="" type="checkbox"/> Original Equipment	<input type="checkbox"/> Modification
(6) Highest Frequency used in the Device	:	7.3728 MHz	
(7) Upper Frequency of Radiated Emission Measurement Range	:	<input checked="" type="checkbox"/> 1000 MHz	<input type="checkbox"/> 2000 MHz <input type="checkbox"/> 5000 MHz

2.3. Test Facility

All tests described in this report were performed by:

Name: KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)
IKOMA TESTING LABORATORY

Open Area Test Site No.1 No.2 No.3 No.4
EMC M.C. Anechoic Chamber No.1
Shielded Room No.2 No.4 EMC M.C. Shielded Room

Address: 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

These test facilities have been filed with the FCC under the criteria of ANSI C63.4-1992. The Open Area Test Site No.4, EMC MC. Anechoic Chamber No.1, Shielded Room No.4 and EMC MC. Shielded Room have been accredited by the NVLAP (Lab. Code: 200207-0) based on ISO/IEC Guide 25.

Also the laboratory has been authorized by ITI (Interference Technology International, (UK), TUV Product Service (GER) and TUV Rheinland (GER) based on their criteria for testing laboratory (EN45001).

3. TESTED SYSTEM

3.1. Operation of EUT System

- (1) Set the recording and playback speed mode of EUT to “2H”.
- (2) Insert the VHS video cassette (120 minutes type) to the EUT.
- (3) Execute the test program(*1) on floppy disk
- (4) Execute the test program(*2) and “WIZARD.EXE”(*3).

Then following operations (a) – (k) were repeated and parallel.

- (a) The EUT was operated forwarding the video cassette for 5 seconds.
- (b) The EUT was operated stopping the video cassette.
- (c) The EUT was operated recording both of a visual and aural on the video cassette by using the color CCD camera for 10 seconds, its condition were appeared on the color video monitor.
- (d) The EUT was operated stopping the video cassette.
- (e) The EUT was operated rewinding the video cassette for 5 seconds.
- (f) The EUT was operated playback the video cassette for 8 seconds, ant its condition were appeared on the color video monitor.
- (g) The EUT was operated stopping the video cassette.
- (h) “H” pattern, one line 80 characters were printed by printer.
- (i) FDD of personal computer was operated (Read/write/delete).
- (j) HDD of personal computer was operated (Read/write/delete).
- (k) “H” pattern (Font size:14, Font name:Arial) were appeared at full screen and scrolled on the LCD display of personal computer.

[Note]


- 1) EUT operations were controlled by using the personal computer via the serial interface cable.
- 2) (*1) : this test program was prepared by the applicant, and it is the EUT control program.
- 3) (*2) : this test program was FDD, HDD and printer control program.
- 4) (*3) : this test program was displaying the “H” pattern on LCD monitor.
- 5) OS : Windows98

3.2. Characterization and Condition of EUT System

☒ : normal , □ : not normal (that is)

3.3 Block Diagram of EUT System

System-1

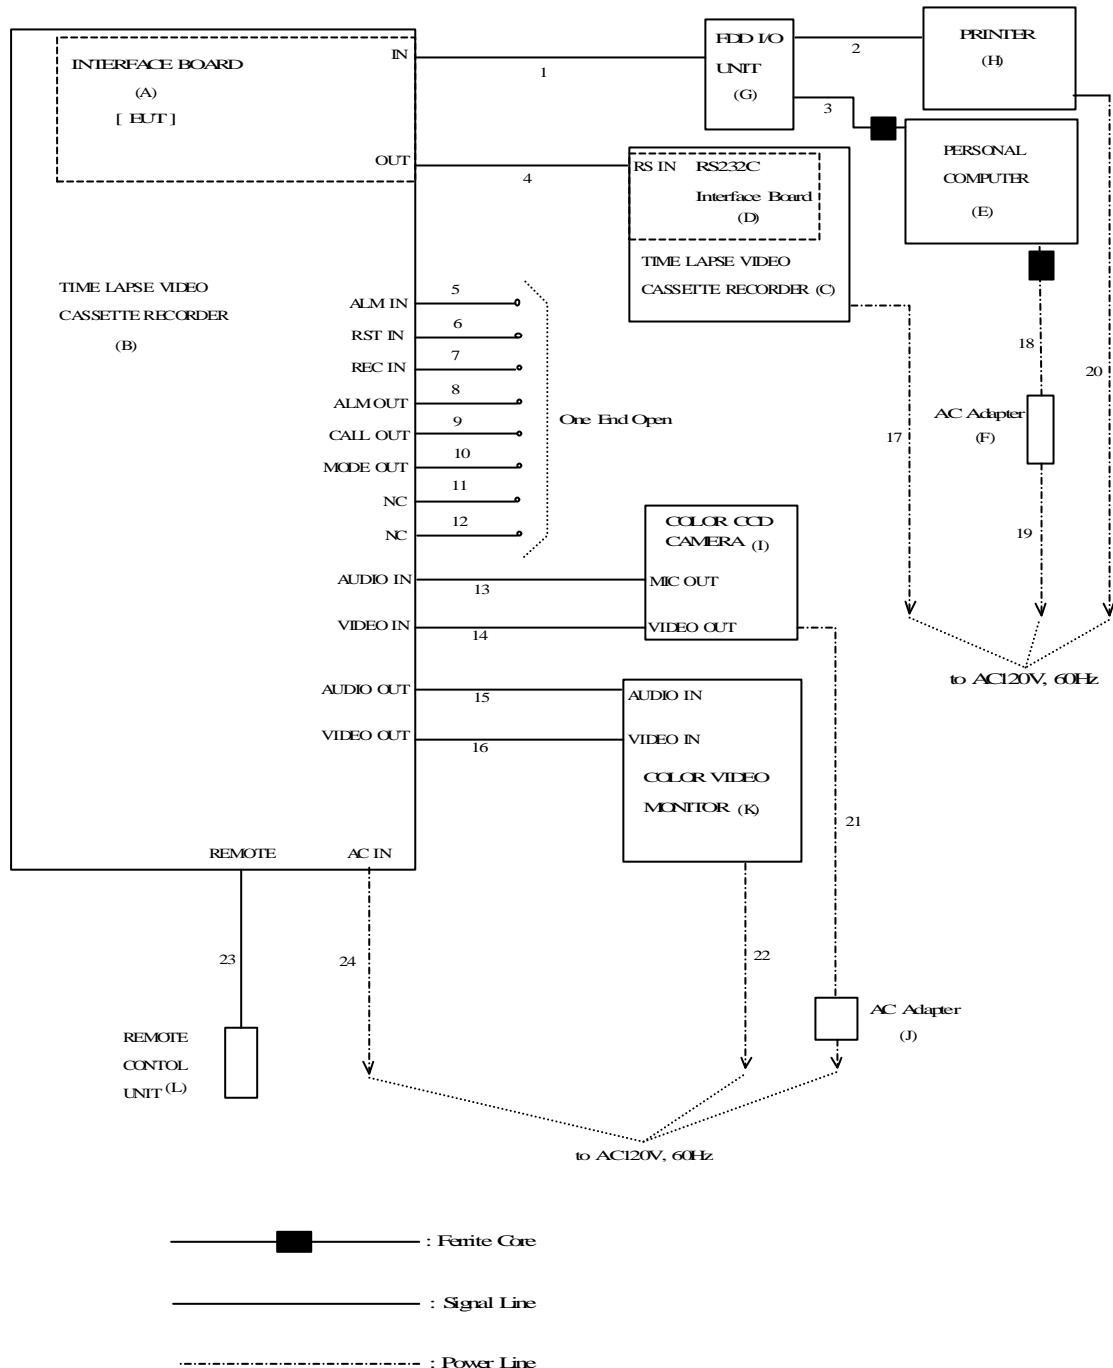

[Note]

See 3.5 List of EUT System and 3.6 List of Cables.

3.4 List of EUT System

No	Device Name (Interface)	Model Number (Serial Number)	FCC ID (Trade Name)	Note	Remark
A	INTERFACE BOARD (RS232C)	R-9000RS (P001)	BGBR-9000RS (MITSUBISHI)	Prototype Option of TIME LAPSE VIDEO CASSETTE RECORDER (B)	(1)
B	TIME LAPSE VIDEO CASSETTE RECORDER	HS-9424U (M012)	N/A (MITSUBISHI)		
C	TIME LAPSE VIDEO CASSETTE RECORDER	HS-7300U (P008)	N/A (MITSUBISHI)		
D	RS-232C Interface Board (RS232C)	R-7000RS (08-002)	BGBR-7000RS (MITSUBISHI)		
E	Personal Computer	PC-A150 (89019990)	DoC (SHARP)		
F	AC ADAPTER	EA-J01V (9980705254A)	N/A (SHARP)	Input : AC100-240V, 50/60 Hz Output : DC22V, 1.8A	(2)
G	FDD I/O UNIT	CE-FD02 (-)	N/A (SHARP)		(2)
H	PRINTER (Parallel)	ND-10 (290080300002)	B6D8MFND10 (Star)		
I	COLOR CCD CAMERA	YH-7B67 (000091)	N/A (SHARP)		
J	AC Adapter of COLOR CCD CAMERA (I)	RADP-A015SDEO (-)	N/A (SHARP)	Input:AC 120V, 60Hz Output:DC6V,500mA Accessory of COLOR CCD CAMERA (I)	
K	COLOR VIDEO MONITOR	VMC-7514 (H7205113)	N/A (SANYO)		
L	REMOTE CONTROL UNIT	R-5000 (-)	N/A (MITSUBISHI)	Option of TIME LAPSE VIDEO CASSETTE RECORDER (B)	

[Attention]

N/A: Not Applicable

[Remark]

(1): EUT

(2): Accessory device of Personal Computer (E)

3.5 List of Cables

No	Cable Name	Shielded (Y/N)	Length (m)	Note	Remark
1	Serial Interface Cable	Y	2.05	Both side D-sub 9pin type, Cross type	
2	Parallel interface Cable	Y	2.0		
3	FDD I/O UNIT (E) Cable	Y	0.2	with one ferrite core	(1)
4	Serial Interface Cable	Y	2.05		
5	Lead for ALM IN	N	1.0	one-end open	
6	Lead for RST IN	N	1.0	one-end open	
7	Lead for REC IN	N	1.0	one-end open	
8	Lead for ALM OUT	N	1.0	one-end open	
9	Lead for CALL OUT	N	1.0	one-end open	
10	Lead for MODE OUT	N	1.0	one-end open	
11	Lead for NC	N	1.0	one-end open	
12	Lead for NC	N	1.0	one-end open	
13	Audio cable	Y	1.8	RCA type	
14	Video cable	Y	1.8	RCA type	
15	Audio Cable	Y	1.4	RCA type	
16	Video Cable	Y	1.5	3C-1V type	
17	AC Power cord of TIME LAPSE VIDEO CASSETTE RECORDER (C)	Y	1.9	3-wires type, accessory cable of TIME LAPSE VIDEOCASSETTE RECORDER(C)	
18	DC Output cord of AC Adapter (F)	N	2.0	With one ferrite core	(1)
19	AC Input cord of AC Adapter(F)	N	2.0	2-wires type	(1)
20	AC Power cord of PRINTER(H)	N	1.85	3-wires type	(1)
21	DC Output cord of AC Adapter(J)	N	1.9		(1)
22	AC Power cord of COLOR VIDEO MONITOR (K)	N	1.9	3-wires type	(1)
23	REMOTE CONTROL UNIT(L) Cable	Y	3.0	Monaural mini plug type	(1)
24	AC Power Cord of TIME LAPSE VIDEO CASSETTE RECORDER(B)	Y	1.9	3-wires type	(2)

[Remark]

(1): Permanently attached to each device

(2): Accessory cable of TIME LAPSE VIDEO CASSETTE RECORDER (B)

4 AC POWER LINE CONDUCTED EMISSION MEASUREMENT

4.1 Test Procedure

- (1) Configure the EUT System in accordance with ANSI C63.4-1992 section 7.
☒: without deviation, : with deviation(details are found below)
See also the block diagram and the photographs of EUT System configuration in this report.
- (2) Connect the EUT's AC power cord to one Line Impedance Stabilization Network (LISN).
- (3) Any other power cord of other equipment is connected to a LISN different from the LISN used for the EUT.
- (4) Warm up the EUT System.
- (5) Activate the EUT System and run the software prepared for the test, if necessary.
- (6) Connect the spectrum analyzer (*1) to the measuring port of the LISN for the EUT, using a calibrated coaxial cable.
- (7) To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT.
- (8) The spectrums are scanned from 450 kHz to 30 MHz and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.
- (9) The test receiver (*2) is connected to the LISN for the EUT, and the six highest emissions minimum recorded above are measured.

[Note]

(*1) Spectrum Analyzer Set Up Conditions

Frequency range	: 450 kHz - 30 MHz
Resolution bandwidth	: 10 kHz
Video bandwidth	: 1 MHz
Detector function	: Peak mode

(*2) Test Receiver Set Up Conditions

Detector function	: Quasi-Peak/ Average (if necessary)
IF bandwidth	: 10 kHz

4.2 Test Results

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading		Maximum RF Voltage (dBuV)	Limits (dBuV)	Margin for Limits (dB)
		Va (dBuV)	Vb (dBuV)			
0.549	0.3	38.5	38.6	38.9	48.0	9.1
0.768	0.3	37.2	37.1	37.5	48.0	10.5
0.881	0.3	39.4	39.2	39.7	48.0	8.3
0.986	0.3	38.4	35.4	38.7	48.0	9.3
1.202	0.3	39.2	39.0	39.5	48.0	8.5
1.407	0.3	37.8	35.3	38.1	48.0	9.9
1.533	0.3	38.8	38.6	39.1	48.0	8.9

[Calculation method]

Maximum RF Voltage (dBuV)

= Meter Reading (at maximum level of Va or Vb) + LISN Factor (dB)

[Note]

(1) LISN Correction Factor includes the cable loss.

(2) The EUT is designed to use as built in a Time Lapse Video Cassette Recorder.

Therefore, the conducted measurement of the EUT, is tested under the AC power lines of the Time Lapse Vide Cassette Recorder.

[Environment]

Temperature: 19°C

Humidity: 54%

[Tested Date/ Tester]


7 April 2000

Signature



Ikuya Minematsu

Test Results in Graph

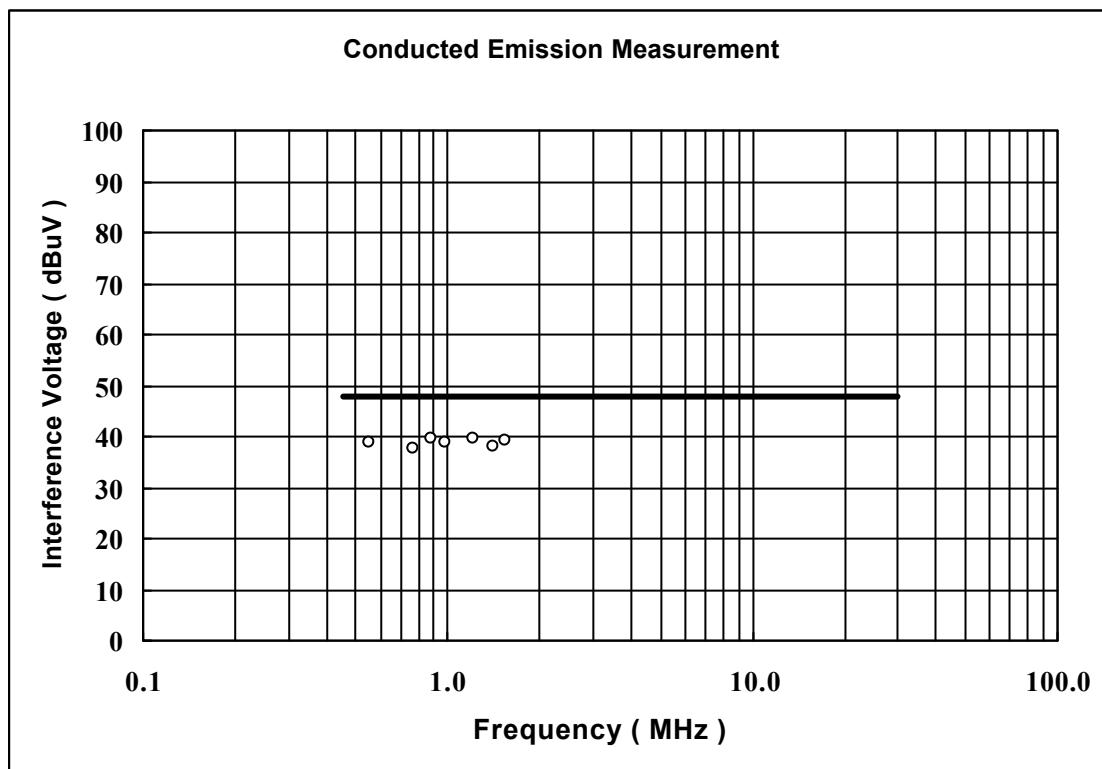

[Note]

- : Maximum RF Voltage
- : Limit Line


4.3 Photographs of EUT System Configuration

FRONT VIEW




- Continued -

LEFT SIDE VIEW

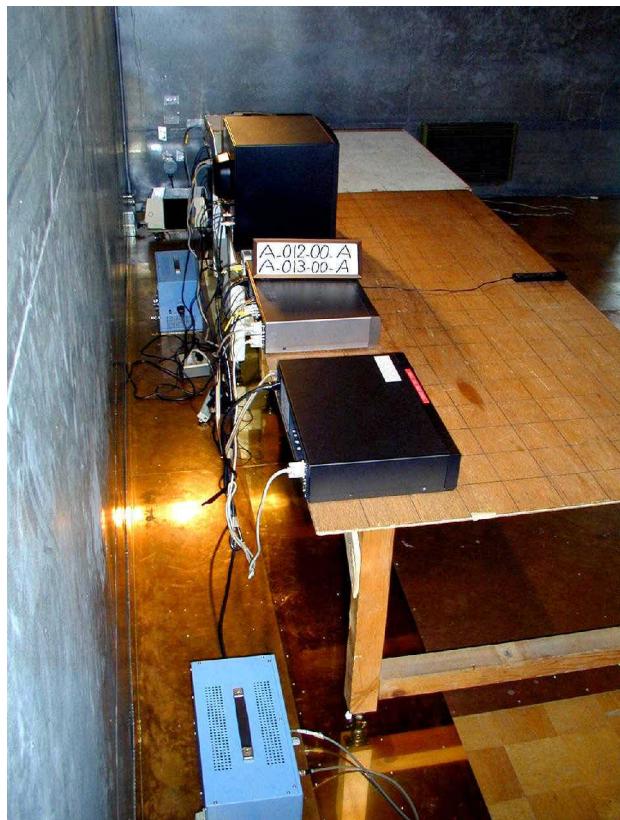

- Continued -

RIGHT SIDE VIEW

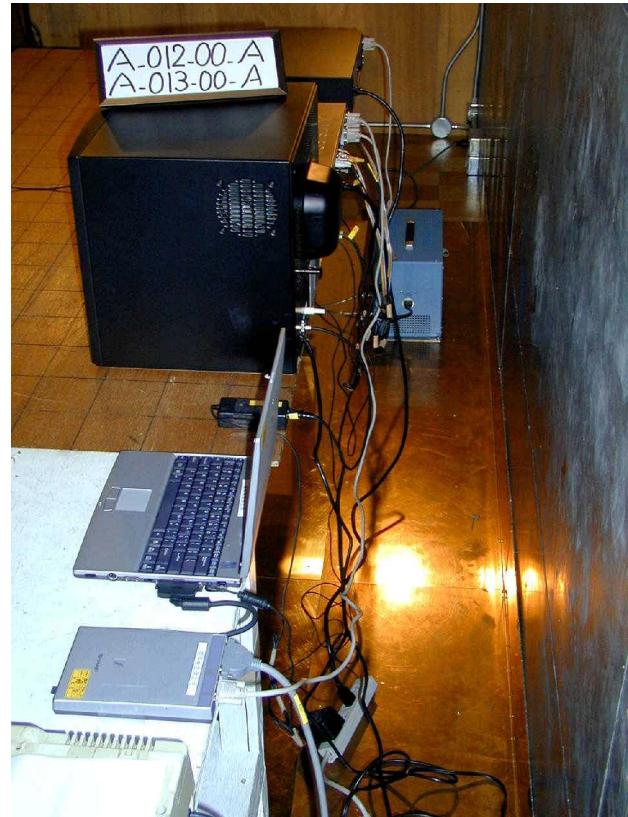

5 RADIATED EMISSION MEASUREMENT

5.1 Test Procedure

- (1) Configure the EUT System in accordance with ANSI C63.4-1992 section 8.
 without deviation, with deviation(details are found below)
 See also the block diagram and the photographs of EUT System configuration in this report.
- (2) If the EUT system is connected to a public power network, all power cords for the EUT System are connected the receptacle on the turntable.
- (3) Warm up the EUT System.
- (4) Activate the EUT System and run the prepared software for the test, if necessary.
- (5) To find out the emissions of the EUT System, preliminary radiated measurement are performed at a closer distance than that specified for final radiated measurement using the spectrum analyzer (*1) and the broad band antenna.
 In the frequency above 1 GHz, it is performed using the spectrum analyzer (*2) and the horn antenna.
- (6) To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT.
- (7) The spectrums are scanned from 30 MHz to the upper frequency of measurement range, and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.
- (8) In final compliance test, the six highest emissions minimum, recorded above, are measured at the specified distance using the broad band antenna or the tuned dipole antenna and the test receiver (*3).
 In the frequency above 1 GHz, the measurements are performed by the horn antenna and
 - the test receiver (*4).
 - the spectrum analyzer(*2) with pre-amplifier.

[Note]

(*1) Spectrum Analyzer Set Up Conditions Frequency range : 30 - 1000 MHz Resolution bandwidth : 100 kHz Detector function : Peak mode
(*2) Spectrum Analyzer Set Up Conditions Frequency range : 1 GHz - Upper frequency of measurement range Resolution bandwidth : 1 MHz Video bandwidth : 1 MHz Attenuator : 10 dB Detector function : Peak mode
(*3) Test Receiver Set Up Conditions Detector function : Quasi-Peak IF bandwidth : 120 kHz
(*4) Test Receiver Set Up Conditions Detector function : Average IF bandwidth : 1 MHz

5.2 Test Results

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limits	Margin for Limits
		Horizontal	Vertical			
(MHz)	(dB/m)	(dB μ V)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
46.17	12.7	7.7	13.6	26.3	40.0	13.7
57.27	10.0	12.4	27.0	37.0	40.0	3.0
67.08	8.4	22.1	27.4	35.8	40.0	4.2
72.20	7.9	17.0	21.8	29.7	40.0	10.3
85.92	9.1	27.4	28.3	37.4	40.0	2.6
107.39	12.9	16.8	22.3	35.2	43.5	8.3
114.54	13.8	15.6	25.1	38.9	43.5	4.6
143.18	16.5	16.0	13.2	32.5	43.5	11.0
211.90	19.1	14.3	6.1	33.4	43.5	10.1
229.10	19.4	18.6	11.4	38.0	46.0	8.0
317.82	17.2	17.6	16.0	34.8	46.0	11.2
429.55	19.8	7.5	5.0	27.3	46.0	18.7
486.80	21.2	6.8	4.1	28.0	46.0	18.0

[Note]

(1) Antenna Factor includes the cable loss.
 (2) * mark in Measured Frequency : Measured with the tuned dipole antenna.
 no mark in Measured Frequency : Measured with the broadband antenna.

[Calculation method]

Maximum Field Strength (dB μ V/m)

= Meter Reading (at maximum level of Horizontal or Vertical) (dB μ V) + Antenna Factor (dB/m)

[Environment]


Temperature: 19°C

Humidity: 54%

[Tested Date/ Tester]


31 March 2000

Signature

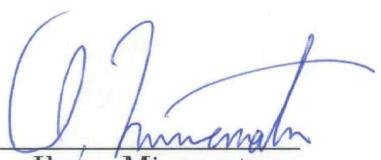

Ikuya Minematsu

Test Results in Graph

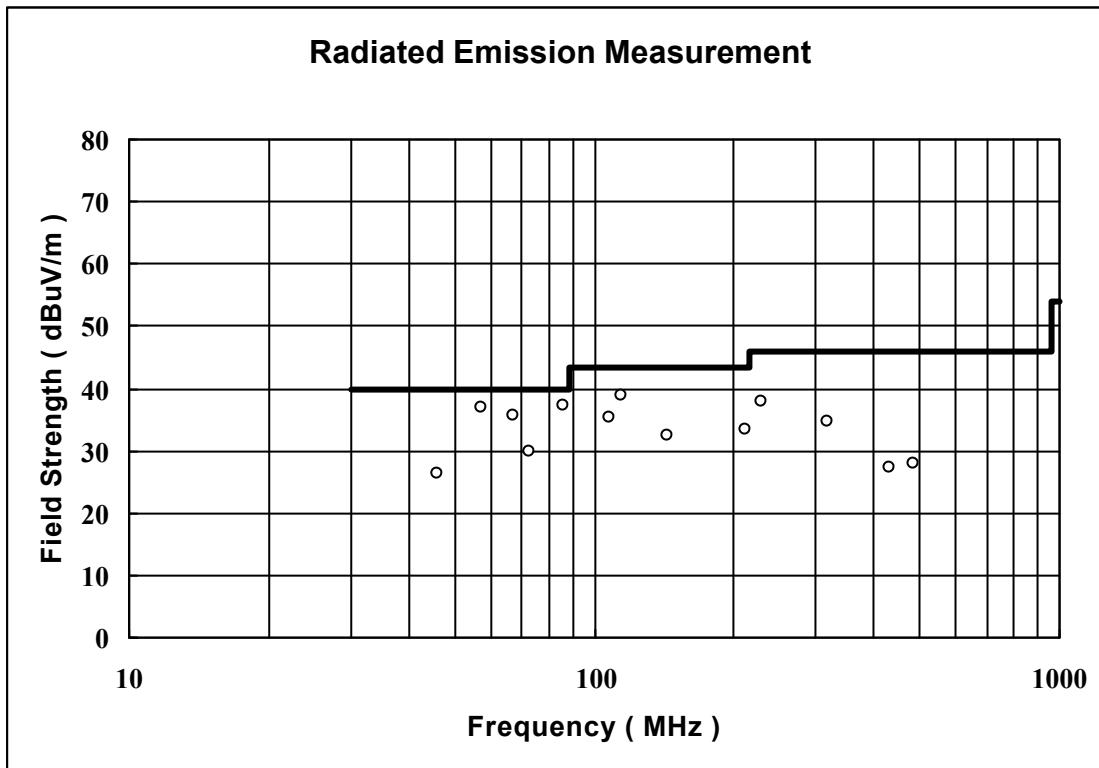

[Note]

- : Maximum Field Strength
- : Limit Line

5.3 Photographs of EUT System Configuration

FRONT VIEW



- Continued -

REAR VIEW



- Continued -

REAR VIEW



6 USED EQUIPMENTS AND CALIBRATION STATUS

Equipment	Manufacturer	Model No.	Specifications	KEC Control No.	Test Item (*)	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESH3	Frequency Range 9kHz-30MHz	FS-38	1	1999/5	2000/5
		ESVS10	Frequency Range 20MHz-1GHz	FS-82	2	2000/1	2001/1
Spectrum Analyzer	Advantest	R3261C	Frequency Range 9kHz-2.6GHz	SA-31	2	1999/8	2000/8
	Hewlett Packard	8568B	Frequency Range 100Hz-1.5 GHz	SA-16	1	1999/8	2000/8
Pre-Amplifier	Hewlett Packard	8449B	Frequency Range 1GHz-26.5GHz	AM-52	N/A	1999/4	2000/4
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30MHz-300MHz	AN-94	2	2000/2	2001/2
Log-Periodic Antenna	Schwarzbeck	UHALP9108A	Frequency Range 300MHz-1GHz	AN-217	2	2000/2	2001/2
Tuned Dipole Antenna	Kyoritsu	KBA-511AS	Frequency Range 25MHz-500MHz	AN-135	N/A	2000/3	2001/3
		KBA-611S	Frequency Range 500MHz-1GHz	AN-137	N/A	2000/3	2001/3
Horn Antenna	Raven	91888-2	Frequency Range 1GHz-2GHz	AN-168	N/A	1999/11	2001/11
LISN for EUT	Kyoritsu	KNW-407	Frequency Range 150kHz-30MHz	FL-106	1	1999/4	2000/4
LISN For Peripherals	Kyoritsu	KNW-242	Frequency Range 150kHz-30MHz	FL-110	1	1999/4	2000/4
Terminator for LISN	Tamagawa	CT-005	Frequency Range 150kHz-30MHz	FL-56-1	N/A	1999/4	2000/4
				FL-77-1	N/A	1999/4	2000/4
				FL-110-1	1	1999/4	2000/4
RF Switch	Rohde & Schwarz	PSU-S	Frequency Range 30MHz-1GHz	MM-123	N/A	2000/2	2001/2

[Note]

Test Item (*):

- 1: Conducted Emission Measurement
- 2: Radiated Emission Measurement (30 MHz – 1 GHz)
- 3: Radiated Emission Measurement (1 GHz <)

N/A: Not Applicable

The overall program of calibration and verification of equipment is designed and operated so as to ensure that measurements made by KEC are traceable to national standards of measurement or equivalent abroad.