


# INTERTEK TESTING SERVICES

Report No.: HK12030075-1


Sample No.:1/1

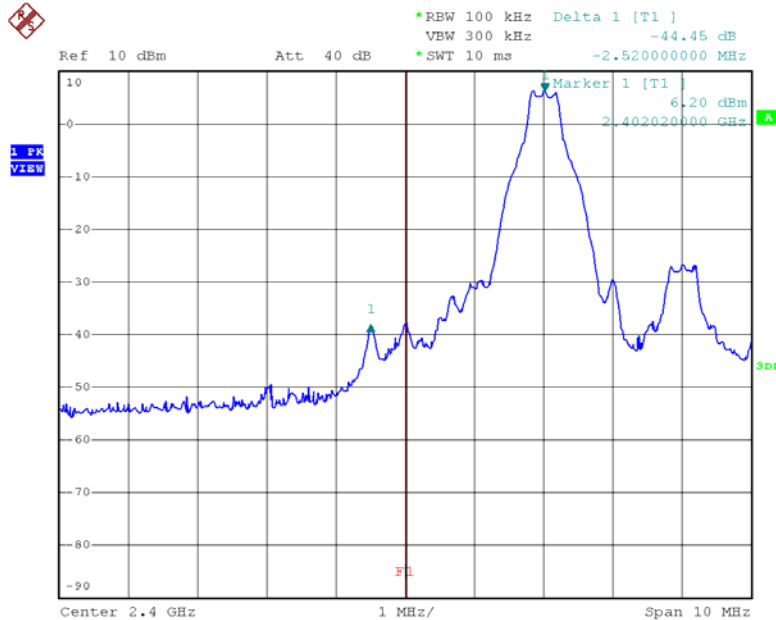

OATS = 97.5 dBuV/m  
Field Strength (Peak)  
= 97.5 – 44.45 dBuV/m  
= 53.05 dBuV/m  
(Limit: 74 dBuV/m)

Field Strength (Average)  
= 53.05 - AF dBuV/m  
= 53.05 – 30.1 dBuV/m  
= 22.95 dBuV/m  
(Limit: 54 dBuV/m)

Date: 25.JUN.2012 00:28:36

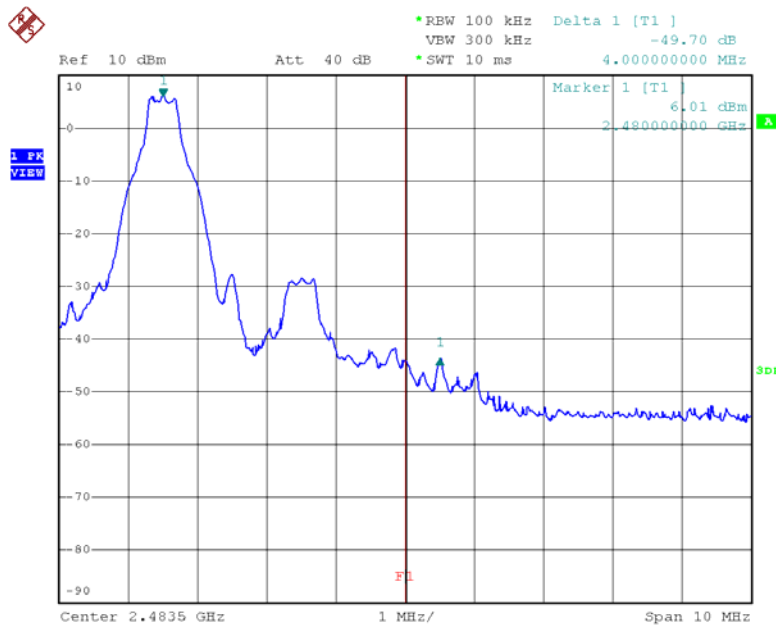

OATS = 98.0 dBuV/m  
Field Strength (Peak)  
= 98.0 – 49.70 dBuV/m  
= 48.30 dBuV/m  
(Limit: 74 dBuV/m)

Field Strength (Average)  
= 48.30 - AF dBuV/m  
= 48.30 – 30.1 dBuV/m  
= 18.20 dBuV/m  
(Limit: 54 dBuV/m)

Date: 25.JUN.2012 00:26:20

**Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement**  
**Bandedge Plot – Pursuant to RSS-210 Requirement**

Code: FCC15C\_f / Effective Date: 24 Jun 2011

( of )