

EXHIBIT 7

TEST REPORT FOR PART 15C

EMC Test Report

Radiated and Conducted Spurious and Harmonic Emissions

Certification - Part 15.247, DTS Rules

For

FCC ID: BIB6100000-01

MCC-6100

Software Defined Radio

Prepared on Behalf of

Meteor Communications, Corporation

8631 South 212th Street
Kent, WA 98031
252 872-2521

By

Spectrum Technology, Inc.

209 Dayton Street, Suite 205
Edmonds, WA 98020
425 771-4482

July 18, 2005

Test Report

TABLE OF CONTENTS

Cover Page	1
Table of Contents	2
Summary of Part 15.247 Test Results	3
Test 1 6 dB Bandwidth	4 - 5
Test 2 Conducted Peak RF Power Output Part 15.247(b) & Equivalent Isotropic Radiated Power	6
Test 3 MPE Calculations Please refer to the	RF Safety Exhibit
Test 4 Antenna Conducted Spurious Emissions	7
Test 4 Radiated Harmonics and Spurious Emissions	8 – 9
Test 4 Field Strength of Fundamental & Restricted Band Edges	10 - 15
Test 6 Peak Power Spectral Density, PPSD	16 – 17
Test 7 AC Conducted RF Spurious Emissions 150 kHz to 30 MHz	18 - 21
Test 8 Radiated Spurious Emissions 30 MHz to 1000 MHz	22 - 23
Block Diagram of Test Set up, Equipment List and Test Setup Photos	Exhibit 8

SUMMARY OF PART 15.247 TEST RESULTS

The test and measurement results included within this report, indicate that the referenced EUT operating as an 802.11(b), Intentional Radiator operating in the band 2412-2462 MHz, **COMPLIES** with the following applicable sections of Part 15.247 Rules.

Test	Rule Part(s) Applicable	Description of all tests PASSED by this Intentional Radiator	Comments
1	15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	2412 MHz = 11.4 MHz 2437 MHz = 11.4 MHz 2462 MHz = 11.4 MHz
2	15.247(b)(1)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	2412 MHz 14.53 dBm or 28.38 mW, 2437 MHz 14.23 dBm or 26.48 mW 2462 MHz 14.15 dBm or 26.00 mW
3	15.247(b)(4)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Part 1.1307(b)(1).	MPE Calculations indicate compliance with this requirement. Please refer to the MPE Exhibit.
4	15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	Please Refer to Test Results
5	15.247(c) 15.209(a) 15.205(a)	Radiated emissions, which fall in the restricted bands, as defined in Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a). All others must be < -20dBc.	Please Refer to Test Results
6	15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	2412 MHz = -00.0 dB 2437 MHz = -00.0 dB 2462 MHz = -00.0 dB
7	15.207	15.207 AC Conducted Emissions (.150 to 30 MHz)	Please Refer to Test Results
8	15.209	15.209 Radiated Emissions (30 to 1000 MHz)	Please Refer to Test Results

TEST 1: 6 dB BANDWIDTH

FCC ID: BIB6100000-01

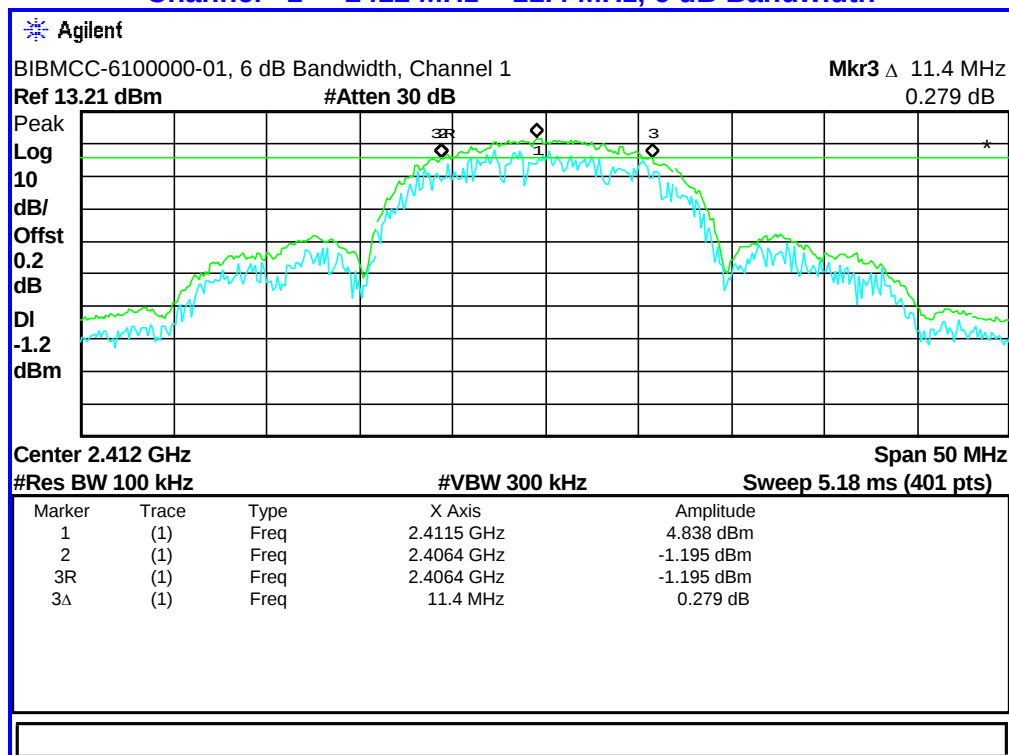
Applicant: Meteor Communications, Corporation

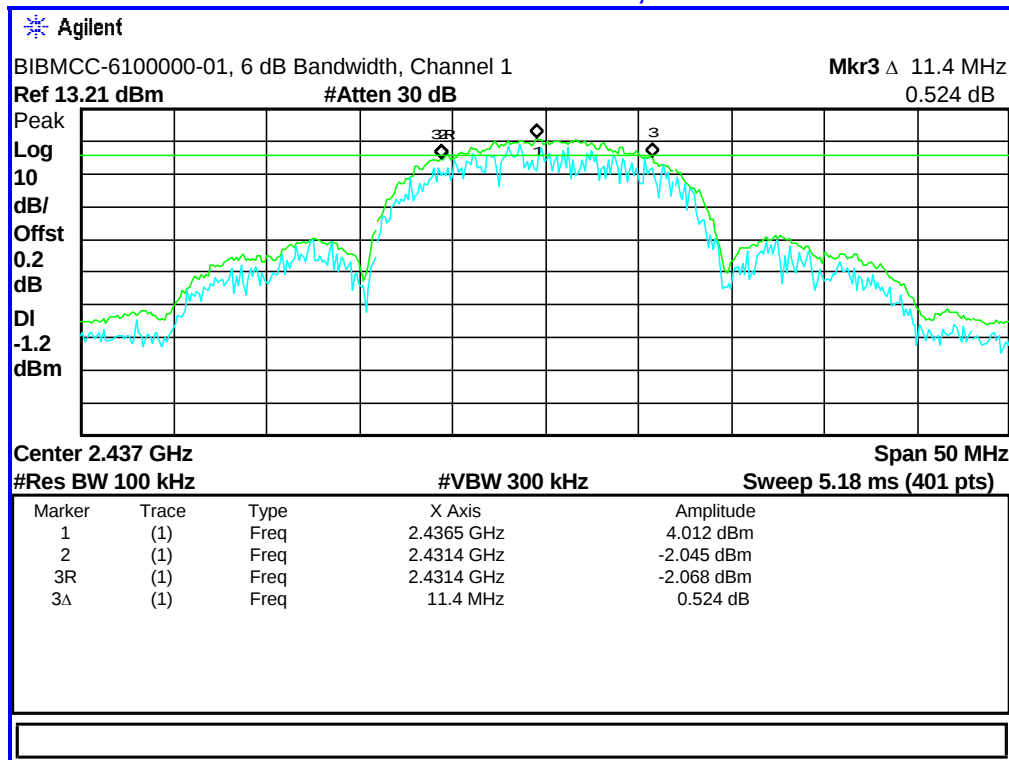
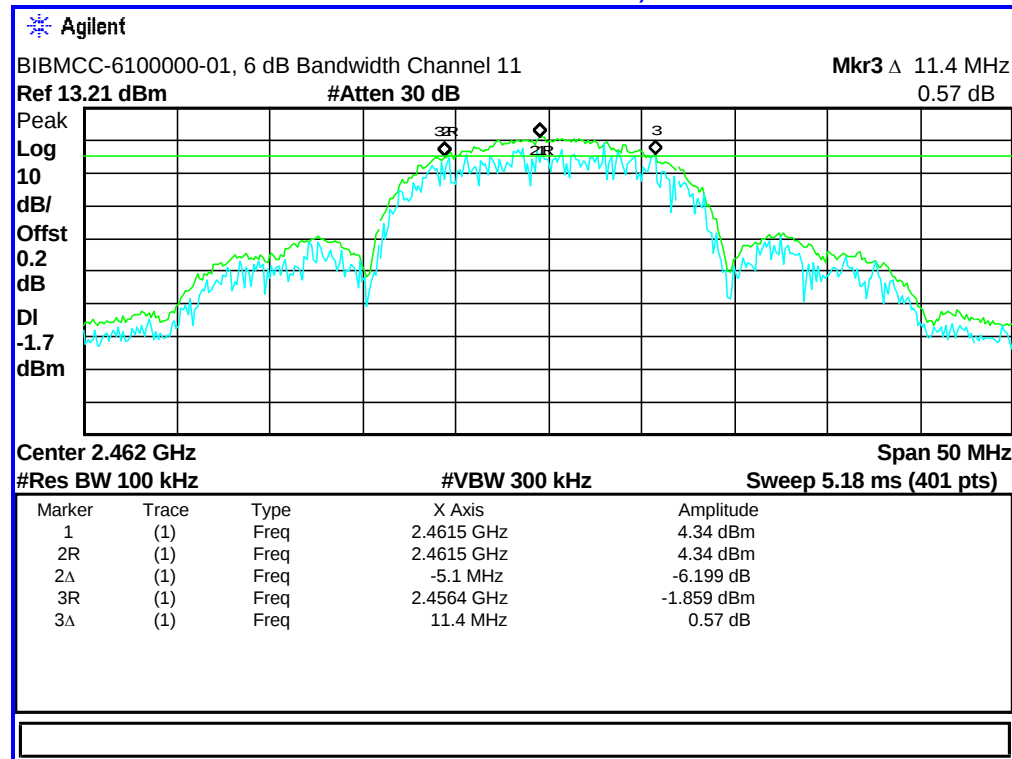
Model: MCC-6100

Minimum Standard: Part 15.247(a) (2) The minimum 6dB bandwidth shall be at least 500 kHz. Measurements were taken with the RF output connected directly to the Spectrum Analyzer. A custom 6 inch RG223 adapter cable type N to SMA (with custom reversed pin) was used.

Test Results: Channel 1 - 2412 MHz = 11.4 MHz, 6 dB Bandwidth
Channel 6 - 2437 MHz = 11.4 MHz, 6 dB Bandwidth
Channel 11 - 2462 MHz = 11.4 MHz, 6 dB Bandwidth

The following three plots detail the supporting 6 dB Bandwidths measurements taken.

Channel 1 - 2412 MHz = 11.4 MHz, 6 dB Bandwidth

TEST 1: 6 dB BANDWIDTH**Channel 6 - 2437 MHz = 11.4 MHz, 6 dB Bandwidth****Channel 11 - 2462 MHz = 11.4 MHz, 6 dB Bandwidth**

TEST 2: RF CONDUCTED POWER OUTPUT

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

Minimum Standard Specified: Part 15.247(b) (3) is 1 Watt for DTS

Test Results: The measured maximum output power level complies with the limit. Measurements were taken with the RF output connected directly to the Spectrum Analyzer. A custom 6 inch RG223 adapter cable, type N to SMA (with custom reversed pin) was used.

Authorization Procedure: Part 2.1046

Maximum Conducted Output: 14.53 dBm or 28.38 mW

Method of Measurement:

1. The output power level was set to a maximum level
2. An Agilent, EPM-441 Power Meter with the 8482A Power Sensor was used to measure reported peak power.
3. The measured channels cover the low, middle and top of the operational frequency range for this 802.11 (b) Intentional Radiator of 2412 – 2462 MHz.

Frequency GHz	Power dBm	Cable loss	Corrected Level dBm
2.412	14.33	.2	14.53
2.437	14.03	.2	14.23
2.462	13.95	.2	14.15

The maximum WLAN EIRP is 16.03 dB with the Antennix Antenna Model: TRA24003P.

This is the only antenna model intended for use and to be approved with this application.

14.53 dBm conducted RF output

– 1.3 dB (20 feet of coaxial cable loss, LM400)

+ 3.0 dBi (Antennix model: TRA24003P, external vehicular mount)

16.23 dBm Maximum EIRP with Antennix Antenna Model: TRA24003P.

TEST 4: ANTENNA CONDUCTED SPURIOUS EMISSIONS

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

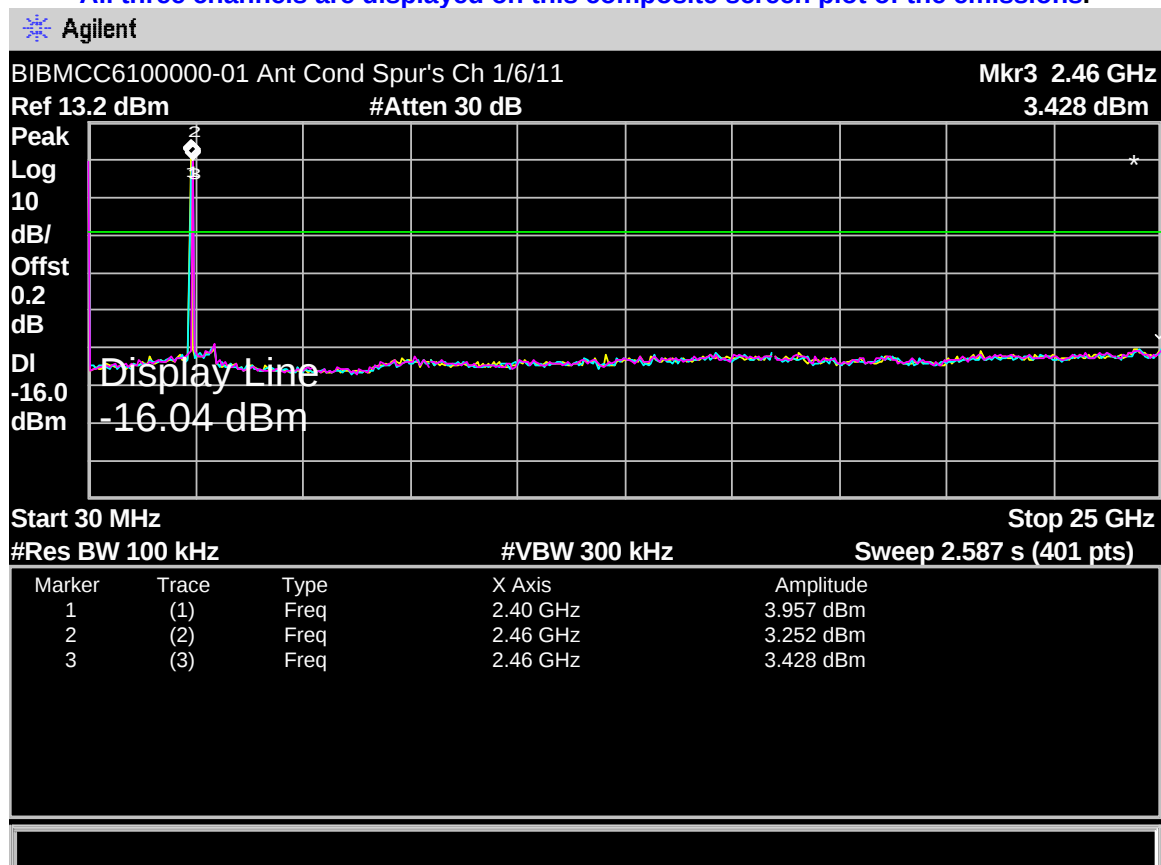
Model: MCC-6100

Minimum Standard: Part 15.247(c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator, shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

Test Results: Marker 1 refers to Channel 1 - 2412 MHz no significant emissions observed.
Marker 2 refers to Channel 6 - 2437 MHz no significant emissions observed.
Marker 3 refers to Channel 11 - 2462 MHz no significant emissions observed.

Note: Measurements were taken with the RF output connected directly to the Spectrum Analyzer. A custom 6 inch RG223 adapter cable type N to SMA (with custom reversed pin) was used.

All three channels are displayed on this composite screen plot of the emissions.



TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.1053

Frequency Range Observed: 0 to 25 GHz

Date: 6/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Exhibit 8

Horn Antenna VerticalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBuV	Ant. Vert. or Horiz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBuV	Margin in dB below LIMIT
Fo - 2.412									
4.824	35.06	V	Peak	32.45	3.97	23.2	48.28	74	25.72
4.824	26.92	V	Average	32.45	3.97	23.2	40.14	54	13.86
7.236	34.76	V	Peak	36.35	4.42	25.9	49.63	74	24.37
7.236	25.06	V	Average	36.35	4.42	25.9	39.93	54	14.07
Fo - 2.437									
4.874	35.23	V	Peak	32.60	3.97	23.2	48.60	74	25.40
4.874	30.74	V	Average	32.60	3.97	23.2	44.11	54	9.89
7.311	36.02	V	Peak	36.57	4.42	25.9	51.11	74	22.89
7.311	25.17	V	Average	36.57	4.42	25.9	40.23	54	13.77
Fo - 2.462									
4.924	37.22	V	Peak	33.01	3.97	23.2	51.00	74	23.00
4.924	30.35	V	Average	33.01	3.97	23.2	44.13	54	9.87
7.386	36.84	V	Peak	36.77	4.42	25.9	52.13	74	21.87
7.386	25.66	V	Average	36.77	4.42	25.9	40.95	54	13.05
Harmonic emissions on all three channels (low, mid & high) 4Fo - 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo - 10Fo	9.668 - 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo - 10Fo	9.784 - 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4Fo - 10Fo	9.848 - 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

Minimum Standard Specified: Part 15.247(c)

Authorization Procedure: Part 2.1053

Frequency Range Observed: 0 to 25 GHz

Date: 6/28/05

Test Equipment Setup: Refer to block diagram & setup photos in Exhibit 8

Horn Antenna HorizontalNOTE: No emissions measurable at 3 meters. Antenna was moved into **1 meter** - antenna to EUT spacing.

RADIATED HARMONIC AND SPURIOUS EMISSIONS & RESTRICTED BANDS									
Frequency GHz	Max. SA Rdg. dBu/V	Ant. Vert. or Horz.	Peak or Average Detector	Antenna Factor dB @ 1 meter	Cable & filter loss dB	Amp Gain	Corrected Reading dBuV/m	3 m Limit 74 Peak 54 Avg. dBu/V	Margin in dB below LIMIT
Fo - 2.412									
4.824	33.79	H	Peak	32.45	3.97	23.2	47.01	74	26.99
4.824	24.07	H	Average	32.45	3.97	23.2	37.29	54	16.71
7.236	36.21	H	Peak	36.35	4.42	25.9	51.08	74	22.92
7.236	25.11	H	Average	36.35	4.42	25.9	39.98	54	14.02
Fo – 2.437									
4.874	32.17	H	Peak	32.60	3.97	23.2	45.54	74	28.46
4.874	21.82	H	Average	32.60	3.97	23.2	35.19	54	18.81
7.311	36.08	H	Peak	36.57	4.42	25.9	51.17	74	22.83
7.311	24.87	H	Average	36.57	4.42	25.9	39.96	54	14.04
Fo – 2.462									
4.924	35.09	H	Peak	33.01	3.97	23.2	48.87	74	25.13
4.924	25.36	H	Average	33.01	3.97	23.2	39.14	54	14.86
7.386	37.21	H	Peak	36.77	4.42	25.9	52.50	74	21.50
7.386	25.38	H	Average	36.77	4.42	25.9	40.67	54	13.33
Harmonic emissions on all three channels (low, mid & high) 4Fo – 10Fo at or below noise floor									
Channel	Frequency in GHz	Harmonics Observed					Limit 74 dBuV/m Peak & 54 dBuV/m Average		
Low Ch.	2.412								
4Fo – 10Fo	9.648 – 24.120	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
Mid Ch.	2.437								
4Fo – 10Fo	9.748 – 24.370	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		
High Ch.	2.4620								
4F o- 10Fo	9.848 – 24.620	None - at or < noise floor @ 1 meter					All emissions < 54 dBuV/m		

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

Minimum Standard Specified: Part 15.247(c), 15.205 & 15.209

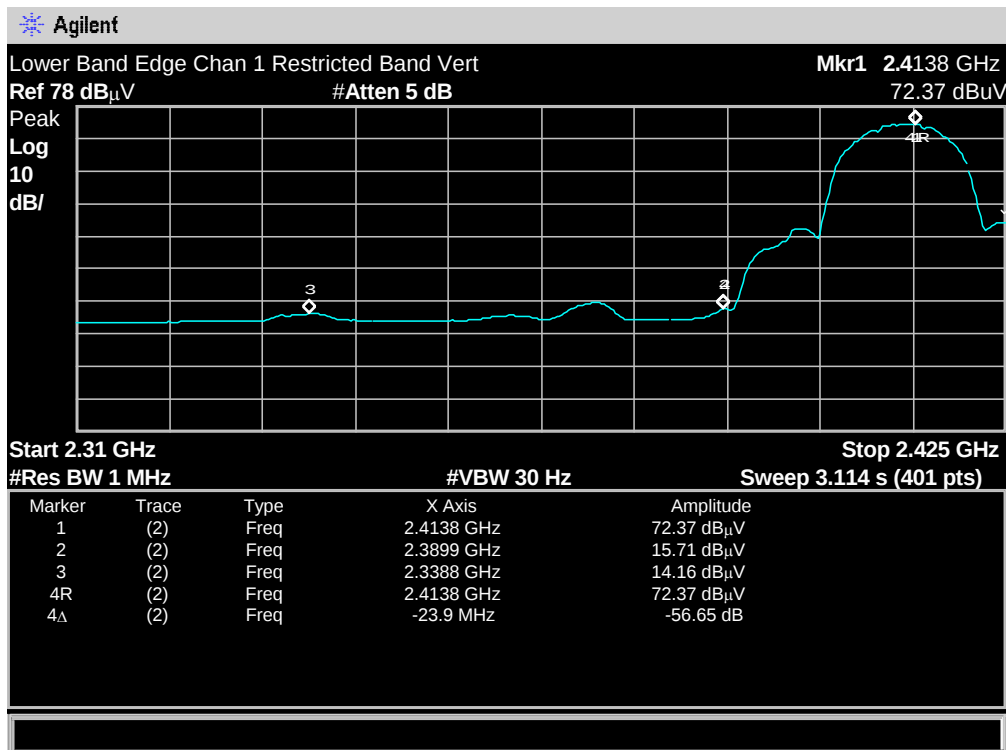
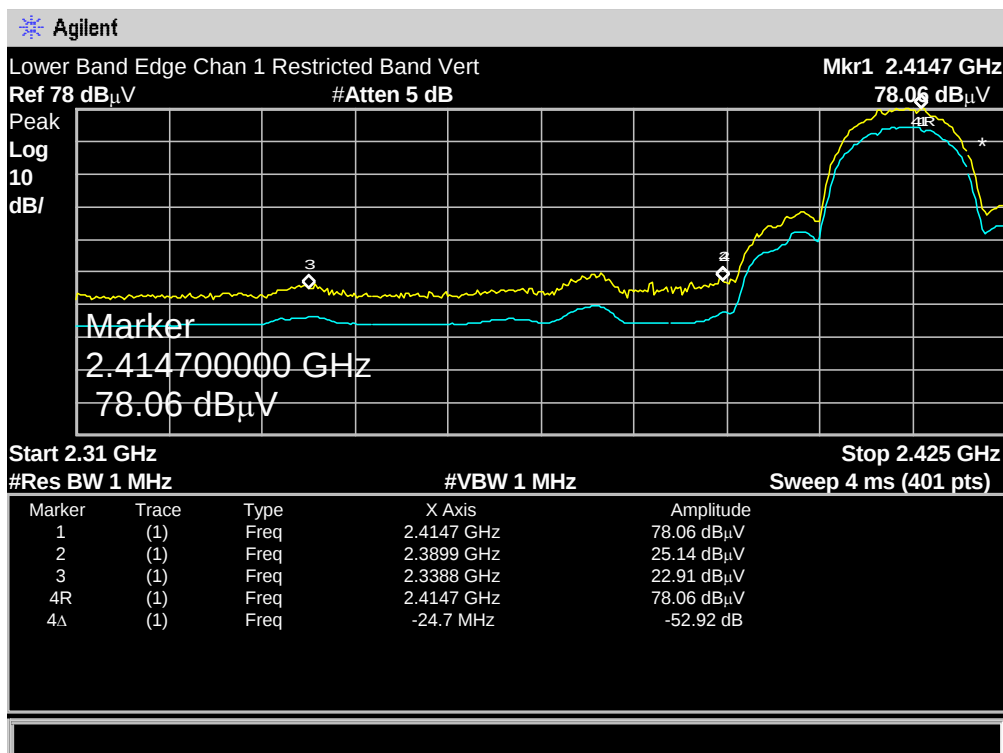
Spectrum OATS at Fluke Park II Test Date: 06/28/05

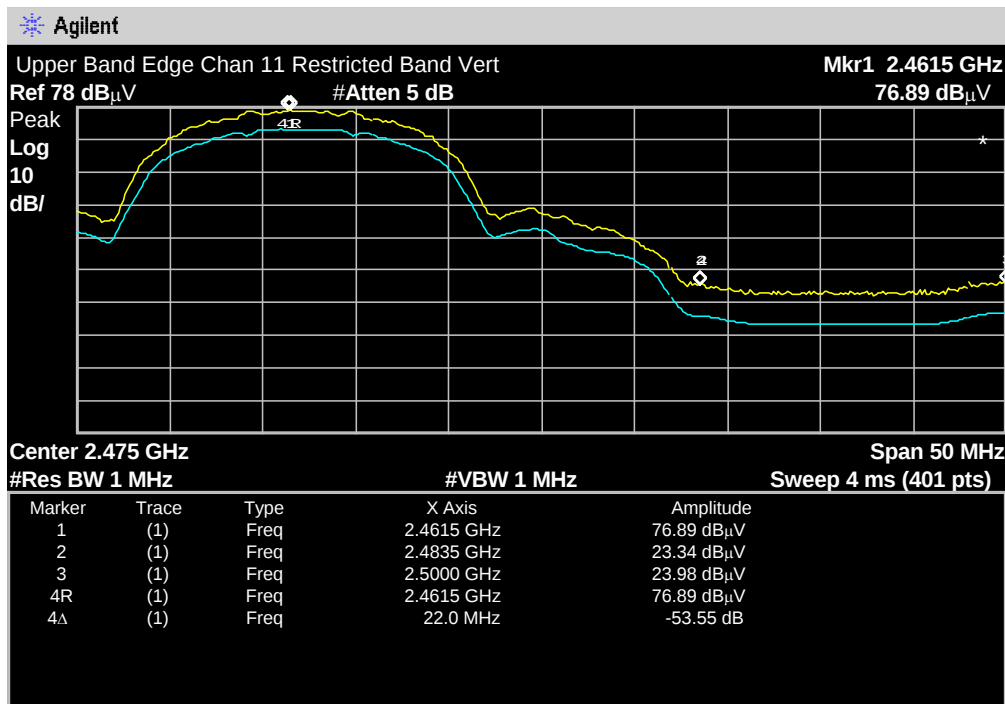
Test Results: Equipment complies with standard

Maximum Field Strength for Low, Mid, High Channels and Band Edges

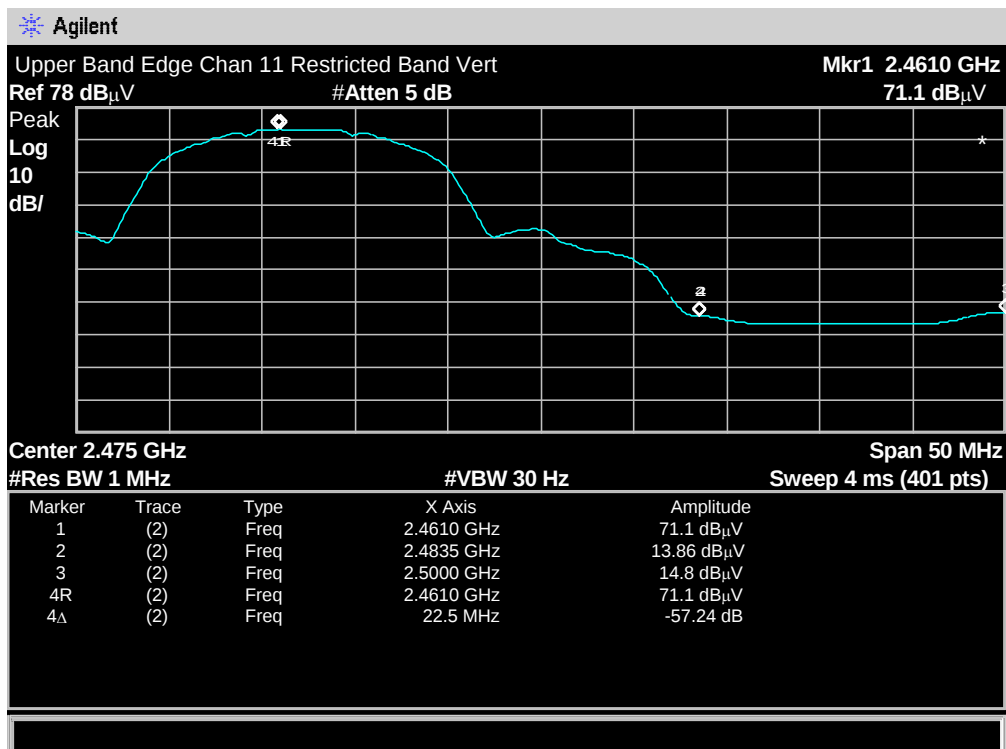
WLAN Channels 1, 6 & 11 Frequency in MHz	Ant. Vert/ Horz	Spectrum Analyzer Reading dBuV	Ant Factor	SA Amp Gain	Cable Loss	dBuV/m @ 3 meters	Spur. Limit	Margin dB
Channel 1 2412.0	V	78.06 PEAK	28.37	inc	2.68	109.11		
Channel 1 2412.0	V	72.37 AVG	28.37	inc	2.68	103.42		
Rest. Band Edge 2390.1	V	25.14 PEAK	28.37	inc	2.68	56.19	74	17.81
Rest. Band Edge 2390.1	V	15.71 AVG	28.37	inc	2.68	46.76	54	7.24
Highest Level 2350.8	V	22.91 PEAK	28.37	inc	2.68	53.96	74	20.04
Highest Level 2350.8	V	14.16 AVG	28.37	inc	2.68	45.21	54	8.79
Channel 6 2437.0	V	76.57 PEAK	28.37	inc	2.68	107.62		
Channel 6 2437.0	V	70.99 AVG	28.37	inc	2.68	102.64		
Channel 11 2462.0	V	76.89 PEAK	28.37	inc	2.68	107.94		
Channel 11 2462.0	V	71.10 AVG	28.37	inc	2.68	102.15		
Rest. Band Edge 2483.5	V	23.34 PEAK	28.37	inc	2.68	54.39	74	19.61
Rest. Band Edge 2483.5	V	13.86 AVG	28.37	inc	2.68	44.91	54	9.09
Highest Level 2500.0	V	23.98 PEAK	28.37	inc	2.68	55.03	74	18.19
Highest Level 2500.0	V	14.80 AVG	28.37	inc	2.68	45.85	54	8.15

The supporting Screen Plots taken with Vertical Antenna Polarization are on the following two pages:

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES - VERTICAL

PEAK



AVERAGE

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

Minimum Standard Specified: Part 15.247(c), 15.205 & 15.209

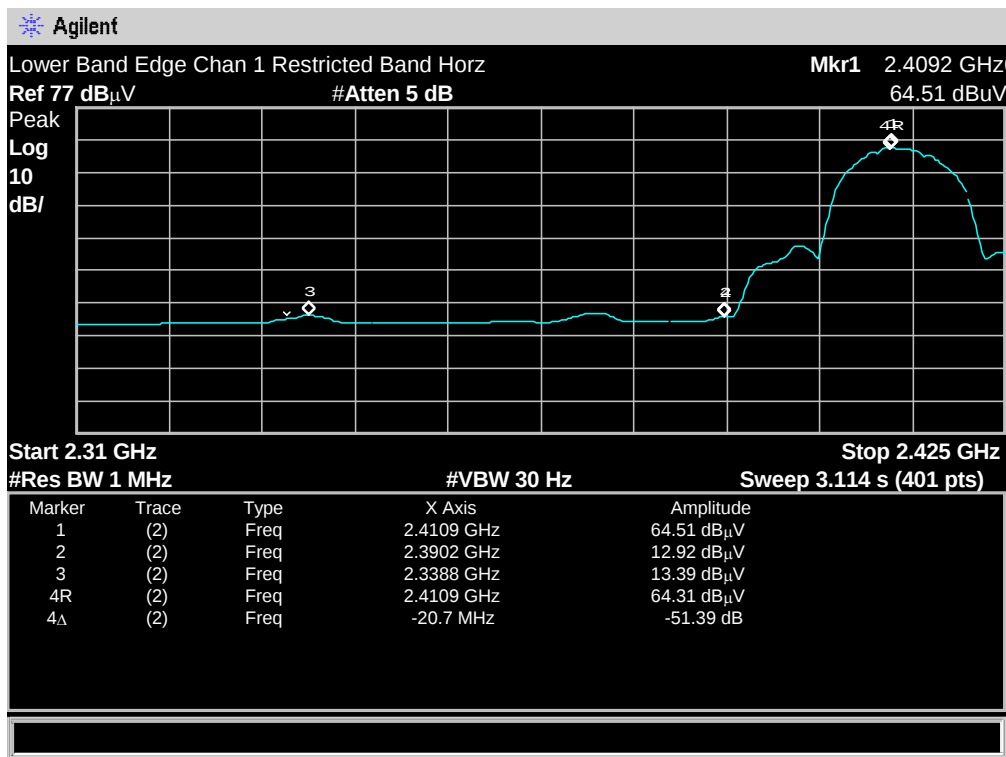
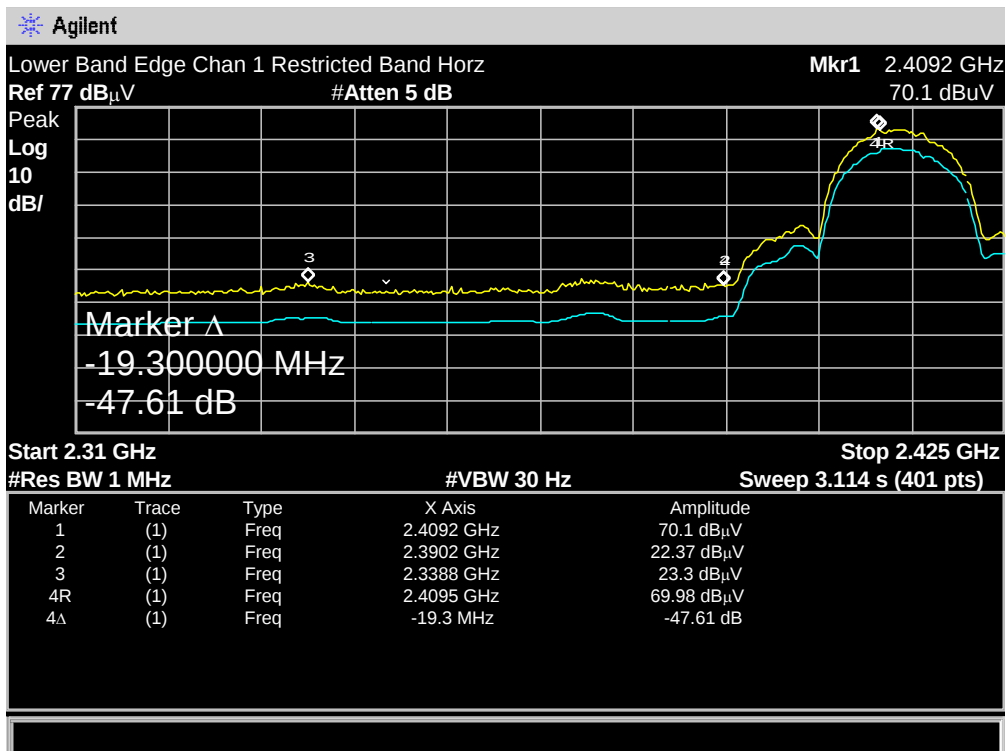
Spectrum OATS at Fluke Park II Test Date: 06/28/05

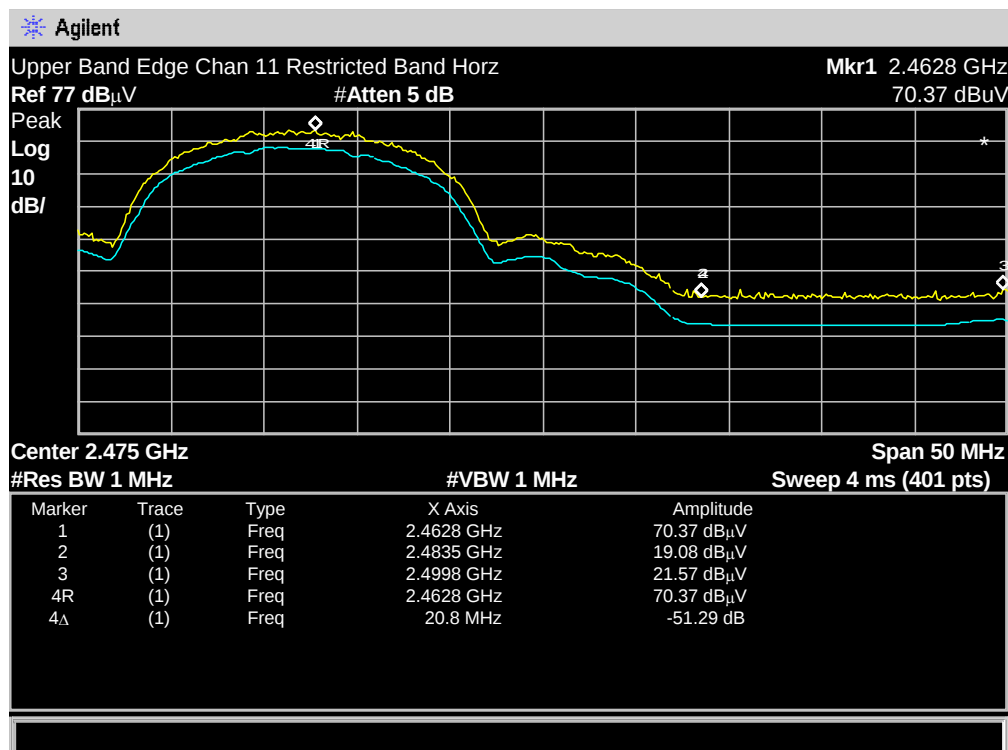
Test Results: Equipment complies with standard

Maximum Field Strength for Low, Mid, High Channels and Band Edges

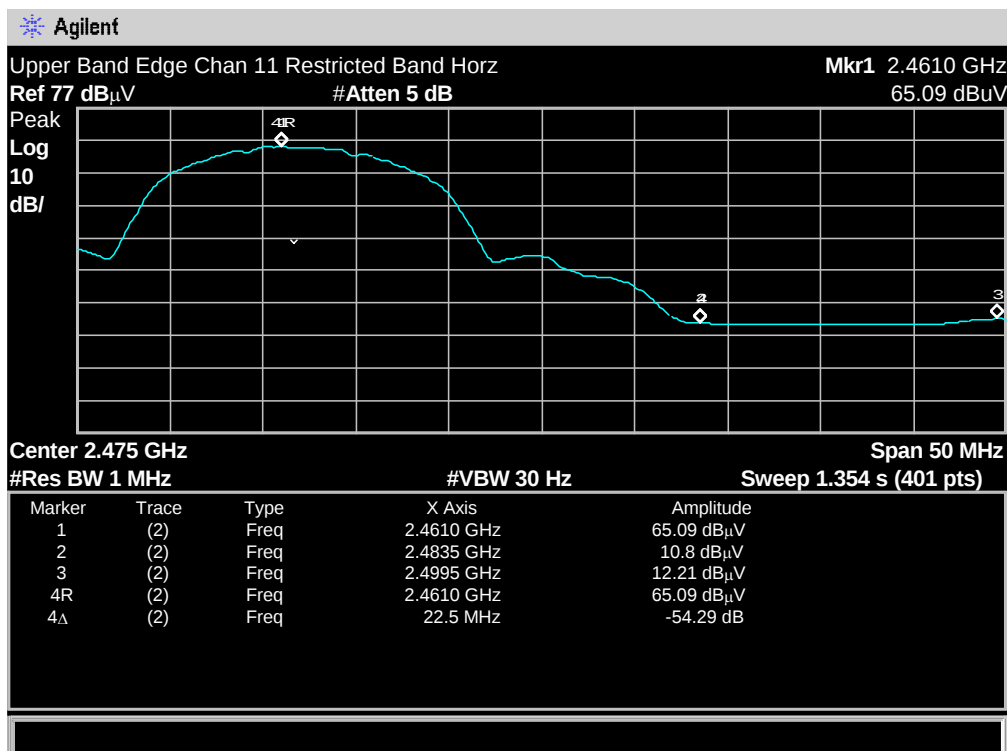
WLAN Channels 1, 6 & 11 Frequency in MHz		Ant. Vert/ Horz	Spectrum Analyzer Reading dBuV		Ant Factor	SA Amp Gain	Cable Loss	dBuV/m @ meters ³	Spurious Limit	Margin dB
Channel 1	2412.0	H	70.10	PEAK	28.37	inc	2.68	101.15		
Channel 1	2412.0	H	64.51	AVG	28.37	inc	2.68	95.56		
							2.68			
Rest. Band Edge	2390.1	H	23.37	PEAK	28.37	inc	2.68	53.42	74	20.58
Rest. Band Edge	2390.1	H	12.92	AVG	28.37	inc	2.68	43.97	54	10.03
Highest Level	2350.8	H	23.30	PEAK	28.37	inc	2.68	54.35	74	19.65
Highest Level	2350.8	H	13.39	AVG	28.37	inc	2.68	44.44	54	9.56
Channel 6	2437.0	H	72.12	PEAK	28.37	inc	2.68	103.17		
Channel 6	2437.0	H	66.59	AVG	28.37	inc	2.68	97.64		
Channel 11	2462.0	H	70.37	PEAK	28.37	inc	2.68	101.42		
Channel 11	2462.0	H	65.09	AVG	28.37	inc	2.68	96.14		
Rest. Band Edge	2483.5	H	19.08	PEAK	28.37	inc	2.68	50.13	74	23.87
Rest. Band Edge	2483.5	H	10.80	AVG	28.37	inc	2.68	41.85	54	12.15
Highest Level	2499.8	H	21.57	PEAK	28.37	inc	2.68	52.65	74	21.38
Highest Level	2463.9	H	12.21	AVG	28.37	inc	2.68	43.26	54	10.74

The supporting Screen Plots taken with Horizontal Antenna Polarization are on the following two pages:

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES HORIZONTAL

TEST 4: FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGES HORIZONTAL

PEAK



AVERAGE

TEST 6: PEAK POWER SPECTRAL DENSITY

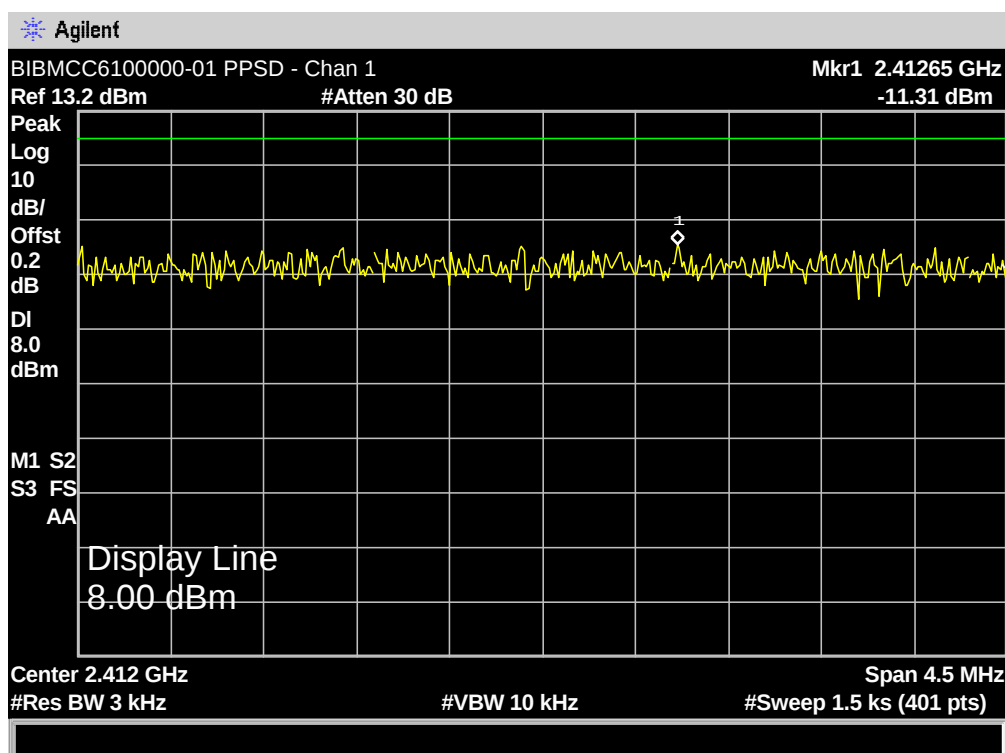
FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

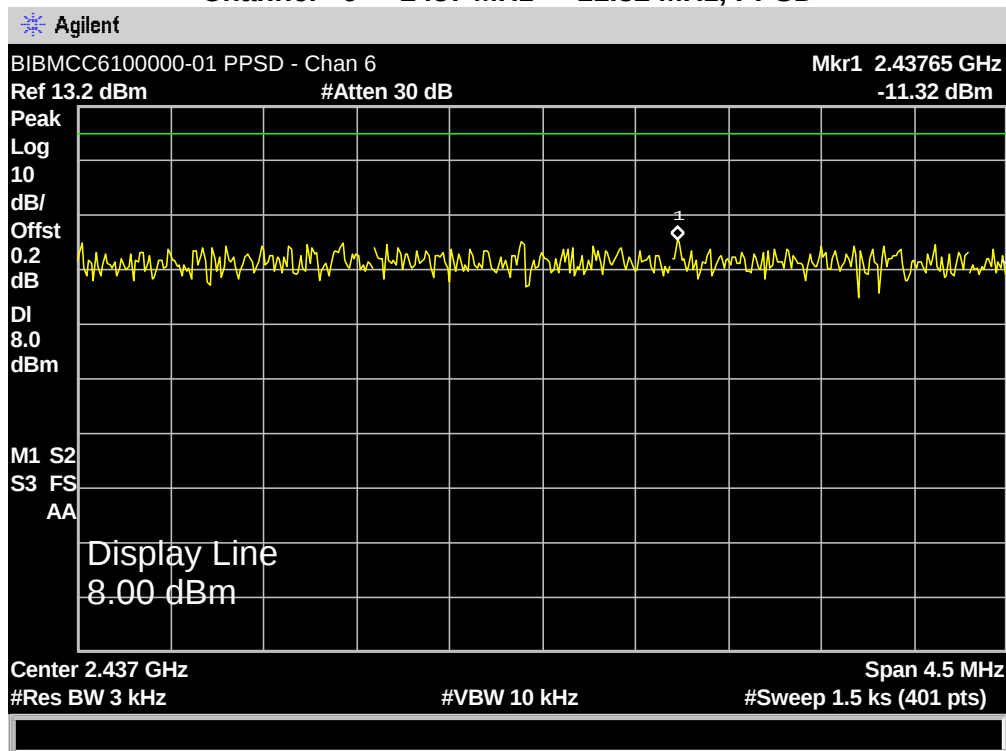
Minimum Standard: Part 5.247(a) (2)
The minimum 6dB bandwidth shall be at least 500 kHz.

Test Results: **Channel 1 - 2412 MHz = -11.31 MHz, PPSD**
Channel 6 - 2437 MHz = -11.32 MHz, PPSD
Channel 11 - 2462 MHz = -11.15 MHz, PPSD

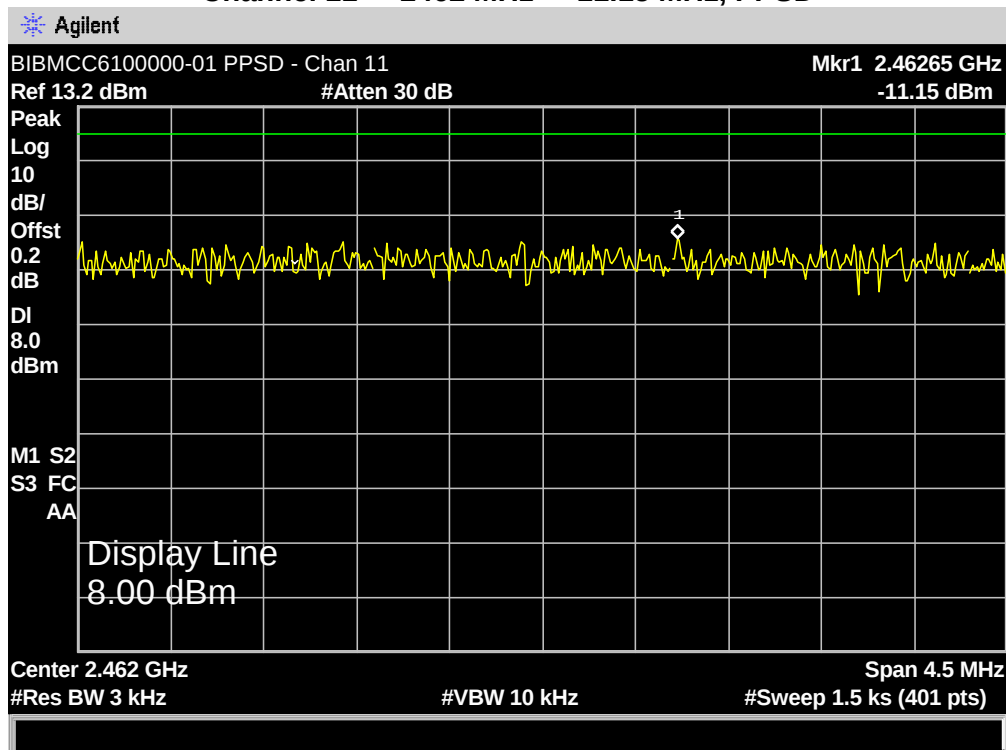
Channel 1 - 2412 MHz = -11.31 MHz, PPSD

TEST 6: PEAK POWER SPECTRAL DENSITY

Channel 6 - 2437 MHz = -11.32 MHz, PPSP



Channel 11 - 2462 MHz = -11.15 MHz, PPSP



TEST 7: AC CONDUCTED SPURIOUS EMISSIONS

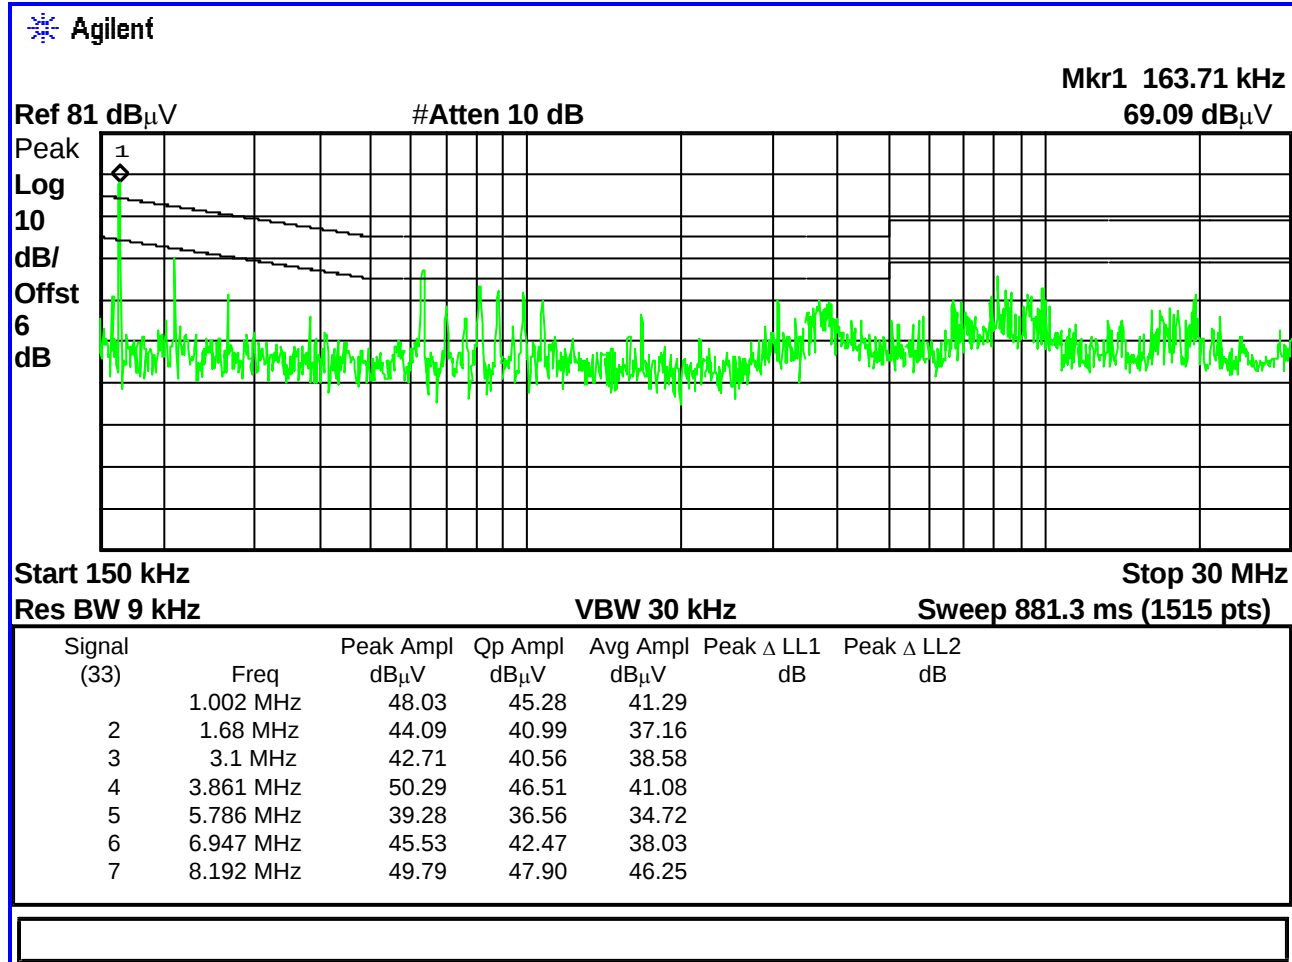
FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Model: MCC-6100

Minimum Standard: Part 15.207(a)

Note: This Plot is [Line 1](#) Peak detector for reference only,
QP and Average measured maximum values are provided in detail on the following page.
Maximum QP and Average Levels Comply with Part 15.107(a) and Part 15.207(a) Limits.

Line 1

TEST 7: AC CONDUCTED SPURIOUS EMISSIONS

Model: MCC-6100

Minimum Standard: Part 15.207(a) Limits.

Frequency of Emission MHz	Conducted Limit (dBuV)	
	* Decreases with the logarithm of the frequency.	
	Quasi-peak	Average
0.15-0.5	66. to 56*	56 to 46*
0.5 – 5	56	46
5 – 3	60	50

Tabular List of all Significant Conducted Emissions Observed Line 1 (Hot)

Sig. #	Freq. (MHz)	Peak (dBuV)	QP (dBuV)	Avg (dBuV)
1	1.002320	48.03	45.28	41.29
2	1.680340	44.09	40.99	37.16
3	3.100130	42.71	40.56	38.58
4	3.860690	50.29	46.51	41.08
5	5.785890	39.28	36.56	34.72
6	6.946660	45.53	42.47	38.03
7	8.192440	49.79	47.90	46.25
8	8.192590	49.84	47.69	46.05
9	8.505070	46.07	43.56	42.03
10	9.514220	42.45	41.31	35.87
11	9.952120	45.81	44.03	43.25
12	10.792960	39.60	36.75	34.56
13	11.464370	37.36	35.08	33.39
14	13.358440	38.07	35.82	33.02
15	14.152600	37.86	35.89	34.44
16	15.435910	34.93	32.73	30.55
17	16.228630	40.96	39.62	36.26
18	17.083820	39.31	37.50	36.23
19	17.390110	38.05	36.25	35.01
20	17.694330	41.39	39.78	38.64
21	18.243600	43.13	41.79	40.68
22	19.159590	38.41	36.69	35.52
23	19.466470	38.97	36.97	35.96
24	19.709070	44.25	42.75	42.09
25	21.052040	36.95	35.97	34.27
26	21.662160	38.46	36.39	36.53
27	23.129660	30.65	27.54	22.29
28	23.130590	31.45	27.14	27.26
29	23.999690	40.73	38.74	35.15
30	24.000120	40.25	38.32	34.55
31	24.288530	35.14	32.31	28.08
32	28.563080	34.32	31.59	28.63

TEST 7: AC CONDUCTED SPURIOUS EMISSIONS

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

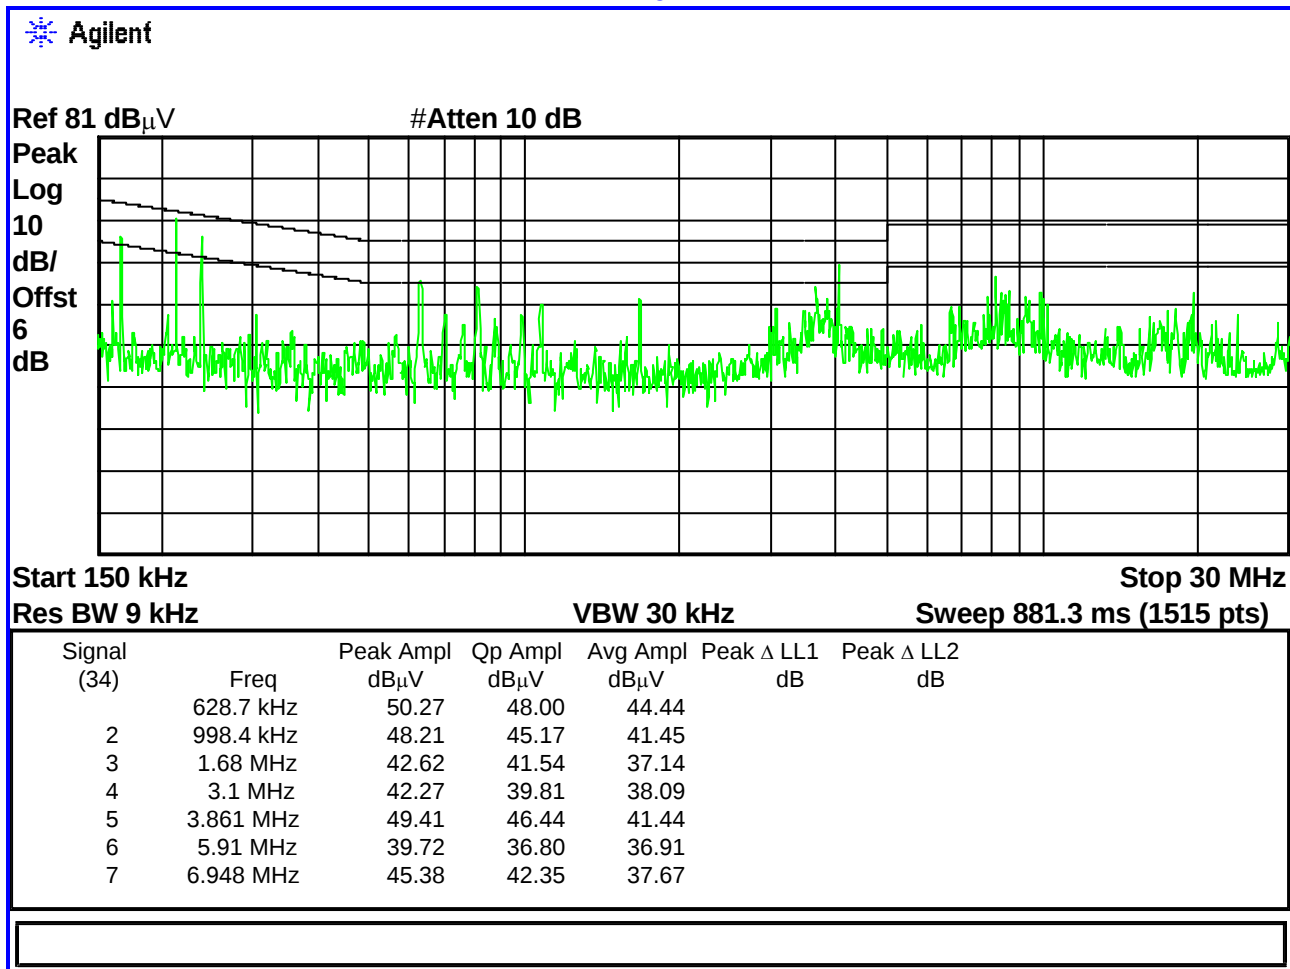
Model: MCC-6100

Minimum Standard: Part 15.207(a)

Note: This Plot is [Line 2](#) Peak detector for reference only.

QP and Average measured maximum values are provided in detail on the following page.

Maximum QP and Average Levels Comply with Part 15.107(a) and Part 15.207(a) Limits.

Line 2

TEST 7: AC CONDUCTED SPURIOUS EMISSIONS

Model: MCC-6100

Minimum Standard: Part 15.207(a) Limits

Frequency of Emission MHz	Conducted Limit (dBuV)	
	* Decreases with the logarithm of the frequency.	
	Quasi-peak	Average
0.15-0.5	66. to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Tabular List of all Significant Conducted Emissions Observed Line 2 (neutral)

Sig. #	Freq. (MHz)	Peak (dBuV)	QP (dBuV)	Avg (dBuV)
1	0.628710	50.27	48.00	44.44
2	0.998420	48.21	45.17	41.45
3	1.679780	42.62	41.54	37.14
4	3.100020	42.27	39.81	38.09
5	3.860650	49.41	46.44	41.44
6	5.909610	39.72	36.80	36.91
7	6.947630	45.38	42.35	37.67
8	8.191680	49.31	47.56	46.11
9	8.193600	48.72	46.61	45.11
10	8.229630	46.59	44.96	43.23
11	9.389080	44.79	43.15	42.75
12	9.953880	45.97	44.37	43.65
13	10.792680	39.30	37.13	34.86
14	11.219620	35.82	33.20	31.26
15	12.808950	35.98	33.97	30.34
16	13.359410	36.47	34.94	32.19
17	14.274850	37.03	34.54	33.16
18	15.619430	33.35	31.14	27.93
19	16.228860	41.05	39.59	38.19
20	16.838790	38.95	37.25	35.48
21	16.899620	39.44	37.28	36.16
22	17.694260	40.85	39.26	38.64
23	18.243450	42.52	41.38	39.35
24	19.466150	38.97	37.33	36.47
25	19.708860	44.56	43.46	42.83
26	20.259040	36.85	35.18	32.89
27	21.113540	36.15	34.28	35.20
28	21.662490	40.25	38.62	33.51
29	21.663070	40.53	38.80	37.57
30	23.126950	32.66	27.66	23.19
31	23.999040	41.11	39.48	36.06
32	28.686430	36.34	34.14	32.38

TEST 4: FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS

FCC ID: BIB6100000-01

Applicant: Meteor Communications, Corporation

Minimum Standard: Part 15.109(a), 15.209(a)

Frequency Range: 30 to 1 GHz Date: 6/24/2005

Location: Spectrum Technology Inc. OATS Fluke Park II

Test Setup: See block diagram in Exhibit 8 and Test Setup Photos.

RADIATED SPURIOUS EMISSIONS									
Frequency GHz	Max. SA Rdg. dBu/V	Ant. Vert. or Horz.	Peak or Average Detector	Antenna Factor dB	Cable loss dB	Amp Gain	Corrected Reading dBuV/m	Limit dBu/V	Margin in dB below LIMIT
75	22.24	V	Peak	8.8	1.6	-inc.-	32.64	40.0	7.36
75	23.52	H	Peak	8.8	1.6	-inc.-	33.92	40.0	6.08
125	14.61	V	Peak	8.7	2.1	-inc.-	24.91	43.5	18.59
125	12.94	H	Peak	8.7	2.1	-inc.-	23.74	43.5	19.76
150	13.45	V	Peak	9.4	2.23	-inc.-	25.08	43.5	18.42
150	16.68	H	Peak	9.4	2.23	-inc.-	28.31	43.5	15.19
200	21.90	V	Peak	10.4	2.53	-inc.-	34.83	43.5	8.67
200	24.35	H	Peak	10.4	2.53	-inc.-	37.28	43.5	6.22
225	11.26	V	Peak	11.6	2.68	-inc.-	25.54	46.0	20.46
225	15.19	H	Peak	11.6	2.68	-inc.-	29.47	46.0	16.53
240	17.27	V	Peak	12.1	2.92	-inc.-	32.92	46.0	13.71
240	25.33	H	Peak	12.1	2.92	-inc.-	40.35	46.0	5.65
250	15.95	V	Peak	12.4	3.0	-inc.-	31.35	46.0	14.65
250	20.64	H	Peak	12.4	3.0	-inc.-	36.04	46.0	9.96
275	14.32	V	Peak	12.8	3.21	-inc.-	30.33	46.0	15.67
275	17.38	H	Peak	12.8	3.21	-inc.-	33.39	46.0	12.61
280	17.05	V	Peak	13.0	3.25	-inc.-	33.30	46.0	12.70
280	20.83	H	Peak	13.0	3.25	-inc.-	37.08	46.0	8.92
284.85	16.20	V	Peak	13.4	3.26	-inc.-	32.86	46.0	13.14
284.85	17.48	H	Peak	13.4	3.26	-inc.-	34.14	46.0	11.86
300	18.04	V	Peak	13.9	3.36	-inc.-	35.30	46.0	10.70
300	19.88	H	Peak	13.9	3.36	-inc.-	37.14	46.0	8.86
325	14.50	V	Peak	14.9	3.58	-inc.-	32.98	46.0	13.02
325	15.27	H	Peak	14.9	3.58	-inc.-	33.75	46.0	12.25

Continued on the following page.

Continued from the previous page.

360	10.47	V	Peak	15.6	3.63	-inc.-	29.70	46.0	16.30
360	11.21	H	Peak	15.6	3.63	-inc.-	30.44	46.0	15.56
375	15.27	V	Peak	16.0	3.74	-inc.-	35.01	46.0	10.99
375	20.79	H	Peak	16.0	3.74	-inc.-	40.53	46.0	5.47
400	18.41	V	Peak	16.1	3.87	-inc.-	38.38	46.0	7.62
400	18.19	H	Peak	16.1	3.87	-inc.-	38.16	46.0	7.84
RADIATED SPURIOUS EMISSIONS									
Frequency GHz	Max. SA Rdg. dBu/V	Ant. Vert. or Horz.	Peak or Average Detector	Antenna Factor dB	Cable loss dB	Amp Gain	Corrected Reading dBuV/m	Limit dBu/V	Margin in dB below LIMIT

- End of Report -