

Meteorcomm, LLC.

EMC TEST REPORT FOR

**ITCR-NG Base
Model: 65030**

Tested to The Following Standards:

FCC Part 90 Subpart T and Subpart K

**217.6125-219.9875MHz
AND
220.0125-221.9875MHz**

Report No.: 109255-4

Date of issue: November 6, 2024



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.



We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

Test Certificate # 803.01

This report contains a total of 78 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Standard / Specification: FCC Part 90 Subpart T and Subpart K	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test (EUT)	6
General Product Information:	7
FCC Part 90 Subpart T and K	15
90.205, 90.723, 90.729, 90.259 - Power Output	15
90.209, 90.733 (d) - Occupied Bandwidth	33
90.213 - Frequency Stability	43
90.210 - Conducted Spurious Emissions Mask	45
90.210 - Radiated Emissions	59
Supplemental Information	77
Measurement Uncertainty	77
Emissions Test Details	77

Administrative Information

Test Report Information

REPORT PREPARED FOR:

Meteorcomm, LLC.
1201 SW 7th Street
Renton, WA 98057

Representative: George Stults
Customer Reference Number: PO32132

REPORT PREPARED BY:

Stacey Noriega
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 109225

DATE OF EQUIPMENT RECEIPT:
DATE(S) OF TESTING:

September 23, 2024
September 25-27, 2024 and October 8-10, 2024

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
22116 23rd Drive SE, Suite A
Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20
EMITest Immunity	5.03.10

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

Summary of Results

Standard / Specification: FCC Part 90 Subpart T and Subpart K

Test Procedure	Description	Modifications	Results
90.205, 90.723, 90.729, 90.259	Power Output	MOD#1 & 2	Pass
90.209, 90.733 (d)	Bandwidth	MOD#1 & 2	Pass
90.213	Frequency Stability	MOD#1 & 2	Pass
90.210	Conducted Spurious Emissions and Mask	MOD#1 & 2	Pass
90.210	Radiated Spurious Emissions	MOD#1 (Except for testing <1GHz in half and full rate modulations) & MOD#2	Pass

NA = Not Applicable

ISO/IEC 17025 Decision Rule

The equipment sample utilized for testing is selected by the manufacturer. The declaration of pass or fail herein is a binary statement for simple acceptance rule (ILAC G8) based upon assessment to the specification(s) listed above, without consideration of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

Modification #1 (MOD#1) = DEV-001273 - 0.47uF caps from power supply input block to chassis.

MOD#1 was in place for all unintentional radiated emissions.

MOD#1 was in place for all intentional emissions except for radiated spurious emissions less than 1GHz half rate and full rate.

Modification #2 (MOD#2) = DEV-001270 NGR Base PS - Replaces power supply modified by Rad.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

Equipment Under Test (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Under Test:

Device	Manufacturer	Model #	S/N
ITCR-NG Base	Meteorcomm LLC.	65030	65BRF13008MC

Support Equipment:

Device	Manufacturer	Model #	S/N
ITCR-NG Wayside	Meteorcomm LLC.	65010A	65WR002008MC
AC/DC Switching Adaptor	Mean Well	GST280A48-C6P	SC200W0884
AC/DC Switching Adaptor	Mean Well	GST280A12-C6P	EC08104020
Attenuator	Fairview Microwave	SA3N1007-30	NA
Attenuator	Fairview Microwave	SA3N1007-30	NA
Attenuator	Fairview Microwave	SA3N1007-30	NA
Vector Signal Generator	Rhode & Schwarz	SMBVIOOB	1423.1003K02-102044-an
Laptop	Panasonic	CF-30	T1260Z
Laptop	Dell	Latitude	8X7DMH2
GPS 4-way Splitter	GPSS	S14-SF	NA
USB Thumb Drive	Micro Center	64GB	NA
Prosafe 8-Port Gigabit	Netgear	GS108Tv2	29SE4C5302E60
Smart Switch	NA	NA	NA

Configuration 2

Equipment Under Test:

Device	Manufacturer	Model #	S/N
ITCR-NG Base	Meteorcomm LLC	65030	65BRF13008MC

Support Equipment:

Device	Manufacturer	Model #	S/N
Programmable DC Power Supply	BK Precision Supply	XLN8018	351EL1073
Laptop	Dell	Latitude	8X7DMH2
Prosafe 8-Port Gigabit	Netgear	GS108Tv2	29SE4C5302E60
Smart Switch	NA	NA	NA

General Product Information:

Description of EUT	
Railway Transceiver	
Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Transmission System:	Proprietary for Locomotive
Operating Frequency Range(s):	217.6125-219.9875MHz AND 220.0125-221.9875MHz
Modulation Type(s):	Full Rate 2 bits / symbol Half Rate 2 bits / symbol PI/8 DQPSK 3 bits / symbol PI/8 16APSK 4 bits /symbol
Maximum Duty Cycle:	50%, but may be increased for testing
Number of TX Chains:	1
Antenna Type(s) and Gain:	Not specified by manufacturer
Beamforming Type:	NA
Antenna Connection Type:	External Connector
Nominal Input Voltage:	48VDC
Firmware / Software used for Test:	S/W Part Number P65000-A01-0.1.90.01 ITC-ROOT gec12a0f (dev) 2024-05-14 16:16:14 S/W Part Number P65000-M01-0.1.135.01 ITC-APP g4a81412a6 2024-05-14 19:09:07 S/W Part Number P65000-R01-0.0.80.0 Baseband-0 g6da029fdf 2024-05-14 14:04:26 S/W Part Number P65000-R01-0.0.80.0 Baseband-1 g6da029fdf 2024-05-14 14:05:06 S/W Part Number P65000-F01-00.00.48.00 FPGA ge45a0e8f 2024-04-09 12:35:12 S/W Part Number P65000-B01-0.1.92.01 Bootloader g5c50125 2024-06-25 19:24:32 S/W Part Number P65000-S01-0.1.92.01 Failsafe g5c50125 2024-06-25 19:24:32 Attenuator settings used to compensate differences in PAPR HALF_RATE PI/4 DQPSK 0.0dB FULL_RATE PI/4 DQPSK 0.0 dB PI/8-DQPSK -0.4 dB PI/8-16APSK -1.3 dB
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

EUT Photo(s)



EUT

Support Equipment Photo(s)



Support EUT



DC Power Supply, #1



DC Power Supply, #2




Support Attenuators



Signal Generator



Laptop, #1

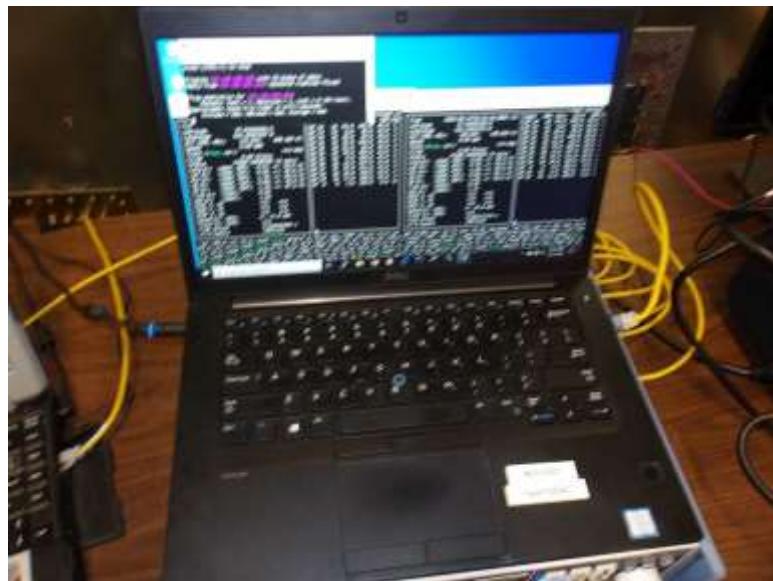

Laptop, #2




Ethernet Hub


Block Diagram(s) of Test Setup

Configuration#	Setup Description of Block Diagram
1, Radiated	<p>Powered by DC powered supply.</p> <p>Ethernet ports connected to Ethernet hub, laptop, and support EUT located outside chamber.</p> <p>GPS port connected to GPS signal located outside chamber.</p> <p>GPIO ports connected to unterminated cables.</p> <p>RX ports terminated into 50Ω.</p> <p>TX port connected to attenuators then Spectrum analyzer for conducted measurements.</p>
1, Conducted	<p>Powered by DC powered supply.</p> <p>Ethernet ports connected to Ethernet hub, laptop, and support EUT.</p> <p>GPS port connected to GPS signal.</p> <p>GPIO ports connected to unterminated cables.</p> <p>RX ports terminated into 50Ω.</p> <p>TX port connected to attenuators then support EUT</p>


Test Setup Block Diagram

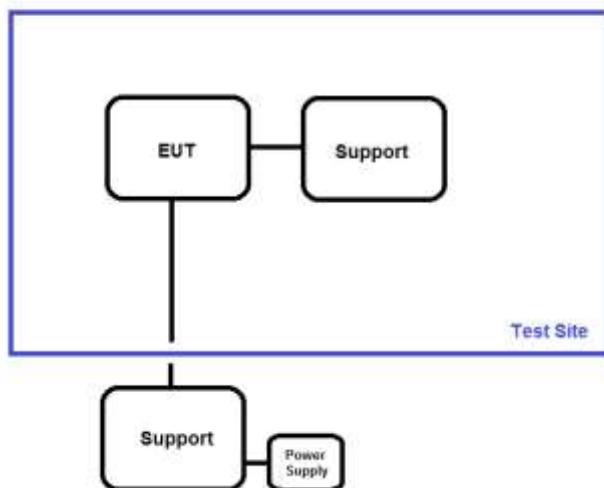


Radiated test setup

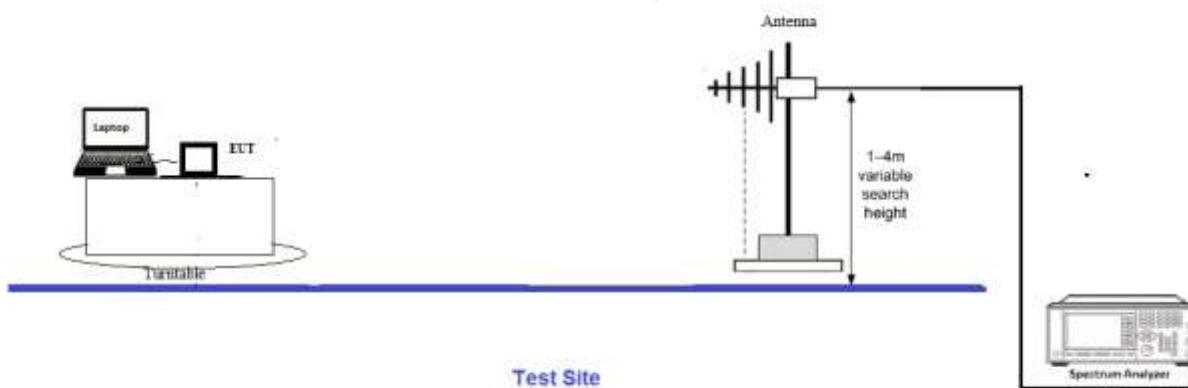

Block Diagram: Radiated

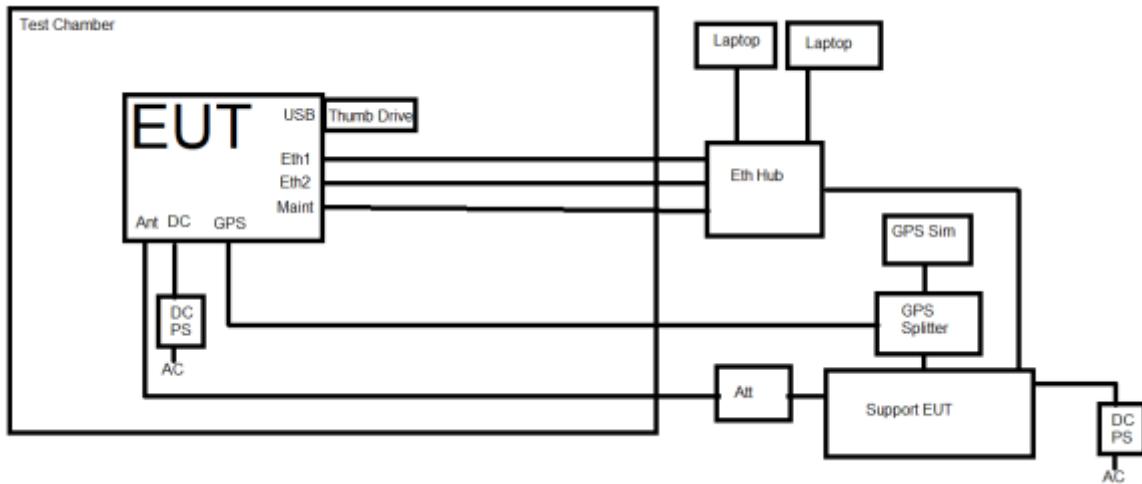

Block Diagram: Conducted

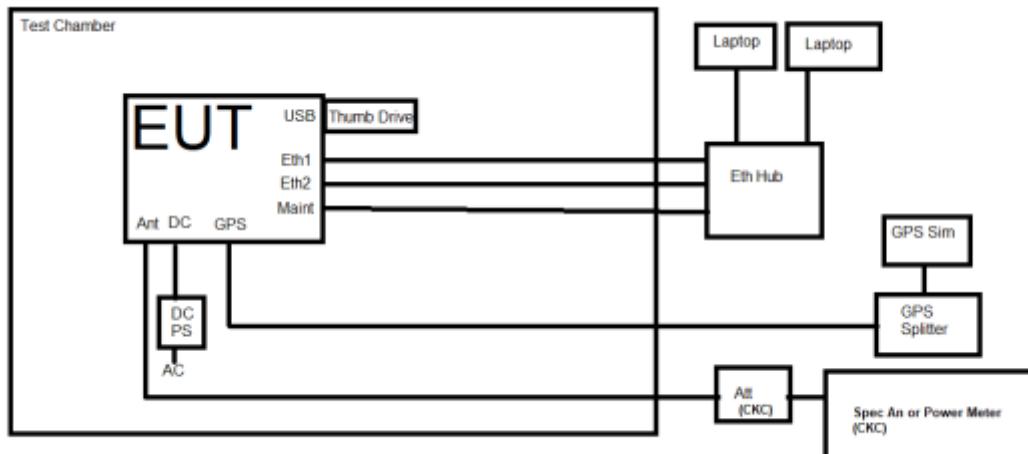

FCC PART 90 SUBPART T AND K

90.205, 90.723, 90.729, 90.259 - Power Output

Test Setup/Conditions			
Test Location:	Bothell Lab Bench	Test Engineer:	C. Plumadore
Test Method:	ANSI C63.26 (2015)	Test Date(s):	10/09/2024-10/10/2024
Configuration:	2		
Test Setup:	<p>The unit is in a temperature chamber for temperature variation. The voltage is varied. The EUT's RF port is connected to a spectrum analyzer with appropriate attenuation. The bandwidth settings are low enough to resolve the center frequency of the emission. Once the EUT transmitter is turned on, it is transmitting continuously with its normal duty cycle, full rate, half rate, pi/8, and pi/8-16 modulations investigated.</p> <p>Per the manufacturer, the applicable limits for testing are under 90.729 for the 220-221 band the limit is assumed to be 125W, for 90.723 for the 221-222 band is assumed to be 500W, for 217-220MHz there is a 2W limit per 90.259. Per the manufacturer, the max power is recorded for all channels tested and the licensee must consider these limitations.</p> <p>Modification #1 & 2 was in place for testing.</p>		

Environmental Conditions			
Temperature (°C)	23.5	Relative Humidity (%):	37

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	10/11/2023	10/11/2025
P05748	Attenuator	Pasternack	PE7004-20	2/26/2024	2/26/2026
02757	Temperature Chamber	Bemco	F100/350-8	12/8/2022	12/8/2024
C00194	30db Attenuator	Fairview Microwave	SA3N1007-30	9/26/2024	9/26/2026
03029	Thermometer, Digital Infrared	Fluke	566	4/14/2023	4/14/2025

Test Data Summary - RF Conducted Measurement (Ch1)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
217.6125	-30	V _{Nom}	Full Rate	48.74	74.82	Pass
217.6125	-20	V _{Nom}	Full Rate	48.90	77.62	Pass
217.6125	-10	V _{Nom}	Full Rate	48.99	79.25	Pass
217.6125	0	V _{Nom}	Full Rate	48.81	76.03	Pass
217.6125	10	V _{Nom}	Full Rate	49.01	79.62	Pass
217.6125	20	V _{Nom}	Full Rate	49.21	83.37	Pass
217.6125	30	V _{Nom}	Full Rate	48.93	78.16	Pass
217.6125	40	V _{Nom}	Full Rate	49.03	79.98	Pass
217.6125	50	V _{Nom}	Full Rate	49.03	79.98	Pass
217.6125	20	V _{Min}	Full Rate	48.89	77.45	Pass
217.6125	20	V _{Max}	Full Rate	48.86	76.91	Pass

Test Data Summary - RF Conducted Measurement (Ch96)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
219.9875	-30	V _{Nom}	Full Rate	48.79	75.68	Pass
219.9875	-20	V _{Nom}	Full Rate	48.82	76.21	Pass
219.9875	-10	V _{Nom}	Full Rate	48.75	74.99	Pass
219.9875	0	V _{Nom}	Full Rate	48.88	77.27	Pass
219.9875	10	V _{Nom}	Full Rate	49.05	80.35	Pass
219.9875	20	V _{Nom}	Full Rate	49.24	83.95	Pass
219.9875	30	V _{Nom}	Full Rate	49.00	79.43	Pass
219.9875	40	V _{Nom}	Full Rate	49.05	80.35	Pass
219.9875	50	V _{Nom}	Full Rate	49.08	80.91	Pass
219.9875	20	V _{Min}	Full Rate	48.94	78.34	Pass
219.9875	20	V _{Max}	Full Rate	48.90	77.62	Pass

Test Data Summary - RF Conducted Measurement (Ch97)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
220.0125	-30	V _{Nom}	Full Rate	48.80	75.86	Pass
220.0125	-20	V _{Nom}	Full Rate	48.83	76.38	Pass
220.0125	-10	V _{Nom}	Full Rate	48.51	70.96	Pass
220.0125	0	V _{Nom}	Full Rate	48.88	77.27	Pass
220.0125	10	V _{Nom}	Full Rate	49.06	80.54	Pass
220.0125	20	V _{Nom}	Full Rate	49.23	83.75	Pass
220.0125	30	V _{Nom}	Full Rate	49.01	79.62	Pass
220.0125	40	V _{Nom}	Full Rate	49.06	80.54	Pass
220.0125	50	V _{Nom}	Full Rate	49.08	80.91	Pass
220.0125	20	V _{Min}	Full Rate	48.96	78.70	Pass
220.0125	20	V _{Max}	Full Rate	48.94	78.34	Pass

Test Data Summary - RF Conducted Measurement (Ch176)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
221.9875	-30	V _{Nom}	Full Rate	48.83	76.38	Pass
221.9875	-20	V _{Nom}	Full Rate	48.77	75.35	Pass
221.9875	-10	V _{Nom}	Full Rate	48.44	69.82	Pass
221.9875	0	V _{Nom}	Full Rate	48.94	78.34	Pass
221.9875	10	V _{Nom}	Full Rate	49.11	81.47	Pass
221.9875	20	V _{Nom}	Full Rate	49.30	85.11	Pass
221.9875	30	V _{Nom}	Full Rate	49.07	80.72	Pass
221.9875	40	V _{Nom}	Full Rate	49.10	81.28	Pass
221.9875	50	V _{Nom}	Full Rate	49.14	82.04	Pass
221.9875	20	V _{Min}	Full Rate	48.99	79.25	Pass
221.9875	20	V _{Max}	Full Rate	49.00	79.43	Pass

Test Data Summary - RF Conducted Measurement (Ch1)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
217.6125	-30	V _{Nom}	Half Rate	48.76	75.16	Pass
217.6125	-20	V _{Nom}	Half Rate	48.62	72.78	Pass
217.6125	-10	V _{Nom}	Half Rate	48.82	76.21	Pass
217.6125	0	V _{Nom}	Half Rate	48.86	76.91	Pass
217.6125	10	V _{Nom}	Half Rate	49.08	80.91	Pass
217.6125	20	V _{Nom}	Half Rate	49.25	84.14	Pass
217.6125	30	V _{Nom}	Half Rate	49.00	79.43	Pass
217.6125	40	V _{Nom}	Half Rate	49.03	79.98	Pass
217.6125	50	V _{Nom}	Half Rate	49.07	80.72	Pass
217.6125	20	V _{Min}	Half Rate	48.92	77.98	Pass
217.6125	20	V _{Max}	Half Rate	48.94	78.34	Pass

Test Data Summary - RF Conducted Measurement (Ch96)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
219.9875	-30	V _{Nom}	Half Rate	48.80	75.86	Pass
219.9875	-20	V _{Nom}	Half Rate	48.68	73.79	Pass
219.9875	-10	V _{Nom}	Half Rate	48.26	66.99	Pass
219.9875	0	V _{Nom}	Half Rate	48.92	77.98	Pass
219.9875	10	V _{Nom}	Half Rate	48.96	78.70	Pass
219.9875	20	V _{Nom}	Half Rate	49.23	83.75	Pass
219.9875	30	V _{Nom}	Half Rate	49.04	80.17	Pass
219.9875	40	V _{Nom}	Half Rate	49.08	80.91	Pass
219.9875	50	V _{Nom}	Half Rate	49.12	81.66	Pass
219.9875	20	V _{Min}	Half Rate	48.98	79.07	Pass
219.9875	20	V _{Max}	Half Rate	48.97	78.89	Pass

Test Data Summary - RF Conducted Measurement (Ch97)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
220.0125	-30	V _{Nom}	Half Rate	48.79	75.68	Pass
220.0125	-20	V _{Nom}	Half Rate	48.87	77.09	Pass
220.0125	-10	V _{Nom}	Half Rate	48.78	75.51	Pass
220.0125	0	V _{Nom}	Half Rate	48.90	77.62	Pass
220.0125	10	V _{Nom}	Half Rate	48.95	78.52	Pass
220.0125	20	V _{Nom}	Half Rate	49.28	84.72	Pass
220.0125	30	V _{Nom}	Half Rate	49.04	80.17	Pass
220.0125	40	V _{Nom}	Half Rate	49.09	81.09	Pass
220.0125	50	V _{Nom}	Half Rate	49.12	81.66	Pass
220.0125	20	V _{Min}	Half Rate	48.98	79.07	Pass
220.0125	20	V _{Max}	Half Rate	48.97	78.89	Pass

Test Data Summary - RF Conducted Measurement (Ch176)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
221.9875	-30	V _{Nom}	Half Rate	48.83	76.38	Pass
221.9875	-20	V _{Nom}	Half Rate	48.92	77.98	Pass
221.9875	-10	V _{Nom}	Half Rate	48.78	75.51	Pass
221.9875	0	V _{Nom}	Half Rate	49.11	81.47	Pass
221.9875	10	V _{Nom}	Half Rate	49.01	79.62	Pass
221.9875	20	V _{Nom}	Half Rate	49.34	85.90	Pass
221.9875	30	V _{Nom}	Half Rate	49.10	81.28	Pass
221.9875	40	V _{Nom}	Half Rate	49.13	81.85	Pass
221.9875	50	V _{Nom}	Half Rate	49.15	82.22	Pass
221.9875	20	V _{Min}	Half Rate	49.03	79.98	Pass
221.9875	20	V _{Max}	Half Rate	49.01	79.62	Pass

Test Data Summary - RF Conducted Measurement (Ch1)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
217.6125	-30	V _{Nom}	Pi/8	48.20	66.07	Pass
217.6125	-20	V _{Nom}	Pi/8	48.10	64.57	Pass
217.6125	-10	V _{Nom}	Pi/8	47.92	61.94	Pass
217.6125	0	V _{Nom}	Pi/8	48.50	70.79	Pass
217.6125	10	V _{Nom}	Pi/8	48.33	68.07	Pass
217.6125	20	V _{Nom}	Pi/8	48.75	74.99	Pass
217.6125	30	V _{Nom}	Pi/8	48.48	70.47	Pass
217.6125	40	V _{Nom}	Pi/8	48.52	71.12	Pass
217.6125	50	V _{Nom}	Pi/8	48.55	71.61	Pass
217.6125	20	V _{Min}	Pi/8	48.41	69.34	Pass
217.6125	20	V _{Max}	Pi/8	48.40	69.18	Pass

Test Data Summary - RF Conducted Measurement (Ch96)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
219.9875	-30	V _{Nom}	Pi/8	48.24	66.68	Pass
219.9875	-20	V _{Nom}	Pi/8	48.17	65.61	Pass
219.9875	-10	V _{Nom}	Pi/8	48.40	69.18	Pass
219.9875	0	V _{Nom}	Pi/8	48.39	69.02	Pass
219.9875	10	V _{Nom}	Pi/8	48.40	69.18	Pass
219.9875	20	V _{Nom}	Pi/8	48.88	77.27	Pass
219.9875	30	V _{Nom}	Pi/8	48.52	71.12	Pass
219.9875	40	V _{Nom}	Pi/8	48.55	71.61	Pass
219.9875	50	V _{Nom}	Pi/8	48.58	72.11	Pass
219.9875	20	V _{Min}	Pi/8	48.46	70.15	Pass
219.9875	20	V _{Max}	Pi/8	48.40	69.18	Pass

Test Data Summary - RF Conducted Measurement (Ch97)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
220.0125	-30	V _{Nom}	Pi/8	48.23	66.53	Pass
220.0125	-20	V _{Nom}	Pi/8	48.18	70.47	Pass
220.0125	-10	V _{Nom}	Pi/8	48.40	69.18	Pass
220.0125	0	V _{Nom}	Pi/8	48.39	69.02	Pass
220.0125	10	V _{Nom}	Pi/8	48.41	69.34	Pass
220.0125	20	V _{Nom}	Pi/8	48.87	77.09	Pass
220.0125	30	V _{Nom}	Pi/8	48.52	71.12	Pass
220.0125	40	V _{Nom}	Pi/8	48.57	71.94	Pass
220.0125	50	V _{Nom}	Pi/8	48.59	72.28	Pass
220.0125	20	V _{Min}	Pi/8	48.45	69.98	Pass
220.0125	20	V _{Max}	Pi/8	48.43	69.66	Pass

Test Data Summary - RF Conducted Measurement (Ch176)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
221.9875	-30	V _{Nom}	Pi/8	48.29	67.45	Pass
221.9875	-20	V _{Nom}	Pi/8	48.12	64.86	Pass
221.9875	-10	V _{Nom}	Pi/8	48.03	63.53	Pass
221.9875	0	V _{Nom}	Pi/8	48.45	69.98	Pass
221.9875	10	V _{Nom}	Pi/8	48.46	70.15	Pass
221.9875	20	V _{Nom}	Pi/8	48.95	78.52	Pass
221.9875	30	V _{Nom}	Pi/8	48.56	71.78	Pass
221.9875	40	V _{Nom}	Pi/8	48.62	72.78	Pass
221.9875	50	V _{Nom}	Pi/8	48.64	73.11	Pass
221.9875	20	V _{Min}	Pi/8	48.49	70.63	Pass
221.9875	20	V _{Max}	Pi/8	48.50	70.79	Pass

Test Data Summary - RF Conducted Measurement (Ch1)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
217.6125	-30	V _{Nom}	Pi/8-16	48.36	68.55	Pass
217.6125	-20	V _{Nom}	Pi/8-16	48.38	68.87	Pass
217.6125	-10	V _{Nom}	Pi/8-16	48.55	71.61	Pass
217.6125	0	V _{Nom}	Pi/8-16	48.49	70.63	Pass
217.6125	10	V _{Nom}	Pi/8-16	48.51	70.96	Pass
217.6125	20	V _{Nom}	Pi/8-16	48.90	77.62	Pass
217.6125	30	V _{Nom}	Pi/8-16	48.61	72.61	Pass
217.6125	40	V _{Nom}	Pi/8-16	48.66	73.45	Pass
217.6125	50	V _{Nom}	Pi/8-16	48.72	74.47	Pass
217.6125	20	V _{Min}	Pi/8-16	48.52	71.12	Pass
217.6125	20	V _{Max}	Pi/8-16	48.52	71.12	Pass

Test Data Summary - RF Conducted Measurement (Ch96)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
219.9875	-30	V _{Nom}	Pi/8-16	48.40	69.18	Pass
219.9875	-20	V _{Nom}	Pi/8-16	48.39	69.02	Pass
219.9875	-10	V _{Nom}	Pi/8-16	48.48	70.45	Pass
219.9875	0	V _{Nom}	Pi/8-16	48.53	71.29	Pass
219.9875	10	V _{Nom}	Pi/8-16	48.54	71.45	Pass
219.9875	20	V _{Nom}	Pi/8-16	49.00	79.43	Pass
219.9875	30	V _{Nom}	Pi/8-16	48.64	73.11	Pass
219.9875	40	V _{Nom}	Pi/8-16	48.70	74.13	Pass
219.9875	50	V _{Nom}	Pi/8-16	48.76	75.16	Pass
219.9875	20	V _{Min}	Pi/8-16	48.57	71.94	Pass
219.9875	20	V _{Max}	Pi/8-16	48.56	71.78	Pass

Test Data Summary - RF Conducted Measurement (Ch97)

Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
220.0125	-30	V _{Nom}	Pi/8-16	48.40	69.18	Pass
220.0125	-20	V _{Nom}	Pi/8-16	48.48	70.47	Pass
220.0125	-10	V _{Nom}	Pi/8-16	48.48	70.45	Pass
220.0125	0	V _{Nom}	Pi/8-16	48.53	71.29	Pass
220.0125	10	V _{Nom}	Pi/8-16	48.55	71.61	Pass
220.0125	20	V _{Nom}	Pi/8-16	49.01	79.62	Pass
220.0125	30	V _{Nom}	Pi/8-16	48.65	73.28	Pass
220.0125	40	V _{Nom}	Pi/8-16	48.70	74.13	Pass
220.0125	50	V _{Nom}	Pi/8-16	48.75	74.99	Pass
220.0125	20	V _{Min}	Pi/8-16	48.57	71.94	Pass
220.0125	20	V _{Max}	Pi/8-16	48.56	71.78	Pass

Test Data Summary - RF Conducted Measurement (Ch176)


Frequency (MHz)	Temperature (°C)	Voltage	Modulation	Conducted Power (dBm)	Conducted Power (Watts)	Results
221.9875	-30	V _{Nom}	Pi/8-16	48.43	69.66	Pass
221.9875	-20	V _{Nom}	Pi/8-16	48.30	67.61	Pass
221.9875	-10	V _{Nom}	Pi/8-16	48.54	71.45	Pass
221.9875	0	V _{Nom}	Pi/8-16	48.58	72.11	Pass
221.9875	10	V _{Nom}	Pi/8-16	48.60	72.44	Pass
221.9875	20	V _{Nom}	Pi/8-16	49.08	80.91	Pass
221.9875	30	V _{Nom}	Pi/8-16	48.69	73.96	Pass
221.9875	40	V _{Nom}	Pi/8-16	48.74	74.82	Pass
221.9875	50	V _{Nom}	Pi/8-16	48.80	75.86	Pass
221.9875	20	V _{Min}	Pi/8-16	48.60	72.44	Pass
221.9875	20	V _{Max}	Pi/8-16	48.62	72.78	Pass

Parameter Definitions:


Measurements performed at input voltage according to manufacturer specification.

Parameter	Value
V _{Nom} :	48VDC
V _{Min} :	21VDC
V _{Max} :	61VDC


Test Plots

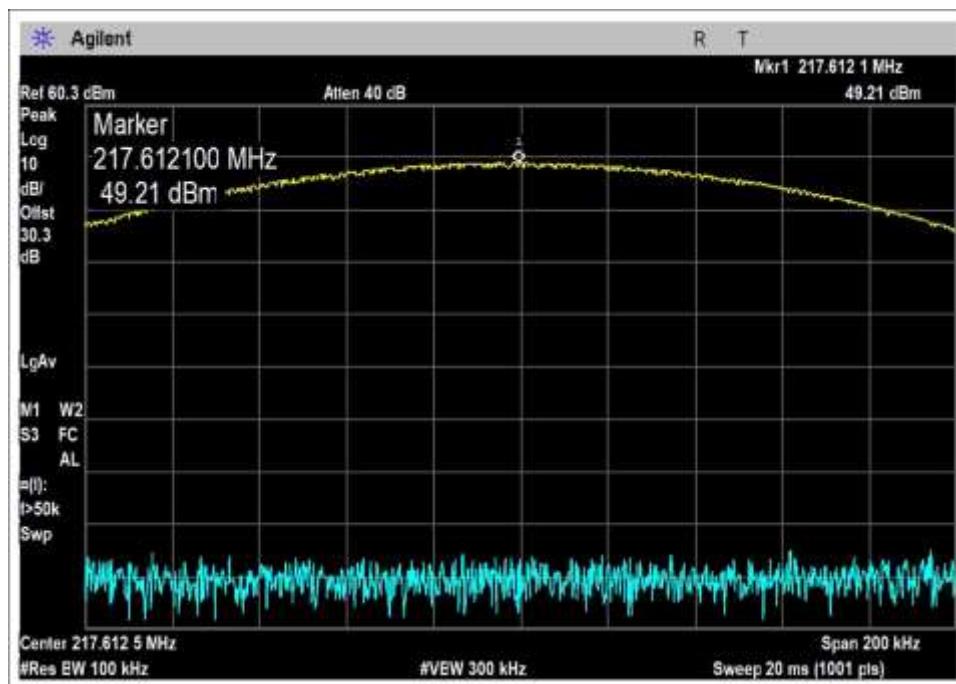


217.6125MHz Full Rate

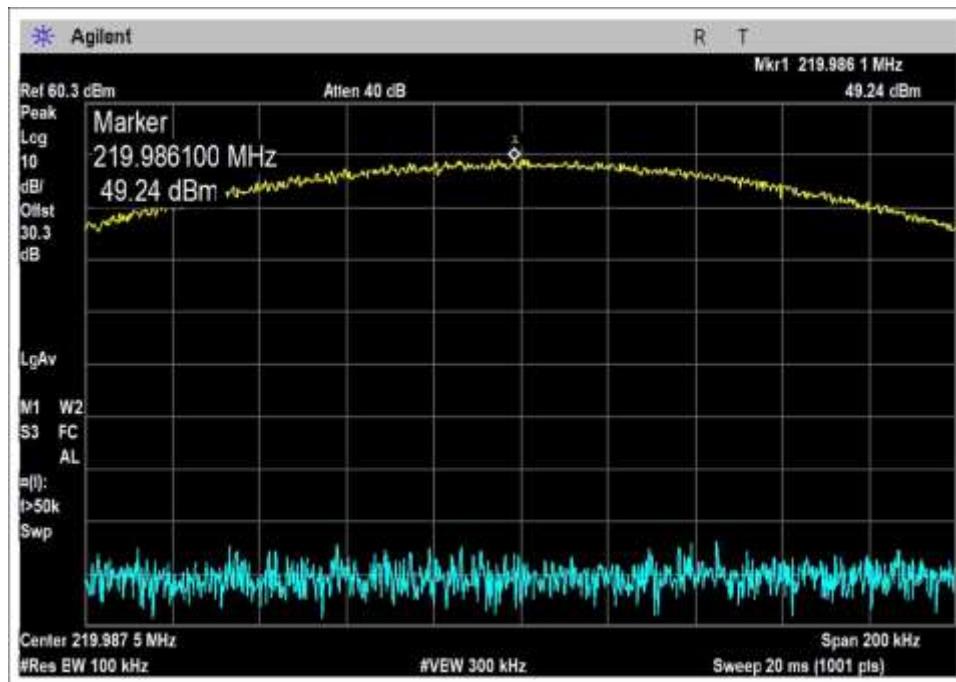



219.9875MHz, Full Rate

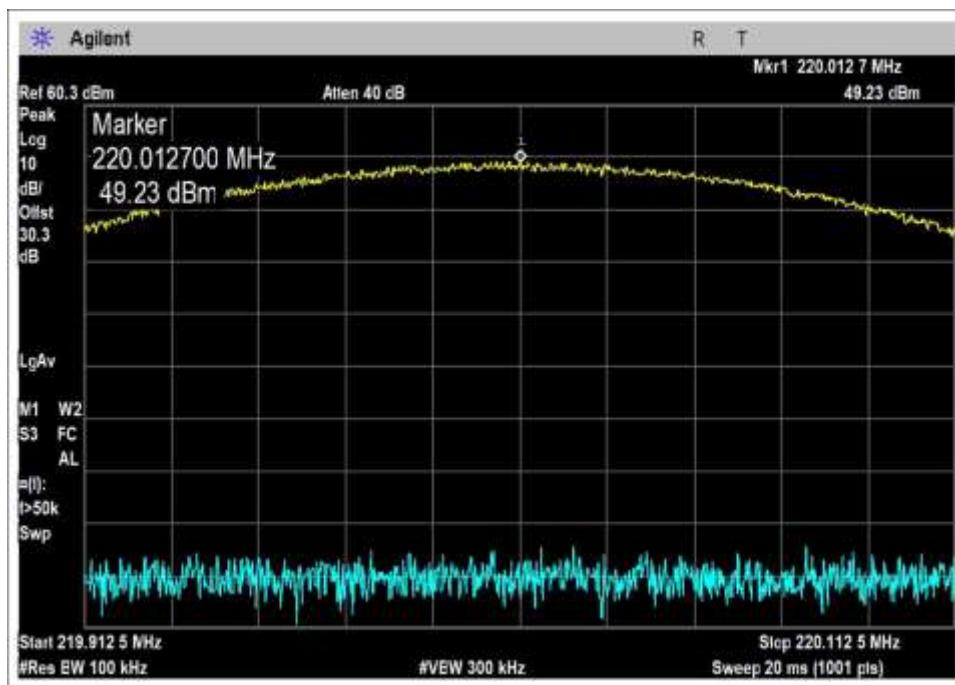


220.0125MHz, Full Rate

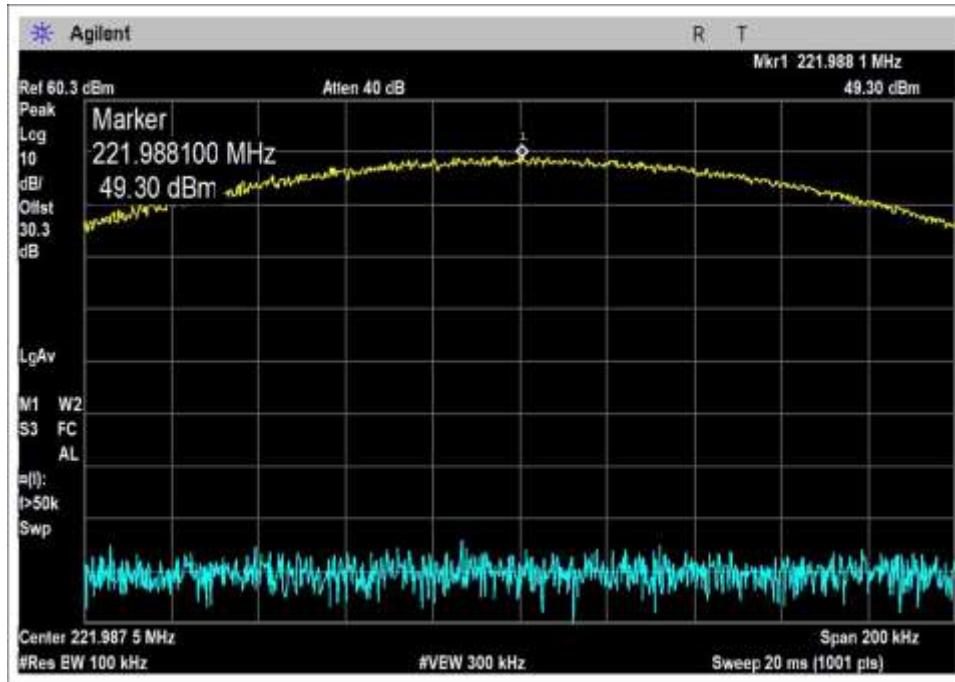


221.9875MHz, Full Rate

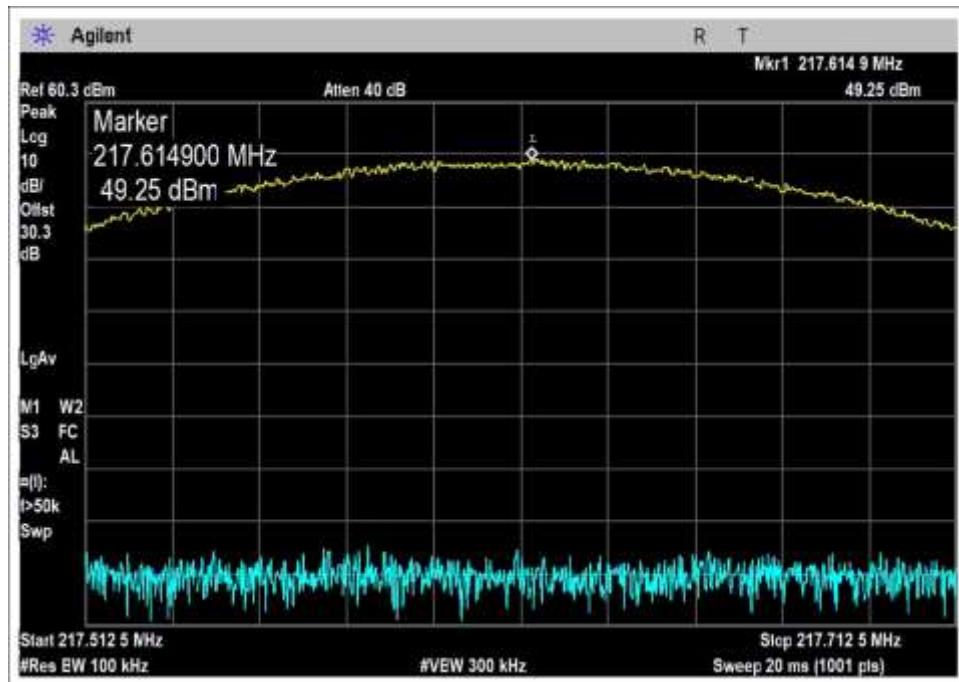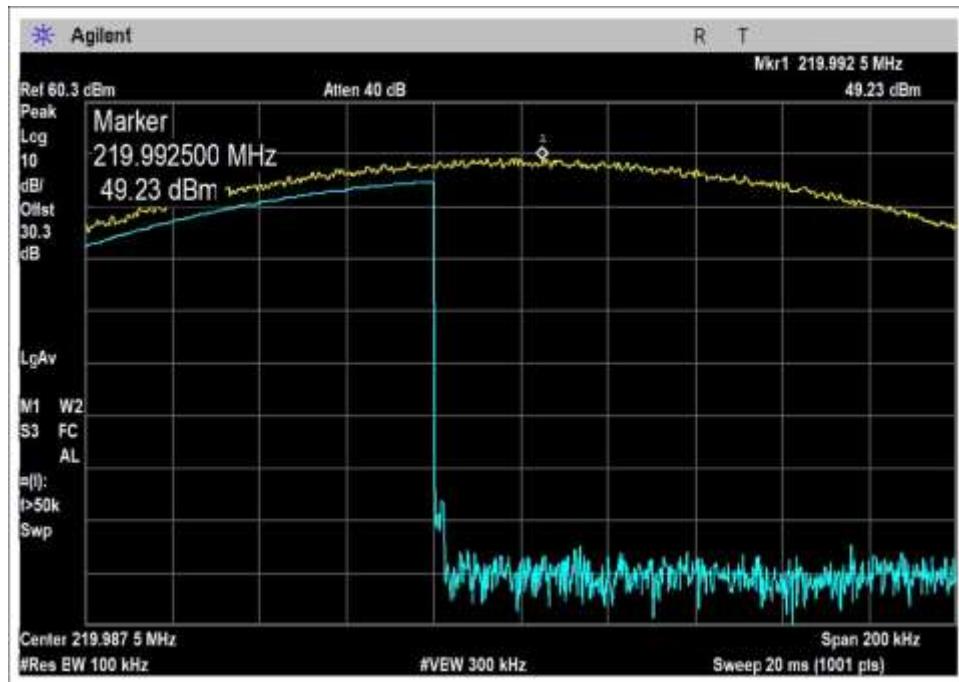

Testing the Future
LABORATORIES, INC.

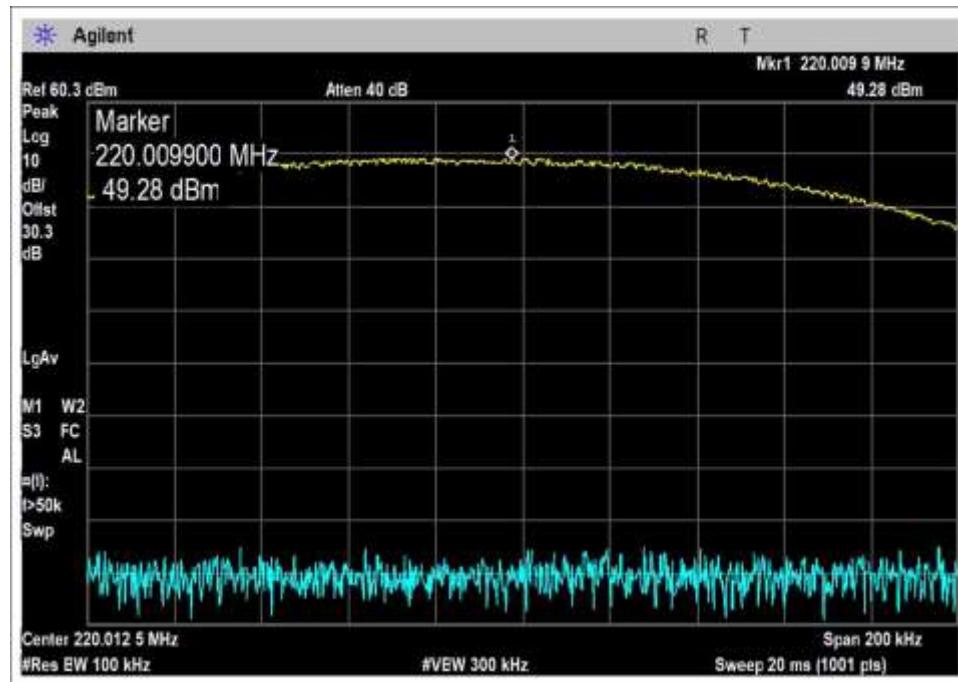217.6125MHz, Half Rate

219.9875MHz, Half Rate

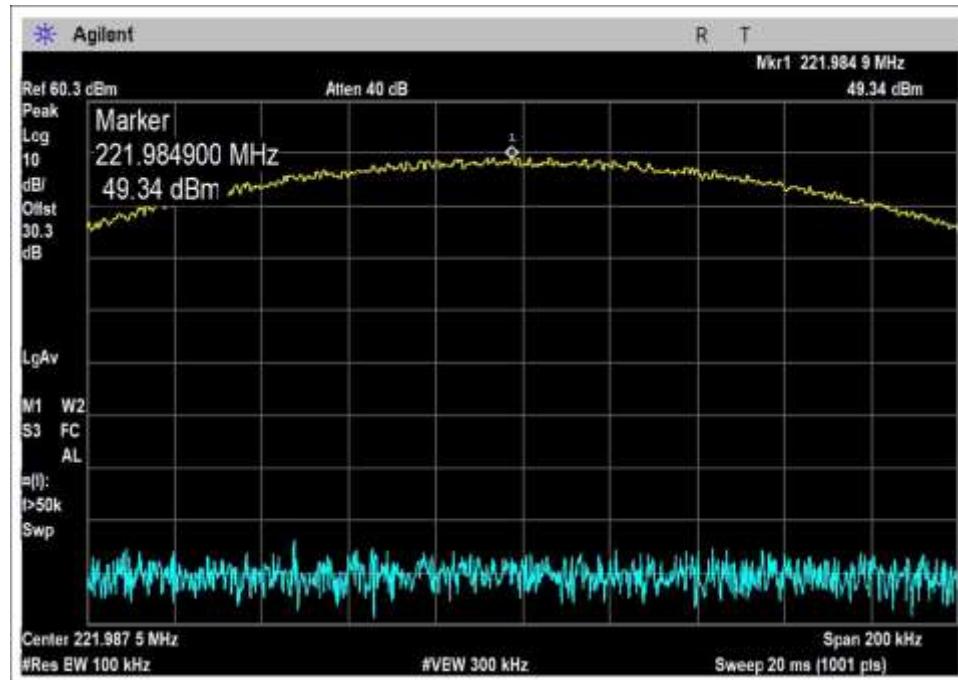


220.0125MHz, Half Rate

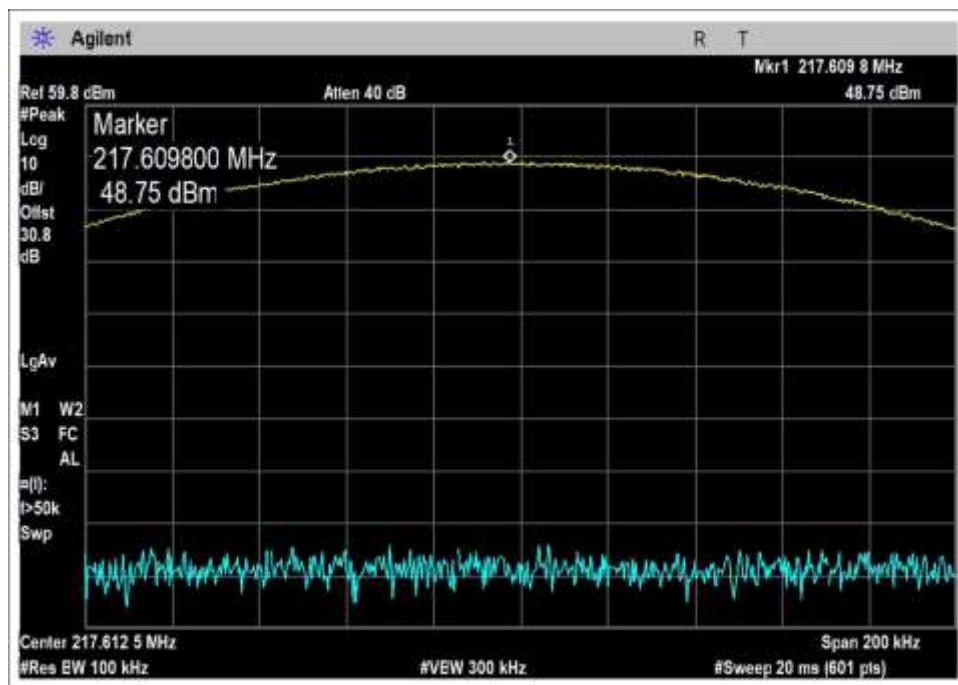


221.9875MHz, Half Rate




217.6125MHz, Pi/8

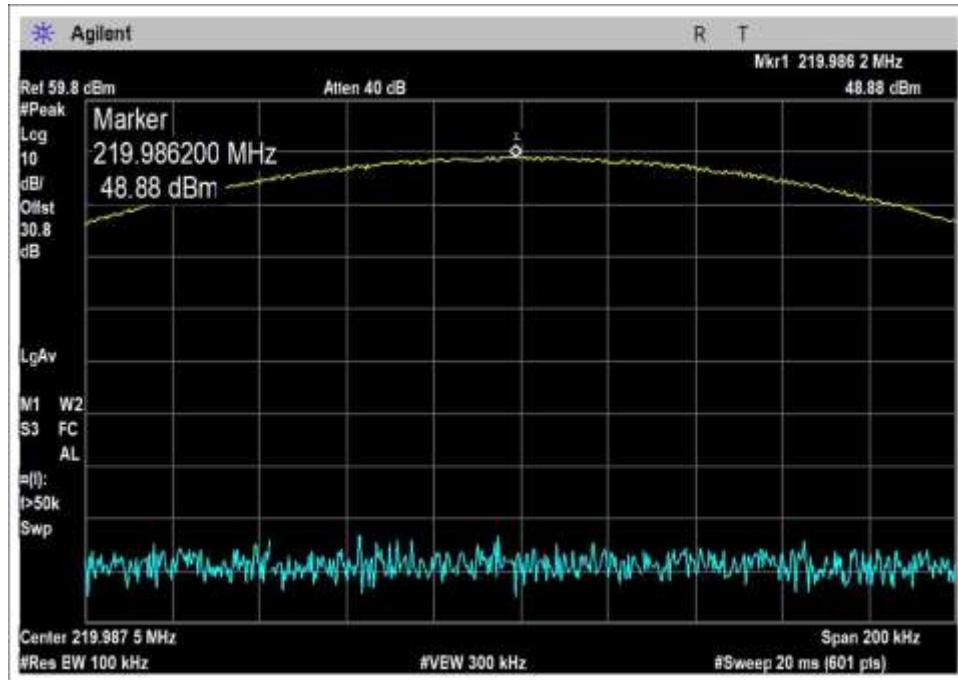


219.9875MHz, Pi/8

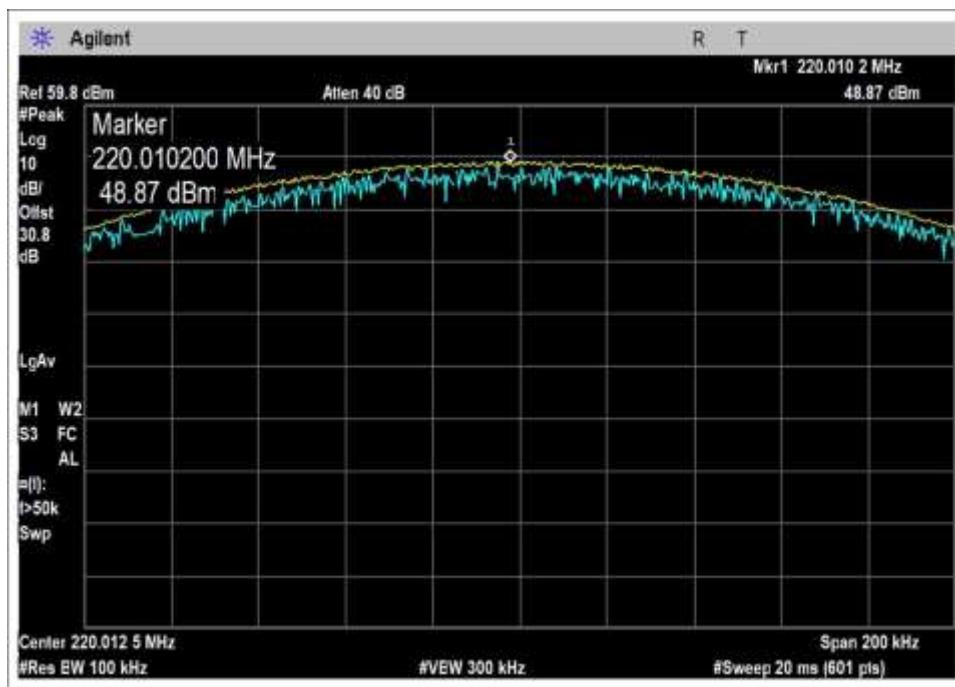


220.0125MHz, Pi/8

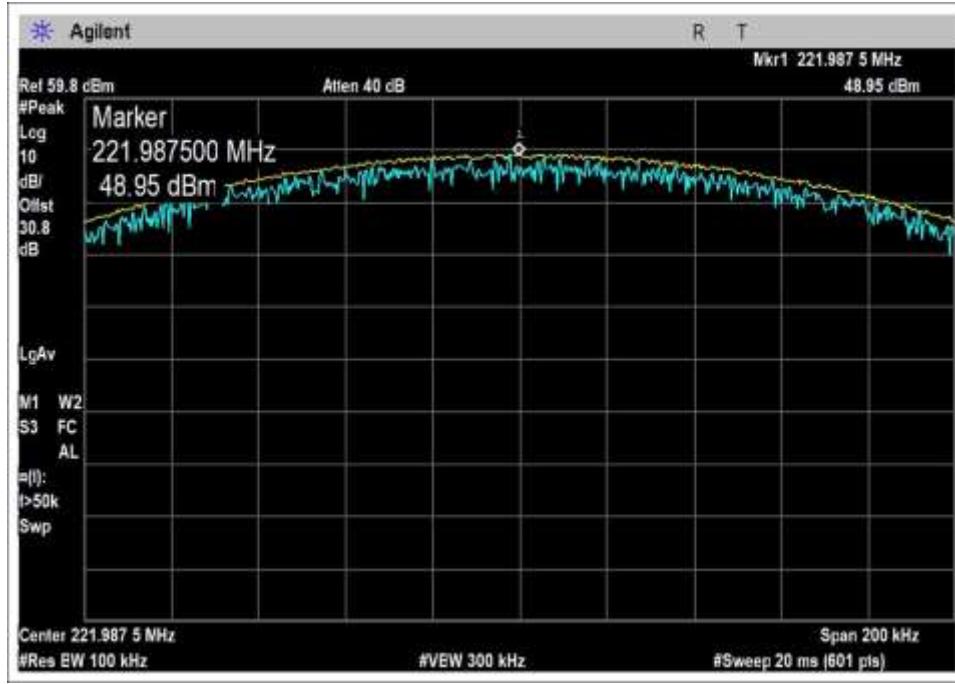


221.9875MHz, Pi/8

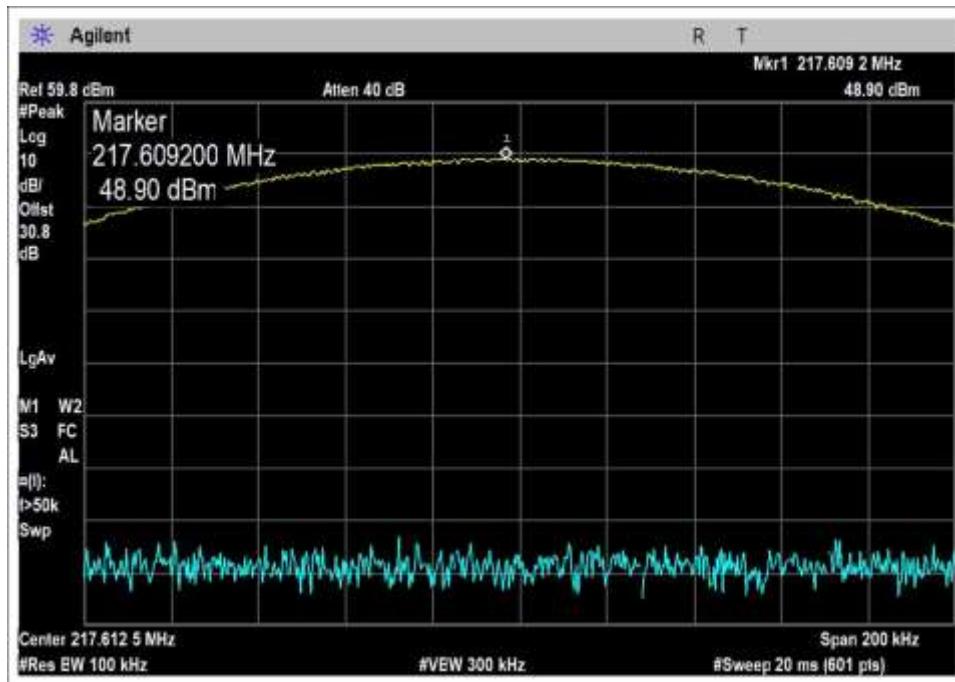


217.6125MHz, Pi/8-16

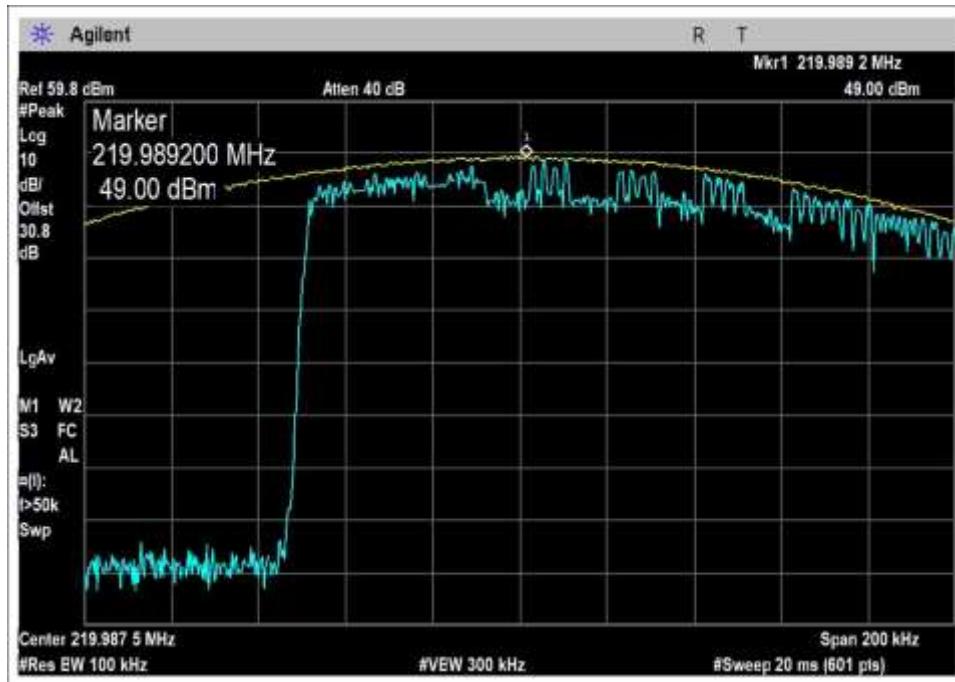

219.9875MHz, Pi/8-16

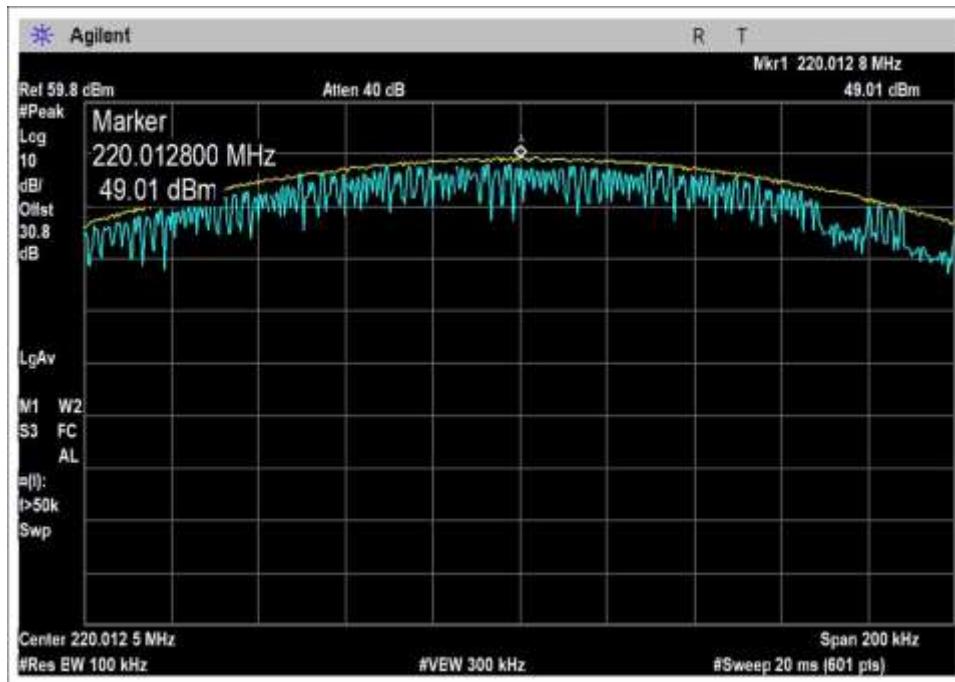

220.0125MHz, Pi/8-16

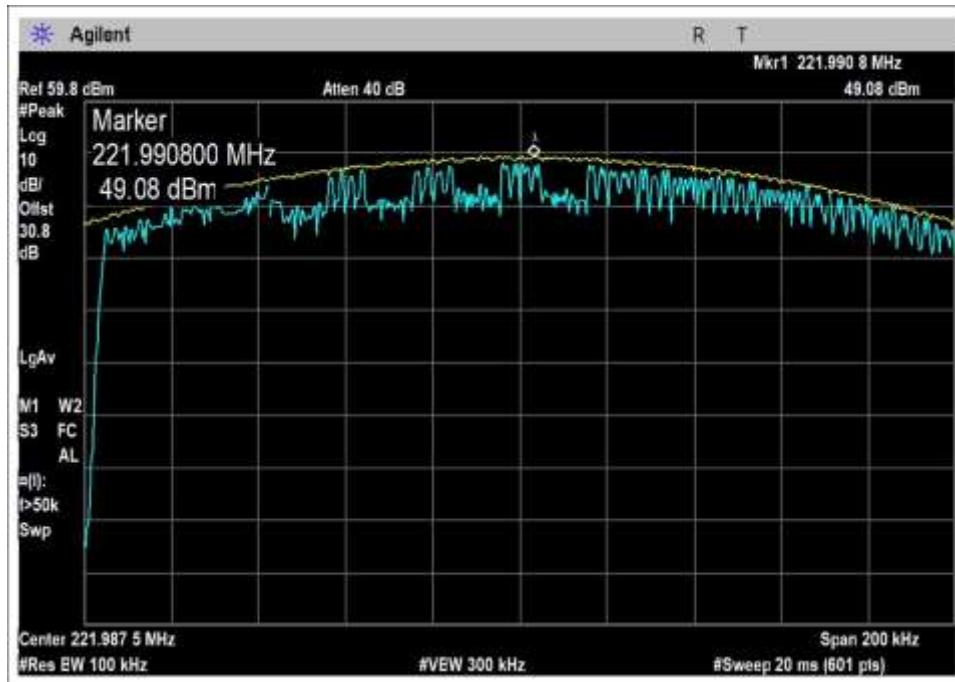

221.9875MHz, Pi/8-16

Test Setup Photo(s)



View 1



View 2

90.209, 90.733 (d) - Occupied Bandwidth

Test Setup/Conditions				
Test Location:	Bothell Lab Bench	Test Engineer:	C. Plumadore	
Test Method:	ANSI C63.26 (2015)	Test Date(s):	9/26/2024 and 10/8/2024	
Configuration:	1			
Test Setup:	<p>The EUT's RF port is connected to a spectrum analyzer directly with appropriate attenuation. The EUT is transmitting continuously with its normal duty cycle, full rate, half rate, pi/8, and pi/8-16 modulations investigated.</p> <p>The bandwidth limitations are considered in 90.209 as well as 90.733 where channel aggregation would be used, the authorized bandwidth is assumed to be 20kHz for the Full Rate modulation, pi/8, and pi/8-16 and 11.25kHz for the Half Rate modulation.</p> <p>Modification #1 & 2 was in place for testing.</p>			


Environmental Conditions			
Temperature (°C)	25	Relative Humidity (%):	44

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03807	Spectrum Analyzer	Agilent	E4440A	10/10/2023	10/10/2025
P06452	Cable	Andrews	NA	2/8/2023	2/8/2025
C00194	30db Attenuator	Fairview Microwave	SA3N1007-30	9/26/2024	9/26/2026


99% Occupied Bandwidth

Test Data Summary				
Frequency (MHz)	Modulation	Measured (kHz)	Limit (kHz)	Results
217.6125	Full Rate	17.6451	20kHz	Pass
219.9875	Full Rate	17.6117	20kHz	Pass
220.0125	Full Rate	17.5918	20kHz	Pass
221.9875	Full Rate	17.5937	20kHz	Pass
217.6125	Half Rate	8.8771	11.25kHz	Pass
219.9875	Half Rate	8.8531	11.25kHz	Pass
220.0125	Half Rate	8.8568	11.25kHz	Pass
221.9875	Half Rate	8.8481	11.25kHz	Pass
217.6125	Pi/8	17.9236	20kHz	Pass
219.9875	Pi/8	17.9044	20kHz	Pass
220.0125	Pi/8	17.8675	20kHz	Pass
221.9875	Pi/8	17.9423	20kHz	Pass
217.6125	Pi/8-16	17.5600	20kHz	Pass
219.9875	Pi/8-16	17.5602	20kHz	Pass
220.0125	Pi/8-16	17.5756	20kHz	Pass
221.9875	Pi/8-16	17.5699	20kHz	Pass


Test Plots

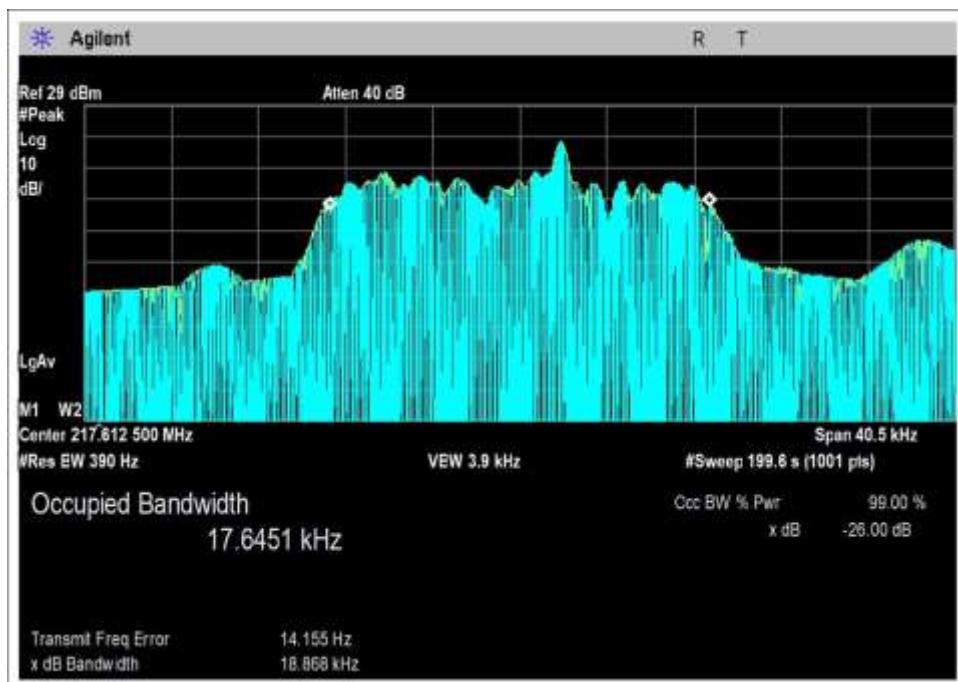


217.6125MHz, Full Rate

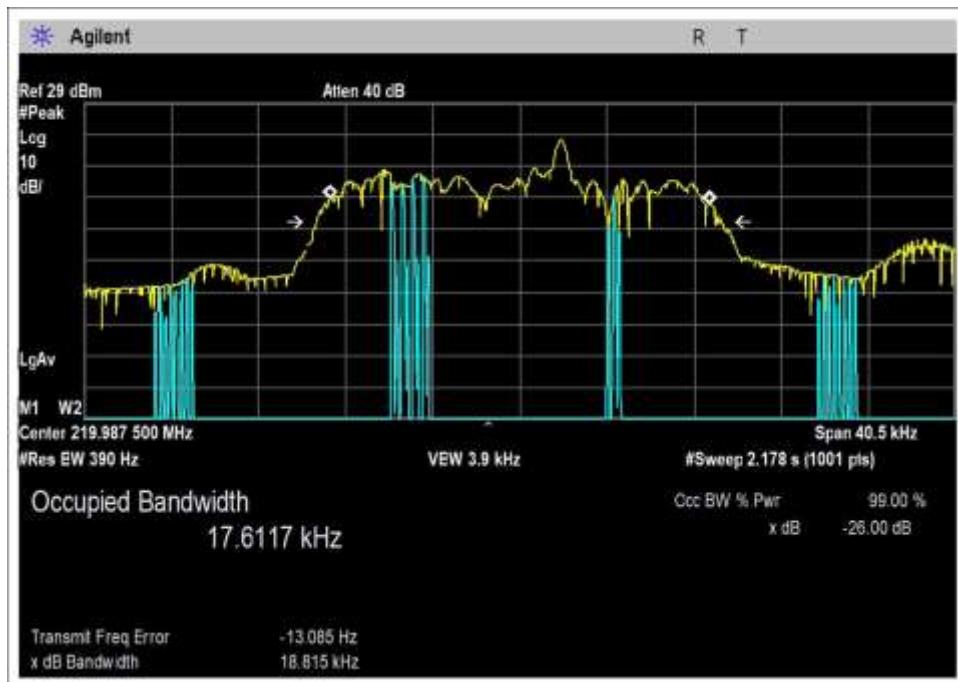


219.9875MHz, Full Rate

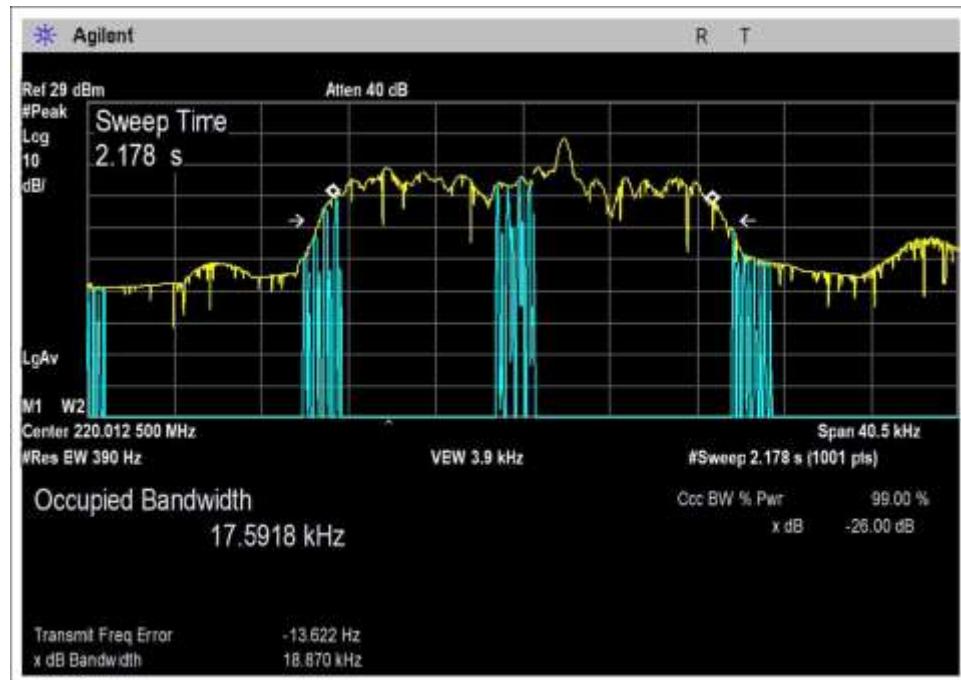


220.0125MHz, Full Rate

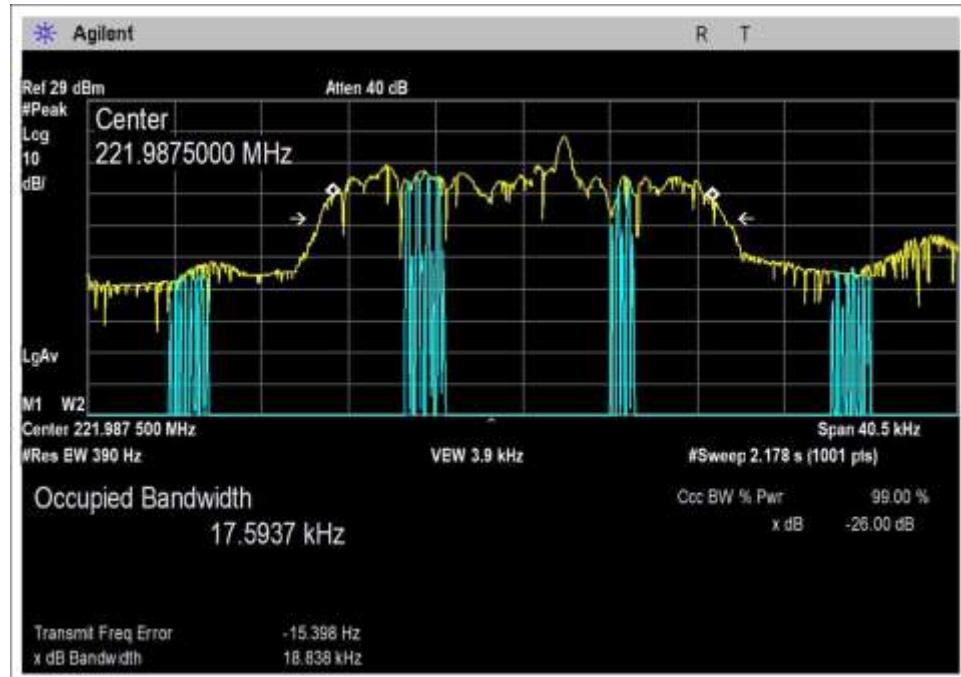


221.9875MHz, Full Rate

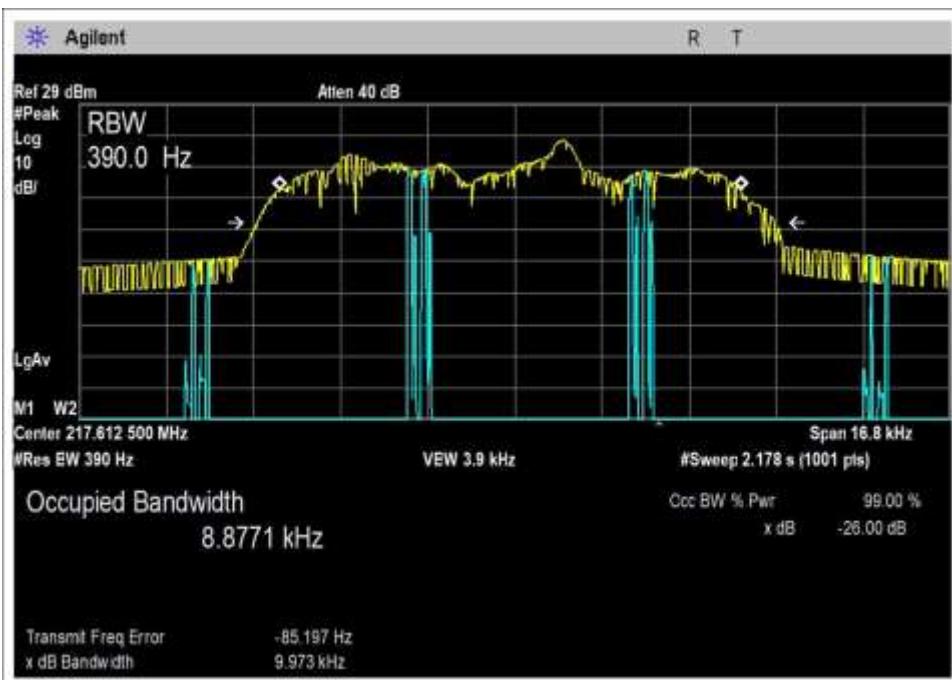


217.6125MHz, Half Rate

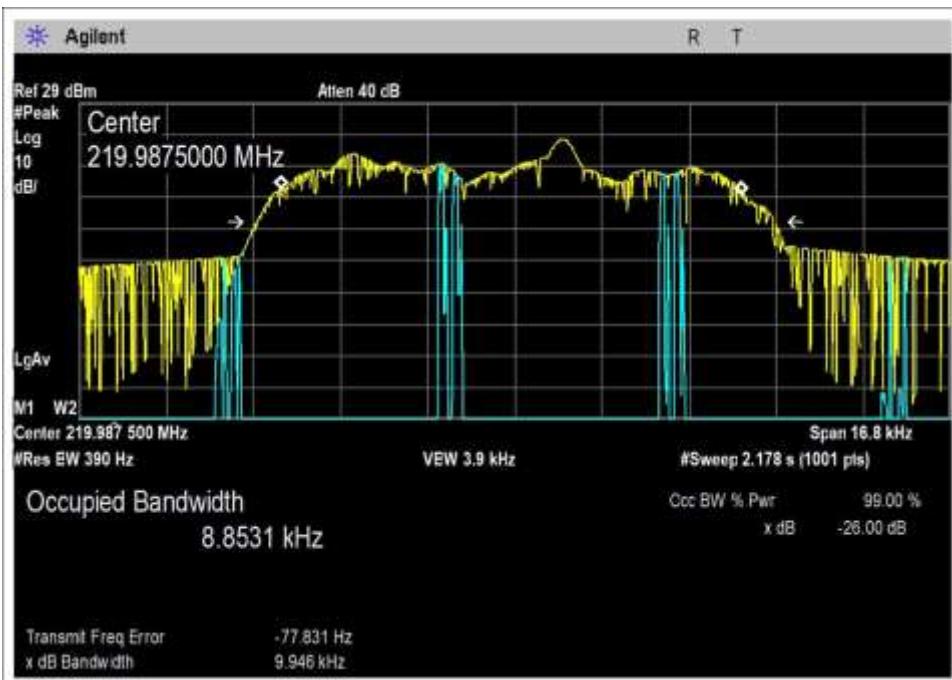


219.9875MHz, Half Rate

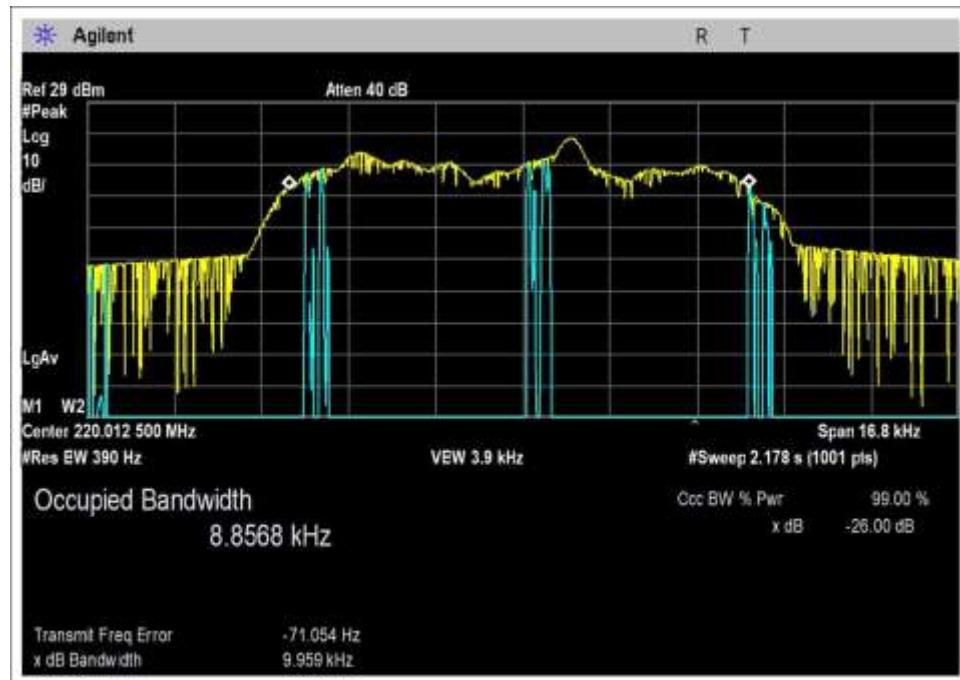


220.0125MHz, Half Rate

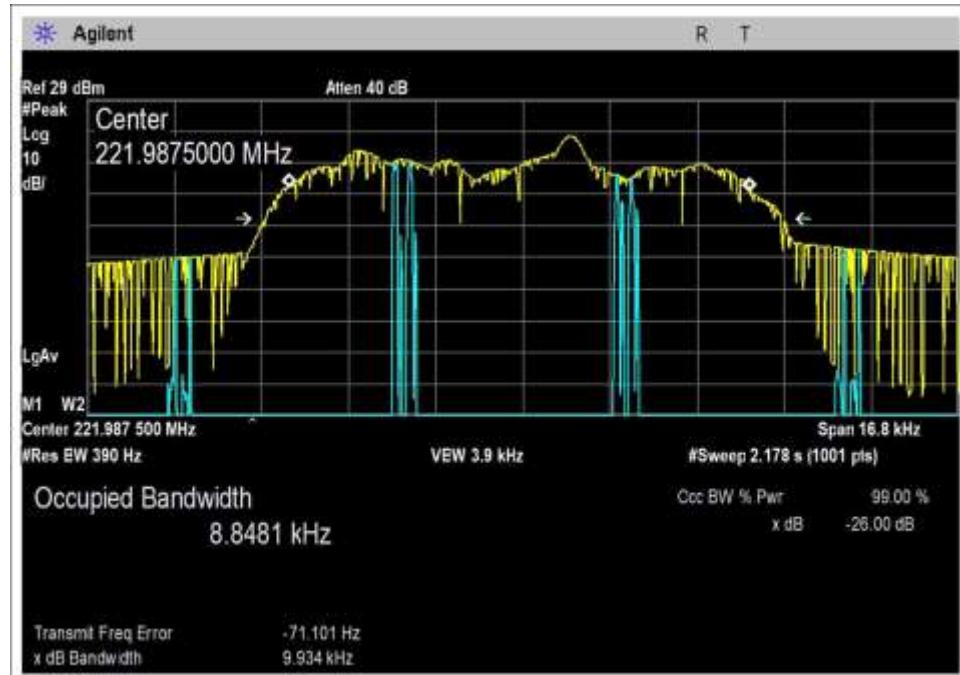


221.9875MHz, Half Rate

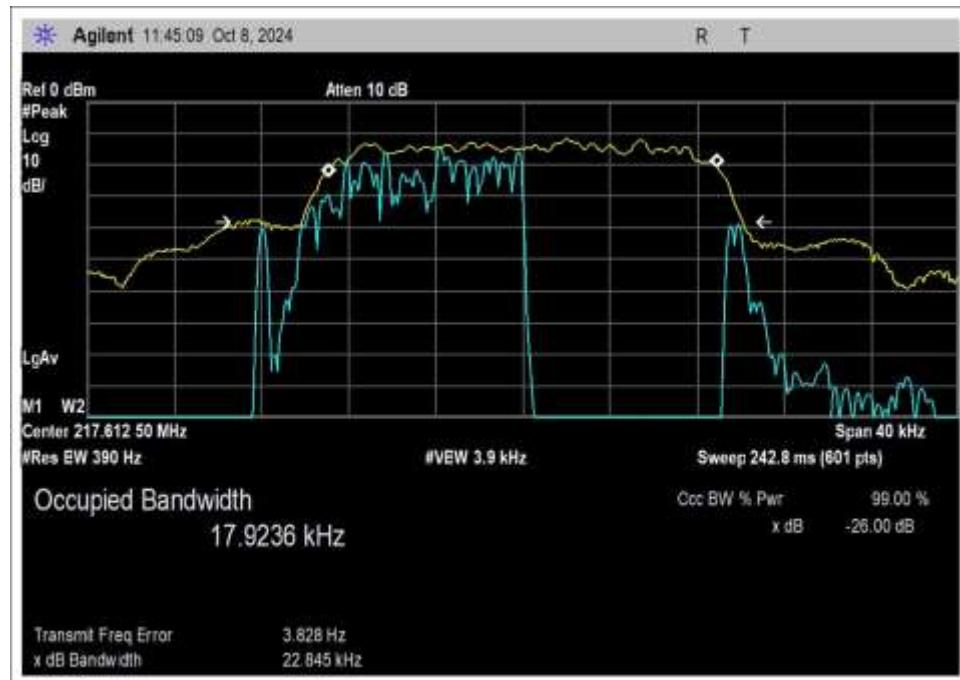


217.6125MHz, Pi/8

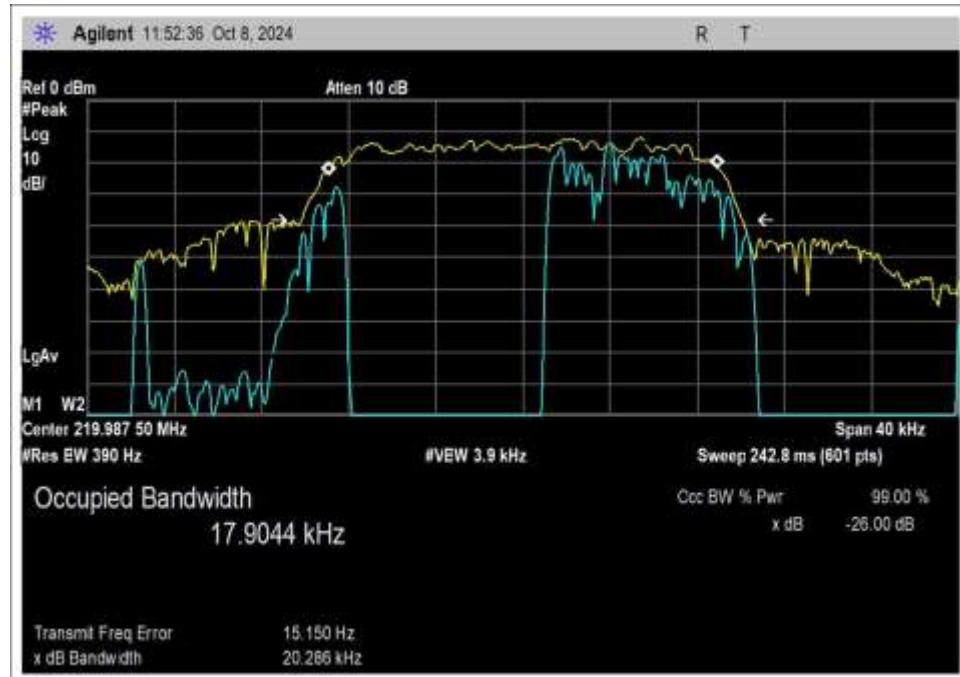


219.9875MHz, Pi/8

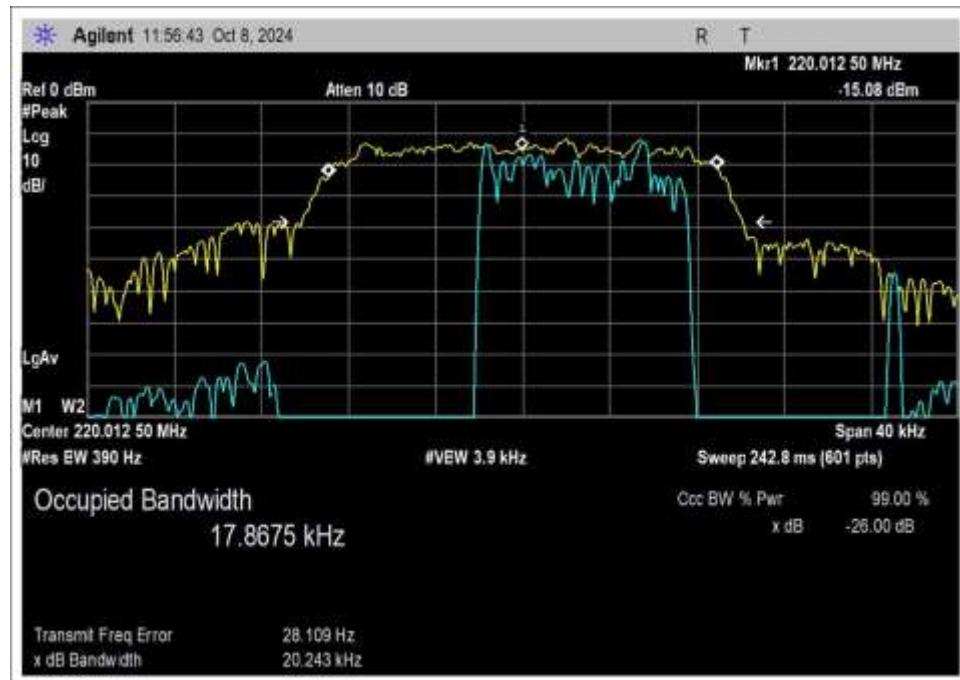


220.0125MHz, Pi/8

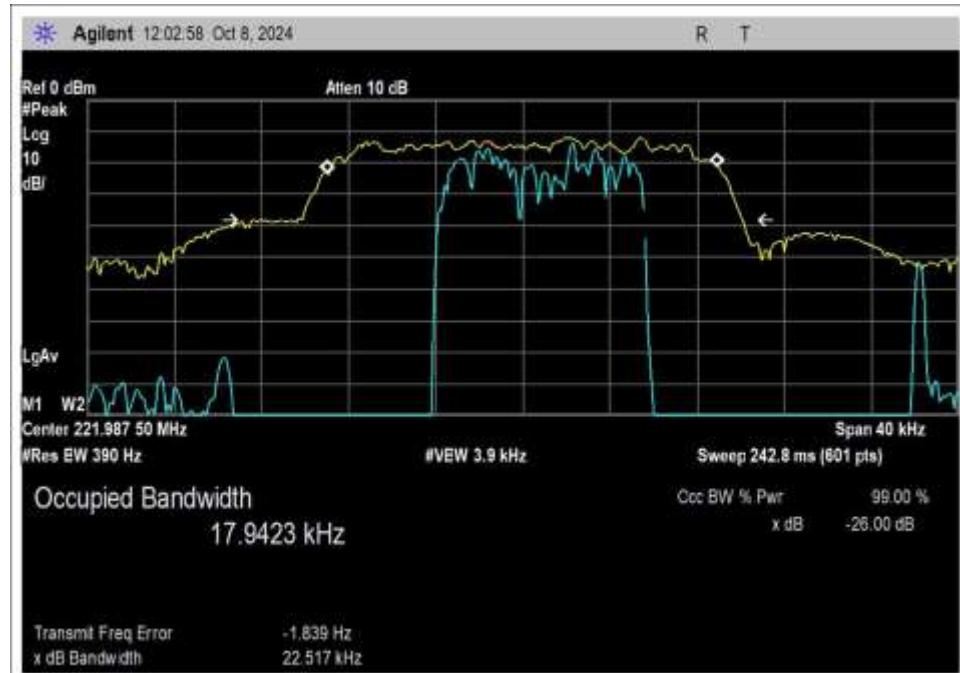


221.9875MHz, Pi/8

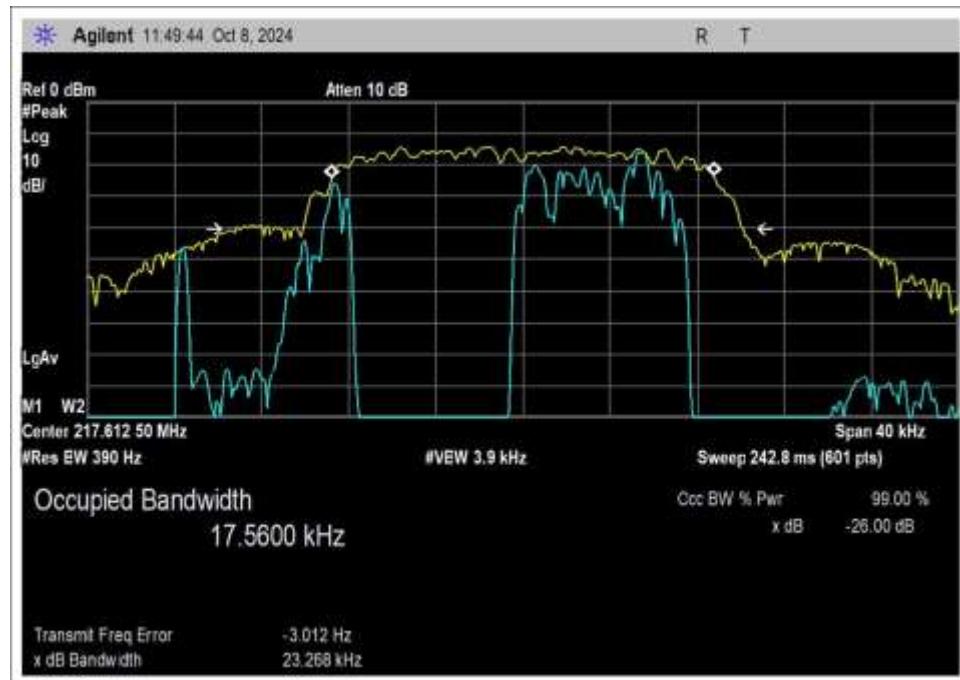


217.6125MHz, Pi/8-16

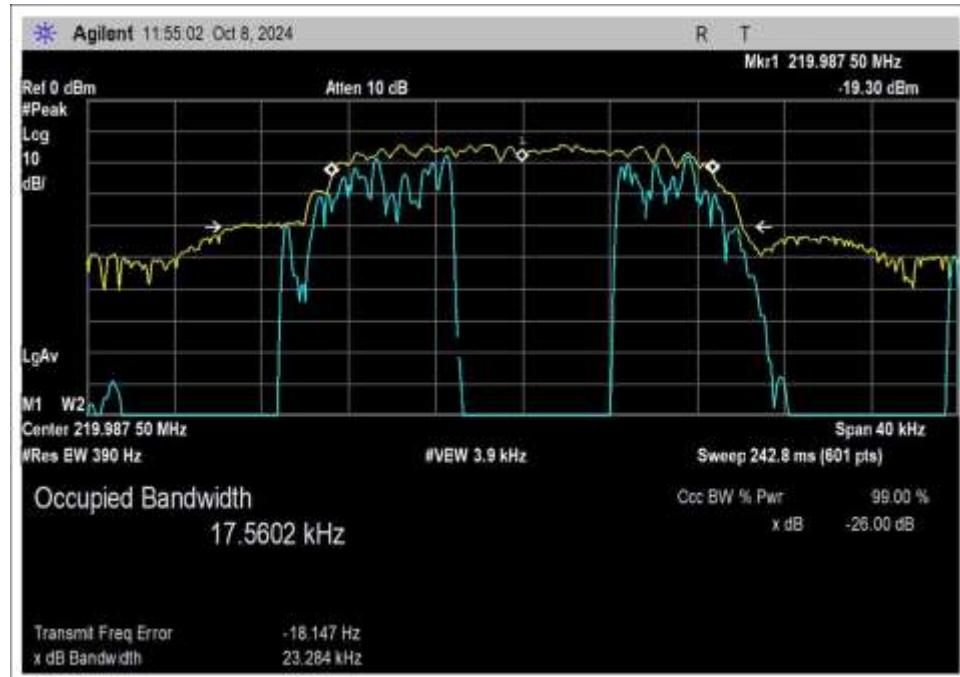

219.9875MHz, Pi/8-16

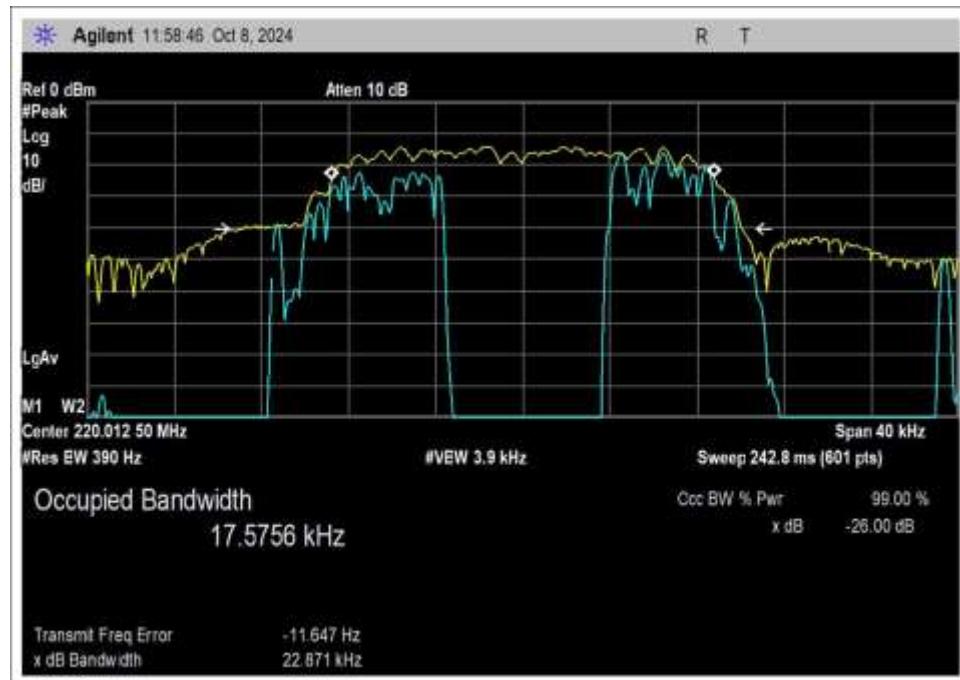

220.0125MHz, Pi/8-16

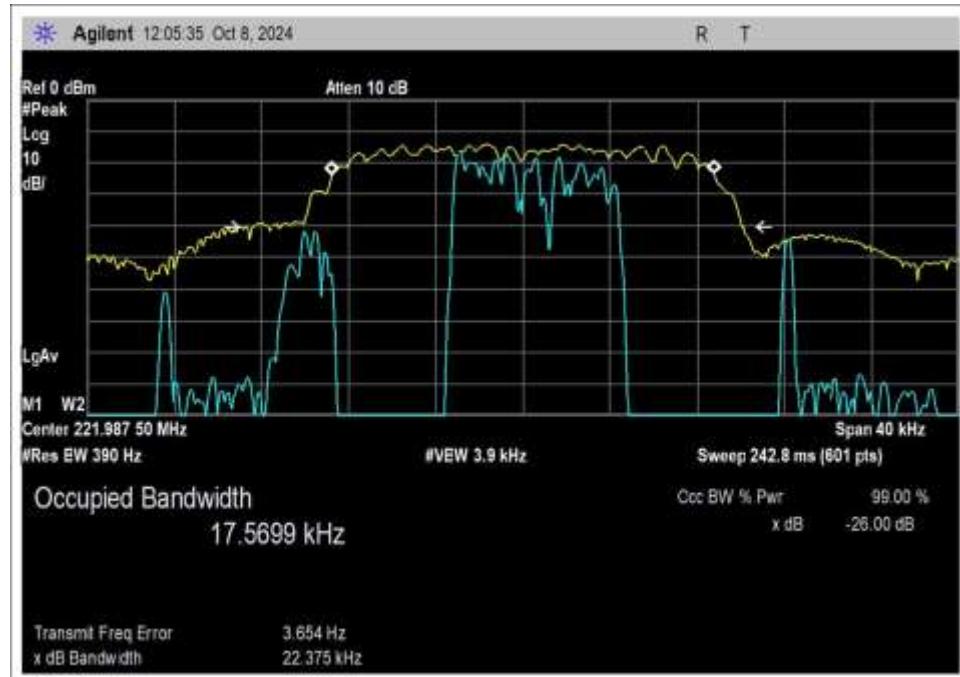

221.9875MHz, Pi/8-16

Test Setup Photo(s)



90.213 - Frequency Stability

Test Setup/Conditions

Test Location:	Bothell Lab Bench	Test Engineer:	C. Plumadore
Test Method:	ANSI C63.26 (2015)	Test Date(s):	10/9/2024-10/10/2024
Configuration:	2		
Test Setup:	<p>The unit is in a temperature chamber for temperature variation. The voltage is varied. The EUT's RF port is connected to a spectrum analyzer directly with appropriate attenuation. The bandwidth settings are low enough to resolve the center frequency of the emission. Once the EUT transmitter is turned on, it is transmitting continuously with its normal duty cycle, CW mode investigated.</p> <p>Per 90.213, the manufacturer declares the EUT is a fixed station, the limit in the table for frequencies falling in the band 216-220MHz is 1.0ppm, for band 220-222 MHz the limit is 0.1ppm.</p> <p>Modification #1 & 2 was in place for testing.</p>		

Environmental Conditions

Temperature (°C)	23.4	Relative Humidity (%):	38
------------------	------	------------------------	----

Test Equipment

Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	10/11/2023	10/11/2025
P05748	Attenuator	Pasternack	PE7004-20	2/26/2024	2/26/2026
02757	Temperature Chamber	Bemco	F100/350-8	12/8/2022	12/8/2024
C00194	30db Attenuator	Fairview Microwave	SA3N1007-30	9/26/2024	9/26/2026

Test Data Summary

Modulation: CW						
Temp (°C)	Voltage	Ch 1 (PPM)	Ch 96 (PPM)	Ch 97 (PPM)	Ch176 (PPM)	Results
-30	V _{Nom}	0.00000	0.00000	0.00000	0.00000	Pass
-20	V _{Nom}	0.01379	0.01364	0.01364	0.01351	
-10	V _{Nom}	0.00000	0.01364	0.01364	0.01351	
0	V _{Nom}	0.00460	0.00455	0.00455	0.00450	
10	V _{Nom}	0.00460	0.00455	0.00455	0.00450	
20	V _{Nom}	0.04595	0.04546	0.04545	0.04505	
30	V _{Nom}	0.03217	0.03182	0.03182	0.03153	
40	V _{Nom}	0.04136	0.04091	0.04091	0.04054	
50	V _{Nom}	0.06433	0.06364	0.06363	0.06307	
20	V _{Min}	0.04136	0.04091	0.04091	0.04054	
20	V _{Max}	0.04136	0.04091	0.04091	0.04054	
Maximum Deviation		0.06433	0.06364	0.06363	0.06307	

Parameter Definitions:

Measurements performed at input voltage according to manufacturer specification.

Parameter	Value
V _{Nom} :	48VDC
V _{Min} :	21VDC
V _{Max} :	61VDC

Test Setup Photo(s)



Test Setup, View 1



Test Setup, View 2

90.210 - Conducted Spurious Emissions Mask

Test Setup/Conditions											
Test Location:	Bothell Lab Bench	Test Engineer:	C. Plumadore								
Test Method:	ANSI C63.26 (2015)	Test Date(s):	9/27/2024								
Configuration:	1										
Test Setup:	<p>The EUT's RF port is connected to a spectrum analyzer directly with appropriate attenuation. The EUT is transmitting continuously with its normal duty cycle, full rate and half rate, pi/8 and pi/8-16 modulations investigated in separate datasheets.</p> <p>The emission mask was built with an RMS Average measurement of the fundamental. Conducted spurs was run on the 4 channels selected, mask data shown for Ch1,96,97 and Ch176.</p> <p>Outside of the span shown in the emission mask plots, the following bandwidths were used:</p> <table> <tr> <td>9kHz-150kHz:</td> <td>200Hz RBW</td> </tr> <tr> <td>150kHz-30MHz:</td> <td>9kHz RBW</td> </tr> <tr> <td>30-1000MHz:</td> <td>100kHz RBW</td> </tr> <tr> <td>1000MHz and above:</td> <td>1MHz RBW</td> </tr> </table> <p>Average values as indicated on datasheet are RMS.</p> <p>(1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;</p> <p>(2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and</p> <p>(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.</p> <p>Limit = Power – Required Attenuation = $10 \log P - (43 + 10\log P)$ = $10 \log P - 43 - 10\log P$ = -43 dBW = 0.00005W (0.05mW) = $10 \log 0.00005/0.001$ = -13dBm (94dBμV) at any power level conducted.</p> <p>Per the manufacturer, a 20kHz ABW for Full Rate, pi/8, and pi/8-16 and 11.25kHz ABW for Half Rate was used to build 90.210B masks accordingly, it will be up the licensee to ensure the mask applicability.</p> <p>Modification #1 & 2 was in place for testing.</p>			9kHz-150kHz:	200Hz RBW	150kHz-30MHz:	9kHz RBW	30-1000MHz:	100kHz RBW	1000MHz and above:	1MHz RBW
9kHz-150kHz:	200Hz RBW										
150kHz-30MHz:	9kHz RBW										
30-1000MHz:	100kHz RBW										
1000MHz and above:	1MHz RBW										

Environmental Conditions			
Temperature (°C)	22.1	Relative Humidity (%):	48.7

Test Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
Customer: **Meteorcomm LLC**
Specification: **47 CFR §90.210(b) Spurious Emissions**
Work Order #: **109225** Date: 10/8/2024
Test Type: **Conducted Emissions** Time: 14:52:16
Tested By: C. Plumadore Sequence#: 1
Software: EMITest 5.03.20 48VDC

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Frequency: 9kHz-2.5GHz
Test Method: ANSI 63.26
Modification #1 & 2 was in place for testing.


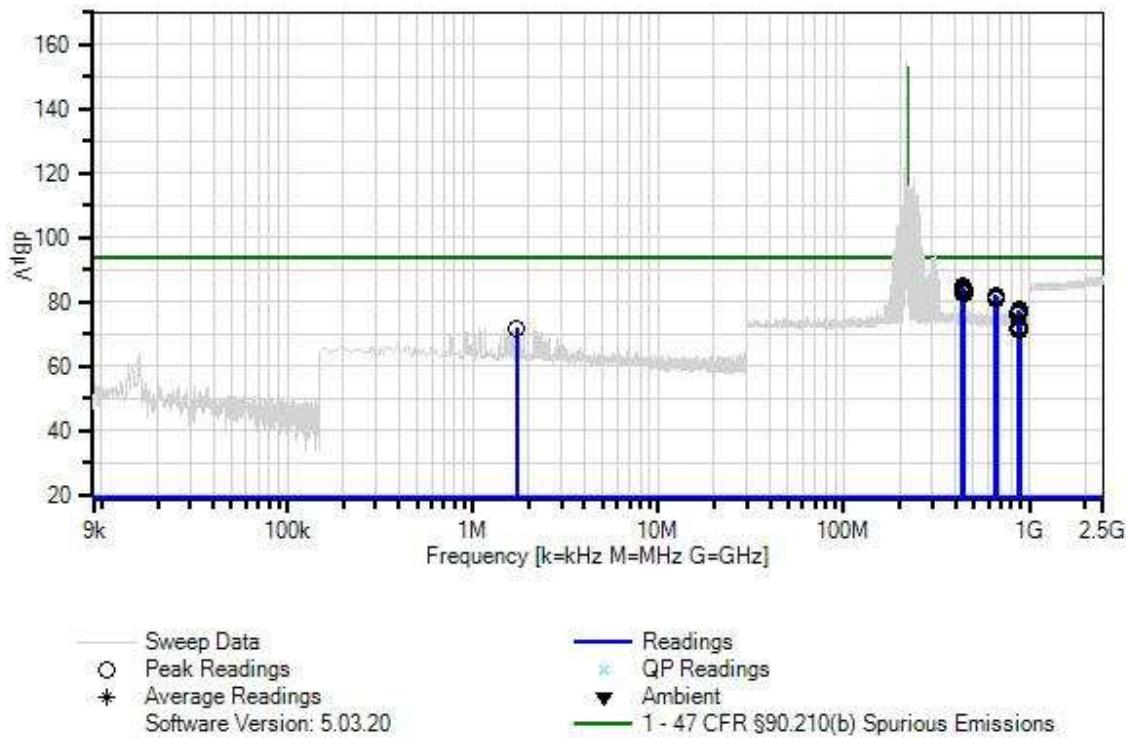
Meteorcomm LLC. WO#: 109225 Sequence#: 1 Date: 10/8/2024
 47 CFR §90.210(b) Spurious Emissions Test Lead: 48VDC RF port

Test Equipment:



ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05748	Attenuator	PE7004-20	2/26/2024	2/26/2026
	AN03807	Spectrum Analyzer	E4440A	10/10/2023	10/10/2025
T2	ANC00194	Attenuator	SA3N1007-30	9/26/2024	9/26/2026
T3	ANP06452	Cable	Heliax	2/8/2023	2/8/2025



Measurement Data:			Reading listed by margin.				Test Lead: RF port				
#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	435.218M	34.3	+20.0	+30.0	+0.5		+0.0	84.8	94.0	-9.2	RF po 217.6125 pi/8
2	435.199M	34.2	+20.0	+30.0	+0.5		+0.0	84.7	94.0	-9.3	RF po 217.6125Mhz pi/8-16
3	439.962M	33.7	+20.0	+30.0	+0.5		+0.0	84.2	94.0	-9.8	RF po 219.9875 pi/8-16
4	440.019M	33.5	+20.0	+30.0	+0.5		+0.0	84.0	94.0	-10.0	RF po 220.0125 pi/8
5	440.030M	33.4	+20.0	+30.0	+0.5		+0.0	83.9	94.0	-10.1	RF po 220.0125 pi/8-16
6	443.986M	33.3	+20.0	+30.0	+0.5		+0.0	83.8	94.0	-10.2	RF po 221.9875 pi/8-16
7	439.971M	33.1	+20.0	+30.0	+0.5		+0.0	83.6	94.0	-10.4	RF po 219.9875 pi/8
8	443.966M	33.1	+20.0	+30.0	+0.5		+0.0	83.6	94.0	-10.4	RF po 221.9875 pi/8
9	435.202M	33.1	+20.0	+30.0	+0.5		+0.0	83.6	94.0	-10.4	RF po 217.6125 full rate
10	435.224M	32.8	+20.0	+30.0	+0.5		+0.0	83.3	94.0	-10.7	RF po 217.6125 half rate
11	439.976M	32.4	+20.0	+30.0	+0.5		+0.0	82.9	94.0	-11.1	RF po 219.9875 full rate
12	439.981M	32.2	+20.0	+30.0	+0.5		+0.0	82.7	94.0	-11.3	RF po 219.9875MHz half rate
13	443.935M	32.1	+20.0	+30.0	+0.5		+0.0	82.6	94.0	-11.4	RF po 221.9875 full rate
14	443.978M	31.9	+20.0	+30.0	+0.5		+0.0	82.4	94.0	-11.6	RF po 221.9875 half rate
15	652.812M	31.4	+20.0	+30.0	+0.7		+0.0	82.1	94.0	-11.9	RF po 217.6125 full rate
16	659.962M	31.3	+20.0	+30.0	+0.7		+0.0	82.0	94.0	-12.0	RF po 219.9875 full rate
17	652.833M	31.2	+20.0	+30.0	+0.7		+0.0	81.9	94.0	-12.1	RF po 217.6125Mhz pi/8-16
18	652.816M	31.1	+20.0	+30.0	+0.7		+0.0	81.8	94.0	-12.2	RF po 217.6125 half rate
19	659.952M	31.0	+20.0	+30.0	+0.7		+0.0	81.7	94.0	-12.3	RF po 219.9875MHz half rate
20	652.840M	31.0	+20.0	+30.0	+0.7		+0.0	81.7	94.0	-12.3	RF po 217.6125 pi/8
21	665.976M	31.0	+20.0	+30.0	+0.7		+0.0	81.7	94.0	-12.3	RF po 221.9875 pi/8-16
22	660.019M	31.0	+20.0	+30.0	+0.7		+0.0	81.7	94.0	-12.3	RF po 220.0125 pi/8-16



23	665.969M	30.8	+20.0	+30.0	+0.7	+0.0	81.5	94.0	-12.5	RF po
								221.9875	half rate	
24	659.969M	30.8	+20.0	+30.0	+0.7	+0.0	81.5	94.0	-12.5	RF po
								219.9875	pi/8-16	
25	660.060M	30.8	+20.0	+30.0	+0.7	+0.0	81.5	94.0	-12.5	RF po
								220.0125	pi/8	
26	665.964M	30.5	+20.0	+30.0	+0.7	+0.0	81.2	94.0	-12.8	RF po
								221.9875	full rate	
27	659.952M	30.3	+20.0	+30.0	+0.7	+0.0	81.0	94.0	-13.0	RF po
								219.9875	pi/8	
28	665.961M	30.2	+20.0	+30.0	+0.7	+0.0	80.9	94.0	-13.1	RF po
								221.9875	pi/8	
29	879.886M	27.0	+20.0	+30.0	+0.8	+0.0	77.8	94.0	-16.2	RF po
								219.9875MHz	half rate	
30	887.904M	26.4	+20.0	+30.0	+0.8	+0.0	77.2	94.0	-16.8	RF po
								221.9875	half rate	
31	870.497M	25.9	+20.0	+30.0	+0.8	+0.0	76.7	94.0	-17.3	RF po
								217.6125	half rate	
32	879.926M	25.8	+20.0	+30.0	+0.8	+0.0	76.6	94.0	-17.4	RF po
								219.9875	full rate	
33	887.951M	25.8	+20.0	+30.0	+0.8	+0.0	76.6	94.0	-17.4	RF po
								221.9875	full rate	
34	870.434M	25.4	+20.0	+30.0	+0.8	+0.0	76.2	94.0	-17.8	RF po
								217.6125	full rate	
35	887.851M	21.6	+20.0	+30.0	+0.8	+0.0	72.4	94.0	-21.6	RF po
								221.9875	pi/8	
36	1.737M	21.8	+20.0	+29.9	+0.1	+0.0	71.8	94.0	-22.2	RF po
37	880.060M	21.0	+20.0	+30.0	+0.8	+0.0	71.8	94.0	-22.2	RF po
								220.0125	pi/8-16	
38	870.403M	20.9	+20.0	+30.0	+0.8	+0.0	71.7	94.0	-22.3	RF po
								217.6125Mhz	pi/8-16	
39	880.042M	20.8	+20.0	+30.0	+0.8	+0.0	71.6	94.0	-22.4	RF po
								219.9875	pi/8-16	
40	870.386M	20.7	+20.0	+30.0	+0.8	+0.0	71.5	94.0	-22.5	RF po
								217.6125	pi/8	
41	880.045M	20.7	+20.0	+30.0	+0.8	+0.0	71.5	94.0	-22.5	RF po
								219.9875	pi/8	
42	887.980M	20.7	+20.0	+30.0	+0.8	+0.0	71.5	94.0	-22.5	RF po
								221.9875	pi/8-16	
43	879.954M	20.6	+20.0	+30.0	+0.8	+0.0	71.4	94.0	-22.6	RF po
								220.0125	pi/8	

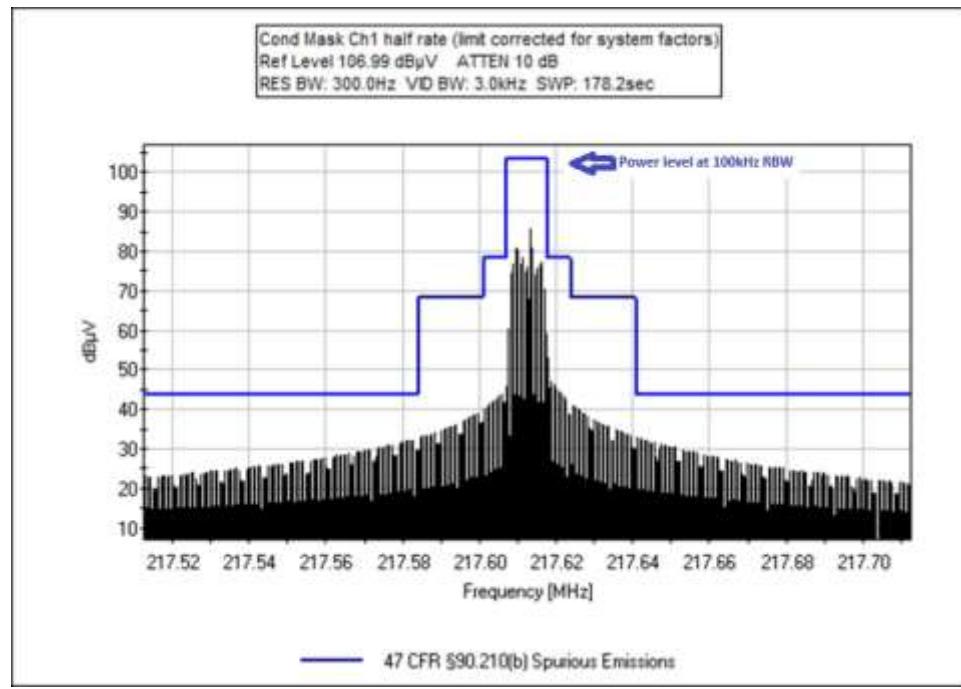
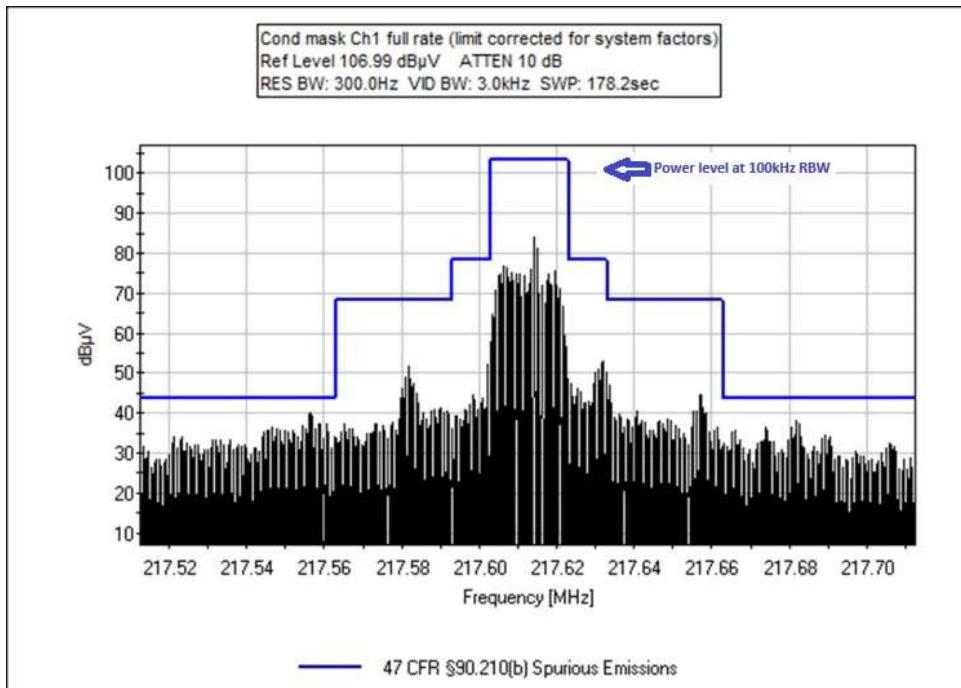
Test Plots





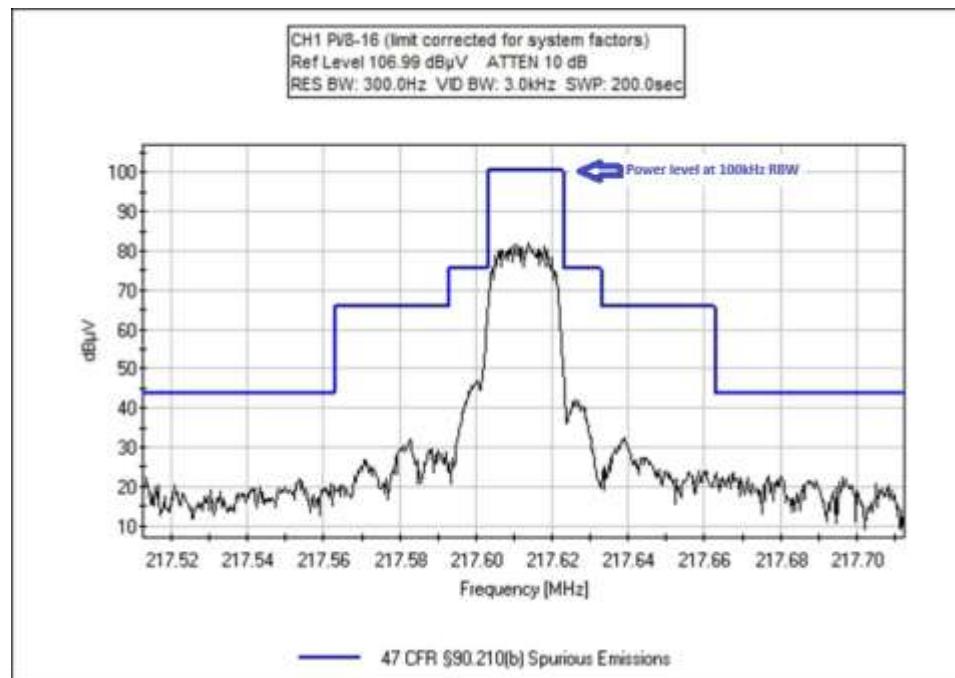
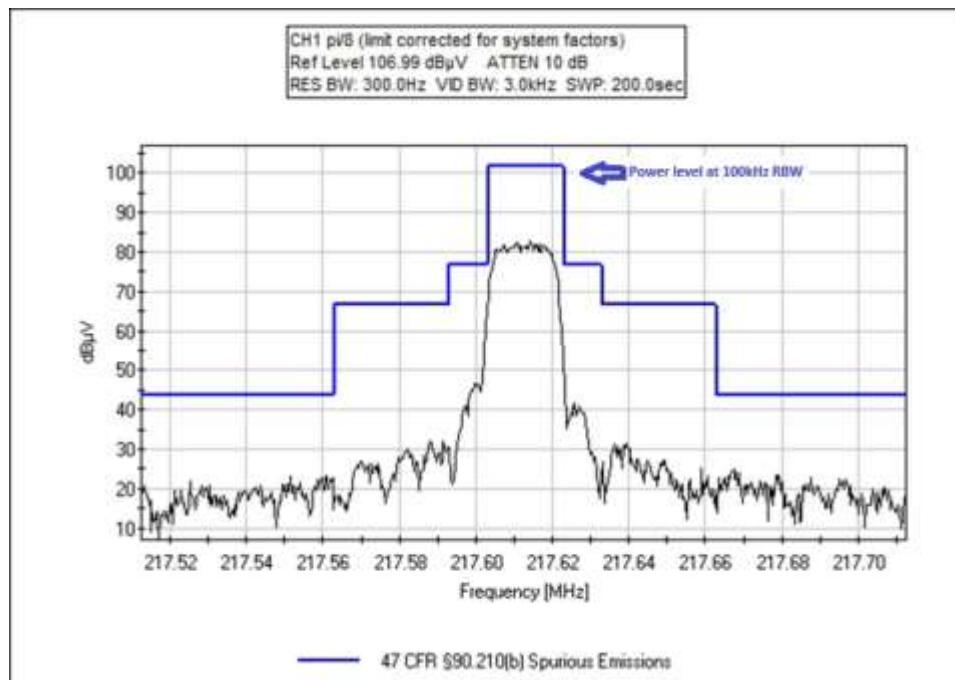


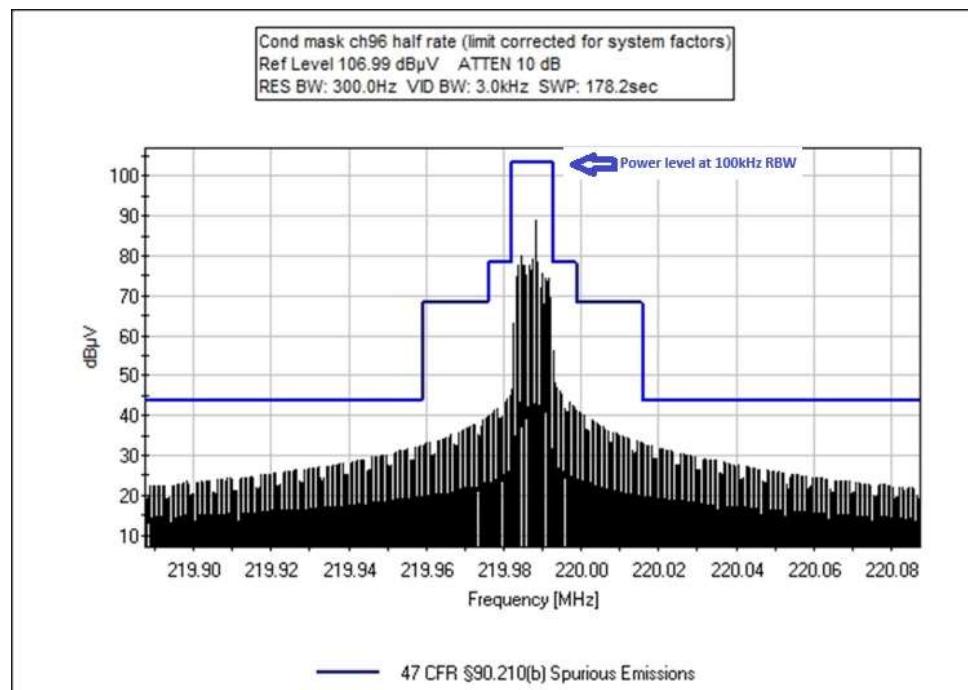
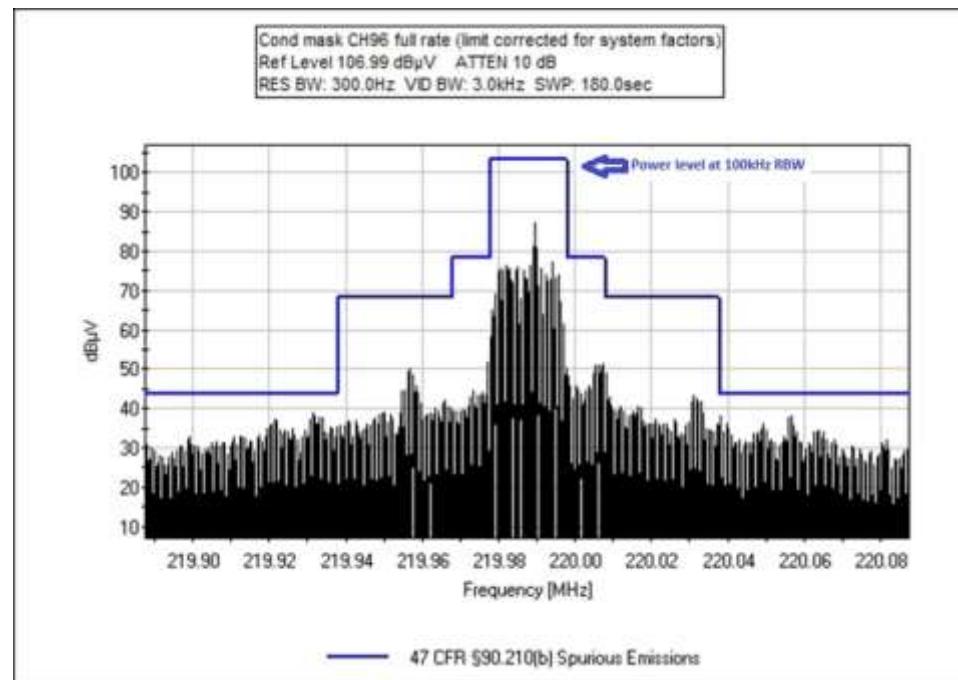


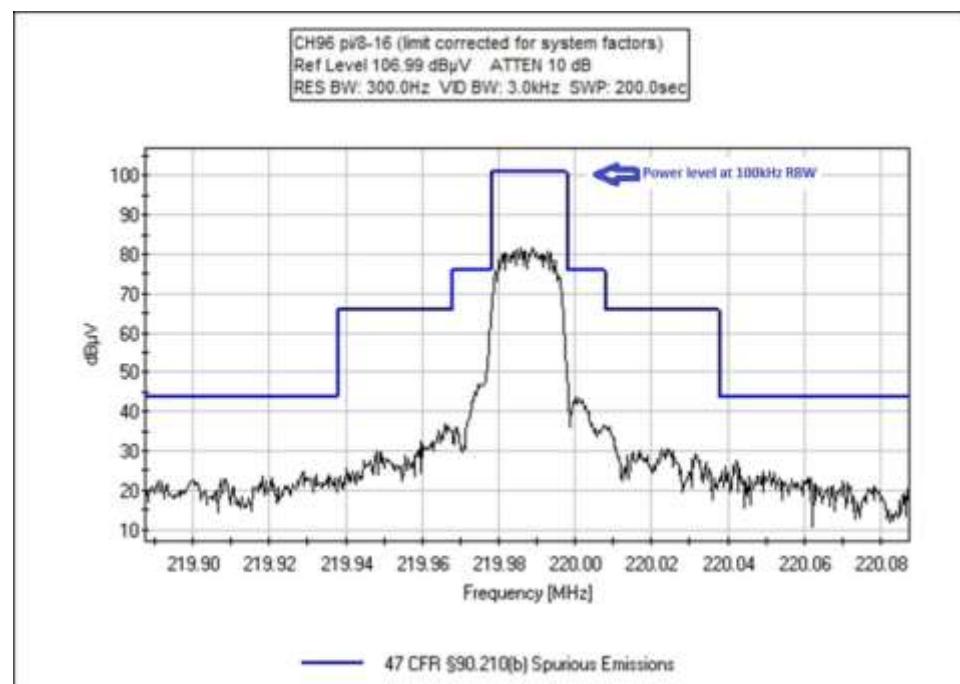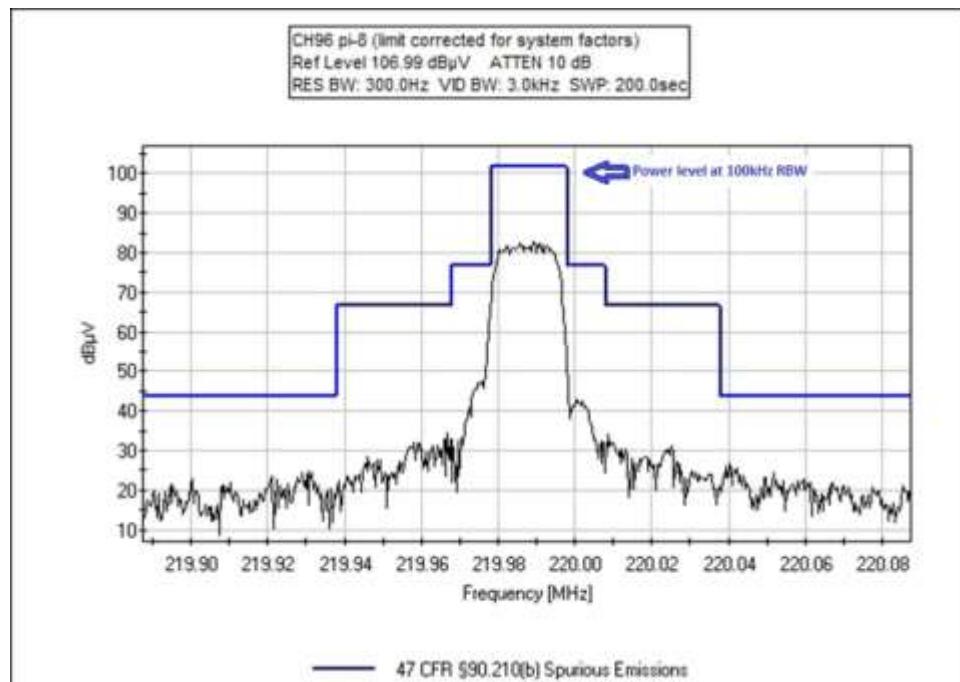

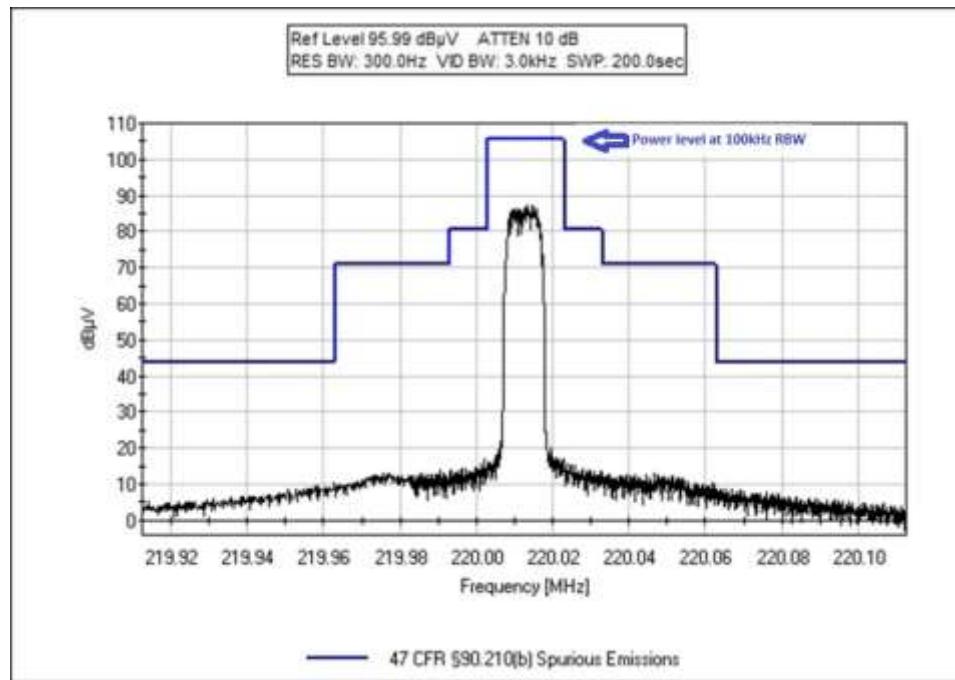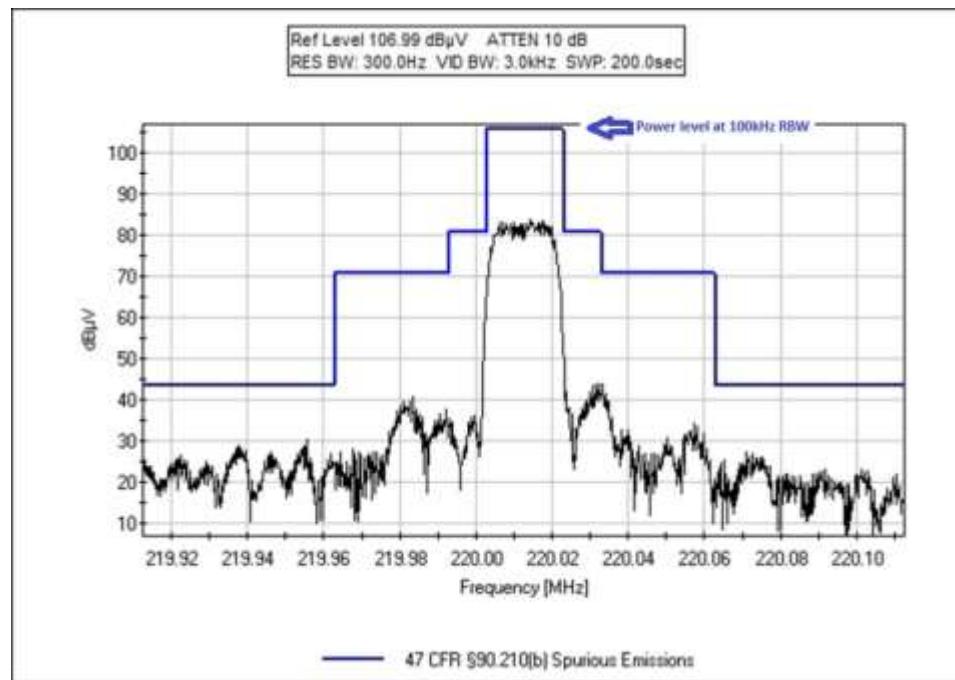

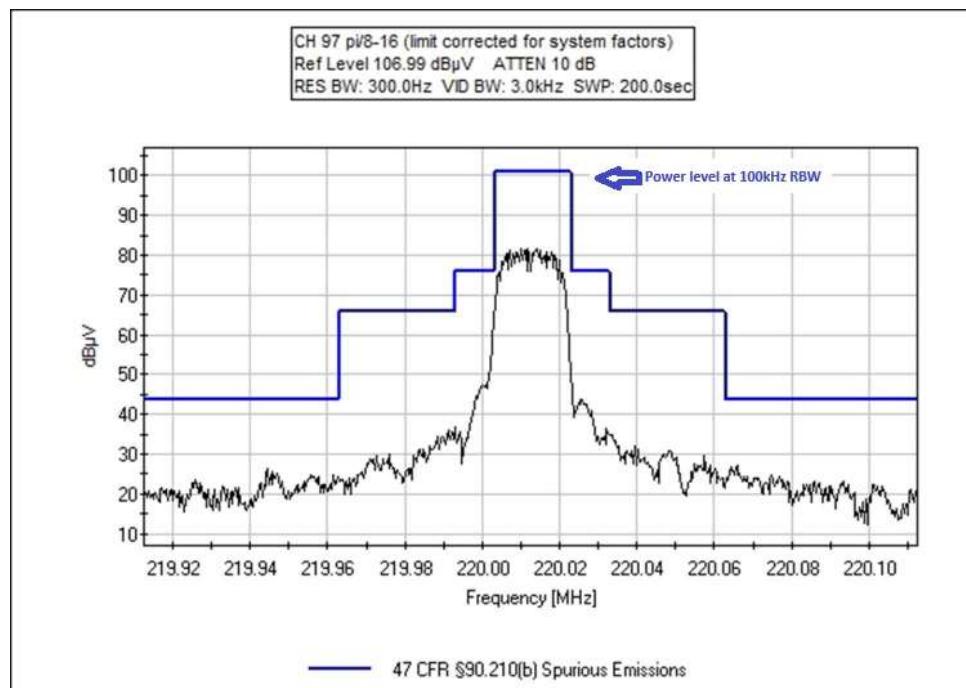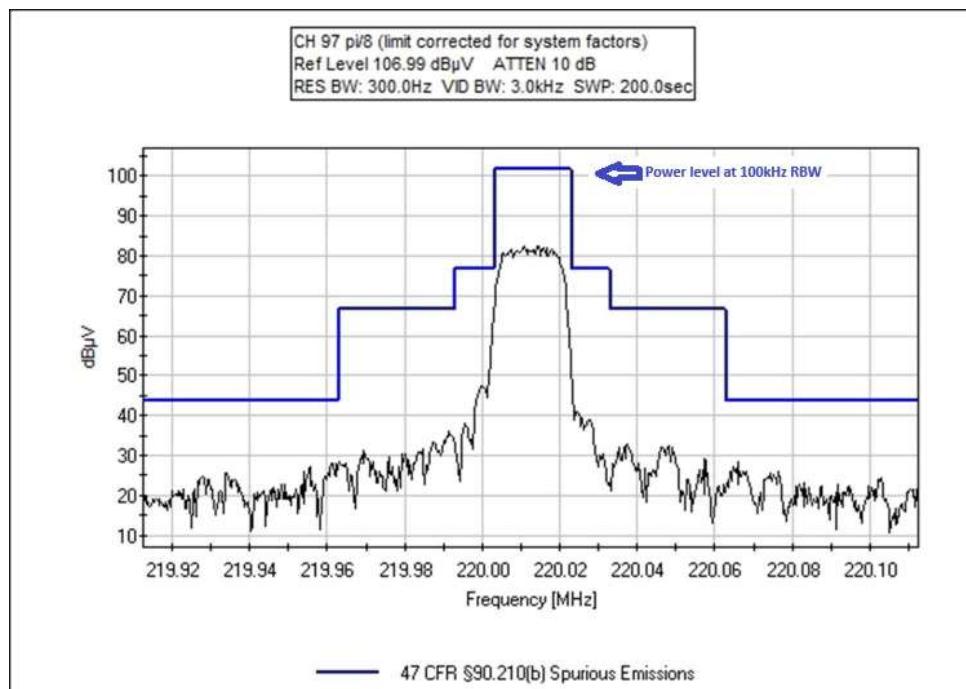

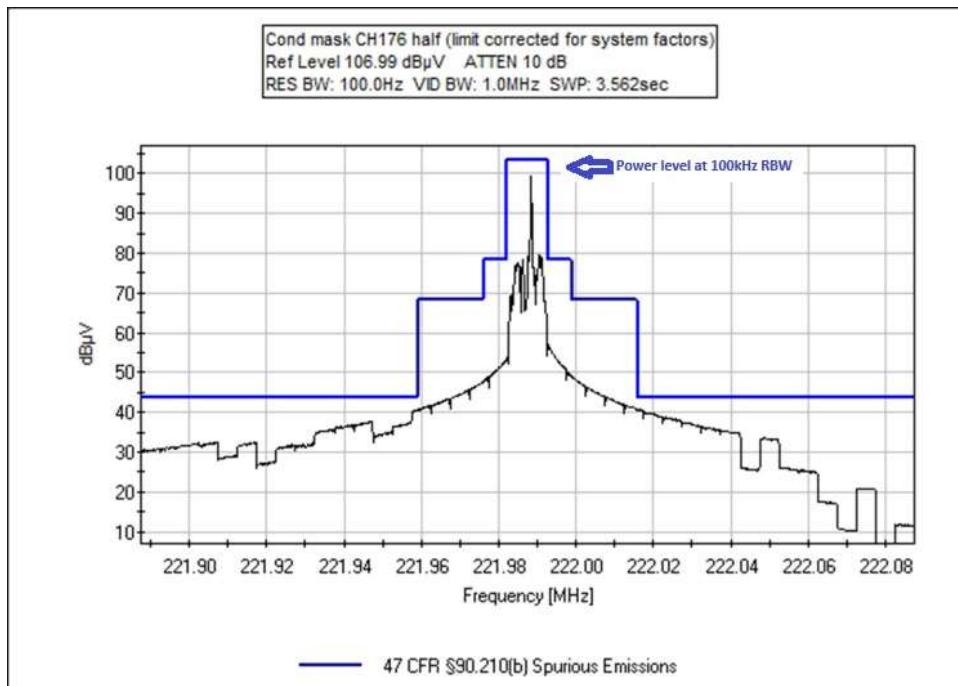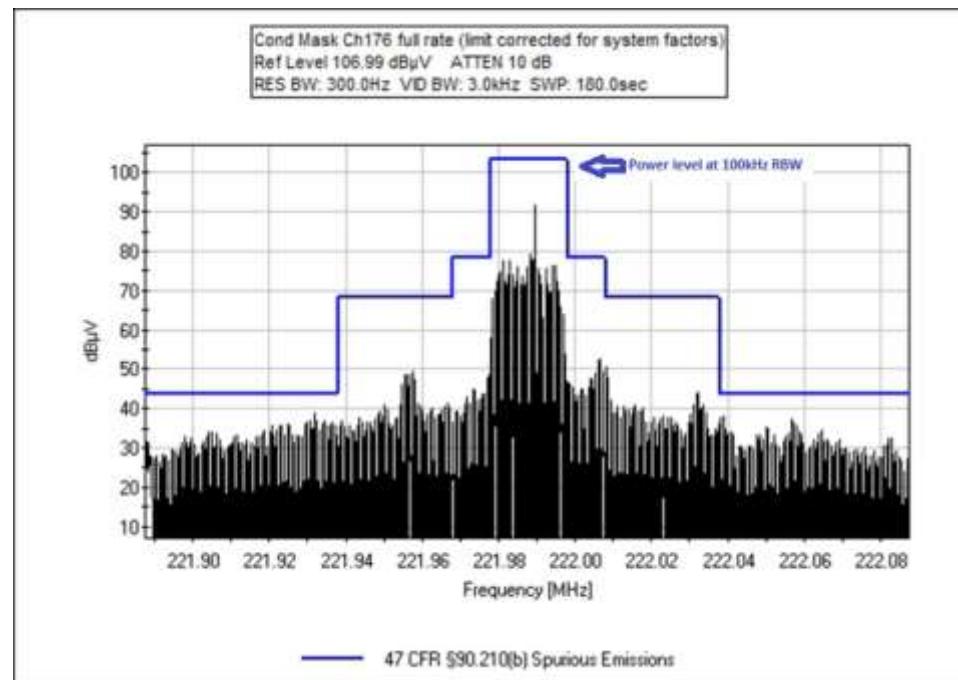

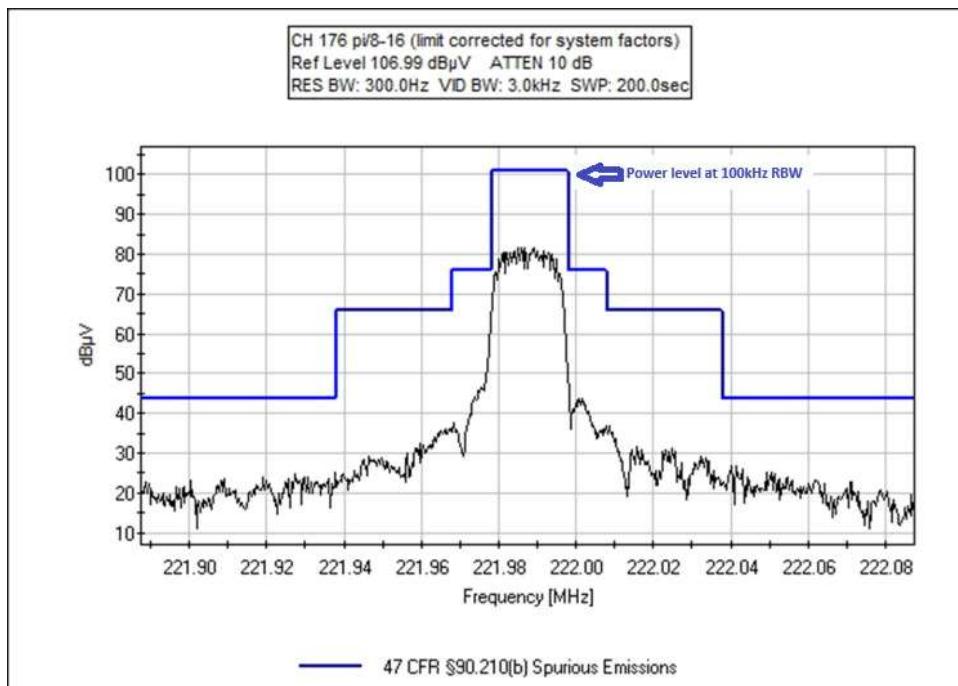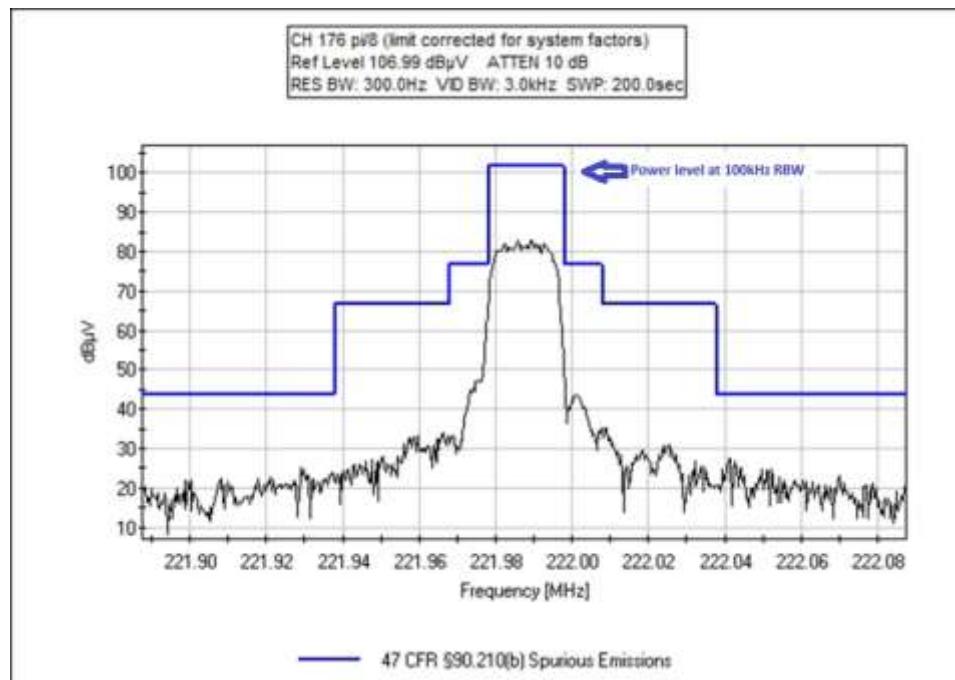

Test Setup Photo(s)



90.210 - Radiated Emissions

Test Setup/Conditions												
Test Location:	Bothell Lab C3	Test Engineer:	C. Plumadore									
Test Method:	ANSI C63.26 (2015)	Test Date(s):	9/23/2024-9/26/2024									
Configuration:	1											
Test Setup:	<p>The emission mask was built with an RMS Average measurement of the fundamental, with the lowest value selected from an investigation on Ch1, Ch96, Ch97, and Ch176 on both full and half rates. The mask was then converted in terms of field strength for a 3m measurement.</p> <p>Outside of the span shown in the emission mask plots, the following bandwidths were used:</p> <table> <tbody> <tr> <td>9kHz-150kHz:</td><td>200Hz RBW</td></tr> <tr> <td>150kHz-30MHz:</td><td>9kHz RBW</td></tr> <tr> <td>30-1000MHz:</td><td>100kHz RBW</td></tr> <tr> <td>1000MHz and above:</td><td>1MHz RBW</td></tr> </tbody> </table> <p>For the final tabular converted to dBm uses equation (d) from ANSI C63.26 (2015) 5.2.7:</p> <p>$EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.</p> <p>(1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;</p> <p>(2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and</p> <p>(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.</p> <p>Limit = Power – Required Attenuation = $10 \log P - (43 + 10\log P)$ = $10 \log P - 43 - 10\log P$ = -43 dBW = $0.00005 \text{ W (0.05mW)}$ = $10 \log 0.00005 / 0.001$ = $-13 \text{ dBm (94dB}\mu\text{V)}$ at any power level conducted.</p> <p>Converting -13dBm EIRP to field strength at 3 meters. $E (dB\mu V/m) = EIRP (dBm) - 20\log(D) + 104.8$ $E (dB\mu V/m) = -13 - 20\log(3) + 104.8$ $E (dB\mu V/m) = 82.2$</p> <p>Modification #1 & 2 was in place for testing. MOD#1 was in place for all intentional emissions except for radiated spurious emissions less than 1GHz, Half rate and full rate.</p>				9kHz-150kHz:	200Hz RBW	150kHz-30MHz:	9kHz RBW	30-1000MHz:	100kHz RBW	1000MHz and above:	1MHz RBW
9kHz-150kHz:	200Hz RBW											
150kHz-30MHz:	9kHz RBW											
30-1000MHz:	100kHz RBW											
1000MHz and above:	1MHz RBW											

Test Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
 Customer: **Meteorcomm LLC.**
 Specification: **47 CFR §80.211(f) Spurious Emissions**
 Work Order #: **109225** Date: 9/25/2024
 Test Type: **Radiated Scan** Time: 14:09:43
 Tested By: C. Plumadore Sequence#: 5
 Software: EMITest 5.03.20

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Full Rate & Half Rate
Test Environment Conditions:
Temperature: 22.1°C
Humidity: 48.7%
Pressure: 101.8 kPa
Frequency: 9k-2500MHz
Test set up:
Uploading, downloading files on ethernet
Receiving GNSS
Standby receiver
Test Method: ANSI 63.26
Modification #1 & 2 was in place for testing.
MOD#1 was in place for all intentional emissions except for radiated spurious emissions less than 1GHz, Half rate and full rate.

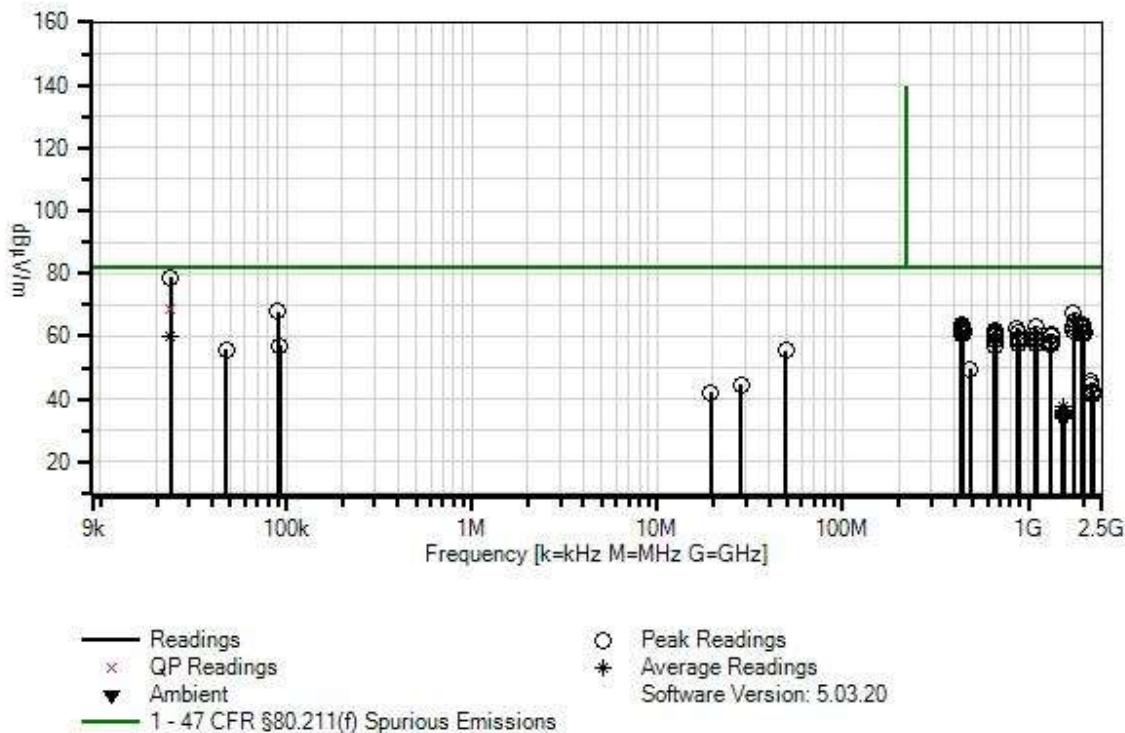Meteorcomm LLC. WO#: 109225 Sequence#: 5 Date: 9/25/2024
 47 CFR §80.211(f) Spurious Emissions Test Distance: 3 Meters Vert

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03824	Biconilog Antenna	3142E	5/9/2023	5/9/2025
T2	ANP05333	Cable	Heliax	8/8/2023	8/8/2025
T3	ANP05360	Cable	RG214	8/8/2023	8/8/2025
T4	ANP06011	Cable	Heliax	11/16/2023	11/16/2025
T5	AN02307	Preamp	8447D	8/9/2023	8/9/2025
T6	AN03803	Spectrum Analyzer	E4440A	2/12/2024	2/12/2026
T7	AN03540	Preamp	83017A	3/24/2023	3/24/2025
T8	AN02374ANSI	Horn Antenna	RGA-60	5/26/2023	5/26/2025
T9	ANP07504	Cable	CLU40-KMKM-02.00F	1/19/2024	1/19/2026
T10	AN00052	Loop Antenna	6502	4/19/2024	4/19/2026

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8	Table	dB μ V/m	dB μ V/m	dB	Ant
			MHz	dB μ V	dB	dB	dB				
1	23.805k	66.5	+0.0	+0.0	+0.0	+0.0	+0.0	78.8	82.2	-3.4	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+12.3							
2	23.805k	56.5	+0.0	+0.0	+0.0	+0.0	+0.0	68.8	82.2	-13.4	paral
	QP		+0.0	+0.0	+0.0	+0.0					
			+0.0	+12.3				221.9875 full rate			
3	90.357k	58.1	+0.0	+0.0	+0.0	+0.0	+0.0	67.8	82.2	-14.4	paral
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+9.7							
4	1740.990M	73.3	+0.0	+2.1	+0.0	+0.6	+0.0	67.7	82.2	-14.5	Vert
			+0.0	+0.0	-35.2	+26.5					
			+0.4	+0.0				217.6125 full rate			
5	1741.075M	73.3	+0.0	+2.1	+0.0	+0.6	+0.0	67.7	82.2	-14.5	Vert
			+0.0	+0.0	-35.2	+26.5					
			+0.4	+0.0				217.6125 half rate			
6	1775.665M	69.7	+0.0	+2.1	+0.0	+0.6	+0.0	64.7	82.2	-17.5	Vert
			+0.0	+0.0	-35.1	+27.0					
			+0.4	+0.0				221.9875 full rate			
7	1775.700M	68.6	+0.0	+2.1	+0.0	+0.6	+0.0	63.6	82.2	-18.6	Vert
			+0.0	+0.0	-35.1	+27.0					
			+0.4	+0.0				221.9875 half rate			
8	1958.708M	66.8	+0.0	+2.4	+0.0	+0.7	+0.0	63.5	82.2	-18.7	Vert
			+0.0	+0.0	-34.9	+28.1					
			+0.4	+0.0				217.6125 full rate			
9	435.220M	64.9	+23.1	+1.0	+1.7	+0.3	+0.0	63.4	82.2	-18.8	Horiz
			-27.6	+0.0	+0.0	+0.0					
			+0.0	+0.0				217.6125 half rate			
10	1088.048M	73.0	+0.0	+1.7	+0.0	+0.4	+0.0	63.1	82.2	-19.1	Vert
			+0.0	+0.0	-37.0	+24.7					
			+0.3	+0.0				217.6125 full rate			
11	1958.278M	66.4	+0.0	+2.4	+0.0	+0.7	+0.0	63.1	82.2	-19.1	Vert
			+0.0	+0.0	-34.9	+28.1					
			+0.4	+0.0				217.6125 half rate			
12	435.225M	64.5	+23.1	+1.0	+1.7	+0.3	+0.0	63.0	82.2	-19.2	Horiz
			-27.6	+0.0	+0.0	+0.0					
			+0.0	+0.0				217.6125Mhz full rate			
13	1760.055M	68.2	+0.0	+2.1	+0.0	+0.6	+0.0	63.0	82.2	-19.2	Vert
			+0.0	+0.0	-35.1	+26.8					
			+0.4	+0.0				220.0125 full rate			
14	1759.860M	68.2	+0.0	+2.1	+0.0	+0.6	+0.0	63.0	82.2	-19.2	Vert
			+0.0	+0.0	-35.1	+26.8					
			+0.4	+0.0				219.9875 full rate			
15	1760.130M	68.0	+0.0	+2.1	+0.0	+0.6	+0.0	62.8	82.2	-19.4	Vert
			+0.0	+0.0	-35.1	+26.8					
			+0.4	+0.0				220.0125 half rate			

16	870.435M	56.3	+29.0	+1.5	+2.5	+0.4	+0.0	62.5	82.2	-19.7	Horiz
			-27.2	+0.0	+0.0	+0.0				217.6125 half rate	
			+0.0	+0.0							
17	870.435M	56.2	+29.0	+1.5	+2.5	+0.4	+0.0	62.4	82.2	-19.8	Horiz
			-27.2	+0.0	+0.0	+0.0				217.6125Mhz full	
			+0.0	+0.0						rate	
18	1979.938M	65.7	+0.0	+2.4	+0.0	+0.7	+0.0	62.4	82.2	-19.8	Vert
			+0.0	+0.0	-34.9	+28.1				219.9875 full rate	
			+0.4	+0.0							
19	439.970M	63.8	+23.0	+1.0	+1.7	+0.3	+0.0	62.2	82.2	-20.0	Horiz
			-27.6	+0.0	+0.0	+0.0				219.9875 90% rate	
			+0.0	+0.0						full rate	
20	665.958M	58.2	+27.8	+1.3	+2.4	+0.3	+0.0	62.1	82.2	-20.1	Vert
			-27.9	+0.0	+0.0	+0.0				221.9875 full rate	
			+0.0	+0.0							
21	443.985M	63.6	+23.1	+1.0	+1.7	+0.3	+0.0	62.0	82.2	-20.2	Horiz
			-27.7	+0.0	+0.0	+0.0				221.9875 full rate	
			+0.0	+0.0							
22	440.035M	63.6	+23.0	+1.0	+1.7	+0.3	+0.0	62.0	82.2	-20.2	Horiz
			-27.6	+0.0	+0.0	+0.0				220.0125 full rate	
			+0.0	+0.0							
23	665.938M	58.1	+27.8	+1.3	+2.4	+0.3	+0.0	62.0	82.2	-20.2	Vert
			-27.9	+0.0	+0.0	+0.0				221.9875 half rate	
			+0.0	+0.0							
24	1759.975M	66.7	+0.0	+2.1	+0.0	+0.6	+0.0	61.5	82.2	-20.7	Vert
			+0.0	+0.0	-35.1	+26.8				219.9875 half rate	
			+0.4	+0.0							
25	879.955M	55.4	+28.9	+1.5	+2.5	+0.4	+0.0	61.5	82.2	-20.7	Horiz
			-27.2	+0.0	+0.0	+0.0				219.9875 half rate	
			+0.0	+0.0							
26	1980.398M	64.7	+0.0	+2.4	+0.0	+0.7	+0.0	61.5	82.2	-20.7	Vert
			+0.0	+0.0	-34.9	+28.2				220.0125 full rate	
			+0.4	+0.0							
27	440.025M	63.0	+23.0	+1.0	+1.7	+0.3	+0.0	61.4	82.2	-20.8	Horiz
			-27.6	+0.0	+0.0	+0.0				220.0125 half rate	
			+0.0	+0.0							
28	1997.868M	64.4	+0.0	+2.4	+0.0	+0.7	+0.0	61.2	82.2	-21.0	Vert
			+0.0	+0.0	-34.9	+28.2				221.9875 full rate	
			+0.4	+0.0							
29	443.955M	62.7	+23.1	+1.0	+1.7	+0.3	+0.0	61.1	82.2	-21.1	Horiz
			-27.7	+0.0	+0.0	+0.0				221.9875 half rate	
			+0.0	+0.0							
30	1997.902M	64.2	+0.0	+2.4	+0.0	+0.7	+0.0	61.0	82.2	-21.2	Vert
			+0.0	+0.0	-34.9	+28.2				221.9875 half rate	
			+0.4	+0.0							
31	1979.932M	64.3	+0.0	+2.4	+0.0	+0.7	+0.0	61.0	82.2	-21.2	Vert
			+0.0	+0.0	-34.9	+28.1				219.9875 half rate	
			+0.4	+0.0							
32	880.065M	54.9	+28.9	+1.5	+2.5	+0.4	+0.0	61.0	82.2	-21.2	Horiz
			-27.2	+0.0	+0.0	+0.0				220.0125 full rate	
			+0.0	+0.0							

33	880.040M	54.9	+28.9	+1.5	+2.5	+0.4	+0.0	61.0	82.2	-21.2	Horiz
			-27.2	+0.0	+0.0	+0.0			220.0125	half rate	
			+0.0	+0.0							
34	659.962M	57.1	+27.7	+1.3	+2.4	+0.3	+0.0	60.9	82.2	-21.3	Horiz
			-27.9	+0.0	+0.0	+0.0			219.9875	half rate	
			+0.0	+0.0							
35	439.975M	62.4	+23.0	+1.0	+1.7	+0.3	+0.0	60.8	82.2	-21.4	Horiz
			-27.6	+0.0	+0.0	+0.0			219.9875	half rate	
			+0.0	+0.0							
36	1331.730M	68.7	+0.0	+1.8	+0.0	+0.5	+0.0	60.7	82.2	-21.5	Vert
			+0.0	+0.0	-36.0	+25.4			221.9875	full rate	
			+0.3	+0.0							
37	1088.452M	70.5	+0.0	+1.7	+0.0	+0.4	+0.0	60.6	82.2	-21.6	Vert
			+0.0	+0.0	-37.0	+24.7			217.6125	half rate	
			+0.3	+0.0							
38	1109.978M	70.2	+0.0	+1.7	+0.0	+0.4	+0.0	60.5	82.2	-21.7	Vert
			+0.0	+0.0	-36.9	+24.8			221.9875	half rate	
			+0.3	+0.0							
39	1109.958M	70.2	+0.0	+1.7	+0.0	+0.4	+0.0	60.5	82.2	-21.7	Vert
			+0.0	+0.0	-36.9	+24.8			221.9875	full rate	
			+0.3	+0.0							
40	1980.128M	63.6	+0.0	+2.4	+0.0	+0.7	+0.0	60.4	82.2	-21.8	Vert
			+0.0	+0.0	-34.9	+28.2			220.0125	half rate	
			+0.4	+0.0							
41	660.072M	56.5	+27.7	+1.3	+2.4	+0.3	+0.0	60.3	82.2	-21.9	Horiz
			-27.9	+0.0	+0.0	+0.0			220.0125	half rate	
			+0.0	+0.0							
42	1331.850M	68.2	+0.0	+1.8	+0.0	+0.5	+0.0	60.2	82.2	-22.0	Vert
			+0.0	+0.0	-36.0	+25.4			221.9875	half rate	
			+0.3	+0.0							
43	660.018M	56.2	+27.7	+1.3	+2.4	+0.3	+0.0	60.0	82.2	-22.2	Horiz
			-27.9	+0.0	+0.0	+0.0			220.0125	full rate	
			+0.0	+0.0							
44	659.998M	56.0	+27.7	+1.3	+2.4	+0.3	+0.0	59.8	82.2	-22.4	Horiz
			-27.9	+0.0	+0.0	+0.0			219.9875	full rate	
			+0.0	+0.0							
45	23.805k	47.4	+0.0	+0.0	+0.0	+0.0	+0.0	59.7	82.2	-22.5	paral
Ave			+0.0	+0.0	+0.0	+0.0			221.9875	full rate	
			+0.0	+12.3							
^	23.805k	72.3	+0.0	+0.0	+0.0	+0.0	+0.0	84.6	82.2	+2.4	paral
			+0.0	+0.0	+0.0	+0.0			221.9875	full rate	
			+0.0	+12.3							
^	24.087k	63.0	+0.0	+0.0	+0.0	+0.0	+0.0	75.3	82.2	-6.9	paral
			+0.0	+0.0	+0.0	+0.0			217.6125	half rate	
			+0.0	+12.3							
^	23.805k	60.4	+0.0	+0.0	+0.0	+0.0	+0.0	72.7	82.2	-9.5	paral
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+12.3							
49	1100.218M	69.0	+0.0	+1.7	+0.0	+0.4	+0.0	59.2	82.2	-23.0	Vert
			+0.0	+0.0	-36.9	+24.7			220.0125	full rate	
			+0.3	+0.0							

50	887.950M	53.0	+28.9	+1.5	+2.5	+0.4	+0.0	59.1	82.2	-23.1	Horiz
			-27.2	+0.0	+0.0	+0.0				221.9875	half rate
			+0.0	+0.0							
51	1100.008M	68.8	+0.0	+1.7	+0.0	+0.4	+0.0	59.0	82.2	-23.2	Vert
			+0.0	+0.0	-36.9	+24.7				219.9875	half rate
			+0.3	+0.0							
52	652.842M	55.1	+27.6	+1.3	+2.4	+0.3	+0.0	58.8	82.2	-23.4	Horiz
			-27.9	+0.0	+0.0	+0.0				217.6125	half rate
			+0.0	+0.0							
53	887.965M	52.6	+28.9	+1.5	+2.5	+0.4	+0.0	58.7	82.2	-23.5	Horiz
			-27.2	+0.0	+0.0	+0.0				221.9875	full rate
			+0.0	+0.0							
54	1099.858M	68.4	+0.0	+1.7	+0.0	+0.4	+0.0	58.6	82.2	-23.6	Vert
			+0.0	+0.0	-36.9	+24.7				220.0125	half rate
			+0.3	+0.0							
55	1305.620M	66.5	+0.0	+1.8	+0.0	+0.5	+0.0	58.4	82.2	-23.8	Vert
			+0.0	+0.0	-36.1	+25.4				217.6125	full rate
			+0.3	+0.0							
56	1319.980M	65.9	+0.0	+1.8	+0.0	+0.5	+0.0	57.9	82.2	-24.3	Vert
			+0.0	+0.0	-36.0	+25.4				219.9875	half rate
			+0.3	+0.0							
57	1320.150M	65.8	+0.0	+1.8	+0.0	+0.5	+0.0	57.8	82.2	-24.4	Vert
			+0.0	+0.0	-36.0	+25.4				220.0125	full rate
			+0.3	+0.0							
58	1319.950M	65.8	+0.0	+1.8	+0.0	+0.5	+0.0	57.8	82.2	-24.4	Vert
			+0.0	+0.0	-36.0	+25.4				219.9875	full rate
			+0.3	+0.0							
59	1320.150M	65.7	+0.0	+1.8	+0.0	+0.5	+0.0	57.7	82.2	-24.5	Vert
			+0.0	+0.0	-36.0	+25.4				220.0125	half rate
			+0.3	+0.0							
60	1099.948M	67.3	+0.0	+1.7	+0.0	+0.4	+0.0	57.5	82.2	-24.7	Vert
			+0.0	+0.0	-36.9	+24.7				219.9875	full rate
			+0.3	+0.0							
61	1305.615M	65.5	+0.0	+1.8	+0.0	+0.5	+0.0	57.4	82.2	-24.8	Vert
			+0.0	+0.0	-36.1	+25.4				217.6125	half rate
			+0.3	+0.0							
62	879.950M	51.2	+28.9	+1.5	+2.5	+0.4	+0.0	57.3	82.2	-24.9	Horiz
			-27.2	+0.0	+0.0	+0.0				219.9875	full rate
			+0.0	+0.0							
63	652.812M	53.4	+27.6	+1.3	+2.4	+0.3	+0.0	57.1	82.2	-25.1	Horiz
			-27.9	+0.0	+0.0	+0.0				217.6125Mhz	full rate
			+0.0	+0.0							
64	91.908k	47.3	+0.0	+0.0	+0.0	+0.0	+0.0	57.0	82.2	-25.2	perp
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+9.7							
65	47.775k	45.5	+0.0	+0.0	+0.0	+0.0	+0.0	55.8	82.2	-26.4	perp
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+10.3							
66	49.100M	69.4	+12.7	+0.3	+0.5	+0.1	+0.0	55.3	82.2	-26.9	Vert
			-27.7	+0.0	+0.0	+0.0				217.6125Mhz	full rate
			+0.0	+0.0							

67	487.100M	50.0	+24.2	+1.1	+1.9	+0.3	+0.0	49.6	82.2	-32.6	Vert
			-27.9	+0.0	+0.0	+0.0			217.6125Mhz full		
			+0.0	+0.0					rate		
68	2176.060M	48.8	+0.0	+2.4	+0.0	+0.7	+0.0	45.5	82.2	-36.7	Vert
			+0.0	+0.0	-34.8	+28.0			217.6125 full rate		
69	28.239M	37.5	+0.0	+0.3	+0.0	+0.0	+0.0	44.5	82.2	-37.7	perp
			+0.0	+0.0	+0.0	+0.0					
70	2176.005M	47.6	+0.0	+2.4	+0.0	+0.7	+0.0	44.3	82.2	-37.9	Vert
			+0.0	+0.0	-34.8	+28.0			217.6125 half rate		
71	2220.130M	45.8	+0.0	+2.4	+0.0	+0.7	+0.0	42.8	82.2	-39.4	Vert
			+0.0	+0.0	-34.7	+28.2			221.9875 half rate		
72	2219.740M	45.8	+0.0	+2.4	+0.0	+0.7	+0.0	42.7	82.2	-39.5	Vert
			+0.0	+0.0	-34.7	+28.1			221.9875 full rate		
73	2200.305M	45.6	+0.0	+2.4	+0.0	+0.7	+0.0	42.5	82.2	-39.7	Vert
			+0.0	+0.0	-34.7	+28.1			220.0125 half rate		
74	2200.015M	45.3	+0.0	+2.4	+0.0	+0.7	+0.0	42.2	82.2	-40.0	Vert
			+0.0	+0.0	-34.7	+28.1			220.0125 full rate		
75	19.314M	33.6	+0.0	+0.2	+0.0	+0.0	+0.0	42.0	82.2	-40.2	perp
			+0.0	+0.0	+0.0	+0.0					
76	2199.950M	44.5	+0.0	+2.4	+0.0	+0.7	+0.0	41.4	82.2	-40.8	Vert
			+0.0	+0.0	-34.7	+28.1			219.9875 full rate		
77	1553.913M	44.6	+0.0	+1.9	+0.0	+0.5	+0.0	37.3	82.2	-44.9	Vert
Ave			+0.0	+0.0	-35.5	+25.4			221.9875 half rate		
			+0.4	+0.0							
78	1553.872M	43.6	+0.0	+1.9	+0.0	+0.5	+0.0	36.3	82.2	-45.9	Vert
Ave			+0.0	+0.0	-35.5	+25.4			221.9875 full rate		
			+0.4	+0.0							
^	1553.872M	79.2	+0.0	+1.9	+0.0	+0.5	+0.0	71.9	82.2	-10.3	Vert
			+0.0	+0.0	-35.5	+25.4			221.9875 full rate		
			+0.4	+0.0							
^	1553.913M	79.0	+0.0	+1.9	+0.0	+0.5	+0.0	71.7	82.2	-10.5	Vert
			+0.0	+0.0	-35.5	+25.4			221.9875 half rate		
			+0.4	+0.0							
81	1540.070M	43.0	+0.0	+1.9	+0.0	+0.5	+0.0	35.7	82.2	-46.5	Vert
Ave			+0.0	+0.0	-35.5	+25.4					
			+0.4	+0.0							

82	1523.292M	43.0	+0.0	+1.9	+0.0	+0.5	+0.0	35.7	82.2	-46.5	Vert
	Ave		+0.0	+0.0	-35.5	+25.4			217.6125	half rate	
			+0.4	+0.0							
83	1539.858M	42.5	+0.0	+1.9	+0.0	+0.5	+0.0	35.2	82.2	-47.0	Vert
	Ave		+0.0	+0.0	-35.5	+25.4			219.9875	half rate	
			+0.4	+0.0							
^	1539.858M	78.4	+0.0	+1.9	+0.0	+0.5	+0.0	71.1	82.2	-11.1	Vert
			+0.0	+0.0	-35.5	+25.4			219.9875	half rate	
			+0.4	+0.0							
85	1540.068M	42.3	+0.0	+1.9	+0.0	+0.5	+0.0	35.0	82.2	-47.2	Vert
	Ave		+0.0	+0.0	-35.5	+25.4			220.0125	half rate	
			+0.4	+0.0							
86	1540.042M	41.7	+0.0	+1.9	+0.0	+0.5	+0.0	34.4	82.2	-47.8	Vert
	Ave		+0.0	+0.0	-35.5	+25.4			219.9875	full rate	
			+0.4	+0.0							
^	1540.042M	79.7	+0.0	+1.9	+0.0	+0.5	+0.0	72.4	82.2	-9.8	Vert
			+0.0	+0.0	-35.5	+25.4			219.9875	full rate	
			+0.4	+0.0							
^	1540.068M	78.5	+0.0	+1.9	+0.0	+0.5	+0.0	71.2	82.2	-11.0	Vert
			+0.0	+0.0	-35.5	+25.4			220.0125	full rate	
			+0.4	+0.0							
^	1540.070M	78.3	+0.0	+1.9	+0.0	+0.5	+0.0	71.0	82.2	-11.2	Vert
			+0.0	+0.0	-35.5	+25.4			220.0125	half rate	
			+0.4	+0.0							
^	1540.068M	68.8	+0.0	+1.9	+0.0	+0.5	+0.0	61.5	82.2	-20.7	Vert
			+0.0	+0.0	-35.5	+25.4			220.0125	full rate	
			+0.4	+0.0							
91	1523.243M	41.1	+0.0	+1.9	+0.0	+0.5	+0.0	33.8	82.2	-48.4	Vert
	Ave		+0.0	+0.0	-35.5	+25.4			217.6125	full rate	
			+0.4	+0.0							
^	1523.292M	79.3	+0.0	+1.9	+0.0	+0.5	+0.0	72.0	82.2	-10.2	Vert
			+0.0	+0.0	-35.5	+25.4			217.6125	half rate	
			+0.4	+0.0							
^	1523.243M	78.6	+0.0	+1.9	+0.0	+0.5	+0.0	71.3	82.2	-10.9	Vert
			+0.0	+0.0	-35.5	+25.4			217.6125	full rate	
			+0.4	+0.0							



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
Customer: **Meteorcomm LLC.**
Specification: **47 CFR §80.211(f) Spurious Emissions**
Work Order #: **109225** Date: 10/8/2024
Test Type: **Radiated Scan** Time: 09:40:22
Tested By: C. Plumadore Sequence#: 31
Software: EMITest 5.03.20

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Pi/8 & Pi/8-16
Test Environment Conditions:
Temperature: 22.1°C
Humidity: 48.7%
Pressure: 101.8 kPa
Frequency: 9kHz-2.5GHz
Test set up:
Uploading, downloading files on ethernet
Receiving GNSS
Test Method: ANSI 63.26
Modification #1 & 2 was in place for testing.
MOD#1 was in place for all intentional emissions except for radiated spurious emissions less than 1GHz, Half rate and full rate..

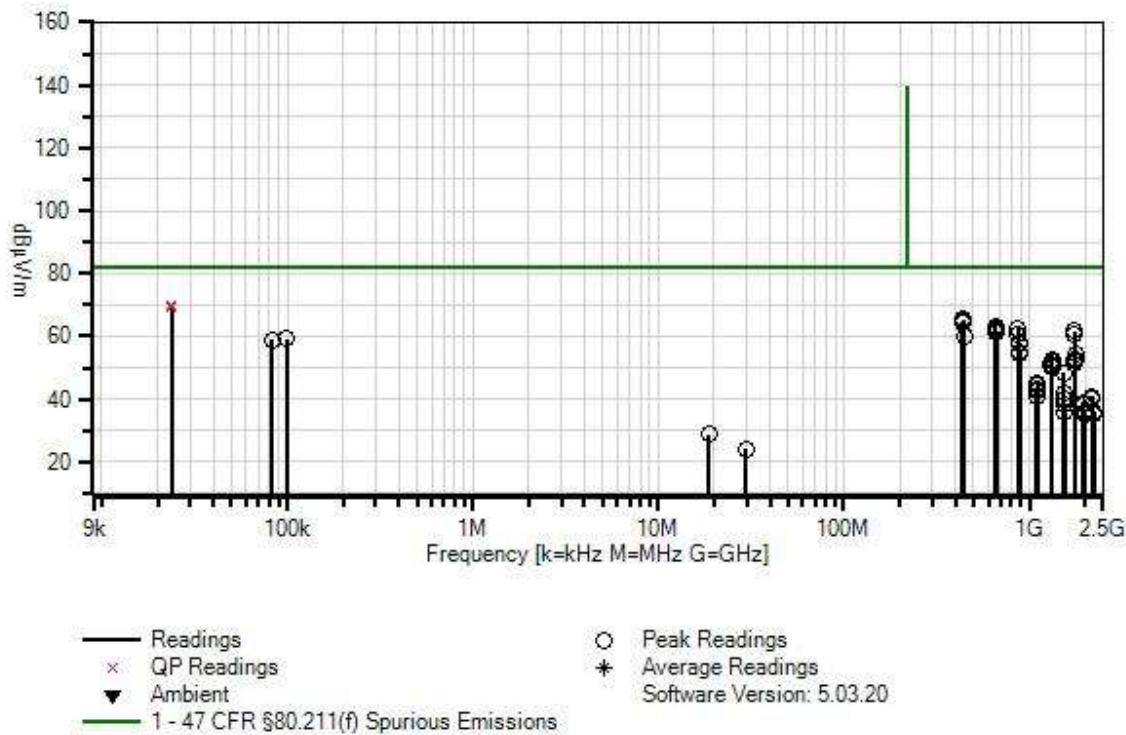Meteorcomm LLC. WO#: 109225 Sequence#: 31 Date: 10/8/2024
 47 CFR §80.211(f) Spurious Emissions Test Distance: 3 Meters parallel

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03824	Biconilog Antenna	3142E	5/9/2023	5/9/2025
T2	ANP05333	Cable	Heliax	8/8/2023	8/8/2025
T3	ANP05360	Cable	RG214	8/8/2023	8/8/2025
T4	ANP06011	Cable	Heliax	11/16/2023	11/16/2025
T5	AN02307	Preamp	8447D	8/9/2023	8/9/2025
	AN03803	Spectrum Analyzer	E4440A	2/12/2024	2/12/2026
T6	AN03540	Preamp	83017A	3/24/2023	3/24/2025
T7	AN02374ANSI	Horn Antenna	RGA-60	5/26/2023	5/26/2025
T8	ANP06515	Cable	Heliax	2/28/2024	2/28/2026
T9	ANP07504	Cable	CLU40-KMKM-02.00F	1/19/2024	1/19/2026
T10	AN00052	Loop Antenna	6502	4/19/2024	4/19/2026

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8	Table	dB μ V/m	dB μ V/m	dB	Ant
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	23.946k	57.3	+0.0	+0.0	+0.0	+0.0	+0.0	69.6	82.2	-12.6	paral
	QP		+0.0	+0.0	+0.0	+0.0			217.6125MHz pi/8-		
			+0.0	+12.3					16		
2	23.805k	56.7	+0.0	+0.0	+0.0	+0.0	+0.0	69.0	82.2	-13.2	paral
	QP		+0.0	+0.0	+0.0	+0.0			217.6125MHz pi/8		
			+0.0	+12.3							
^	23.805k	67.8	+0.0	+0.0	+0.0	+0.0	+0.0	80.1	82.2	-2.1	paral
			+0.0	+0.0	+0.0	+0.0			217.6125MHz pi/8		
			+0.0	+12.3							
^	23.946k	66.5	+0.0	+0.0	+0.0	+0.0	+0.0	78.8	82.2	-3.4	paral
			+0.0	+0.0	+0.0	+0.0			217.6125MHz pi/8-		
			+0.0	+12.3					16		
^	23.946k	65.1	+0.0	+0.0	+0.0	+0.0	+0.0	77.4	82.2	-4.8	paral
			+0.0	+0.0	+0.0	+0.0					
^	23.664k	55.5	+0.0	+0.0	+0.0	+0.0	+0.0	67.9	82.2	-14.3	paral
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+12.4							
7	440.025M	67.0	+23.0	+1.0	+1.7	+0.3	+0.0	65.4	82.2	-16.8	Vert
			-27.6	+0.0	+0.0	+0.0			220.0125MHz pi/8-		
			+0.0	+0.0					16		
8	439.969M	66.9	+23.0	+1.0	+1.7	+0.3	+0.0	65.3	82.2	-16.9	Vert
			-27.6	+0.0	+0.0	+0.0			219.9875MHz pi/8-		
			+0.0	+0.0					16		
9	440.026M	66.8	+23.0	+1.0	+1.7	+0.3	+0.0	65.2	82.2	-17.0	Vert
			-27.6	+0.0	+0.0	+0.0			220.0125MHz pi/8		
			+0.0	+0.0							
10	435.220M	66.2	+23.1	+1.0	+1.7	+0.3	+0.0	64.7	82.2	-17.5	Vert
			-27.6	+0.0	+0.0	+0.0			217.6125MHz pi/8		
			+0.0	+0.0							
11	439.978M	66.2	+23.0	+1.0	+1.7	+0.3	+0.0	64.6	82.2	-17.6	Vert
			-27.6	+0.0	+0.0	+0.0			219.9875Mhz pi/8		
			+0.0	+0.0							
12	435.216M	66.0	+23.1	+1.0	+1.7	+0.3	+0.0	64.5	82.2	-17.7	Vert
			-27.6	+0.0	+0.0	+0.0			217.6125MHz pi/8-		
			+0.0	+0.0					16		
13	660.019M	59.5	+27.7	+1.3	+2.4	+0.3	+0.0	63.3	82.2	-18.9	Vert
			-27.9	+0.0	+0.0	+0.0			220.0125MHz pi/8-		
			+0.0	+0.0					16		
14	659.951M	59.3	+27.7	+1.3	+2.4	+0.3	+0.0	63.1	82.2	-19.1	Vert
			-27.9	+0.0	+0.0	+0.0			219.9875Mhz pi/8		
			+0.0	+0.0							
15	659.940M	59.0	+27.7	+1.3	+2.4	+0.3	+0.0	62.8	82.2	-19.4	Vert
			-27.9	+0.0	+0.0	+0.0			219.9875MHz pi/8-		
			+0.0	+0.0					16		

16	652.826M	59.0	+27.6	+1.3	+2.4	+0.3	+0.0	62.7	82.2	-19.5	Vert
			-27.9	+0.0	+0.0	+0.0			217.6125MHz pi/8-		
			+0.0	+0.0					16		
17	870.451M	56.3	+29.0	+1.5	+2.5	+0.4	+0.0	62.5	82.2	-19.7	Vert
			-27.2	+0.0	+0.0	+0.0			217.6125MHz pi/8-		
			+0.0	+0.0					16		
18	660.058M	58.3	+27.7	+1.3	+2.4	+0.3	+0.0	62.1	82.2	-20.1	Vert
			-27.9	+0.0	+0.0	+0.0			220.0125MHz pi/8		
			+0.0	+0.0							
19	665.948M	57.9	+27.8	+1.3	+2.4	+0.3	+0.0	61.8	82.2	-20.4	Vert
			-27.9	+0.0	+0.0	+0.0			221.9875MHz pi/8		
			+0.0	+0.0							
20	1741.050M	67.1	+0.0	+0.0	+0.0	+0.6	+0.0	61.6	82.2	-20.6	Vert
			+0.0	-35.2	+26.5	+2.2			217.6125MHz pi/8-		
			+0.4	+0.0					16		
21	665.946M	57.4	+27.8	+1.3	+2.4	+0.3	+0.0	61.3	82.2	-20.9	Vert
			-27.9	+0.0	+0.0	+0.0			221.9875Mhz pi/8-		
			+0.0	+0.0					16		
22	652.850M	57.6	+27.6	+1.3	+2.4	+0.3	+0.0	61.3	82.2	-20.9	Vert
			-27.9	+0.0	+0.0	+0.0			217.6125MHz pi/8		
			+0.0	+0.0							
23	870.426M	54.5	+29.0	+1.5	+2.5	+0.4	+0.0	60.7	82.2	-21.5	Vert
			-27.2	+0.0	+0.0	+0.0			217.6125MHz pi/8		
			+0.0	+0.0							
24	1740.633M	66.1	+0.0	+0.0	+0.0	+0.6	+0.0	60.6	82.2	-21.6	Vert
			+0.0	-35.2	+26.5	+2.2			217.6125MHz pi/8		
			+0.4	+0.0							
25	443.980M	61.8	+23.1	+1.0	+1.7	+0.3	+0.0	60.2	82.2	-22.0	Vert
			-27.7	+0.0	+0.0	+0.0			221.9875MHz pi/8		
			+0.0	+0.0							
26	443.978M	61.7	+23.1	+1.0	+1.7	+0.3	+0.0	60.1	82.2	-22.1	Vert
			-27.7	+0.0	+0.0	+0.0			221.9875Mhz pi/8-		
			+0.0	+0.0					16		
27	99.005k	49.6	+0.0	+0.0	+0.0	+0.0	+0.0	59.3	82.2	-22.9	paral
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+9.7							
28	82.555k	49.3	+0.0	+0.0	+0.0	+0.0	+0.0	59.0	82.2	-23.2	paral
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+9.7							
29	879.953M	52.3	+28.9	+1.5	+2.5	+0.4	+0.0	58.4	82.2	-23.8	Vert
			-27.2	+0.0	+0.0	+0.0			219.9875MHz pi/8-		
			+0.0	+0.0					16		
30	880.035M	51.9	+28.9	+1.5	+2.5	+0.4	+0.0	58.0	82.2	-24.2	Vert
			-27.2	+0.0	+0.0	+0.0			220.0125MHz pi/8-		
			+0.0	+0.0					16		
31	879.966M	51.5	+28.9	+1.5	+2.5	+0.4	+0.0	57.6	82.2	-24.6	Vert
			-27.2	+0.0	+0.0	+0.0			219.9875Mhz pi/8		
			+0.0	+0.0							
32	880.034M	51.2	+28.9	+1.5	+2.5	+0.4	+0.0	57.3	82.2	-24.9	Vert
			-27.2	+0.0	+0.0	+0.0			220.0125MHz pi/8		
			+0.0	+0.0							

33	887.961M	48.8	+28.9	+1.5	+2.5	+0.4	+0.0	54.9	82.2	-27.3	Vert
			-27.2	+0.0	+0.0	+0.0			221.9875Mhz pi/8-		
			+0.0	+0.0					16		
34	1775.925M	59.4	+0.0	+0.0	+0.0	+0.6	+0.0	54.5	82.2	-27.7	Vert
			+0.0	-35.1	+27.0	+2.2			221.9875MHz pi/8-		
			+0.4	+0.0					16		
35	887.948M	48.2	+28.9	+1.5	+2.5	+0.4	+0.0	54.3	82.2	-27.9	Vert
			-27.2	+0.0	+0.0	+0.0			221.9875MHz pi/8		
36	1759.825M	57.9	+0.0	+0.0	+0.0	+0.6	+0.0	52.8	82.2	-29.4	Vert
			+0.0	-35.1	+26.8	+2.2			219.9875 pi/8		
			+0.4	+0.0							
37	1331.800M	60.5	+0.0	+0.0	+0.0	+0.5	+0.0	52.6	82.2	-29.6	Vert
			+0.0	-36.0	+25.4	+1.9			221.9875MHz pi/8-		
			+0.3	+0.0					16		
38	1775.883M	57.4	+0.0	+0.0	+0.0	+0.6	+0.0	52.5	82.2	-29.7	Vert
			+0.0	-35.1	+27.0	+2.2			221.9875MHz pi/8		
			+0.4	+0.0							
39	1760.242M	57.6	+0.0	+0.0	+0.0	+0.6	+0.0	52.5	82.2	-29.7	Vert
			+0.0	-35.1	+26.8	+2.2			220.0125MHz pi/8-		
			+0.4	+0.0					16		
40	1759.833M	57.4	+0.0	+0.0	+0.0	+0.6	+0.0	52.3	82.2	-29.9	Vert
			+0.0	-35.1	+26.8	+2.2			219.9875MHz pi/8-		
			+0.4	+0.0					16		
41	1332.017M	59.5	+0.0	+0.0	+0.0	+0.5	+0.0	51.6	82.2	-30.6	Vert
			+0.0	-36.0	+25.4	+1.9			221.9875MHz pi/8		
			+0.3	+0.0							
42	1760.075M	56.6	+0.0	+0.0	+0.0	+0.6	+0.0	51.5	82.2	-30.7	Vert
			+0.0	-35.1	+26.8	+2.2			220.0125MHz pi/8		
			+0.4	+0.0							
43	1305.833M	59.2	+0.0	+0.0	+0.0	+0.5	+0.0	51.1	82.2	-31.1	Vert
			+0.0	-36.1	+25.4	+1.8			217.6125MHz pi/8-		
			+0.3	+0.0					16		
44	1319.817M	58.7	+0.0	+0.0	+0.0	+0.5	+0.0	50.8	82.2	-31.4	Vert
			+0.0	-36.0	+25.4	+1.9			219.9875MHz pi/8-		
			+0.3	+0.0					16		
45	1305.475M	58.5	+0.0	+0.0	+0.0	+0.5	+0.0	50.4	82.2	-31.8	Vert
			+0.0	-36.1	+25.4	+1.8			217.6125MHz pi/8		
			+0.3	+0.0							
46	1320.000M	58.3	+0.0	+0.0	+0.0	+0.5	+0.0	50.4	82.2	-31.8	Vert
			+0.0	-36.0	+25.4	+1.9			220.0125MHz pi/8		
			+0.3	+0.0							
47	1320.125M	58.3	+0.0	+0.0	+0.0	+0.5	+0.0	50.4	82.2	-31.8	Vert
			+0.0	-36.0	+25.4	+1.9			220.0125MHz pi/8-		
			+0.3	+0.0					16		
48	1320.050M	58.0	+0.0	+0.0	+0.0	+0.5	+0.0	50.1	82.2	-32.1	Vert
			+0.0	-36.0	+25.4	+1.9			219.9875 pi/8		
			+0.3	+0.0							
49	1523.346M	55.6	+0.0	+0.0	+0.0	+0.5	+0.0	48.4	82.2	-33.8	Vert
			+0.0	-35.5	+25.4	+2.0			217.6125MHz pi/8		
			+0.4	+0.0							

50	1523.062M	55.1	+0.0	+0.0	+0.0	+0.5	+0.0	47.9	82.2	-34.3	Vert
			+0.0	-35.5	+25.4	+2.0			217.6125MHz pi/8-		
			+0.4	+0.0					16		
51	1099.996M	54.7	+0.0	+0.0	+0.0	+0.4	+0.0	44.9	82.2	-37.3	Vert
			+0.0	-36.9	+24.7	+1.7			220.0125MHz pi/8-		
			+0.3	+0.0					16		
52	1099.996M	54.4	+0.0	+0.0	+0.0	+0.4	+0.0	44.6	82.2	-37.6	Vert
			+0.0	-36.9	+24.7	+1.7			219.9875MHz pi/8-		
			+0.3	+0.0					16		
53	1100.012M	52.9	+0.0	+0.0	+0.0	+0.4	+0.0	43.1	82.2	-39.1	Vert
			+0.0	-36.9	+24.7	+1.7			219.9875 pi/8		
			+0.3	+0.0							
54	1109.829M	52.7	+0.0	+0.0	+0.0	+0.4	+0.0	43.0	82.2	-39.2	Vert
			+0.0	-36.9	+24.8	+1.7			221.9875MHz pi/8-		
			+0.3	+0.0					16		
55	1088.254M	52.6	+0.0	+0.0	+0.0	+0.4	+0.0	42.7	82.2	-39.5	Vert
			+0.0	-37.0	+24.7	+1.7			217.6125MHz pi/8-		
			+0.3	+0.0					16		
56	1100.221M	52.5	+0.0	+0.0	+0.0	+0.4	+0.0	42.7	82.2	-39.5	Vert
			+0.0	-36.9	+24.7	+1.7			220.0125MHz pi/8		
			+0.3	+0.0							
57	1088.062M	52.4	+0.0	+0.0	+0.0	+0.4	+0.0	42.5	82.2	-39.7	Vert
			+0.0	-37.0	+24.7	+1.7			217.6125MHz pi/8		
			+0.3	+0.0							
58	1539.938M	48.9	+0.0	+0.0	+0.0	+0.5	+0.0	41.7	82.2	-40.5	Vert
			+0.0	-35.5	+25.4	+2.0			219.9875MHz pi/8-		
			+0.4	+0.0					16		
59	2176.200M	44.1	+0.0	+0.0	+0.0	+0.7	+0.0	40.9	82.2	-41.3	Vert
			+0.0	-34.8	+28.0	+2.5			217.6125MHz pi/8		
			+0.4	+0.0							
60	1109.638M	50.3	+0.0	+0.0	+0.0	+0.4	+0.0	40.6	82.2	-41.6	Vert
			+0.0	-36.9	+24.8	+1.7			221.9875MHz pi/8		
			+0.3	+0.0							
61	1539.938M	47.5	+0.0	+0.0	+0.0	+0.5	+0.0	40.3	82.2	-41.9	Vert
			+0.0	-35.5	+25.4	+2.0			219.9875 pi/8		
			+0.4	+0.0							
62	2176.133M	43.4	+0.0	+0.0	+0.0	+0.7	+0.0	40.2	82.2	-42.0	Vert
			+0.0	-34.8	+28.0	+2.5			217.6125MHz pi/8-		
			+0.4	+0.0					16		
63	1539.871M	47.2	+0.0	+0.0	+0.0	+0.5	+0.0	40.0	82.2	-42.2	Vert
			+0.0	-35.5	+25.4	+2.0			220.0125MHz pi/8-		
			+0.4	+0.0					16		
64	1540.029M	47.0	+0.0	+0.0	+0.0	+0.5	+0.0	39.8	82.2	-42.4	Vert
			+0.0	-35.5	+25.4	+2.0			220.0125MHz pi/8		
			+0.4	+0.0							
65	1958.396M	42.3	+0.0	+0.0	+0.0	+0.7	+0.0	39.0	82.2	-43.2	Vert
			+0.0	-34.9	+28.1	+2.4			217.6125MHz pi/8		
			+0.4	+0.0							
66	1958.571M	41.8	+0.0	+0.0	+0.0	+0.7	+0.0	38.5	82.2	-43.7	Vert
			+0.0	-34.9	+28.1	+2.4			217.6125MHz pi/8-		
			+0.4	+0.0					16		

67	1554.179M	45.2	+0.0	+0.0	+0.0	+0.5	+0.0	38.0	82.2	-44.2	Vert
			+0.0	-35.5	+25.4	+2.0			221.9875MHz pi/8-		
			+0.4	+0.0					16		
68	1979.821M	39.3	+0.0	+0.0	+0.0	+0.7	+0.0	36.0	82.2	-46.2	Vert
			+0.0	-34.9	+28.1	+2.4			219.9875 pi/8		
			+0.4	+0.0							
69	2219.908M	38.9	+0.0	+0.0	+0.0	+0.7	+0.0	35.9	82.2	-46.3	Vert
			+0.0	-34.7	+28.1	+2.5			221.9875MHz pi/8-		
			+0.4	+0.0					16		
70	1979.679M	39.1	+0.0	+0.0	+0.0	+0.7	+0.0	35.8	82.2	-46.4	Vert
			+0.0	-34.9	+28.1	+2.4			219.9875MHz pi/8-		
			+0.4	+0.0					16		
71	2219.742M	38.8	+0.0	+0.0	+0.0	+0.7	+0.0	35.8	82.2	-46.4	Vert
			+0.0	-34.7	+28.1	+2.5			221.9875MHz pi/8		
			+0.4	+0.0							
72	1980.154M	38.9	+0.0	+0.0	+0.0	+0.7	+0.0	35.7	82.2	-46.5	Vert
			+0.0	-34.9	+28.2	+2.4			220.0125MHz pi/8-		
			+0.4	+0.0					16		
73	1553.771M	42.8	+0.0	+0.0	+0.0	+0.5	+0.0	35.6	82.2	-46.6	Vert
			+0.0	-35.5	+25.4	+2.0			221.9875MHz pi/8		
			+0.4	+0.0							
74	1979.879M	38.8	+0.0	+0.0	+0.0	+0.7	+0.0	35.5	82.2	-46.7	Vert
			+0.0	-34.9	+28.1	+2.4			220.0125MHz pi/8		
			+0.4	+0.0							
75	1998.038M	38.7	+0.0	+0.0	+0.0	+0.7	+0.0	35.5	82.2	-46.7	Vert
			+0.0	-34.9	+28.2	+2.4			221.9875MHz pi/8-		
			+0.4	+0.0					16		
76	2199.817M	38.3	+0.0	+0.0	+0.0	+0.7	+0.0	35.3	82.2	-46.9	Vert
			+0.0	-34.7	+28.1	+2.5			219.9875 pi/8		
			+0.4	+0.0							
77	1997.988M	38.1	+0.0	+0.0	+0.0	+0.7	+0.0	34.9	82.2	-47.3	Vert
			+0.0	-34.9	+28.2	+2.4			221.9875MHz pi/8		
			+0.4	+0.0							
78	2200.250M	37.9	+0.0	+0.0	+0.0	+0.7	+0.0	34.9	82.2	-47.3	Vert
			+0.0	-34.7	+28.1	+2.5			220.0125MHz pi/8		
			+0.4	+0.0							
79	2199.717M	37.8	+0.0	+0.0	+0.0	+0.7	+0.0	34.8	82.2	-47.4	Vert
			+0.0	-34.7	+28.1	+2.5			219.9875MHz pi/8-		
			+0.4	+0.0					16		
80	2200.225M	37.8	+0.0	+0.0	+0.0	+0.7	+0.0	34.8	82.2	-47.4	Vert
			+0.0	-34.7	+28.1	+2.5			220.0125MHz pi/8-		
			+0.4	+0.0					16		
81	18.687M	20.2	+0.0	+0.0	+0.0	+0.0	+0.0	28.8	82.2	-53.4	paral
			+0.0	+0.0	+0.0	+0.2					
			+0.0	+8.4							
82	29.582M	17.7	+0.0	+0.0	+0.0	+0.0	+0.0	24.0	82.2	-58.2	paral
			+0.0	+0.0		+0.3					
			+0.0	+6.0							


Test Setup Photo(s)



Below 1Ghz, Front View



Below 1GHz, Back View

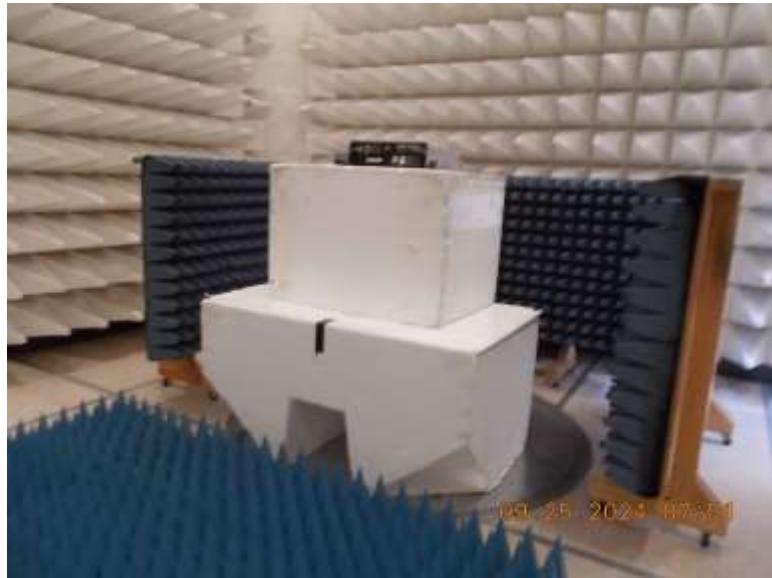

Above 1GHz, 1.5m

Supplemental Information

Measurement Uncertainty

Uncertainty Value	Parameter
5.77 dB	Radiated Emissions
0.673 dB	RF Conducted Measurements
5.77×10^{-10}	Frequency Deviation
0.00005 s	Time Deviation
3.18 dB	Mains Conducted Emissions

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	($\text{dB}\mu\text{V}$)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	($\text{dB}\mu\text{V}/\text{m}$)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.

End of Report