


RADIO TEST REPORT

Test Report No. 15407888S-E

Customer	Nintendo Co., Ltd.
Description of EUT	Game Controller
Model Number of EUT	BEE-021
FCC ID	BKEBEE021
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	March 13, 2025
Remarks	Bluetooth (BR / EDR) parts Except Maximum Peak Output Power

Representative Test EngineerMiku Ikudome
Engineer**Approved By**Kazuya Noda
Leader

CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements.
(if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.15407888S-E

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15407888S-E	March 13, 2025	-

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	IEC	International Electrotechnical Commission
AC	Alternating Current	IEEE	Institute of Electrical and Electronics Engineers
AFH	Adaptive Frequency Hopping	IF	Intermediate Frequency
AM	Amplitude Modulation	ILAC	International Laboratory Accreditation Conference
Amp, AMP	Amplifier	ISED	Innovation, Science and Economic Development Canada
ANSI	American National Standards Institute	ISO	International Organization for Standardization
Ant, ANT	Antenna	JAB	Japan Accreditation Board
AP	Access Point	LAN	Local Area Network
ASK	Amplitude Shift Keying	LIMS	Laboratory Information Management System
Atten., ATT	Attenuator	MCS	Modulation and Coding Scheme
AV	Average	MRA	Mutual Recognition Arrangement
BPSK	Binary Phase-Shift Keying	N/A	Not Applicable
BR	Bluetooth Basic Rate	NIST	National Institute of Standards and Technology
BT	Bluetooth	NS	No signal detect.
BT LE	Bluetooth Low Energy	NSA	Normalized Site Attenuation
BW	BandWidth	NVLAP	National Voluntary Laboratory Accreditation Program
Cal Int	Calibration Interval	OBW	Occupied Band Width
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
Ch., CH	Channel	OFDMA	Orthogonal Frequency Division Multiple Access
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PP	Preamble Puncturing
DSSS	Direct Sequence Spread Spectrum	PRBS	Pseudo-Random Bit Sequence
EDR	Enhanced Data Rate	PSD	Power Spectral Density
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QAM	Quadrature Amplitude Modulation
EMC	ElectroMagnetic Compatibility	QP	Quasi-Peak
EMI	ElectroMagnetic Interference	QPSK	Quadri-Phase Shift Keying
EN	European Norm	RBW	Resolution Band Width
ERP, e.r.p.	Effective Radiated Power	RDS	Radio Data System
EU	European Union	RE	Radio Equipment
EUT	Equipment Under Test	RF	Radio Frequency
Fac.	Factor	RMS	Root Mean Square
FCC	Federal Communications Commission	RSS	Radio Standards Specifications
FHSS	Frequency Hopping Spread Spectrum	Rx	Receiving
FM	Frequency Modulation	SA, S/A	Spectrum Analyzer
Freq.	Frequency	SG	Signal Generator
FSK	Frequency Shift Keying	SVSWR	Site-Voltage Standing Wave Ratio
GFSK	Gaussian Frequency-Shift Keying	TR	Test Receiver
GNSS	Global Navigation Satellite System	Tx	Transmitting
GPS	Global Positioning System	VBW	Video BandWidth
Hori.	Horizontal	Vert.	Vertical
ICES	Interference-Causing Equipment Standard	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information.....	5
SECTION 2: Equipment Under Test (EUT)	5
SECTION 3: Test Specification, Procedures & Results.....	6
SECTION 4: Operation of EUT during testing	9
SECTION 5: Conducted Emission	11
SECTION 6: Radiated Spurious Emission.....	12
SECTION 7: Antenna Terminal Conducted Tests	14
APPENDIX 1: Test data.....	15
Conducted Emission	15
20 dB Bandwidth, 99 %Occupied Bandwidth and Carrier Frequency Separation	16
Number of Hopping Frequency	20
Dwell time	22
Radiated Spurious Emission	25
Conducted Spurious Emission	37
Conducted Emission Band Edge compliance	43
APPENDIX 2: Test Instruments.....	45
APPENDIX 3: Photographs of test setup	47
Conducted Emission	47
Radiated Spurious Emission	48
Pre-check of Worst Case Position.....	49
Antenna Terminal Conducted Tests	50

SECTION 1: Customer Information

Company Name	Nintendo Co., Ltd.
Address	11-1 Hokotate-cho, Kamitoba, Minami-ku, Kyoto 601-8501, Japan
Telephone Number	+81-75-662-9600
Contact Person	Yosuke Ishikawa

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Game Controller
Model Number	BEE-021
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	October 9, 2024
Test Date	October 9 to November 6, 2024

2.2 Product Description

General Specification

Rating	DC 5 V (*.Supply voltage from connector) (*. DC 3.89 V from Re-chargeable Li-ion battery for the internal circuit)
Operating temperature	5 deg. C to 35 deg. C

Radio Specification

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Antenna Gain _{a)}	1.52 dBi

Bluetooth (BR / EDR)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK)
Antenna Gain _{a)}	1.52 dBi

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

* Also the EUT complies with FCC Part 15 Subpart B..

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	27.7 dB, 0.15000 MHz, QP, L1	Complied	-
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ISED: RSS-247 5.1 (b)	See data.	Complied	Conducted
20 dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ISED: RSS-247 5.1 (a)		Complied	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	10.5 dB 4804.00 MHz, AV, Horizontal. Mode: Tx, Hopping Off, DH5 2402 MHz	Complied	Conducted/ Radiated (above 30 MHz) *1)
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) Radiated test was selected over 30 MHz based on section 15.247(d).					

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Module regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)
Conducted Emission (AC Mains) LISN	150 kHz to 30 MHz	3.0 dB
Radiated Emission (Measurement distance: 3 m)	9 kHz to 30 MHz	3.3 dB
	30 MHz to 200 MHz	4.8 dB
	200 MHz to 1 GHz	6.1 dB
	1 GHz to 6 GHz	4.7 dB
	6 GHz to 18 GHz	5.3 dB
	18 GHz to 40 GHz	5.5 dB
Radiated Emission (Measurement distance: 1 m)	1 GHz to 18 GHz	5.6 dB
	18 GHz to 40 GHz	5.8 dB

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)	1.3 dB
Power Measurement above 1 GHz (Peak Detector)	1.5 dB
Spurious Emission (Conducted) below 1 GHz	0.93 dB
Conducted Emissions Power Density Measurement 1 GHz to 3 GHz	0.93 dB
Conducted Emissions Power Density Measurement 3 GHz to 18 GHz	3.0 dB
Spurious Emission (Conducted) 18 GHz to 26.5 GHz	2.8 dB
Spurious Emission (Conducted) 26.5 GHz to 40 GHz	2.3 dB
Bandwidth Measurement	0.012 %
Duty Cycle and Time Measurement	0.27 %
Temperature	2.2 deg.C.
Humidity	3.4 %
Voltage	0.92 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan

Telephone: +81-463-50-6400

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test room	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber (SAC1)	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber (SAC2)	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber (SAC3)	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber (SAC4)	8.1 x 5.1 x 3.55	8.1 x 5.1	-
Wireless anechoic chamber 1 (WAC1)	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
Wireless anechoic chamber 2 (WAC2)	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
No.1 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	2.55 x 4.1 x 2.5	-	-
No.2 Measurement room	4.5 x 3.5 x 2.5	-	-
Wireless shielded room 1	3.0 x 4.5 x 2.7	3.0 x 4.5	-
Wireless shielded room 2	3.0 x 4.5 x 2.7	3.0 x 4.5	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
*EUT has the power settings by the software as follows; Power Setting: Fixed Software: InspectionFwPackage Version: 1.0.14 (Date: 2024.09 18, Storage location: EUT memory) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

Details of Operating Mode(s)


Test Item	Mode	Hopping	Tested Frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz)	Tx DH5 *1)	Off	2402 MHz
Radiated Spurious Emission (Above 1 GHz), Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20 dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99 % Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative. *It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.			
*1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands. The Maximum Peak Output Power was referred to Test Report No.: 15730981H-A.			

4.2 Configuration and Peripherals

<For Radiated and Conducted Emission tests >

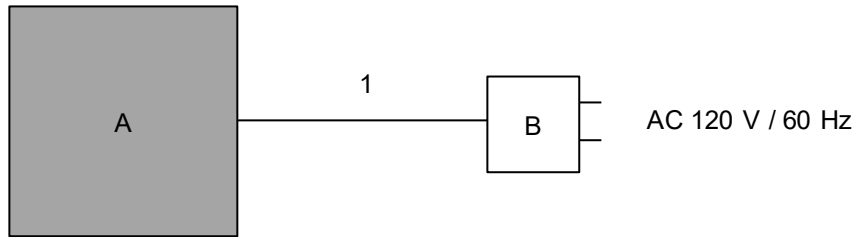

<For Antenna Terminal Conducted Tests>

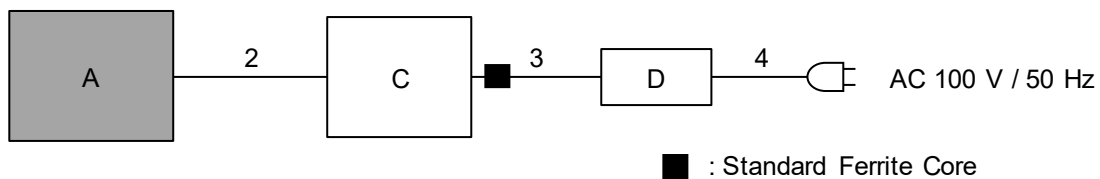

*Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
*As a result of comparing AC 120 V and AC 240 V at pre-check, conducted emission test was performed with AC 120 V of the worst voltage as representative.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Game Controller	BEE-021	HHL04000006260 *1) HHL04000006482 *2)	Nintendo Co., Ltd.	EUT
B	AC Adaptor	NGN-01	0A0000030	Nintendo Co., Ltd.	-
C	Laptop PC	CF-SV9RDQVS	0JKSC39510	Panasonic	-
D	AC Adaptor	CF-AA65D2A M1	65D2AM1208002424WA	Panasonic	-

*1) Used for Antenna Terminal Conducted tests.

*2) Used for Conducted Emission test and Radiated Emission test.

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB	1.5	Shielded	Shielded	-
2	USB	3.0	Shielded	Shielded	-
3	DC	0.9	Unshielded	Unshielded	-
4	AC	0.8	Unshielded	Unshielded	-

SECTION 5: Conducted Emission

Test Procedure and Conditions

EUT was placed on a urethane platform table of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN).

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50 ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Shielded room.


The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Detector	: QP and CISPR AV
Measurement Range	: 0.15 MHz to 30 MHz
Test Data	: APPENDIX
Test Result	: Pass

Figure 1: Test Setup

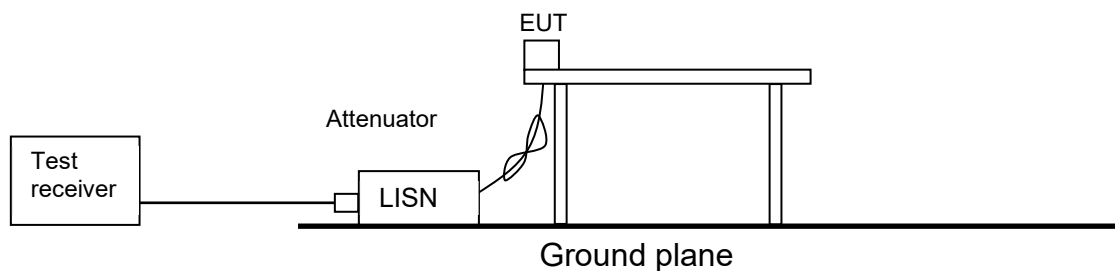

SECTION 6: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Burst rate confirmation sheet) Detector: Peak	RBW: 100 kHz VBW: 300 kHz

Figure 2: Test Setup


Below 1 GHz

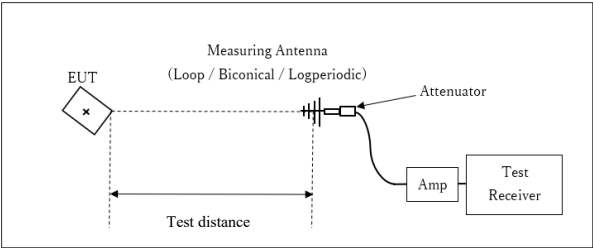

x : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

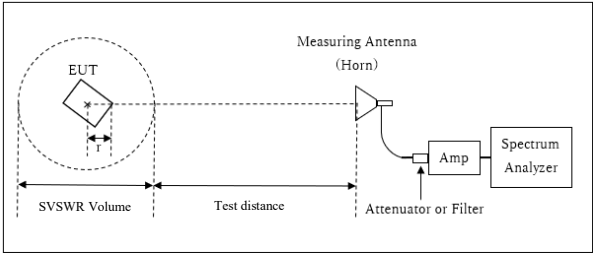


r : Radius of an outer periphery of EUT
x : Center of turn table

Distance Factor: $20 \times \log (3.945 \text{ m}^* / 3.0 \text{ m}) = 2.38 \text{ dB}$
*(Test Distance + SVSWR Volume / 2) - r = 3.945 m

Test Distance: 3 m
SVSWR Volume: 2 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
r: 0.055 m

10 GHz to 26.5 GHz

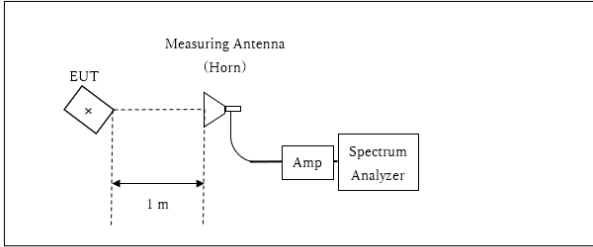

x : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

	Carrier	Spurious (30 MHz - 1 GHz)	Spurious (1 GHz - 2.8 GHz)	Spurious (2.8 GHz - 10 GHz)	Spurious (10 GHz - 18 GHz)	Spurious (18 GHz - 26.5 GHz)
Horizontal	Z	Y	Z	Z	X	X
Vertical	Y	Z	Y	Y	X	X

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20 dB Bandwidth	3 MHz	30 kHz	91 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Carrier Frequency Separation	3 MHz	30 kHz	91 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *2) *3)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
*1) The measurement was performed with Max Hold since the duty cycle was not 100 %. Peak hold was applied as Worst-case measurement. *2) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart. (9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz). *3) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.							

Test results are rounded off and limit are rounded down, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test data

Conducted Emission


UL Japan, Inc. Shonan EMC Lab. No.3 Shielded Room
Date : 2024/11/06

Mode : Tx, DH5, 2402 MHz
Power : AC 120 V / 60 Hz
Temp./Humi. : 23 deg.C / 39 %RH

Remarks : -

Limit : FCC_Part 15 Subpart C(15.207)

Engineer : Makoto Hosaka

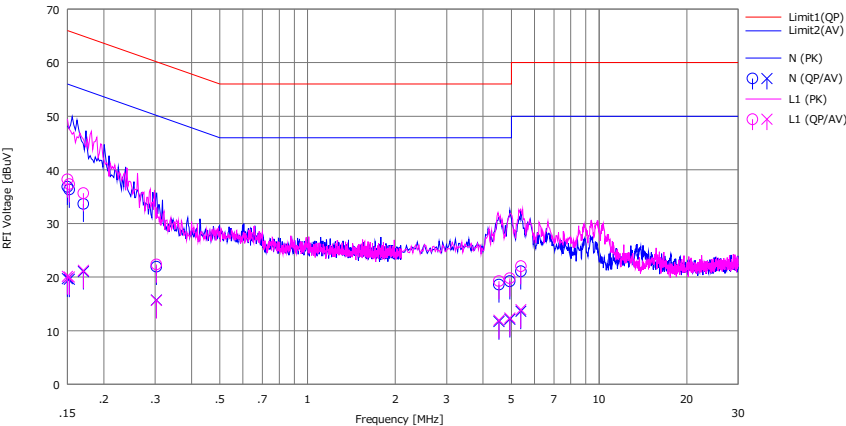

No.	Freq. [MHz]	Reading		C.Fac	Results		Limit		Margin		Phase	Comment
		(QP)	(AV)		(QP)	(AV)	(QP)	(AV)	(QP)	(AV)		
		[dBuV]	[dBuV]		[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dB]	[dB]		
1	0.15000	24.30	7.20	12.52	36.82	19.72	66.00	56.00	29.1	36.2	N	
2	0.15210	23.90	7.10	12.52	36.32	19.62	65.88	55.88	29.5	36.2	N	
3	0.17007	21.10	8.50	12.55	33.65	21.05	64.96	54.96	31.3	33.9	N	
4	0.30280	9.40	3.20	12.53	21.93	15.73	60.17	50.17	38.2	34.4	N	
5	4.53632	5.70	-1.20	12.89	18.59	11.69	56.00	46.00	37.4	34.3	N	
6	4.94098	6.30	-0.80	12.93	19.23	12.13	56.00	46.00	36.7	33.8	N	
7	5.39239	8.10	0.70	12.96	21.06	13.66	60.00	50.00	38.9	36.3	N	
8	0.15000	25.70	7.60	12.54	38.24	20.14	66.00	56.00	27.7	35.8	L1	
9	0.15210	24.80	7.50	12.54	37.34	20.04	65.88	55.88	28.5	35.8	L1	
10	0.17007	23.10	8.70	12.54	35.64	21.24	64.96	54.96	29.3	33.7	L1	
11	0.30280	9.80	3.10	12.55	22.35	15.65	60.17	50.17	37.8	34.5	L1	
12	4.53632	6.40	-0.90	12.85	19.25	11.95	56.00	46.00	36.7	34.0	L1	
13	4.94098	6.90	-0.50	12.88	19.78	12.38	56.00	46.00	36.2	33.6	L1	
14	5.39239	9.10	1.00	12.91	22.01	13.91	60.00	50.00	37.9	36.0	L1	

Calculation:Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]

20 dB Bandwidth, 99 %Occupied Bandwidth and Carrier Frequency Separation


Test place	Shonan EMC Lab. No.2 Measurement Room
Date	October 10, 2024
Temperature / Humidity	25 deg. C / 51 % RH
Engineer	Yosuke Murakami
Mode	Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.953	888.1	1.000	>= 0.635
DH5	2441.0	0.953	889.8	1.000	>= 0.635
DH5	2480.0	0.953	888.5	1.000	>= 0.635
DH5	Hopping On	-	78654	-	-
3DH5	2402.0	1.255	1153.0	1.000	>= 0.837
3DH5	2441.0	1.256	1152.1	1.000	>= 0.837
3DH5	2480.0	1.255	1152.2	1.000	>= 0.837
3DH5	Hopping On	-	78601	-	-


Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.

20 dB Bandwidth and 99 % Occupied Bandwidth

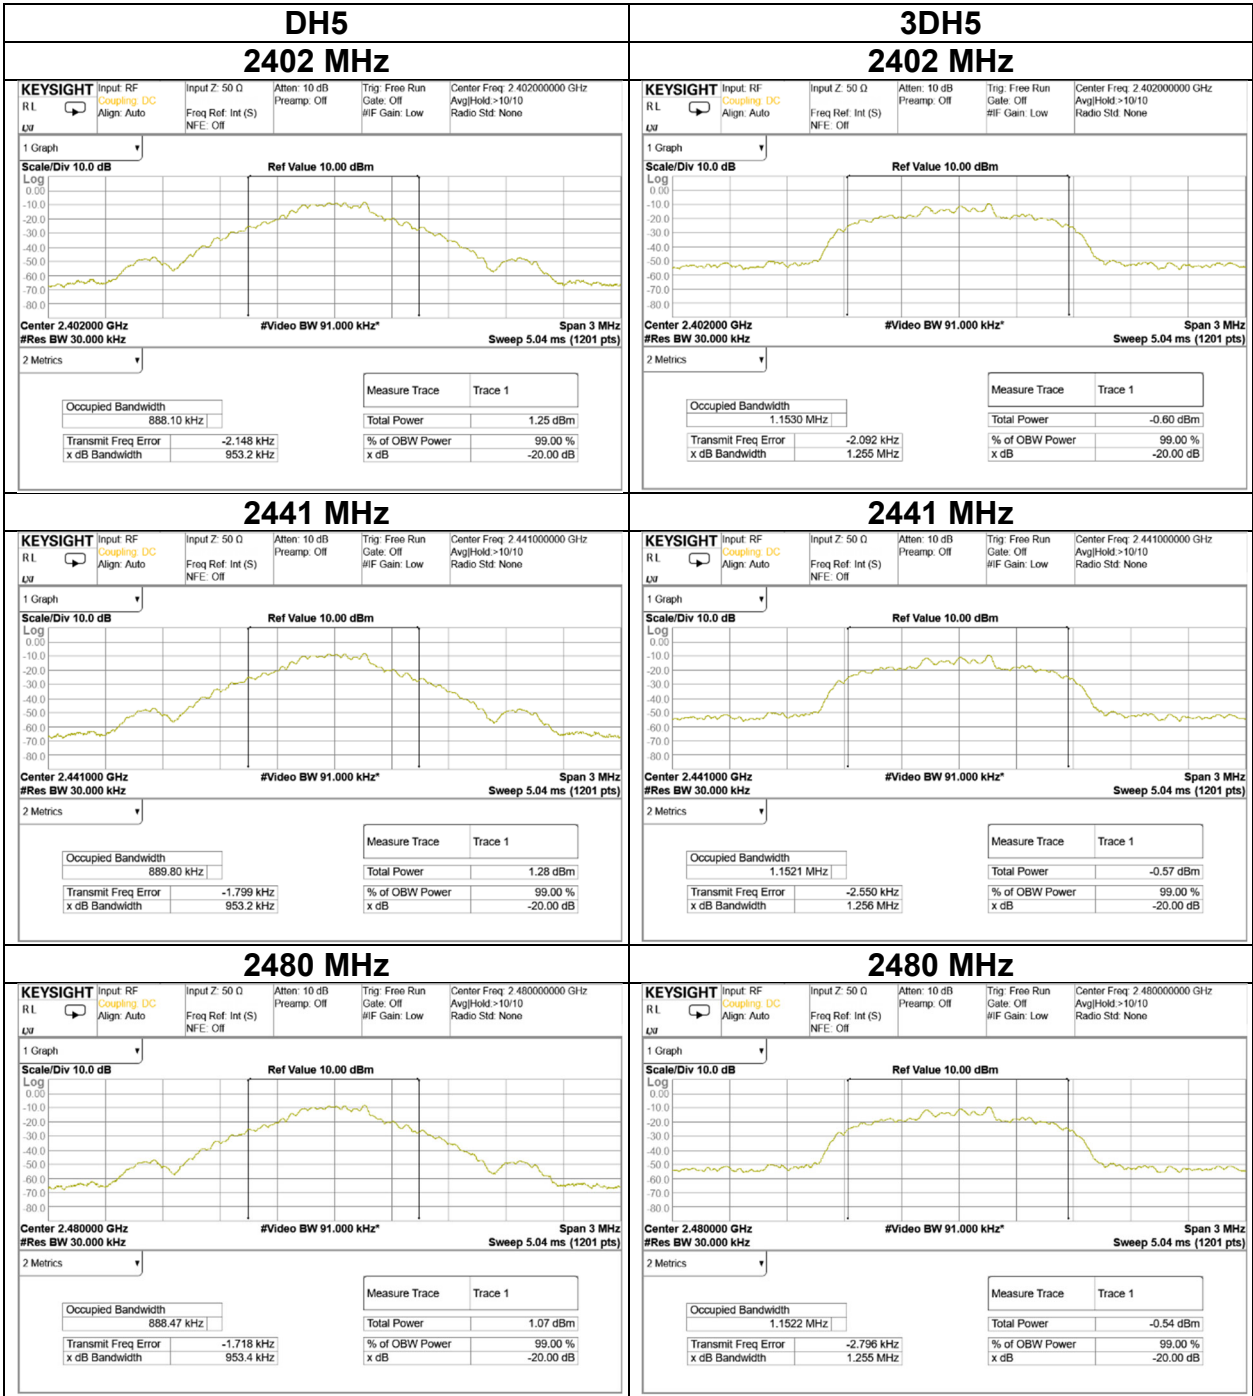

20 dB Bandwidth and 99 % Occupied Bandwidth

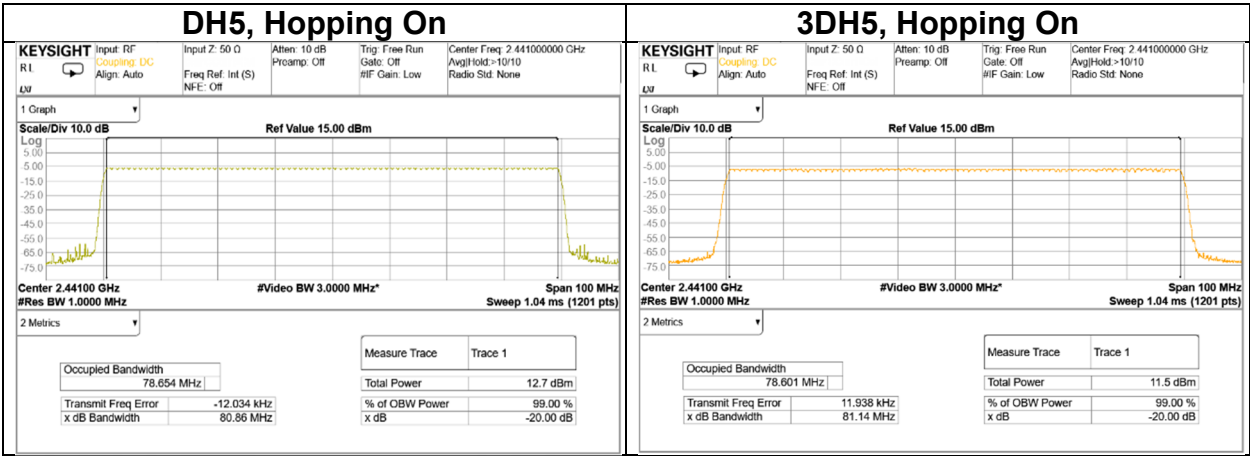

KEYSIGHT

Input: RF

Input Z: 50 Ω

Atten: 10 dB

Trig: Free Run

Center Freq: 2.441000000 GHz

R1

Coupling: DC

Align: Auto

Freq Ref: Int (S)

Preamp: Off

Gate: Off

Avg/Hold: 10/10

LF

NFE: Off

#IF Gain: Low

Radio Std: None

1 Graph

Scale/Div 10.0 dB

Ref Value 15.00 dBm

Log

5.00

-5.00

-15.0

-25.0

-35.0

-45.0

-55.0

-65.0

-75.0

Center 2.44100 GHz

#Video BW 3.0000 MHz*

Span 100 MHz

#Res BW 1.0000 MHz

Sweep 1.04 ms (1201 pts)

2 Metrics

Measure Trace

Trace 1

Occupied Bandwidth

78.601 MHz

Total Power

11.5 dBm

Transmit Freq Error

11.938 kHz

% of OBW Power

99.00 %


x dB Bandwidth

81.14 MHz

x dB

-20.00 dB

Carrier Frequency Separation

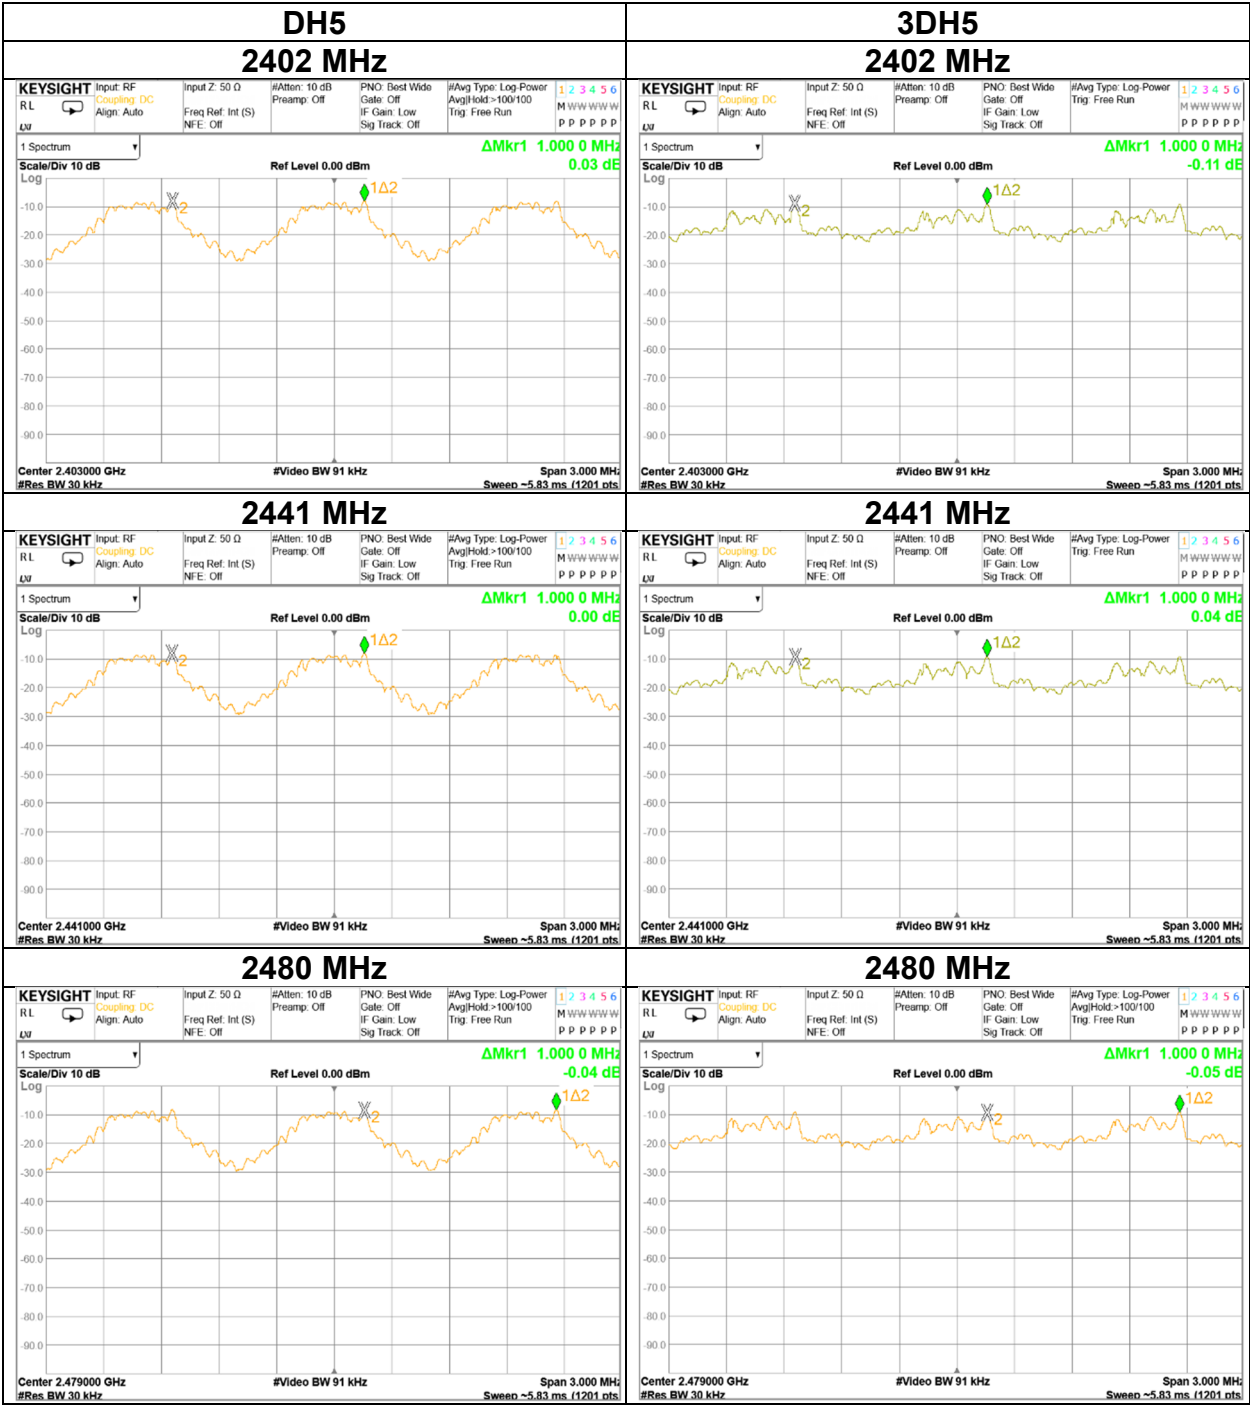


Number of Hopping Frequency

Test place Shonan EMC Lab. No.2 Measurement Room
Date October 10, 2024
Temperature / Humidity 25 deg. C / 51 % RH
Engineer Yosuke Murakami
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	>= 15
3DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

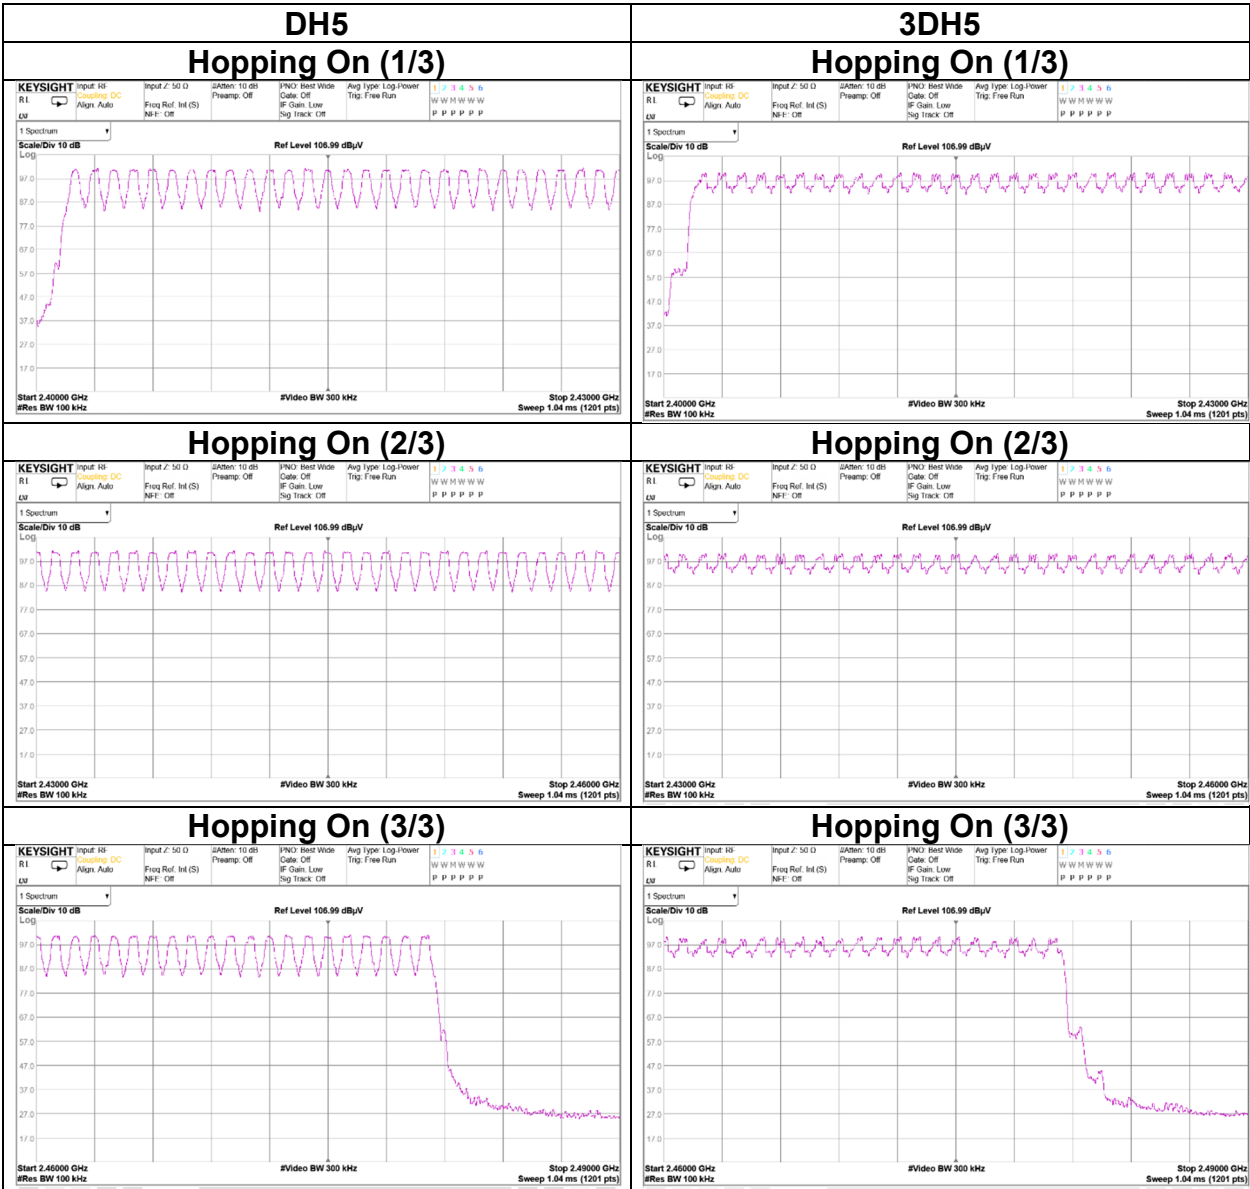

Dwell time

Test place Shonan EMC Lab. No.2 Measurement Room
Date October 10, 2024
Temperature / Humidity 25 deg. C / 51 % RH
Engineer Yosuke Murakami
Mode Tx, Hopping On

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4)	Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	50.8 times / 5 s x 31.6 s = 322 times	0.397	128	400
DH3	26.2 times / 5 s x 31.6 s = 166 times	1.662	276	400
DH5	21.0 times / 5 s x 31.6 s = 133 times	2.907	387	400
3DH1	51.4 times / 5 s x 31.6 s = 325 times	0.405	132	400
3DH3	27.8 times / 5 s x 31.6 s = 176 times	1.662	292	400
3DH5	21.2 times / 5 s x 31.6 s = 134 times	2.920	391	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.

Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	49	51	52	51	51	50.8
DH3	25	27	27	25	27	26.2
DH5	21	21	22	20	21	21
3DH1	52	52	51	52	50	51.4
3DH3	27	29	28	28	27	27.8
3DH5	22	21	20	20	23	21.2

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4$ s, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time



Dwell time

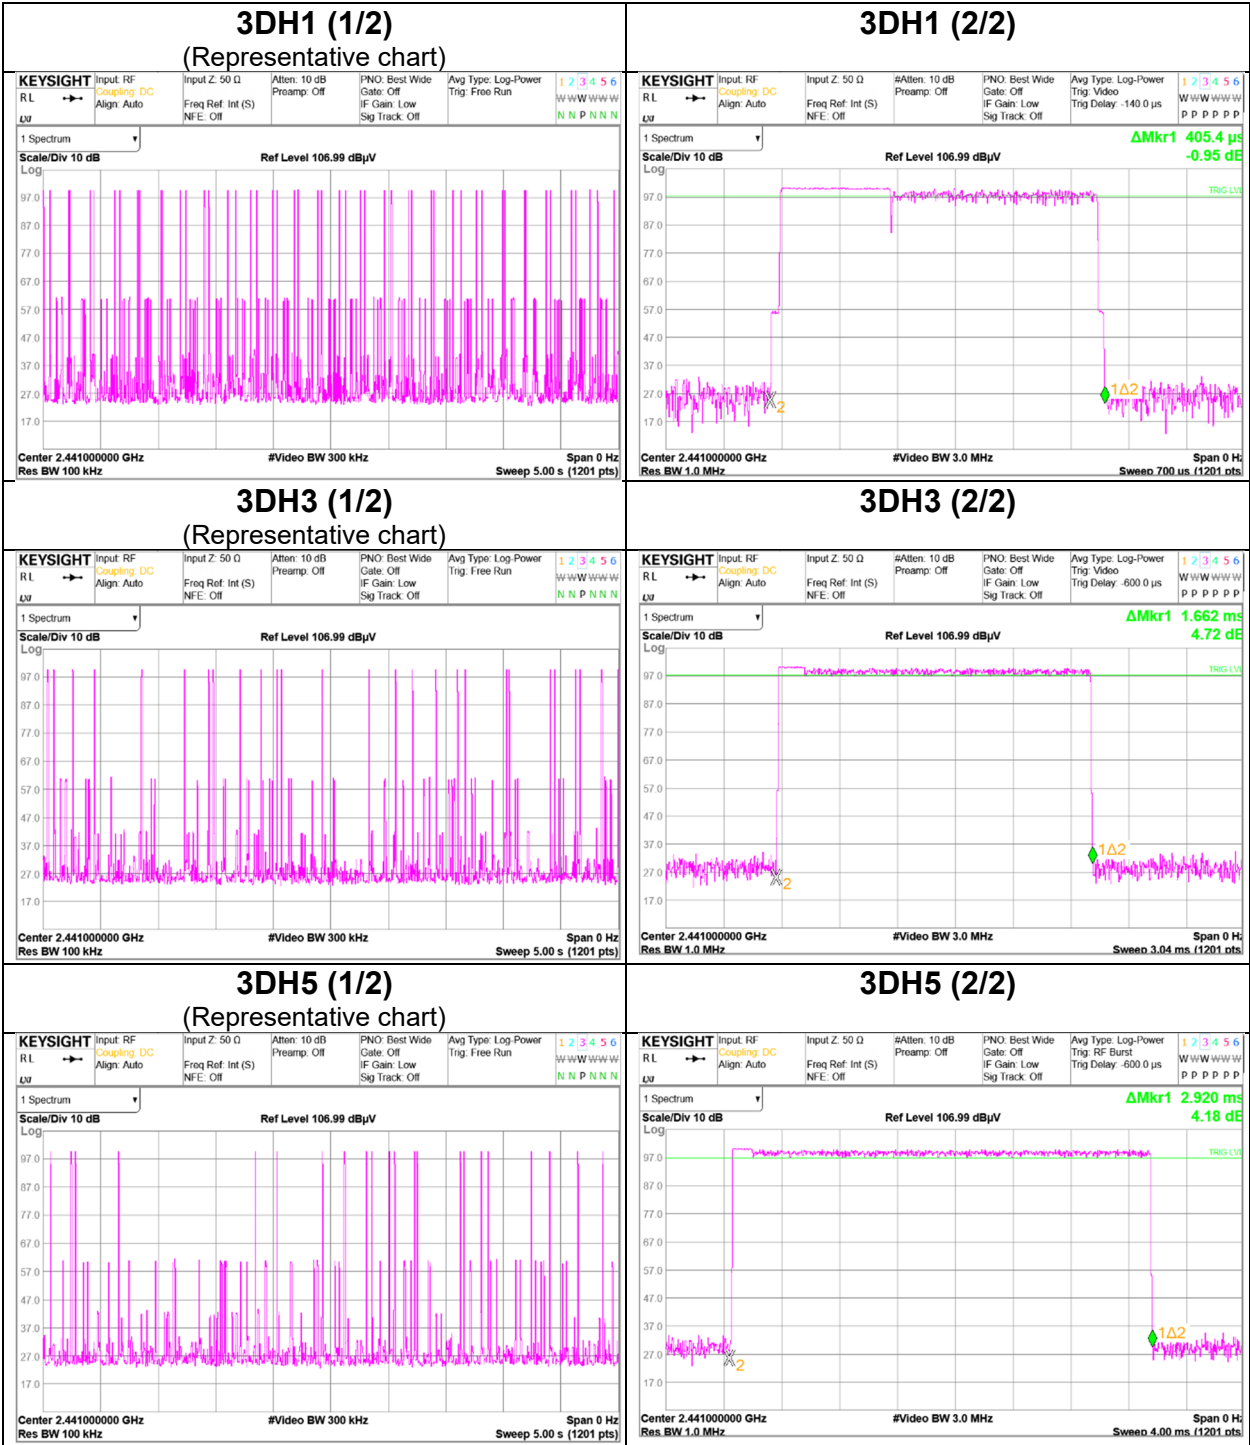

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	WAC2	WAC2	WAC2
Date	October 14, 2024	October 10, 2024	October 11, 2024
Temperature / Humidity	23 deg. C / 53 % RH	23 deg. C / 56 % RH	23 deg. C / 50 % RH
Engineer	Kouki Yamada	Kouki Yamada	Kouki Yamada
	(Below 1 GHz)	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	188.991	QP	26.80	13.86	7.24	33.08	0.00	14.82	43.5	28.6	100	112	-
Hori.	447.426	QP	24.40	16.60	7.95	32.43	0.00	16.52	46.0	29.4	174	140	-
Hori.	2390.000	PK	47.81	27.75	-28.27	-	2.38	49.67	73.9	24.2	156	53	-
Hori.	4804.000	PK	52.72	31.56	-36.04	-	2.38	50.62	73.9	23.2	147	65	-
Hori.	7206.000	PK	47.69	36.21	-34.48	-	2.38	51.80	73.9	22.1	150	0	Floor Noise
Hori.	9608.000	PK	46.42	38.14	-31.55	-	2.38	55.39	73.9	18.5	150	0	Floor Noise
Hori.	2390.000	AV	33.53	27.75	-28.27	-	2.38	35.39	53.9	18.5	156	53	VBW:500 Hz
Hori.	4804.000	AV	45.42	31.56	-36.04	-	2.38	43.32	53.9	10.5	147	65	VBW:500 Hz
Hori.	7206.000	AV	33.01	36.21	-34.48	-	2.38	37.12	53.9	16.7	150	0	VBW:500 Hz, Floor noise
Hori.	9608.000	AV	31.98	38.14	-31.55	-	2.38	40.95	53.9	12.9	150	0	VBW:500 Hz, Floor noise
Vert.	49.518	QP	35.30	10.12	6.46	33.05	0.00	18.83	40.0	21.1	100	144	-
Vert.	60.054	QP	42.70	9.48	6.42	33.14	0.00	25.46	40.0	14.5	100	178	-
Vert.	64.639	QP	45.60	9.38	6.41	33.16	0.00	28.23	40.0	11.7	100	192	-
Vert.	75.217	QP	36.70	9.10	6.64	33.19	0.00	19.25	40.0	20.7	100	185	-
Vert.	126.888	QP	36.50	11.00	6.81	33.18	0.00	21.13	43.5	22.3	100	186	-
Vert.	185.521	QP	33.60	13.58	7.27	33.09	0.00	21.36	43.5	22.1	145	178	-
Vert.	434.460	QP	30.70	16.30	7.92	32.45	0.00	22.47	46.0	23.5	100	180	-
Vert.	2390.000	PK	47.39	27.75	-28.27	-	2.38	49.25	73.9	24.6	232	236	-
Vert.	4804.000	PK	51.95	31.56	-36.04	-	2.38	49.85	73.9	24.0	117	345	-
Vert.	7206.000	PK	46.99	36.21	-34.48	-	2.38	51.10	73.9	22.8	150	0	Floor Noise
Vert.	9608.000	PK	46.63	38.14	-31.55	-	2.38	55.60	73.9	18.3	150	0	Floor Noise
Vert.	2390.000	AV	33.45	27.75	-28.27	-	2.38	35.31	53.9	18.5	232	236	VBW:500 Hz
Vert.	4804.000	AV	44.14	31.56	-36.04	-	2.38	42.04	53.9	11.8	117	345	VBW:500 Hz
Vert.	7206.000	AV	32.98	36.21	-34.48	-	2.38	37.09	53.9	16.8	150	0	VBW:500 Hz, Floor noise
Vert.	9608.000	AV	31.86	38.14	-31.55	-	2.38	40.83	53.9	13.0	150	0	VBW:500 Hz, Floor noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.945[m] / 3.0[m]) = 2.38 [dB]$

10 GHz to 40 GHz : $20\log(1.0[m] / 3.0[m]) = -9.54 [dB]$

20 dBc Data Sheet

(RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	99.63	27.77	-28.26	-	2.38	101.52	-	-	Carrier
Hori.	2400.000	PK	42.41	27.77	-28.26	-	2.38	44.30	81.5	37.2	-
Vert.	2402.000	PK	99.41	27.77	-28.26	-	2.38	101.30	-	-	Carrier
Vert.	2400.000	PK	41.55	27.77	-28.26	-	2.38	43.44	81.3	37.8	-



Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.945[m] / 3.0[m]) = 2.38 [dB]$

10 GHz to 40 GHz : $20\log(1.0[m] / 3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	WAC2
Date	October 10, 2024
Temperature / Humidity	23 deg. C / 56 % RH
Engineer	Kouki Yamada
	(1 GHz to 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

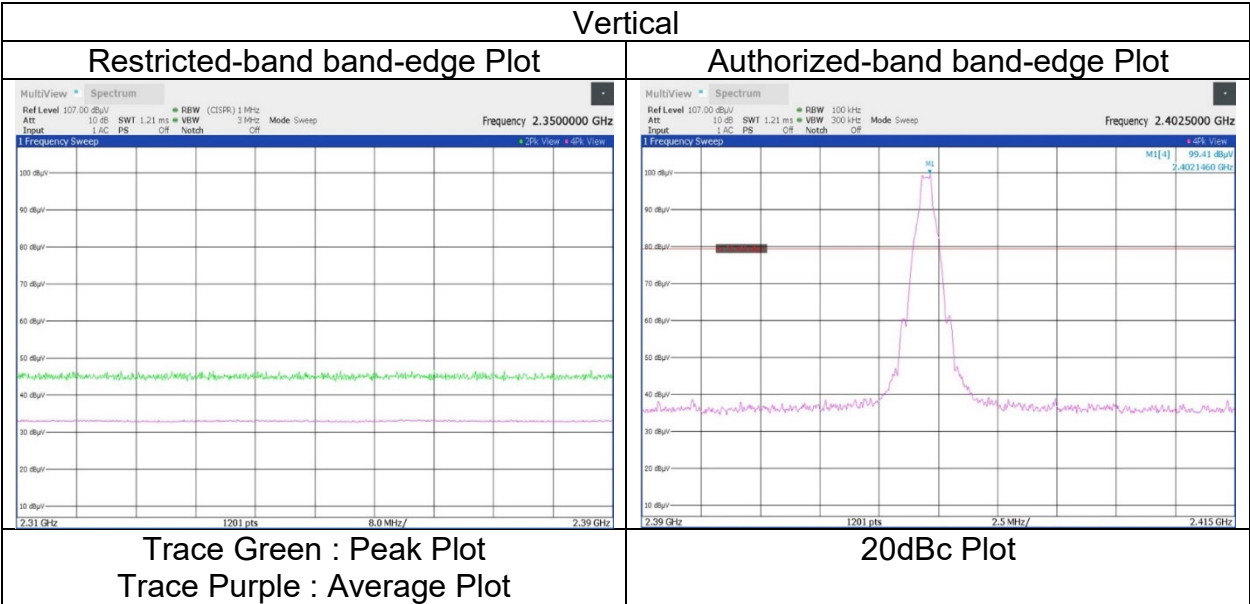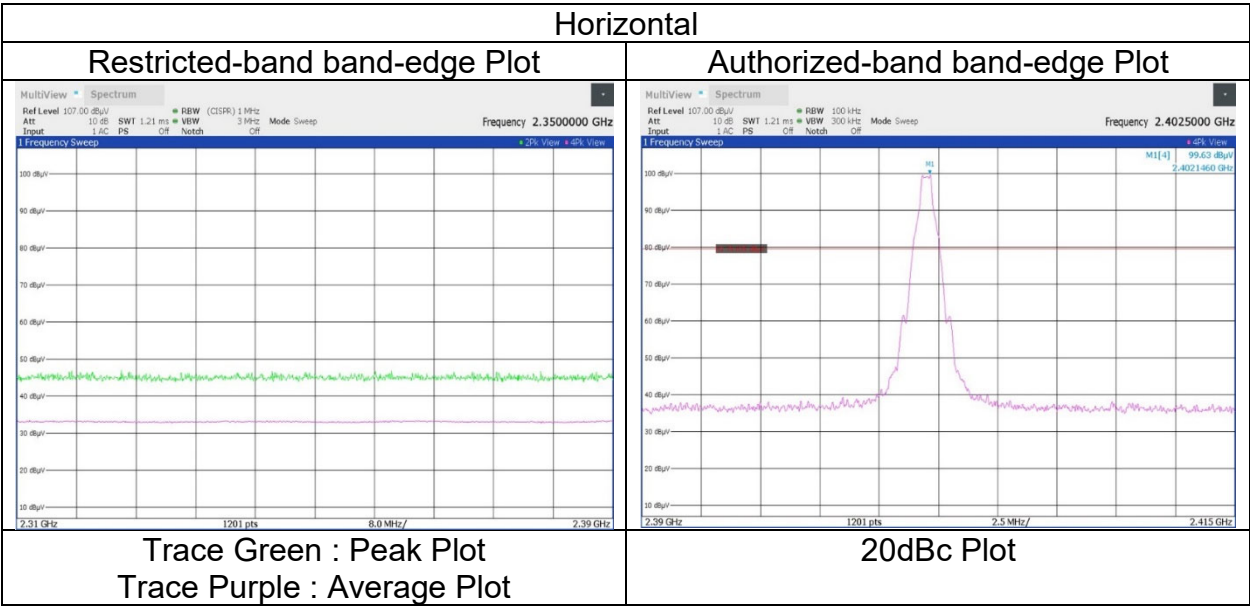

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	WAC2	WAC2
Date	October 10, 2024	October 11, 2024
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 50 % RH
Engineer	Kouki Yamada	Kouki Yamada
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Fac. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	4882.000	PK	51.88	31.96	-36.01	-	2.38	50.21	73.9	23.6	186	75	-
Hori.	7323.000	PK	47.71	36.67	-34.25	-	2.38	52.51	73.9	21.3	150	0	Floor Noise
Hori.	9764.000	PK	45.71	38.10	-31.32	-	2.38	54.87	73.9	19.0	150	0	Floor Noise
Hori.	4882.000	AV	43.30	31.96	-36.01	-	2.38	41.63	53.9	12.2	186	75	VBW:500 Hz
Hori.	7323.000	AV	33.25	36.67	-34.25	-	2.38	38.05	53.9	15.8	150	0	VBW:500 Hz, Floor noise
Hori.	9764.000	AV	31.74	38.10	-31.32	-	2.38	40.90	53.9	13.0	150	0	VBW:500 Hz, Floor noise
Vert.	4882.000	PK	51.61	31.96	-36.01	-	2.38	49.94	73.9	23.9	126	338	-
Vert.	7323.000	PK	47.83	36.67	-34.25	-	2.38	52.63	73.9	21.2	150	0	Floor Noise
Vert.	9764.000	PK	45.83	38.10	-31.32	-	2.38	54.99	73.9	18.9	150	0	Floor Noise
Vert.	4882.000	AV	41.51	31.96	-36.01	-	2.38	39.84	53.9	14.0	126	338	VBW:500 Hz
Vert.	7323.000	AV	33.29	36.67	-34.25	-	2.38	38.09	53.9	15.8	150	0	VBW:500 Hz, Floor noise
Vert.	9764.000	AV	31.62	38.10	-31.32	-	2.38	40.78	53.9	13.1	150	0	VBW:500 Hz, Floor noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz: $20\log(3.945[m]/3.0[m]) = 2.38 [dB]$

10 GHz to 40 GHz: $20\log(1.0[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Test place	Shonan EMC Lab.	WAC2
Semi Anechoic Chamber	WAC2	WAC2
Date	October 10, 2024	October 11, 2024
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 50 % RH
Engineer	Kouki Yamada	Kouki Yamada
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	2483.500	PK	48.62	27.80	-28.21	-	2.38	50.59	73.9	23.3	182	355	-
Hori.	4960.000	PK	51.59	32.23	-35.98	-	2.38	50.22	73.9	23.6	195	78	-
Hori.	7440.000	PK	47.56	36.81	-34.00	-	2.38	52.75	73.9	21.1	150	0	Floor Noise
Hori.	9920.000	PK	46.03	38.04	-31.09	-	2.38	55.36	73.9	18.5	150	0	Floor Noise
Hori.	2483.500	AV	34.56	27.80	-28.21	-	2.38	36.53	53.9	17.3	182	355	VBW:500 Hz
Hori.	4960.000	AV	41.99	32.23	-35.98	-	2.38	40.62	53.9	13.2	195	78	VBW:500 Hz
Hori.	7440.000	AV	33.19	36.81	-34.00	-	2.38	38.38	53.9	15.5	150	0	VBW:500 Hz, Floor noise
Hori.	9920.000	AV	31.84	38.04	-31.09	-	2.38	41.17	53.9	12.7	150	0	VBW:500 Hz, Floor noise
Vert.	2483.500	PK	48.89	27.80	-28.21	-	2.38	50.86	73.9	23.0	211	100	-
Vert.	4960.000	PK	49.29	32.23	-35.98	-	2.38	47.92	73.9	25.9	285	83	-
Vert.	7440.000	PK	47.35	36.81	-34.00	-	2.38	52.54	73.9	21.3	150	0	Floor Noise
Vert.	9920.000	PK	45.95	38.04	-31.09	-	2.38	55.28	73.9	18.6	150	0	Floor Noise
Vert.	2483.500	AV	34.51	27.80	-28.21	-	2.38	36.48	53.9	17.4	211	100	VBW:500 Hz
Vert.	4960.000	AV	36.57	32.23	-35.98	-	2.38	35.20	53.9	18.7	285	83	VBW:500 Hz
Vert.	7440.000	AV	33.27	36.81	-34.00	-	2.38	38.46	53.9	15.4	150	0	VBW:500 Hz, Floor noise
Vert.	9920.000	AV	31.87	38.04	-31.09	-	2.38	41.20	53.9	12.7	150	0	VBW:500 Hz, Floor noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz: $20\log(3.945[m]/3.0[m]) = 2.38 [dB]$



10 GHz to 40 GHz: $20\log(1.0[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Shonan EMC Lab.
WAC2
October 10, 2024
23 deg. C / 56 % RH
Kouki Yamada
(1 GHz to 10 GHz)
Tx, Hopping Off, DH5 2480 MHz

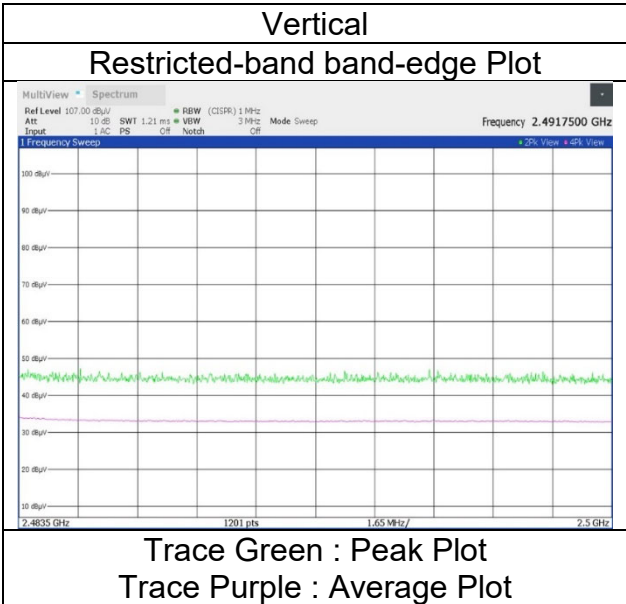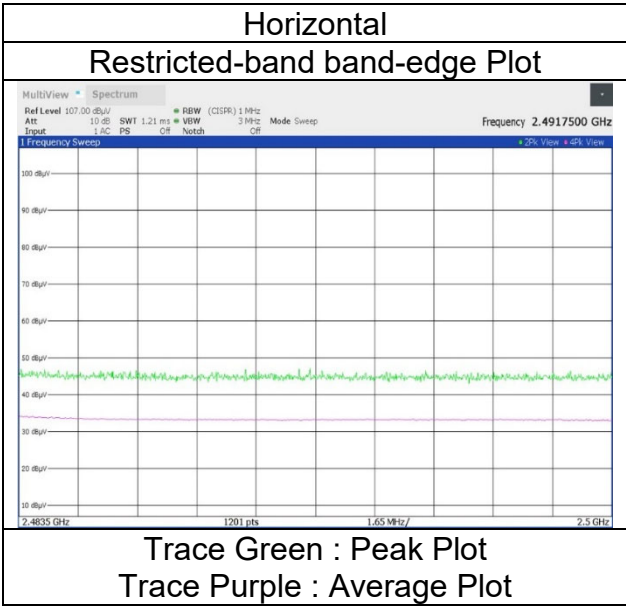

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber WAC2
Date October 10, 2024 WAC2
Temperature / Humidity 23 deg. C / 56 % RH 23 deg. C / 50 % RH
Engineer Kouki Yamada Kouki Yamada
(1 GHz to 10 GHz) (10 GHz to 26.5 GHz)
Mode Tx, Hopping Off, 3DH5 2402 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	2390.000	PK	47.85	27.75	-28.27	-	2.38	49.71	73.9	24.1	247	210	-
Hori.	4804.000	PK	48.60	31.56	-36.04	-	2.38	46.50	73.9	27.4	154	346	-
Hori.	7206.000	PK	46.63	36.21	-34.48	-	2.38	50.74	73.9	23.1	150	0	Floor Noise
Hori.	9608.000	PK	46.19	38.14	-31.55	-	2.38	55.16	73.9	18.7	150	0	Floor Noise
Hori.	2390.000	AV	33.50	27.75	-28.27	-	2.38	35.36	53.9	18.5	247	210	VBW:500 Hz
Hori.	4804.000	AV	36.36	31.56	-36.04	-	2.38	34.26	53.9	19.6	154	346	VBW:500 Hz
Hori.	7206.000	AV	32.95	36.21	-34.48	-	2.38	37.06	53.9	16.8	150	0	VBW:500 Hz, Floor noise
Hori.	9608.000	AV	32.07	38.14	-31.55	-	2.38	41.04	53.9	12.8	150	0	VBW:500 Hz, Floor noise
Vert.	2390.000	PK	47.27	27.75	-28.27	-	2.38	49.13	73.9	24.7	234	235	-
Vert.	4804.000	PK	49.04	31.56	-36.04	-	2.38	46.94	73.9	26.9	314	87	-
Vert.	7206.000	PK	46.56	36.21	-34.48	-	2.38	50.67	73.9	23.2	150	0	Floor Noise
Vert.	9608.000	PK	46.00	38.14	-31.55	-	2.38	54.97	73.9	18.9	150	0	Floor Noise
Vert.	2390.000	AV	33.29	27.75	-28.27	-	2.38	35.15	53.9	18.7	234	235	VBW:500 Hz
Vert.	4804.000	AV	36.14	31.56	-36.04	-	2.38	34.04	53.9	19.8	314	87	VBW:500 Hz
Vert.	7206.000	AV	32.79	36.21	-34.48	-	2.38	36.90	53.9	17.0	150	0	VBW:500 Hz, Floor noise
Vert.	9608.000	AV	31.95	38.14	-31.55	-	2.38	40.92	53.9	12.9	150	0	VBW:500 Hz, Floor noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.945[m]/3.0[m]) = 2.38[dB]$

10 GHz to 40 GHz : $20\log(1.0[m]/3.0[m]) = -9.54[dB]$

20 dBc Data Sheet

(RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2402.000	PK	98.53	27.77	-28.26	-	2.38	100.42	-	-	Carrier
Hori.	2400.000	PK	42.82	27.77	-28.26	-	2.38	44.71	80.4	35.6	-
Vert.	2402.000	PK	98.04	27.77	-28.26	-	2.38	99.93	-	-	Carrier
Vert.	2400.000	PK	42.47	27.77	-28.26	-	2.38	44.36	79.9	35.5	-



Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

Distance Fac. : 1 GHz to 10 GHz : $20\log(3.945[m]/3.0[m]) = 2.38[dB]$

10 GHz to 40 GHz : $20\log(1.0[m]/3.0[m]) = -9.54[dB]$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	WAC2
Date	October 10, 2024
Temperature / Humidity	23 deg. C / 56 % RH
Engineer	Kouki Yamada
	(1 GHz to 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

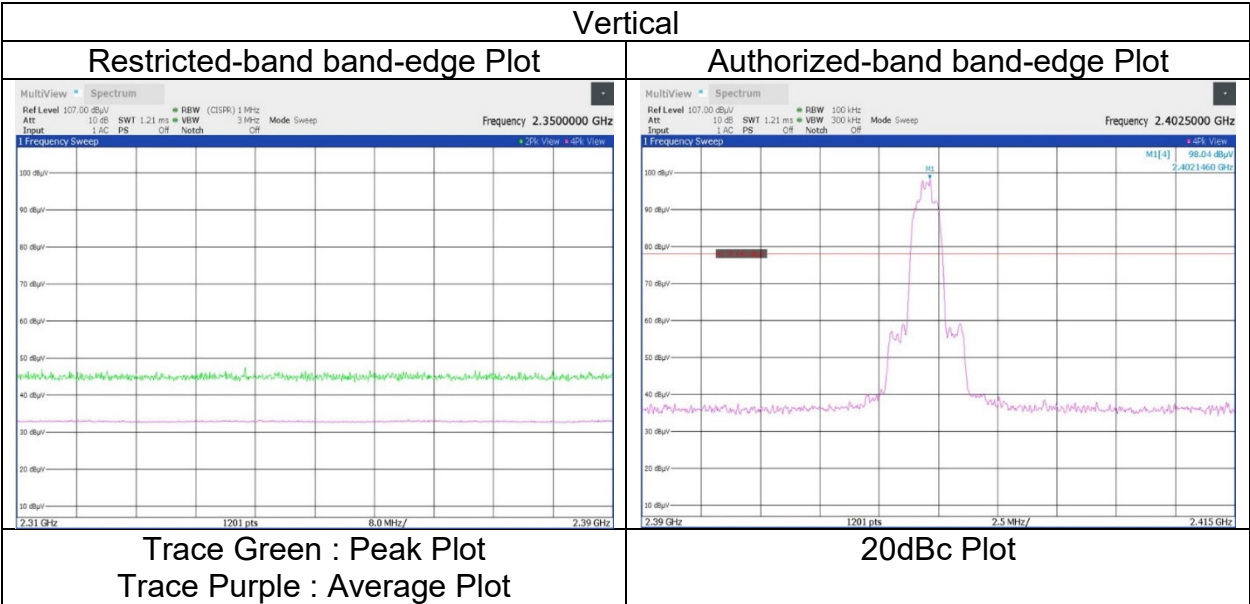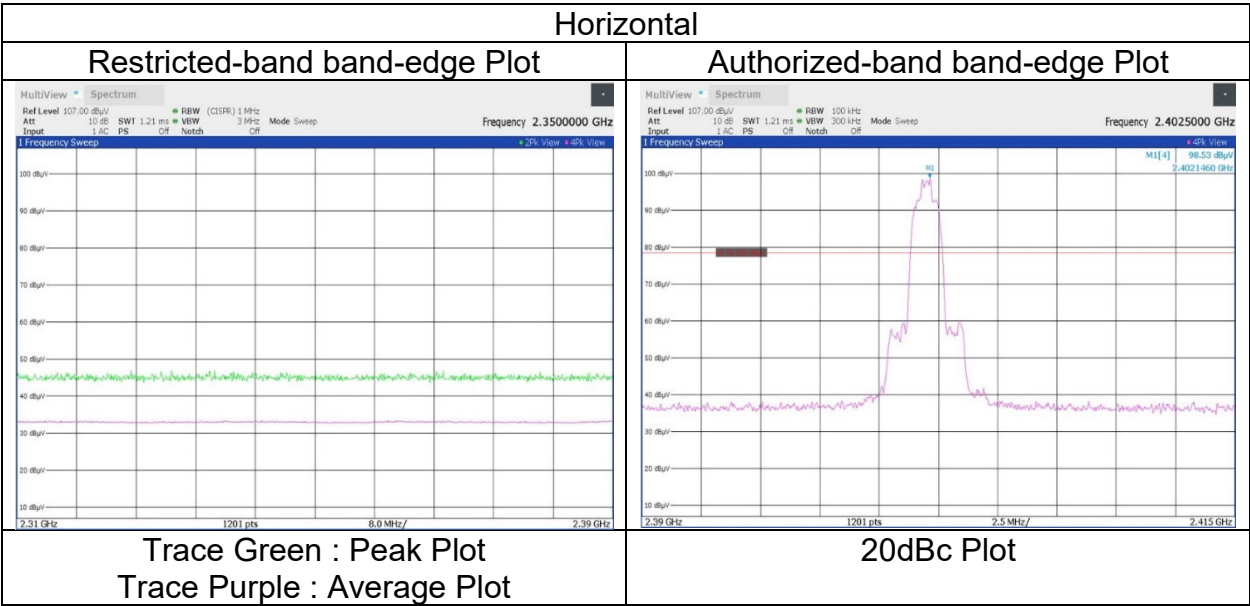

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.	WAC2
Semi Anechoic Chamber	WAC2	WAC2
Date	October 10, 2024	October 11, 2024
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 50 % RH
Engineer	Kouki Yamada	Kouki Yamada
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	Fac. [dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	4882.000	PK	50.45	31.96	-36.01	-	2.38	48.78	73.9	25.1	100	60	-
Hori.	7323.000	PK	47.41	36.67	-34.25	-	2.38	52.21	73.9	21.6	150	0	Floor Noise
Hori.	9764.000	PK	45.79	38.10	-31.32	-	2.38	54.95	73.9	18.9	150	0	Floor Noise
Hori.	4882.000	AV	37.11	31.96	-36.01	-	2.38	35.44	53.9	18.4	100	60	VBW:500 Hz
Hori.	7323.000	AV	33.28	36.67	-34.25	-	2.38	38.08	53.9	15.8	150	0	VBW:500 Hz, Floor noise
Hori.	9764.000	AV	31.69	38.10	-31.32	-	2.38	40.85	53.9	13.0	150	0	VBW:500 Hz, Floor noise
Vert.	4882.000	PK	48.41	31.96	-36.01	-	2.38	46.74	73.9	27.1	275	80	-
Vert.	7323.000	PK	47.91	36.67	-34.25	-	2.38	52.71	73.9	21.1	150	0	Floor Noise
Vert.	9764.000	PK	46.12	38.10	-31.32	-	2.38	55.28	73.9	18.6	150	0	Floor Noise
Vert.	4882.000	AV	35.62	31.96	-36.01	-	2.38	33.95	53.9	19.9	275	80	VBW:500 Hz
Vert.	7323.000	AV	33.14	36.67	-34.25	-	2.38	37.94	53.9	15.9	150	0	VBW:500 Hz, Floor noise
Vert.	9764.000	AV	31.67	38.10	-31.32	-	2.38	40.83	53.9	13.0	150	0	VBW:500 Hz, Floor noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz)) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz: $20\log(3.945[m]/3.0[m]) = 2.38 [dB]$

10 GHz to 40 GHz: $20\log(1.0[m]/3.0[m]) = -9.54 [dB]$

Radiated Spurious Emission

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	WAC2	WAC2
Date	October 10, 2024	October 11, 2024
Temperature / Humidity	23 deg. C / 56 % RH	23 deg. C / 50 % RH
Engineer	Kouki Yamada	Kouki Yamada
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency	Detector	Reading	Ant.Fac.	Loss	Gain	Distance	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[deg.]	
Hori.	2483.500	PK	50.17	27.80	-28.21	-	2.38	52.14	73.9	21.7	184	200	-
Hori.	4960.000	PK	49.80	32.23	-35.98	-	2.38	48.43	73.9	25.4	186	64	-
Hori.	7440.000	PK	47.11	36.81	-34.00	-	2.38	52.30	73.9	21.6	150	0	Floor Noise
Hori.	9920.000	PK	46.20	38.04	-31.09	-	2.38	55.53	73.9	18.3	150	0	Floor Noise
Hori.	2483.500	AV	35.05	27.80	-28.21	-	2.38	37.02	53.9	16.8	184	200	VBW:500 Hz
Hori.	4960.000	AV	37.05	32.23	-35.98	-	2.38	35.68	53.9	18.2	186	64	VBW:500 Hz
Hori.	7440.000	AV	33.21	36.81	-34.00	-	2.38	38.40	53.9	15.5	150	0	VBW:500 Hz, Floor noise
Hori.	9920.000	AV	31.97	38.04	-31.09	-	2.38	41.30	53.9	12.6	150	0	VBW:500 Hz, Floor noise
Vert.	2483.500	PK	50.22	27.80	-28.21	-	2.38	52.19	73.9	21.7	215	78	-
Vert.	4960.000	PK	48.72	32.23	-35.98	-	2.38	47.35	73.9	26.5	285	85	-
Vert.	7440.000	PK	47.36	36.81	-34.00	-	2.38	52.55	73.9	21.3	150	0	Floor Noise
Vert.	9920.000	PK	45.94	38.04	-31.09	-	2.38	55.27	73.9	18.6	150	0	Floor Noise
Vert.	2483.500	AV	35.01	27.80	-28.21	-	2.38	36.98	53.9	16.9	215	78	VBW:500 Hz
Vert.	4960.000	AV	35.40	32.23	-35.98	-	2.38	34.03	53.9	19.8	285	85	VBW:500 Hz
Vert.	7440.000	AV	33.17	36.81	-34.00	-	2.38	38.36	53.9	15.5	150	0	VBW:500 Hz, Floor noise
Vert.	9920.000	AV	31.72	38.04	-31.09	-	2.38	41.05	53.9	12.8	150	0	VBW:500 Hz, Floor noise

Result = Reading + Ant.Fac. + Loss (Cable + (Atten or Filter)(below 18 GHz) - Gain(Amp) (1 GHz to 18 GHz) - Gain(Amp) (only below 1 GHz & above 18 GHz) + Distance Fac.



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance Fac. : 1 GHz to 10 GHz: $20\log(3.945[m]/3.0[m]) = 2.38$ [dB]

10 GHz to 40 GHz: $20\log(1.0[m]/3.0[m]) = -9.54$ [dB]

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	WAC2
Date	October 10, 2024
Temperature / Humidity	23 deg. C / 56 % RH
Engineer	Kouki Yamada
	(1 GHz to 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

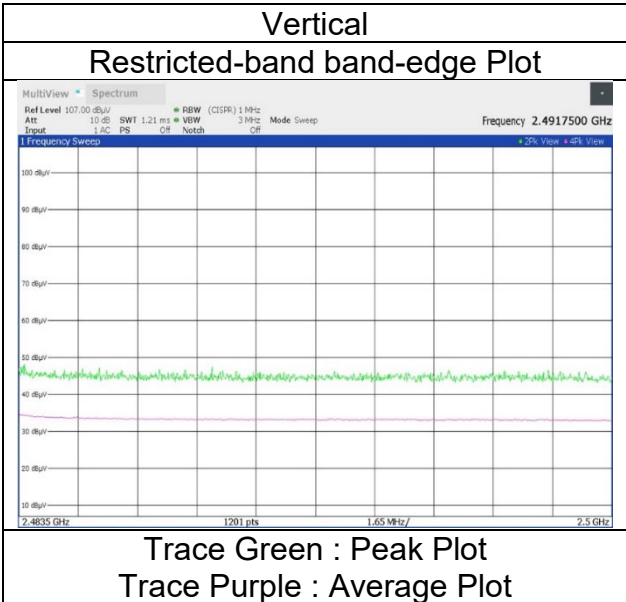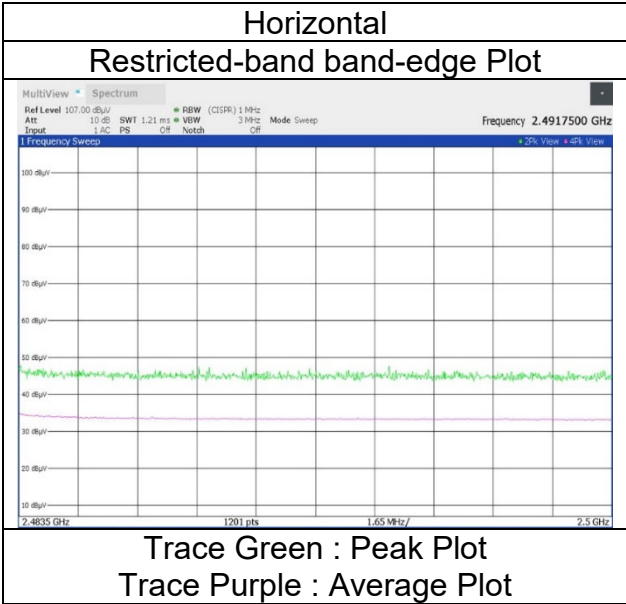


* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

(Plot data, Worst case mode for Maximum Peak Output Power)

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	WAC2	WAC2	WAC2
Date	October 14, 2024	October 10, 2024	October 11, 2024
Temperature / Humidity	23 deg. C / 53 % RH	23 deg. C / 56 % RH	23 deg. C / 50 % RH
Engineer	Kouki Yamada	Kouki Yamada	Kouki Yamada
Mode	(Below 1 GHz)	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)
	Tx, Hopping Off, DH5 2402 MHz		

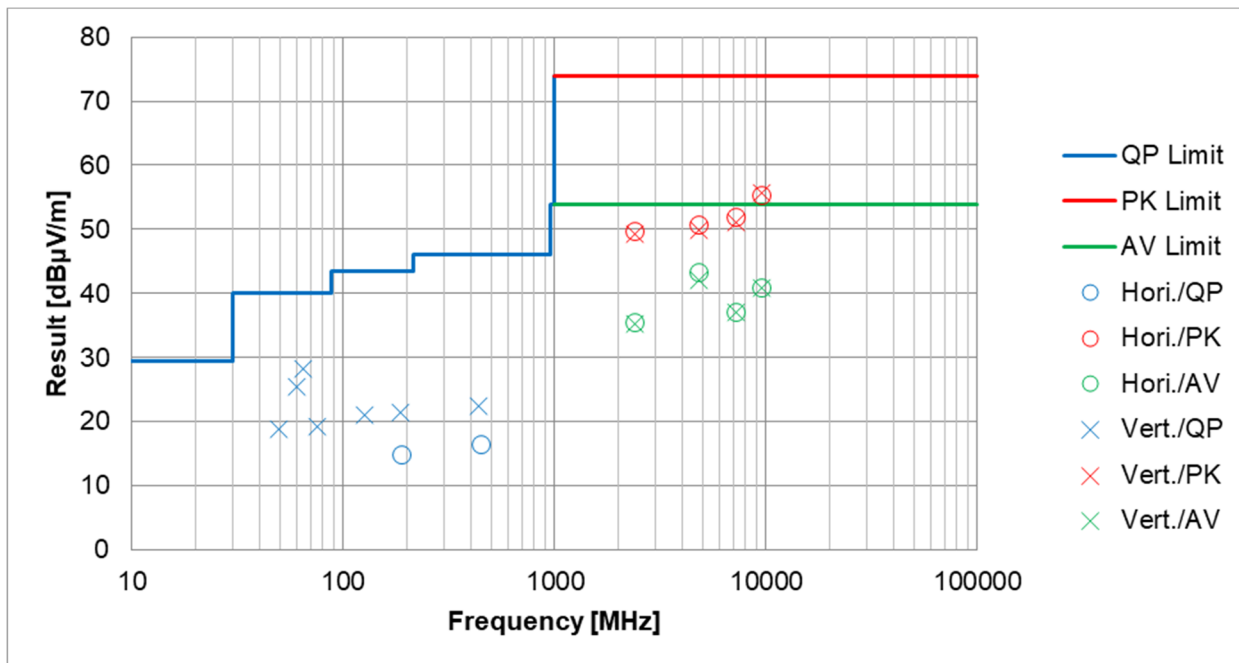

*These plots data contain sufficient number to show the trend of characteristic features for EUT.