



Elliott Laboratories  
www.elliottlabs.com

684 West Maude Avenue  
Sunnyvale, CA 94085-3518  
408-245-7800 Phone  
408-245-3499 Fax

Elliott TCB  
684 W. Maude Ave  
Sunnyvale, CA, 94085

To whom it may concern:

The enclosed documents constitute a formal submittal and application for Equipment Authorization for an 802.11bg module pursuant to the following rules:

The enclosed documents constitute a formal submittal and application for a Modular Approval to a previously FCC-certified device (and multiple listing for Industry Canada) for an 802.11bg module pursuant to the following rules:

Subpart C of Part 15 of FCC Rules (CFR 47)  
RSS-Gen Issue 2, June 2007, "General Requirements and Information for the Certification of Radiocommunication Equipment"  
RSS-210, Issue 7, June 2007, "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"

Elliott Laboratories, as duly authorized agent prepared this submittal. A copy of the letter of our appointment as agent is included with the application.

If there are any questions or if further information is needed, please contact Elliott Laboratories for assistance.

Sincerely,

Mark E. Hill  
Staff Engineer

MEH/dmg

*Electromagnetic Emissions Test Report  
Application for Grant of Equipment Authorization  
pursuant to  
Industry Canada RSS-Gen Issue 2 / RSS 210 Issue 7  
FCC Part 15 Subpart C  
on the  
Seiko Epson Corporation  
Transmitter  
Model: WLU3090-D69 (RoHS)*

UPN: 1052C-WLU3090  
FCC ID: BKMFBWLU3090


GRANTEE: Seiko Epson Corporation  
80 Harashinden, Hirooka,  
Shojiri-shi, Nagano-ken 399-0785  
Japan

TEST SITE(S): Elliott Laboratories  
41039 Boyce Road.  
Fremont, CA. 94538-2435  
IC Site Registration #: IC 4549-3; IC 4549-4

REPORT DATE: February 12, 2009

FINAL TEST DATE: January 27, January 28, January 29, February 2,  
February 5 and February 6, 2009

AUTHORIZED SIGNATORY:

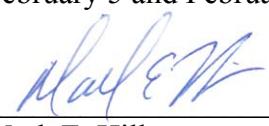  
\_\_\_\_\_  
Mark E. Hill  
Staff Engineer



Testing Cert #2016-01

Elliott Laboratories is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

***REVISION HISTORY***

Rev #	Date	Comments	Modified By
1	March 13, 2009	Initial Release	-

**TABLE OF CONTENTS**

<b>COVER PAGE</b> .....	<b>1</b>
<b>REVISION HISTORY</b> .....	<b>2</b>
<b>TABLE OF CONTENTS</b> .....	<b>3</b>
<b>SCOPE</b> .....	<b>5</b>
<b>OBJECTIVE</b> .....	<b>6</b>
<b>STATEMENT OF COMPLIANCE</b> .....	<b>6</b>
<b>TEST RESULTS SUMMARY</b> .....	<b>7</b>
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ).....	7
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	8
<b>MEASUREMENT UNCERTAINTIES</b> .....	<b>8</b>
<b>EQUIPMENT UNDER TEST (EUT) DETAILS</b> .....	<b>9</b>
GENERAL.....	9
ANTENNA SYSTEM .....	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS .....	10
EUT OPERATION.....	10
<b>TEST SITE</b> .....	<b>11</b>
GENERAL INFORMATION .....	11
CONDUCTED EMISSIONS CONSIDERATIONS .....	11
RADIATED EMISSIONS CONSIDERATIONS .....	11
<b>MEASUREMENT INSTRUMENTATION</b> .....	<b>12</b>
RECEIVER SYSTEM .....	12
INSTRUMENT CONTROL COMPUTER .....	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS .....	13
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	13
INSTRUMENT CALIBRATION.....	13

**TABLE OF CONTENTS (Continued)**

<b>TEST PROCEDURES .....</b>	<b>14</b>
EUT AND CABLE PLACEMENT .....	14
CONDUCTED EMISSIONS.....	14
RADIATED EMISSIONS.....	14
RADIATED EMISSIONS.....	15
BANDWIDTH MEASUREMENTS .....	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	17
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN .....	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS .....	18
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS .....	18
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS .....	19
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	20
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	21
<i>EXHIBIT 1: Test Equipment Calibration Data.....</i>	<i>1</i>
<i>EXHIBIT 2: Test Measurement Data.....</i>	<i>2</i>
<i>EXHIBIT 3: Photographs of Test Configurations.....</i>	<i>3</i>
<i>EXHIBIT 4: Proposed FCC ID Label &amp; Label Location .....</i>	<i>4</i>
<i>EXHIBIT 5: Detailed Photographs.....</i>	<i>5</i>
<i>EXHIBIT 6: Operator's Manual .....</i>	<i>6</i>
<i>EXHIBIT 7: Block Diagram.....</i>	<i>7</i>
<i>EXHIBIT 8: Schematic Diagrams.....</i>	<i>8</i>
<i>EXHIBIT 9: Theory of Operation .....</i>	<i>9</i>
<i>EXHIBIT 10: RF Exposure Information .....</i>	<i>10</i>

***SCOPE***

An electromagnetic emissions test has been performed on the Seiko Epson Corporation model WLU3090-D69 (RoHS) pursuant to the following rules:

Industry Canada RSS-Gen Issue 2  
RSS 210 Issue 7 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”  
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003  
FCC DTS Measurement Procedure KDB558074, March 2005

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Seiko Epson Corporation model WLU3090-D69 (RoHS) and therefore apply only to the tested sample. The sample was selected and prepared by Jerry Chen of Askey Computer Corporation.

**OBJECTIVE**

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**STATEMENT OF COMPLIANCE**

The tested sample of Seiko Epson Corporation model WLU3090-D69 (RoHS) complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 2  
RSS 210 Issue 7 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"  
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**TEST RESULTS SUMMARY****DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses OFDM / DSSS techniques	-	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	802.11g: 15.4 MHz 802.11b: 6.8 MHz	>500kHz	Complies
	RSP100	99% Bandwidth	802.11g: 17.0 MHz 802.11b: 12.8 MHz	Information only	Complies
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	802.11g: 18.3 dBm (0.068 Watts) EIRP = 0.1 W <sup>Note 1</sup> 802.11b: 18.8dBm (0.076 Watts) EIRP = 0.112 W <sup>Note 1</sup>	1Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	802.11g: -4.7 dBm / MHz 802.11b: 0.3 dBm / MHz	8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	<-30dBc	< -30dBc <sup>Note 2</sup>	Complies
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	53.9dB $\mu$ V/m @ 2483.6MHz (-0.1dB)	15.207 in restricted bands, all others <-30dBc <sup>Note 2</sup>	Complies

Note 1: EIRP calculated using antenna gain of 1.71 dBi for the highest EIRP multi-point system.

Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst) / RMS averaging over a time interval, as permitted under RSS 210 section A8.4(4).

**GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS**

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Antenna is integral to the pcb/module		Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	38.8dB $\mu$ V/m @ 2132.2MHz (-15.2dB)	Refer to standard	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	45.8dB $\mu$ V @ 0.177MHz (-18.8dB)	Refer to standard	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in Exhibit 10, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
	RSP 100 RSS GEN 7.1.5	User Manual		Statement required regarding non-interference	

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	0.015 to 30	± 3.0
Radiated Emissions	30 to 1000	± 3.6
Radiated Emissions	1000 to 40000	± 6.0

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Seiko Epson Corporation model WLU3090-D69 (RoHS) is an 802.11bg radio module. The EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 3.3VDC.

The sample was received on January 27, 2009 and tested on January 27, January 28, January 29, February 2, February 5 and February 6, 2009. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number	FCC ID
Askey Computer Corporation	WLU3090-D69	802.11bg radio module	N/A	BKMFBWLU3090

**ANTENNA SYSTEM**

The antenna system used with the Seiko Epson Corporation model WLU3090-D69 (RoHS) is integral to the device.

**ENCLOSURE**

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host system.

**MODIFICATIONS**

The EUT did not require modifications during testing in order to comply with emissions specifications.

**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	PP01L	Laptop	CN-04P449-48643-2CH-2011	-

The following equipment was used as remote support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Netgear	FS108	Hub	-	-

**EUT INTERFACE PORTS**

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
USB/Laptop	EUT Board	USB Cable	Shielded	1.5
AC Power	AC Mains	3Wire	Unshielded	1.0
Ethernet/Laptop	Hub	Cat-5	Unshielded	10.0

Note: The EUT is a module designed to be installed into a host device.

**EUT OPERATION**

During emissions testing the EUT was configured to transmit at the noted channel.

For receive-mode tests the EUT was configured to a receive-only mode.

**TEST SITE****GENERAL INFORMATION**

Final test measurements were taken on January 27, January 28, January 29, February 2, February 5 and February 6, 2009 at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	IC 2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	IC 2845B-4	

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

**CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

**RADIATED EMISSIONS CONSIDERATIONS**

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

## MEASUREMENT INSTRUMENTATION

### RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

### INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

### LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

**FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

**ANTENNAS**

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

**ANTENNA MAST AND EQUIPMENT TURNTABLE**

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

**INSTRUMENT CALIBRATION**

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.


## TEST PROCEDURES

### EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

### CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

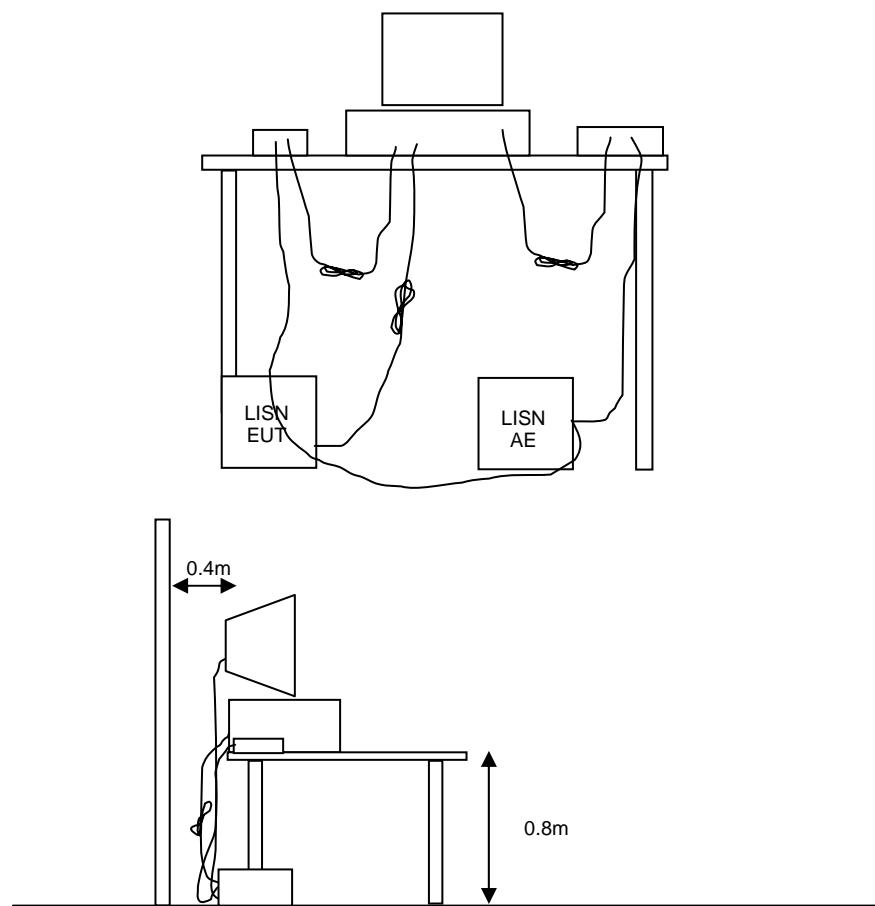


**RADIATED EMISSIONS**

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

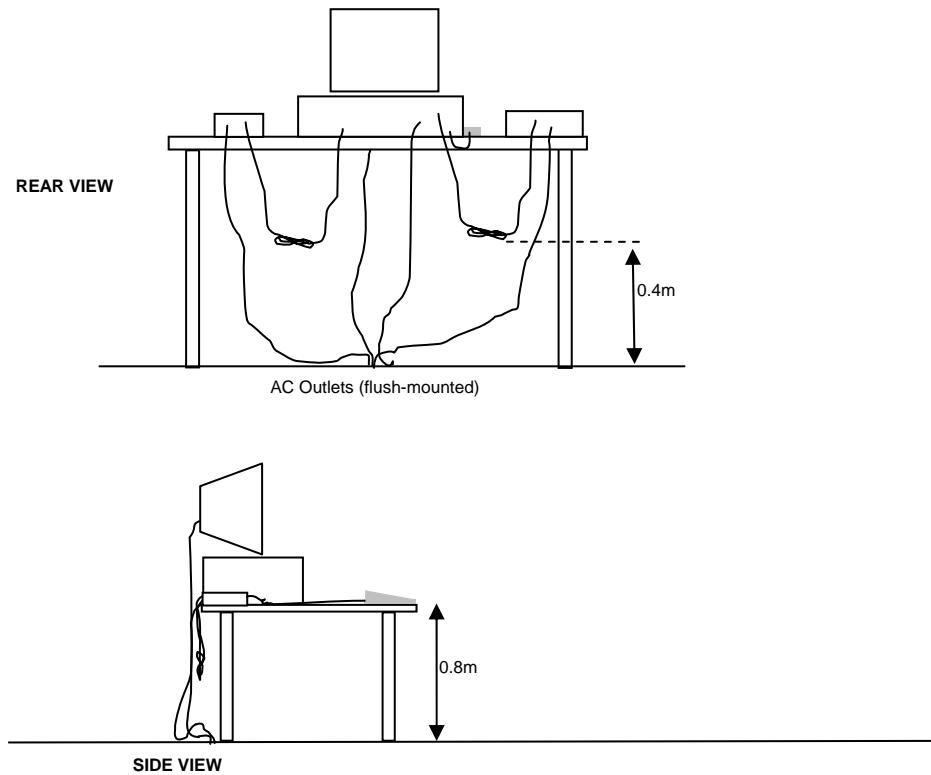


Typical Test Configuration for Radiated Field Strength Measurements

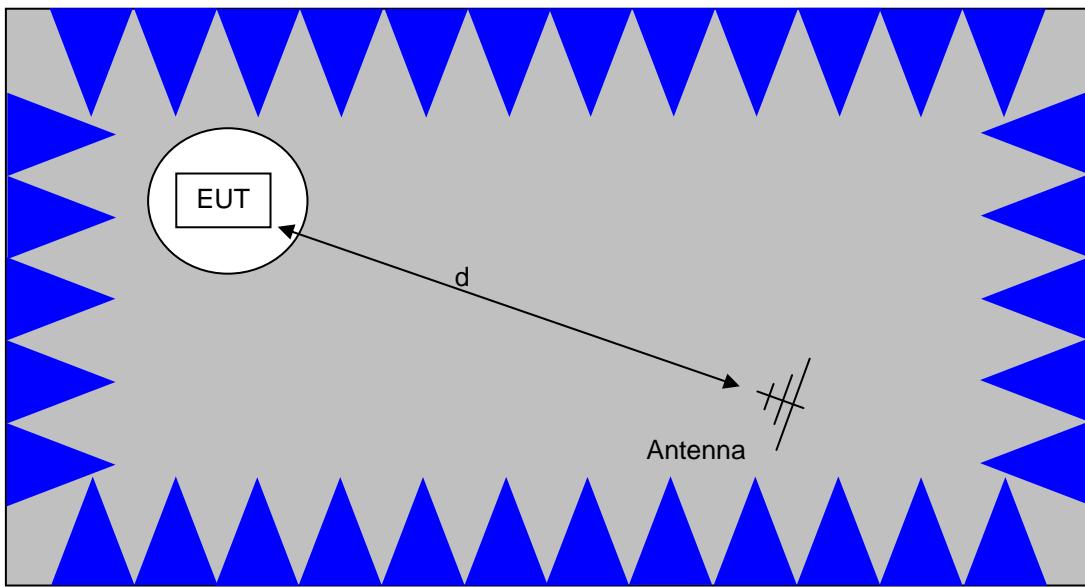

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.

Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

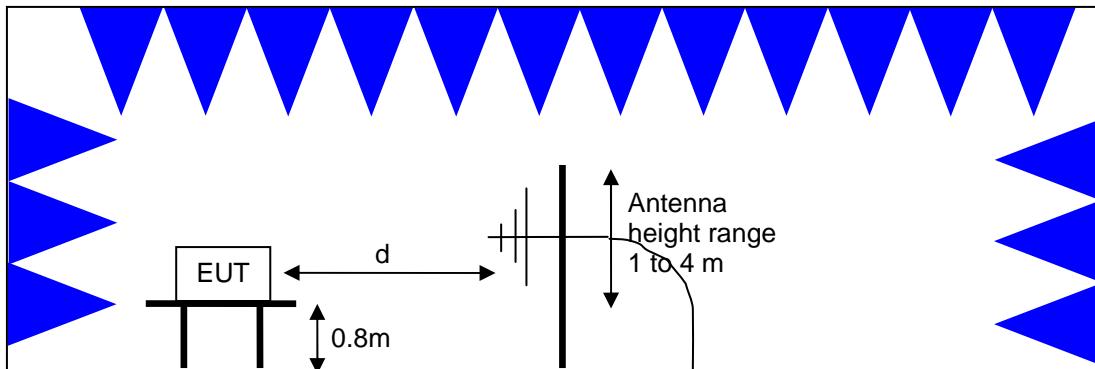

Test Configuration for Radiated Field Strength Measurements  
Semi-Anechoic Chamber, Plan and Side Views

**BANDWIDTH MEASUREMENTS**

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

***CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN***

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

**GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands<sup>1</sup> (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F <sub>KHz</sub> @ 300m	67.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 300m
0.490-1.705	24000/F <sub>KHz</sub> @ 30m	87.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

**RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

<sup>1</sup> The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

**OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS**

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

**TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS**

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_f - S = M$$

where:

$R_f$  = Receiver Reading in dBuV

$S$  = Specification Limit in dBuV

$M$  = Margin to Specification in +/- dB

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m/D_s)$$

where:

$F_d$  = Distance Factor in dB

$D_m$  = Measurement Distance in meters

$D_s$  = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_C = R_r + F_d$$

and

$$M = R_C - L_S$$

where:

$R_r$  = Receiver Reading in dBuV/m

$F_d$  = Distance Factor in dB

$R_C$  = Corrected Reading in dBuV/m

$L_S$  = Specification Limit in dBuV/m

$M$  = Margin in dB Relative to Spec

#### *SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION*

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{3} \text{ microvolts per meter}$$

where P is the eirp (Watts)

*EXHIBIT 1: Test Equipment Calibration Data*

1 Page

**Radio Antenna Port (Power and Spurious Emissions), 27-Jan-09****Engineer: Suhaila Khushzad**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	07-Dec-09
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	19-Sep-09

**Bandedge DTS, 28-Jan-09****Engineer: jcaizzi**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	07-Dec-09
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	04-Feb-09

**Conducted Emissions - AC Power Ports, 29-Jan-09****Engineer: rwarelas**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz	3825/2	1292	22-Feb-09
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	17-Apr-09
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	04-Feb-09

**Radiated Emissions, 1000 - 7,500 MHz, 29-Jan-09****Engineer: rwarelas**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	02-Sep-10
Hewlett Packard	SpectAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	15-Feb-09
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	13-Nov-09

**Radiated Emissions, 1000 - 26,500 MHz, 29-Jan-09****Engineer: Joseph Cadigal**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18GHz	3115	868	10-Jun-10
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1731	02-Dec-09
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	20-Oct-09
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	13-Nov-09

**Radiated Emissions, 1,000 - 25,000 MHz, 02-Feb-09****Engineer: Mehran Birgani**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	09-Oct-09
EMCO	Antenna, Horn, 1-18 GHz	3115	786	06-Dec-09
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1731	02-Dec-09
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	20-Oct-09

**Radio Spurious Emissions, 05-Feb-09****Engineer: skhushzad**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	09-Oct-09
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	02-Sep-10
Hewlett Packard	SpectAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	15-Feb-09
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1731	02-Dec-09

**Radio Antenna Port (Power and Spurious Emissions), 06-Feb-09****Engineer: Mehran Birgani**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	19-Sep-09
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40)	8564E	CH5273	20-Feb-09

**Radio Spurious (Power and Spurious Emissions), 12-Feb-09****Engineer: Joseph Cadigal**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	06-Dec-09
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	19-Sep-09
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	20-Oct-09
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	13-Nov-09

***EXHIBIT 2: Test Measurement Data***

44 Pages



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
		Account Manager:	Dean Eriksen
Contact:	Jerry Chan		-
Emissions Standard(s):	FCC Part 15, LP0002	Class:	-
Immunity Standard(s):	-	Environment:	-

## EMC Test Data

For The

## Askey Computer Corporation

Model

WLU3090-D69 (RoHS)

Date of Last Test: 2/13/2009



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
		Account Manger:	Dean Eriksen
Contact:	Jerry Chan		
Emissions Standard(s):	FCC Part 15, LP0002	Class:	-
Immunity Standard(s):	-	Environment:	-

### EUT INFORMATION

*The following information was collected during the test session(s).*

#### General Description

The EUT is a 802.11bg radio module. The EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 3.3VDC.

#### Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Askey Computer Corporation	WLU3090-D69	802.11bg radio module	N/A	BKMFBWLU3090

#### EUT Antenna (Intentional Radiators Only)

The antenna is integral to the device.

#### EUT Enclosure

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

#### Modification History

Mod. #	Test	Date	Modification
1			No modifications were made to the EUT during testing.
2			
3			

Modifications applied are assumed to be used on subsequent tests unless otherwise stated as a further modification.



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
		Account Manger:	Dean Eriksen
Contact:	Jerry Chan		
Emissions Standard(s):	FCC Part 15, LP0002	Class:	-
Immunity Standard(s):	-	Environment:	-

### Test Configuration #1

*The following information was collected during the test session(s).*

#### Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Dell	PP01L	Laptop	CN-04P449-48643-2CH-2011	-

#### Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Netgear	FS108	Hub	-	-

#### Cabling and Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
USB/Laptop	EUT Board	USB Cable	Shielded	1.5
AC Power	AC Mains	3Wire	Unshielded	1.0
Ethernet/Laptop	Hub	Cat-5	Unshielded	10.0

Note: The EUT is a module designed to be installed into a host device.

#### EUT Operation During Emissions Tests

During emissions testing the EUT was configured to transmit at the noted channel.



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

### RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

#### General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

**Ambient Conditions:** Temperature: 15-22 °C Rel. Humidity: 30-45 %

#### Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Test Performed	Limit	Result / Margin
1a	b mode	1	-	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	49.0dB $\mu$ V/m (280.5 $\mu$ V/m) @ 2388.7MHz (-5.0dB)
			-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	49.6dB $\mu$ V/m (302.0 $\mu$ V/m) @ 4824.0MHz (-4.4dB)
1b	b mode	6	-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	48.9dB $\mu$ V/m (278.6 $\mu$ V/m) @ 4824.0MHz (-5.1dB)
1c	b mode	11	-	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	49.6dB $\mu$ V/m (301.6 $\mu$ V/m) @ 2484.8MHz (-4.4dB)
			-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	51.0dB $\mu$ V/m (354.8 $\mu$ V/m) @ 4874.0MHz (-3.0dB)
2a	g mode	1	-	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	73.1dB $\mu$ V/m @ 2389.6MHz (-0.9dB)
			-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	46.2dB $\mu$ V/m (204.2 $\mu$ V/m) @ 12059.5MHz (-7.8dB)
2b	g mode	2	-	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	73.4dB $\mu$ V/m @ 2390.1MHz (-0.6dB)
2c	g mode	6	-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	51.9dB $\mu$ V/m (393.6 $\mu$ V/m) @ 7313.6MHz (-2.1dB)
2d	g mode	10	-	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	50.1dB $\mu$ V/m @ 2483.6MHz (-3.9dB)
	g mode		-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	51.3dB $\mu$ V/m @ 7370.9MHz (-2.7dB)
2e	g mode	11	-	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	53.9dB $\mu$ V/m @ 2483.6MHz (-0.1dB)
			-	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	48.7dB $\mu$ V/m (272.3 $\mu$ V/m) @ 7386.1MHz (-5.3dB)

#### Modifications Made During Testing

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

Note: Preliminary testing showed no radio related emissions below 1000 MHz, and the worst case orientation was with the EUT up right

Run #1: Radiated Spurious Emissions, 1000 - 25000 MHz. Operating Mode: 802.11b,

Run #1a: Low Channel @ 2412 MHz, EUT Up right on table

Date of Test: 1/29/2009


Config. Used: 1

Test Engineer: Joseph Cadigal

Config Change: None

Test Location: Chamber # 3

Host Unit Voltage 120V/ 60Hz

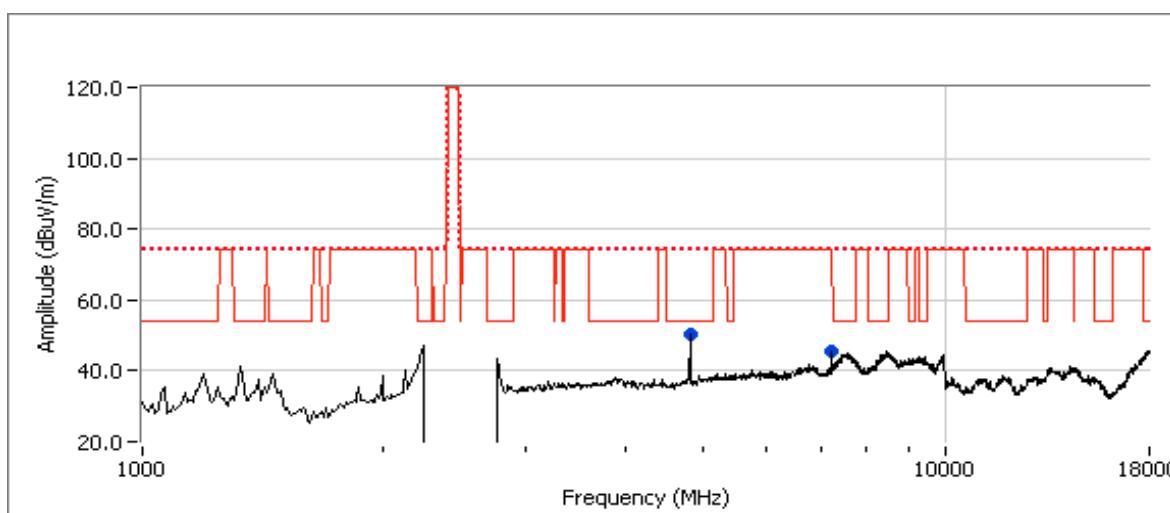

#### Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
4824.000	49.6	H	54.0	-4.4	AVG	313	RB 1 MHz; VB: 10 Hz
7236.700	43.1	V	74.0	-30.9	AVG	348	RB 1 MHz; VB: 10 Hz
4824.000	52.4	H	74.0	-21.6	PK	313	RB 1 MHz; VB: 1 MHz
7236.870	50.8	V	74.0	-23.2	PK	348	RB 1 MHz; VB: 1 MHz
Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.						
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.						

Date of Test: 1/27/2009

Config. Used: 1

Test Engineer: Suhaila Khushzad

Config Change: None

Test Location: Chamber # 4

Host Unit Voltage 120V/ 60Hz

#### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
2388.740	49.0	H	54.0	-5.0	Avg	266	2.3 EUT Up right on table
2388.246	61.4	H	74.0	-12.6	PK	266	2.3 EUT Up right on table

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398


Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

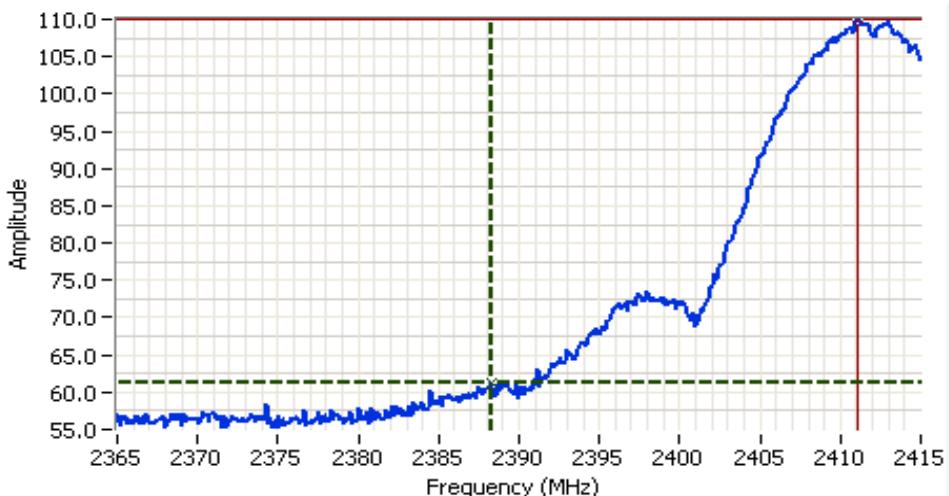

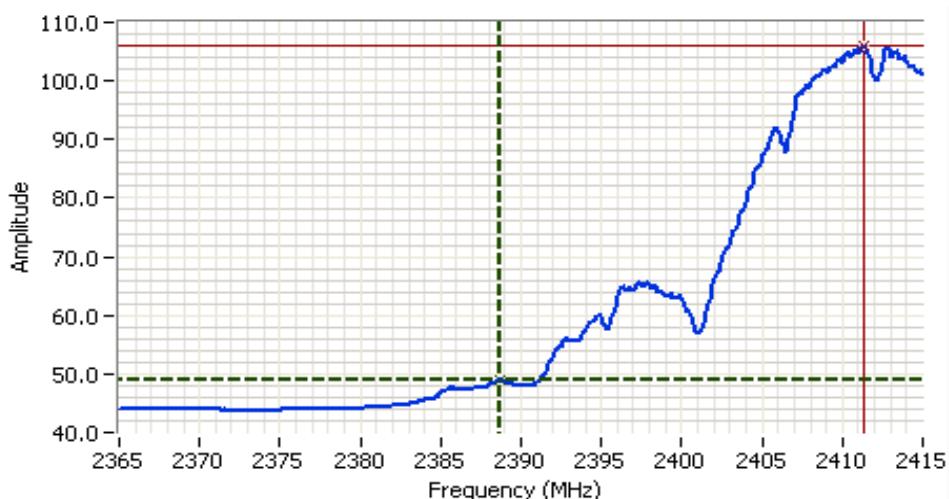**Elliott**


**Elliott**

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #1b: Center Channel @ 2437 MHz, EUT Up right on table**

Date of Test: 1/29/2009


Config. Used: 1

Test Engineer: Joseph Cadigal

Config Change: None

Test Location: Chamber # 3

Host Unit Voltage 120V/ 60Hz

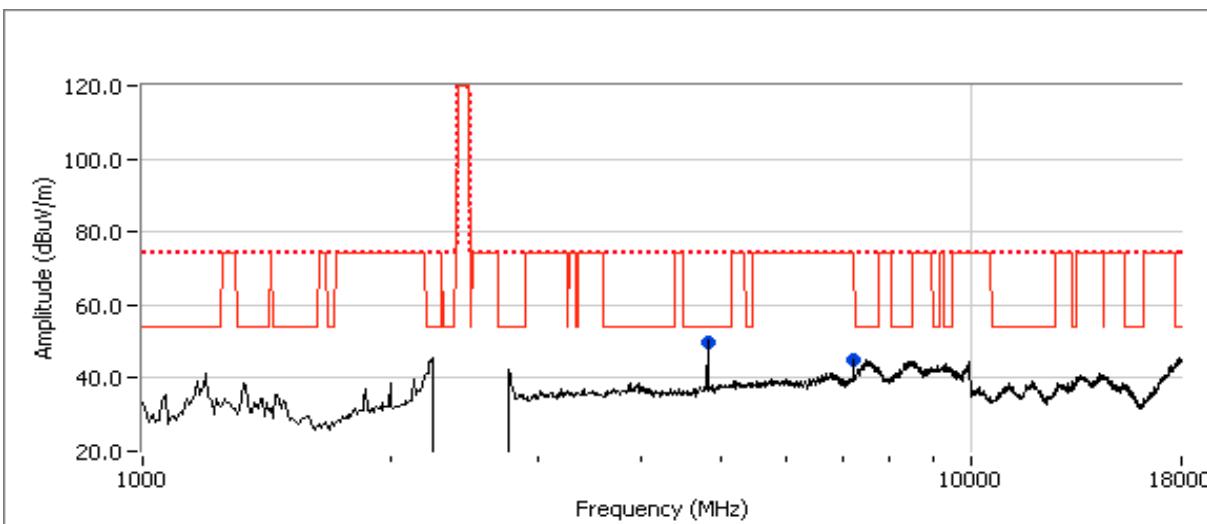
**Other Spurious Emissions**


Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dBμV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
4824.020	48.9	H	54.0	-5.1	AVG	305	1.6
7235.220	42.5	V	74.0	-31.5	AVG	202	1.6
4824.080	52.2	H	74.0	-21.8	PK	305	1.6
7235.290	50.6	V	74.0	-23.4	PK	202	1.6

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

Run #1c: High Channel @ 2462 MHz, EUT Up right on table

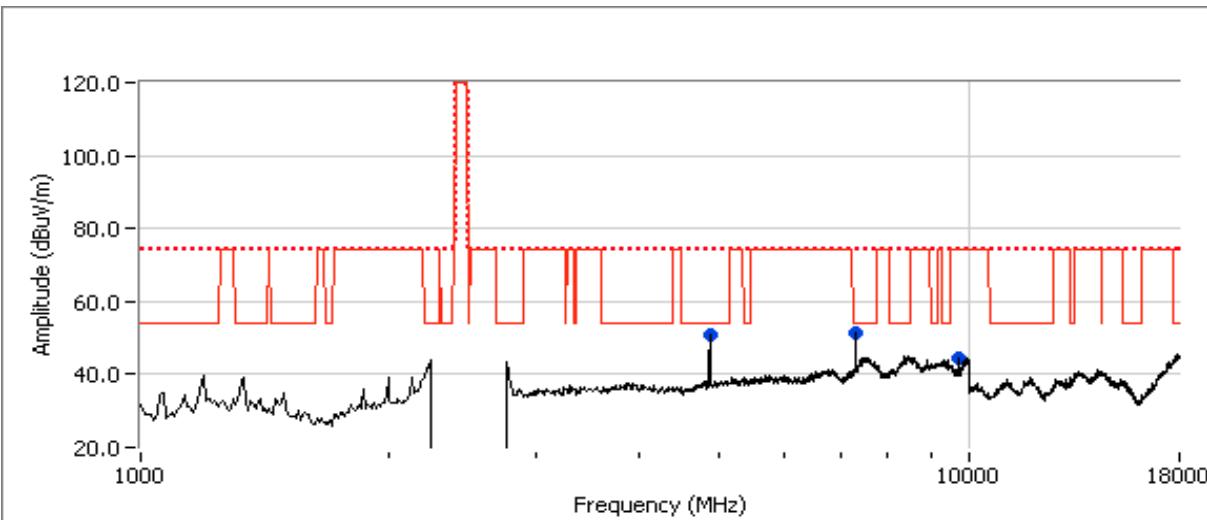

#### Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBµV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
4874.020	51.0	H	54.0	-3.0	AVG	153	1.6	RB 1 MHz; VB: 10 Hz
7311.720	50.1	H	54.0	-3.9	AVG	171	1.3	RB 1 MHz; VB: 10 Hz
9748.000	40.2	V	74.0	-33.8	AVG	34	1.3	RB 1 MHz; VB: 10 Hz
4874.020	53.8	H	74.0	-20.2	PK	153	1.6	RB 1 MHz; VB: 1 MHz
7311.960	55.6	H	74.0	-18.4	PK	171	1.3	RB 1 MHz; VB: 1 MHz
9747.950	48.6	V	74.0	-25.4	PK	34	1.3	RB 1 MHz; VB: 1 MHz

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Date of Test: 1/27/2009

Test Engineer: Suhaila Khushzad

Test Location: Chamber # 4

Config. Used: 1

Config Change: None

Host Unit Voltage 120V/ 60Hz

#### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBµV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2484.750	49.6	H	54.0	-4.4	Avg	87	1.5	EUT Up right on table
2484.950	61.2	H	74.0	-12.8	PK	87	1.5	EUT Up right on table

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

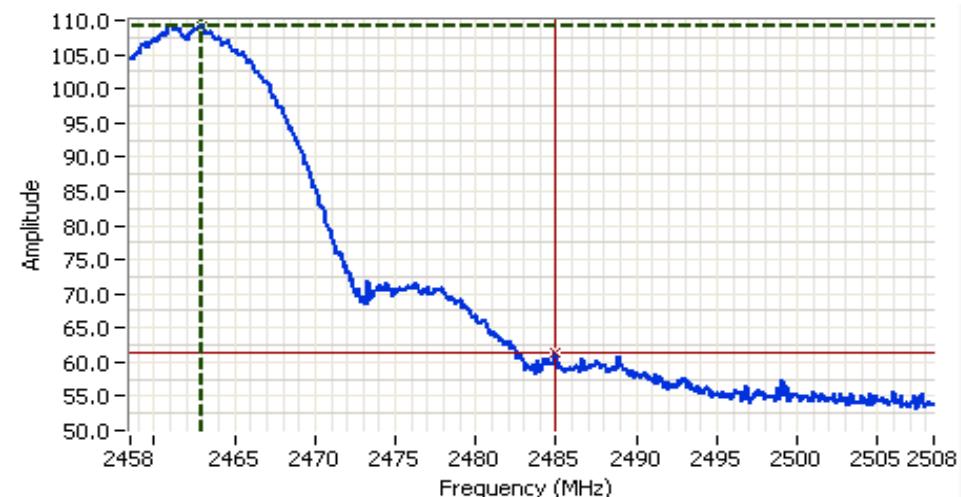

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

Run #2: Radiated Spurious Emissions, 1000 - 25000 MHz. Operating Mode: 802.11g,

Run #2a: Low Channel @ 2412 MHz, EUT Up right on table

Date of Test: 2/5/2009

Config. Used: 1

Test Engineer: Suhaila Khushzad


Config Change: None

Test Location: Chamber # 3

Host Unit Voltage 120V/ 60Hz

#### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
2389.640	73.1	V	74.0	-0.9	PK	360	1.3
2390.050	51.3	V	54.0	-2.7	Avg	360	1.3
2390.050	49.9	H	54.0	-4.2	Avg	250	2.3
2389.950	71.9	H	74.0	-2.2	PK	250	2.3

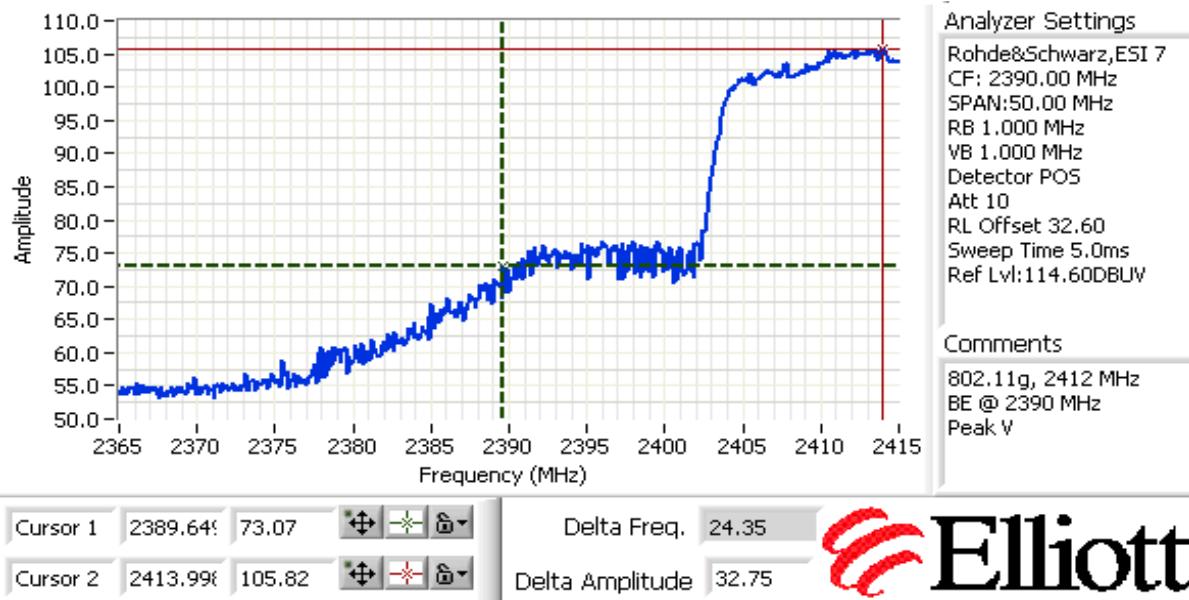

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

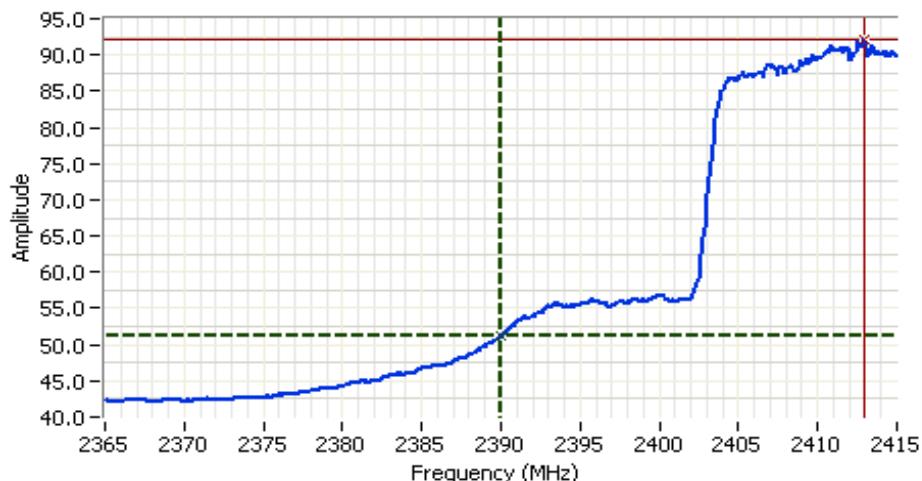
 Cursor 1 2390.05 51.34 

Delta Freq. 22.95


 Cursor 2 2412.99 92.10 

Delta Amplitude 40.76

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

Date of Test: 2/2/2009  
 Test Engineer: Mehran Birgani  
 Test Location: FT Chamber #3

Config. Used: 1  
 Config Change: None  
 Host Unit Voltage 120V/ 60Hz

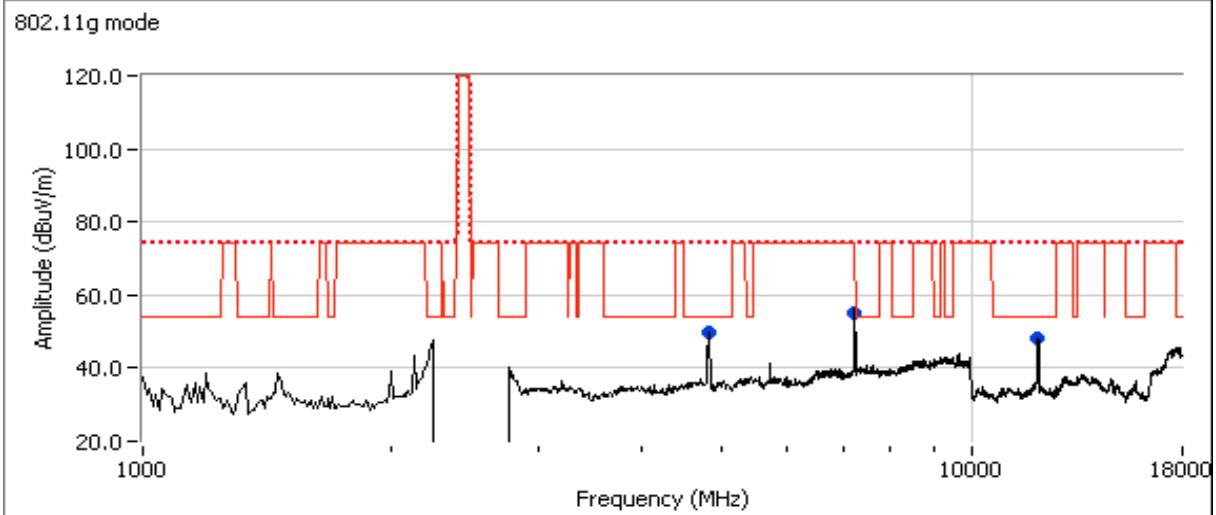

#### Other Spurious Emissions with power setting of 19.0 dBm (q = 73)

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
12059.470	46.2	H	54.0	-7.8	AVG	126	1.0
4822.900	43.3	V	54.0	-10.7	AVG	279	1.8
7237.200	63.1	H	74.0	-10.9	PK	37	1.4
12067.240	62.5	H	74.0	-11.5	PK	126	1.0
4825.660	56.3	V	74.0	-17.7	PK	279	1.8
7236.100	48.1	H	74.0	-25.9	AVG	37	1.4


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

Run #2: Radiated Spurious Emissions, 1000 - 25000 MHz. Operating Mode: 802.11g,

Run #2b: Low Channel @ 2417 MHz, EUT Up right on table

#### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
2390.050	73.4	V	74.0	-0.6	PK	12	1.0
2389.750	52.8	V	54.0	-1.2	Avg	12	1.0
2390.050	52.3	H	54.0	-1.7	Avg	249	2.3
2390.050	73.1	H	74.0	-0.9	PK	249	2.3

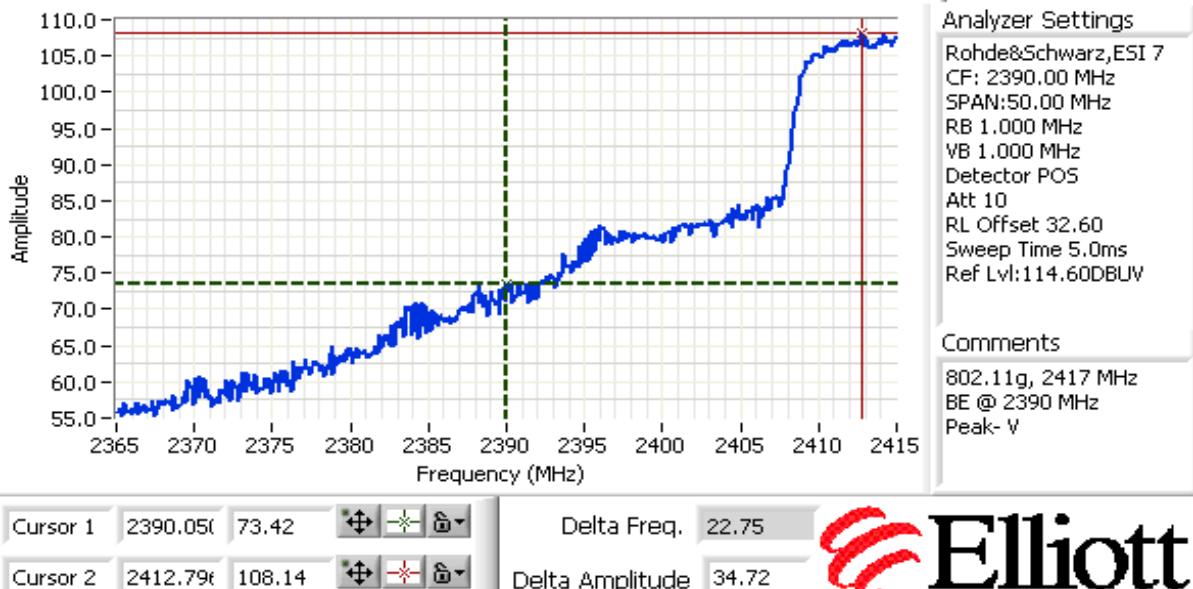

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

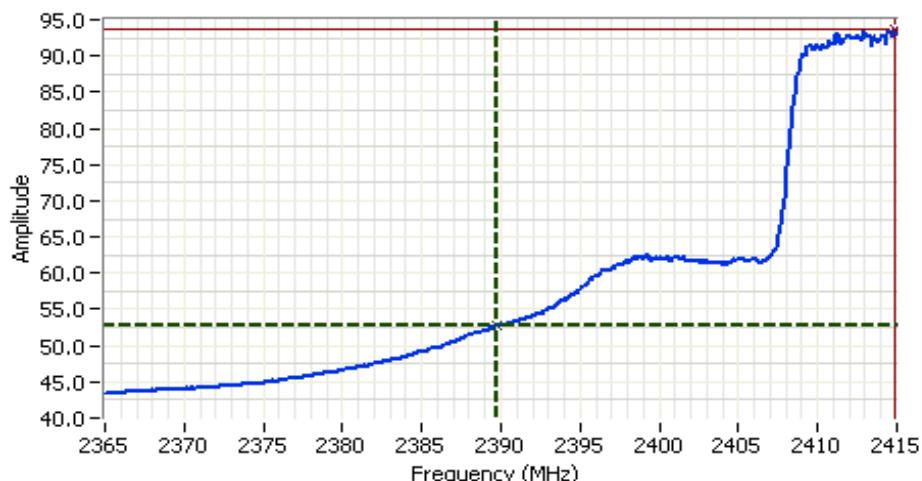

Cursor 1 2389.75 52.83  Delta Freq. 25.15  
 Cursor 2 2414.90 93.71  Delta Amplitude 40.88



Run #2c: Center Channel @ 2437 MHz, EUT Up right on table

Date of Test: 2/2/2009


Config. Used: 1

Test Engineer: Mehran Birgani

Config Change: None

Test Location: FT Chamber #3

Host Unit Voltage 120V/ 60Hz

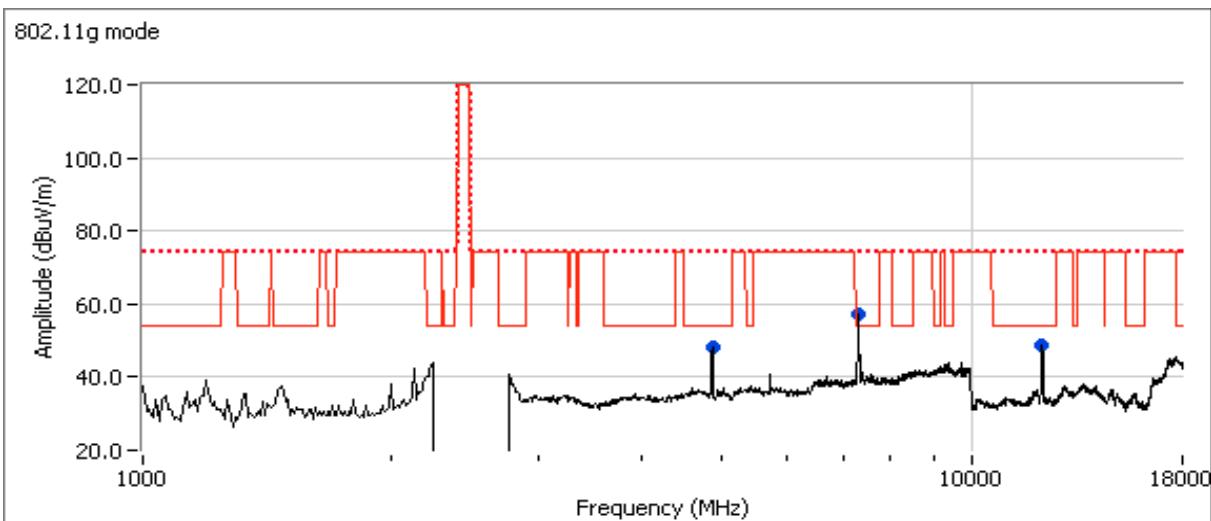

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A


**Other Spurious Emissions**

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
7313.630	51.9	H	54.0	-2.1	AVG	40	1.3
7317.160	66.6	H	74.0	-7.4	PK	40	1.3
12182.600	45.8	H	54.0	-8.2	AVG	189	1.0
4873.300	43.1	V	54.0	-10.9	AVG	264	1.0
12182.900	60.8	H	74.0	-13.2	PK	189	1.0
4868.840	57.5	V	74.0	-16.5	PK	264	1.0


Run #2d: 10th Channel @ 2457 MHz, EUT Up right on table

**Band Edge Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
2483.550	50.1	V	54.0	-3.9	Avg	355	1.2
2483.650	69.9	V	74.0	-4.1	PK	355	1.2
2483.650	48.9	H	54.0	-5.1	Avg	245	1.7
2483.950	68.1	H	74.0	-5.9	PK	245	1.7

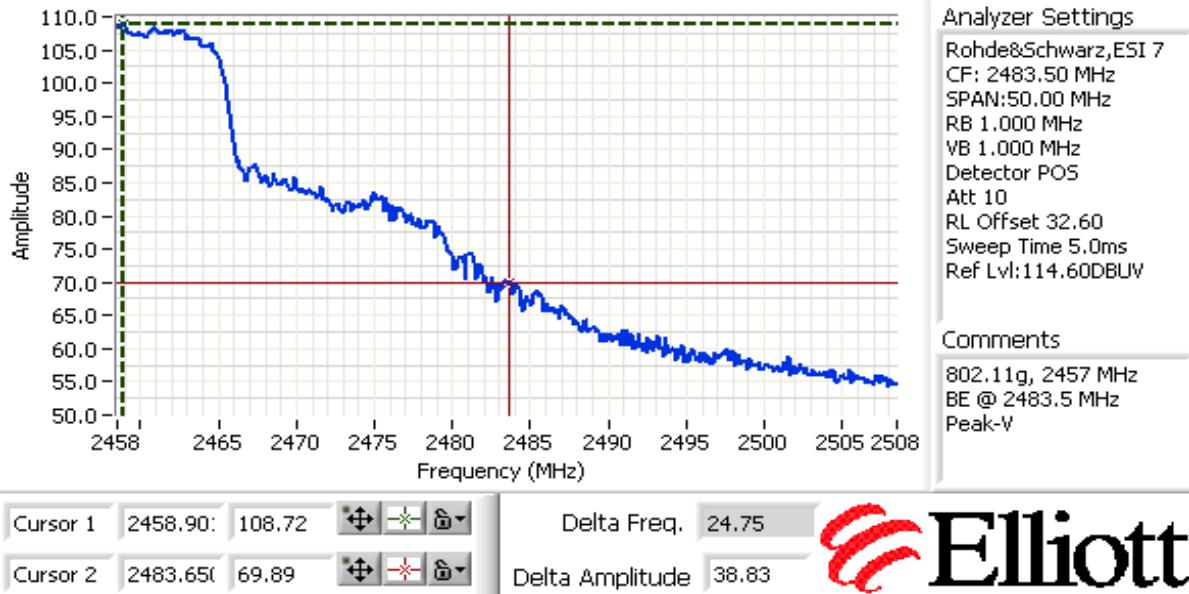


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

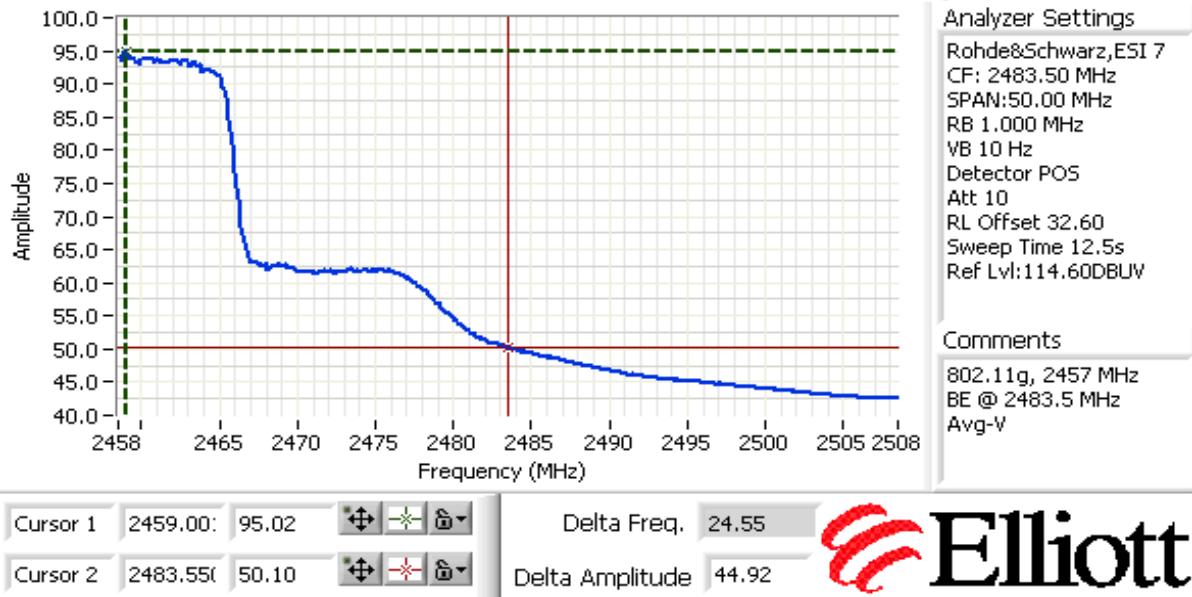

**Other Spurious Emissions**

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
7370.870	51.3	H	54.0	-2.7	AVG	289	1.3
7373.950	67.2	H	74.0	-6.8	PK	289	1.3
4911.210	41.8	H	54.0	-12.2	AVG	42	1.4
12283.840	36.5	H	54.0	-17.5	AVG	249	1.0
2761.080	36.0	V	54.0	-18.0	AVG	185	1.0
4908.810	55.8	H	74.0	-18.2	PK	42	1.4
12284.060	52.3	H	74.0	-21.7	PK	249	1.0
2767.370	47.5	V	74.0	-26.5	PK	185	1.0


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

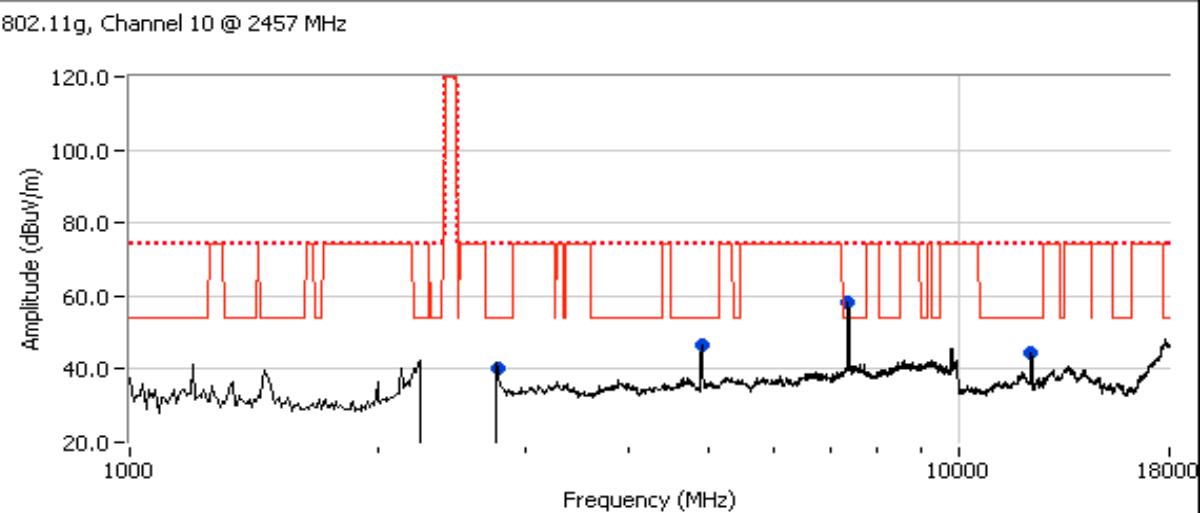

Run #2e: High Channel @ 2462 MHz, EUT Up right on table

**Band Edge Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters
2483.550	53.9	V	54.0	-0.1	Avg	354	1.0
2483.550	72.3	V	74.0	-1.7	PK	354	1.0
2483.550	52.3	H	54.0	-1.7	Avg	249	2.1
2483.550	72.1	H	74.0	-2.0	PK	249	2.1

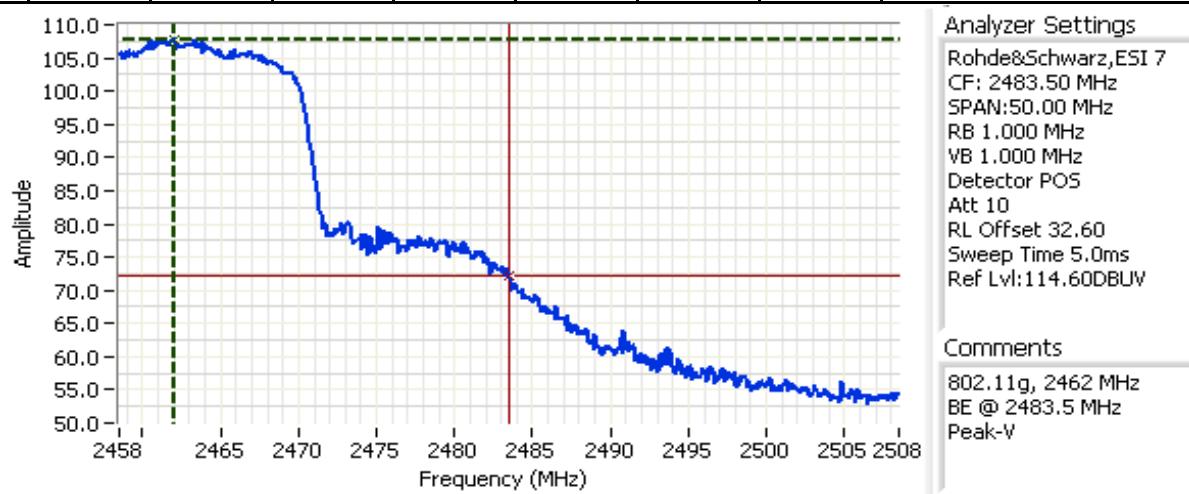

Cursor 1 2462.00: 107.85 

Cursor 2 2483.550 72.23 

Delta Freq. 21.54  
 Delta Amplitude 35.63


**Elliott**

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

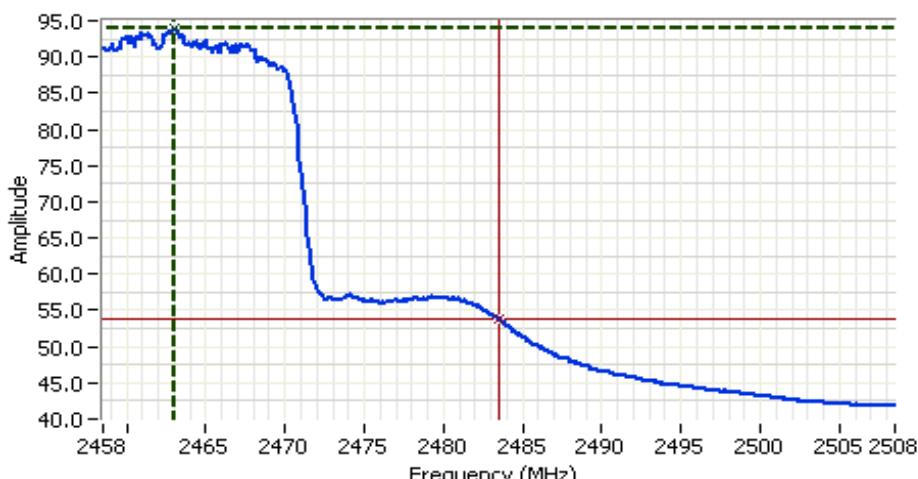

**Analyzer Settings**  
 Rohde&Schwarz,ESI 7  
 CF: 2483.50 MHz  
 SPAN:50.00 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector AutoPeak  
 Att 10  
 RL Offset 32.60  
 Sweep Time 12.5s  
 Ref Lvl:114.60DBUV


**Comments**  
 802.11g, 2462 MHz  
 BE @ 2483.5 MHz  
 Avg-V

Cursor 1	2463.00	94.08		Delta Freq.	20.54
Cursor 2	2483.55	53.89		Delta Amplitude	40.18



Date of Test: 2/2/2009  
 Test Engineer: Mehran Birgani  
 Test Location: FT Chamber #3

Config. Used: 1  
 Config Change: None  
 Host Unit Voltage 120V/ 60Hz

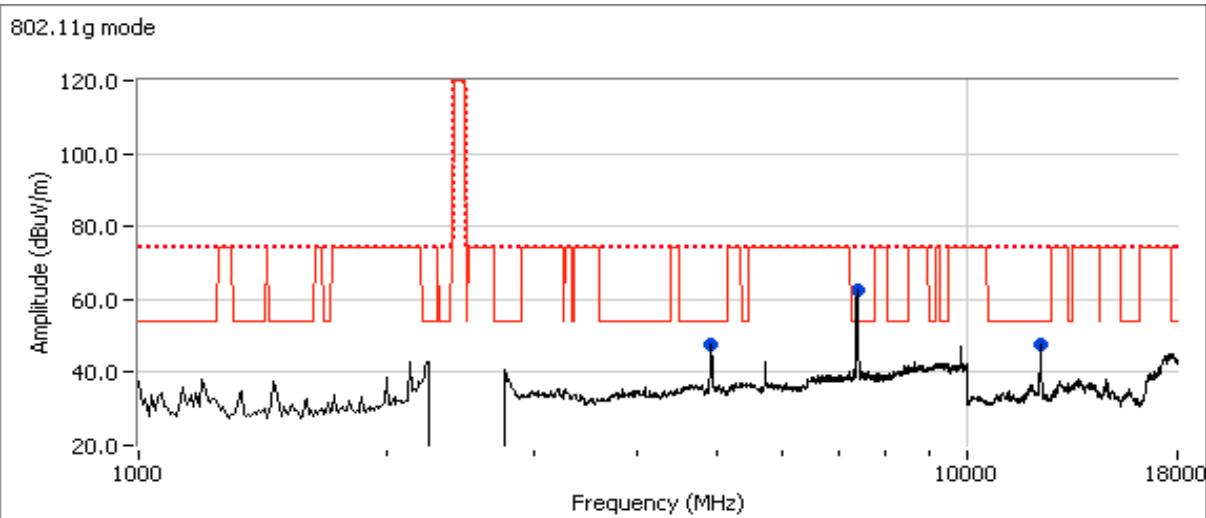



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

### Other Spurious Emissions

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247 Limit	Margin	Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
7386.060	48.7	H	54.0	-5.3	AVG	331	1.1	RB 1 MHz; VB: 10 Hz
12308.740	47.0	H	54.0	-7.0	AVG	194	1.0	RB 1 MHz; VB: 10 Hz
7389.490	66.6	H	74.0	-7.4	PK	331	1.1	RB 1 MHz; VB: 1 MHz
4921.290	42.5	V	54.0	-11.5	AVG	215	1.1	RB 1 MHz; VB: 10 Hz
12307.840	61.4	H	74.0	-12.6	PK	194	1.0	RB 1 MHz; VB: 1 MHz
4927.420	56.5	V	74.0	-17.5	PK	215	1.1	RB 1 MHz; VB: 1 MHz



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

### RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions (802.11 G Mode)

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/6/2009

Config. Used: -

Test Engineer: Mehran Birgani

Config Change: -

Test Location: FT Chamber #5

Host Unit Voltage 120V/ 60Hz

#### General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

#### Ambient Conditions:

Temperature: 10 °C  
Rel. Humidity: 42 %

#### Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	18.3 dBm (67.6mW) 20 dBm EIRP
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	-4.7 dBm/3kHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	15.4 MHz
3	-	-	99% Bandwidth	RSS GEN	-	17.0 MHz
4	-	-	Spurious emissions	15.247(b)	Pass	<-30dBc

#### Modifications Made During Testing

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #1: Output Power**

Power Setting <sup>2</sup>	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP <sup>Note 2</sup>	
		(dBm) <sup>1</sup>	mW			dBm	W
-	2412	15.2	33.1	1.71	Pass	16.9	0.049
-	2417	18.3	67.6	1.71	Pass	20.0	0.100
-	2437	18.1	64.6	1.71	Pass	19.8	0.096
-	2457	17.7	58.9	1.71	Pass	19.4	0.087
-	2462	14.4	27.5	1.71	Pass	16.1	0.041

Note 1: RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the ESI analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz. Spurious limit is -30dBc because this method was used.

Note 2: Power setting - the software power setting used during testing, included for reference only.

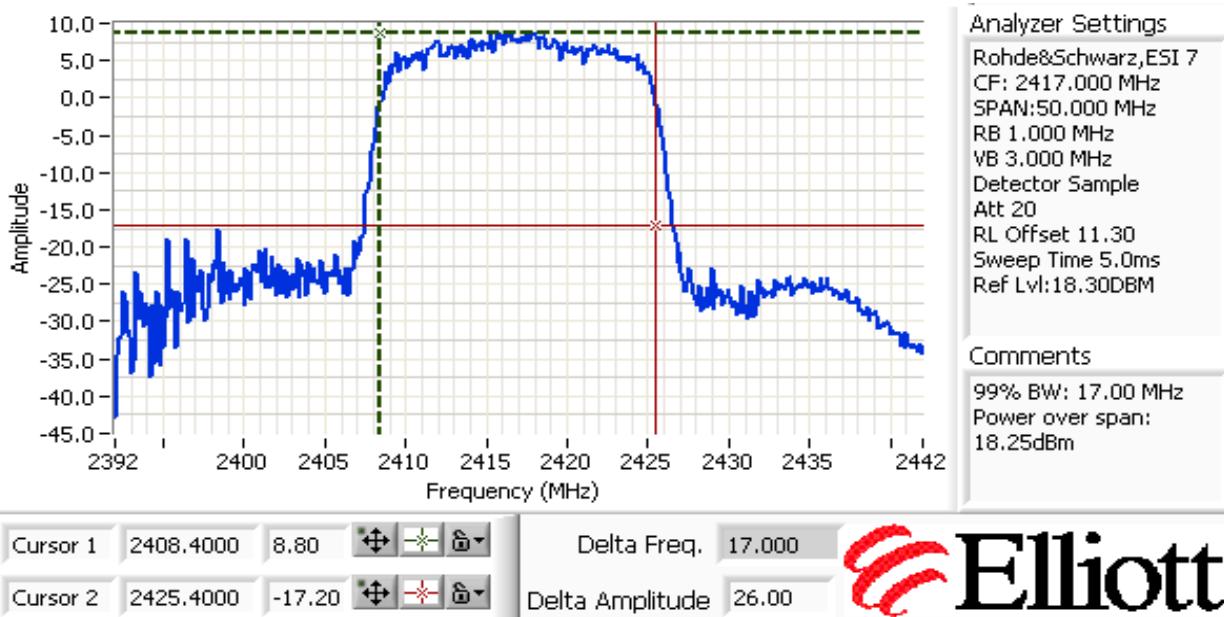


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #2: Power spectral Density**

Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) <small>Note 1</small>		
-	2413.843	-7.0	8.0	Pass
-	2435.456	-4.7	8.0	Pass
-	2463.204	-6.0	8.0	Pass

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

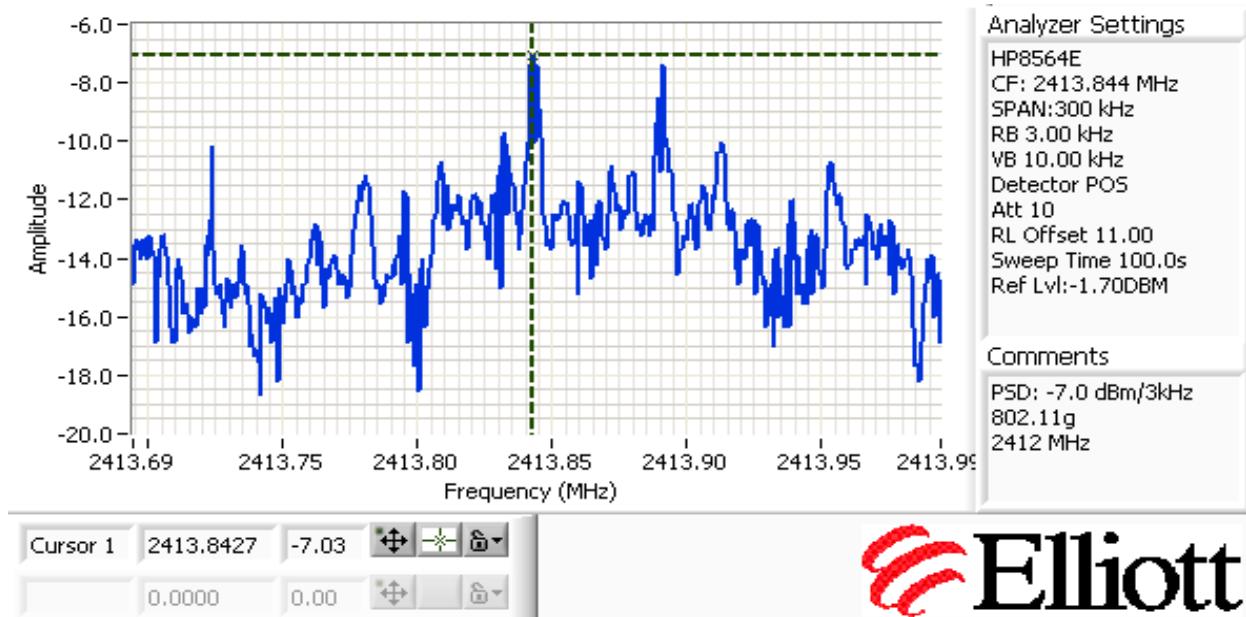

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)




T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

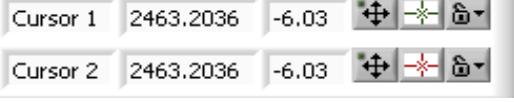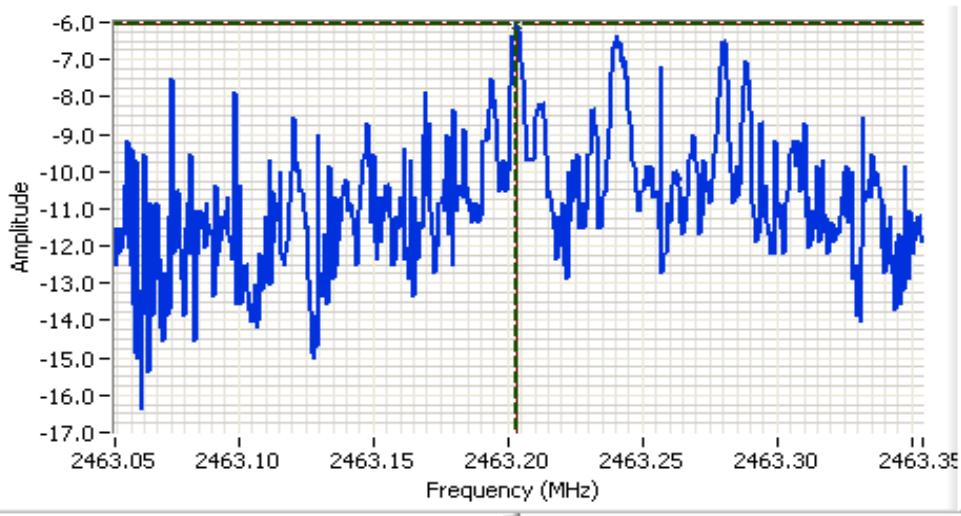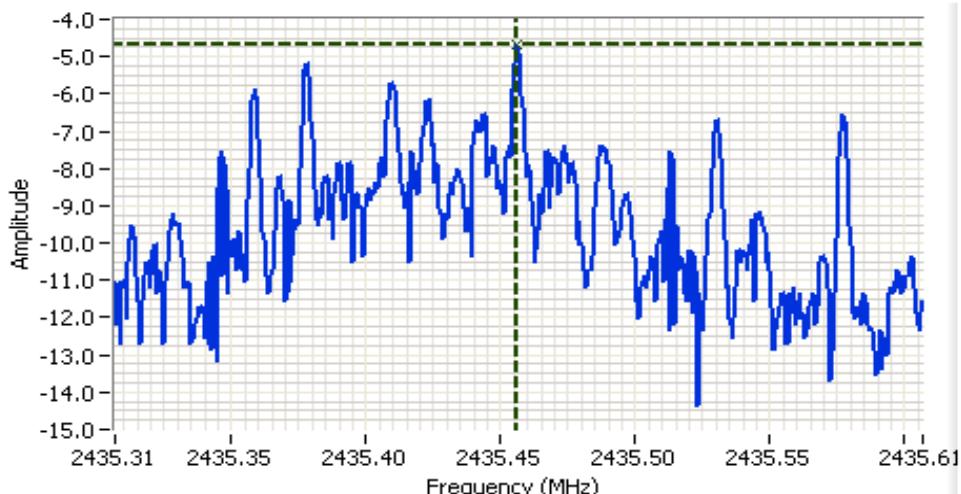

 Delta Freq. 0.000  
 Delta Amplitude 0.00


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #3: Signal Bandwidth**

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100 kHz	16.3	17.0
-	2437	100 kHz	16.3	16.9
-	2462	100 kHz	15.4	16.8

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

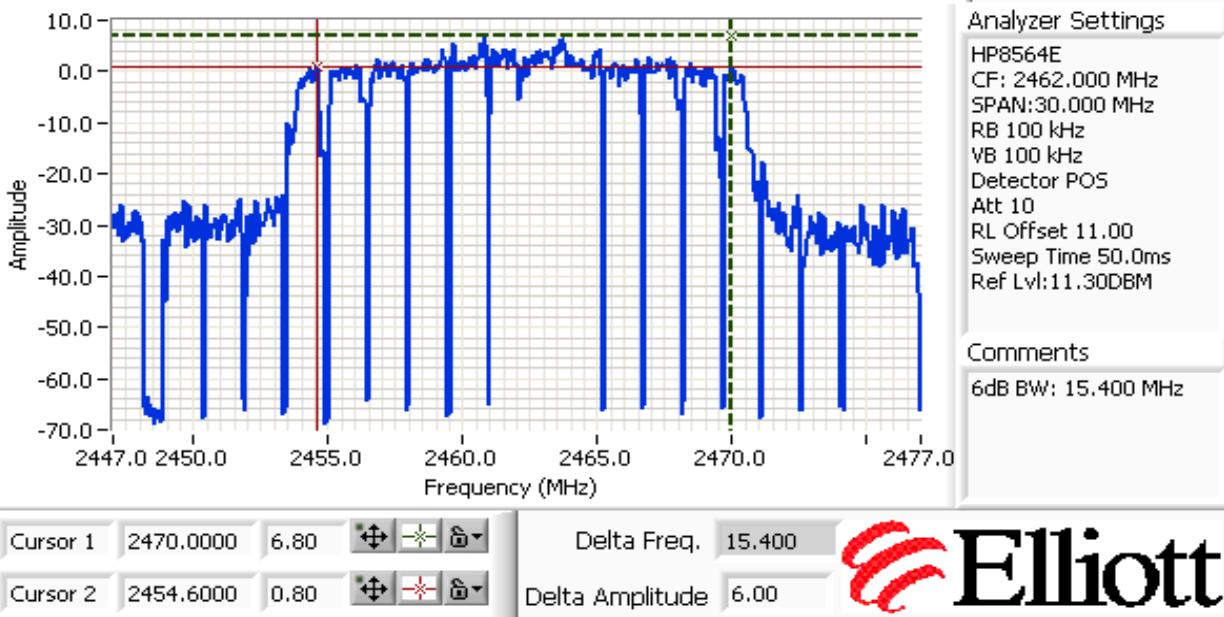

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

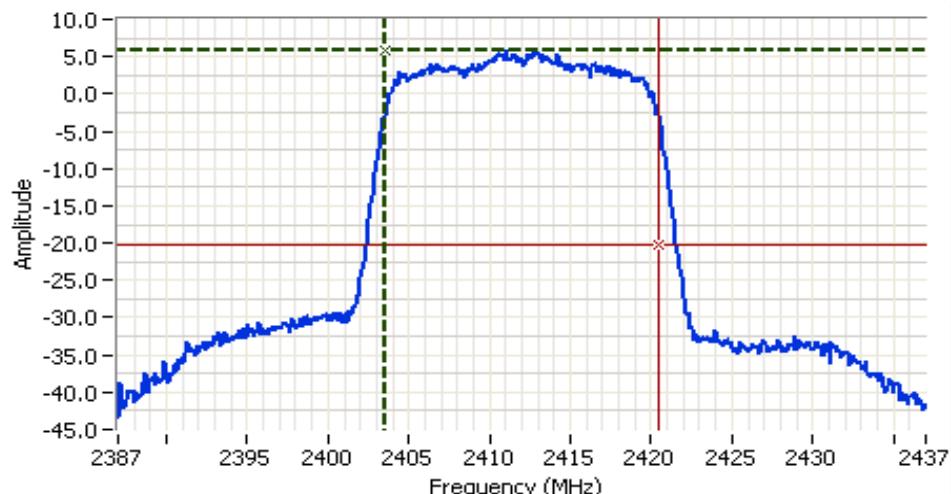
**Analyzer Settings**

Rohde&Schwarz,ESI 7  
 CF: 2412.000 MHz  
 SPAN:50.000 MHz  
 RB 1.000 MHz  
 VB 3.000 MHz  
 Detector Sample  
 Att 20  
 RL Offset 11.30  
 Sweep Time 5.0ms  
 Ref Lvl:18.30dBm

**Comments**

99% BW: 17.00 MHz  
 Power over span:  
 15.23dBm

Cursor 1	2403.5000	5.87		Delta Freq.	17.000
Cursor 2	2420.5000	-20.13		Delta Amplitude	26.00




**Elliott**

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A



**Run #4: Out of Band Spurious Emissions**

Note: All plots were taken with RBW=VBW=100kHz


Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

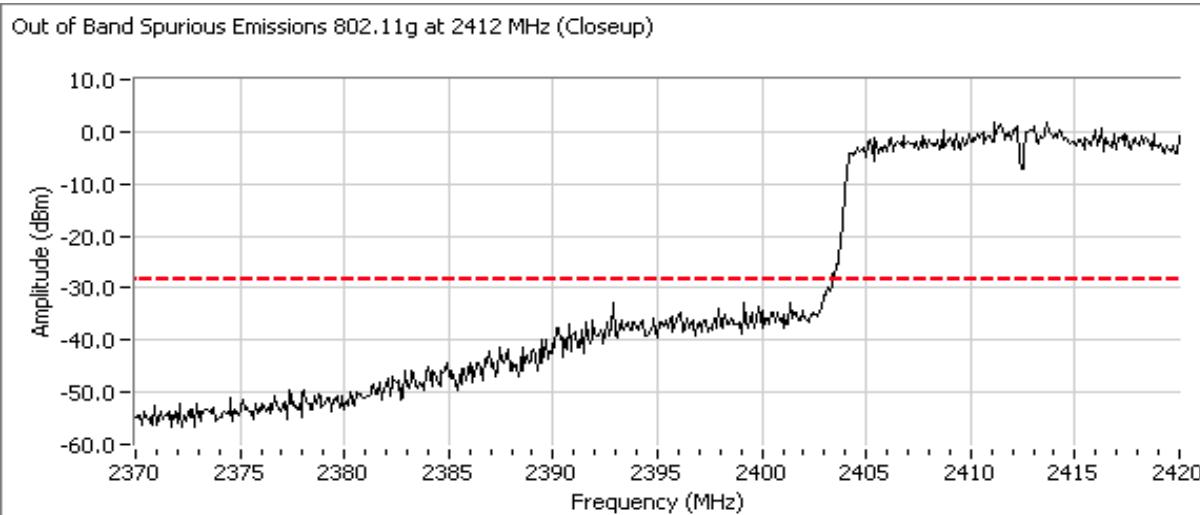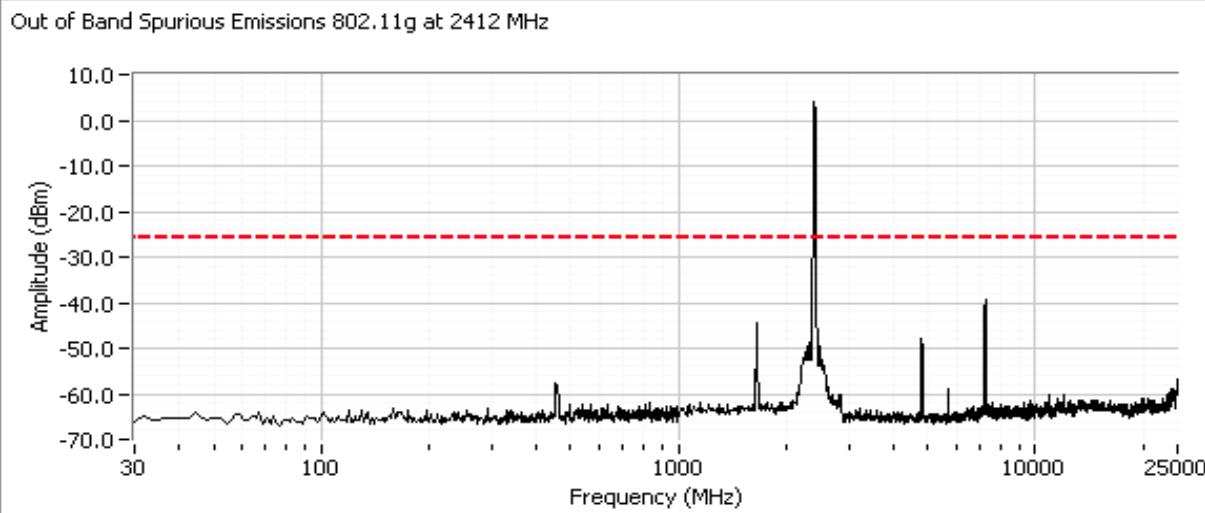Plots for low channel


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

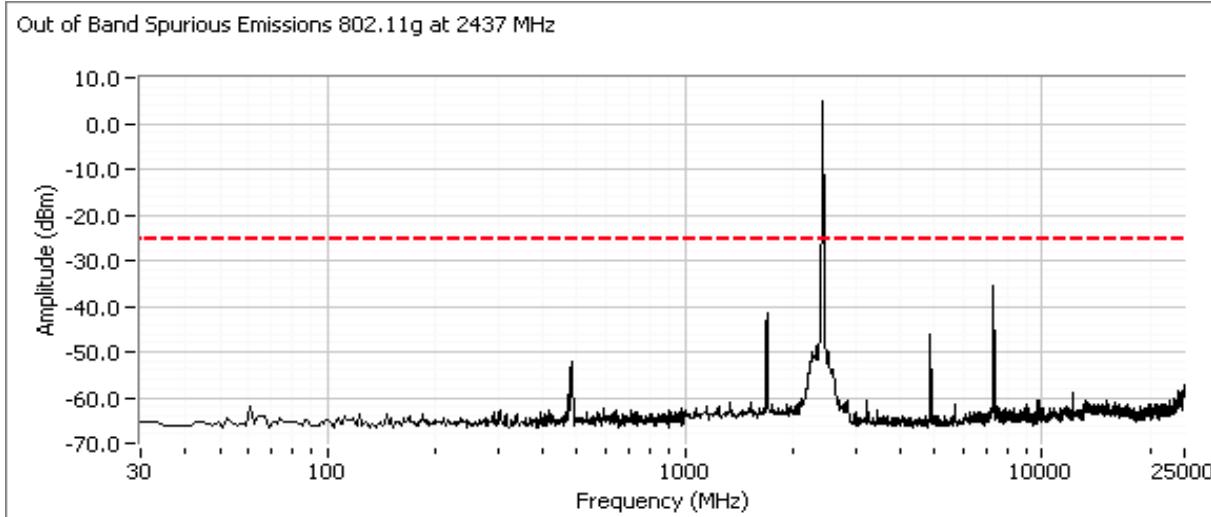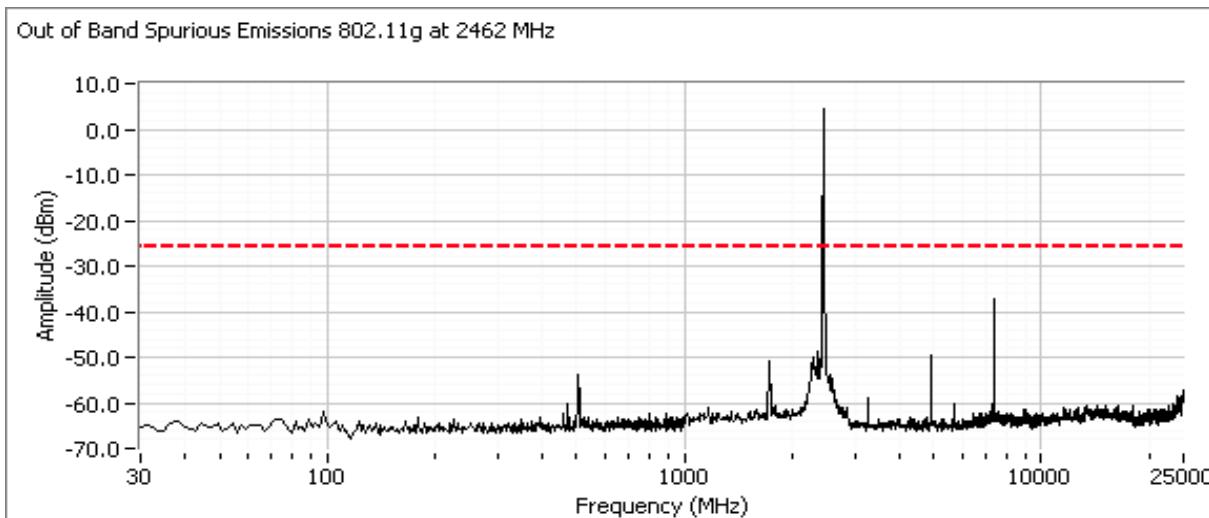Plots for center channel

Plots for high channel

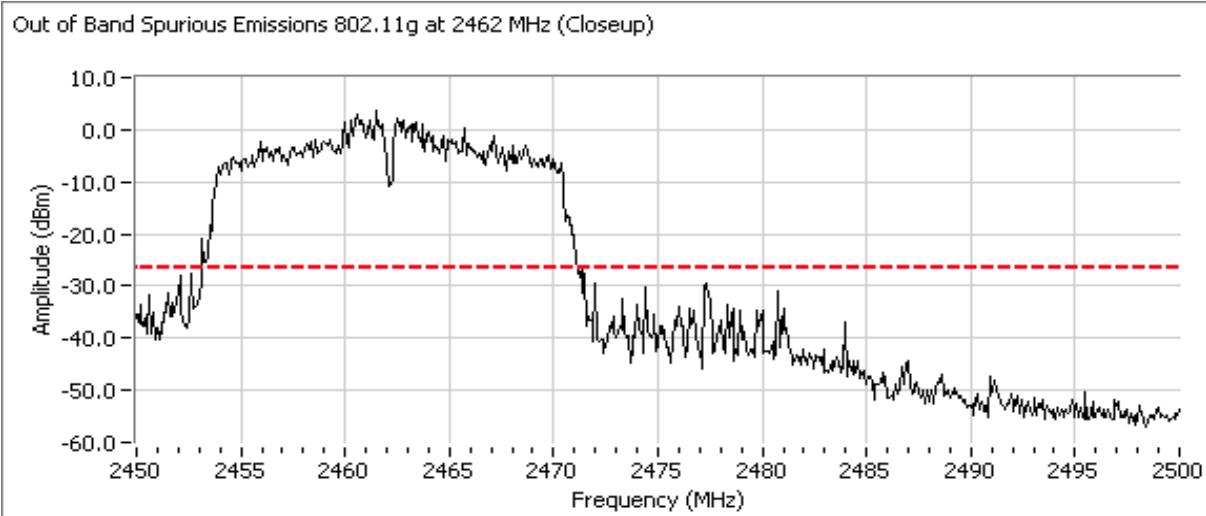
Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A





## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

### RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions (802.11 B Mode)

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/6/2009

Config. Used: -

Test Engineer: Mehran Birgani

Config Change: -

Test Location: FT Chamber #5

Host Unit Voltage 120V/ 60Hz

#### General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

#### Ambient Conditions:

Temperature: 10 °C

Rel. Humidity: 42 %

#### Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	18.8 dBm (75.9mW) 20.5 dBm EIRP
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	0.3 dBm/3kHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	6.8 MHz
3	-	-	99% Bandwidth	RSS GEN	-	12.8 MHz
4	-	-	Spurious emissions	15.247(b)	Pass	<-30dBc

#### Modifications Made During Testing

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #1: Output Power**

Power Setting <sup>2</sup>	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP Note 2	
		(dBm) <sup>1</sup>	mW			dBm	W
-	2412	18.2	66.1	1.71	Pass	19.9	0.098
-	2437	18.3	67.6	1.71	Pass	20.0	0.100
-	2462	18.8	75.9	1.71	Pass	20.5	0.112

Note 1: RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the ESI analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 30? MHz. **Spurious limit is -30dBc because this method was used.**

Note 2: Power setting - the software power setting used during testing, included for reference only.

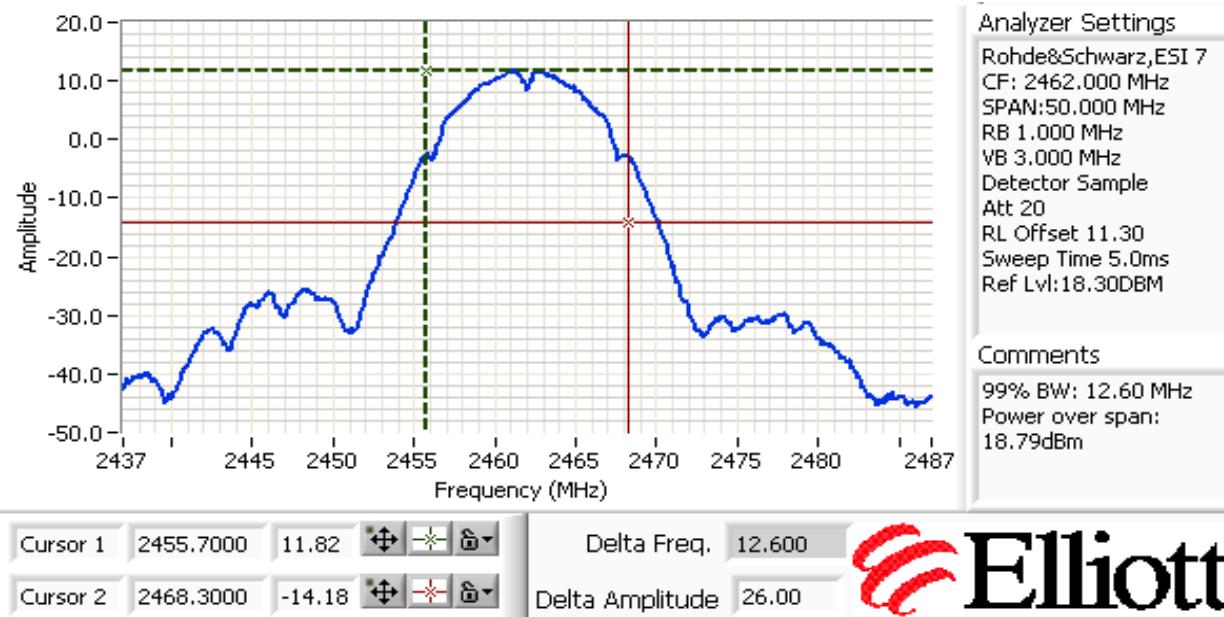


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #2: Power spectral Density**

Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) <small>Note 1</small>		
-	2411.213	-0.6	8.0	Pass
-	2436.213	0.3	8.0	Pass
-	2461.214	0.1	8.0	Pass

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

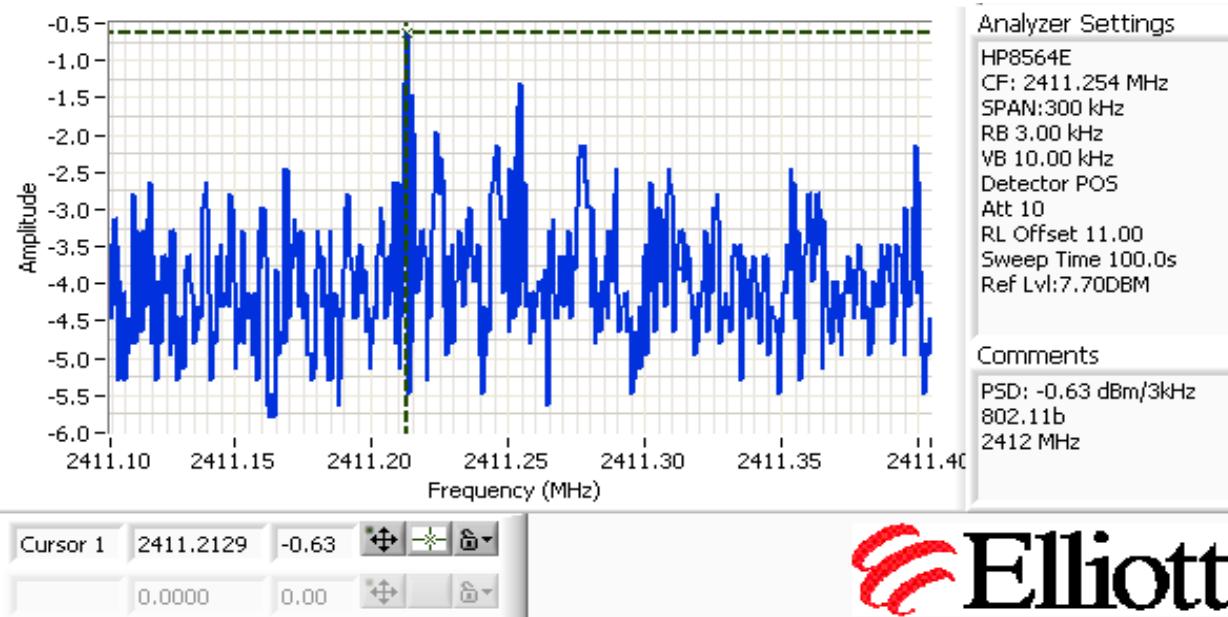

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)



T-Log Number: T74398



Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

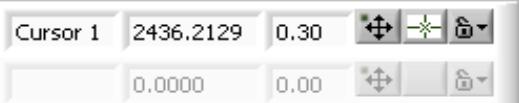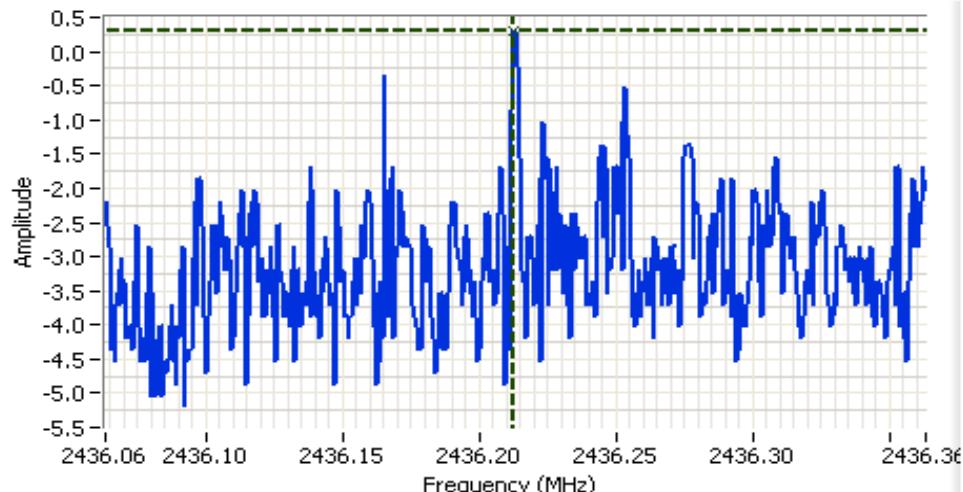

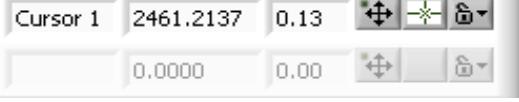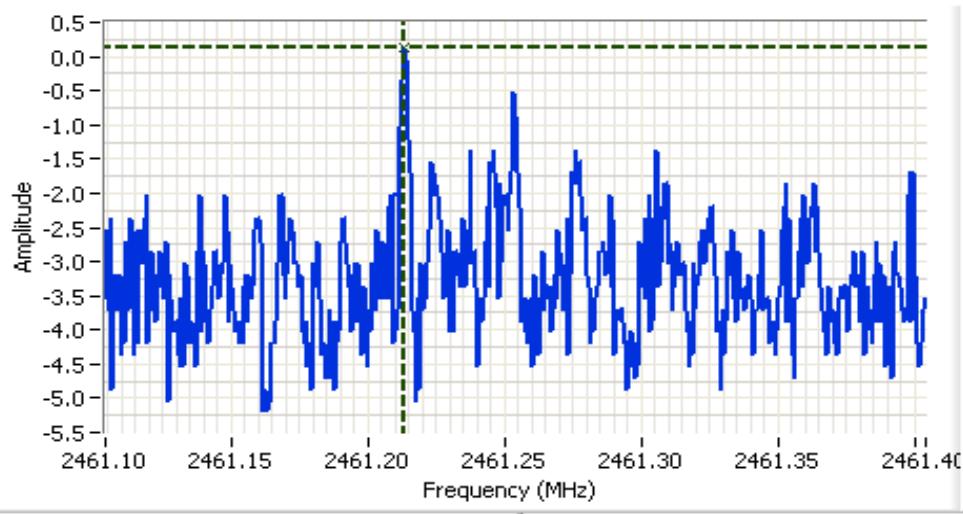**Elliott**


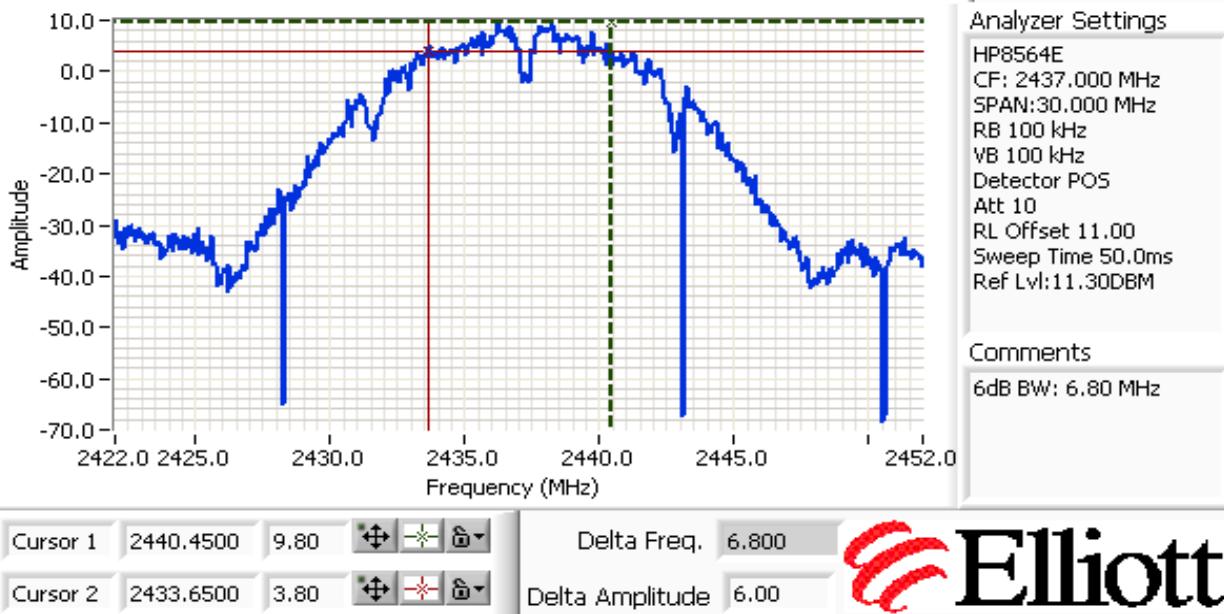
**Elliott**

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

**Run #3: Signal Bandwidth**

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100 kHz	7.6	12.8
-	2437	100 kHz	6.8	12.6
-	2462	100 kHz	8.7	12.6

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB



Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)


T-Log Number: T74398

Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: N/A

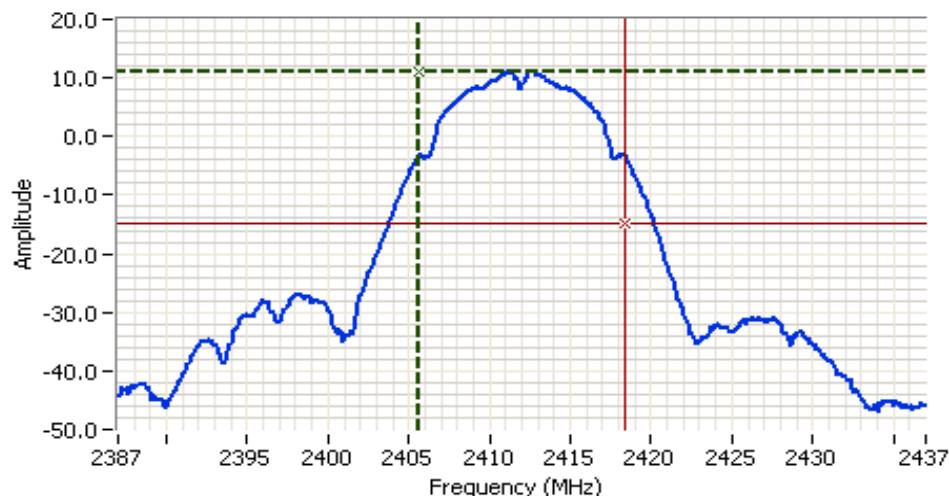
**Analyzer Settings**

Rohde&Schwarz,ESI 7  
CF: 2412.000 MHz  
SPAN:50.000 MHz  
RB 1.000 MHz  
VB 3.000 MHz  
Detector Sample  
Att 20  
RL Offset 11.30  
Sweep Time 5.0ms  
Ref Lvl:16.30dBm

**Comments**

99% BW: 12.80 MHz  
Power over span:  
18.16dBm

Cursor 1 2405.6000 11.16   
Cursor 2 2418.4000 -14.84 

Delta Freq. 12.800  
Delta Amplitude 26.00 



**Elliott**

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A



**Run #4: Out of Band Spurious Emissions**

Note: All plots were taken with RBW=VBW=100kHz

Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

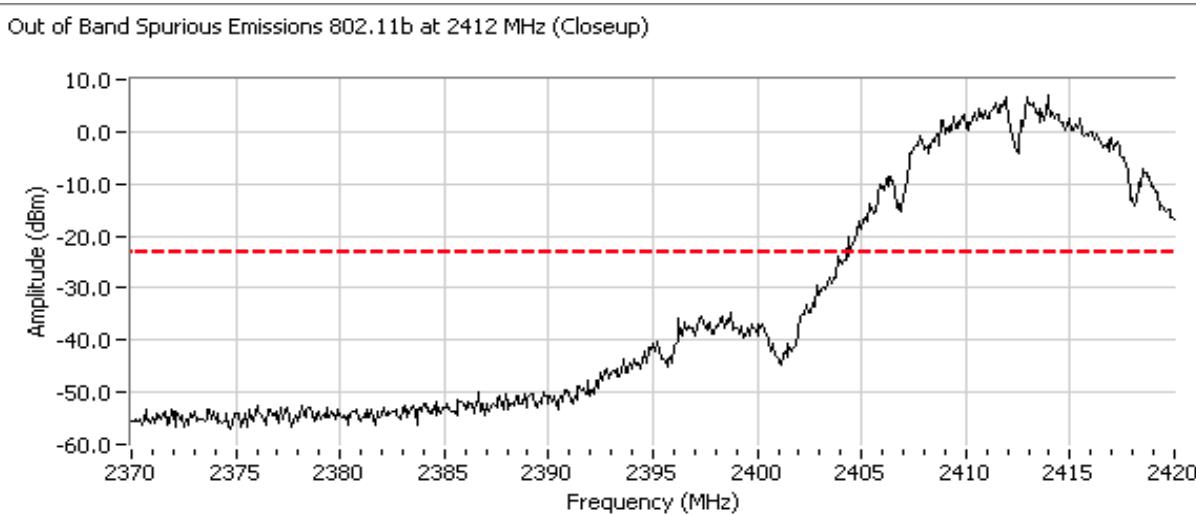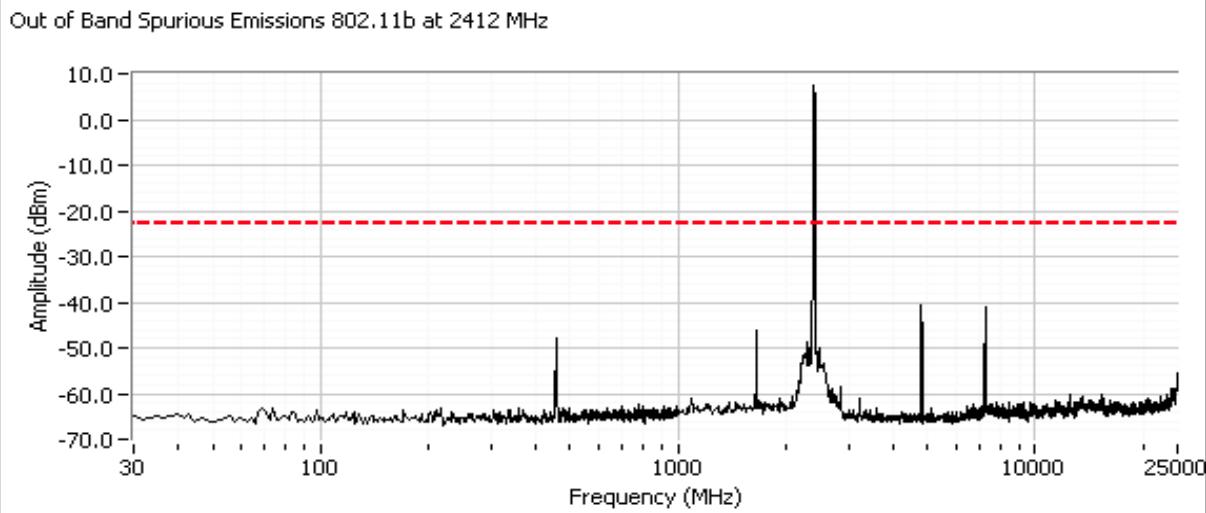
Plots for low channel


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

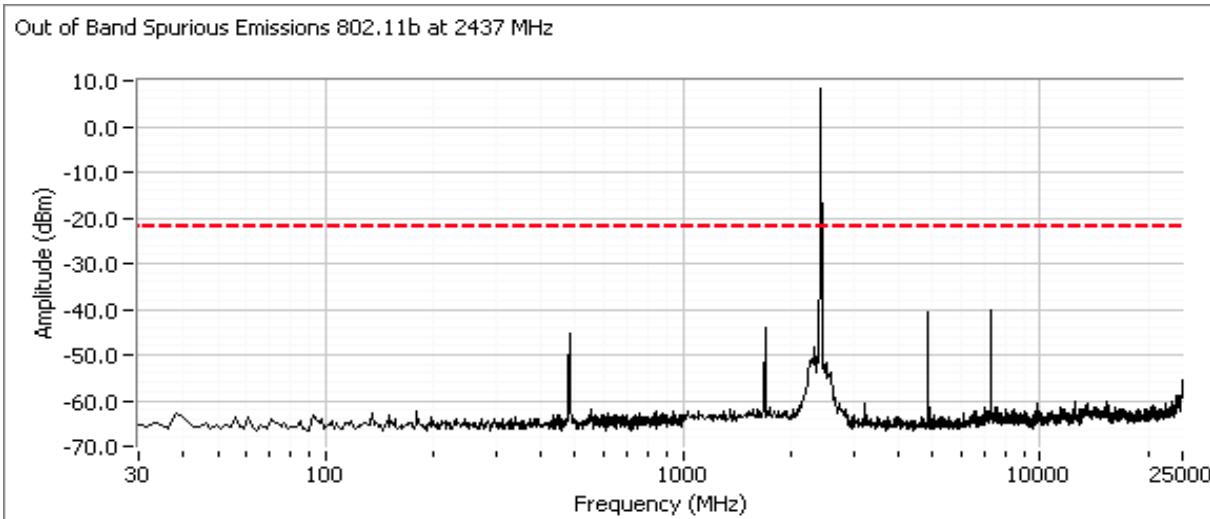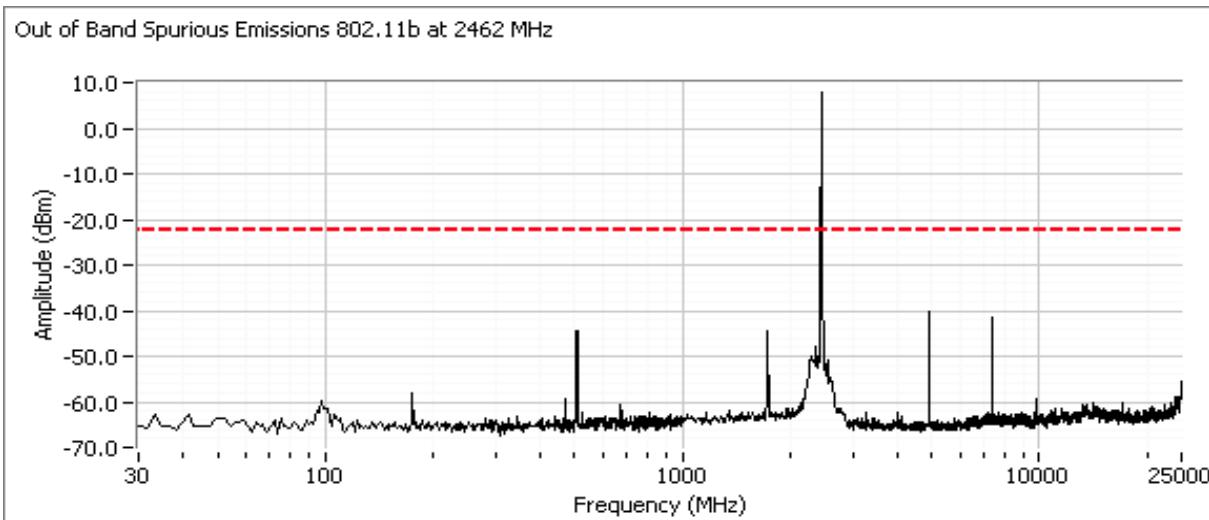Plots for center channel

Plots for high channel


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	N/A

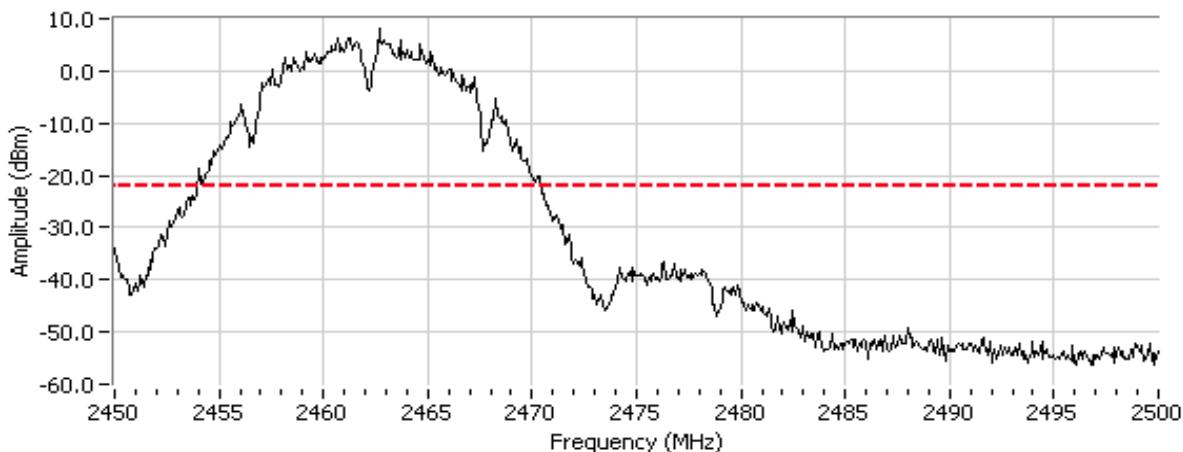Out of Band Spurious Emissions 802.11b at 2462 MHz (Closeup)





## *EMC Test Data*

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	-

## Radiated Emissions

## **(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)**

## Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/28/2009

Config. Used: 1

Test Engineer: rvarelas

Config Change: None

Test Location: Fremont Chamber #3

EUT Voltage: 120V/60Hz

## General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, **and** manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 20.4 °C  
Rel. Humidity: 33 %

## Summary of Results

Run #	Test Performed	Limit	Result	Margin
1 (802.11b)	RE, 1000 - 7500 MHz Maximized Emissions	FCC Class B	Pass	38.8dB $\mu$ V/m @ 2132.2MHz (-15.2dB)
2 (802.11g)	RE, 1000 - 7500 MHz Maximized Emissions	FCC Class B	Pass	36.4dB $\mu$ V/m @ 2132.1MHz (-17.6dB)

## Modifications Made During Testing

No modifications were made to the EUT during testing

## Deviations From The Standard

No deviations were made from the requirements of the standard.

Note: Preliminary testing showed no radio related emissions below 1000 MHz



## EMC Test Data

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)

T-Log Number: T74398

Account Manager: Dean Eriksen

Contact: Jerry Chan


Standard: FCC Part 15, LP0002

Class: -

Run #1: Maximized Readings, 1000 - 7500 MHz. 802.11b Mode

Rx Mode on 2437 MHz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 7500 MHz	3	3	0.0

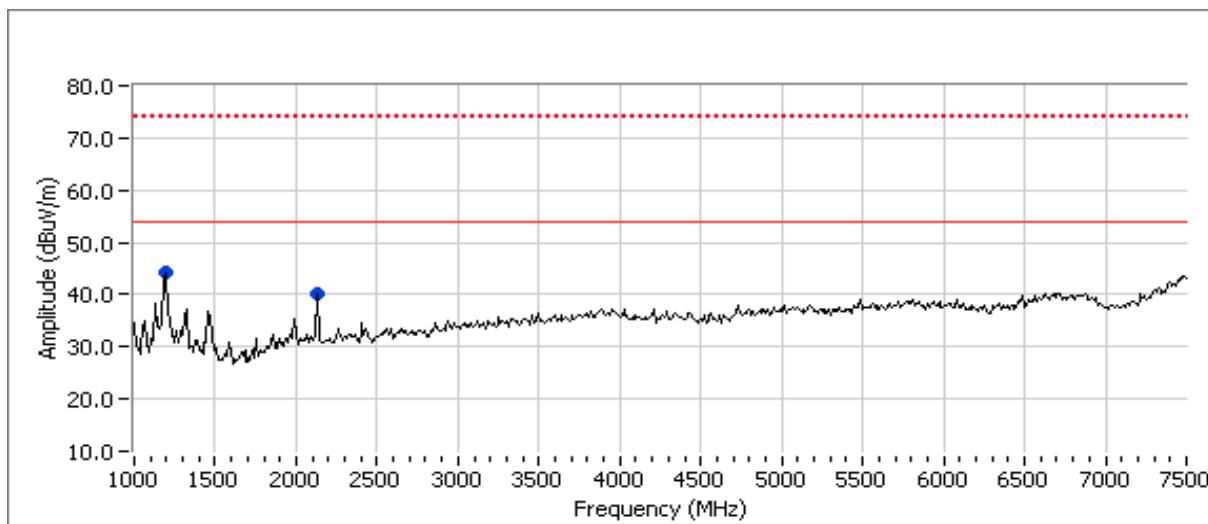

### Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency	Level	Pol	FCC Class B		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1199.330	44.2	V	54.0	-9.8	Peak	141	1.0	
2132.400	40.2	H	54.0	-13.8	Peak	254	1.0	

### Final peak and average readings

Frequency	Level	Pol	FCC Class B		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2132.200	38.8	H	54.0	-15.2	AVG	258	1.0	RB 1 MHz; VB: 10 Hz
1199.360	37.8	V	54.0	-16.2	AVG	135	1.0	RB 1 MHz; VB: 10 Hz
1199.270	49.0	V	74.0	-25.0	PK	135	1.0	RB 1 MHz; VB: 1 MHz
2132.360	43.4	H	74.0	-30.6	PK	258	1.0	RB 1 MHz; VB: 1 MHz

Note 1: Above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.



## EMC Test Data

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)

T-Log Number: T74398

Account Manager: Dean Eriksen

Contact: Jerry Chan


Standard: FCC Part 15, LP0002

Class: -

Run #2: Maximized Readings, 1000 - 7500 MHz. 802.11g Mode

Rx Mode on 2437 MHz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 7500 MHz	3	3	0.0

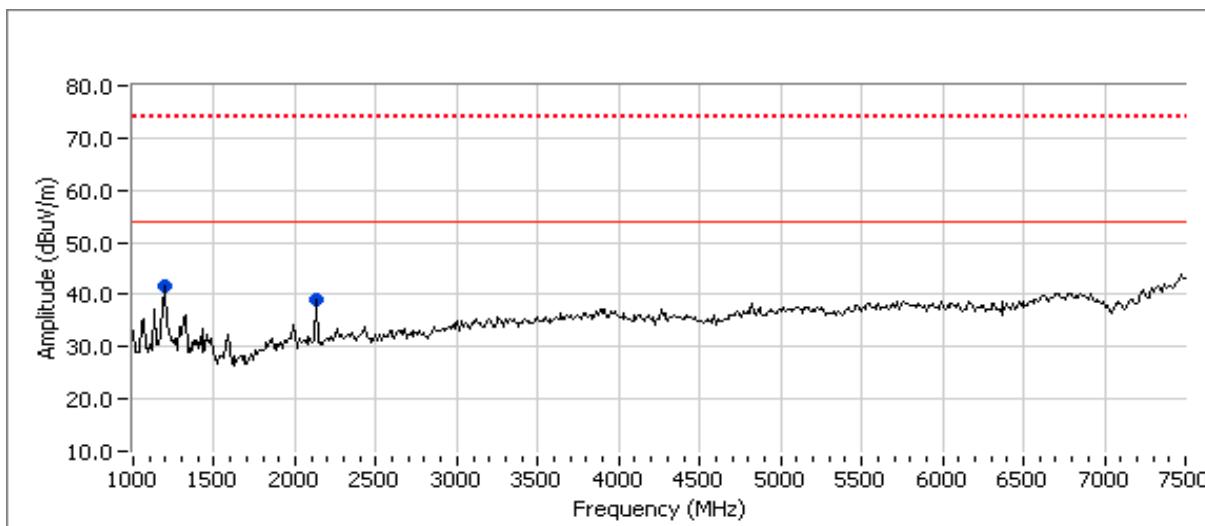

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency	Level	Pol	FCC Class B		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1199.220	41.5	V	54.0	-12.5	Peak	268	1.9	
2132.190	39.2	H	54.0	-14.8	Peak	308	1.9	

Final peak and average readings

Frequency	Level	Pol	FCC Class B		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2132.110	36.4	H	54.0	-17.6	AVG	310	1.1	RB 1 MHz; VB: 10 Hz
1199.320	35.3	V	54.0	-18.7	AVG	260	1.0	RB 1 MHz; VB: 10 Hz
1199.200	50.3	V	74.0	-23.7	PK	260	1.0	RB 1 MHz; VB: 1 MHz
2132.010	42.1	H	74.0	-31.9	PK	310	1.1	RB 1 MHz; VB: 1 MHz

Note 1: Above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	-

### Conducted Emissions

**(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)**

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/28/2009  
Test Engineer: rvarelas  
Test Location: Fremont Chamber #3

Config. Used: 1  
Config Change: None  
EUT Voltage: 110V/60Hz and 230V/50Hz

#### General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions: Temperature: 20.4 °C  
Rel. Humidity: 33 %

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 230V/50Hz	EN55022 Class B	Pass	49.3dB $\mu$ V @ 0.176MHz (-15.4dB)
2	CE, AC Power, 110V/60Hz	EN55022 Class B	Pass	45.8dB $\mu$ V @ 0.177MHz (-18.8dB)

#### Modifications Made During Testing

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Askey Computer Corporation

Job Number: J74383

Model: WLU3090-D69 (RoHS)

T-Log Number: T74398



Contact: Jerry Chan

Account Manager: Dean Eriksen

Standard: FCC Part 15, LP0002

Class: -

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

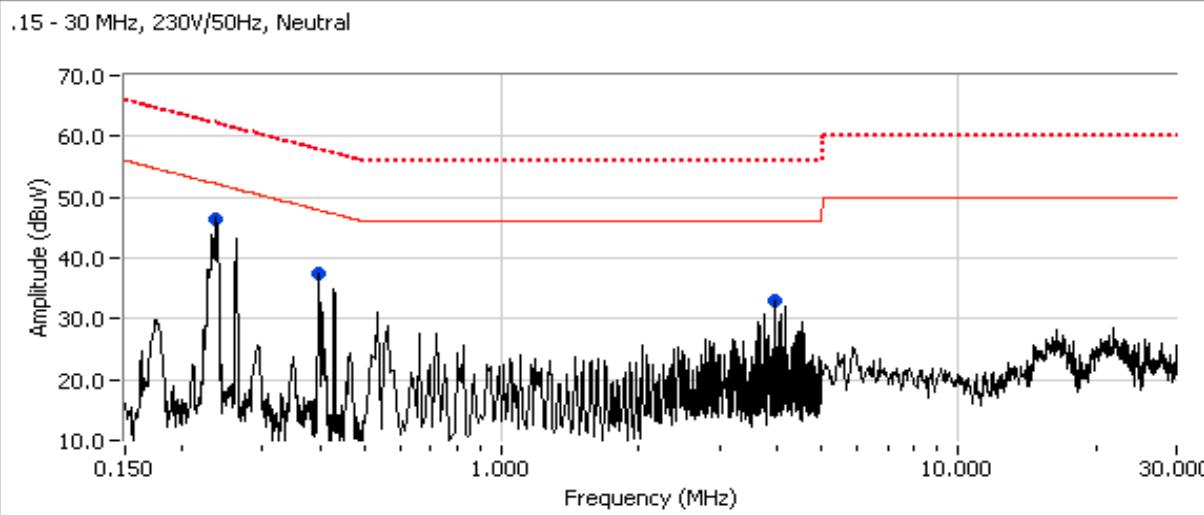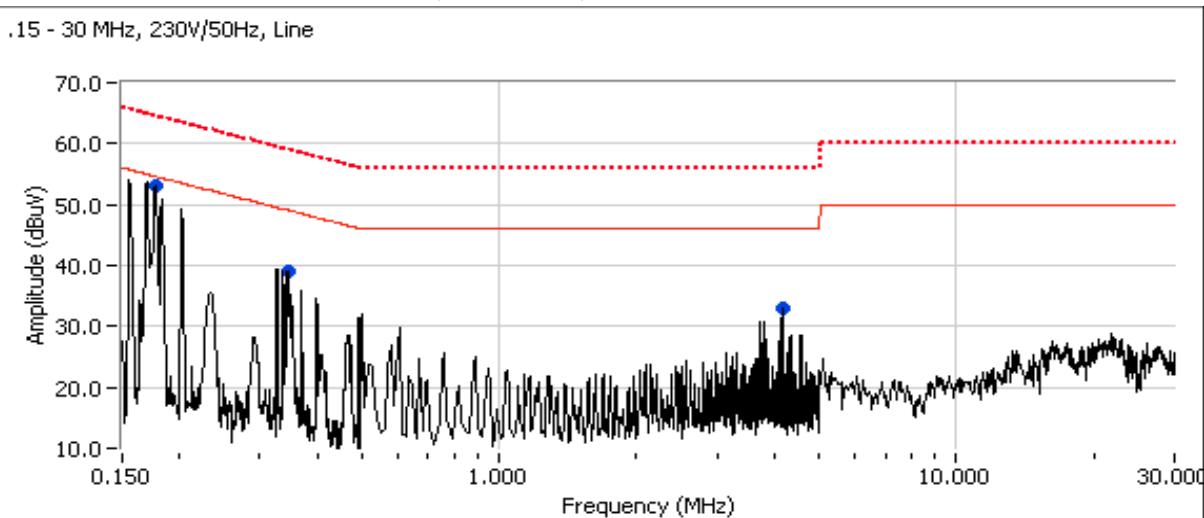

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Class B Limit	Margin	Detector QP/Ave	Comments
0.236	46.4	Neutral	52.2	-5.8	Peak	
0.397	37.3	Neutral	47.9	-10.6	Peak	
3.948	33.1	Neutral	46.0	-12.9	Peak	
0.176	53.1	Line 1	54.6	-1.5	Peak	
0.345	39.2	Line 1	49.1	-9.9	Peak	
4.190	33.1	Line 1	46.0	-12.9	Peak	


Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	-

Run #1: Continued


**Final quasi-peak and average readings**

Frequency MHz	Level dB <sub>UV</sub>	AC Line	EN 55022 Class B Limit	Margin	Detector QP/Ave	Comments
0.176	49.3	Line 1	64.7	-15.4	QP	QP (1.00s)
0.176	38.0	Line 1	54.7	-16.7	AVG	AVG (0.10s)
4.190	34.1	Line 1	56.0	-21.9	QP	QP (1.00s)
0.236	39.7	Neutral	62.2	-22.5	QP	QP (1.00s)
0.236	27.3	Neutral	52.2	-24.9	AVG	AVG (0.10s)
0.345	22.7	Line 1	49.1	-26.4	AVG	AVG (0.10s)
0.345	32.5	Line 1	59.1	-26.6	QP	QP (1.00s)
4.190	19.4	Line 1	46.0	-26.6	AVG	AVG (0.10s)
3.948	17.7	Neutral	46.0	-28.3	AVG	AVG (0.10s)
0.397	28.9	Neutral	57.9	-29.0	QP	QP (1.00s)
3.948	25.6	Neutral	56.0	-30.4	QP	QP (1.00s)
0.397	9.5	Neutral	47.9	-38.4	AVG	AVG (0.10s)

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 110V/60Hz

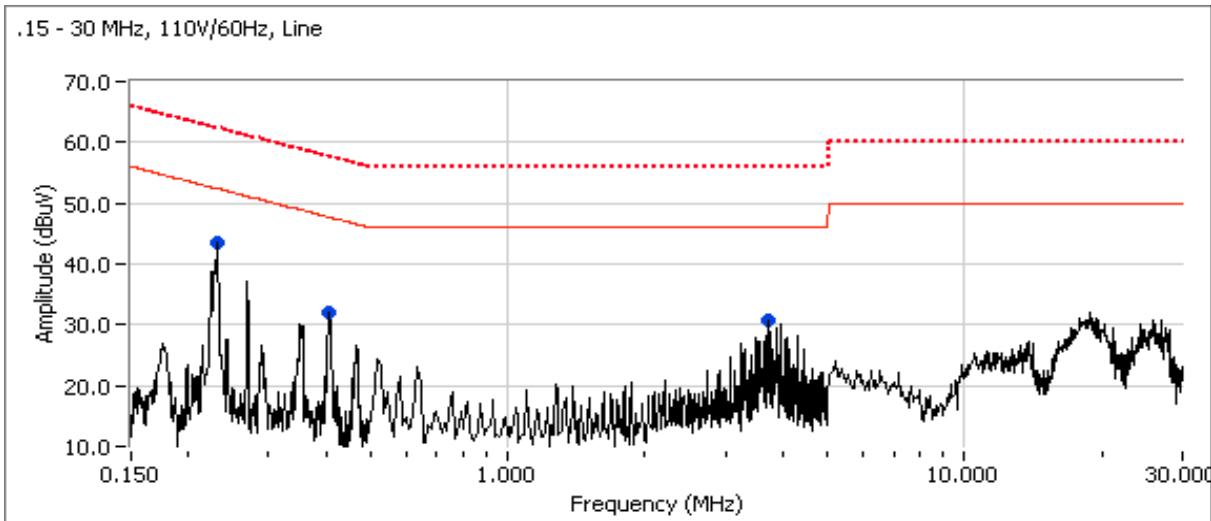

Client:	Askey Computer Corporation	Job Number:	J74383
Model:	WLU3090-D69 (RoHS)	T-Log Number:	T74398
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, LP0002	Class:	-

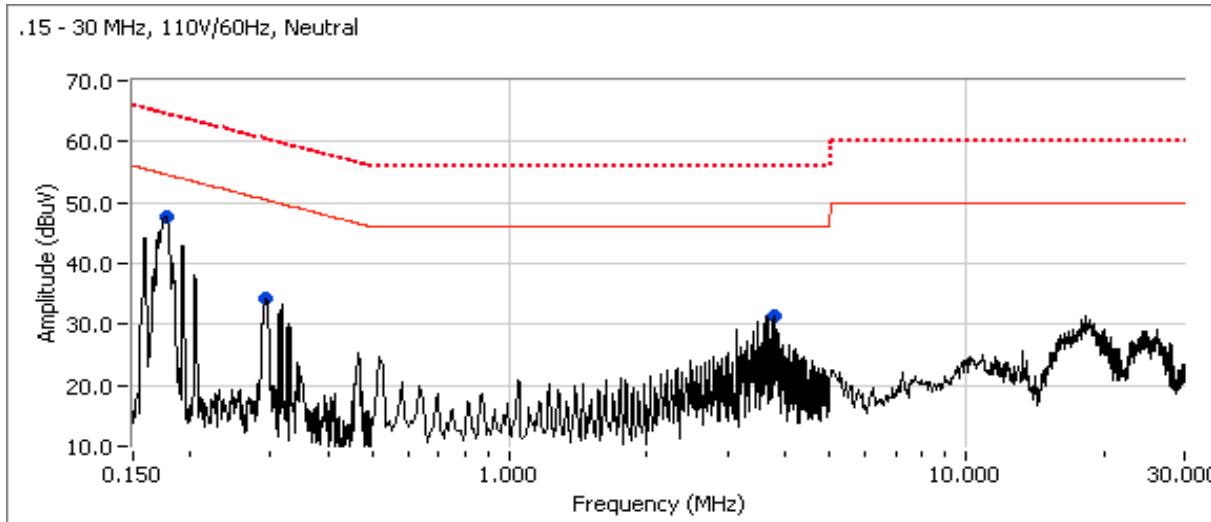**Run #2: Continued**

**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**

Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Class B Limit	Margin	Detector QP/Ave	Comments
0.177	47.6	Neutral	54.6	-7.0	Peak	
0.292	34.3	Neutral	50.4	-16.1	Peak	
3.775	31.5	Neutral	46.0	-14.5	Peak	
0.233	43.5	Line 1	52.4	-8.9	Peak	
0.407	31.9	Line 1	47.7	-15.8	Peak	
3.717	30.6	Line 1	46.0	-15.4	Peak	

**Final quasi-peak and average readings**

Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Class B Limit	Margin	Detector QP/Ave	Comments
0.177	45.8	Neutral	64.6	-18.8	QP	QP (1.00s)
0.233	40.2	Line 1	62.3	-22.1	QP	QP (1.00s)
0.407	25.1	Line 1	47.7	-22.6	AVG	AVG (0.10s)
0.177	31.8	Neutral	54.6	-22.8	AVG	AVG (0.10s)
0.233	28.7	Line 1	52.3	-23.6	AVG	AVG (0.10s)
3.717	21.0	Line 1	46.0	-25.0	AVG	AVG (0.10s)
3.775	20.7	Neutral	46.0	-25.3	AVG	AVG (0.10s)
3.775	30.4	Neutral	56.0	-25.6	QP	QP (1.00s)
0.407	31.4	Line 1	57.7	-26.3	QP	QP (1.00s)
0.292	34.0	Neutral	60.5	-26.5	QP	QP (1.00s)
3.717	28.9	Line 1	56.0	-27.1	QP	QP (1.00s)
0.292	20.9	Neutral	50.5	-29.6	AVG	AVG (0.10s)

---

*EXHIBIT 3: Photographs of Test Configurations*

***EXHIBIT 4: Proposed FCC ID Label & Label Location***

*EXHIBIT 5: Detailed Photographs  
of Seiko Epson Corporation Model WLU3090-D69 (RoHS) Construction*

*EXHIBIT 6: Operator's Manual  
for Seiko Epson Corporation Model WLU3090-D69 (RoHS)*

*EXHIBIT 7: Block Diagram  
of Seiko Epson Corporation Model WLU3090-D69 (RoHS)*

*EXHIBIT 8: Schematic Diagrams  
for Seiko Epson Corporation Model WLU3090-D69 (RoHS)*

*EXHIBIT 9: Theory of Operation  
for Seiko Epson Corporation Model WLU3090-D69 (RoHS)*

***EXHIBIT 10: RF Exposure Information***