



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555

Fax: +86 (0) 20 82075059

Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION

Registration number: 282398

Report No.: GZEM110700250101

Page: 1 of 106

FCC ID: BOU-AS111V37

TEST REPORT

Application No.:	GZEM1107002501RF
Applicant:	Philips Consumer Lifestyle
Manufacturer:	Philips Electronics Hong Kong Ltd.
Factory:	Arts Electronics Co., Ltd.
FCC ID:	BOU-AS111V37
Product Name:	Docking Speaker
Product Description:	Speaker with BT function to transmit and receive audio signal.
Model No.:	AS111/zz (Where zz=07, 17, 37) ♦
♦	Please refer to section 3 of this report for details
Trade Mark:	PHILIPS
Standards:	FCC PART 15 Subpart C: 2010 section 15.247
Date of Receipt:	2011-07-13
Date of Test:	2011-07-13 to 2011-07-19
Date of Issue:	2011-08-01
Test Result :	Pass*

* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 3 of this report for further detail.

Authorized Signature:



2011 Aug.

Strong Yao
Manager


The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2011-08-01		Original

Authorized for issue by:			
Tested By		 (Daniel He) /Signature	2011-07-13 to 2011-07-19 Date
Prepared By		 (Daniel He) /Signature	2011-07-25 Date
Checked By		 (Strong Yao) /Reviewer	2011-08-01 Date

3 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(1)	ANSI C63.10: Clause 6.9 & DA 00-705	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1)	DA 00-705	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii)	DA 00-705	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii)	DA 00-705	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 C section 15.247(a)(1)	DA 00-705	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1)	ANSI C63.10: Clause 6.10 & DA 00-705	PASS
Conducted Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.7 & DA 00-705	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9 & DA 00-705	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2 & DA 00-705	PASS
Remark:			
N/A: not applicable. Refer to the relative section for the details.			
EUT: In this whole report EUT means Equipment Under Test.			
Tx: In this whole report Tx (or tx) means Transmitter.			
Rx: In this whole report Rx (or rx) means Receiver.			
RF: In this whole report RF means Radio Frequency.			
ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.			
DA 00-705: "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"			
* Model No.: AS111/zz (Where zz=07, 17, 37)			
According to the confirmation from the applicant, all models are totally the same in and electrical and mechanical construction, except model No., plug portion and exported countries.			
Therefore only one model AS111/37 was tested in this report.			

4 Contents

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 Client Information	5
5.2 General Description of E.U.T.	5
5.3 Details of E.U.T.	5
5.4 Modulation configure	6
5.5 Description of Support Units.....	6
5.6 Deviation from Standards	6
5.7 Abnormalities from Standard Conditions	7
5.8 Other Information Requested by the Customer	7
5.9 Test Location	7
5.10 Test Facility	8
6 EQUIPMENT USED DURING TEST	9
7 TEST RESULTS	11
7.1 E.U.T. test conditions	11
7.2 Antenna Requirement	13
7.3 Occupied Bandwidth	14
7.4 Carrier Frequencies Separated.....	23
7.5 Hopping Channel Number.....	30
7.6 Dwell Time	32
7.7 Pseudorandom Frequency Hopping Sequence	47
7.8 Maximum Peak Output Power	49
7.9 Conducted Spurious Emissions	58
7.10 Radiated Spurious Emissions	69
7.11 Band Edges Requirement	96
7.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz	101

5 General Information

5.1 Client Information

Applicant: Philips Consumer Lifestyle
Address of Applicant: 3029E. Governor John Sevier Hwy. Knoxville, TN 37914
Manufacturer: Philips Electronics Hong Kong Ltd.
Address of Manufacturer: 5/F, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Factory: Arts Electronics Co., Ltd.
Address of Factory: No. 1, SHANGXING LU, SHANGJIAO COMMUNITY, CHANGAN TOWN, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA

5.2 General Description of E.U.T.

Product Name: Docking Speaker
Model No.: AS111/zz (Where zz=07, 17, 37)
Trade Mark: PHILIPS

5.3 Details of E.U.T.

Operating Frequency 2402 MHz to 2480 MHz
Type of Modulation: GFSK, $(\pi/4)$ DQPSK, 8DPSK
Number of Channels 79 Channels
Channel Separation: 1 MHz
Dwell time Per channel is less than 0.4s.
Antenna Type PCB Layout Inverted F
Antenna gain: 0dBi
Speciality: Bluetooth 2.1 with EDR
Function: Speaker with BT function to transmit and receive audio signal.
Power Supply: AC 100-240V 50/60Hz
Adaptor: 1)Model: AS150-059-AA240
Input: 100-240V 50/60Hz 0.7A
Output: DC 5.9V 2.4A
2) Model: S018KU0590240
Input: AC 100-240V 50/60Hz 500mA
Output: DC 5.9V 2400mA
Power cord: 1.5 m x 2 wires unscreened DC cable


5.4 Modulation configure

Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	24
	DH3	11	183
	DH5	15	339
($\pi/4$)DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

Remark:

Modulation 8-DPSK

The modulation 8 PSK works with 8 phases between 0 and 2π (0 and 360 degrees), it can be seen below in the circle.

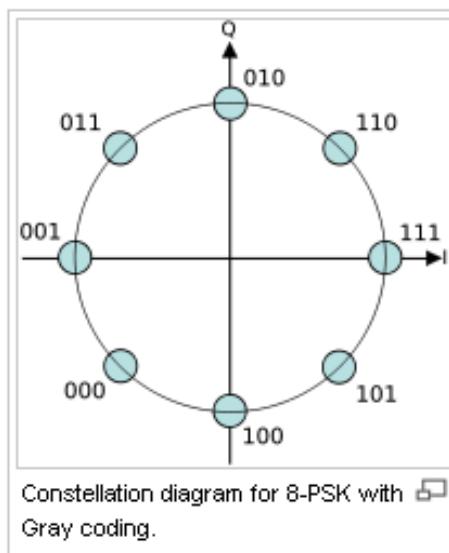

Normal mode: the Bluetooth has been tested on the Modulation of GFSK;

EDR mode: the Bluetooth has been tested on the Modulation of ($\pi/4$)DQPSK and 8DPSK, compliance test and record the worst case on 8DPSK.

5.5 Description of Support Units

The EUT has been tested with Motorola (XT800) fixed frequency by testing lab.

5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.



5.7 Abnormalities from Standard Conditions

None.

5.8 Other Information Requested by the Customer

None.

5.9 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.10 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

Date of Registration: February 18, 2009. Valid until February 18, 2011.

- **VCCI (Registration No.: R-2460 and C-2584)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460 and C-2584 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.

This certificate was issued August 6, 2009 and valid until May 19, 2012.



6 Equipment Used during Test

RE in Chamber					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2011-09-06
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-01-17
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2012-06-01
EMC0514	Coaxial cable	SGS	N/A	N/A	2011-12-08
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2011-10-28
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2011-12-20
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2011-12-20
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2011-10-28
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2011-09-11
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-01-17
EMC0049	Amplifier	Agilent	8447D	2944A10862	2012-04-21
EMC0075	310N Amplifier	Sonama	310N	272683	2011-10-25
EMC0523	Active Loop Antenna	EMCO	6502	42963	2011-11-17
EMC2041	Broad-Band Horn Antenna(14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2012-06-01
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2012-05-10

Conducted Emission					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2011-09-25
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2011-11-23
EMC2046	Artificial Mains Network (LISN)	AFJ Instruments	LT32C	S.N.320311201 50	2012-05-18
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2011-11-24
EMC0107	Coaxial Cable	SGS	2m	N/A	2012-07-18
EMC0106	Voltage Probe	SGS	N/A	N/A	N/A
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2012-01-17
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2012-01-17
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2012-01-17



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM110700250101
Page: 10 of 106
FCC ID: BOU-AS111V37

General used equipment					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date
					(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2011-12-16
EMC0007	DMM	Fluke	73	70671122	2011-12-16

Notice: Calibration duration for above equipments is 1 year.

7 Test Results

7.1 E.U.T. test conditions

Power supply:	AC 120V
Temperature:	20.0 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Test frequencies and frequency range:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465		
48	2450	64	2466		

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 39 channel(2441 MHz) and highest channel: 78 channel(2480 MHz)

7.2 Antenna Requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed.

Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

Test result: The unit does meet the FCC requirements.

7.3 Occupied Bandwidth


Test Requirement: FCC Part 15 C section 15.247

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Method: ANSI C63.10: Clause 6.9 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data package. Compliance test in normal mode (DH5) and EDR mode (3DH5) as the worst case was found.

Test Configuration:

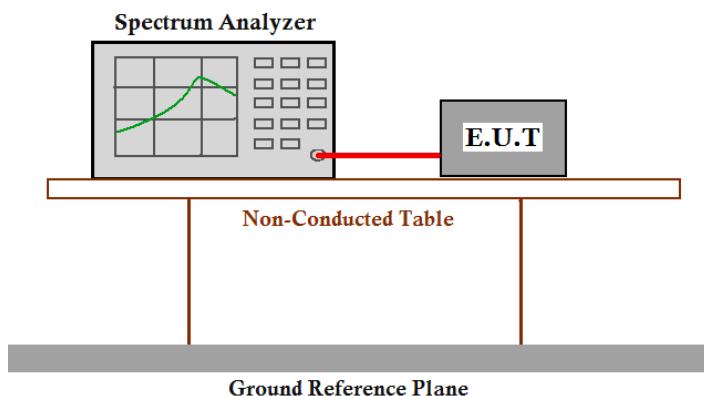

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: RBW \geq 1% of the 20Db bandwidth VBW \geq RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20dB points bandwidth.



1) Test the EUT with adaptor (model: AS150-059-AA240)

Test result:

Normal mode:

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.14228	0.76152
Middle	1.15230	0.76820
Highest	1.14228	0.76152


EDR mode:

Test Channel	bandwidth	2/3 bandwidth
Lowest	1.41283	0.94189
Middle	1.40281	0.93352
Highest	1.41283	0.94189


Result plot as follows:

DH5:


Lowest Channel:

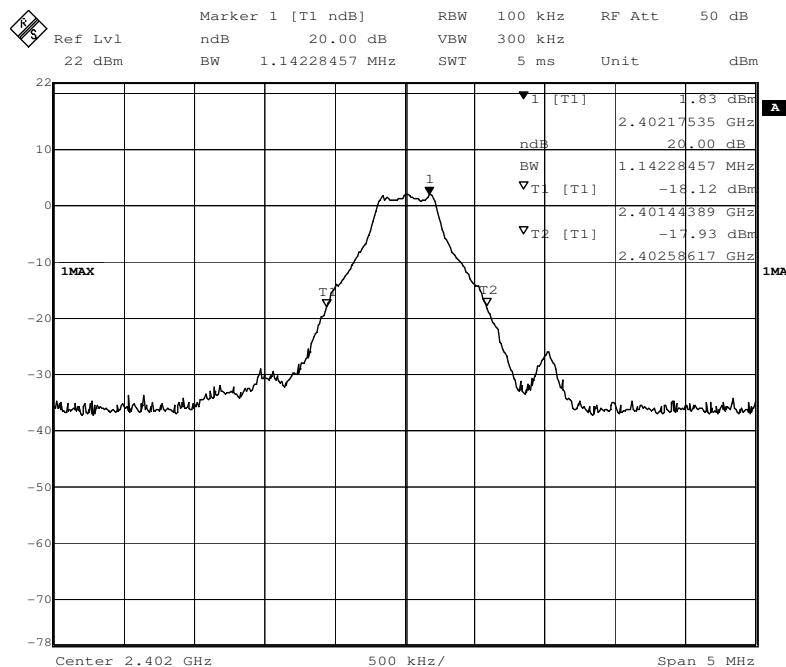

Middle Channel:

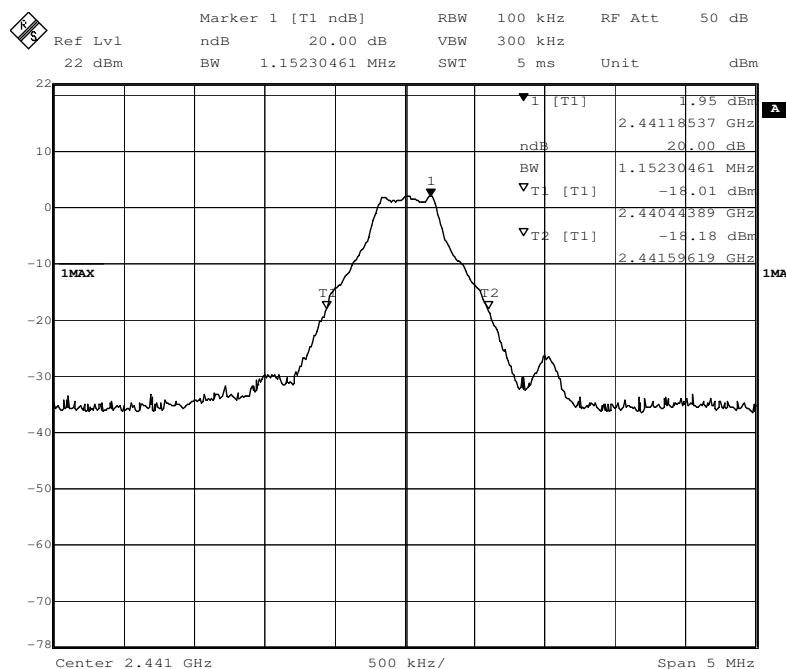


Highest Channel:

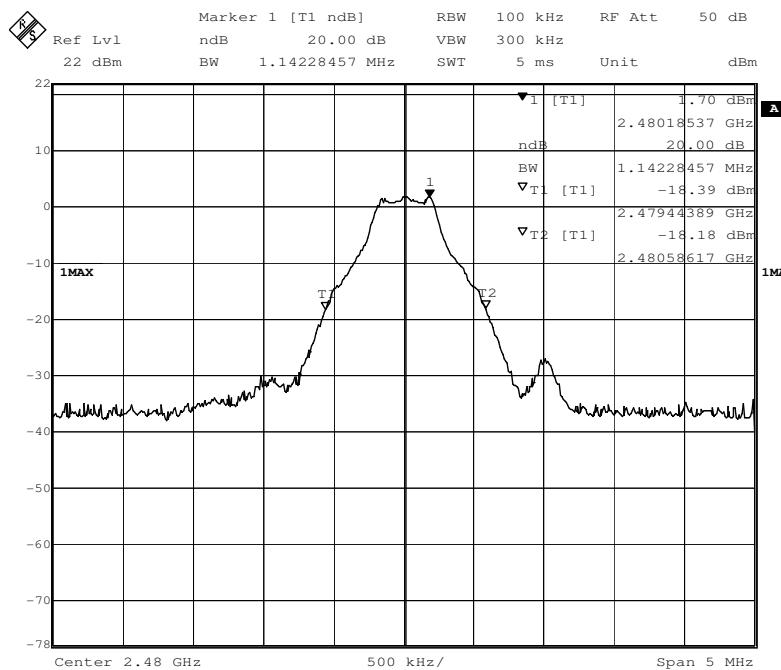


3DH5:


Lowest channel:

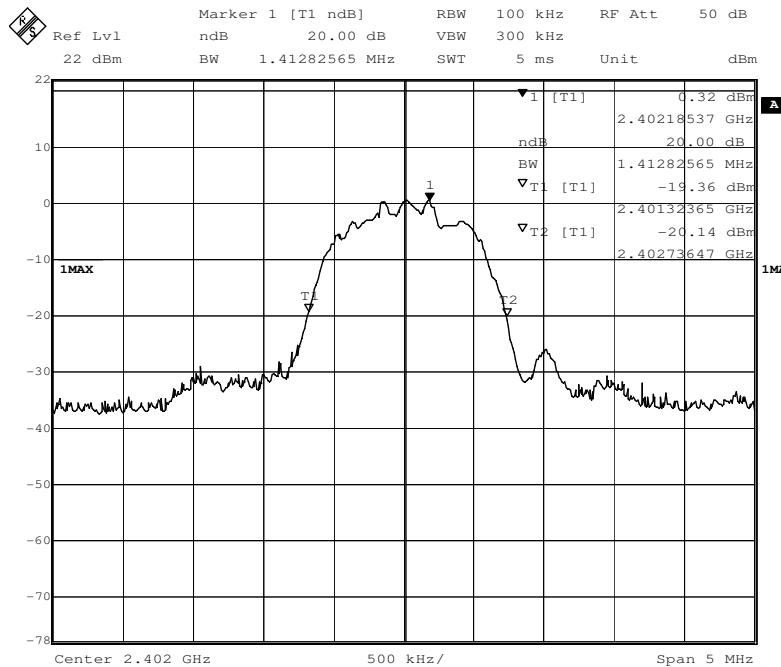

Middle channel:

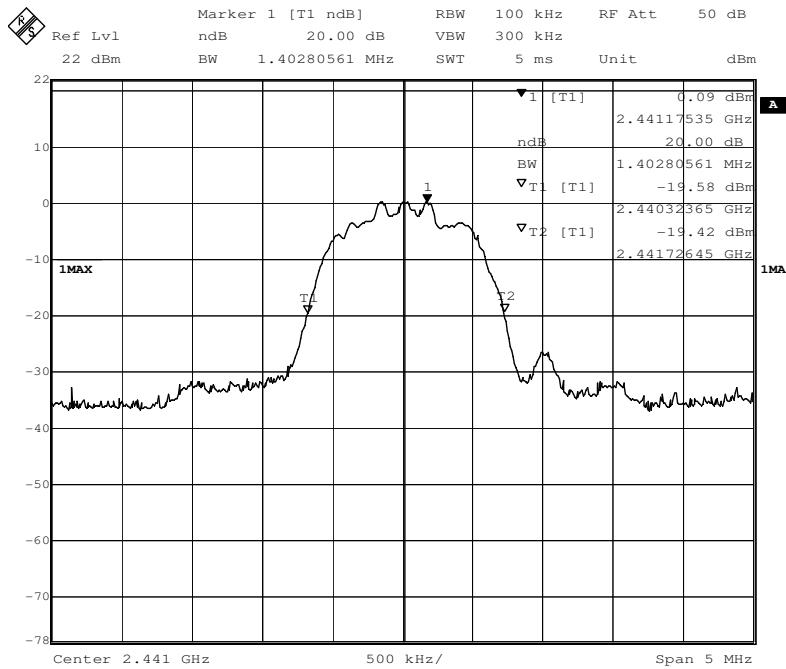

Highest channel:

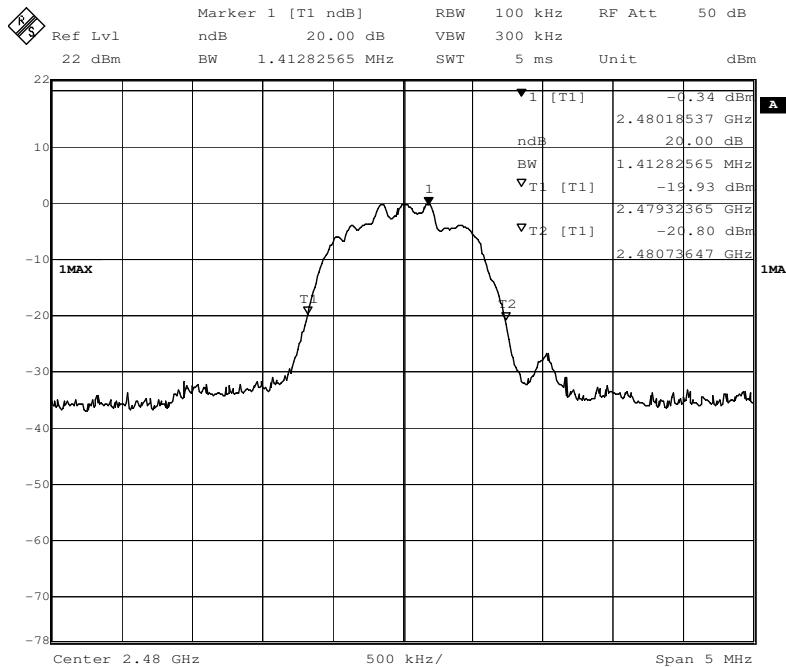



2) Test the EUT with adaptor (model: S018KU0590240)

Test result:

Normal mode:

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.14228	0.76152
Middle	1.13226	0.75484
Highest	1.15230	0.76820


EDR mode:

Test Channel	bandwidth	2/3 bandwidth
Lowest	1.41283	0.94189
Middle	1.41283	0.94189
Highest	1.41283	0.94189


Result plot as follows:

DH5:


Lowest Channel:

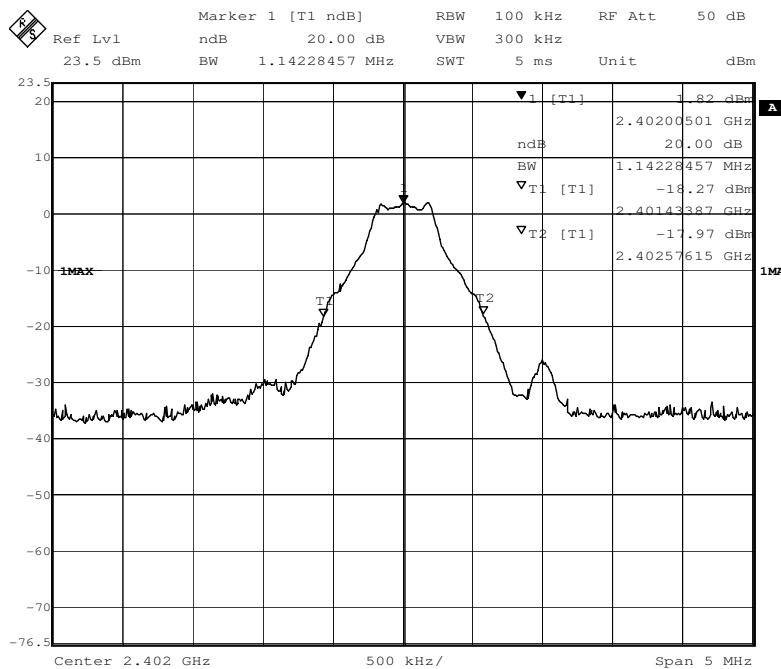

Middle Channel:

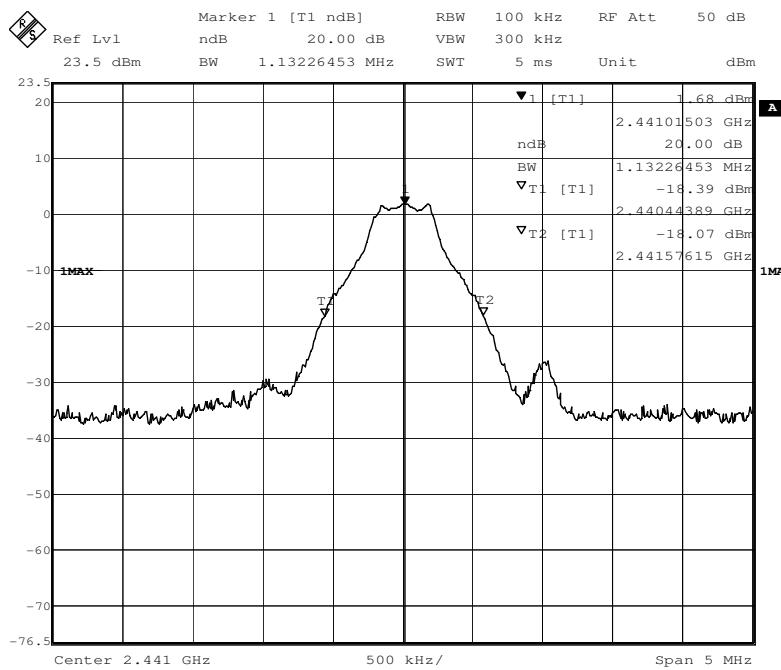


Highest Channel:

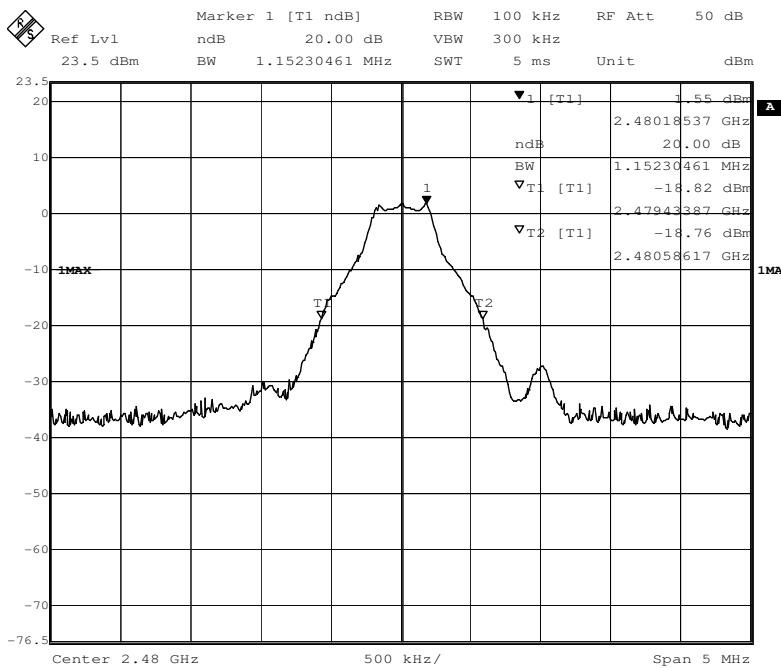


3DH5:


Lowest channel:

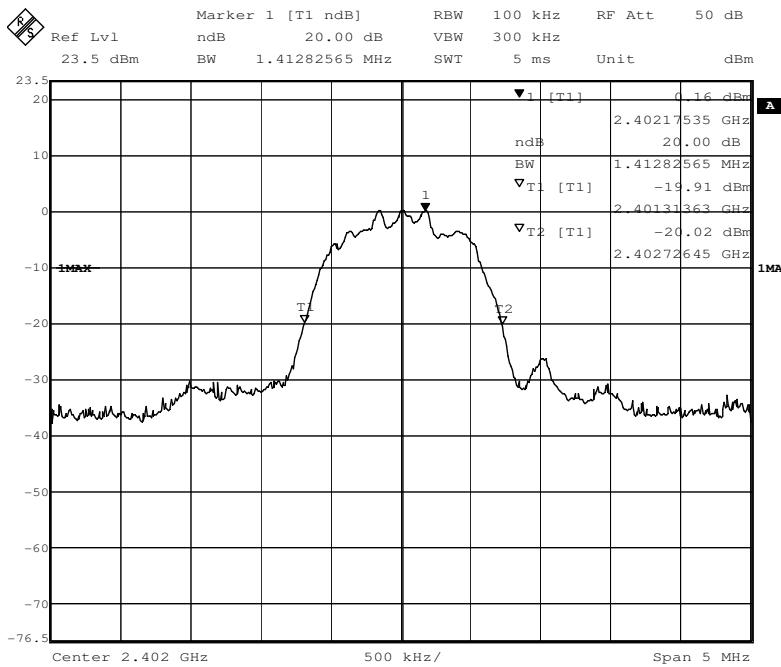

Middle channel:

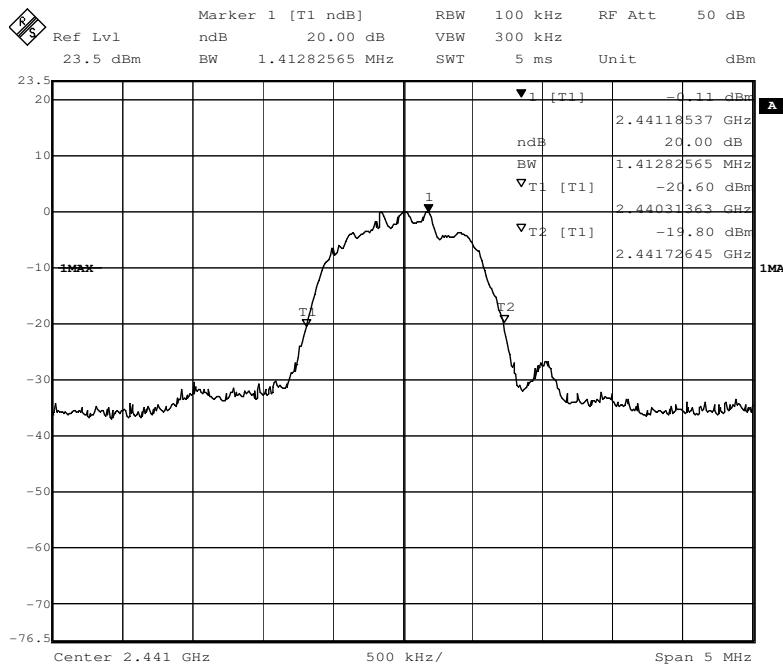

Highest channel:

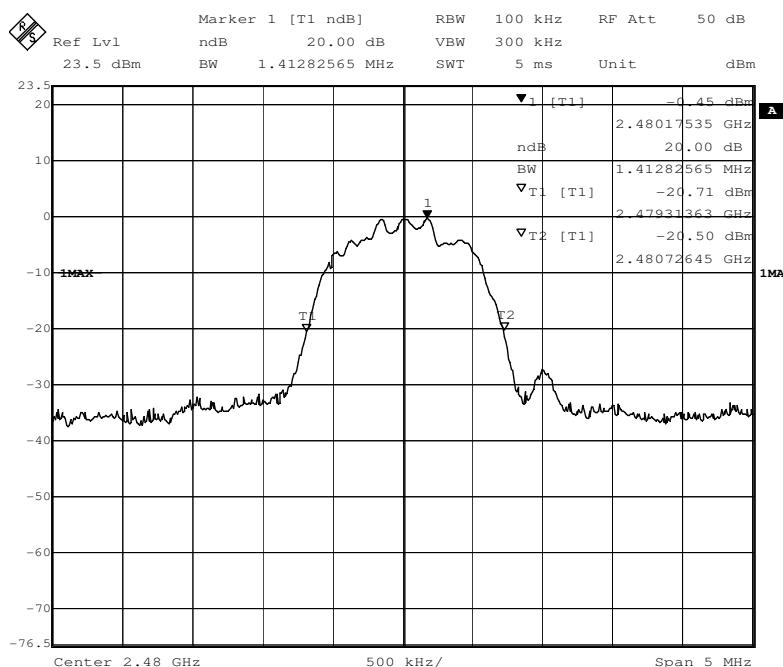

7.4 Carrier Frequencies Separated


Test Requirement: FCC Part 15 C section 15.247

(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Method: DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in hopping with normal mode (DH5) as the worst case was found.

Test Configuration:

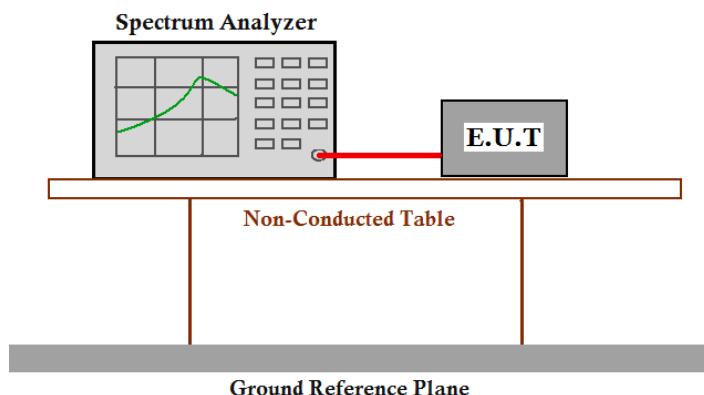

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW \geq 1% of the span, VBW \geq RBW, Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.



1) Test the EUT with adaptor (model: AS150-059-AA240)


Test result:

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.02204MHz	Pass
Middle Channels (channel 39 and channel 40)	1.03206MHz	Pass
Upper Channels (channel 77 and channel 78)	1.02204MHz	Pass


Remark:


The limit is maximum two-thirds of the 20 dB bandwidth: 0.94189 MHz

1. Lowest Channels: **Carrier Frequencies Separated**

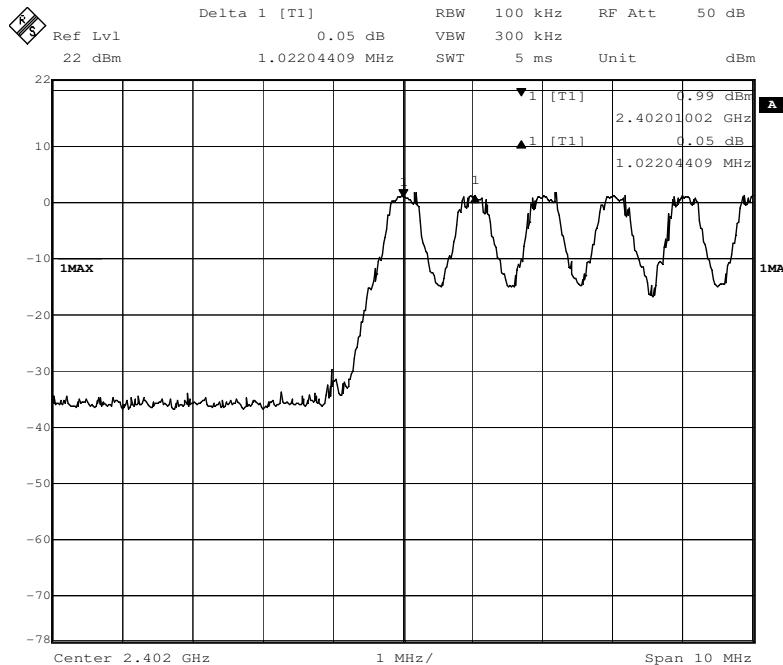

2. Middle Channels: **Carrier Frequencies Separated**

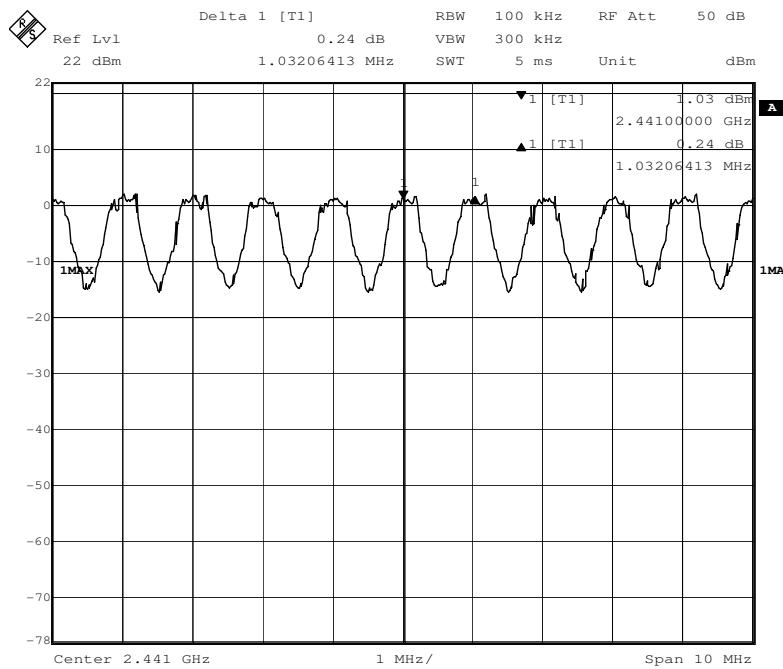

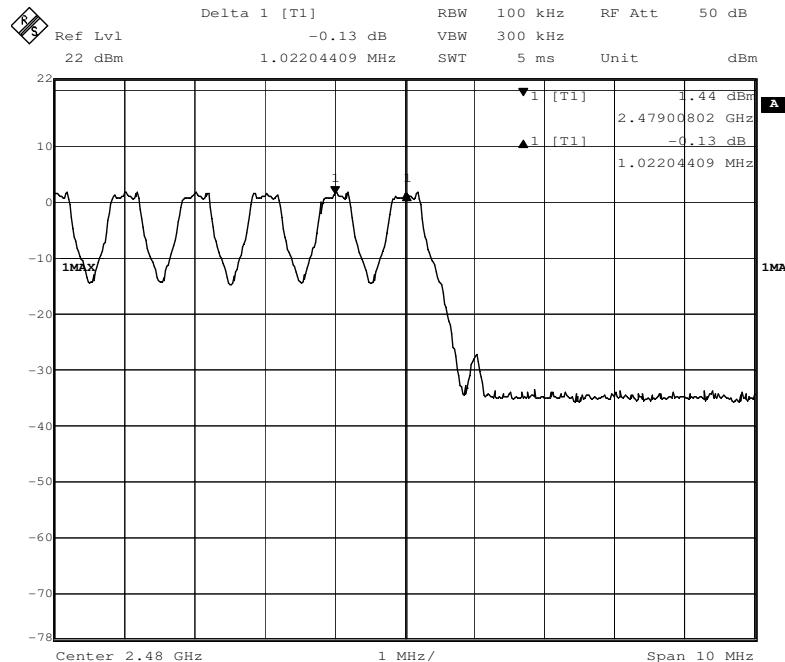3. Highest Channels: Carrier Frequencies Separated**Test result: The unit does meet the FCC requirements.**




2) Test the EUT with adaptor (model: S018KU0590240)


Test result:


Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.02204MHz	Pass
Middle Channels (channel 39 and channel 40)	1.03206MHz	Pass
Upper Channels (channel 77 and channel 78)	1.02204MHz	Pass
Remark:		
The limit is maximum two-thirds of the 20 dB bandwidth: 0.94189 MHz		

1. Lowest Channels: Carrier Frequencies Separated

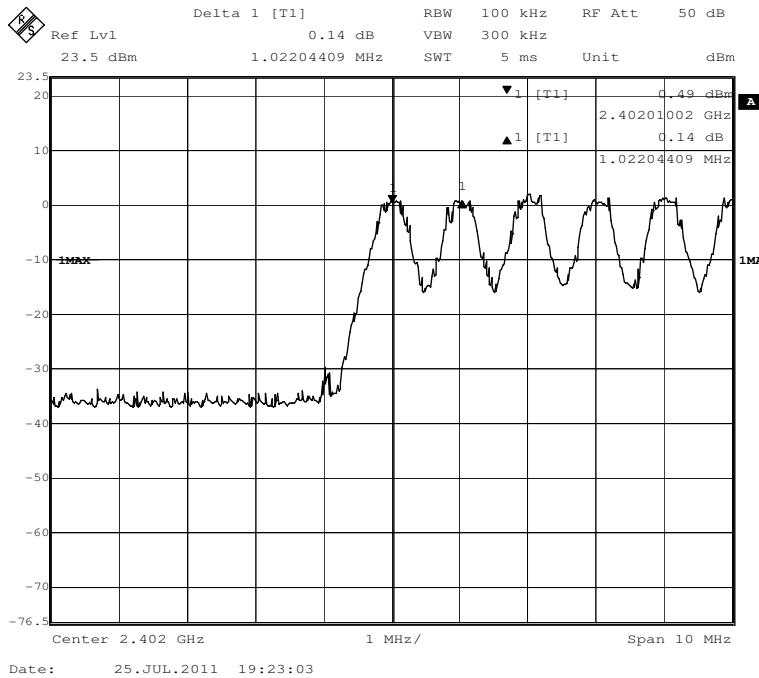

2. Middle Channels: Carrier Frequencies Separated

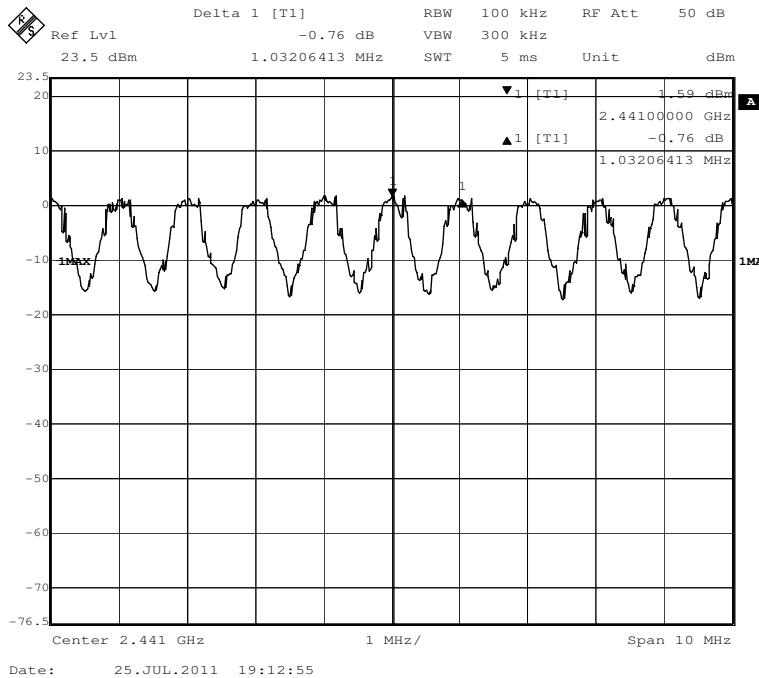

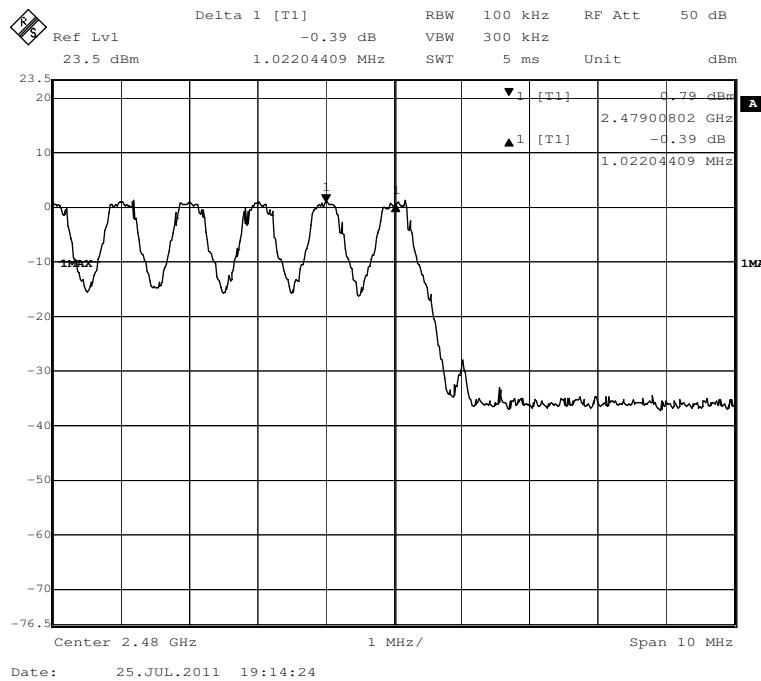3. Highest Channels: Carrier Frequencies Separated**Test result: The unit does meet the FCC requirements.**

7.5 Hopping Channel Number


Test Requirement: FCC Part15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Method: DA 00-705

Test Status: Pre-test the EUT in hopping mode with different data packet. Compliance test in hopping with normal mode (DH5) as the worst case was found.

Test Configuration:

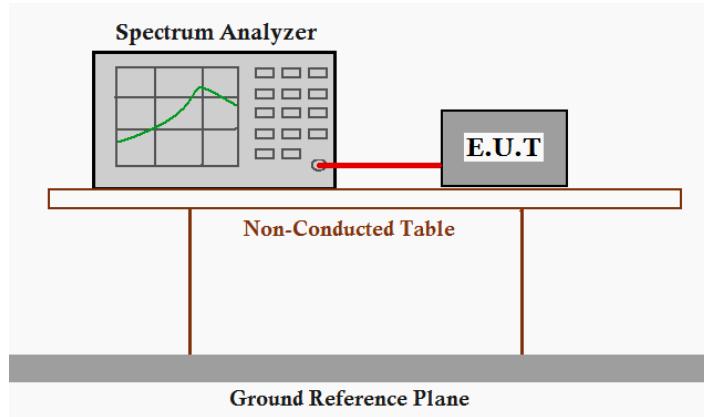


Test Procedure:


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400 MHz. stop frequency = 2483.5 MHz. Submit the test result graph.

Test result: Total channels are 79 channels.

1) Test the EUT with adaptor (model: AS150-059-AA240)

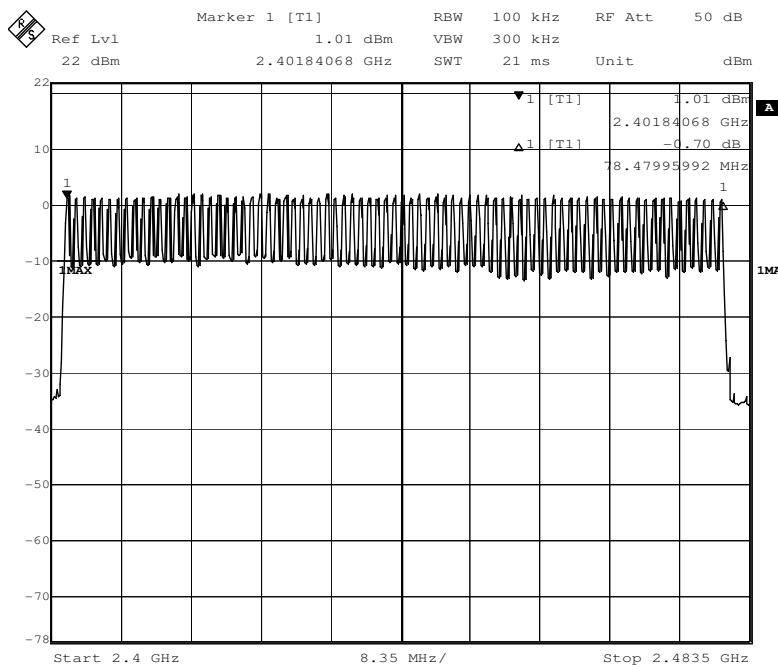

2) Test the EUT with adaptor (model: S018KU0590240)

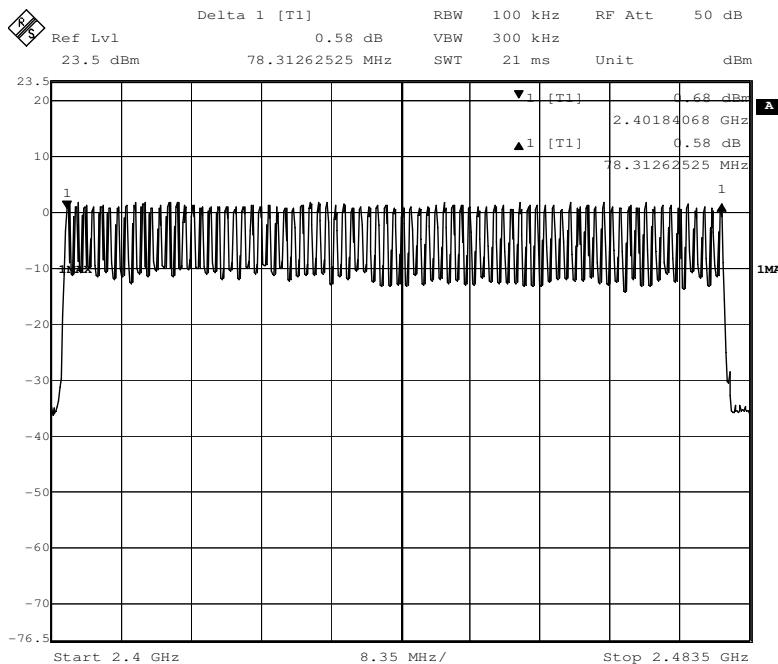

Test result: The unit does meet the FCC requirements.

7.6 Dwell Time


Test Requirement: FCC Part 15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Method: DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in hopping with EDR mode (3DH1, 3DH3 and 3DH5) as the worst case was found.

Test Configuration:

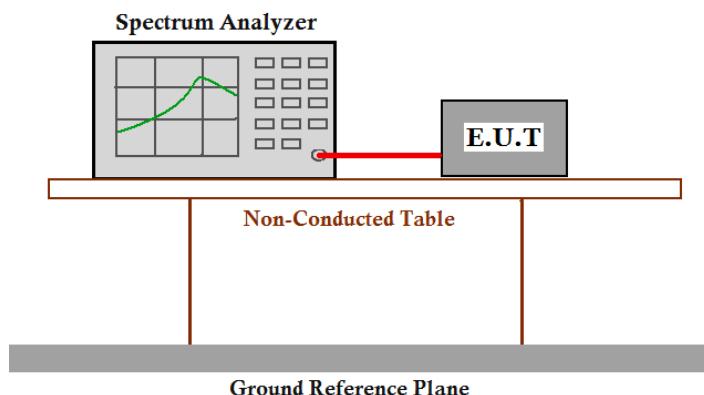

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. centered on a hopping channel;
3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation.

The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.



1) Test the EUT with adaptor (model: AS150-059-AA240)

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

1. Channel 0: 2.402GHz

$3DH1 \text{ time slot} = 0.390782(\text{ms}) \times (1600/(2*79)) \times 31.6 = 125.050\text{ms}$

$3DH3 \text{ time slot} = 1.643287 (\text{ms}) \times (1600/(4*79)) \times 31.6 = 262.926 \text{ ms}$

$3DH5 \text{ time slot} = 2.925852 (\text{ms}) \times (1600/(6*79)) \times 31.6 = 312.091\text{ms}$

2. Channel 39: 2.441GHz

$3DH1 \text{ time slot} = 0.390782 (\text{ms}) \times (1600/(2*79)) \times 31.6 = 125.050\text{ms}$

$3DH3 \text{ time slot} = 1.643287 (\text{ms}) \times (1600/(4*79)) \times 31.6 = 262.926\text{ms}$

$3DH5 \text{ time slot} = 2.925852 (\text{ms}) \times (1600/(6*79)) \times 31.6 = 312.091\text{ms}$

3. Channel 78: 2.480GHz

$3DH1 \text{ time slot} = 0.390782 (\text{ms}) \times (1600/(2*79)) \times 31.6 = 125.050\text{ms}$

$3DH3 \text{ time slot} = 1.663327 (\text{ms}) \times (1600/(4*79)) \times 31.6 = 266.132\text{ms}$

$3DH5 \text{ time slot} = 2.925852 (\text{ms}) \times (1600/(6*79)) \times 31.6 = 312.091\text{ms}$


The results are not greater than 0.4 seconds

The unit does meet the FCC requirements.


Please refer the graph as below:

1. Lowest channel (2.402 GHz):


(1). 3DH1

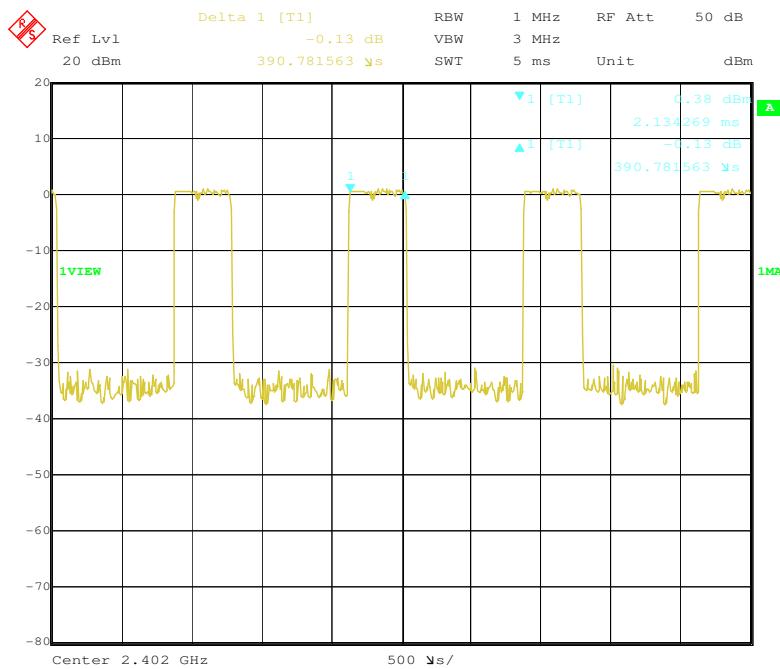

(2) 3DH3

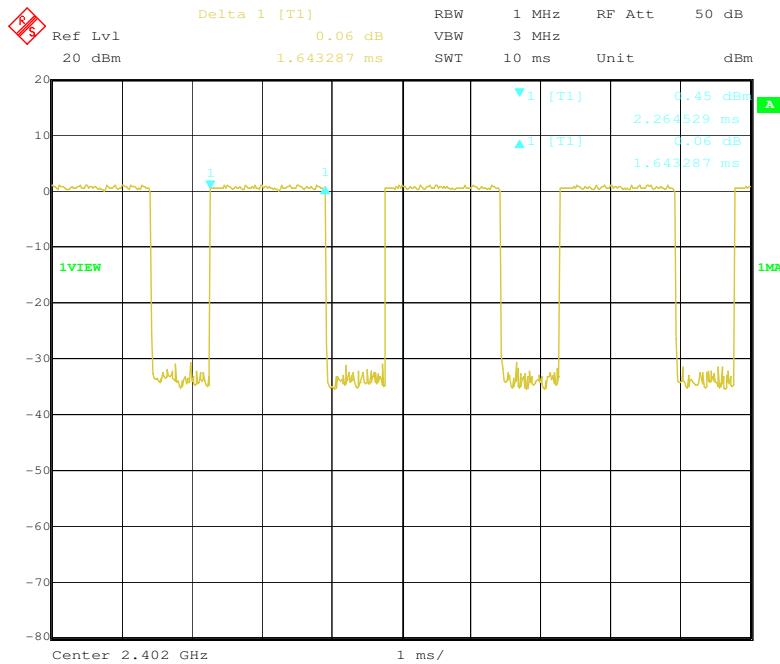


(3) 3DH5

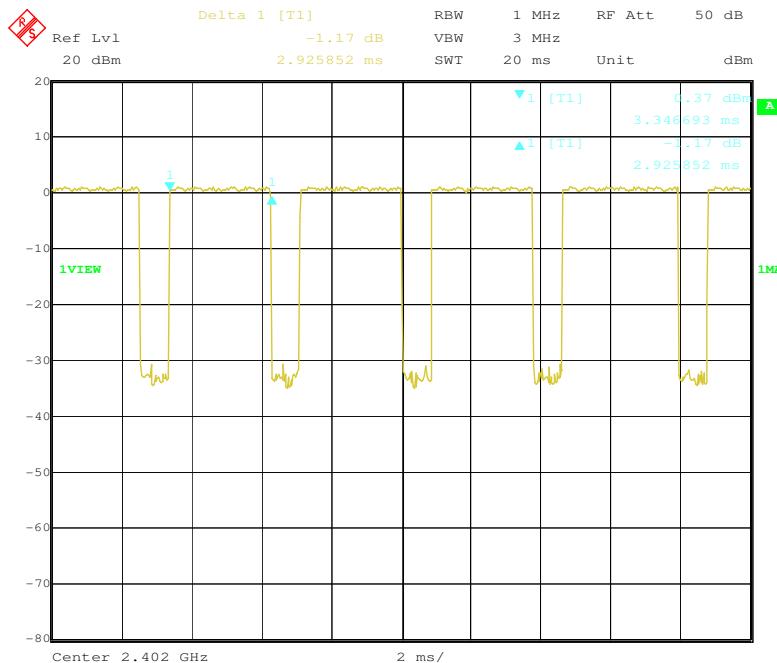


2. Middle Channel (2.441 GHz)


(1). 3DH1

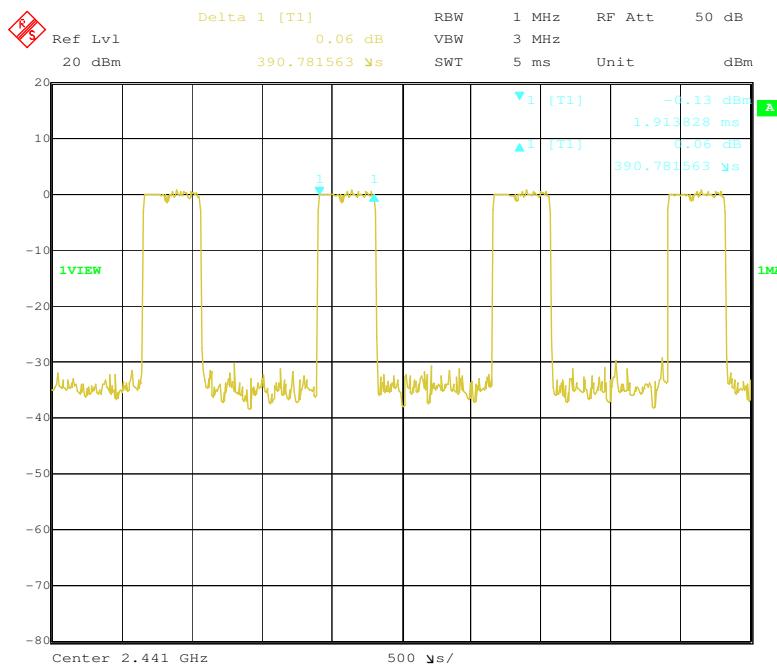

(2) 3DH3

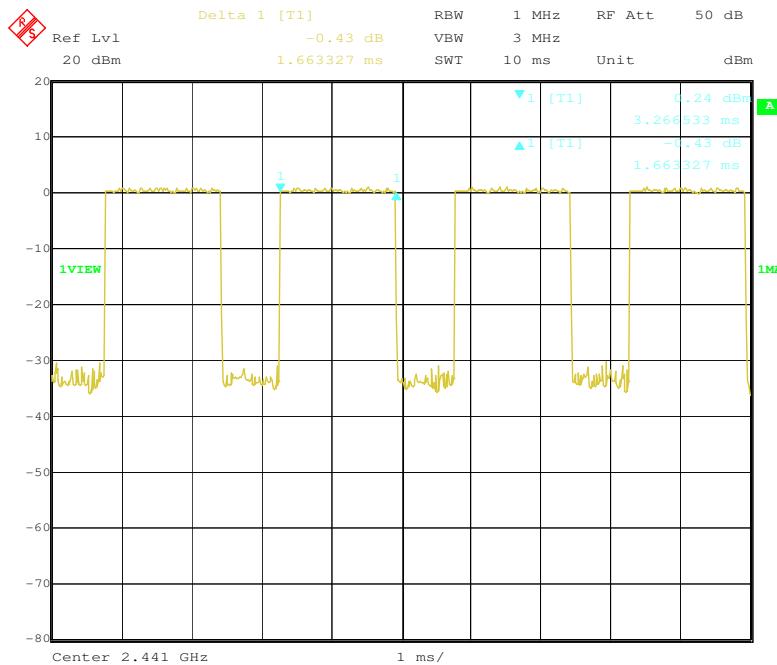


(3) 3DH5

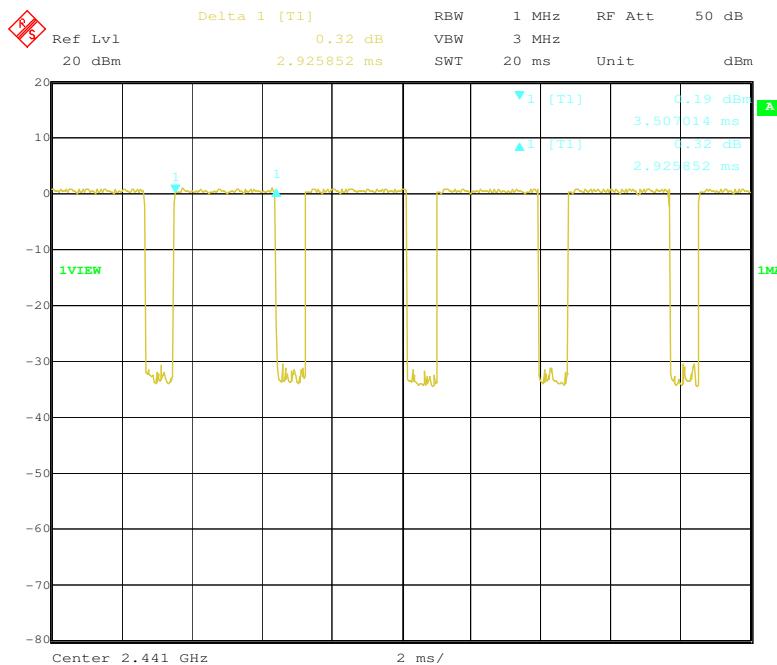



3. Highest Channel (2.480 GHz)

(1) 3DH1

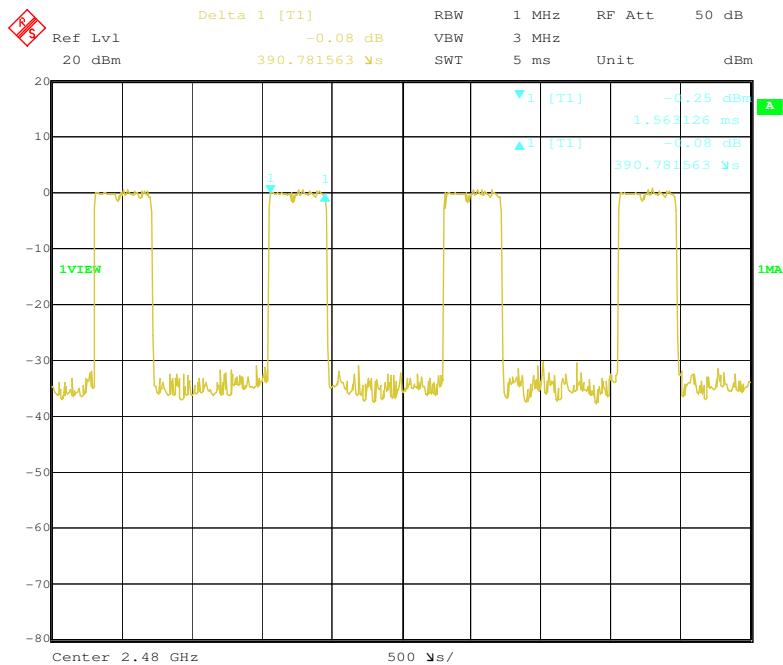

(2) 3DH3

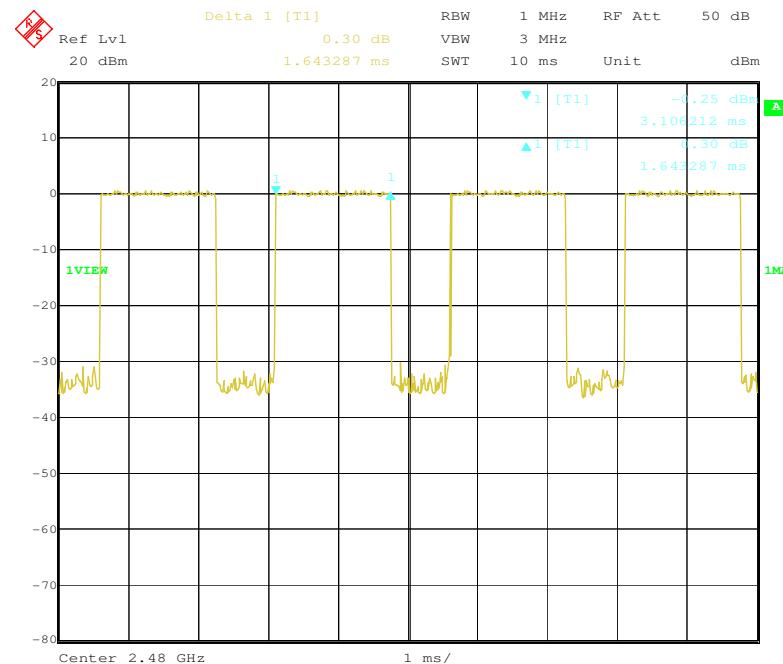

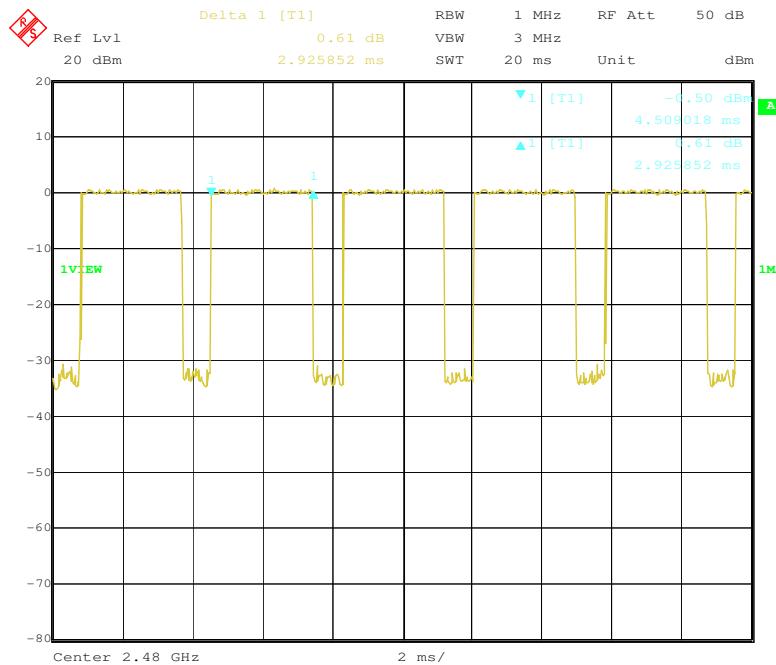(3) 3DH5

2) Test the EUT with adaptor (model: S018KU0590240)

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

4. Channel 0: 2.402GHz

$3DH1 \text{ time slot} = 0.390782(\text{ms}) \times (1600/(2*79)) \times 31.6 = 125.050\text{ms}$

$3DH3 \text{ time slot} = 1.653307(\text{ms}) \times (1600/(4*79)) \times 31.6 = 264.529\text{ms}$

$3DH5 \text{ time slot} = 2.955912(\text{ms}) \times (1600/(6*79)) \times 31.6 = 315.297\text{ms}$

5. Channel 39: 2.441GHz

$3DH1 \text{ time slot} = 0.390782(\text{ms}) \times (1600/(2*79)) \times 31.6 = 125.050\text{ms}$

$3DH3 \text{ time slot} = 1.653307(\text{ms}) \times (1600/(4*79)) \times 31.6 = 264.529\text{ms}$

$3DH5 \text{ time slot} = 2.875752(\text{ms}) \times (1600/(6*79)) \times 31.6 = 306.747\text{ms}$

6. Channel 78: 2.480GHz

$3DH1 \text{ time slot} = 0.390782(\text{ms}) \times (1600/(2*79)) \times 31.6 = 125.050\text{ms}$

$3DH3 \text{ time slot} = 1.633267(\text{ms}) \times (1600/(4*79)) \times 31.6 = 261.323\text{ms}$

$3DH5 \text{ time slot} = 2.915832(\text{ms}) \times (1600/(6*79)) \times 31.6 = 311.022\text{ms}$


The results are not greater than 0.4 seconds

The unit does meet the FCC requirements.


Please refer the graph as below:

1. Lowest channel (2.402 GHz):


(1). 3DH1

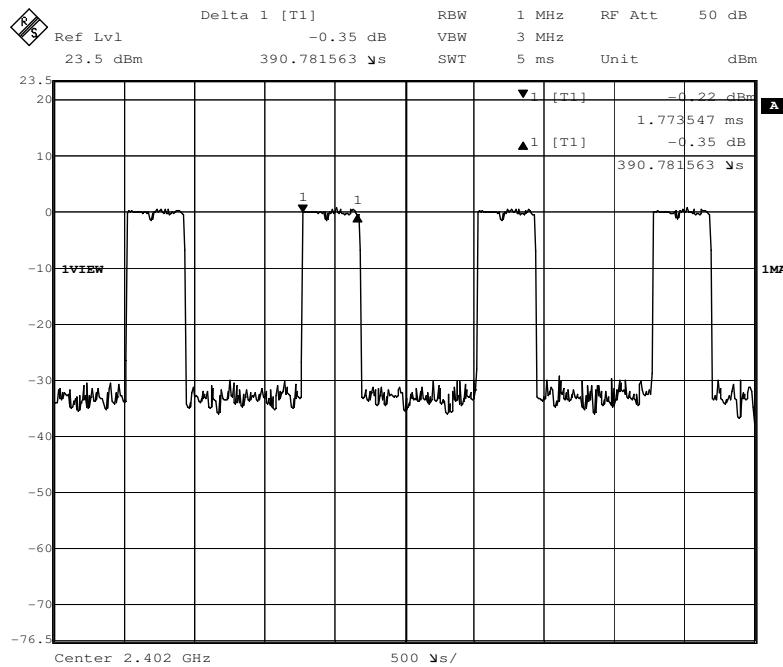

(2) 3DH3

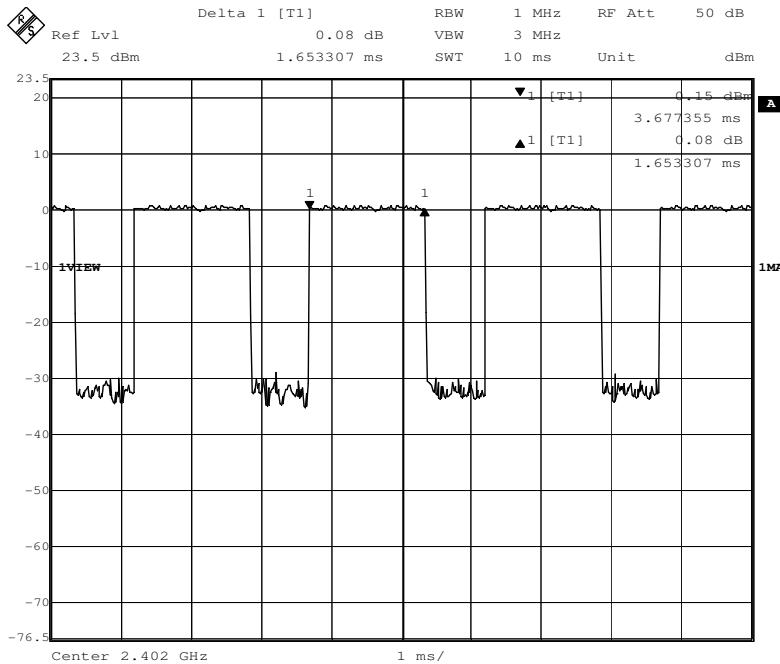


(3) 3DH5

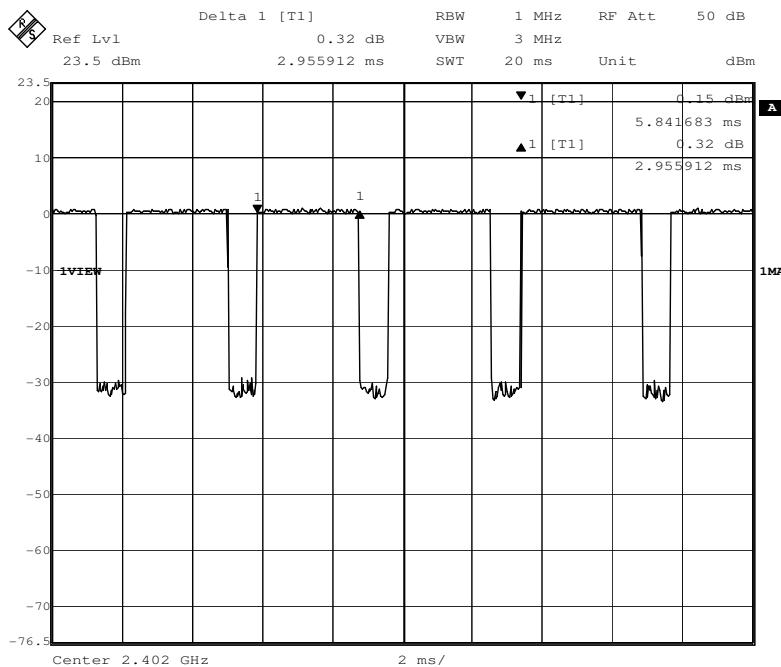


2. Middle Channel (2.441 GHz)


(1). 3DH1

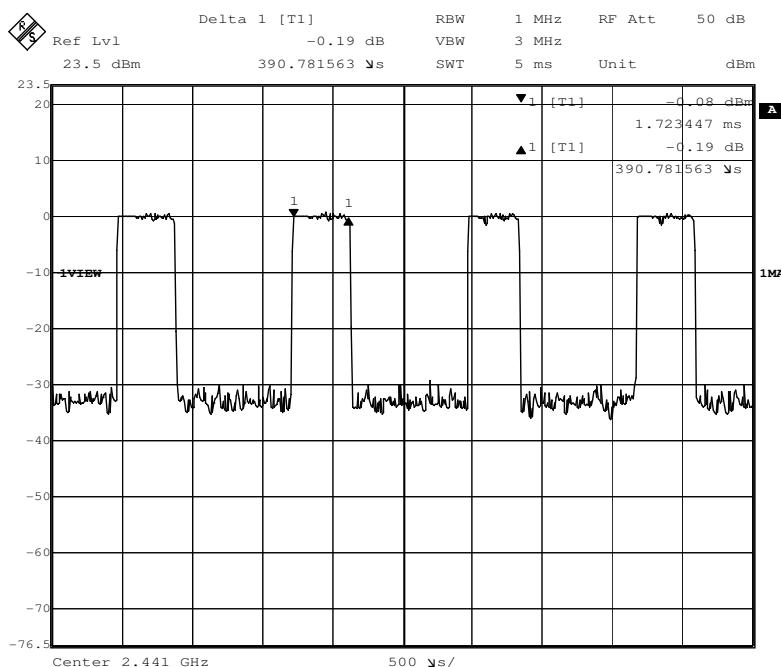

(2) 3DH3

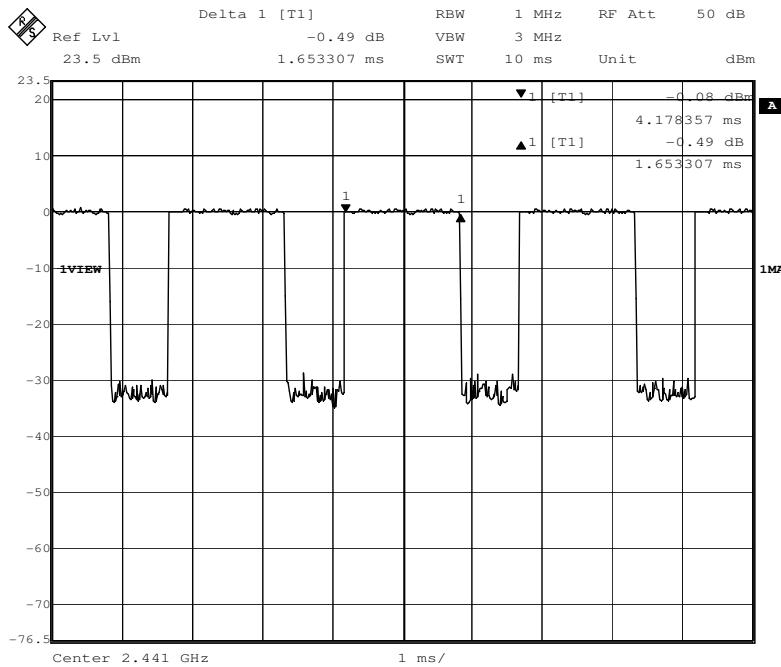


(3) 3DH5

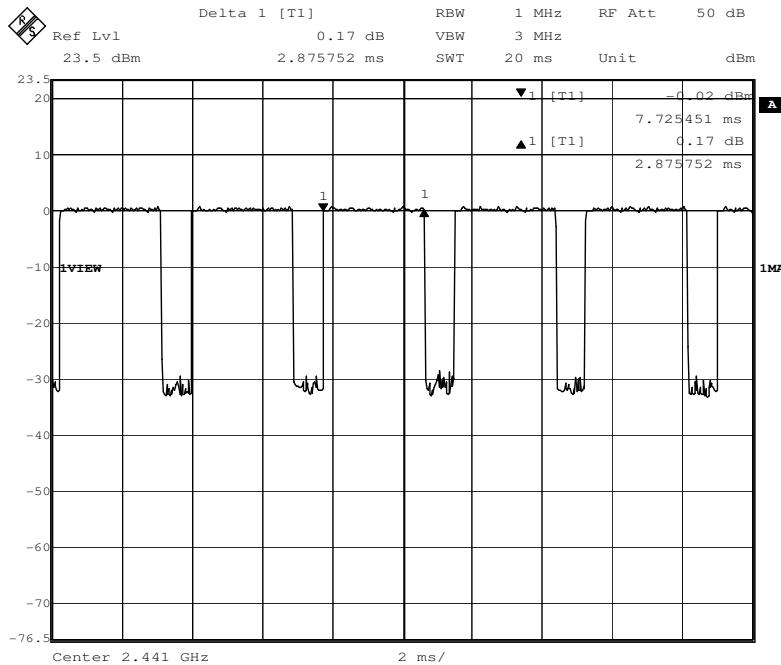



3. Highest Channel (2.480 GHz)

(1) 3DH1

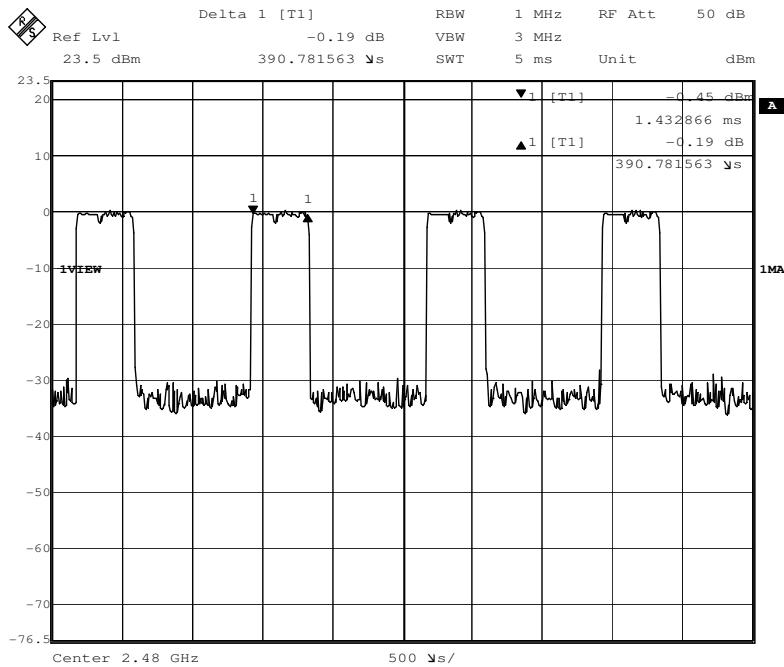

(2) 3DH3

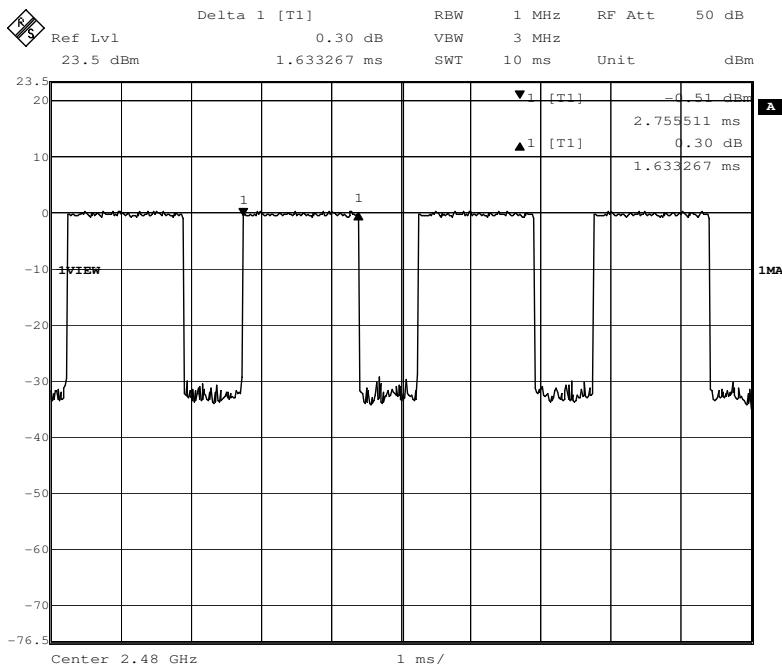

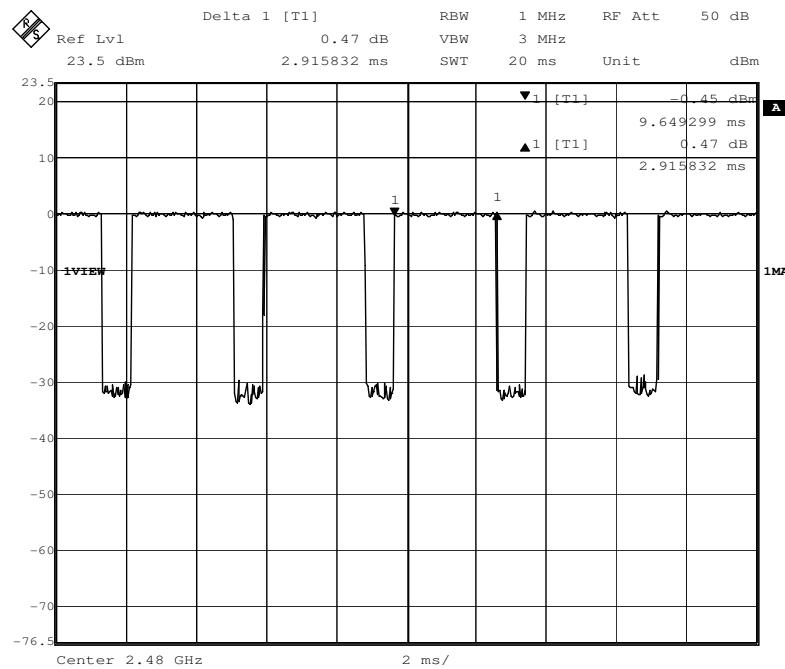(3) 3DH5

Remark:

In communication data link mode (expect inquiry or page mode) the hopping rate is 1600 per second, the 79 channels will be randomly selected for RF channel, and each channel have equal probability to be selected. The hop selection scheme is defined in Clause 2.6 of Part B of Volume 2 of core specification of Bluetooth.

The Dwell time must be calculated via following formula:

$$\text{Dwell time} = \text{Pulse width} \times (\text{Hopping rate} / \text{Number of channels}) \times \text{Period}$$

$$\text{Period} = 0.4 \text{ (seconds/channel)} \times 79 \text{ (channel)} = 31.6 \text{ seconds}$$

So

$$\text{Dwell time DH1} = \text{slot time} \times (1600/2/79) \times 31.6$$

$$\text{Dwell time DH3} = \text{slot time} \times (1600/4/79) \times 31.6$$

$$\text{Dwell time DH5} = \text{slot time} \times (1600/6/79) \times 31.6$$

The RF channel will remain fixed for duration of a packet, that means for DH3 packet the RF frequency will remain unchanged during 3 slots (1slot=1/1600=625us), and for DH5 packet the RF frequency will remain unchanged during 5 slots, illustrated the principle as below:

BLUETOOTH SPECIFICATION Version 2.0 + EDR [vol 3] page 85 of 814

Baseband Specification

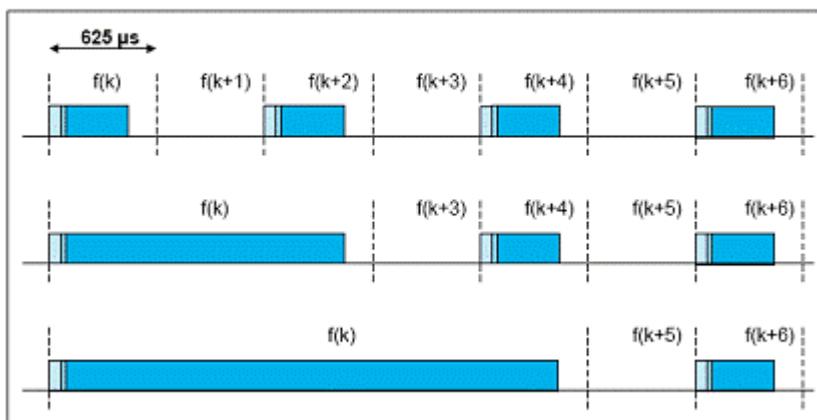


Figure 2.14: Single- and multi-slot packets.

Therefore, in a certain period for different packet types, the quantities of hops (not hopping rate 1600) are different, accurately, the quantity of hops for DH1 is double of DH3's and triple of DH5's. "for DH1 packet, 1 hop in 1 slot; for DH3 packet, 1/2 hop in 1 slot; for DH5 packet, 1/3 hop in 1 slot.", explained as below:

From the illustrated hopping scheme:

For DH1, in two slots, there are two hops, i.e. f(k) in Slot(k), f(k+1) in Slot(k+1), means DH1 1 hop in 1 slot;

For DH3, in four slots, there are two hops, i.e. f(k) in Slot(k) & Slot(k+1) & Slot(k+2), f(k+3) in Slot(k+3), means DH3 2 hops in four slots -> 1/2 hop in 1 slot;



For DH5, in six slots, there are two hops, i.e. f(k) in Slot(k) & Slot(k+1) & Slot(k+2) & Slot(k+3) & Slot(k+4), f(k+5) in Slot(k+5), means DH3 2 hops in six slots -> 1/3 hop in 1 slot.

The Hopping rate in the formula should not be fixed value, for DH1, it is 1600/2; for DH3, it is 1600/4; for DH5, it is 1600/6.

To calculate Dwell time of data transmission of Bluetooth system, the worst case is for Bluetooth PICONET that contains two devices only (although Bluetooth PICONET can support up to eight devices), and for Bluetooth data transmission, after device A sending a packet to device B, device A must get response packet from device B to continue data transmission;

For DH1 packet: assume device A is EUT, the worst case is after device A sending a DH1 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 1 time slot for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is half of 1600, i.e. 800 hops per second for EUT;

For DH3 packet: assume device A is EUT, the worst case is after device A sending a DH3 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 3 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is quarter of 1600, i.e. 400 hops per second for EUT;

For DH5 packet: assume device A is EUT, the worst case is after device A sending a DH5 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 5 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is sixth of 1600, i.e. 1600/6=266.7 hops per second for EUT;

7.7 Pseudorandom Frequency Hopping Sequence

7.7.1 Standard requirement

15.247(a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

7.7.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

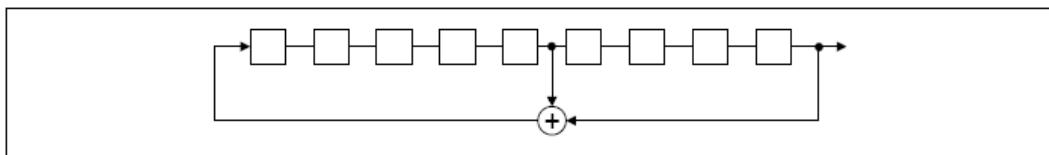

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

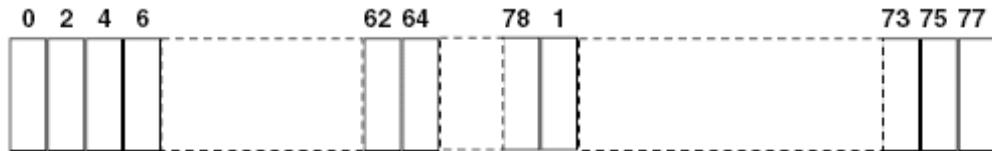

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

7.8 Maximum Peak Output Power


Test Requirement: FCC Part 15 C section 15.247
(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Refer to the result "Hopping channel number" of this document. The 1 watt (30.0 dBm) limit applies.

Test Method: ANSI C63.10: Clause 6.10 & DA 00-705

Test Limit:

Test mode: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.

Test Configuration:

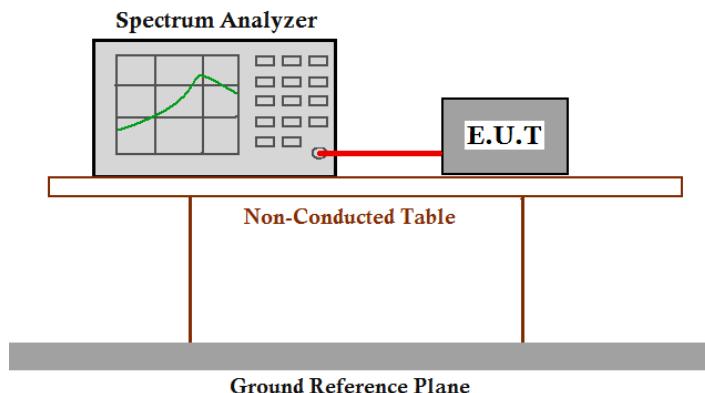

Test Procedure:


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2 MHz. VBW = 2 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

1) Test the EUT with adaptor (model: AS150-059-AA240):


Test Result:				
Normal mode:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	4.15	30.0	Pass
Middle	2441	4.08	30.0	Pass
Highest	2480	3.94	30.0	Pass
EDR mode:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	3.27	30.0	Pass
Middle	2441	3.17	30.0	Pass
Highest	2480	2.85	30.0	Pass
Remark: cable loss=2.0dB				
Test result: The unit does meet the FCC requirements.				
Test result plot as follows:				

Normal mode:


Lowest Channel:

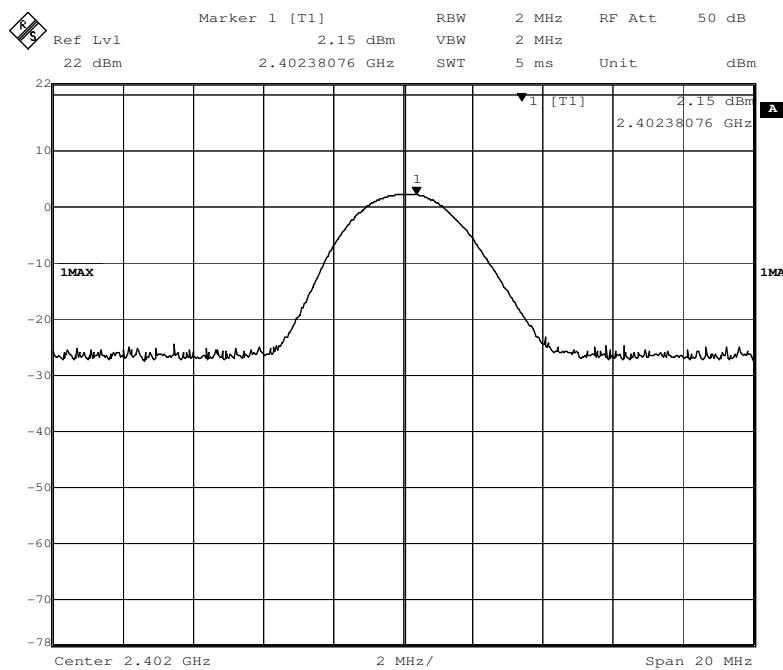

Middle Channel:

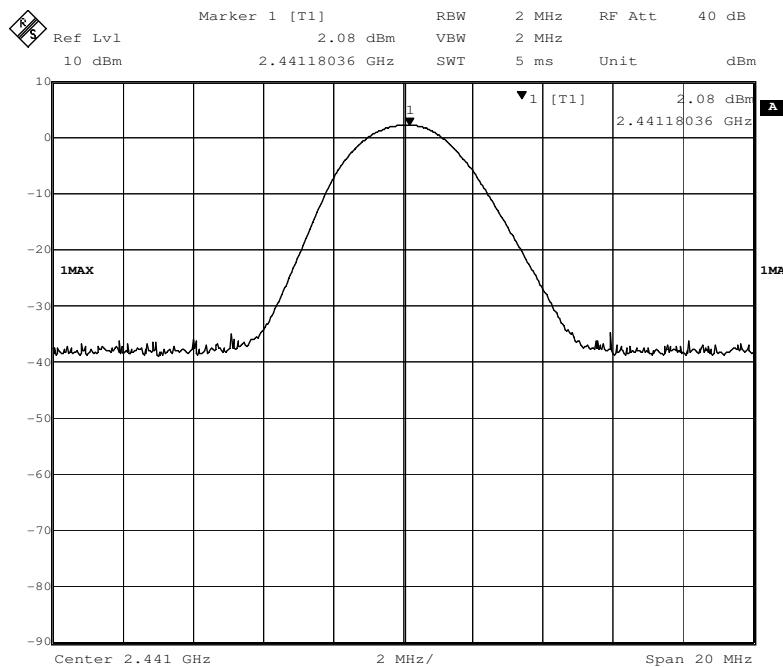


Highest Channel:

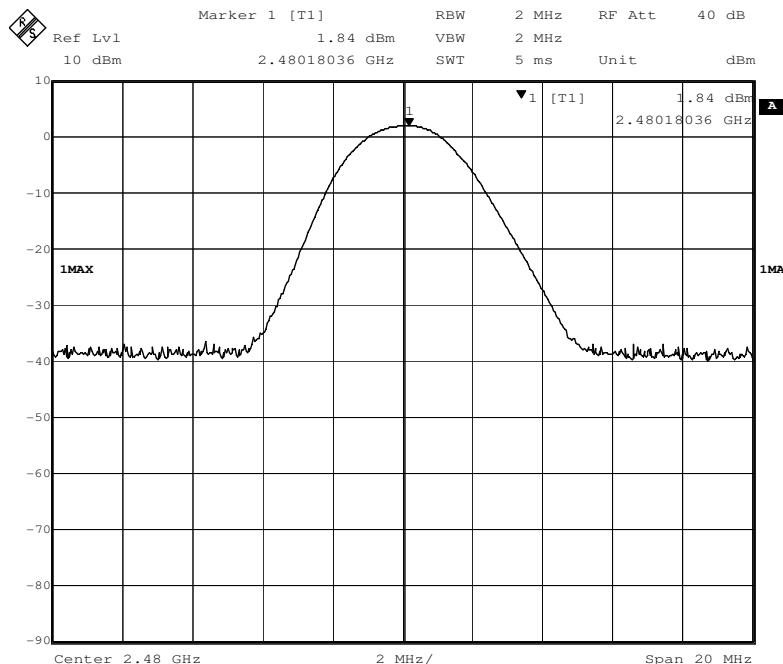


EDR mode:


Lowest Channel:

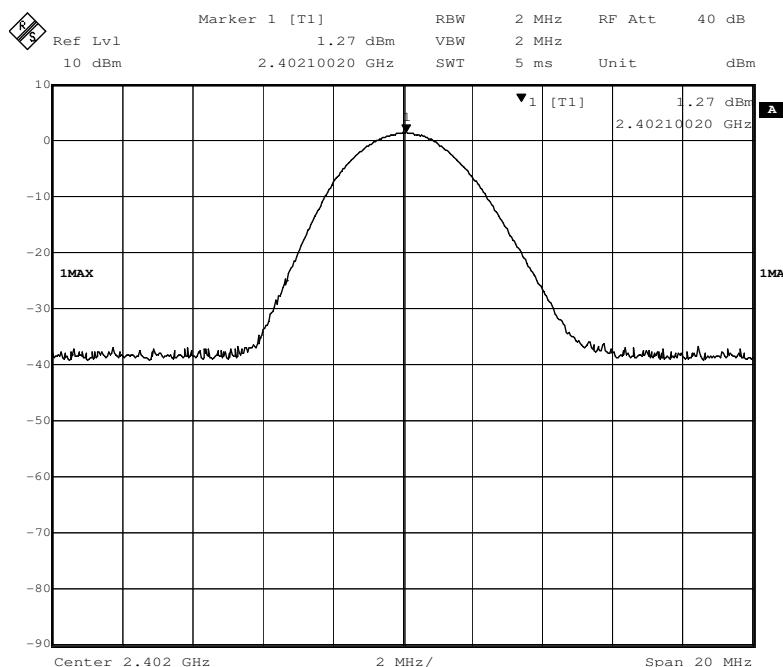

Middle channel:

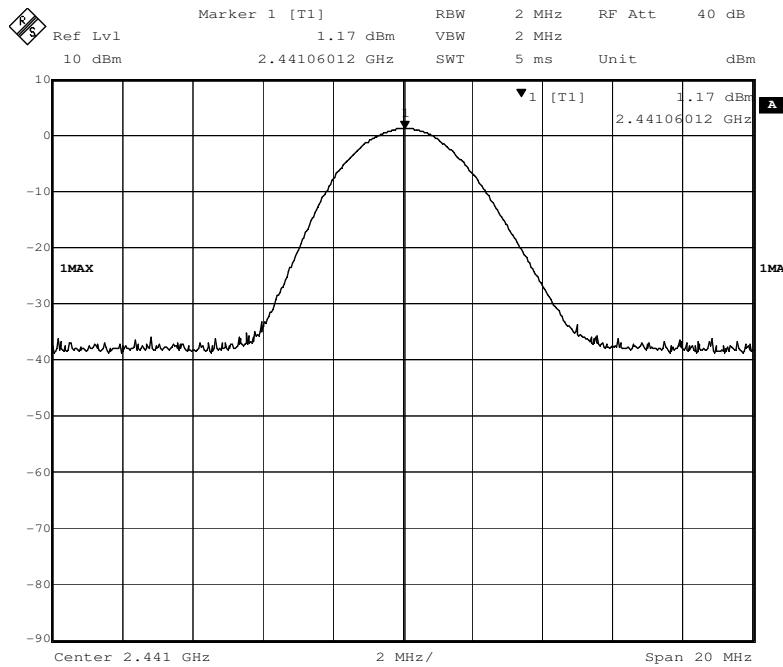

Highest channel:

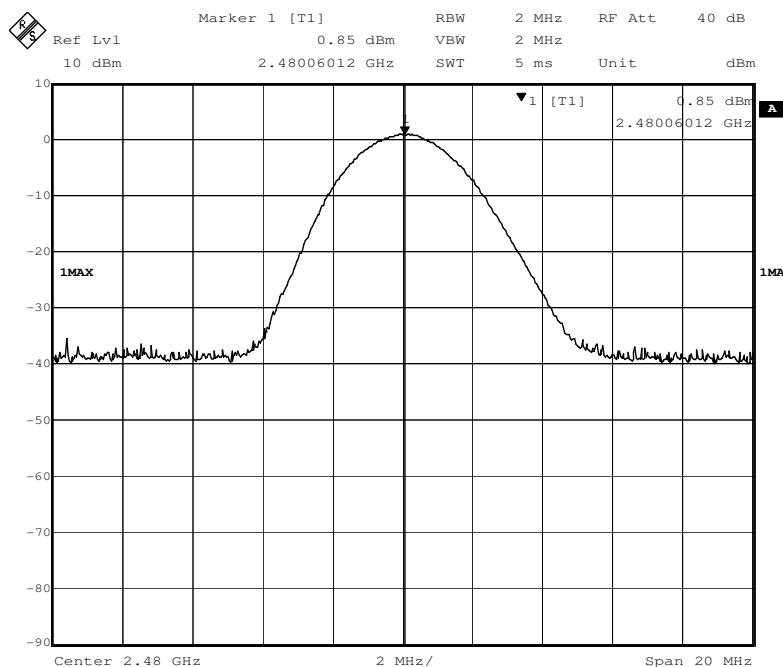


2) Test the EUT with adaptor (model: S018KU0590240):


Test Result:				
Normal mode:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	3.95	30.0	Pass
Middle	2441	3.96	30.0	Pass
Highest	2480	3.90	30.0	Pass
EDR mode:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	3.31	30.0	Pass
Middle	2441	3.09	30.0	Pass
Highest	2480	2.76	30.0	Pass
Remark: cable loss=2.0dB				
Test result: The unit does meet the FCC requirements.				
Test result plot as follows:				

Normal mode:


Lowest Channel:

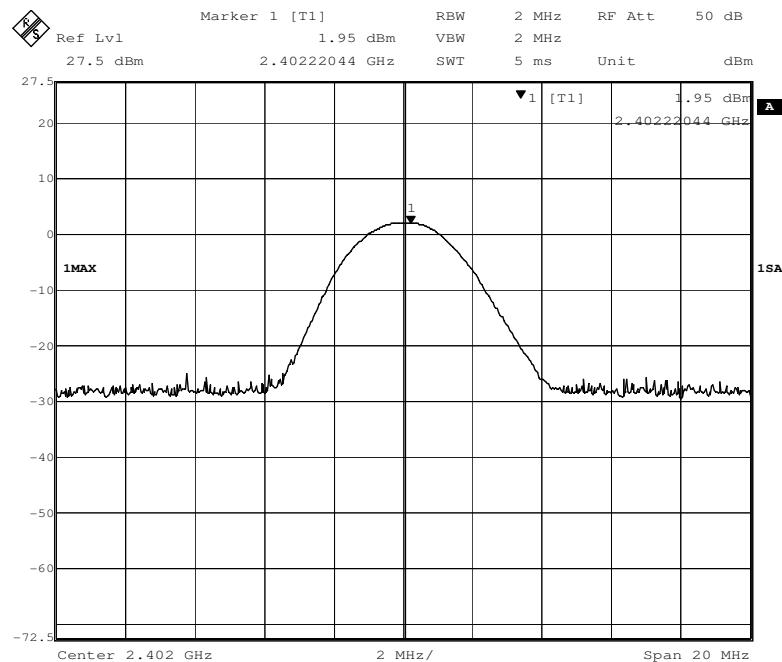

Middle Channel:

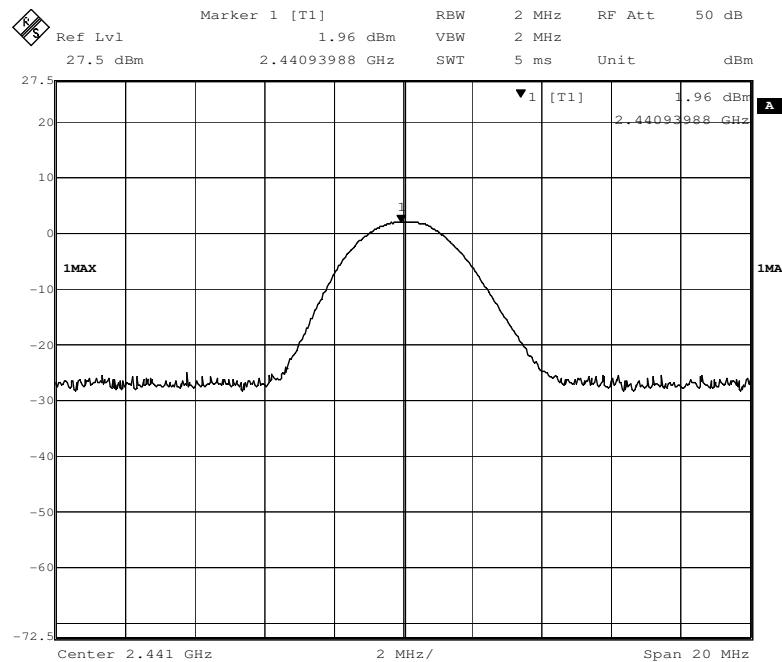


Highest Channel:

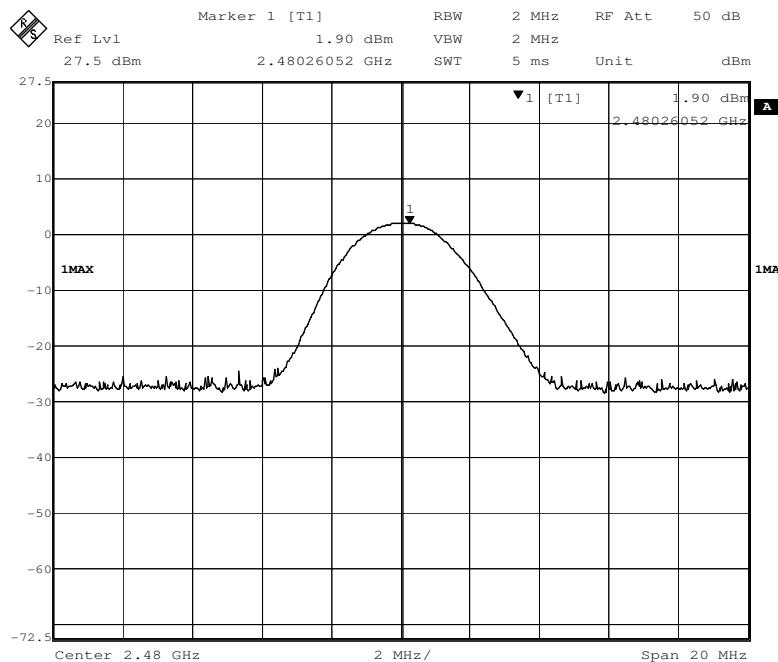


EDR mode:


Lowest Channel:

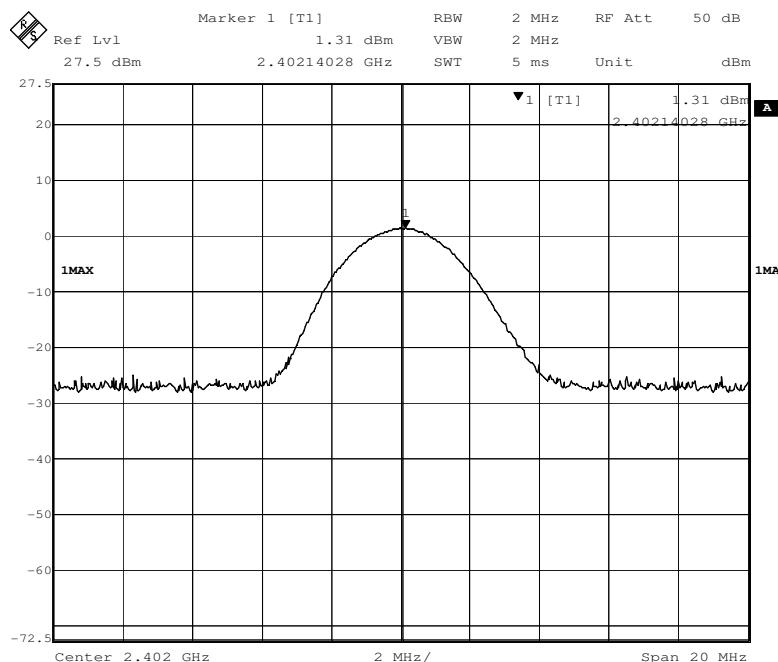

Middle channel:

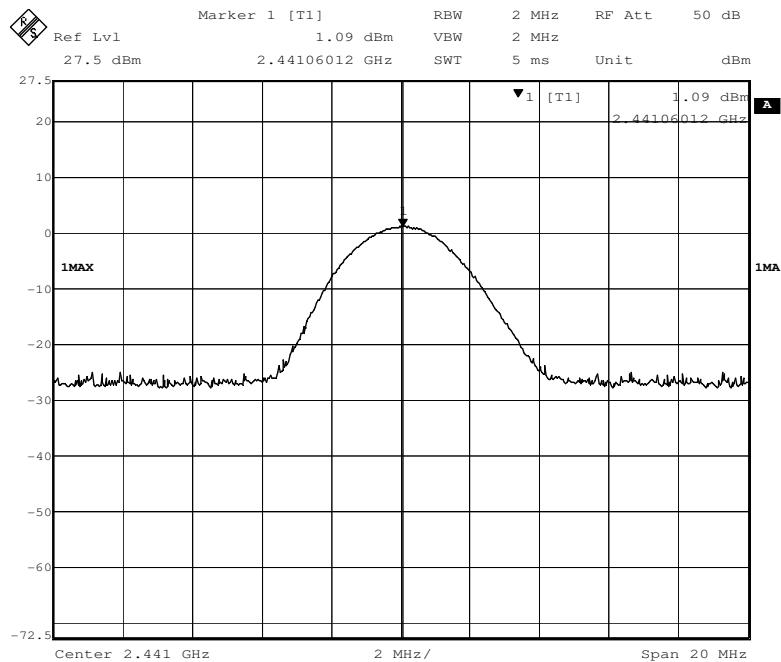

Highest channel:

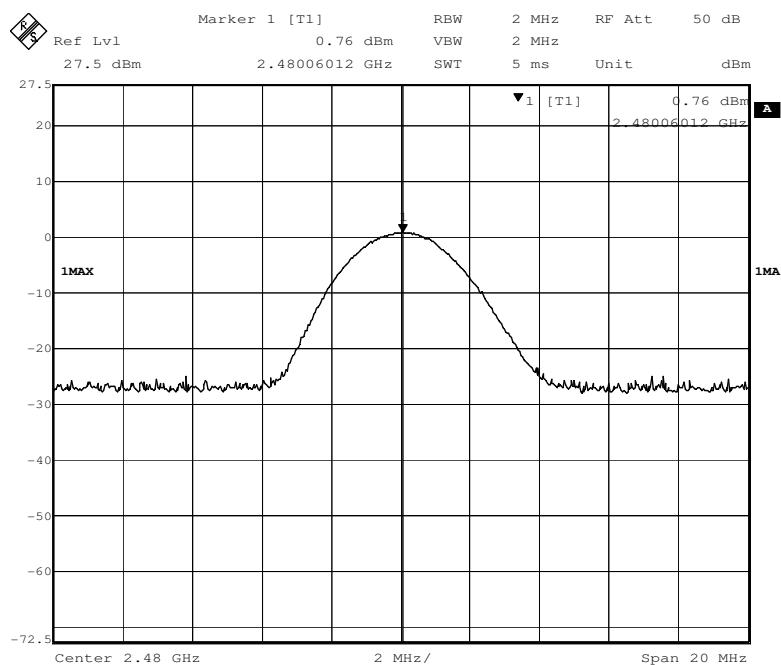

7.9 Conducted Spurious Emissions


Test Requirement: FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10: Clause 6.7 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.

Test Configuration:

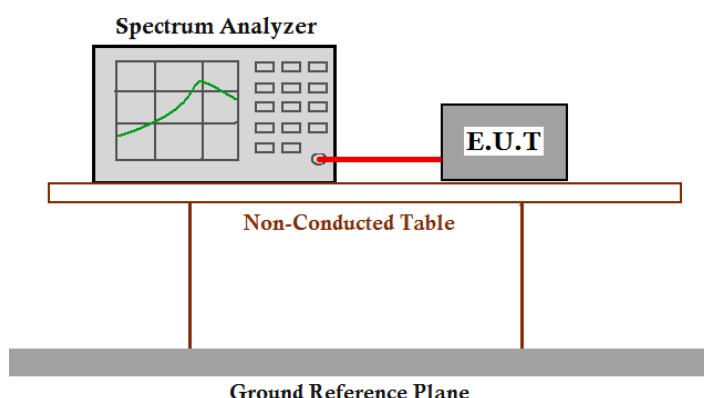


Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW \geq RBW. Sweep = auto; Detector Function = Peak (Max. hold).


Test result plot as follows:

1) Test the EUT with adaptor (model: AS150-059-AA240):


Lowest Channel: 30 M to 1 GHz

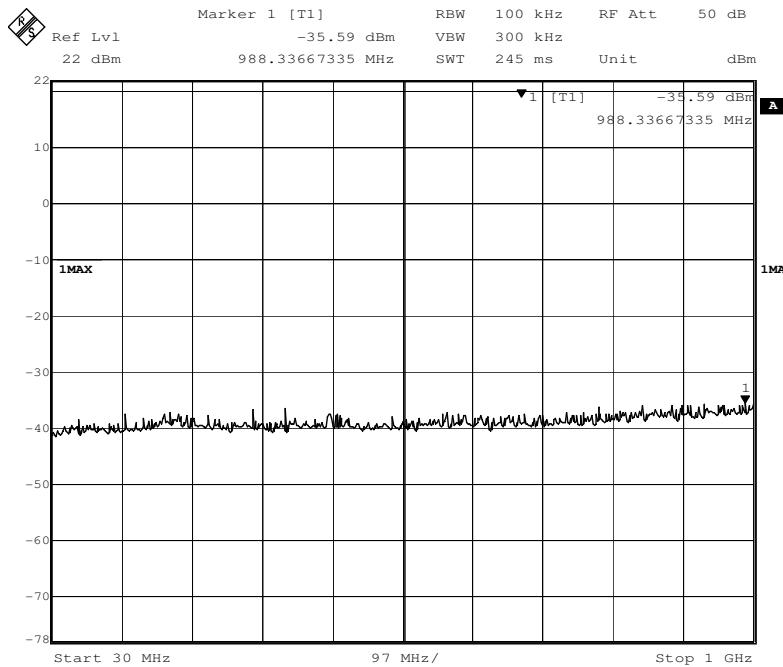


1 G to 5 GHz

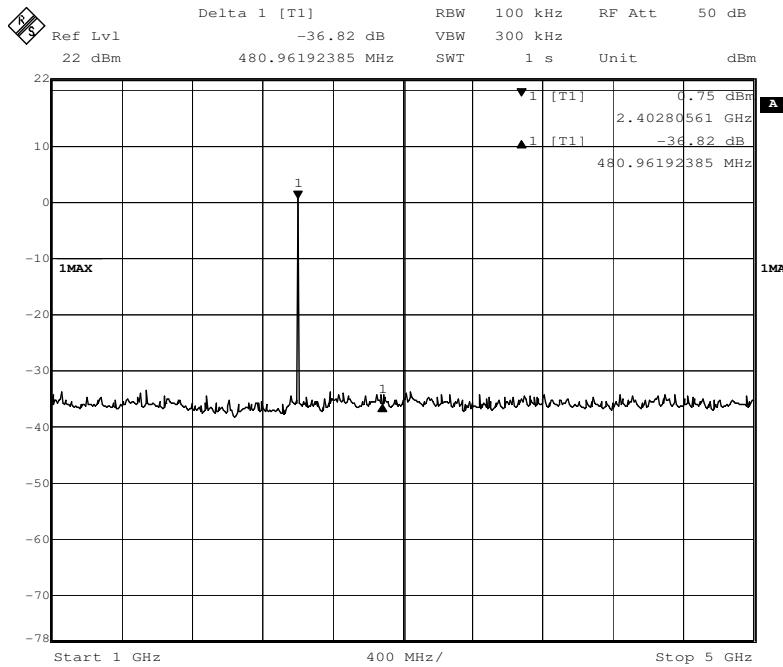


5 G to 25 GHz

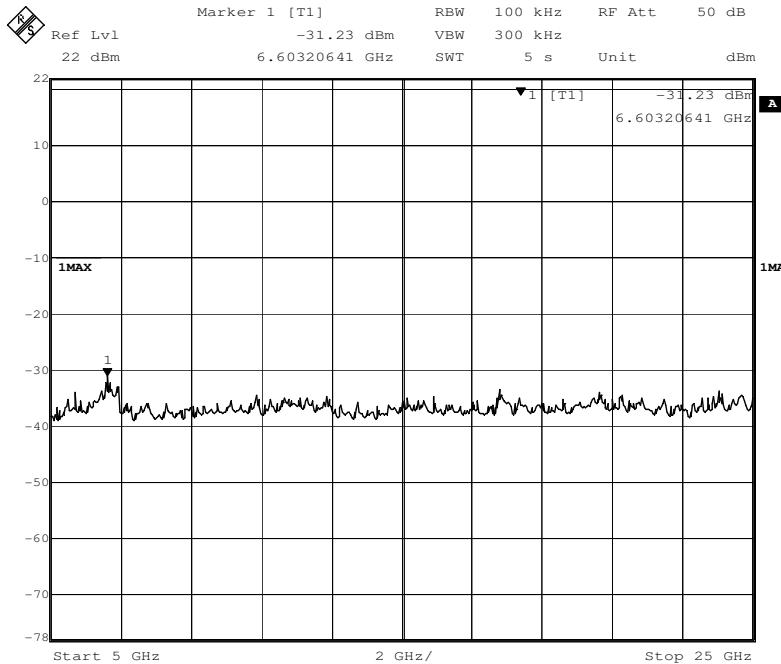


Middle Channel: 30 M to 1 GHz

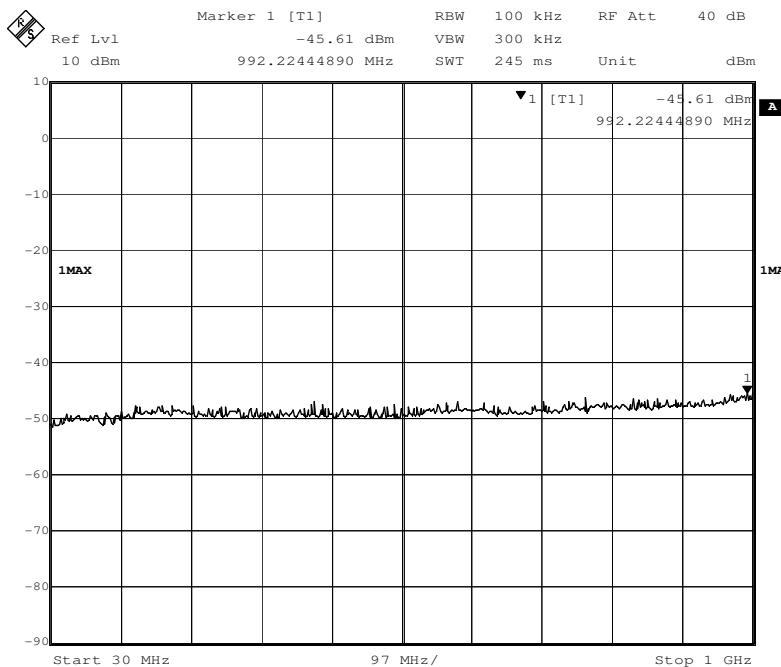


1 G to 5 GHz

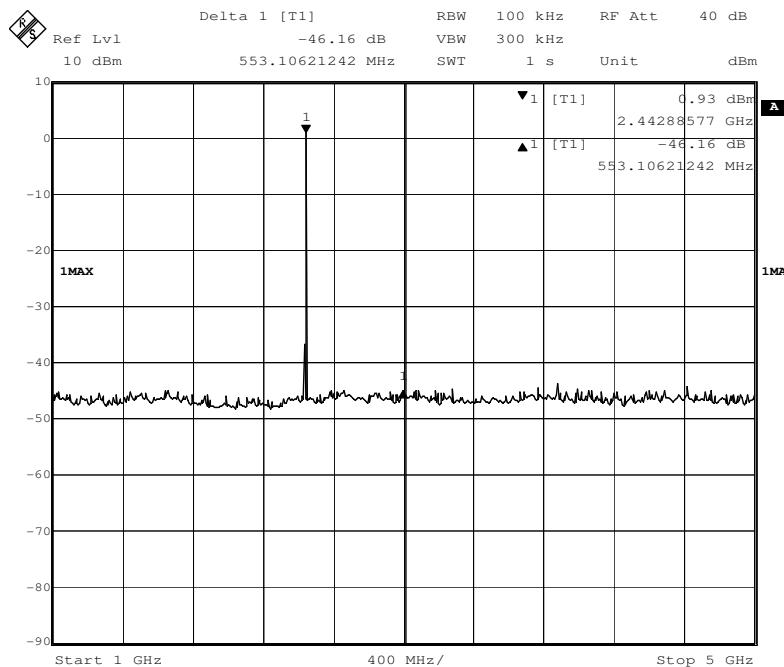


5 G to 25 GHz

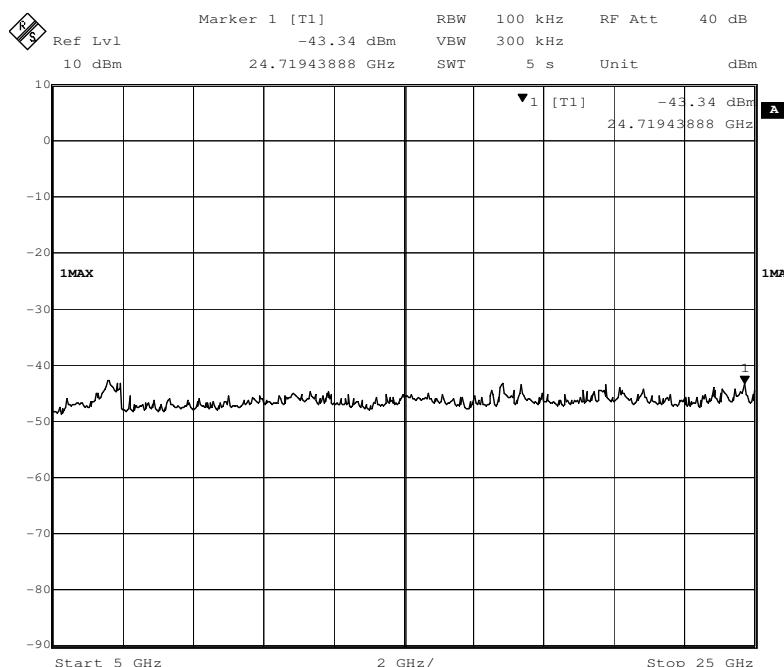


Highest Channel: 30 M to 1 GHz

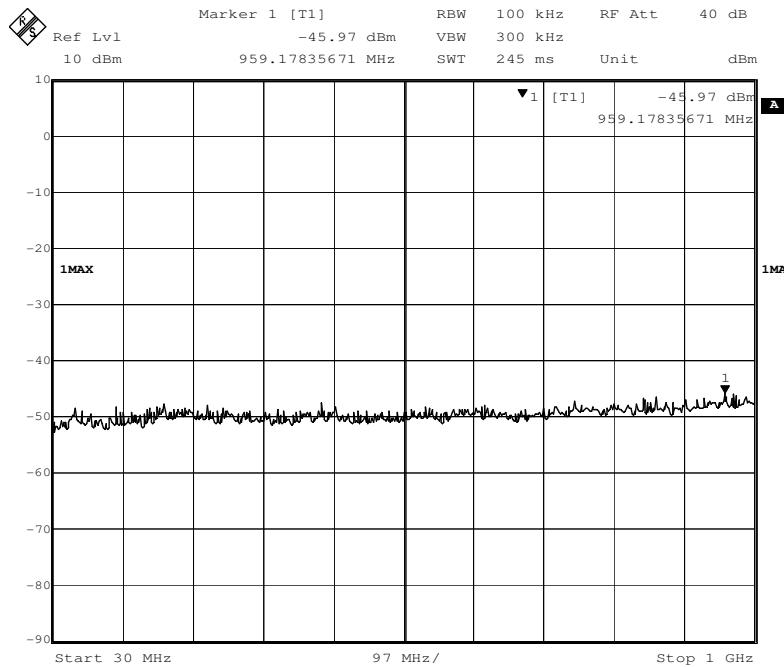

1 G to 5 GHz

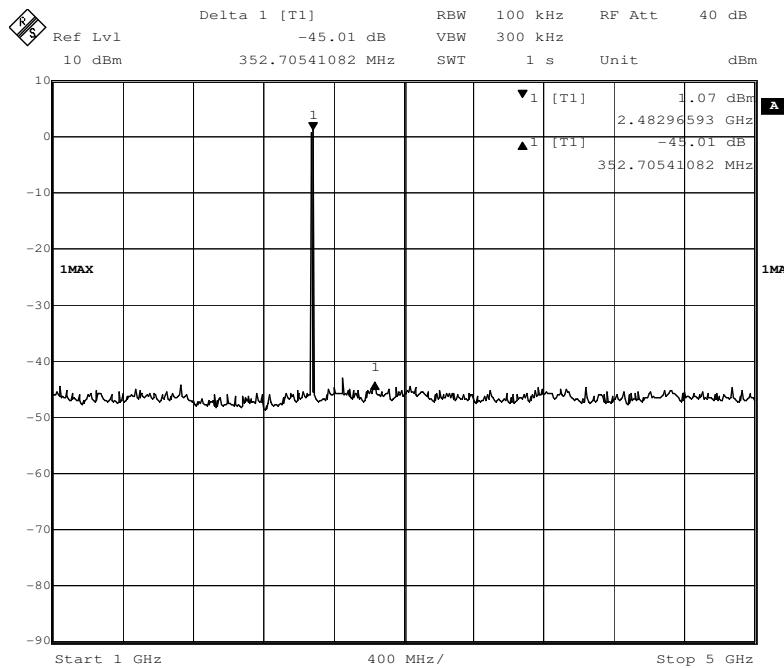


5 G to 25 GHz

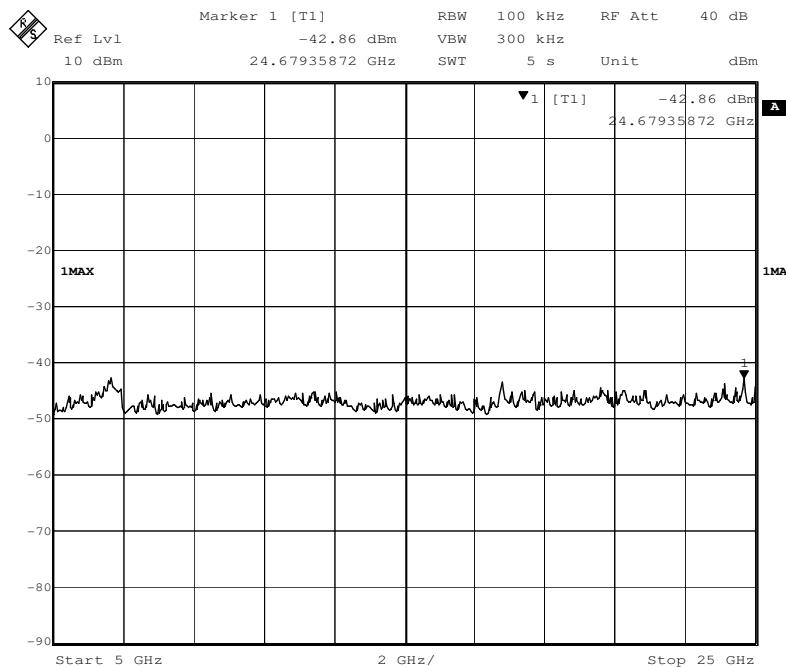


2) Test the EUT with adaptor (model: S018KU0590240):


Lowest Channel: 30 M to 1 GHz

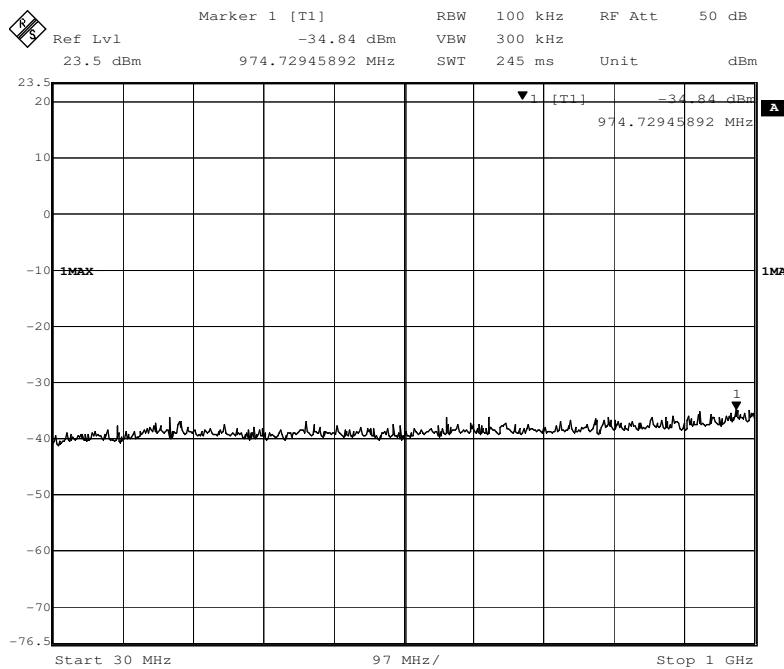


1 G to 5 GHz

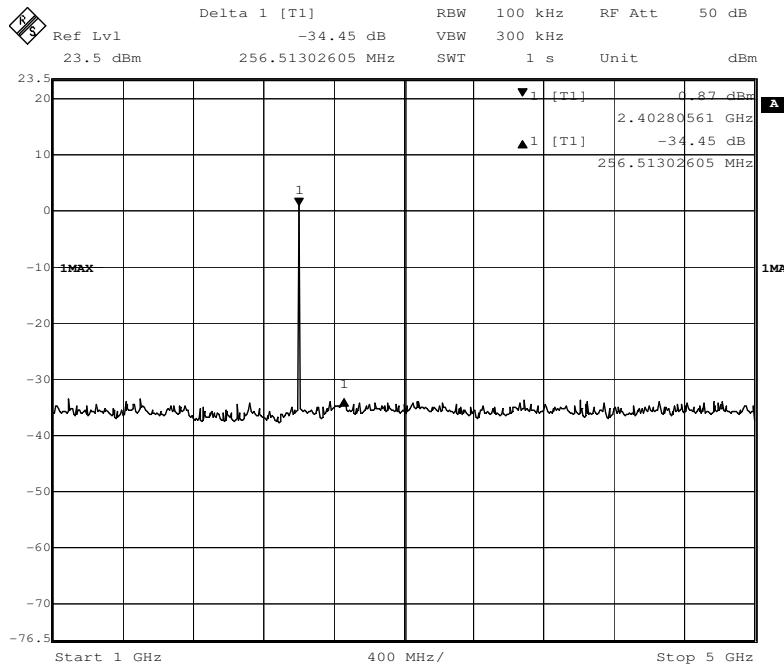


5 G to 25 GHz

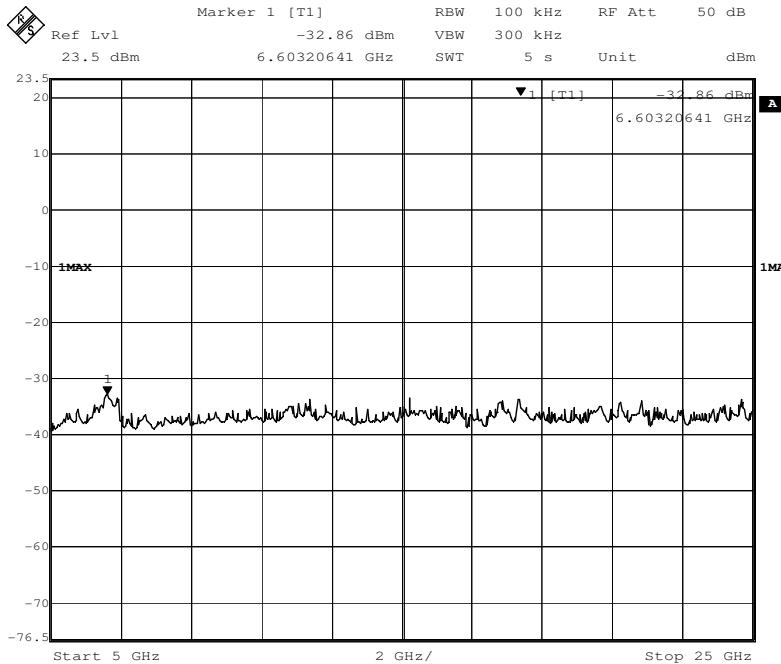


Middle Channel: 30 M to 1 GHz

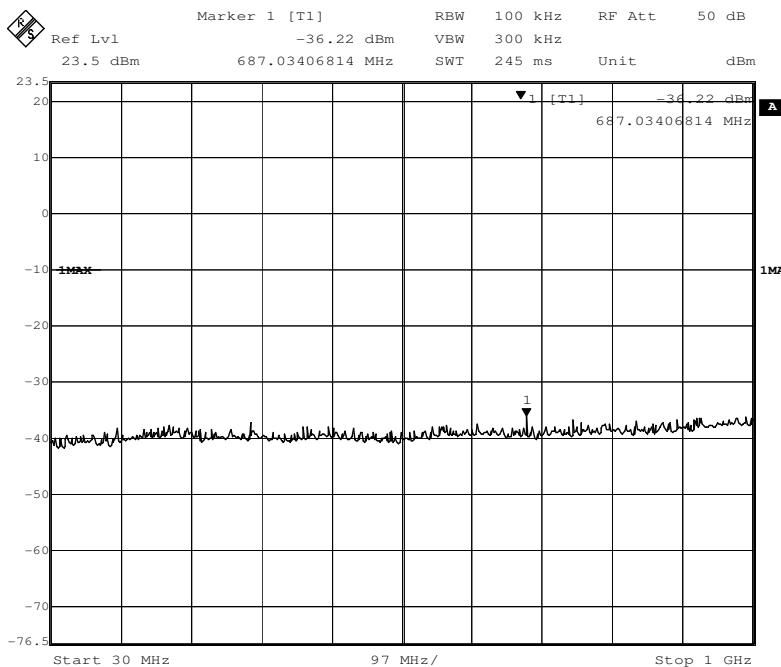


1 G to 5 GHz

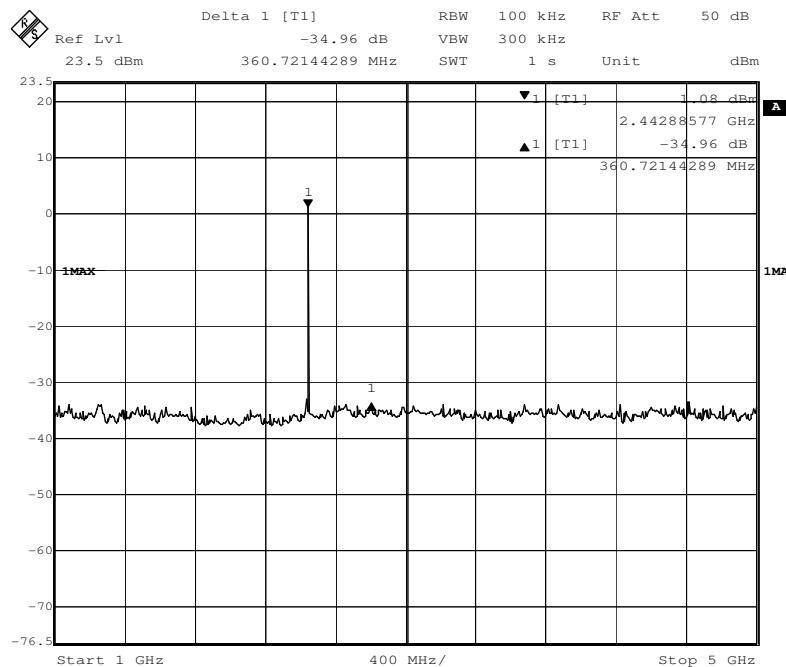


5 G to 25 GHz

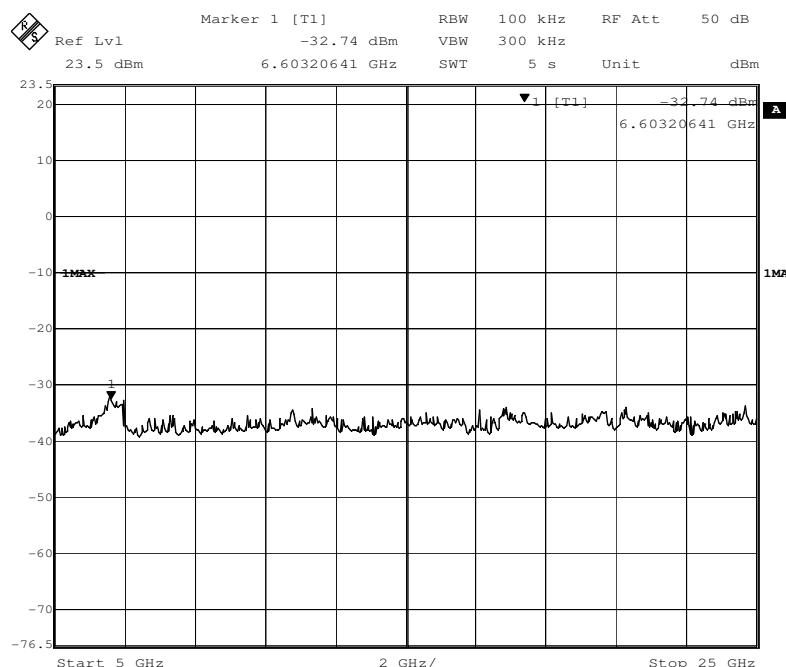


Highest Channel: 30 M to 1 GHz

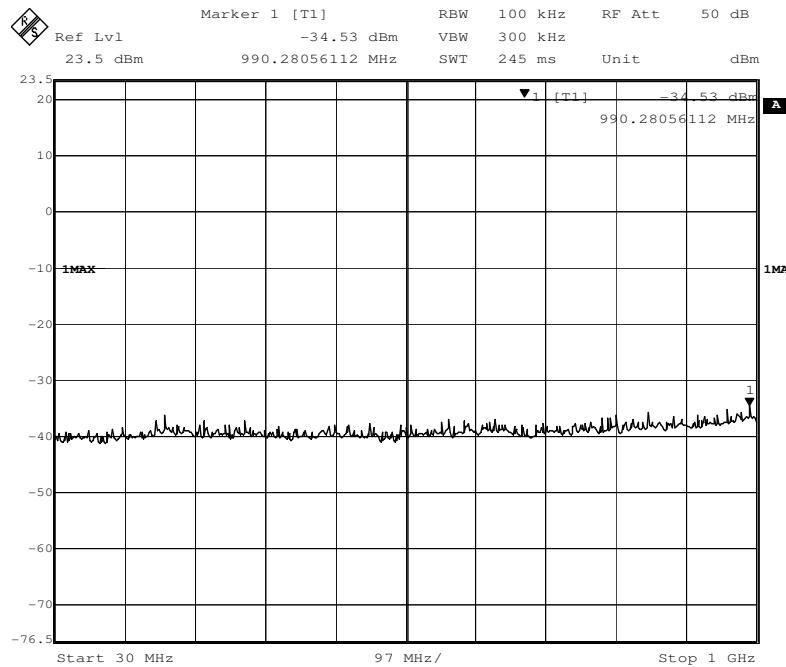

1 G to 5 GHz

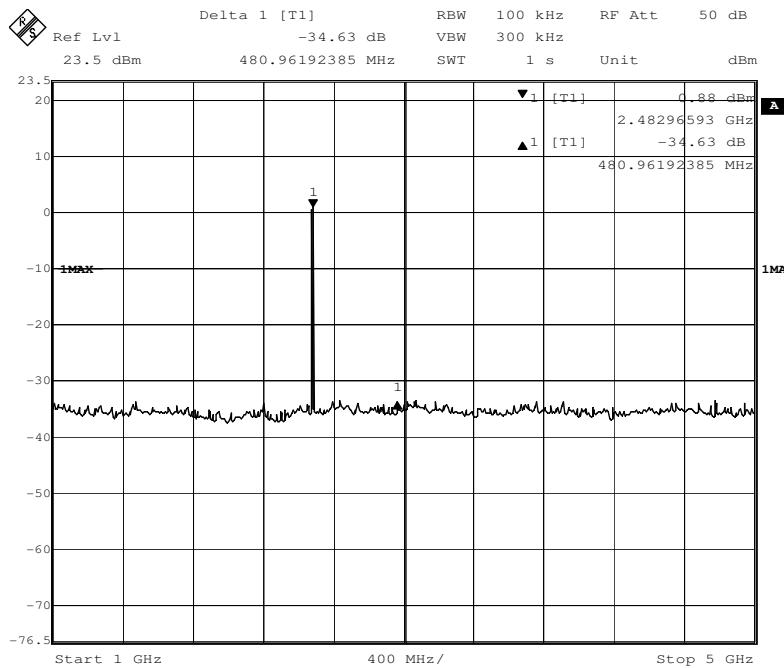

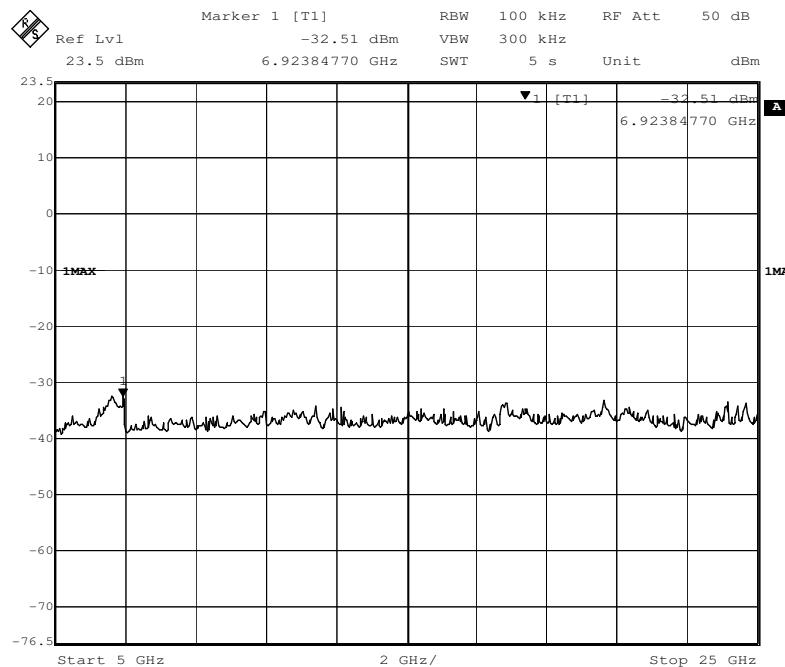
5 G to 25 GHz

7.10 Radiated Spurious Emissions


Test Requirement:	FCC Part15 C section 15.247
	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705
Test Status:	Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10 Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz

Test Configuration:

- 1) 30 MHz to 1 GHz emissions:

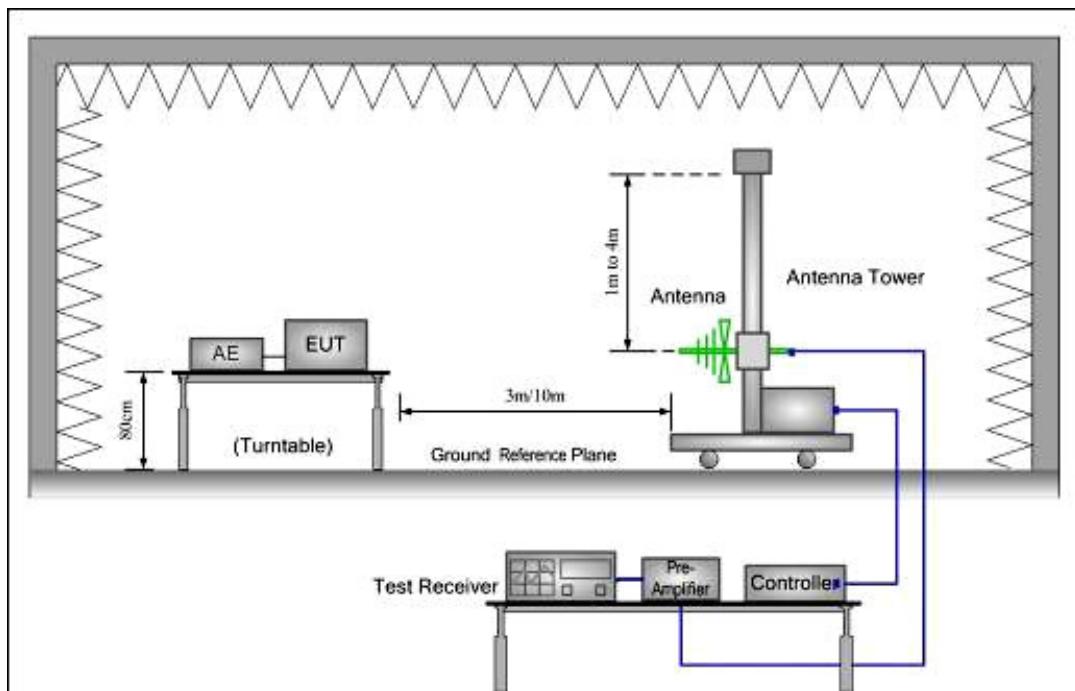

- 2) 1 GHz to 40 GHz emissions:

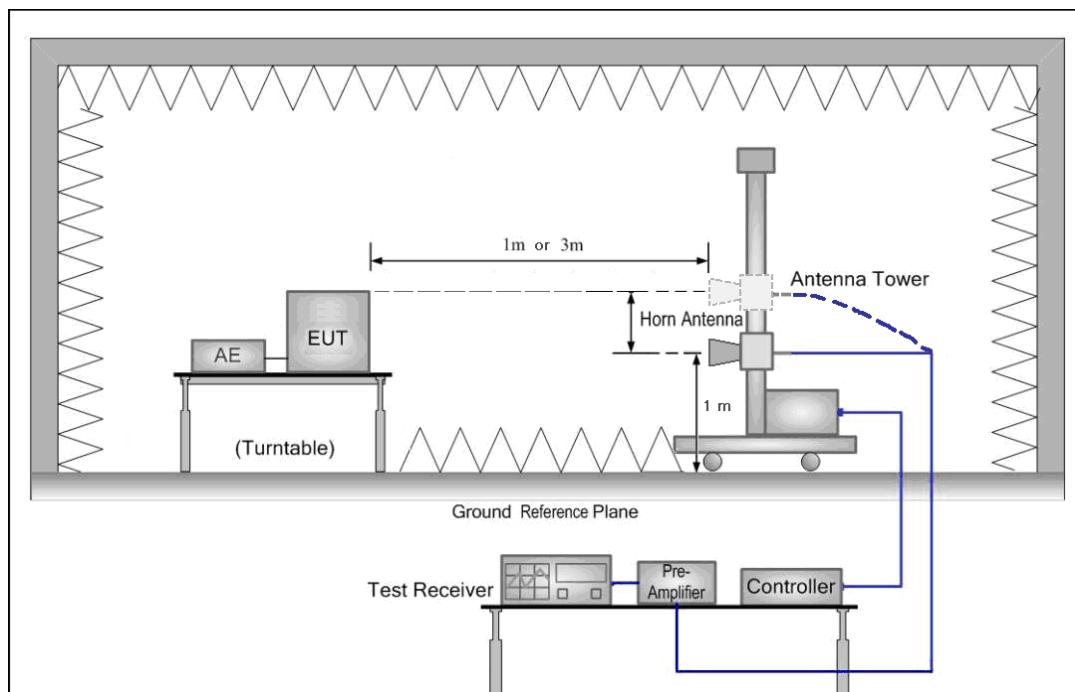

Test Procedure: The procedure used was ANSI Standard C63.4:2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.

7.10.1 Harmonic and other spurious emissions

7.10.1.1 Test at low Channel in transmitting status


1) Test the EUT with adaptor (model: AS150-059-AA240)

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB μ V/m)

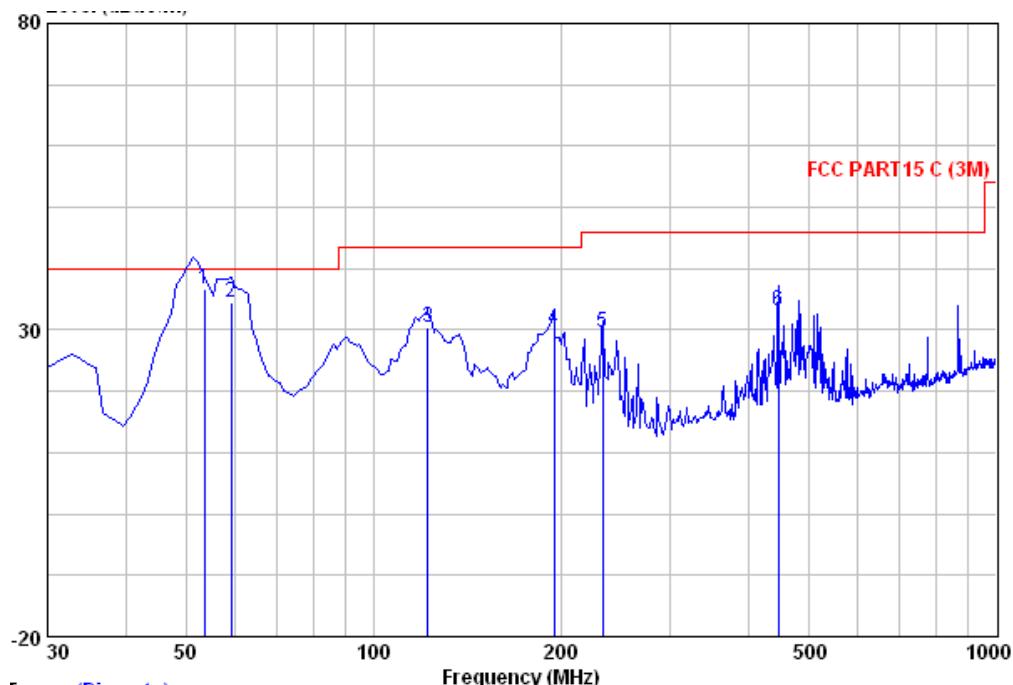


Quasi-peak measurement

Freq MHz	Read Antenna		Cable		Preamp Loss Factor	Level dB	Limit Line dB	Over Line Limit dB	Over Limit Remark
	Level dB μ V	Factor	dB	dB μ V/m					
53.515	52.43	13.08	0.70	29.52	36.70	40.00	-3.30	QP	
59.100	50.57	12.75	0.70	29.55	34.47	40.00	-5.53	QP	
122.150	49.20	10.09	0.90	29.70	30.49	43.50	-13.01	QP	
194.900	47.84	10.57	1.20	29.52	30.09	43.50	-13.41	QP	
233.700	46.09	11.78	1.30	29.54	29.63	46.00	-16.37	QP	
447.100	45.31	15.57	1.90	29.55	33.23	46.00	-12.77	QP	

Horizontal:

Peak scan

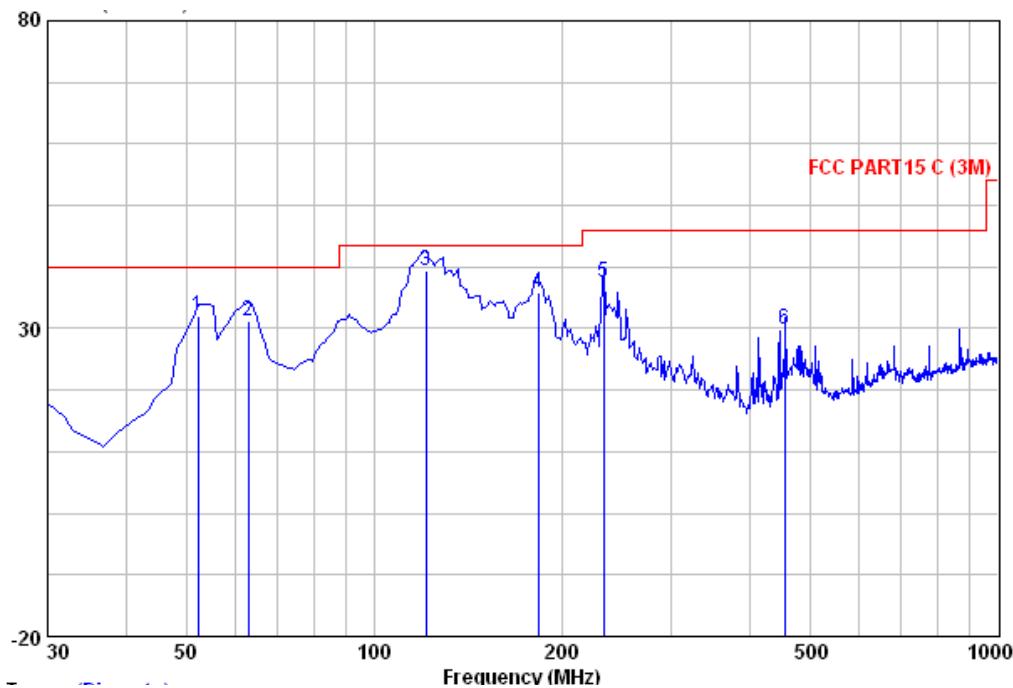Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read Level dB μ V	Antenna Factor	Cable Loss dB	Preamp Factor	Line Level dB μ V/m	Limit Line dB μ V/m	Over Limit dB	Over Remark
	MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB	
52.310	47.61	13.15	0.70	29.51	31.94	40.00	-8.06	QP
62.980	48.53	11.50	0.70	29.57	31.16	40.00	-8.84	QP
121.230	57.93	10.29	0.90	29.70	39.41	43.50	-4.09	QP
183.260	54.11	10.00	1.20	29.56	35.75	43.50	-7.75	QP
233.700	54.07	11.78	1.30	29.54	37.60	46.00	-8.40	QP
455.830	41.82	15.58	2.00	29.54	29.86	46.00	-16.14	QP



1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4804.000	31.53	6.20	33.48	49.61	53.86	74.00	V
7206.000	36.47	7.20	32.76	49.21	60.12	74.00	V
9608.000	38.08	8.56	34.08	48.22	60.78	74.00	V
4804.000	31.53	6.20	33.48	49.45	53.7	74.00	H
7206.000	36.47	7.20	32.76	48.28	59.19	74.00	H
9608.000	38.08	8.56	34.08	48.43	60.99	74.00	H

Average Measurement:


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4804.000	31.53	6.20	33.48	38.61	42.86	54.00	V
7206.000	36.47	7.20	32.76	39.18	50.09	54.00	V
9608.000	38.08	8.56	34.08	36.23	48.79	54.00	V
4804.000	31.53	6.20	33.48	39.79	44.04	54.00	H
7206.000	36.47	7.20	32.76	38.75	49.66	54.00	H
9608.000	38.08	8.56	34.08	36.86	49.42	54.00	H

2) Test the EUT with adaptor (model: S018KU0590240)

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:


Peak scan

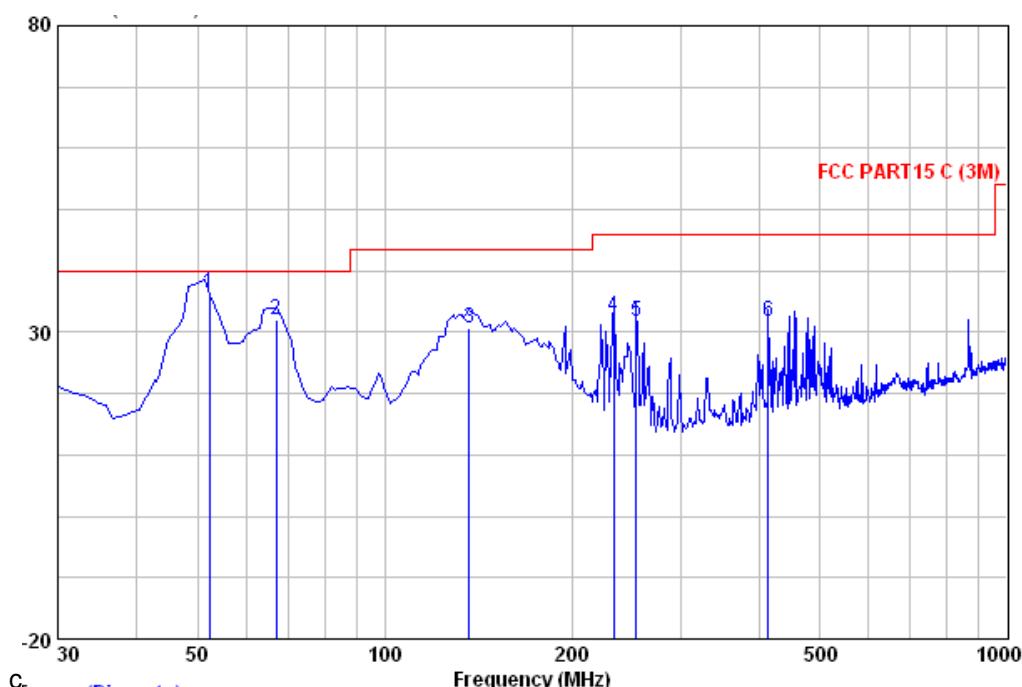Level (dB μ V/m)**Quasi-peak measurement**

Freq MHz	Read	Antenna	Cable	Preamp	Limit Line dB μ V/m	Over Line dB μ V/m	Over Limit dB	Remark
	Level dB μ V	Factor	Loss dB	Factor				
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
52.250	51.98	13.15	0.70	29.51	36.31	40.00	-3.69	QP
66.860	51.08	9.89	0.70	29.58	32.08	40.00	-7.92	QP
136.700	50.95	8.40	1.00	29.70	30.65	43.50	-12.85	QP
233.700	49.06	11.78	1.30	29.54	32.60	46.00	-13.40	QP
254.070	47.80	12.06	1.40	29.56	31.70	46.00	-14.30	QP
413.150	44.02	15.35	1.90	29.59	31.69	46.00	-14.31	QP

Horizontal:

Peak scan

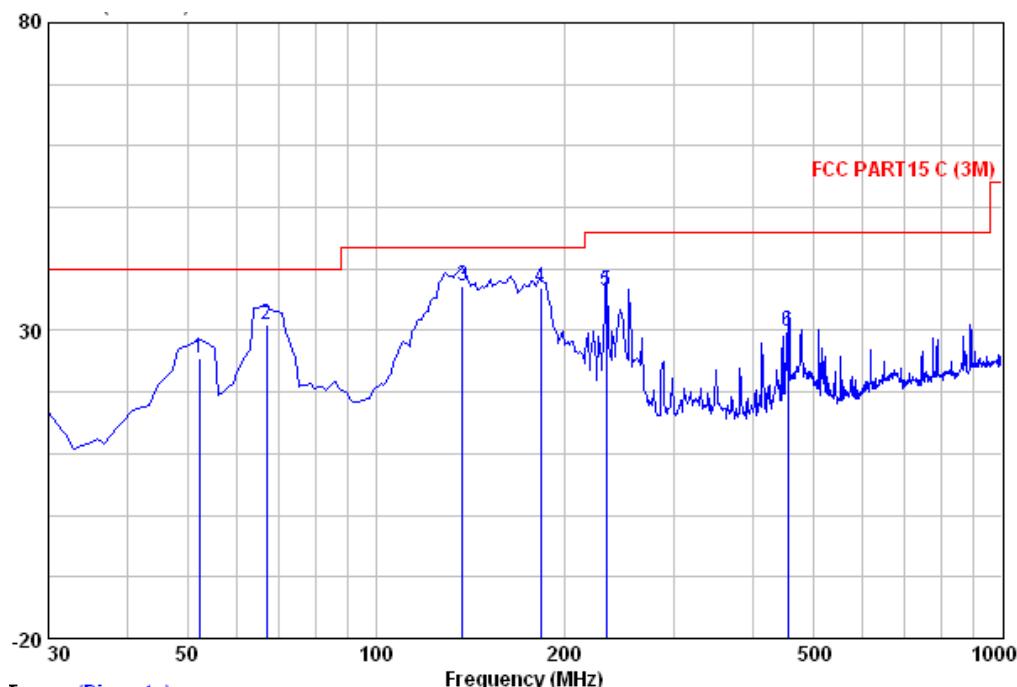Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read	Antenna Level	Cable Factor	Preamp Loss	Limit dB	Line dB μ V/m	Over Line dB	Over Limit dB	Over Remark
	dBuV	dB/m	dB	dB					
52.310	41.30	13.15	0.70	29.51	25.63	40.00	-14.37	QP	
66.860	49.89	9.89	0.70	29.58	30.90	40.00	-9.10	QP	
137.670	57.51	8.35	1.00	29.70	37.16	43.50	-6.34	QP	
183.260	55.19	10.00	1.20	29.56	36.83	43.50	-6.67	QP	
233.700	52.97	11.78	1.30	29.54	36.50	46.00	-9.50	QP	
455.830	41.70	15.58	2.00	29.54	29.74	46.00	-16.26	QP	



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM110700250101
Page: 77 of 106
FCC ID: BOU-AS111V37

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4804.000	31.53	6.20	33.48	50.05	54.30	74.00	V
7206.000	36.47	7.20	32.76	48.67	59.58	74.00	V
9608.000	38.08	8.56	34.08	49.36	61.92	74.00	V
4804.000	31.53	6.20	33.48	49.43	53.68	74.00	H
7206.000	36.47	7.20	32.76	47.71	58.62	74.00	H
9608.000	38.08	8.56	34.08	49.43	61.99	74.00	H

Average Measurement:


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4804.000	31.53	6.20	33.48	37.15	41.40	54.00	V
7206.000	36.47	7.20	32.76	38.89	49.80	54.00	V
9608.000	38.08	8.56	34.08	36.63	49.19	54.00	V
4804.000	31.53	6.20	33.48	38.32	42.57	54.00	H
7206.000	36.47	7.20	32.76	38.37	49.28	54.00	H
9608.000	38.08	8.56	34.08	37.03	49.59	54.00	H

7.10.1.2 Test at middle Channel in transmitting status**1) Test the EUT with adaptor (model: AS150-059-AA240)**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:


Peak scan

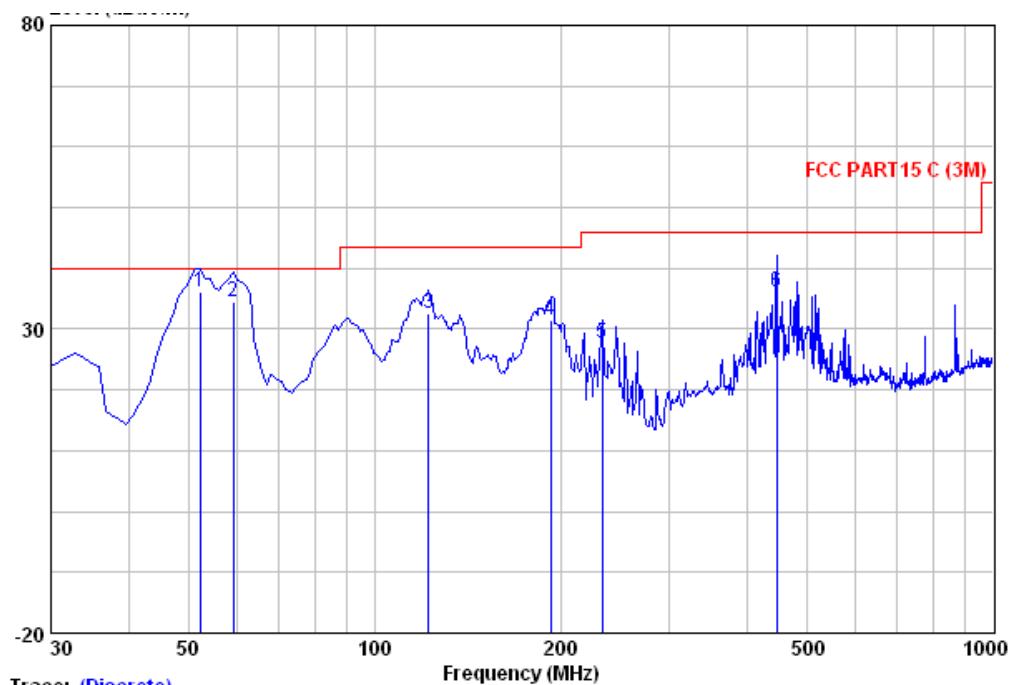Level (dB μ V/m)**Quasi-peak measurement**

Freq MHz	Read	Antenna Level dB μ V	Cable Factor	Preamp Loss dB	Line Level dB	Limit dB μ V/m	Over Line dB	Over Limit dB	Over Remark
	Antenna Level dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB			
52.310	51.72	13.15	0.70	29.51	36.06	40.00	-3.94	QP	
59.100	50.57	12.75	0.70	29.55	34.47	40.00	-5.53	QP	
122.150	51.20	10.09	0.90	29.70	32.49	43.50	-11.01	QP	
192.960	49.20	10.56	1.20	29.52	31.44	43.50	-12.06	QP	
233.700	44.09	11.78	1.30	29.54	27.63	46.00	-18.37	QP	
447.100	48.31	15.57	1.90	29.55	36.23	46.00	-9.77	QP	

Horizontal:

Peak scan

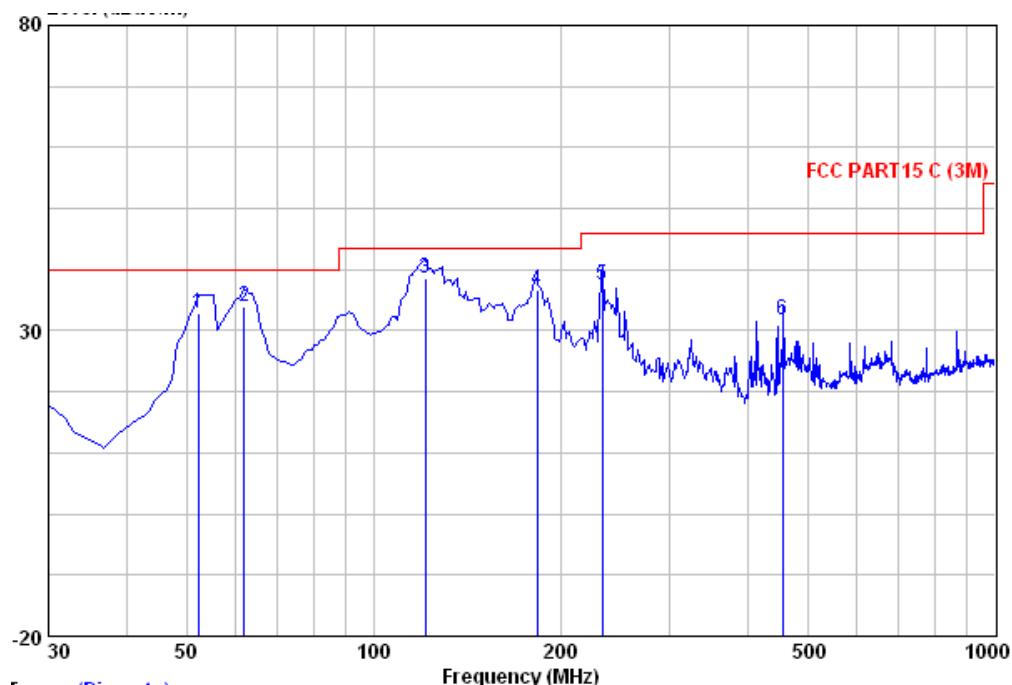Level (dB μ V/m)**Quasi-peak measurement**

Freq MHz	Read Level dB μ V	Antenna Factor	Cable Loss dB	Preamp Factor	Line Level dB μ V/m	Limit Line dB μ V/m	Over Limit dB	Over Remark
	MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB	
52.310	48.61	13.15	0.70	29.51	32.94	40.00	-7.06	QP
62.010	50.79	11.90	0.70	29.56	33.82	40.00	-6.18	QP
121.180	57.18	10.29	0.90	29.70	38.66	43.50	-4.84	QP
183.260	55.11	10.00	1.20	29.56	36.75	43.50	-6.75	QP
233.700	54.07	11.78	1.30	29.54	37.60	46.00	-8.40	QP
455.830	43.82	15.58	2.00	29.54	31.86	46.00	-14.14	QP



1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4882.000	31.57	6.27	33.15	49.78	54.47	74.00	V
7323.000	36.50	7.68	32.61	49.45	61.02	74.00	V
9764.000	38.51	8.66	34.17	45.32	58.32	74.00	V
4882.000	31.57	6.27	33.15	48.13	52.82	74.00	H
7323.000	36.50	7.68	32.61	47.62	59.19	74.00	H
9764.000	38.51	8.66	34.17	45.39	58.39	74.00	H

Average Measurement:


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4882.000	31.57	6.27	33.15	37.62	42.31	54.00	V
7323.000	36.50	7.68	32.61	38.46	50.03	54.00	V
9764.000	38.51	8.66	34.17	35.69	48.69	54.00	V
4882.000	31.57	6.27	33.15	38.32	43.01	54.00	H
7323.000	36.50	7.68	32.61	38.77	50.34	54.00	H
9764.000	38.51	8.66	34.17	35.31	48.31	54.00	H

2) Test the EUT with adaptor (model: S018KU0590240)

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:


Peak scan

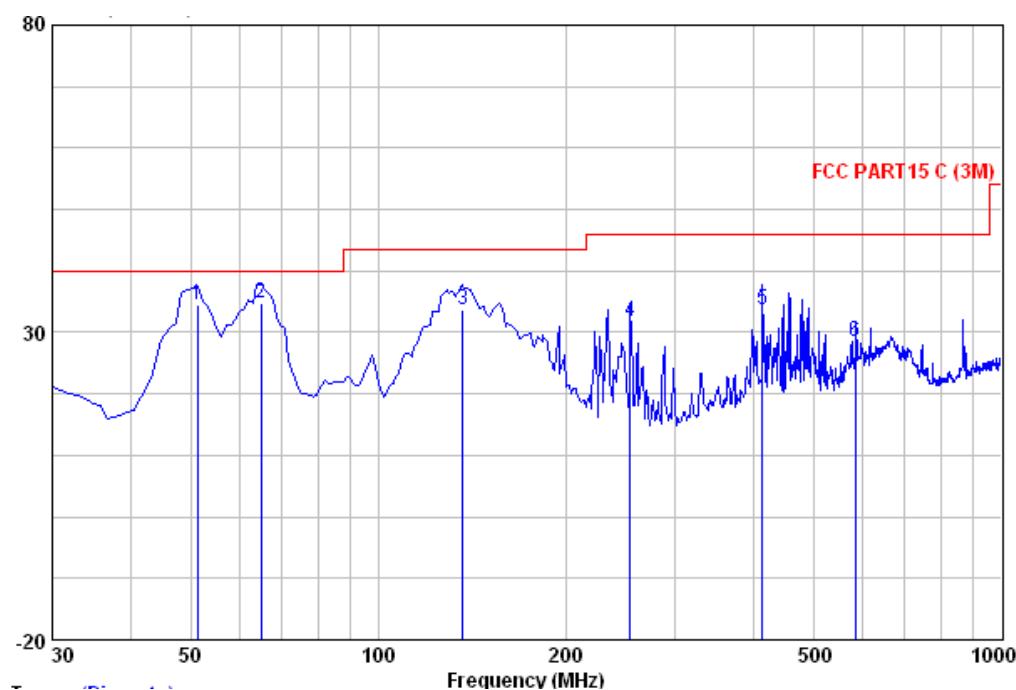Level (dB μ V/m)**Quasi-peak measurement**

Freq MHz	Read Level dB μ V	Antenna Factor	Cable Loss dB	Preamp Factor	Line Level dB	Limit dB μ V/m	Over Line dB	Over Limit dB	Remark
	MHz	dB μ V/m	dB	dB μ V/m	dB μ V/m	dB	dB	dB	
51.340	50.23	13.19	0.70	29.51	34.61	40.00	-5.39	QP	
64.920	53.05	10.71	0.70	29.58	34.88	40.00	-5.12	QP	
136.700	53.95	8.40	1.00	29.70	33.65	43.50	-9.85	QP	
254.070	47.80	12.06	1.40	29.56	31.70	46.00	-14.30	QP	
413.150	46.02	15.35	1.90	29.59	33.69	46.00	-12.31	QP	
583.870	37.51	18.19	2.30	29.41	28.59	46.00	-17.41	QP	

Horizontal:

Peak scan

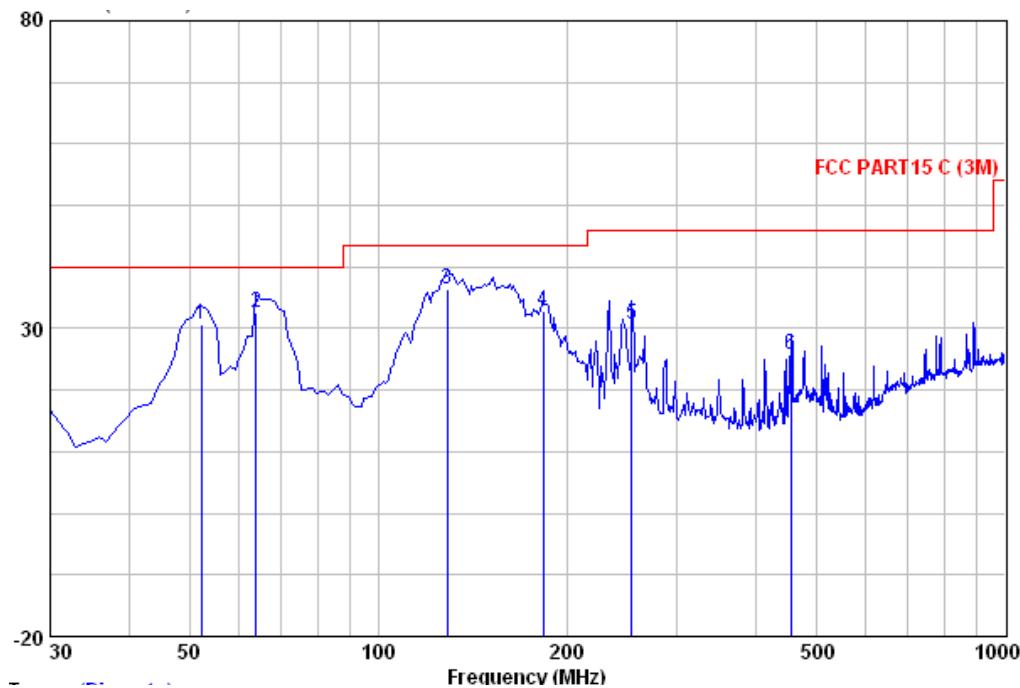Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read Level dB μ V	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Line Level dB μ V/m	Limit Line dB μ V/m	Over Line dB	Over Limit dB	Over Remark
52.310	46.30	13.15	0.70	29.51	30.63	40.00	-9.37	QP	
63.950	50.47	11.11	0.70	29.57	32.70	40.00	-7.30	QP	
128.940	56.12	9.12	0.90	29.70	36.44	43.50	-7.06	QP	
183.260	51.19	10.00	1.20	29.56	32.83	43.50	-10.67	QP	
254.070	46.73	12.06	1.40	29.56	30.63	46.00	-15.37	QP	
455.830	37.70	15.58	2.00	29.54	25.74	46.00	-20.26	QP	



1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4882.000	31.57	6.27	33.15	50.23	54.92	74.00	V
7323.000	36.50	7.68	32.61	47.66	59.23	74.00	V
9764.000	38.51	8.66	34.17	48.18	61.18	74.00	V
4882.000	31.57	6.27	33.15	48.83	53.52	74.00	H
7323.000	36.50	7.68	32.61	46.61	58.18	74.00	H
9764.000	38.51	8.66	34.17	48.93	61.93	74.00	H

Average Measurement:


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4882.000	31.57	6.27	33.15	38.72	43.41	54.00	V
7323.000	36.50	7.68	32.61	38.31	49.88	54.00	V
9764.000	38.51	8.66	34.17	35.55	48.55	54.00	V
4882.000	31.57	6.27	33.15	37.54	42.23	54.00	H
7323.000	36.50	7.68	32.61	38.23	49.80	54.00	H
9764.000	38.51	8.66	34.17	35.45	48.45	54.00	H

7.10.1.3 Test at high Channel in transmitting status**1) Test the EUT with adaptor (model: AS150-059-AA240)**

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

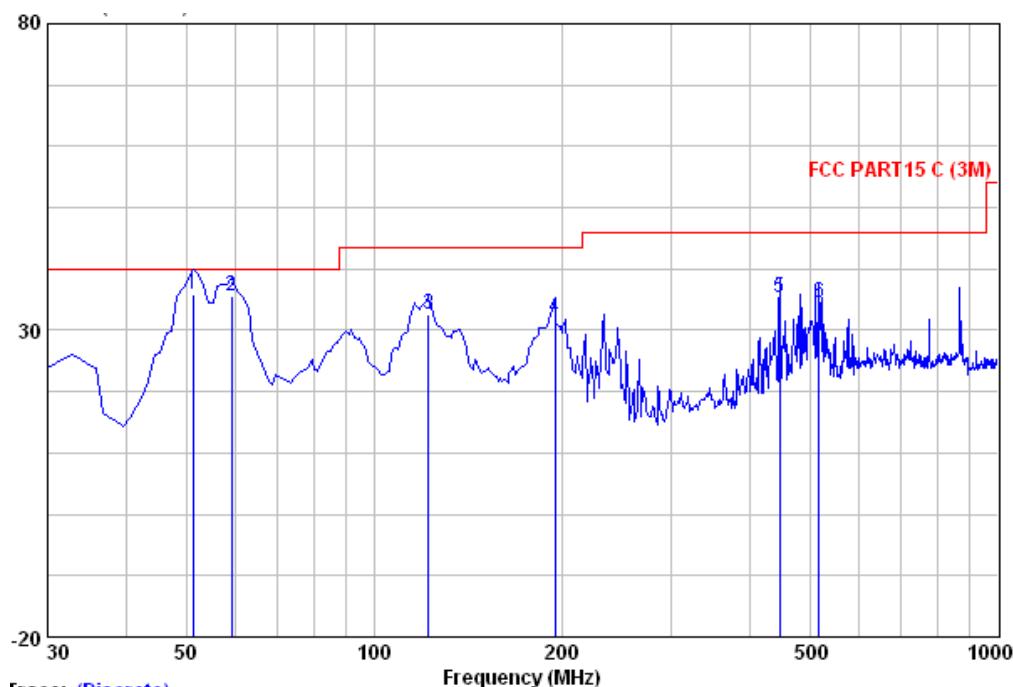
Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read Antenna Level Factor		Cable Preamp Loss Factor		Limit Line dB	Over Line dB	Over Limit Remark
	MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB
51.340	51.44	13.19	0.70	29.51	35.81	40.00	-4.19 QP
59.100	51.57	12.75	0.70	29.55	35.47	40.00	-4.53 QP
122.150	51.20	10.09	0.90	29.70	32.49	43.50	-11.01 QP
194.900	49.84	10.57	1.20	29.52	32.09	43.50	-11.41 QP
447.100	47.31	15.57	1.90	29.55	35.23	46.00	-10.77 QP
516.940	44.95	16.94	2.10	29.48	34.51	46.00	-11.49 QP

Horizontal:

Peak scan

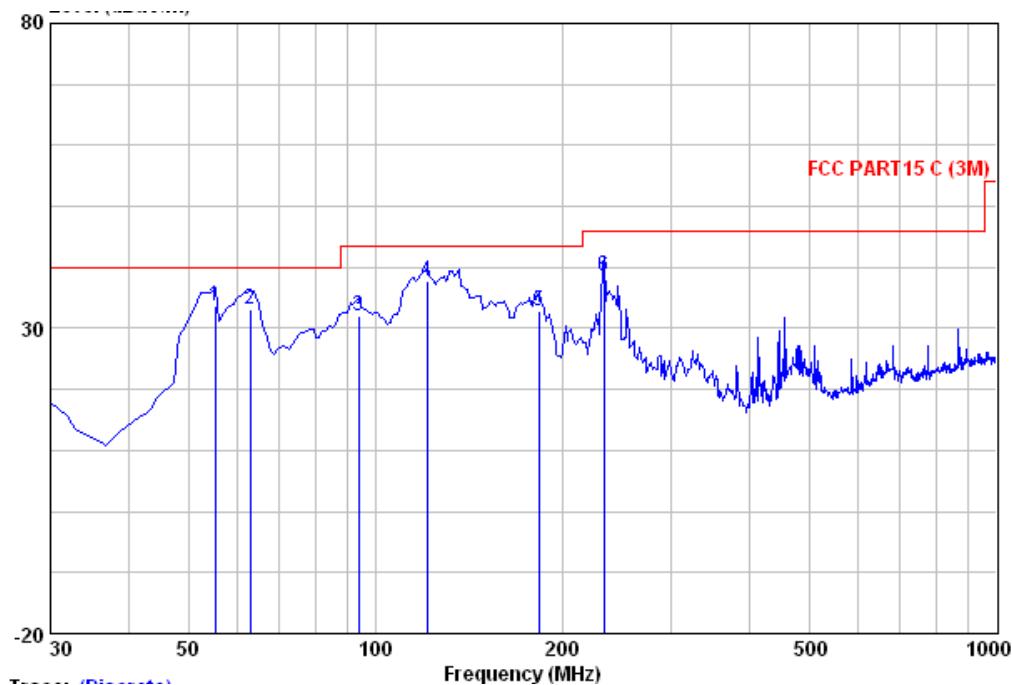Level (dB μ V/m)**Quasi-peak measurement**

Freq MHz	Read		Antenna		Cable		Preamp Level dB	Limit Line dB μ V/m	Over Line dB	Over Limit Remark
	Level dB μ V	Antenna Factor dB	Loss Factor dB	Preamp Level dB	dB μ V/m	dB μ V/m				
55.220	49.58	13.00	0.70	29.53	33.75	40.00	-6.25	QP		
62.980	50.53	11.50	0.70	29.57	33.16	40.00	-6.84	QP		
94.020	48.29	12.67	0.90	29.68	32.18	43.50	-11.32	QP		
121.180	56.18	10.29	0.90	29.70	37.66	43.50	-5.84	QP		
183.260	51.11	10.00	1.20	29.56	32.75	43.50	-10.75	QP		
233.700	55.07	11.78	1.30	29.54	38.60	46.00	-7.40	QP		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4960.000	31.70	6.20	32.82	50.62	55.70	74.00	V
7440.000	36.60	7.47	32.46	45.05	56.66	74.00	V
9920.000	38.68	8.75	34.26	45.39	58.56	74.00	V
4960.000	31.70	6.20	32.82	49.42	54.50	74.00	H
7440.000	36.60	7.47	32.46	45.88	57.49	74.00	H
9920.000	38.68	8.75	34.26	46.38	59.55	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4960.000	31.70	6.20	32.82	37.38	42.46	54.00	V
7440.000	36.60	7.47	32.46	38.03	49.64	54.00	V
9920.000	38.68	8.75	34.26	36.72	49.89	54.00	V
4960.000	31.70	6.20	32.82	39.32	44.40	54.00	H
7440.000	36.60	7.47	32.46	38.67	50.28	54.00	H
9920.000	38.68	8.75	34.26	36.02	49.19	54.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.


Test result: The unit does meet the FCC requirements.

2) Test the EUT with adaptor (model: S018KU0590240)

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

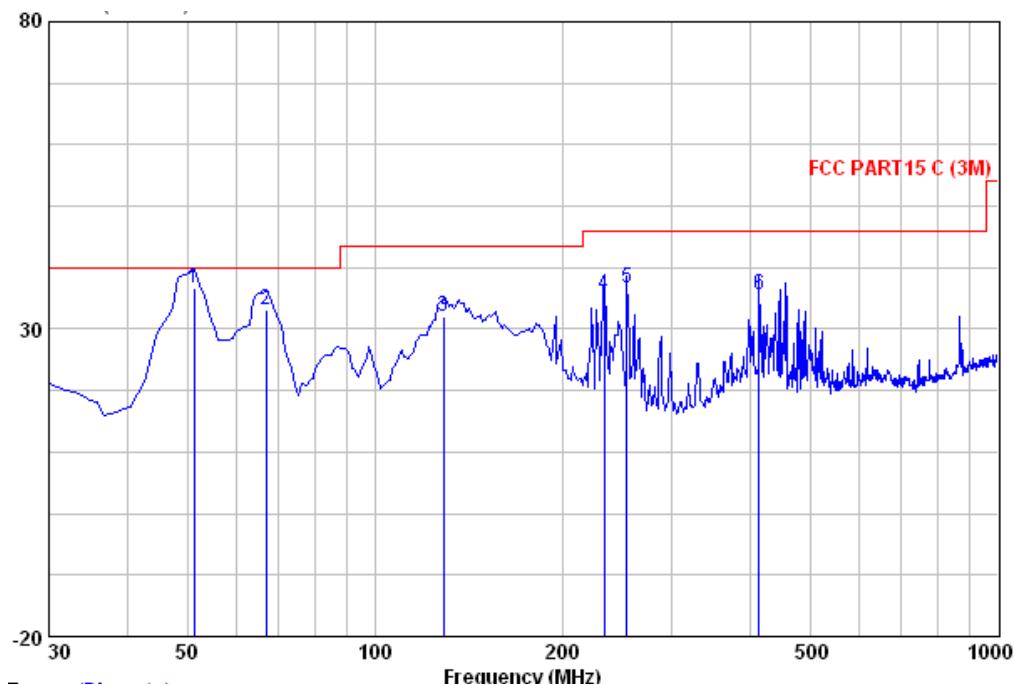
Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read	Antenna	Cable	Preamp	Limit Line dB	Over Line Limit dB	Over Limit Remark
	Level dB μ V	Factor	Loss Factor	Level dB			
51.340	52.23	13.19	0.70	29.51	36.61	40.00	-3.39 QP
66.860	52.08	9.89	0.70	29.58	33.08	40.00	-6.92 QP
128.940	51.61	9.12	0.90	29.70	31.93	43.50	-11.57 QP
233.700	52.06	11.78	1.30	29.54	35.60	46.00	-10.40 QP
254.070	52.80	12.06	1.40	29.56	36.70	46.00	-9.30 QP
413.150	48.02	15.35	1.90	29.59	35.69	46.00	-10.31 QP

Horizontal:

Peak scan

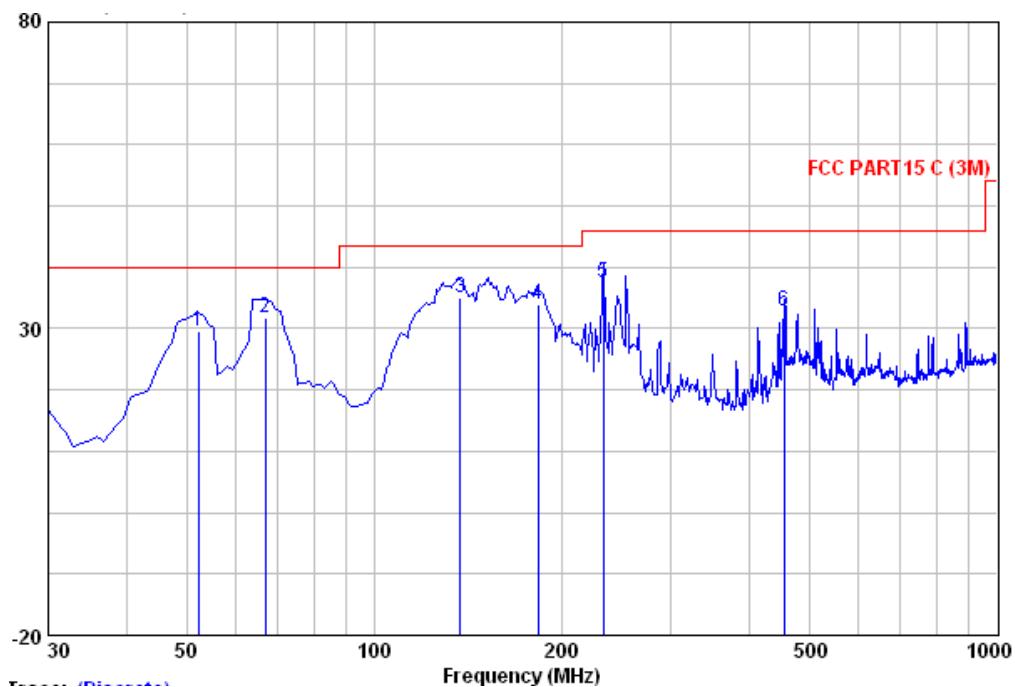Level (dB μ V/m)**Quasi-peak measurement**

Freq MHz	Read	Antenna	Cable	Preamp	Limit Line dB μ V/m	Over Line dB	Over Limit Remark
	Level dB μ V	Factor	Loss dB	Level dB			
52.310	45.30	13.15	0.70	29.51	29.63	40.00	-10.37 QP
66.860	50.89	9.89	0.70	29.58	31.90	40.00	-8.10 QP
137.670	55.51	8.35	1.00	29.70	35.16	43.50	-8.34 QP
183.260	52.19	10.00	1.20	29.56	33.83	43.50	-9.67 QP
233.700	53.97	11.78	1.30	29.54	37.50	46.00	-8.50 QP
455.830	44.70	15.58	2.00	29.54	32.74	46.00	-13.26 QP

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4960.000	31.70	6.20	32.82	51.36	56.44	74.00	V
7440.000	36.60	7.47	32.46	47.30	58.91	74.00	V
9920.000	38.68	8.75	34.26	45.09	58.26	74.00	V
4960.000	31.70	6.20	32.82	49.41	54.49	74.00	H
7440.000	36.60	7.47	32.46	48.11	59.72	74.00	H
9920.000	38.68	8.75	34.26	45.83	59.00	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4960.000	31.70	6.20	32.82	35.86	40.94	54.00	V
7440.000	36.60	7.47	32.46	37.62	49.23	54.00	V
9920.000	38.68	8.75	34.26	37.02	50.19	54.00	V
4960.000	31.70	6.20	32.82	39.93	45.01	54.00	H
7440.000	36.60	7.47	32.46	38.36	49.97	54.00	H
9920.000	38.68	8.75	34.26	37.32	50.49	54.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

7.10.2 Radiated Emissions which fall in the restricted bands

Test Requirement: FCC Part15 C Section 15.247

(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: Section 15.209(a)

40.0 dB μ V/m between 30MHz & 88MHz;

43.5 dB μ V/m between 88MHz & 216MHz;

46.0 dB μ V/m between 216MHz & 960MHz;

54.0 dB μ V/m above 960MHz.

Detector: For PK value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW = 10 Hz

Sweep = auto

Detector function = peak

Trace = max hold

1) Test the EUT with adaptor (model: AS150-059-AA240)
Test Result:
1. Low Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	48.16	37.89	44.72	34.45
2390.000	27.61	4.30	35.60	49.37	38.21	45.68	34.52
2500.000	27.55	4.40	35.60	47.33	37.66	43.68	34.01
2483.500	27.55	4.40	35.60	48.18	37.99	44.53	34.34

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	48.52	37.22	45.08	33.78
2390.000	27.61	4.30	35.60	48.63	38.23	44.94	34.54
2500.000	27.55	4.40	35.60	49.55	39.24	45.90	35.59
2483.500	27.55	4.40	35.60	48.30	39.38	44.65	35.73

2. middle Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	47.38	38.17	43.94	34.73
2390.000	27.61	4.30	35.60	48.47	38.26	44.78	34.57
2500.000	27.55	4.40	35.60	48.74	39.74	45.09	36.09
2483.500	27.55	4.40	35.60	50.19	38.89	46.54	35.24

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	49.61	37.69	46.17	34.25
2390.000	27.61	4.30	35.60	48.65	38.07	44.96	34.38
2500.000	27.55	4.40	35.60	48.15	39.16	44.50	35.51
2483.500	27.55	4.40	35.60	49.39	37.31	45.74	33.66

3. high Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	49.05	37.28	45.61	33.84
2390.000	27.61	4.30	35.60	49.44	37.18	45.75	33.49
2500.000	27.55	4.40	35.60	50.17	39.27	46.52	35.62
2483.500	27.55	4.40	35.60	50.24	39.34	46.59	35.69

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	49.17	39.17	45.73	35.73
2390.000	27.61	4.30	35.60	50.26	38.57	46.57	34.88
2500.000	27.55	4.40	35.60	49.23	37.12	45.58	33.47
2483.500	27.55	4.40	35.60	48.24	37.63	44.59	33.98

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.

2) Test the EUT with adaptor (model: S018KU0590240)
Test Result:
1. Low Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	48.15	38.09	44.71	34.65
2390.000	27.61	4.30	35.60	49.45	38.35	45.76	34.66
2500.000	27.55	4.40	35.60	48.78	39.29	45.13	35.64
2483.500	27.55	4.40	35.60	47.01	39.09	43.36	35.44

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	49.46	38.30	46.02	34.86
2390.000	27.61	4.30	35.60	48.84	39.41	45.15	35.72
2500.000	27.55	4.40	35.60	49.69	39.25	46.04	35.60
2483.500	27.55	4.40	35.60	48.43	38.86	44.78	35.21

2. middle Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	48.25	39.28	44.81	35.84
2390.000	27.61	4.30	35.60	49.50	38.41	45.81	34.72
2500.000	27.55	4.40	35.60	48.74	40.15	45.09	36.50
2483.500	27.55	4.40	35.60	50.14	39.92	46.49	36.27

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	48.68	38.77	45.24	35.33
2390.000	27.61	4.30	35.60	49.84	38.25	46.15	34.56
2500.000	27.55	4.40	35.60	49.30	39.24	45.65	35.59
2483.500	27.55	4.40	35.60	48.57	37.35	44.92	33.7

3. high Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	49.23	38.35	45.79	34.91
2390.000	27.61	4.30	35.60	49.67	37.64	45.98	33.95
2500.000	27.55	4.40	35.60	50.19	37.17	46.54	33.52
2483.500	27.55	4.40	35.60	51.79	39.19	48.14	35.54

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	27.93	4.23	35.60	48.39	39.40	44.95	35.96
2390.000	27.61	4.30	35.60	50.48	38.80	46.79	35.11
2500.000	27.55	4.40	35.60	49.44	37.35	45.79	33.70
2483.500	27.55	4.40	35.60	48.46	37.84	44.81	34.19

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

7.11 Band Edges Requirement

Test Requirement: FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency Band: 2400 MHz to 2483.5 MHz

Test Method: ANSI C63.10: Clause 6.9 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.

Test Configuration:

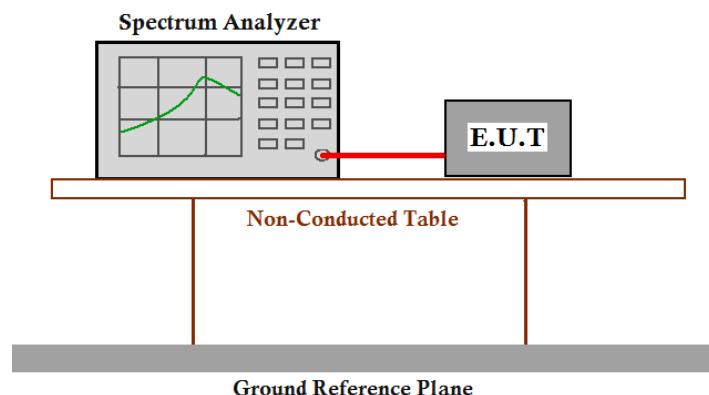

Test Procedure: Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

The graph as below. Represents the emissions take for this device.


1) Test the EUT with adaptor (model: AS150-059-AA240):

DH5:


Low channel:

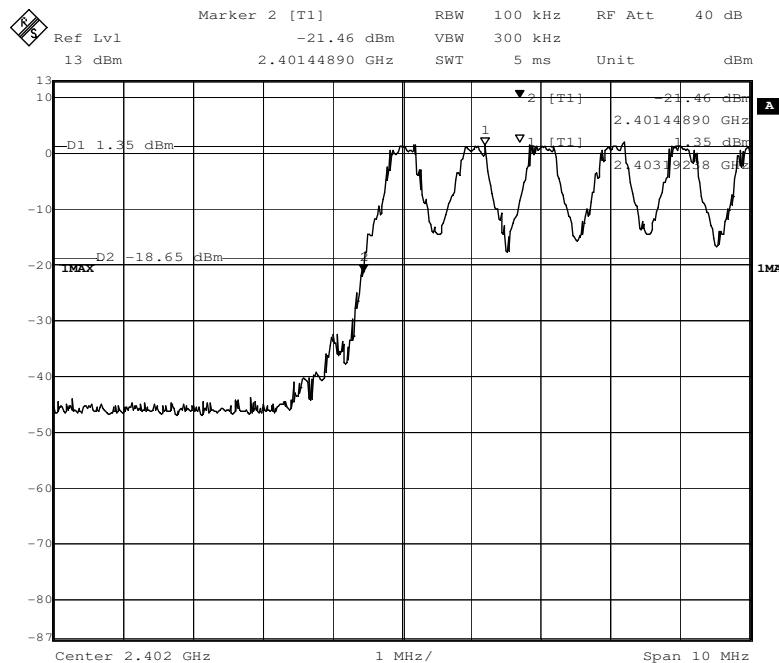


Highest Channel:

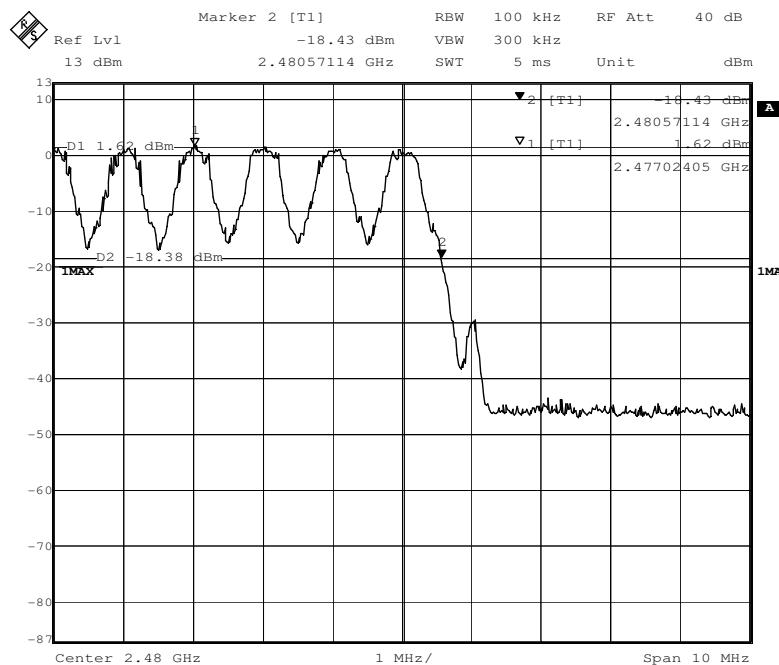

3DH5:
Low channel:

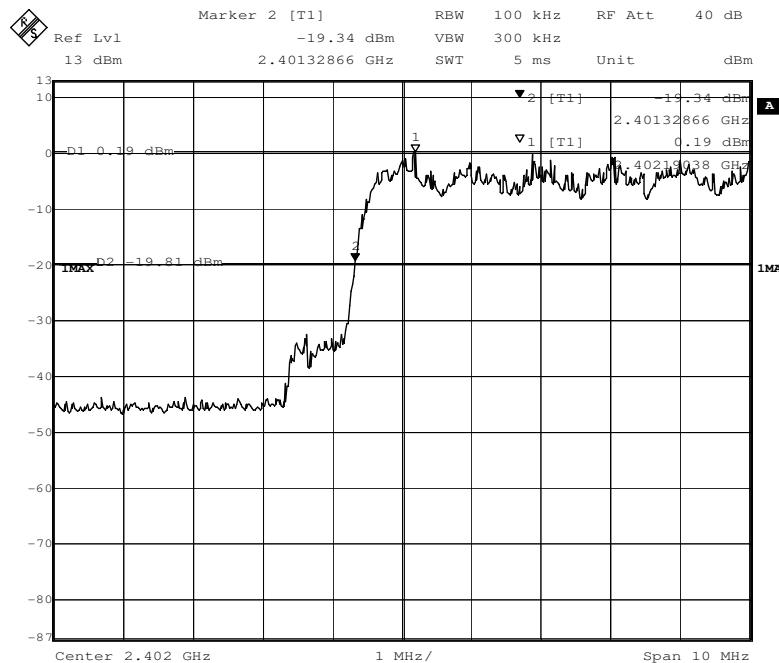

Highest Channel:

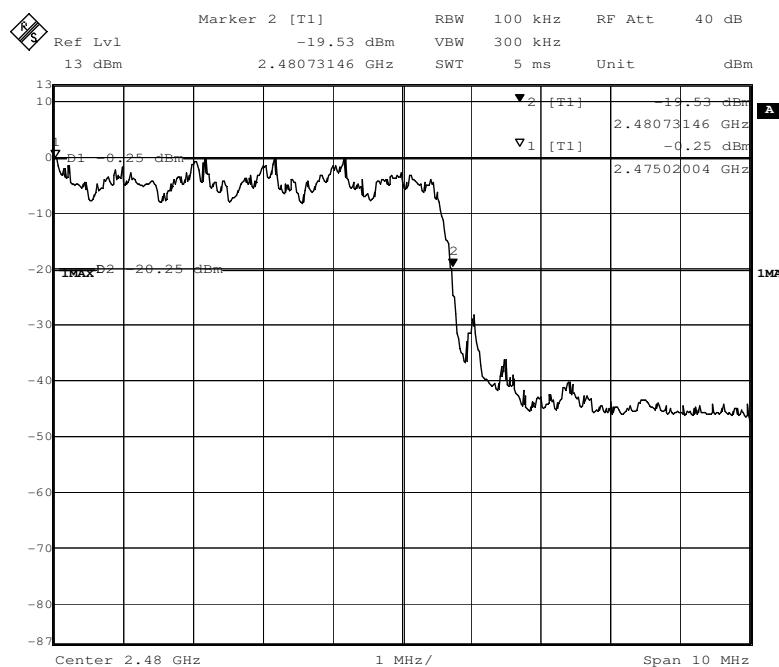


Test result: The unit does meet the FCC requirements.


2) Test the EUT with adaptor (model: S018KU0590240):

DH5:


Low channel:

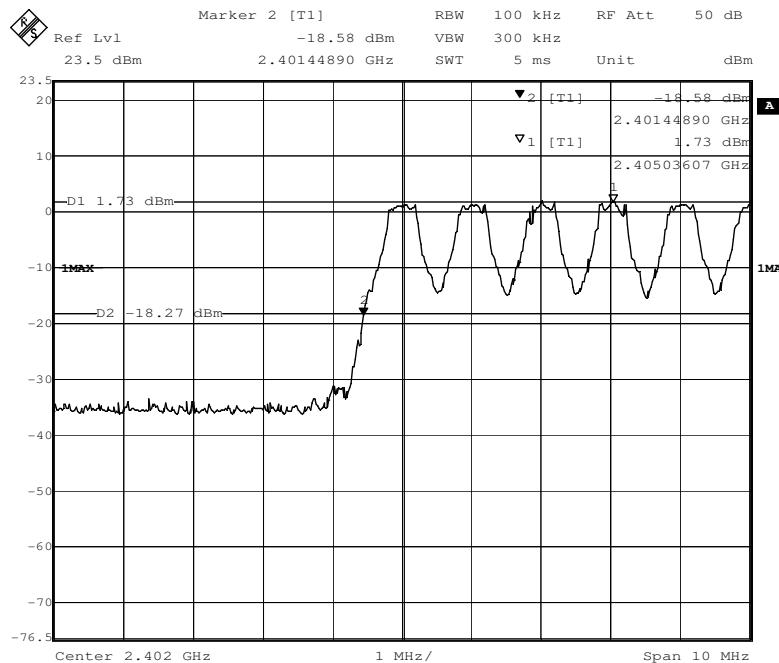


Highest Channel:

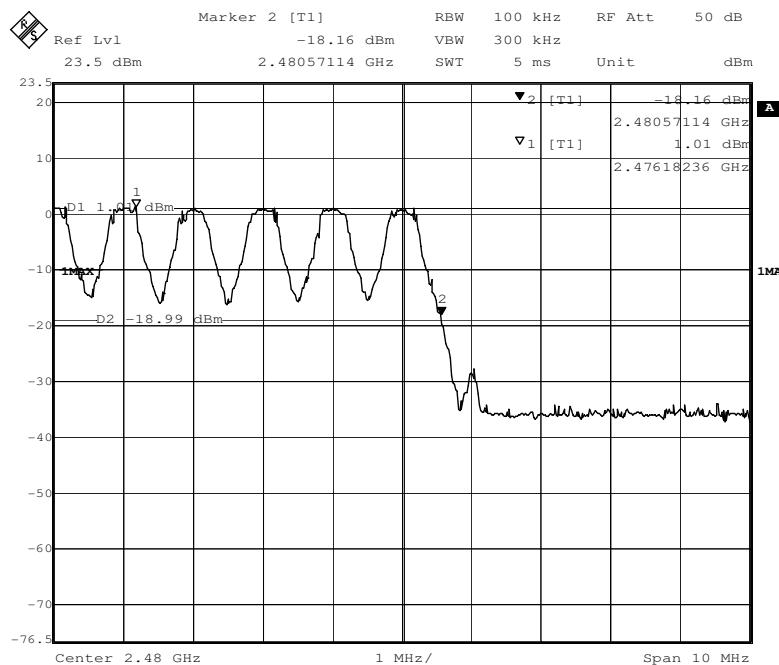

3DH5:
Low channel:

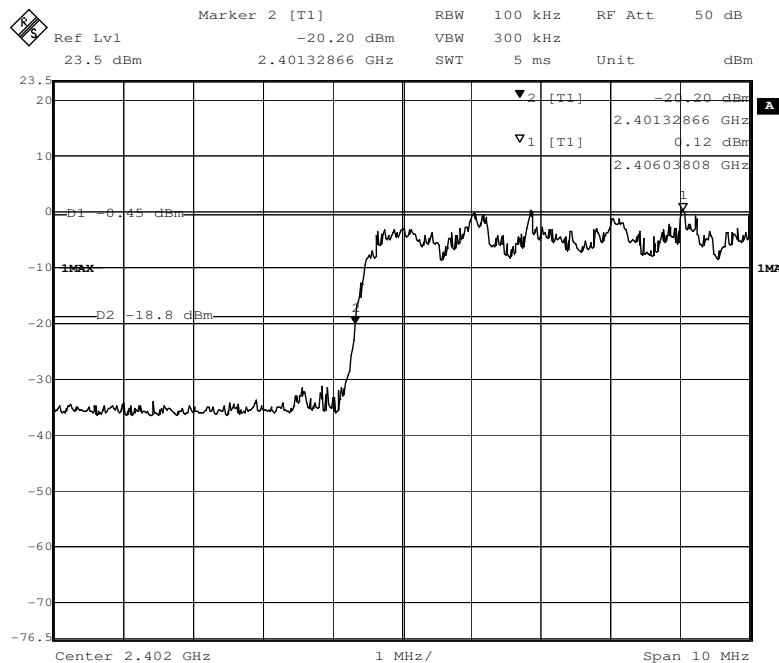

Highest Channel:

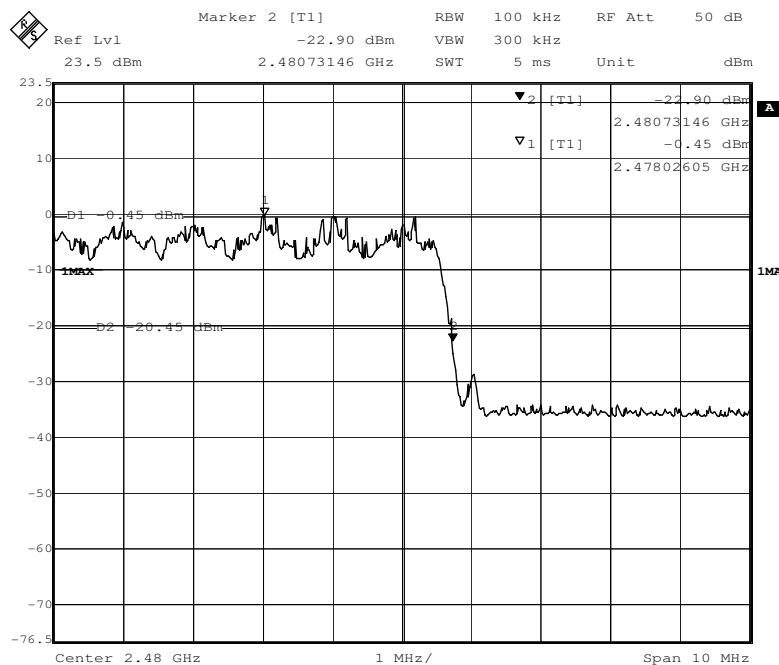

Test result: The unit does meet the FCC requirements.

7.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2 & DA 00-705
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit


Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit dB(µV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

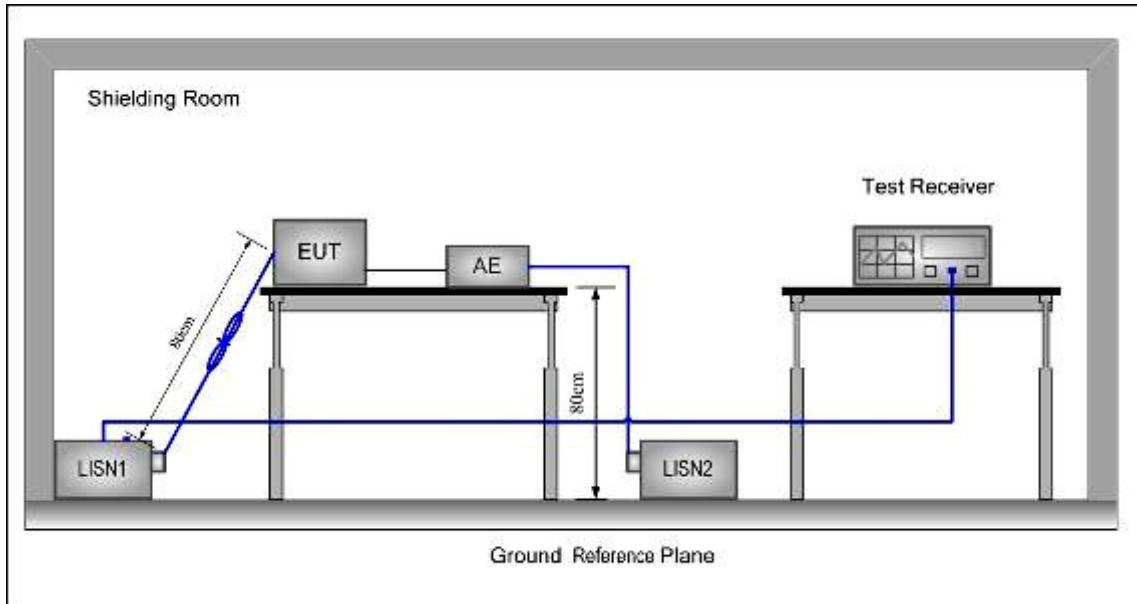

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

7.12.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT:

1) Test the EUT with adaptor (model: AS150-059-AA240):


Neutral Line

Level(dB μ V)

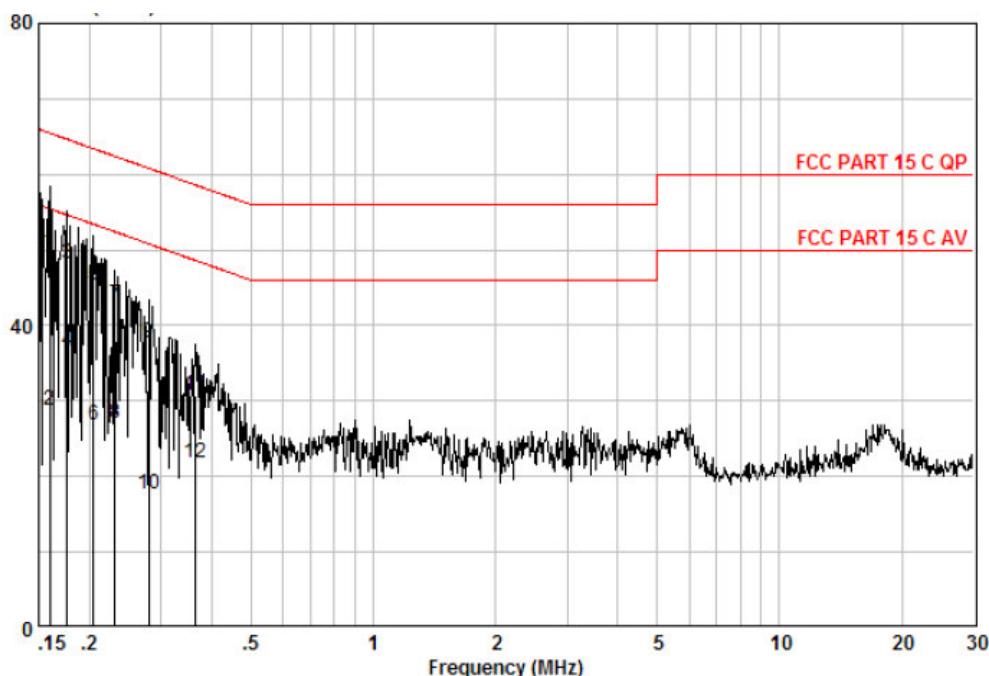

Measure data:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor	Level dB μ V	Limit Line dB μ V	Over Limit dB	Over Limit Remark
0.160	40.08	0.08	9.65	49.81	65.47	-15.67	QP
0.160	19.02	0.08	9.65	28.75	58.31	-29.57	AVERAGE
0.176	38.42	0.10	9.64	48.16	64.68	-16.52	QP
0.176	26.95	0.10	9.64	36.69	57.28	-20.60	AVERAGE
0.205	35.62	0.13	9.64	45.39	63.40	-18.02	QP
0.205	17.13	0.13	9.64	26.90	55.62	-28.73	AVERAGE
0.232	32.96	0.11	9.64	42.71	62.39	-19.68	QP
0.232	17.36	0.11	9.64	27.11	54.31	-27.20	AVERAGE
0.280	27.92	0.09	9.63	37.64	60.81	-23.17	QP
0.280	8.04	0.09	9.63	17.76	52.25	-34.49	AVERAGE
0.363	20.98	0.05	9.63	30.67	58.65	-27.98	QP
0.363	12.14	0.05	9.63	21.83	49.45	-27.62	AVERAGE

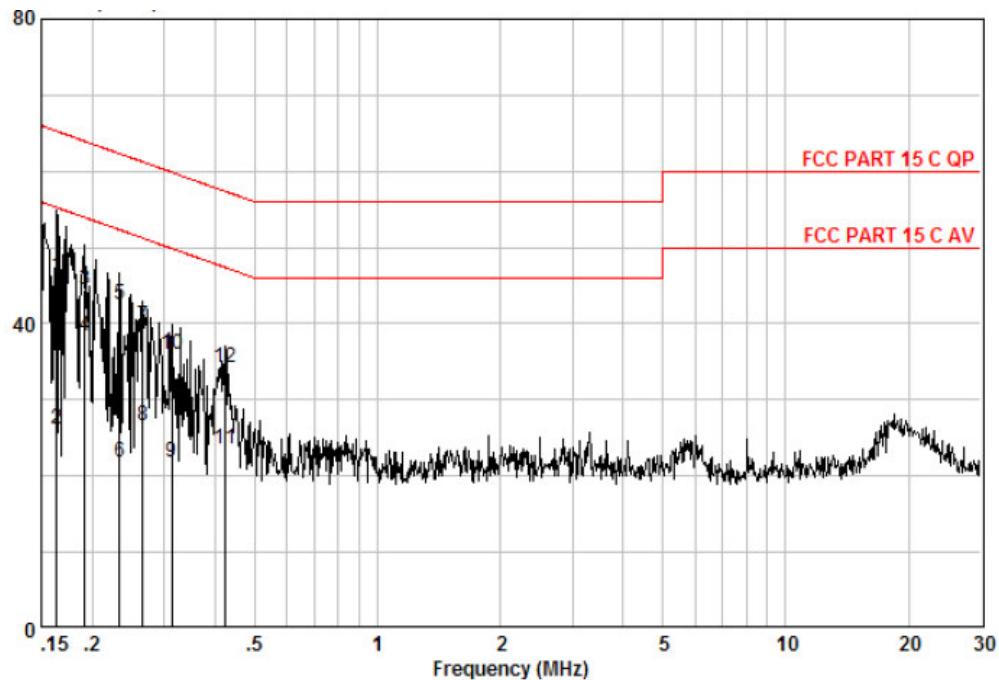
Live Line
Level (dB μ V)

Measure result:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor dB	LISN Level dB μ V	Limit Line dB μ V	Over Limit dB	Over Limit Remark
							QP
0.163	36.50	0.08	9.63	46.21	65.30	-19.09	QP
0.163	16.48	0.08	9.63	26.19	58.08	-31.89	AVERAGE
0.191	34.72	0.12	9.62	44.46	63.98	-19.51	QP
0.191	28.52	0.12	9.62	38.26	56.37	-18.11	AVERAGE
0.233	32.68	0.11	9.63	42.42	62.35	-19.93	QP
0.233	12.14	0.11	9.63	21.88	54.25	-32.37	AVERAGE
0.266	30.00	0.10	9.63	39.73	61.25	-21.52	QP
0.266	16.89	0.10	9.63	26.62	52.82	-26.20	AVERAGE
0.313	12.14	0.07	9.64	21.85	51.05	-29.20	AVERAGE
0.313	26.20	0.07	9.64	35.91	59.88	-23.97	QP
0.421	13.84	0.04	9.63	23.51	47.84	-24.33	AVERAGE
0.421	24.54	0.04	9.63	34.21	57.42	-23.21	QP

2) Test the EUT with adaptor (model: S018KU0590240):


Neutral Line

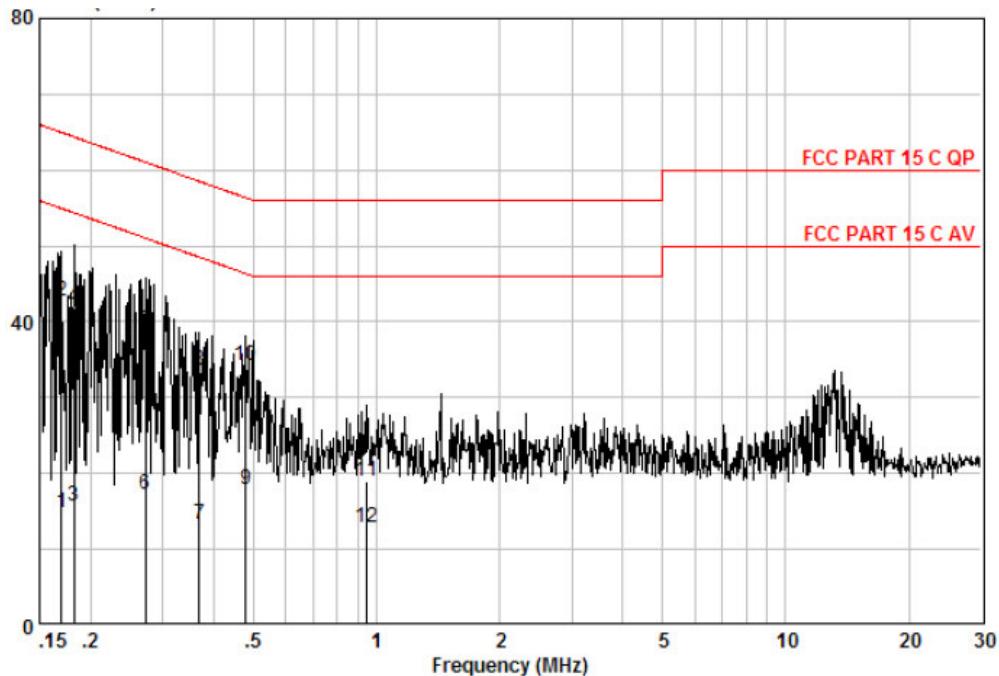Level (dB μ V)

Measure data:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor dB	Level dB μ V	Limit Line dB μ V	Over Limit dB	Remark	
							Line	QP
0.169	5.01	0.09	9.64	14.74	57.68	-42.94	AVERAGE	
0.169	32.98	0.09	9.64	42.71	64.99	-22.28	QP	
0.182	5.91	0.11	9.64	15.66	56.88	-41.23	AVERAGE	
0.182	32.02	0.11	9.64	41.77	64.37	-22.60	QP	
0.272	29.02	0.09	9.64	38.75	61.07	-22.32	QP	
0.272	7.59	0.09	9.64	17.32	52.59	-35.28	AVERAGE	
0.369	3.69	0.05	9.63	13.38	49.27	-35.90	AVERAGE	
0.369	23.82	0.05	9.63	33.51	58.52	-25.01	QP	
0.479	8.21	0.05	9.66	17.92	46.47	-28.55	AVERAGE	
0.479	24.58	0.05	9.66	34.29	56.36	-22.07	QP	
0.943	9.30	0.04	9.69	19.02	56.00	-36.98	QP	
0.943	3.12	0.04	9.69	12.84	46.00	-33.16	AVERAGE	

Live Line

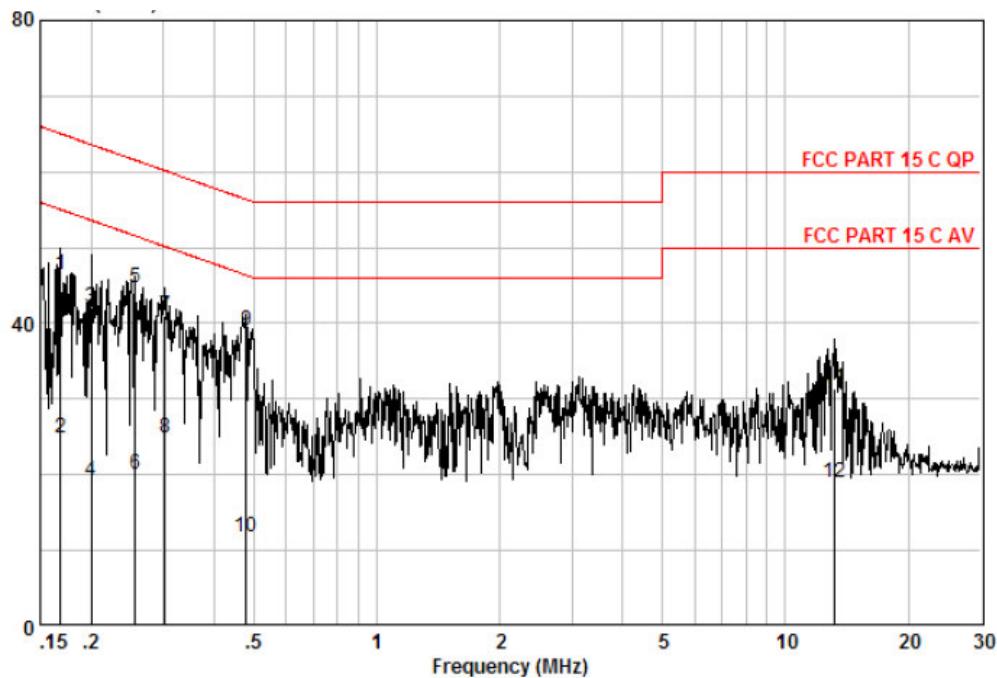Level(dB μ V)

Measure result:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor dB	Level dB μ V	Limit Line dB μ V	Over Limit dB		Remark
						Line	Level	
0.169	36.62	0.09	9.63	46.34	65.03	-18.69	QP	
0.169	15.21	0.09	9.63	24.93	57.74	-32.81	AVERAGE	
0.200	32.34	0.13	9.62	42.09	63.62	-21.53	QP	
0.200	9.43	0.13	9.62	19.18	55.91	-36.73	AVERAGE	
0.256	34.94	0.10	9.63	44.67	61.56	-16.88	QP	
0.256	10.29	0.10	9.63	20.02	53.22	-33.20	AVERAGE	
0.303	31.22	0.08	9.64	40.94	60.15	-19.21	QP	
0.303	15.06	0.08	9.64	24.78	51.39	-26.61	AVERAGE	
0.479	29.38	0.05	9.63	39.06	56.36	-17.30	QP	
0.479	2.08	0.05	9.63	11.76	46.47	-34.71	AVERAGE	
13.197	20.88	0.23	10.21	31.31	60.00	-28.69	QP	
13.197	8.48	0.23	10.21	18.91	50.00	-31.09	AVERAGE	

--End of Report--