


9.4.2. Unwanted Emissions(Conducted)


Low Band-edge

Lowest Channel & Modulation : GFSK

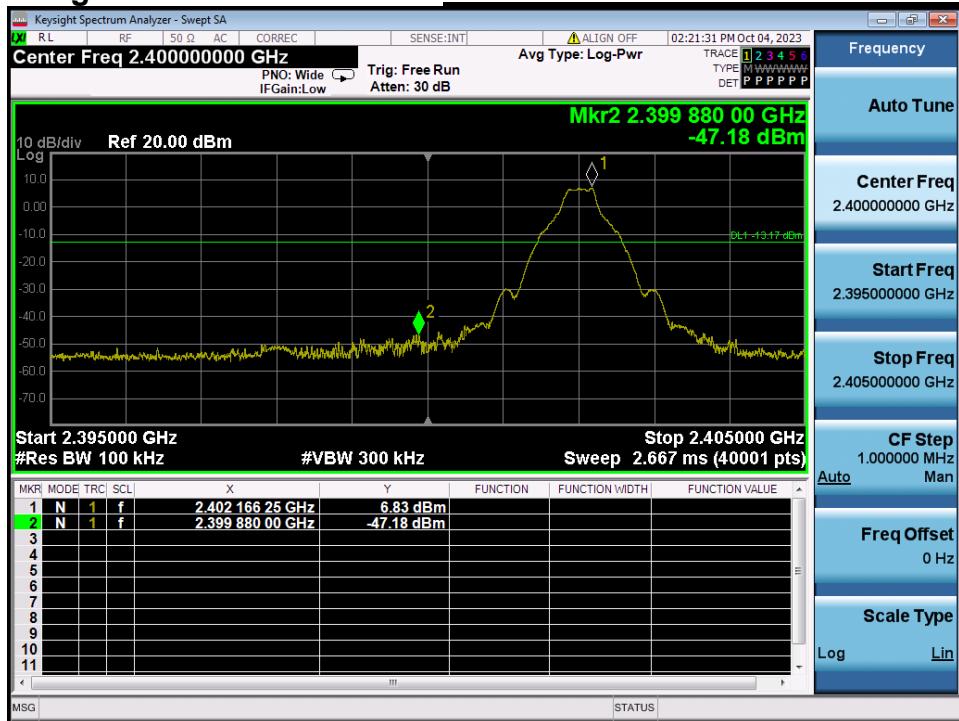



Low Band-edge

Hopping mode & Modulation : GFSK

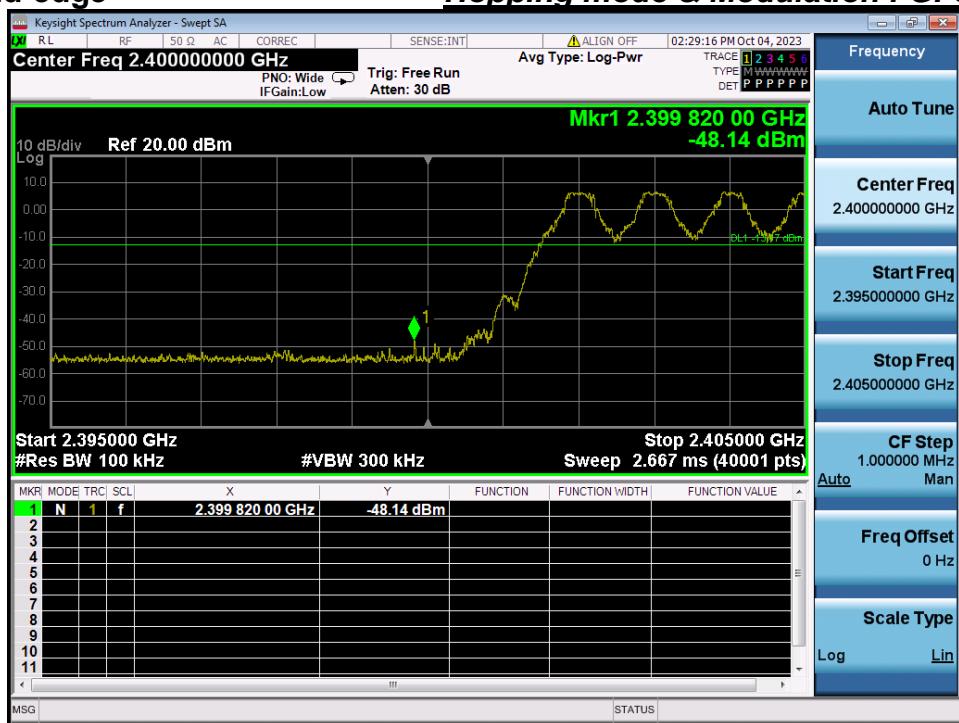


Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

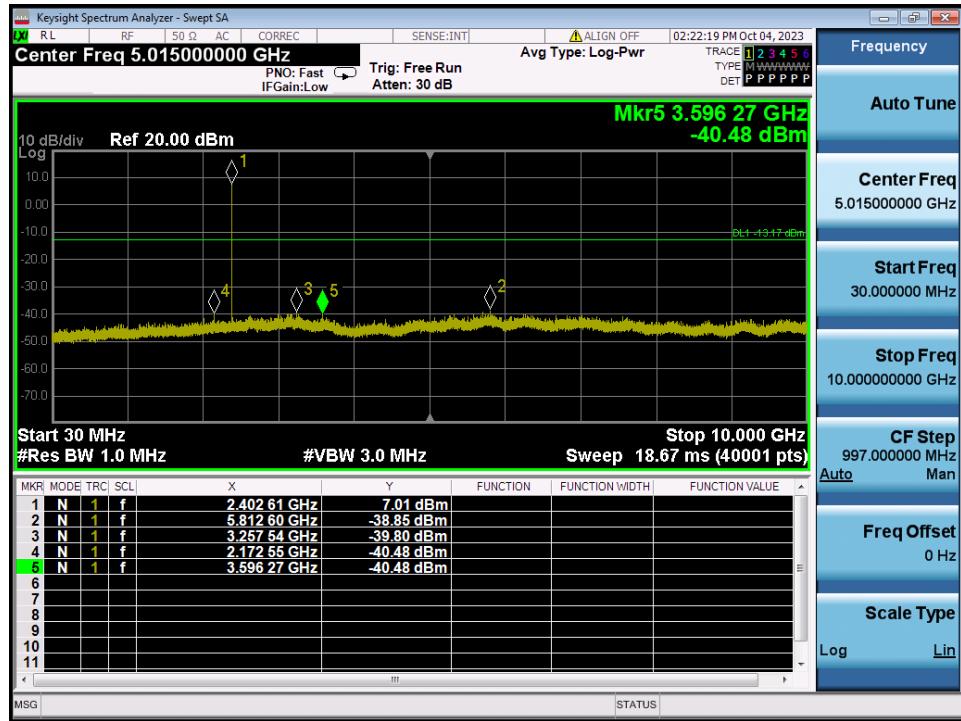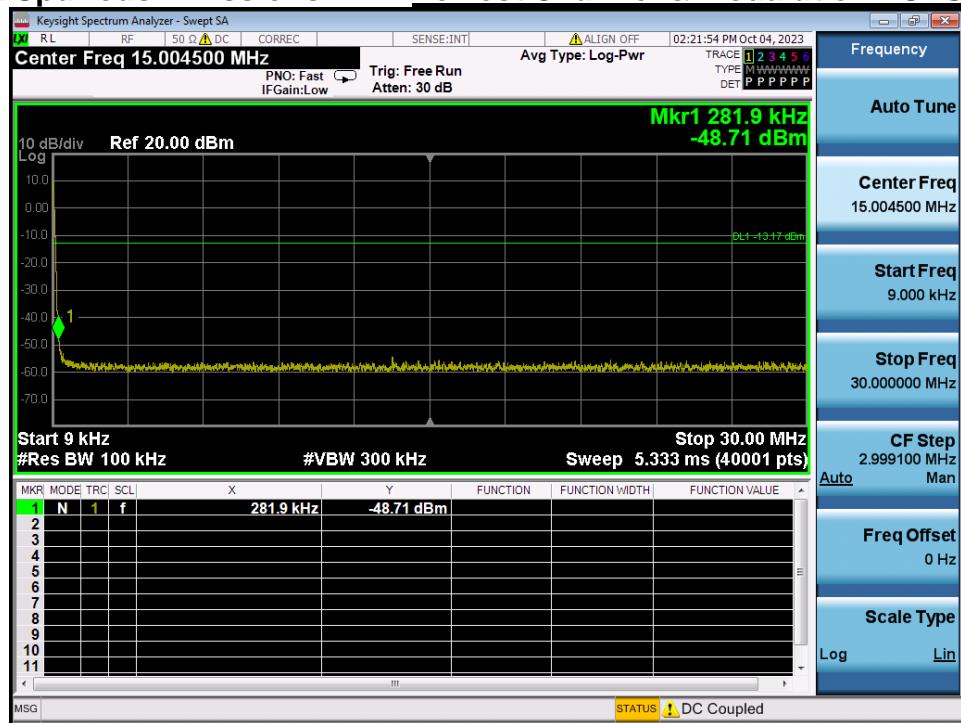

Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

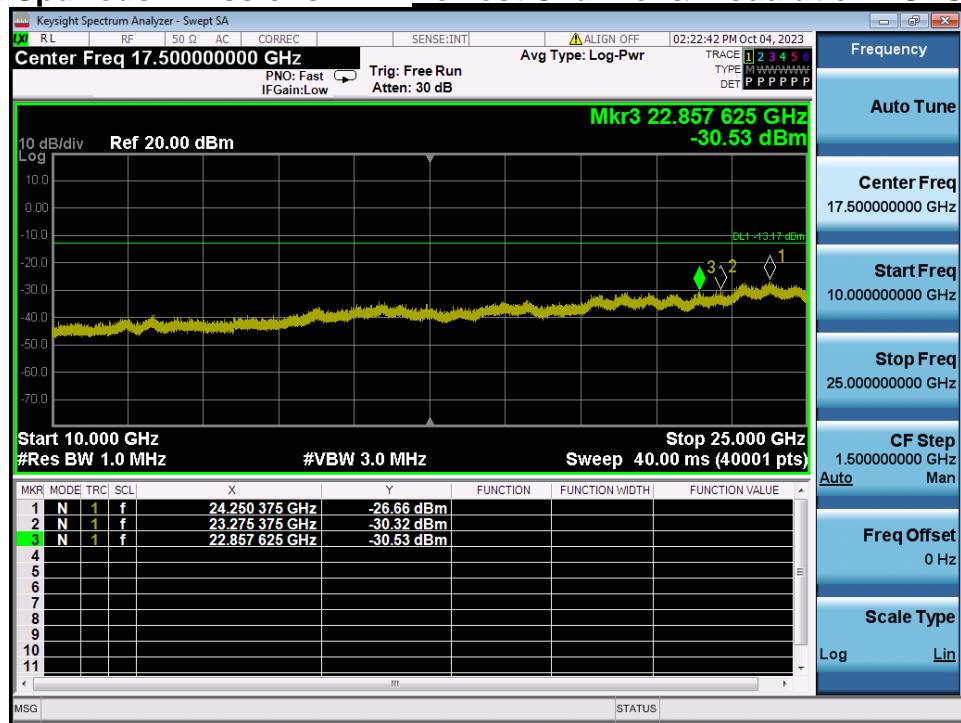


Reference for limit

Middle Channel & Modulation : GFSK





Conducted Spurious Emissions


Middle Channel & Modulation : GFSK

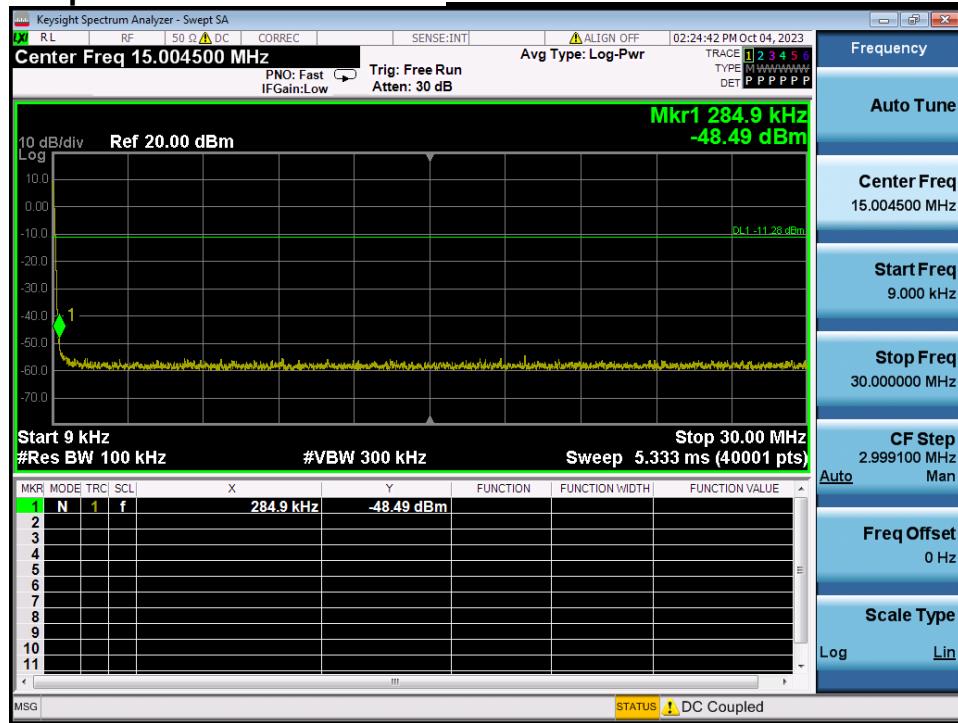

Conducted Spurious Emissions



Middle Channel & Modulation : GFSK

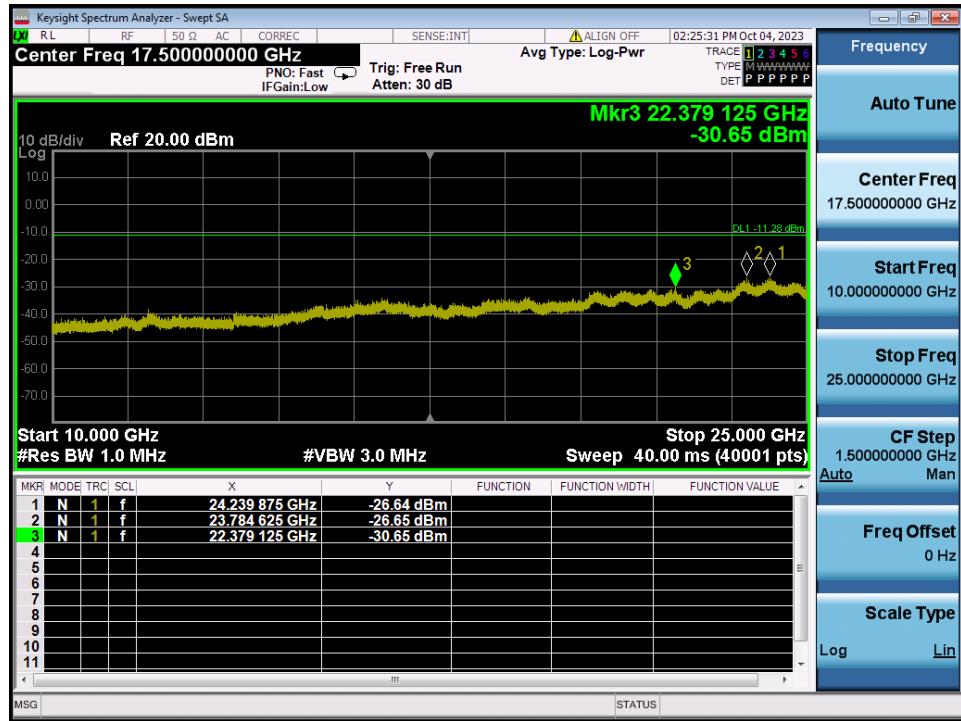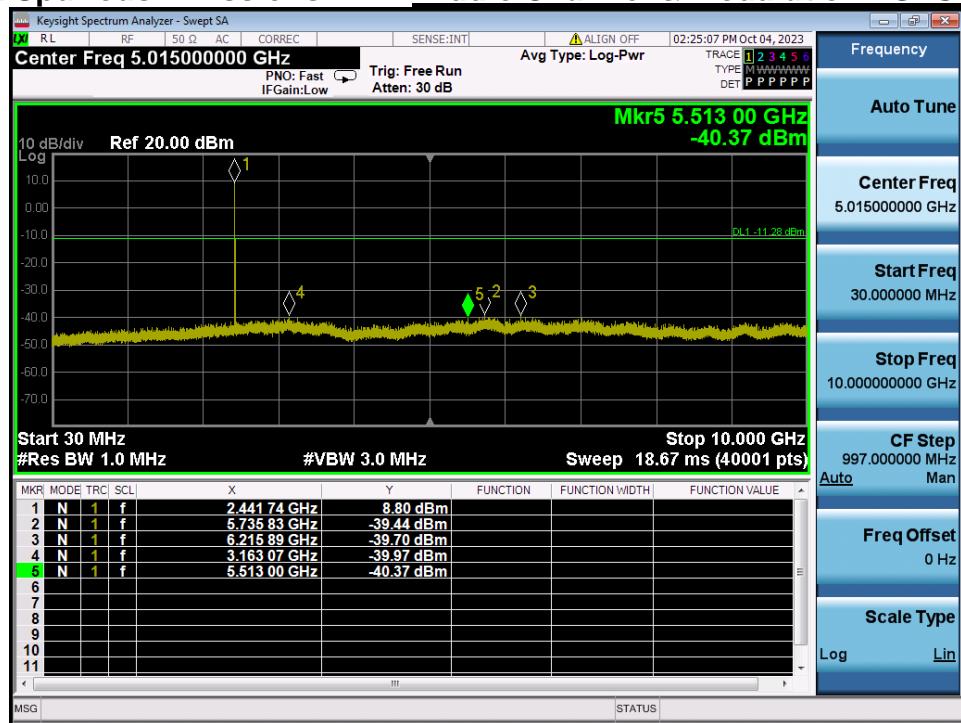

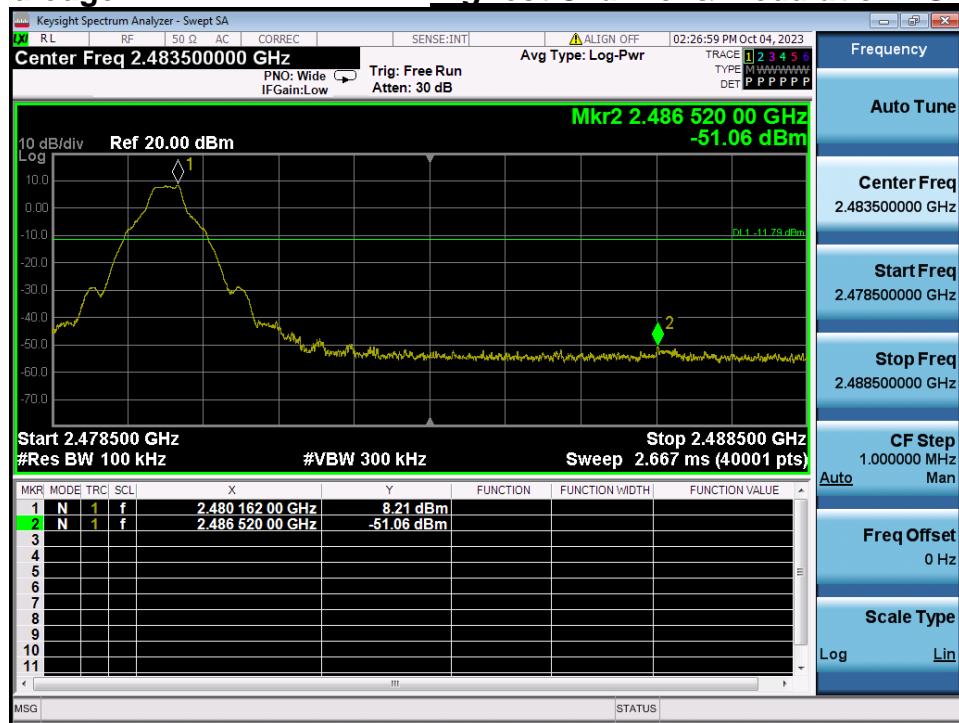High Band-edge
Highest Channel & Modulation : GFSK

High Band-edge
Hopping mode & Modulation : GFSK



Conducted Spurious Emissions

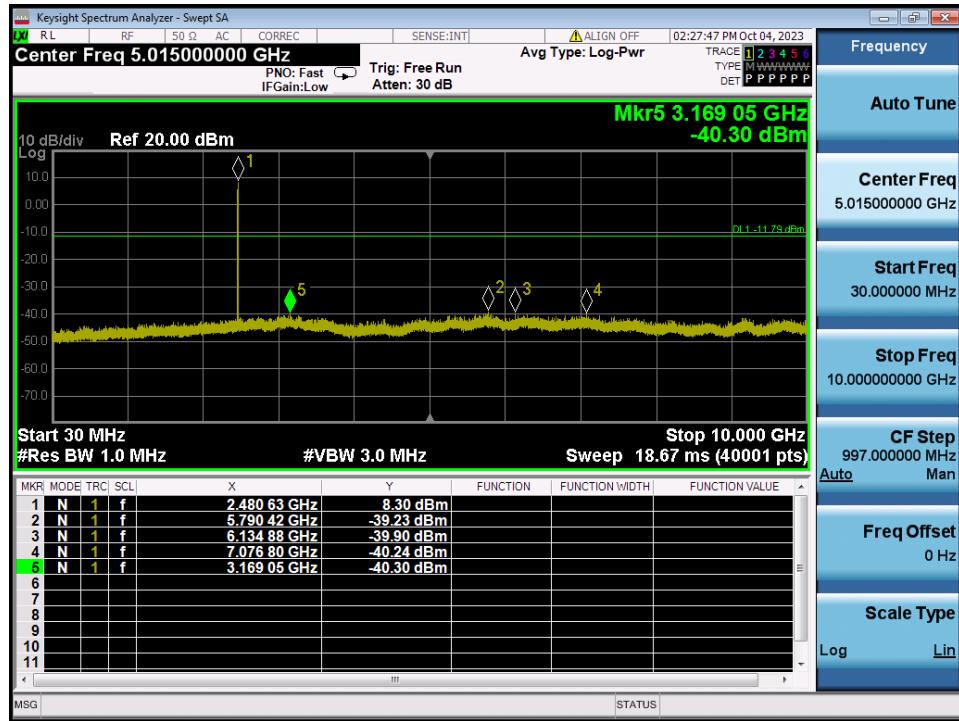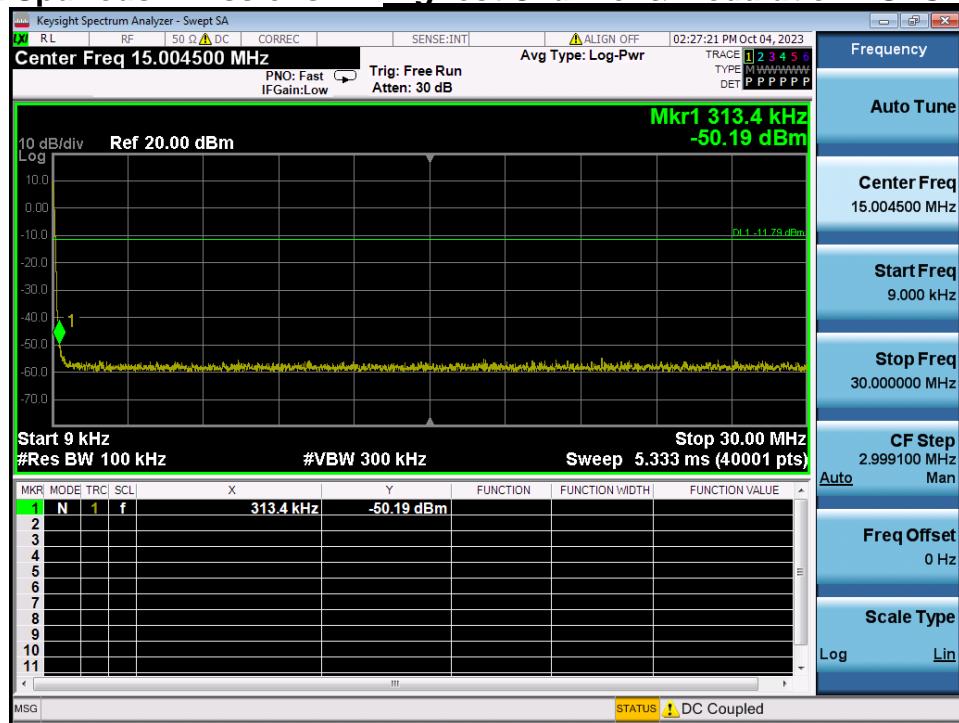Highest Channel & Modulation : GFSK




Conducted Spurious Emissions

Highest Channel & Modulation : GFSK

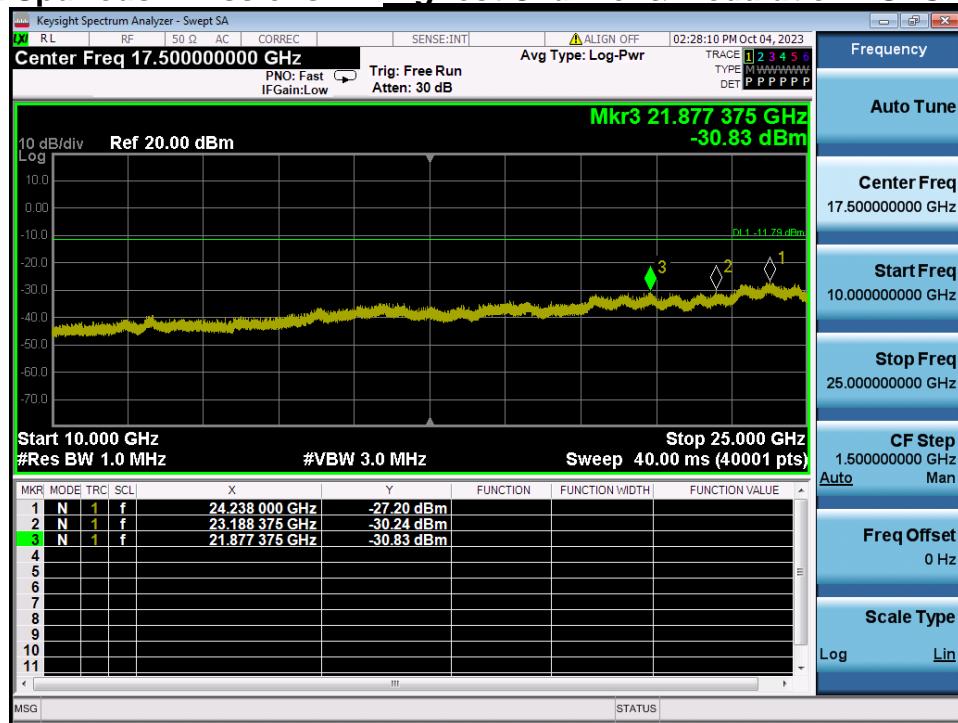


Low Band-edge

Lowest Channel & Modulation : $\pi/4$ DQPSK


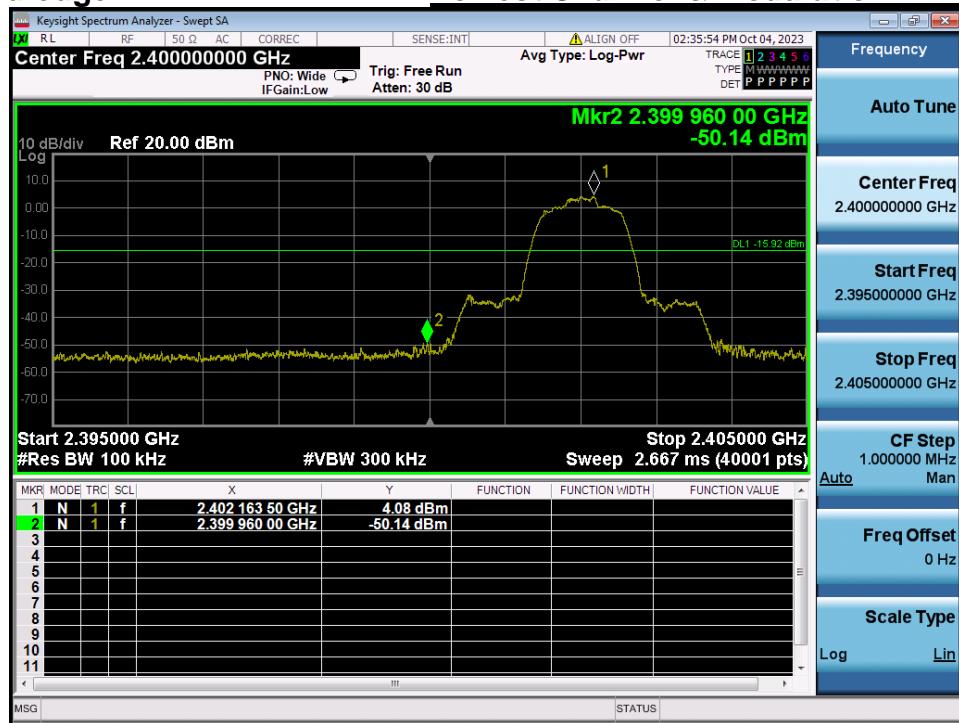


Low Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

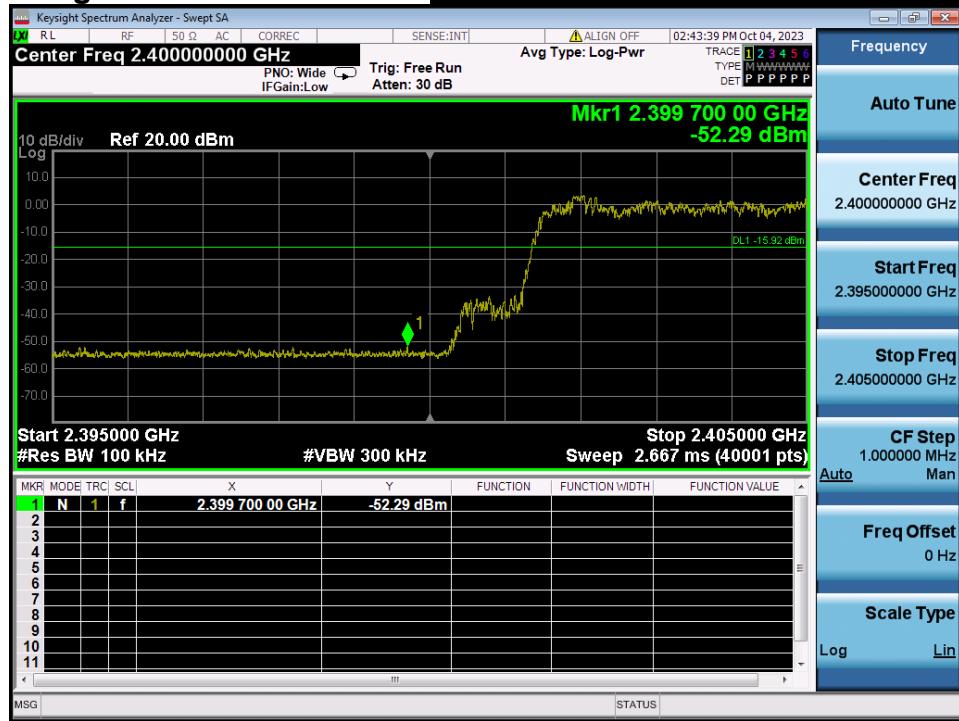


Conducted Spurious Emissions

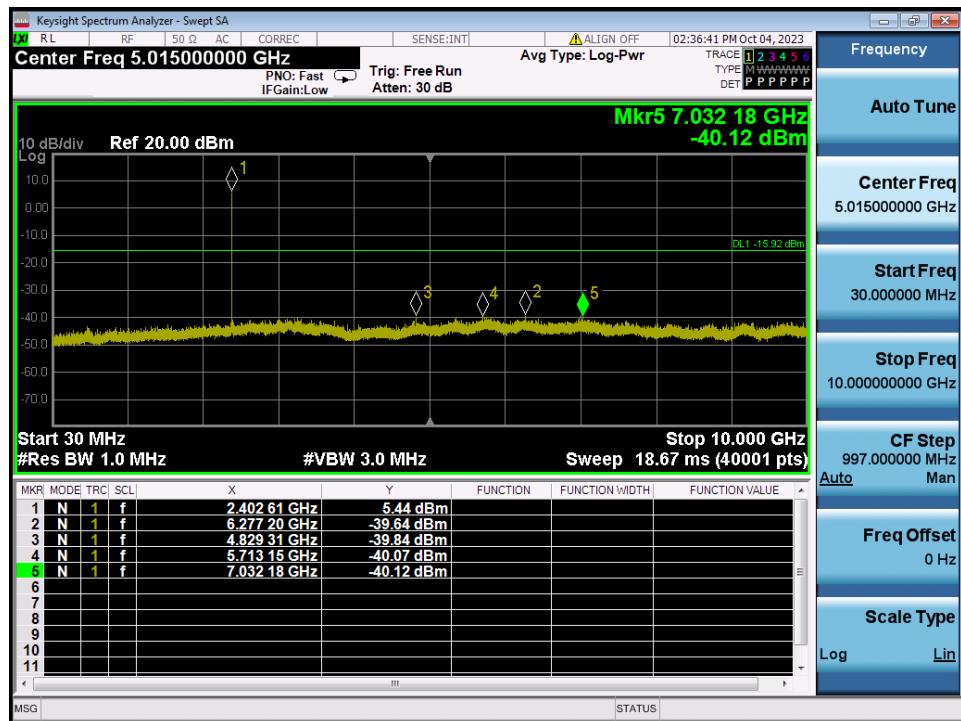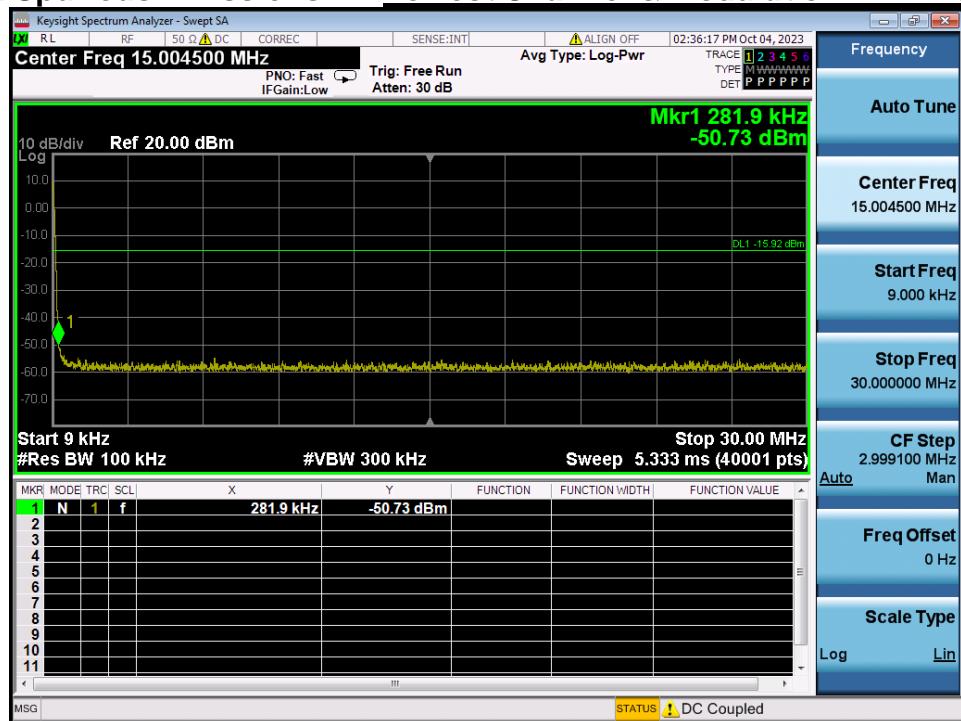Lowest Channel & Modulation : $\pi/4$ DQPSK


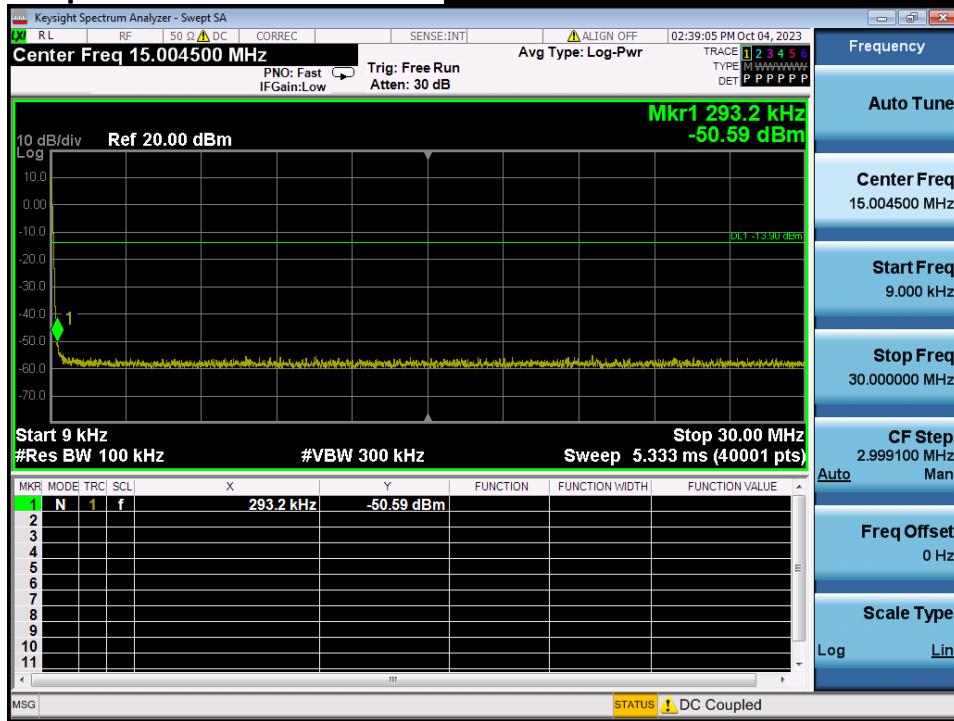
Conducted Spurious Emissions

Lowest Channel & Modulation : $\pi/4$ DQPSK


Reference for limit


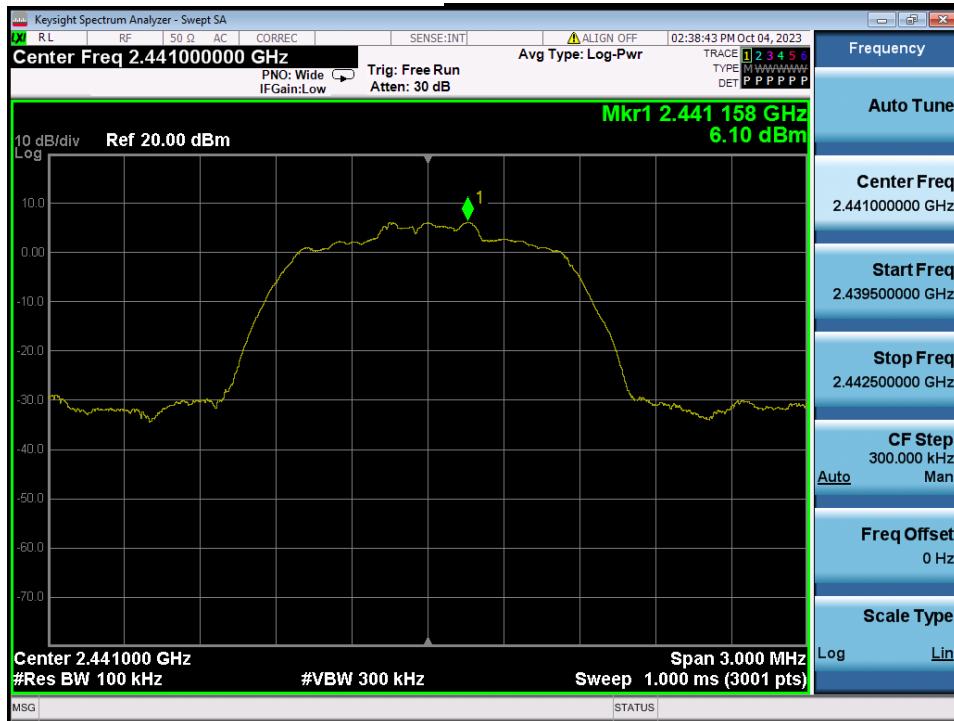
Middle Channel & Modulation : $\pi/4$ DQPSK


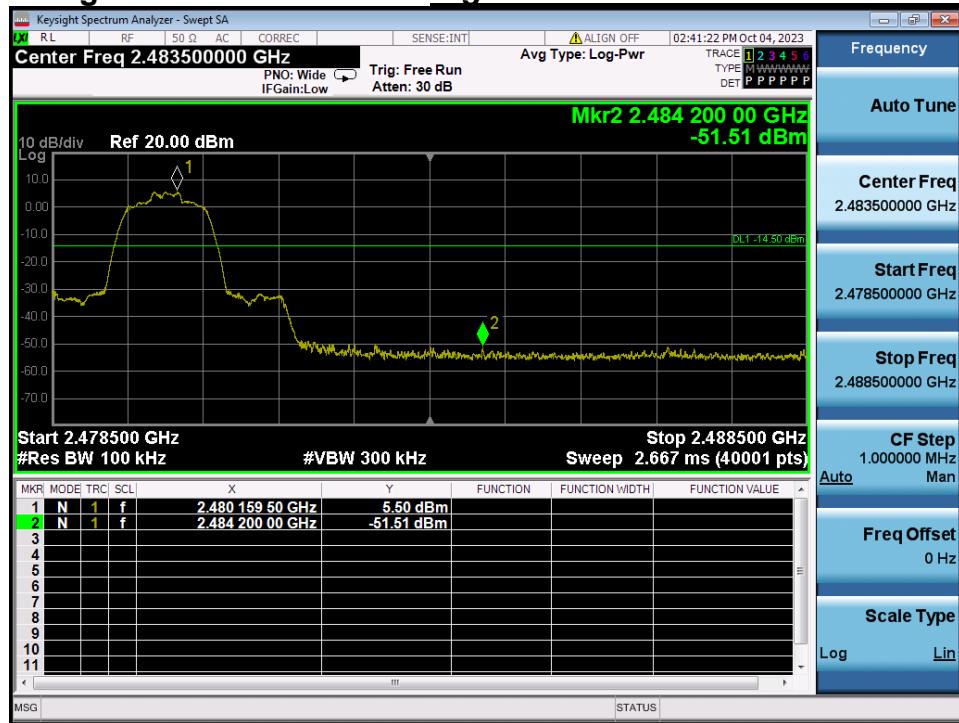
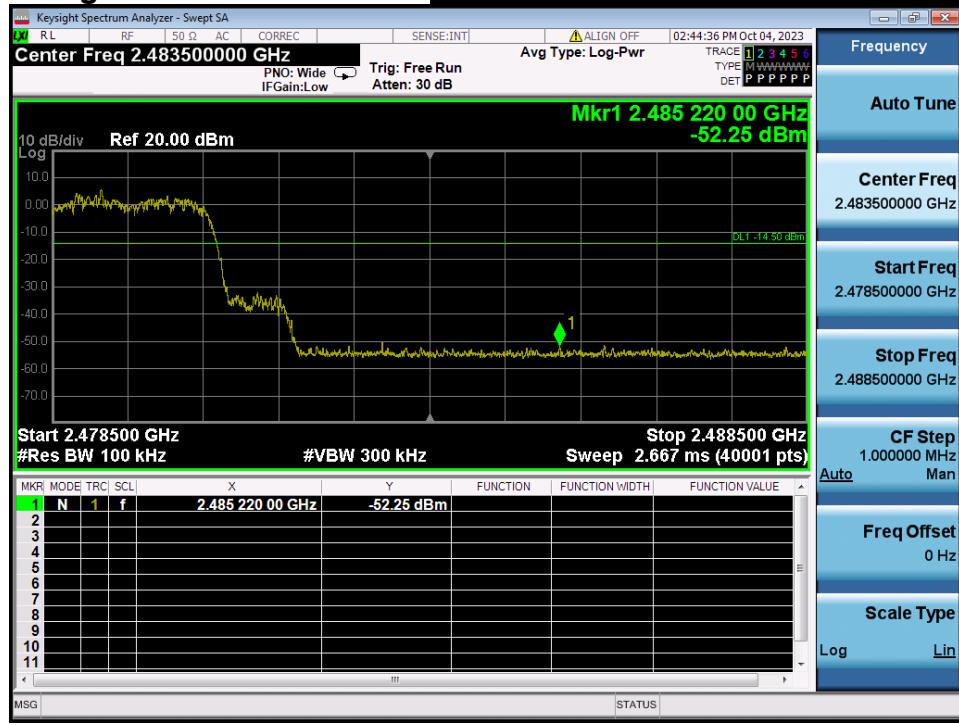
Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK


Conducted Spurious Emissions



Middle Channel & Modulation : π/4DQPSK

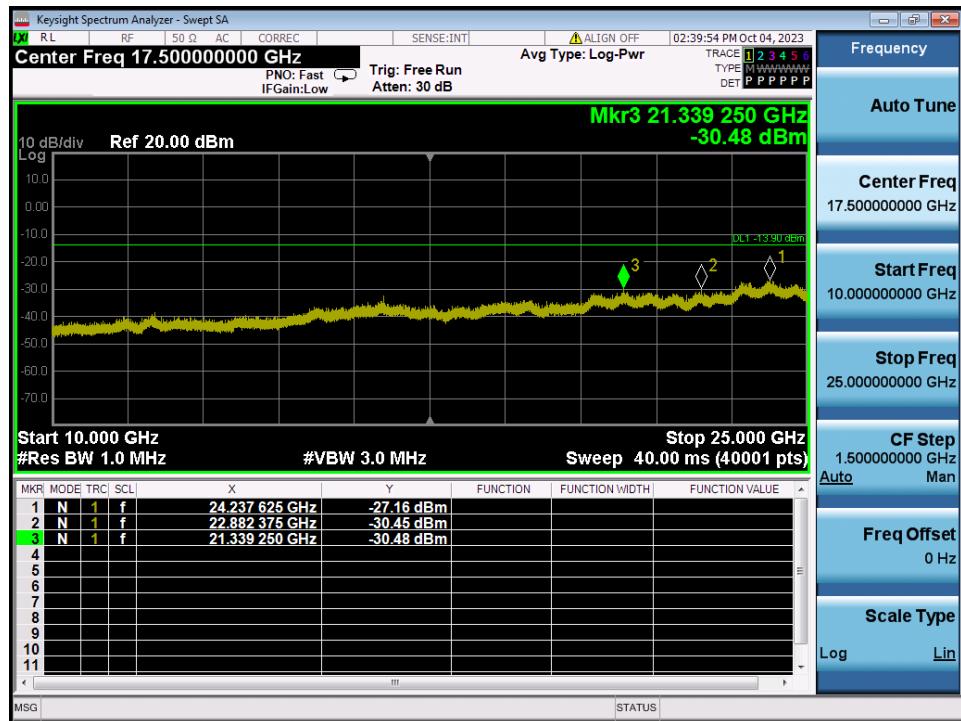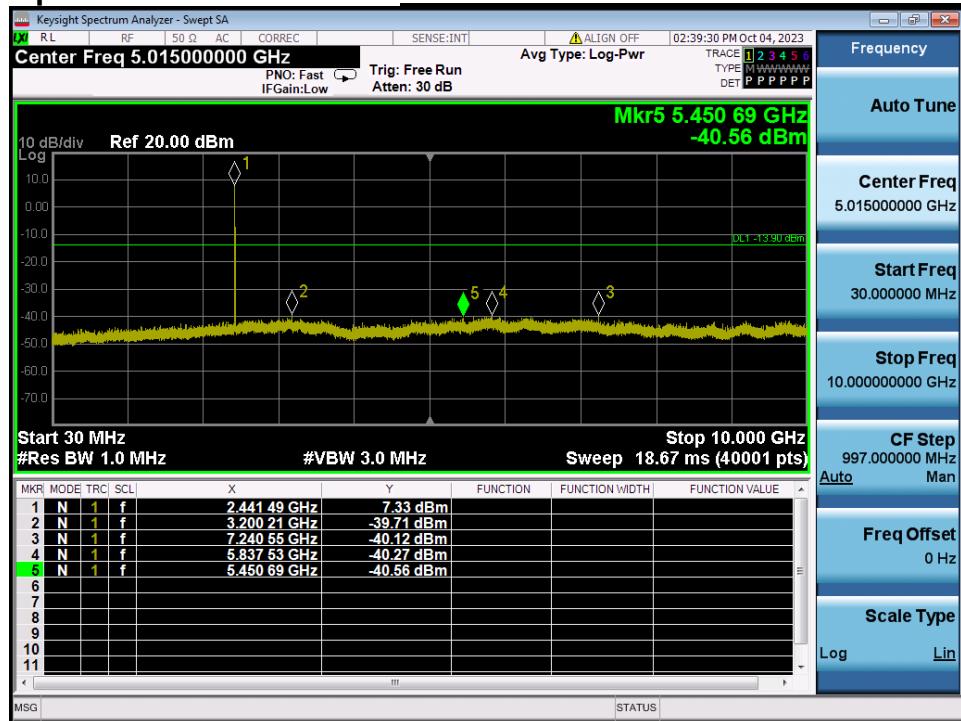

High Band-edge
Highest Channel & Modulation : $\pi/4$ DQPSK

High Band-edge
Hopping mode & Modulation : $\pi/4$ DQPSK


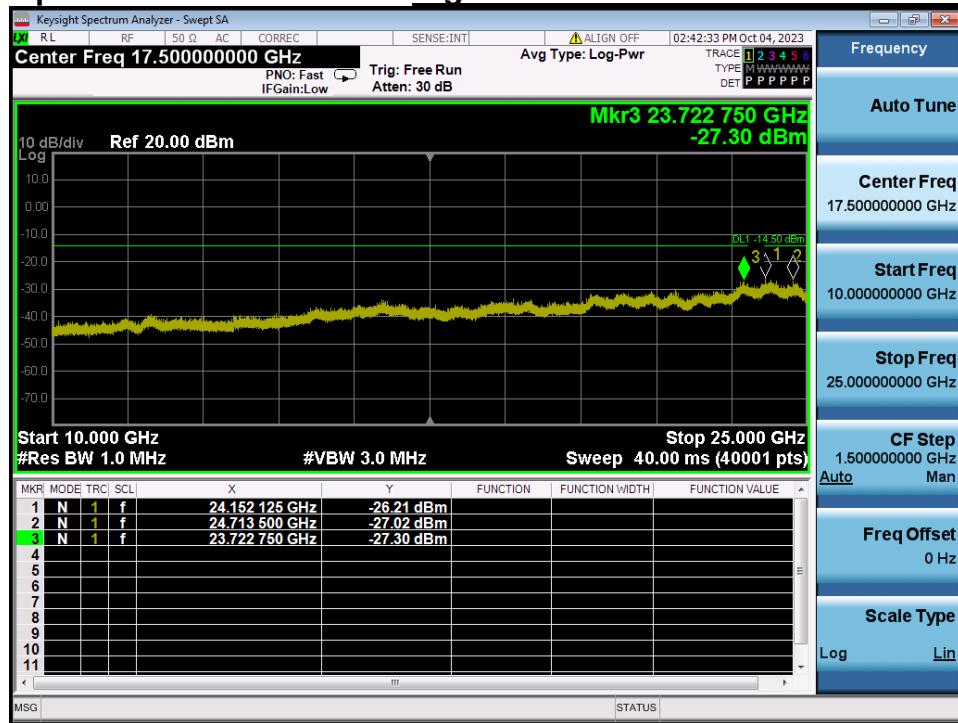
Conducted Spurious Emissions

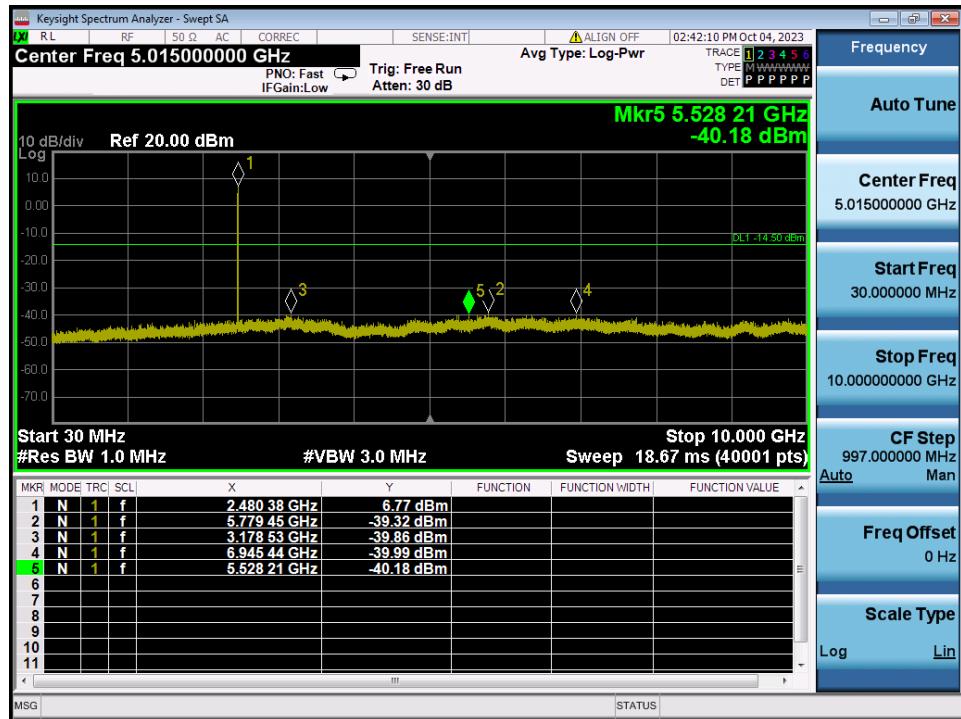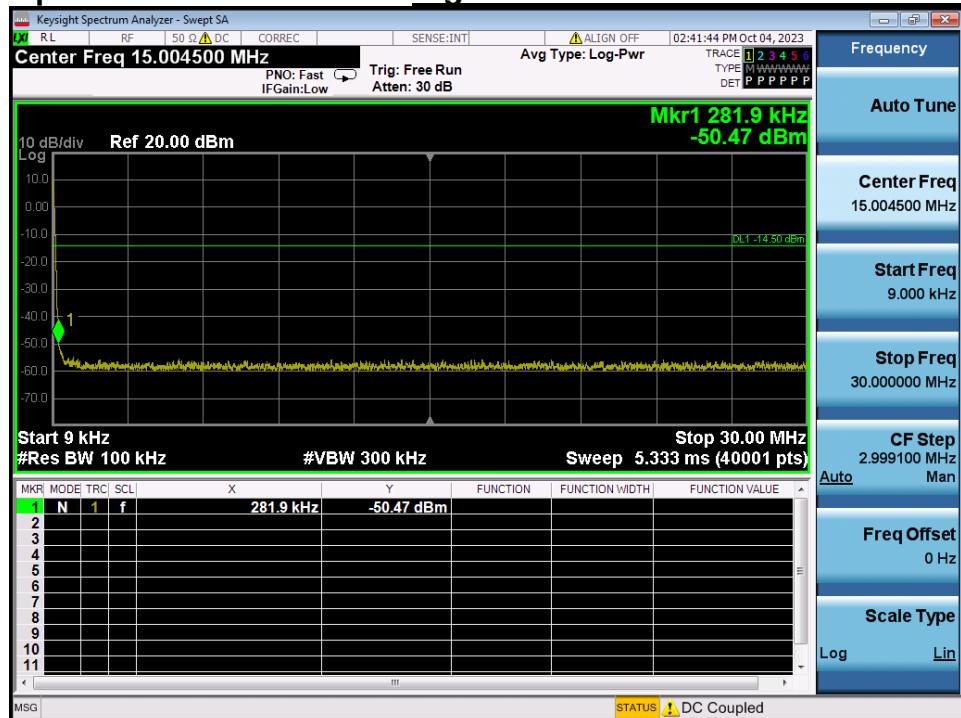Highest Channel & Modulation : π/4DQPSK




Conducted Spurious Emissions

Highest Channel & Modulation : π/4DQPSK





Low Band-edge
Lowest Channel & Modulation : 8DPSK

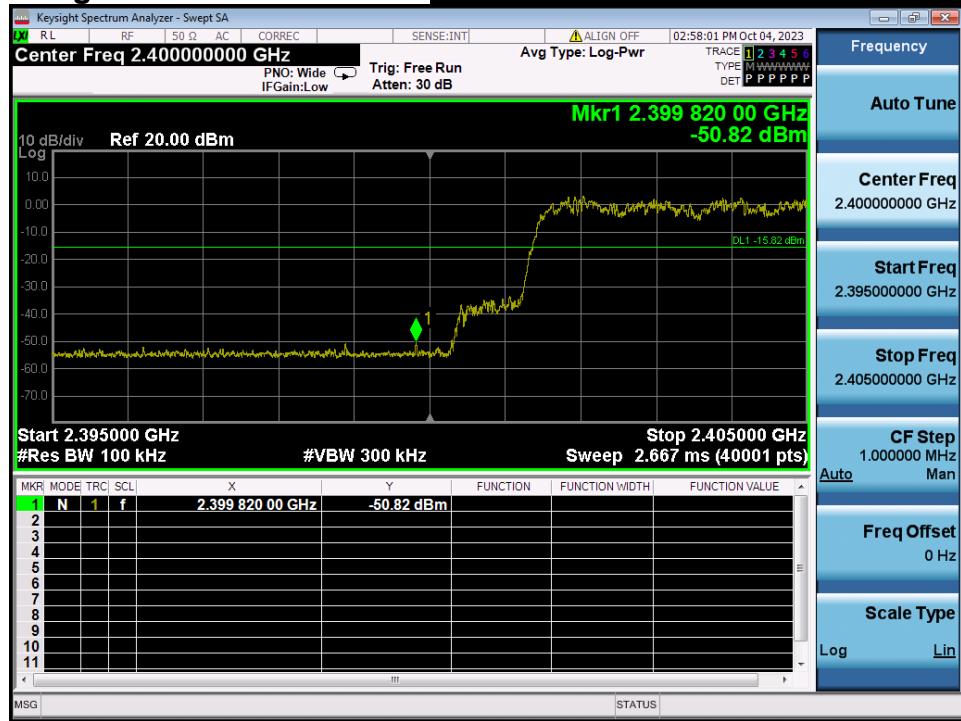Low Band-edge
Hopping mode & Modulation : 8DPSK


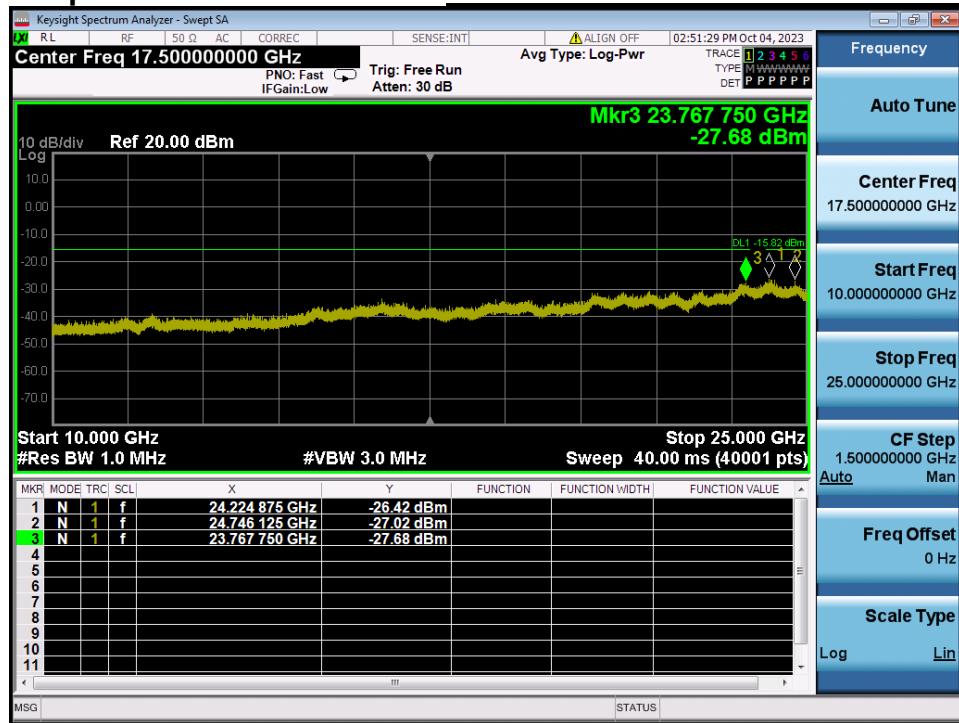
Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

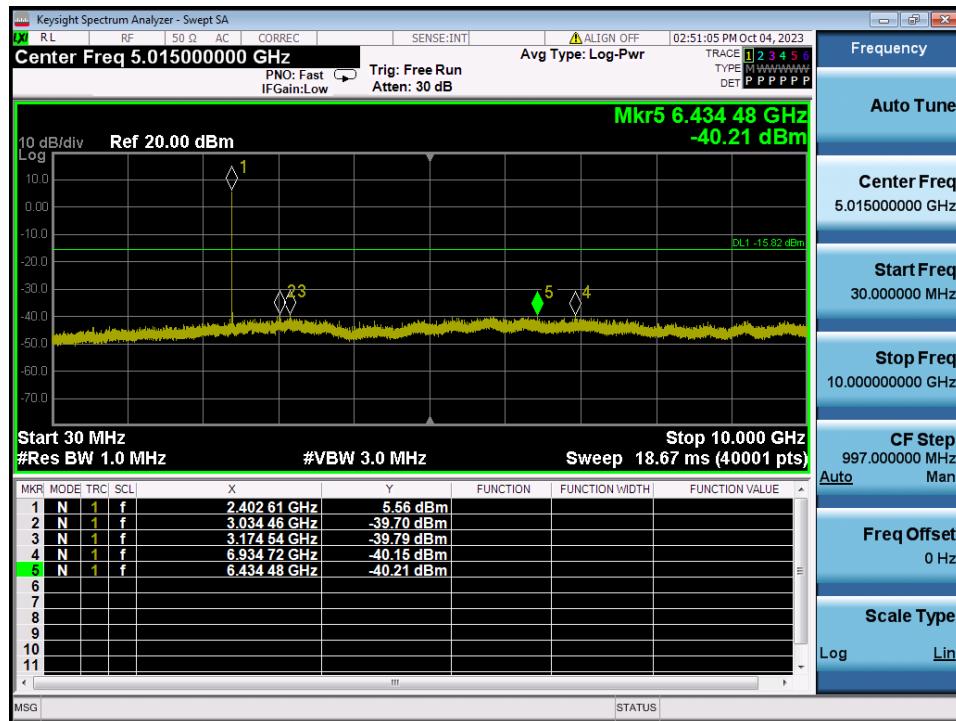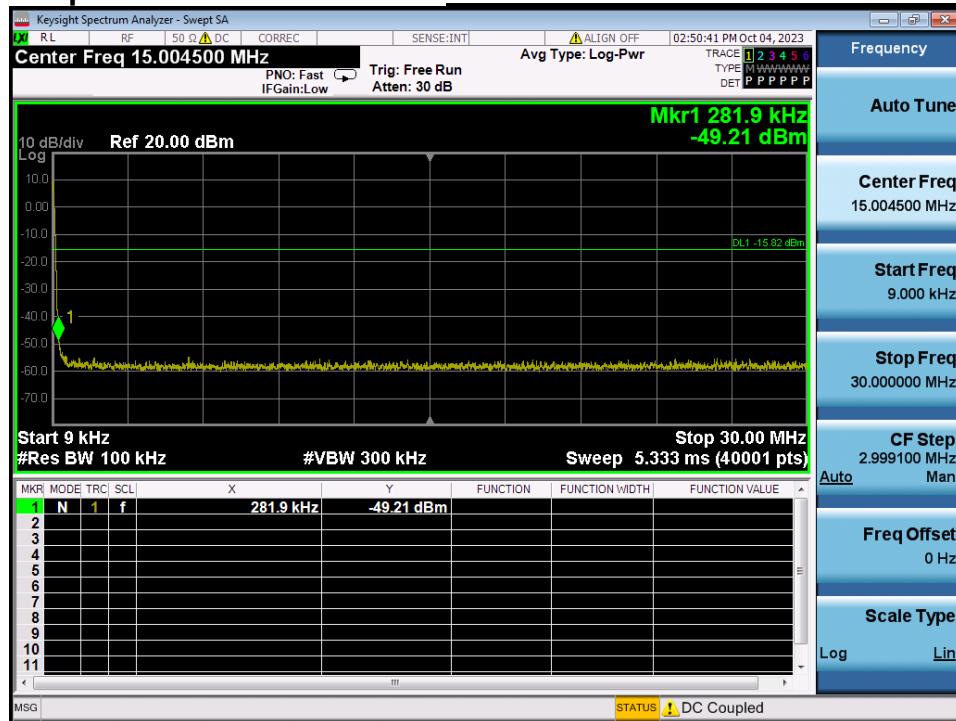

Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK




Reference for limit

Middle Channel & Modulation : 8DPSK





Conducted Spurious Emissions


Middle Channel & Modulation : 8DPSK

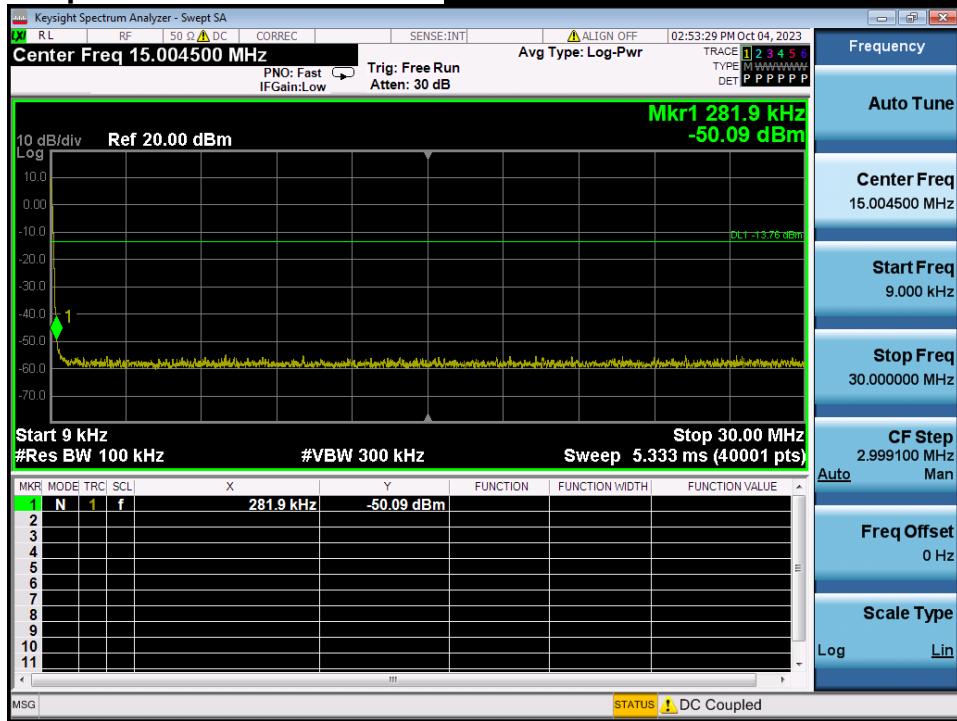

Conducted Spurious Emissions



Middle Channel & Modulation : 8DPSK

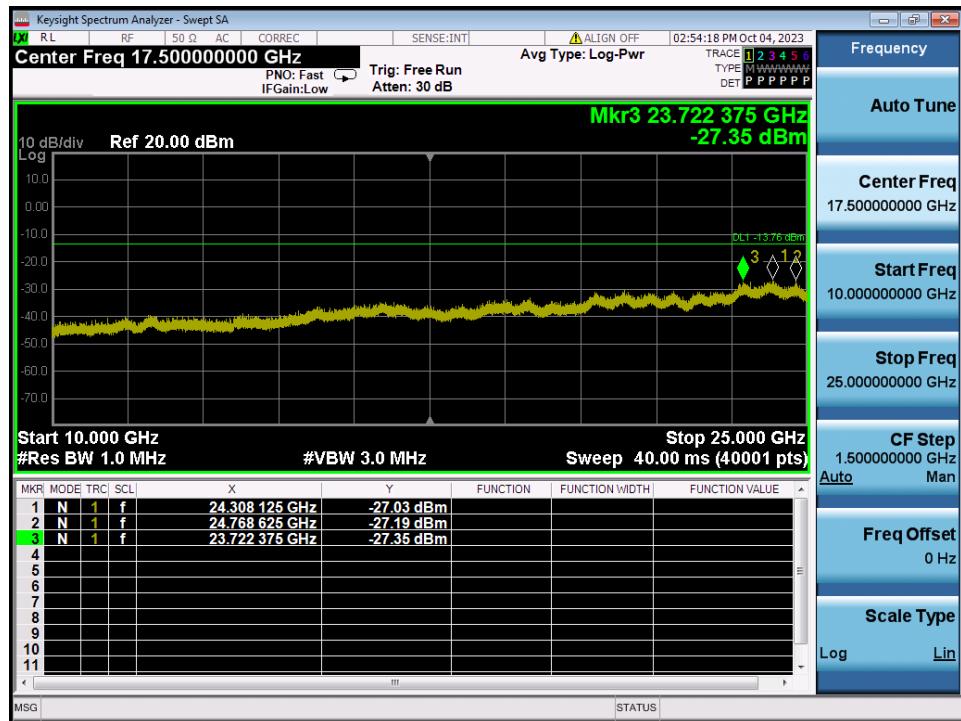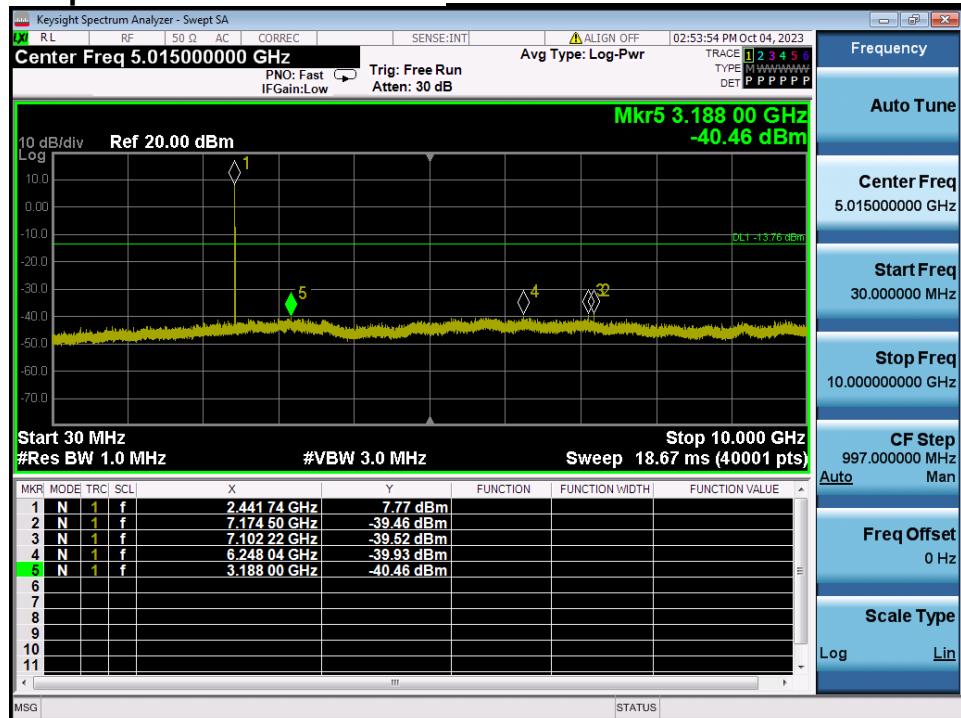

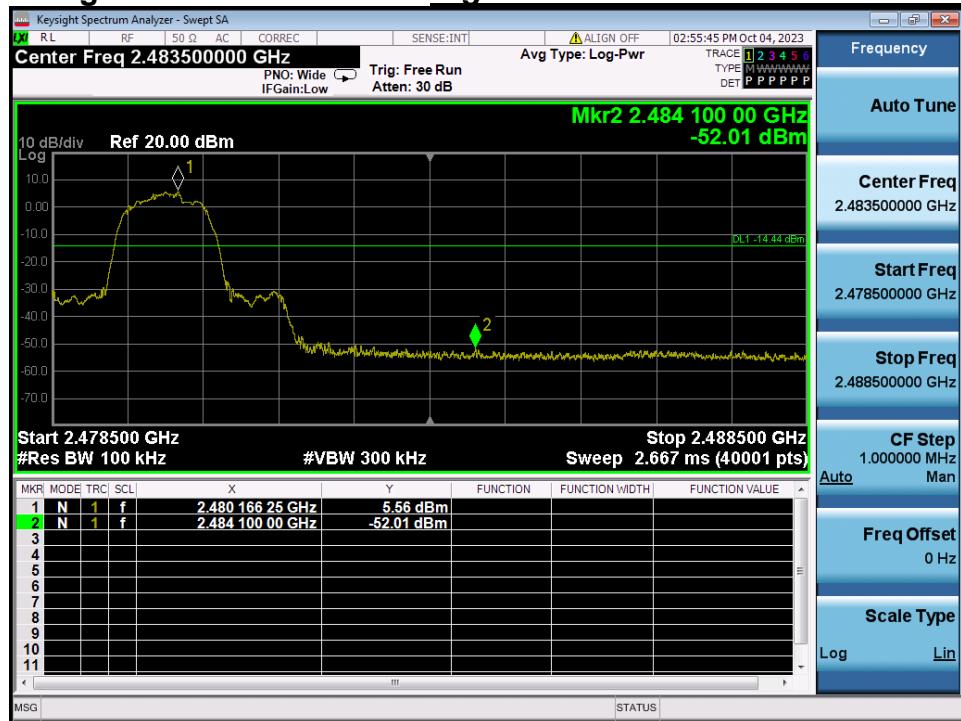High Band-edge
Highest Channel & Modulation : 8DPSK

High Band-edge
Hopping mode & Modulation : 8DPSK



Conducted Spurious Emissions

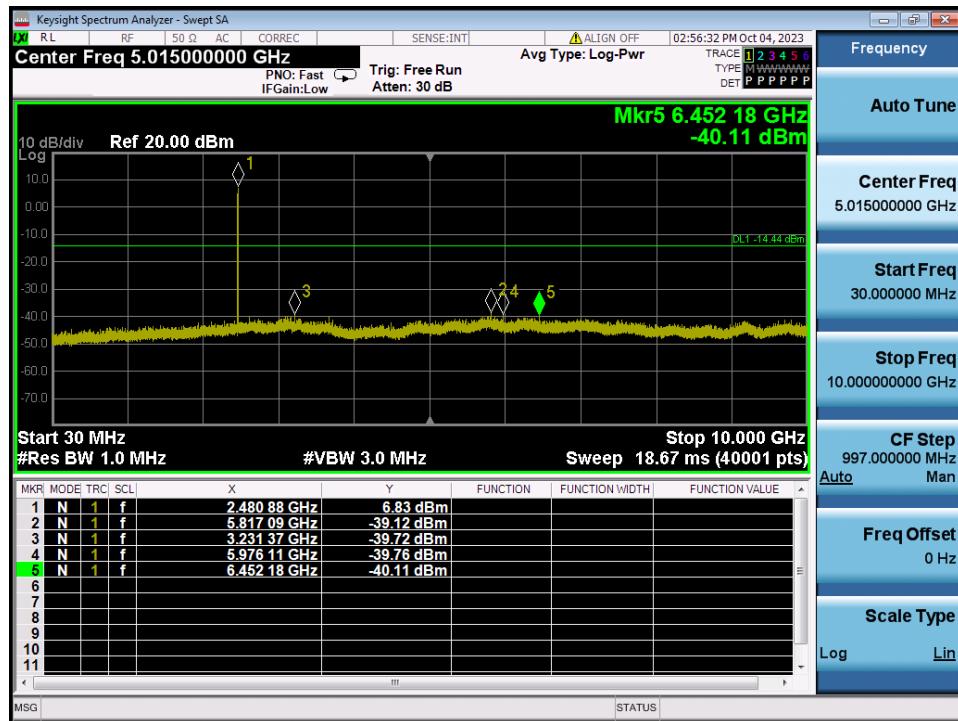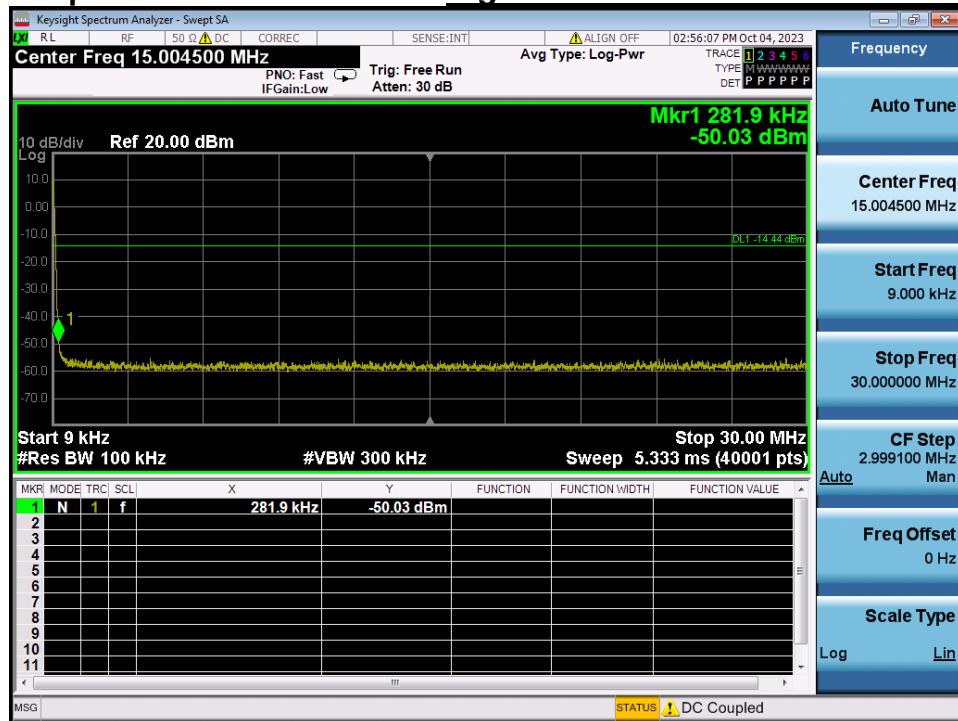Highest Channel & Modulation : 8DPSK



Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

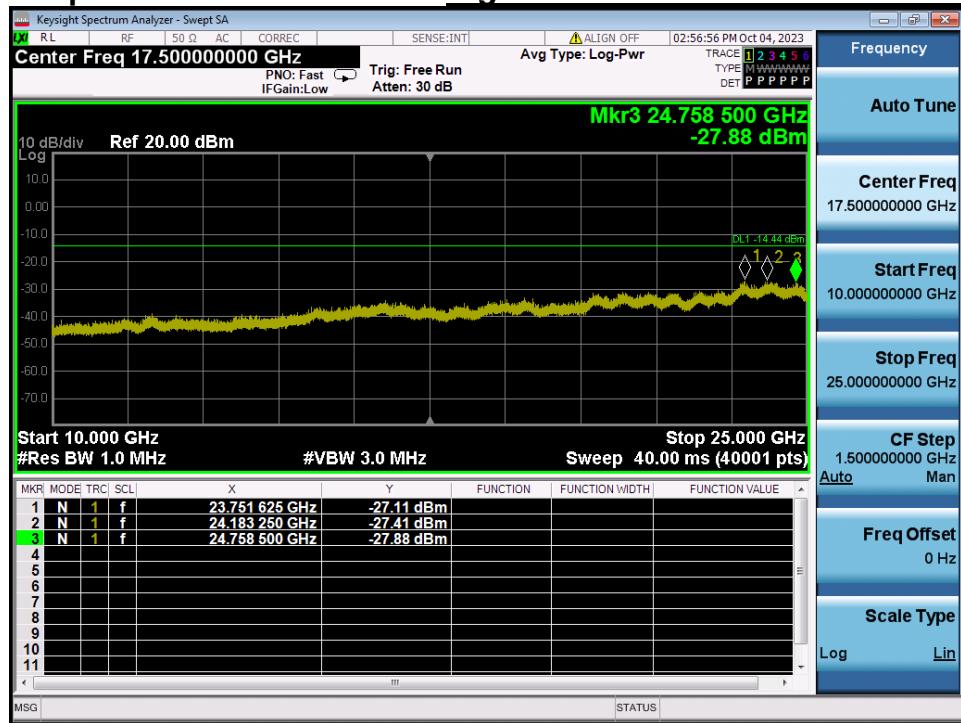

10. AC Power-Line Conducted Emissions

10.1. Test Setup

NA

10.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.50	66 to 56 *	56 to 46 *
0.5 ~ 5.0	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

10.3. Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m x 3.5 m x 3.5 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) x 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.


10.4. Test Results

NA


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

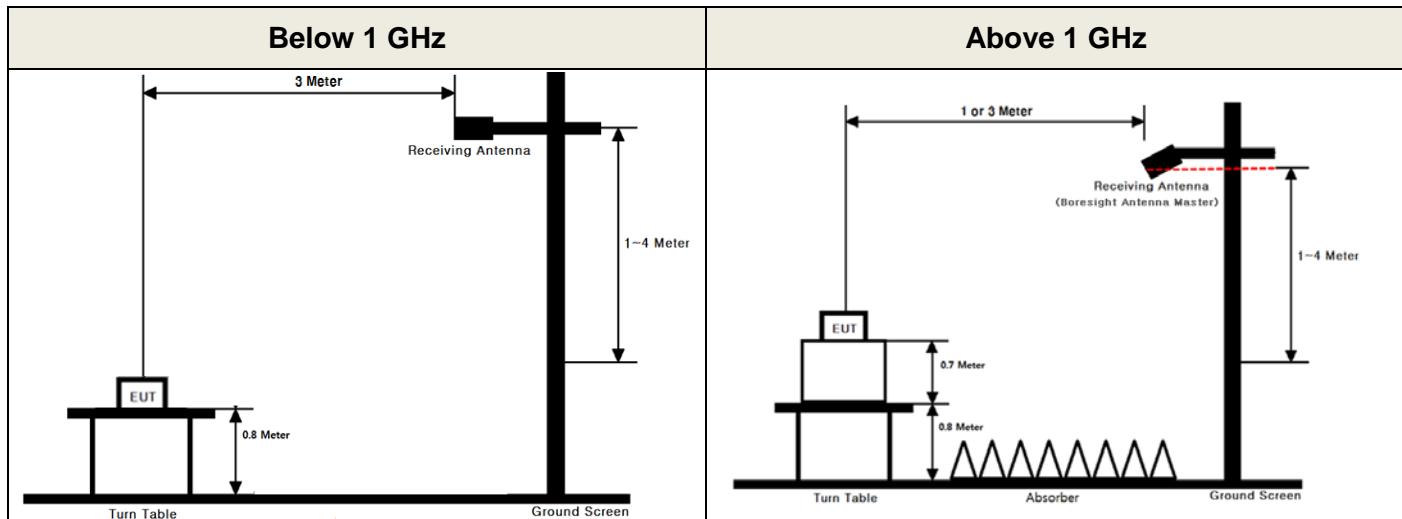

▪ Conducted Measurement

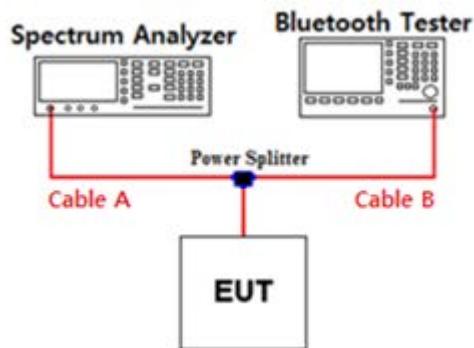

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.53	15	7.83
1	6.83	20	8.09
2.402 & 2.441 & 2.480	6.96	25	8.69
5	7.04	-	-
10	7.38	-	-

Note 1: The path loss from EUT to Spectrum analyzer was measured and used for test.


Path loss (S/A's correction factor) = Cable A + Power Splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & X & Hor



Detector Mode : PK


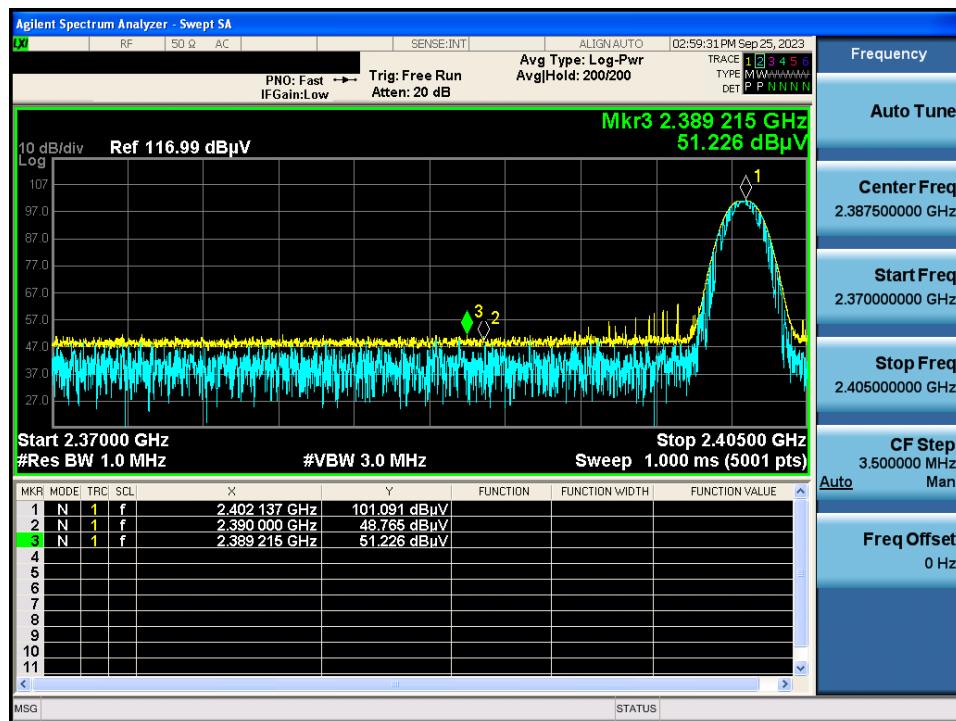




GFSK & Highest & X & Hor

Detector Mode : PK

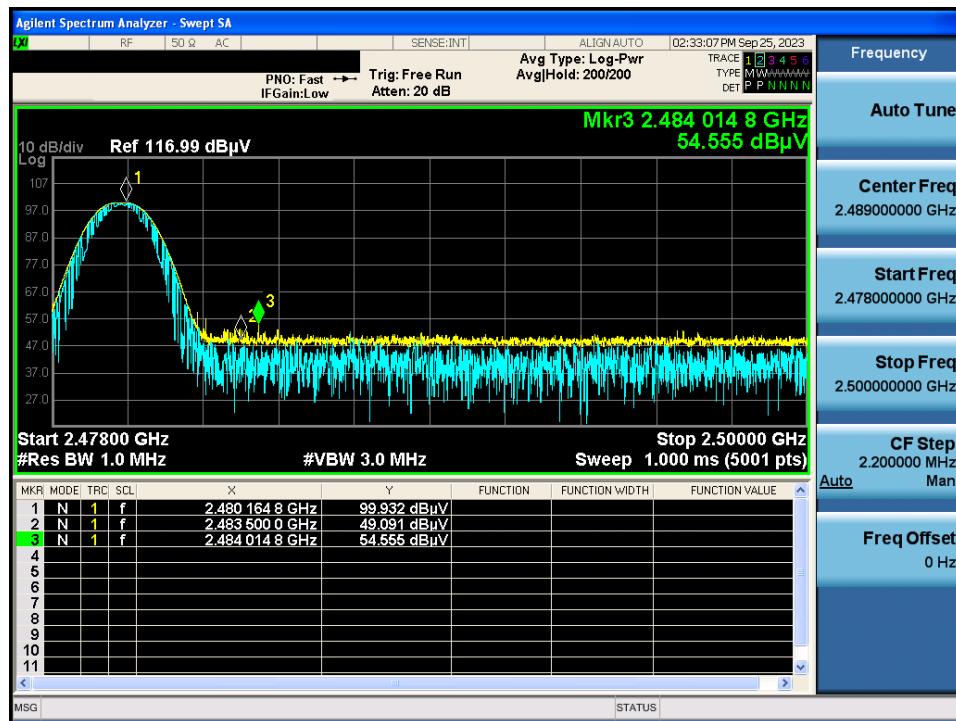

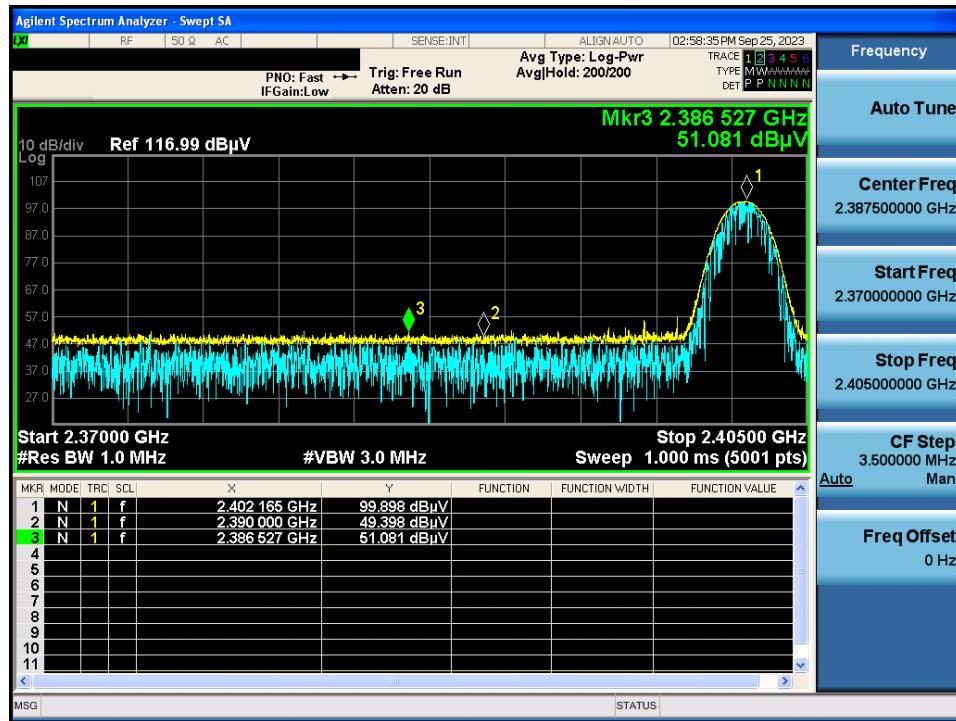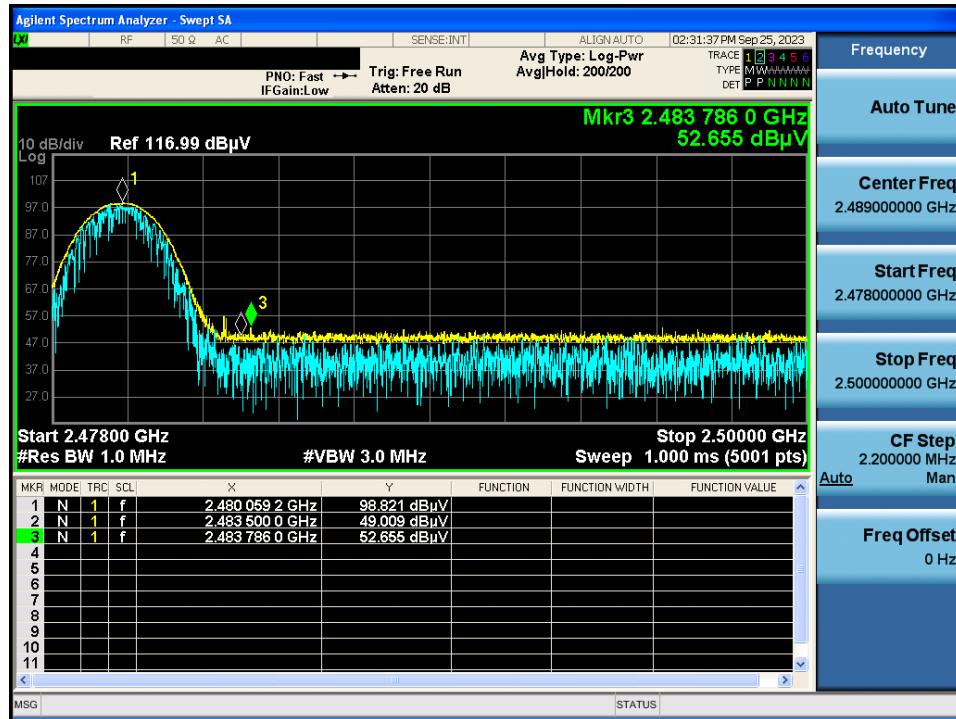π/4DQPSK & Lowest & X & Hor
Detector Mode : PK

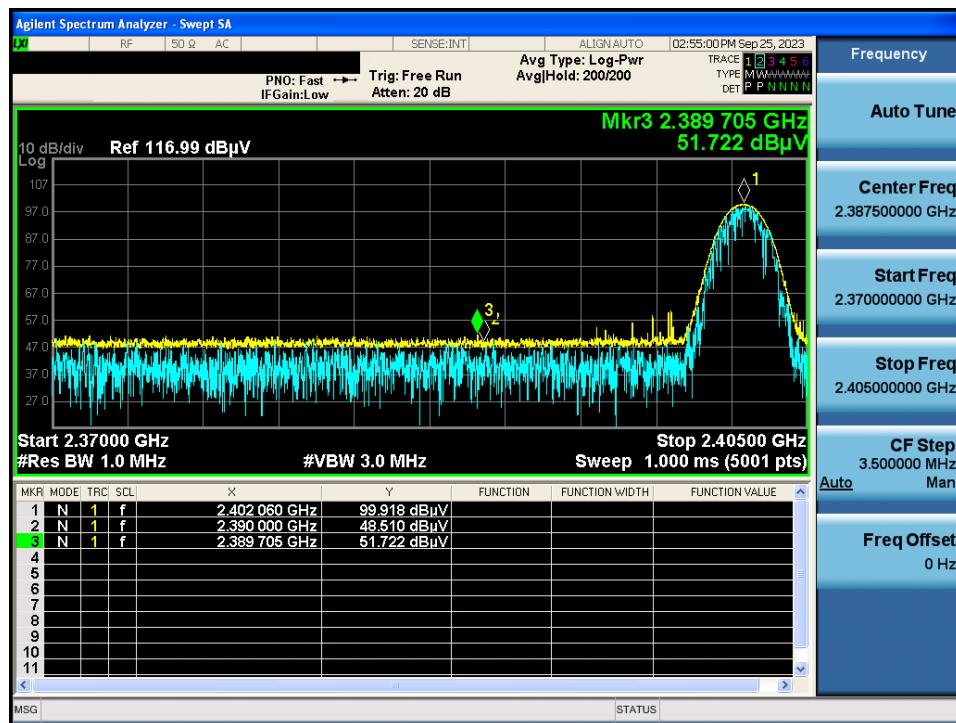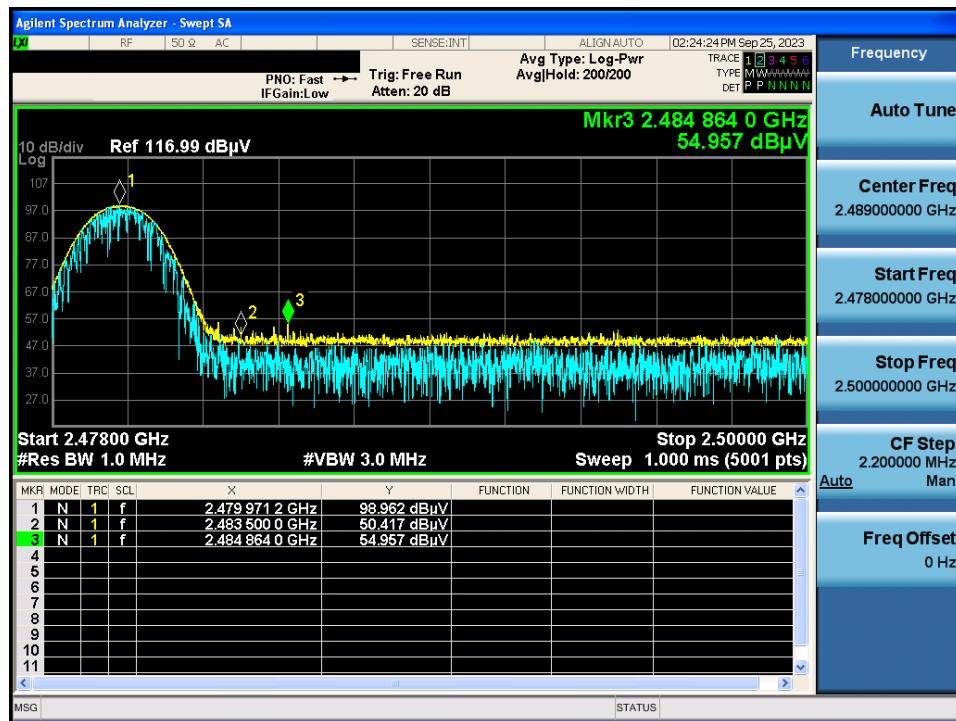π/4DQPSK & Highest & X & Hor
Detector Mode : PK

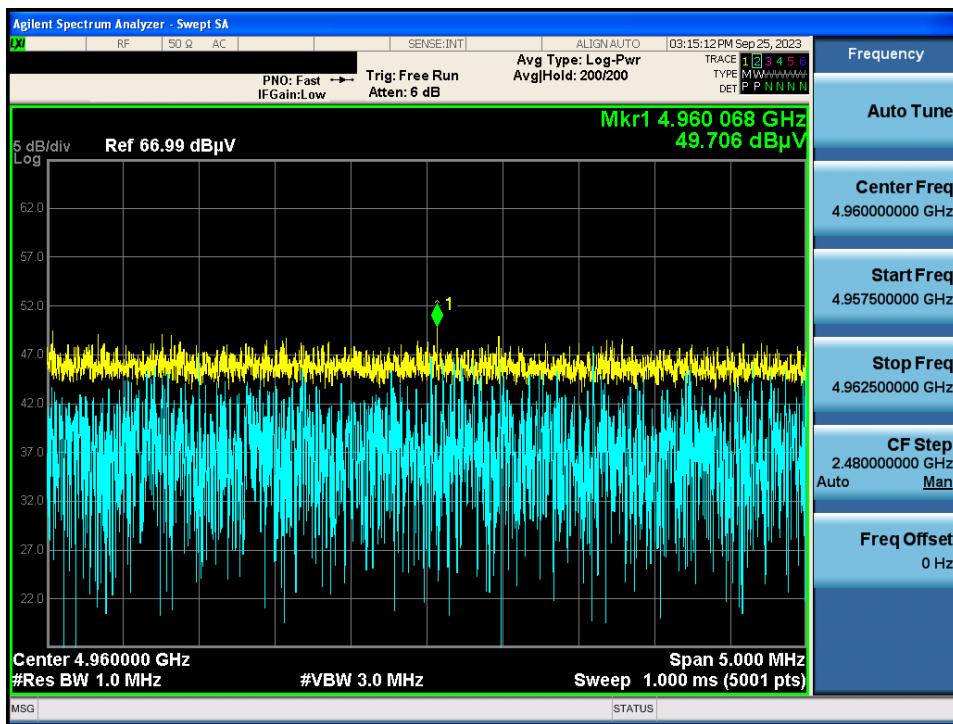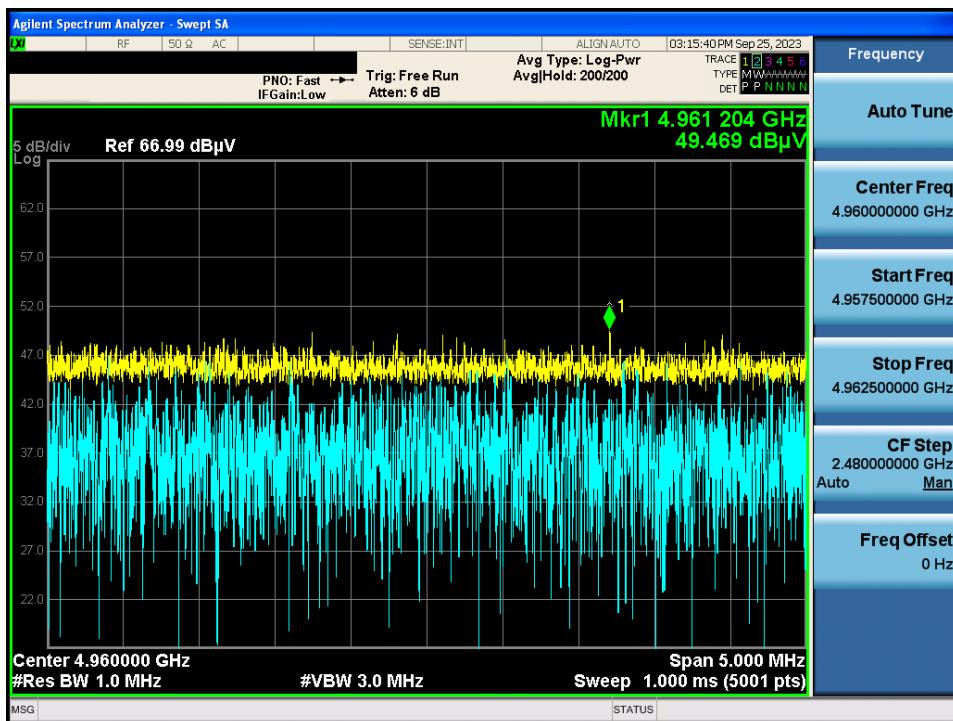
8DPSK & Lowest & X & Hor
Detector Mode : PK

8DPSK & Highest & X & Hor
Detector Mode : PK


GFSK & Highest & X & Ver
Detector Mode : PK

 $\pi/4$ DQPSK & Highest & X & Ver
Detector Mode : PK


8DPSK & Highest & X & Ver**Detector Mode : PK**