

APPENDIX 2 : SAR Measurement data

1. Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 15 mm x 15 mm . Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan) , a volume of 30mm x 30mm x 30mm was assessed by measuring 7 x 7 x 7 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak (level more than ambient noise (≥ 0.012 W/kg)) and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

(2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

(3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

2. Measurement data (SAR 2450MHz)

FC-N22A/ Body/ Main antenna/ Nom. Battery / Top (Tablet mode) / 11b DBPSK (1Mbps) / 2437MHz

Crest factor :1.0

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 0.931 W/kg


SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.596 mW/g

Test Date = 05/0908

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

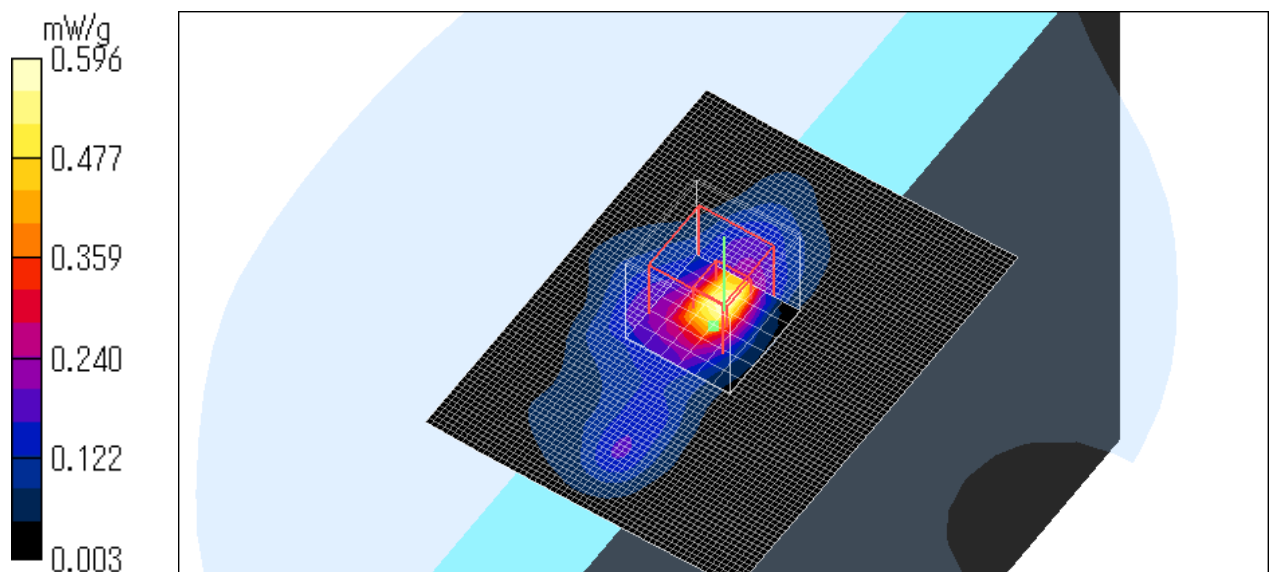

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Nom.Battery / Top (Tablet mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.403 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.0 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.922 W/kg


SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.631 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

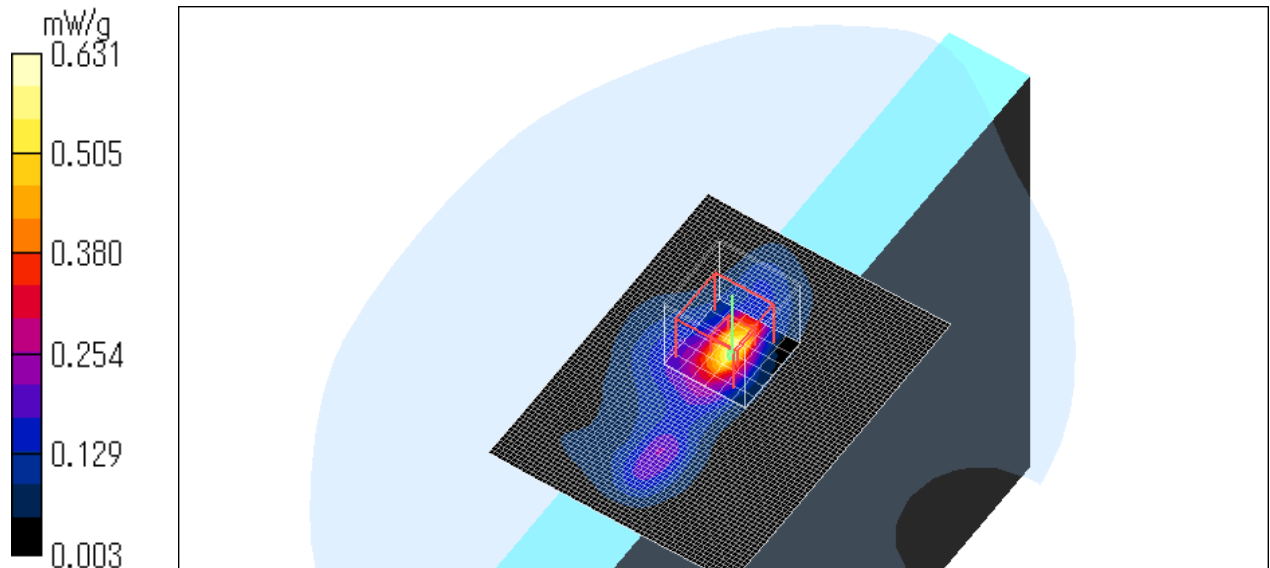

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.424 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.208 dB

Peak SAR (extrapolated) = 1.04 W/kg


SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.668 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

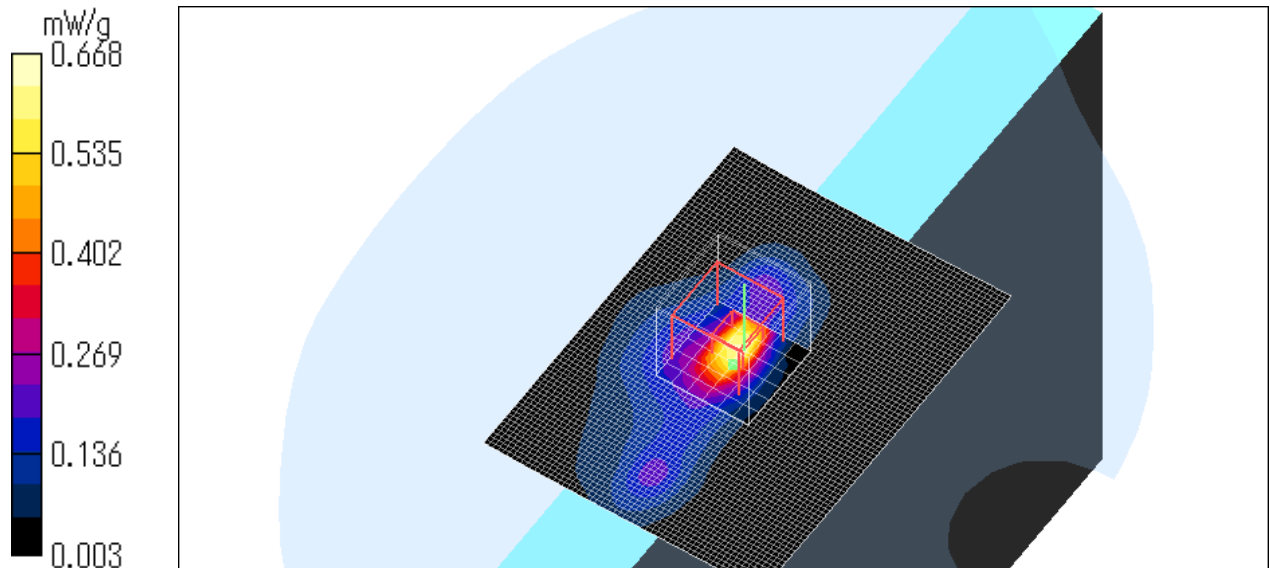

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op2 Battery / Top (Tablet mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.324 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.2 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.993 W/kg

SAR(1 g) = 0.379 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.670 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.2 V/m; Power Drift = -0.100 dB


Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.605 mW/g

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.8 degree.C , After 23.9 degree.C

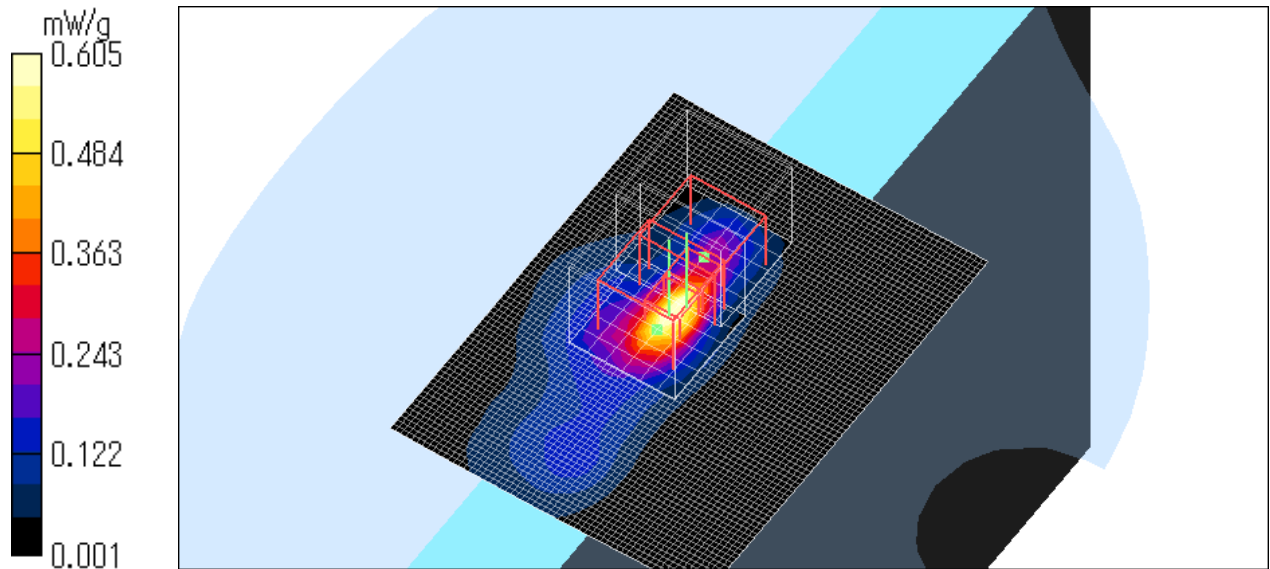

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Bottom (Tablet mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.013 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.99 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.00535 mW/g; SAR(10 g) = 0.00335 mW/g

Maximum value of SAR (measured) = 0.008 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.99 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.011 W/kg


SAR(1 g) = 0.00591 mW/g; SAR(10 g) = 0.0034 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

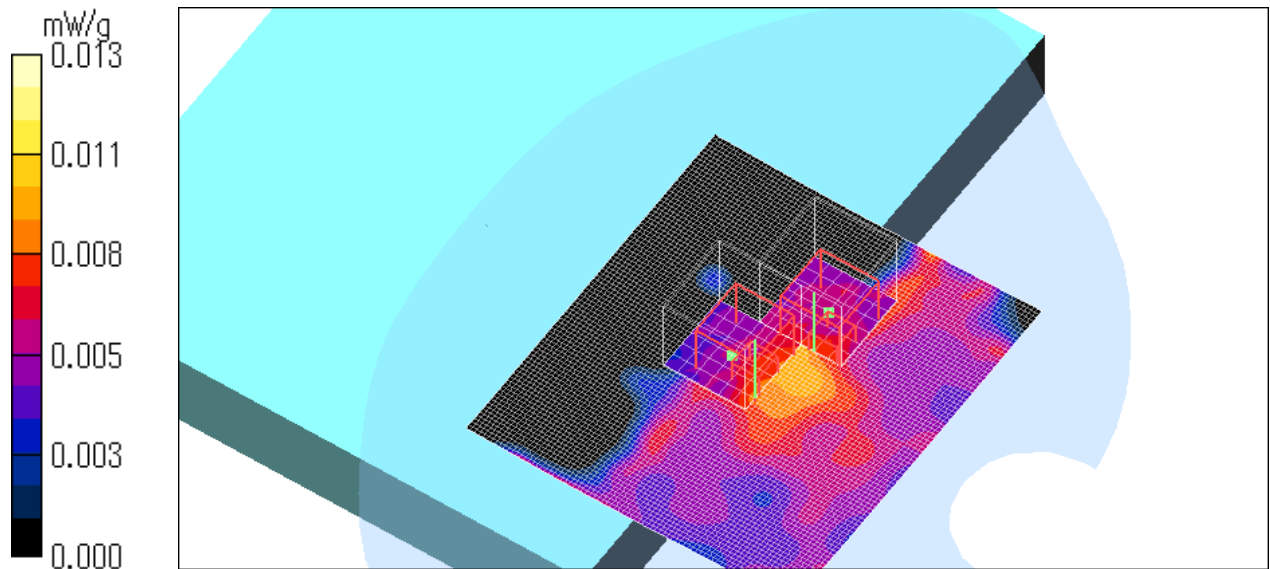

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Laptop mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.004 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.22 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 0.005 W/kg


SAR(1 g) = 0.00152 mW/g; SAR(10 g) = 0.00106 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.C

Liquid Temperature = Before 24.0 degree.C , After 23.9 degree.C

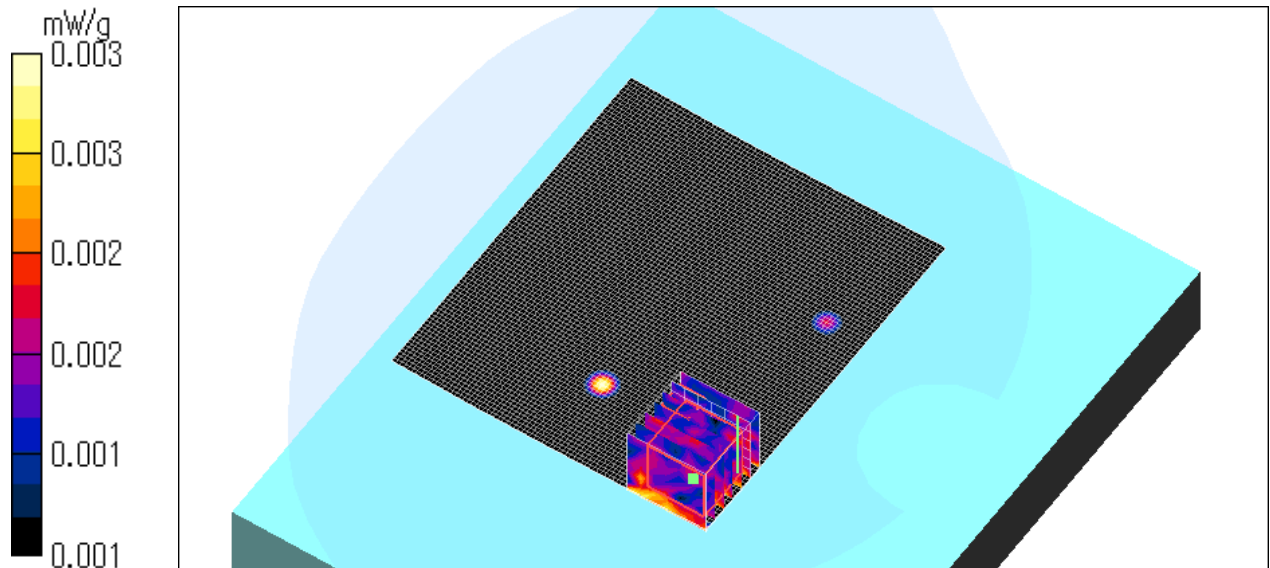

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11b CCK (11Mbps) / 2412MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.415 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.16 W/kg


SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.797 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.9 degree.C , After 24.1 degree.C

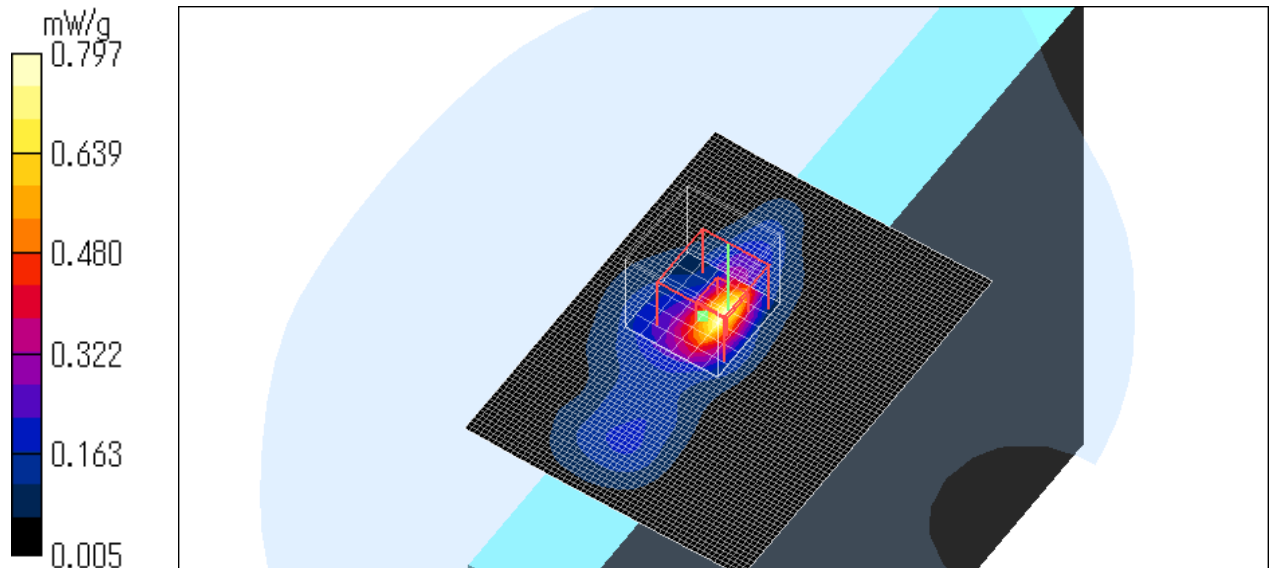

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11b CCK (11Mbps) / 2462MHz

Crest factor : 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.381 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 1.13 W/kg


SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.715 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.1 degree.C , After 24.2 degree.C

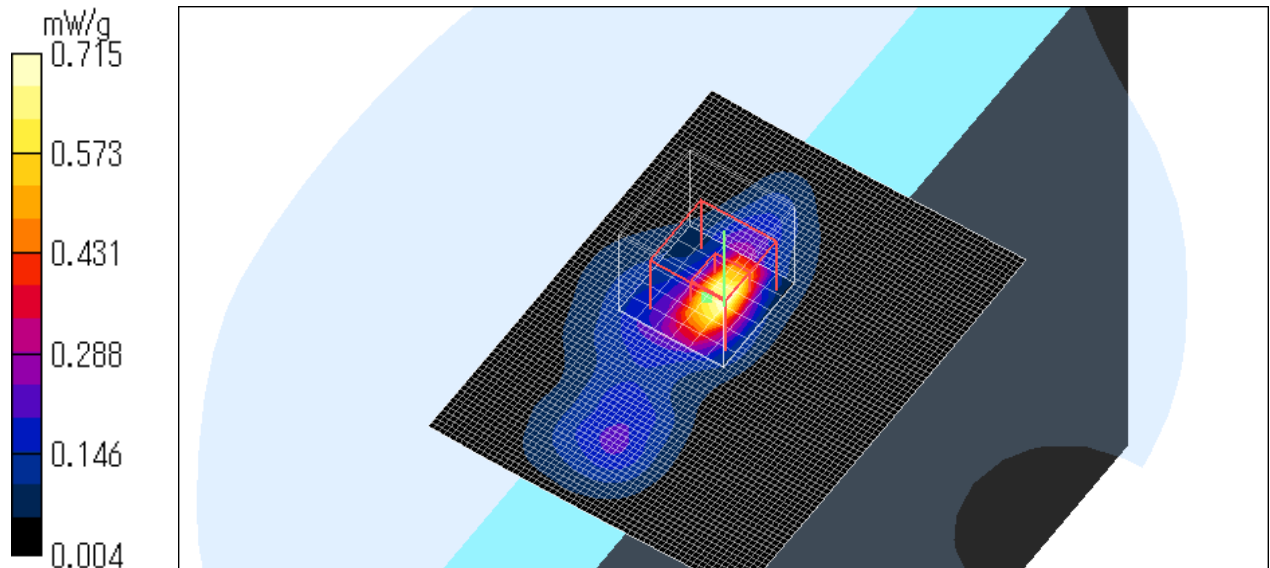

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.452 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.0 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.955 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.0 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.19 W/kg


SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.781 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.9 degree.C , After 23.9 degree.C

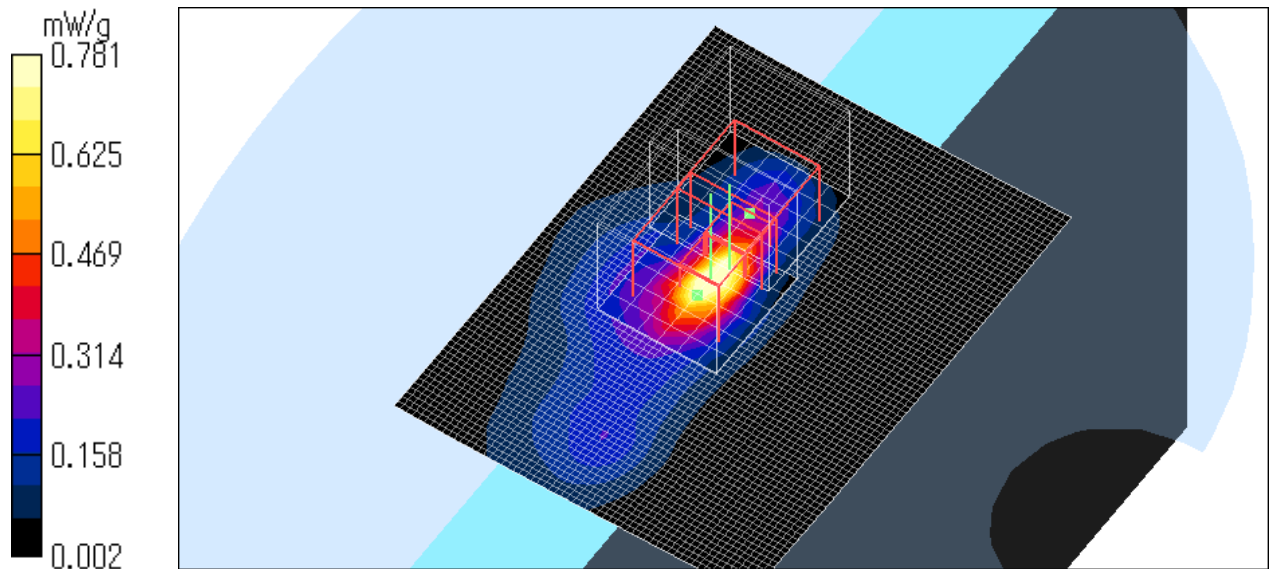

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Z-axis scan at max SAR location

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

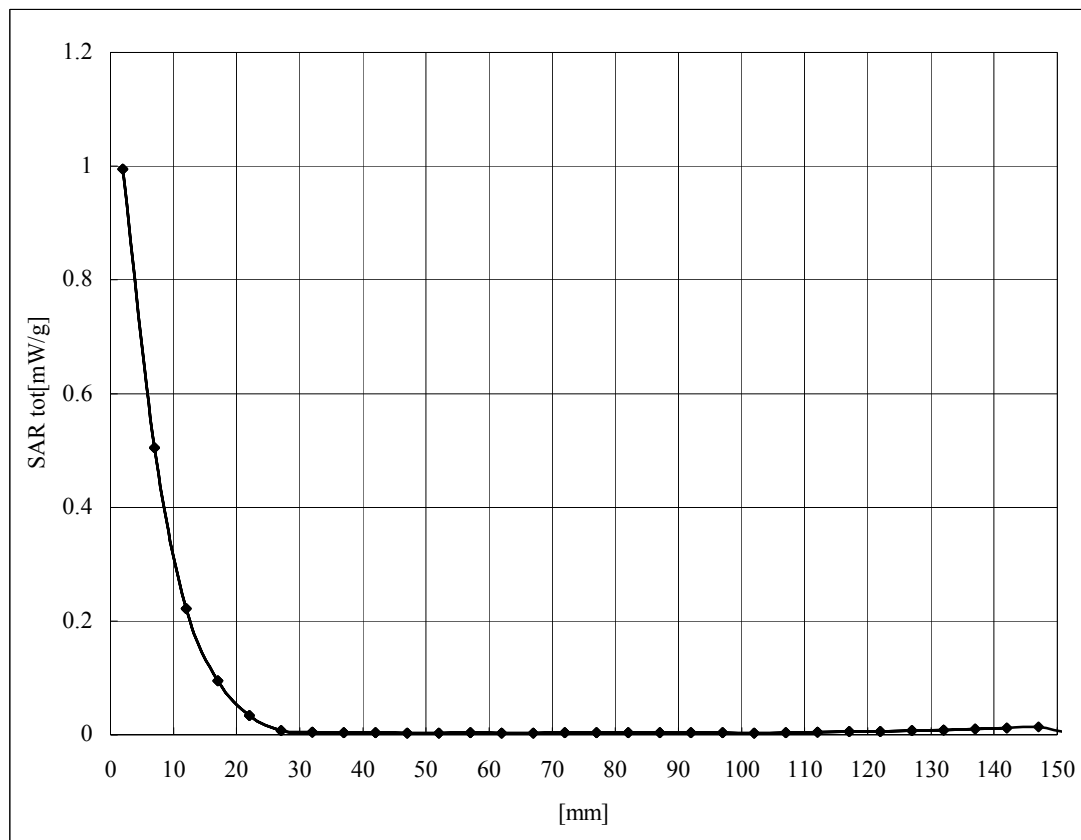

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g QPSK (12Mbps) / 2437MHz

Crest factor :1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.432 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 1.13 W/kg


SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.783 mW/g

Test Date = 05/09/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 23.9 degree.C , After 23.9 degree.C

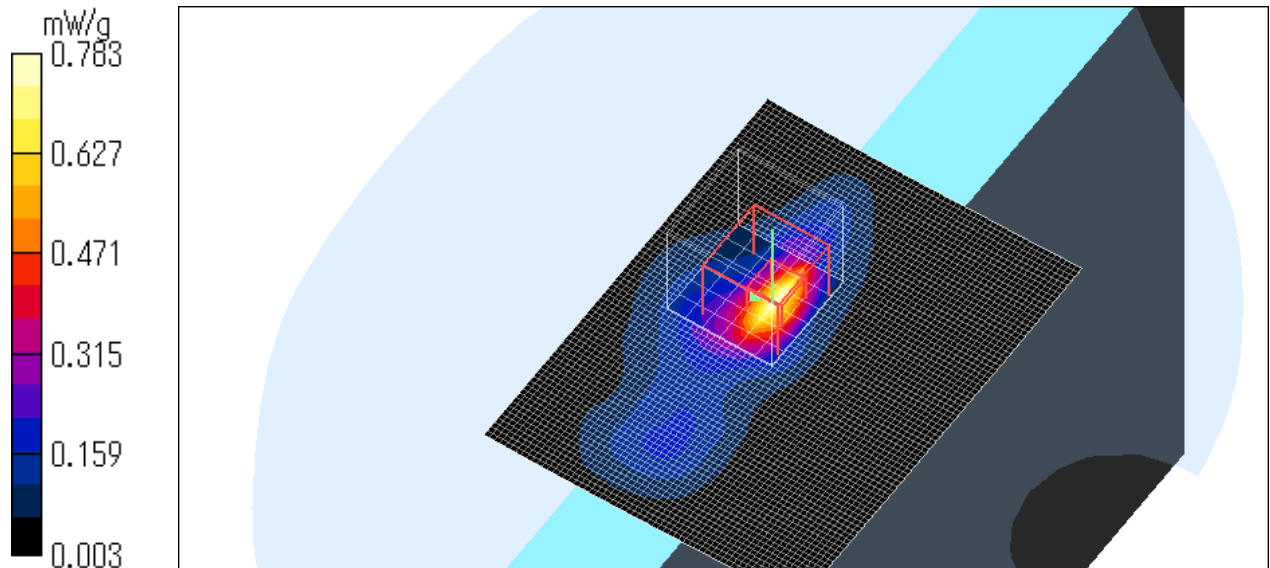

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g 16QAM(24Mbps) / 2437MHz

Crest factor :1.4

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.351 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.968 W/kg


SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.668 mW/g

Test Date = 05/09/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 23.9 degree.C , After 23.9 degree.C

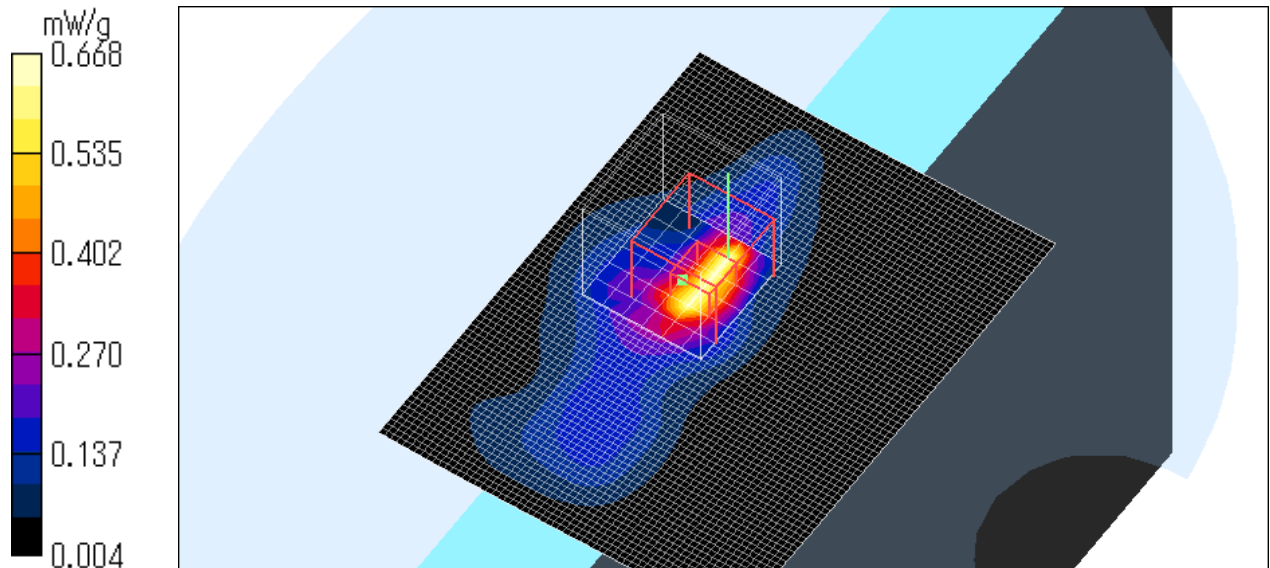

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g 64QAM (48Mbps) / 2437MHz

Crest factor :1.7

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.812 W/kg


SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.9 degree.C , After 23.9 degree.C

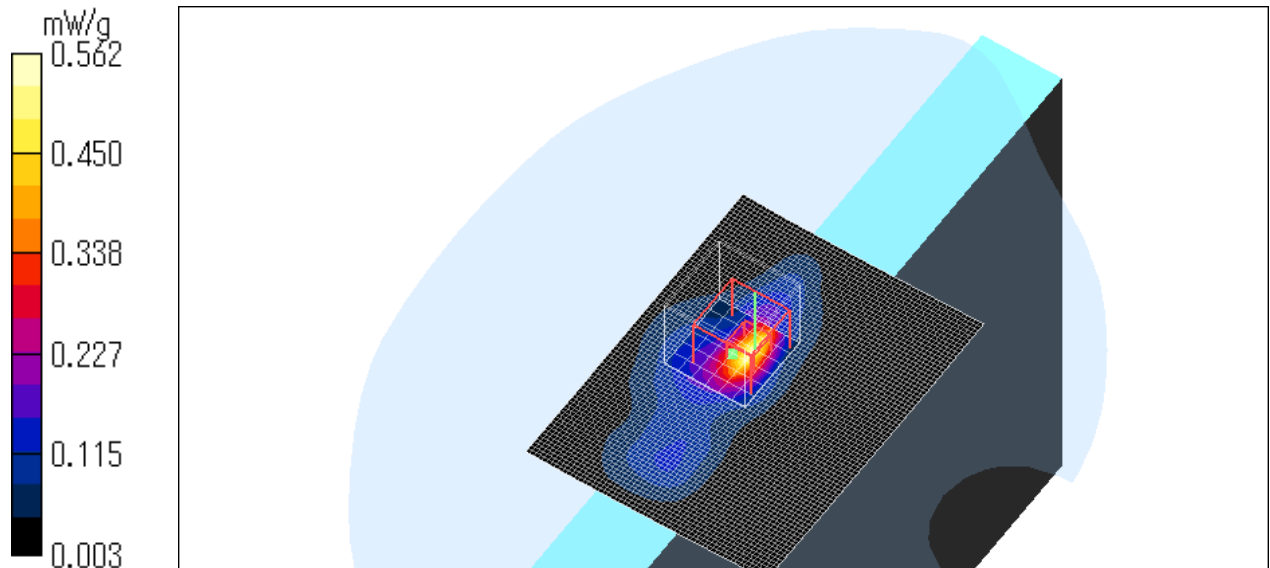

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Bottom (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.013 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.00 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.034 W/kg


SAR(1 g) = 0.00763 mW/g; SAR(10 g) = 0.00429 mW/g

Maximum value of SAR (measured) = 0.011 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

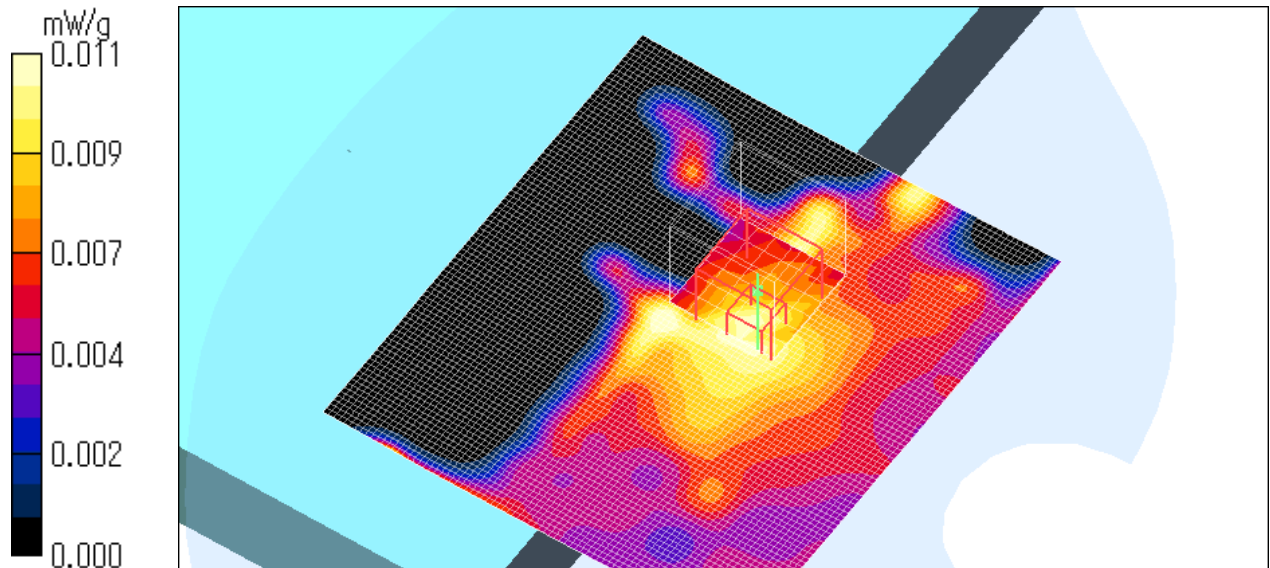

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Bottom (Laptop mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (91x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.003 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.15 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 0.003 W/kg


SAR(1 g) = 0.00123 mW/g; SAR(10 g) = 0.000658 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

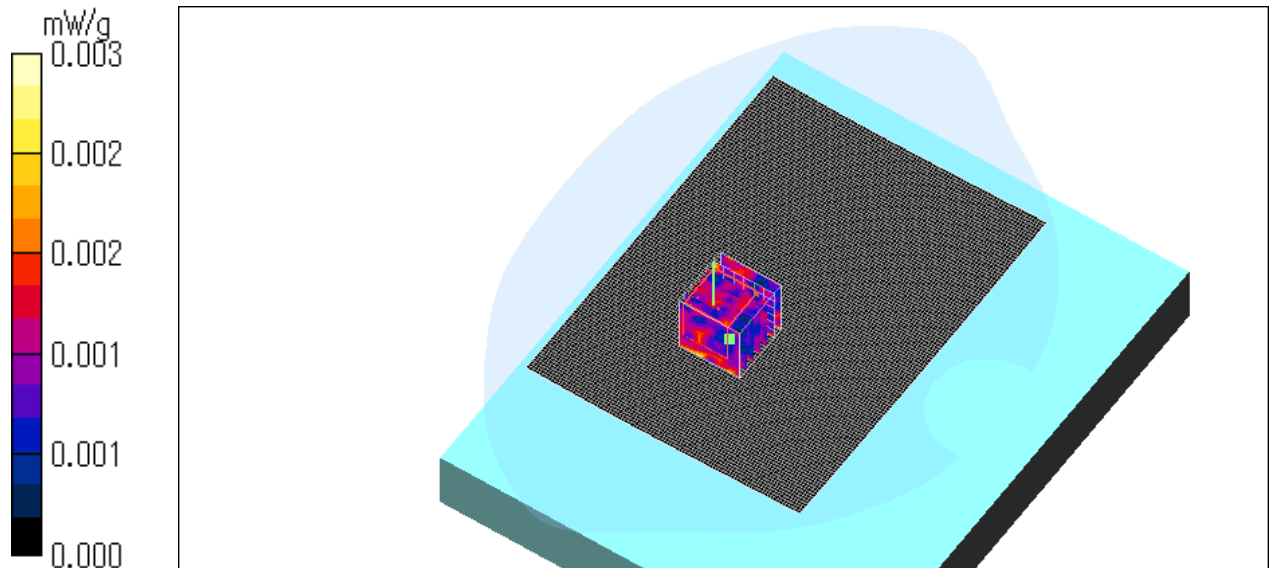

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g BPSK (6Mbps) / 2412MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.397 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.151 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.759 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.2 degree.C , After 24.1 degree.C

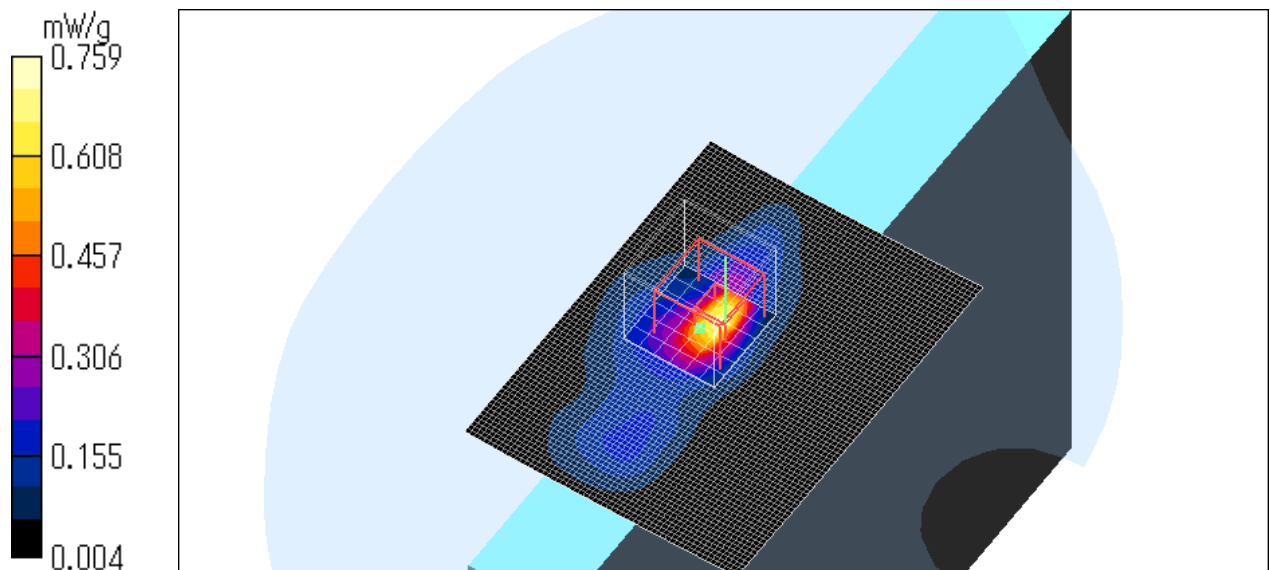

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top (Tablet mode) / 11g BPSK (6Mbps) / 2462MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 1.23 W/kg


SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.846 mW/g

Test Date = 05/09/08

Ambient Temperature = 24.5 degree.c

Liquid Temperature = Before 24.1 degree.C , After 24.1 degree.C

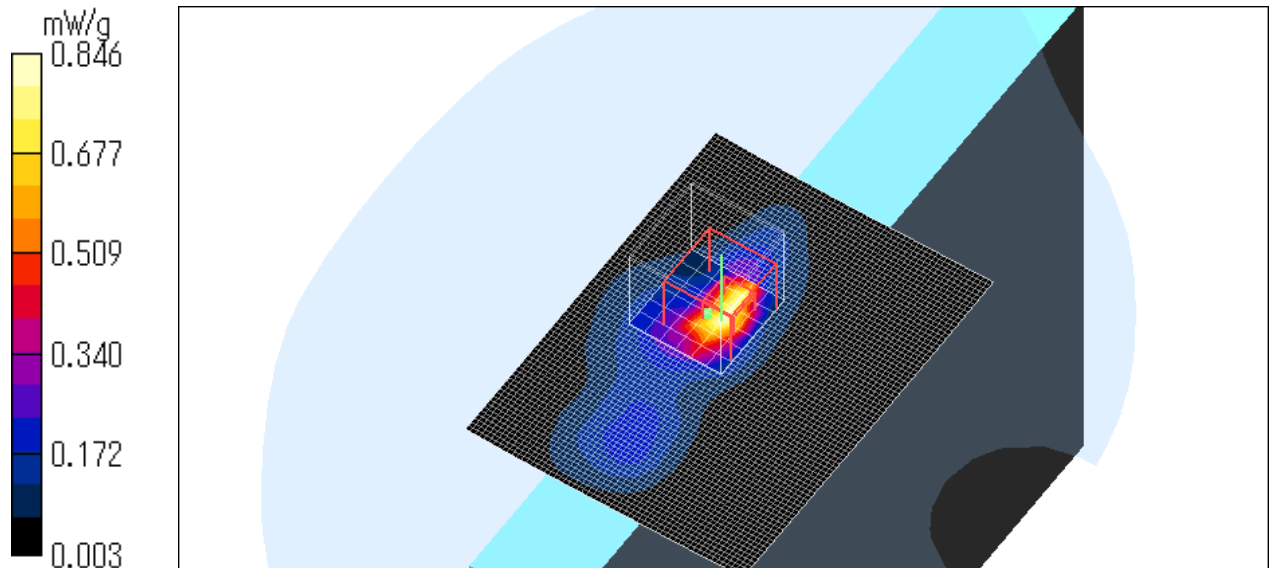

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11b DBPSK (1Mbps) / 2437MHz

Crest factor: 1.0

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.514 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.38 V/m; Power Drift = -0.194 dB

Peak SAR (extrapolated) = 0.783 W/kg


SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

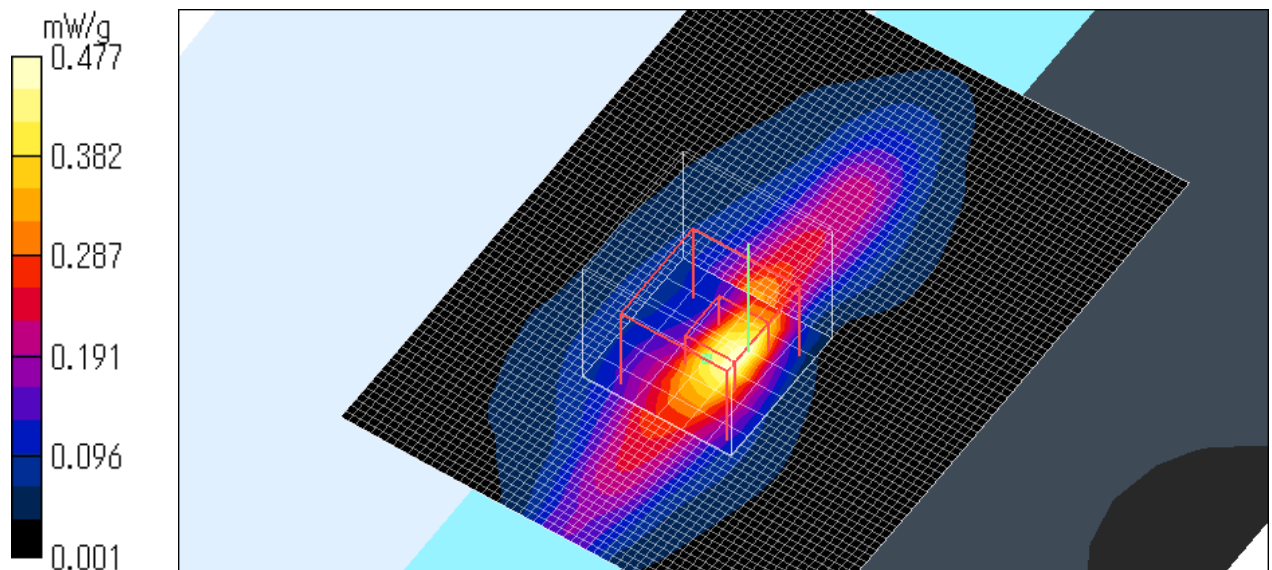

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor: 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.485 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.56 V/m; Power Drift = 0.181 dB

Peak SAR (extrapolated) = 0.887 W/kg


SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

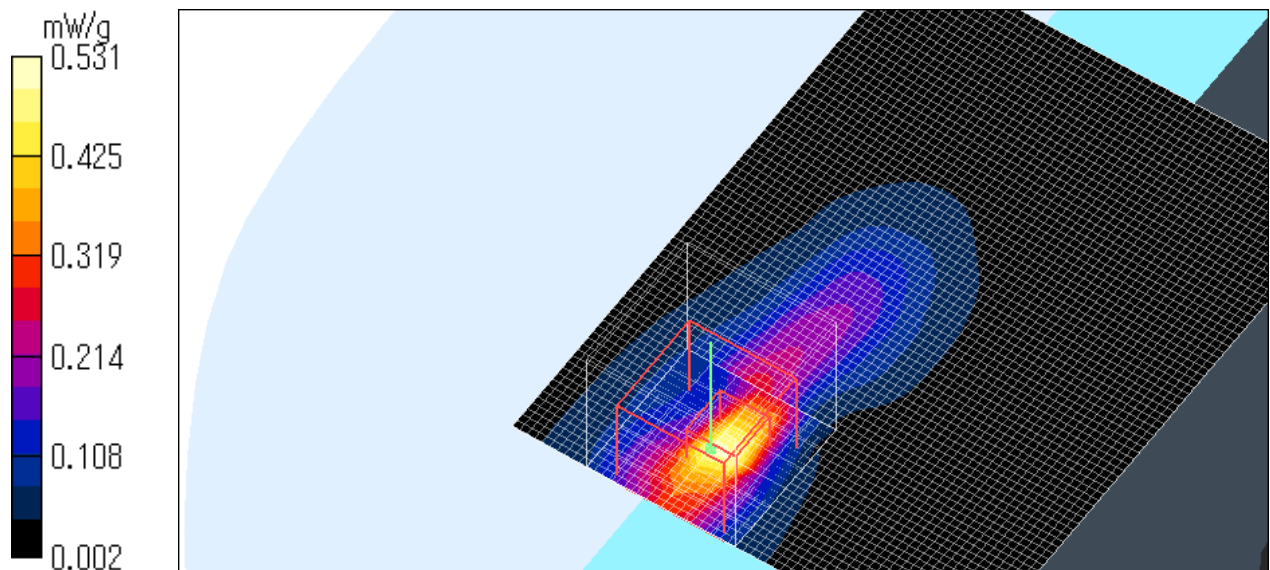

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Bottom (Tablet mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor: 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.009 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.57 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.011 W/kg


SAR(1 g) = 0.00555 mW/g; SAR(10 g) = 0.00331 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

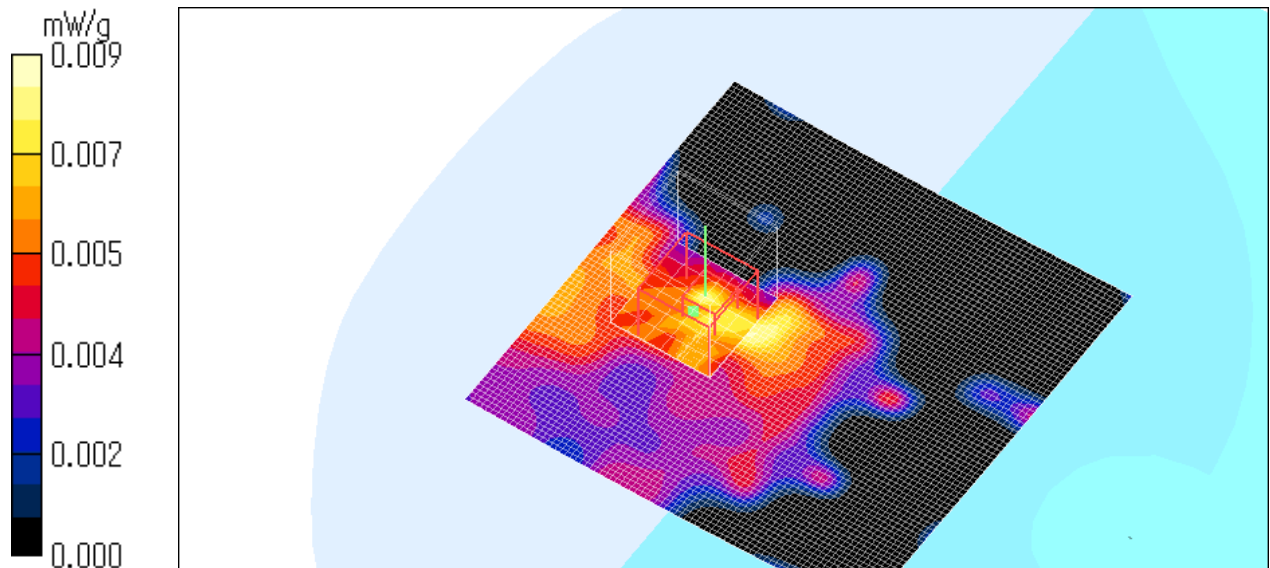

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Bottom (Laptop mode) / 11b CCK (11Mbps) / 2437MHz

Crest factor: 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.021 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.00 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.029 W/kg


SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00936 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

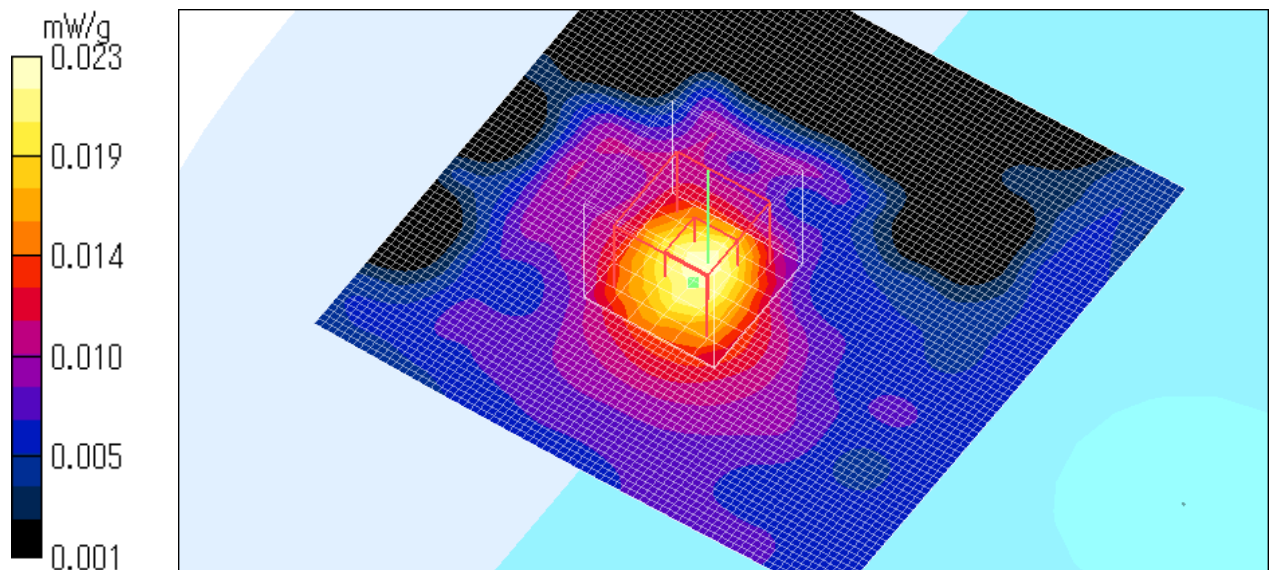

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11b CCK (11Mbps) / 2412MHz

Crest factor: 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.295 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.491 W/kg


SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

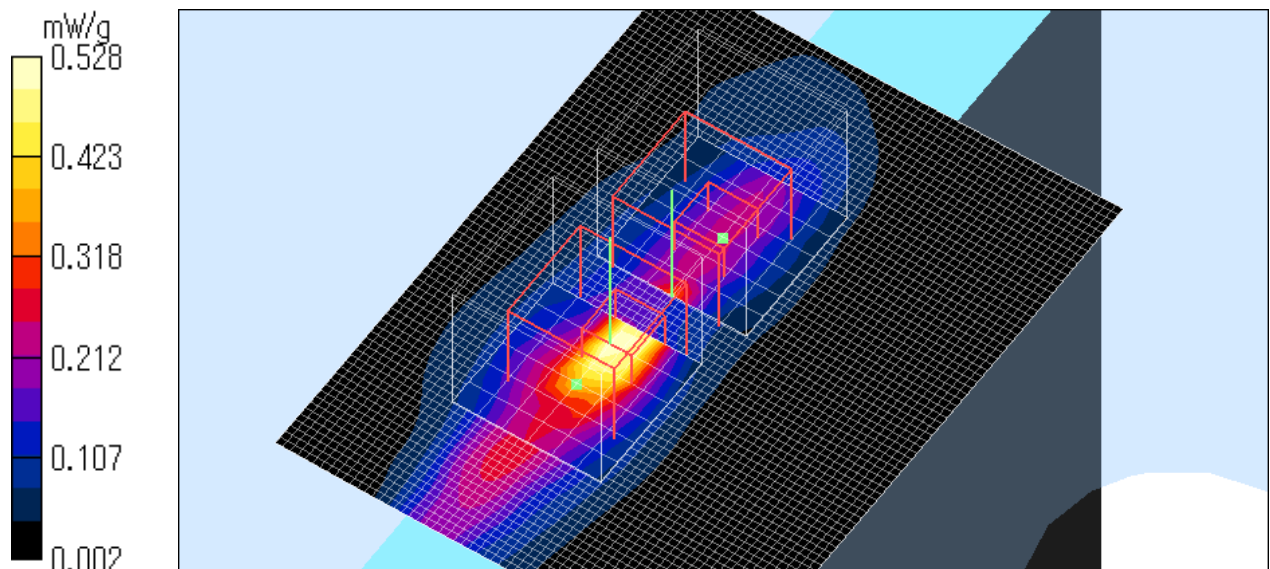

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11b CCK (11Mbps) / 2462MHz

Crest factor: 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.242 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.233 mW/g

Zoom Scan (7x7x7)/Cube 2: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.390 W/kg


SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

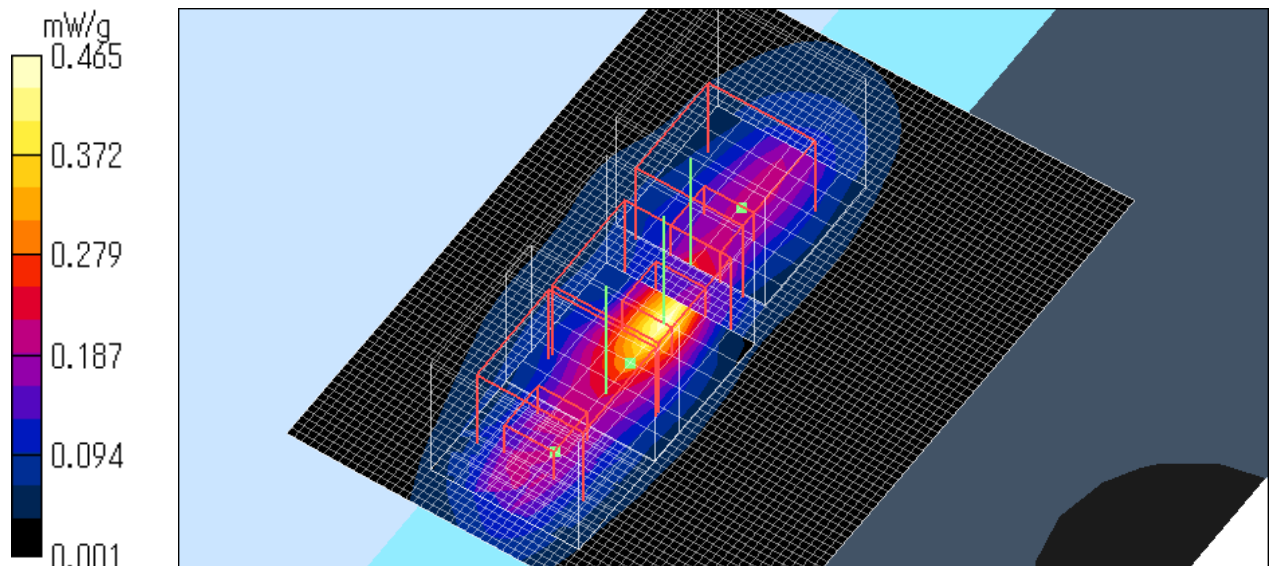

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor: 1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.415 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.30 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.689 W/kg


SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.394 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

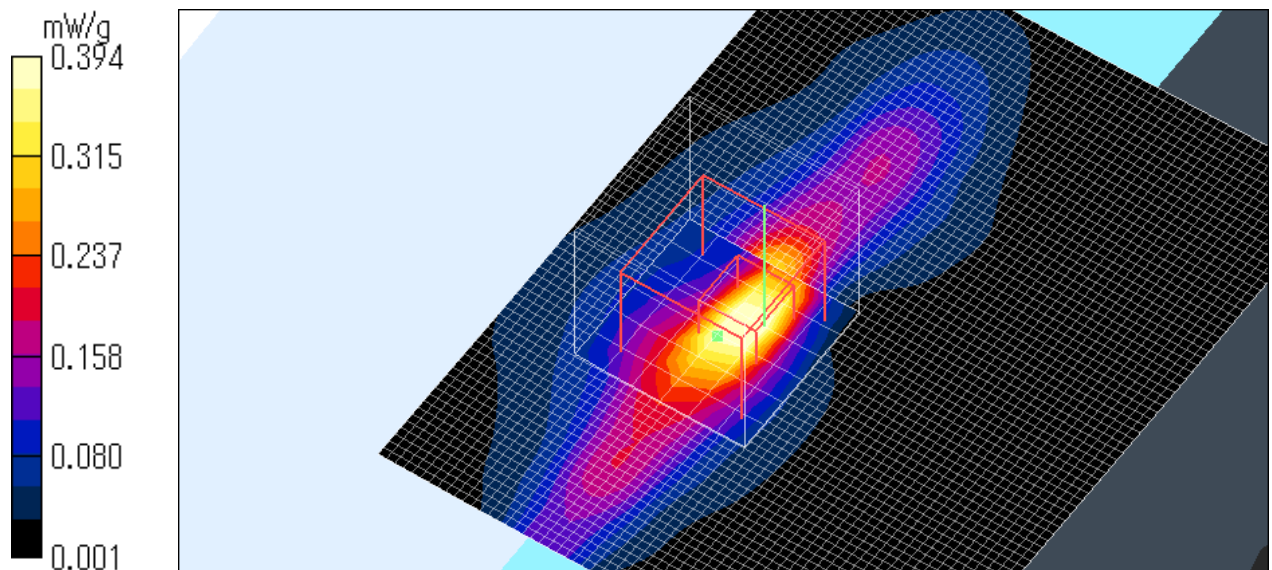

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11g QPSK (18Mbps) / 2437MHz

Crest factor: 1.2

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.175 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.98 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.312 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.98 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.206 W/kg


SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

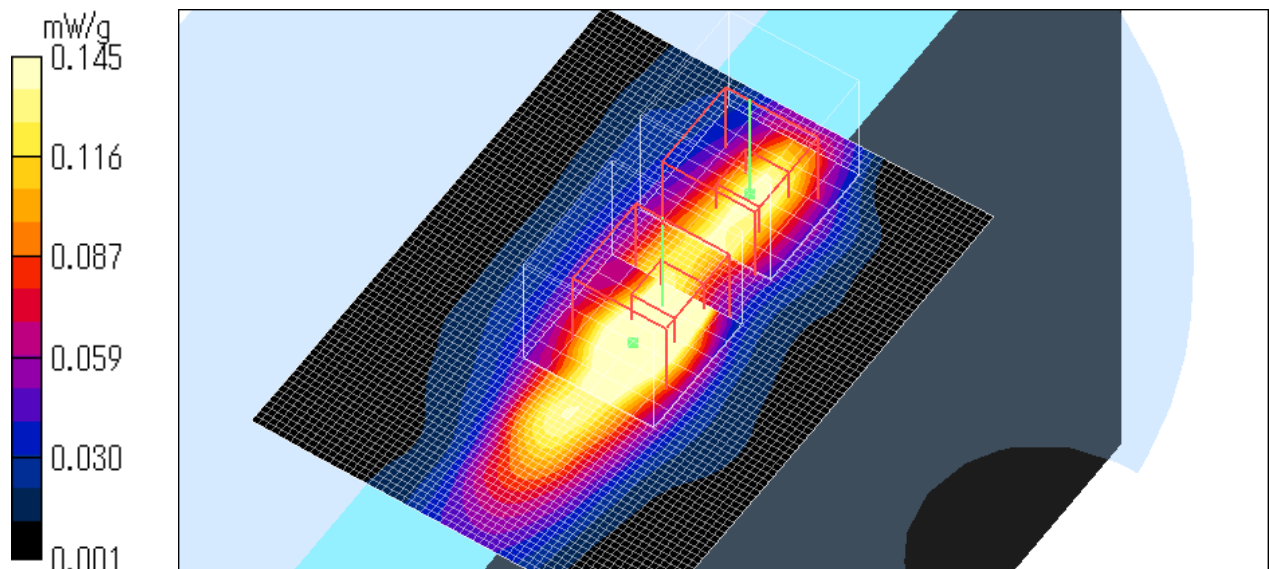

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11g 16QAM (24Mbps) / 2437MHz

Crest factor: 1.4

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.334 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.95 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.450 W/kg


SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

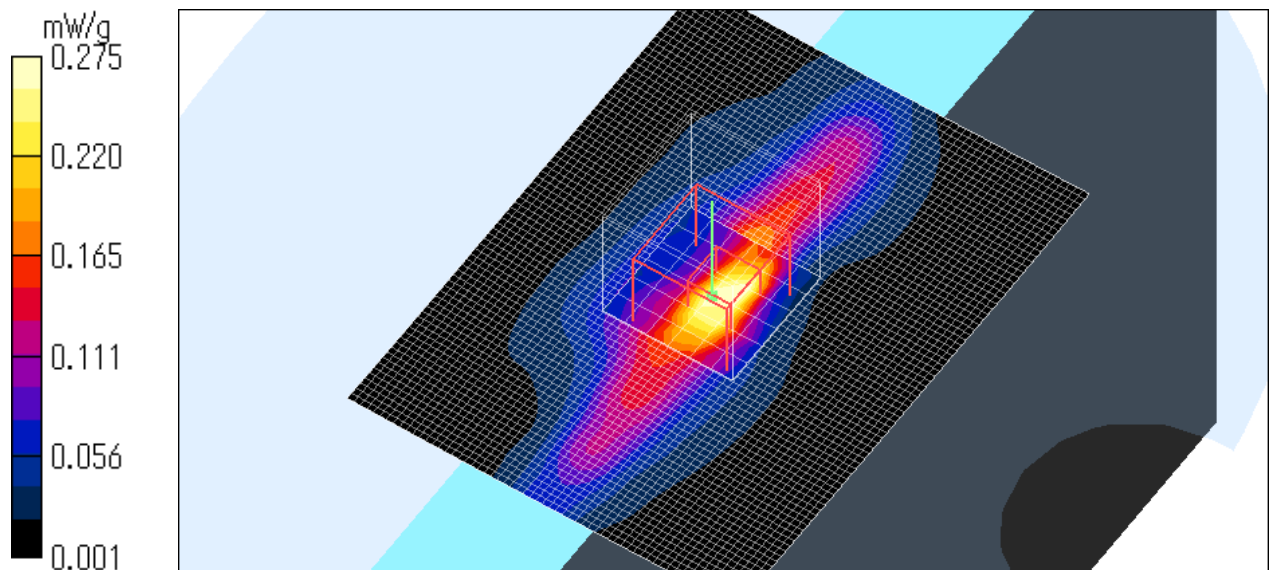

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11g 64QAM (48Mbps) / 2437MHz

Crest factor: 1.7

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.180 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.89 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.408 W/kg


SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.266 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

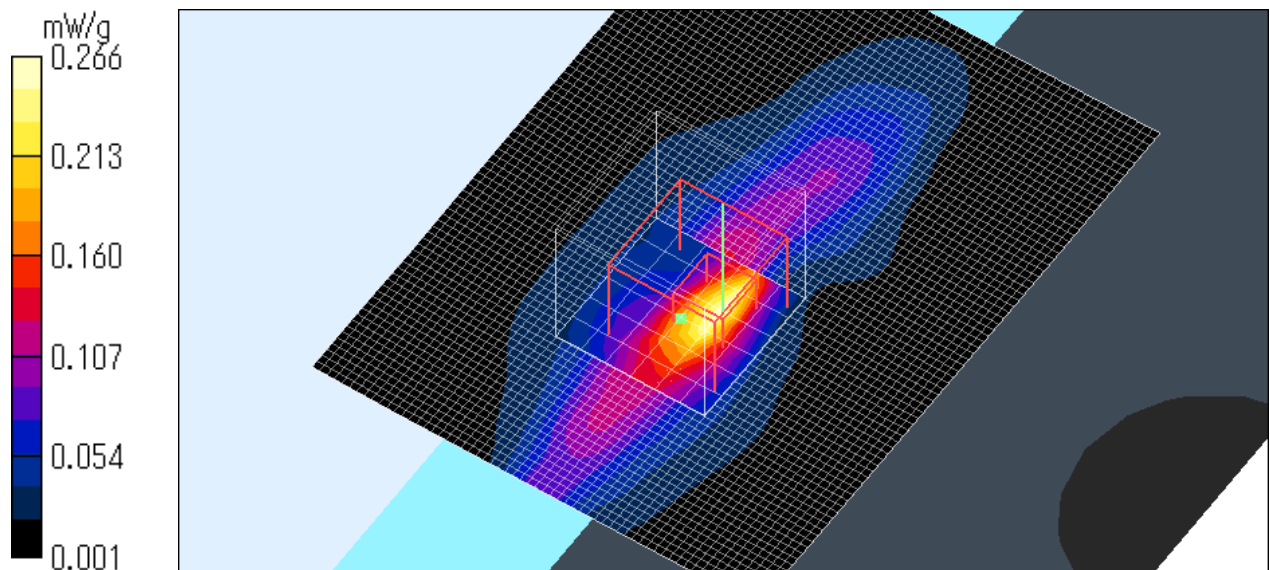

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Bottom (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor: 1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.010 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.64 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.011 W/kg


SAR(1 g) = 0.00566 mW/g; SAR(10 g) = 0.00323 mW/g

Maximum value of SAR (measured) = 0.008 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

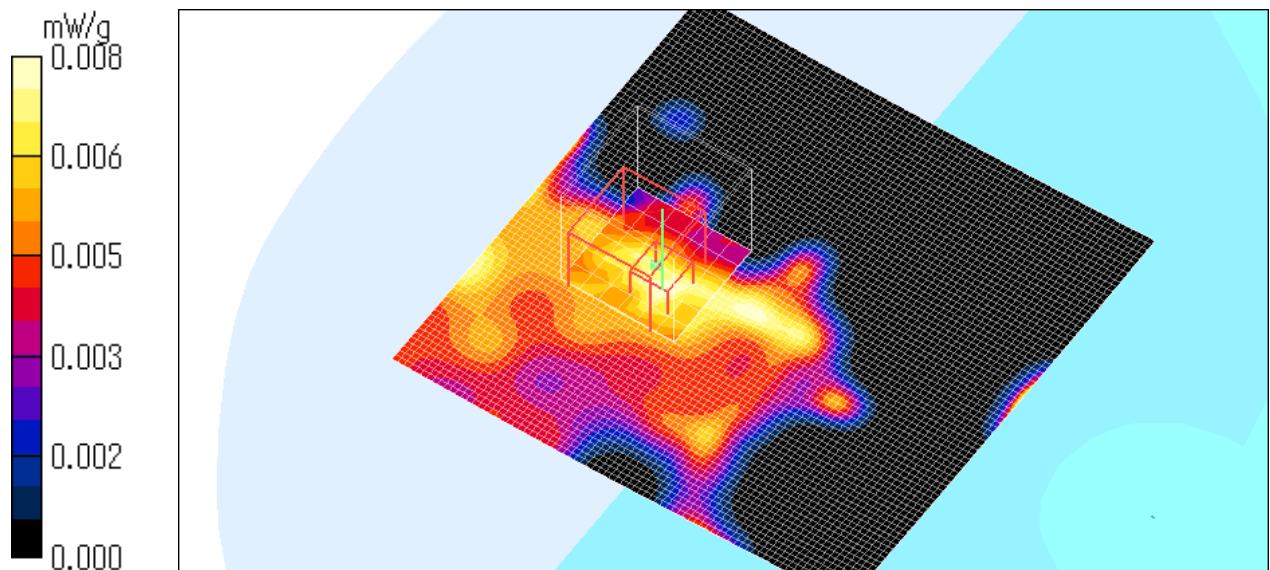

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Bottom (Laptop mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor: 1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.019 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.05 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.025 W/kg


SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00811 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

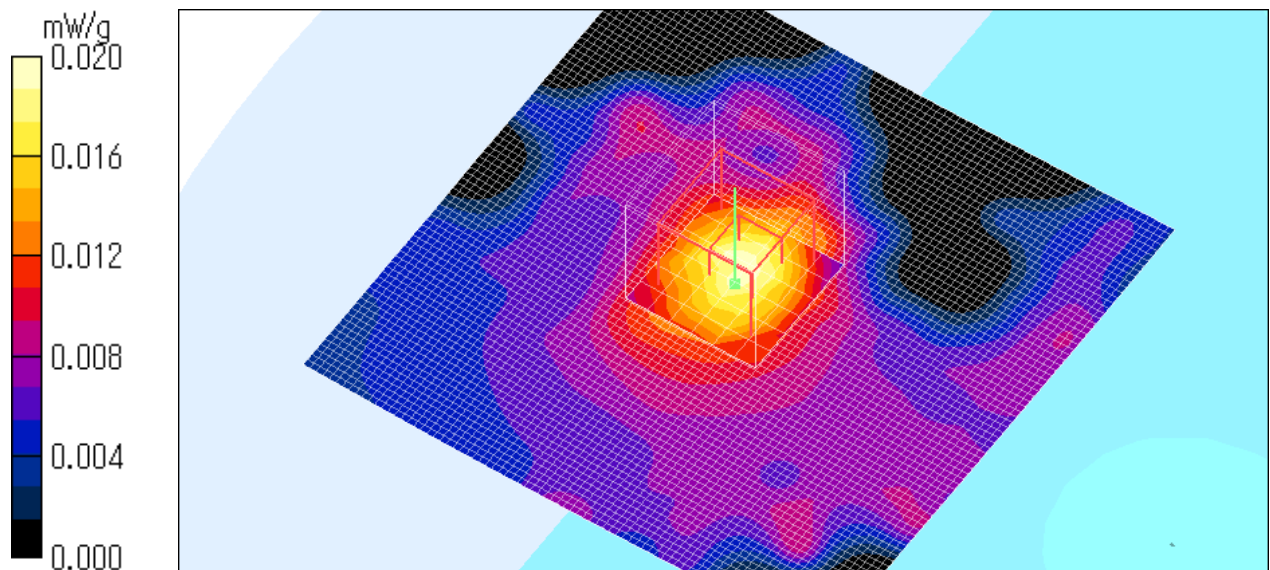

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11g BPSK (6Mbps) / 2412MHz

Crest factor: 1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.219 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.44 V/m; Power Drift = 0.167 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.396 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.44 V/m; Power Drift = 0.167 dB

Peak SAR (extrapolated) = 0.344 W/kg


SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

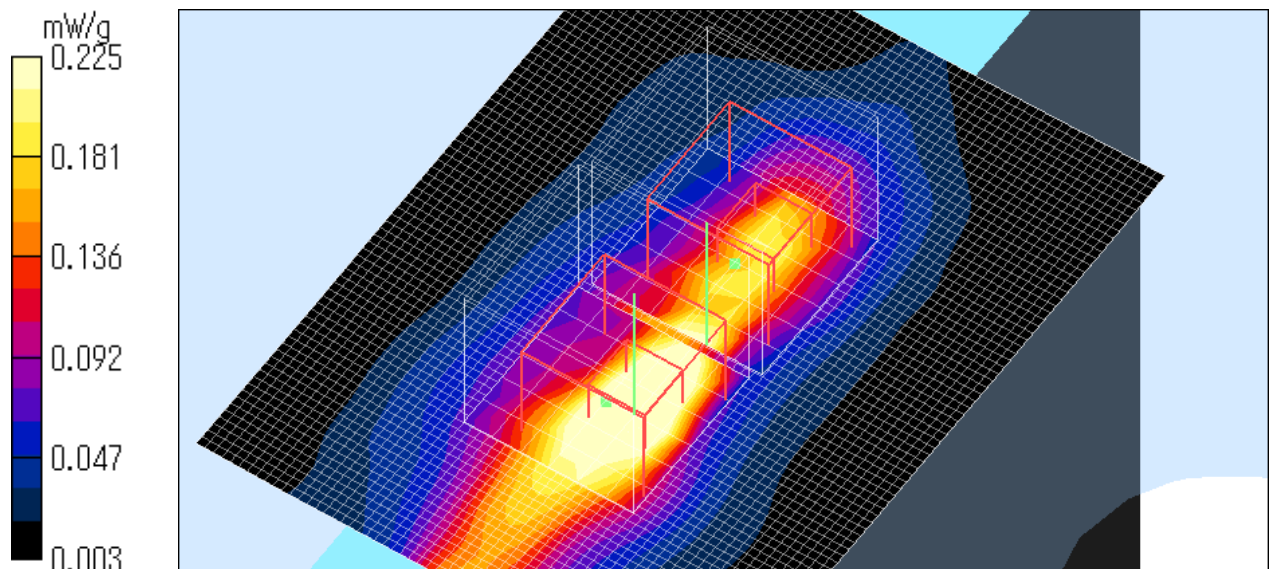

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Aux antenna/ Op1 Battery/ Right side (Tablet mode) / 11g BPSK (6Mbps) / 2462MHz

Crest factor: 1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.289 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.98 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.98 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.481 W/kg


SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

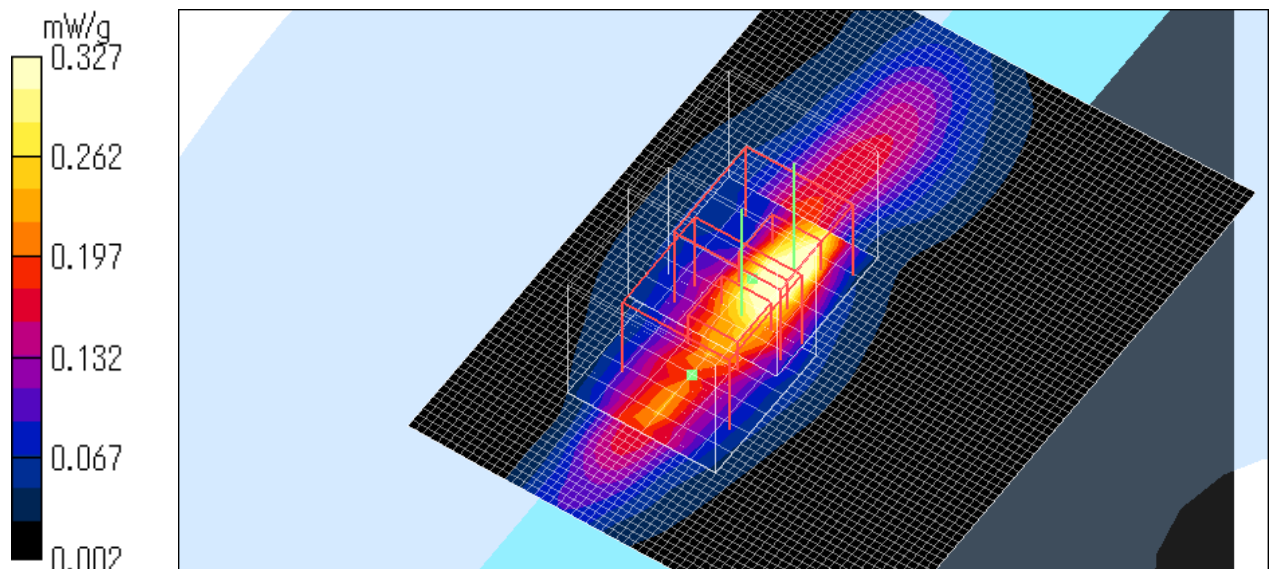

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top 5mm (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.196 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -2.76 dB

Peak SAR (extrapolated) = 0.382 W/kg


SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

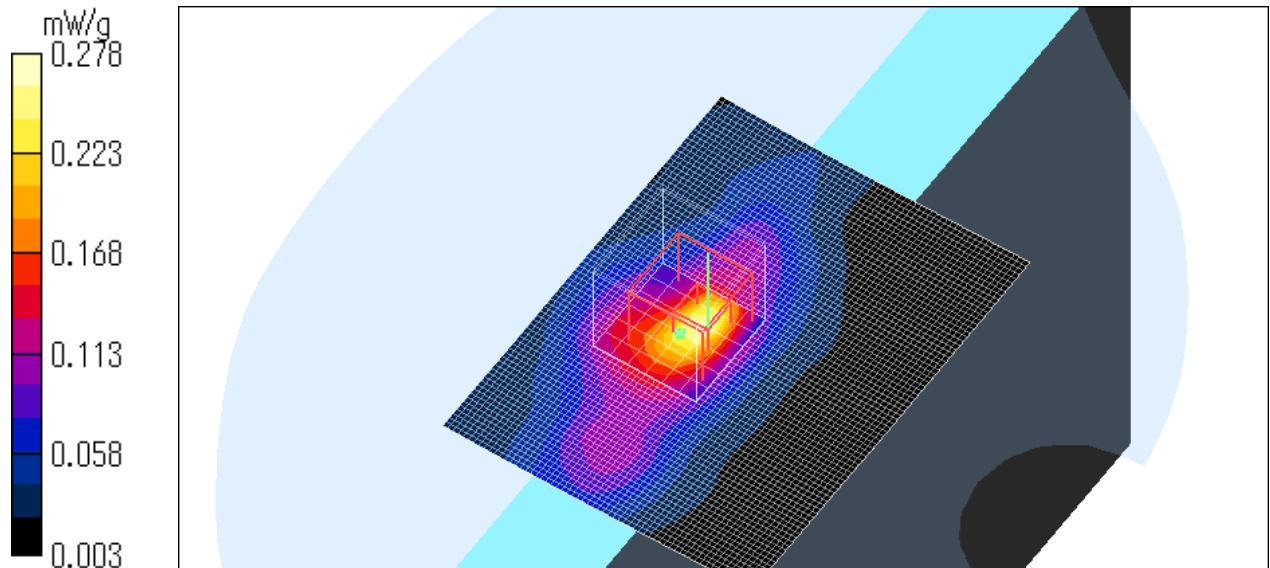

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top 10mm (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.152 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.86 V/m; Power Drift = 0.316 dB

Peak SAR (extrapolated) = 0.213 W/kg


SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.157 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

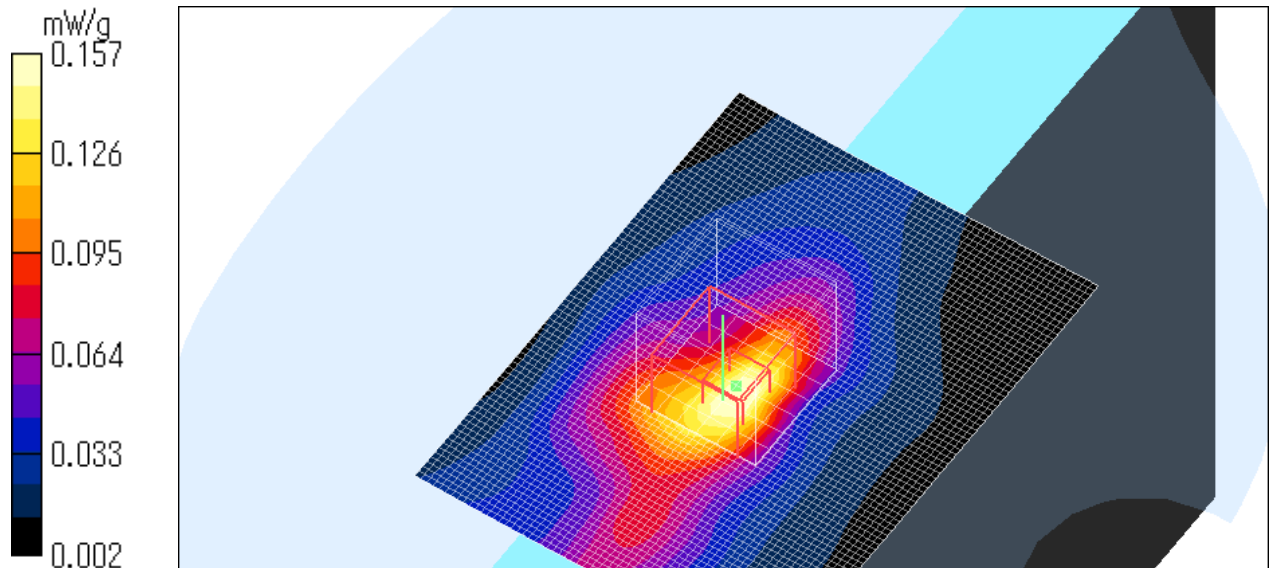

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

FC-N22A/ Body/ Main antenna/ Op1 Battery / Top 15mm (Tablet mode) / 11g BPSK (6Mbps) / 2437MHz

Crest factor :1.1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.070 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.21 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.070 mW/g

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.21 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 0.070 W/kg


SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

Test Date = 05/12/08

Ambient Temperature = 23.5 degree.c

Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

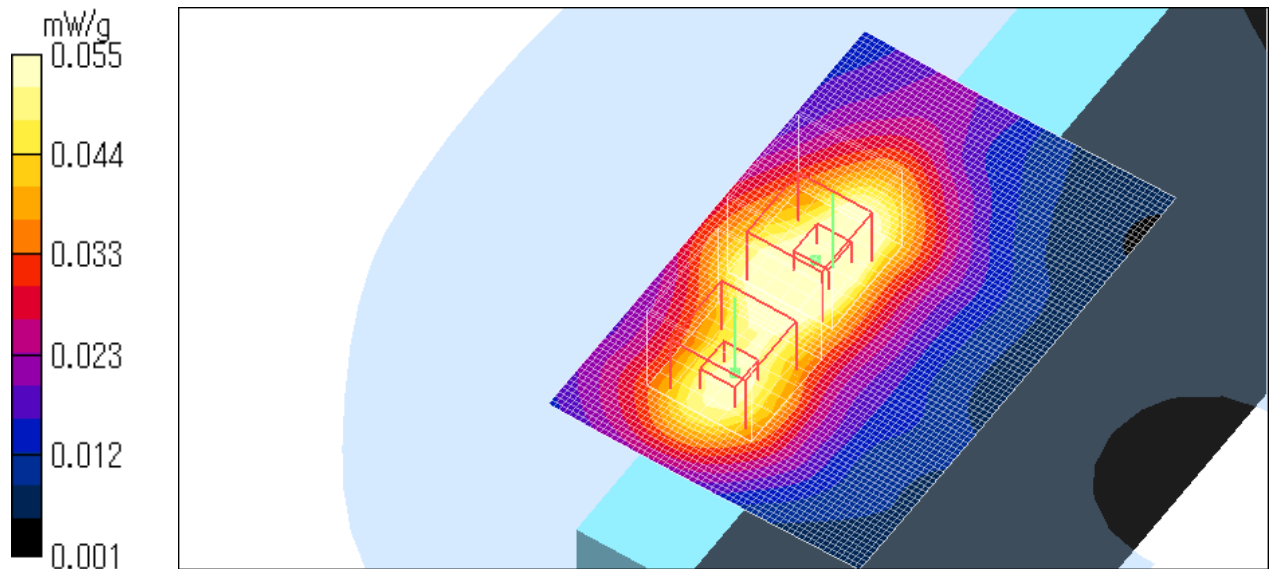

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 3 : Test instruments

1. Equipment used

Control No.	Name of Equipment	Manufacture	Model number	Serial number	Calibration	
					Last Cal	due date
MPM-01	Power Meter	Agilent	E4417A	3008A01671	2008/02/06	2009/02/28
MPSE-01	Power Sensor	Agilent	E9300B	US40010300	2008/02/04	2009/02/28
MPSE-03	Power sensor	Agilent	E9327A	US40440576	2008/02/09	2009/02/28
MAT-15	Attenuator(30dB)	Agilent	8498A	100023	2008/02/21	2009/02/28
MSG-01	Signal Genelator	Agilent	SMR40	100023	2008/01/08	2009/01/31
MRFA-02	RF Amplifier	OPHIR	5056F	1005	2007/06/01	2008/06/30
MHDC-12	Dual Directional Coupler	Hewlett Packard	772D	2839A0016	-	-
MPM-09	Power Meter	Anritsu	ML2495A	6K00003348	2007/09/22	2008/09/30
MPSE-12	Power sensor	Anritsu	MA2411B	US37181068	2007/09/22	2008/09/30
MCC-05	Microwave Cable 1G-40GHz 2m	Storm	421-011 (90-1394-079)	01-12-002	2008/01/31	2009/01/31
MAT-20	Attenuator(10dB)(above1GHz)	HIROSE ELECTRIC CO.,LTD.	AT-110	-	2008/01/09	2009/01/31
MNA-01	Network Analyzer	Agilent	E8358A	US41080381	2006/02/10	2009/02/28
MNCK-01	Type N Calibration Kit	Agilent	85032F	MY41495257	2006/02/08	2009/02/28
MRENT-64	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3540	2008/03/12	2009/03/31
MDAE-01	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2007/06/13	2008/06/30
MSTW-16	SAR/HAC measurement System	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
MDA-07	2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2006/09/27	2008/09/31
MPS-01	SAM Phantom	Schmid&Partner Engineering AG	SAMTwin Phantom V4.0	1196	-	-
MDPK-01	Dielectric probe kit	Agilent	85070D	-	-	-
MOS-05	Thermo-Hygrometer	Custom	CTH-190	810201	2008/04/03	2009/04/30
MOS-10	Digital thermometer	HANNA	Checktemp-2	MOS-10	2007/03/23	2009/03/31
-	Body2450MHz	-	-	-	Daily check Target value ± 5%	
-	SAR room	-	-	-	Daily check Ambient Noise<0.012W/kg	

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

2. Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe EX3DV4, SN: 3540 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3. Configuration and peripherals

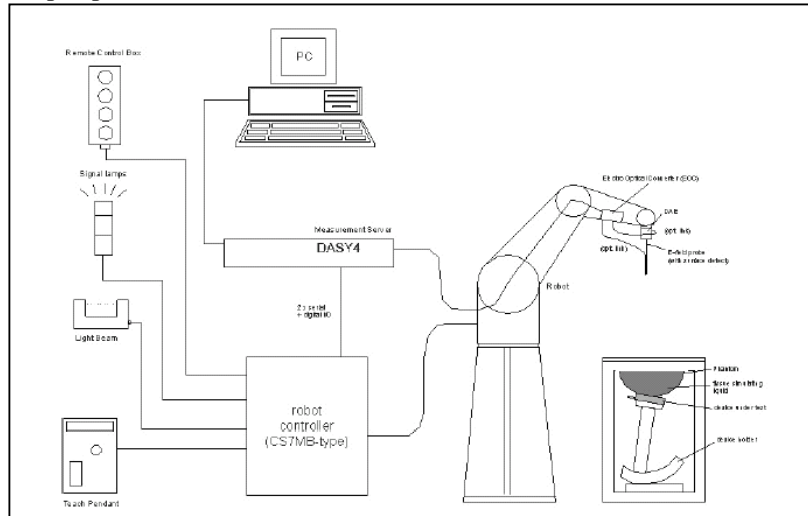

The DASY4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASY4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4. System components

4.1 EX3DV4 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration(S/N 3540):

Basic Broad Band Calibration in air : 10-3000 MHz
Conversion Factors(Head and Body): 450MHz,900 MHz,1810MHz,,2450MHz,
5.2GHz,5.5GHz,5.8GHz

Frequency:

10 MHz to > 6GHz; Linearity: +/-0.2 dB(30 MHz to 3 GHz)

Directivity:

+/-0.3 dB in HSL (rotation around probe axis)
+/-0.5 dB in tissue material (rotation normal probe axis)

Dynamic Range:

10uW/g to > 100 mW/g;Linearity: +/-0.2 dB(noise: typically < 1uW/g)

Dimensions:

Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm

Application:

Highprecision dosimetric measurement in any exposure scenario
(e.g., very strong gradient fields).Only probe which enables compliance
testing for frequencies up to 6GHz with precision of better 30%.



**EX3DV3 E-field
Probe**

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.2 SAM Twin Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:


2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:

(H x L x W): 810 x 1000 x 500 mm

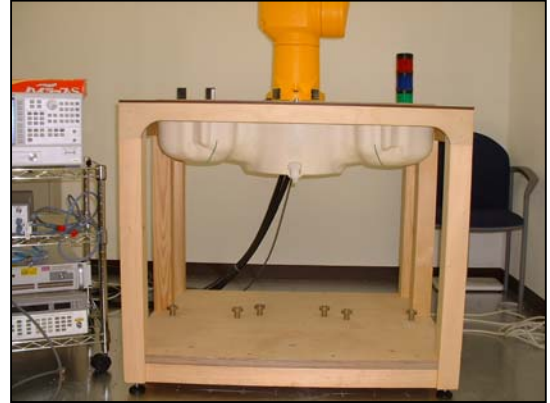

SAM Twin Phantom

Device Holder

For this measurement, the urethane foam was used as device holder.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

5. Test system specifications

Robot RX60L

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manufacture	:	Stäubli Unimation Corp. Robot Model: RX60

DASY4 Measurement server

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chain Two expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

Data Acquisition Electronic (DAE)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 μ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 μ V (with auto zero)
Input Resistance	:	200 M Ω
Battery Power	:	> 10 h of operation (with two 9 V battery)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

Software

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.6
Manufacture / Origin	:	Schimid & Partner Engineering AG

E-Field Probe

Model	:	EX3DV4
Serial No.	:	3540
Construction	:	Symmetrical design with triangular core
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB (30 MHz to 3 GHz)
Manufacture	:	Schimid & Partner Engineering AG

Phantom

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 25 liters
Manufacture	:	Schimid & Partner Engineering AG

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

6. Simulated Tissues Composition of 2450MHz

Ingredient	MIXTURE(%)
	Muscle 2450MHz
Water	69.83
DGMBE	30.2

Note:DGMBE(Diethyleneglycol-monobutyl ether)

7. Validation Measurement

Simulated tissue liquid parameter

7-a Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.
The dielectric parameters measurement are reported in each correspondent section.

7-b Muscle 2450 MHz

Type of liquid : Muscle 2450 MHz
Ambient temperature (deg.c.) : 24.5(9-May), 23.5(12-May)
Relative Humidity (%) : 41(9-May), 39(12-May)
Liquid depth (cm) : 15.0

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
9-May	2450	23.5	23.5	Relative Permittivity ϵ_r	52.7	50.6	-4.0	+/-5
				Coductivity σ [mho/m]	1.95	2.03	4.1	+/-5
12-May	2450	22.9	22.9	Relative Permittivity ϵ_r	52.7	50.2	-4.7	+/-5
				Coductivity σ [mho/m]	1.95	2.01	3.1	+/-5

*1 The target values is a parameter defined in FCC OET 65

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value*2	Measured	Deviation [%]	Limit [%]
		Before	After					
9-May	2450	23.5	23.5	Relative Permittivity ϵ_r	52.2	50.6	-3.1	+/-5
				Coductivity σ [mho/m]	1.97	2.03	3.0	+/-5
12-May	2450	22.9	22.9	Relative Permittivity ϵ_r	52.2	50.2	-3.8	+/-5
				Coductivity σ [mho/m]	1.97	2.01	2.0	+/-5

*2 The target value is the calibrated dipole MSL parameters. (D2450V2 SN:713)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

8. System validation data


We performed the system validation based on FCC requirement, [The 1-g or 10-g SAR values measured using the required tissue dielectric parameters should be within 10% of manufacturer calibrated dipole SAR values. However these manufacturer calibrated dipole target SAR values should be substantially similar to those defined in IEEE Standard 1528.] and FCC permits [SAR system verification with the actual liquid used for DUT SAR measurement should be the default operating procedures.] We confirmed the this dipole manufacture's validation date for head is within 5% against IEEE Standard 1528. so we can only use Body liquid validation data for our system verification.

System validation of 2450MHz

Type of liquid : Muscle 2450MHz
Frequency : 2450MHz
Ambient temperature (deg.c.) : 24.5(9-May), 23.5(12-May)
Relative Humidity (%) : 41(9-May), 39(12-May)
Dipole : D2450V2 SN:713
Power : 250mW

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
9-May	23.5	23.5	52.7	50.6	1.95	2.03	13.7	14.4	5.1	+/-10
12-May	22.9	22.9	52.7	50.2	1.95	2.01	13.7	14.5	5.8	+/-10

Note: Please refer to Attachment for the result representation in plot format

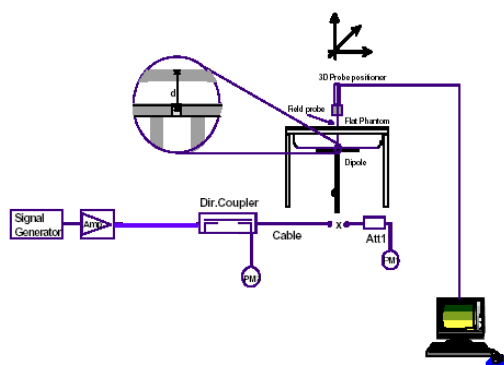

2450MHz System
performance check setup

Test system for the system performance check setup diagram

9. Validation uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or v _{eff}
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Spherical isotropy of the probe	± 9.6	Rectangular	0	0	0	∞
Boundary effects	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	0	Rectangular	$\sqrt{3}$	1	0	∞
Integration time	0	Rectangular	$\sqrt{3}$	1	0	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	1	1	± 1.7	∞
Algorithms for Max.SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Input power and SAR drift meas.	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	1	0.6	± 3.0	∞
Combined Standard Uncertainty					± 9.321	
Expanded Uncertainty (k=2)					± 18.64	

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

10. Validation Measurement data

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW


Dipole 2450 MHz;
Type: D2450V2; Serial:713

Communication System: CW; Frequency: 2450 MHz; Crest factor : 1
Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x61x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 22.9 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 101.0 V/m; Power Drift = 0.003 dB
Peak SAR (extrapolated) = 29.9 W/kg
SAR(1 g) = 14.4 mW/g; SAR(10 g) = 6.63 mW/g
Maximum value of SAR (measured) = 22.2 mW/g

Test Date = 05/09/08
Ambient Temperature = 23.5 degree.c
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

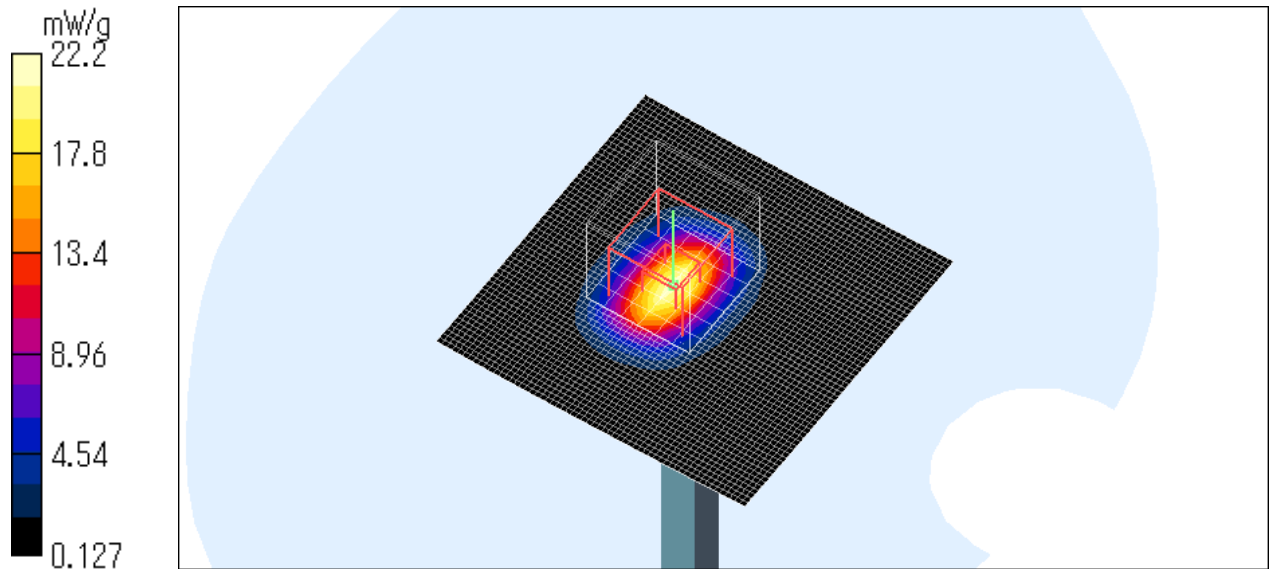

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW


Dipole 2450 MHz;
Type: D2450V2; Serial:713

Communication System: CW; Frequency: 2450 MHz; Crest factor :1
Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3540; ConvF(7.66, 7.66, 7.66); Calibrated: 2008/03/12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 23.5 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 100.4 V/m; Power Drift = 0.023 dB
Peak SAR (extrapolated) = 30.2 W/kg
SAR(1 g) = 14.5 mW/g; SAR(10 g) = 6.64 mW/g
Maximum value of SAR (measured) = 22.0 mW/g

Test Date = 05/12/08
Ambient Temperature = 23.5 degree.c
Liquid Temperature = Before 22.9 degree.C , After 22.9 degree.C

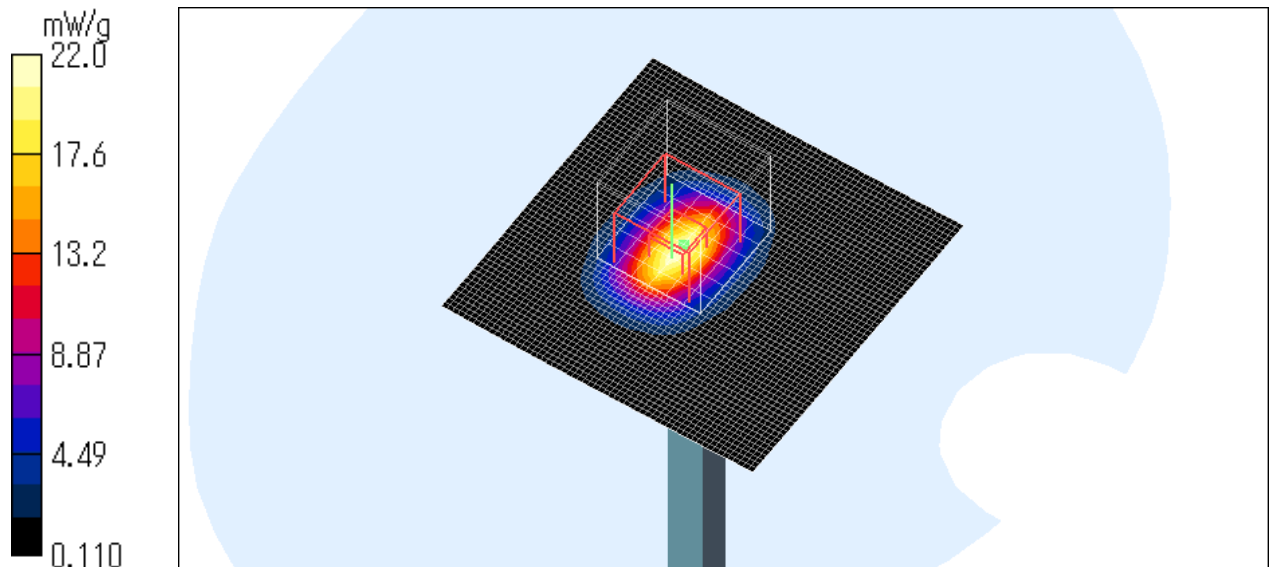

Test report No. : 28HE0115-HO-02-1
Page : 80 of 98
Issued date : August 8, 2008
FCC ID : BSFFC-N22A

11. System Validation Dipole (D2450V2,S/N: 713)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ULA-pex (MTT)**

Certificate No: **D2450V2-713_Sep06**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 713**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **September 27, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ES3DV2	SN 3025	28-Oct-05 (SPEAG, No. ES3-3025_Oct05)	Oct-06
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06
Secondary Standards	ID #	Check Date (In house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

Calibrated by: **Claudio Leubler** **Laboratory Technician** **Signature**

Approved by: **Katja Pokovic** **Technical Manager** **Signature**

Issued: September 28, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-713_Sep06

Page 1 of 9

UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.8 $\pm$ 6 %	1.77 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.0 $\pm$ 0.2) °C	-----	-----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	13.7 mW / g
SAR normalized	normalized to 1W	54.8 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	54.2 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.39 mW / g
SAR normalized	normalized to 1W	25.6 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	25.3 mW / g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.1 ± 6 %	1.97 mho/m ± 6 %
Body TSL temperature during test	(21.7 ± 0.2) °C	-----	-----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.7 mW / g
SAR normalized	normalized to 1W	54.8 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	54.1 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.34 mW / g
SAR normalized	normalized to 1W	25.4 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	25.2 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$51.2 \Omega + 3.3 j\Omega$
Return Loss	- 29.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.7 \Omega + 4.0 j\Omega$
Return Loss	- 26.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.160 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 5, 2002

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

DASY4 Validation Report for Head TSL

Date/Time: 27.09.2006 11:36:11

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 – SN713

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025 (HF); ConvF(4.4, 4.4, 4.4); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.5 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.39 mW/g

Maximum value of SAR (measured) = 15.0 mW/g

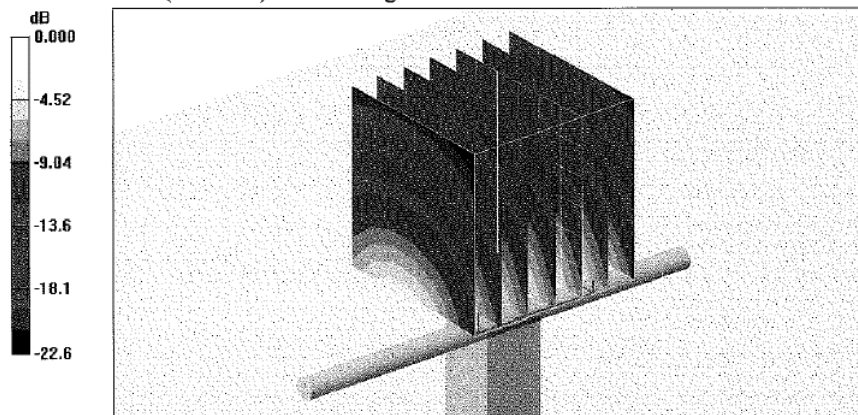

0 dB = 15.0mW/g

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Impedance Measurement Plot for Head TSL

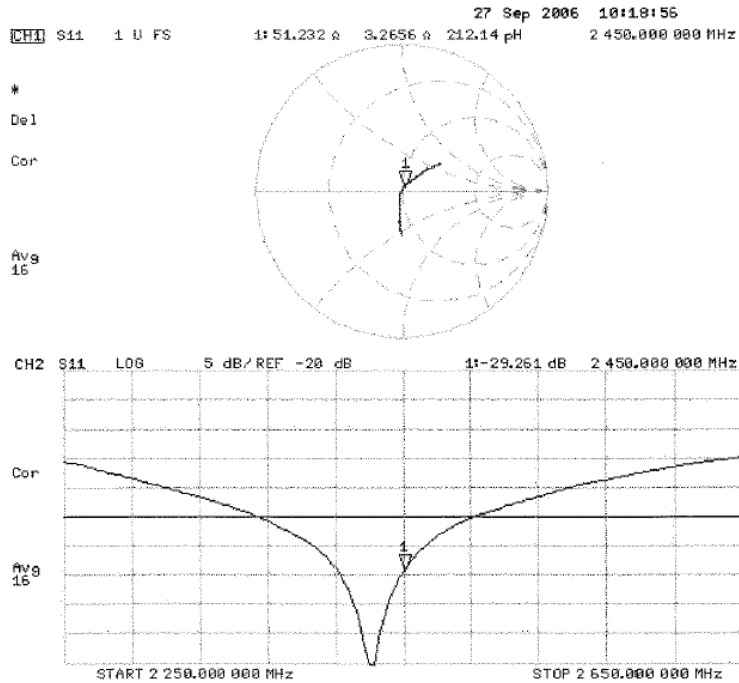

DASY4 Validation Report for Body TSL

Date/Time: 27.09.2006 14:23:31

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 – SN713

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025 (HF); ConvF(4.06, 4.06, 4.06); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.4 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.34 mW/g

Maximum value of SAR (measured) = 15.4 mW/g

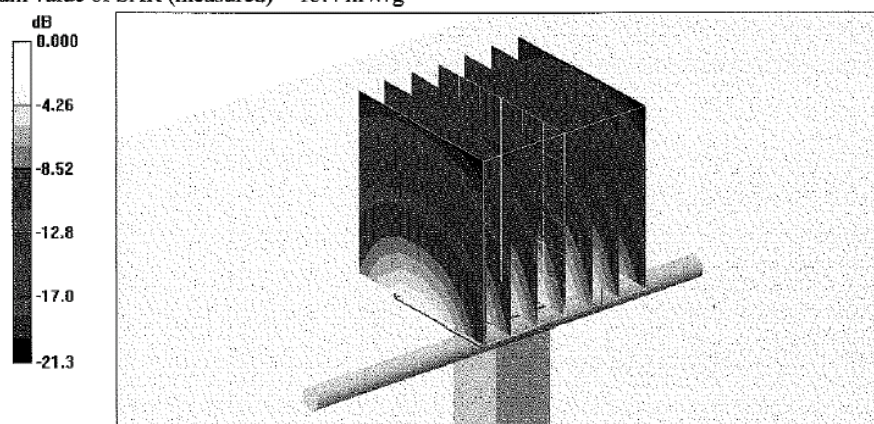

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Impedance Measurement Plot for Body TSL

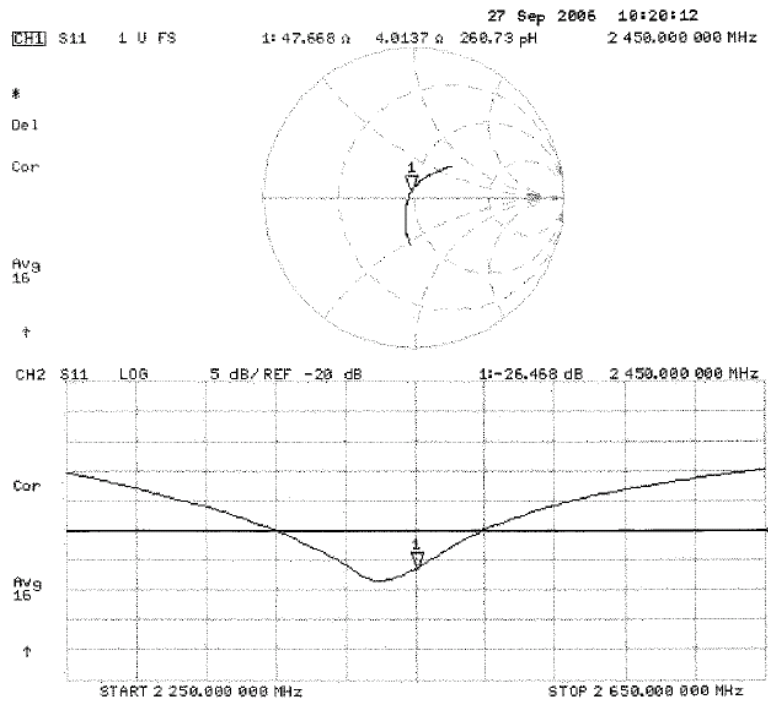

12. Dosimetric E-Field Probe Calibration (EX3DV4,S/N: 3540)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **MTT**

Certificate No: **EX3-3540_Mar08**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3540**

Calibration procedure(s) **QA CAL-01.v6 and QA CAL-14.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 12, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (SPEAG, No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: March 13, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3540_Mar08

Page 1 of 9

UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

EX3DV4 SN:3540

March 12, 2008

Probe EX3DV4

SN:3540

Manufactured: August 23, 2005
Last calibrated: January 19, 2007
Recalibrated: March 12, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

EX3DV4 SN:3540

March 12, 2008

DASY - Parameters of Probe: EX3DV4 SN:3540

Sensitivity in Free Space^A

Diode Compression^B

NormX	0.450 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	88 mV
NormY	0.490 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	0.590 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	92 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	7.3	4.3
SAR _{be} [%]	With Correction Algorithm	0.7	0.5

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	5.9	2.5
SAR _{be} [%]	With Correction Algorithm	0.5	0.3

Sensor Offset

Probe Tip to Sensor Center 1.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

EX3DV4 SN:3540

March 12, 2008

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

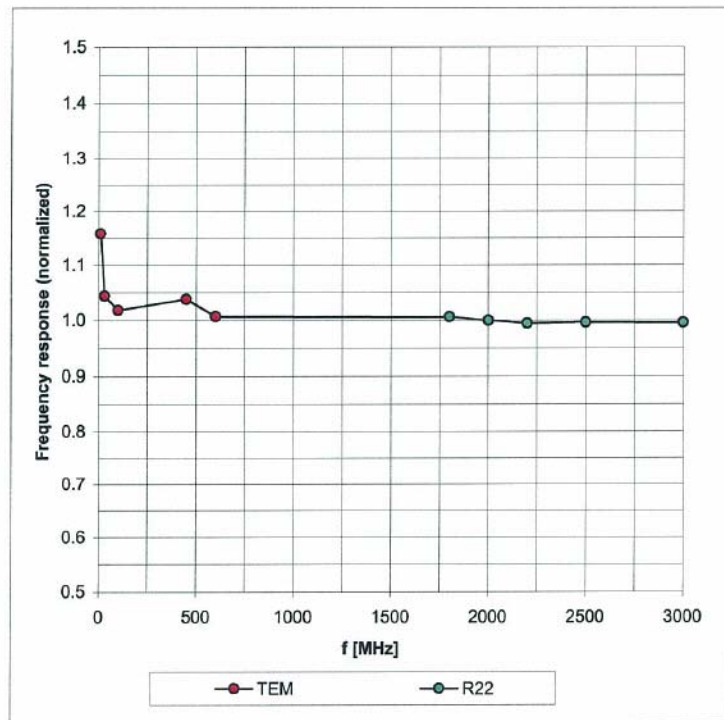

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

EX3DV4 SN:3540

March 12, 2008

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

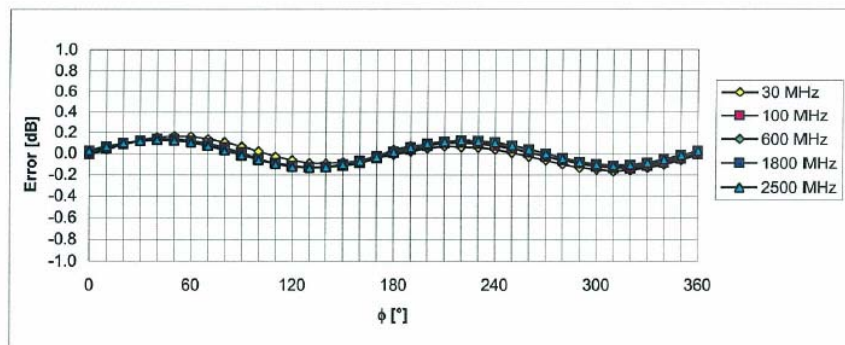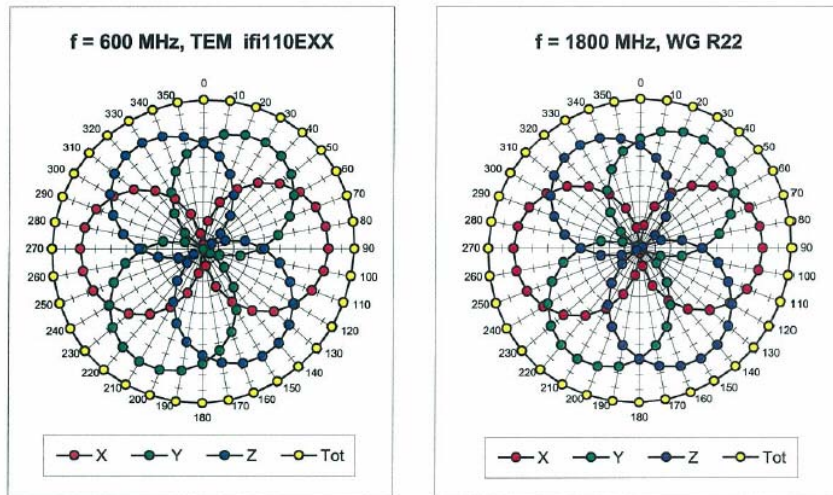


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4 SN:3540

March 12, 2008

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)

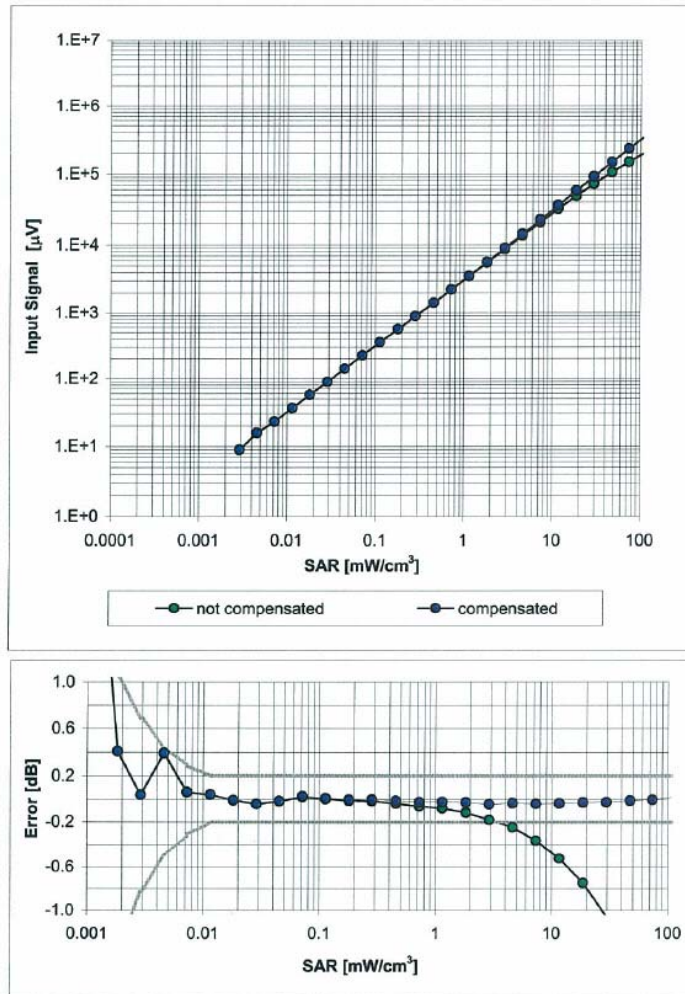


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

EX3DV4 SN:3540

March 12, 2008

Conversion Factor Assessment

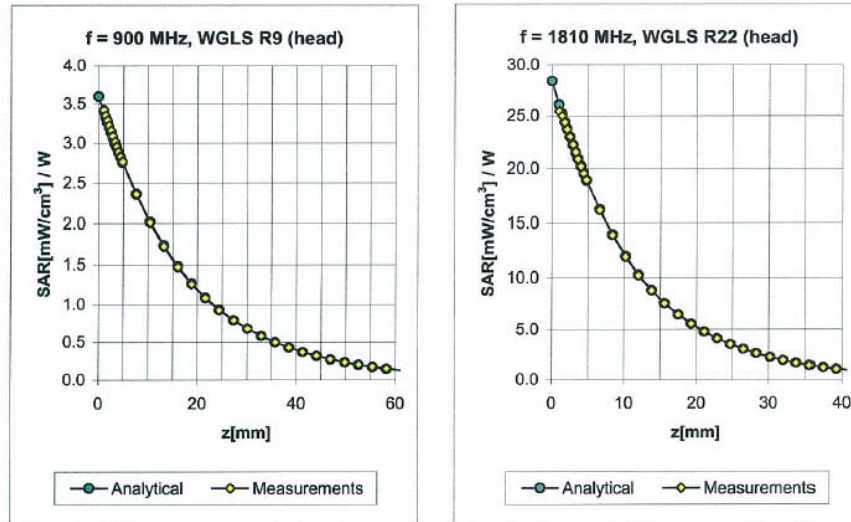

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.54	0.52	10.01	± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.72	0.57	10.05	± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.63	0.59	8.66	± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.42	0.71	7.85	± 11.8% (k=2)
5200	± 50 / ± 100	Head	36.0 ± 5%	4.66 ± 5%	0.35	1.75	4.85	± 13.1% (k=2)
5500	± 50 / ± 100	Head	35.6 ± 5%	4.96 ± 5%	0.35	1.75	4.55	± 13.1% (k=2)
5800	± 50 / ± 100	Head	35.3 ± 5%	5.27 ± 5%	0.40	1.75	4.38	± 13.1% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.70	0.40	11.04	± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.84	0.57	9.55	± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.49	0.66	8.93	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.48	0.72	7.66	± 11.8% (k=2)
5200	± 50 / ± 100	Body	49.0 ± 5%	5.30 ± 5%	0.35	1.75	4.54	± 13.1% (k=2)
5500	± 50 / ± 100	Body	48.6 ± 5%	5.65 ± 5%	0.45	1.75	3.95	± 13.1% (k=2)
5800	± 50 / ± 100	Body	48.2 ± 5%	6.00 ± 5%	0.45	1.75	3.74	± 13.1% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3540

March 12, 2008

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

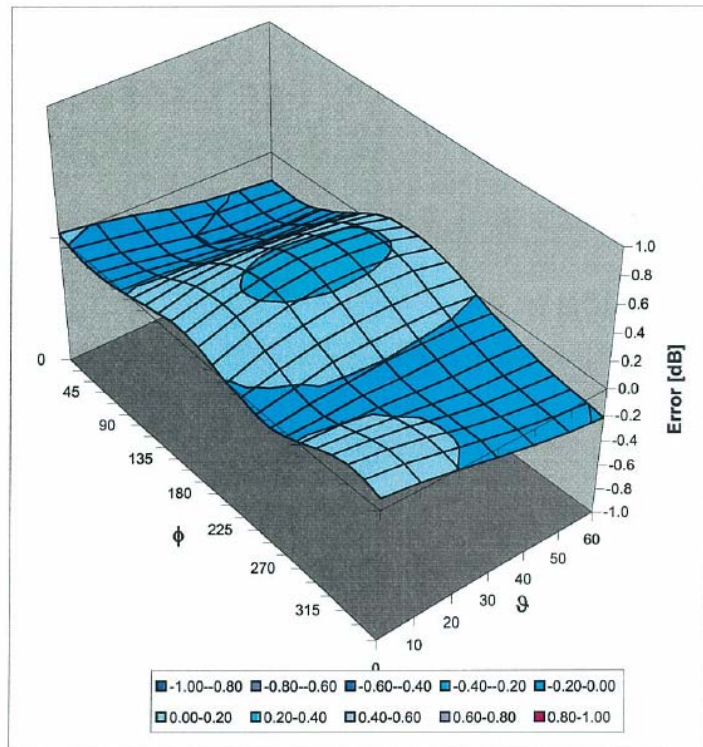

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13. References

- [1]ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E- field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6]SPEAG uncertainty document for DASY 4 System from SPEAG (Shimid & Partner Engineering AG).
- [7]SPEAG uncertainty document for "the 5-6GHz Extension" from SPEAG (Shimid & Partner Engineering AG).