



FCC CFR 47 Part 2.1091

RF Exposure Report

APPLICANT	Enterprise Electronics Corporation
FCC ID	BUV-MAVERICK
MODEL NUMBER	MAVERICK
PRODUCT DESCRIPTION	X-BAND WEATHER RADAR
FINAL TEST DATE	03/15/2020
REPORT NUMBER	518AUT20_MPE Report_

AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION
UNDER ISO/IEC 17025, AND ISO/IEC 17065





TABLE OF CONTENTS

SIGNATURE PAGE 3

TESTING LABORATORY 4

TEST INFORMATION 5

EUT INFORMATION..... 6

FCC PT 1.1310 SAR & MPE 7

EMC EQUIPMENT LIST **ERROR! BOOKMARK NOT DEFINED.**

ANNEX I – MANUFACTURER-PROVIDED INFORMATION 10

ANNEX II – MEASUREMENT DATA..... 11

SIGNATURE PAGE

Timco Engineering, Inc. attests that:

This report relates only to the Equipment Under Test (EUT) sample(s) tested.

This report shall not be reproduced except in full without the written approval of Timco Engineering, Inc.

To the best of my knowledge and belief, this device has been tested in accordance with the standards identified in this test report, and these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Name and Title Franklin Rose, Project Manager / EMC Specialist



Name and Title Tim Royer, Project Manager / EMC Engineer




Name and Title Sharon Hoffman, Senior Marketing Director

Date 03/15/2020

TESTING LABORATORY

**Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669, USA**

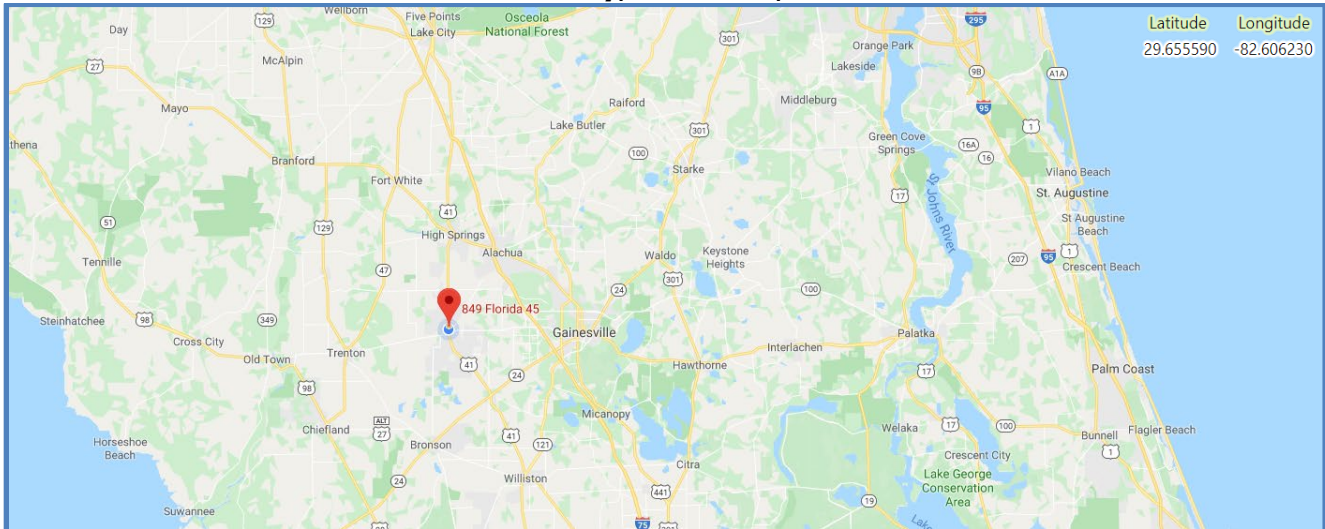

United States	FCC Accredited and Recognized Test Lab & TCB # US1070
	DHS Recognized P25 CAP Test Facility # P25CAPTIMCO081016
Australia / New Zealand	U.S. CABs Recognized by Australia ACMA Under MRA
Canada	U.S. Lab & CB Recognized by Canada ISCED, Designation # US0111, Test Site # 2056A
Chinese Taipei	U.S. CABs Recognized by Chinese Taipei BSMI/NCC Under MRA
European Union	U.S. EMC & RE Directive NB's, Designation # US0111, Notified Body # 1177
Hong Kong	U.S. Labs & CBs Recognized by Hong Kong OFCA Under MRA
Israel	U.S. CABs Recognized by Israel MOE/MOC Under MRA
Japan	U.S. RCBs Recognized by Japan MIC
Korea	U.S. CABs Recognized by Korea RRA Under MRA
Mexico	U.S. CABs Recognized by Mexico IFT Under MRA
Singapore	U.S. Labs & CBs Recognized by Singapore IMDA Under MRA
Vietnam	U.S. CABs Recognized by Vietnam MIC Under MRA

TEST INFORMATION

Report Version	Description	Issue Date
Rev1	Initial Issue	03/15/2020
Rev2	Updated MPE calculation	04/23/2020
Rev3		
Rev4		
Rev5		
Rev6		

Test Conditions	Temperature during testing: 26°C, Humidity during testing: 50%
Test Exercise	The EUT was operated in accordance with the service manual using software supplied by the manufacturer.
Applicable Standards	FCC CFR 47 Part 2, Jan 2020 FCC CFR 47 Part 1, Jan 2020
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA

EUT INFORMATION

EUT Description	X-BAND WEATHER RADAR		
EUT Model Number	MAVERICK		
Modified for Testing	☐		
Modification	n/a		
Antenna Connector	☐ UHF	☐ BNC	☐ N
	☐ TNC	☐ SMA	☒ Other WR-112
EUT Power Source	☒ AC Power (120 V)	☐ DC Power (48 V)	☐ Battery (13.8 V)
Test Item	☐ Prototype	☒ Pre-Production	☐ Post-Production
Type of Equipment	☒ Fixed	☐ Mobile	☐ Portable

FCC PT 1.1310 SAR & MPE

- ☐ (a) Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in §1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).
- ☐ (b) The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits.
- ☐ (c) The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.
- ☒ (d)(1) Evaluation with respect to the SAR limits in this section and in §2.1093 of this chapter must demonstrate compliance with both the whole-body and peak spatial-average limits using technically supportable methods and exposure conditions in advance of authorization (licensing or equipment certification) and in a manner that permits independent assessment.
- ☒ (2) At operating frequencies less than or equal to 6 GHz, the limits for maximum permissible exposure (MPE), derived from whole-body SAR limits and listed in Table 1 of paragraph (e) of this section, may be used instead of whole-body SAR limits as set forth in paragraph (a) through (c) of this section to evaluate the environmental impact of human exposure to RF radiation as specified in §1.1307(b), except for portable devices as defined in §2.1093 as these evaluations shall be performed according to the SAR provisions in §2.1093 of this chapter.
- ☐ (3) At operating frequencies above 6 GHz, the MPE limits shall be used in all cases to evaluate the environmental impact of human exposure to RF radiation as specified in §1.1307(b).
- ☐ (4) Both the MPE limits listed in Table 1 of paragraph (e) of this section and the SAR limits as set forth in paragraph (a) through (c) of this section and in §2.1093 of this chapter are for continuous exposure, that is, for indefinite time periods. Exposure levels higher than the limits are permitted for shorter exposure times, as long as the average exposure over the specified averaging time in Table 1 is less than the limits. Detailed information on our policies regarding procedures for evaluating compliance with all of these exposure limits can be found in the FCC's *OET Bulletin 65*, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields," and in supplements to *Bulletin 65*, all available at the FCC's Internet Web site: <http://www.fcc.gov/oet/rfsafety>.

Note to paragraphs (a) through (d): SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. The SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in §4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, §17.4.5, copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, §§17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in §4.1 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

FCC PT 1.1310 SAR & MPE

(e) Table 1 below sets forth limits for Maximum Permissible Exposure (MPE) to radiofrequency electromagnetic fields.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

(1) Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase *fully aware* in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of *transient* persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for *transient* persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase *exercise control* means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.

FCC PT 1.1310 SAR & MPE

(2) General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

(3) Licensees and applicants are responsible for compliance with both the occupational/controlled exposure limits and the general population/uncontrolled exposure limits as they apply to transmitters under their jurisdiction. Licensees and applicants should be aware that the occupational/controlled exposure limits apply especially in situations where workers may have access to areas in very close proximity to antennas and access to the general public may be restricted.

(4) In lieu of evaluation with the general population/uncontrolled exposure limits, amateur licensees authorized under part 97 of this chapter and members of his or her immediate household may be evaluated with respect to the occupational/controlled exposure limits in this section, provided appropriate training and information has been provided to the amateur licensee and members of his/her household. Other nearby persons who are not members of the amateur licensee's household must be evaluated with respect to the general population/uncontrolled exposure limits.

ANNEX I – MANUFACTURER-PROVIDED INFORMATION

Note: The accuracy and precision of the following information provided by the manufacturer of the equipment under test has not been verified using test methods, cannot be verified, or is not necessary to verify.

Antenna Information was provided by the customer.

ANNEX II – MEASUREMENT DATA

Test Engineer: FR
 Test Date: 03/20/2020

NOTE: The calculations below do not take into account antenna rotation, and thus assume direct exposure for the entire 6 minute averaging period.

Inside Beam (< +/- 8° from center, in horizontal or vertical polarity)

<i>EUT Parameters</i>		
<i>Parameter</i>	<i>Value</i>	<i>Unit</i>
<i>EUT Form Factor</i>	Fixed ▼	
<i>Lowest Frequency</i>	8500.000	MHz
<i>Highest Frequency</i>	9600.000	MHz
<i>Maximum Power</i>	80.000	dBm ▼
<i>Tune Up Tolerance</i>	0.370	+/- dBm ▼
<i>Duty Cycle</i>	0.075%	%
<i>Antenna Gain</i>	42.100	dBi EIRP ▼
<i>Coax Loss</i>	0.000	dB ▼
<i>EIRP</i>	1324528.366	W

Inside Beam MPE Distance:**Calculations****RF Exposure Field Strength Limits**

Public Persons may be exposed up to:

Worst-Case RF Field Strength Limit for the General Public (Uncontrolled Environment)	1 mW/cm ²
--	----------------------

Occupational Persons may be exposed up to:

Worst-Case RF Field Strength Limit for Controlled Use (Controlled Environment)	5 mW/cm ²
--	----------------------

Separation Distance

Mandatory distance from radiating element:

Calculation Method	Distance from Radiating Element (cm) = SQRT (P(mW) / 4π S(mW/cm ²))
Uncontrolled Sep. Distance @ 1 mW/cm ²	10266.58 cm
Controlled Sep. Distance @ 5 mW/cm ²	4591.35 cm

EUT Power Density at 20 cm

Calculation Method	Power Density (mW/cm ²) = P(mW) / 4π R(cm) ²
EUT Power Density @ 20 cm	263506.546 mW/cm ²

FINAL RESULT**Uncontrolled Public RF Exposure/MPE Guideline**

Separation Distance (cm)	10266 cm
Power Density (mW/cm ²)	1 mW/cm ²

Controlled Occupational RF Exposure/MPE Guideline

Separation Distance (cm)	4591 cm
Power Density (mW/cm ²)	5 mW/cm ²

Outside Beam ($\geq \pm 8^\circ$ from center, in horizontal or vertical polarity)**EUT Parameters**

<i>Parameter</i>	<i>Value</i>	<i>Unit</i>
<i>EUT Form Factor</i>	Fixed ▼	
<i>Lowest Frequency</i>	8500.000	MHz
<i>Highest Frequency</i>	9600.000	MHz
<i>Maximum Power</i>	80.000	dBm ▼
<i>Tune Up Tolerance</i>	0.370	+/- dBm ▼
<i>Duty Cycle</i>	0.075%	%
<i>Antenna Gain</i>	42.100	dBi EIRP ▼
<i>Coax Loss</i>	0.000	dB ▼
<i>EIRP</i>	1324.528	W

Outside Beam MPE Distance:**Calculations****RF Exposure Field Strength Limits**

Public Persons may be exposed up to:

Worst-Case RF Field Strength Limit for the General Public (Uncontrolled Environment)	1 mW/cm ²
--	----------------------

Occupational Persons may be exposed up to:

Worst-Case RF Field Strength Limit for Controlled Use (Controlled Environment)	5 mW/cm ²
--	----------------------

Separation Distance

Mandatory distance from radiating element:

Calculation Method	Distance from Radiating Element (cm) = SQRT (P(mW) / 4 π S(mW/cm ²))
Uncontrolled Sep. Distance @ 1 mW/cm ²	324.66 cm
Controlled Sep. Distance @ 5 mW/cm ²	145.19 cm

EUT Power Density at 20 cm

Calculation Method	Power Density (mW/cm ²) = P(mW) / 4 π R(cm) ²
EUT Power Density @ 20 cm	263.506 mW/cm ²

FINAL RESULT**Uncontrolled Public RF Exposure/MPE Guideline**

Separation Distance (cm)	324.6 cm
Power Density (mW/cm ²)	1 mW/cm ²

Controlled Occupational RF Exposure/MPE Guideline

Separation Distance (cm)	145 cm
Power Density (mW/cm ²)	5 mW/cm ²

END OF TEST REPORT