

Test Report Serial Number:

45461397 R1.3

Test Report Date:

10 August 2017

Project Number:

1374

SAR Test Report - Class II Permissive Change

Applicant:



Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA, 24501
USA

Maximum Reported 1g SAR			W/kg
FCC	HEAD:	2.24	W/kg
	BODY:	4.65	
ISEDC	HEAD:	2.34	
	BODY:	4.65	
Occupational Limit:		8.00	

FCC ID:

OWDTR-0143-E

IC Registration Number

3636B-0143

Product Model Number / HVIN

Product Name / PMN

XS-PFM9M, XS-PFM9Y
XS-PPM9M, XS-PPM9Y

XL-185P

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:



Ben Hewson, President
Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01



Industry
Canada

IC Registration 3874A-1



FCC Registration: 714830

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
3.1 REQUIRED NUMBER OF TEST CHANNELS.....	6
4.0 NORMATIVE REFERENCES	7
5.0 STATEMENT OF COMPLIANCE	8
6.0 RF CONDUCTED POWER MEASUREMENT.....	9
TABLE 6.0 CONDUCTED POWER MEASUREMENTS.....	9
7.0 ACCESSORIES EVALUATED.....	10
TABLE 7.0 MANUFACTURER'S ACCESSORY LIST	10
8.0 SAR MEASUREMENT SUMMARY	13
TABLE 8.0: MEASURED RESULTS - BODY.....	13
TABLE 8.1: MEASURED RESULTS - FACE.....	14
9.0 ANALYSIS OF SIMULTANEOUS TRANSMISSION	15
TABLE 9.0 LIST OF POSSIBLE TRANSMITTERS	15
TABLE 9.1 LIST OF POSSIBLE TRANSMITTERS COMBINATIONS	15
TABLE 9.2 ANALYSIS OF SUM-OF-THE-RATIOS.....	16
10.0 SCALING OF MAXIMUM MEASURE SAR.....	17
TABLE 10.0 SAR SCALING	17
11.0 SAR EXPOSURE LIMITS	19
TABLE 11.0 EXPOSURE LIMITS.....	19
12.0 DETAILS OF SAR EVALUATION.....	20
TABLE 12.1 DAY LOG	20
12.2 DUT SETUP AND CONFIGURATION	21
12.3 DUT POSITIONING	22
12.4 GENERAL PROCEDURES AND REPORT	22
12.5 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK	23
12.6 SCAN RESOLUTION 100MHz TO 2GHz	23
12.7 SCAN RESOLUTION 2GHz TO 3GHz.....	24
12.8 SCAN RESOLUTION 5GHz TO 6GHz.....	24
13.0 MEASUREMENT UNCERTAINTIES	25
TABLE 13.0 MEASUREMENT UNCERTAINTY.....	25
TABLE 13.1 CALCULATION OF DEGREES OF FREEDOM.....	26

14.0 FLUID DIELECTRIC PARAMETERS	27
TABLE 14.0 FLUID DIELECTRIC PARAMETERS 900MHz BODY TSL	27
TABLE 14.1 FLUID DIELECTRIC PARAMETERS 900MHz HEAD TSL.....	29
15.0 SYSTEM VERIFICATION TEST RESULTS	31
TABLE 15.0 SYSTEM VERIFICATION RESULTS 900MHz BODY TSL	31
TABLE 15.1 SYSTEM VERIFICATION RESULTS 900MHz HEAD TSL.....	32
16.0 MEASUREMENT SYSTEM SPECIFICATIONS	33
TABLE 16.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	33
17.0 TEST EQUIPMENT LIST.....	35
TABLE 17.0 EQUIPMENT LIST AND CALIBRATION	35
18.0 FLUID COMPOSITION	36
TABLE 18.1 FLUID COMPOSITION 900MHz HEAD TSL	36
TABLE 18.2 FLUID COMPOSITION 900MHz BODY TSL	36
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	37
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR	41
APPENDIX C - SETUP PHOTOS.....	54
APPENDIX D – DUT PHOTOS.....	56
APPENDIX E – PROBE CALIBRATION.....	60
APPENDIX F – DIPOLE CALIBRATION	61
APPENDIX G - PHANTOM	62

1.0 DOCUMENT CONTROL

Revision History				
Samples Tested By:		Trevor Whillock	Date(s) of Evaluation:	
Report Prepared By:		Art Voss, P.Eng.	Report Reviewed By:	
Report Revision	Description of Revision		Revised Section	Revised By
1.0	Initial Release		-	-
1.1	Revised Reference to Antenna		All	Art Voss
1.2	Revised HVIN		Cover	Art Voss
			2.0	
1.3	Revised 900MHz Frequency Range		2.0	Art Voss
				10 August 2017

2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Harris Corporation
Applicant Address	221 Jefferson Ridge Parkway Lynchburg, VA, 24501 USA
DUT Information	
Device Identifier(s):	FCC ID: OWDTR-0143-E IC: 3636B-0143
Type of Equipment:	Licensed Non-Broadcast Transmitter Held to Face (TNF) FCC Part 90 Land Mobile Radio Transmitter/Receiver (27.41-960MHz) RSS-119 Digital Transmission System (DTS) FCC Part 15, RSS 247 Unlicensed National Information Infrastructure (NII) FCC Part 15 Spread Spectrum Transmitter (DSS) FCC Part 15
Device Model(s) / HVIN:	XS-PFM9M XS-PFM9Y XS-PPM9M XS-PPM9Y
Device Marketing Name / PMN:	XL-185P
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	700 Band *: 768-776MHz, 798-806MHz 800 Band: 806-816MHz, 851-861MHz 900 Band: 896-901MHz, 935-944MHz WLAN: 2412-2462MHz, 5180-5825MHz BT/BLE: 2402-2480MHz
Number of Channels:	Programmable
Manuf. Max. Rated Output Power:	7/8/900MHz Band: 34.8dBm BlueTooth: 12.7dBm BLE: 8.4dBm WLAN 2.4G: 23.7dBm WLAN 5G: 11.8dBm
Modulation:	LMR: FM
Duty Cycle:	50% PTT Duty Cycle
DUT Power Source:	See Manufacturer's Accessory List
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

* 768-769MHz, 775-776MHz, 798-799MHz, 805-806MHz : Authorized for Canada Only.

3.0 SCOPE OF EVALUATION

This is a Class II Permissive Change to add a E75-0286-001 (Larsen SPEN 14918) antenna to the XL-185P. The XL-185P, FCC ID: OWDTR-0143-E, ISED ID: 3636B-0143 is a single-band, Push-To-Talk (PTT) Licensed Mobile Radio (LMR) transceiver intended for Occupational Use. It incorporates WiFi and BlueTooth transmitters. The E75-0286-001 antenna is a 1/2 wave length whip antenna with a frequency range of 890-960MHz. In this document, the following DUT references are made:

The XL-185P, FCC ID: OWDTR-0143-E, ISED ID: 3636B-0143 is referenced in this report as XL-185P.

The Test Plan developed for this evaluation leverages SAR test data from previous evaluations of the OWDTR-0143-E, 3636B-0143 and is based on test channels, configurations and accessories which produced the highest (worst case) SAR. The WiFi and BlueTooth transmitters use a separate antenna and it has been shown that their SAR contribution is unaffected by the LMR antenna. The number of required test channels for frequency range of this antenna are shown below:

3.1 Required Number of Test Channels

Number of Required Test Channels						
Frequency			Number of Channels		Spacing	
f_{LOW} (MHz)	f_{HIGH} (MHz)	f_c (MHz)	KDB 447498 (N_c)	IEC 62209 (N_c)	KDB 447498 (MHz)	IEC 62209 (MHz)
890	944	917	4	3	18.0	27.0
$\text{KDB 447498: } N_c = \text{RoundUp} \{ [100 (F_{HIGH} - F_{LOW}) / F_c]^{0.5} \times (F_c / 100)^{0.2} \}$ $\text{IEC 62209-1: } N_c = 2 \times \{ \text{RoundUp} [10 (F_{HIGH} - F_{LOW}) / F_c] \} + 1$						
Notes:						
Per FCC KDB 643646 D01v01r03 (A1)(A2) I) When the Head/Body SAR of an antenna tested in A) is: a) ≤ 3.5 W/kg, testing of all other required channels is not necessary for that antenna b) > 3.5 W/kg and ≤ 4.0 W/kg, testing of the required immediately adjacent channel(s) is not necessary; testing of the other required channels may still be required c) > 4.0 W/kg and ≤ 6.0 W/kg, Head/Body SAR should be measured for that antenna on the required immediately adjacent channels; testing of the other required channels still needs consideration d) > 6.0 W/kg, test all required channels for that antenna						

4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 643646 D01v01r03	SAR Test Reduction Considerations for Occupational PTT Radios

* When the issue number or issue date is omitted, the latest version is assumed.

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant:	Date(s) Evaluated:
Harris Corporation	22 June - 26 June 2017
Product Name / PMN:	Product Model Number / HVIN:
XL-185P	XS-PFM9M, XS-PFM9Y XS-PPM9M, XS-PPM9Y
FCC ID:	ISED ID:
OWDTR-0143-E	3636B-0143
Standard(s) Applied:	
FCC 47 CFR §2.1093 Health Canada's Safety Code 6	
Measurement Procedures:	
FCC KDB 865664, FCC KDB 447498, FCC KDB 643646 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2	
Use Group:	Limits Applied:
<input type="checkbox"/> General Population / User Unaware	<input type="checkbox"/> 1.6W/kg - 1g Volume
<input checked="" type="checkbox"/> Occupational / User Aware	<input checked="" type="checkbox"/> 8.0W/kg - 1g Volume
Reason for Issue:	
<input type="checkbox"/> New Certification	<input checked="" type="checkbox"/> Class II Permissive Change
Reason for Change:	
Addition of E75-0286-001, 1/2 Wave, 890-960MHz, Whip Antenna (SPEN14918)	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

18 July 2017

Date



6.0 RF CONDUCTED POWER MEASUREMENT

Table 6.0 Conducted Power Measurements

Conducted Power Measurements					
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Delta (dBm)	SAR Test Channel (Y/N)
n/a	768.000	34.32	34.80	-0.48	N
n/a	776.000	34.31	34.80	-0.49	N
n/a	798.000	34.37	34.80	-0.43	N
n/a	806.000	35.09	34.80	0.29	N
n/a	816.000	35.11	35.50	-0.39	N
n/a	851.000	35.09	35.50	-0.41	N
n/a	861.000	35.01	35.50	-0.49	Y
n/a	896.000	35.05	35.50	-0.45	Y
n/a	898.500	35.05	35.50	-0.45	Y
n/a	901.000	35.00	35.50	-0.50	Y
n/a	935.000	35.12	35.50	-0.38	Y
n/a	937.500	35.12	35.50	-0.38	Y
n/a	940.000	35.12	35.50	-0.38	Y

7.0 ACCESSORIES EVALUATED

Table 7.0 Manufacturer's Accessory List

Change History			
Change ID	Date	Change Type	Description of Change
1	23 March 2017	Initial	Initial Filing
2	30 June 2017	C2PC	Add E75-0286-001, 1/2 Wave, 890-960MHz, Whip Antenna (SPEN14918)

Manufacturer's Accessory List							
Test Report ID Number	Manufacturer's Part Number	Description	Change ID ⁽¹⁾	UDC Group ⁽²⁾	Type II Group ⁽³⁾	SAR ⁽⁴⁾ Evaluated	SAR ⁽⁵⁾ Tested
Antenna							
T1	14035-4450-01	1/2 Wave Whip Antenna, (762-944 MHz)	1			Y	Y
T2	14035-4450-02	1/4 Wave Stub Antenna (762-944 MHz)	1			Y	Y
T3	KRE1011223/02	900 MHz Antenna (896-941 MHz)	1			Y	Y
T4	E75-0286-001	1/2 Wave Whip Antenna (890-960MHz)	1			Y	Y
Battery							
P1	14034-4010-01	Li-Ion Battery 7.2VDC, 3300mAh	1			Y	Y
P2	14034-4010-04	Li-Ion Battery 7.2VDC, 3100mAh, 22Wh	1			Y	Y
P3	14034-4010-05	Li-Ion Battery 7.2VDC, 3100mAh, 22Wh, UL	1			Y	-

Manufacturer's Accessory List							
Test Report ID Number	Manufacturer's Part Number	Description	Change ID ⁽¹⁾	UDC Group ⁽²⁾	Type II Group ⁽³⁾	SAR ⁽⁴⁾ Evaluated	SAR ⁽⁵⁾ Tested
Audio Accessory							
A1	12082-0600-01	Standard Speaker Microphone	1	7A	PB	Y	Y
A2	12082-0600-02	Storm Speaker Microphone	1	7A	PB	Y	Y
A28	12082-0600-03	Storm Speaker Microphone	6	7A	PB	Y	Y
A3	12150-1000-01	Premium Speaker MIC, Fire, NC	1	9	PB	Y	Y
A4	12082-0650-01	Microphone, Palm, 2-Wire Black	1	7A	IL	Y	Y
A5	12082-0650-02	Microphone, Palm, 2-Wire Beige	3	7A	IL	Y	-
A6	12082-0650-03	Microphone, Mini Lapel, 3-Wire Black	1	7A	IL	Y	Y
A7	12082-0650-04	Microphone, Mini Lapel, 3-Wire Beige	3	7A	IL	Y	-
A8	12082-0650-05	Earphone Kit, Black, XG-100P	**			Y	-
A9	12082-0650-06	Earphone Kit, Beige, XG-100P	**			Y	-
A10	12082-0650-07	Headset, In-Ear, Boom MIC, In-Line PTT	3	7A	IL	Y	-
A11	12082-0650-08	Headset, LTWT, OTH, Single Ear, IN-Line PTT	3	7A	IL	Y	-
A12	12082-0650-09	Headset, LTWT, BTH, Dual Ear, In-Line PTT	3	7A	IL	Y	-
A13	12082-0650-10	Headset, LTWT, BTH, Dual Ear, Pig Tail PTT	3	7A	PT	Y	Y
A14	12082-0650-11	Headset, LTWT, BTH, Dual In-Ear, In-Line PTT	3	7A	IL	Y	-
A15	12082-0650-12	Headset, LTWT, BTH, Dual In-Ear, Pig Tail PTT	3	7A	PT	Y	Y
A16	12082-0650-13	Headset, Heavy Duty, BTH, w/PTT, XG-100P	3	7A	IL	Y	Y
A17	12082-0650-14	Headset, Heavy Duty, OTH, w/PTT, XG-100P	3	7A	IL	Y	-
A18	12082-0650-15	Headset, BTH, Boom MIC, Earpiece, w/PTT	**			Y	-
A19	12082-0650-16	Headset, Tactical, Boom MIC, Earpiece, w/PTT	3	7A	PT	Y	-
A20	12082-0650-17	Skull MIC, w/Body PTT, Earcup, XG-100P	3	9	BB	Y	Y
A21	12082-0650-18	Throat MIC, w/Acoustic Tube, Body PTT	3	9	BB	Y	-
A22	12082-0650-19	Throat MIC, w/Acoustic Tube, Body & Ring PTT	3	9	RB	Y	-
A23	12082-0681-01	Speaker MIC, Wireless Bluetooth	3	BT	PB	Y	-
A24	12082-0684-01	BlueTooth, Covert, Earpiece, MIC, PTT	3	BT	n/a	Y	-
A25	14002-0197-01	Hirose to Unity Adapter	1	7B	n/a	Y	Y
A26	LS103239V1	Earphone, Lapel MIC, 2.5mm	3	n/a	n/a	Y	Y
A27	LS103239V2	Earphone, Lapel MIC, 2.5mm, Right Angle	4	n/a	n/a	Y	-

Manufacturer's Accessory List							
Test Report ID Number	Manufacturer's Part Number	Description	Change ID ⁽¹⁾	UDC Group ⁽¹⁾	Type II Group ⁽²⁾	SAR ⁽³⁾ Evaluated	SAR ⁽⁴⁾ Tested
Body-Worn Accessory							
B1	12082-1290-01	Metal Belt Clip	1			Y	Y
B2	12082-3230-01	D-Swivel (Used w/ 14002-0218-01 and KRY 1011609/1)	1			Y	Y
B3	14002-0218-01	Premium Belt Loop	1			Y	Y
B4	14035-4200-01	Holster, Leather, Radio, Premium	3			Y	Y
B5	14035-4200-02	Holster, Leather w/Rings for Shoulder Strap, Radio, Premium	3			Y	Y
B6	14035-4200-03	Holster, Nylon, Black, Radio, Premium	**			Y	
B7	14035-4200-04	Holster, Ring, Leather, Radio, Premium	**			Y	
B8	14035-4201-01	Kit, 14035-4200-01 Holster Assy w/ 14002-0218-01 Belt Loop	**			Y	
B9	14035-4202-02	Kit, 14035-4200-02 Holster Assy w/ 14002-0218-01 Belt Loop	**			Y	
B10	14035-4202-01	Holster, Leather, Radio, Standard	**			Y	
B11	14035-4202-02	Holster, Leather w/Rings for Shoulder Strap, Radio, Standard	**			Y	
B12	14035-4202-03	Holster, Nylon, Black, Radio, Standard	**			Y	
B13	14035-4202-04	Holster, Ring, Leather, Radio, Standard	**			Y	
B14	CC103333V1	Shoulder Strap	1			Y	Y
B15	KRY 1011609/1	Leather Belt Loop	1			Y	Y

(1) From Table 8.0 - Indicates which change the item was introduced or tested. A "****" in this column indicates these accessories were evaluated on similar product and are deemed compliant.

(2) UDC Group: 9 = 9 Pin, 7A = 7 Pin, 7B = 7 Pin Modified

(3) Type II Group: PB = Palm Button, IL = In-Line Pushbutton, PT = Pigtail Pushbutton, RB = Ring Pushbutton, BB = Body Button, BT = BlueTooth

(4) Accessories are categorized into groups of similar design and construction. Samples of individual groups are SAR Tested and the SAR results apply to ALL members of the Accessory Group. A "Y" in this column indicates the accessory is deemed acceptable.

(5) Accessories and/or Accessory Group members SAR Tested.

8.0 SAR MEASUREMENT SUMMARY

Table 8.0: Measured Results - BODY

Measured SAR Results (1g) - BODY Configuration (FCC/ISED)															
Date	Plot ID	DUT		Test Frequency (MHz)	Modulation	Accessories				DUT Spacing		Conducted Power (dBm)	Measured SAR (10g)		SAR Drift (dB)
		M/N	Type			Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)		100% DC (W/kg)	50% DC (W/kg)	
22 Jun 2017	B1	XL-185P	Radio 1	896	CW	E75-0286-001	4010-01	B1	A1	0	30		8.010	4.005	0.411
23 Jun 2017	B2*	XL-185P	Radio 1	861	CW	E75-0286-001	4010-01	B1	A1	0	30		6.460	3.230	0.103
23 Jun 2017	B3*	XL-185P	Radio 1	898.5	CW	E75-0286-001	4010-01	B1	A1	0	30		8.110	4.055	0.056
22 Jun 2017	B4	XL-185P	Radio 1	901	CW	E75-0286-001	4010-01	B1	A1	0	30		8.390	4.195	0.094
22 Jun 2017	B5	XL-185P	Radio 1	935	CW	E75-0286-001	4010-01	B1	A1	0	30		8.020	4.010	-0.040
23 Jun 2017	B6*	XL-185P	Radio 1	937.5	CW	E75-0286-001	4010-01	B1	A1	0	30		8.190	4.095	-0.006
22 Jun 2017	B7	XL-185P	Radio 1	940	CW	E75-0286-001	4010-01	B1	A1	0	30		7.960	3.980	-0.257
SAR Limit						Spatial Peak				Head/Body		RF Exposure Category			
FCC 47 CFR 2.1093				Health Canada Safety Code 6				1 Gram Average		8.0 W/kg		Occupational/User Aware			

* As per FCC KDB 643664, When SAR for an antenna is > 4.0, testing of immediately adjacent channels is required.

Table 8.1: Measured Results - FACE

Measured SAR Results (1g) - FACE Configuration (FCC/ISED)															
Date	Plot ID	DUT		Test Frequency (MHz)	Modulation	Accessories				DUT Spacing		Conducted Power (dBm)	Measured SAR (10g)		SAR Drift (dB)
		M/N	Type			Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)		100% DC (W/kg)	50% DC (W/kg)	
26 Jun 2017	F1	XL-185P	Radio 1	896	CW	E75-0286-001	4010-01	n/a	n/a	25	33		2.550	1.275	-0.124
26 Jun 2017	F2	XL-185P	Radio 1	901	CW	E75-0286-001	4010-01	n/a	n/a	25	33		2.220	1.110	-0.067
26 Jun 2017	F3	XL-185P	Radio 1	935	CW	E75-0286-001	4010-01	n/a	n/a	25	33		1.990	0.995	-0.177
26 Jun 2017	F4	XL-185P	Radio 1	940	CW	E75-0286-001	4010-01	n/a	n/a	25	33		4.100	2.050	-0.195
SAR Limit						Spatial Peak			Head/Body		RF Exposure Category				
FCC 47 CFR 2.1093			Health Canada Safety Code 6			1 Gram Average			8.0 W/kg		Occupational/User Aware				

9.0 ANALYSIS OF SIMULTANEOUS TRANSMISSION

The XL-185P incorporates integrated Wi-Fi and BlueTooth transmitters capable of simultaneously transmitting with the LMR transmitter. The Wi-Fi and BlueTooth transmitters share the same antenna and the transmissions are interleaved such that only one transmitter is transmitting at a time. As per FCC KDB 447498, simultaneous transmission analysis is required for devices capable of simultaneous transmission. The Wi-Fi, BT and LTE SAR are subject to General Population limits of 1.6W/kg. The LMR SAR is subject to Occupational limits of 8.0W/kg. To determine compliance when different SAR limits are applied to the different transmit modes, the Sum-of-the-Ratios of the SAR to the respective SAR limit is applied. When the Sum-of-the-Ratios is ≤ 1.0 , simultaneous SAR test exclusion may be applied.

SAR for each transmission band, transmission mode and/or equipment class was evaluated with Body-Worn and Audio Accessories in the BODY configuration and without Body-Worn or Audio Accessories in the HEAD configurations. Only the Maximum *reported* SAR for each is used in the Sum-of-the-Ratios calculation and the worst case of all possible combinations is considered.

Table 9.0 List of Possible Transmitters

List of Possible Transmitters				
Type	Class	Frequency Range		Rated Output Power (dBm)
		Lower (MHz)	Upper (MHz)	
LMR 7/800	TNF	768.0	861.0	34.8
		896.0	944.0	35.4
BlueTooth	DSS	2402.0	2480.0	12.7
BLE	DTS	2402.0	2480.0	8.4
WiFi 2.4	DTS	2412.0	2462.0	23.7
	NII	5150.0	5850.0	11.8

Table 9.1 List of Possible Transmitters Combinations

Simultaneous Transmitter Combinations					
Configuration Number	Transmitter				
	LMR 7/800	BlueTooth	BLE	WiFi 2.4	WiFi 5
1	X	X			
2	X		X		
3	X			X	
4	X				X

 Indicates this configuration is not supported

Table 9.2 Analysis of Sum-of-the-Ratios

Analysis of Sum-of-the-Ratios For All Transmitters and Configurations															
Configuration Number	Configuration	Transmitter Type										Sum of Ratios	Sum of SARs (W/kg)		
		LMR Band		BlueTooth		BLE		WiFi 2.4		WiFi 5					
		<u>stand-alone</u>	Ratio to Limit	<u>stand-alone</u>	Ratio to Limit	<u>stand-alone</u>	Ratio to Limit	<u>stand-alone</u>	Ratio to Limit	<u>stand-alone</u>	Ratio to Limit				
		SAR (W/kg)		SAR (W/kg)		SAR (W/kg)		SAR (W/kg)		SAR (W/kg)					
<i>SAR Limit = 8.0W/kg (Occupational)</i>		<i>SAR Limit = 1.6W/kg (General Population)</i>											(W/kg)		
1	HEAD	2.187	0.273	0.006	0.004							0.277	2.193		
2		2.187	0.273			0.048	0.030					0.303	2.235		
3		2.187	0.273					0.040	0.025			0.298	2.227		
4		2.187	0.273							0.031	0.019	0.293	2.218		
1	BODY	4.600	0.575	0.006	0.004							0.579	4.606		
2		4.600	0.575			0.048	0.030					0.605	4.648		
3		4.600	0.575					0.040	0.025			0.600	4.640		
4		4.600	0.575							0.031	0.019	0.594	4.631		

 Indicates this combination is not supported

From the above, the Sum-of-the-Ratios for any given simultaneous transmission combination, when applied to their respective SAR limit, exceeds 1.0. No further analysis is required.

10.0 SCALING OF MAXIMUM MEASURE SAR

Table 10.0 SAR Scaling

Scaling of Maximum Measured SAR ⁽¹⁾											
Plot ID	Configuration	Freq (MHz)	Measured Fluid Deviation		Measured Conducted Power		Measured Drift (dB)	Measured SAR (1g) (W/kg)			
			Permittivity	Conductivity	(dBm)	(W/kg)					
F4	FACE	940	-3.81%	2.02%	35.1	-0.195	2.050				
B4	BODY	901	-2.24%	-3.62%	35.0	0.094	4.195				
Step 1											
Fluid Sensitivity Adjustment											
Plot ID	Scale Factor		X	Measured SAR			Step 1 Adjusted SAR (1g) (W/kg)				
	(%)			(W/kg)		=					
F4	1.000%		X	2.050		=	2.050				
B4	1.000%		X	4.195		=	4.195				
Step 2											
Manufacturer's Tune-Up Tolerance											
Plot ID	Measured Conducted Power		Rated Power		Delta	Step 1 Adjusted SAR (W/kg)	Step 2 Adjusted SAR (1g) (W/kg)				
	(dBm)		(dBm)		(dB)						
F4	35.1		35.4		-0.28	+	2.050				
B4	35.0		35.4		-0.4	+	4.195				
Step 3											
Simultaneous Transmission - Bluetooth and/or WiFi											
Plot ID	Rated Output Power (Pmax)	Freq	Separation Distance		Estimated SAR	Step 2 Adjusted SAR (W/kg)	Step 3 Adjusted SAR (1g) (W/kg)				
	(mW)	(MHz)	(mm)		(W/kg)						
F4					0.05	+	2.187				
B4					0.05	+	4.600				
Step 4											
Drift Adjustment											
Plot ID	Measured Drift		+	Step 3 Adjusted SAR			Step 4 Adjusted SAR (1g) (W/kg)				
	(dB)			(W/kg)		=					
F4	-0.195		+	2.237		=	2.339				
B4	0.094		+	4.650		=	4.600				
Step 5											
Reported SAR											
Plot ID	FCC From Steps 1 through 3				ISED From Steps 1 through 4						
	1g SAR (W/kg)				1g SAR (W/kg)						
F4	2.24				2.34						
B4	4.65				4.65						

NOTES to Table 10.0

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.

NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by light gray text.

Step 1

Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 10.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

Step 3

Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.

Step 4

Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.

Step 5

The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Trevor Whillock
Test Lab Engineer
Celltech Labs Inc.

18 July 2017

Date

11.0 SAR EXPOSURE LIMITS

Table 11.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
	Spatial Average⁽¹⁾ (averaged over the whole body)	0.08 W/kg	0.4 W/kg
	Spatial Peak⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)	1.6 W/kg	8.0 W/kg
	Spatial Peak⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)	4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

12.0 DETAILS OF SAR EVALUATION

Table 12.1 Day Log

Day Log							
Date	Ambient Temp °C	Fluid Temp °C	Humidity	TSL	Fluid Param	SPC	DUT Test
22 Jun 2017	21	22.4	22%	835B		X	
22 Jun 2017	25	23.1	18%	900B			X
23 Jun 2017	22	23.1	19%	900B			X
26 Jun 2017	25	23.4	21%	900H	X	X	
26 Jun 2017	25	24.3	19%	900H			X

12.2 DUT Setup and Configuration

DUT Setup and Configuration	
Overview	The number of test channels and test configurations performed on this device were based on the accessory combinations which produced the highest, or worst case, SAR from previous SAR evaluations of the XL-185P, FCC ID: OWDTR-0143-E and ISED ID: 3636B-0143. Table 6.0 identifies those test channels and each channel was tested in the BODY and FACE configuration. The <u>XL-185P</u> was evaluated at the maximum conducted output power level, preset by the manufacturer, with a fully charged battery in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key continuously depressed. For a Push-To-Talk (PTT) device with a manually operated transmit pushbutton, a 50% duty cycle compensation for the <u>reported SAR</u> was used, as per FCC KDB 447498 (6.1). This was applied only to the LMR bands. The test procedures outlined in FCC KDB 643646 "SAR Test Reduction Considerations for Occupational PTT Radios" as well as FCC KDB 865664, ISED RSS-102 and IEEE 1528 were used throughout the evaluation of this device in the LMR bands.

12.3 DUT Positioning

DUT Positioning	
Positioning	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
FACE Configuration	
The DUT was securely clamped into the device holder with the surface of the DUT normally held to the user's face facing the phantom. The device holder was adjusted to ensure that the horizontal axis of the DUT was parallel to the bottom of the phantom. A 25mm spacer block was used to set the separation distance between the DUT and the phantom to 25mm. When applicable and unless by design, the antenna of the DUT was prevented from sagging away from the phantom. The spacer block was removed before testing.	
BODY Configuration	
Body-Worn and Audio Accessories were affixed to the DUT in the manner in which they are intended to be used. The DUT, with its accessories, were securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom. Body-Worn Accessory straps, linkages, etc. were positioned in a fashion resembling that for which they were intended to be used. Audio Accessory cables, etc., were positioned in a fashion resembling that for which they were intended to be used.	
HEAD Configuration	
This device is not intended to be held to the ear and was not tested in the HEAD configuration.	

12.4 General Procedures and Report

General Procedures and Reporting	
General Procedures	The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 1.0^{\circ}\text{C}$ throughout the test series. TSL analysis and SPC were repeated when the Active TSL use exceeded 84 hours.
An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.	
Reporting	
The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. The SAR values in the 50% DC column have been scaled by 50% for 50% Push-To-Talk duty cycle compensation. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.	
In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY and FACE configurations, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.	

12.5 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running Aprel Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC OET Bulletin 65 Supplement C targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>
Systems Performance Check	
<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>	

12.6 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

12.7 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	12 mm
Zoom Scan Spatial Resolution ΔX, ΔY	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maxima within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

12.8 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	10 mm
Zoom Scan Spatial Resolution ΔX, ΔY	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maxima within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.0 MEASUREMENT UNCERTAINTIES

Table 13.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration*	E.2.1	6.6	Normal	1	1	1	6.60	6.60	∞
Axial Isotropy*	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy*	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect*	E.2.3	8.3	Rectangular	1.732050808	1	1	4.8	4.8	∞
Linearity*	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits*	E.2.4	1.0	Rectangular	1.732050808	1	1	0.6	0.6	∞
Modulation Response	E.2.5	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
Readout Electronics*	E.2.6	1.0	Normal	1	1	1	1.0	1.0	∞
Response Time*	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time*	E.2.8	1.4	Rectangular	1.732050808	1	1	0.8	0.8	∞
RF Ambient Conditions - Noise	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
RF Ambient Conditions - Reflection	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance*	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell*	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation*	E.5	3.9	Rectangular	1.732050808	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	0.3	Normal	1	1	1	0.3	0.3	5
Device Holder Uncertainty*	E.4.1	3.6	Normal	1	1	1	3.6	3.6	∞
SAR Drift Measurement**	E.2.9	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
SAR Scaling***	E.6.5	2.0	Rectangular	1.732050808	1	1	1.2	1.2	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Uncertainty	E.3.2	1.2	Normal	1	1	0.84	1.2	1.0	∞
Liquid Conductivity (measurement)	E.3.3	6.8	Normal	1	0.78	0.71	5.3	4.8	10
Liquid Permittivity (measurement)	E.3.3	5.3	Normal	1	0.23	0.26	1.2	1.4	10
Liquid Conductivity (Temperature)	E.3.2	0.1	Rectangular	1.732050808	0.78	0.71	0.1	0.0	∞
Liquid Permittivity (Temperature)	E.3.2	0.0	Rectangular	1.732050808	0.23	0.26	0.0	0.0	∞
Effective Degrees of Freedom⁽¹⁾								$V_{eff} =$	873.2
Combined Standard Uncertainty			RSS				12.59	12.40	
Expanded Uncertainty (95% Confidence Interval)			k=2				25.18	24.80	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30 therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

* Provided by SPEAG

Table 13.1 Calculation of Degrees of Freedom

Table 13.1	
Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m} \sum_{i=1}^{c_i^4 u_i^4} v_i$

14.0 FLUID DIELECTRIC PARAMETERS

Table 14.0 Fluid Dielectric Parameters 900MHz BODY TSL

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8000	55.34	0.97	54.76	0.94
0.8100	55.30	0.97	54.58	0.92
0.8200	55.26	0.97	54.61	0.94
0.8300	55.22	0.97	54.20	0.95
0.8400	55.18	0.98	54.43	0.95
0.8500	55.15	0.99	54.06	0.98
0.8600	55.12	1.00	54.07	0.98
0.8700	55.09	1.01	54.02	1.00
0.8800	55.06	1.03	54.01	1.00
0.8900	55.03	1.04	54.04	1.01
0.9000	55.00	1.05	53.78	1.01
0.9100	55.00	1.06	53.65	1.04
0.9200	54.99	1.06	53.68	1.03
0.9300	54.97	1.07	53.37	1.04
0.9400	54.95	1.07	53.72	1.07
0.9500	54.93	1.08	53.14	1.07
0.9600	54.92	1.08	53.34	1.10
0.9700	54.90	1.08	52.93	1.10
0.9800	54.88	1.09	52.99	1.11
0.9900	54.86	1.09	52.82	1.13
1.0000	54.84	1.10	53.01	1.14

FLUID DIELECTRIC PARAMETERS						
Date:	22 Jun 2017	Fluid Temp:	22.4	Frequency:	900MHz	Tissue:
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
800.0000	54.7600	0.9400	55.3400	0.97	-1.05%	-3.09%
810.0000	54.5800	0.9200	55.3000	0.97	-1.30%	-5.15%
820.0000	54.6100	0.9400	55.2600	0.97	-1.18%	-3.09%
830.0000	54.2000	0.9500	55.2200	0.97	-1.85%	-2.06%
840.0000	54.4300	0.9500	55.1800	0.98	-1.36%	-3.06%
850.0000	54.0600	0.9800	55.1500	0.99	-1.98%	-1.01%
860.0000	54.0700	0.9800	55.1200	1.00	-1.90%	-2.00%
861.0000	*	54.0650	0.9820	55.1170	1.00	-1.91%
870.0000	54.0200	1.0000	55.0900	1.01	-1.94%	-0.99%
880.0000	54.0100	1.0000	55.0600	1.03	-1.91%	-2.91%
890.0000	54.0400	1.0100	55.0300	1.04	-1.80%	-2.88%
896.0000	*	53.8840	1.0100	55.0120	1.05	-2.05%
898.5000	*	53.8190	1.0100	55.0045	1.05	-2.16%
900.0000	53.7800	1.0100	55.0000	1.05	-2.22%	-3.81%
901.0000	*	53.7670	1.0130	55.0000	1.05	-2.24%
910.0000	53.6500	1.0400	55.0000	1.06	-2.45%	-1.89%
920.0000	53.6800	1.0300	54.9900	1.06	-2.38%	-2.83%
930.0000	53.3700	1.0400	54.9700	1.07	-2.91%	-2.80%
935.0000	*	53.5450	1.0550	54.9600	1.07	-2.57%
937.5000	*	53.6325	1.0625	54.9550	1.07	-2.41%
940.0000	*	53.7200	1.0700	54.9500	1.07	-2.24%
950.0000	53.1400	1.0700	54.9300	1.08	-3.26%	-0.93%
960.0000	53.3400	1.1000	54.9200	1.08	-2.88%	1.85%
970.0000	52.9300	1.1000	54.9000	1.08	-3.59%	1.85%
980.0000	52.9900	1.1100	54.8800	1.09	-3.44%	1.83%
990.0000	52.8200	1.1300	54.8600	1.09	-3.72%	3.67%
1000.0000	53.0100	1.1400	54.8400	1.10	-3.34%	3.64%

*Channel Frequency Tested

Table 14.1 Fluid Dielectric Parameters 900MHz HEAD TSL

Aprel Laboratory				
Test Result for UIM Dielectric Parameter				
Mon 26/Jun/2017 08:48:46				
Freq Frequency(GHz)				
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon				
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma				
Test_e Epsilon of UIM				
Test_s Sigma of UIM				

Freq	FCC_eHFCC	sH	Test_e	Test_s
0.8000	41.68	0.90	41.08	0.88
0.8100	41.63	0.90	40.85	0.88
0.8200	41.58	0.90	40.89	0.90
0.8300	41.53	0.90	40.82	0.90
0.8400	41.50	0.91	40.71	0.90
0.8500	41.50	0.92	40.47	0.92
0.8600	41.50	0.93	40.22	0.93
0.8700	41.50	0.94	40.17	0.94
0.8800	41.50	0.95	40.10	0.95
0.8900	41.50	0.96	39.89	0.97
0.9000	41.50	0.97	39.76	0.98
0.9100	41.50	0.98	39.78	0.98
0.9200	41.49	0.98	39.53	1.00
0.9300	41.47	0.99	39.24	1.01
0.9400	41.45	0.99	39.87	1.01
0.9500	41.43	0.99	39.37	1.02
0.9600	41.42	1.00	39.14	1.04
0.9700	41.40	1.00	39.04	1.05
0.9800	41.38	1.01	39.27	1.05
0.9900	41.36	1.01	38.78	1.05
1.0000	41.34	1.01	38.63	1.07

FLUID DIELECTRIC PARAMETERS							
Date:	26 Jun 2017	Fluid Temp:	23.4	Frequency:	0HeaMHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
800.0000		41.0800	0.8800	41.6800	0.90	-1.44%	-2.22%
810.0000		40.8500	0.8800	41.6300	0.90	-1.87%	-2.22%
820.0000		40.8900	0.9000	41.5800	0.90	-1.66%	0.00%
830.0000		40.8200	0.9000	41.5300	0.90	-1.71%	0.00%
840.0000		40.7100	0.9000	41.5000	0.91	-1.90%	-1.10%
850.0000		40.4700	0.9200	41.5000	0.92	-2.48%	0.00%
860.0000		40.2200	0.9300	41.5000	0.93	-3.08%	0.00%
861.0000	*	40.2150	0.9310	41.5000	0.93	-3.10%	0.00%
870.0000		40.1700	0.9400	41.5000	0.94	-3.20%	0.00%
880.0000		40.1000	0.9500	41.5000	0.95	-3.37%	0.00%
890.0000		39.8900	0.9700	41.5000	0.96	-3.88%	1.04%
896.0000	*	39.8120	0.9760	41.5000	0.97	-4.07%	1.04%
898.5000	*	39.7795	0.9785	41.5000	0.97	-4.15%	1.03%
900.0000		39.7600	0.9800	41.5000	0.97	-4.19%	1.03%
901.0000	*	39.7620	0.9800	41.5000	0.97	-4.19%	0.93%
910.0000		39.7800	0.9800	41.5000	0.98	-4.14%	0.00%
920.0000		39.5300	1.0000	41.4900	0.98	-4.72%	2.04%
930.0000		39.2400	1.0100	41.4700	0.99	-5.38%	2.02%
935.0000	*	39.5550	1.0100	41.4600	0.99	-4.59%	2.02%
937.5000	*	39.7125	1.0100	41.4550	0.99	-4.20%	2.02%
940.0000	*	39.8700	1.0100	41.4500	0.99	-3.81%	2.02%
950.0000		39.3700	1.0200	41.4300	0.99	-4.97%	3.03%
960.0000		39.1400	1.0400	41.4200	1.00	-5.50%	4.00%
970.0000		39.0400	1.0500	41.4000	1.00	-5.70%	5.00%
980.0000		39.2700	1.0500	41.3800	1.01	-5.10%	3.96%
990.0000		38.7800	1.0500	41.3600	1.01	-6.24%	3.96%
1000.0000		38.6300	1.0700	41.3400	1.01	-6.56%	5.94%

*Channel Frequency Tested

15.0 SYSTEM VERIFICATION TEST RESULTS

Table 15.0 System Verification Results 900MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
22 June 2017		900	D900V2		54
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	22.4	21	22%	250	15
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
53.80	55.00	-2.22%	1.01	1.05	-3.81%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
2.67	2.86	-6.64%	1.70	1.85	-8.11%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
10.68	11.44	-6.64%	6.80	7.40	-8.11%

Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.

The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.

The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.

The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.


Table 15.1 System Verification Results 900MHz HEAD TSL

System Verification Test Results					
Date	Frequency (MHz)	Validation Source			S/N
		P/N			
26 June 2017	900	D900V2			54
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	23.4	25	21%	250	15
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
39.80	39.76	-4.19%	0.98	0.97	1.03%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
2.66	2.81	-5.64%	1.67	1.79	-7.19%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
10.64	11.24	-5.34%	6.68	7.16	-6.70%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

16.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 16.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY Postprocessing Software: SEMCAD, V1.8 Build 186
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	ELI Elliptical Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter

Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy \pm 8%)	
Frequency:	10 MHz to > 6 GHz; Linearity: \pm 0.2 dB (30 MHz to 3 GHz)	
Directivity:	\pm 0.2 dB in head tissue (rotation around probe axis) \pm 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: \pm 0.2 dB	
Surface Detect:	\pm 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	EX3DV4 E-Field Probe
Phantom Specification		
The SAM V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.		
		ELI Phantom
Device Positioner Specification		
The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65 $^{\circ}$. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.		
		Device Positioner

17.0 TEST EQUIPMENT LIST

Table 17.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
Schmid & Partner DASY System	-	-	-	-
-DASY Measurement Server	158	1078	CNR	CNR
-Robot	46	599396-01	CNR	CNR
-DAE4	19	353	24-Apr-17	Annual
-EX3DV4 E-Field Probe	213	3600	27-Apr-17	Annual
-CLA150 Validation Source	251	4007	27-Apr-17	Triennial
-D835V2 Validation Dipole	217	4D075	23-Apr-15	Triennial
-D900V2 Validation Dipole	20	54	17-Apr-17	Triennial
-D450V3 Validation Dipole	221	1068	21-Apr-15	Triennial
-D2450V2 Validation Dipole	25	825	23-Apr-15	Triennial
-D5GHzV2 Validation Dipole	126	1031	20-Apr-15	Triennial
ELI Phantom	247	-	CNR	CNR
HP 85070C Dielectric Probe Kit	33	none	CNR	CNR
Gigatronics 8652A Power Meter	110	1835801	29-Feb-16	Triennial
Gigatronics 80701A Power Sensor	248	1833687	29-Feb-16	Triennial
HP 8753ET Network Analyzer	134	US39170292	22-Oct-14	Triennial
Rohde & Schwarz SMR20 Signal Generator	6	100104	29-May-17	Triennial
Amplifier Research 5S1G4 Power Amplifier	106	26235	CNR	CNR

18.0 FLUID COMPOSITION

Table 18.1 Fluid Composition 900MHz HEAD TSL

900		900MHz Head					
Tissue Simulating Liquid (TSL) Composition							
Component by Percent Weight							
Water	Sugar	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾			
40.71	56.63	1.48	0.99	0.19			

(1) Non-iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 18.2 Fluid Composition 900MHz BODY TSL

900		900MHz Body					
Tissue Simulating Liquid (TSL) Composition							
Component by Percent Weight							
Water	Sugar	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾			
53.79	45.13	0.98	0.0	0.1			

(1) Non-iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 22/06/2017 12:27:25 PM

Test Laboratory: Celltech Labs

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:054; Calibrated:04/17/2017
Program Name: SPC 900B

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 900$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

Body d=15mm Pin=250mW. TS=[2.574][2.86][3.146]W/kg/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.77 mW/g


Body d=15mm Pin=250mW. TS=[2.574][2.86][3.146]W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 53.3 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 2.67 mW/g; SAR(10 g) = 1.7 mW/g

Maximum value of SAR (measured) = 2.89 mW/g

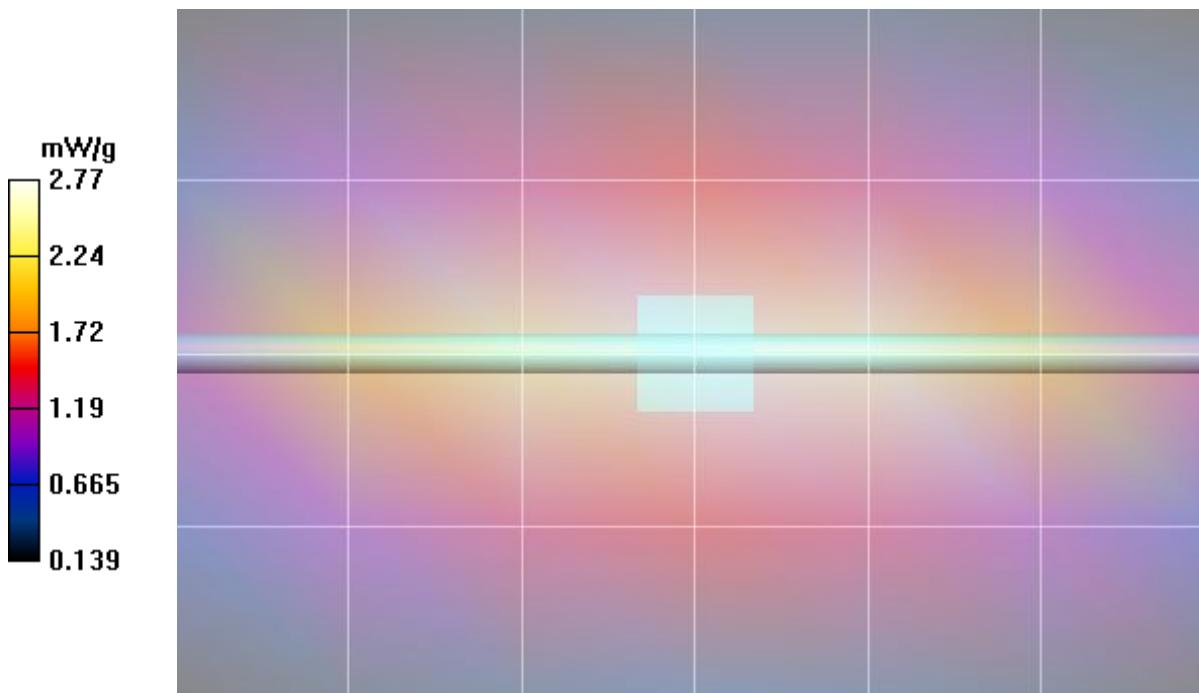

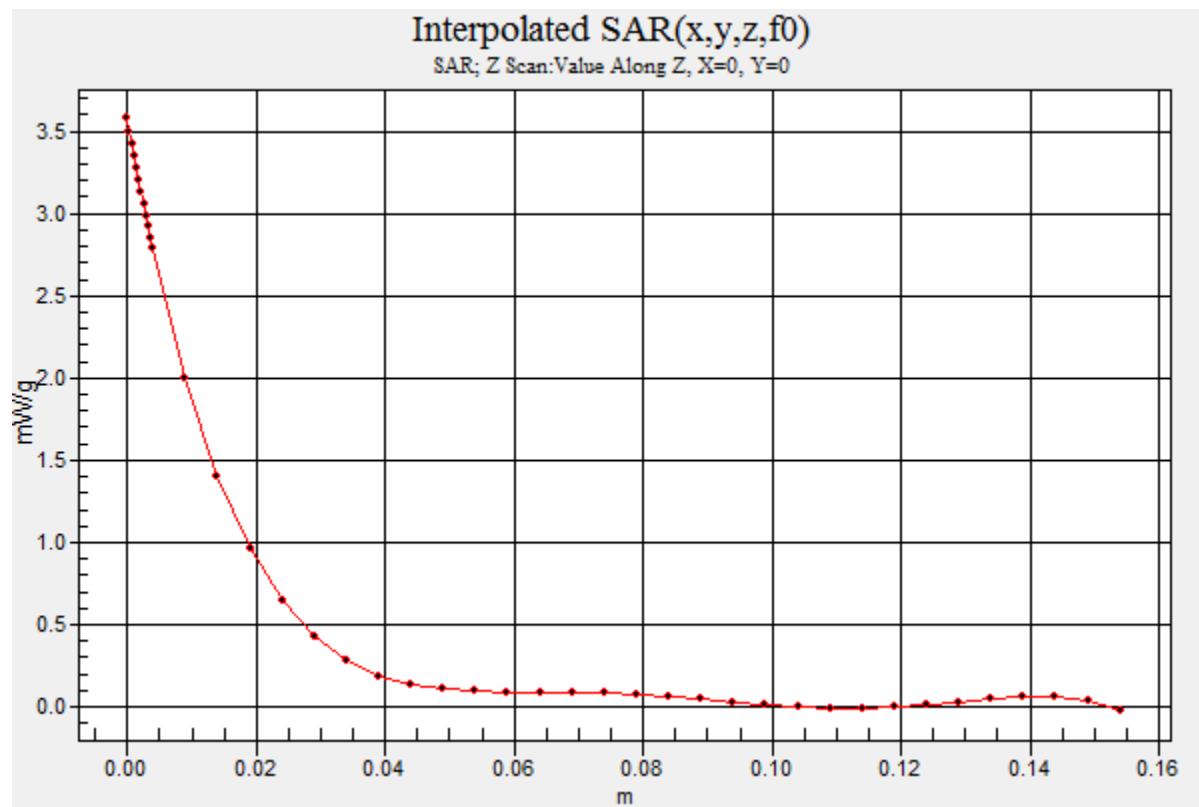

Date/Time: 26/06/2017 9:59:01 AM

Test Laboratory: Celltech Labs

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:054; Calibrated:04/17/2017
Program Name: SPC 900H

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 900$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.25, 8.25, 8.25); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

Head d=15mm Pin=250mW. TS=[2.529][2.81][3.091]W/kg/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.10 mW/g


Head d=15mm Pin=250mW. TS=[2.529][2.81][3.091]W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 56.1 V/m; Power Drift = -0.324 dB

Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 2.66 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.88 mW/g

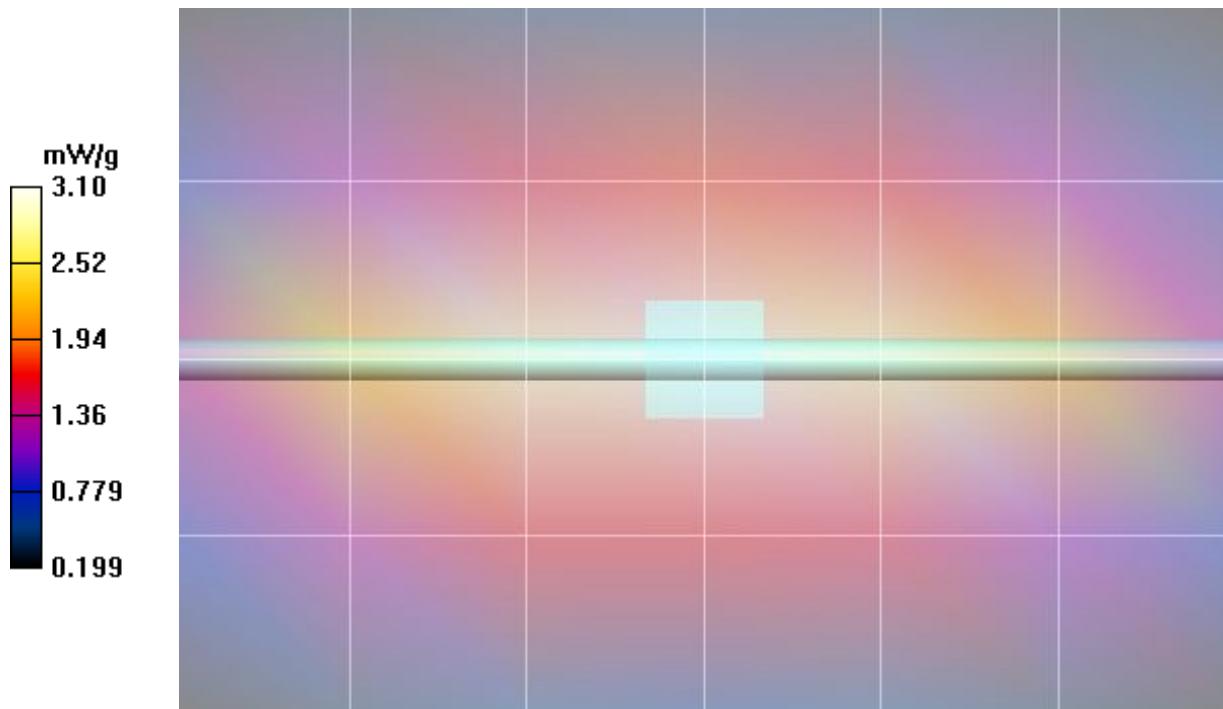

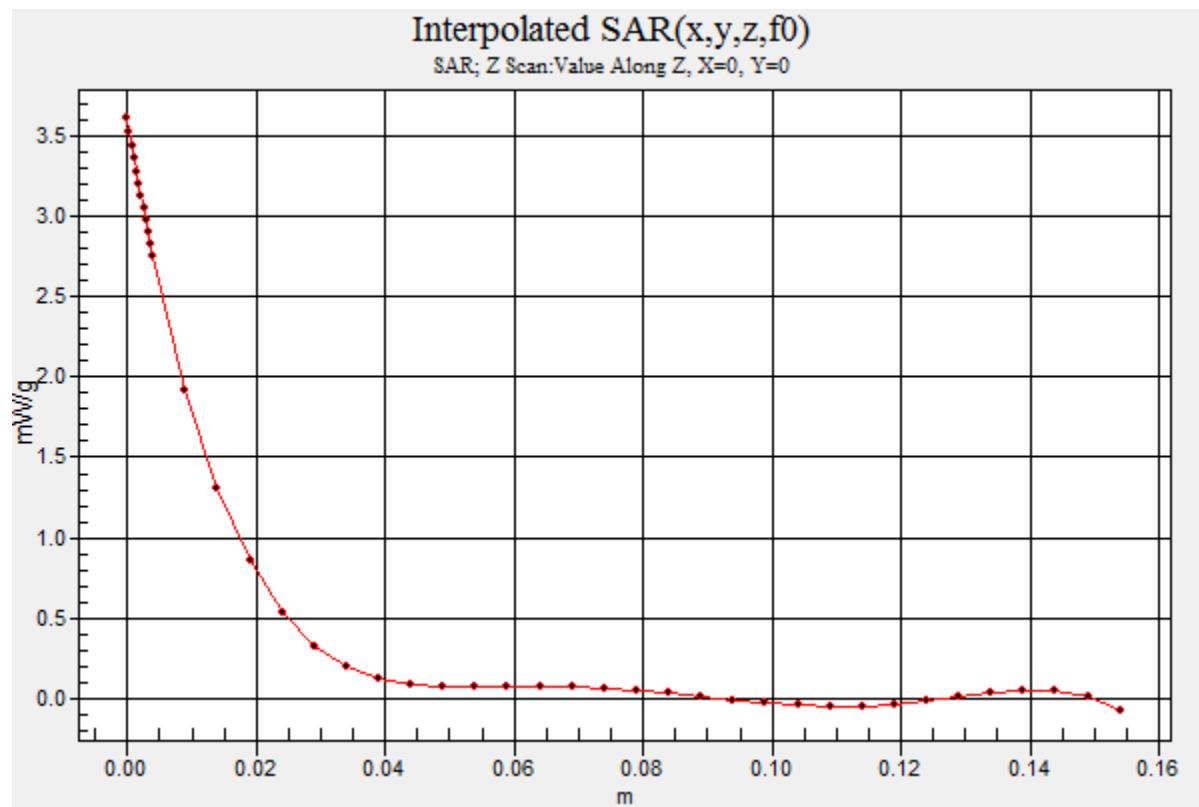

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B1

Date/Time: 22/06/2017 2:32:32 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 896 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 896$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B1 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 896MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01 2/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 8.34 mW/g

B1 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 896MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01 2/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.89 V/m; Power Drift = 0.411 dB

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 8.01 mW/g; SAR(10 g) = 5.64 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 8.47 mW/g

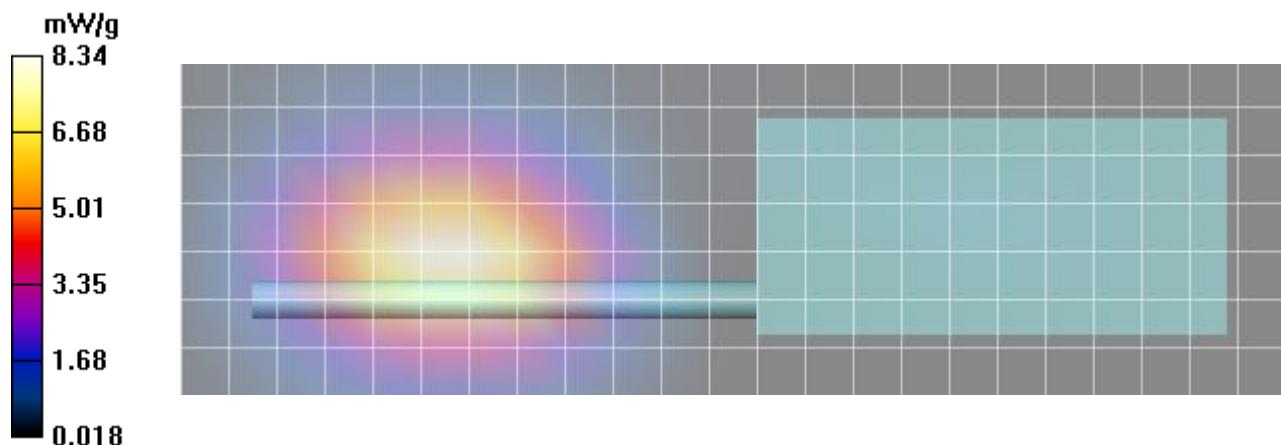

Plot B2

Date/Time: 23/06/2017 8:33:54 AM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 861 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 861$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B2 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 861 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 6.92 mW/g

B2 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 861 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.8 V/m; Power Drift = 0.103 dB
Peak SAR (extrapolated) = 8.82 W/kg
SAR(1 g) = 6.46 mW/g; SAR(10 g) = 4.56 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 6.83 mW/g

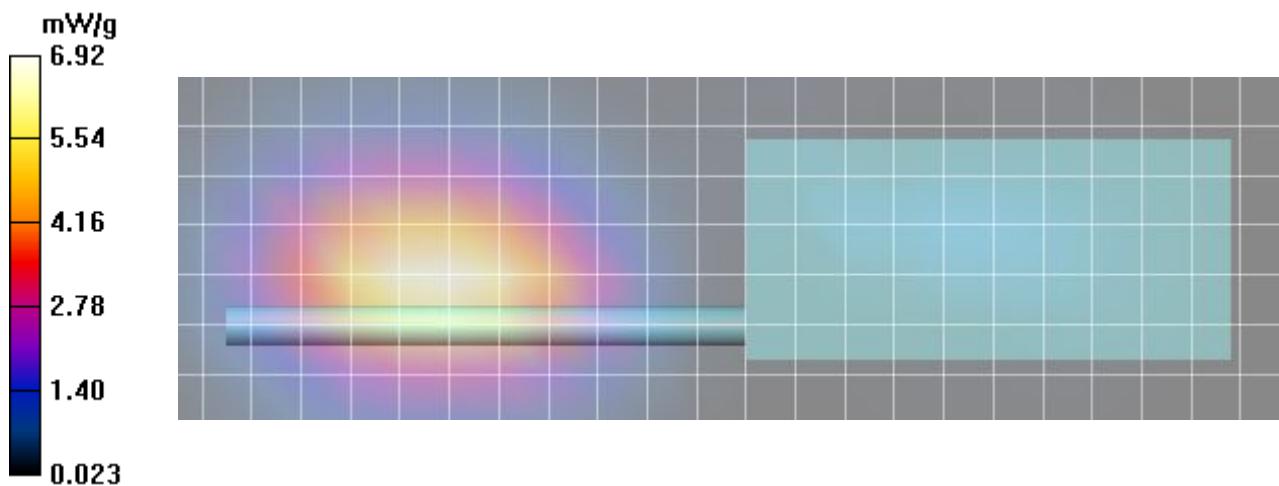

Plot B3

Date/Time: 23/06/2017 9:43:29 AM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 898.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 898.5$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B3 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 898.5 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.66 mW/g

B3 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 898.5 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.17 V/m; Power Drift = 0.056 dB
Peak SAR (extrapolated) = 11.1 W/kg
SAR(1 g) = 8.11 mW/g; SAR(10 g) = 5.74 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.62 mW/g

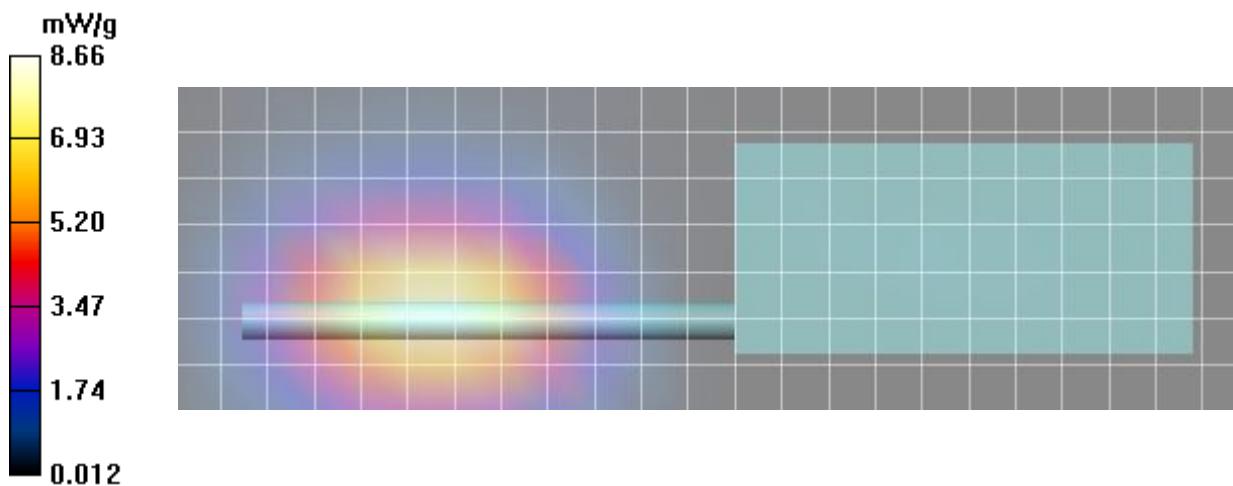

Plot B4

Date/Time: 22/06/2017 2:09:39 PM Date/Time: 22/06/2017 2:19:01 PM

Test Laboratory: Celltech Labs

DUT: Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 901 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 901$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B4Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 901MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.71 mW/g


B4Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 901MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.47 V/m; Power Drift = 0.094 dB
Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 8.39 mW/g; SAR(10 g) = 5.88 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.87 mW/g

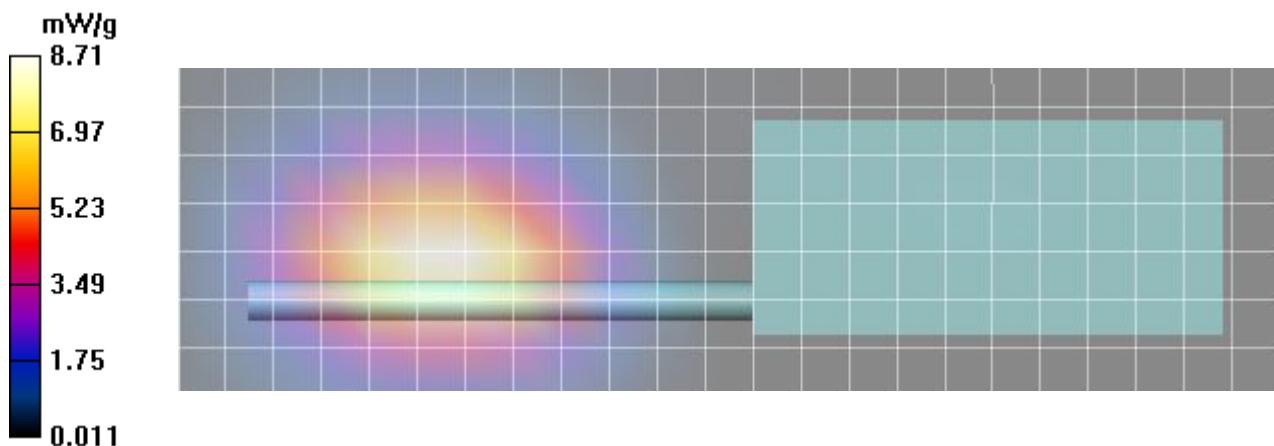

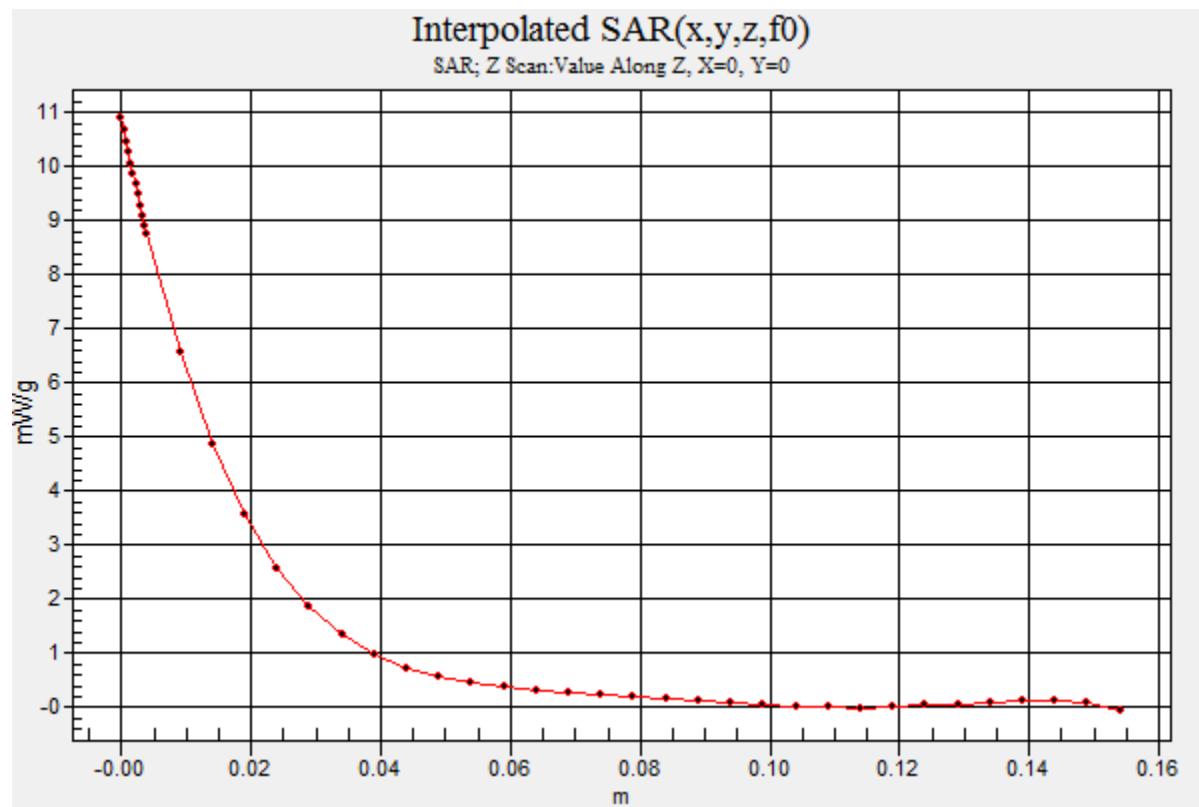

Plot B5

Date/Time: 22/06/2017 2:51:29 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 935 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 935$ MHz; $\sigma = 1.06$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B5 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 935 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.41 mW/g

B5 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 935 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.61 V/m; Power Drift = -0.040 dB
Peak SAR (extrapolated) = 11.1 W/kg
SAR(1 g) = 8.02 mW/g; SAR(10 g) = 5.61 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.47 mW/g

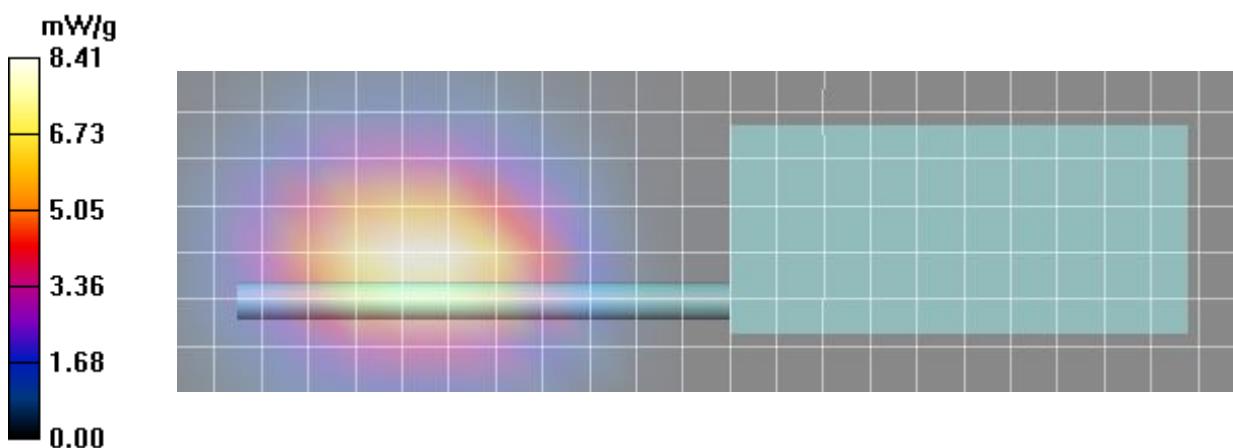

Plot B6

Date/Time: 23/06/2017 9:25:56 AM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 937.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 937.5$ MHz; $\sigma = 1.06$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B6 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 937.5 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.78 mW/g

B6 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 937.5 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.07 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 11.3 W/kg
SAR(1 g) = 8.19 mW/g; SAR(10 g) = 5.72 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 8.70 mW/g

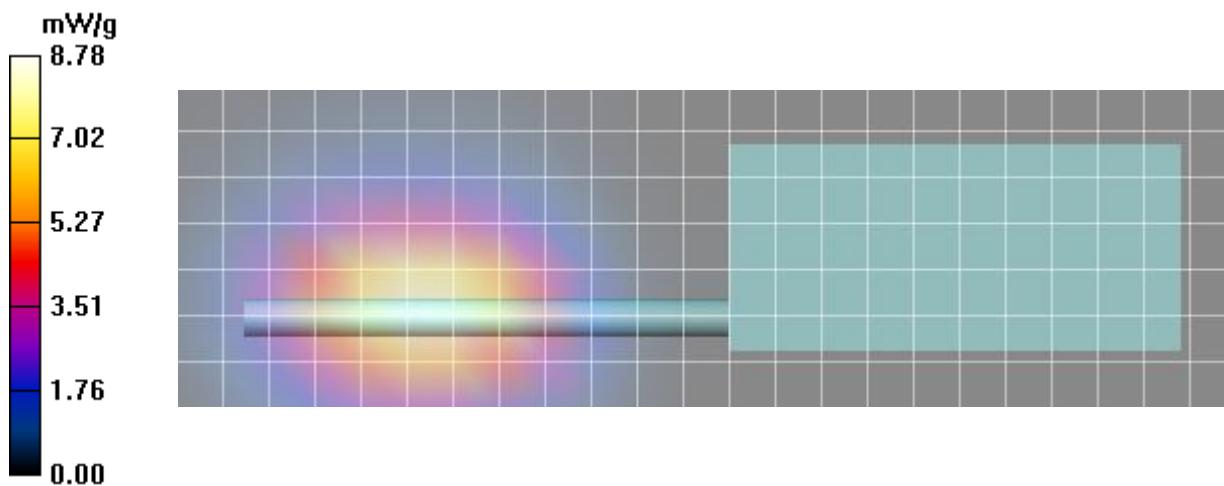

Plot B7

Date/Time: 22/06/2017 3:30:49 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 940 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 940$ MHz; $\sigma = 1.07$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.13, 8.13, 8.13); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

B7 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 940 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 8.30 mW/g

B7 Body, SYS, Eclipse XL-185P 8/900 w/ LTE, 940 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.14 V/m; Power Drift = -0.257 dB

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 7.96 mW/g; SAR(10 g) = 5.54 mW/g

Maximum value of SAR (measured) = 8.39 mW/g

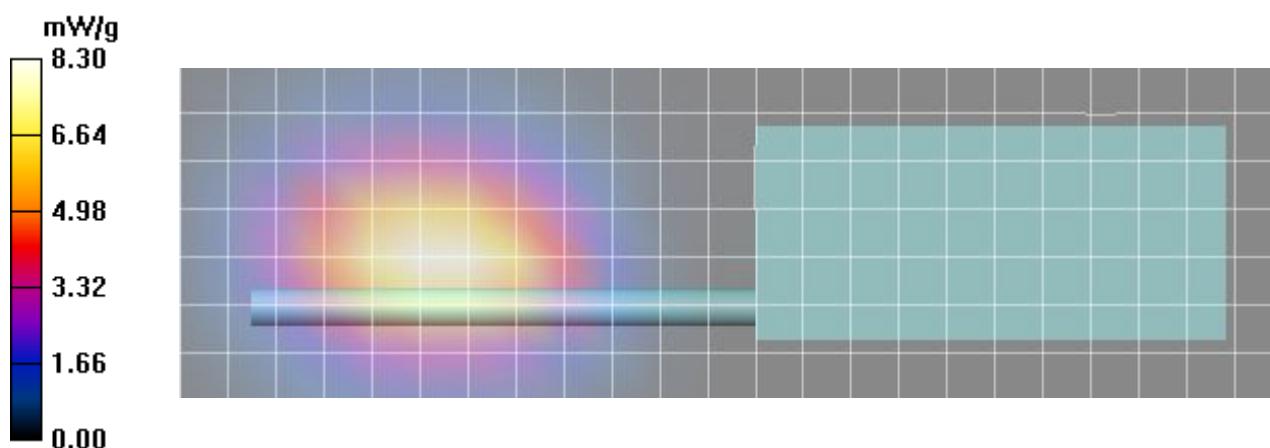

Plot F1

Date/Time: 26/06/2017 2:34:51 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 896 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 896$ MHz; $\sigma = 0.976$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.25, 8.25, 8.25); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

F1 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 896MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.56 mW/g

F1 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 896MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 15.3 V/m; Power Drift = -0.124 dB
Peak SAR (extrapolated) = 3.43 W/kg
SAR(1 g) = 2.55 mW/g; SAR(10 g) = 1.84 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.70 mW/g

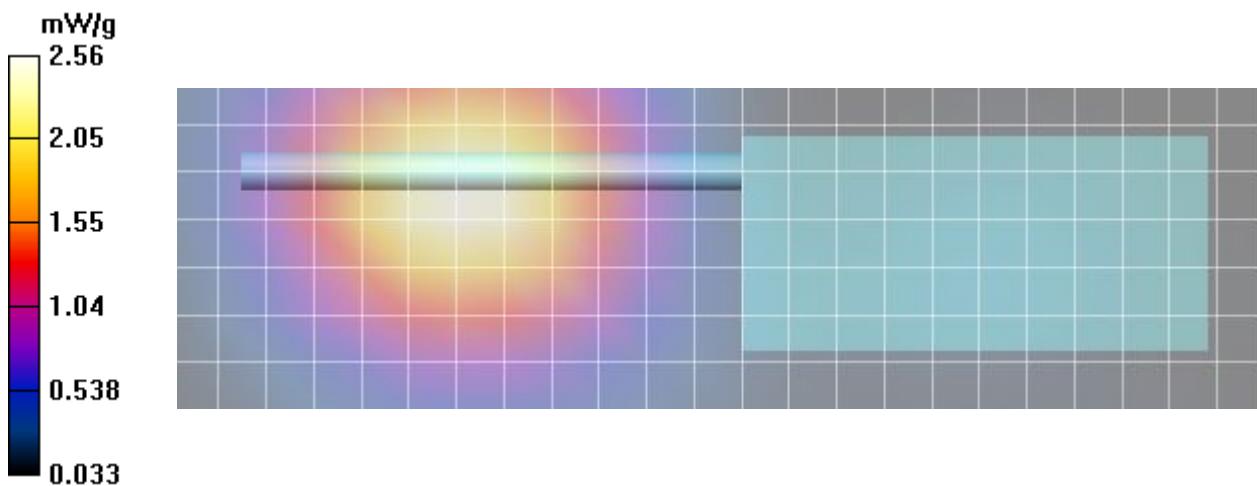

Plot F2

Date/Time: 26/06/2017 3:06:54 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 901 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 901$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.25, 8.25, 8.25); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

F2 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 901MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.24 mW/g

F2 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 901MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.5 V/m; Power Drift = 0.067 dB
Peak SAR (extrapolated) = 2.99 W/kg
SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.6 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.34 mW/g

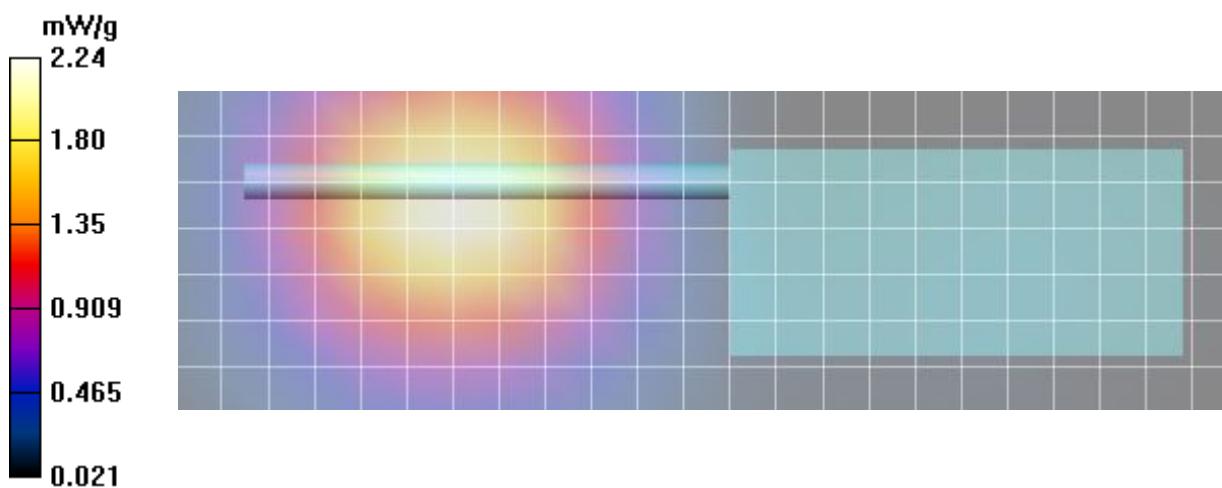

Plot F3

Date/Time: 26/06/2017 3:27:21 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 935 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 935$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.25, 8.25, 8.25); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

F3 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 935 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):
Measurement grid: dx=15mm, dy=15mm


[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.99 mW/g

F3 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 935 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.1 V/m; Power Drift = -0.177 dB
Peak SAR (extrapolated) = 2.70 W/kg
SAR(1 g) = 1.99 mW/g; SAR(10 g) = 1.42 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.11 mW/g

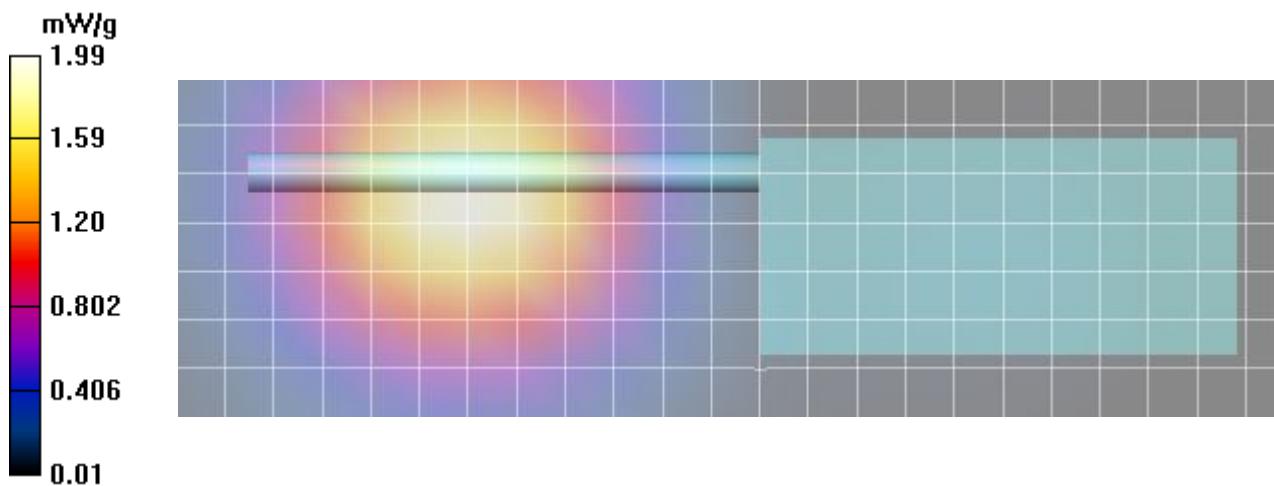

Plot F4

Date/Time: 26/06/2017 3:46:01 PM

Test Laboratory: Celltech Labs

DUT:Harris; Type: PTT Radio Transceiver;
Program Name: 900B

Communication System: Lotus -OWDTR-0143-E; Frequency: 940 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 940$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.25, 8.25, 8.25); Calibrated: 27/04/2017
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 24/04/2017
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 145

F4 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 940 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Area Scan (8x24x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.11 mW/g

F4 Face, SYS, Eclipse XL-185P 8/900 w/ LTE, 940 MHz, bc, spk-mic, ant E75-0286-001, bat 4010-01/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 5.67 W/kg

SAR(1 g) = 4.1 mW/g; SAR(10 g) = 2.89 mW/g

Maximum value of SAR (measured) = 4.36 mW/g

