



ITS**Intertek Testing Services
ETL SEMKO**

**FCC Part 90 Test Report
for
M/A-Com, Inc.
on the
RF Exposure Testing
of the
OpenSky M-803 Mobile Radio System
Model: MAMROS0004**

FCC ID: BV8M803M

Test Report #: 3061720.M803
Date of Report: September 29, 2004

Project #: 3061720
Dates of Test: July 2, 2004

	Nicholas Abbondante, Test Engineer
	Roland Gubisch, Chief Engineer

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

FCC Part 90 Certification



Intertek Testing Services NA, Inc.

70 Codman Hill Road, Boxborough, MA 01719

Telephone 978-263-2662 Fax 978-263-4120 Home Page www.etlsemko.com



Table of Contents

1.0	Summary of Tests	3
2.0	General Description.....	4
2.1	Product Description	4
2.2	Related Submittal(s) Grants	4
2.3	Test Facility	5
3.0	RF Power Output.....	6
3.1	Test Procedure	6
3.2	Test Results.....	11

Intertek**ETL SEMKO***70 Codman Hill Road Boxborough MA 01719*M/A-Com, Model No. MAMROS0004
FCC ID: BV8M803M

Date of Test: July 2, 2004

1.0 Summary of Tests**FCC ID: BV8M803M**
Model No.: MAMROS0004

FCC RULE	DESCRIPTION OF TEST	RESULTS	REPORT PAGE
1.1310, 2.1091	RF Exposure	Passed	6

2.0 General Description

2.1 Product Description

The OpenSky M-803 Mobile Radio is a versatile voice and data radio designed for the mobile environment. The M-803 Mobile Radio operates in the 800 MHz SMR and NPSPAC frequency bands. A production version of the M-803 Unit was received on July 1, 2004 in good condition. The purpose of testing is to perform a routine RF Exposure evaluation for five antennas which are being added to the existing filing. Only the OpenSky digital modulation (OTP/ORP which employs a GFSK modulation) software was provided and tested. This radio has been tested and complies with the FCC RF exposure limits for Controlled Exposure.

The EUT has been tested at the request of

Company: M/A-Com
1011 Pawtucket Blvd.
Lowell, MA, 01853-2395

Name of contact: Benjamin George
Telephone: (978) 442-5008
Fax: (978) 442-5353

Overview of M-803 Mobile Radio Unit

Applicant	M/A-Com
Trade Name	OpenSky M-803 Mobile Radio
FCC Identifier	BV8M803M
Use of Product	Voice and Data Communication
Type of Modulation	GFSK and FM
Bit Rate	19200 bps
Max. Allowed Deviation	10 kHz
RF Output	25 Watts Rated
The dc voltage applied to and current into the several elements of the final RF amplifying device	Voltage: 12VDC Current: 9A
Frequency Range	806 – 824 MHz and 851 – 869 MHz
Max. Number of Channels	830
Antenna(e) & Gain	3 dBd (5 dBi)
Detachable Antenna?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Receiver L.O. Frequency	921 – 939 MHz
External Input	<input checked="" type="checkbox"/> Audio <input checked="" type="checkbox"/> Digital Data

2.2 Related Submittal(s) Grants

None.

2.3 Test Facility

Site 2C (Middle Site) is a 3m and 10m sheltered emissions measurement range located in a light commercial environment in Boxborough, Massachusetts. It meets the technical requirements of ANSI C63.4-1992 and CISPR 22:1993/EN 55022:1994 for radiated and conducted emission measurements. The shelter structure is entirely fiberglass and plastic, with outside dimensions of 33 ft x 57 ft. The structure resembles a quonset hut with a center ceiling height of 16.5 ft.

The testing floor is covered by a galvanized sheet metal groundplane that is earth-grounded via copper rods around the perimeter of the site. The joints between individual metal sheets are bridged with a 2 inch wide metal strips to provide low RF impedance contact throughout. The sheets are screwed in place with stainless steel, round-head screws every three inches. Site illumination and HVAC are provided from beneath the ground reference plane through flush entry ports, the port covers are electrically bonded to the ground plane.

A flush metal turntable with 12 ft. diameter and 5000 lb. load capacity is provided for floor-standing equipment. A wooden table 80 cm high is used for table-top equipment. The turntable is electrically connected to the ground plane with three copper straps. The straps are connected to the turntable at the center of it with ground braid. The copper strap is directly connected to the groundplane at the edges of the turntable. The turntable is located on the south end of the structure and the antennas are mounted 3 and 10 meters away to the north. The antenna mast is a non-conductive with remote control of antenna height and polarization. The antenna height is adjustable from 1 to 4 meters.

FCC Site Registration #: 91658

Industry Canada Site Registration #: IC4585-2

M/A-Com, Model No. MAMROS0004
FCC ID: BV8M803M

Date of Test: July 2, 2004

3.0 RF Exposure
FCC §1.1310, §2.1091

3.1 Test Procedure

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK-30	100225	06/04/05
High Frequency Cable	Megaphase	TM40 K1K1 197	CBL028	11/11/04
Antenna	Compliance Design, Inc.	B300	3352	09/19/04

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Laptop	IBM	Thinkpad 2647	78-GPZ99
DC Power Supply	Samlex America	SEC1223	03061-3J04-00763
Test Vehicle	Oldsmobile	1994 Cutlass Supreme	1G3WH55M2RD302262
Fan	Electrix	K128	N/L
Equipment Under Test			
OpenSky Mobile Radio	M/A-Com, Inc.	M-803	A4006016E629
3 dBd Gain Tri-Band Roof Mount Antenna	Antenex	OEM2322	#1
3 dBd Gain Tri-Band Roof Mount Antenna	Andrew (Antenna Specialists)	L239R-A	#2
3 dBd Gain Tri-Band Roof Mount Antenna	Maxrad	MAX7603	#3
3 dBd Gain Dual-Band Trunk-Lip Mount Antenna	Maxrad	MUF7603	#4
3 dBd Gain Dual-Band Low-Profile Roof Mount Antenna	Maxrad	MLPV700	#5


The EUT was activated at full power, and connected to each of the antennas listed in this report. Each antenna was placed at a typical mounting point. At the request of M/A-Com, the roof mounted antennas were connected to an 8"x8" flat metal panel which was 3mm thick. The metal panel the roof mounted antennas were mounted on was grounded to the chassis of the vehicle at the sun visor attachment screw via a 195 cm 14-gauge ground wire. A measurement antenna was connected to a spectrum analyzer, and peak readings of the field strength were taken at various test points outside and inside of the vehicle. Measurement antenna height and polarization were varied at each point to produce the worst-case value. Below are diagrams showing the transmit antenna mounting point and the corresponding test point locations and designations. Note that for this set of antennas, only the trunk @ window and roof mounting points were tested as they fully represent the intended use of these antennas.

The readings at the spectrum analyzer are in dBuV/m. The limits are expressed in mW/cm². An equation that relates these two values is

$$E = 20 \text{ LOG} (1 \times 10^6 (377 * 10 * P)^{1/2})$$

where E is the measured voltage in dBuV/m, and P is the power density in mW/cm². The factor 377 is the impedance of free space, a constant. The obtained power density can then be compared to the limits. The power density limit for controlled exposure is f/300, where f is the transmit frequency. The worst case limits are at the lowest transmit frequency, and the measured RF output power of the EUT at the antenna port was maximum at the lowest transmit frequency.

Therefore the lowest transmit frequency of 806.0125 MHz was selected as the worst case frequency and the limit for Maximum Permissible Exposure (MPE) in controlled environments was determined to be 2.687 mW/cm².

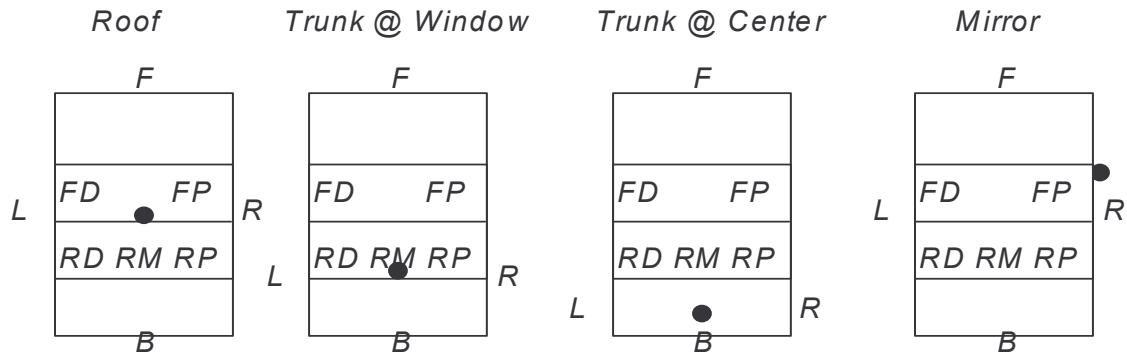

F = Front

L = Left

R = Right

B = Back

FD = Front Driver Side

FP = Front Passenger Side

RD = Rear Driver Side

RM = Rear Middle

RP = Rear Passenger Side


● = Transmit Antenna




Roof Mounting on Test Vehicle, #1 Antenna




Roof Mounting on Test Vehicle, #2 Antenna

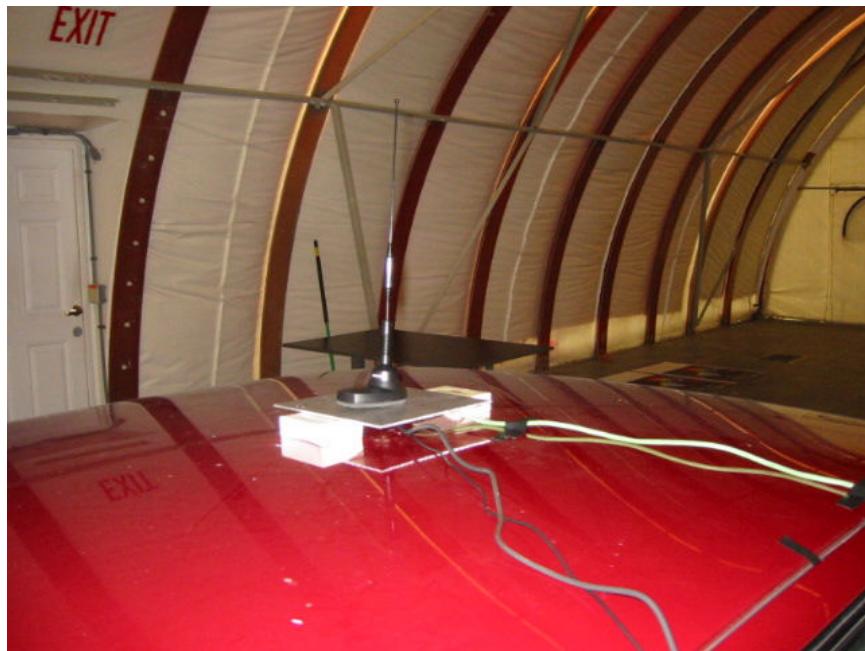

Roof Mounting on Test Vehicle, #3 Antenna

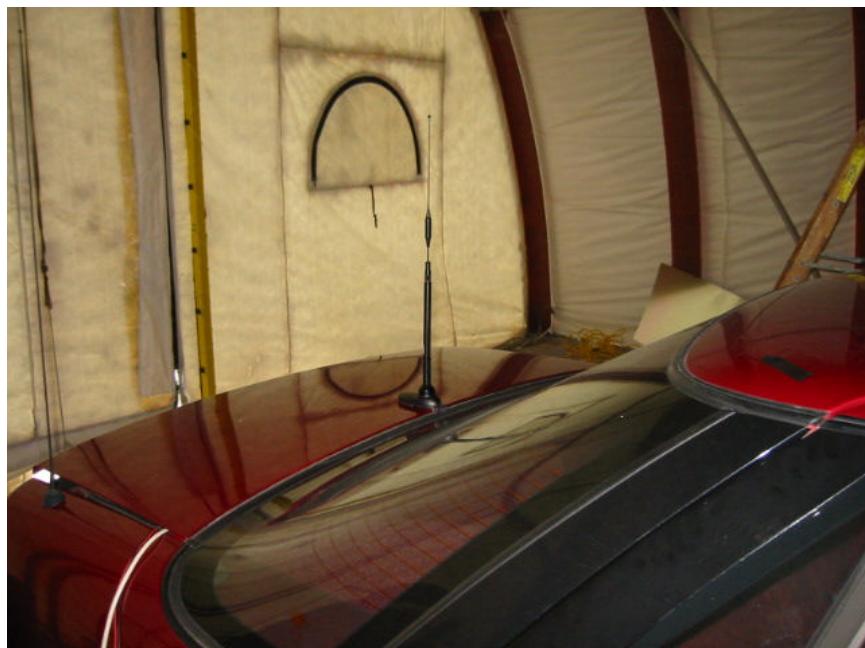

Trunk Mounting on Test Vehicle, #4 Antenna

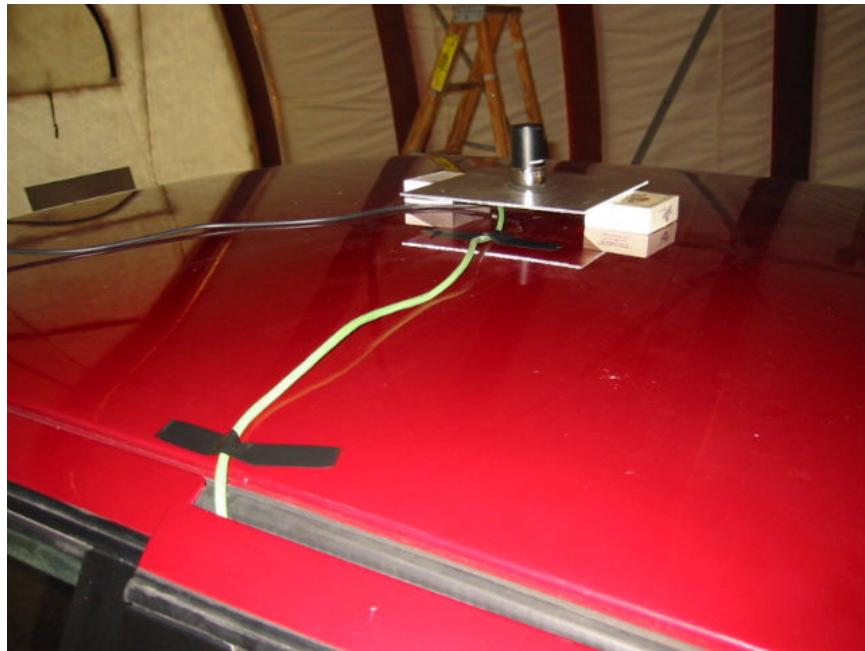

Roof Mounting on Test Vehicle, #5 Antenna

3.2 Test Results

Antenex OEM2322 3dBd Gain Roof Mount on Oldsmobile

Test Point	Field Strength Reading (dBuV/m)	Power Density Reading (mW/cm ²)	Controlled MPE Limit (mW/cm ²)	Test Point Distance (cm)	Interpolated Power Density at 43 cm (mW/cm ²) [†]
Front	138.14	0.017	2.687	294.0	0.795
Back	141.98	0.042	2.687	203.0	0.936
Left	147.15	0.138	2.687	97.0	0.702
Right	147.76	0.158	2.687	110.0	1.033
Front Driver	138.77	0.020	2.687	55.0	0.033
Front Passenger	139.31	0.023	2.687	54.0	0.036
Rear Driver	139.50	0.024	2.687	55.0	0.039
Rear Middle	138.61	0.019	2.687	48.0	0.024
Rear Passenger	141.00	0.033	2.687	60.0	0.064

Andrew (Antenna Specialists) L239R-A 3dBd Gain Roof Mount on Oldsmobile

Test Point	Field Strength Reading (dBuV/m)	Power Density Reading (mW/cm ²)	Controlled MPE Limit (mW/cm ²)	Test Point Distance (cm)	Interpolated Power Density at 43 cm (mW/cm ²) [†]
Front	139.58	0.024	2.687	294.0	1.122
Back	142.65	0.049	2.687	203.0	1.092
Left	148.10	0.171	2.687	97.0	0.870
Right	147.47	0.148	2.687	110.0	0.969
Front Driver	136.53	0.012	2.687	55.0	0.020
Front Passenger	138.34	0.018	2.687	54.0	0.028
Rear Driver	136.32	0.011	2.687	55.0	0.018
Rear Middle	133.24	0.006	2.687	48.0	0.007
Rear Passenger	138.24	0.018	2.687	60.0	0.035

Maxrad MAX7603 3dBd Gain Roof Mount on Oldsmobile

Test Point	Field Strength Reading (dBuV/m)	Power Density Reading (mW/cm ²)	Controlled MPE Limit (mW/cm ²)	Test Point Distance (cm)	Interpolated Power Density at 43 cm (mW/cm ²) [†]
Front	138.43	0.018	2.687	294.0	0.841
Back	140.10	0.027	2.687	203.0	0.602
Left	146.94	0.131	2.687	97.0	0.667
Right	144.54	0.075	2.687	110.0	0.491
Front Driver	141.22	0.035	2.687	55.0	0.057
Front Passenger	139.03	0.021	2.687	54.0	0.033
Rear Driver	141.73	0.040	2.687	55.0	0.065
Rear Middle	142.35	0.046	2.687	48.0	0.057
Rear Passenger	135.53	0.009	2.687	60.0	0.018

Maxrad MUF7603 3dBd Gain Trunk@Window Mount on Oldsmobile

Test Point	Field Strength Reading (dBuV/m)	Power Density Reading (mW/cm ²)	Controlled MPE Limit (mW/cm ²)	Test Point Distance (cm)	Interpolated Power Density at 43 cm (mW/cm ²) [†]
Front	135.61	0.010	2.687	429.0	0.995
Back	150.04	0.268	2.687	73.0	0.772
Left	148.94	0.208	2.687	100.0	1.125
Right	150.67	0.309	2.687	100.0	1.671
Front Driver	144.21	0.070	2.687	165.0	1.031
Front Passenger	141.60	0.038	2.687	165.0	0.560
Rear Driver	145.64	0.097	2.687	85.0	0.379
Rear Middle	144.12	0.068	2.687	75.0	0.207
Rear Passenger	143.30	0.057	2.687	85.0	0.223

Maxrad MLPV700 3dBd Gain Roof Mount on Oldsmobile

Test Point	Field Strength Reading (dBuV/m)	Power Density Reading (mW/cm ²)	Controlled MPE Limit (mW/cm ²)	Test Point Distance (cm)	Interpolated Power Density at 43 cm (mW/cm ²) [†]
Front	138.90	0.021	2.687	294.0	0.982
Back	140.14	0.027	2.687	203.0	0.602
Left	146.71	0.124	2.687	97.0	0.631
Right	146.62	0.122	2.687	110.0	0.798
Front Driver	137.59	0.015	2.687	55.0	0.025
Front Passenger	139.70	0.025	2.687	54.0	0.039
Rear Driver	136.52	0.012	2.687	55.0	0.020
Rear Middle	133.50	0.006	2.687	48.0	0.007
Rear Passenger	139.52	0.024	2.687	60.0	0.047

$$^† P_{43cm} = P_{meas} * (Test\ Point\ Distance/43)^2$$

This radio has been tested and complies with the FCC RF exposure limits for Controlled Exposure.

Results: Passed
