

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.29 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M767 ($\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 78.1 V/m; Power Drift = 0.545 dB

Peak SAR (extrapolated) = 21.1 W/kg

SAR(1 g) = 11.3 mW/g; SAR(10 g) = 7.11 mW/g

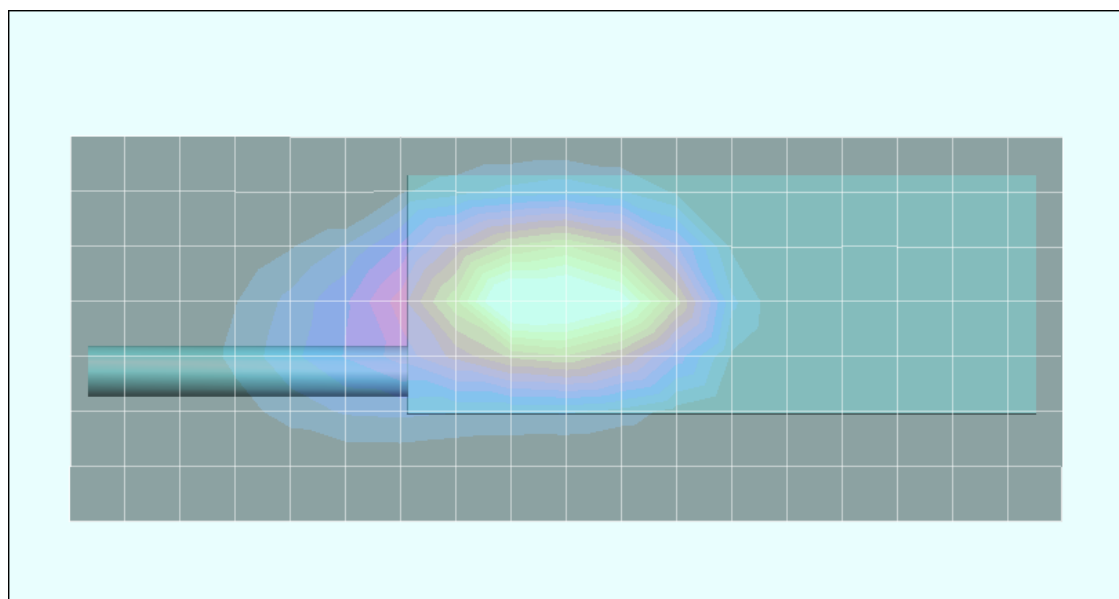

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						129 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.22 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 85.8 V/m; Power Drift = -0.0292 dB


Peak SAR (extrapolated) = 24.7 W/kg

SAR(1 g) = 14.3 mW/g; SAR(10 g) = 9.37 mW/g

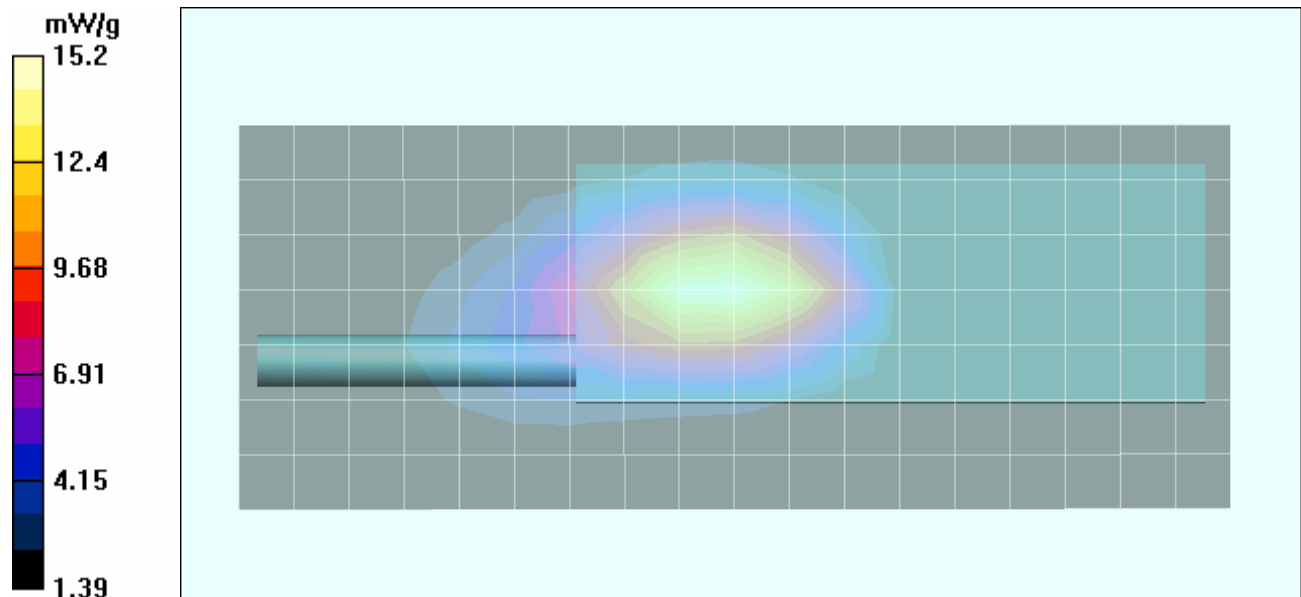

SAR-versus-Time Power Droop Evaluation

DUT with Belt-Clip & Speaker-Microphone accessories
NiMH NIS Battery
Quarter-Wave Antenna
Mid Channel (766.9875 MHz)

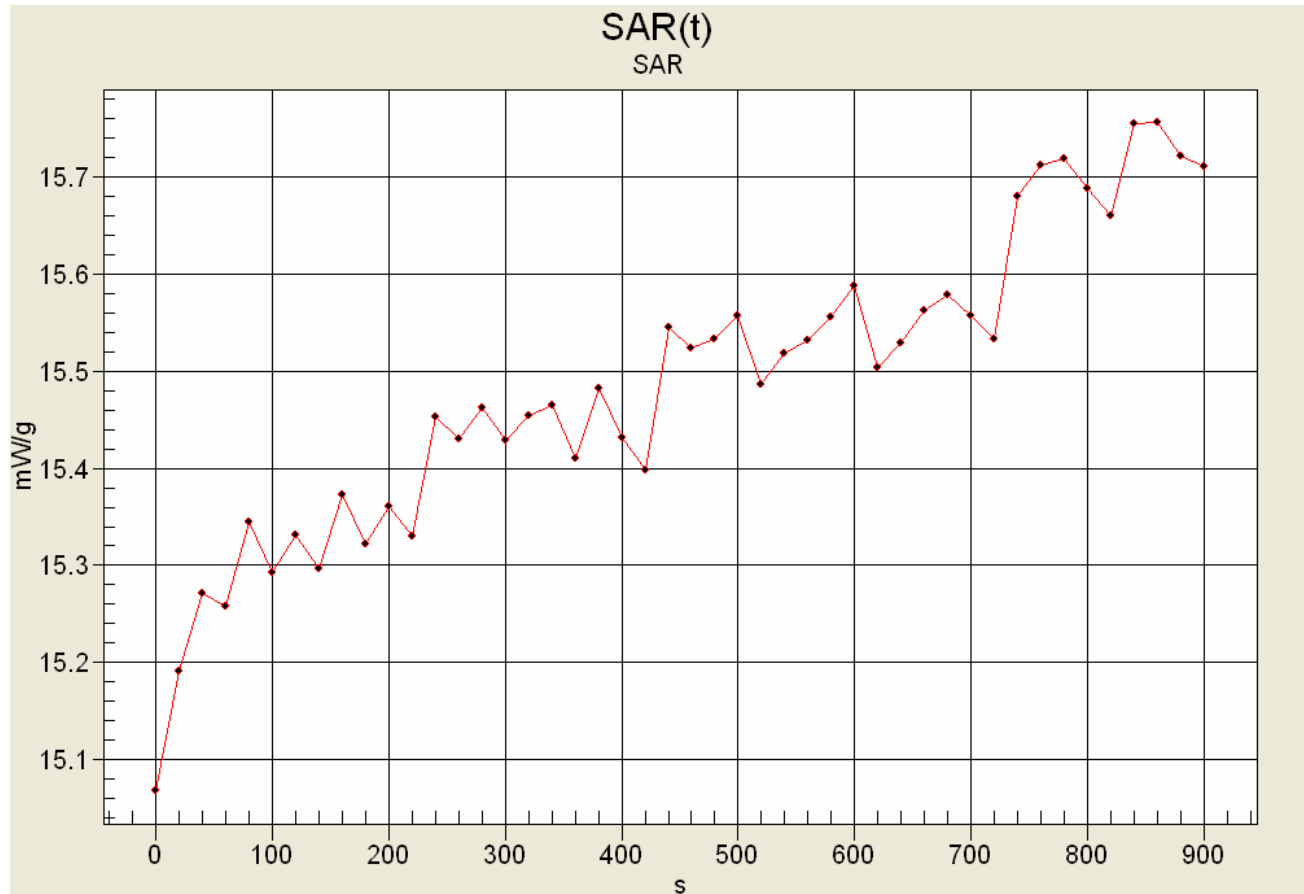

Start SAR: 15.0683 mW/g
Max. SAR: 15.7561 mW/g (0.1938dB)
Highest SAR after 340s: 15.4649 mW/g (0.1128 dB)
(340s = Zoom Scan Duration)

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.21 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 78.4 V/m; Power Drift = 0.201 dB

Peak SAR (extrapolated) = 21.1 W/kg

SAR(1 g) = 12.2 mW/g; SAR(10 g) = 8.05 mW/g

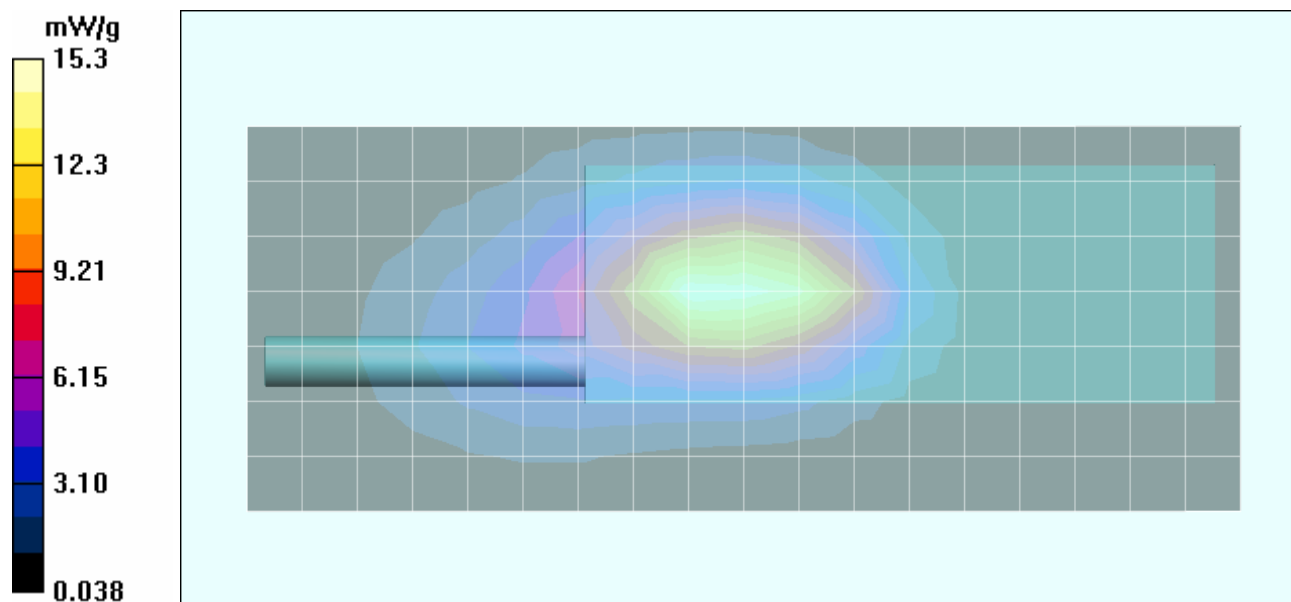

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.35 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.8 V/m; Power Drift = 0.104 dB


Peak SAR (extrapolated) = 24.8 W/kg

SAR(1 g) = 14.4 mW/g; SAR(10 g) = 9.46 mW/g

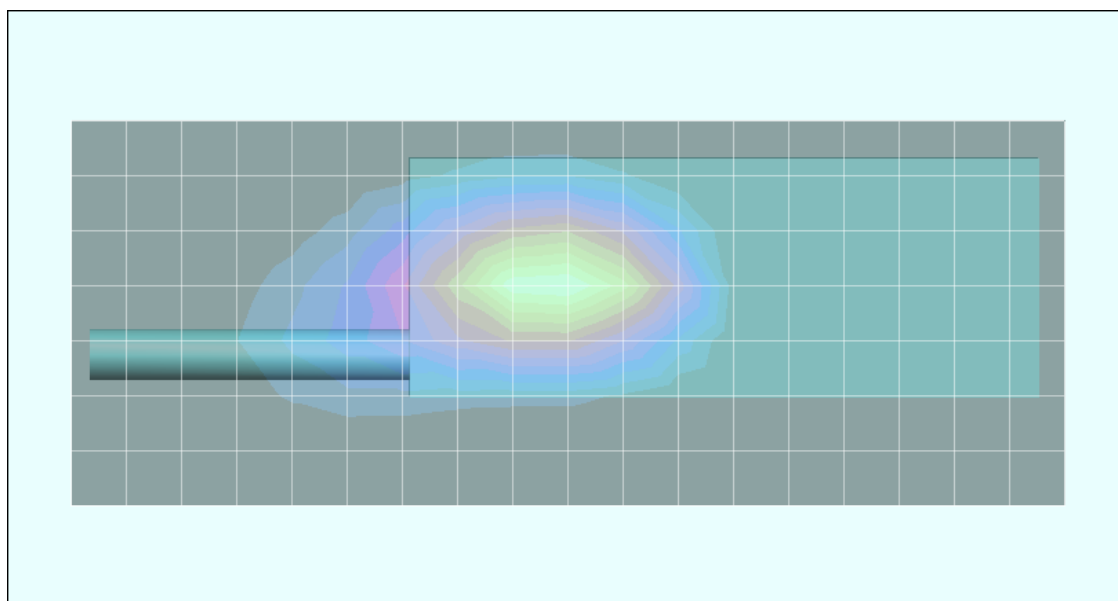

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						133 of 336

Z-Axis Scan

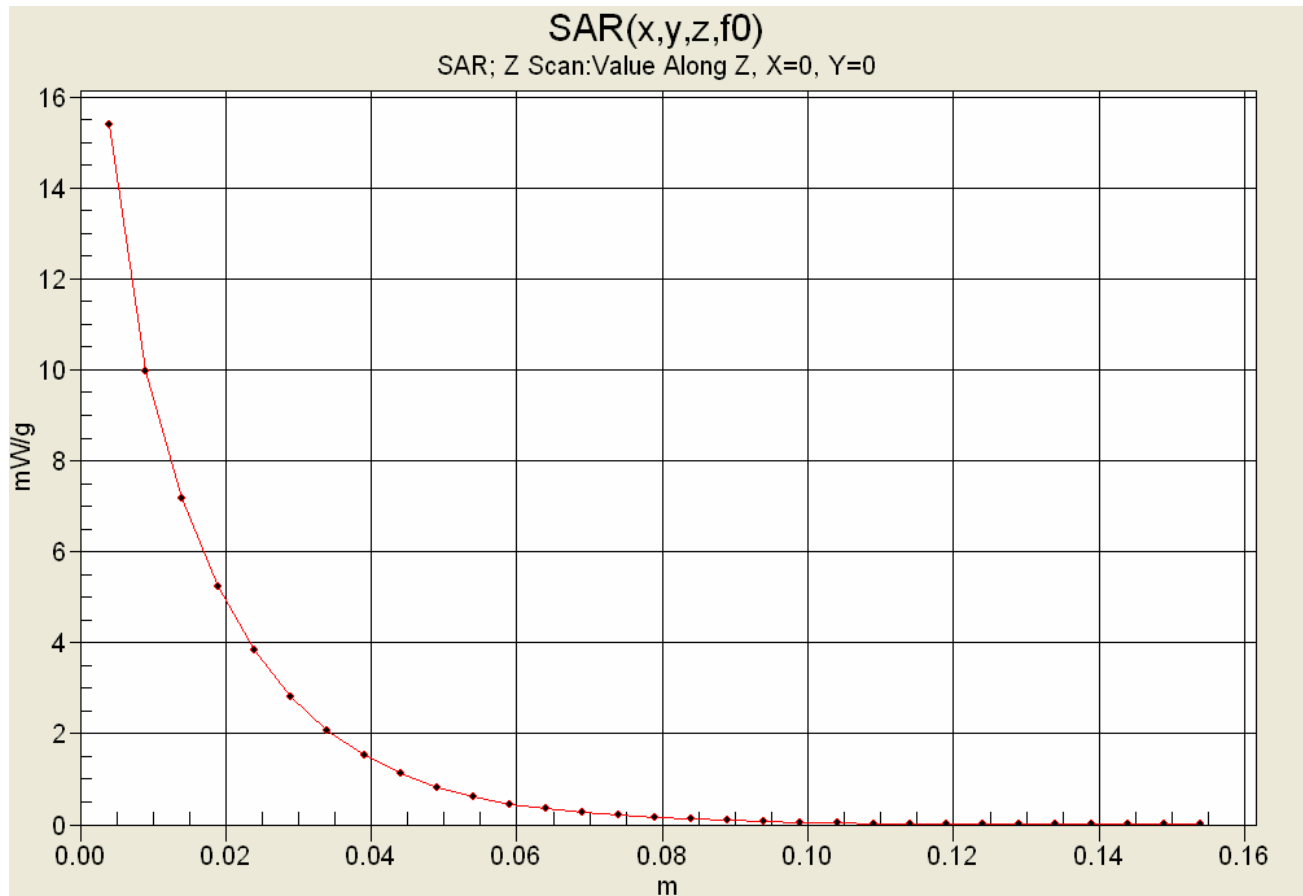

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 764.0125 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.38 dBm (Conducted)

Frequency: 764.0125 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 86.1 V/m; Power Drift = 0.207 dB

Peak SAR (extrapolated) = 23.1 W/kg

SAR(1 g) = 13.5 mW/g; SAR(10 g) = 8.88 mW/g

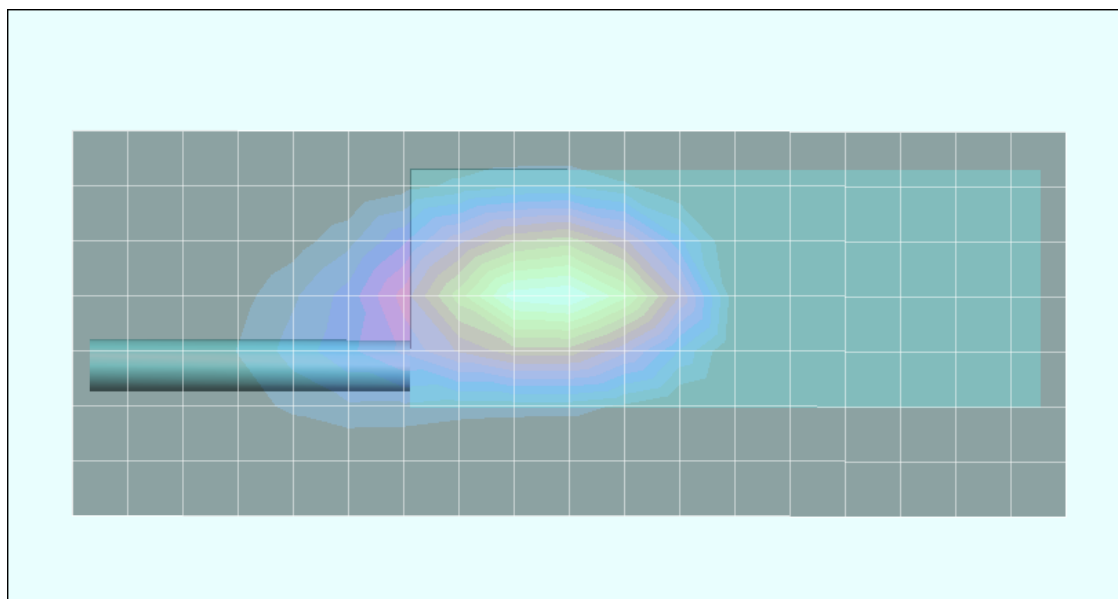

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 775.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.12 dBm (Conducted)

Frequency: 775.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 75.6 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 11.1 mW/g; SAR(10 g) = 7.13 mW/g

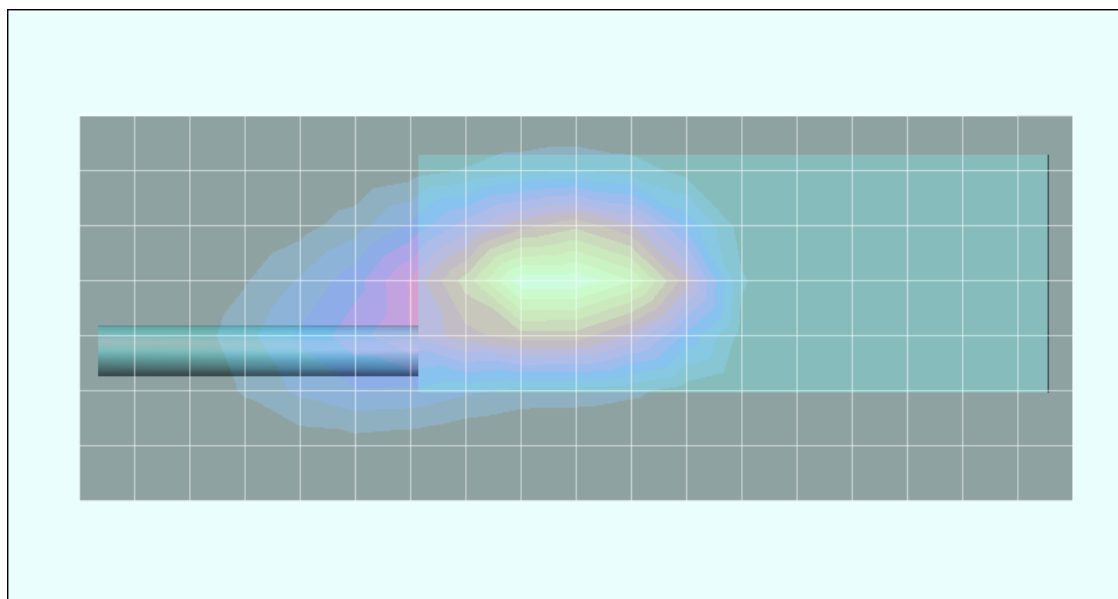

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.30 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M797 ($\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.17 mW/g; SAR(10 g) = 1.53 mW/g

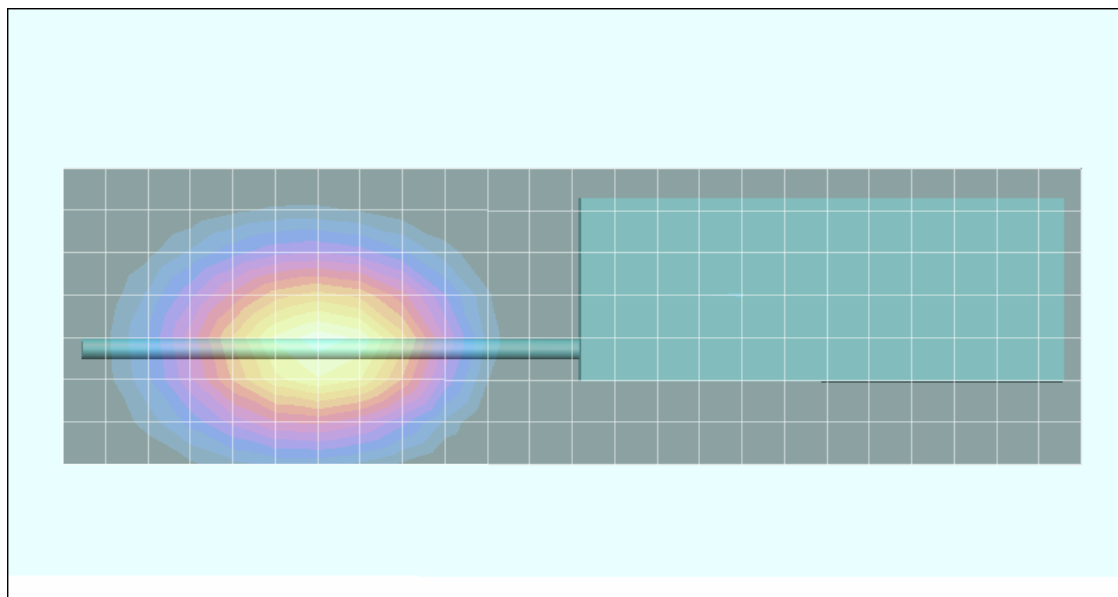

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						137 of 336

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.16 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.429 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.6 mW/g

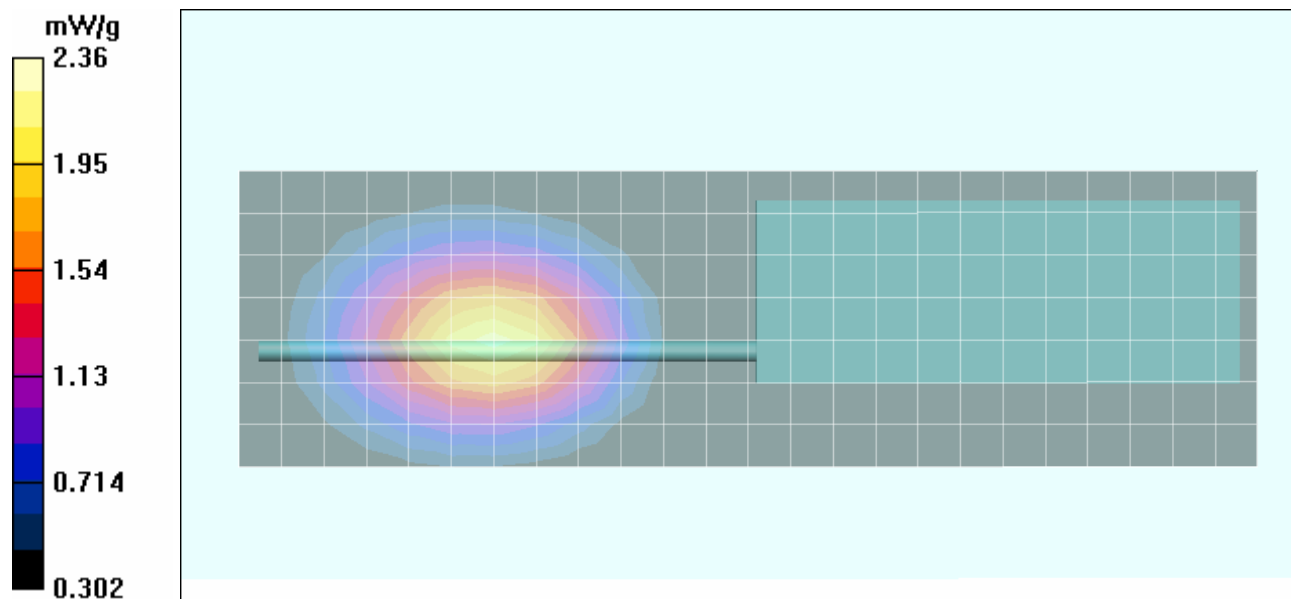

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.31 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.57 mW/g

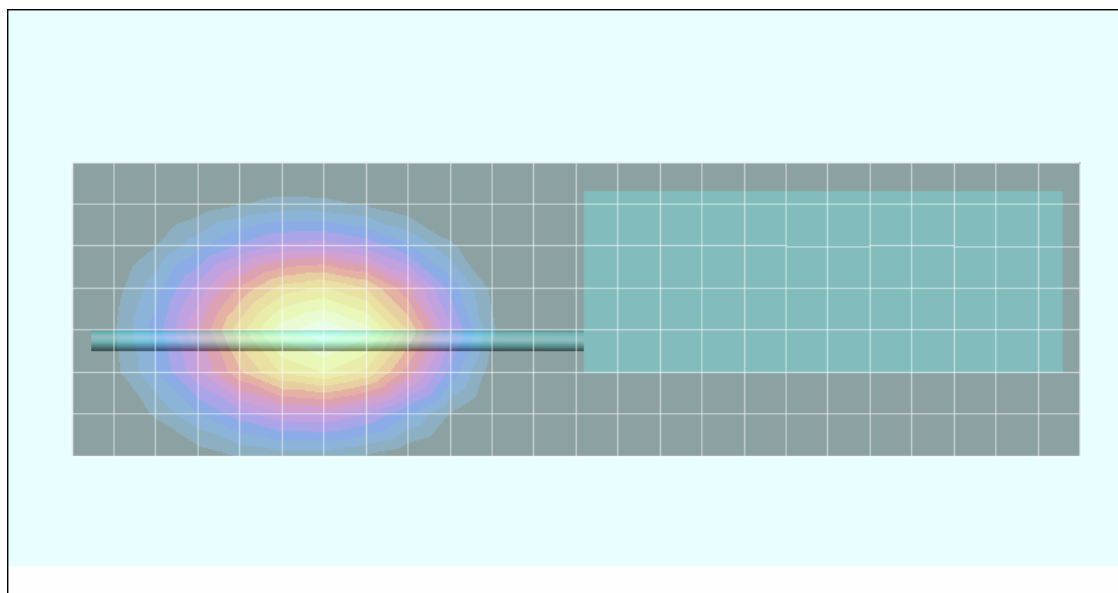

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						139 of 336

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.35 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.0387 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.65 mW/g

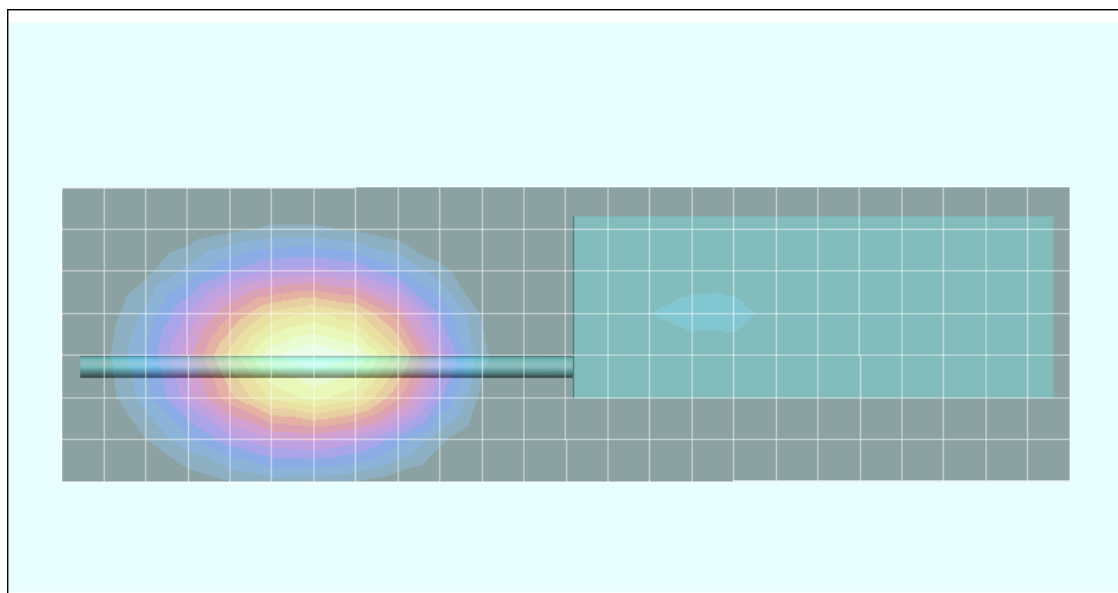

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.38 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M797 ($\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 77.1 V/m; Power Drift = 0.0365 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 7.02 mW/g

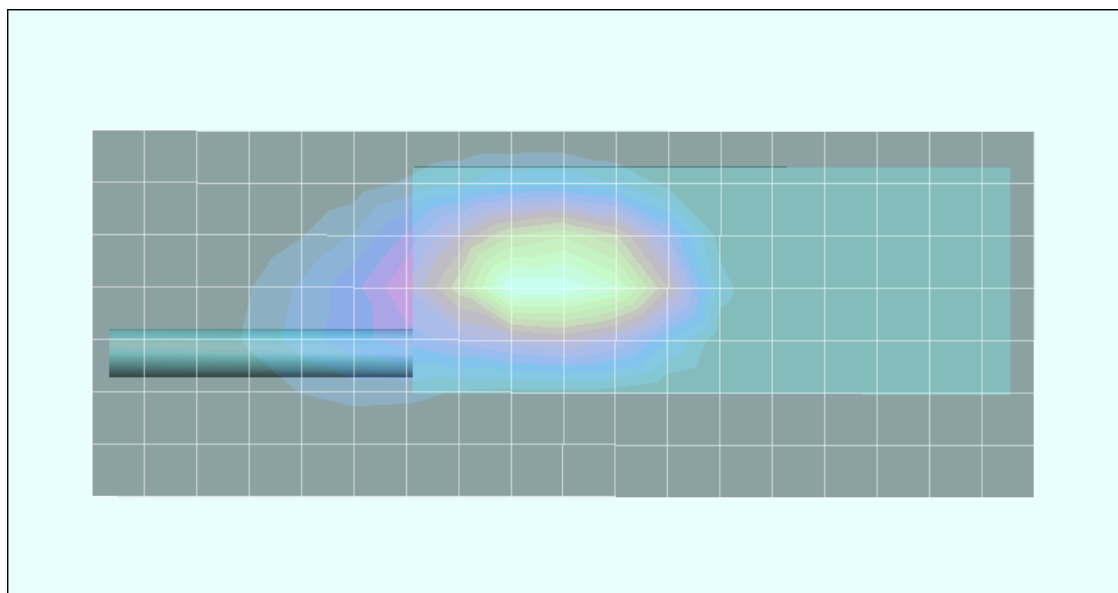

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.22 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M797 ($\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 71.5 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 8.98 mW/g; SAR(10 g) = 5.79 mW/g

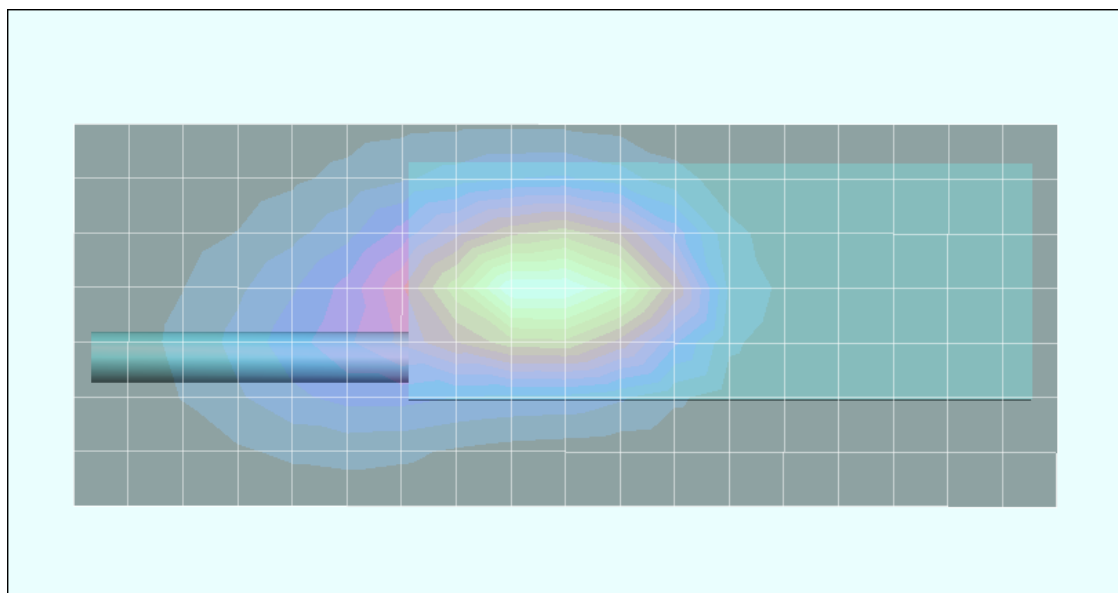

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.27 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 73.2 V/m; Power Drift = -0.0757 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 6.96 mW/g

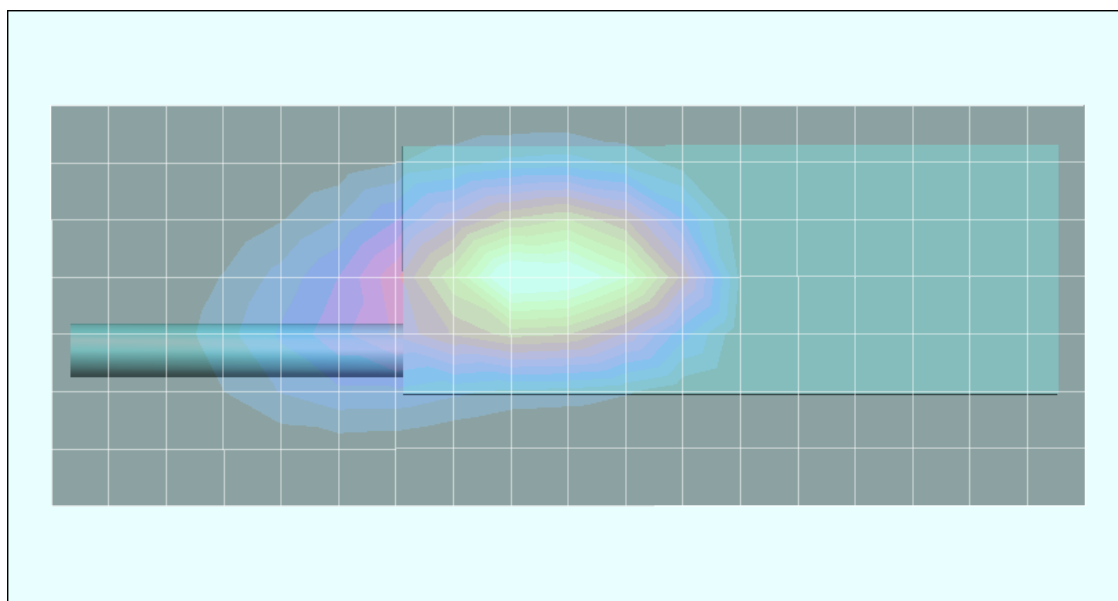

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						143 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.31 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M797 ($\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 78.2 V/m; Power Drift = 0.0709 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 11.1 mW/g; SAR(10 g) = 7.25 mW/g

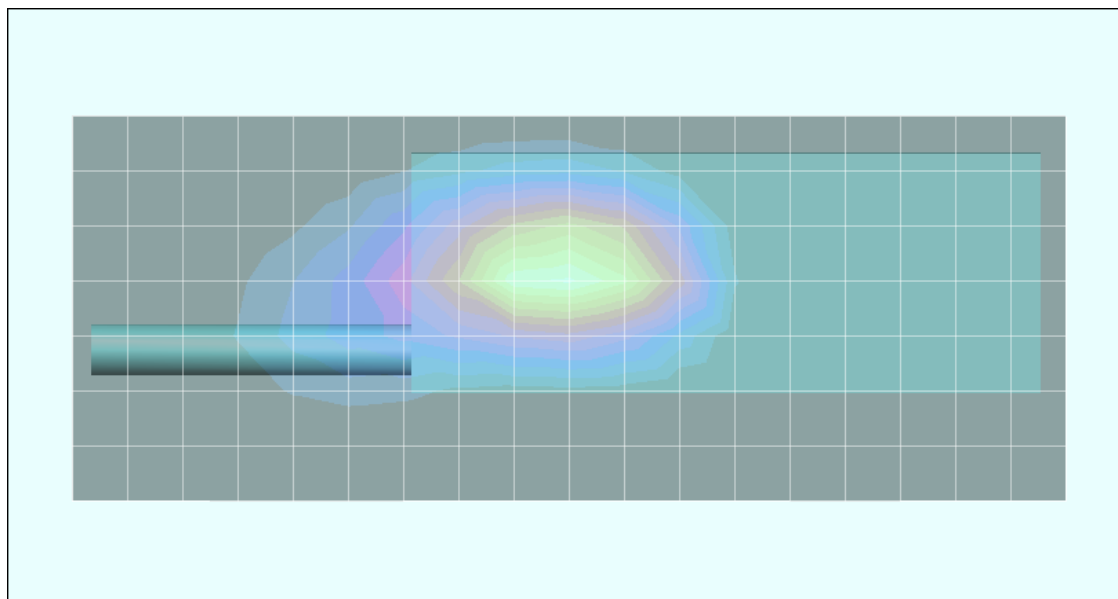

Z-Axis Scan

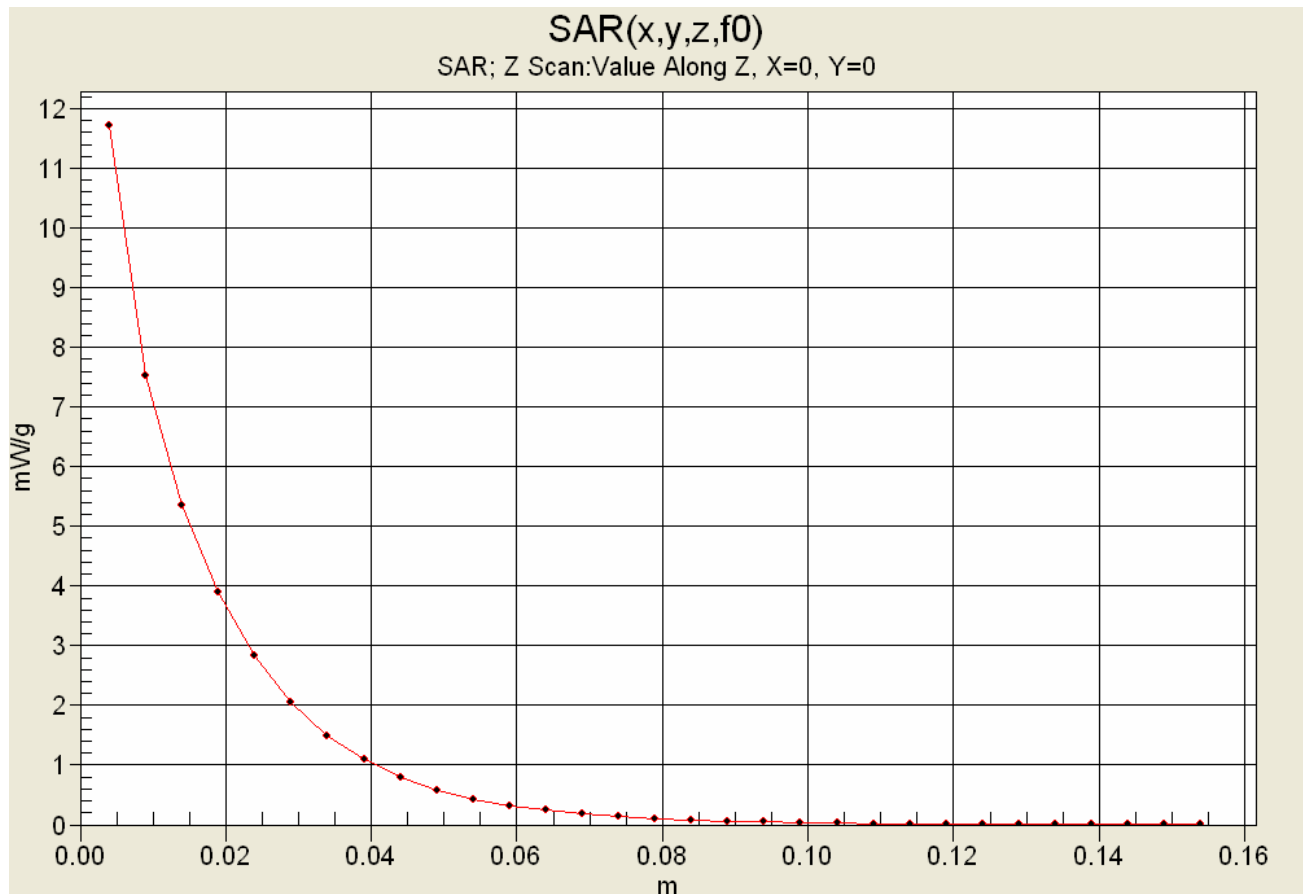

Date Tested: 07/27/2005

Body-Worn SAR - 794.0125 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.42 dBm (Conducted)

Frequency: 794.0125 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 74.9 V/m; Power Drift = 0.0629 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 6.95 mW/g

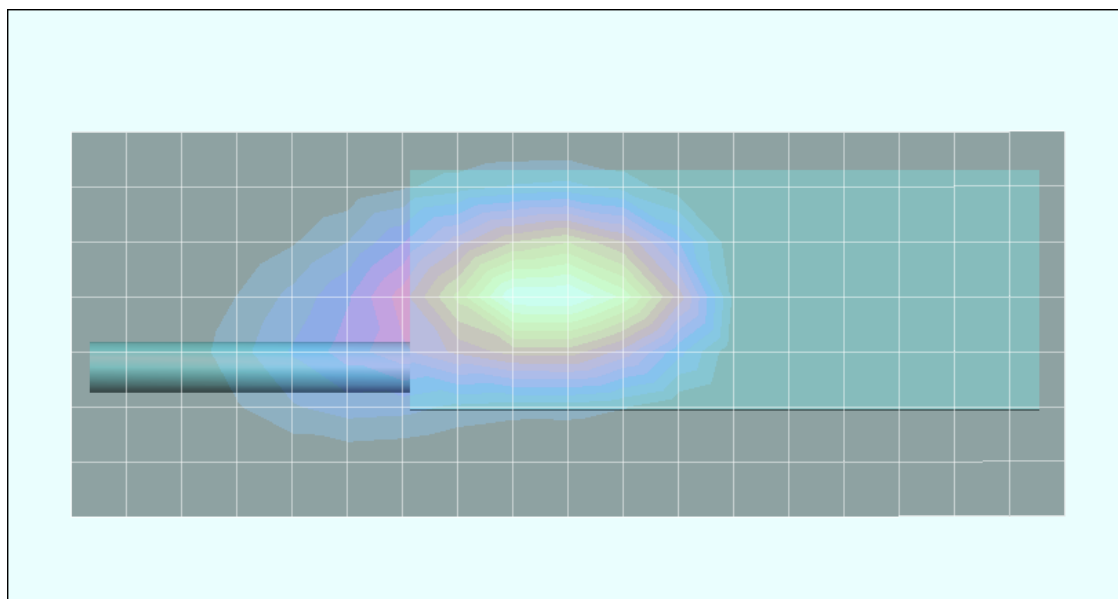

Date Tested: 07/27/2005

Body-Worn SAR - 805.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.12 dBm (Conducted)

Frequency: 805.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M797 ($\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 79.8 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 6.84 mW/g

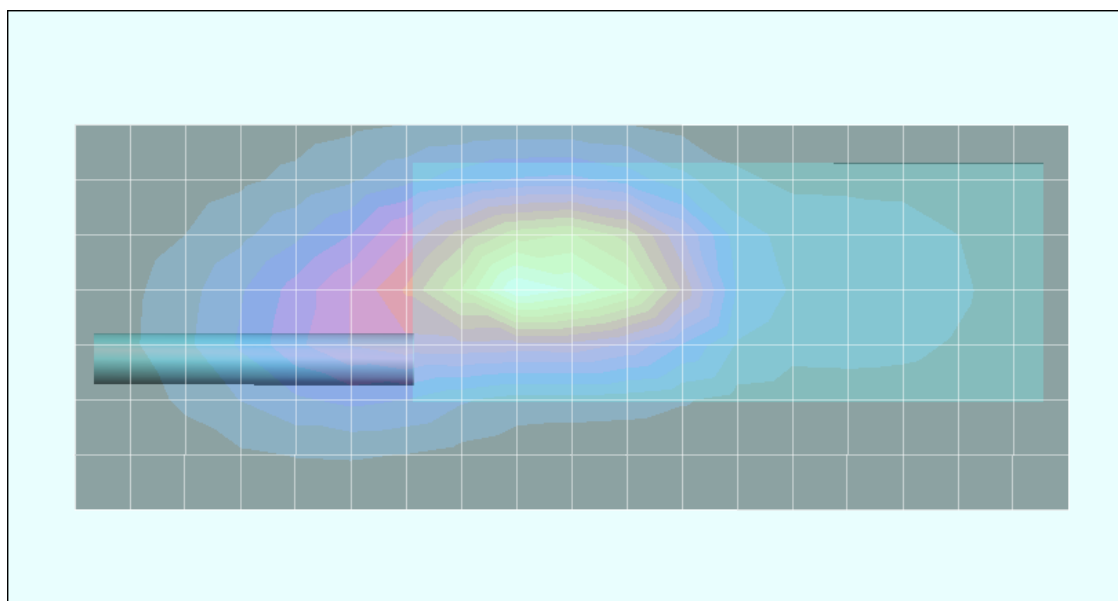

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.68 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.237 dB

Peak SAR (extrapolated) = 4.26 W/kg

SAR(1 g) = 3.32 mW/g; SAR(10 g) = 2.43 mW/g

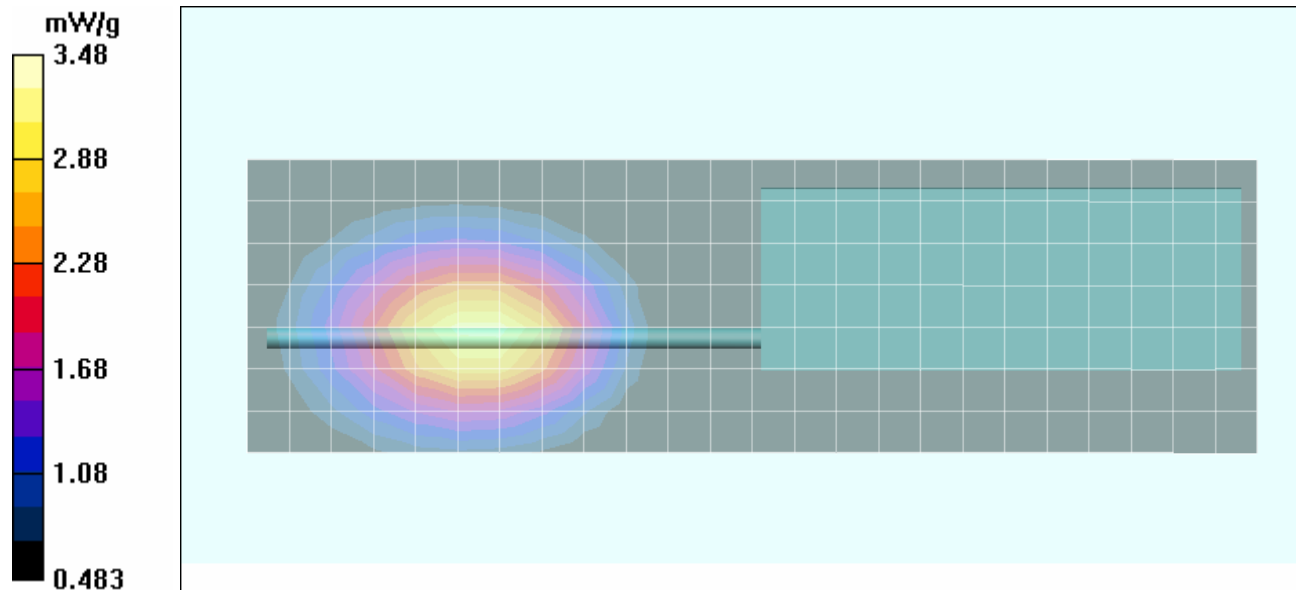

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.62 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.89 V/m; Power Drift = 0.308 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.82 mW/g; SAR(10 g) = 2.06 mW/g

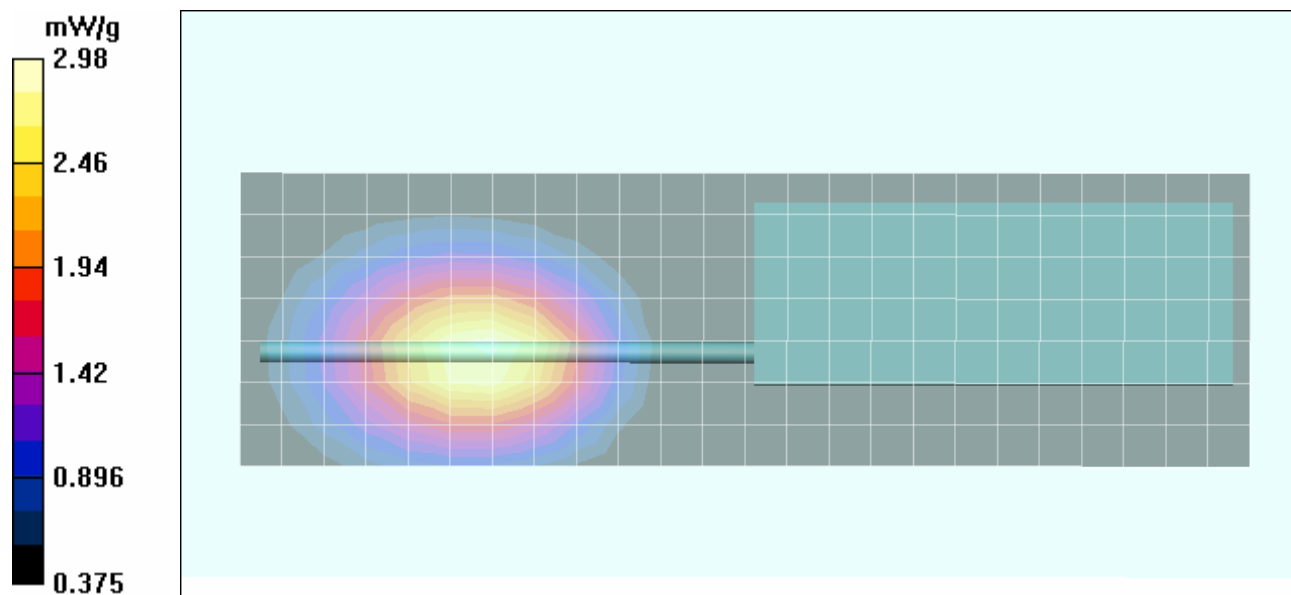

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.66 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.24 V/m; Power Drift = -0.0351 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.86 mW/g; SAR(10 g) = 2.11 mW/g

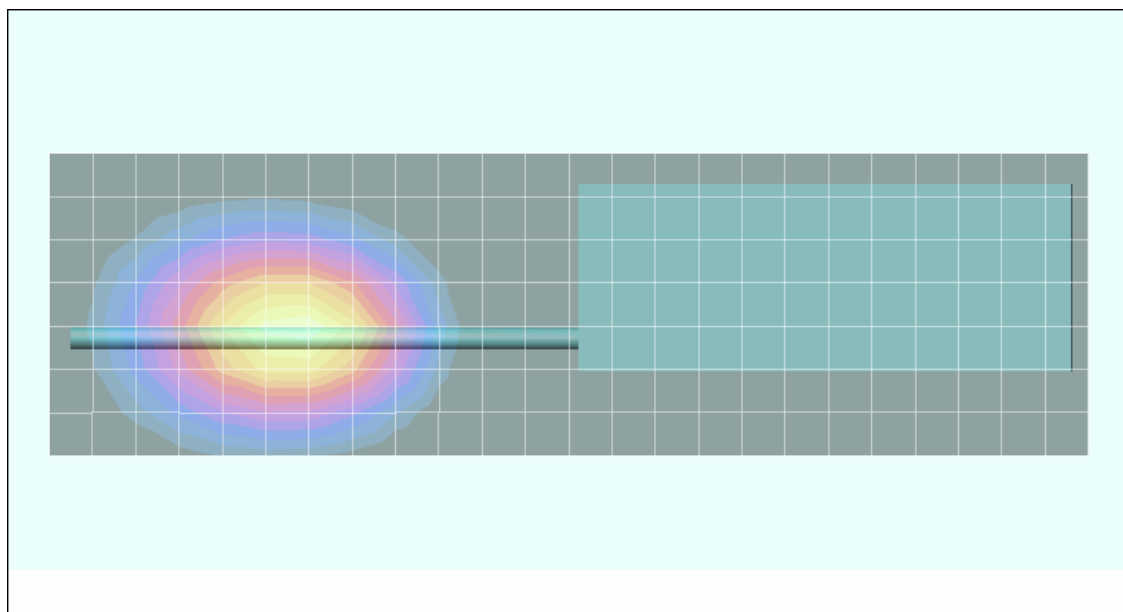

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.61 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M815 ($\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.165 dB

Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 2.98 mW/g; SAR(10 g) = 2.18 mW/g

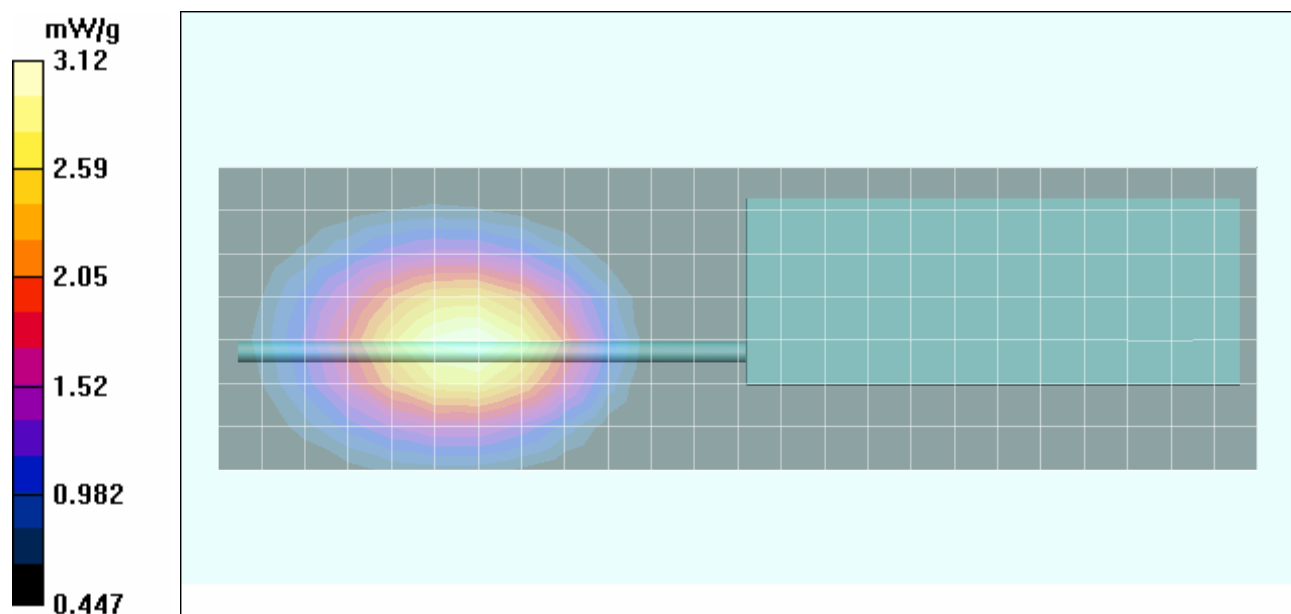

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						151 of 336

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.73 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 71.5 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 12.0 W/kg

SAR(1 g) = 8.28 mW/g; SAR(10 g) = 5.48 mW/g

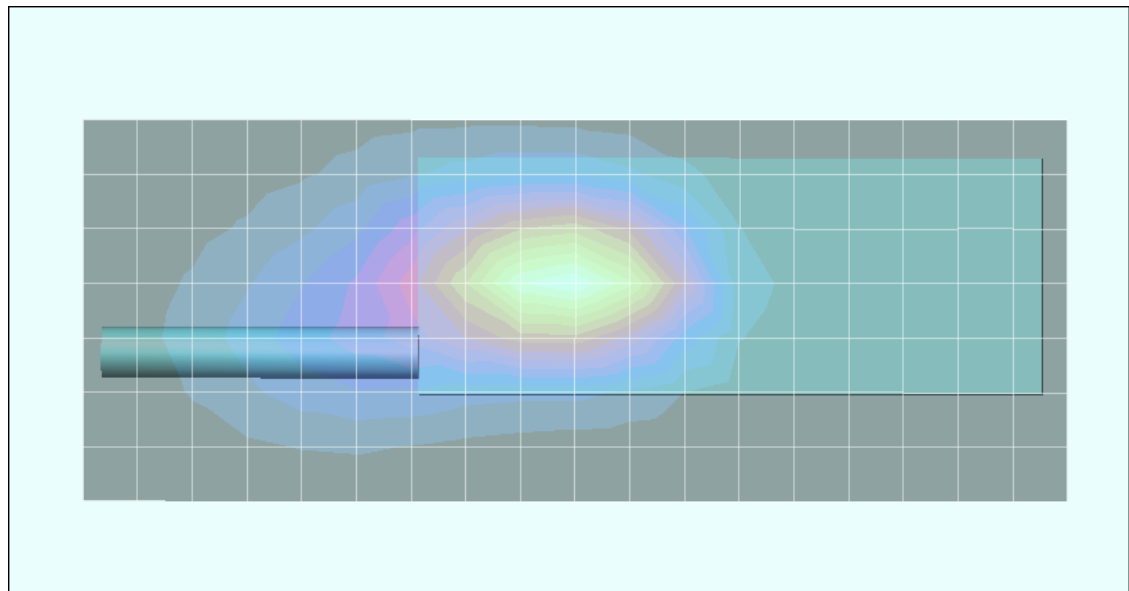

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.62 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 74.0 V/m; Power Drift = 0.151 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 11.0 mW/g; SAR(10 g) = 7.4 mW/g

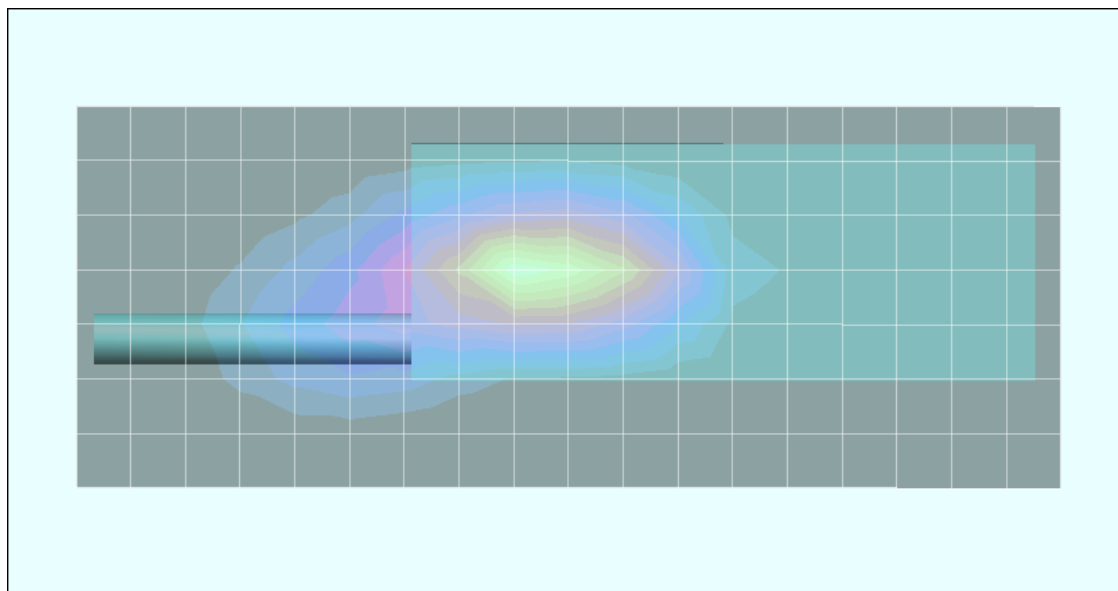

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.62 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M815 ($\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 79.1 V/m; Power Drift = -0.0236 dB

Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 9.64 mW/g; SAR(10 g) = 6.49 mW/g

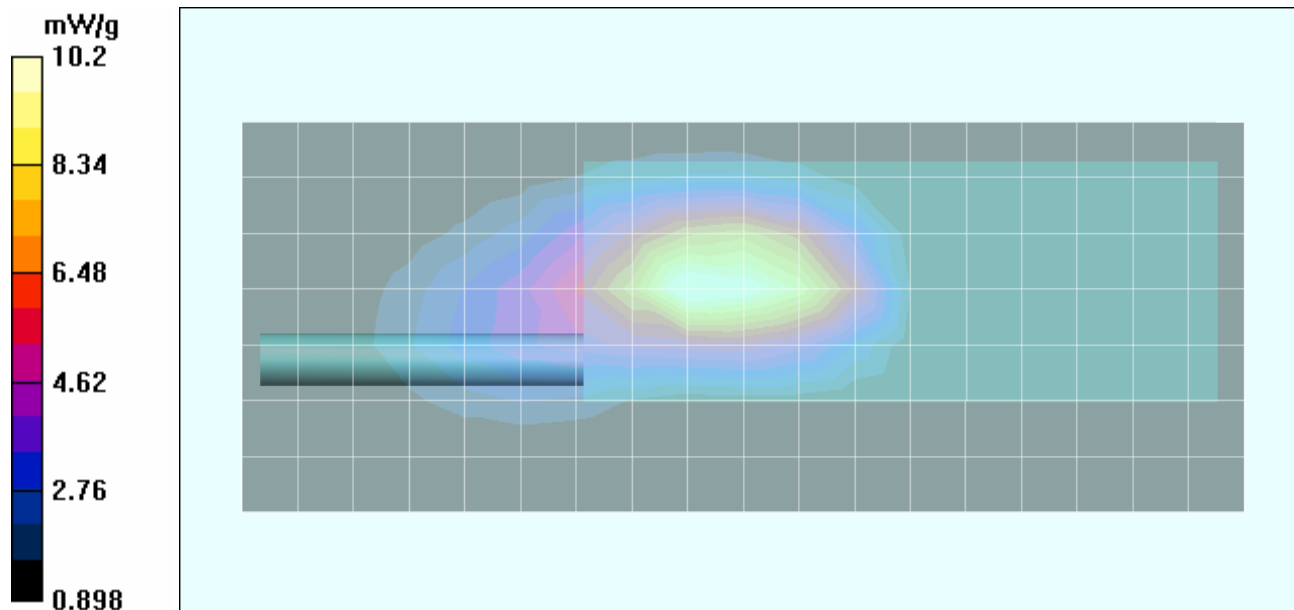

Date Tested: 07/25/2005

Body-Worn SAR - 815.0000 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.70 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 81.1 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 7.06 mW/g

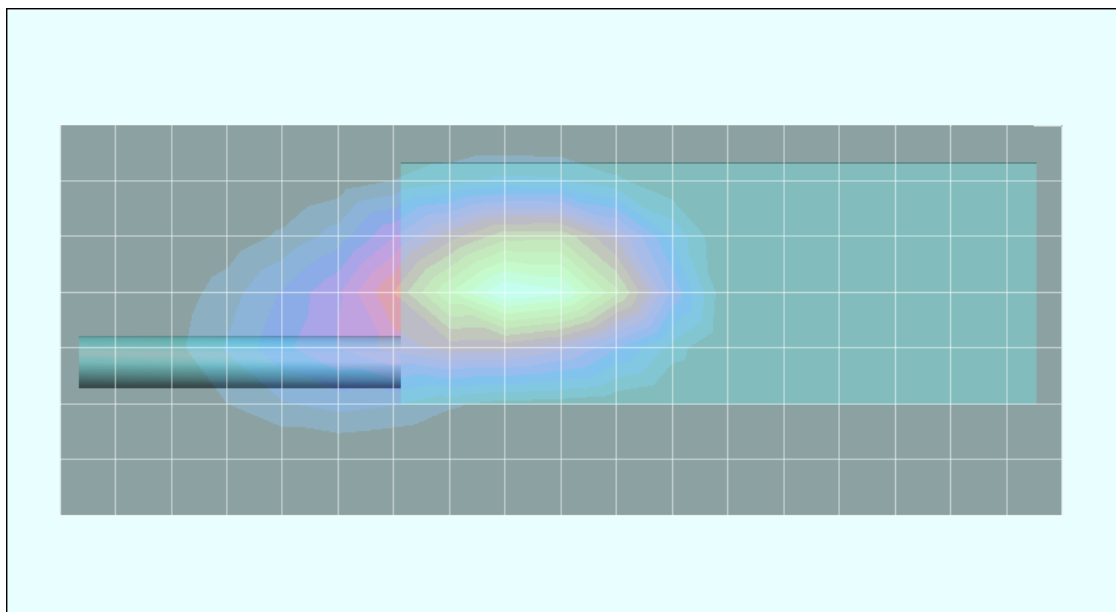

Date Tested: 07/25/2005

Body-Worn SAR - 806.0125 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.65 dBm (Conducted)

Frequency: 806.0125 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.96$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 84.0 V/m; Power Drift = 0.161 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 11.6 mW/g; SAR(10 g) = 7.79 mW/g

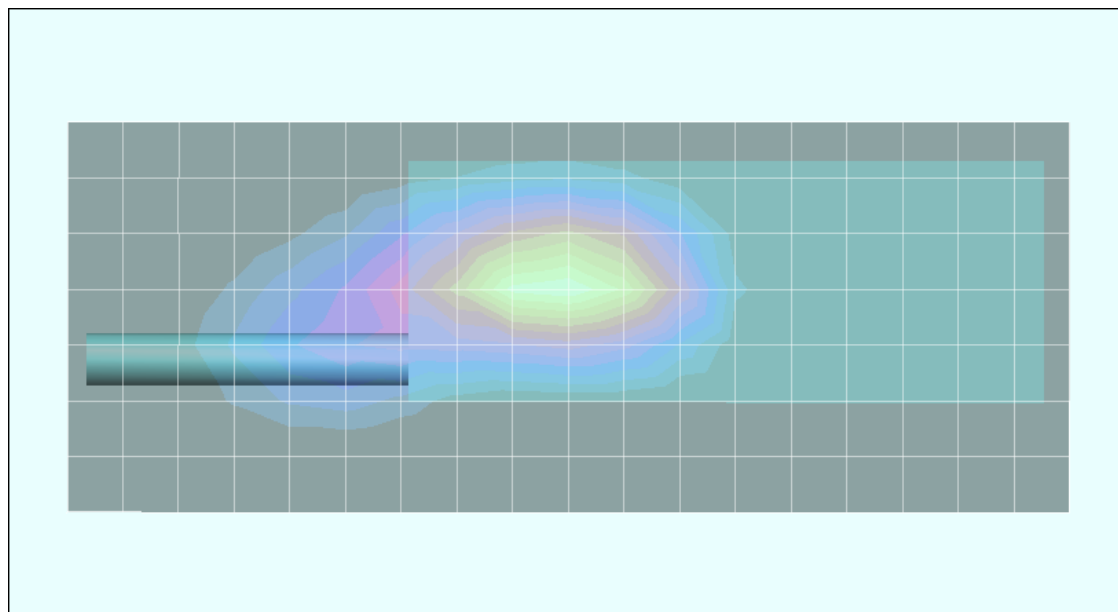

Z-Axis Scan

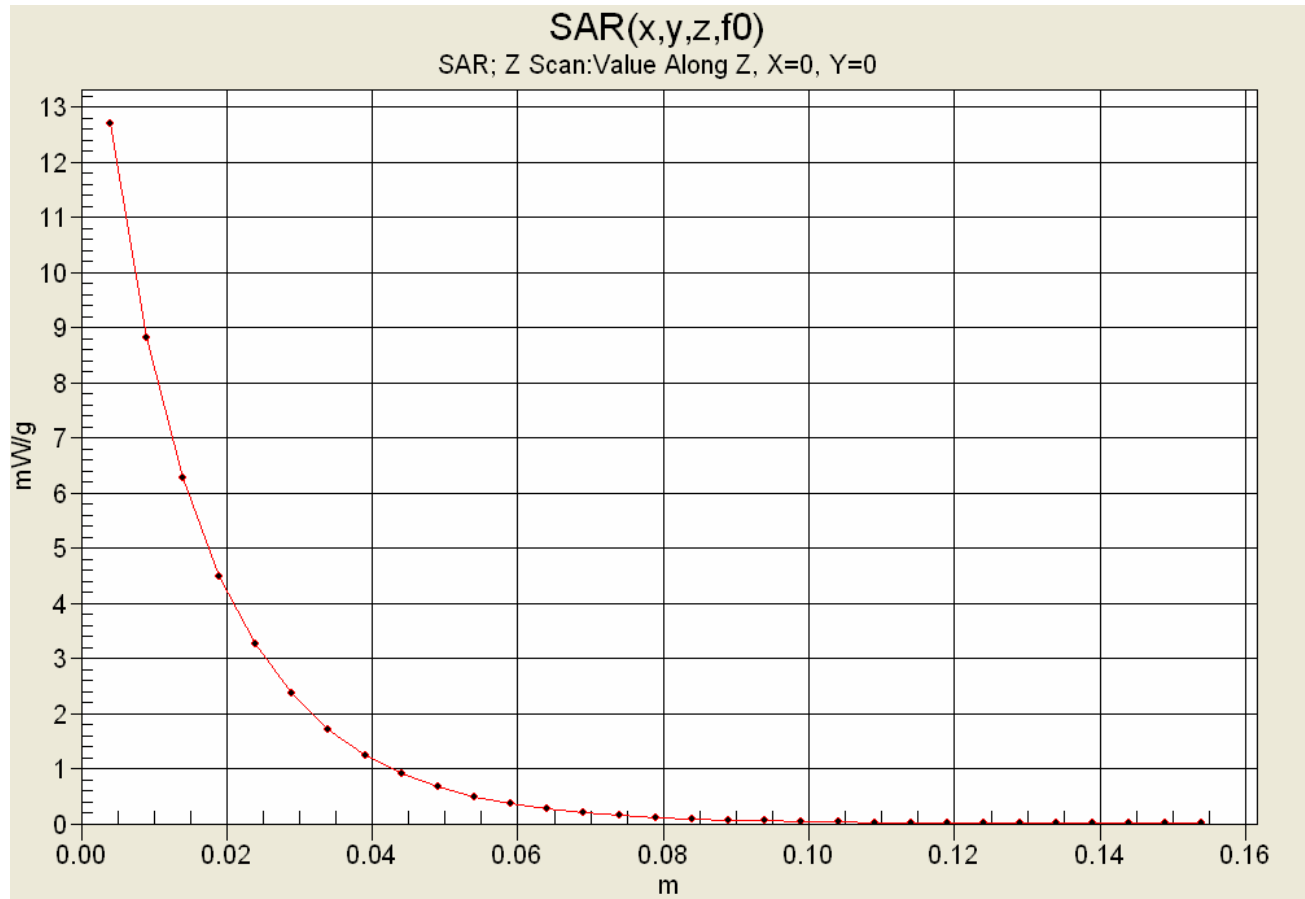

Date Tested: 07/25/2005

Body-Worn SAR - 823.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.93 dBm (Conducted)

Frequency: 823.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 77.0 V/m; Power Drift = -0.203 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 9.85 mW/g; SAR(10 g) = 6.58 mW/g

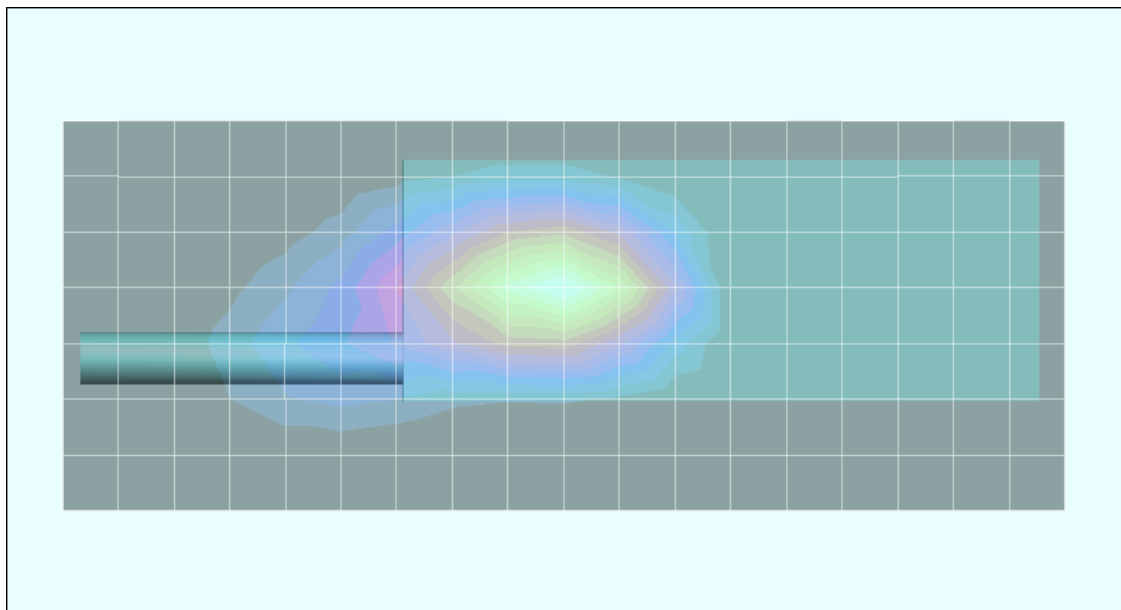

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.85 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M860 ($\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.279 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.79 mW/g

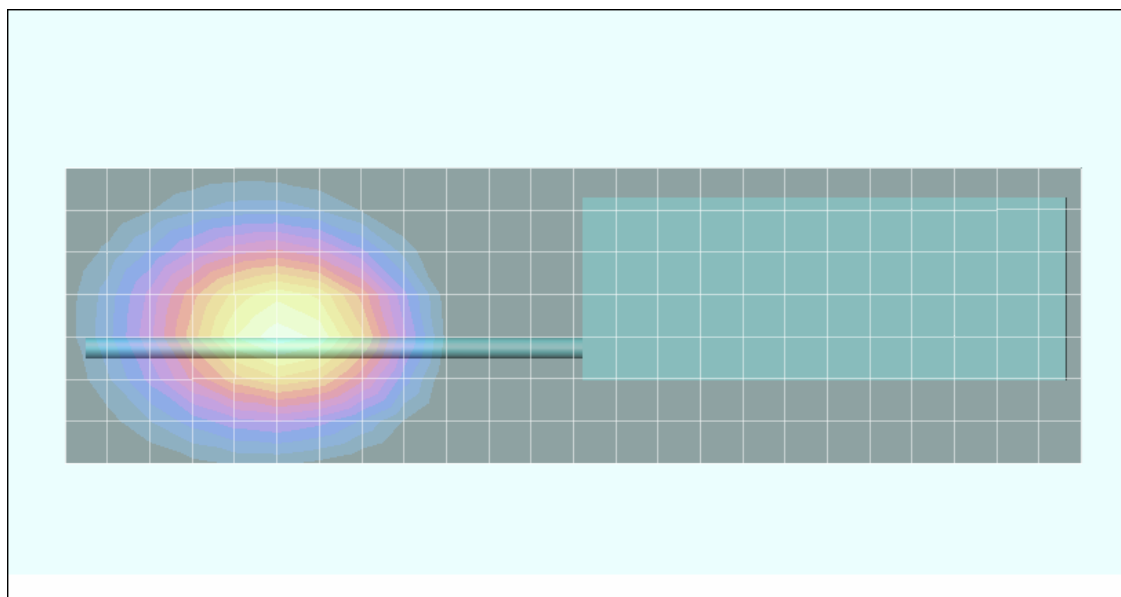

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.93 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M860 ($\sigma = 1.01$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.24 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 3.37 W/kg

SAR(1 g) = 2.61 mW/g; SAR(10 g) = 1.91 mW/g

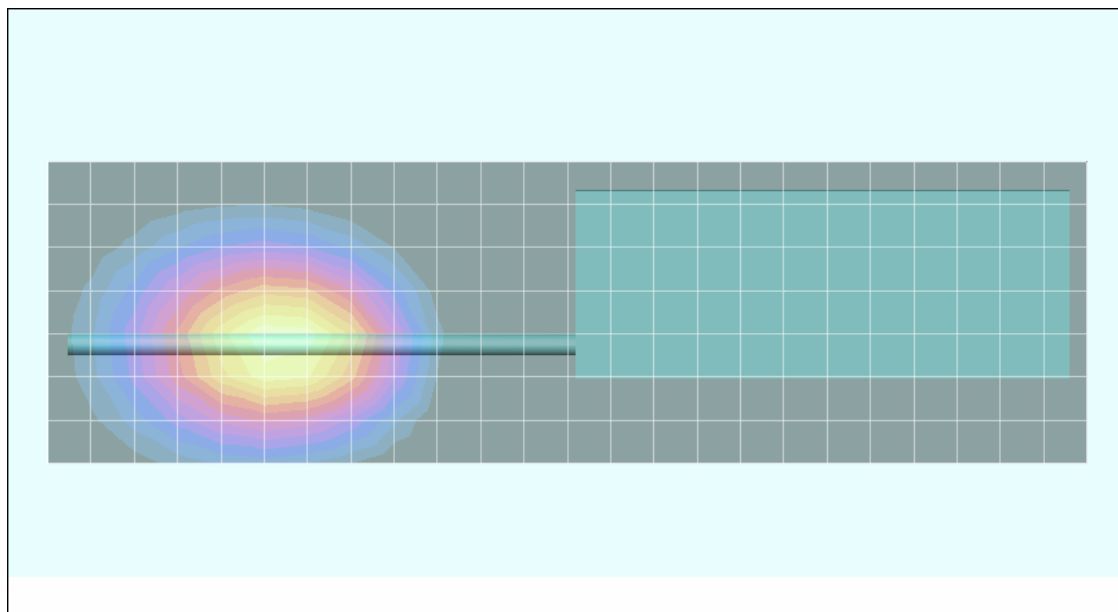

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.77 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M860 ($\sigma = 1.01$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.560 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.68 mW/g; SAR(10 g) = 1.95 mW/g

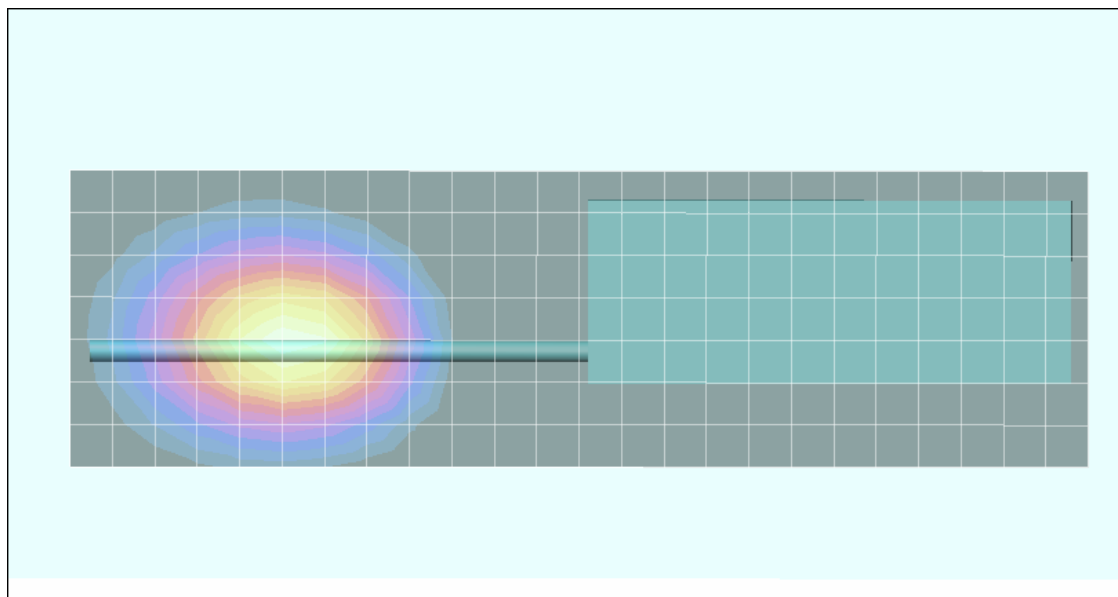

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 35.00 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M860 ($\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.585 dB

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.84 mW/g

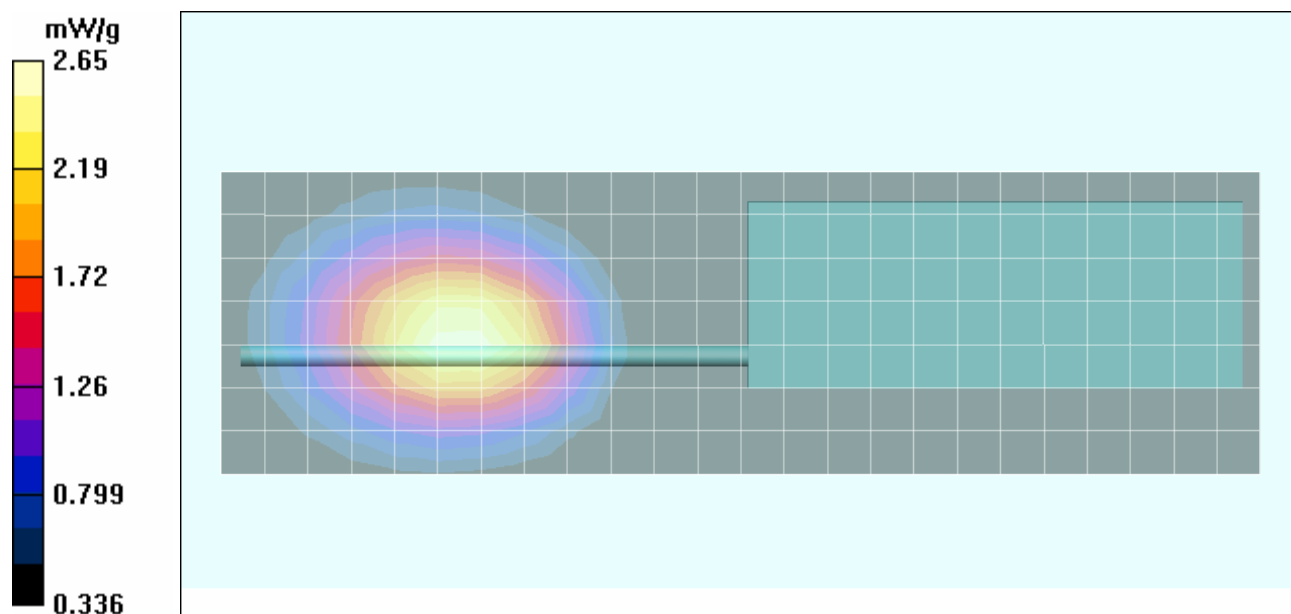

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.88 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M860 ($\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 65.2 V/m; Power Drift = -0.0536 dB

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 8.14 mW/g; SAR(10 g) = 5.43 mW/g

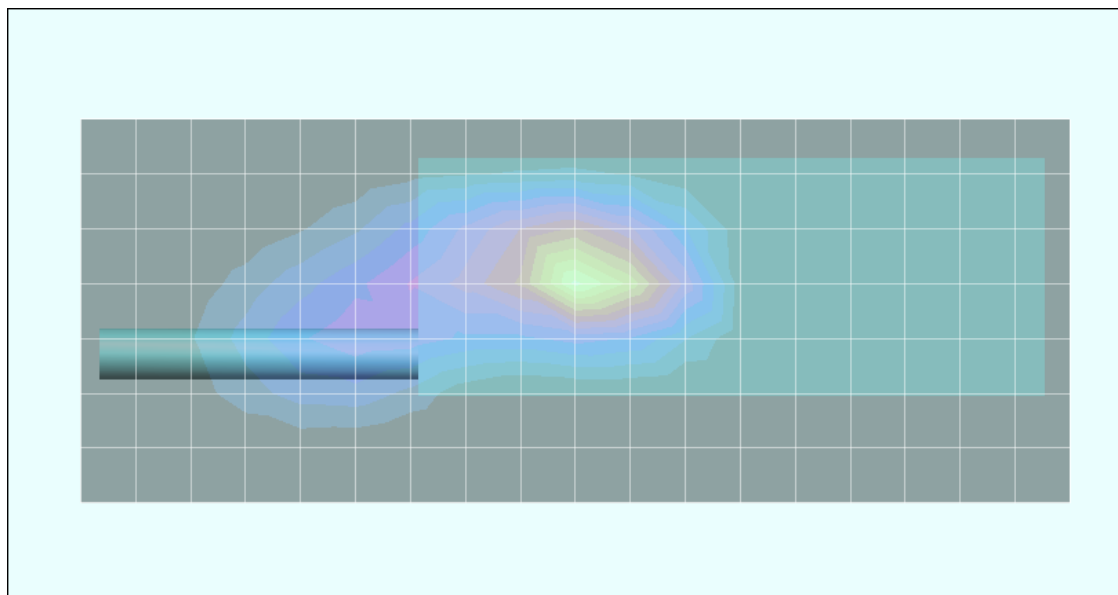

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.92 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M860 ($\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 69.3 V/m; Power Drift = 0.0342 dB

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 7.88 mW/g; SAR(10 g) = 5.26 mW/g

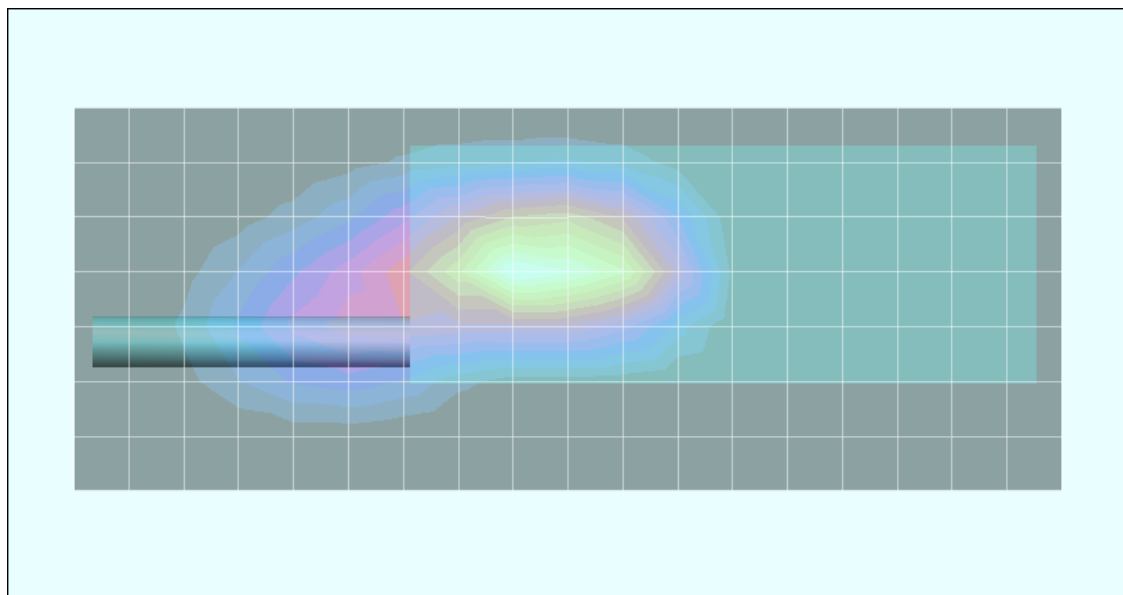

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.90 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M860 ($\sigma = 1.01$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan 2 (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 69.8 V/m; Power Drift = -0.0391 dB

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 8.70 mW/g; SAR(10 g) = 5.71 mW/g

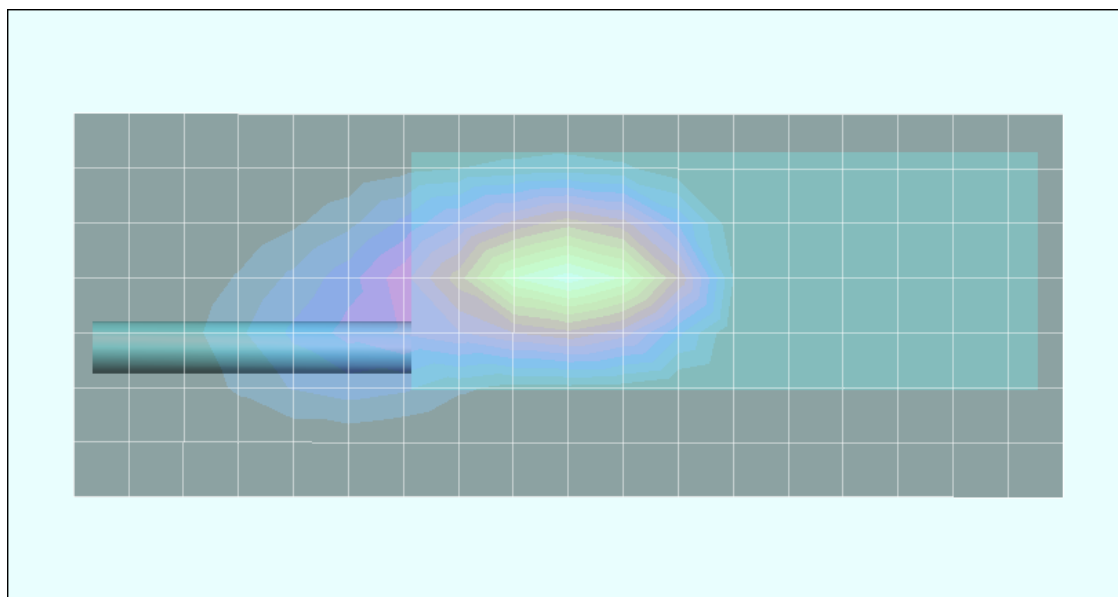

Z-Axis Scan

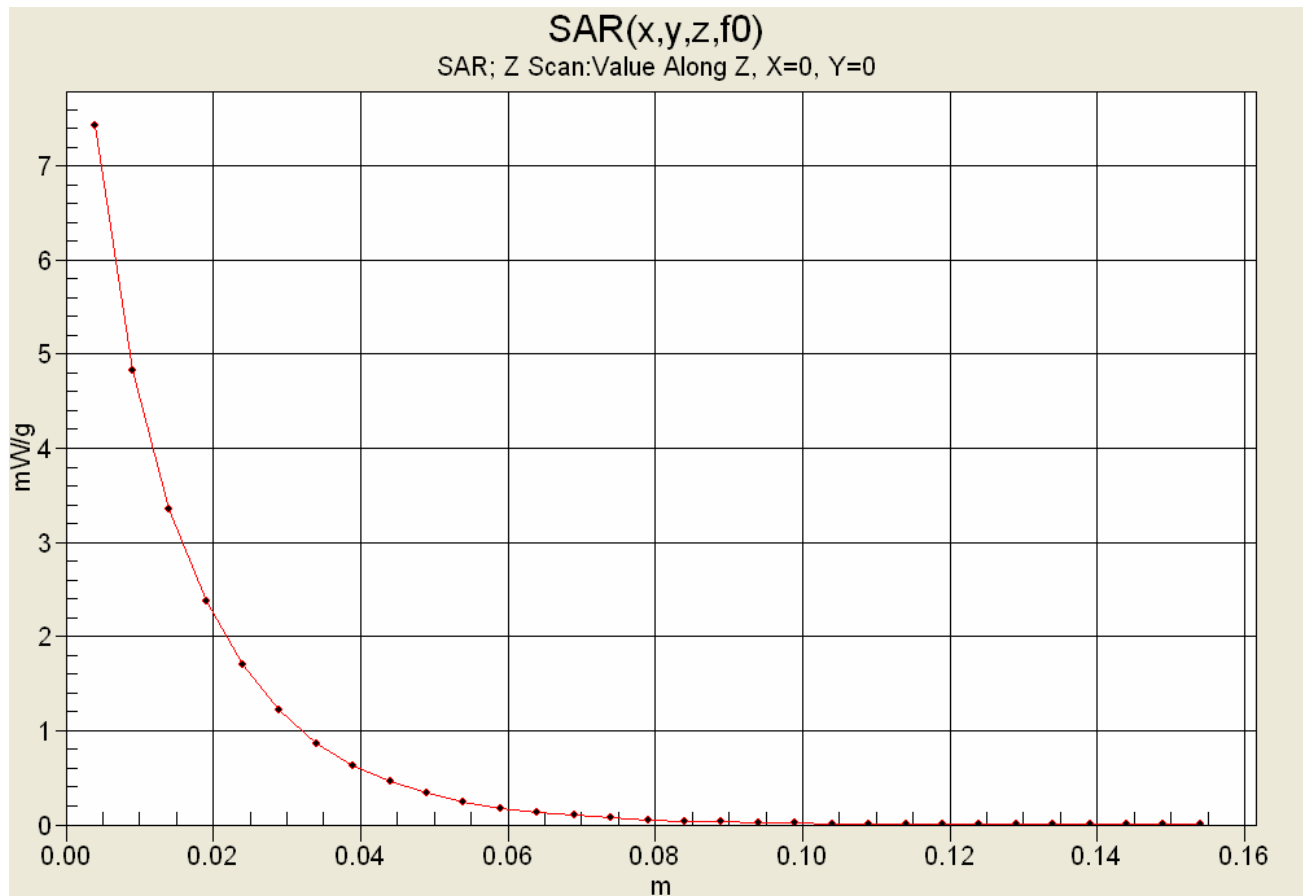

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/22/2005

Body-Worn SAR - 860.0000 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.95 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M860 ($\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 71.2 V/m; Power Drift = -0.0686 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 8.05 mW/g; SAR(10 g) = 5.36 mW/g

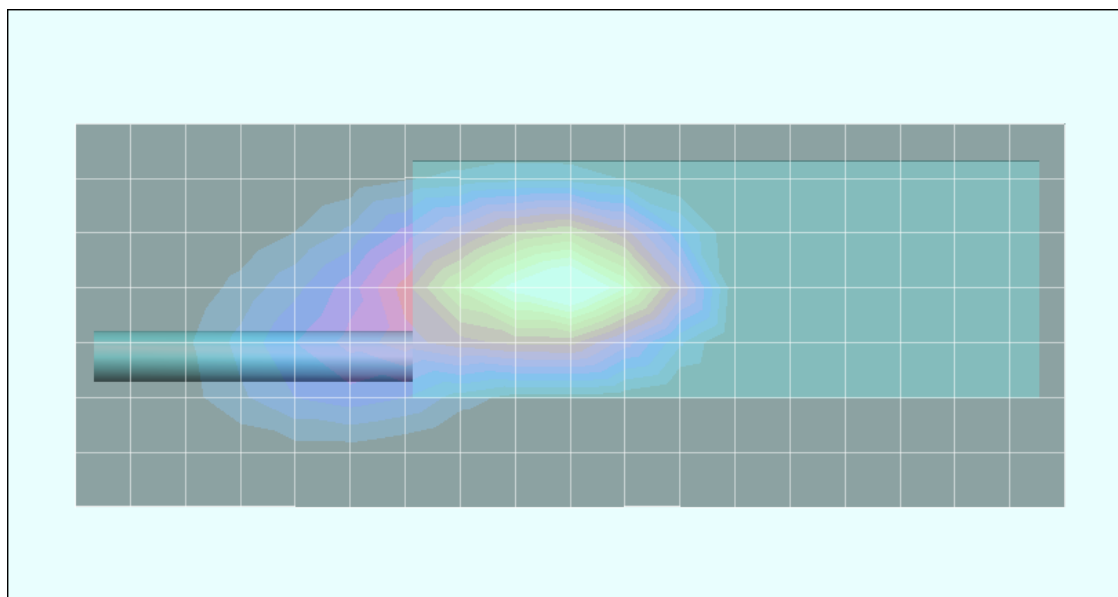

Date Tested: 07/22/2005

Body-Worn SAR - 851.0125 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.92 dBm (Conducted)

Frequency: 851.0125 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M860 ($\sigma = 1.01$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 70.1 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 8.35 mW/g; SAR(10 g) = 5.57 mW/g

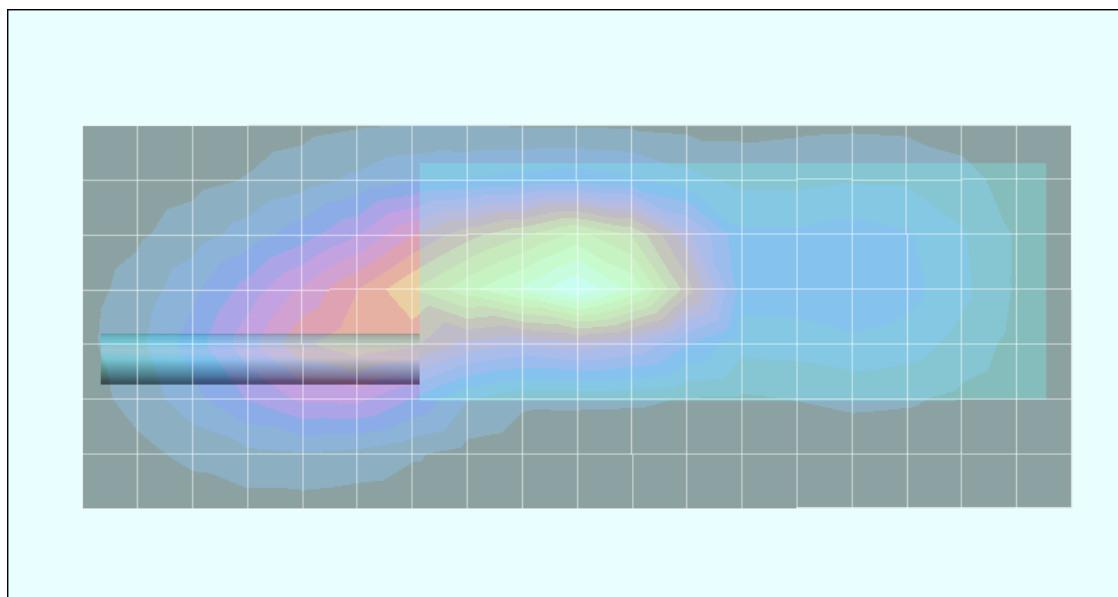

Date Tested: 07/22/2005

Body-Worn SAR - 868.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.1 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: FM

RF Output Power: 34.92 dBm (Conducted)

Frequency: 868.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M860 ($\sigma = 1.01$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 64.1 V/m; Power Drift = -0.229 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 6.93 mW/g; SAR(10 g) = 4.56 mW/g

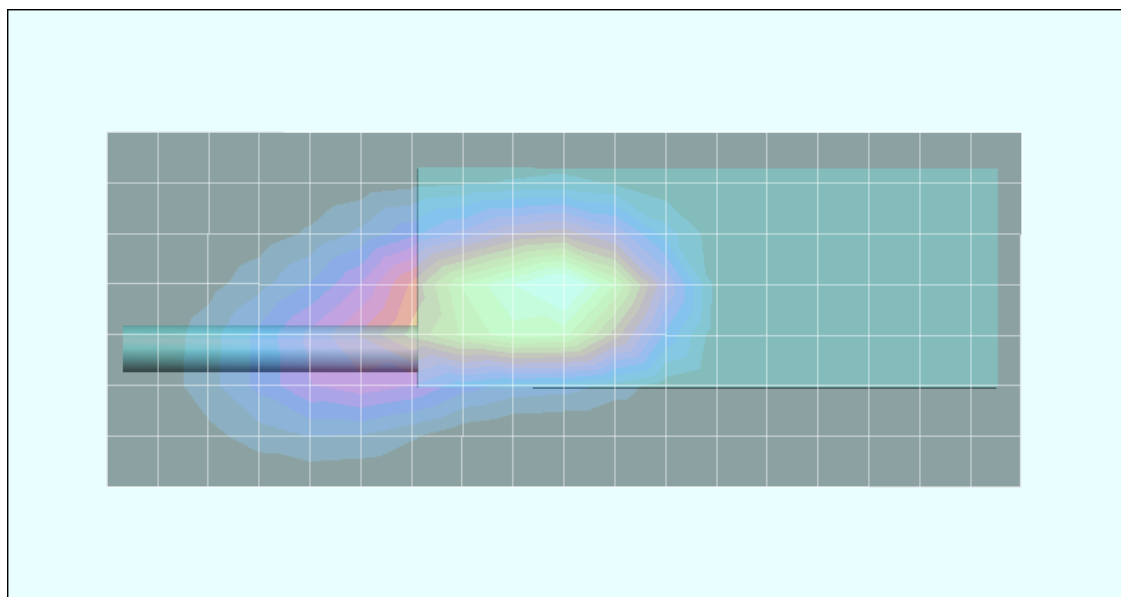

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Body-Worn with System Radio (Model No.: MAHROS0050)

Body-worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Shoulder Strap (P/N: CC103333V1)

Audio Accessory: Speaker-Microphone (P/N: KRY 101 1617/183)

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						170 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.99 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.13 mW/g; SAR(10 g) = 1.53 mW/g

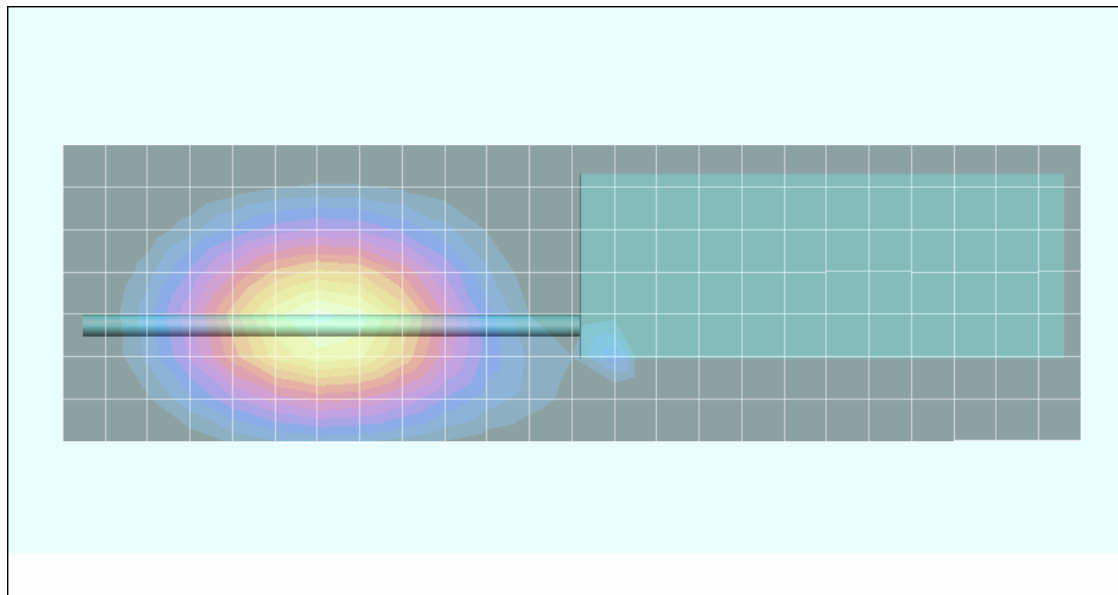

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.96 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.04 mW/g; SAR(10 g) = 1.46 mW/g

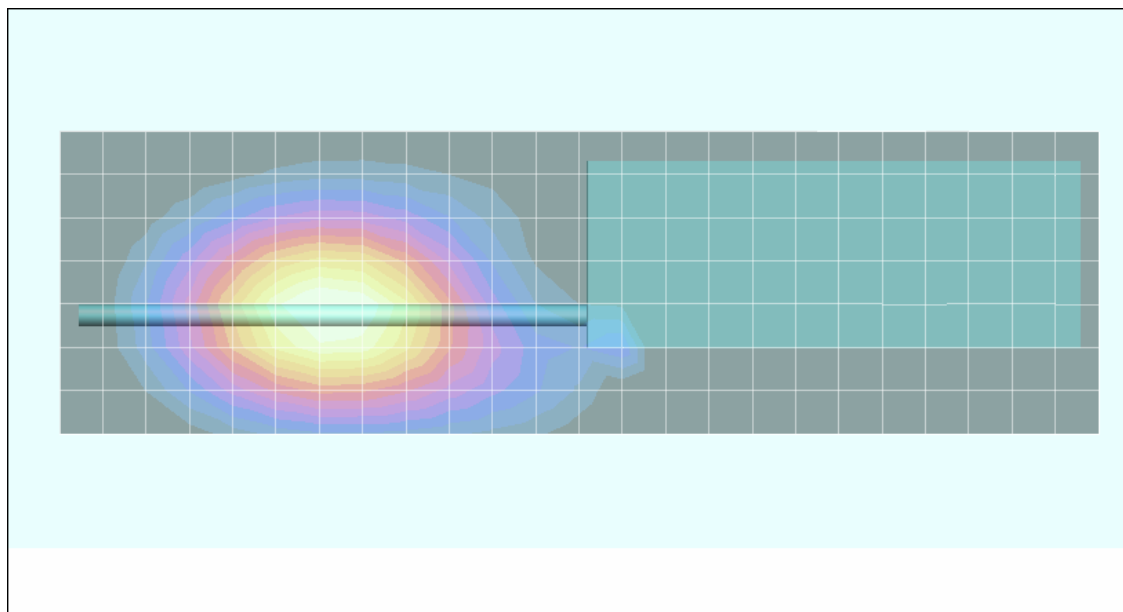

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.92 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = -0.0203 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.03 mW/g; SAR(10 g) = 1.46 mW/g

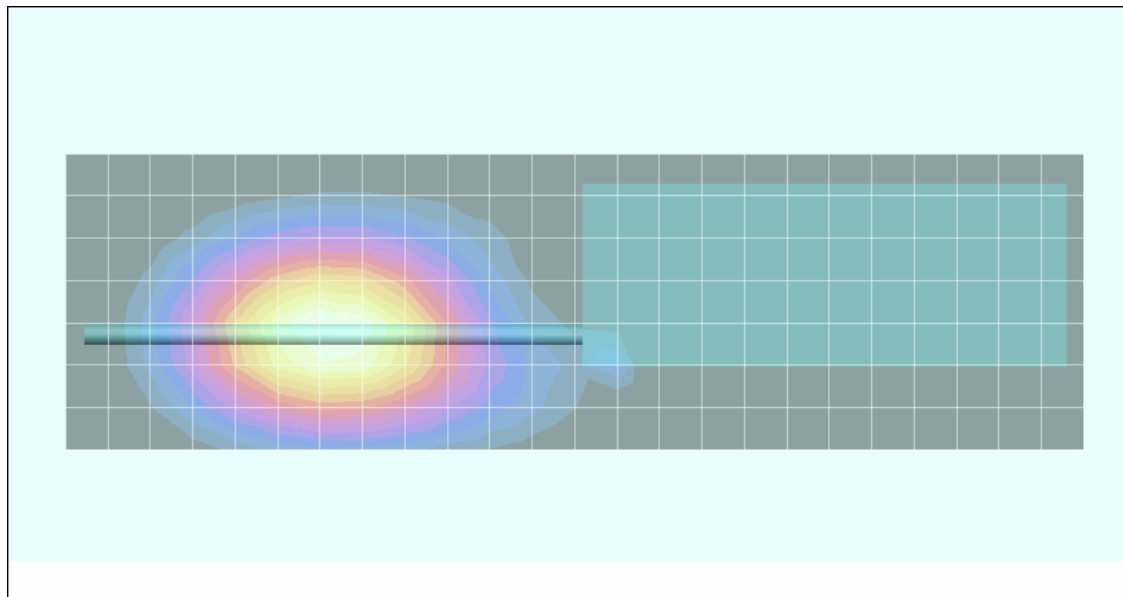

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.90 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = 0.306 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.15 mW/g; SAR(10 g) = 1.55 mW/g


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = 0.306 dB

Peak SAR (extrapolated) = 3.46 W/kg

SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.436 mW/g

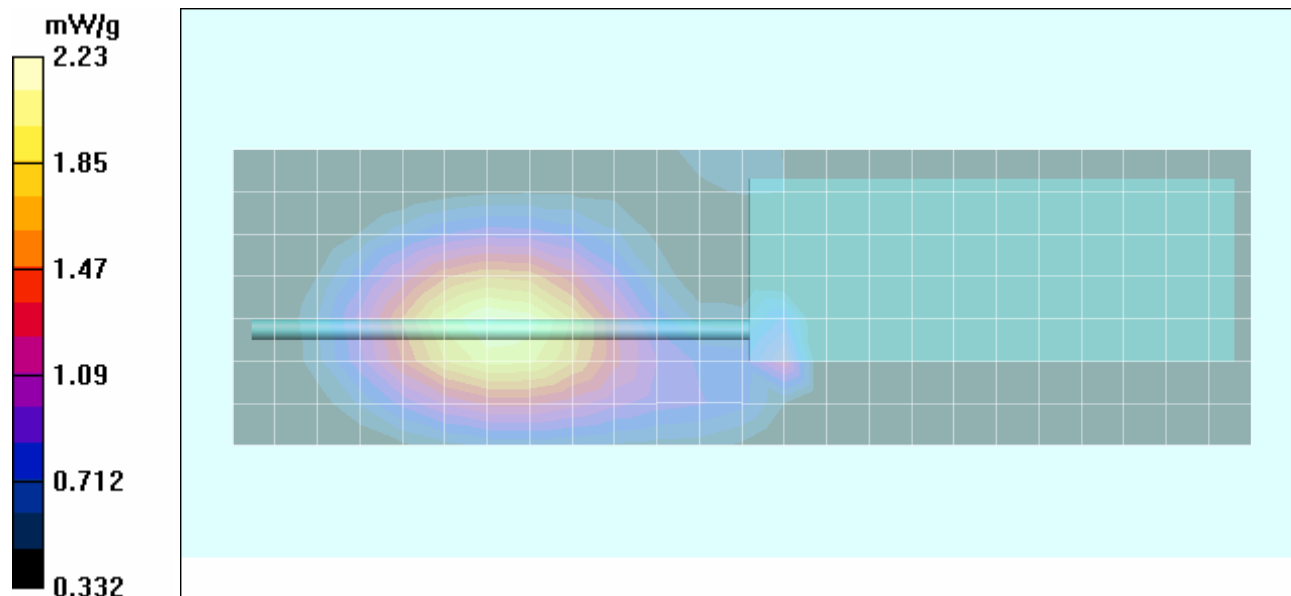

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.99 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 48.9 V/m; Power Drift = 0.178 dB

Peak SAR (extrapolated) = 7.65 W/kg

SAR(1 g) = 3.72 mW/g; SAR(10 g) = 2.41 mW/g


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 48.9 V/m; Power Drift = 0.178 dB

Peak SAR (extrapolated) = 5.50 W/kg

SAR(1 g) = 3.67 mW/g; SAR(10 g) = 2.62 mW/g

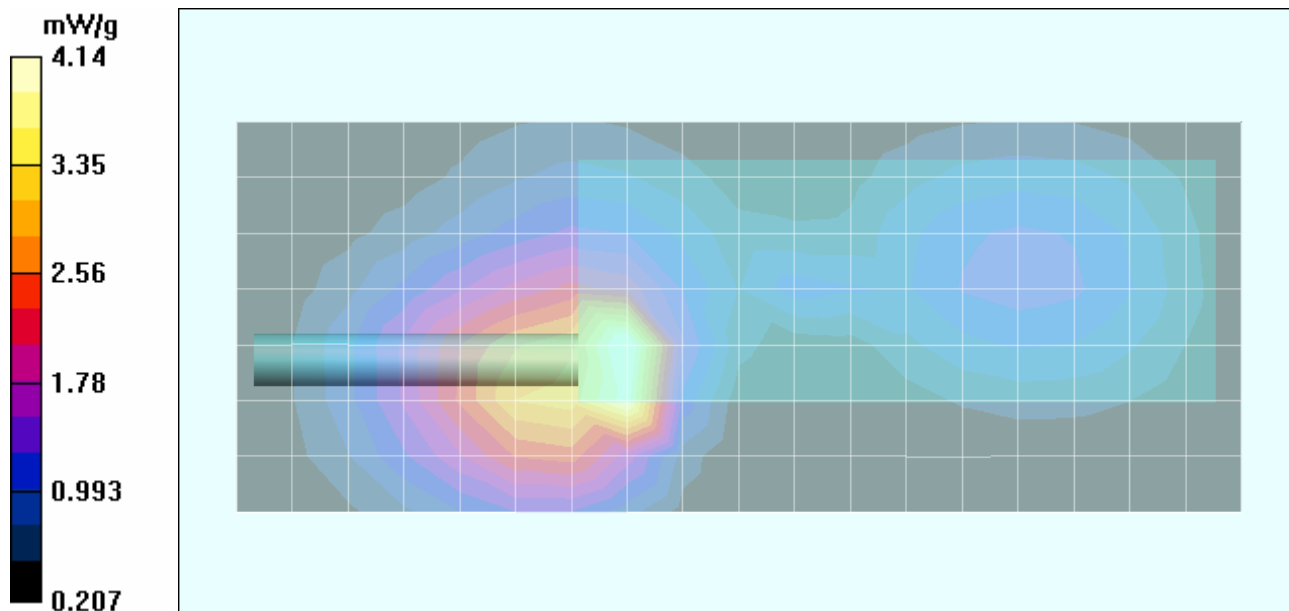

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.97 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 46.0 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 8.81 W/kg

SAR(1 g) = 3.69 mW/g; SAR(10 g) = 2.33 mW/g

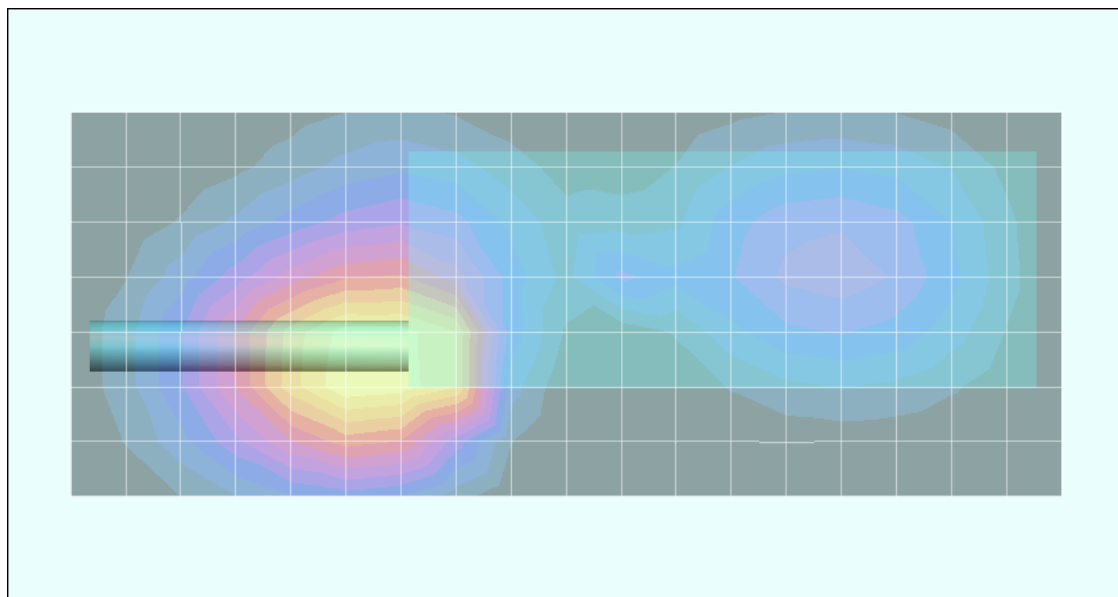

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.01 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 48.5 V/m; Power Drift = 0.183 dB

Peak SAR (extrapolated) = 9.49 W/kg

SAR(1 g) = 4.02 mW/g; SAR(10 g) = 2.57 mW/g

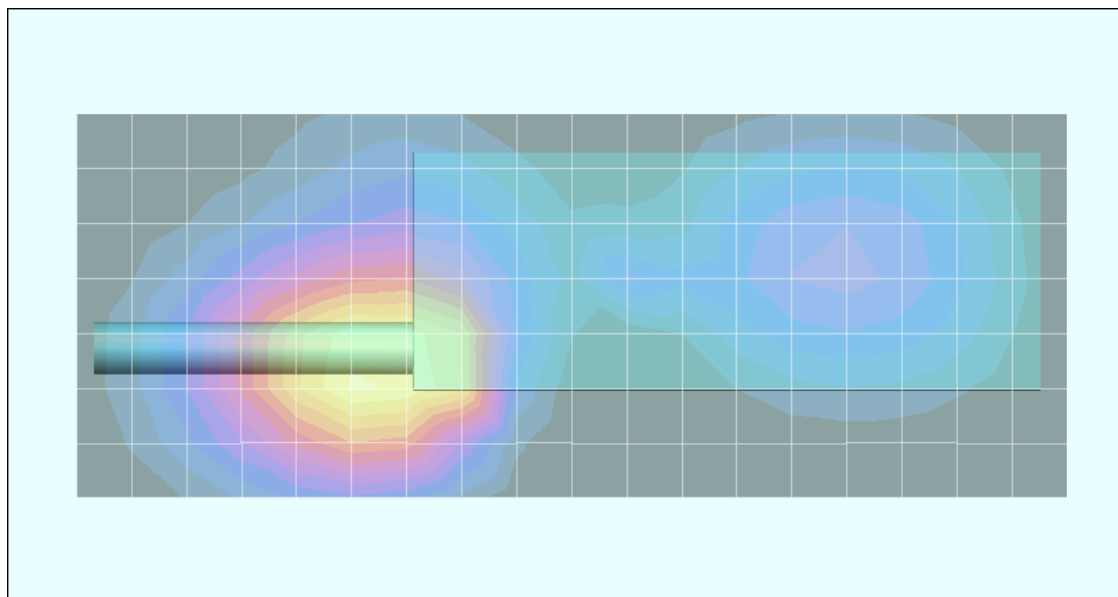

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 33.96 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = 0.0942 dB

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 5.07 mW/g; SAR(10 g) = 2.7 mW/g

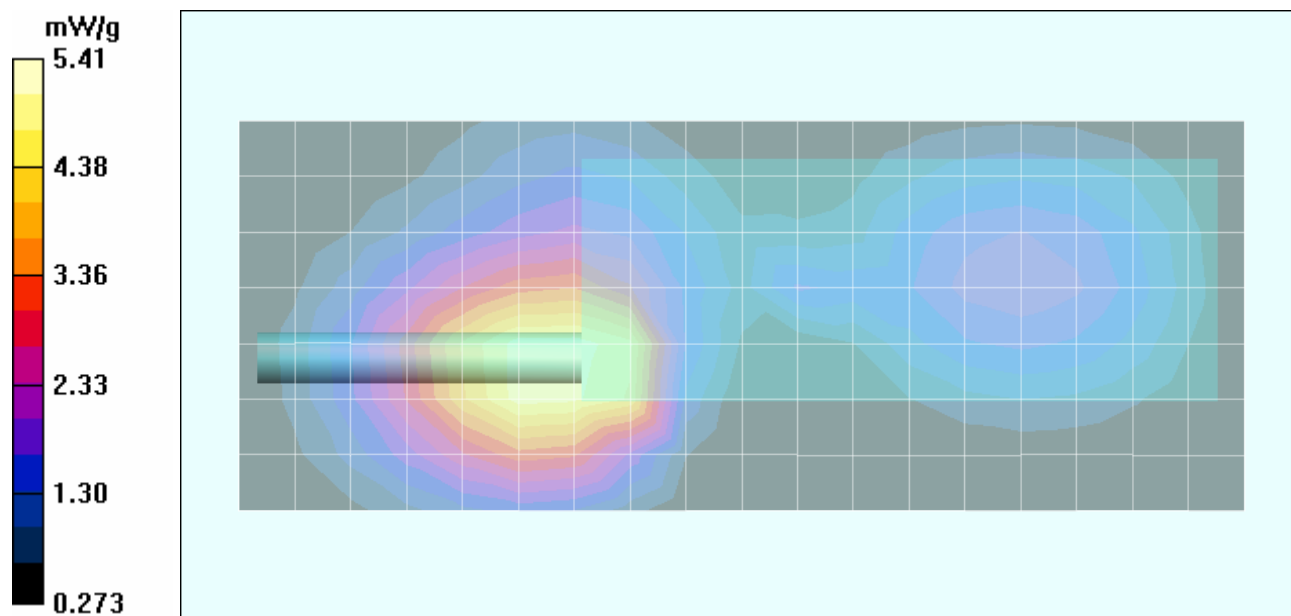

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.08 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.400 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.75 mW/g


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.400 dB

Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 1.44 mW/g; SAR(10 g) = 0.600 mW/g

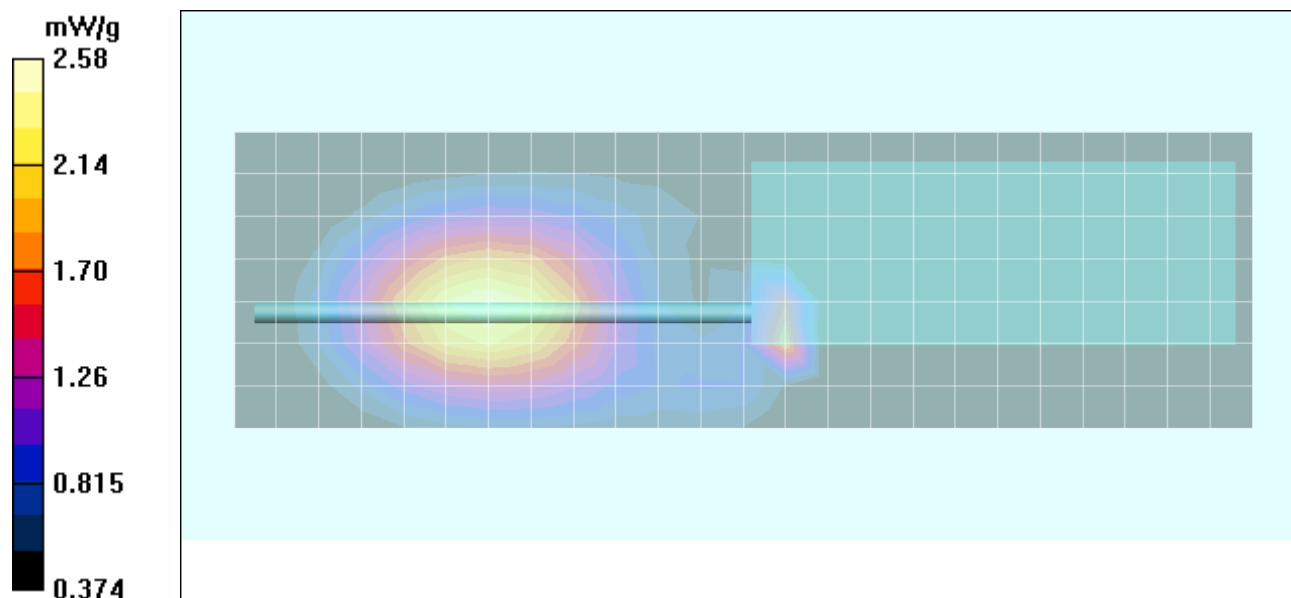

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.10 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = 0.0512 dB

Peak SAR (extrapolated) = 4.00 W/kg

SAR(1 g) = 2.64 mW/g; SAR(10 g) = 1.87 mW/g

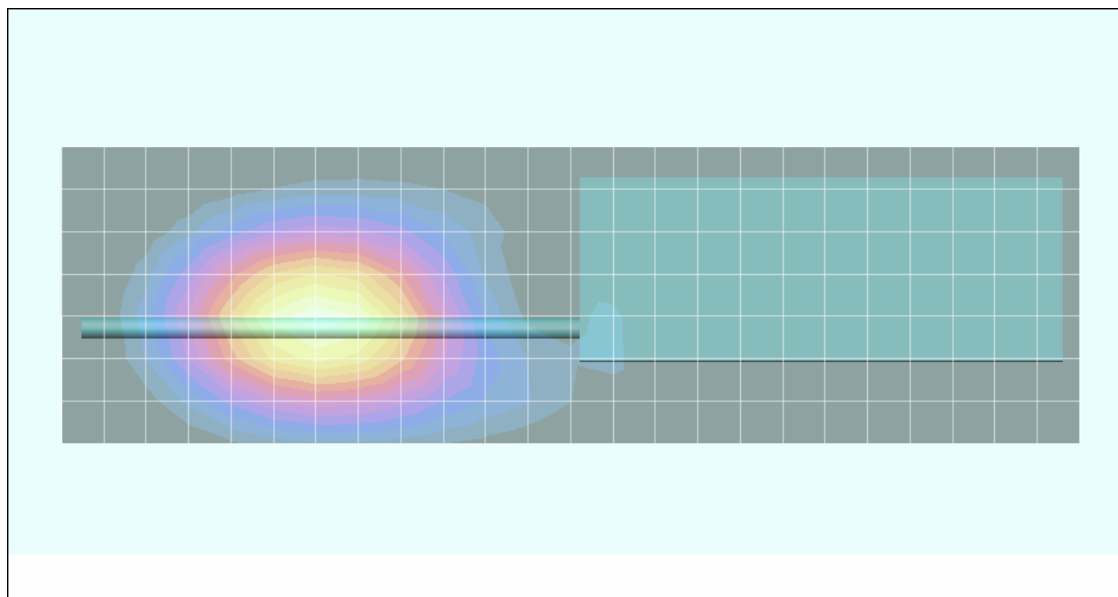

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.04 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.334 dB

Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.75 mW/g



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.334 dB

Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 1.97 mW/g; SAR(10 g) = 0.720 mW/g

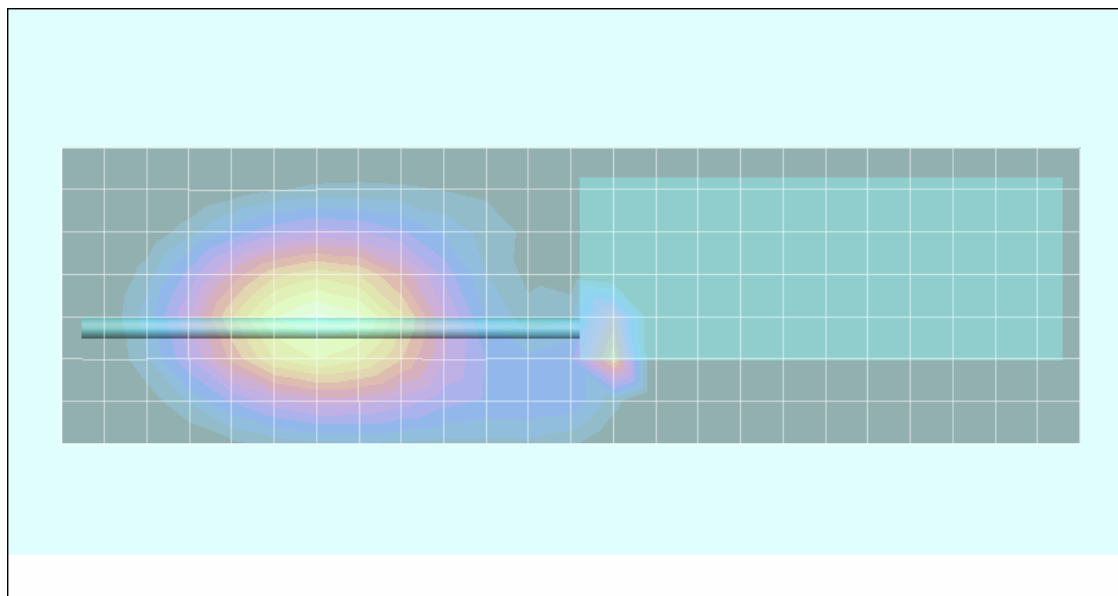

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.12 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.64 mW/g

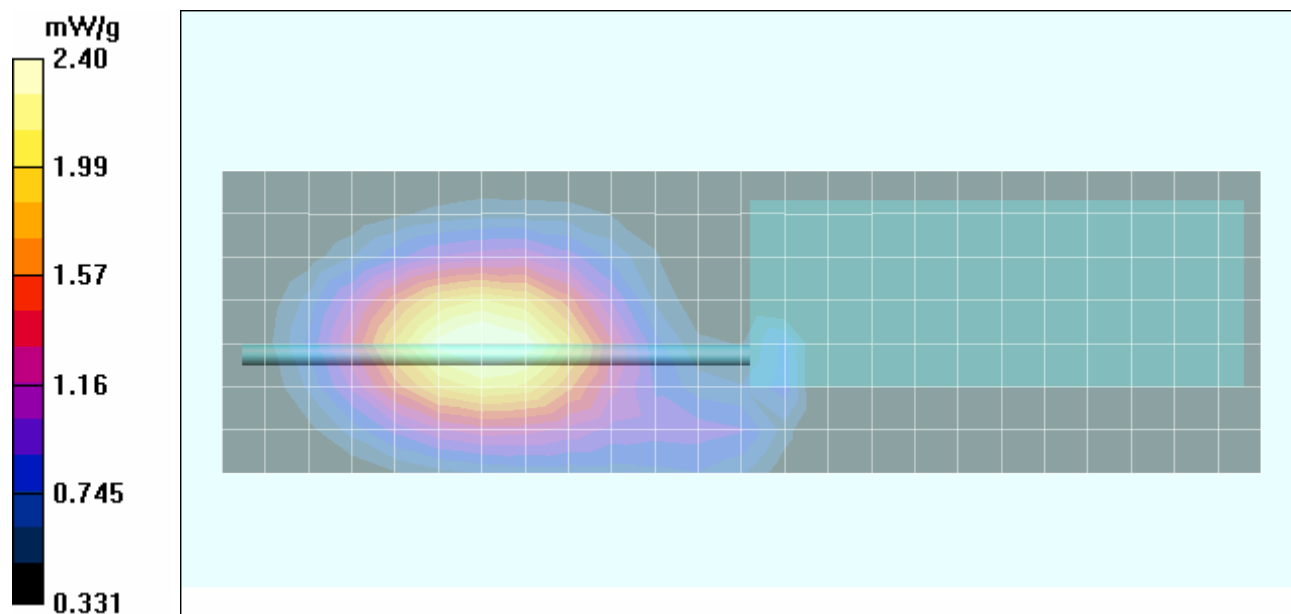

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.09 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 50.7 V/m; Power Drift = 0.0938 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 7.42 mW/g; SAR(10 g) = 3.43 mW/g

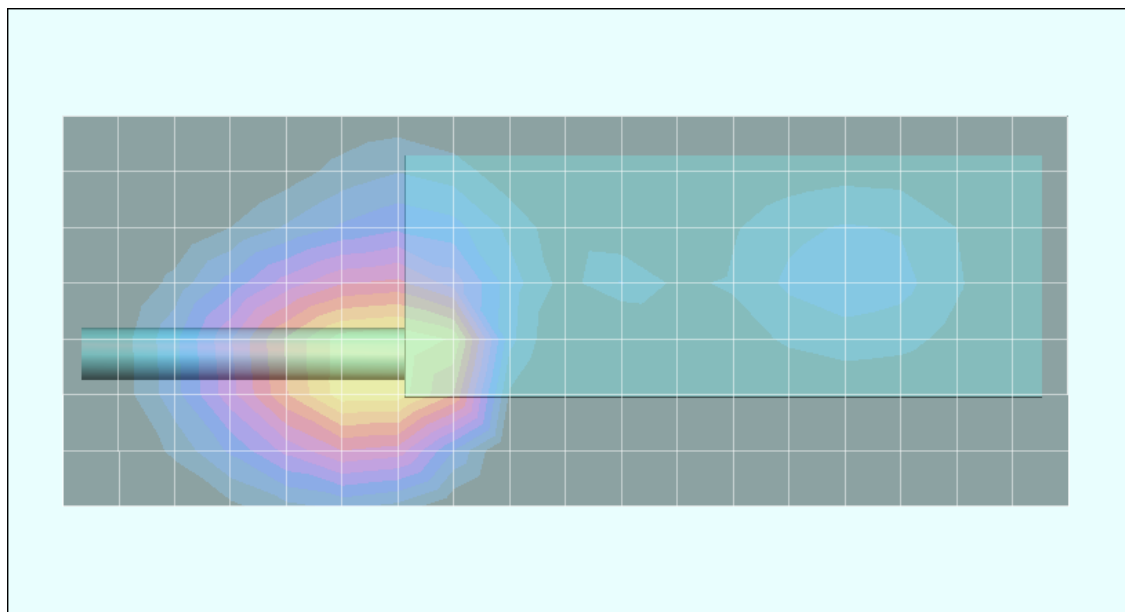

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.11 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 54.6 V/m; Power Drift = -0.0910 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 9.22 mW/g; SAR(10 g) = 3.93 mW/g

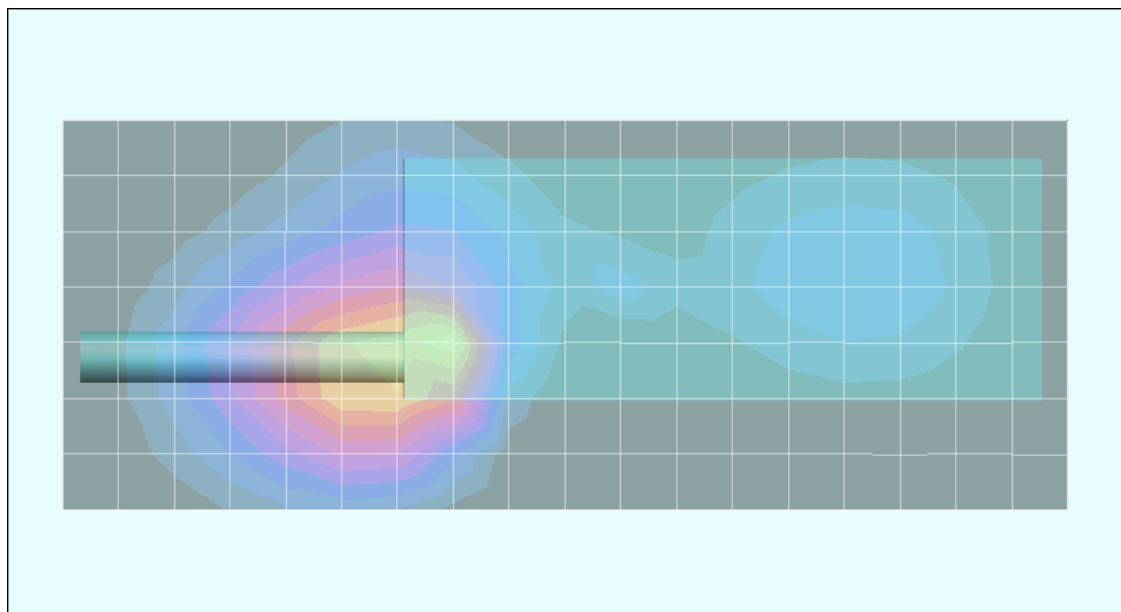

Z-Axis Scan

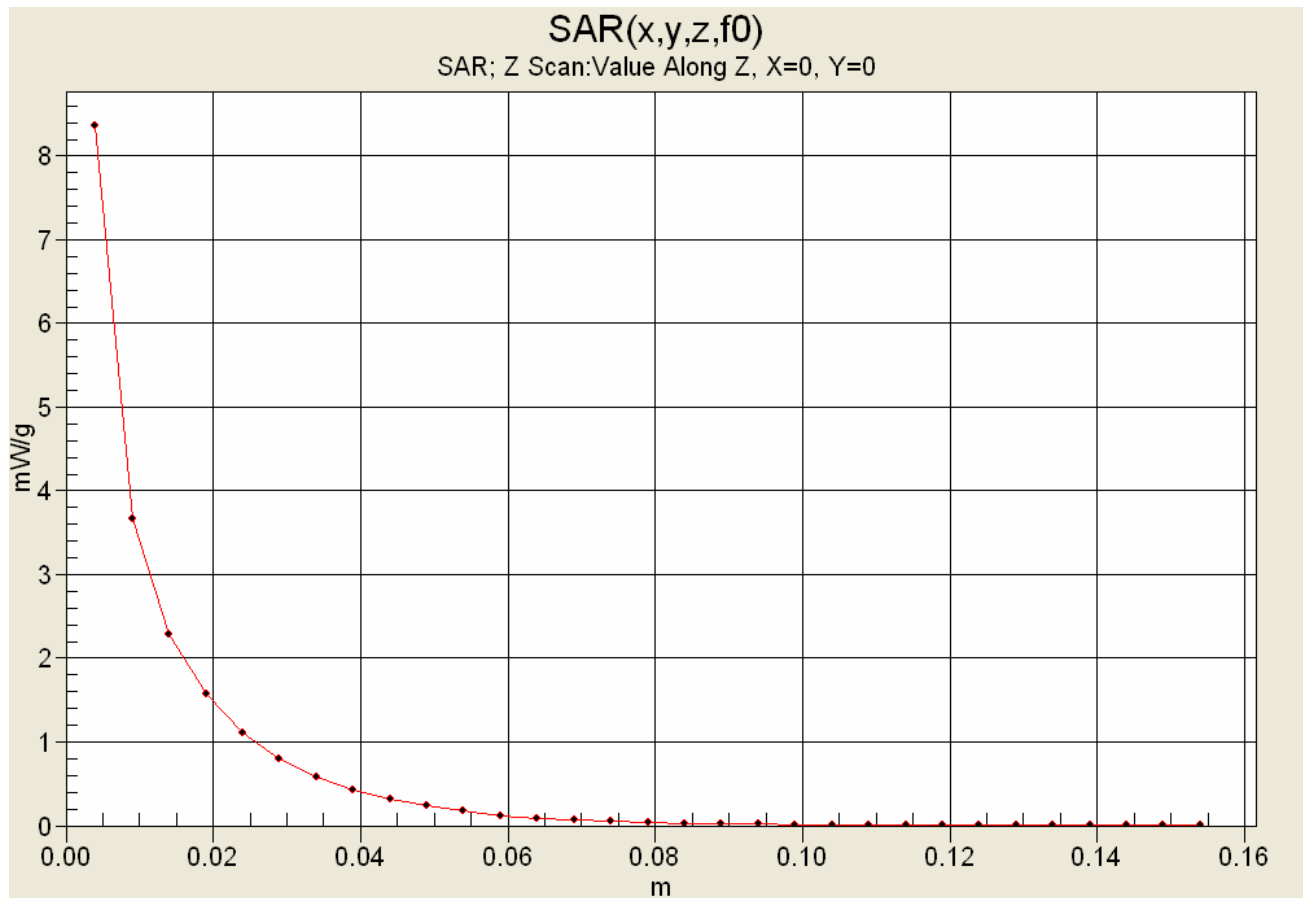

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.13 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 9.03 mW/g; SAR(10 g) = 3.9 mW/g

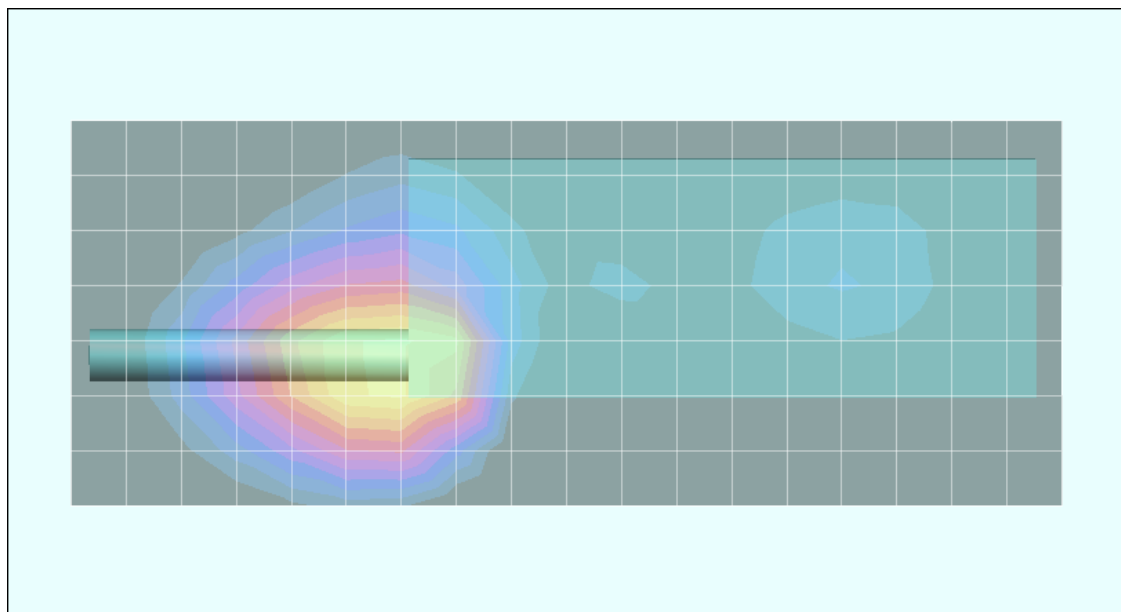

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.08 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 50.8 V/m; Power Drift = 0.171 dB

Peak SAR (extrapolated) = 7.86 W/kg

SAR(1 g) = 3.72 mW/g; SAR(10 g) = 2.42 mW/g

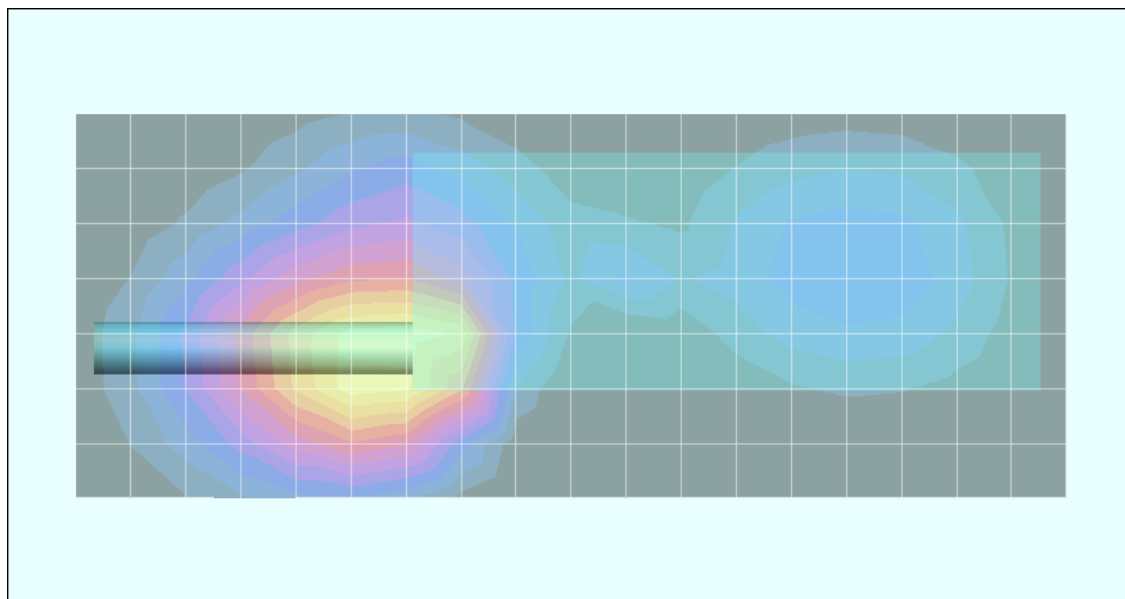

Date Tested: 07/26/2005

Body-Worn SAR - 794.0125 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.06 dBm (Conducted)

Frequency: 794.0125 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Low Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 49.7 V/m; Power Drift = 0.185 dB

Peak SAR (extrapolated) = 9.95 W/kg

SAR(1 g) = 4.29 mW/g; SAR(10 g) = 2.56 mW/g

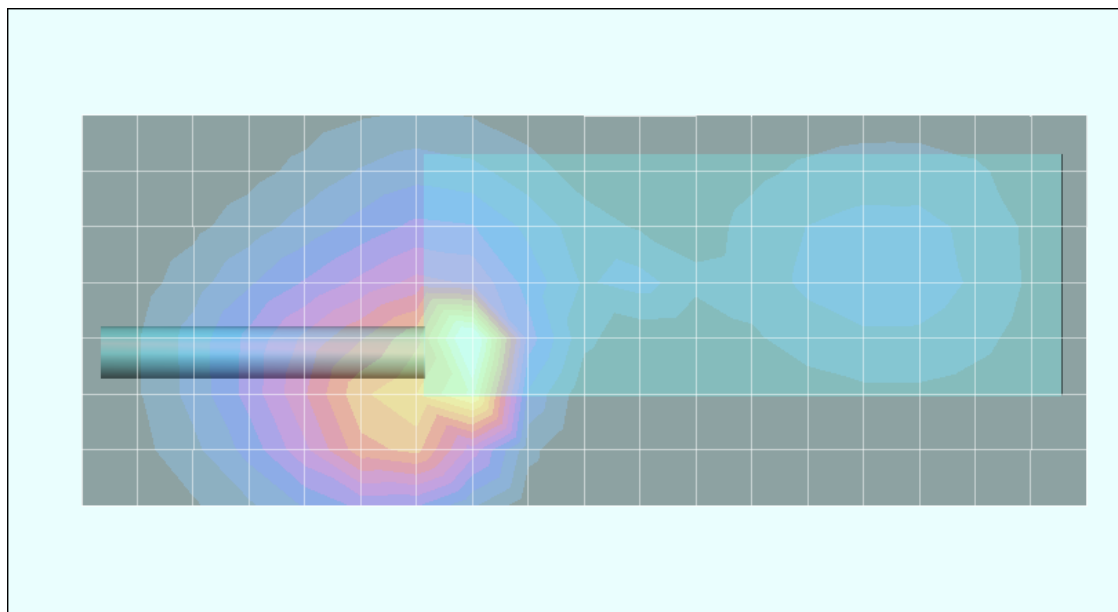

Date Tested: 07/26/2005

Body-Worn SAR - 805.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.94 dBm (Conducted)

Frequency: 805.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - High Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 51.2 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 4.35 W/kg

SAR(1 g) = 2.99 mW/g; SAR(10 g) = 2.09 mW/g

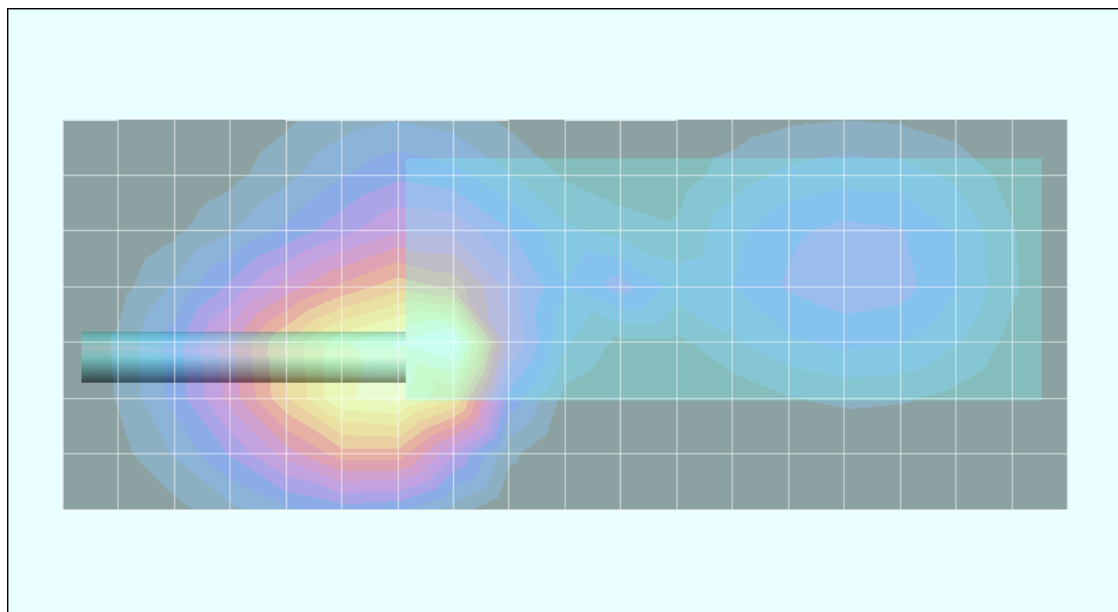

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.89 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.87 mW/g; SAR(10 g) = 2.11 mW/g

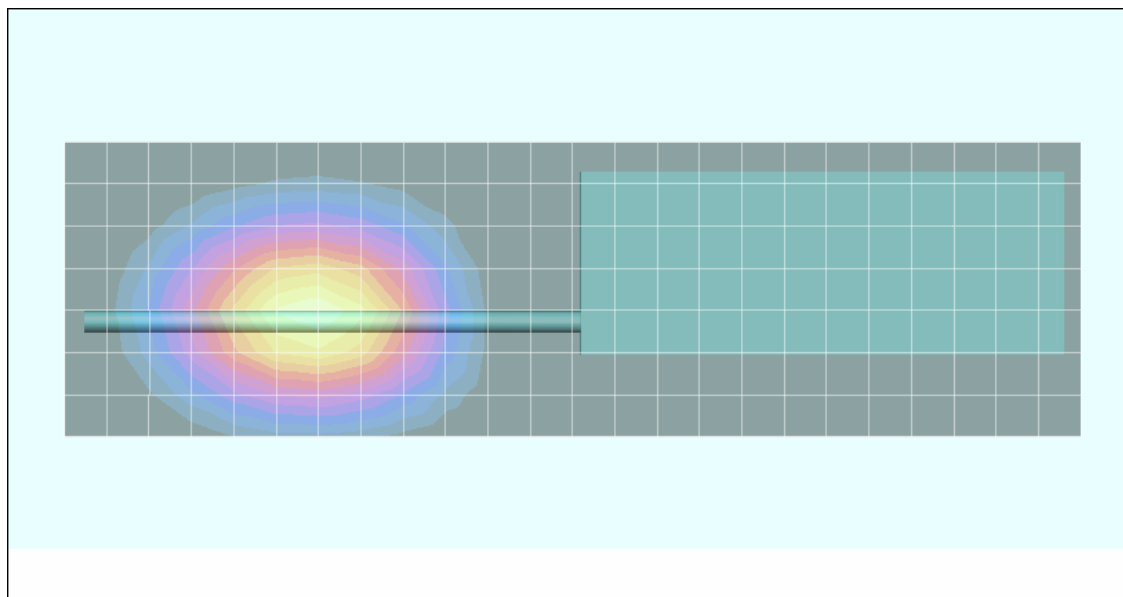

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.86 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 3.96 W/kg

SAR(1 g) = 3.10 mW/g; SAR(10 g) = 2.27 mW/g

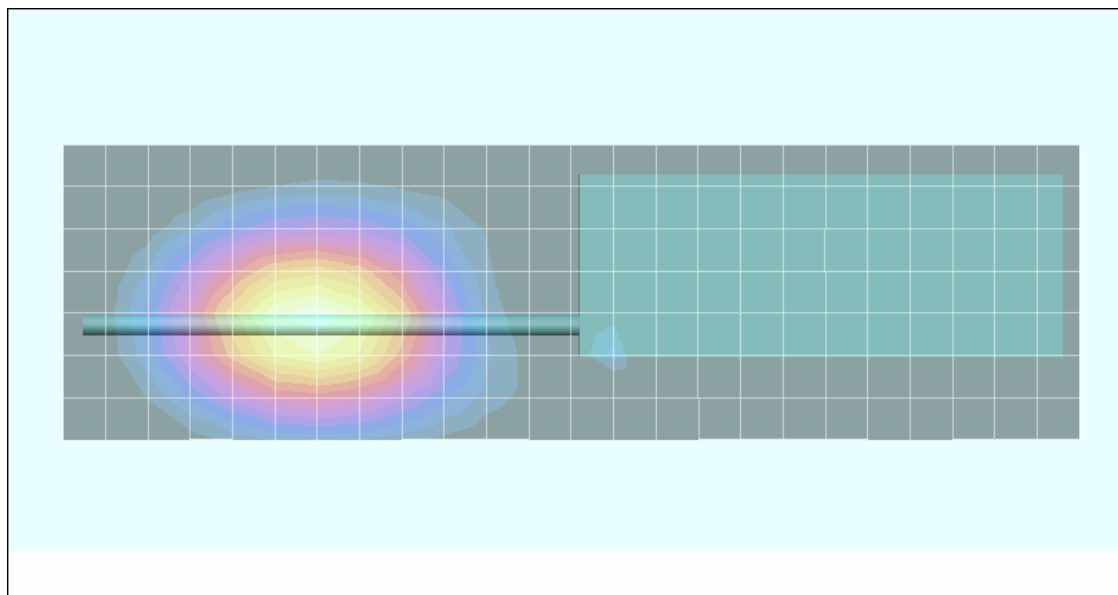

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.82 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.0246 dB

Peak SAR (extrapolated) = 3.89 W/kg

SAR(1 g) = 3.04 mW/g; SAR(10 g) = 2.23 mW/g

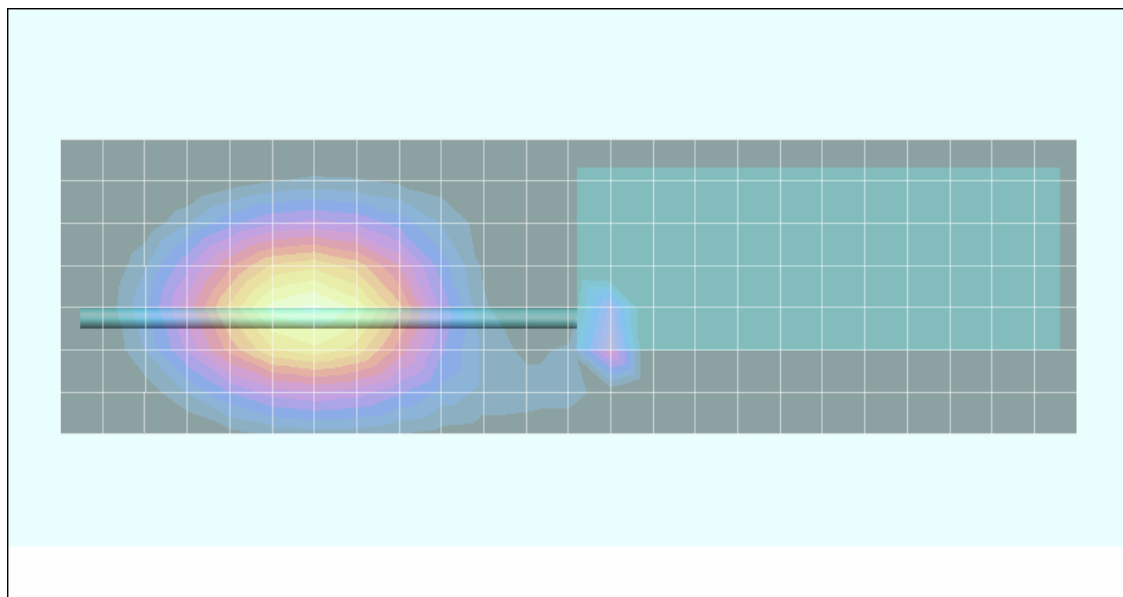

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.83 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = 0.00684 dB

Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 2.92 mW/g; SAR(10 g) = 2.15 mW/g

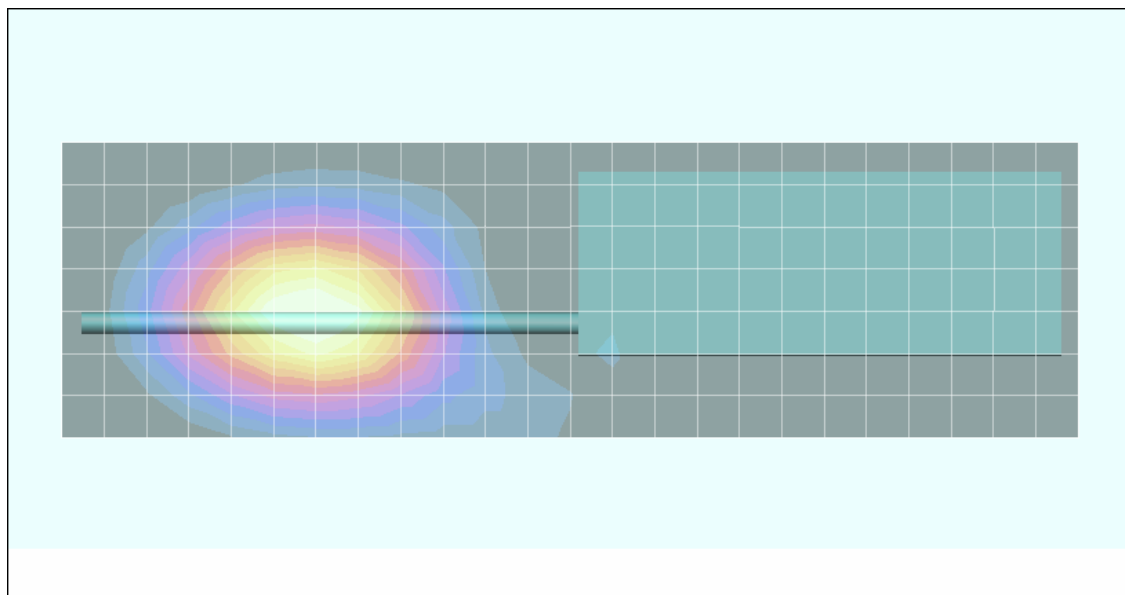

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.85 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M815 ($\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56.3 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 6.86 mW/g; SAR(10 g) = 3.45 mW/g

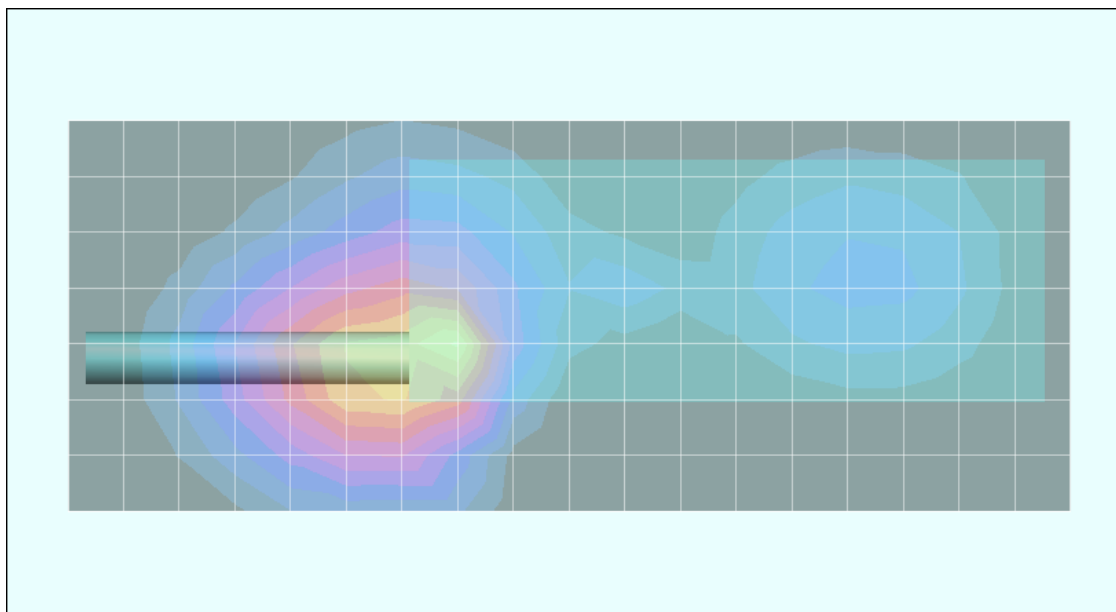

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.83 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.1 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 6.95 W/kg

SAR(1 g) = 3.99 mW/g; SAR(10 g) = 2.61 mW/g

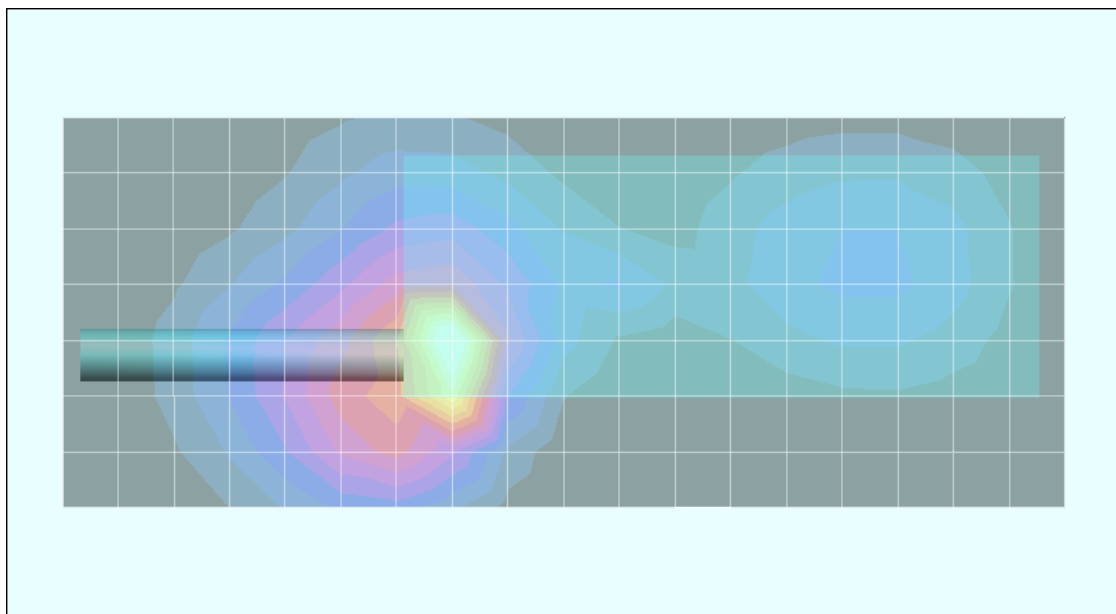

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.86 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 53.2 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 7.06 W/kg

SAR(1 g) = 3.99 mW/g; SAR(10 g) = 2.69 mW/g

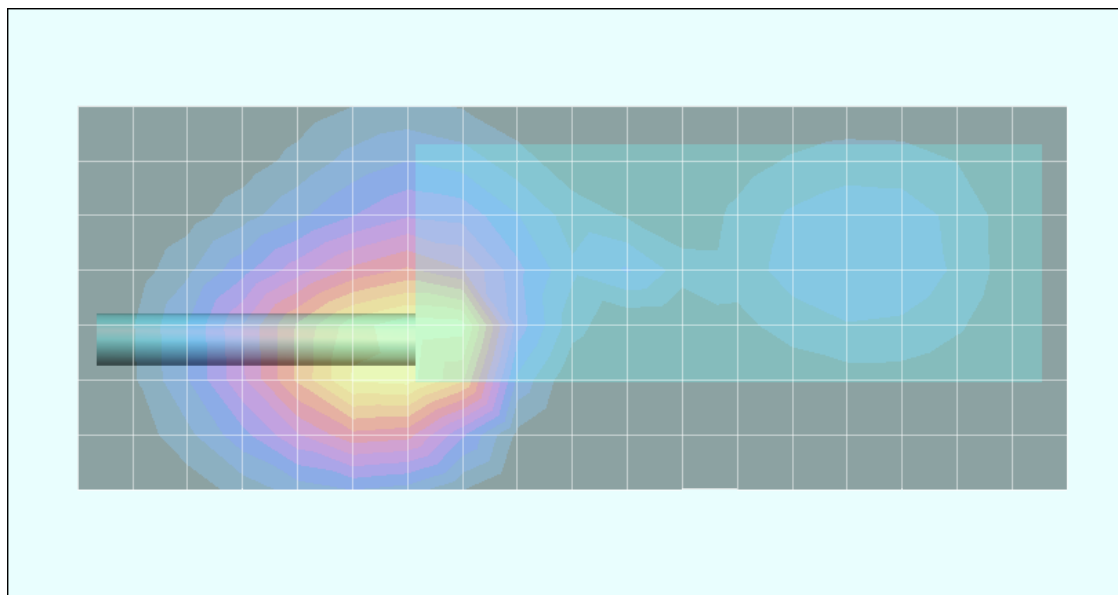

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.87 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 53.9 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 7.04 W/kg

SAR(1 g) = 4.06 mW/g; SAR(10 g) = 2.79 mW/g

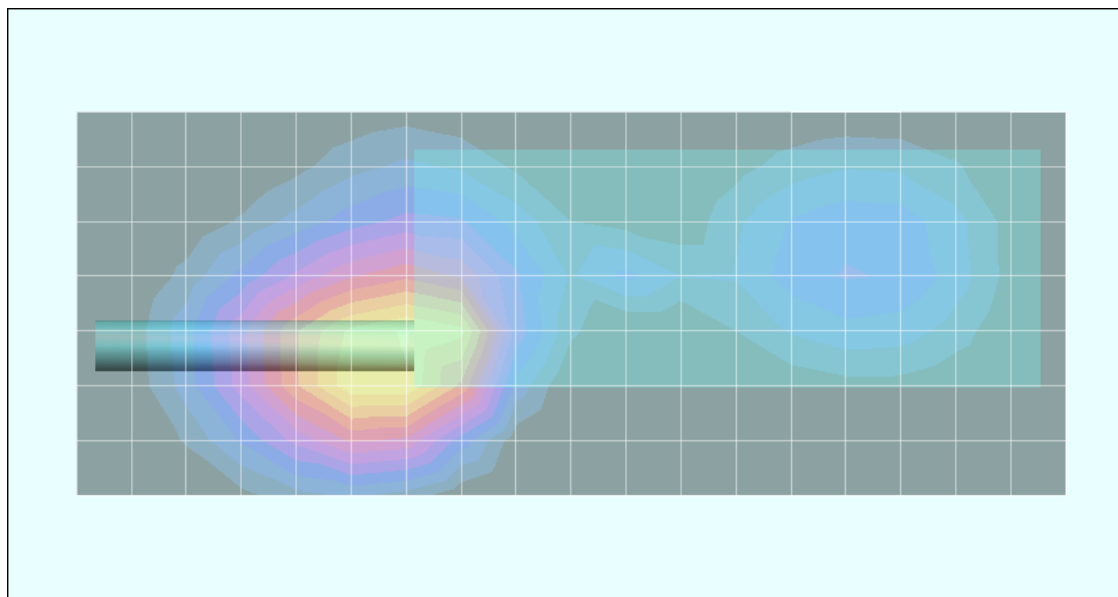

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.89 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.0446 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.65 mW/g

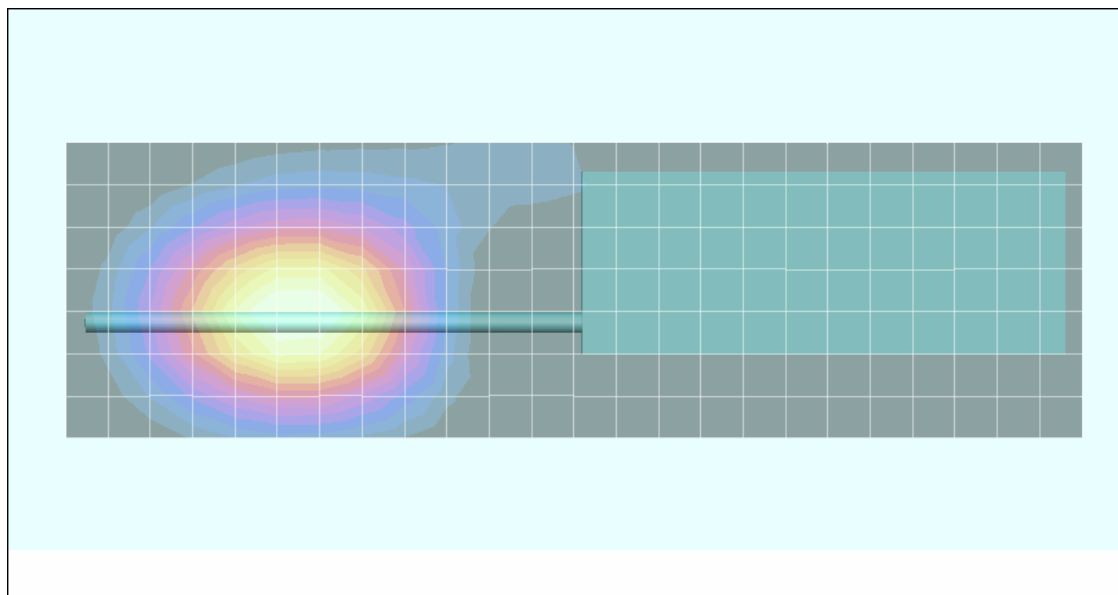

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.93 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.211 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 2.15 mW/g; SAR(10 g) = 1.56 mW/g

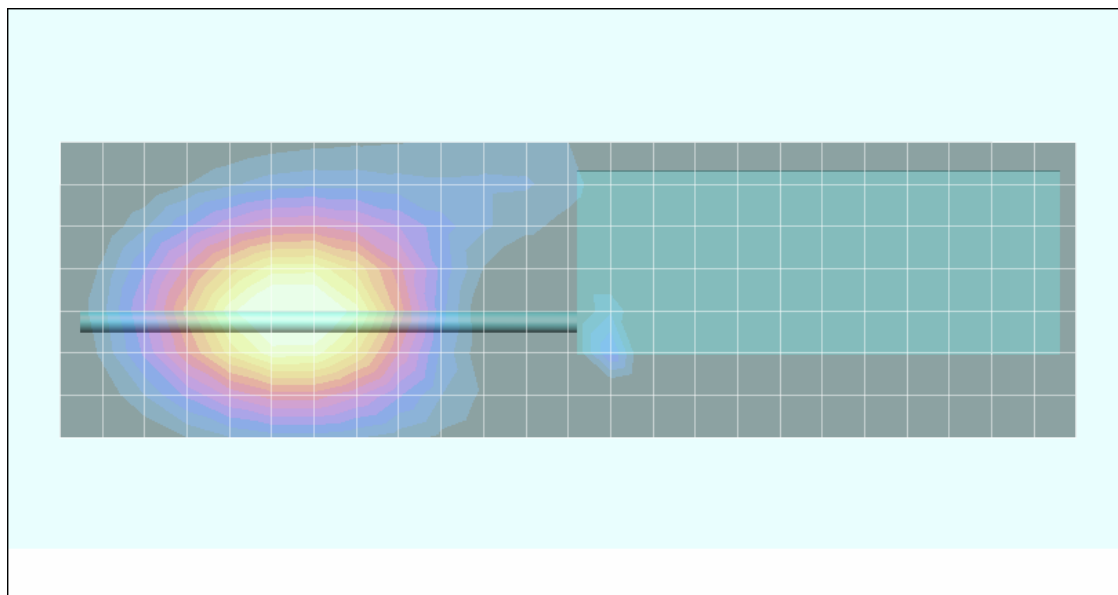

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.86 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M860 ($\sigma = 1.03$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = 0.230 dB

Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 2.55 mW/g; SAR(10 g) = 1.84 mW/g

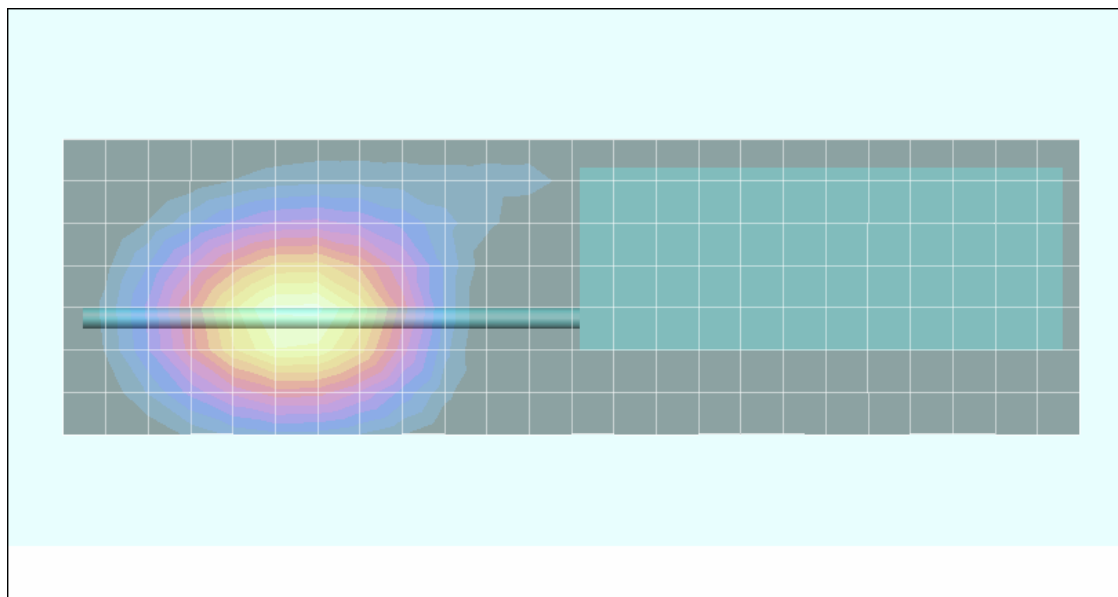

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.82 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.83 mW/g

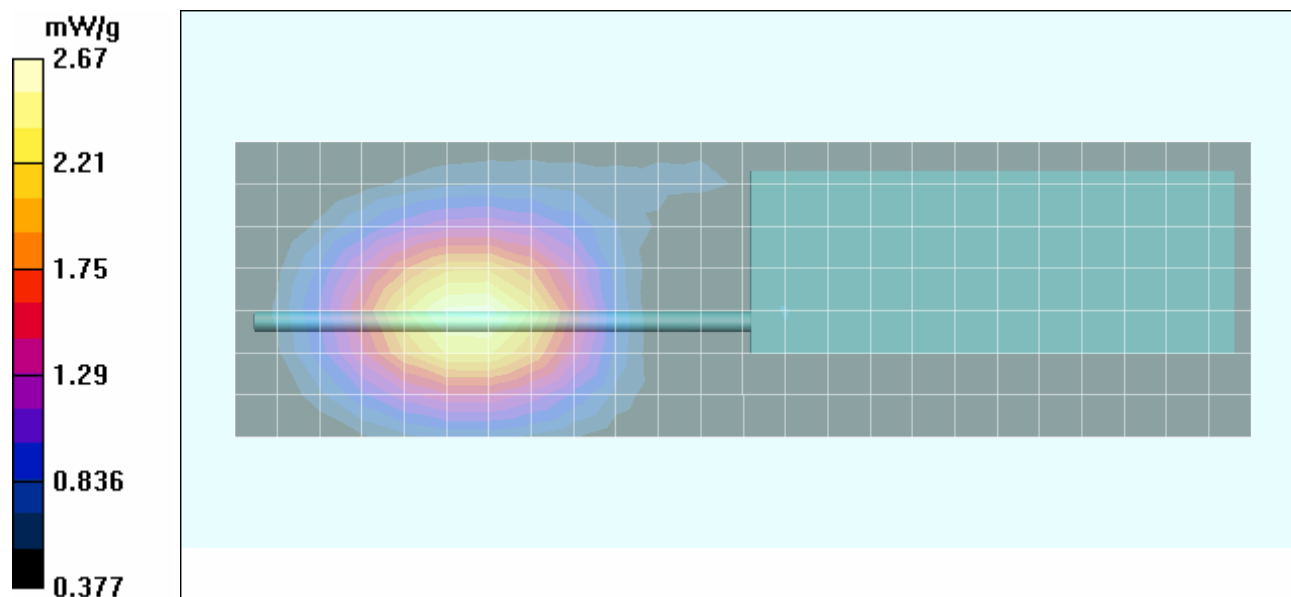

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.88 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 47.5 V/m; Power Drift = 0.0766 dB

Peak SAR (extrapolated) = 6.26 W/kg

SAR(1 g) = 3.52 mW/g; SAR(10 g) = 2.26 mW/g

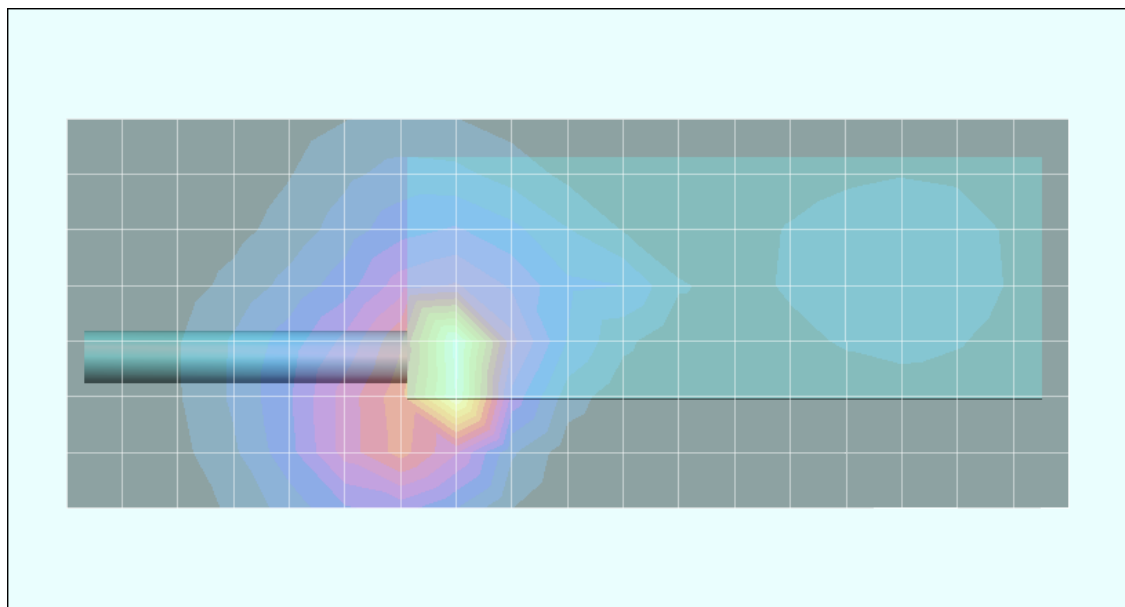

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

Frequency: 860.0000 MHz; Duty Cycle: 1:1

RF Output Power: 34.91 dBm (Conducted)

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M860 ($\sigma = 1.03$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 51.5 V/m; Power Drift = 0.0191 dB

Peak SAR (extrapolated) = 21.3 W/kg

SAR(1 g) = 8.10 mW/g; SAR(10 g) = 3.8 mW/g

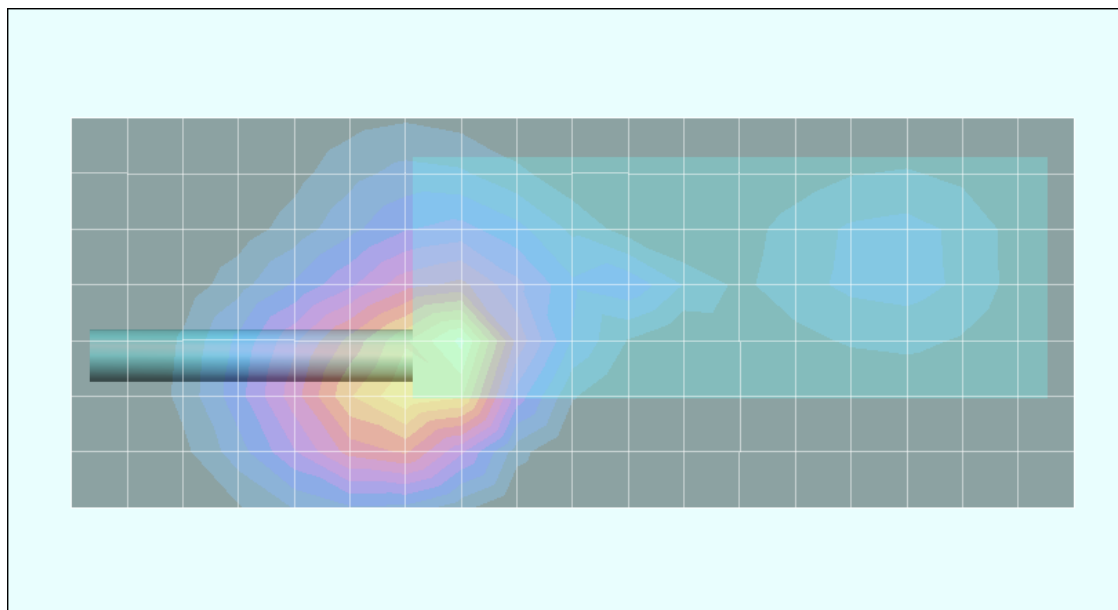

Z-Axis Scan

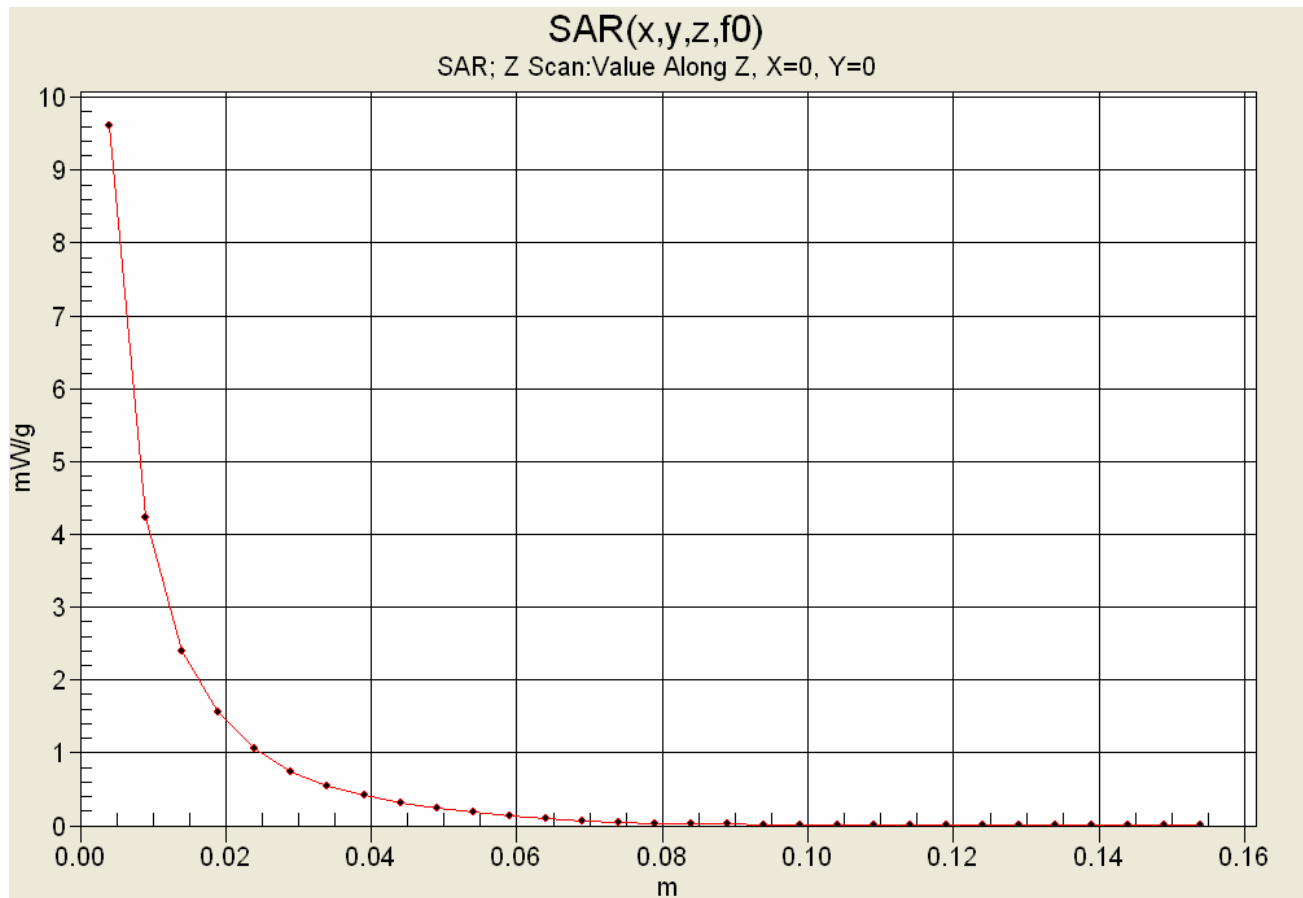

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

Frequency: 860.0000 MHz; Duty Cycle: 1:1

RF Output Power: 34.83 dBm (Conducted)

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 49.3 V/m; Power Drift = 0.0753 dB

Peak SAR (extrapolated) = 7.42 W/kg

SAR(1 g) = 4.14 mW/g; SAR(10 g) = 2.59 mW/g

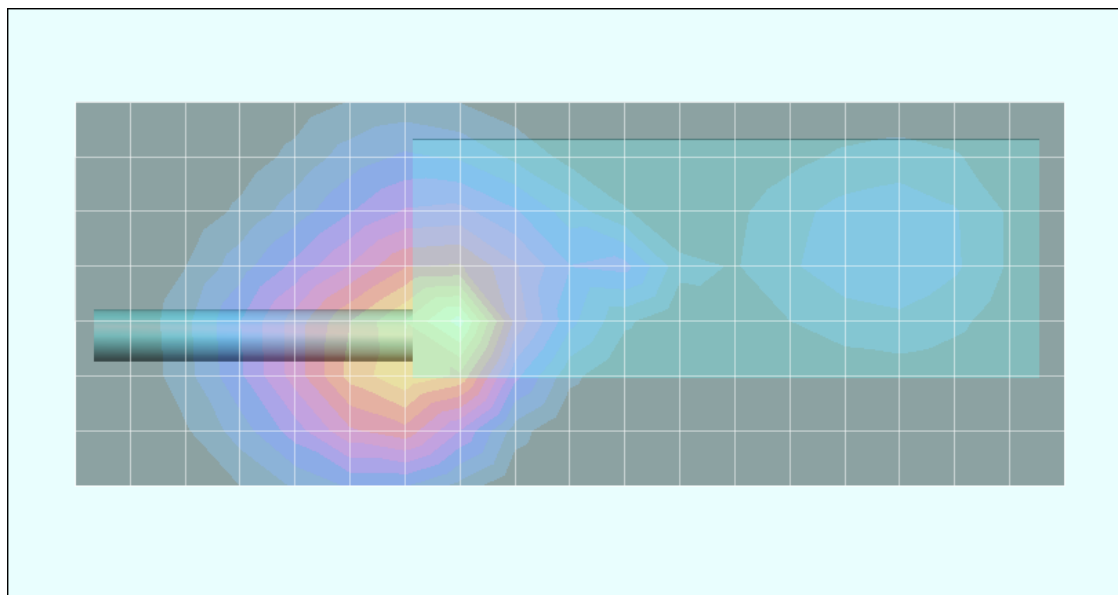

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

Frequency: 860.0000 MHz; Duty Cycle: 1:1

RF Output Power: 34.86 dBm (Conducted)

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 48.1 V/m; Power Drift = 0.0984 dB

Peak SAR (extrapolated) = 6.08 W/kg

SAR(1 g) = 3.56 mW/g; SAR(10 g) = 2.35 mW/g

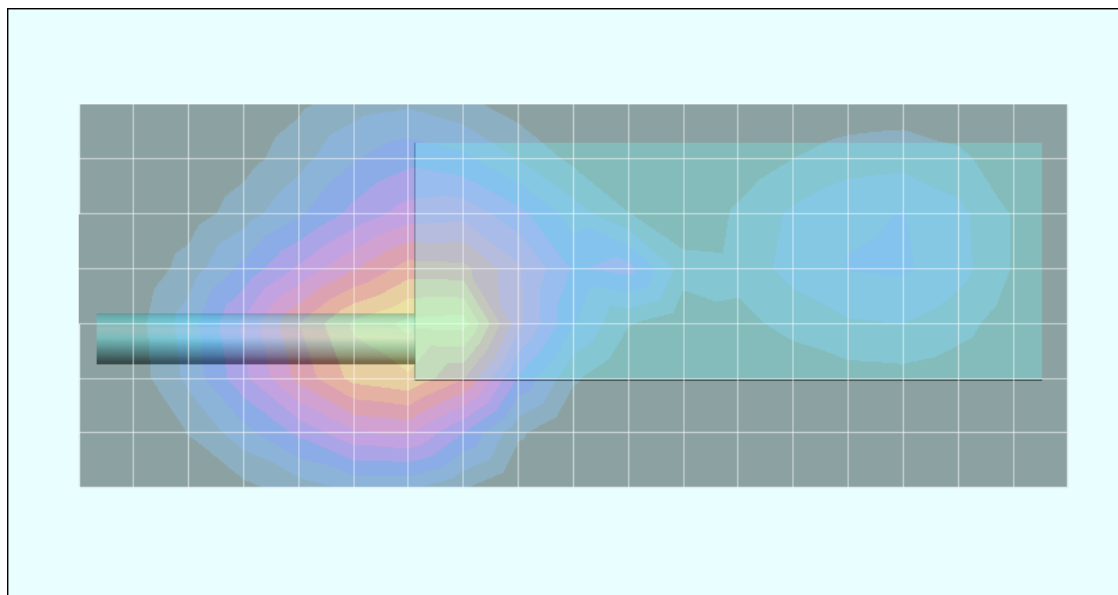

Date Tested: 07/21/2005

Body-Worn SAR - 851.0125 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

Frequency: 851.0125 MHz; Duty Cycle: 1:1

RF Output Power: 34.84 dBm (Conducted)

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M860 ($\sigma = 1.03$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - Low Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 50.3 V/m; Power Drift = 0.0575 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 3.82 mW/g; SAR(10 g) = 2.62 mW/g

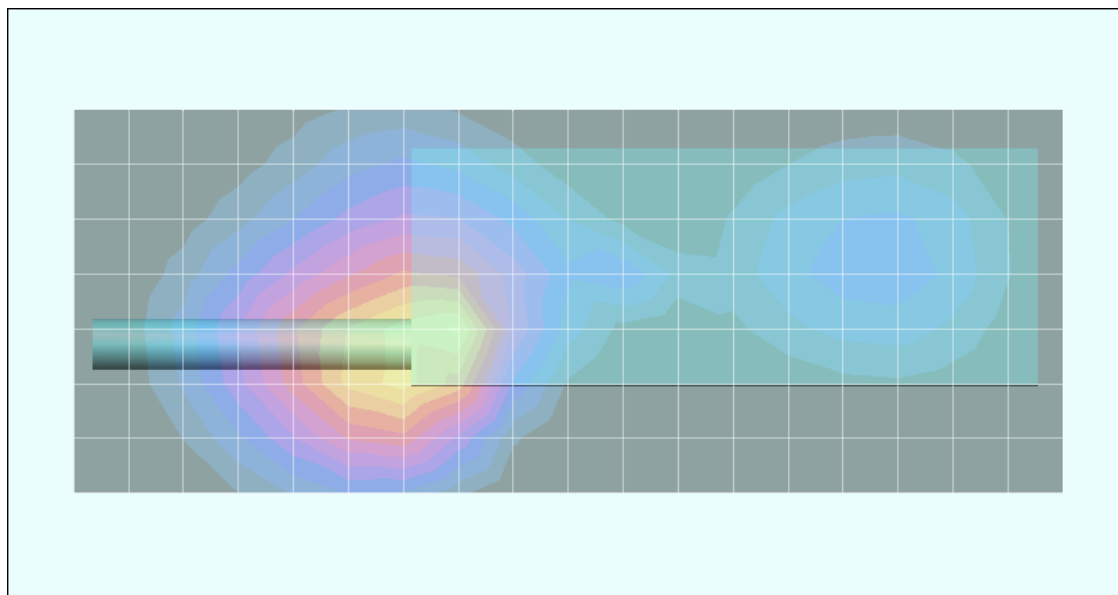

Date Tested: 07/21/2005

Body-Worn SAR - 868.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Shoulder Strap (P/N: CC103333V1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

Frequency: 868.9875 MHz; Duty Cycle: 1:1

RF Output Power: 34.83 dBm (Conducted)

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M860 ($\sigma = 1.03$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Leather Case Separation Distance - High Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Leather Case Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 47.3 V/m; Power Drift = 0.204 dB

Peak SAR (extrapolated) = 6.85 W/kg

SAR(1 g) = 3.78 mW/g; SAR(10 g) = 2.33 mW/g

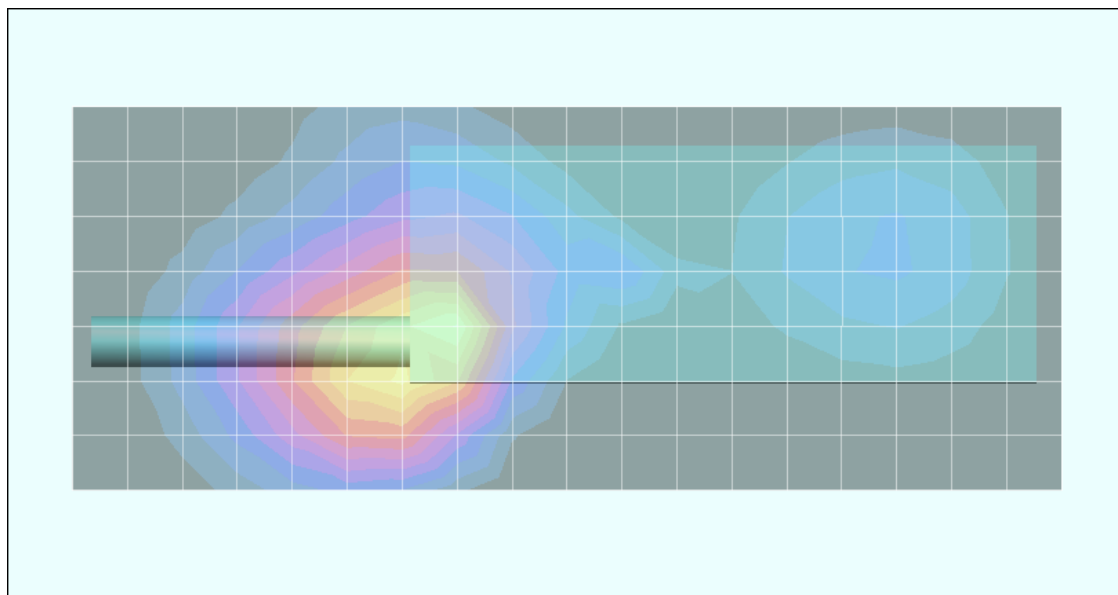

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

BODY-WORN with System Radio (Model No.: MAHROS0050)

Body-worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Belt-Loop (P/N: KRY 101 1609/1)

Audio Accessory: Speaker-Microphone (P/N: KRY 101 1617/183)

Date Tested: 08/03/2005

Body-Worn SAR - 766.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Belt-Loop (P/N: KRY 101 1609/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.09 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 4.2 cm Leather Case & Belt-Loop Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 4.2 cm Leather Case & Belt-Loop Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.30 mW/g; SAR(10 g) = 0.942 mW/g

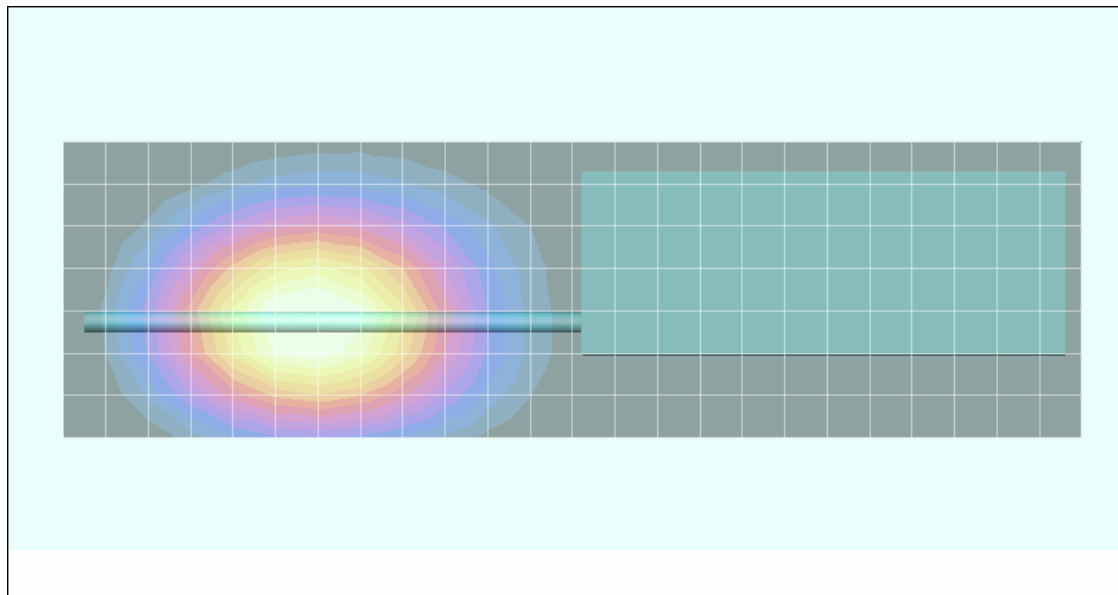

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 08/03/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Leather Case Kit (P/N: KRY 101 1639/4) & Leather Belt-Loop (P/N: KRY 101 1609/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.11 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 4.2 cm Leather Case & Belt-Loop Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 4.2 cm Leather Case & Belt-Loop Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 36.5 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.69 mW/g; SAR(10 g) = 1.22 mW/g

