

RADIO TEST REPORT – REP114959

Type of assessment:

Final product testing

Applicant:

McIntosh Laboratory Inc.

Model:

DS200

Product:

Streaming DAC

FCC ID:

BWY-DS200

ISED Certification number:

2483A-DS200

Specifications:

- ◆ FCC 47 CFR Part 15 Subpart E, §15.407
- ◆ RSS-247, Issue 3, August 2023, Section 6

Date of issue: September 23, 2025

Sagarkumar Patel

Tested by

Andrey Adelberg, Senior EMC/RF Specialist

Reviewed by



Signature

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada.
The tests included in this report are within the scope of this accreditation

Lab locations

Company name	Nemko Canada Inc.
Facilities	<p>Ottawa site: 303 River Road, Ottawa, ON, Canada, K1V 1H2 Tel: +1 613 737 9680 Test site registration number: CA2040</p> <p>Montréal site: 292 Labrosse Avenue, Pointe-Claire, QC, Canada, H9R 5L8 Tel: +1 514 694 2684 Test site registration number: CA2041</p> <p>Cambridge site: 1-130 Saltsman Drive, Cambridge, ON, Canada, N3E 0B2 Tel: +1 519 650 4811 Test site registration number: CA0101</p>
Website	www.nemko.com

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Test specifications	4
1.2 Test methods	4
1.3 Exclusions	4
1.4 Statement of compliance	4
1.5 Test report revision history	4
Section 2 Engineering considerations	5
2.1 Modifications incorporated in the EUT for compliance	5
2.2 Technical judgment	5
2.3 Deviations from laboratory tests procedures	5
Section 3 Test conditions	6
3.1 Atmospheric conditions	6
3.2 Power supply range	6
Section 4 Measurement uncertainty	7
4.1 Uncertainty of measurement	7
Section 5 Information provided by the applicant	8
5.1 Disclaimer	8
5.2 Applicant/Manufacture	8
5.3 EUT information	8
5.4 Radio technical information	8
5.5 EUT setup details	9
Section 6 Summary of test results	11
6.1 Testing location	11
6.2 Testing period	11
6.3 Sample information	11
6.4 FCC Part 15 Subpart A and C, general requirements test results	11
6.5 FCC Part §15.407 test results	11
6.6 ISED RSS-Gen, Issue 5, test results	12
6.7 ISED RSS-247, Issue 3, test results	12
Section 7 Test equipment	13
7.1 Test equipment list	13
Section 8 Testing data	14
8.1 Variation of power source	14
8.2 Number of frequencies	15
8.3 Antenna requirement	17
8.4 AC power line conducted emissions limits	18
8.5 Emission bandwidth	21
8.6 Occupied bandwidth	24
8.7 Transmitter output power and e.i.r.p. requirements for 5150–5250 MHz band	27
8.8 Spurious unwanted (undesirable) emissions	33
8.9 Frequency stability	45

Section 1 Report summary

1.1 Test specifications

FCC 47 CFR Part 15, Subpart E, Clause 15.407	Unlicensed National Information Infrastructure Devices operating in the 5.15–5.35 GHz, 5.47–5.725 GHz, 5.725–5.85 GHz, and 5.925–7.125 GHz bands.
RSS-247, Issue 3, August 2023, Section 6	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices. Technical requirements for licence-exempt local area network devices and digital transmission systems operating in the 5 GHz band

1.2 Test methods

789033 D02 General U-NII Test Procedures New Rules v02r01 (December 14, 2017)	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
662911 D01 Multiple Transmitter Output v02r01 (October 31, 2013)	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
662911 D02 MIMO with Cross Polarized Antenna v01 (October 25, 2011)	Emissions testing of transmitters with multiple outputs in the same band (MIMO) with Cross Polarized Antenna
ANSI C63.10 v2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

1.3 Exclusions

None

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.3 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Test report revision history

Table 1.5-1: Test report revision history

Revision #	Date of issue	Details of changes made to test report
REP114959	September 23, 2025	Original report issued

Section 2 Engineering considerations

2.1 Modifications incorporated in the EUT for compliance

There were no modifications performed to the EUT during this assessment.

2.2 Technical judgment

None

2.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 3 Test conditions

3.1 Atmospheric conditions

Temperature	15 °C – 35 °C
Relative humidity	20 % – 75 %
Air pressure	86 kPa (860 mbar) – 106 kPa (1060 mbar)

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

3.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 4 Measurement uncertainty

4.1 Uncertainty of measurement

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Table 4.1-1: Measurement uncertainty calculations

Test name	Measurement uncertainty, \pm dB
All antenna port measurements	0.55
Occupied bandwidth	4.45
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

Section 5 Information provided by the applicant

5.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

5.2 Applicant/Manufacture

Applicant name	McIntosh Laboratory Inc
Applicant address	2 Chambers St, Binghamton, 13903, United States, NY USA
Manufacture name	Same as applicant
Manufacture address	Same as applicant

5.3 EUT information

Product	Streaming DAC
Model	DS200
Serial number	AKF1427
Power supply requirements	AC: 120-240 V, 50/60 Hz power cord
Product description and theory of operation	2-channel Digital-to-Analog Converter (DAC) with wired digital audio inputs for legacy formats and wired/wireless inputs for streaming audio services.

5.4 Radio technical information

	<input checked="" type="checkbox"/> Indoor access point
Frequency band	5150–5250 MHz (U-NII-1)
Frequency Min (MHz)	802.11a/n 20 MHz Signal 5180 MHz 802.11n 40 MHz Signal 5190 MHz 802.11ac 80 MHz Signal 5210 MHz
Frequency Max (MHz)	802.11a/n 20 MHz Signal 5240 MHz 802.11n 40 MHz Signal 5230 MHz 802.11ac 80 MHz Signal 5210 MHz
Channel numbers	802.11a/n 20 MHz Signal 36,48 802.11n 40 MHz Signal 36,48 802.11ac 80 MHz Signal 36
RF power Max (W), Conducted	802.11a: 0.0197W, 12.94 dBm 802.11n: 0.0165 W, 12.17dBm 802.11n(HT40): 0.0054 W, 7.3 dBm 802.11ac (HT80): 0.0021 W, 3.25 dBm
Measured BW (kHz), 99% OBW	802.11a: 18577.8; 802.11n: 18293.2; 802.11n(HT40): 36552.0; 802.11ac (HT80): 76263.2
Type of modulation	802.11a/n/ac: OFDM (QPSK, BPSK, 16-QAM, 64-QAM, 256-QAM)
Emission classification	20M0W7D, 40M0W7D, 80M0W7D
Antenna information	External whip antenna, by Tekfun Co., MN: F04A-SR-V2, 2 dBi

5.5 EUT setup details

5.5.1 Radio exercise details

Operating conditions	The Equipment Under Test (EUT) is powered using a 120V, 50 Hz AC supply. Transmission signals are sent through the antenna ports using PuTTY and LabTool software, utilizing various modulation schemes as listed below 802.11a: 14 dBm 802.11n(HT20): 14 dBm 802.11n (HT40): 9 dBm 802.11n (HT80): 6 dBm
Transmitter state	Transmitter set in to continuous mode.
Receiver state	N/A

Table 5.5-1: EUT interface ports

Description	Qty.
USB	1
AC Power input	1

Table 5.5-2: Support equipment

Description	Brand name	Model, Part number, Serial number, Revision level
Laptop	Dell	Nemko Asset, FA003141
TP link Router	TP link	Nemko Asset, FA003562

Table 5.5-3: Inter-connection cables

Cable description	From	To	Length (m)
USB	EUT	Laptop	<3
Power cord	AC Mains	EUT	<3
Ethernet	Laptop	Routerr	<3
Ethernet	Router	EUT	<3

EUT setup configuration, continued

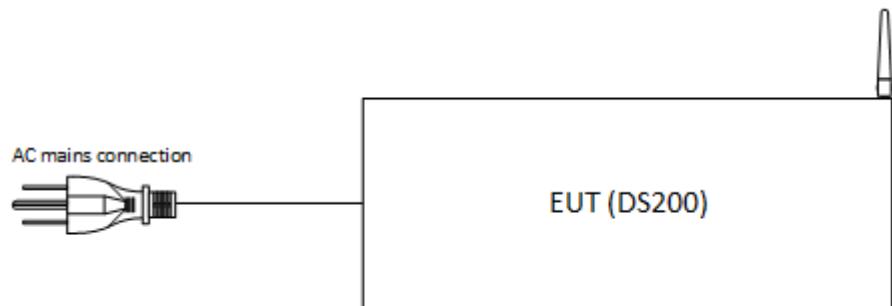


Figure 5.5-1: Radiated testing block diagram

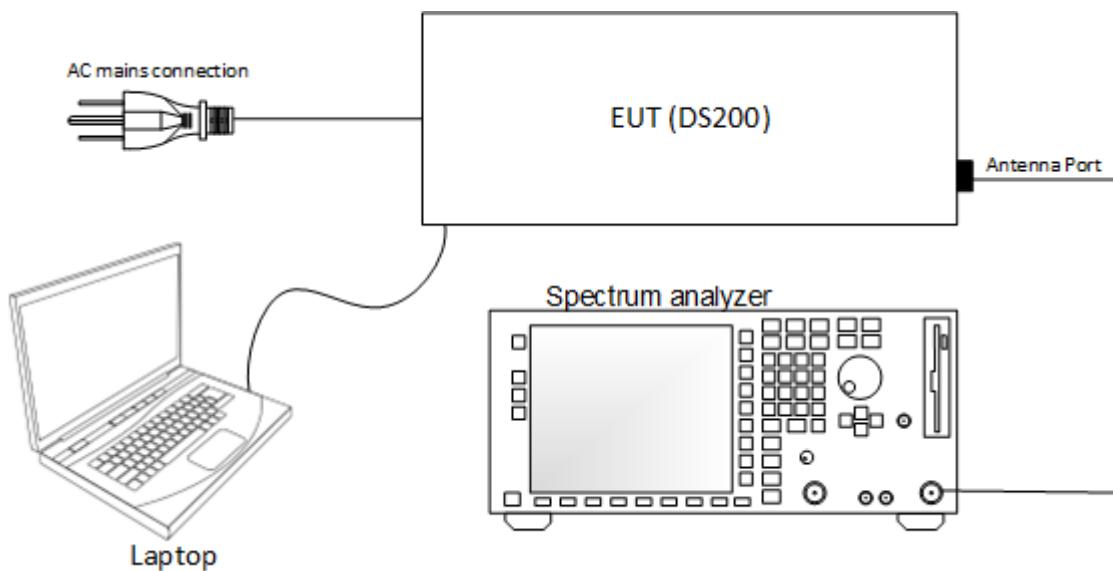


Figure 5.5-2: Antenna port testing block diagram

Section 6 Summary of test results

6.1 Testing location

Test location (s)	Ottawa
-------------------	--------

6.2 Testing period

Test start date	September 8, 2025	Test end date	September 12, 2025
-----------------	-------------------	---------------	--------------------

6.3 Sample information

Receipt date	September 2, 2025	Nemko sample ID number(s)	PRJ00871770001
--------------	-------------------	---------------------------	----------------

6.4 FCC Part 15 Subpart A and C, general requirements test results

Table 6.4-1: FCC general requirements results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.311	Variation of power source	Pass
§15.31(m)	Number of tested frequencies	Pass
§15.203	Antenna requirement	Pass

Notes: EUT is an AC powered device.

6.5 FCC Part §15.407 test results

Table 6.5-1: FCC §15.407 requirements results

Part	Test description	Verdict
§15.403	Emission bandwidth	Pass
§15.407(a)(1)	Power and density limits within 5.15–5.25 GHz band	Pass
§15.407(b)(1)	Undesirable emission limits for 5.15–5.25 GHz band	Pass
§15.407(b)(8)	AC power line conducted limits	Pass
§15.407(g)	Frequency stability	Pass
§15.407(h)(1) ¹	Transmit power control (TPC)	Not applicable
§15.407(h)(2) ¹	Dynamic Frequency Selection (DFS)	Not applicable
§15.407(k)	Automated frequency coordination (AFC) system	Not applicable

Notes ¹DFS and TPC requirements are only applicable to 5.25–5.35 GHz and 5.47–5.725 GHz bands

6.6 ISED RSS-Gen, Issue 5, test results

Table 6.6-1: RSS-Gen requirements results

Clause	Test description	Verdict
7.3	Receiver radiated emission limits	Not applicable
7.4	Receiver conducted emission limits	Not applicable
6.9	Operating bands and selection of test frequencies	Pass
8.8	AC powerline conducted emissions limits	Pass

Notes: ¹According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

EUT is an AC powered device.

6.7 ISED RSS-247, Issue 3, test results

Table 6.7-1: ISED RSS-247 requirements results

Section	Test description	Verdict
6.1 ¹	Types of Modulation	Pass
6.2.1.1	Power limits for 5150–5250 MHz band	Pass
6.2.1.2	Unwanted emission limits for 5150–5250 MHz band	Pass
6.3	Dynamic Frequency Selection (DFS) for devices operating in the bands 5250–5350 MHz, 5470–5600 MHz and 5650–5725 MHz	Not applicable

Notes: ¹ The EUT employs digital modulations, such as: 802.11a, 802.11n HT20 and 802.11n HT40

Section 7 Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	March 14, 2026
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	February 7, 2026
Horn antenna (1-18 GHz)	ETS Lindgren	3117	FA002840	1 year	March 7, 2026
61505 AC/DC programmable source	Chroma	61509	FA003036	—	NCR
Preamp (1-18 GHz)	ETS Lindgren	124334	FA002877	1 year	November 19, 2025
Bilog antenna (20-3000 MHz)	Sunol	JB3	FA002108	1 year	April 8, 2026
50 Ω coax cable	Carlisle	WHU18-1818-072	FA002391	1 year	October 18, 2025
50 Ω coax cable	Huber+Suhner	104B11NX2/11000	FA003441	1 year	October 18, 2025
Horn antenna (18-26.5 GHz)	Electro-metrics	SH-50/60-1	FA000479	—	NCR
Horn antenna 26.5-40 GHz	Electro-metrics	SH-50/60-2	FA000485	—	NCR
Pre-amplifier (18-26 GHz)	Narda	BBS-1826N612	FA001550	1 year	March 21, 2026
Spectrum analyzer	Rohde & Schwarz	FSV 40	FA002731	1 year	March 25, 2026
Notch filter 5150-5350 MHz	Microwave Circuits	5150-5350 MHz	FA001941	1 year	June 5, 2026
NRP18A Average Power Sensor	Rohde & Schwarz	NRP18A	FA003586	1 year	June 4, 2026
LISN	Rohde & Schwarz	ENV216	FA002023	1 year	December 10, 2025
LISN	Rohde & Schwarz	ENV216	FA002515	1 year	February 6, 2026
30 dB attenuator	Aeroflex/Weinschel	73-30-43	FA002058	1 year	April 14, 2026

Notes: NCR - no calibration required,

All equipment related to the contribution of measurement has been included in this list. Such items include, but are not limited to, cables, attenuators, directional couplers, and pre-amps.

Table 7.1-2: Automation software details

Test description	Manufacturer of Software	Details
AC power line conducted emissions	Rohde & Schwarz	EMC32, Software for EMC Measurements, Version 11.20.00
Radiated spurious emissions	Rohde & Schwarz	EMC32, Software for EMC Measurements, Version 11.20.00



Section 8 Testing data

8.1 Variation of power source

8.1.1 References, definitions and limits

FCC §15.31 (e):

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.1.2 Test summary

Verdict	Pass	Tested by	Sagarkumar Patel	Test date	September 8, 2025
---------	------	-----------	------------------	-----------	-------------------

8.1.3 Observations, settings and special notes

The testing was performed as per ANSI C63.10 Section 5.13.

- a) Where the device is intended to be powered from an external power adapter, the voltage variations shall be applied to the input of the adapter provided with the device at the time of sale. If the device is not marketed or sold with a specific adapter, then a typical power adapter shall be used.
- b) For devices, where operating at a supply voltage deviating $\pm 15\%$ from the nominal rated value may cause damages or loss of intended function, test to minimum and maximum allowable voltage per manufacturer's specification and document in the report.
- c) For devices with wide range of rated supply voltage, test at 15% below the lowest and 15% above the highest declared nominal rated supply voltage.
- d) For devices obtaining power from an input/output (I/O) port (USB, firewire, etc.), a test jig is necessary to apply voltage variation to the device from a support power supply, while maintaining the functionalities of the device.

For battery-operated equipment, the equipment tests shall be performed using a variable power supply.

8.1.4 Test data

EUT Power requirements:

AC DC Battery

If EUT is an AC or a DC powered, was the noticeable output power variation observed?

YES NO N/A

If EUT is battery operated, was the testing performed using fresh batteries?

YES NO N/A

If EUT is rechargeable battery operated, was the testing performed using fully charged batteries?

YES NO N/A

8.2 Number of frequencies

8.2.1 References, definitions and limits

FCC §15.31:

(m) Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

RSS-Gen, Clause 6.9:

Except where otherwise specified, measurements shall be performed for each frequency band of operation for which the radio apparatus is to be certified, with the device operating at the frequencies in each band of operation shown in table below. The frequencies selected for measurements shall be reported in the test report.

Table 8.2-1: Frequency Range of Operation

Frequency range over which the device operates (in each band)	Number of test frequencies required	Location of measurement frequency inside the operating frequency range
1 MHz or less	1	Center (middle of the band)
1–10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near center and 1 near low end

Notes: "near" means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

8.2.2 Test summary

Verdict	Pass		
Tested by	Sagarkumar Patel	Test date	September 9, 2025

8.2.3 Observations, settings and special notes

ANSI C63.10, Clause 5.6.2.1:

The number of channels tested can be reduced by measuring the center channel bandwidth first and then applying the following relaxations as appropriate:

- For each operating mode, if the measured channel bandwidth on the middle channel is at least 150% of the minimum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.
- For multiple-input multiple-output (MIMO) systems, if the measured channel bandwidth on testing the middle channel exceeds the minimum permitted bandwidth by more than 50% on one transmit chain, then it is not necessary to repeat testing on the other chains.
- If the measured channel bandwidth on the middle channel is less than 50% of the maximum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.

ANSI C63.10, Clause 5.6.2.2:

For devices with multiple operating modes, measurements on the middle channel can be used to determine the worst-case mode(s). The worst-case modes are as follows:

- Band edge requirements—Measurements on the mode with the widest bandwidth can be used to cover the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- Spurious emissions—Measure the mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- In-band PSD—Measurements on the mode with the narrowest bandwidth can be used to cover all modes within the same modulation family of an equal or lower output power provided the result is less than 50% of the limit.

8.2.4 Test data

Table 8.2-2: Test channels selection

Start of Frequency range, MHz	End of Frequency range, MHz	Frequency range bandwidth, MHz	Low channel, MHz	High channel, MHz
		20	5180	5240
5150	5250	40	5190	5230
		80		5210

8.3 Antenna requirement

8.3.1 References, definitions and limits

FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-Gen, Clause 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report.

8.3.2 Test summary

Verdict	Pass
Tested by	Sagarkumar Patel

Test date

September 11, 2025

8.3.3 Observations, settings and special notes

None

8.3.4 Test data

Must the EUT be professionally installed?

YES NO

Does the EUT have detachable antenna(s)?

YES NO

If detachable, is the antenna connector(s) non-standard?

YES NO N/A

Table 8.3-1: Antenna information

Antenna type	Manufacturer	Model number	Maximum gain	Connector type
Whip dipole	Tekfun Co.	F04A-SR-V2	2 dBi	reverse-SMA



8.4 AC power line conducted emissions limits

8.4.1 References, definitions and limits

FCC §15.407(b):

(8) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

FCC §15.207:

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

ANSI C63.10, Clause 6.2:

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements shall be made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required.

For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an "off-the-shelf" unmodified ac power adapter shall be used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.

RSS-Gen, Clause 8.8:

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

Table 8.4-1: Conducted emissions limit

Frequency of emission, MHz	Conducted emissions limit, dB μ V	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Notes: * - The level decreases linearly with the logarithm of the frequency.

** - A linear average detector is required.

8.4.2 Test summary

Verdict	Pass		
Tested by	Sagarkumar Patel	Test date	September 8, 2025

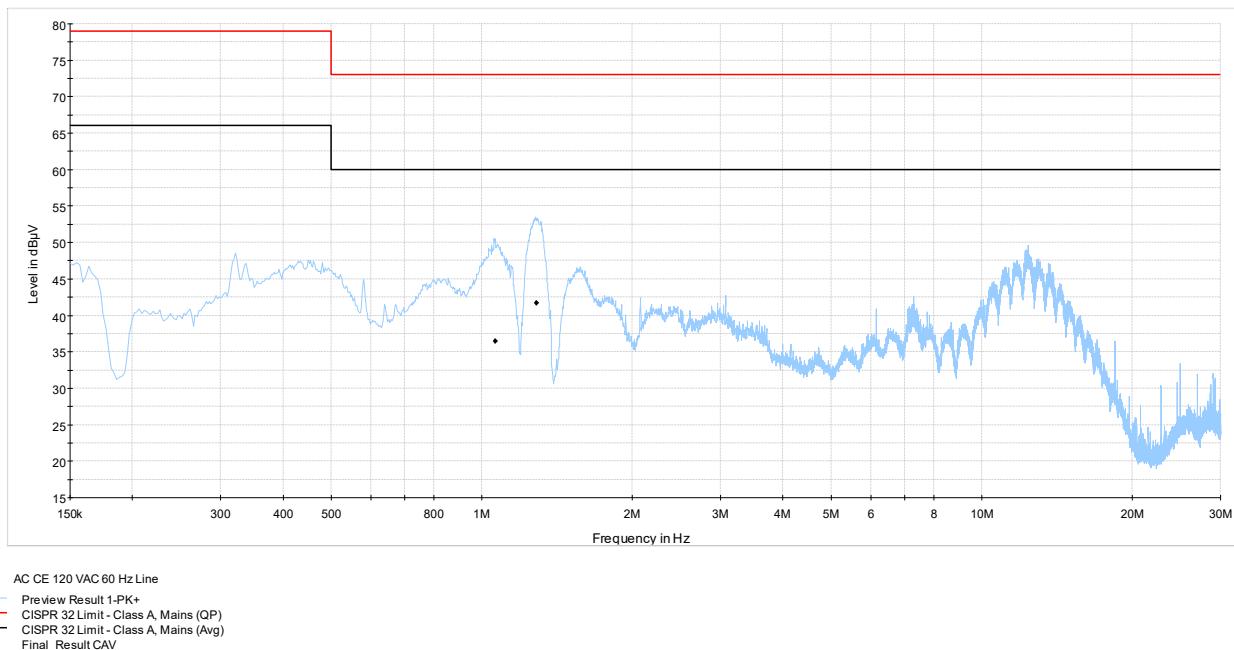
8.4.3 Observations, settings and special notes

Port under test – Coupling device	AC Mains – Artificial Mains Network (AMN)
EUT power input during test	120 V _{AC} , 60 Hz;
EUT setup configuration	Table top
Measurement details	A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 10 dB or above the limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.
Additional notes:	<ul style="list-style-type: none">– The EUT was set up as tabletop configuration per ANSI C63.10-2020 measurement procedure.– The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance. Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)– Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

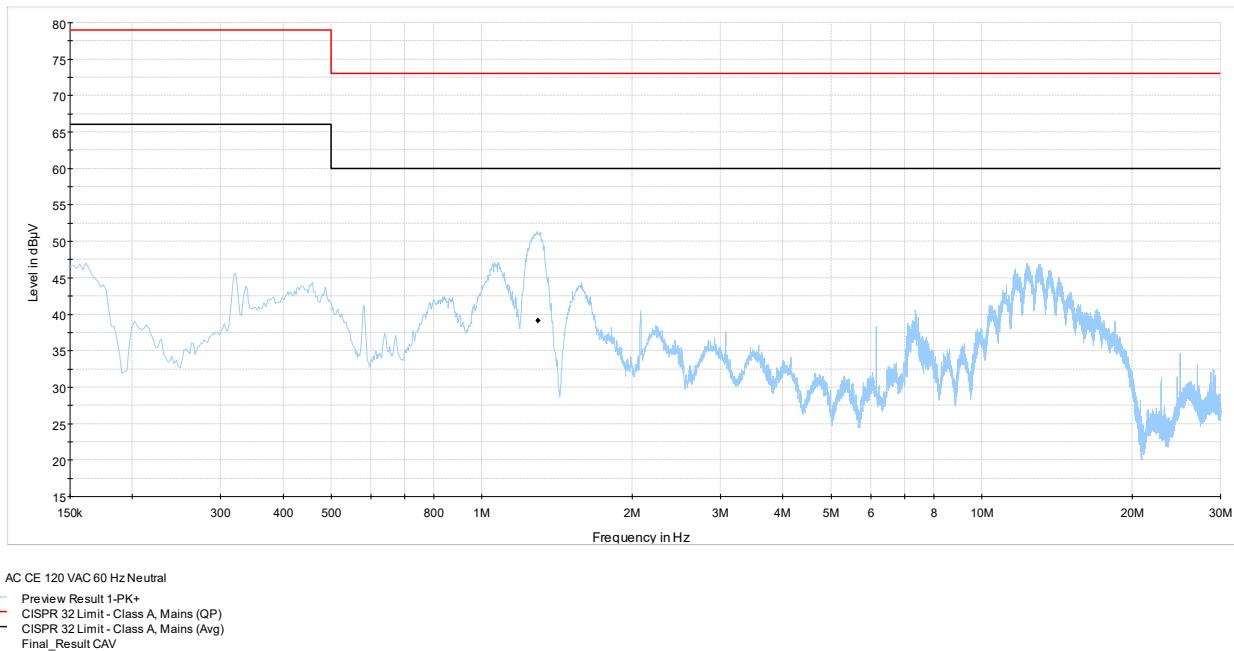
Conducted AC line emissions test was performed as per ANSI C63.10, Clause 6.2. Spectrum analyser settings:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average (Preview), Quasi-peak and CAverage (Final)
Trace mode	Max Hold
Measurement time	100 ms (Preview), 160 ms (Final)

8.4.4 Test data



Plot 8.4-1: Conducted emissions on phase line



Plot 8.4-2: Conducted emissions on neutral line

8.5 Emission bandwidth

8.5.1 References, definitions and limits

FCC §15.403:

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

8.5.2 Test summary

Verdict	Pass		
Tested by	Sagarkumar Patel	Test date	September 12, 2025

8.5.3 Observations, settings and special notes

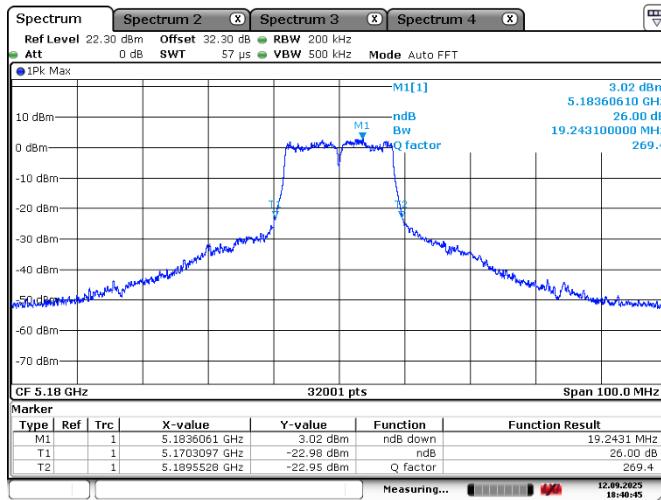
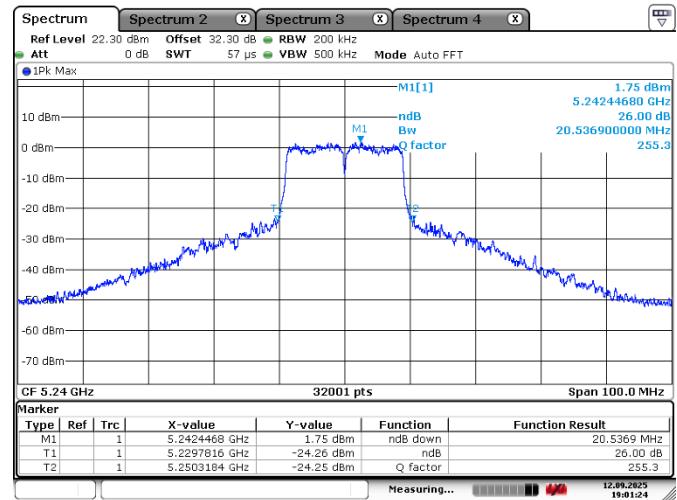
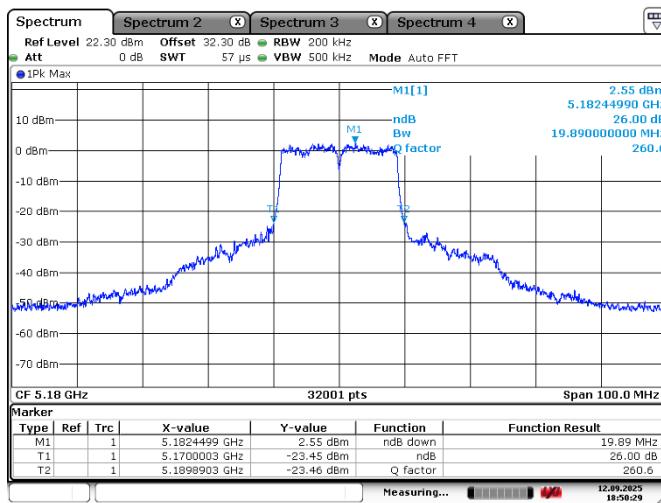
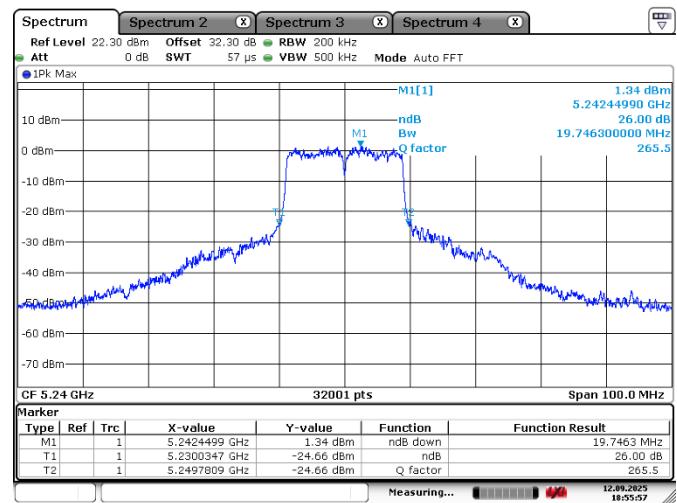
The emission bandwidth was tested per ANSI C63.10, Clause 12.4 and KDB 789033 D02, Clause II(C)(1). Spectrum analyser settings:

Resolution bandwidth	approximately 1% of the emission bandwidth
Video bandwidth	> RBW
Detector mode	Peak
Trace mode	Max Hold

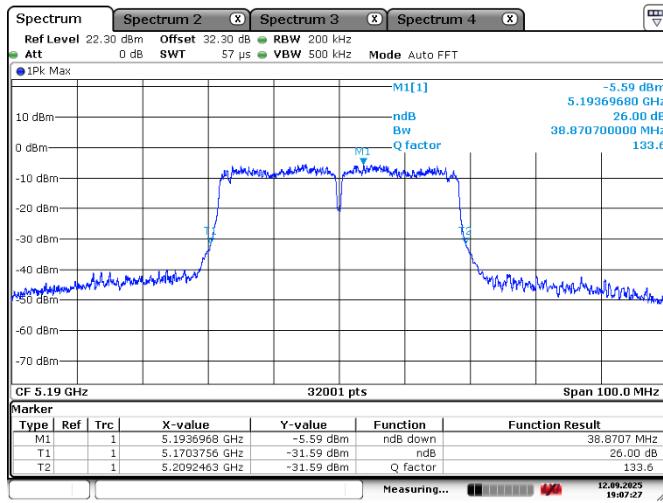
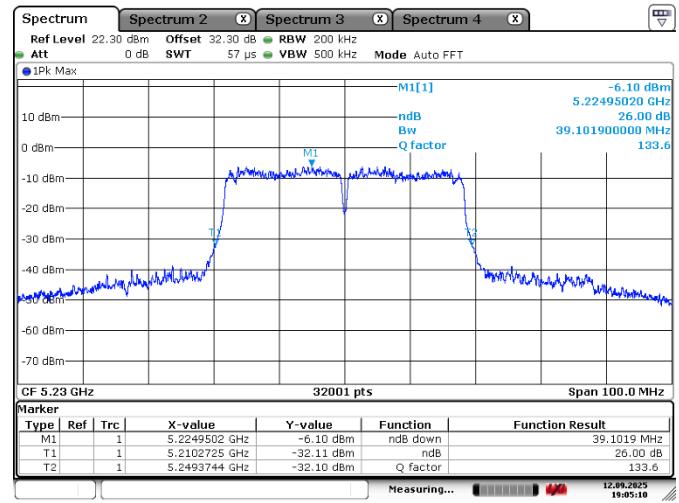
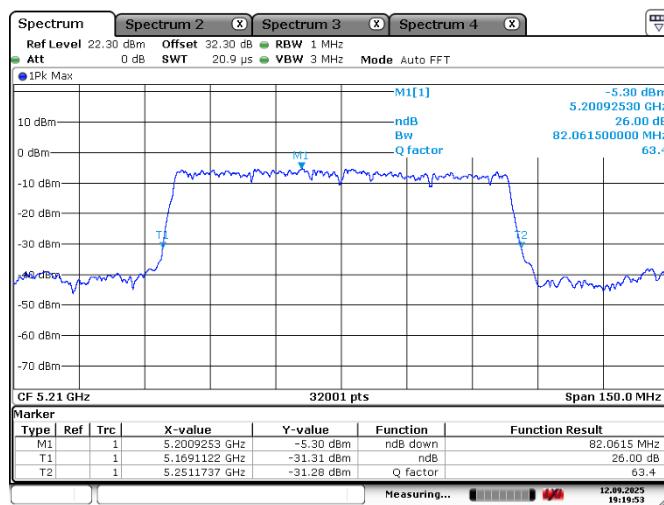
8.5.4 Test data

Table 8.5-1: 26 dB bandwidth results

Modulation	Frequency, MHz	26 dB bandwidth, MHz
802.11a	5180	19.2431
	5240	205369
802.11n HT20	5180	19.8900
	5240	19.7463
802.11n HT40	5190	38.8707
	5230	39.1019
802.11ac HT80	5210	82.0615

Test data, continued

Figure 8.5-1: 26 dB bandwidth on 802.11a (5180 MHz), sample plot

Figure 8.5-2: 26 dB bandwidth on 802.11a (5240 MHz), sample plot

Figure 8.5-3: 26 dB bandwidth on 802.11n HT20 (5180 MHz), sample plot

Figure 8.5-4: 26 dB bandwidth on 802.11n HT20 (5240 MHz), sample plot

Test data, continued


Figure 8.5-5: 26 dB bandwidth on 802.11n HT40 (5190 MHz), sample plot

Figure 8.5-6: 26 dB bandwidth on 802.11n HT40 (5230 MHz), sample plot

Figure 8.5-7: 26 dB bandwidth on 802.11n HT40 (5210 MHz), sample plot

8.6 Occupied bandwidth

8.6.1 References, definitions and limits

ANSI C63.10-2020, Clause 6.9.3:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

RSS-Gen, Clause 6.7:

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

8.6.2 Test summary

Verdict	Pass	Test date	September 12, 2025
Tested by	Sagarkumar Patel		

8.6.3 Observations, settings and special notes

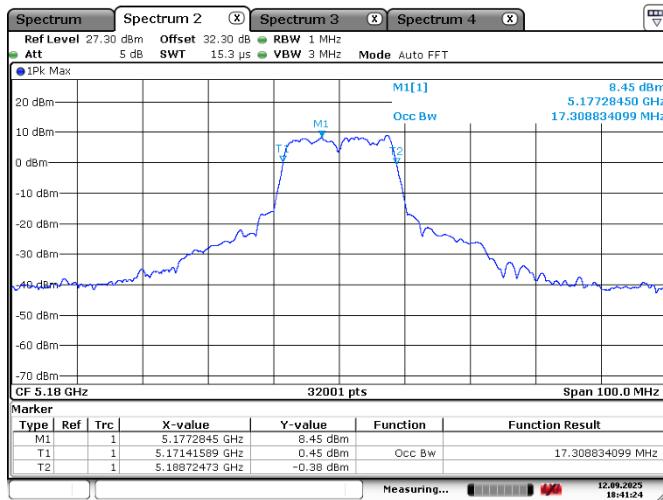
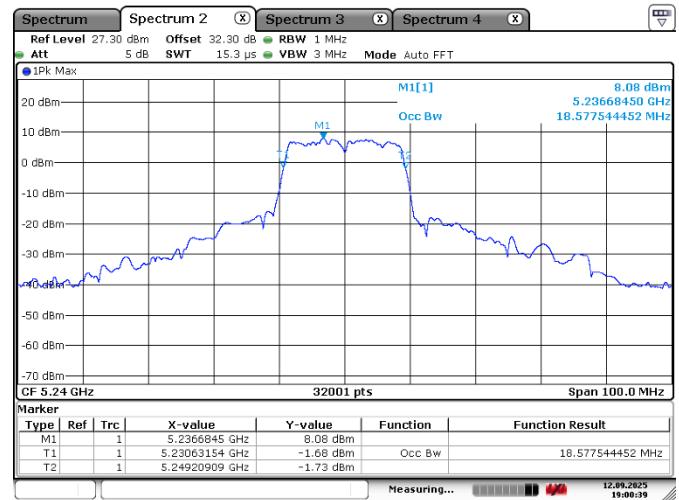
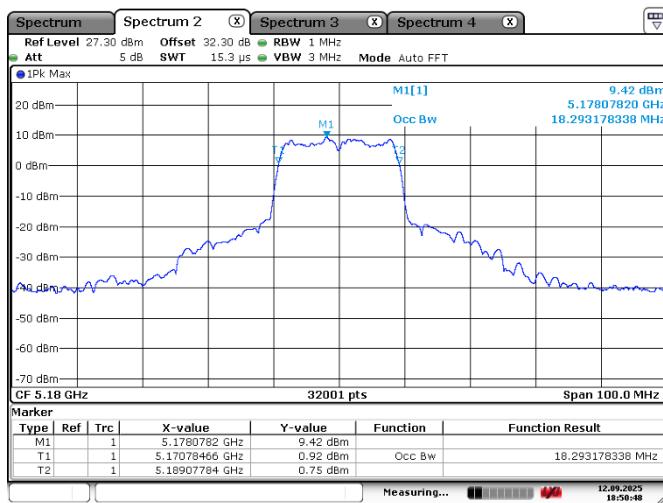
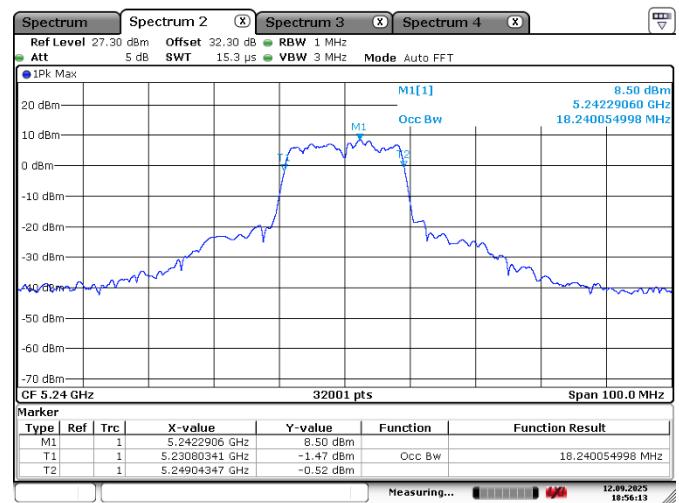
The emission bandwidth was tested per ANSI C63.10, Clause 6.9.3 and KDB 789033 D02, Clause II(D). Spectrum analyser settings:

Resolution bandwidth:	$\geq 1\%$ of span
Video bandwidth:	$\geq 3 \times$ RBW
Detector mode:	Peak
Trace mode:	Max Hold

8.6.4 Test data

Table 8.6-1: 99% bandwidth results

Modulation	Frequency, MHz	99% bandwidth, MHz
802.11a	5180	17.3088
	5240	18.5778
802.11n H20	5180	18.2932
	5240	18.2401
802.11n H40	5190	36.2364
	5230	36.5520
802.11ac H80	5210	76.2632

Test data, continued

Figure 8.6-1: 99% bandwidth on 802.11a (5180 MHz), sample plot

Figure 8.6-2: 99% bandwidth on 802.11a (5240 MHz), sample plot

Figure 8.6-3: 99% bandwidth on 802.11n HT20 (5180 MHz), sample plot

Figure 8.6-4: 99% bandwidth on 802.11n HT20 (5240 MHz), sample plot

Test data, continued

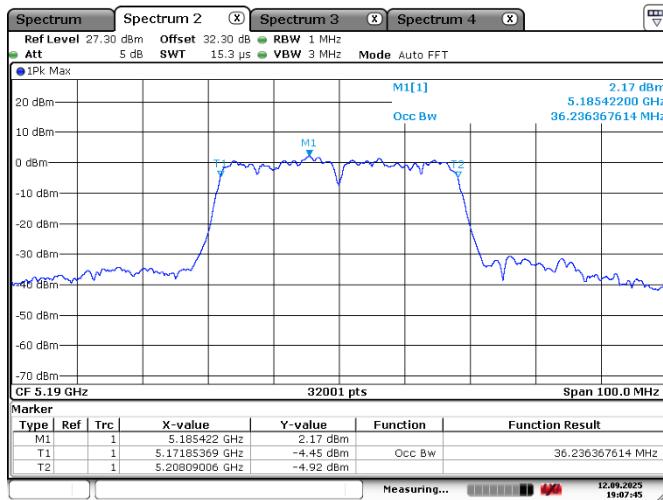


Figure 8.6-5: 99% bandwidth on 802.11n HT40 (5190 MHz), sample plot

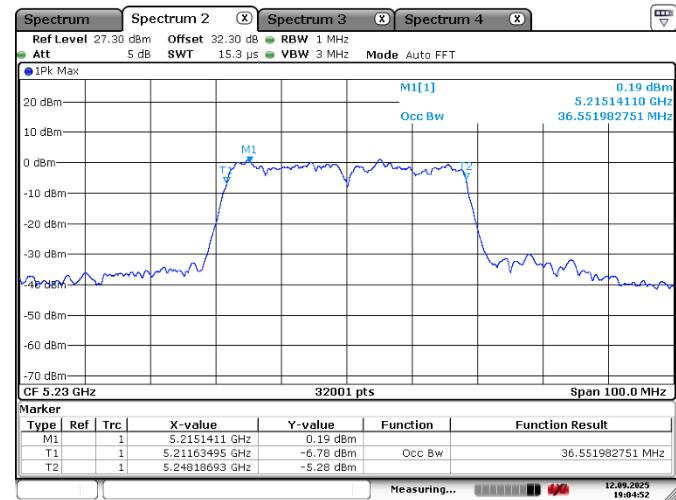


Figure 8.6-6: 99% bandwidth on 802.11n HT40 (5230 MHz), sample plot

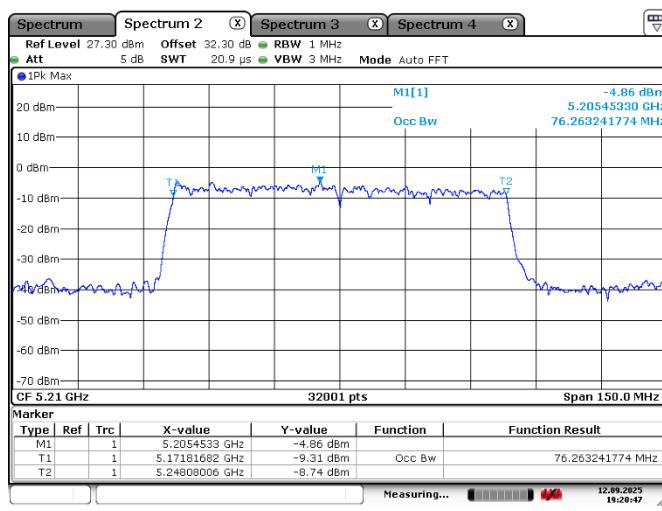


Figure 8.6-7: 99% bandwidth on 802.11ac HT80 (5210 MHz), sample plot

8.7 Transmitter output power and e.i.r.p. requirements for 5150–5250 MHz band

8.7.1 References, definitions and limits

FCC §15.407:

- (a) Power limits:
 - (1) For the band 5.15–5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
- (12) Power spectral density measurement. The maximum power spectral density is measured as either a conducted emission by direct connection of a calibrated test instrument to the equipment under test or a radiated measurement. Measurements in the 5.725–5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in all other bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth

RSS-247, Clause 6.2:

Power and unwanted emissions limits

The output power and e.i.r.p. of the equipment wanted emission shall be measured in terms of average value.

6.2.1 Frequency band 5150–5250 MHz

LE-LAN devices are restricted to indoor operation only in the band 5150–5250 MHz. However, original equipment manufacturer (OEM) devices, which are installed in vehicles by vehicles manufacturers, are permitted.

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW (23 dB) or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

8.7.2 Test summary

Verdict	Pass
Tested by	Sagarkumar Patel
Test date	September 11, 2025

8.7.3 Observations, settings and special notes

Combined average output power was calculated as follows: $P_{combined} = 10 \times \log_{10} \left((10^{P_{cho}/10}) + (10^{P_{ch1}/10}) \right)$

EIRP was calculated as follows: $EIRP = P_{combined} + \text{antenna gain}$

Combined PSD was calculated as follows: $PPSD_{combined} = 10 \times \log_{10} \left((10^{PSD_{cho}/10}) + (10^{PSD_{ch1}/10}) \right)$

Average was calculated from peak results using duty cycle correction factor (DCCF).

Modulation	T _{on}	T _{Total}	Duty Cycle	DCCF
802.11a	181.5313	238.5313	0.7610	-2.37
802.11n HT20	169.5938	226.5000	0.7488	-2.51
802.11n HT40	168.4688	226.5625	0.7436	-2.57
802.11ac HT80	64.5000	122.4688	0.5267	-5.57

Note: DCCF (dB)=20·log10(T_{on}/T_{Total})

Power spectral density was tested per ANSI C63.10, Clause 12.5 and 789033 D02, Clause II(F).

Conducted output power was tested per ANSI C63.10, Clause 12.3 and 789033 D02, Clause II(E) using method PM (Measurement using an RF average power meter).

Spectrum analyser settings:

Resolution bandwidth	1 MHz
Video bandwidth	≥ 3 MHz
Frequency span	Enough to encompass the entire 26 dB EBW or 99% OBW of the signal
Detector mode	RMS
Trace mode	Max Hold
Power aggregation	Over 26 dB EBW or 99% OBW

8.7.4 Test data

Table 8.7-1: Output power measurements results for FCC

Modulation	Frequency, MHz	Conducted output power,		
		dBm	Power limit, dBm	Margin, dB
802.11a	5180	12.19	24.00	11.81
	5240	12.94	24.00	11.06
802.11n HT20	5180	12.17	24.00	11.83
	5240	11.26	24.00	12.74
802.11n HT40	5190	7.30	24.00	16.70
	5230	5.53	24.00	18.47
802.11ac HT80	5210	3.25	24.00	20.75

Test data, continued

Table 8.7-2: PPSD measurements results for FCC

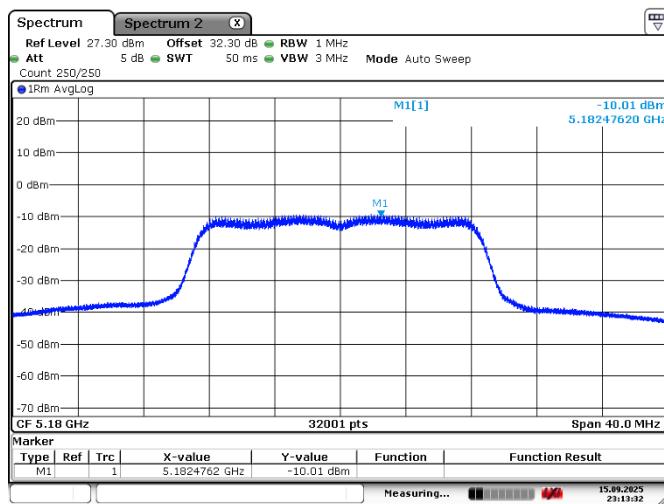
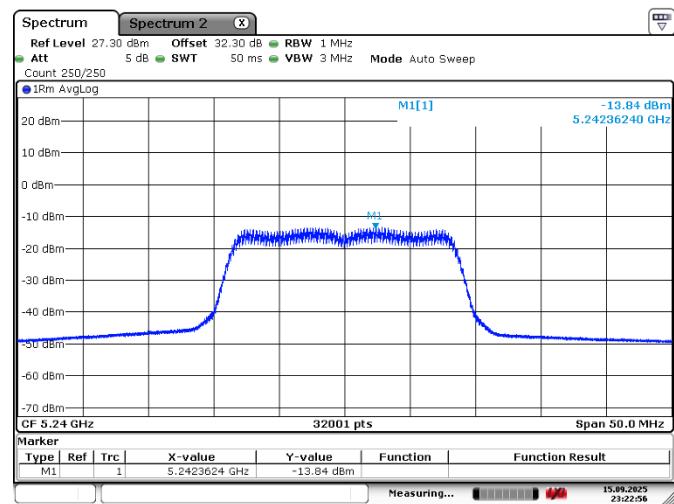
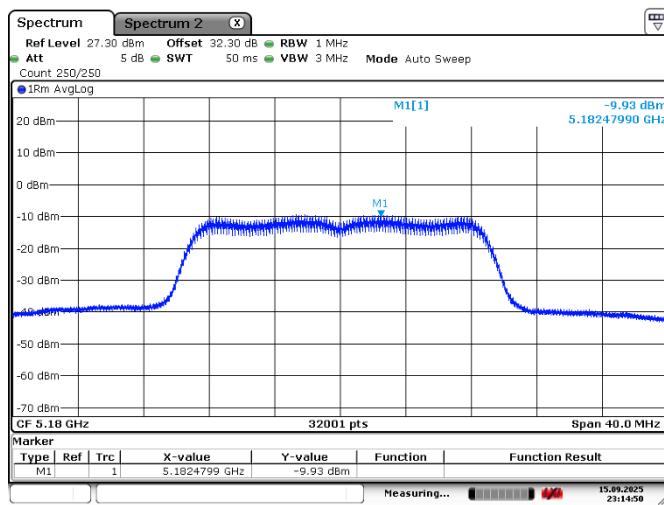
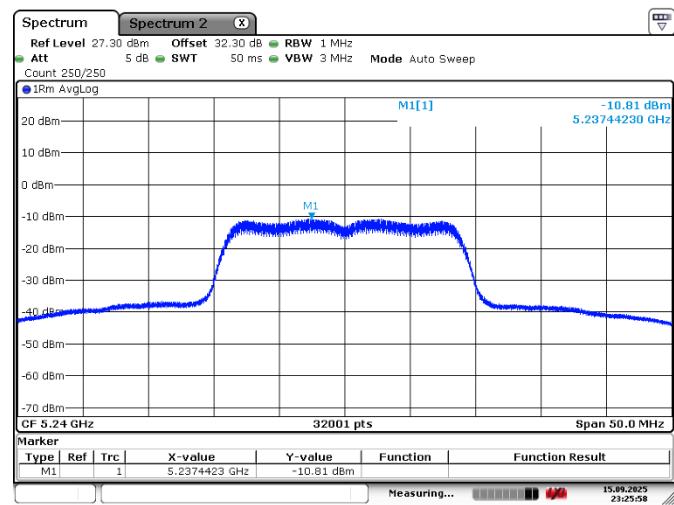
Modulation	Frequency, MHz	PPSD, dBm/MHz	PPSD limit, dBm/MHz	Margin, dB
802.11a	5180	-7.64	11.00	18.64
	5240	-11.47	11.00	22.47
802.11n HT20	5180	-7.42	11.00	18.42
	5240	-8.30	11.00	19.30
802.11n HT40	5190	-18.70	11.00	29.70
	5230	-16.52	11.00	27.52
802.11ac HT80	5210	-15.70	11.00	26.70

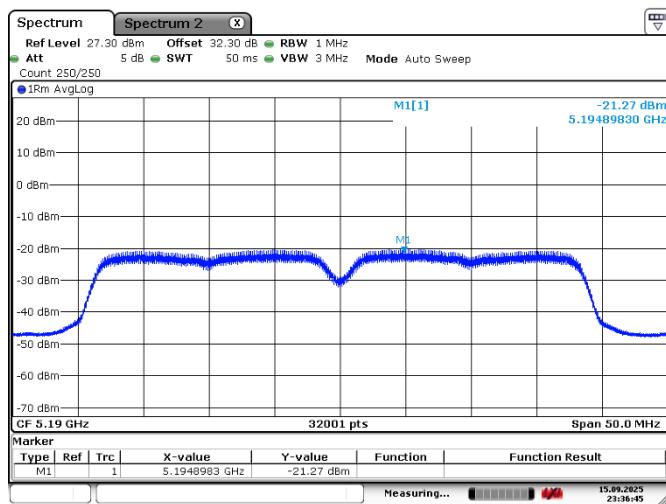
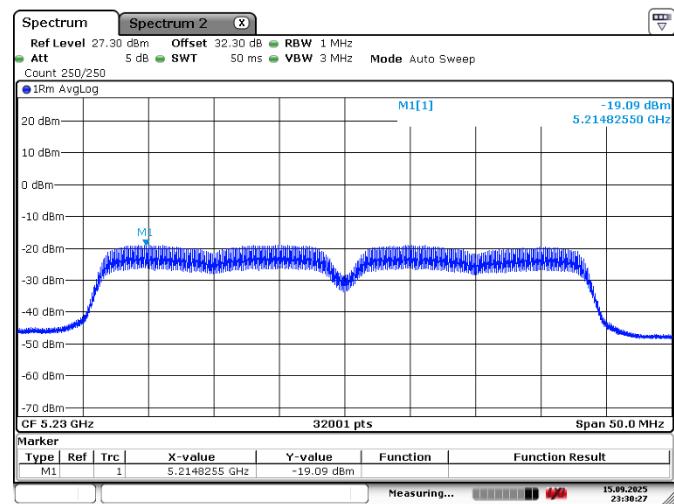
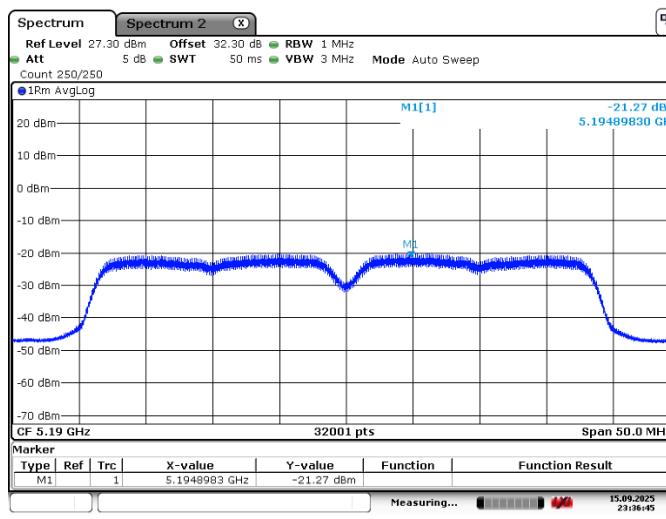
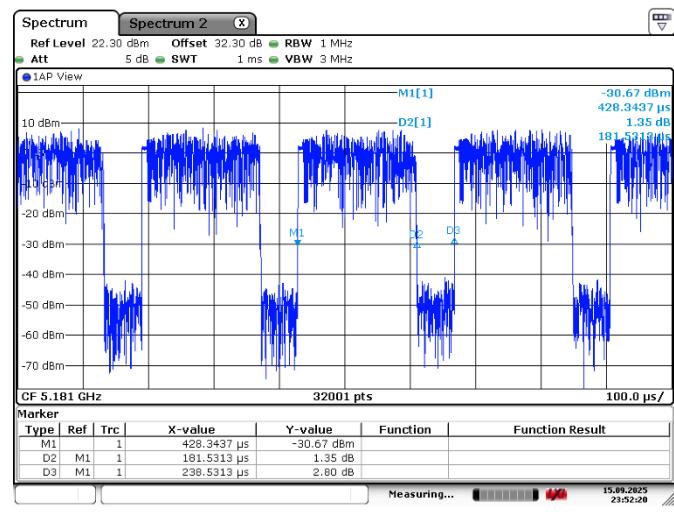
Table 8.7-3: Output power measurements and EIRP calculations results for ISED

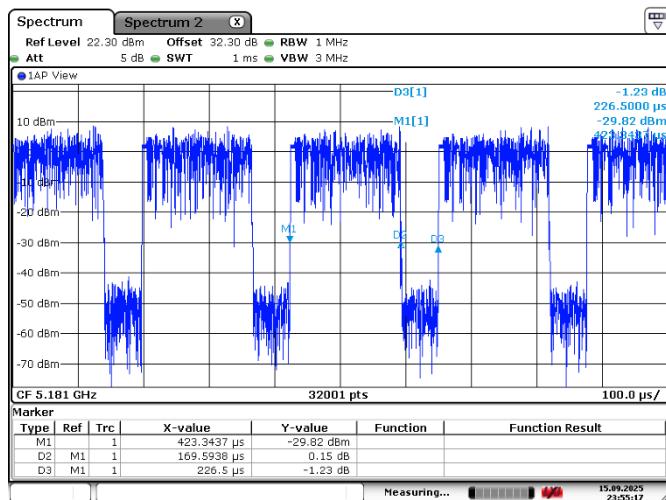
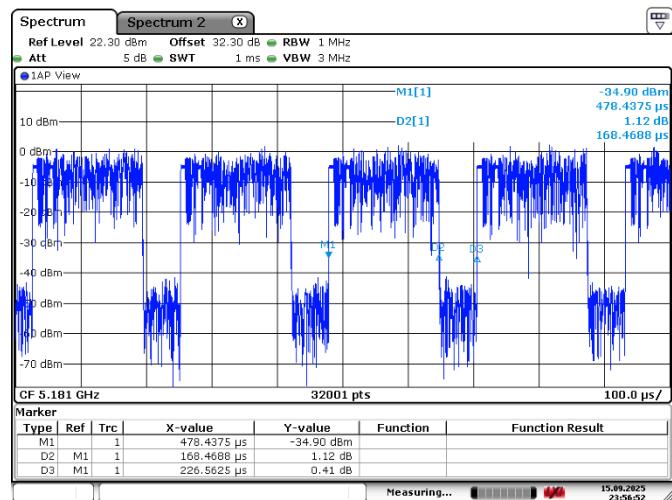
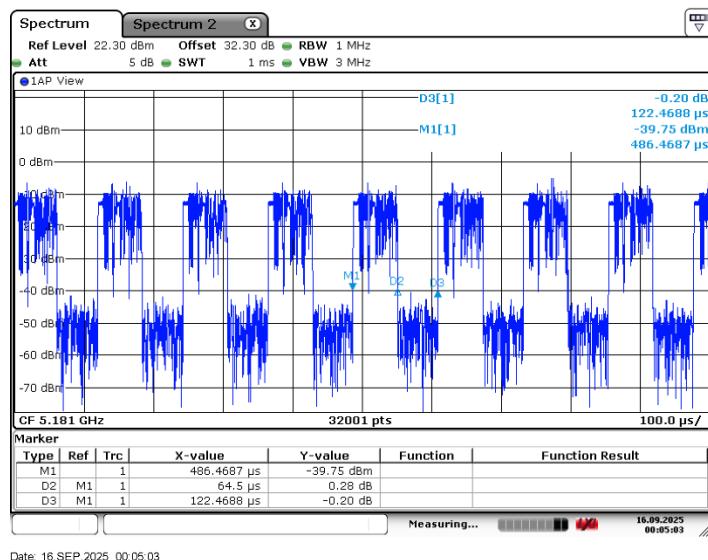
Modulation	Frequency, MHz	Conducted output		EIRP, dBm	EIRP limit, dBm	Margin, dB
		power, dBm	Antenna gain, dBi			
802.11a	5180	12.19	2.00	14.19	30.00	15.81
	5240	12.94	2.00	14.94	30.00	15.06
802.11n HT20	5180	12.17	2.00	14.17	30.00	15.83
	5240	11.26	2.00	13.26	30.00	16.74
802.11n HT40	5190	7.30	2.00	9.30	30.00	20.70
	5230	5.53	2.00	7.53	30.00	22.47
802.11ac HT80	5210	3.25	2.00	5.25	30.00	24.75

Table 8.7-4: PSD measurements results for ISED

Modulation	Frequency, MHz	PSD, dBm/MHz	Antenna gain, dBi	EIRP PSD, dBm/MHz	EIRP PSD limit, dBm/MHz	Margin, dB
802.11a	5180	-10.01	2.00	-8.01	10.00	18.01
	5240	-13.84	2.00	-11.84	10.00	21.84
802.11n HT20	5180	-9.93	2.00	-7.93	10.00	17.93
	5240	-10.81	2.00	-8.81	10.00	18.81
802.11n HT40	5190	-21.27	2.00	-19.27	10.00	29.27
	5230	-19.09	2.00	-17.09	10.00	27.09
802.11ac HT80	5210	-21.27	2.00	-19.27	10.00	29.27

Test data, continued

Figure 8.7-1: Sample plot for PSD on 802.11a (5180 MHz)

Figure 8.7-2: Sample plot for PSD on 802.11a (5240 MHz)

Figure 8.7-3: Sample plot for PSD on 802.11n HT20(5180 MHz)

Figure 8.7-4: Sample plot for PSD on 802.11n HT20(5240 MHz)

Test data, continued

Figure 8.7-5: Sample plot for PSD on 802.11n HT40(5190 MHz)

Figure 8.7-6: Sample plot for PSD on 802.11n HT40(5230 MHz)

Figure 8.7-7: Sample plot for PSD on 802.11n HT80(5210 MHz)

Figure 8.7-8: Duty Cycle (802.11a)


Figure 8.7-9: Duty Cycle (802.11n HT20)

Figure 8.7-10: Duty Cycle (802.11n HT40)

Figure 8.7-11: Duty Cycle (802.11ac HT80)

8.8 Spurious unwanted (undesirable) emissions

8.8.1 References, definitions and limits

FCC §15.407:

- (b) Undesirable emission limits.
Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
 - (1) For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - (7) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
 - (8) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
 - (9) The provisions of § 15.205 apply to intentional radiators operating under this section.
 - (10) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

RSS-247, Clause 6.2:

Power and unwanted emissions limits

The power and e.i.r.p. of the equipment unwanted emission shall be measured in peak value. However, the equipment is required to comply with the provisions in RSS-Gen with respect to emissions falling within restricted frequency bands which are listed in the same standard.

If the transmission is in bursts, the provisions of RSS-Gen for pulsed operation shall apply.

The outermost carrier frequencies or channels shall be used when measuring unwanted emissions. Such carrier or channel centre frequencies are to be indicated in the test report.

6.2.1 Frequency band 5150–5250 MHz

LE-LAN devices are restricted to indoor operation only in the band 5150–5250 MHz. However, original equipment manufacturer (OEM) devices, which are installed in vehicles by vehicles manufacturers, are permitted.

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150–5250 MHz, all emissions outside the band 5150–5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250–5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250–5350 MHz band; however, if the occupied bandwidth also falls within the 5250–5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250–5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250–5350 MHz band.

Table 8.8-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Field strength of emissions			
Frequency, MHz	μ V/m	$\text{dB}\mu\text{V}/\text{m}$	Measurement distance, m
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.



References, definitions and limits, continued

Table 8.8-2: ISED restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.57675–12.57725	399.9–410	7.25–7.75
0.495–0.505	13.36–13.41	608–614	8.025–8.5
2.1735–2.1905	16.42–16.423	960–1427	9.0–9.2
3.020–3.026	16.69475–16.69525	1435–1626.5	9.3–9.5
4.125–4.128	16.80425–16.80475	1645.5–1646.5	10.6–12.7
4.17725–4.17775	25.5–25.67	1660–1710	13.25–13.4
4.20725–4.20775	37.5–38.25	1718.8–1722.2	14.47–14.5
5.677–5.683	73–74.6	2200–2300	15.35–16.2
6.215–6.218	74.8–75.2	2310–2390	17.7–21.4
6.26775–6.26825	108–138	2483.5–2500	22.01–23.12
6.31175–6.31225	149.9–150.05	2655–2900	23.6–24.0
8.291–8.294	156.52475–156.52525	3260–3267	31.2–31.8
8.362–8.366	156.7–156.9	3332–3339	36.43–36.5
8.37625–8.38675	162.0125–167.17	3345.8–3358	
8.41425–8.41475	167.72–173.2	3500–4400	
12.29–12.293	240–285	4500–5150	Above 38.6
12.51975–12.52025	322–335.4	5350–5460	

Note: Certain frequency bands listed in Table 8.8-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Table 8.8-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.8.2 Test summary

Verdict	Pass		
Tested by	Sagarkumar Patel	Test date	September 12, 2025

8.8.3 Observations, settings and special notes

- As part of the current assessment, the test range of 9 kHz to 40 GHz has been fully considered and compared to the actual frequencies utilized within the EUT. Since the EUT contains a transmitter in the GHz range, the EUT has been deemed compliant without formal testing in the 9 kHz to 30 MHz test range, therefore formal test results (tabular data and/or plots) are not provided within this test report.
- EUT was set to transmit with 100 % duty cycle.
- Radiated measurements were performed at a distance of 3 m.
- The spurious emission was tested per ANSI C63.10, Clause 12.7 and 789033 D02, Clause II(G).

Spectrum analyser for peak conducted measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser for peak conducted measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser for average conducted measurements within restricted bands above 1 GHz for frequencies where peak results were above the average limit:

Resolution bandwidth:	1 MHz
Video bandwidth:	10 MHz
Detector mode:	RMS
Trace mode:	Power average
Number of averaging traces:	100

Spectrum analyser for peak conducted measurements outside restricted bands:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

8.8.4 Test data

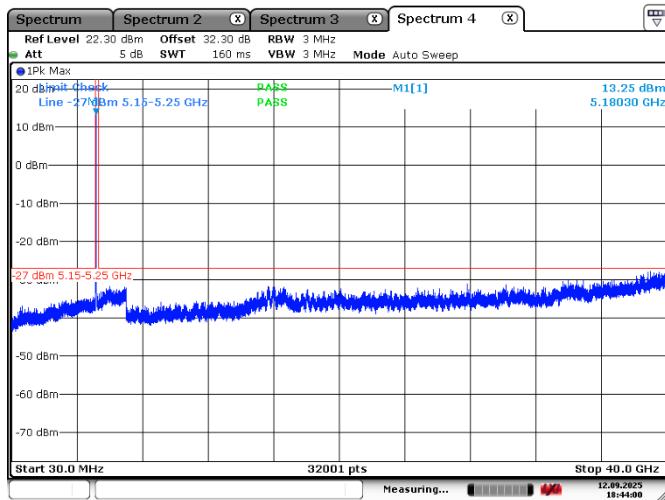
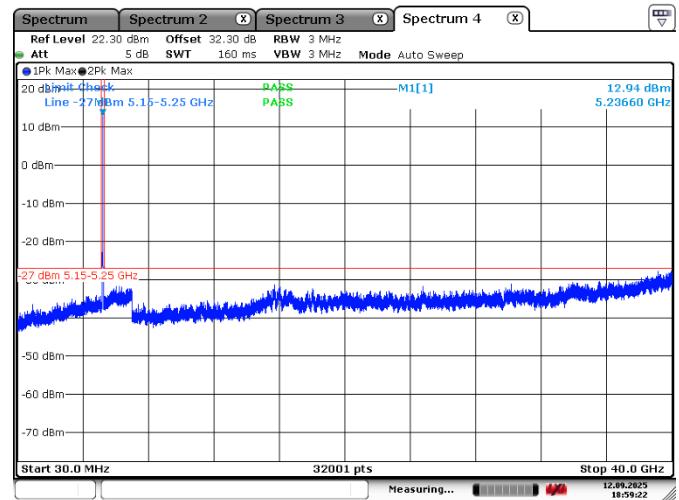
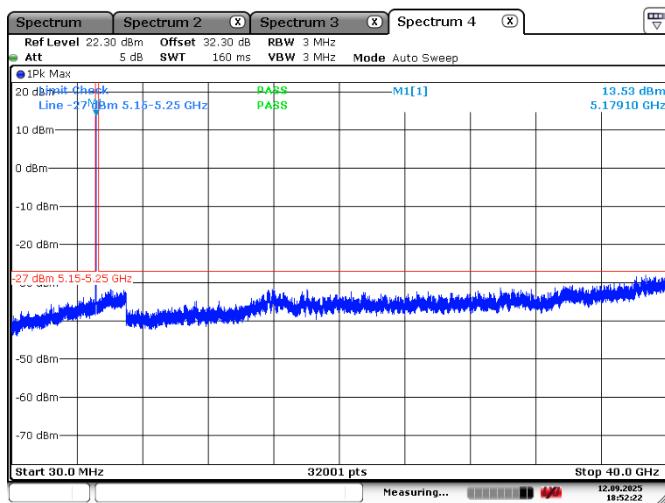
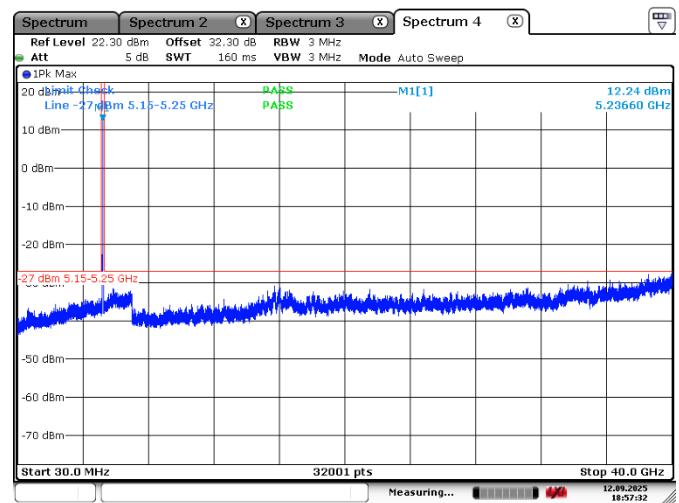
Table 8.8-4: Radiated field strength measurement results

Modulation	Channel	Frequency, MHz	Peak Field strength, dB μ V/m			Average Field strength, dB μ V/m		
			Measured	Limit	Margin, dB	Measured	Limit	Margin, dB
802.11a	Low	5150	62.13	74.00	11.87	52.3	54.00	1.70
	High	5250	62.18	74.00	11.82	52.63	54.00	1.37
802.11n HT20	Low	5150	62.52	74.00	11.48	52.44	54.00	1.56
	High	5250	62.86	74.00	11.14	52.56	54.00	1.44
802.11n HT40	Low	5150	62.70	74.00	11.30	52.83	54.00	1.17
	High	5250	64.55	74.00	9.45	52.80	54.00	1.20
802.11ac HT800	Low	5150	63.17	74.00	10.83	52.44	54.00	1.56
	High	5250	64.17	74.00	9.83	52.23	54.00	1.77

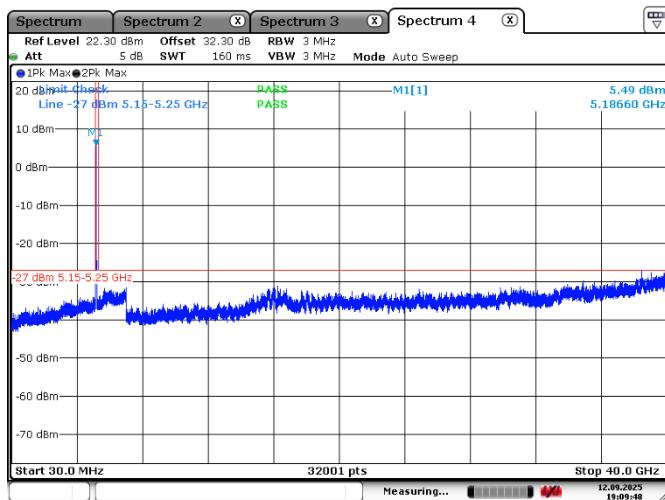
Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

All emissions in the 30–100 MHz frequency range are as digital emissions and are not associated with radio TX.

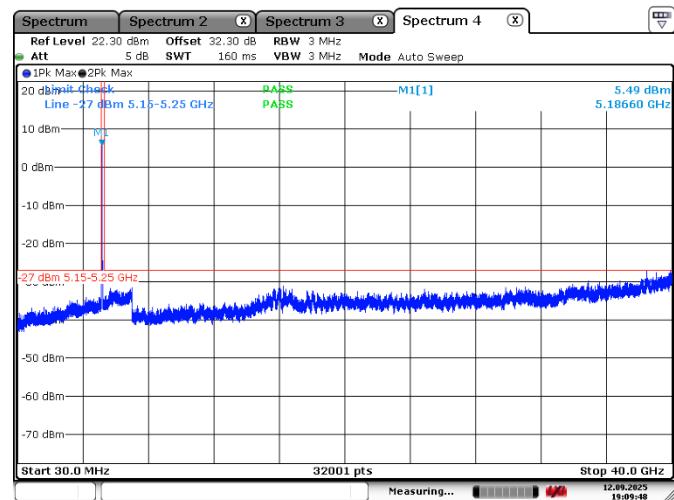
Test data, continued


Figure 8.8-1: Conducted spurious emissions 802.11a(5180 MHz)

Figure 8.8-2: Conducted spurious emissions 802.11a(5240 MHz)

Figure 8.8-3: Conducted spurious emissions 802.11n HT20(5180 MHz)

Figure 8.8-4: Conducted spurious emissions 802.11n HT20(5240 MHz)

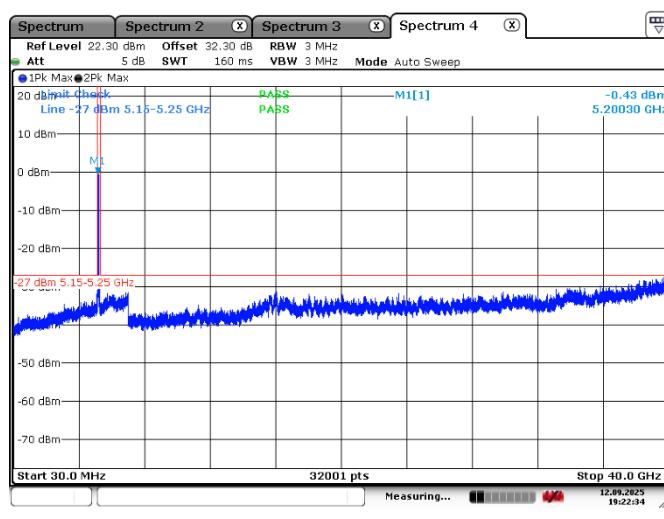
Test data, continued



Date: 12.SEP.2025 19:09:48



Date: 12.SEP.2025 19:09:48



Date: 12 SEP 2025 19:22:34

Test data, continued

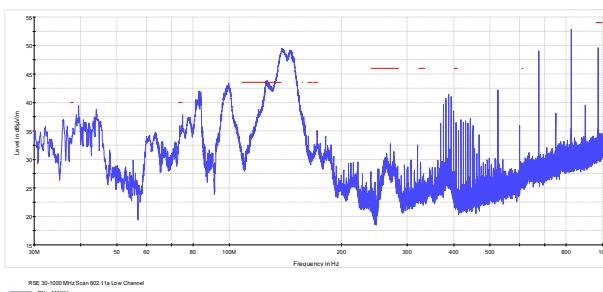


Figure 8.8-8: Radiated spurious emissions below 1 GHz for low channel on 802.11a

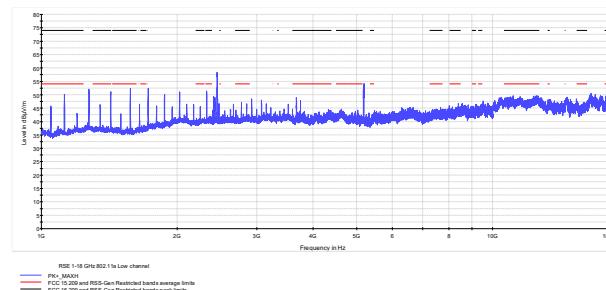


Figure 8.8-9: Radiated spurious emissions 1-18 GHz for low channel on 802.11a

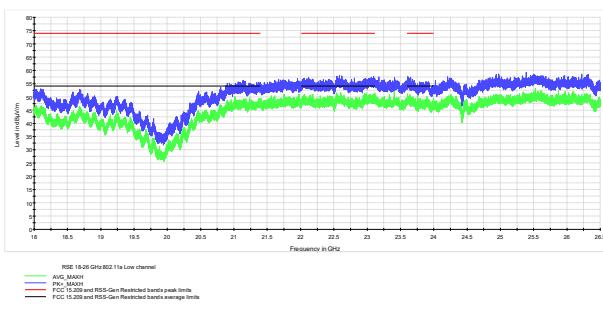


Figure 8.8-10: Radiated spurious emissions 18-26.5 GHz for low channel on 802.11a

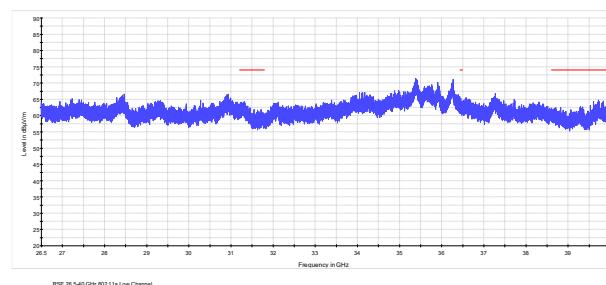


Figure 8.8-11: Radiated spurious emissions 26.5-40 GHz for low channel on 802.11a

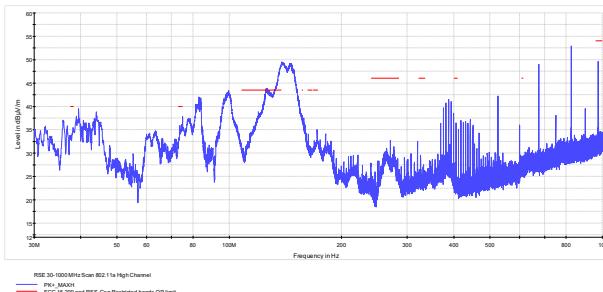


Figure 8.8-12: Radiated spurious emissions below 1 GHz for High channel on 802.11a

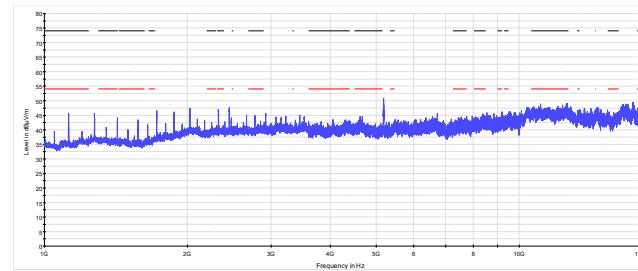


Figure 8.8-13: Radiated spurious emissions 1-18 GHz for High channel on 802.11a

Test data, continued

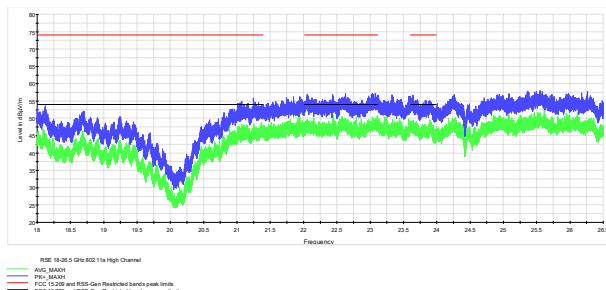


Figure 8.8-14: Radiated spurious emissions 18-26.5 GHz for High channel on 802.11a

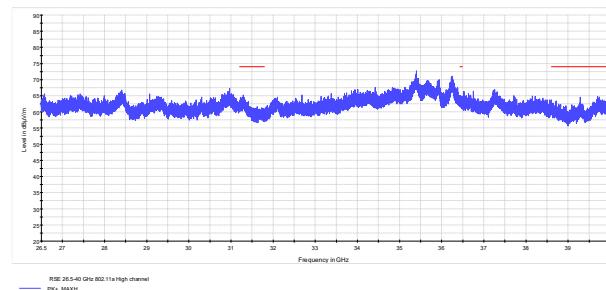


Figure 8.8-15: Radiated spurious emissions 26.5-40 GHz for High channel on 802.11a

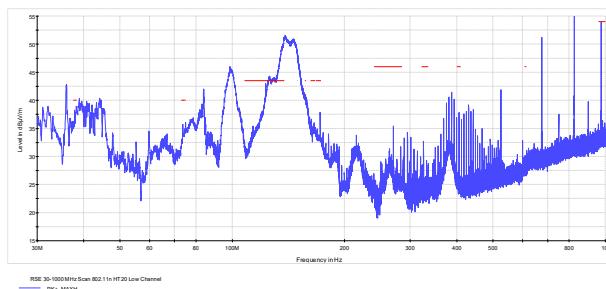


Figure 8.8-16: Radiated spurious emissions below 1 GHz for low channel on 802.11n HT20

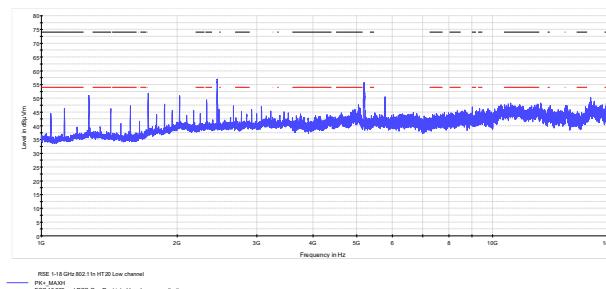


Figure 8.8-17: Radiated spurious emissions 1-18 GHz for low channel on 802.11n HT20

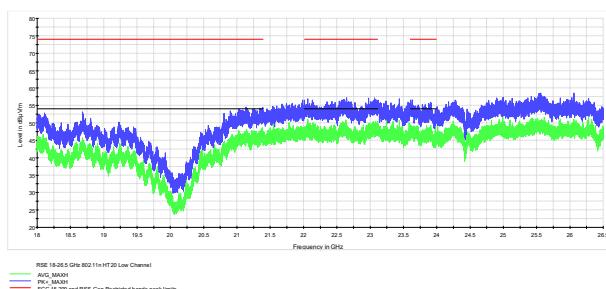


Figure 8.8-18: Radiated spurious emissions 18-26.5 GHz for low channel on 802.11n HT20

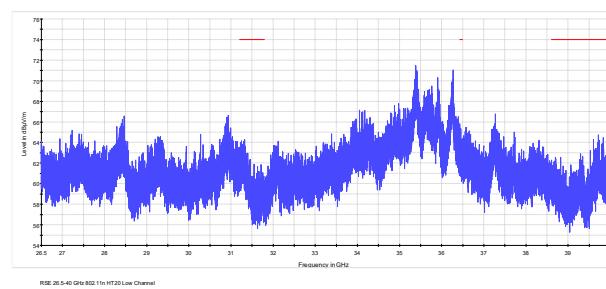


Figure 8.8-19: Radiated spurious emissions 26.5-40 GHz for low channel on 802.11n HT20

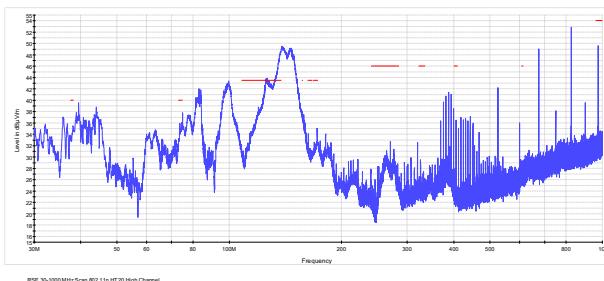
Test data, continued


Figure 8.8-20: Radiated spurious emissions below 1 GHz for High channel on 802.11n HT20

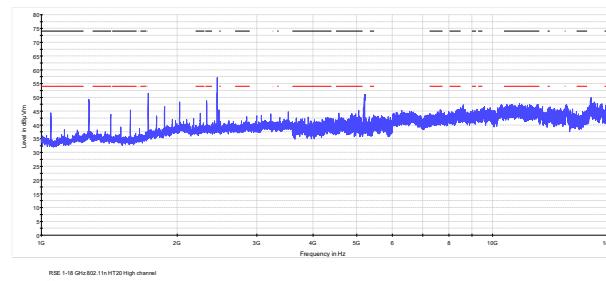


Figure 8.8-21: Radiated spurious emissions 1-18 GHz for High channel on 802.11n HT20

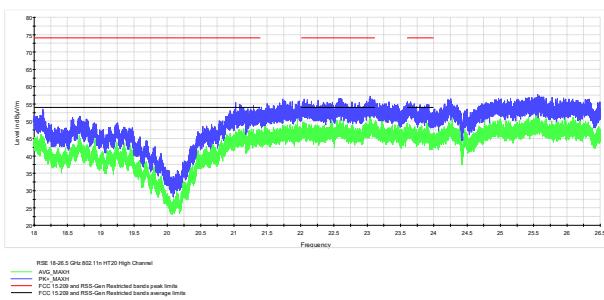


Figure 8.8-22: Radiated spurious emissions 18-26.5 GHz for High channel on 802.11n HT20

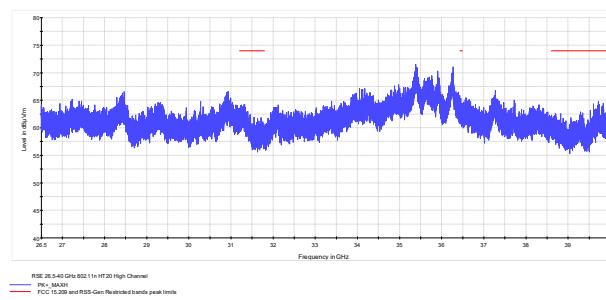


Figure 8.8-23: Radiated spurious emissions 26.5-40 GHz for High channel on 802.11n HT20

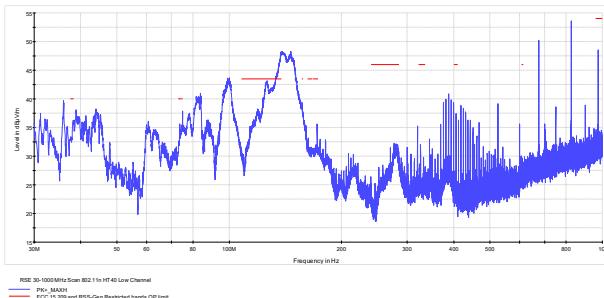


Figure 8.8-24: Radiated spurious emissions below 1 GHz for low channel on 802.11n HT40

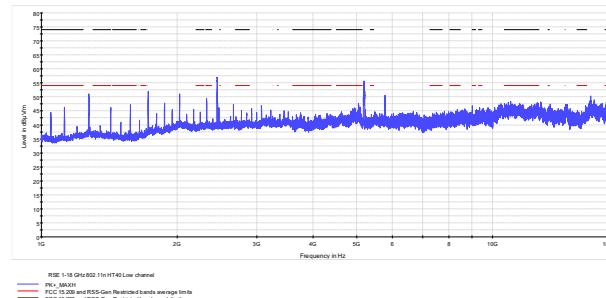


Figure 8.8-25: Radiated spurious emissions 1-18 GHz for low channel on 802.11n HT40

Test data, continued

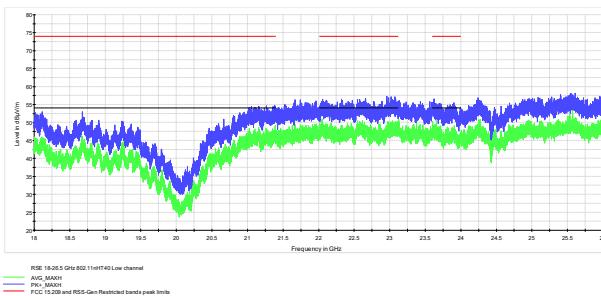


Figure 8.8-26: Radiated spurious emissions 18-26.5 GHz for low channel on 802.11n HT40

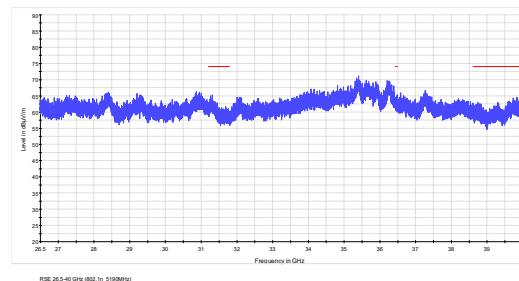


Figure 8.8-27: Radiated spurious emissions 26.5-40 GHz for low channel on 802.11n HT40

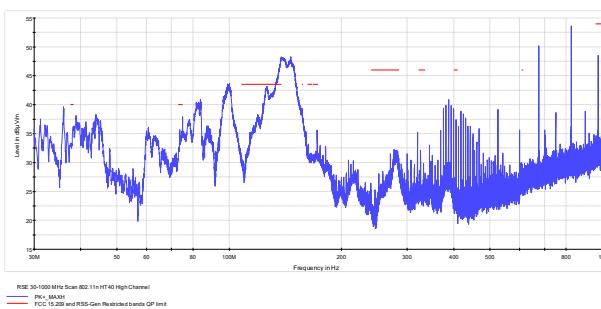


Figure 8.8-28: Radiated spurious emissions below 1 GHz for High channel on 802.11n HT40

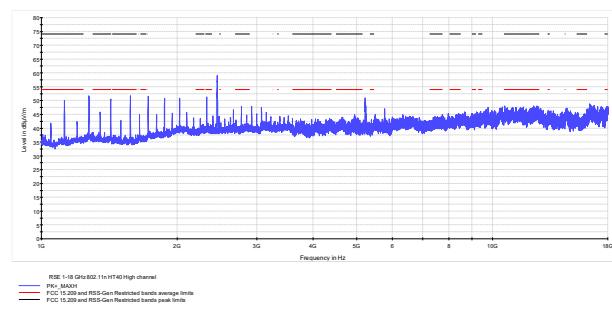


Figure 8.8-29: Radiated spurious emissions 1-18 GHz for High channel on 802.11n HT40

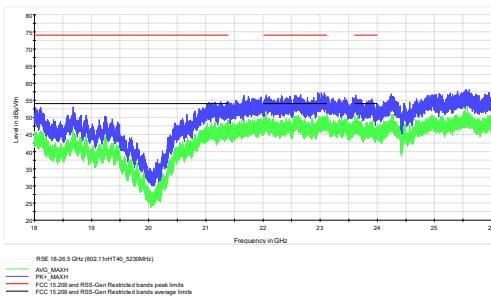


Figure 8.8-30: Radiated spurious emissions 18-26.5 GHz for High channel on 802.11n HT40

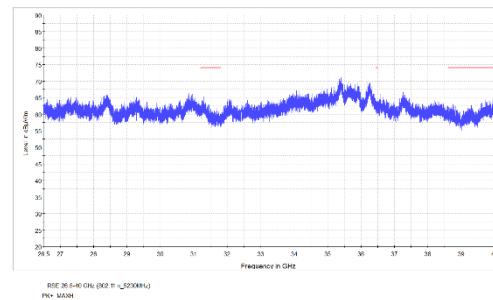


Figure 8.8-31: Radiated spurious emissions 26.5-40 GHz for High channel on 802.11n HT40

Test data, continued

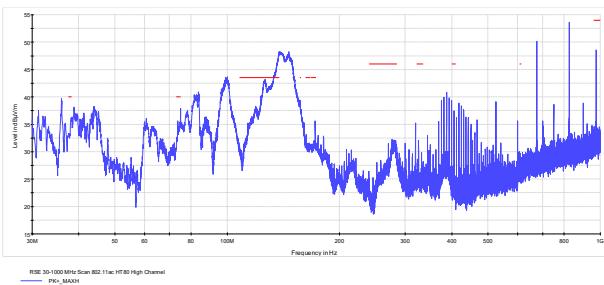


Figure 8.8-32: Radiated spurious emissions below 1 GHz on 802.11ac HT80

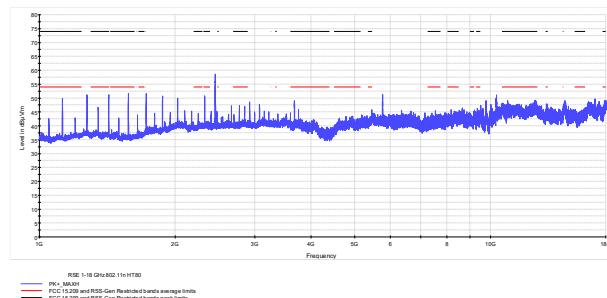


Figure 8.8-33: Radiated spurious emissions 1-18 GHz on 802.11ac HT80

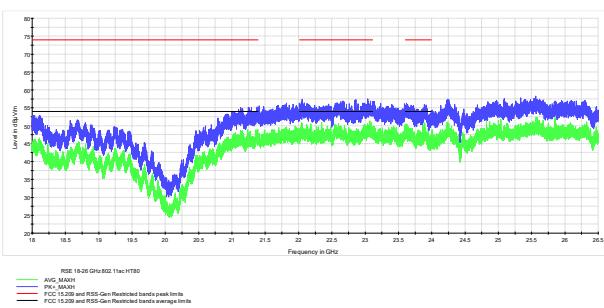


Figure 8.8-34: Radiated spurious emissions 18-26.5 on 802.11ac HT80

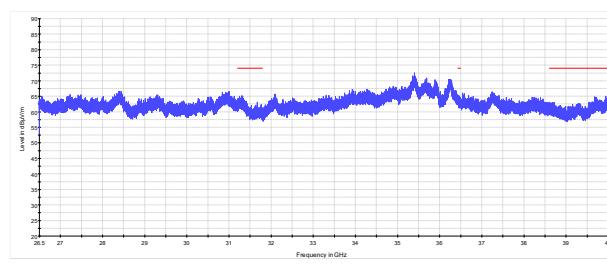
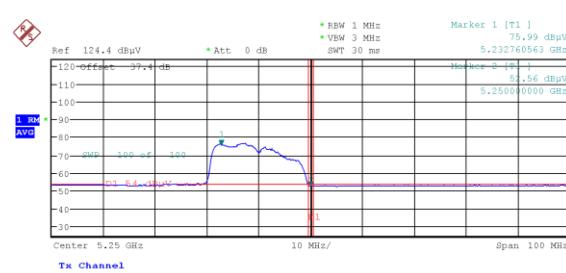
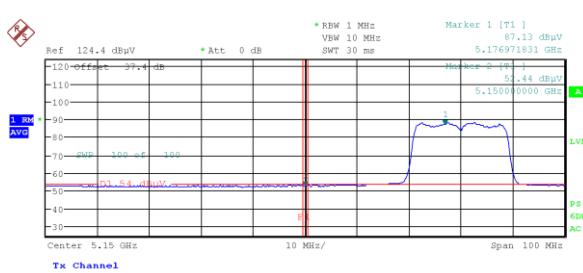
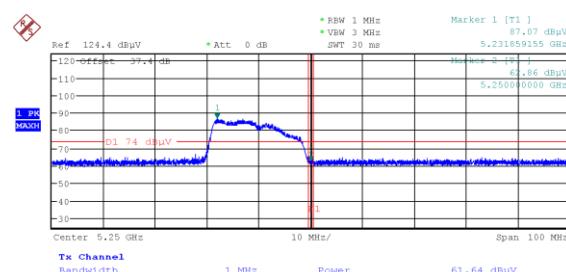
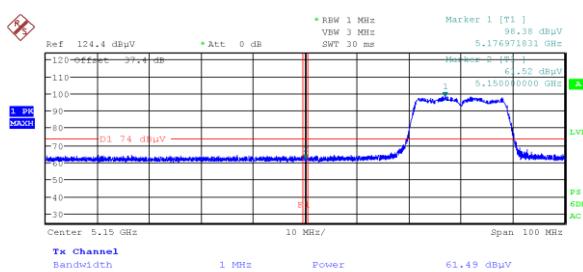
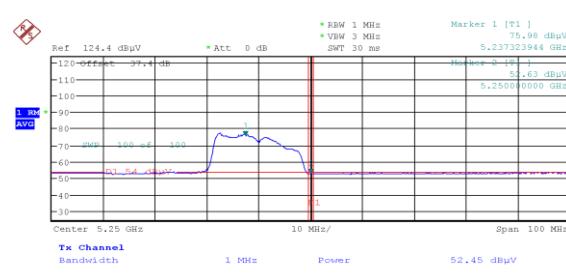
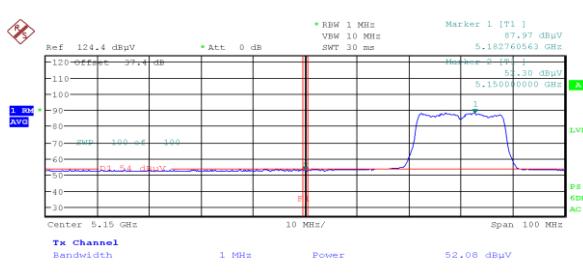
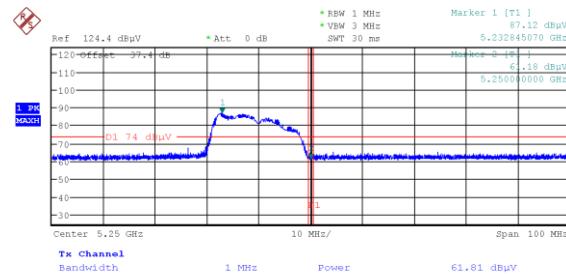
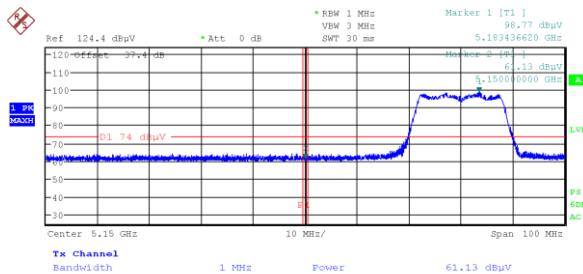


Figure 8.8-35: Radiated spurious emissions 26.5-40 GHz on 802.11ac HT80

Test data, continued



Test data, continued

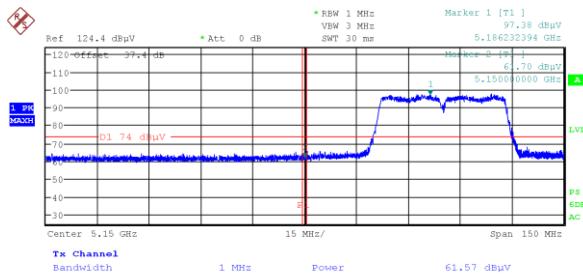


Figure 8.8-44: Radiated spurious emissions on lower band edge Pk, 5150 MHz (802.11n HT40)

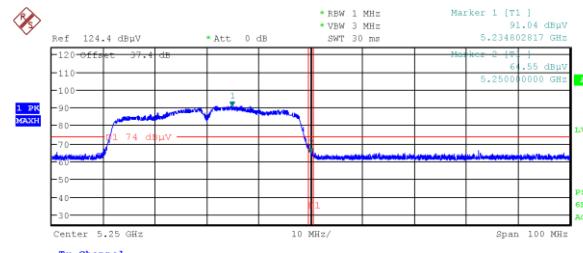


Figure 8.8-45: Radiated spurious emissions on upper band edge Pk, 5250 MHz (802.11n HT40)

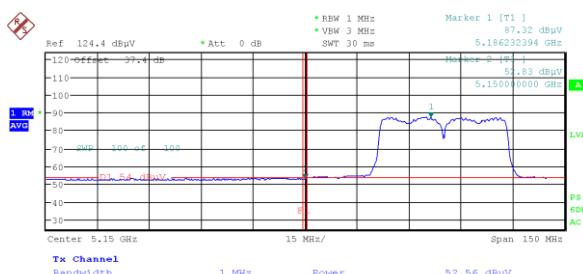


Figure 8.8-46: Radiated spurious emissions on lower band edge RMS, 5150 MHz (802.11n HT40)

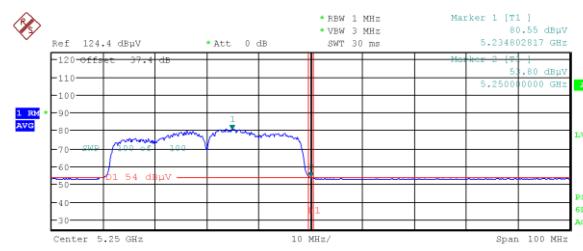


Figure 8.8-47: Radiated spurious emissions on upper band edge RMS, 5250 MHz (802.11n HT40)

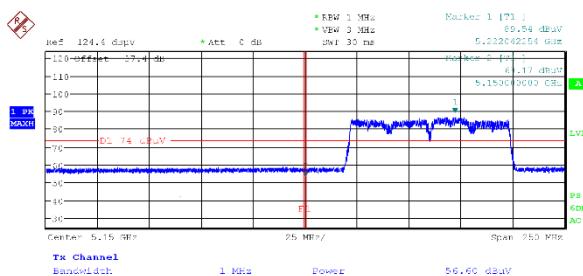


Figure 8.8-48: Radiated spurious emissions on lower band edge Pk, 5150 MHz (802.11ac HT80)

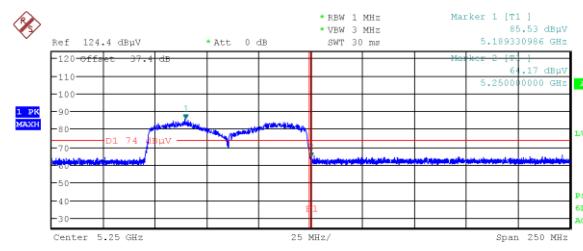


Figure 8.8-49: Radiated spurious emissions on upper band edge Pk, 5250 MHz (802.11ac HT80)

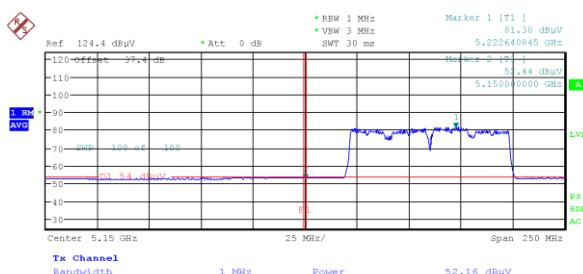


Figure 8.8-50: Radiated spurious emissions on lower band edge RMS, 5150 MHz (802.11ac HT80)

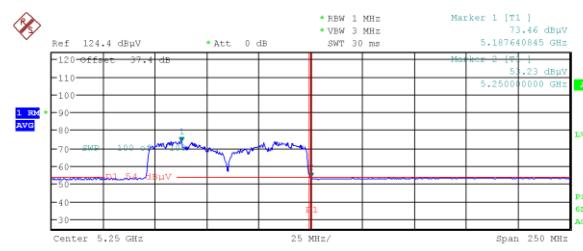


Figure 8.8-51: Radiated spurious emissions on upper band edge RMS, 5250 MHz (802.11ac HT80)

8.9 Frequency stability

8.9.1 References, definitions and limits

FCC §15.407:

(g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

RSS-Gen, Clause 8.11:

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.

8.9.2 Test summary

Verdict	Pass	Tested by	Sagarkumar Patel	Test date	September 12, 2025
---------	------	-----------	------------------	-----------	--------------------

8.9.3 Observations, settings and special notes

Frequency stability test was performed as per ANSI C63.10, Clause 6.8 and 789033 D02, Clause II(A)(3). Spectrum analyser settings:

Resolution bandwidth:	100 Hz
Video bandwidth:	300 Hz
Detector mode:	Peak
Trace mode:	Max Hold

8.9.4 Test data

Table 8.9-1: Frequency drift measurement

Test conditions	Frequency, GHz	Drift, Hz
+50 °C, Nominal	5.17777689	390.00
+40 °C, Nominal	5.17777682	320.00
+30 °C, Nominal	5.17777672	220.00
+20 °C, +15 %	5.17777661	110.00
+20 °C, Nominal	5.17777650	Reference
+20 °C, -15 %	5.17777654	40.00
+10 °C, Nominal	5.17777635	-150.00
0 °C, Nominal	5.17777633	-170.00
-10 °C, Nominal	5.17777632	-180.00
-20 °C, Nominal	5.177776293	-207.00
-30 °C, Nominal	5.177776289	-211.00

Test data, continued

Table 8.9-2: Lower band edge drift calculation

Modulation	-26 dBc lower cross		Drifted lower cross		
	point, GHz	Max negative drift, Hz	point, GHz	Band edge, GHz	Margin, MHz
802.11a	5.1703097	-211	5.170309	5.15	20.309489
802.11n HT20	5.1700003	-211	5.170000	5.15	20.000089
802.11n HT40	5.1703756	-211	5.170375	5.15	20.375389
802.11ac HT80	5.1608122	-211	5.160812	5.15	10.811989

Notes: Drifted lower cross point = -26 dBc lower cross point – max negative drift.

Table 8.9-3: Upper band edge drift calculation

Modulation	-26 dBc upper cross		Drifted upper cross		
	point, GHz	Max positive drift, Hz	point, GHz	Band edge, GHz	Margin, MHz
802.11a	5.2297816	390	5.229782	5.25	20.219010
802.11n HT20	5.2300347	390	5.230035	5.25	19.964910
802.11n HT40	5.2493744	390	5.249374	5.25	0.625210
802.11ac HT80	5.2428722	390	5.242873	5.25	7.127410

Notes: Drifted upper cross point = -26 dBc upper cross point + max positive drift.

End of the test report