

# FCC WLAN 6GHz RF Exposure

**Applicant** : Ascom (Sweden) AB  
**Equipment** : Myco 4 WiFi, Myco 4 Slim  
**Brand Name** : ascom  
**Model Name** : SH4-AABC, SH4-AABB, SH4-ABBC, SH4-ABBB  
**FCC ID** : BXZSH4  
**Standard** : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

**Sporton International Inc. (Shenzhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**  
**People's Republic of China**



## **Table of Contents**

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. Statement of Compliance .....</b>                 | <b>4</b>  |
| <b>2. Administration Data .....</b>                     | <b>5</b>  |
| <b>3. Guidance Applied.....</b>                         | <b>6</b>  |
| <b>4. Equipment Under Test (EUT) Information.....</b>   | <b>7</b>  |
| 4.1 General Information .....                           | 7         |
| <b>5. RF Exposure Limits.....</b>                       | <b>8</b>  |
| 5.1 Uncontrolled Environment.....                       | 8         |
| 5.2 Controlled Environment.....                         | 8         |
| 5.3 RF Exposure limit for below 6GHz .....              | 8         |
| 5.4 RF Exposure limit for above 6GHz.....               | 9         |
| <b>6. System Description and Setup .....</b>            | <b>10</b> |
| <b>7. Test Equipment List.....</b>                      | <b>11</b> |
| <b>8. SAR System Verification .....</b>                 | <b>12</b> |
| 8.1 SAR Tissue Verification .....                       | 12        |
| 8.2 SAR System Performance Check Results .....          | 12        |
| 8.3 PD System Verification Results.....                 | 13        |
| <b>9. RF Exposure Positions .....</b>                   | <b>14</b> |
| 9.1 Ear and handset reference point.....                | 14        |
| 9.2 Definition of the cheek position .....              | 15        |
| 9.3 Definition of the tilt position .....               | 16        |
| 9.4 Body Worn Accessory .....                           | 17        |
| 9.5 Product Specific/Extremity Exposure .....           | 17        |
| 9.6 Miscellaneous Testing Considerations .....          | 17        |
| <b>10. WLAN 6GHz Output Power (Unit: dBm) .....</b>     | <b>18</b> |
| <b>11. Antenna Location.....</b>                        | <b>19</b> |
| <b>12. RF Exposure Test Results.....</b>                | <b>20</b> |
| 12.1 Head SAR Test Result .....                         | 21        |
| 12.2 Body Worn SAR Test Result .....                    | 21        |
| 12.3 Product Specific SAR Test Result .....             | 22        |
| 12.4 PD Test Result .....                               | 23        |
| <b>13. Uncertainty Assessment .....</b>                 | <b>25</b> |
| <b>14. References.....</b>                              | <b>28</b> |
| <b>Appendix A. Plots of System Performance Check</b>    |           |
| <b>Appendix B. Plots of High SAR and PD Measurement</b> |           |
| <b>Appendix C. DASY Calibration Certificate</b>         |           |
| <b>Appendix D. Test Setup Photos</b>                    |           |
| <b>Appendix E. Conducted RF Output Power Table</b>      |           |



## History of this test report

| Report No. | Version | Description             | Issued Date   |
|------------|---------|-------------------------|---------------|
| FA2D0705B  | 01      | Initial issue of report | Jun. 27, 2023 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Ascom (Sweden) AB, Myco 4 WiFi, Myco 4 Slim, SH4-AABC, SH4-AABB, SH4-ABBC, SH4-ABBB**, are as follows.

| Band             | Tx Frequency (MHz) | Reported SAR          |                         |                        | Measured APD             |                               |                             | Scaled PD                |
|------------------|--------------------|-----------------------|-------------------------|------------------------|--------------------------|-------------------------------|-----------------------------|--------------------------|
|                  |                    | Head (1g SAR W/kg)    | Body Worn (1g SAR W/kg) | Phablet (10g SAR W/kg) | Head (W/m <sup>2</sup> ) | Body Worn (W/m <sup>2</sup> ) | Phablet (W/m <sup>2</sup> ) | psPD (W/m <sup>2</sup> ) |
| WLAN 6GHz        | 5925-7125          | 0.66                  | 0.58                    | 0.36                   | 3.91                     | 6.09                          | 6.09                        | 7.20                     |
| Date of Testing: |                    | 2023/4/11 ~ 2023/4/18 |                         |                        |                          |                               |                             |                          |

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) and Power density exposure limits (1 mW/cm<sup>2</sup> = 10 W/m<sup>2</sup>) specified in FCC 47 CFR part 2 (2.1093), ANSI/IEEE C95.1-1992 and FCC 47 CFR Part1.1310, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

## 2. Administration Data

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| Testing Laboratory |                                                                                                                                                                            |                     |                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------|
| Test Firm          | Sporton International Inc. (Shenzhen)                                                                                                                                      |                     |                                |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055<br>People's Republic of China<br>TEL: +86-755-86379589<br>FAX: +86-755-86379595 |                     |                                |
| Test Site No.      | Sporton Site No.                                                                                                                                                           | FCC Designation No. | FCC Test Firm Registration No. |
|                    | SAR02-SZ                                                                                                                                                                   | CN1256              | 421272                         |

| Applicant    |                                             |
|--------------|---------------------------------------------|
| Company Name | Ascom (Sweden) AB                           |
| Address      | Grimbodalen 2, SE-417 49 Gothenburg, Sweden |

| Manufacturer |                                             |
|--------------|---------------------------------------------|
| Company Name | Ascom (Sweden) AB                           |
| Address      | Grimbodalen 2, SE-417 49 Gothenburg, Sweden |



### **3. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)
- IEC TR 63170:2018
- IEC 62479:2010
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

| Product Feature & Specification                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Name                                                                                                                                                                                                                                                                                                                                                                                                                          | Myco 4 WiFi, Myco 4 Slim                                                                                                                                                                                                                                                                                                                                                                                                              |
| Brand Name                                                                                                                                                                                                                                                                                                                                                                                                                              | ascom                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Model Name                                                                                                                                                                                                                                                                                                                                                                                                                              | SH4-AABC, SH4-AABB, SH4-ABBC, SH4-ABBB                                                                                                                                                                                                                                                                                                                                                                                                |
| FCC ID                                                                                                                                                                                                                                                                                                                                                                                                                                  | BXZSH4                                                                                                                                                                                                                                                                                                                                                                                                                                |
| SN                                                                                                                                                                                                                                                                                                                                                                                                                                      | Sample 1:<br>TI00000556 for SH4-AABC, SH4-AABB<br>Sample 2:<br>TI00000575 for SH4-AABC, SH4-AABB<br>Sample 3:<br>TI00000669 for SH4 ABBC, SH4 ABBB                                                                                                                                                                                                                                                                                    |
| Wireless Technology and Frequency Range                                                                                                                                                                                                                                                                                                                                                                                                 | WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz<br>WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz<br>WLAN 6GHz U-NII-5: 5925 MHz ~ 6425 MHz<br>WLAN 6GHz U-NII-6: 6425 MHz ~ 6525 MHz<br>WLAN 6GHz U-NII-7: 6525 MHz ~ 6875 MHz<br>WLAN 6GHz U-NII-8: 6875 MHz ~ 7125 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>NFC: 13.56 MHz |
| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                    | WLAN 2.4GHz 802.11b/g/n HT20/HT40<br>WLAN 2.4GHz 802.11ac/ax VHT20/VHT40/HE20/HE40<br>WLAN 5GHz 802.11a/n HT20/HT40<br>WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160<br>WLAN 6GHz 802.11a<br>WLAN 6GHz 802.11ax HE20/HE40/HE80/HE160<br>Bluetooth BR/EDR/LE<br>NFC:ASK                                                                                                                                          |
| HW Version                                                                                                                                                                                                                                                                                                                                                                                                                              | V0.50                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SW Version                                                                                                                                                                                                                                                                                                                                                                                                                              | SH4_ASCOM_A12                                                                                                                                                                                                                                                                                                                                                                                                                         |
| EUT Stage                                                                                                                                                                                                                                                                                                                                                                                                                               | Production Unit                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Remark:</b><br>1. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO and MIMO antenna mode.<br>2. There are three samples. The difference between them can be referred to the SH4-AABC, SH4-AABB, SH4-ABBC, SH4-ABBB_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we chose sample 1 to perform full SAR testing and sample 2/3 verified the worst case of sample 1. |                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## **5. RF Exposure Limits**

### **5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### **5.3 RF Exposure limit for below 6GHz**

**Limits for Occupational/Controlled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

### 5.4 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310. The unit of power density evaluation is W/m<sup>2</sup> or mW/cm<sup>2</sup>.


Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm<sup>2</sup> per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

| Frequency range (MHz)                                          | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                               |                               |                                     |                          |
| 0.3-3.0                                                        | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0-30                                                         | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1500                                                       |                               |                               | f/300                               | 6                        |
| 1500-100,000                                                   |                               |                               | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                       | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30                                                        | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                                       |                               |                               | f/1500                              | 30                       |
| 1500-100,000                                                   |                               |                               | 1.0                                 | 30                       |

Note: 1.0 mW/cm<sup>2</sup> is 10 W/m<sup>2</sup>

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

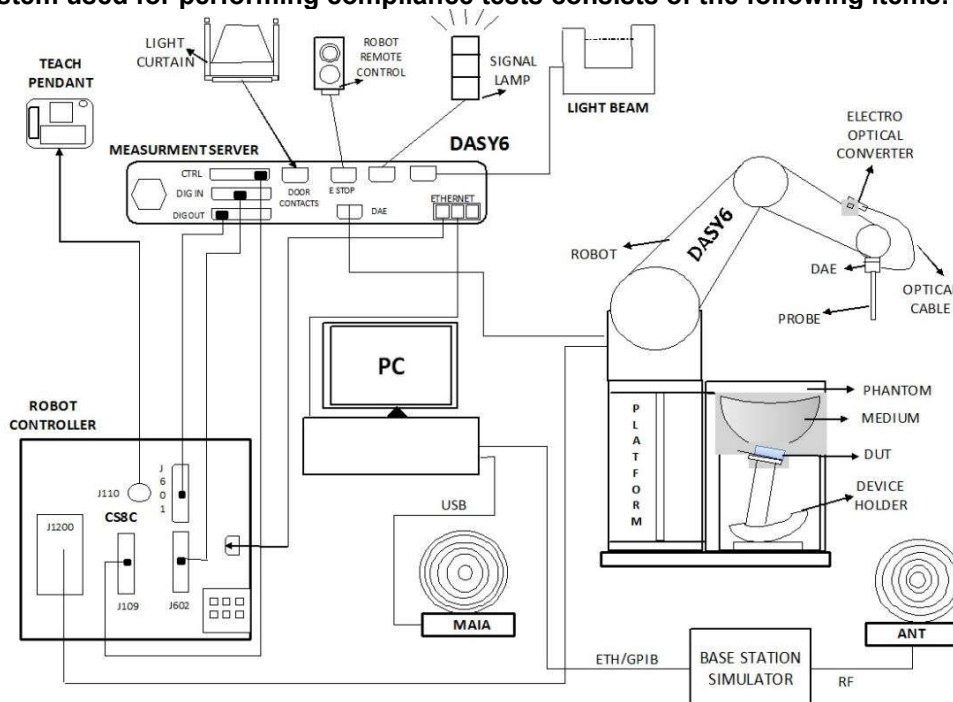

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 7. Test Equipment List

| Manufacturer  | Name of Equipment               | Type/Model    | Serial Number | Calibration   |               |
|---------------|---------------------------------|---------------|---------------|---------------|---------------|
|               |                                 |               |               | Last Cal.     | Due Date      |
| SPEAG         | 6500MHz System Validation Kit   | D6.5GHzV2     | 1026          | Jan. 29, 2021 | Jan. 28, 2024 |
| SPEAG         | 5G Verification Source          | 10GHz         | 2002          | Feb. 15, 2023 | Feb. 14, 2024 |
| SPEAG         | Data Acquisition Electronics    | DAE4          | 715           | Jan. 23, 2023 | Jan. 22, 2024 |
| SPEAG         | Data Acquisition Electronics    | DAE4          | 1386          | Jun. 30, 2022 | Jun. 29, 2023 |
| SPEAG         | Dosimetric E-Field Probe        | EX3DV4        | 7577          | Nov. 23, 2022 | Nov. 22, 2023 |
| SPEAG         | EUmmWV Probe Tip Protection     | EUmmWV3       | 9432          | Jan. 23, 2023 | Jan. 22, 2024 |
| SPEAG         | SAM Twin Phantom                | QD 000 P41 AA | 2035          | NCR           | NCR           |
| SPEAG         | Phone Positioner                | N/A           | N/A           | NCR           | NCR           |
| Agilent       | Wireless Communication Test Set | E5515C        | MY50267224    | Jul. 07, 2022 | Jul. 06, 2023 |
| Keysight      | Network Analyzer                | E5071C        | MY46523671    | Oct. 17, 2022 | Oct. 16, 2023 |
| Speag         | Dielectric Assessment KIT       | DAK-3.5       | 1144          | Aug. 15, 2022 | Aug. 14, 2023 |
| Agilent       | Signal Generator                | N5181A        | MY50145381    | Dec. 27, 2022 | Dec. 26, 2023 |
| R&S           | Signal Generator                | SMB100A       | 175779        | Dec. 28, 2022 | Dec. 27, 2023 |
| Anritsu       | Power Sensor                    | MA2411B       | 1306099       | Oct. 17, 2022 | Oct. 16, 2023 |
| Anritsu       | Power Meter                     | ML2495A       | 1349001       | Oct. 17, 2022 | Oct. 16, 2023 |
| Anritsu       | Power Sensor                    | MA2411B       | 1542004       | Dec. 27, 2022 | Dec. 26, 2023 |
| Anritsu       | Power Meter                     | ML2495A       | 1339473       | Dec. 27, 2022 | Dec. 26, 2023 |
| R&S           | CBT BLUETOOTH TESTER            | CBT           | 100963        | Dec. 27, 2022 | Dec. 26, 2023 |
| R&S           | Spectrum Analyzer               | FSP7          | 100818        | Jul. 07, 2022 | Jul. 06, 2023 |
| TES           | Hygrometer                      | 1310          | 200505600     | Jul. 12, 2022 | Jul. 11, 2023 |
| Anymetre      | Thermo-Hygrometer               | JR593         | 2020062101    | Jul. 12, 2022 | Jul. 11, 2023 |
| SPEAG         | Device Holder                   | N/A           | N/A           | N/A           | N/A           |
| AR            | Amplifier                       | 5S1G4         | 0333096       | Note 1        |               |
| Mini-Circuits | Amplifier                       | ZVE-3W-83+    | 599201528     | Note 1        |               |
| Mini-Circuits | Amplifier                       | ZVA-183W-S+   | 726202215     | Note 1        |               |
| ARRA          | Power Divider                   | A3200-2       | N/A           | Note 1        |               |
| ET Industries | Dual Directional Coupler        | C-058-10      | N/A           | Note 1        |               |
| Weinschel     | Attenuator 1                    | 3M-10         | N/A           | Note 1        |               |
| Weinschel     | Attenuator 2                    | 3M-20         | N/A           | Note 1        |               |

### General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

## 8. SAR System Verification

### 8.1 SAR Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The liquid tissue depth was at least 15cm in the phantom for all SAR testing

#### <Tissue Dielectric Parameter Check Results>


| Frequency (MHz) | Liquid Temp. (°C) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date      |
|-----------------|-------------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|-----------|
| 6500            | 22.5              | 6.080                     | 34.000                        | 6.07                             | 34.50                                | 0.16                   | -1.45                      | $\pm 5$   | 2023/4/18 |

### 8.2 SAR System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Date      | Frequency (MHz) | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|------------------|------------|-----------|---------|------------------------|------------------------|--------------------------|---------------|
| 2023/4/18 | 6500            | 100              | 1026       | 7577      | 1386    | 27.300                 | 290.000                | 273                      | -5.86         |

| Date      | Frequency (MHz) | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 10g SAR (W/kg) | Targeted 10g SAR (W/kg) | Normalized 10g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|------------------|------------|-----------|---------|-------------------------|-------------------------|---------------------------|---------------|
| 2023/4/18 | 6500            | 100              | 1026       | 7577      | 1386    | 4.910                   | 53.400                  | 49.1                      | -8.05         |

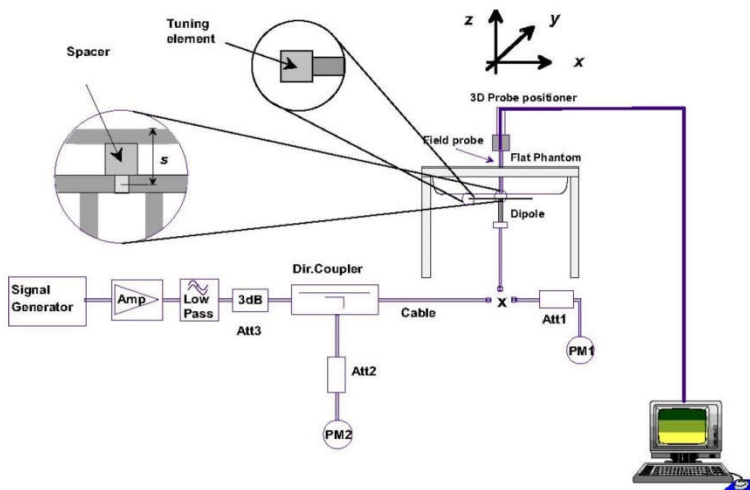

System Performance Check Setup




Setup Photo

### 8.3 PD System Verification Results

The system was verified to be within  $\pm 0.66$  dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

| Frequency (GHz) | 5G Verification Source | Probe S/N | DAE S/N | Distance (mm) | Prad (mW) | Measured 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | Targeted 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | Deviation (dB) | Date      |
|-----------------|------------------------|-----------|---------|---------------|-----------|------------------------------------------------|------------------------------------------------|----------------|-----------|
| 10G             | 10GHz_2002             | 9432      | 715     | 10mm          | 132       | 165                                            | 171                                            | -0.16          | 2023/4/11 |

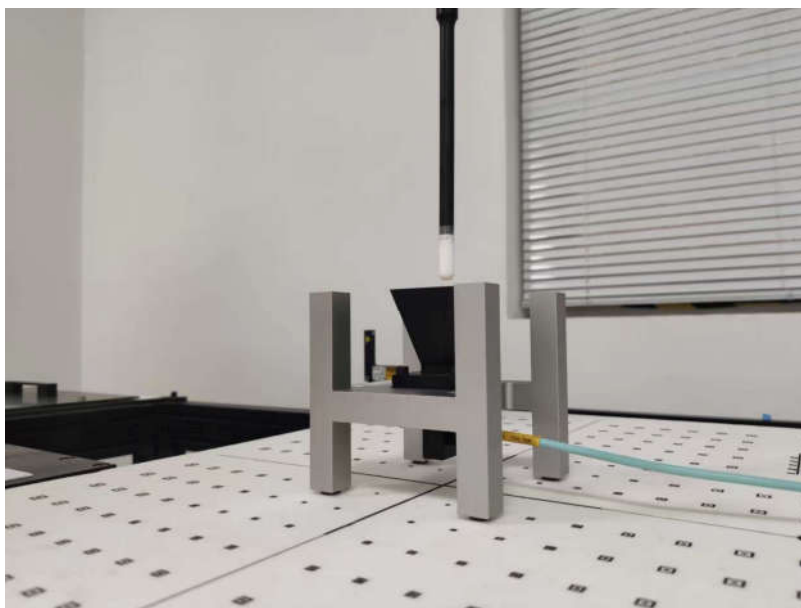

System Verification Setup Photo

## 9. RF Exposure Positions

### 9.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

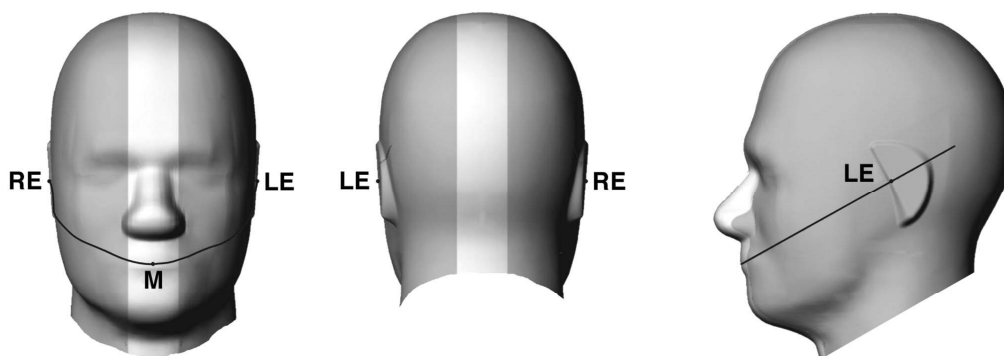


Fig 9.1.1 Front, back, and side views of SAM twin phantom

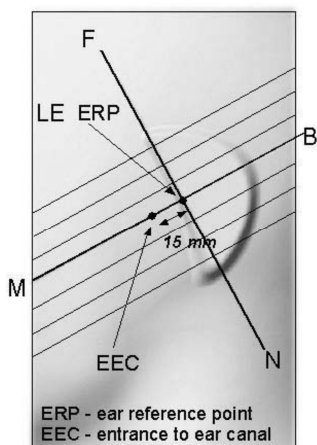


Fig 9.1.2 Close-up side view of phantom showing the ear region.


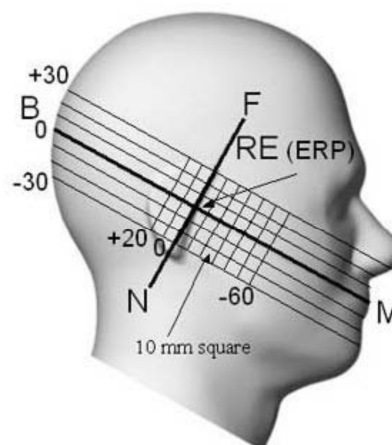



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

## **9.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

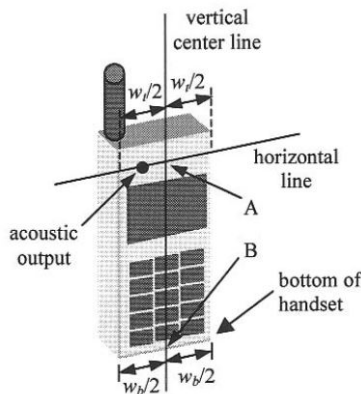

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

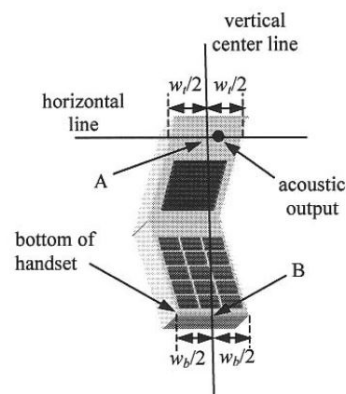

**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

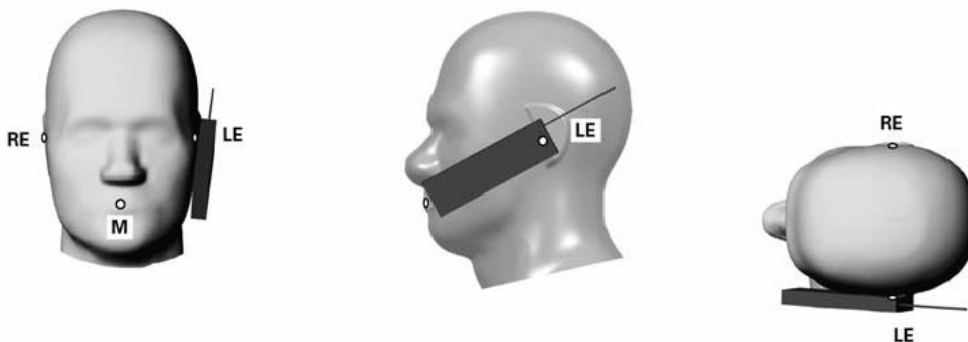

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

### 9.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point


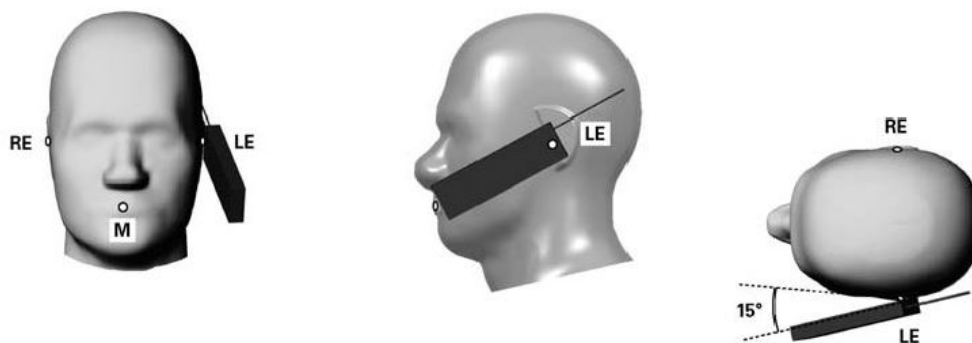


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

## **9.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

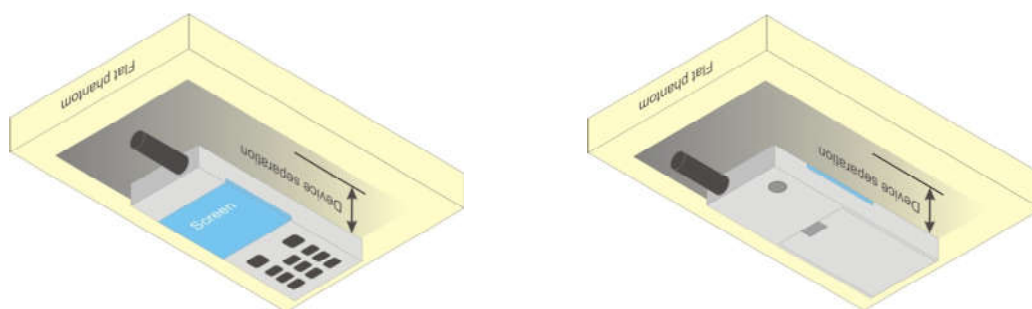

**Fig 9.4 Body Worn Position**

## **9.5 Product Specific/Extremity Exposure**

For smart phones with a display diagonal dimension  $> 15.0 \text{ cm}$  or an overall diagonal dimension  $> 16.0$ , that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless mode and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25 \text{ mm}$  from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2 \text{ W/kg}$ .

## **9.6 Miscellaneous Testing Considerations**

- Evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020.
- Per procedures of KDB Pubs. 447498 and 248227, and applicable product-specific procedures among KDB Pubs. 648474 (handsets/phablets).
- Where supported by the test system, also report estimated absorbed (epithelial) power density (for reference purposes only, not specifically for compliance) and estimated incident PD, derived from measured SAR.
- In addition, for the highest SAR test configurations evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method (2 mm closest meas. plane)
  - Adjust measured results per amount that measurement uncertainty exceeds 30 % (see e.g. IEC 62479:2010)

## **10. WLAN 6GHz Output Power (Unit: dBm)**

The detailed conducted power table can refer to Appendix E.

### **General Note:**

1. The 6GHz WLAN can transmit in SISO/MIMO antenna mode, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, SAR and PD for MIMO was evaluated by making a measurement with both antennas transmitting simultaneously.
2. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
3. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
4. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
5. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands



## **11. Antenna Location**

The detailed antenna location information can refer to SAR Test Setup Photos.

## 12. RF Exposure Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, this device is considered a phablet since the display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm. Therefore, phablet SAR tests are required when wireless mode does not apply or if wireless router 1g SAR  $> 1.2$ W/kg
6. For WLAN 6GHz doesn't support wireless router capability.
7. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors.
8. Per October 2020 TCB Workshop Interim procedures, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02.
9. Absorbed power density (APD) using a 4cm<sup>2</sup> averaging area is reported based on SAR measurements.
10. Per FCC guidance, the WLAN 6GHz Sim-Tx analysis are using the SAR results with the conventional SPLSR etc procedures from KDB 447498 D01. And the Sim-Tx analysis result refer to Sporton SAR report no.: FA2D0705.

### WLAN SAR Note:

1. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
2. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
3. The 6GHz WLAN can transmit in SISO/MIMO antenna mode, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO power to perform SAR testing. Per KDB 248227, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB 447498 by making a SAR measurement with both antennas transmitting simultaneously.
4. During SAR testing the WLAN 6GHz transmission was verified using a spectrum analyzer.
5. When SAR testing for 802.11ax is required
  - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
  - b. Otherwise, consider the fully allocated channel for SAR testing
  - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel.

**12.1 Head SAR Test Result****<WLAN SAR>**

| Plot No. | Band     | Mode                | Test Position | Gap (mm) | Antenna      | Power Reduction | Ch. | Freq. (MHz) | Sample | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) | Measured APD (W/m^2) |
|----------|----------|---------------------|---------------|----------|--------------|-----------------|-----|-------------|--------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|----------------------|
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Cheek   | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.15            | 0.434                  | 0.581                  | 3.54                 |
| 01       | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.01            | 0.495                  | <b>0.663</b>           | <b>3.91</b>          |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 2      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.09             | 0.328                  | 0.439                  | 2.43                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Left Cheek    | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.16            | 0.402                  | 0.538                  | 2.94                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Left Tilted   | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.13             | 0.392                  | 0.525                  | 2.78                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10(10) | Full Power      | 15  | 6025        | 1      | 10.99               | 12.00               | 1.262                  | 99.1         | 1.009                     | -0.11            | 0.306                  | 0.390                  | 2.53                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10(10) | Full Power      | 111 | 6505        | 1      | 12.20               | 13.50               | 1.349                  | 99.1         | 1.009                     | -0.08            | 0.322                  | 0.438                  | 2.68                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10     | Full Power      | 143 | 6665        | 1      | 15.27               | 16.50               | 1.327                  | 99.1         | 1.009                     | 0.16             | 0.456                  | 0.611                  | 3.62                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10     | Full Power      | 207 | 6985        | 1      | 10.25               | 11.50               | 1.333                  | 99.1         | 1.009                     | -0.02            | 0.064                  | 0.086                  | 0.568                |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Tilted  | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 3      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.05            | 0.105                  | 0.141                  | 0.897                |

**12.2 Body Worn SAR Test Result****<WLAN SAR>**

| Plot No. | Band     | Mode                | Test Position | Gap (mm) | Antenna      | Power Reduction | Ch. | Freq. (MHz) | Sample | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) | Measured APD (W/m^2) |
|----------|----------|---------------------|---------------|----------|--------------|-----------------|-----|-------------|--------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|----------------------|
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Front         | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.08             | 0.425                  | 0.569                  | 3.81                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.04            | 0.433                  | 0.580                  | 4.34                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 2      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.06             | 0.340                  | 0.455                  | 2.9                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 15  | 6025        | 1      | 10.99               | 12.00               | 1.262                  | 99.1         | 1.009                     | 0.02             | 0.355                  | 0.452                  | 3.62                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 111 | 6505        | 1      | 12.20               | 13.50               | 1.349                  | 99.1         | 1.009                     | 0.15             | 0.413                  | 0.562                  | 3.89                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10     | Full Power      | 143 | 6665        | 1      | 15.27               | 16.50               | 1.327                  | 99.1         | 1.009                     | -0.01            | 0.369                  | 0.494                  | 3.55                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10     | Full Power      | 207 | 6985        | 1      | 10.25               | 11.50               | 1.333                  | 99.1         | 1.009                     | -0.15            | 0.053                  | 0.071                  | 0.48                 |
| 02       | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 3      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.07             | 0.436                  | <b>0.584</b>           | <b>6.09</b>          |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 15  | 6025        | 3      | 10.99               | 12.00               | 1.262                  | 99.1         | 1.009                     | 0.03             | 0.223                  | 0.284                  | 2.61                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 111 | 6505        | 3      | 12.20               | 13.50               | 1.349                  | 99.1         | 1.009                     | 0.02             | 0.363                  | 0.494                  | 5.13                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10     | Full Power      | 143 | 6665        | 3      | 15.27               | 16.50               | 1.327                  | 99.1         | 1.009                     | 0.05             | 0.301                  | 0.403                  | 3.4                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10     | Full Power      | 207 | 6985        | 3      | 10.25               | 11.50               | 1.333                  | 99.1         | 1.009                     | 0.05             | 0.069                  | 0.093                  | 0.06                 |

**12.3 Product Specific SAR Test Result****<WLAN SAR>**

| Plot No. | Band     | Mode                | Test Position | Gap (mm) | Antenna      | Power Reduction | Ch. | Freq. (MHz) | Sample | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 10g SAR (W/kg) | Reported 10g SAR (W/kg) | Measured APD (W/m^2) |
|----------|----------|---------------------|---------------|----------|--------------|-----------------|-----|-------------|--------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|-------------------------|-------------------------|----------------------|
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Front         | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.08             | 0.152                   | 0.204                   | 3.81                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.04            | 0.174                   | 0.233                   | 4.34                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Side    | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.05            | 0.106                   | 0.142                   | 2.66                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 1      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.12             | 0.211                   | 0.283                   | 5.29                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 2      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.03             | 0.165                   | 0.221                   | 3.77                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10(10) | Full Power      | 15  | 6025        | 1      | 10.99               | 12.00               | 1.262                  | 99.1         | 1.009                     | 0.03             | 0.217                   | 0.276                   | 5.54                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10(10) | Full Power      | 111 | 6505        | 1      | 12.20               | 13.50               | 1.349                  | 99.1         | 1.009                     | 0.05             | 0.154                   | 0.210                   | 3.86                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10     | Full Power      | 143 | 6665        | 1      | 15.27               | 16.50               | 1.327                  | 99.1         | 1.009                     | -0.01            | 0.205                   | 0.275                   | 5.12                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10     | Full Power      | 207 | 6985        | 1      | 10.25               | 11.50               | 1.333                  | 99.1         | 1.009                     | 0.11             | 0.019                   | 0.026                   | 0.489                |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 3      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | -0.03            | 0.094                   | 0.126                   | 2.34                 |
| 03       | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 47  | 6185        | 3      | 13.27               | 14.50               | 1.327                  | 99.1         | 1.009                     | 0.07             | 0.269                   | <b>0.360</b>            | <b>6.09</b>          |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 15  | 6025        | 3      | 10.99               | 12.00               | 1.262                  | 99.1         | 1.009                     | 0.03             | 0.104                   | 0.132                   | 2.61                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10(10) | Full Power      | 111 | 6505        | 3      | 12.20               | 13.50               | 1.349                  | 99.1         | 1.009                     | 0.02             | 0.205                   | 0.279                   | 5.13                 |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10     | Full Power      | 143 | 6665        | 3      | 15.27               | 16.50               | 1.327                  | 99.1         | 1.009                     | 0.05             | 0.136                   | 0.182                   | 3.4                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 0mm      | Ant 3+10     | Full Power      | 207 | 6985        | 3      | 10.25               | 11.50               | 1.333                  | 99.1         | 1.009                     | 0.05             | 0.020                   | 0.027                   | 0.06                 |

## 12.4 PD Test Result

### Power Density General Notes:

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements.
3. Absorbed power density (APD) using a 4cm<sup>2</sup> averaging area is reported based on SAR measurements.
4. Power density was calculated by repeated E-field measurements on two measurement planes separated by  $\lambda/4$ .
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
6. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
7. Per April 2021 TCB Workshop, For the highest SAR test configurations also measure incident PD (total) using power-density reconstruction method in 2 mm closest measurement plane.
8. Since this device is considered a phablet and there is no different PD limit on different exposure conditions, therefore select highest phablet SAR at 0 mm test distance and configurations evaluate power density. Since there is no different PD limit on different exposure conditions, therefore the PD test was performed of a 2mm separation between Probe sensor and EUT surface to cover all exposure conditions of phablet.
9. IPD is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.
10. The measurement procedure consists of measuring the PD<sub>inc</sub> at two different distances: 2 mm (compliance distance) and  $\lambda/5$ . The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD<sub>n</sub> fulfill the criterion described below. Since iPD ratio between the two distances is  $\geq -1$  dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

### <WLAN PD>

| Band     | Mode                | Test Position | Gap (mm) | Antenna      | Sample | Ch. | Freq. (MHz) | Average Power (dBm) | Grid Step (λ) | iPD (W/m <sup>2</sup> ) | iPD ratio (≥-1) | Normal psPD(W/m <sup>2</sup> ) | Total psPD(W/m <sup>2</sup> ) |
|----------|---------------------|---------------|----------|--------------|--------|-----|-------------|---------------------|---------------|-------------------------|-----------------|--------------------------------|-------------------------------|
| WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 0.0625        | 4.57                    | 0.47            | 3.13                           | 3.64                          |
| WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 10mm     | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 0.0625        | 4.1                     |                 | 1.42                           | 1.45                          |
| WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10     | 1      | 207 | 6985        | 10.25               | 0.0625        | 3.49                    | -0.28           | 0.772                          | 0.794                         |
| WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 8.59mm   | Ant 3+10     | 1      | 207 | 6985        | 10.25               | 0.0625        | 3.72                    |                 | 0.693                          | 0.7                           |



| Plot No. | Band     | Mode                | Test Position | Gap (mm) | Antenna      | Sample | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Grid Step (A) | Scaling Factor for measurement uncertainty | Power Drift (dB) | Normal psPD (W/m <sup>2</sup> ) | Scaled Normal psPD (W/m <sup>2</sup> ) | Total psPD (W/m <sup>2</sup> ) | Scaled Total psPD (W/m <sup>2</sup> ) |
|----------|----------|---------------------|---------------|----------|--------------|--------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|---------------|--------------------------------------------|------------------|---------------------------------|----------------------------------------|--------------------------------|---------------------------------------|
| 01       | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.05             | 3.13                            | 6.19                                   | 3.64                           | 7.20                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10(10) | 2      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.05             | 2.21                            | 4.37                                   | 3.16                           | 6.25                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10(10) | 1      | 47  | 6185        | 13.27               | 14.50               | 1.327                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.07             | 2.31                            | 4.81                                   | 2.90                           | 6.03                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10(10) | 1      | 111 | 6505        | 12.20               | 13.50               | 1.349                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.02             | 1.6                             | 3.38                                   | 1.67                           | 3.53                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10     | 1      | 143 | 6665        | 15.27               | 16.50               | 1.327                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | -0.06            | 1.08                            | 2.25                                   | 1.55                           | 3.23                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10     | 1      | 207 | 6985        | 10.25               | 11.50               | 1.334                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | -0.15            | 0.772                           | 1.61                                   | 0.794                          | 1.66                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Front         | 2mm      | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.04             | 1.05                            | 2.08                                   | 1.59                           | 3.14                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 2mm      | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.03             | 1.54                            | 3.05                                   | 2.01                           | 3.98                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Right Side    | 2mm      | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.02             | 1.55                            | 3.07                                   | 1.58                           | 3.13                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Left Side     | 2mm      | Ant 3+10(10) | 1      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.09             | 1.58                            | 3.13                                   | 1.6                            | 3.16                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Top Side      | 2mm      | Ant 3+10(10) | 3      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.06             | 1.32                            | 2.61                                   | 1.43                           | 2.83                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 2mm      | Ant 3+10(10) | 3      | 15  | 6025        | 10.99               | 12.00               | 1.262                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.02             | 2.58                            | 5.10                                   | 2.99                           | 5.91                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 2mm      | Ant 3+10(10) | 3      | 47  | 6185        | 13.27               | 14.50               | 1.327                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | -0.07            | 2.79                            | 5.81                                   | 3.05                           | 6.35                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 2mm      | Ant 3+10(10) | 3      | 111 | 6505        | 12.20               | 13.50               | 1.349                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | -0.08            | 1.43                            | 3.02                                   | 1.56                           | 3.30                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 2mm      | Ant 3+10     | 3      | 143 | 6665        | 15.27               | 16.50               | 1.327                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | -0.04            | 2.36                            | 4.91                                   | 2.64                           | 5.49                                  |
|          | WLAN6GHz | 802.11ax-HE160 MCS0 | Back          | 2mm      | Ant 3+10     | 3      | 207 | 6985        | 10.25               | 11.50               | 1.334                  | 99.10        | 1.009                     | 0.0625        | 1.5535                                     | 0.04             | 0.578                           | 1.21                                   | 0.603                          | 1.26                                  |

**Test Engineer :** Hank Huang, Kevin Xu, David Dai, Bin He

### 13. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

| Uncertainty Distributions          | Normal      | Rectangular  | Triangular   | U-Shape      |
|------------------------------------|-------------|--------------|--------------|--------------|
| Multi-plying Factor <sup>(a)</sup> | $1/k^{(b)}$ | $1/\sqrt{3}$ | $1/\sqrt{6}$ | $1/\sqrt{2}$ |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

#### **Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

| Uncertainty Budget<br>According to IEC/IEEE 62209-1528<br>(Frequency band: 4 MHz - 10 GHz range) |                    |             |       |         |          |                                |                                 |
|--------------------------------------------------------------------------------------------------|--------------------|-------------|-------|---------|----------|--------------------------------|---------------------------------|
| Error Description                                                                                | Uncert. Value (±%) | Prob. Dist. | Div.  | (Ci) 1g | (Ci) 10g | Standard Uncertainty (1g) (±%) | Standard Uncertainty (10g) (±%) |
| <b>Measurement System errors</b>                                                                 |                    |             |       |         |          |                                |                                 |
| Probe calibration                                                                                | 18.6               | N           | 2     | 1       | 1        | 9.3                            | 9.3                             |
| Probe calibration drift                                                                          | 1.7                | R           | 1.732 | 1       | 1        | 1.0                            | 1.0                             |
| Probe linearity and detection Limit                                                              | 4.7                | R           | 1.732 | 1       | 1        | 2.7                            | 2.7                             |
| Broadband signal                                                                                 | 2.8                | R           | 1.732 | 1       | 1        | 1.6                            | 1.6                             |
| Probe isotropy                                                                                   | 7.6                | R           | 1.732 | 1       | 1        | 4.4                            | 4.4                             |
| Other probe and data acquisition errors                                                          | 2.4                | N           | 1     | 1       | 1        | 2.4                            | 2.4                             |
| RF ambient and noise                                                                             | 1.8                | N           | 1     | 1       | 1        | 1.8                            | 1.8                             |
| Probe positioning errors                                                                         | 0.006              | N           | 1     | 0.5     | 0.5      | 0.0                            | 0.0                             |
| Data processing errors                                                                           | 4.0                | N           | 1     | 1       | 1        | 4.0                            | 4.0                             |
| <b>Phantom and Device Errors</b>                                                                 |                    |             |       |         |          |                                |                                 |
| Measurement of phantom conductivity ( $\sigma$ )                                                 | 2.5                | N           | 1     | 0.78    | 0.71     | 2.0                            | 1.8                             |
| Temperature effects (medium)                                                                     | 5.4                | R           | 1.732 | 0.78    | 0.71     | 2.4                            | 2.2                             |
| Shell permittivity                                                                               | 14.0               | R           | 1.732 | 0.5     | 0.5      | 4.0                            | 4.0                             |
| Distance between the radiating element of the DUT and the phantom medium                         | 2.0                | N           | 1     | 2       | 2        | 4.0                            | 4.0                             |
| Repeatability of positioning the DUT or source against the phantom                               | 1.0                | N           | 1     | 1       | 1        | 1.0                            | 1.0                             |
| Device holder effects                                                                            | 3.6                | N           | 1     | 1       | 1        | 3.6                            | 3.6                             |
| Effect of operating mode on probe sensitivity                                                    | 2.4                | R           | 1.732 | 1       | 1        | 1.4                            | 1.4                             |
| Time-average SAR                                                                                 | 1.7                | R           | 1.732 | 1       | 1        | 1.0                            | 1.0                             |
| Variation in SAR due to drift in output of DUT                                                   | 2.5                | N           | 1     | 1       | 1        | 2.5                            | 2.5                             |
| Validation antenna uncertainty (validation measurement only)                                     | 0.0                | N           | 1     | 1       | 1        | 0.0                            | 0.0                             |
| Uncertainty in accepted power (validation measurement only)                                      | 0.0                | N           | 1     | 1       | 1        | 0.0                            | 0.0                             |
| <b>Correction to the SAR results</b>                                                             |                    |             |       |         |          |                                |                                 |
| Phantom deviation from target ( $\epsilon', \sigma$ )                                            | 1.9                | N           | 1     | 1       | 0.84     | 1.9                            | 1.6                             |
| SAR scaling                                                                                      | 0.0                | R           | 1.732 | 1       | 1        | 0.0                            | 0.0                             |
| <b>Combined Std. Uncertainty</b>                                                                 |                    |             |       |         |          | <b>14.5%</b>                   | <b>14.4%</b>                    |
| <b>Coverage Factor for 95 %</b>                                                                  |                    |             |       |         |          | <b>K=2</b>                     | <b>K=2</b>                      |
| <b>Expanded STD Uncertainty</b>                                                                  |                    |             |       |         |          | <b>29.0%</b>                   | <b>28.8%</b>                    |

**SAR Uncertainty Budget for frequency range 4MHz to 10GHz**

| <b>cDASY6 Module mmWave Uncertainty Budget</b><br><b>Evaluation Distances to the Antennas &gt; <math>\lambda/2\pi</math></b><br><b>In Compliance with IEC TR 63170</b> |                                               |                    |                |             |                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------|----------------|-------------|--------------------------------------------------|
| <b>Error Description</b>                                                                                                                                               | <b>Uncertainty Value (<math>\pm</math>dB)</b> | <b>Probability</b> | <b>Divisor</b> | <b>(Ci)</b> | <b>Standard Uncertainty (<math>\pm</math>dB)</b> |
| <b>Uncertainty terms dependent on the measurement system</b>                                                                                                           |                                               |                    |                |             |                                                  |
| Probe Calibration                                                                                                                                                      | 0.49                                          | N                  | 1              | 1           | 0.49                                             |
| Probe correction                                                                                                                                                       | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Frequency response                                                                                                                                                     | 0.20                                          | R                  | 1.732          | 1           | 0.12                                             |
| Sensor cross coupling                                                                                                                                                  | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Isotropy                                                                                                                                                               | 0.50                                          | R                  | 1.732          | 1           | 0.29                                             |
| Linearity                                                                                                                                                              | 0.20                                          | R                  | 1.732          | 1           | 0.12                                             |
| Probe scattering                                                                                                                                                       | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Probe positioning offset                                                                                                                                               | 0.30                                          | R                  | 1.732          | 1           | 0.17                                             |
| Probe positioning repeatability                                                                                                                                        | 0.04                                          | R                  | 1.732          | 1           | 0.02                                             |
| Sensor mechanical offset                                                                                                                                               | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Probe spatial resolution                                                                                                                                               | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Field impedance dependence                                                                                                                                             | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Amplitude and phase drift                                                                                                                                              | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Amplitude and phase noise                                                                                                                                              | 0.04                                          | R                  | 1.732          | 1           | 0.02                                             |
| Measurement area truncation                                                                                                                                            | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Data acquisition                                                                                                                                                       | 0.03                                          | N                  | 1              | 1           | 0.03                                             |
| Sampling                                                                                                                                                               | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Field reconstruction                                                                                                                                                   | 2.00                                          | R                  | 1.732          | 1           | 1.15                                             |
| Forward transformation                                                                                                                                                 | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Power density scaling                                                                                                                                                  | 0.00                                          | R                  | 1.732          | 1           | 0.00                                             |
| Spatial averaging                                                                                                                                                      | 0.10                                          | R                  | 1.732          | 1           | 0.06                                             |
| System detection limit                                                                                                                                                 | 0.04                                          | R                  | 1.732          | 1           | 0.02                                             |
| <b>Uncertainty terms dependent on the DUT and environmental factors</b>                                                                                                |                                               |                    |                |             |                                                  |
| Probe coupling with DUT                                                                                                                                                | 0.00                                          | R                  | 1.732          | 1           | 0.0                                              |
| Modulation response                                                                                                                                                    | 0.40                                          | R                  | 1.732          | 1           | 0.2                                              |
| Integration time                                                                                                                                                       | 0.00                                          | R                  | 1.732          | 1           | 0.0                                              |
| Response time                                                                                                                                                          | 0.00                                          | R                  | 1.732          | 1           | 0.0                                              |
| Device holder influence                                                                                                                                                | 0.10                                          | R                  | 1.732          | 1           | 0.1                                              |
| DUT alignment                                                                                                                                                          | 0.00                                          | R                  | 1.732          | 1           | 0.0                                              |
| RF ambient conditions                                                                                                                                                  | 0.04                                          | R                  | 1.732          | 1           | 0.0                                              |
| Ambient reflections                                                                                                                                                    | 0.04                                          | R                  | 1.732          | 1           | 0.0                                              |
| Immunity / secondary reception                                                                                                                                         | 0.00                                          | R                  | 1.732          | 1           | 0.0                                              |
| Drift of the DUT                                                                                                                                                       |                                               | R                  | 1.732          | 1           |                                                  |
| <b>Combined Std. Uncertainty</b>                                                                                                                                       |                                               |                    |                |             | <b>1.34</b>                                      |
| <b>Expanded STD Uncertainty (95%)</b>                                                                                                                                  |                                               |                    |                |             | <b>2.68</b>                                      |

**PD Uncertainty Budget**

## **14. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [5] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [6] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [9] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [10] IEC 62479:2010 Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)
- [11] IEC TR 63170: 2018 Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz
- [12] SPEAG DASY System Handbook
- [13] SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz)

-----THE END-----