


Appendix B

Peak Output Power




Marker 1 [T1] RBW 2 MHz RF Att 60 dB
Ref Lvl 18.24 dBm VBW 2 MHz
30 dBm 2.40193002 GHz SWT 56 ms Unit dBm

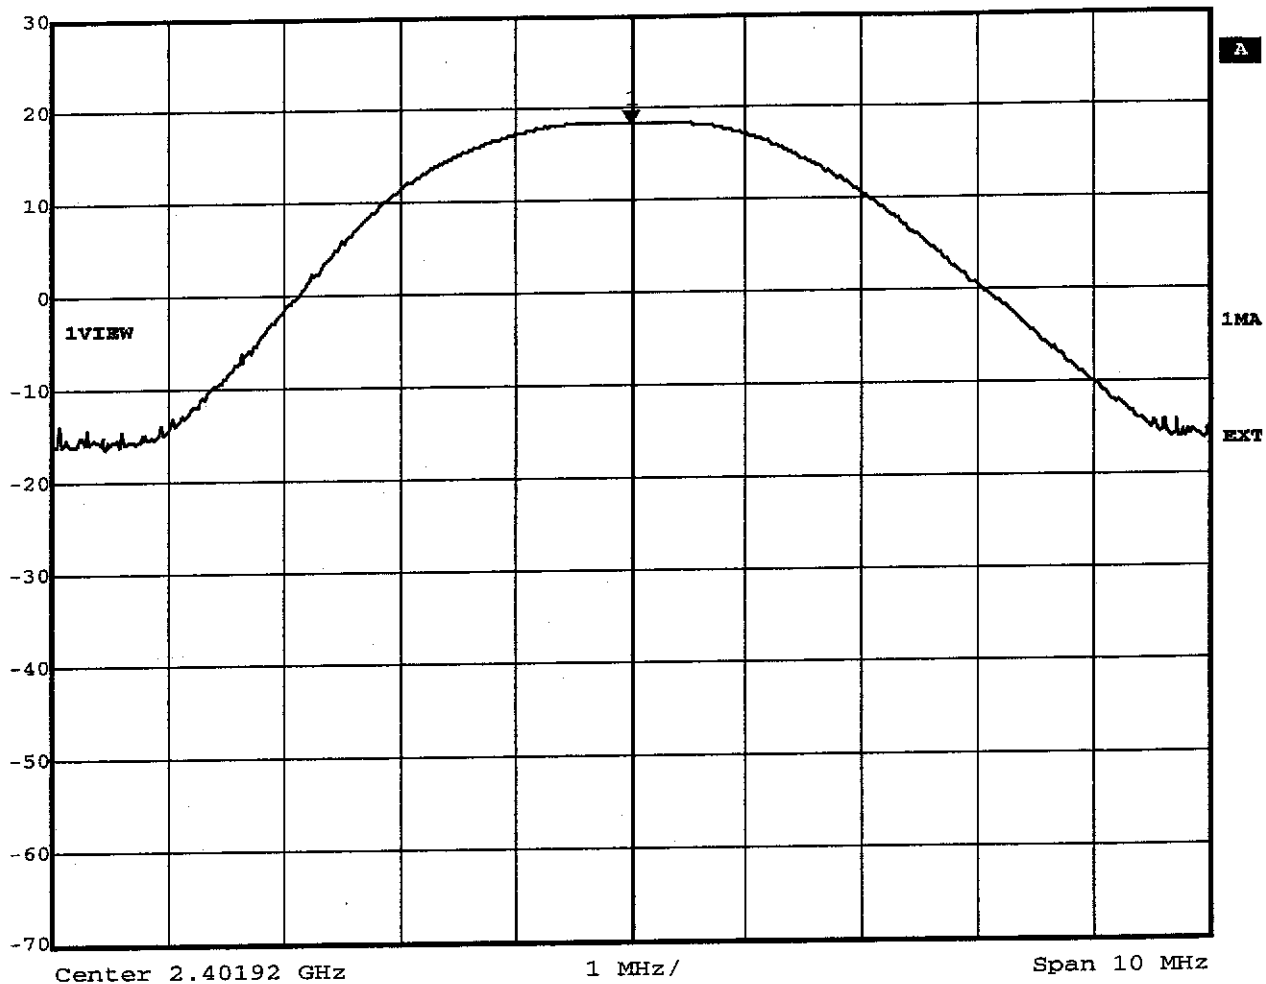

Title: Peak Output Power conducted Ch.: 0
Comment A: HM Electronics Wireless 6000 base 6000
Date: 27.JUN.2003 15:14:32




Marker 1 [T1] RBW 2 MHz RF Att 60 dB
Ref Lvl 18.68 dBm VBW 2 MHz
30 dBm 2.44177422 GHz SWT 56 ms Unit dBm

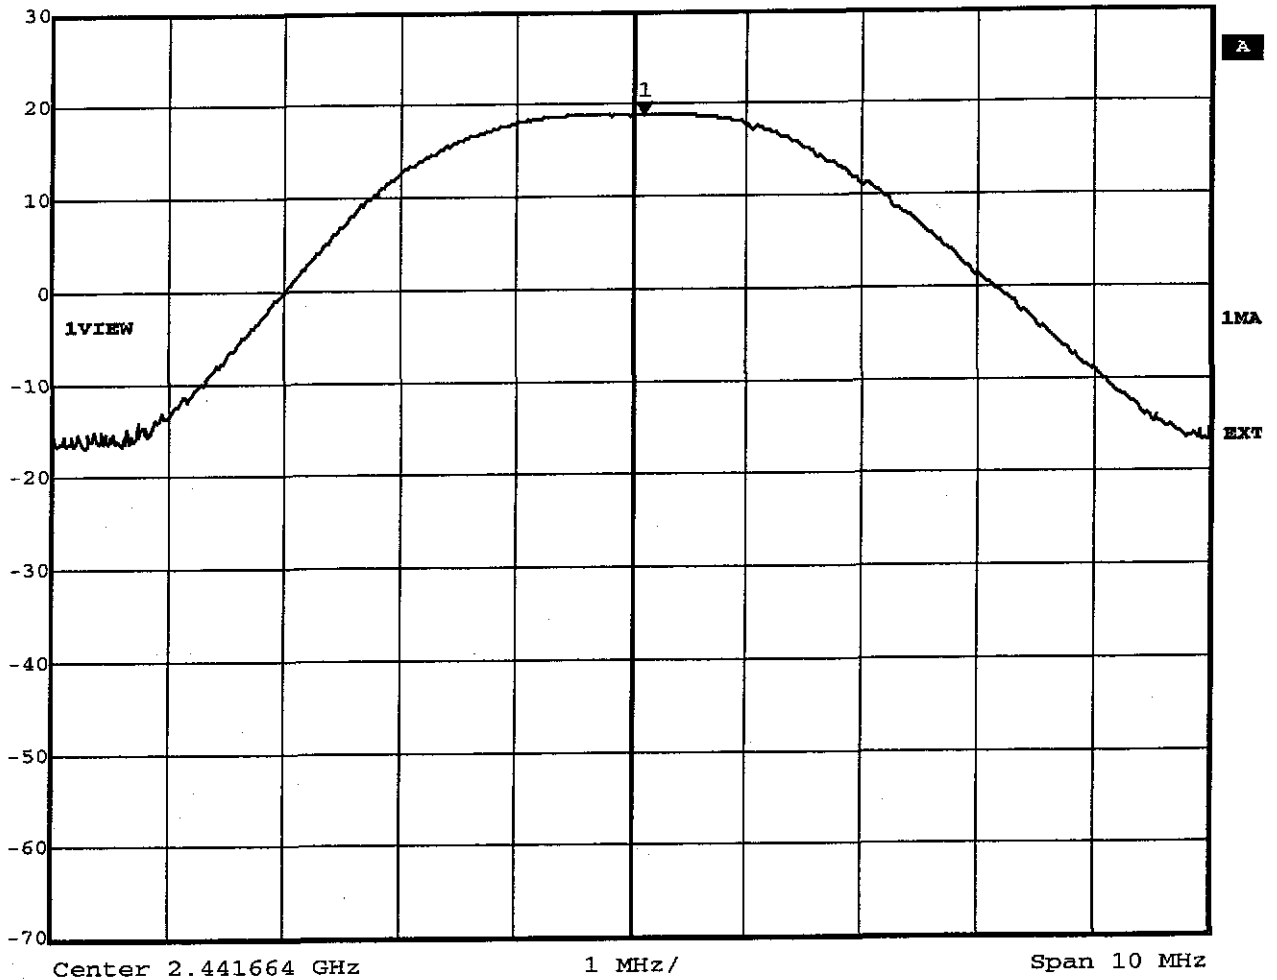

Title: Peak Output Power conducted Ch.: 23
Comment A: HM Electronics Wireless 6000 base 6000
Date: 27.JUN.2003 15:15:52




Marker 1 [T1] RBW 2 MHz RF Att 60 dB
Ref Lvl 18.60 dBm VBW 2 MHz
30 dBm 2.48155830 GHz SWT 56 ms Unit dBm

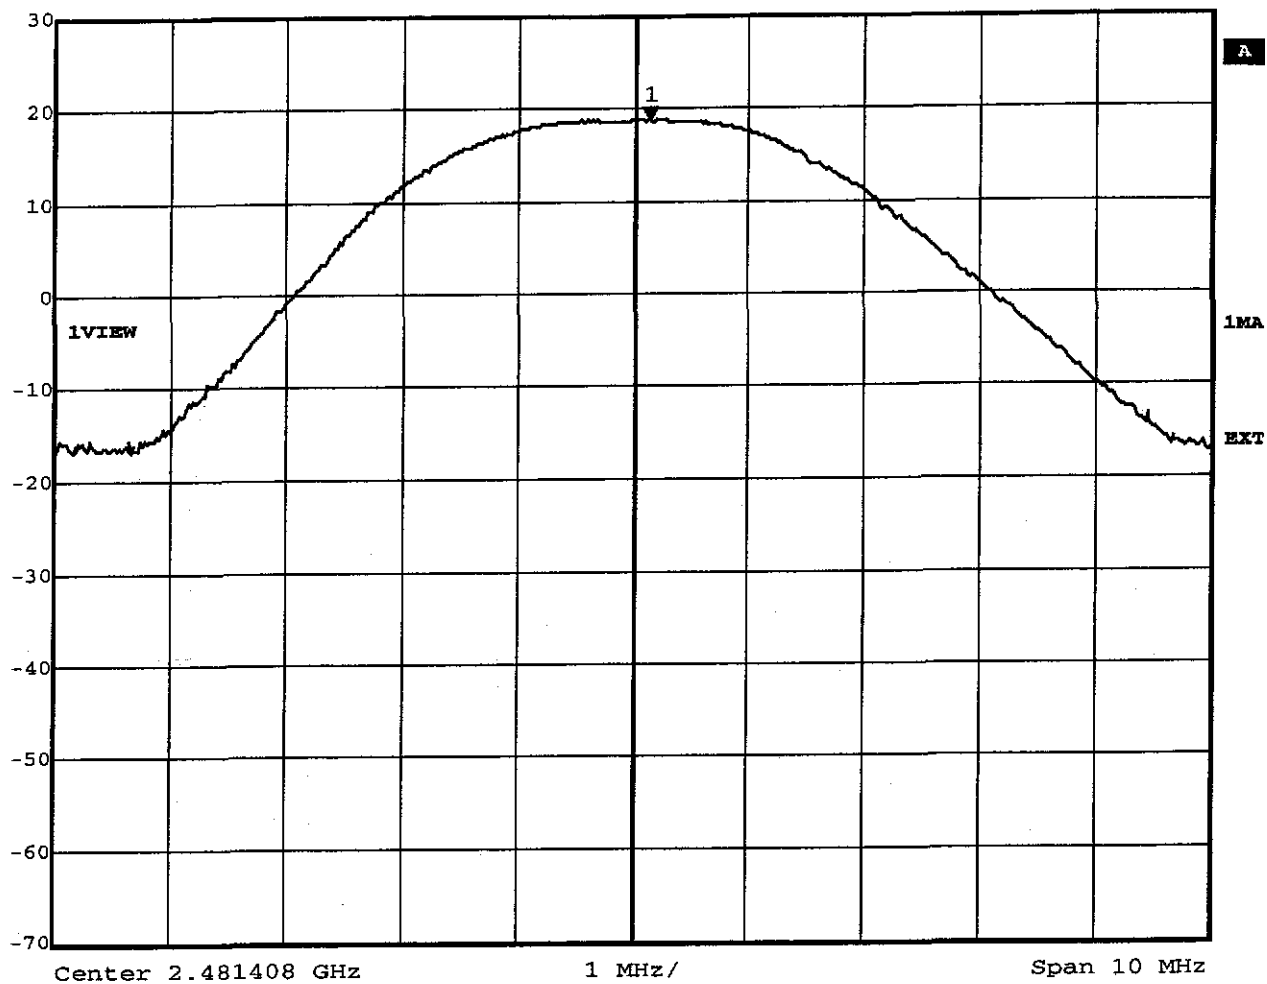

Title: Peak Output Power conducted Ch.: 46
Comment A: HM Electronics Wireless 6000 base 6000
Date: 27.JUN.2003 15:16:44


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 18.96dBm, RBW: 5MHz

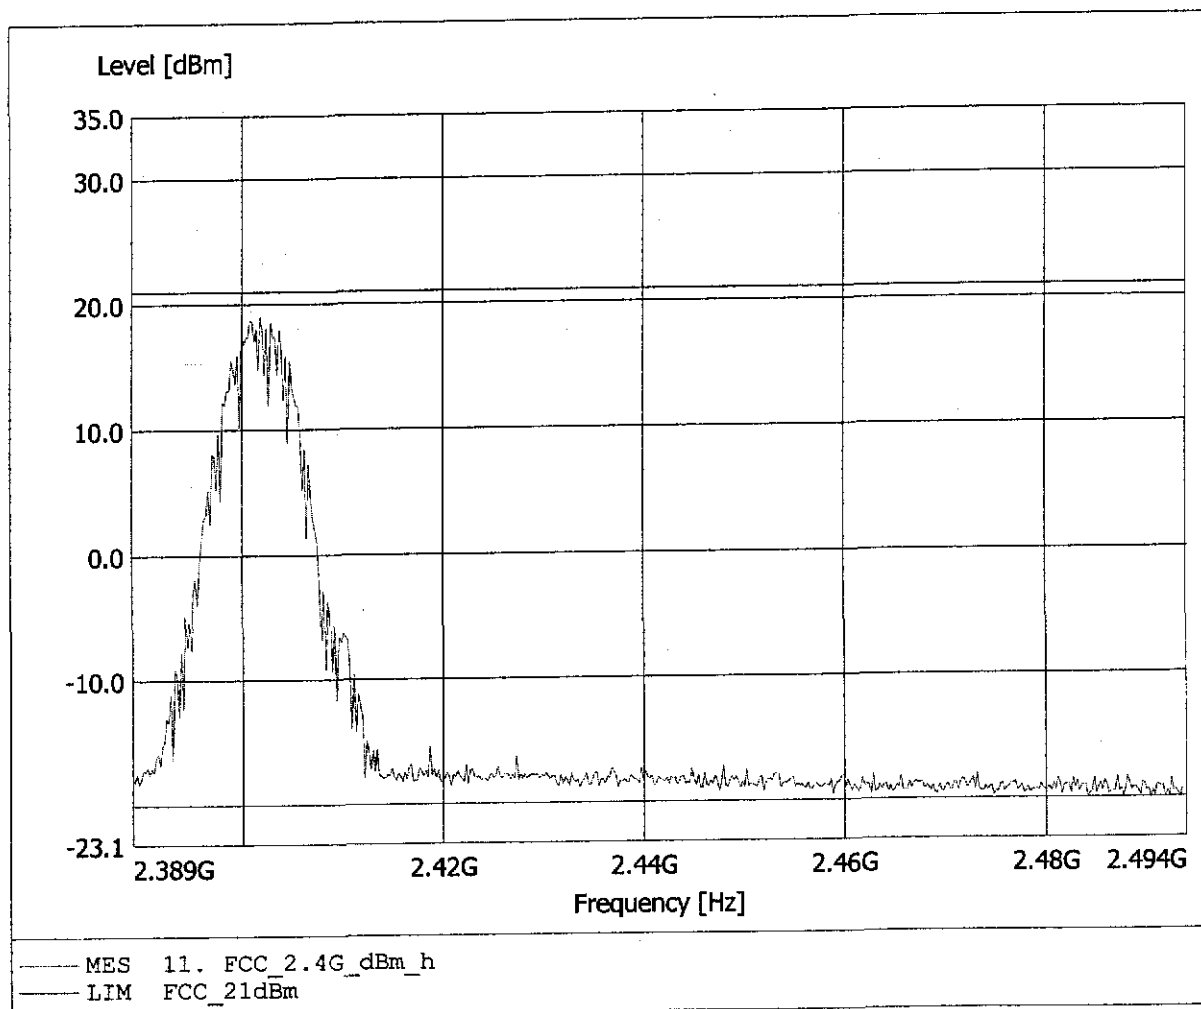


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 1.40dBm, RBW: 5MHz

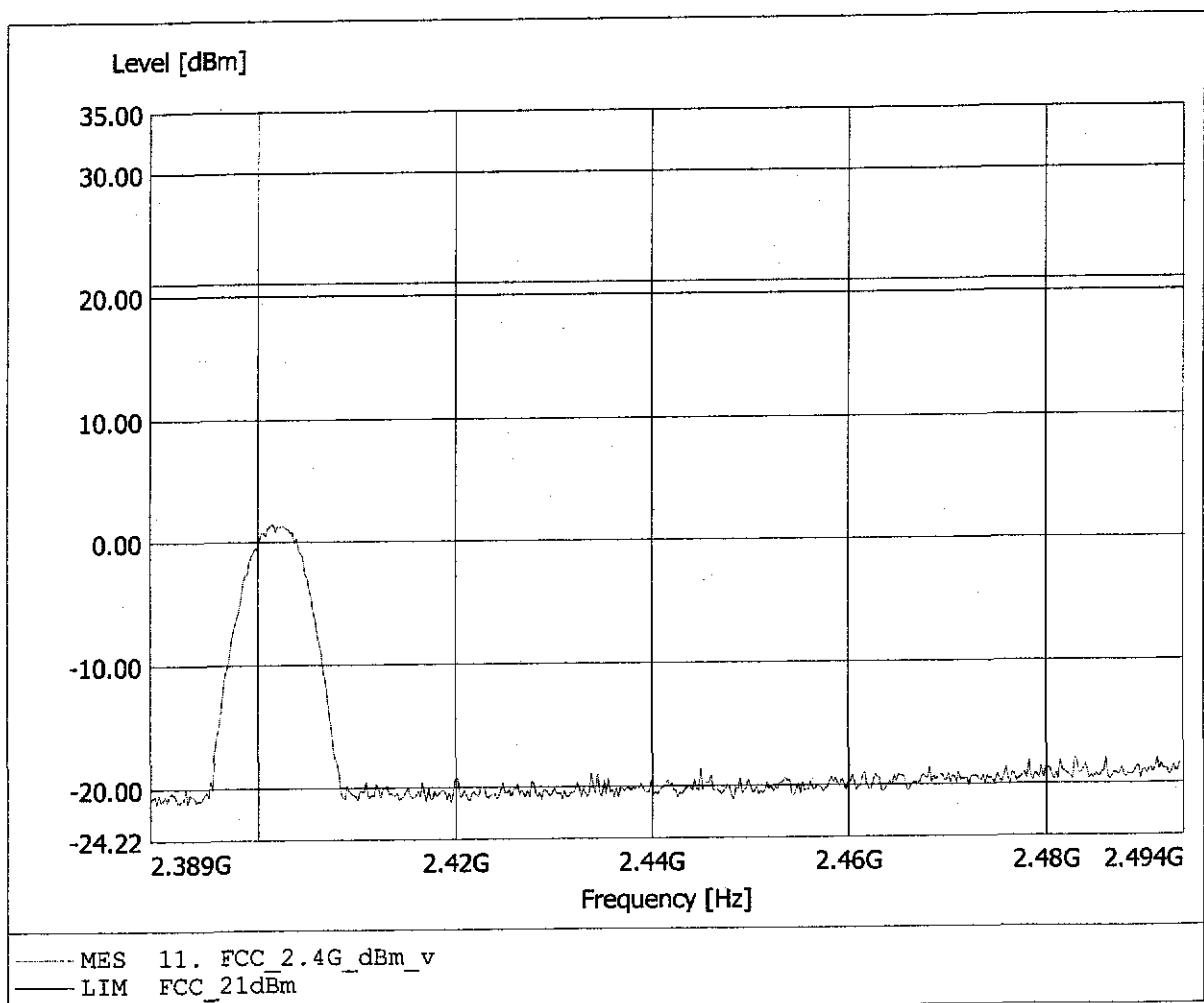


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 18.79dBm, RBW: 5MHz

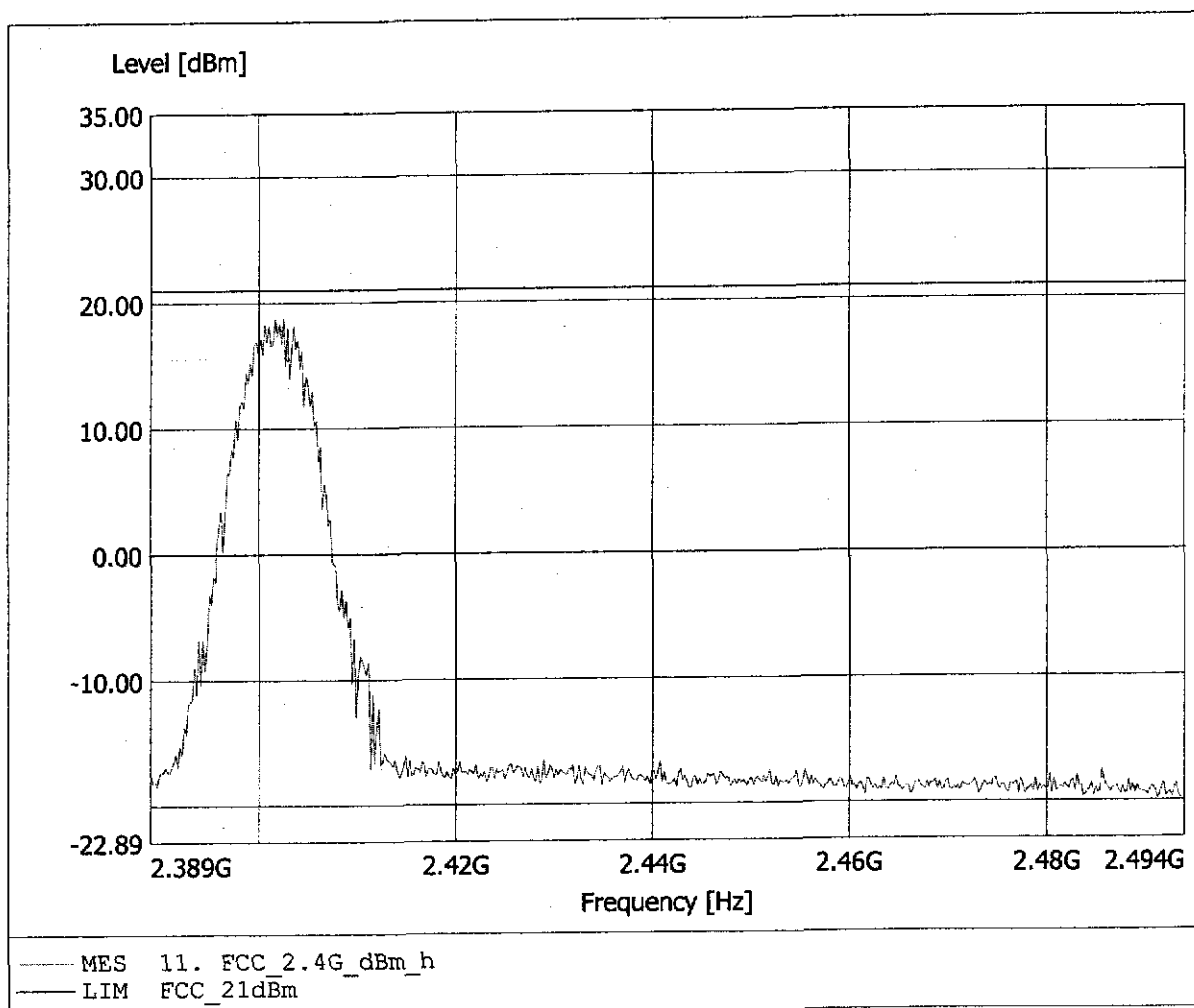


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 1.58dBm, RBW: 5MHz

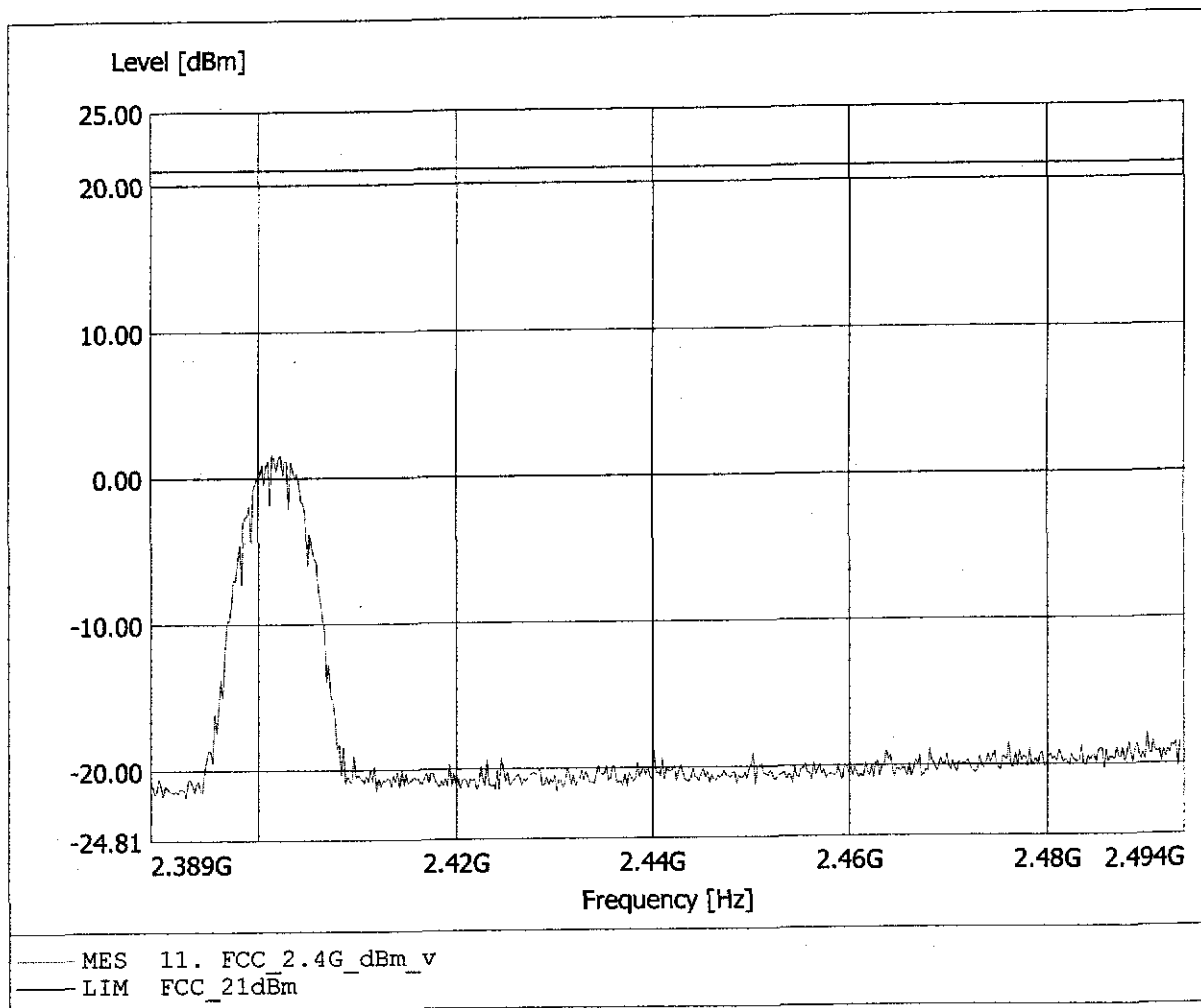


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 18.81dBm, RBW: 5MHz

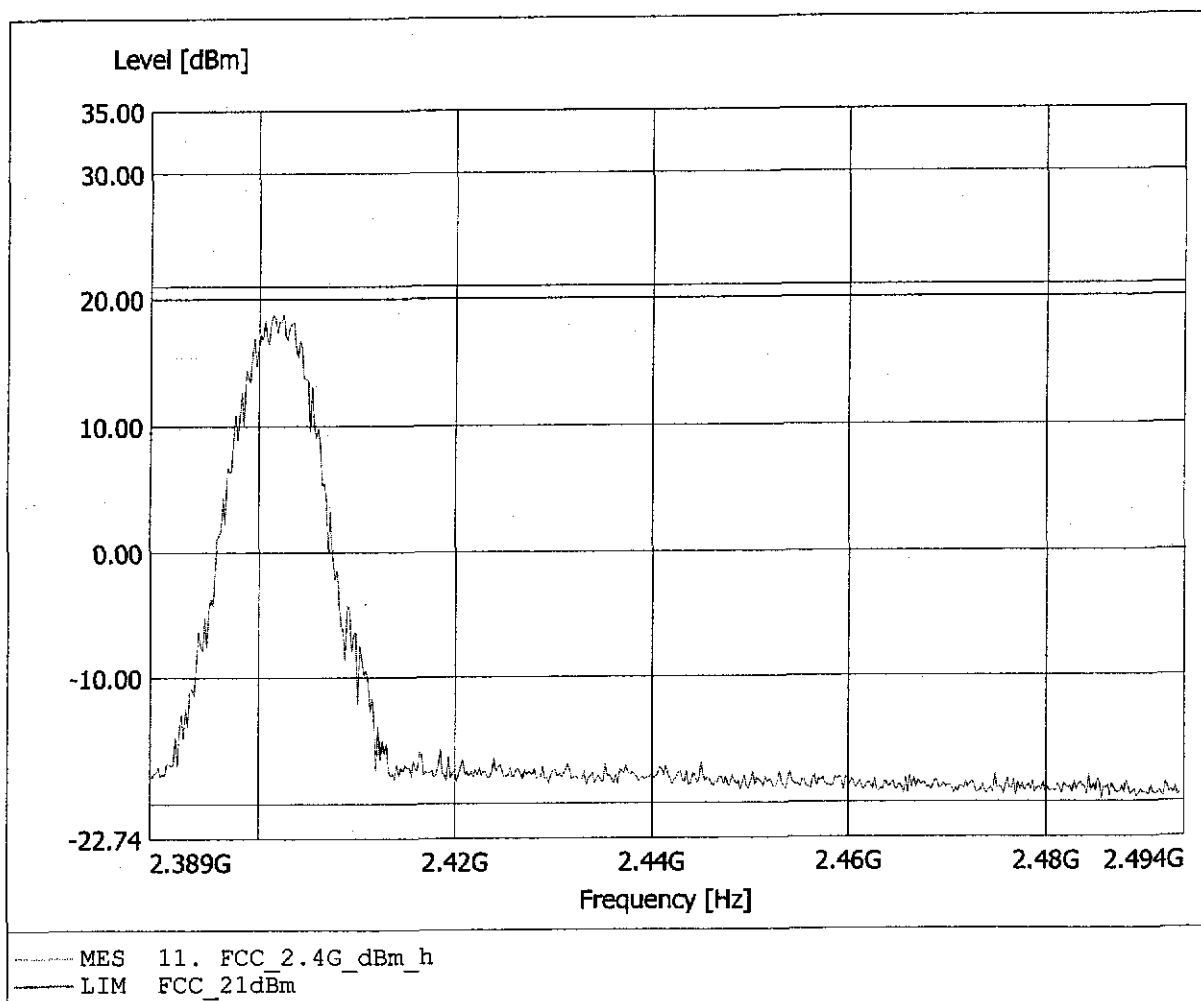


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.89dBm, RBW: 5MHz

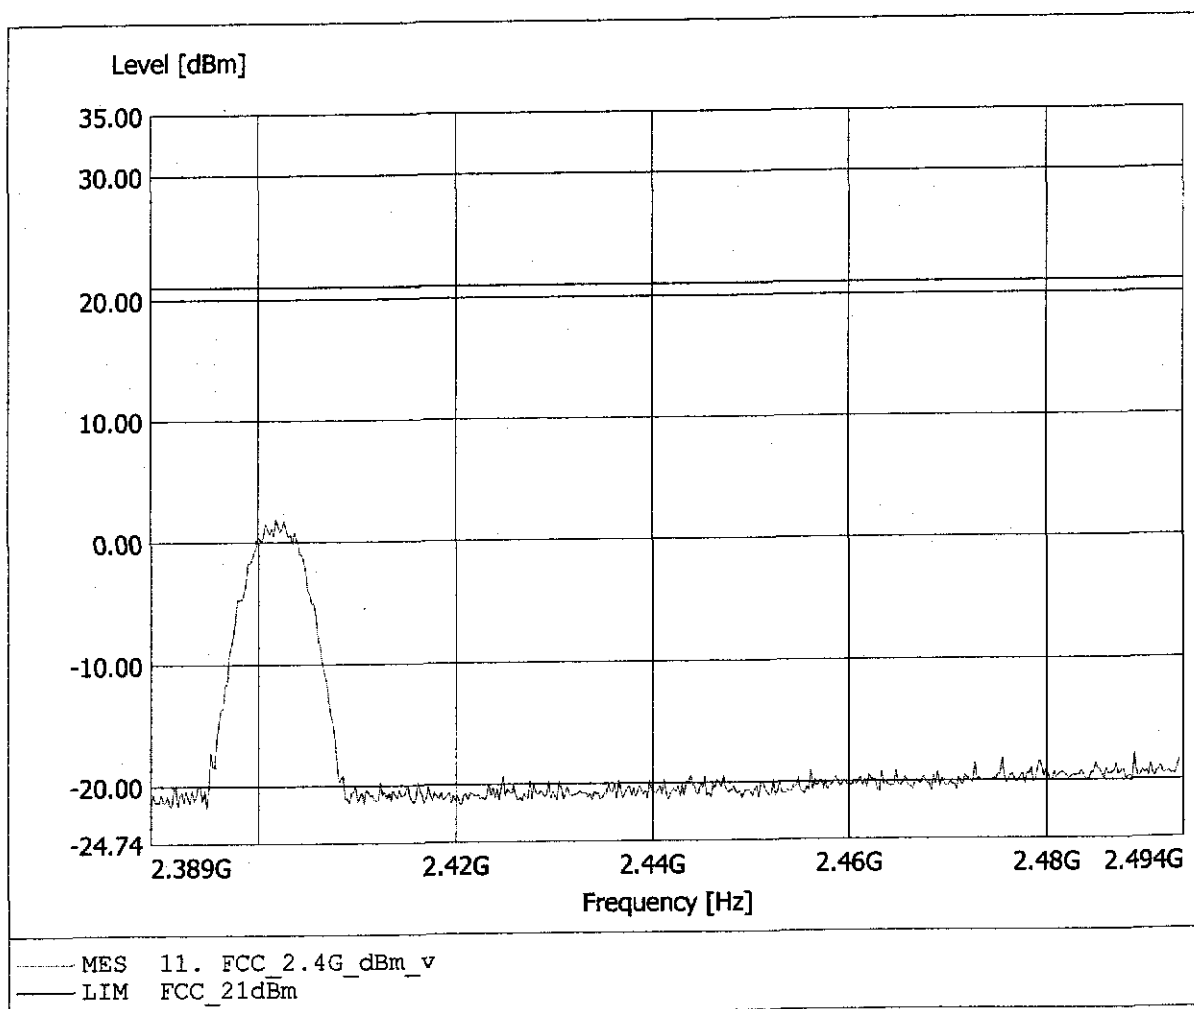


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 19.40dBm, RBW: 5MHz

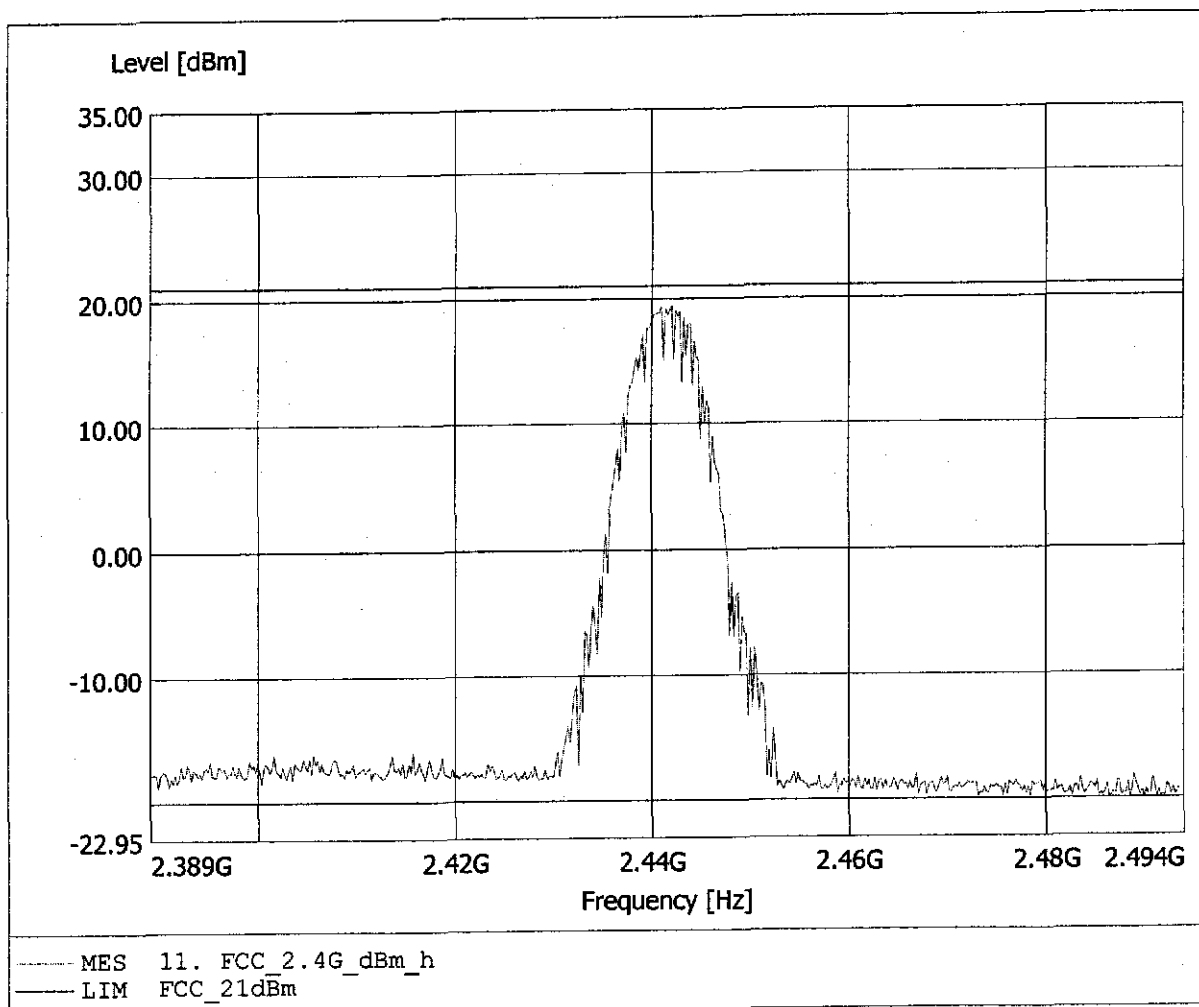


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 4.39dBm, RBW: 5MHz

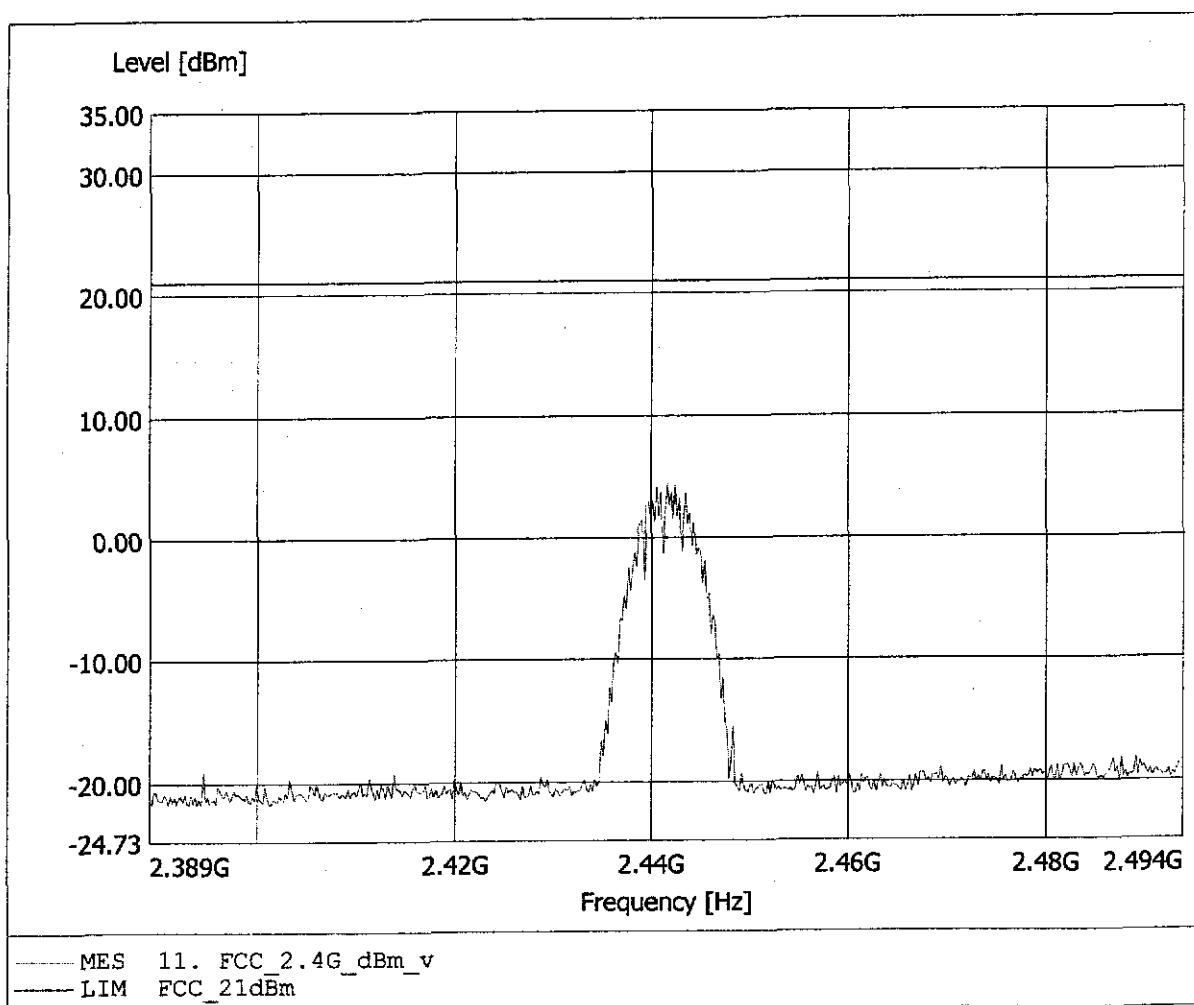


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 19.35dBm, RBW: 5MHz

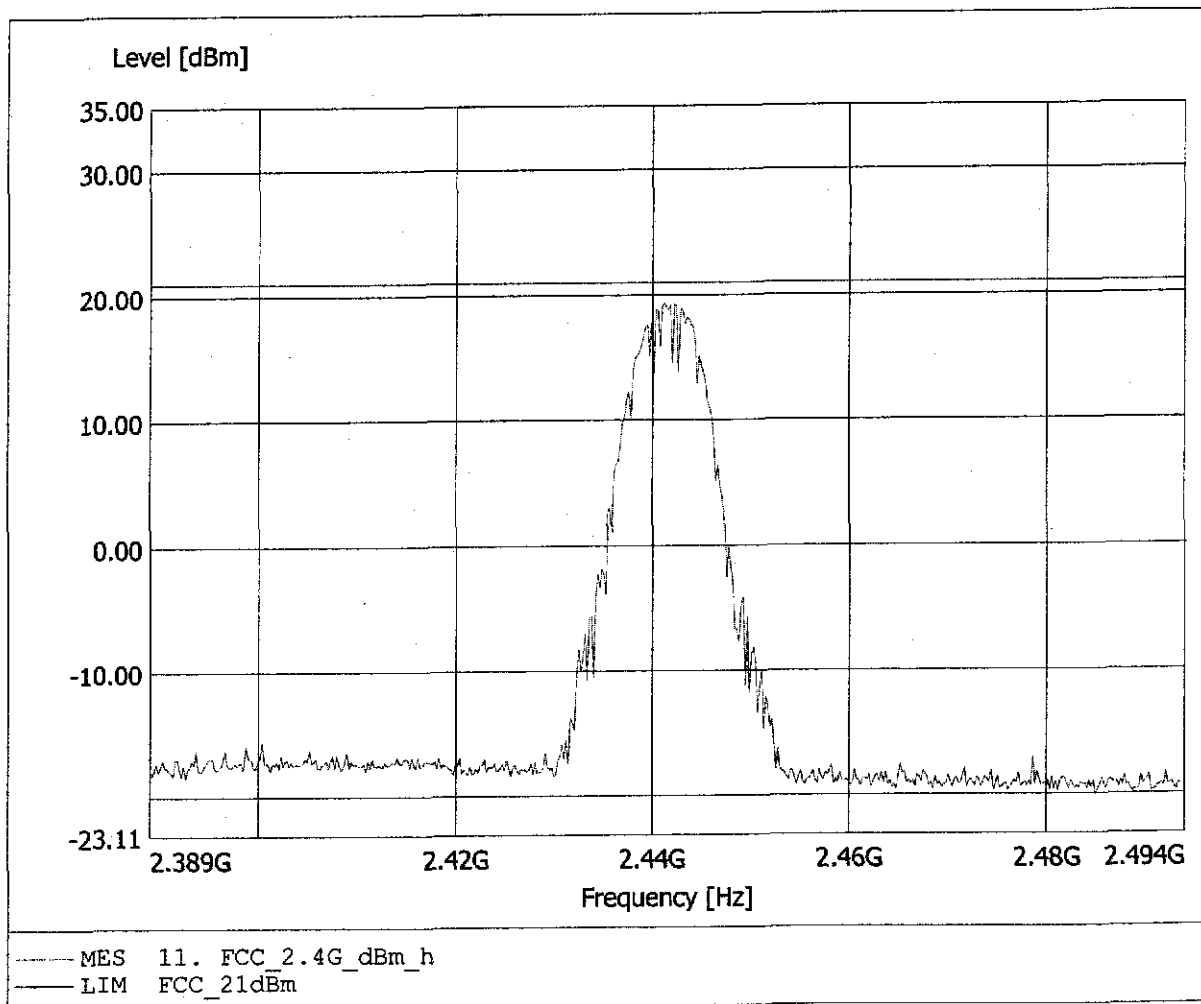


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 4.22dBm, RBW: 5MHz

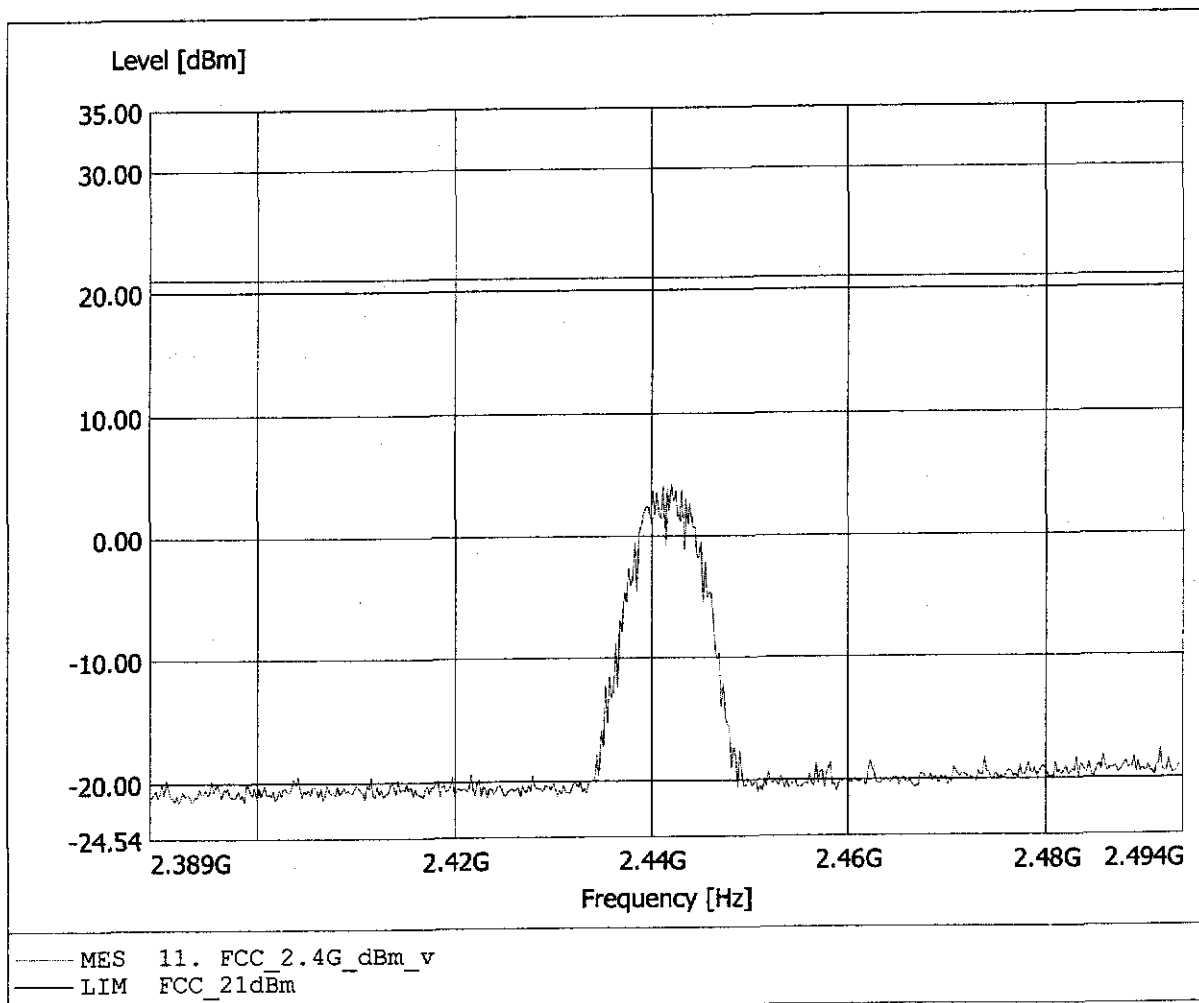


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 19.28dBm, RBW: 5MHz

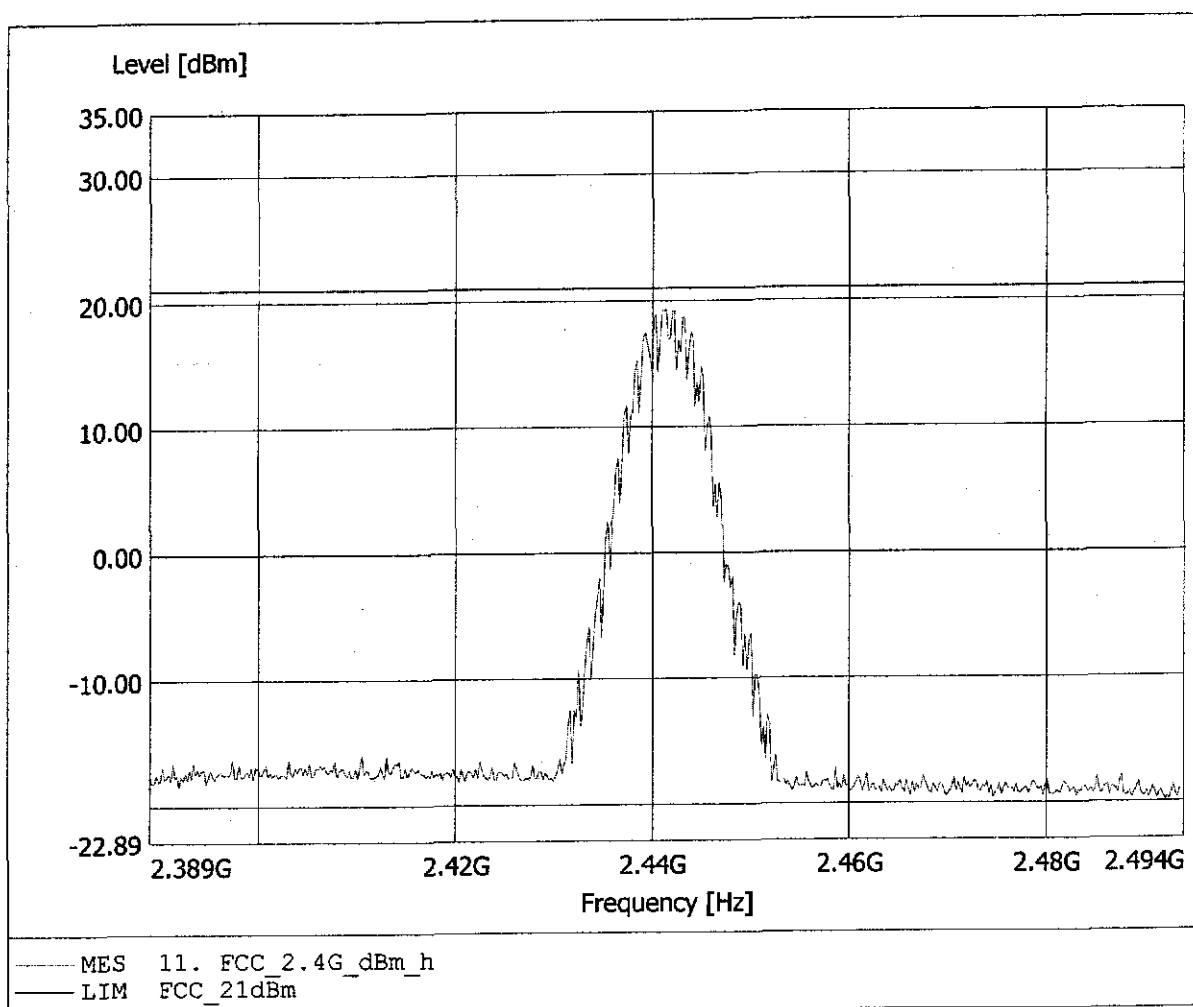


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 4.10dBm, RBW: 5MHz

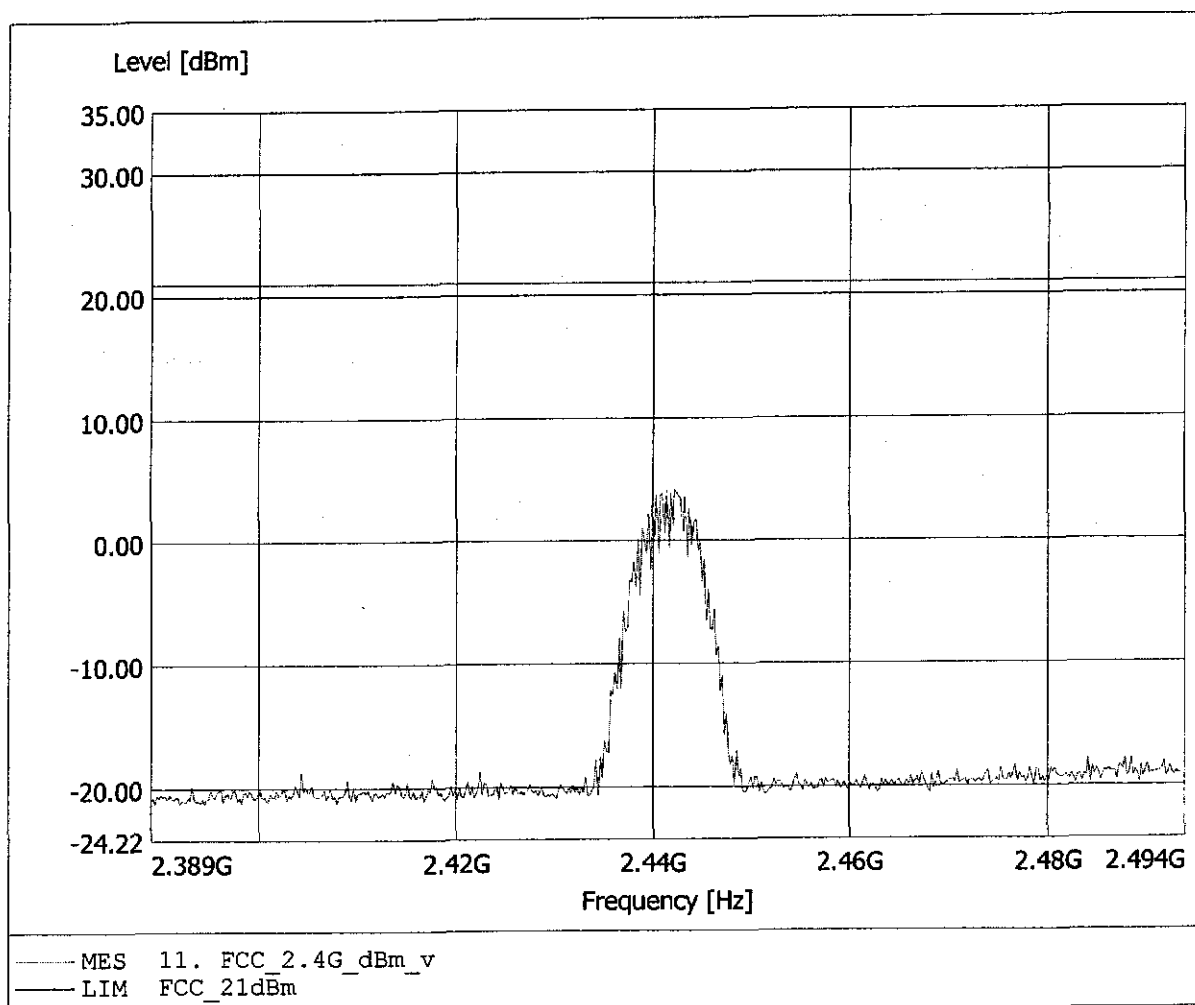


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 19.41dBm, RBW: 5MHz

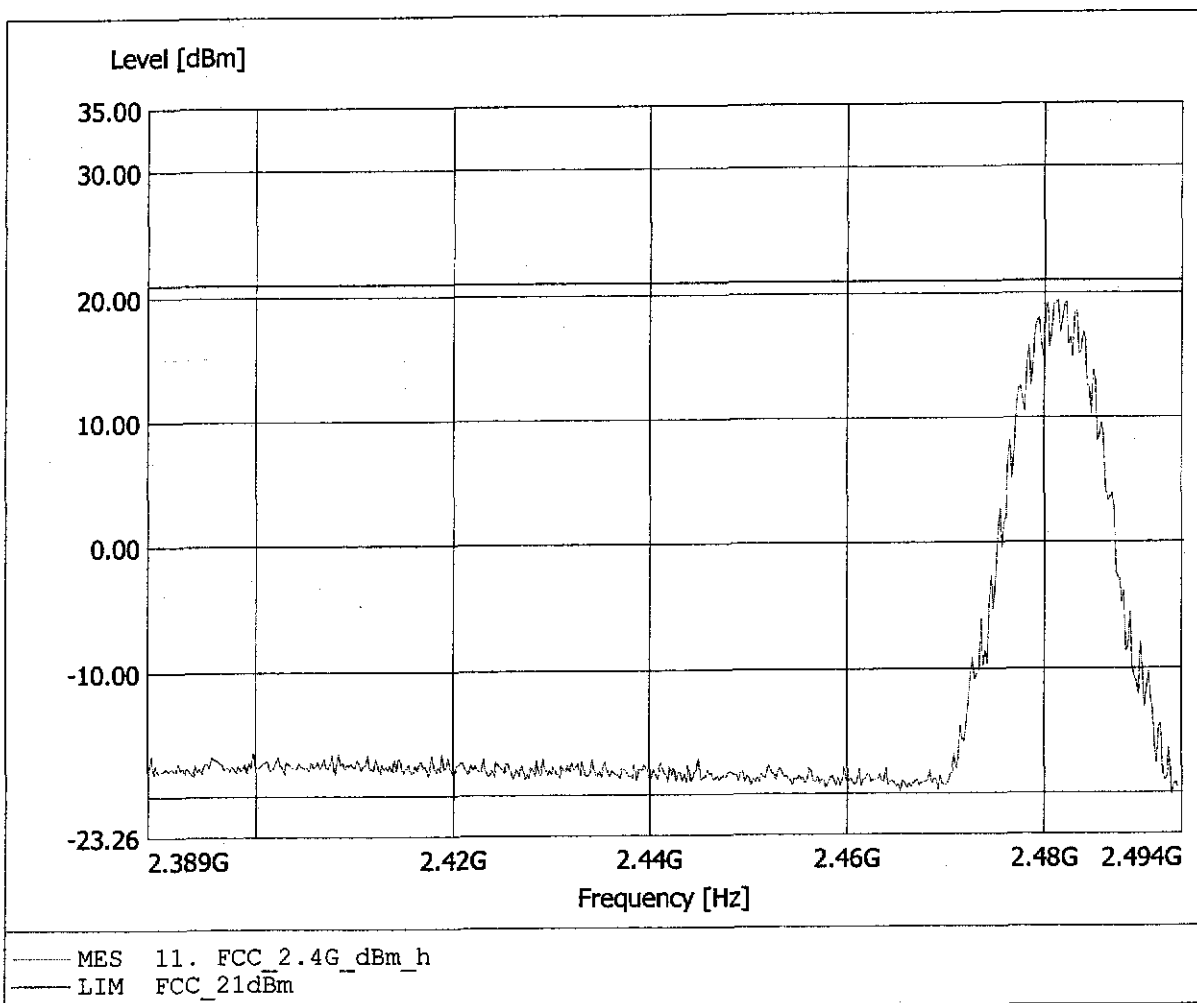


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 4.89dBm, RBW: 5MHz

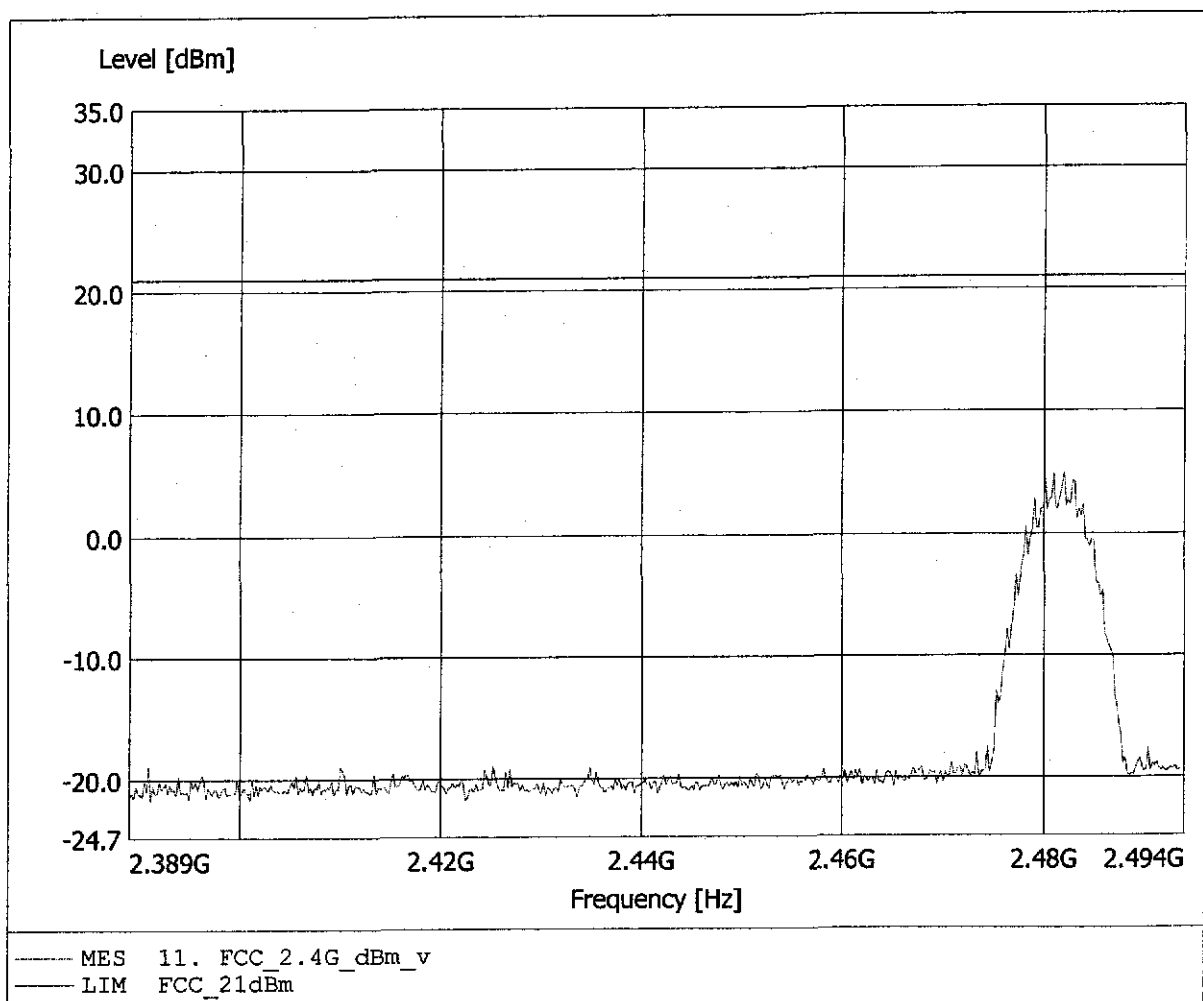


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 19.69dBm, RBW: 5MHz

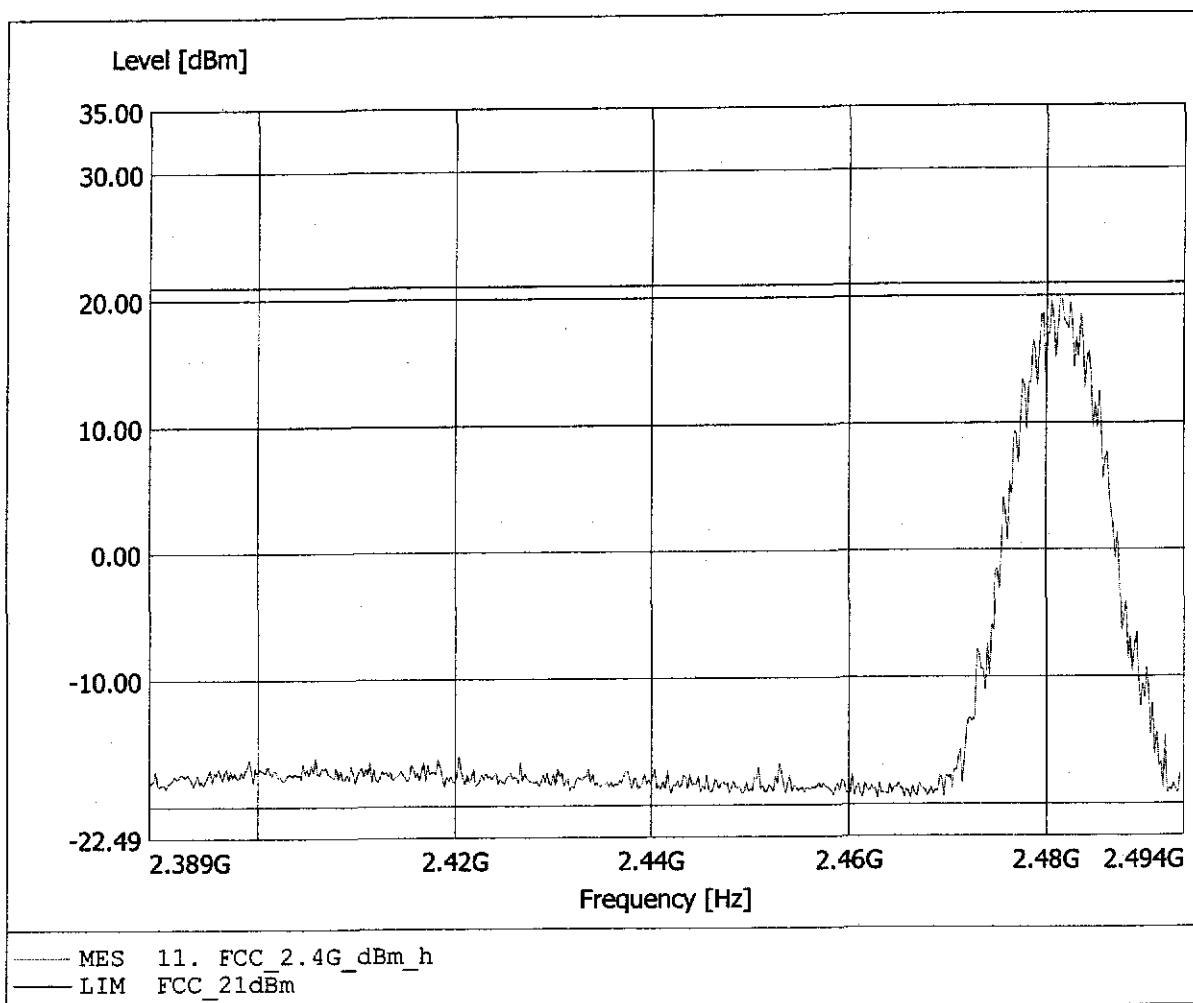


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 5.36dBm, RBW: 5MHz

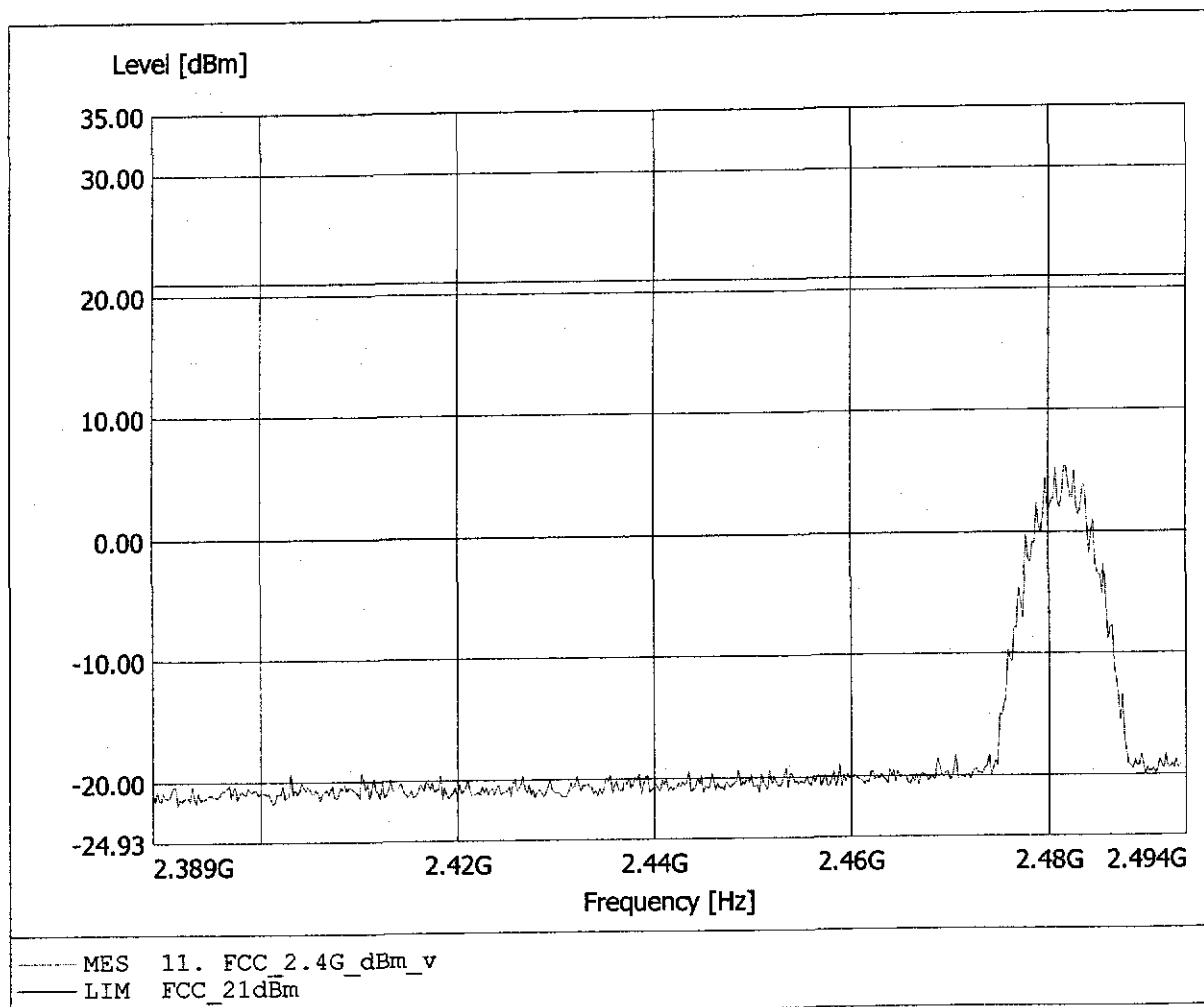


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Thom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 19.75dBm, RBW: 5MHz

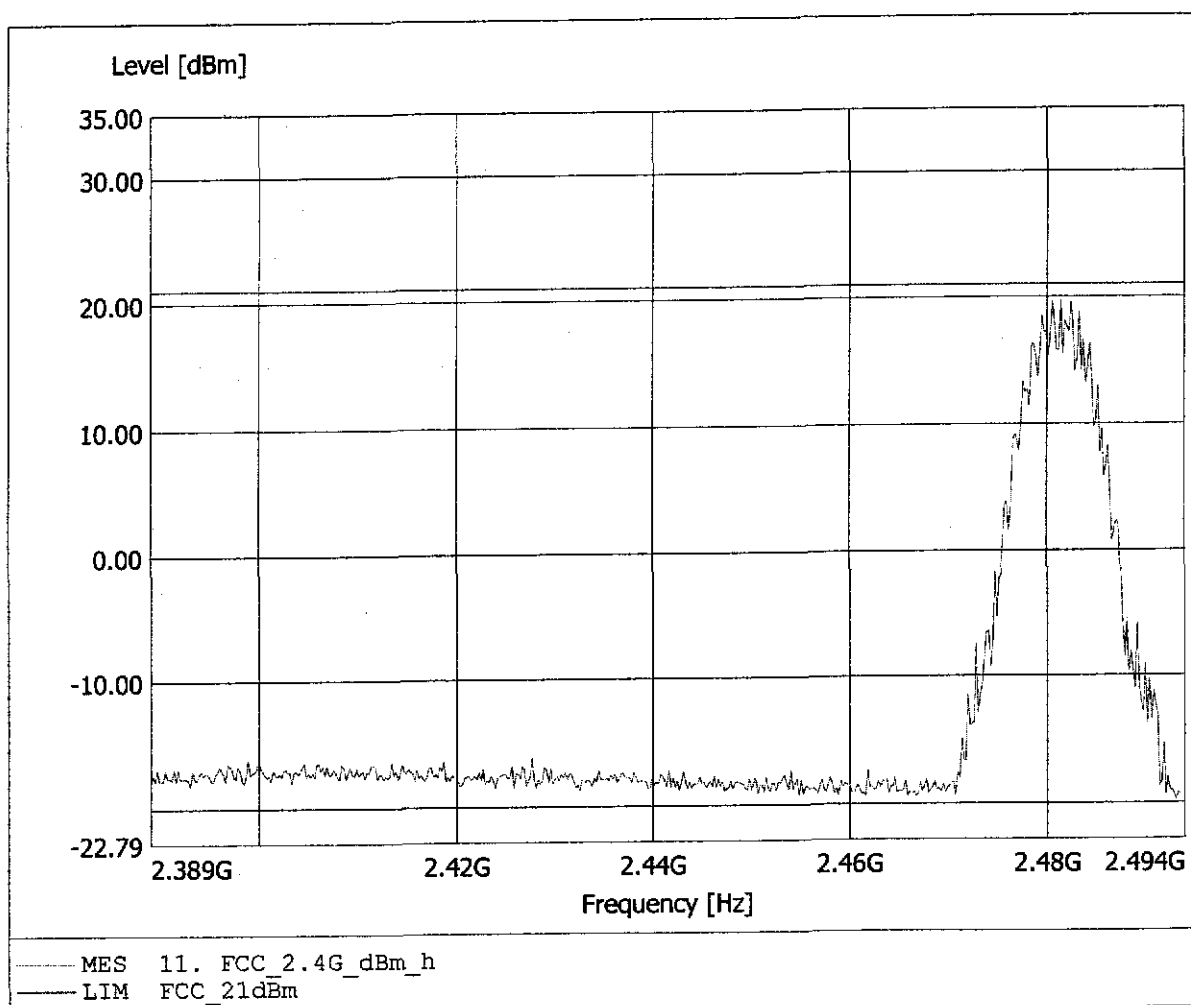


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 1
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 5.42dBm, RBW: 5MHz

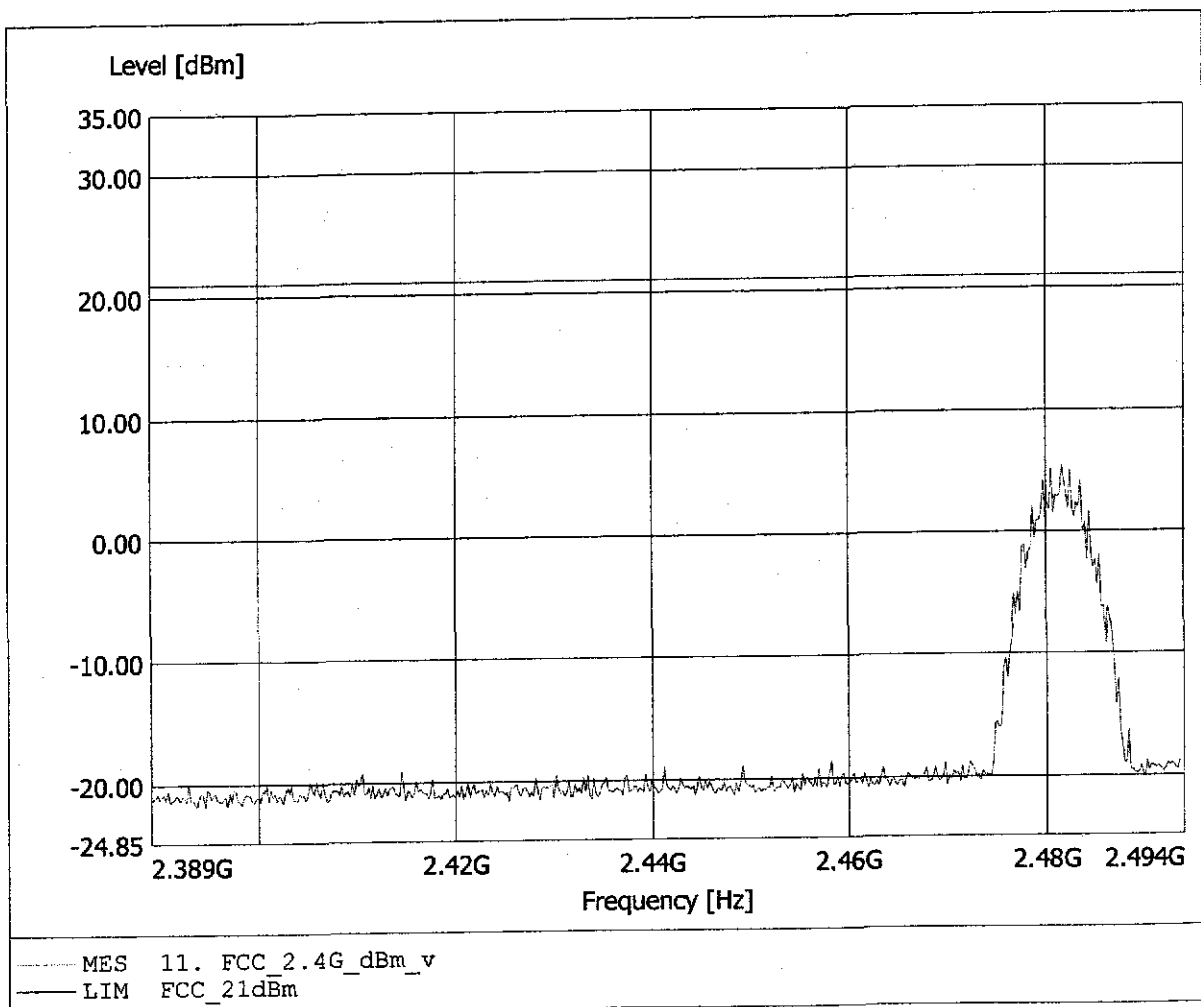


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 12.68dBm, RBW: 5MHz

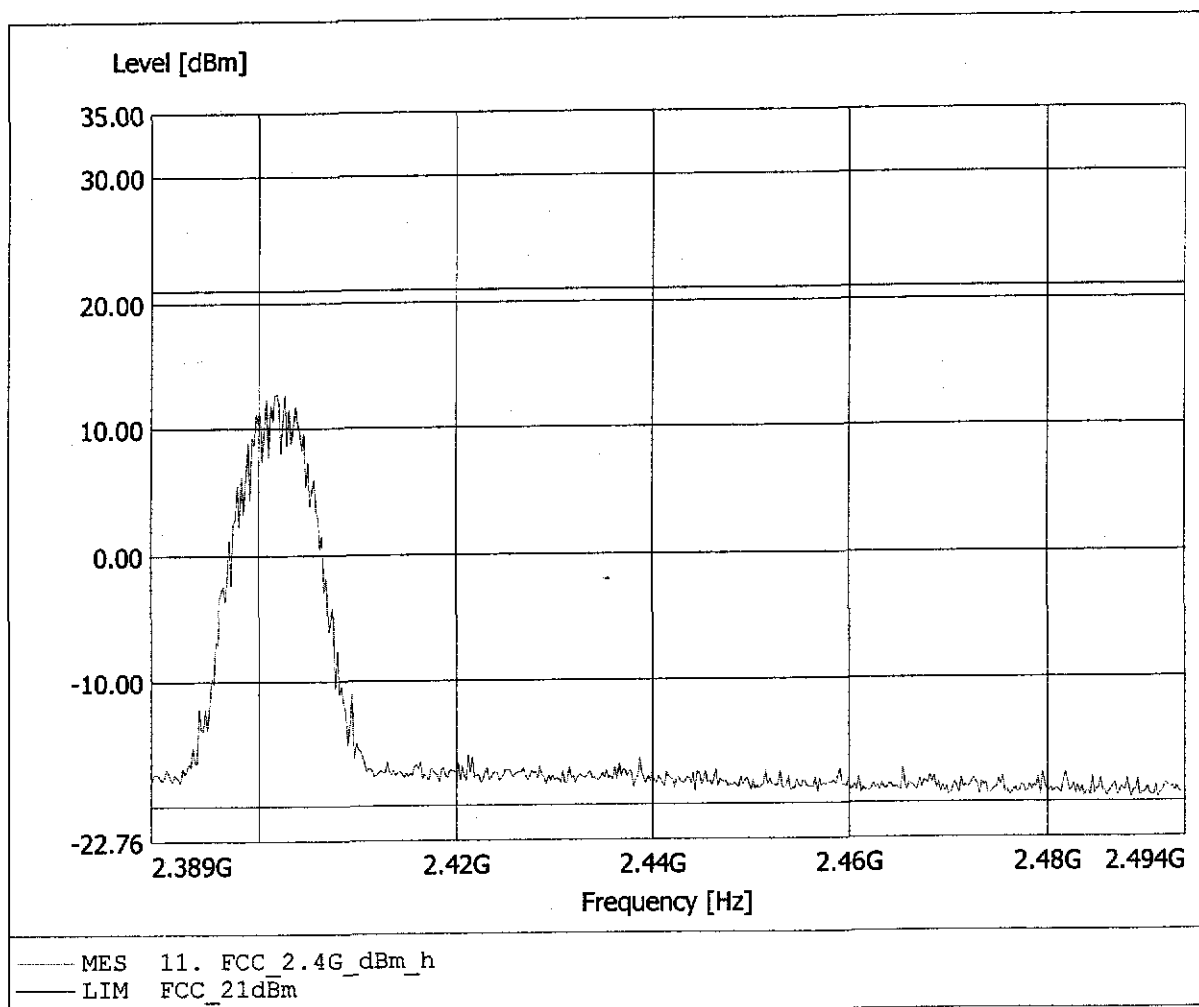


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 13.08dBm, RBW: 5MHz

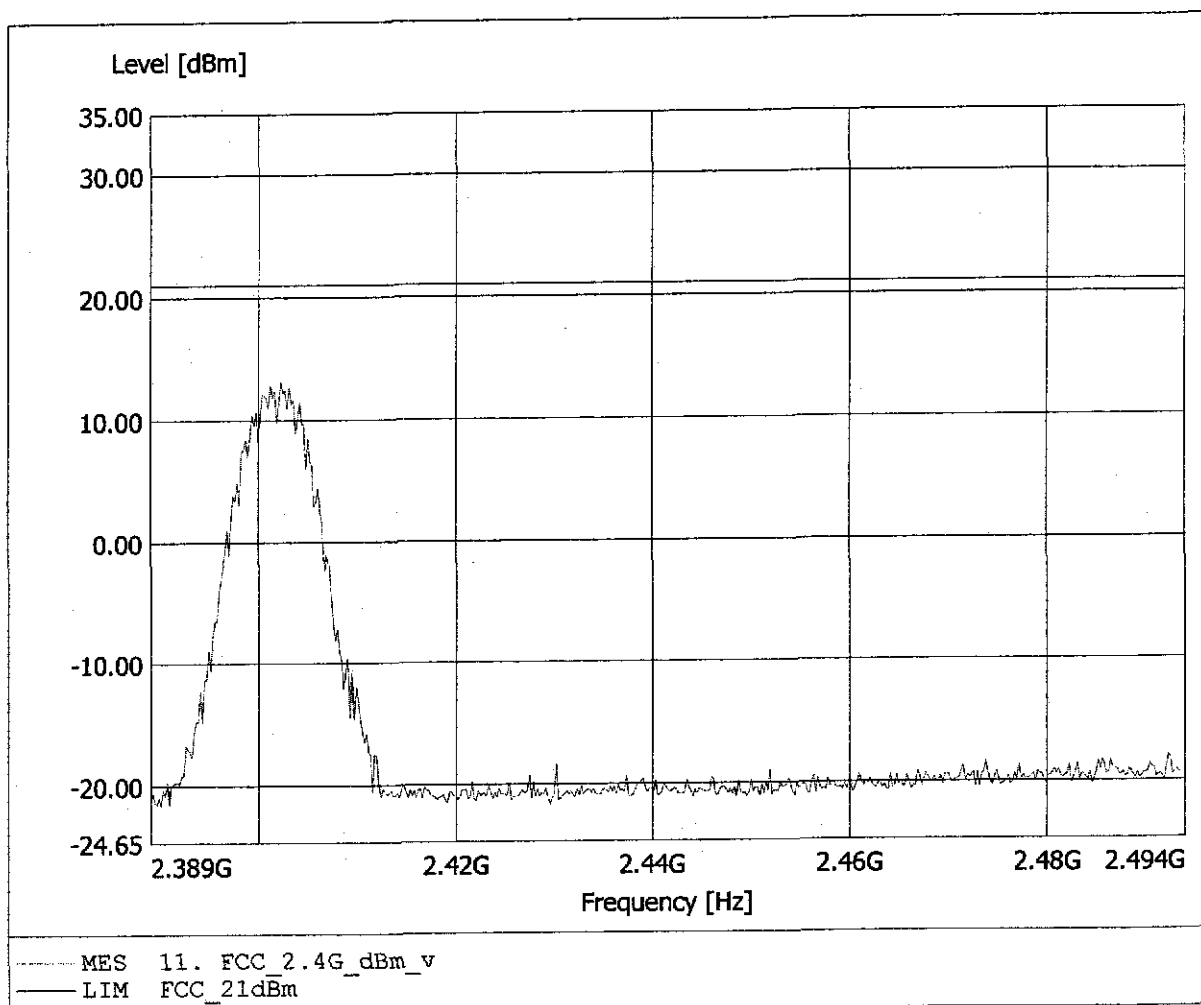


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 12.67dBm, RBW: 5MHz

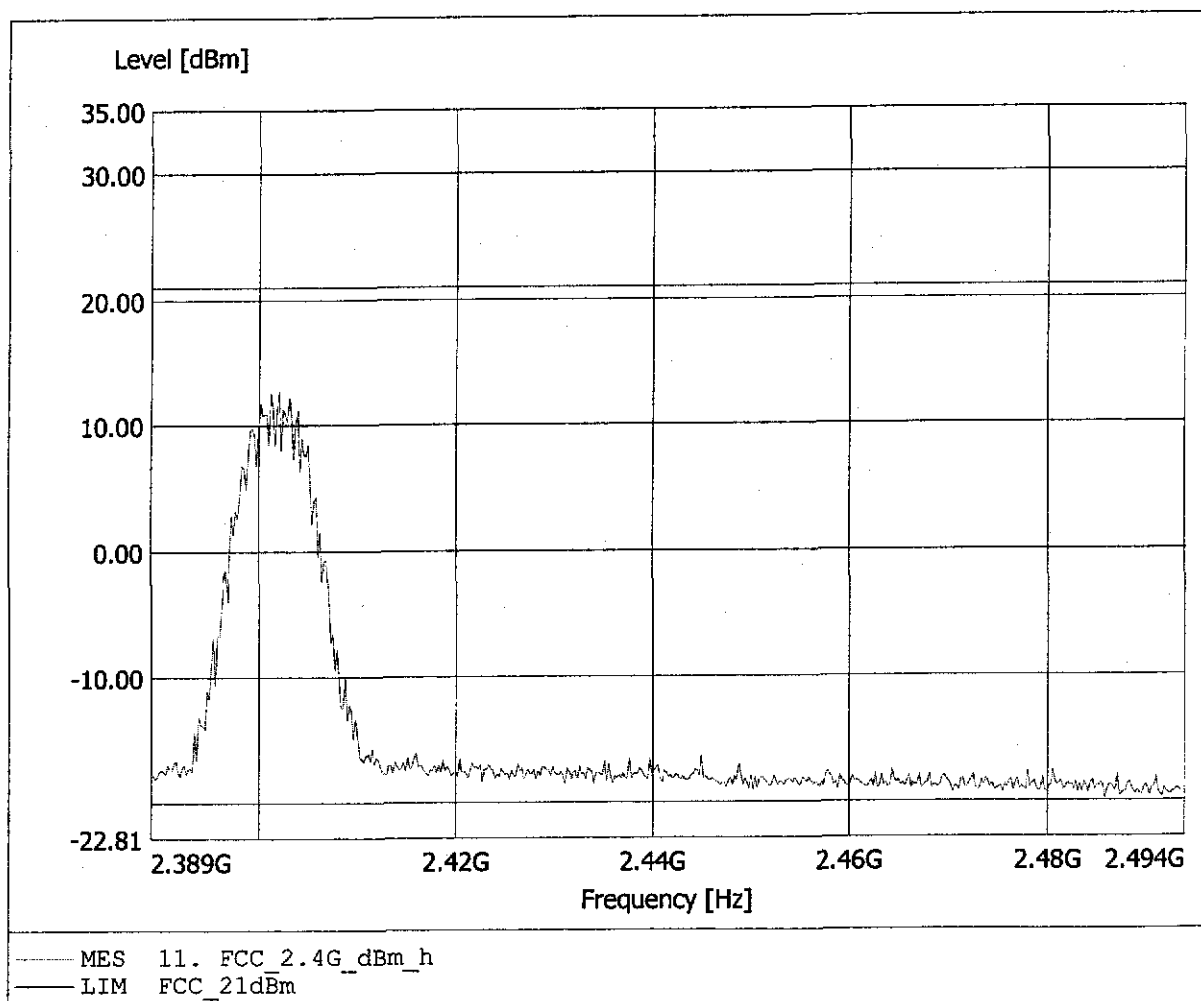


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 13.09dBm, RBW: 5MHz

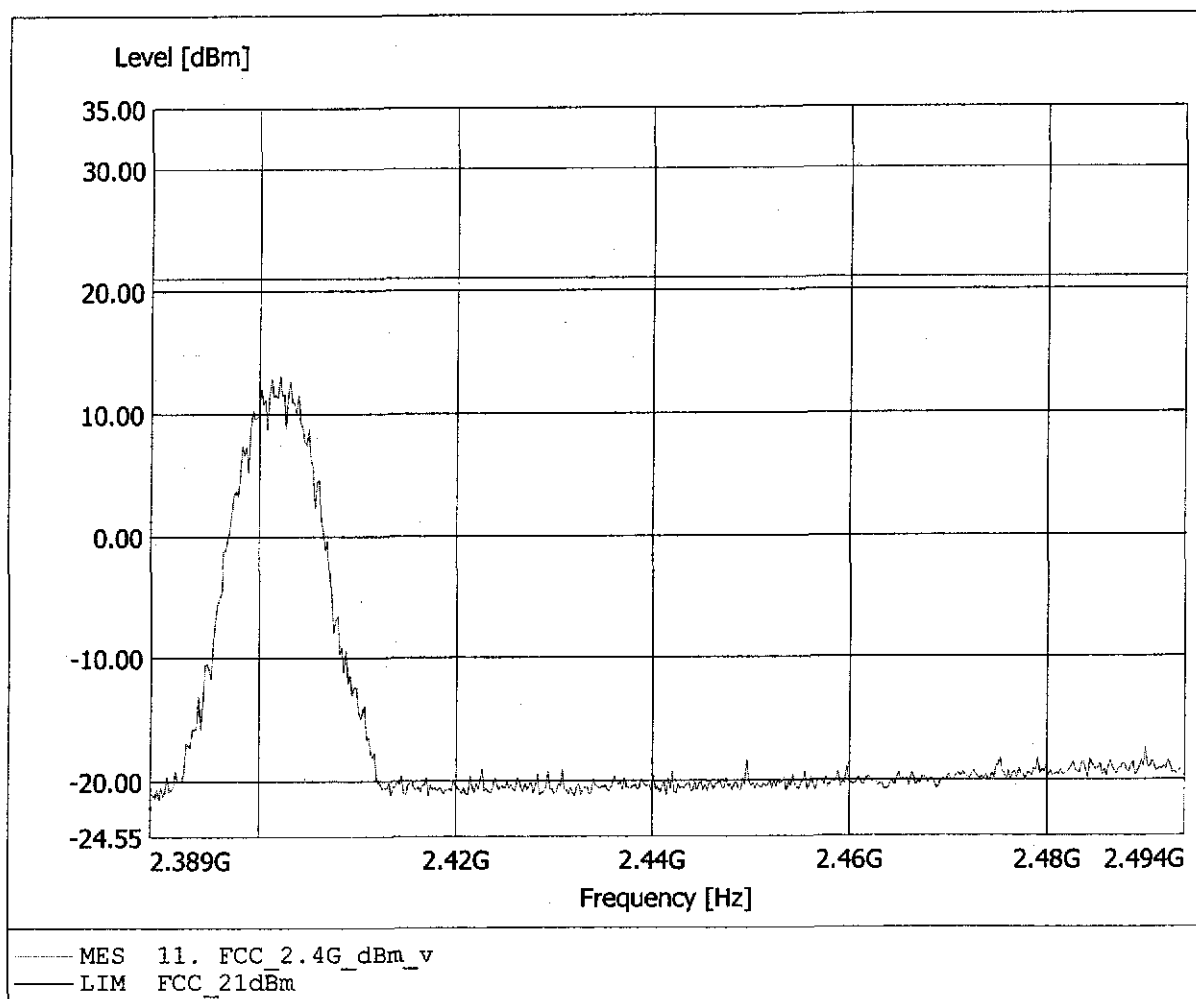


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 12.50dBm, RBW: 5MHz

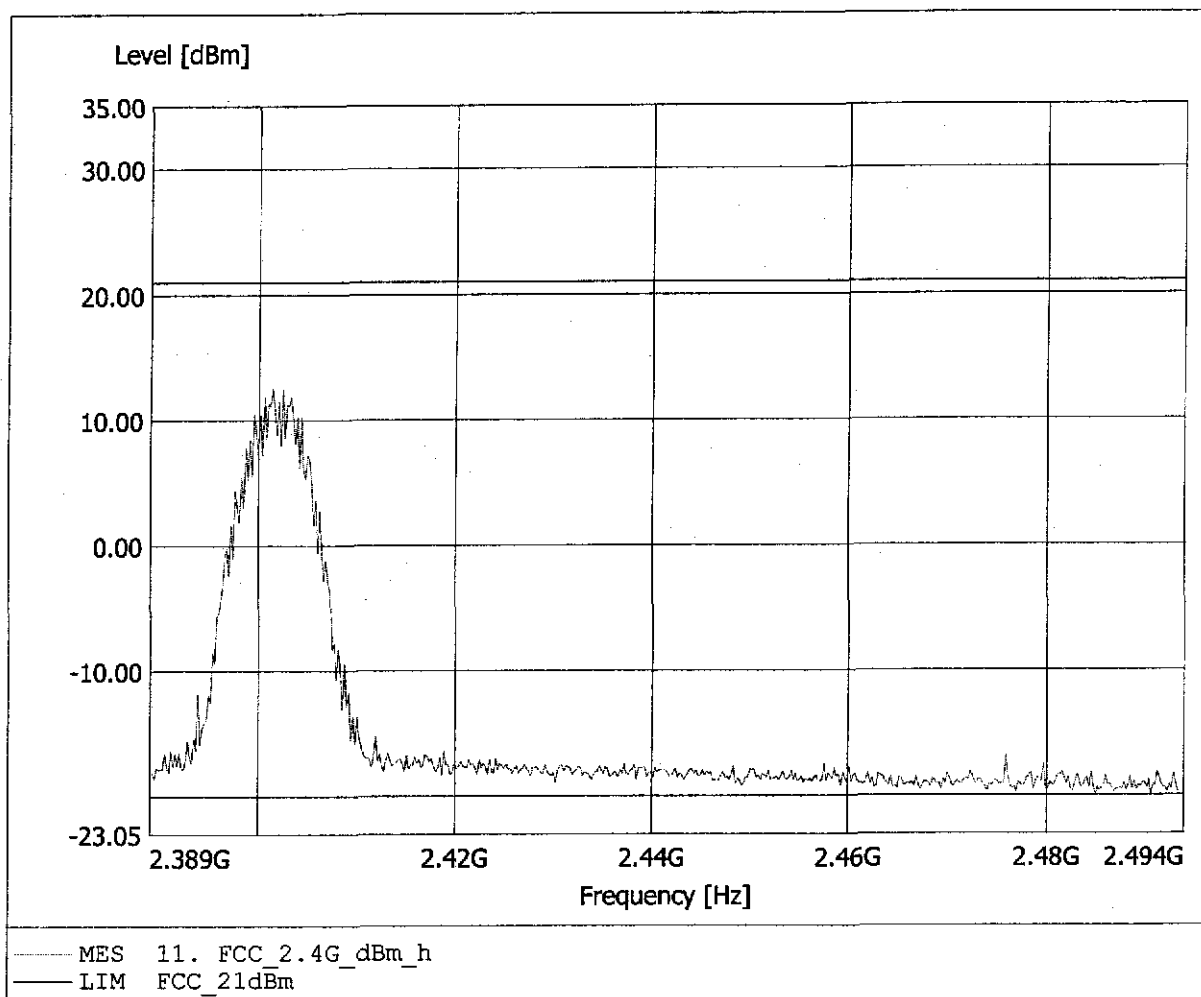


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 0 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 13.20dBm, RBW: 5MHz

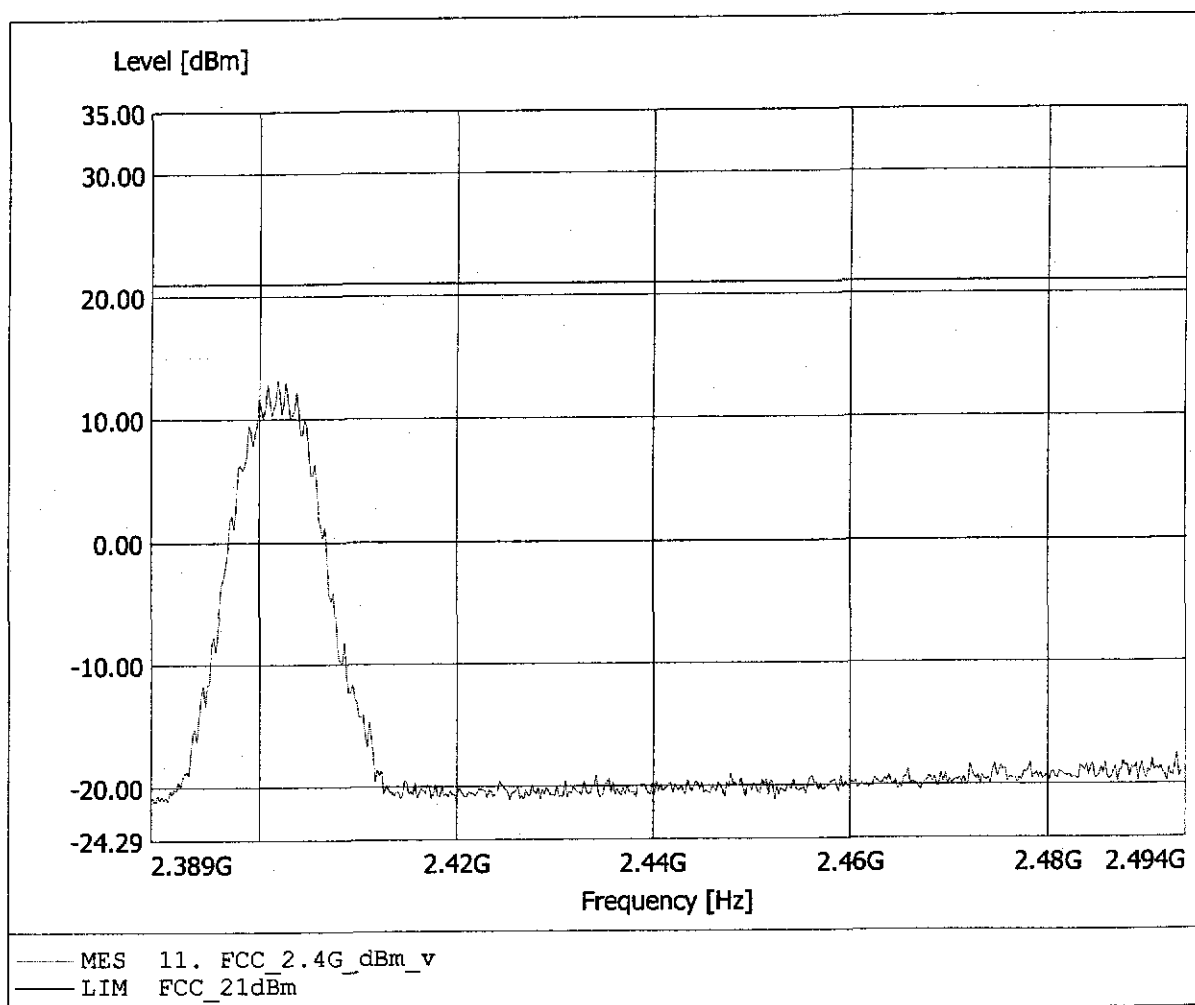


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 10.12dBm, RBW: 5MHz

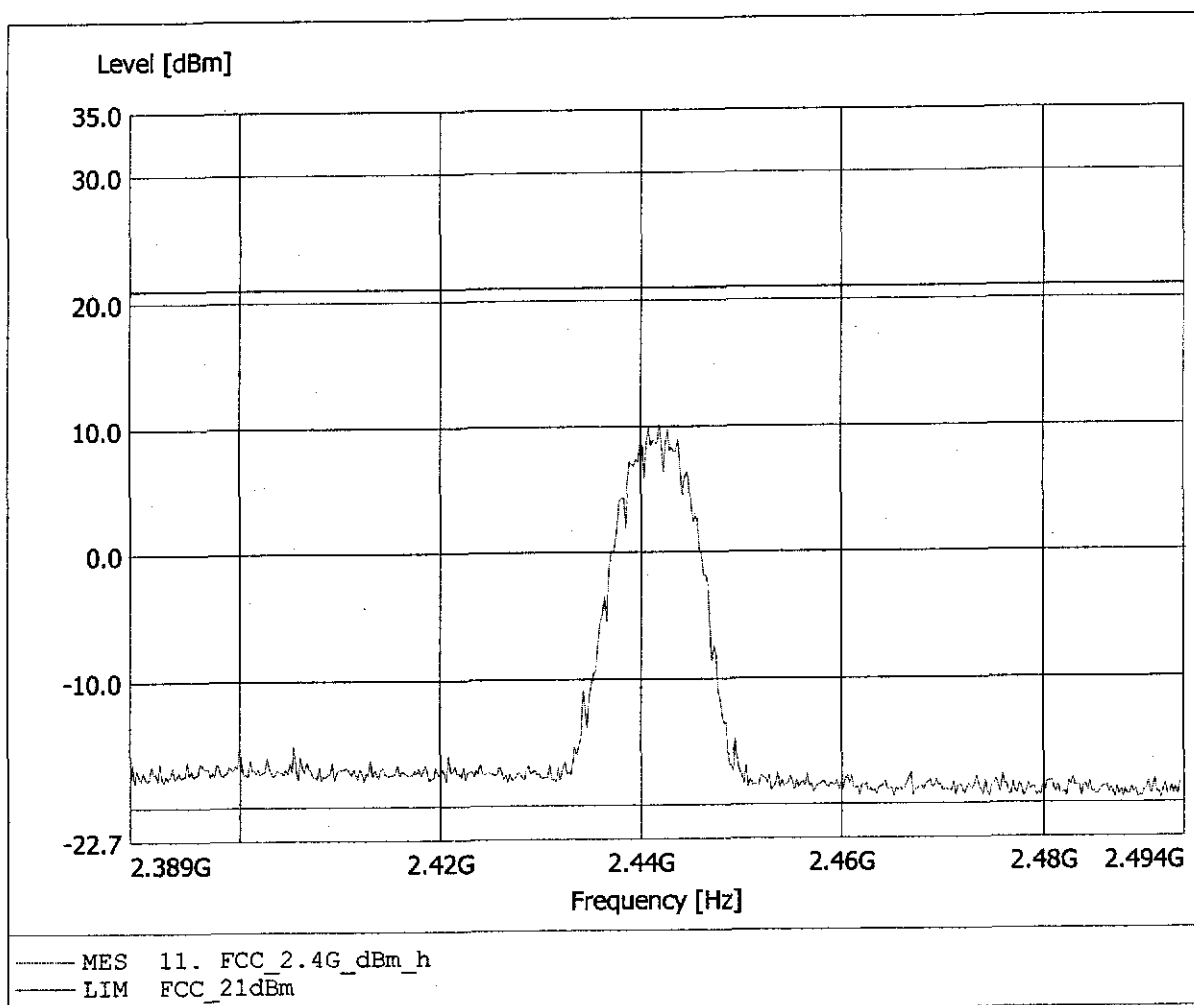


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 12.61dBm, RBW: 5MHz

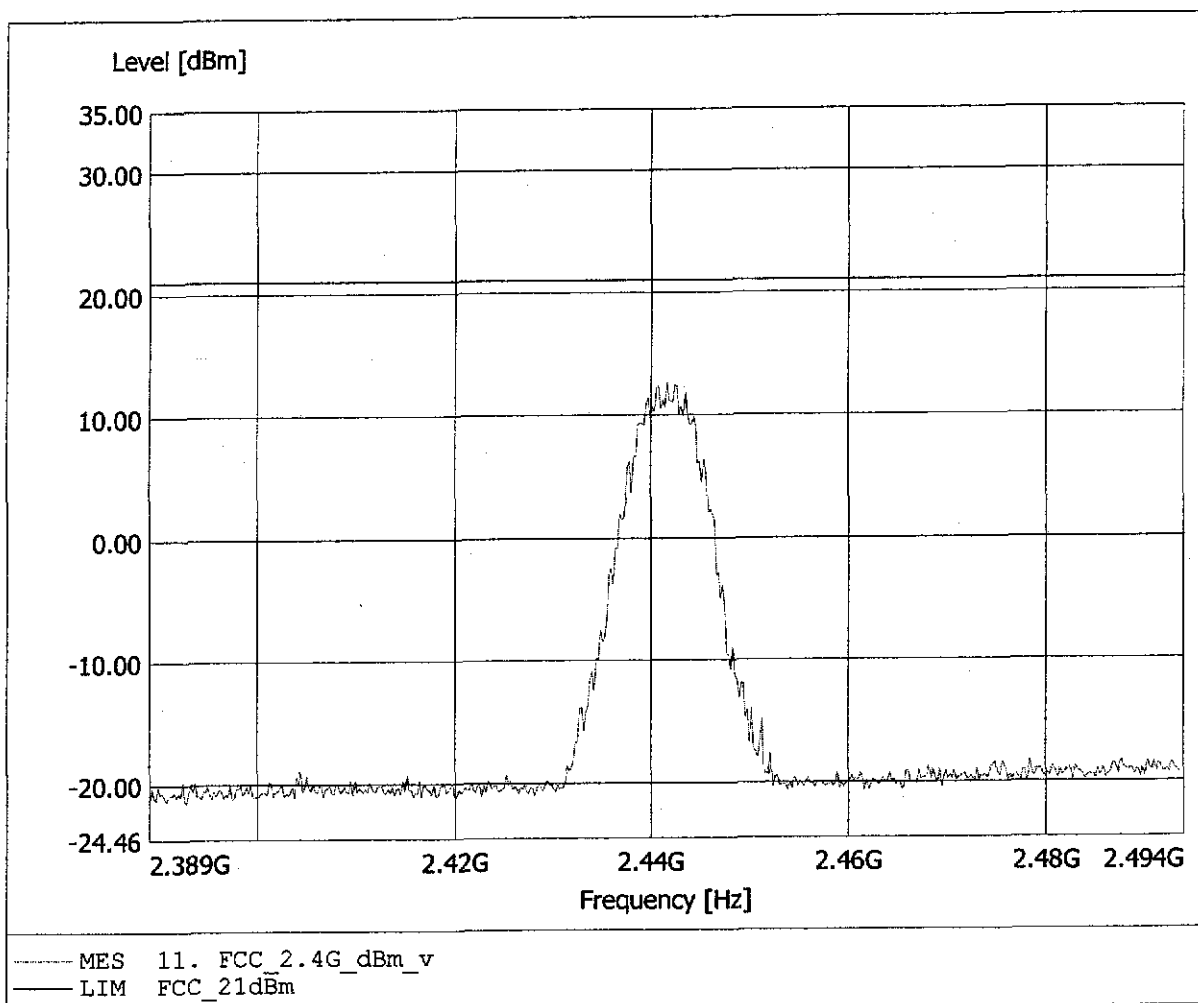


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 10.37dBm, RBW: 5MHz

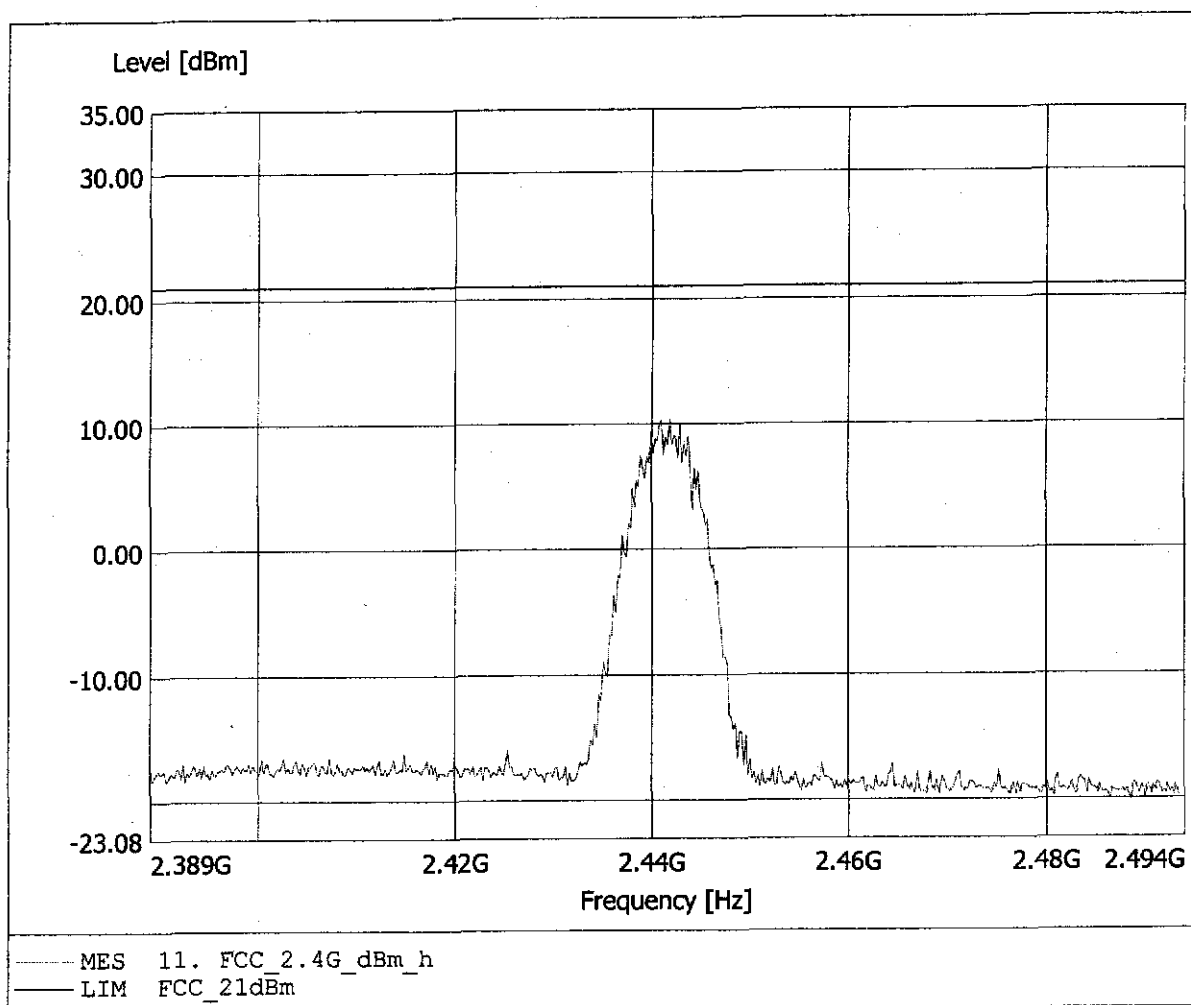


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 12.97dBm, RBW: 5MHz

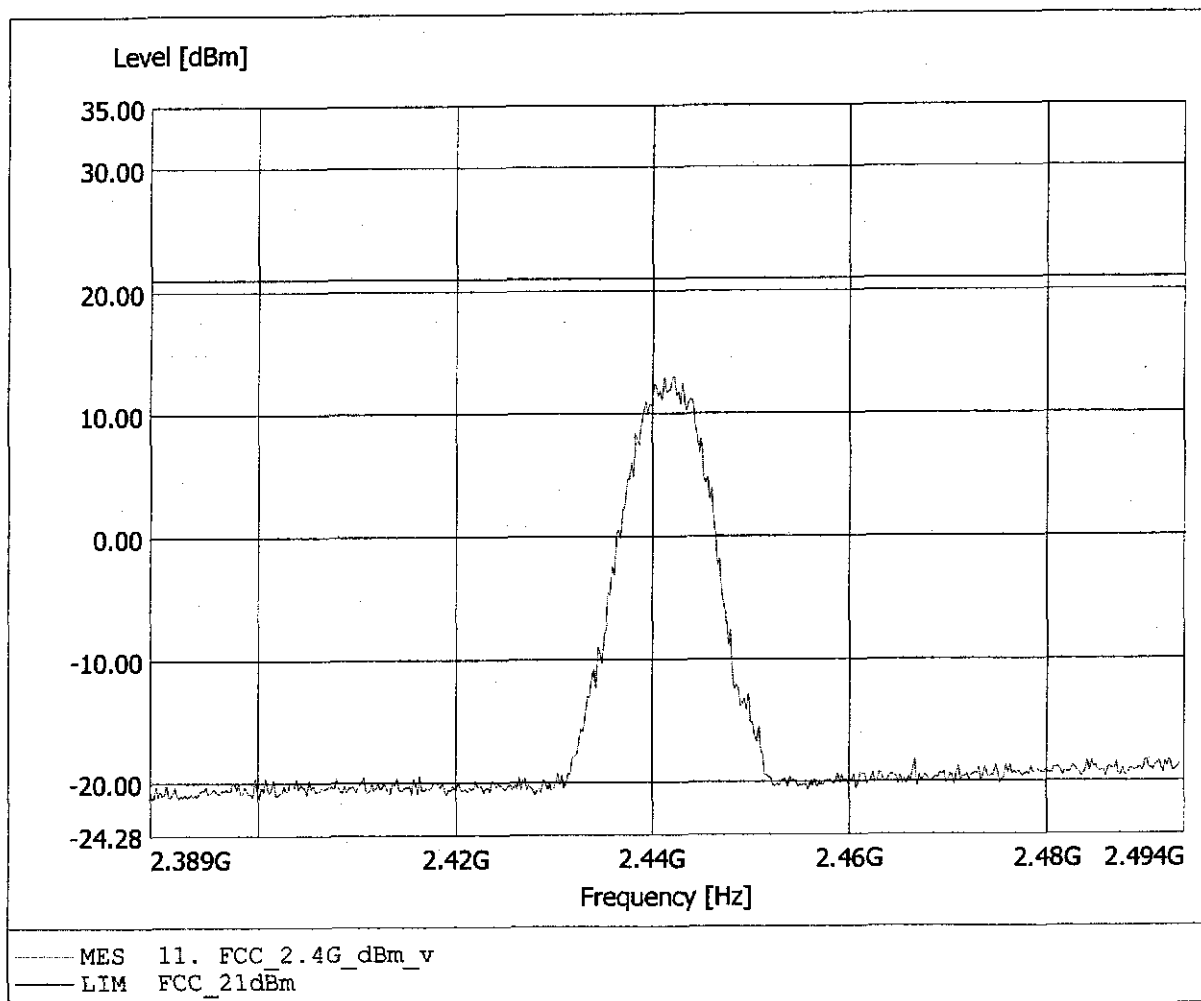


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 10.43dBm, RBW: 5MHz

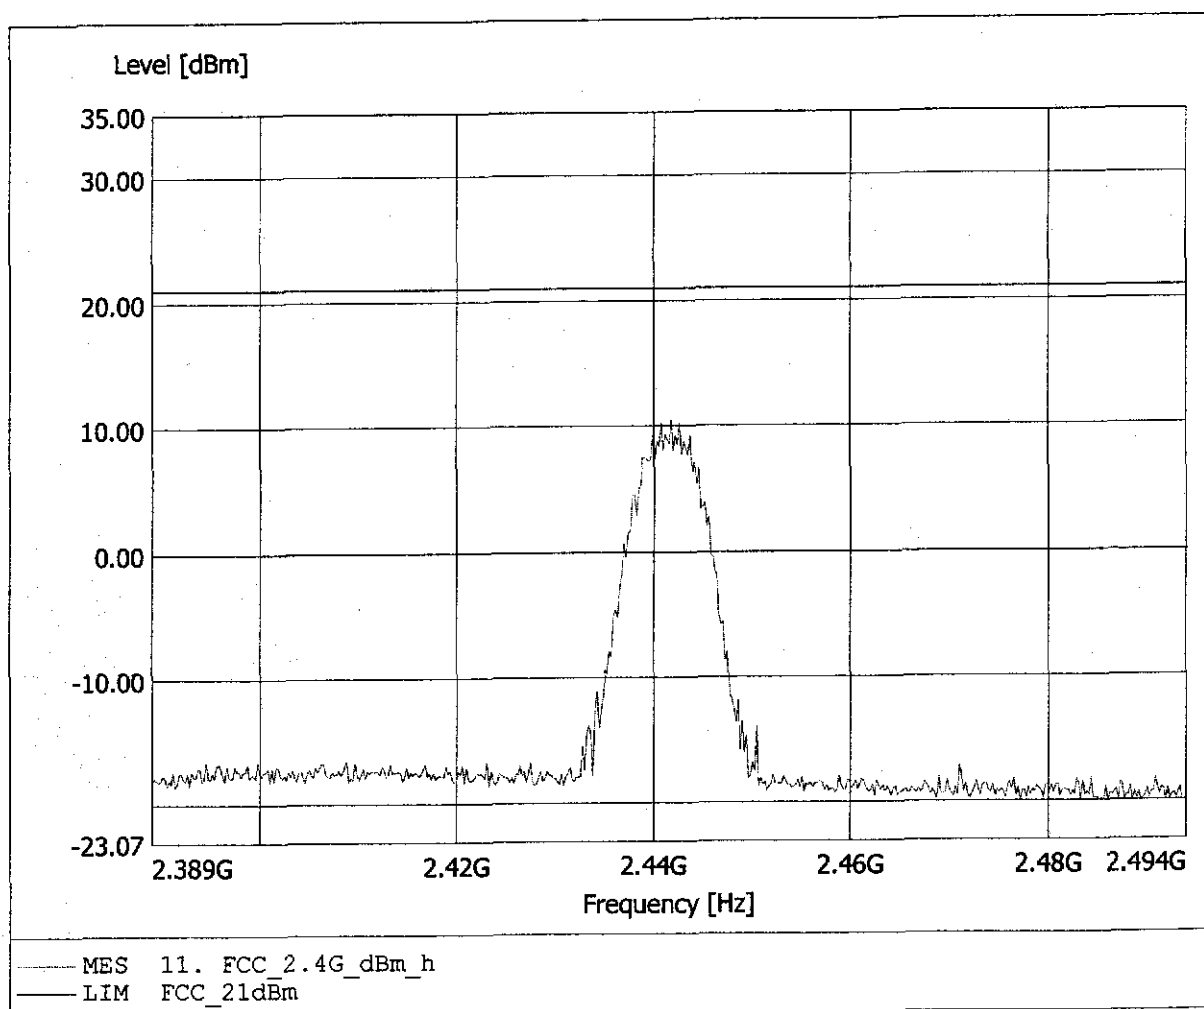


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 23 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 12.93dBm, RBW: 5MHz

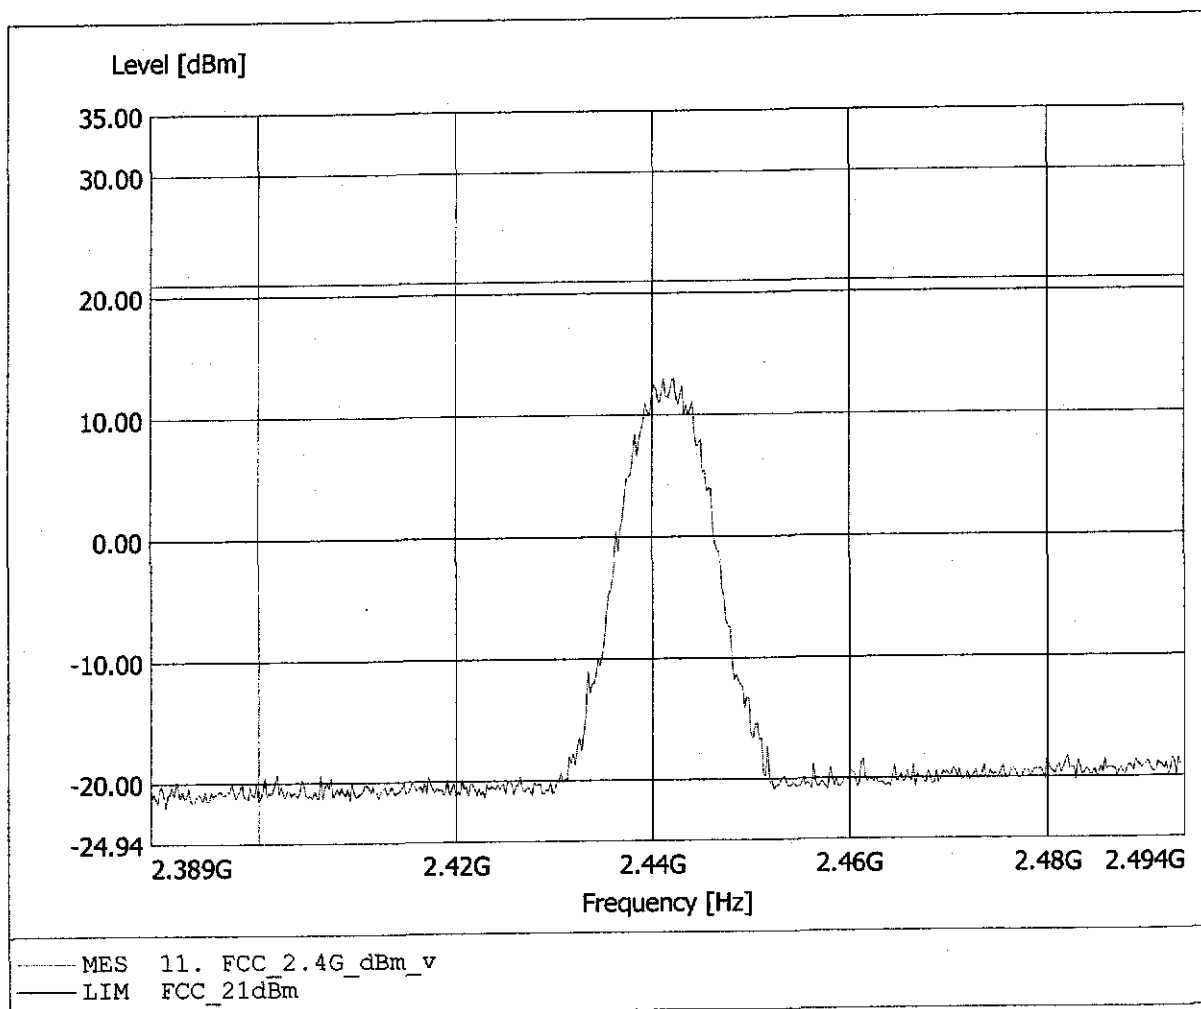


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 8.59dBm, RBW: 5MHz

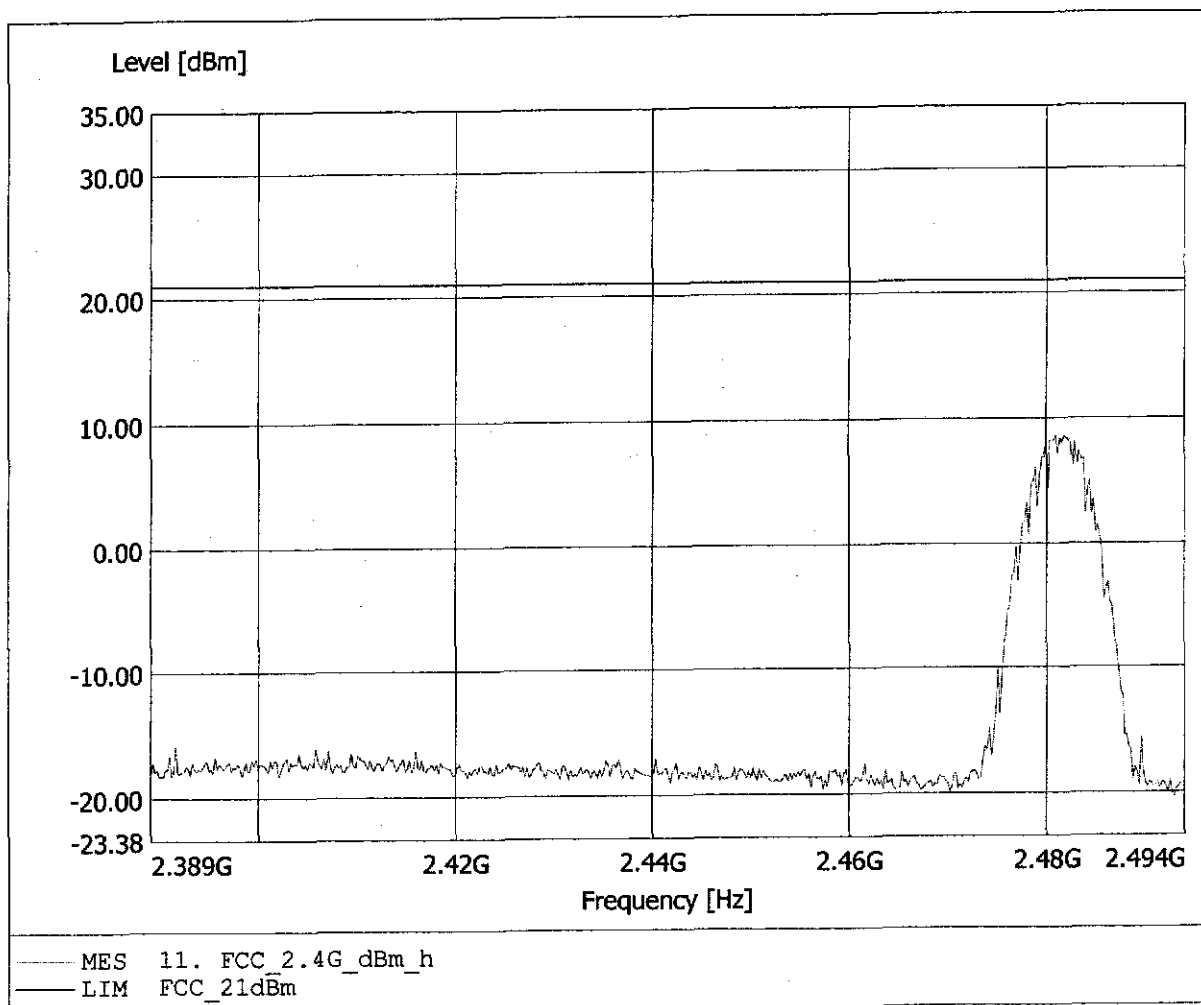


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Unom: 16 V AC and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 14.62dBm, RBW: 5MHz

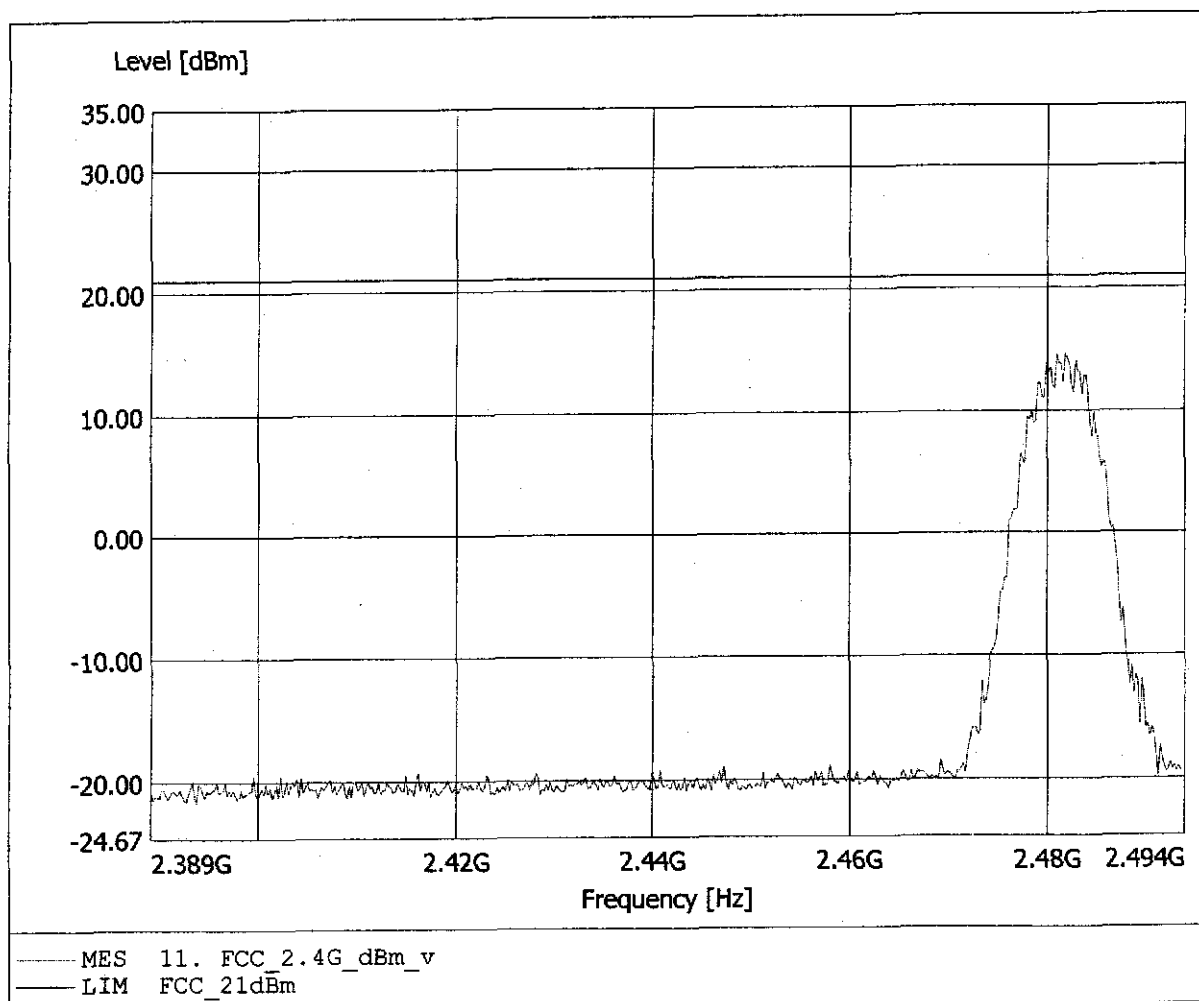


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 8.70dBm, RBW: 5MHz

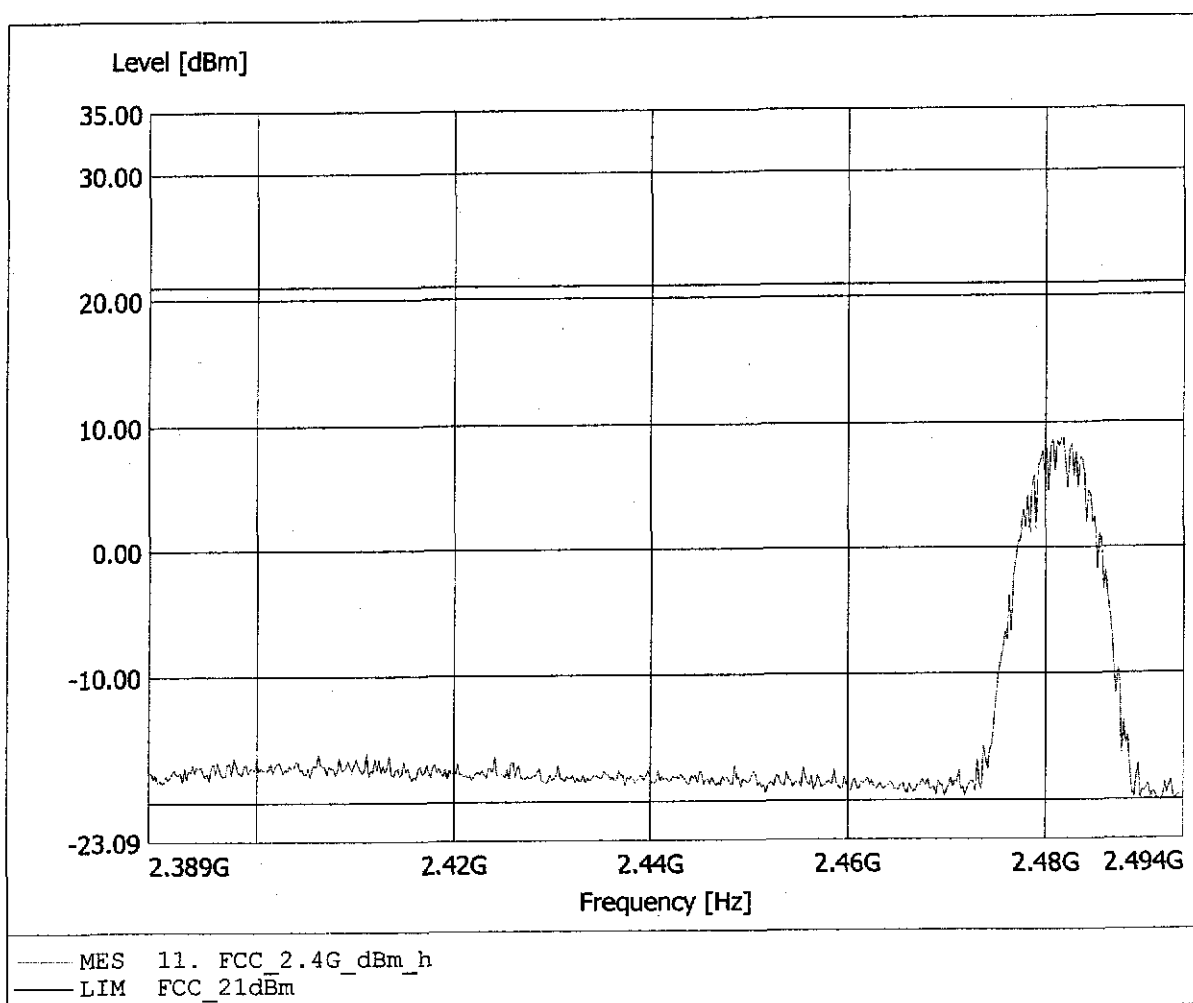


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umin : 16 V AC -15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 14.48dBm, RBW: 5MHz

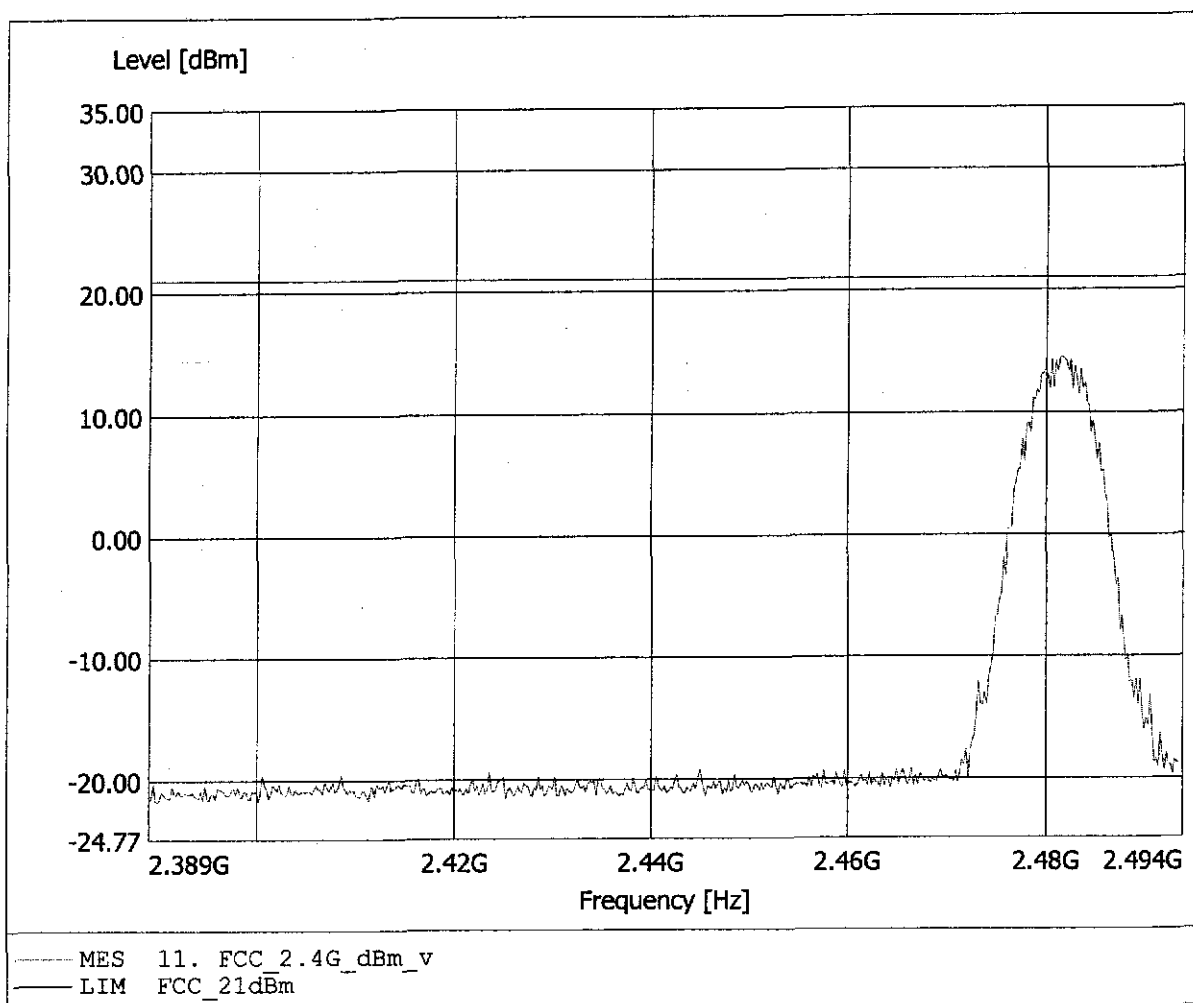

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 14.35dBm, RBW: 5MHz

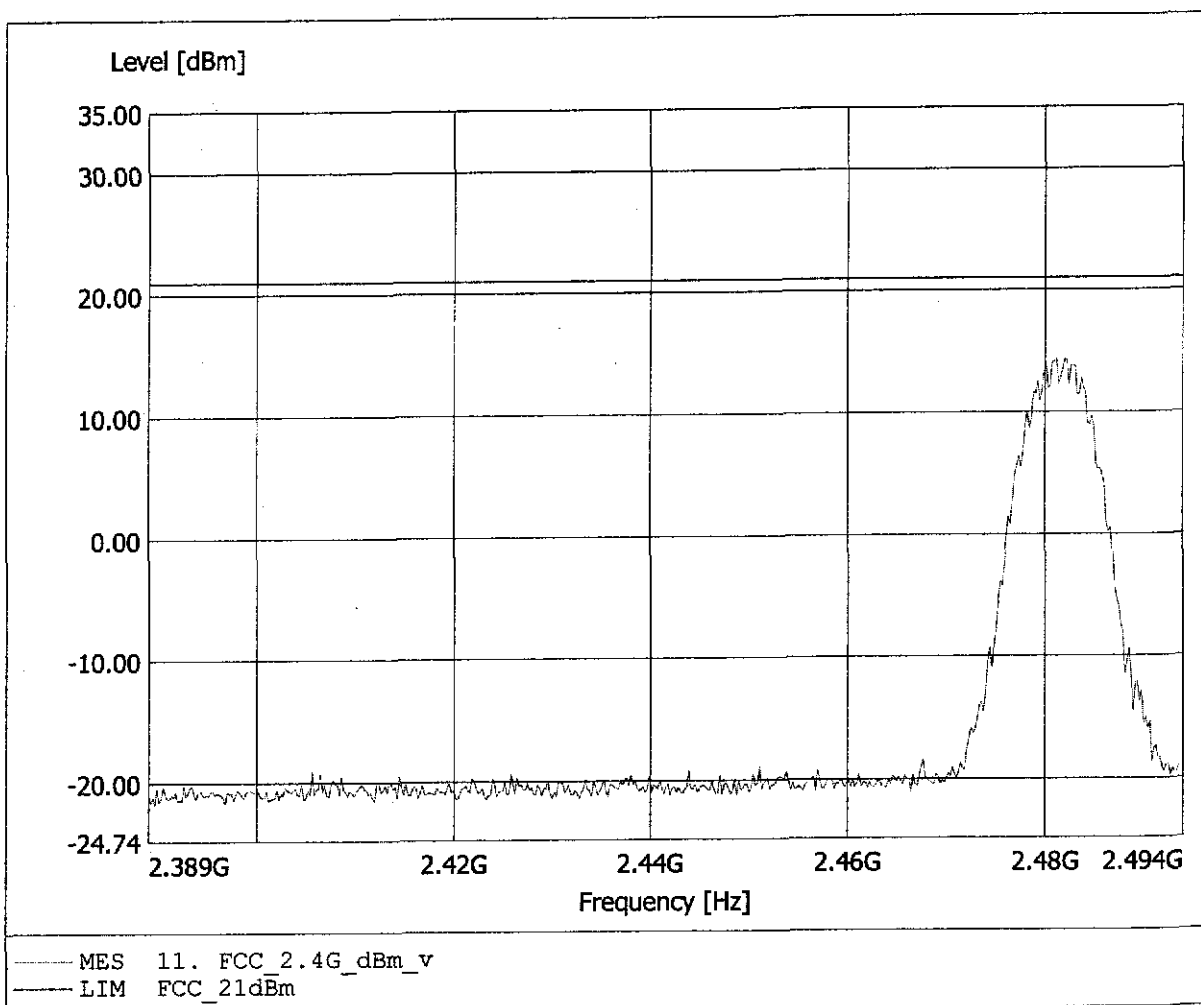

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2,4 GHz digital intercom System / EU CH 46 Tx Ant 2
Model: BASE 6000
Approval Holder: HM Electronics Inc.
Operating Condition: Tnom: 23°C / Umax : 16 V AC +15% and AC/AC - Adapter
Test Site / Operator: ETS / Mr. Pudell
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 8.84dBm, RBW: 5MHz

