


BZ5TTS250MVX
APPLICATION FOR FCC CERTIFICATION
DEMODULATOR INPUT
250 WATT VHF TRANSLATOR

INPUT MODULATED STAIR STEP

UM700A Video Measurement Set

Channel A System Default

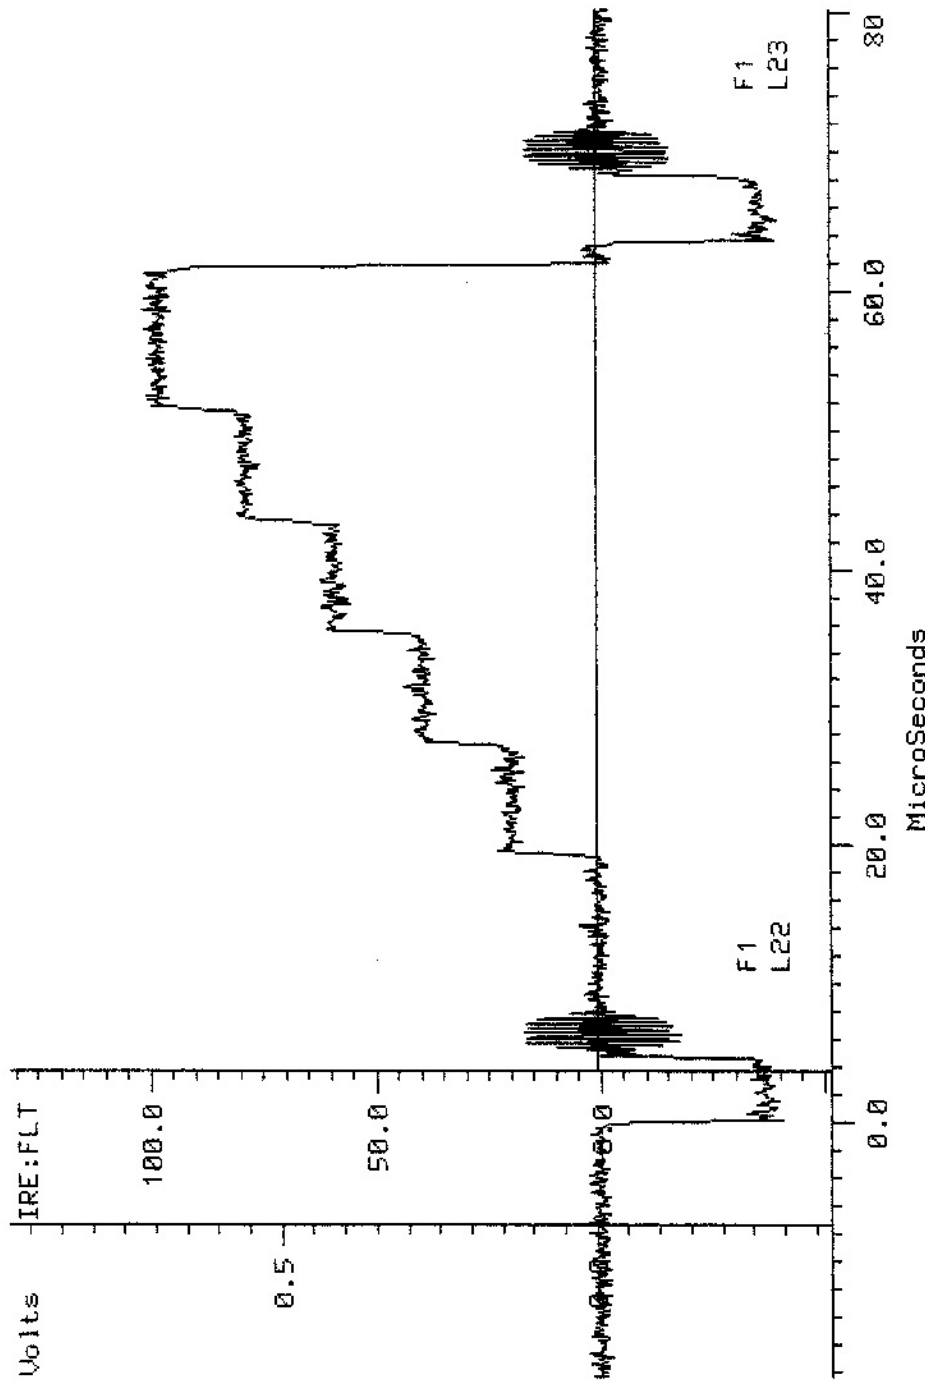

APL = 49.1%
525 line NTSC No Filtering
Slow clamp to 0.00 V at 6.63 μ s


Precision Mode Off
Synchronous Sync = Source
Frames selected: 1 2

BZ5TTS250MVX
APPLICATION FOR FCC CERTIFICATION
DEMODULATOR INPUT
250 WATT VHF TRANSLATOR

OUTPUT UNMODULATED STAIR STEP

VM700A Video Measurement Set

Channel A System Default

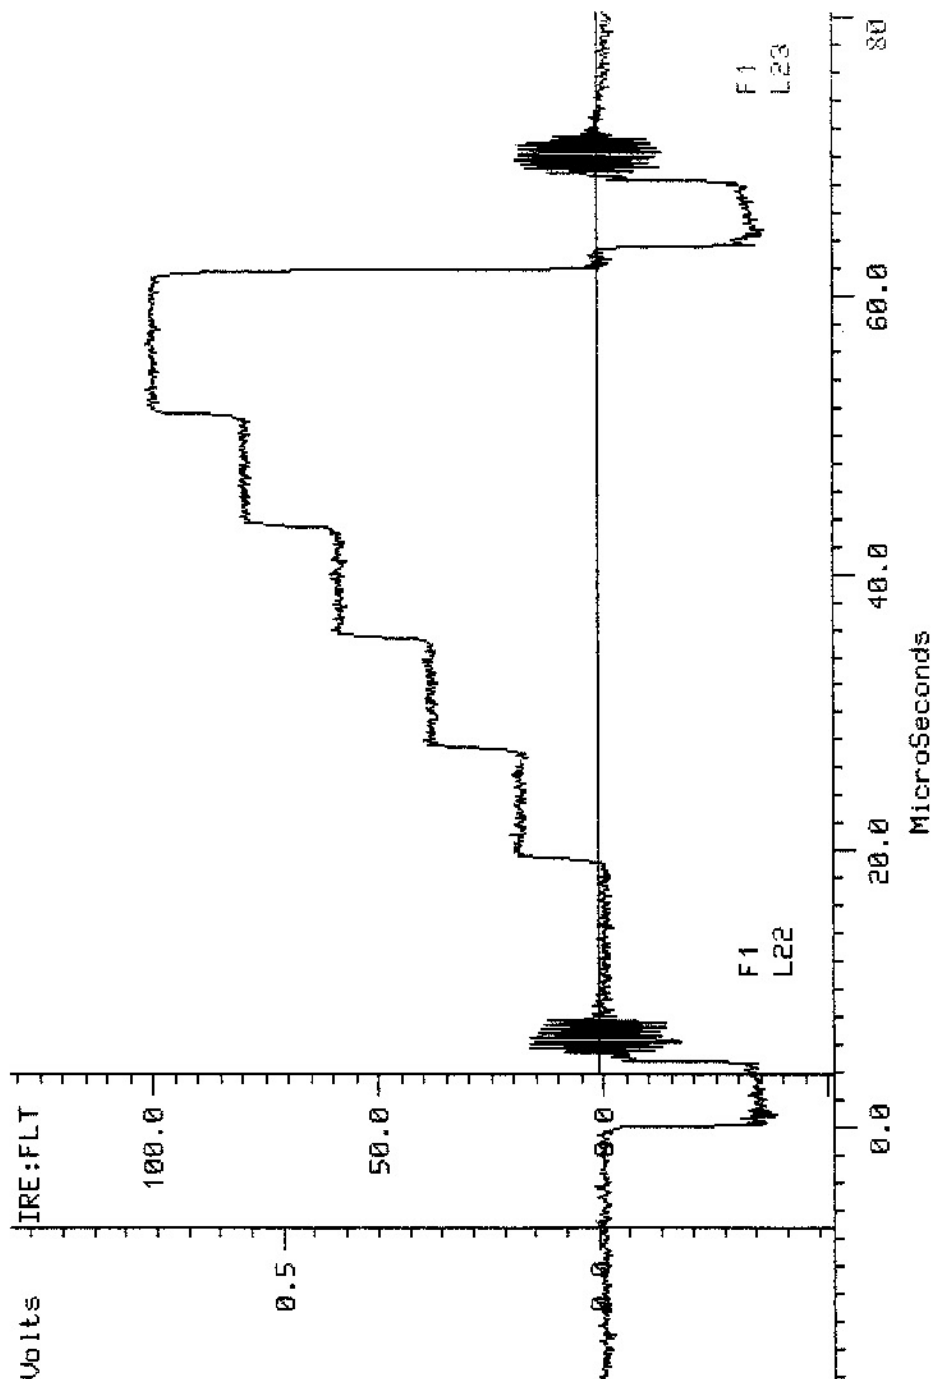

APL = 47.9%
525 line NTSC No Filtering
Slow clamp to 0.00 V at 6.63 μ s

Precision Mode Off
Synchronous Sync = Source
Frames selected: 1 2

UM700A Video Measurement Set

Channel A System Default

