






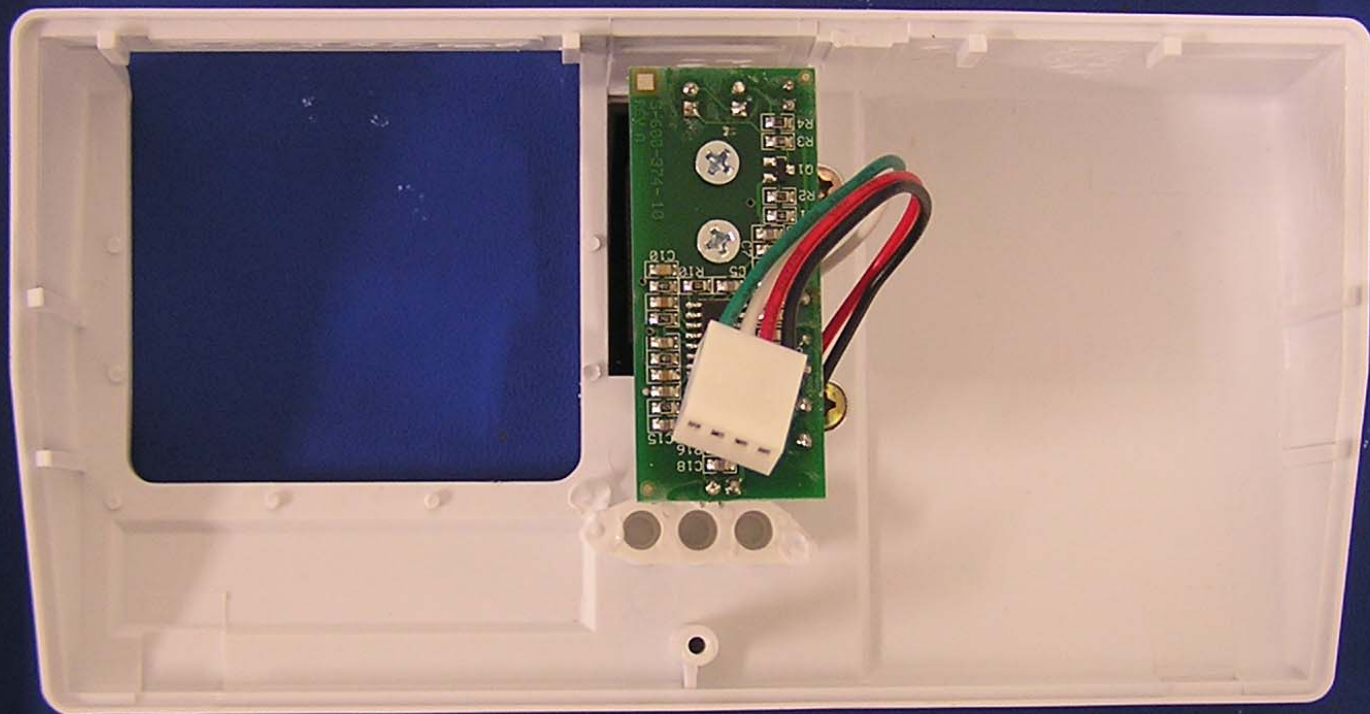

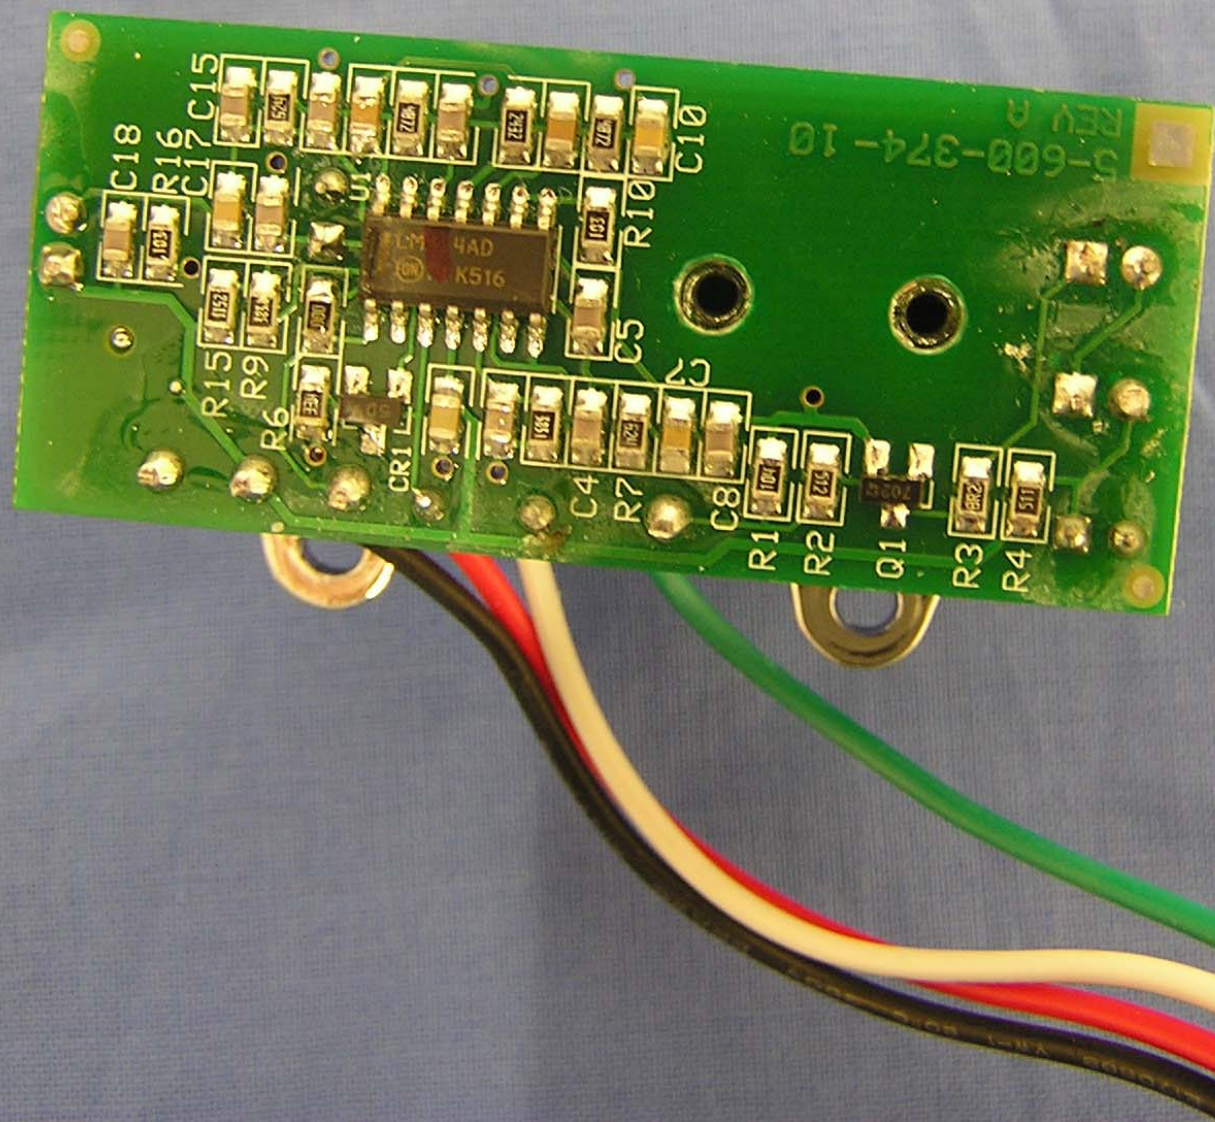

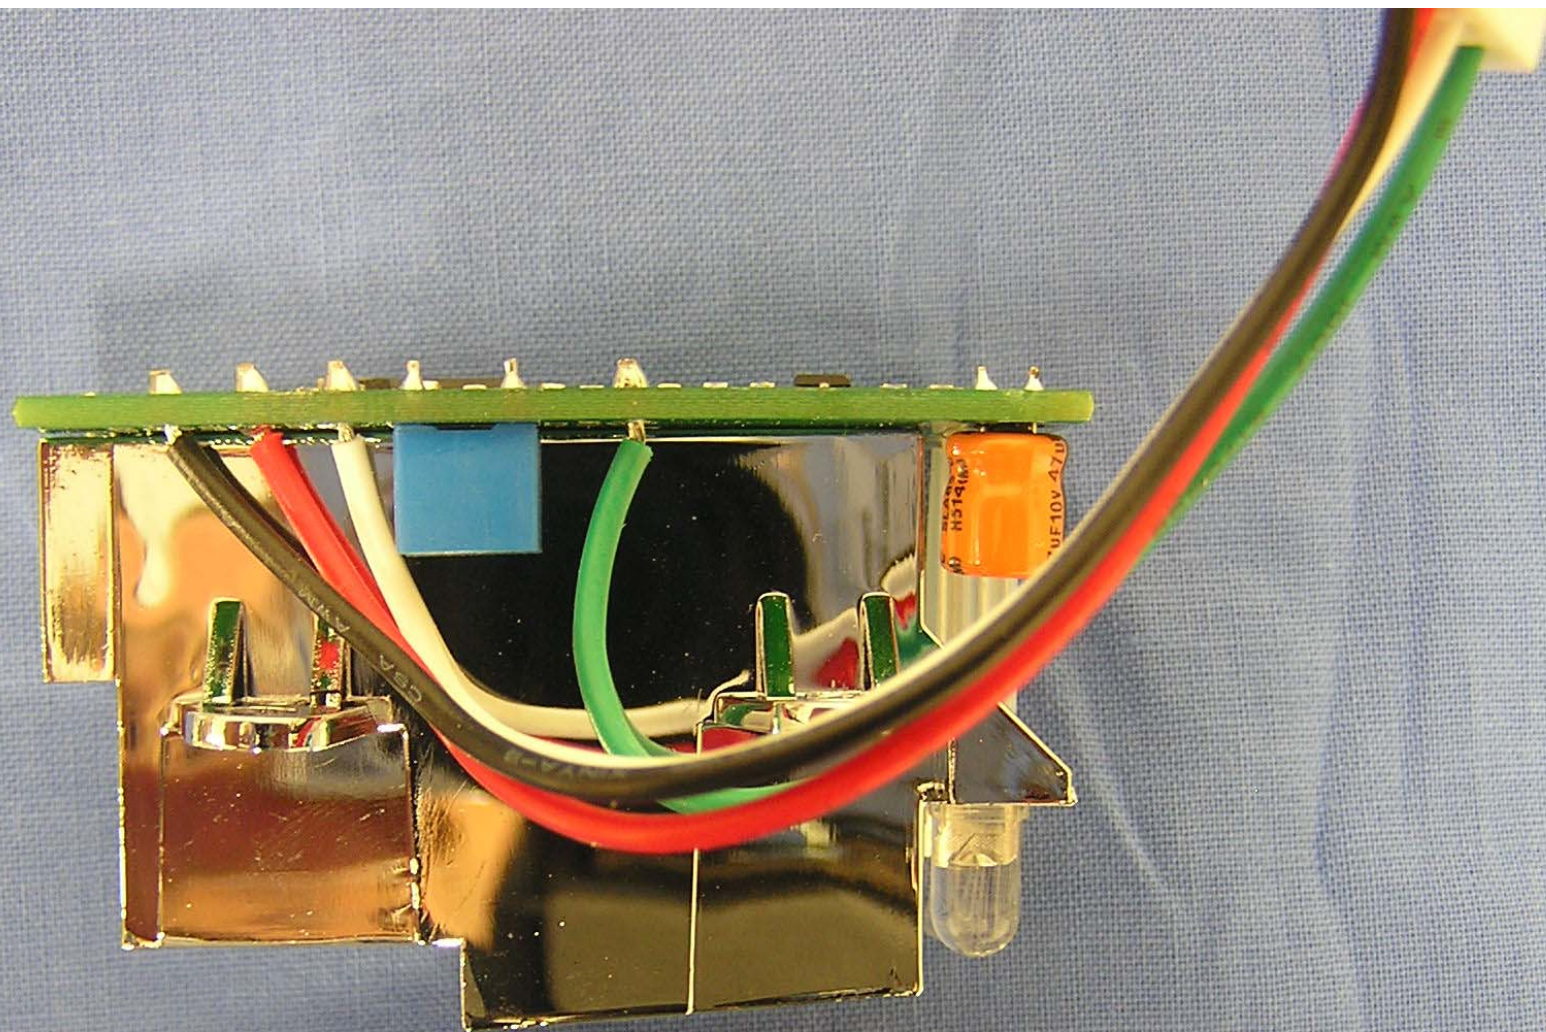

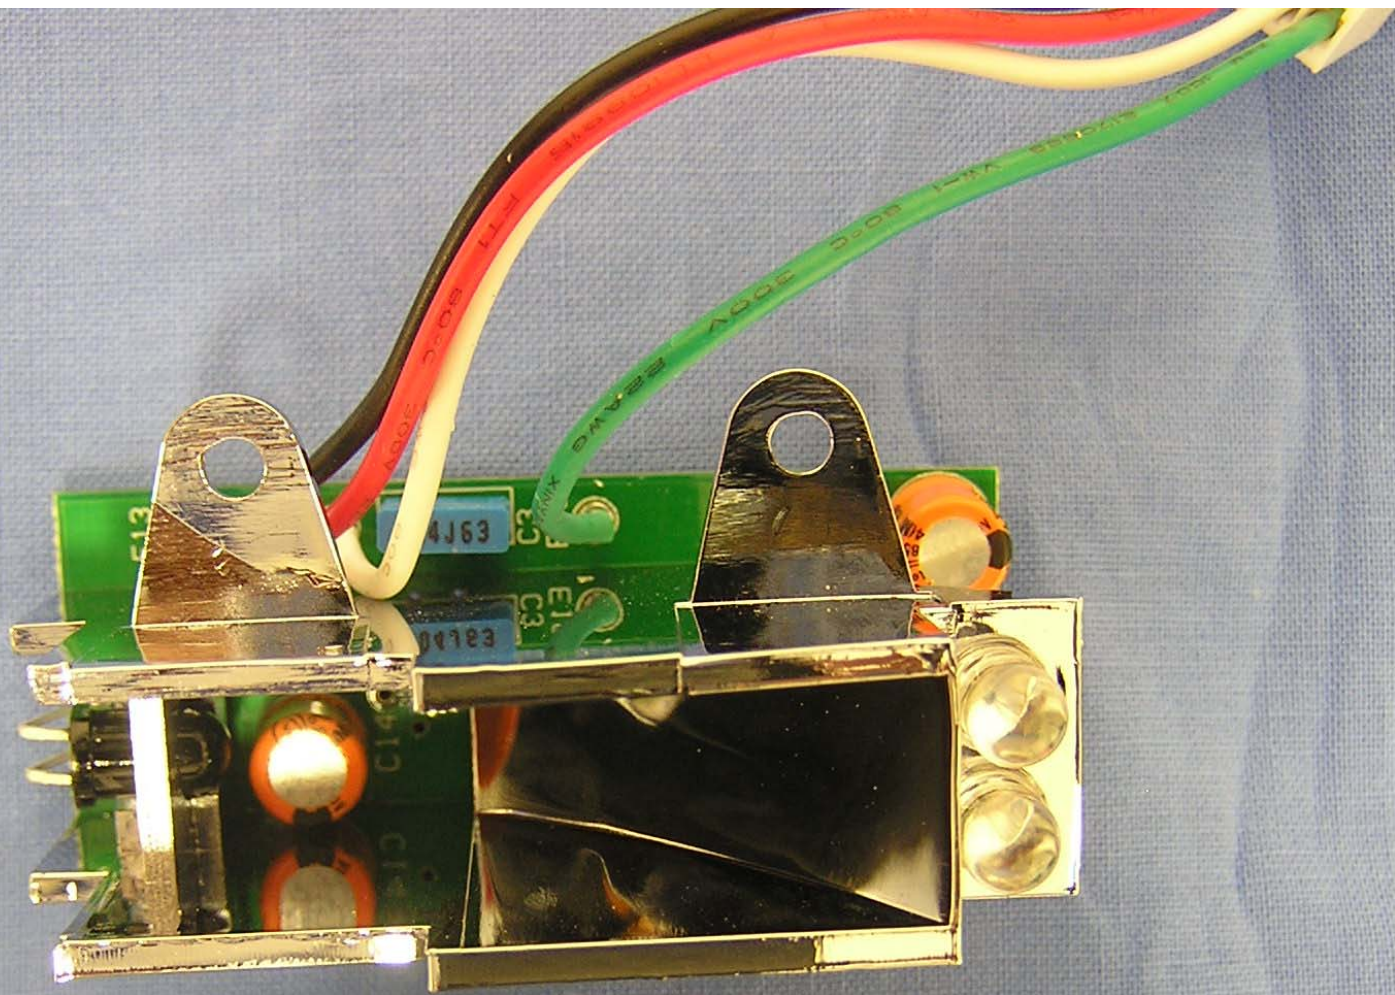

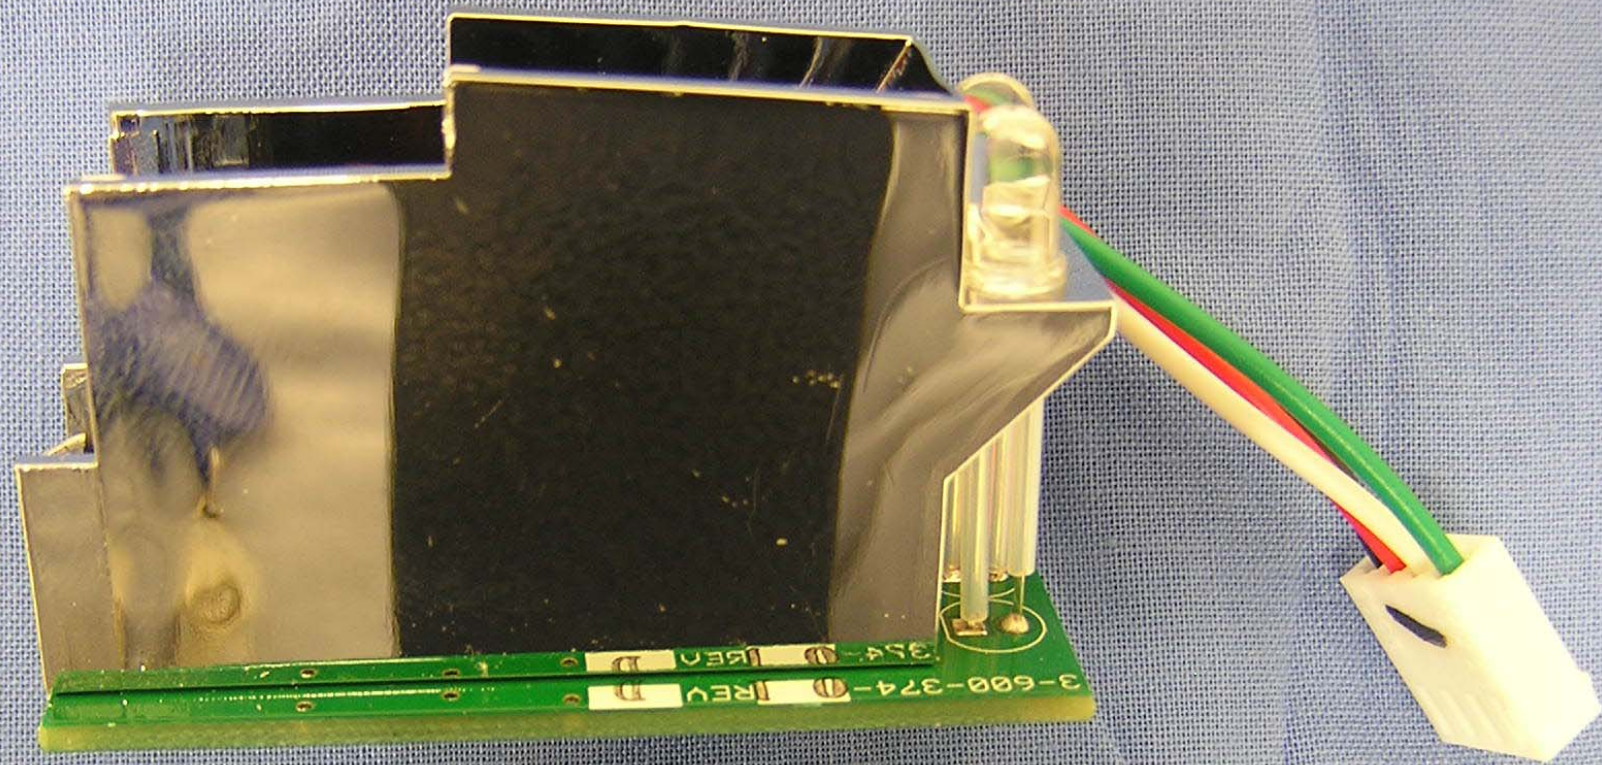

Model: DT-906

INPUTS 1 & 2

Standard or

Carvelec mode

WALK DETECT (NO)

30 VDC, 25 mA

TROUBLE (NO)

30 VDC, 25 mA

TAMPER (NO)

30 VDC, 25 mA

END-OF-LINE

Connect terminating

resistors on last unit

ALARM OUTPUTS

NO, NC, COM

30 VDC, 1.25 mA

From D-Sub

INPUT 2

INPUT 1

WALK

WALK

TBL

TBL

TAMP

ECN

TAMP

NO

C

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO

ECN

NO


ECN


NO

ECN


NO


ECN

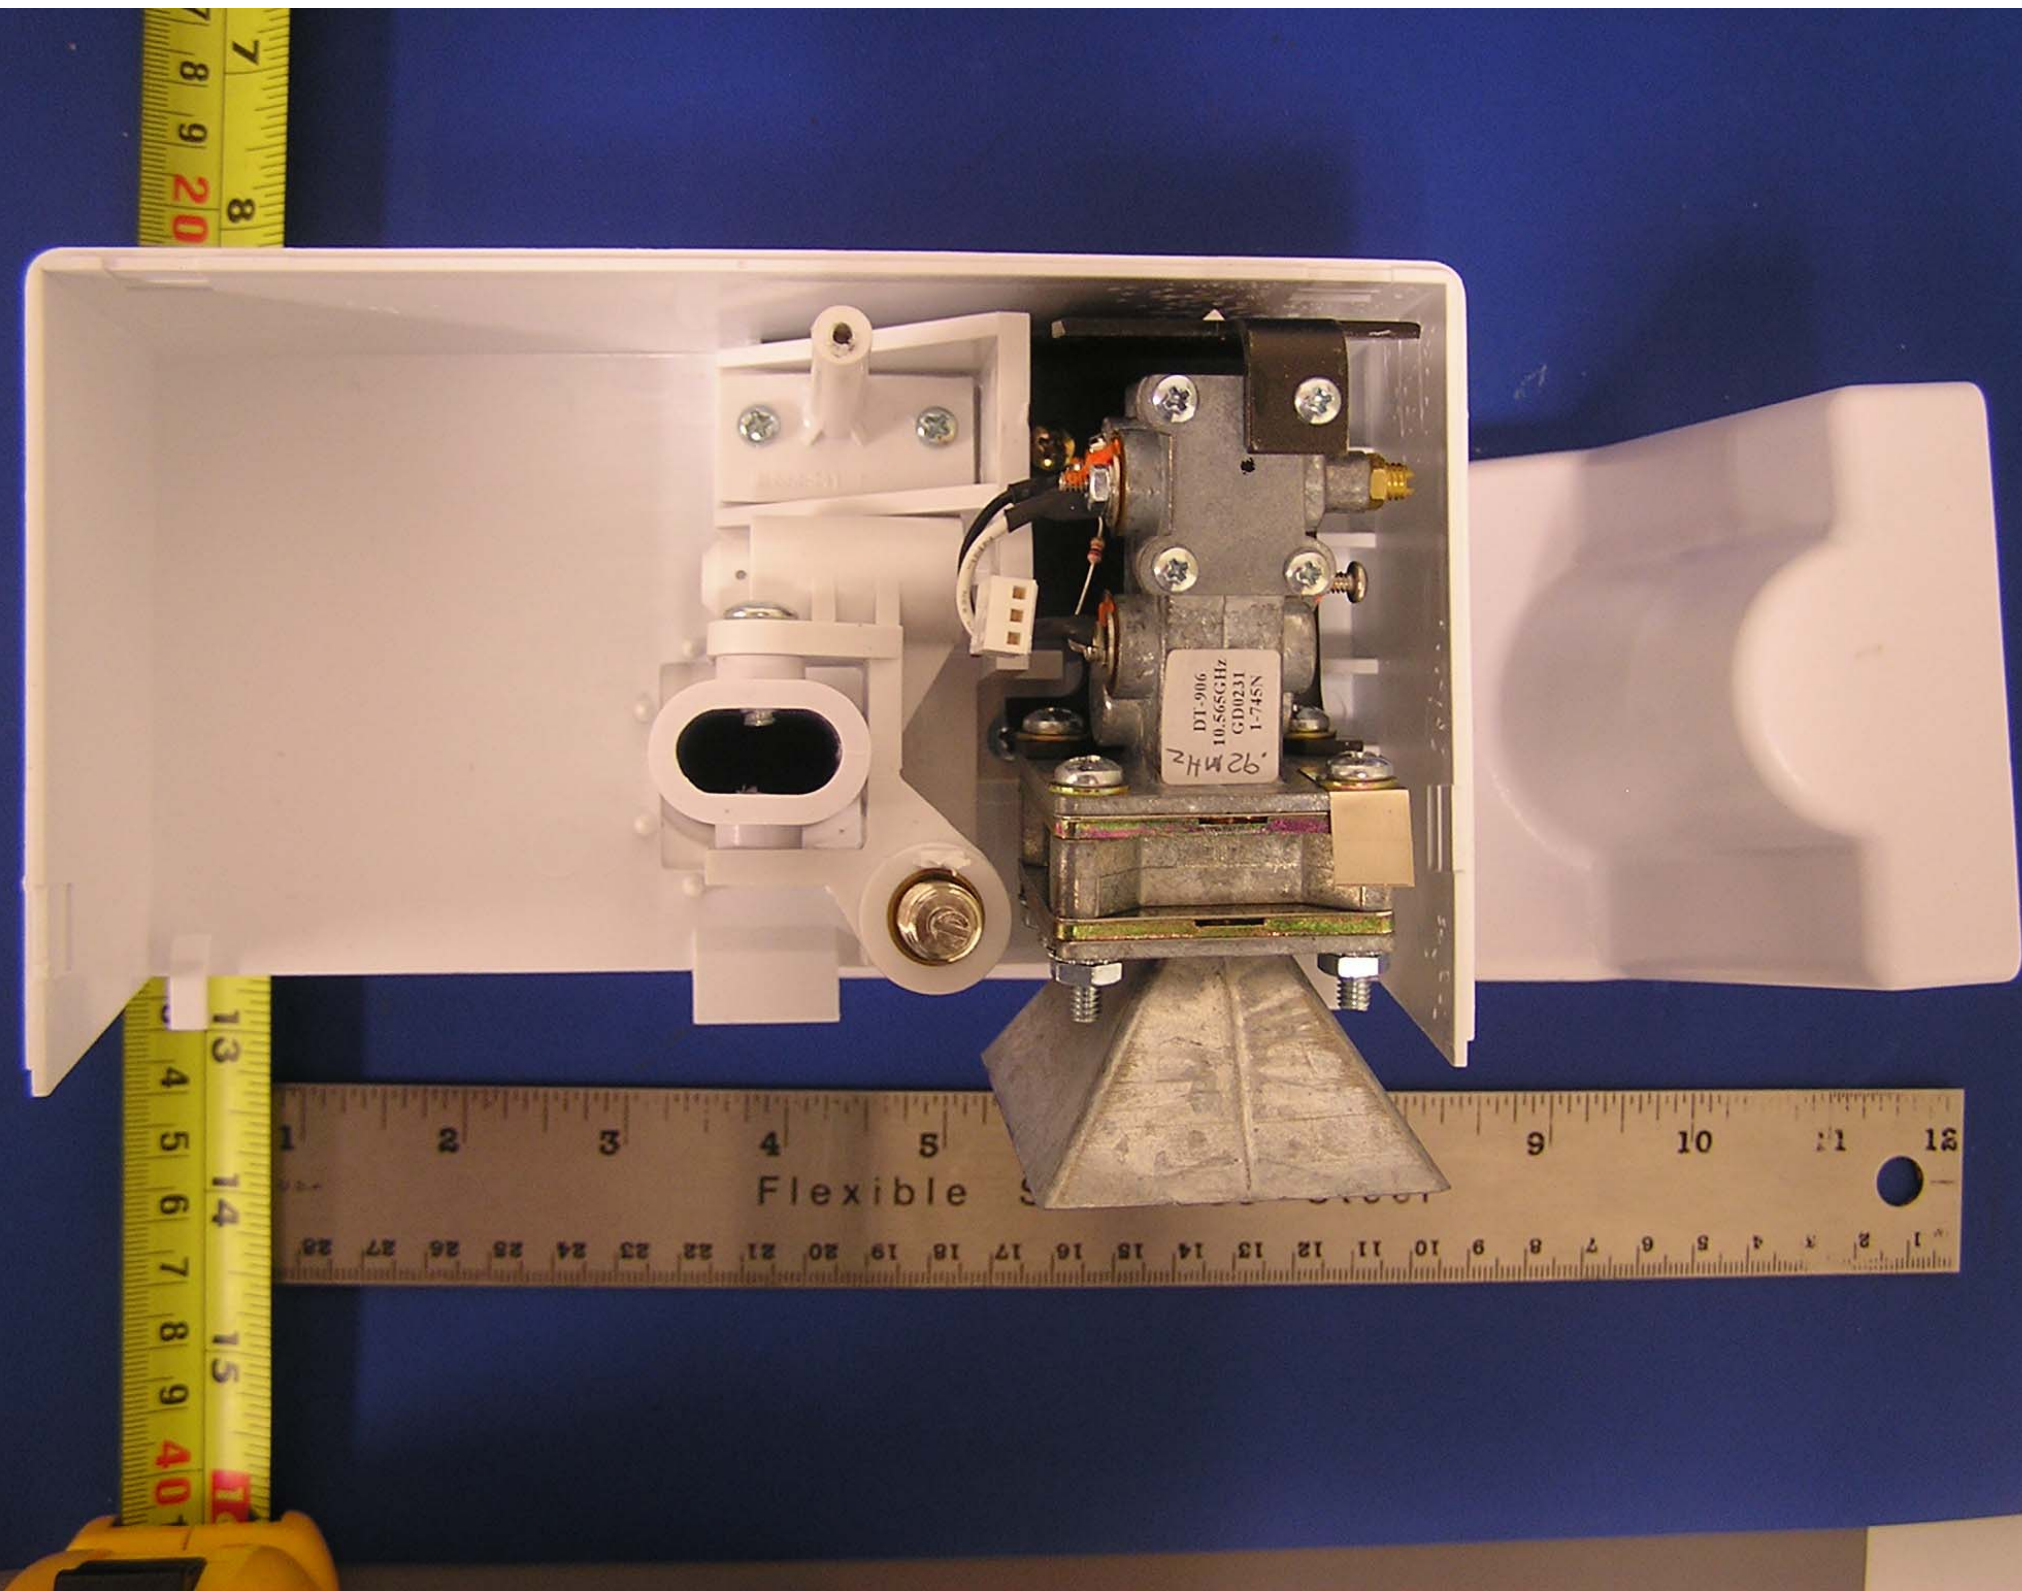


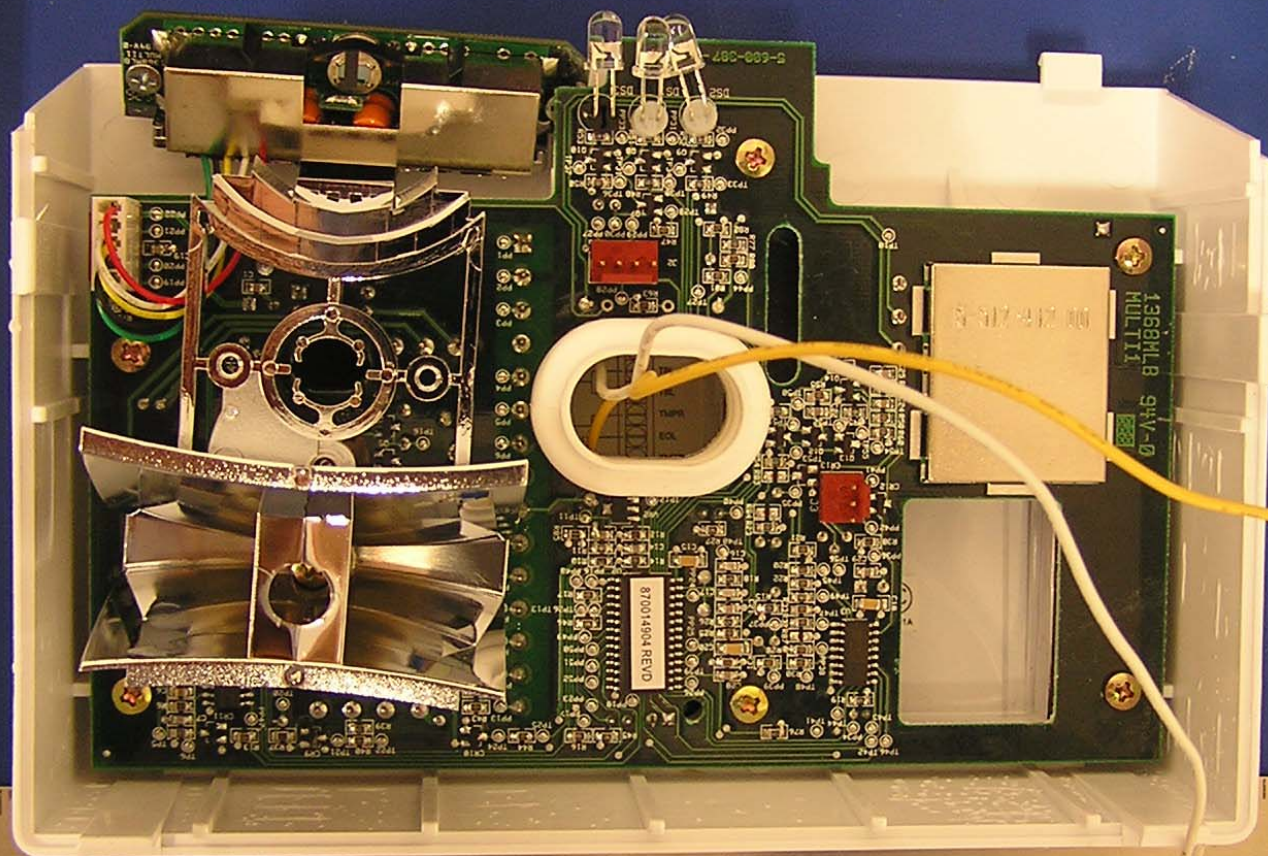

Flexible Stainless Steel

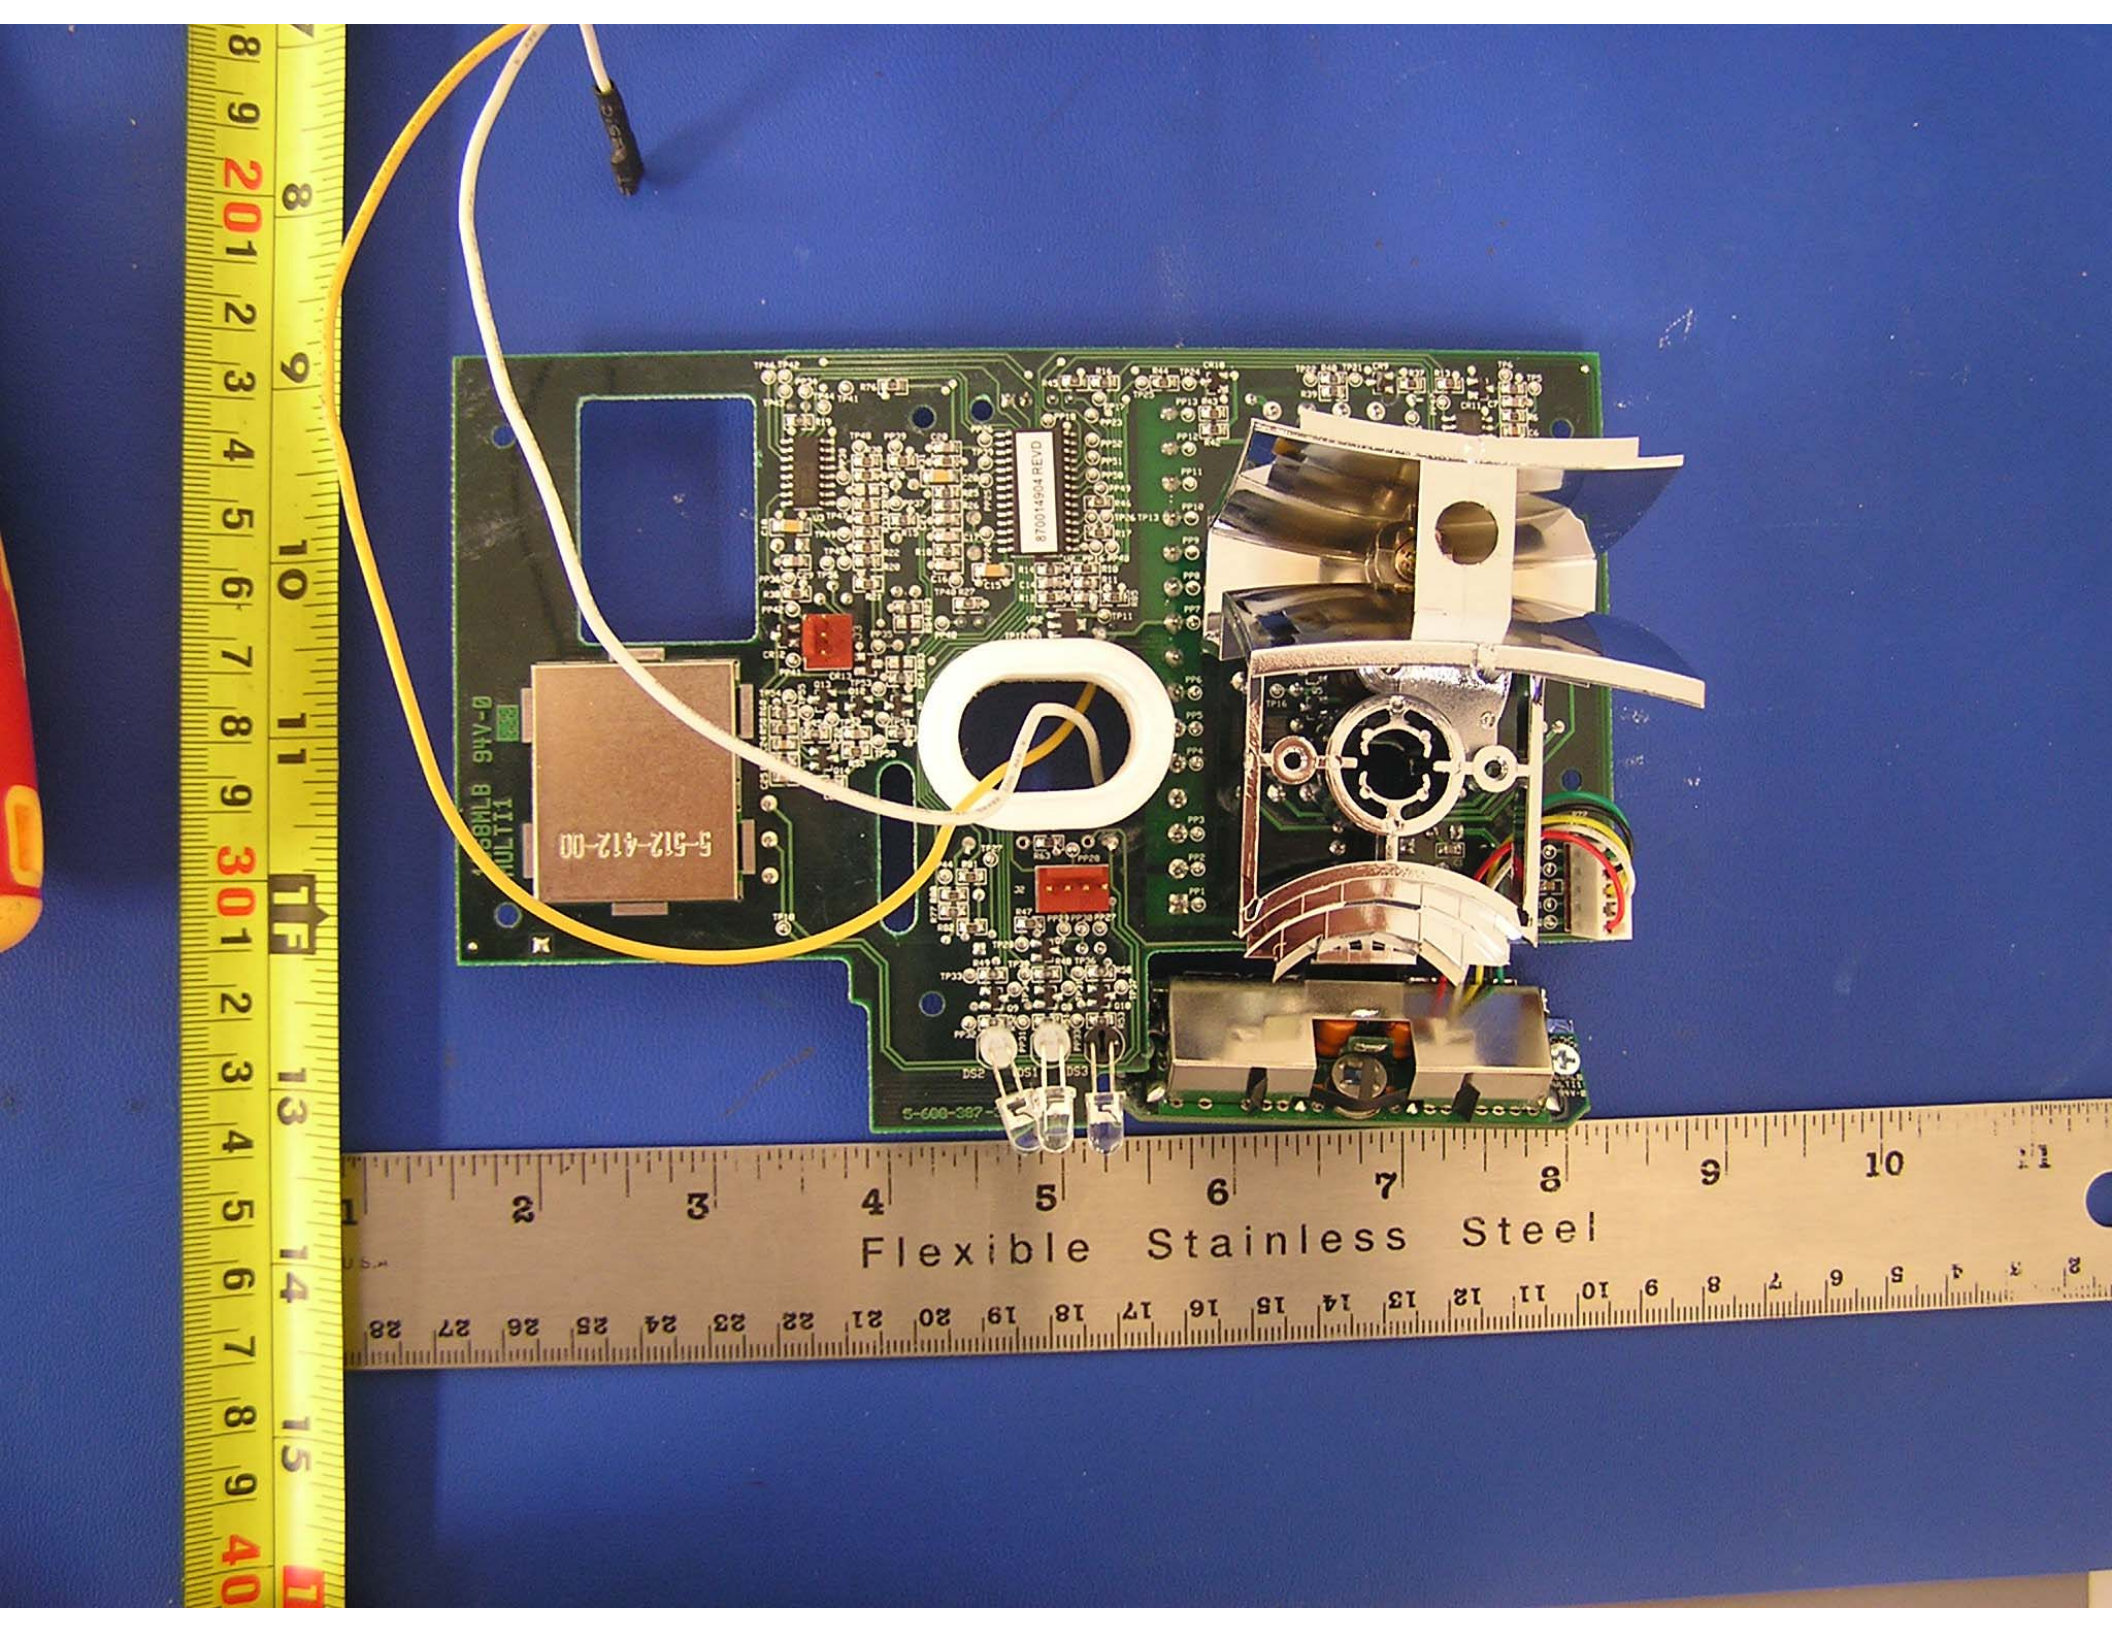

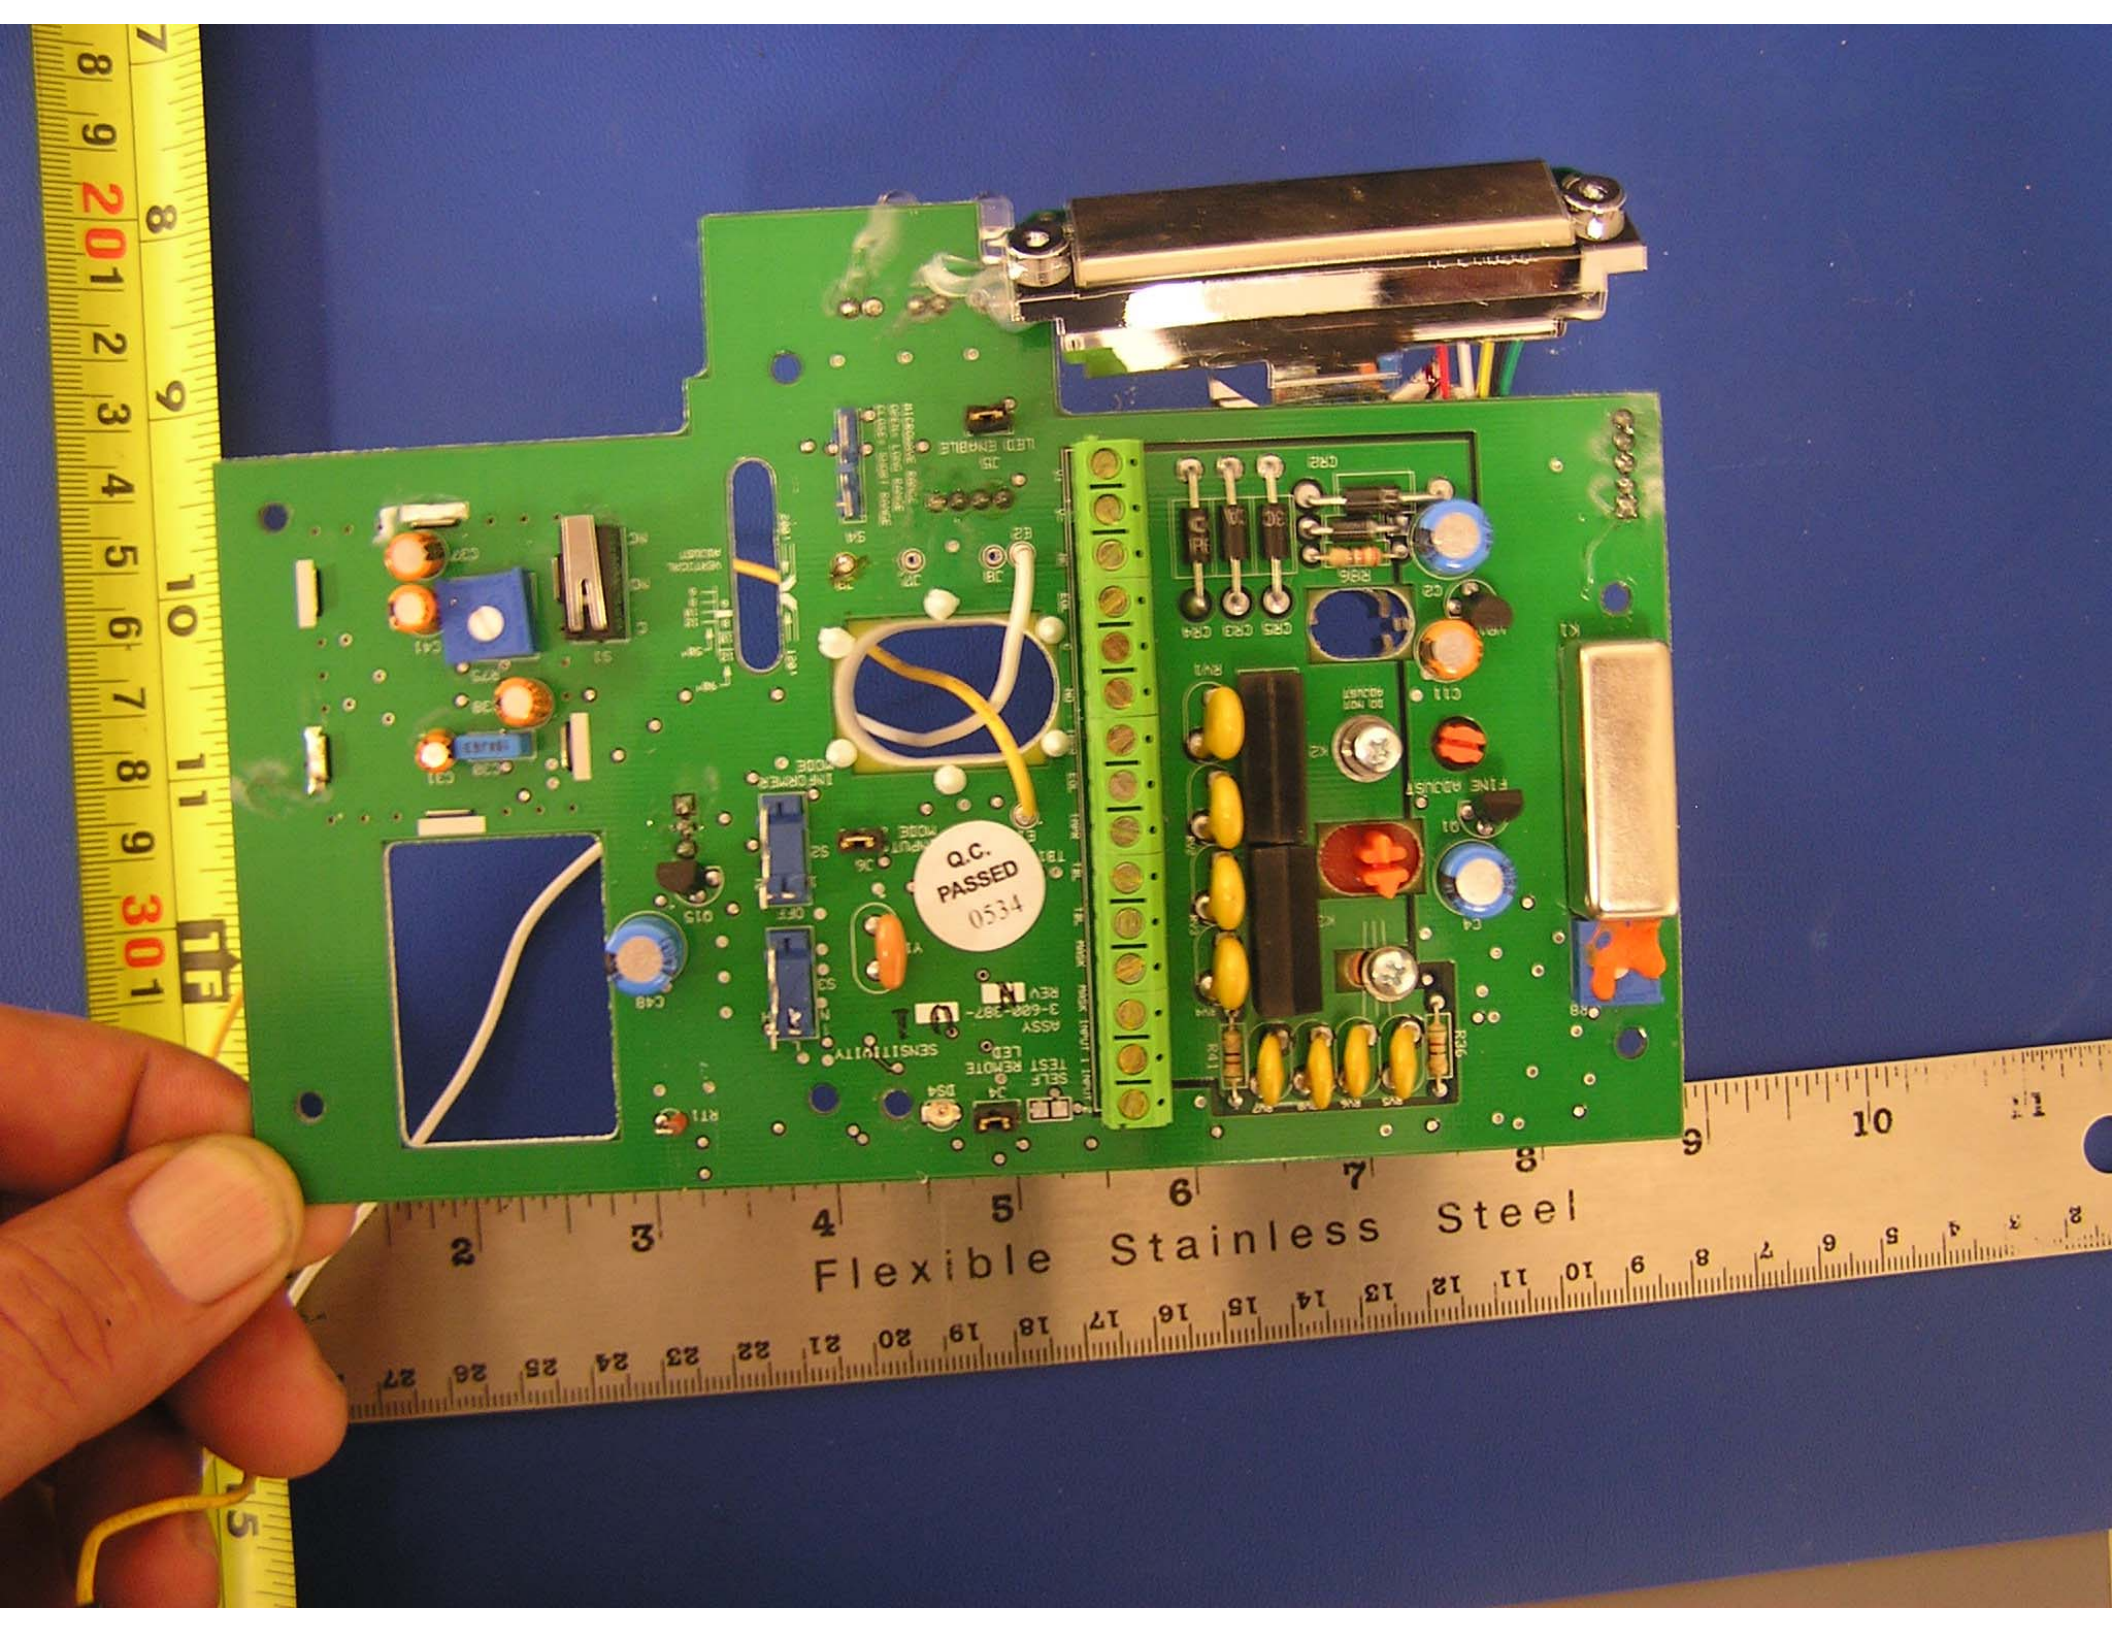

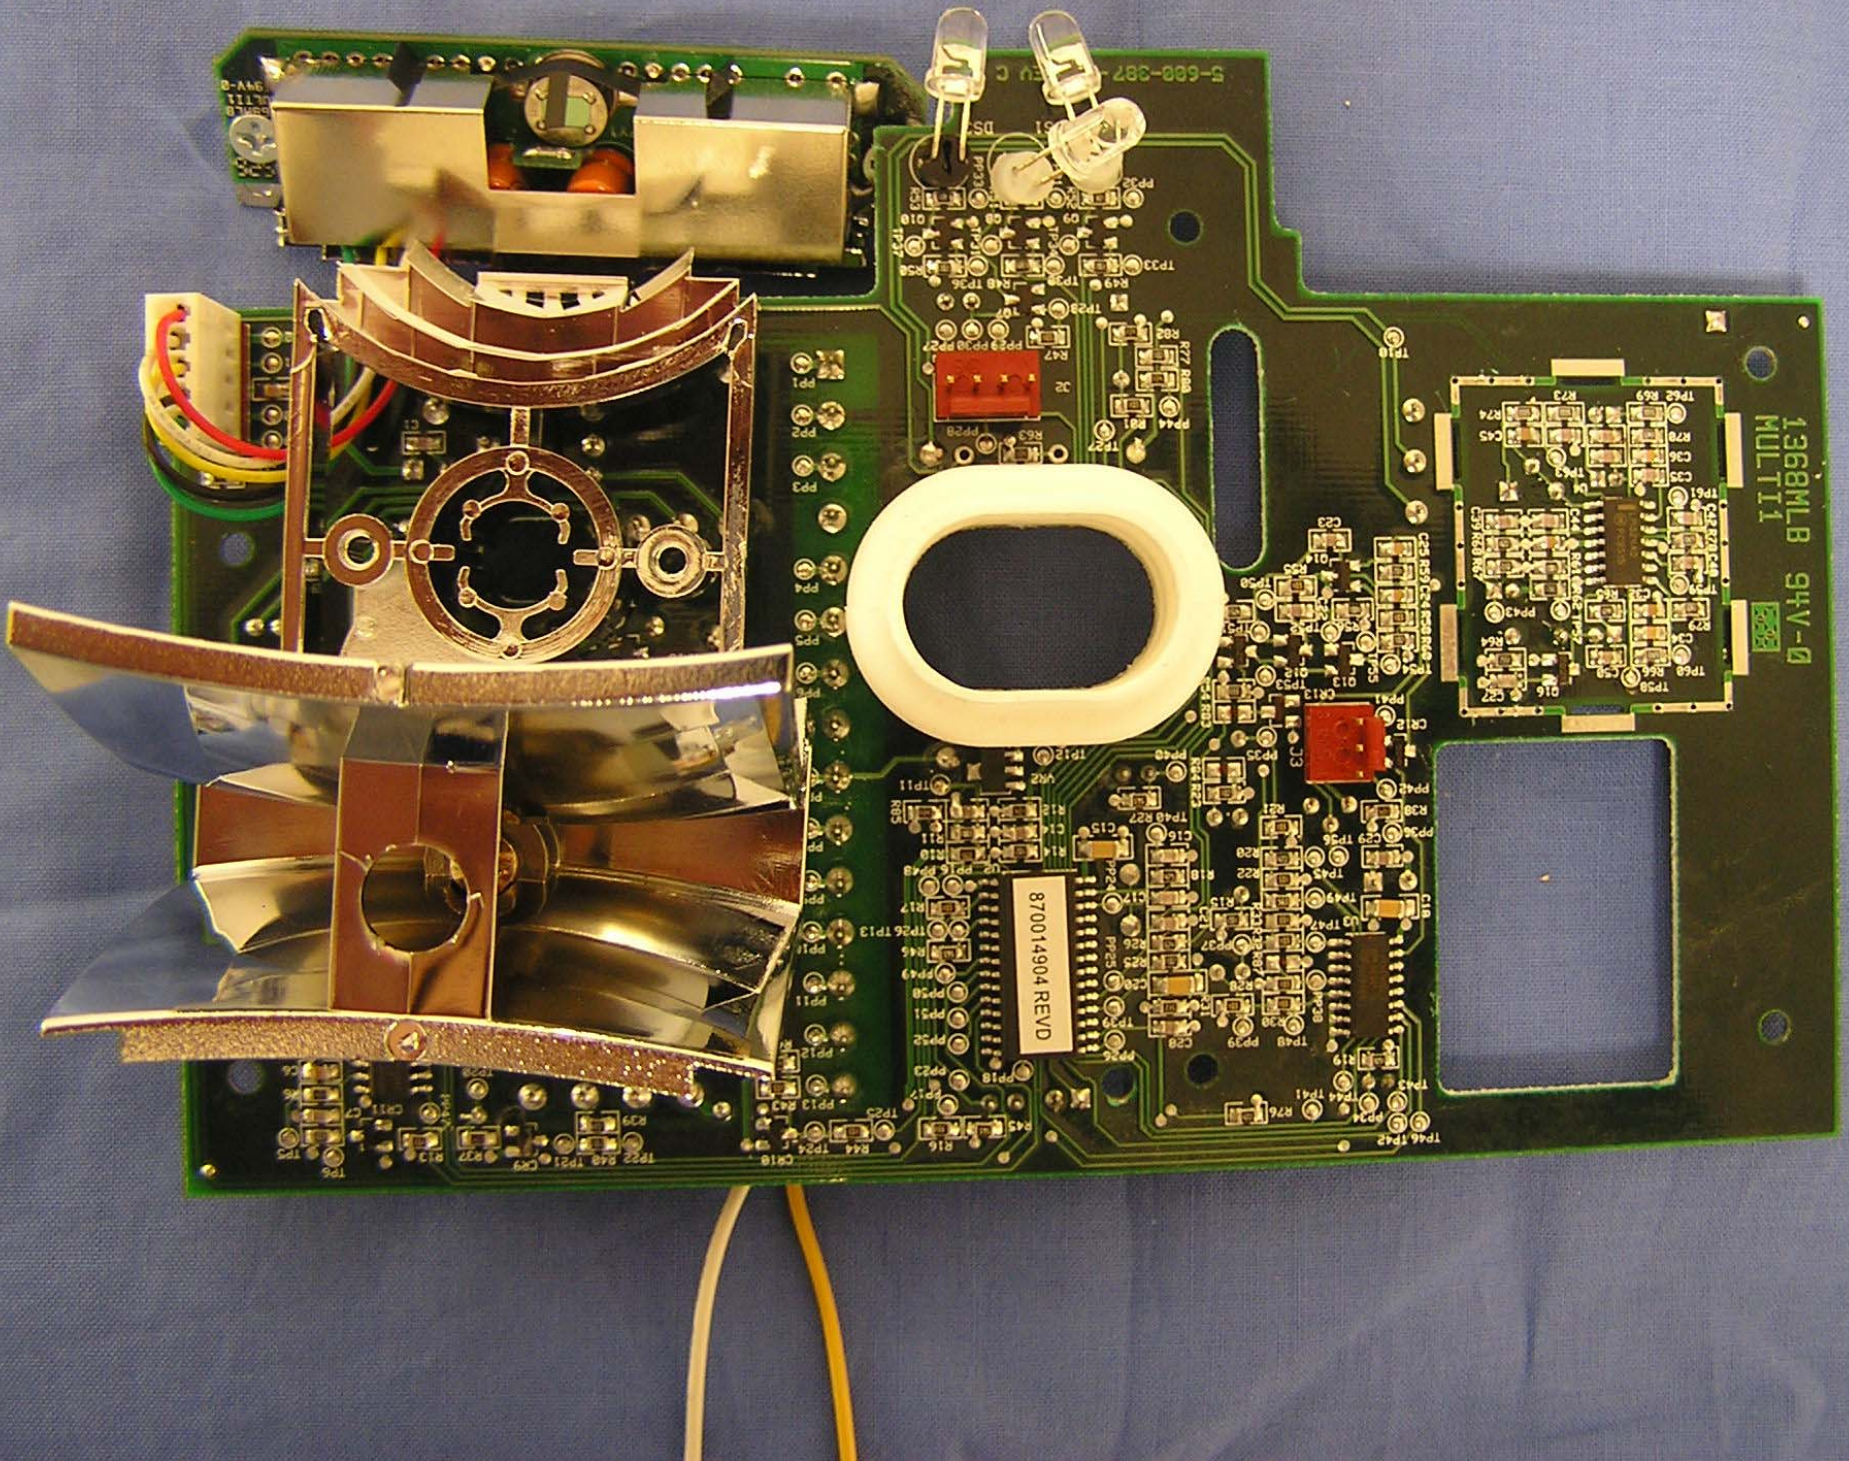

1368MLB 94V-0
MULTI1

870014904 REV D

5-680-387