

APPLICATION CERTIFICATION  
On Behalf of  
Polaroid Corporation

Weather Station Transmitter  
Model No.: 6057A

FCC ID: C2G6057AT

Prepared for : Polaroid Corporation  
Address : 565 Tech Square-7C, Cambridge, Massachusetts  
02130 United States

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20071630  
Date of Test : July 6, 2007  
Date of Report : July 9, 2007

## TABLE OF CONTENTS

Description	Page
<b>Test Report Certification</b>	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	4
1.3. Measurement Uncertainty .....	4
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>5</b>
<b>3. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>6</b>
3.1. Block Diagram of Test Setup.....	6
3.2. The Field Strength of Radiation Emission Measurement Limits.....	6
3.3. Configuration of EUT on Measurement .....	7
3.4. Operating Condition of EUT .....	7
3.5. Test Procedure .....	7
3.6. The Field Strength of Radiation Emission Measurement Results .....	8
<b>4. 20DB OCCUPIED BANDWIDTH .....</b>	<b>10</b>
4.1. Block Diagram of Test Setup.....	10
4.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c) .....	10
4.3. EUT Configuration on Measurement .....	11
4.4. Operating Condition of EUT .....	11
4.5. Test Procedure .....	11
4.6. Measurement Result .....	12
<b>5. DURATION TIME AND SILENT PERIOD MEASUREMENT.....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. Duration Time and silent period measurement according to FCC Part 15 Section 15.231(e) .....	13
5.3. EUT Configuration on Measurement .....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	14
5.6. Measurement Result .....	15
<b>6. AVERAGE FACTOR MEASUREMENT .....</b>	<b>16</b>
6.1. Block Diagram of Test Setup.....	16
6.2. Average factor Measurement according to ANSI 63.4: 2003.....	16
6.3. EUT Configuration on Measurement .....	17
6.4. Operating Condition of EUT .....	17
6.5. Test Procedure .....	17
6.6. Measurement Result .....	18
<b>APPENDIX I ( TEST CURVES ) (9pages)</b>	

## Test Report Certification

Applicant : Polaroid Corporation  
 Manufacturer : Flextronics Link (HK) Ltd.  
 EUT Description : Weather Station Transmitter  
     (A) MODEL NO.: 6057A  
     (B) SERIAL NO.: N/A  
     (C) POWER SUPPLY: DC 3.0V (AAA Battery ×2)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.231: 2006 & ANSI 63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : \_\_\_\_\_ July 6, 2007

Prepared by :




(Engineer)

Reviewer :



(Quality Manager)

Approved & Authorized Signer :



(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Weather Station Transmitter  
 Model Number : 6057A  
 Memo : This device is a transmitter  
 Power Supply : DC 3.0V(AAA Battery ×2)  
 Applicant : Polaroid Corporation  
 Address : 565 Tech Square-7C, Cambridge, Massachusetts 02130 United States  
 Manufacturer : Flextronics Link (HK) Ltd.  
 Address : 6F, Block A3, Cyber-tech Zone, Gaoxin Ave. 7<sup>th</sup>. S. Hi-tech Industrial Park, Nanshan District, Shenzhen, China  
 Date of sample received : July 2, 2007  
 Date of Test : July 6, 2007

### 1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004  
 Accredited by FCC, May 10, 2004  
 The Certificate Registration Number is 253065  
 Accredited by Industry Canada, May 18, 2004  
 The Certificate Registration Number is IC 5077  
 Name of Firm : ACCURATE TECHNOLOGY CO. LTD  
 Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

### 1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.31.2008
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.24.2008
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2008
Bilog Antenna	Chase	CBL6112B	2591	01.24.2008
Horn Antenna	Rohde&Schwarz	HF906	100013	01.24.2008
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.31.2008
Pre-Amplifier	Agilent	8447D	2944A10619	03.31.2008

### 3. THE FIELD STRENGTH OF RADIATION EMISSION


#### 3.1. Block Diagram of Test Setup

##### 3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Weather Station Transmitter)

##### 3.1.2. Anechoic Chamber Test Setup Diagram

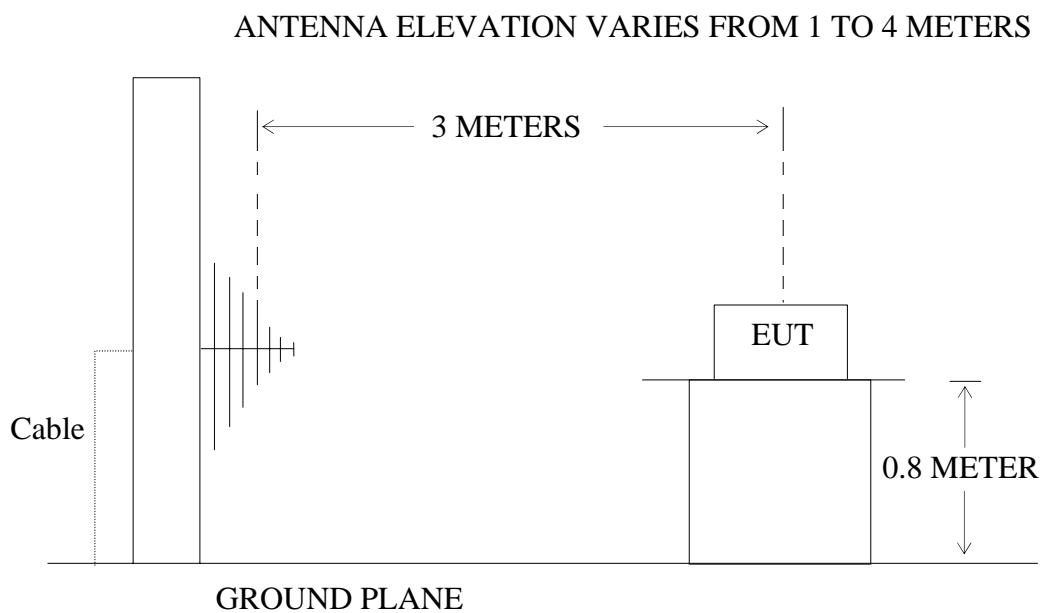

(EUT: Weather Station Transmitter)

#### 3.2. The Field Strength of Radiation Emission Measurement Limits

##### 3.2.1 Radiation Emission Measurement Limits According to Section 15.231(e)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]	Field Strength of Spurious Emission [Average] [ $\mu$ V/m]
40.66-40.70	1000	100
70-130	500	50
130-174	500 - 1500	50-150
174-260	1500	150
260-470	1500-5000	150-500
Above 470	5000	500

Where F is the frequency in MHz, The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174MHz,  $\mu\text{V/m}$  at 3 meters=22.72727(F)-2454.545; For the band 260-470MHz,  $\mu\text{V/m}$  at 3 meters=16.6667(F)-2833.3333. The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

### 3.2.2 Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

## 3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.3.1. Weather Station Transmitter (EUT)

Model Number	:	6057A
Serial Number	:	N/A
Manufacturer	:	Flextronics Link (HK) Ltd.

## 3.4.Operating Condition of EUT

3.4.1.Setup the EUT and simulator as shown as Section 3.1.

3.4.2.Turn on the power of all equipment.

3.4.3. Let the EUT work in measuring modes (TX) measure it.

## 3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz, and 1MHz in 1000-5000MHz.

The frequency range from 30MHz to 5000MHz is checked.

### 3.6. The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 5000MHz is investigated.

Date of Test:	July 6, 2007	Temperature:	25°C
EUT:	Weather Station Transmitter	Humidity:	50%
Model No.:	6057A	Power Supply:	DC 3.0V(AAA Battery ×2)
Test Mode:	TX	Test Engineer:	Andy

#### Fundamental Emission

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor Corr.	Average Factor	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
433.998	96.0	-16.1	-12.0	67.9	79.9	72.8	92.8	4.9	12.9	Horizontal
433.998	90.5	-16.1	-12.0	62.4	74.4	72.8	92.8	10.4	18.4	Vertical

#### Spurious Emission

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor Corr.	Average Factor	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
288.537	59.6	-19.8	-12.0	27.8	39.8	52.8	72.8	25.0	33.0	Horizontal
364.349	60.9	-17.3	-12.0	31.6	43.6	52.8	72.8	21.2	29.2	
398.339	60.5	-16.4	-12.0	32.1	44.1	52.8	72.8	20.7	28.7	
867.987	69.7	-12.1	-12.0	45.6	57.6	52.8	72.8	7.2	16.2	
*1301.994	65.0	-7.2	-12.0	45.8	57.8	54	74	8.2	16.2	
1736.002	61.9	-5.7	-12.0	44.2	56.2	52.8	72.8	8.6	16.6	
2169.991	58.2	-4.5	-12.0	41.7	53.7	52.8	72.8	11.1	19.1	
2603.988	58.4	-3.0	-12.0	43.4	55.4	52.8	72.8	9.4	17.4	
3037.986	58.9	-1.8	-12.0	45.1	57.1	52.8	72.8	7.7	15.7	
3471.994	55.9	-0.4	-12.0	43.5	55.5	52.8	72.8	9.3	17.3	
*3905.982	59.8	0.7	-12.0	48.5	60.5	54	74	5.5	13.5	
*4339.985	47.0	1.5	-12.0	36.5	48.5	54	74	17.5	25.5	
*4773.978	47.0	2.0	-12.0	37.0	49.0	54	74	17.0	25.0	
451.823	53.3	-16.2	-12.0	25.1	37.1	52.8	72.8	27.7	35.7	Vertical
867.987	62.6	-12.1	-12.0	38.5	50.5	52.8	72.8	14.3	22.3	
*1301.994	63.8	-7.2	-12.0	44.6	56.6	54	74	9.4	17.4	
1736.002	61.9	-5.7	-12.0	44.2	56.2	52.8	72.8	8.6	16.6	

2169.991	62.5	-4.5	-12.0	46.0	58.0	52.8	72.8	6.8	14.8	
2603.988	57.5	-3.0	-12.0	42.5	54.5	52.8	72.8	10.3	18.3	
3037.986	53.1	-1.8	-12.0	39.3	51.3	52.8	72.8	13.5	21.5	
3471.994	50.9	-0.4	-12.0	38.5	50.5	52.8	72.8	14.3	22.3	
*3905.982	59.3	0.7	-12.0	48.0	60.0	54	74	6.0	14.0	
*4339.985	41.5	1.5	-12.0	31.0	43.0	54	74	23.0	31.0	
*4773.978	52.1	2.0	-12.0	42.1	54.1	54	74	11.9	19.9	

Note:

1. \*: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission Above 1000MHz and falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. FCC Limit for Average Measurement =  $16.6667(433.912)-2833.3333 = 4398.5478\mu\text{V}/\text{m} = 72.8\text{dB}\mu\text{V}/\text{m}$

4. The spectral diagrams in appendix 1 display the measurement of peak values with corrected factors counted.


## 4. 20DB OCCUPIED BANDWIDTH

### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



#### 4.1.2. Anechoic Chamber Test Setup Diagram

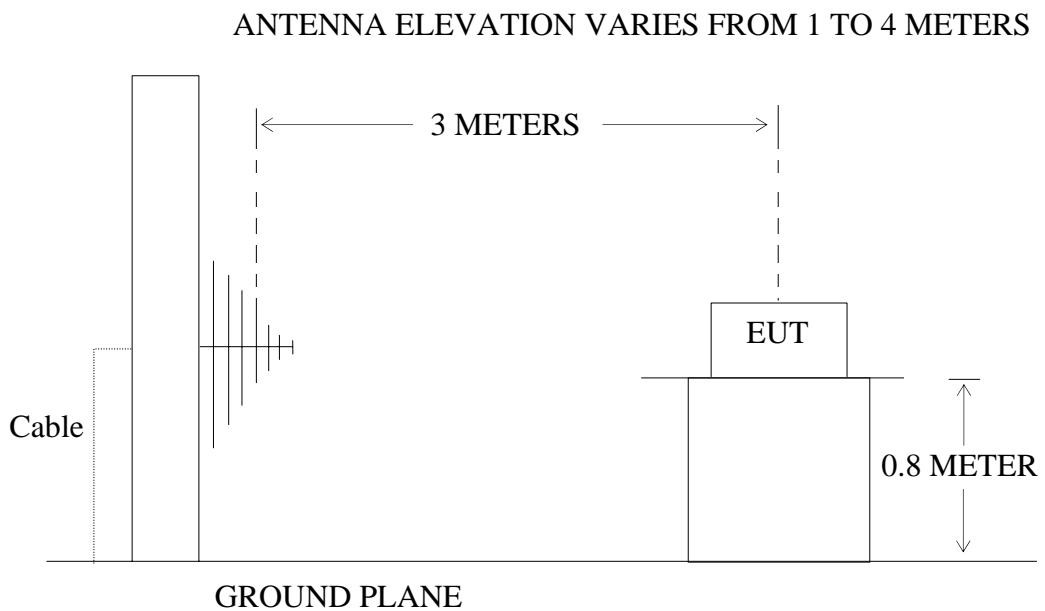

(EUT: Weather Station Transmitter)

### 4.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $433\text{MHz} \times 0.25\% = 1082.5\text{KHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 4.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.3.1.Weather Station Transmitter (EUT)

Model Number : 6057A  
Serial Number : N/A  
Manufacturer : Flextronics Link (HK) Ltd.

### 4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3.Let the EUT work in measuring mode (TX) measure it.

### 4.5.Test Procedure

4.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 300kHz.

4.5.2. Set SPA Max hold. Mark peak, -20dB

#### 4.6. Measurement Result

**The EUT does meet the FCC requirement.**

-20dB bandwidth = 52.2KHz <1082.5KHz.

The spectral diagrams in appendix I.

Reviewer : Sean

## 5. DURATION TIME AND SILENT PERIOD MEASUREMENT


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Weather Station Transmitter)

#### 5.1.2. Anechoic Chamber Test Setup Diagram

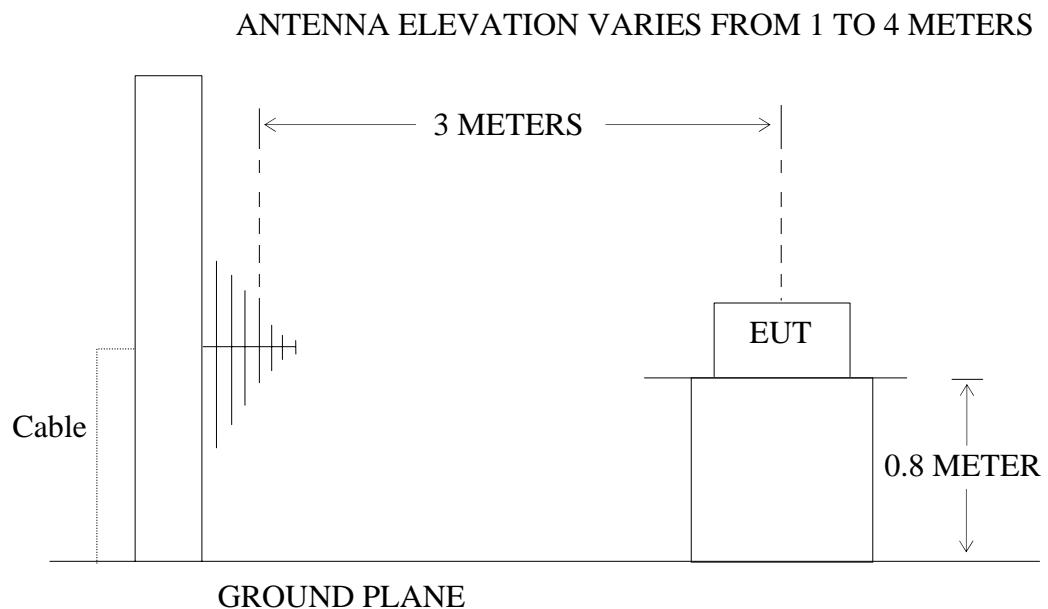

### 5.2. Duration Time and silent period measurement according to FCC Part 15

#### Section 15.231(e)

Section 15.231(e) In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on duration time and silent period measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1.Weather Station Transmitter (EUT)

Model Number : 6057A  
Serial Number : N/A  
Manufacturer : Flextronics Link (HK) Ltd.

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in measuring mode (TX) measure it.

### 5.5.Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,  
VBW =30kHz, Span = 0Hz.

5.5.2. Set EUT as normal operation.

5.5.3. Set SPA View. Delta Mark time.

## 5.6. Measurement Result

**The EUT does meet the FCC requirement.**

Duration time = 0.848 second <1 second

Silent period = 154.368 seconds > 30 times the duration of the transmission > 10seconds

The spectral diagrams in appendix I.


## 6. AVERAGE FACTOR MEASUREMENT

### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block diagram of connection between the EUT and simulators



#### 6.1.2. Anechoic Chamber Test Setup Diagram

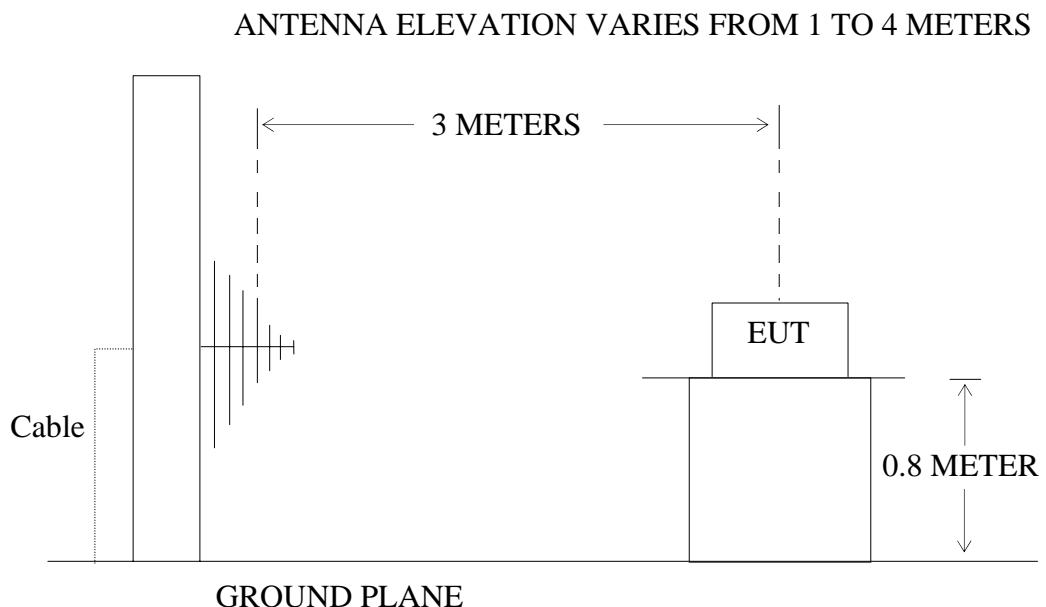

(EUT: Weather Station Transmitter)

### 6.2. Average factor Measurement according to ANSI 63.4: 2003

**ANSI 63.4: 2003 Section 13.1.4.2** Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

**Average factor in dB =  $20 \log (\text{duty cycle})$**

### 6.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1.Weather Station Transmitter (EUT)

Model Number : 6057A  
 Serial Number : N/A  
 Manufacturer : Flextronics Link (HK) Ltd.

### 6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 5.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in measuring mode (TX) measure it.

### 6.5.Test Procedure

6.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

6.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,

VBW =30kHz, Span = 0Hz.

6.5.3. Set EUT as normal operation.

6.5.4. Set SPA View. Delta Mark time.

## 6.6. Measurement Result

**The duty cycle is simply the on time divided by the period:**

Effective period of one cycle = 100ms

Sum of pulse width =  $33 \times 0.76$  ms = 25.08ms

Duty Cycle = 25.08ms/100ms = 0.2508


**Therefore, the average factor is found by  $20\log 0.2508 = -12.0\text{dB}$**

The spectral diagrams in appendix I.

## APPENDIX I (Test Curves)

*Radiated Disturbance**FCC Part 15*


EUT: Weather Station Transmitter M/N:6057A  
 Manufacturer: Flextronics Link  
 Operating Condition: TX  
 Test Site: ATC EMC Lab.SAC  
 Operator: Andy  
 Test Specification: Horizontal  
 Comment : DC 3.0V

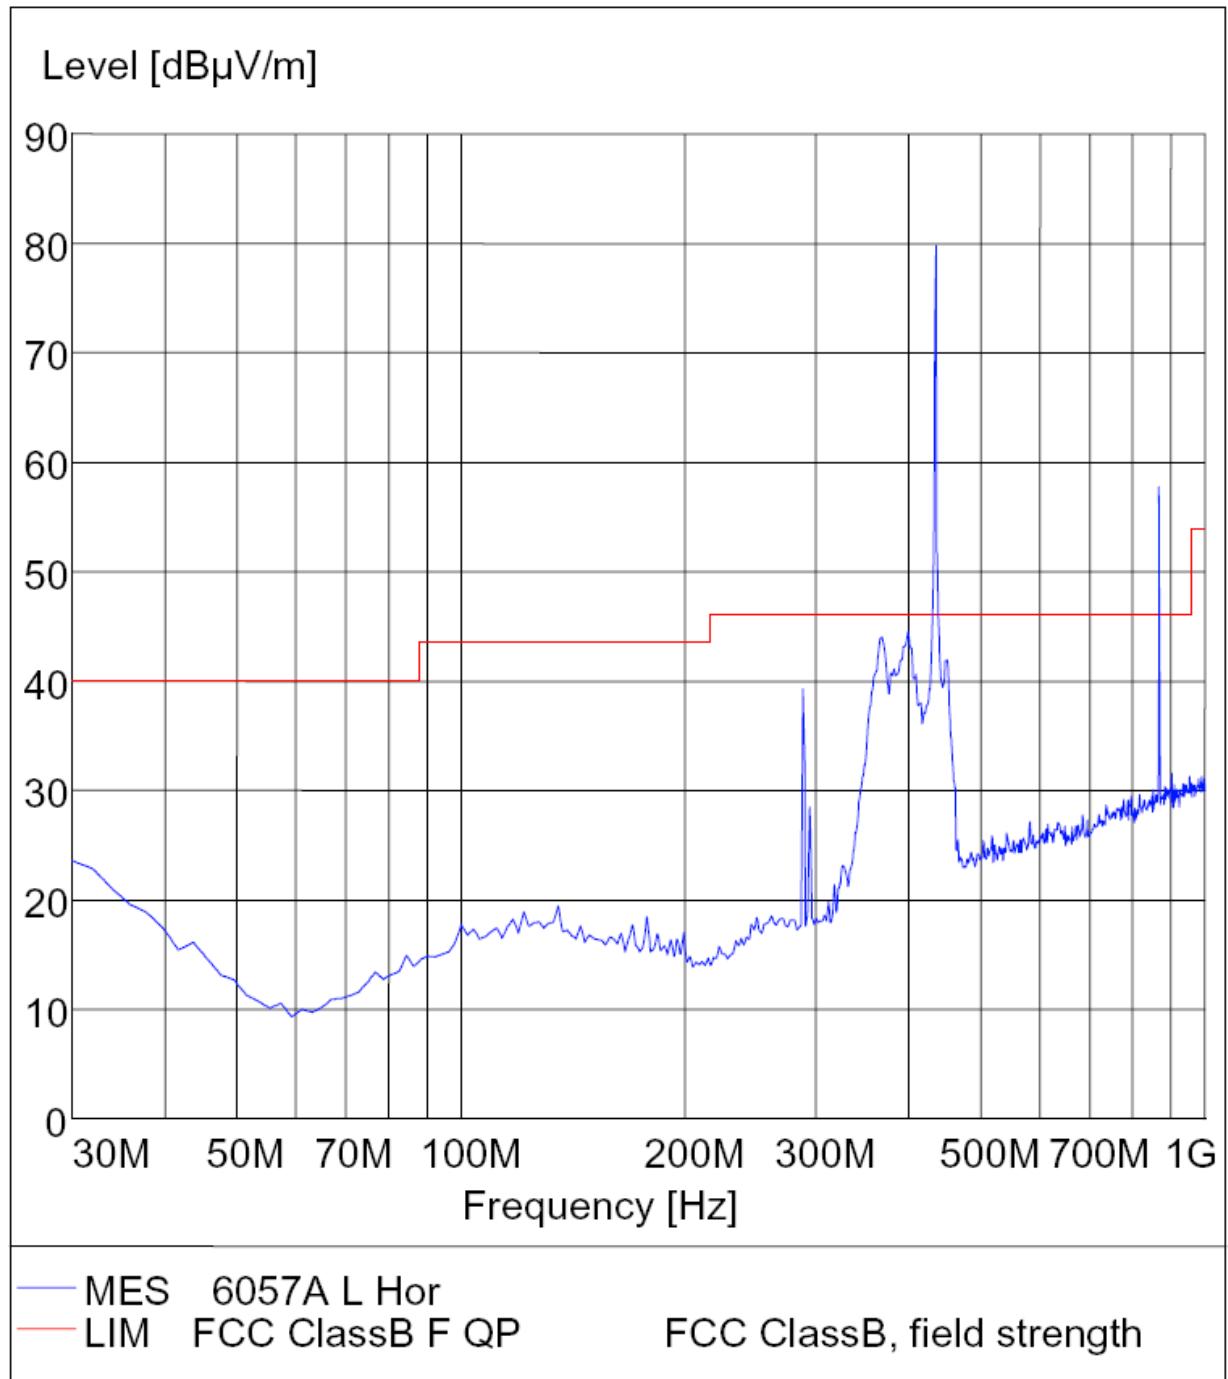

### *Radiated Disturbance*


FCC Part 15

EUT: Weather Station Transmitter M/N:6057A  
Manufacturer: Flextronics Link  
Operating Condition: TX  
Test Site: ATC EMC Lab.SAC  
Operator: Andy  
Test Specification: Vertical  
Comment : DC 3.0V

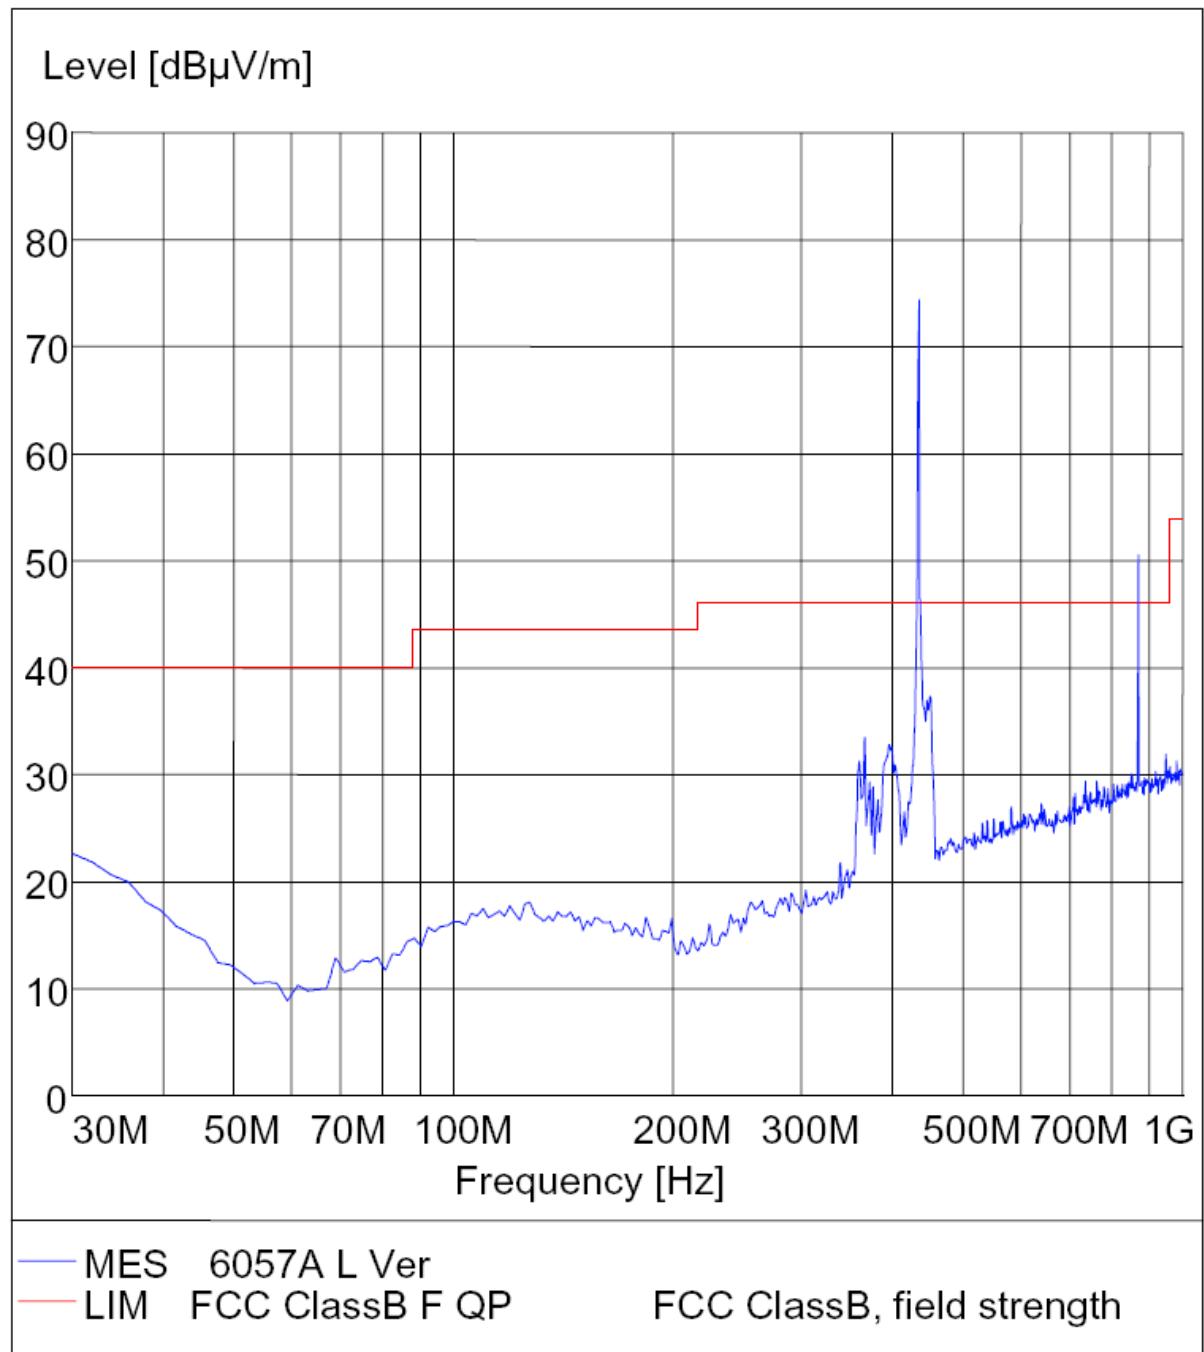


*Radiated Disturbance**FCC Part 15*


EUT: Weather Station Transmitter  
 Manufacturer: Flextronics Link  
 Operating Condition: TX  
 Test Site: ATC EMC Lab.SAC  
 Operator: Andy  
 Test Specification: Horizontal  
 Comment : DC 3.0V

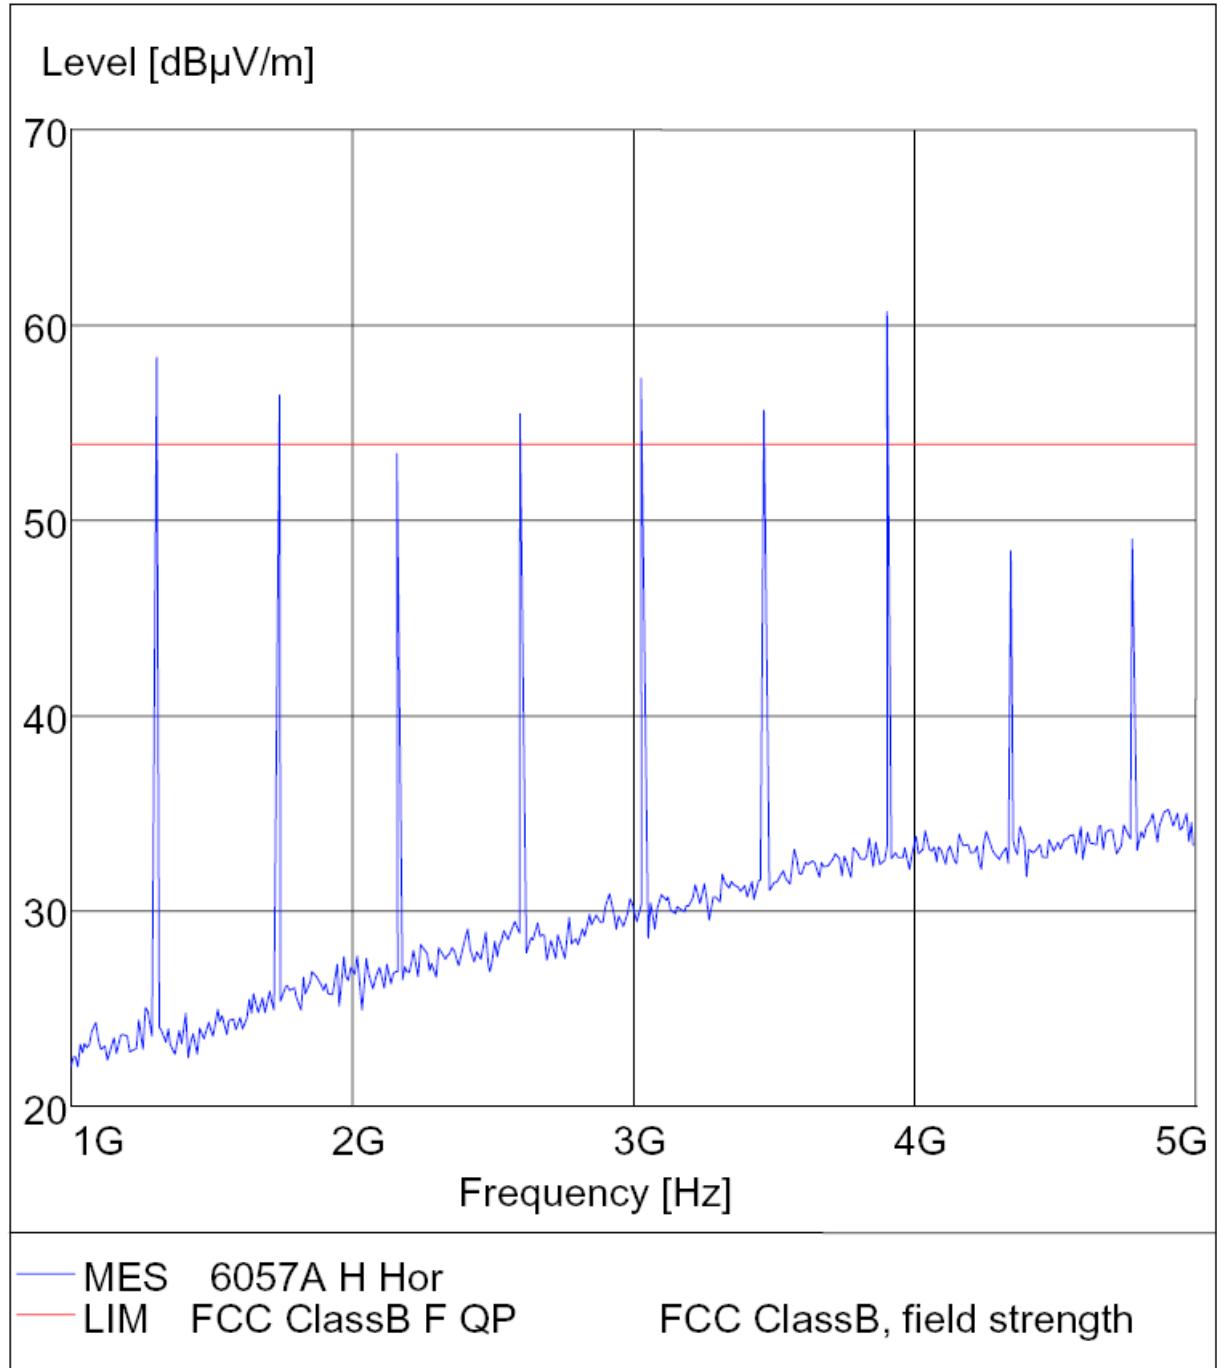



**Radiated Disturbance****FCC Part 15**


EUT: Weather Station Transmitter M/N:6057A  
 Manufacturer: Flextronics Link  
 Operating Condition: TX  
 Test Site: ATC EMC Lab.SAC  
 Operator: Andy  
 Test Specification: Vertical  
 Comment : DC 3.0V

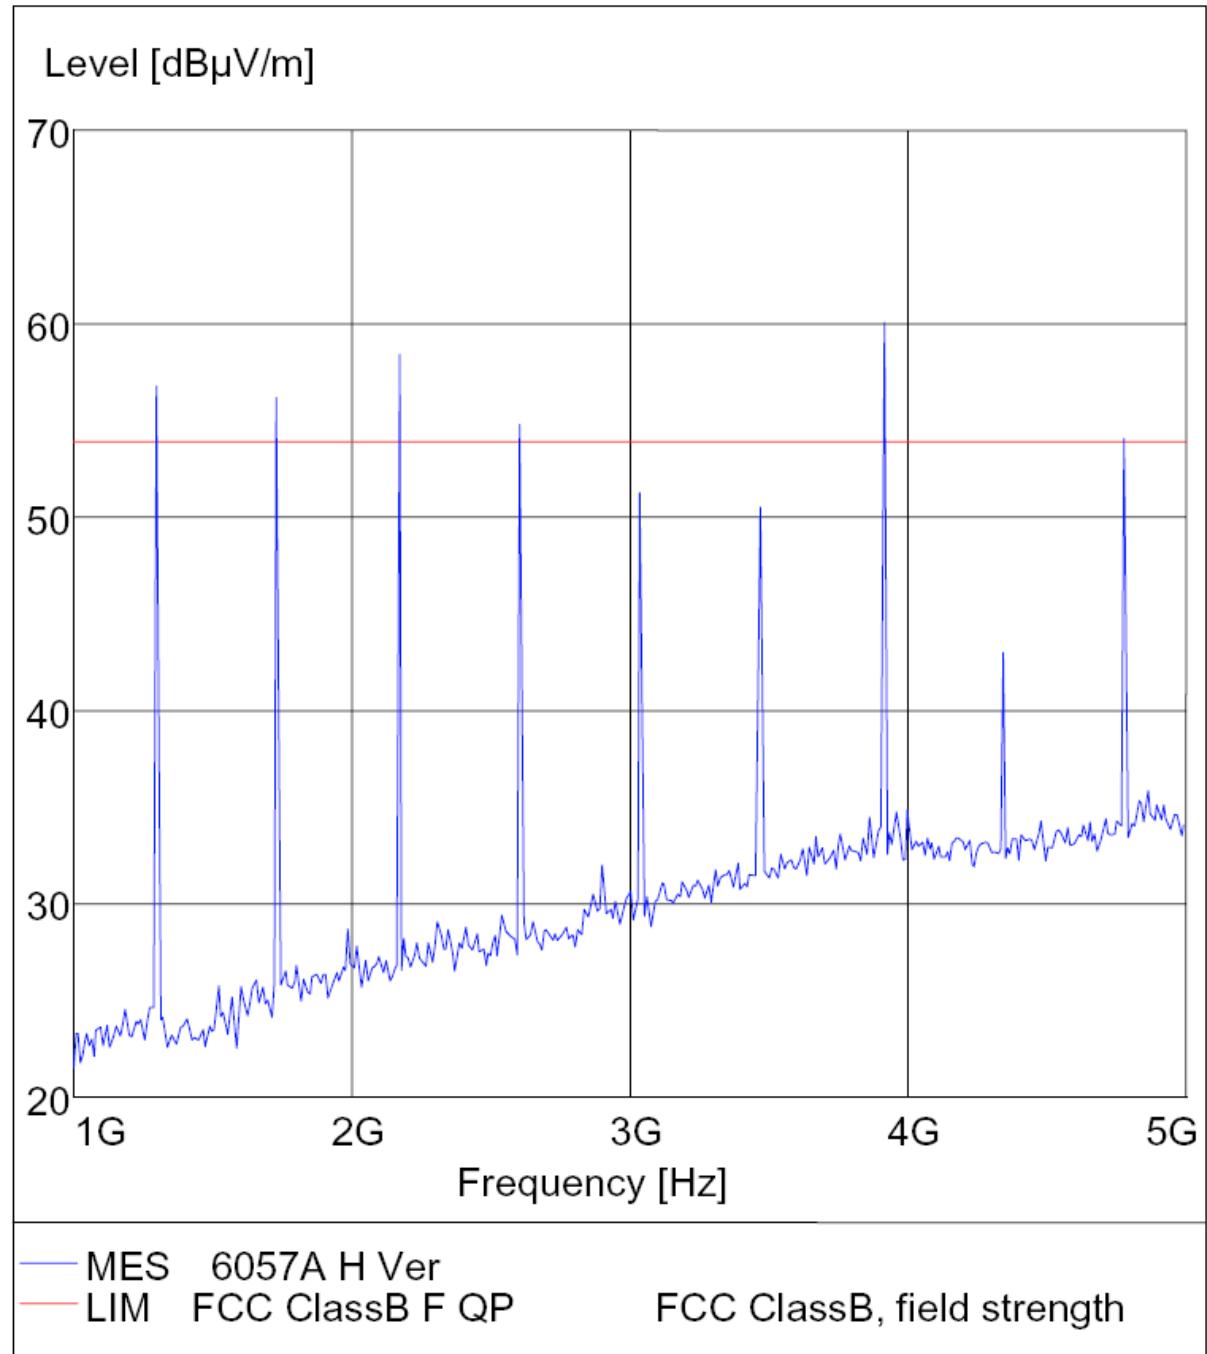

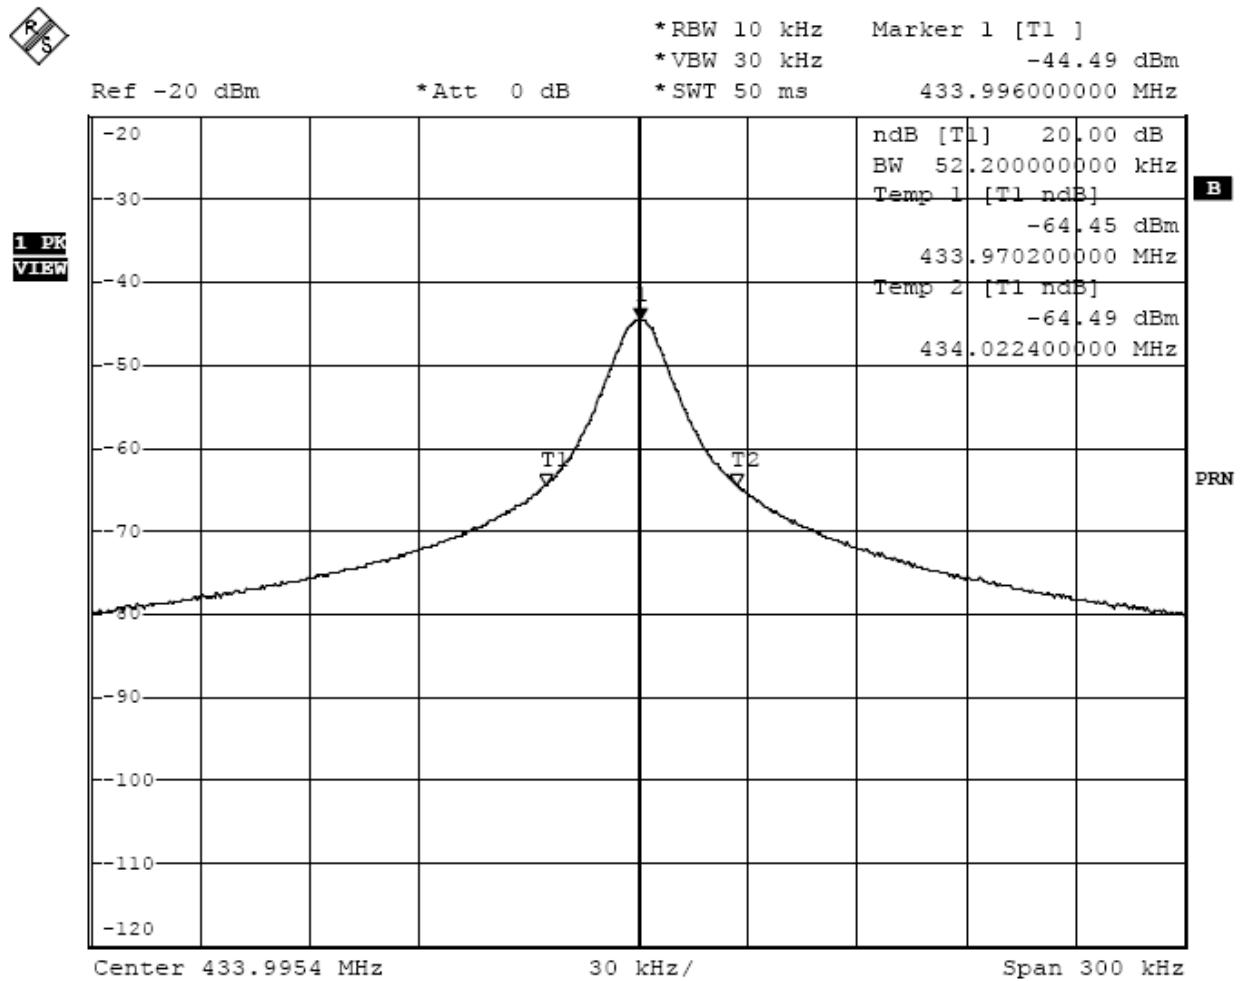


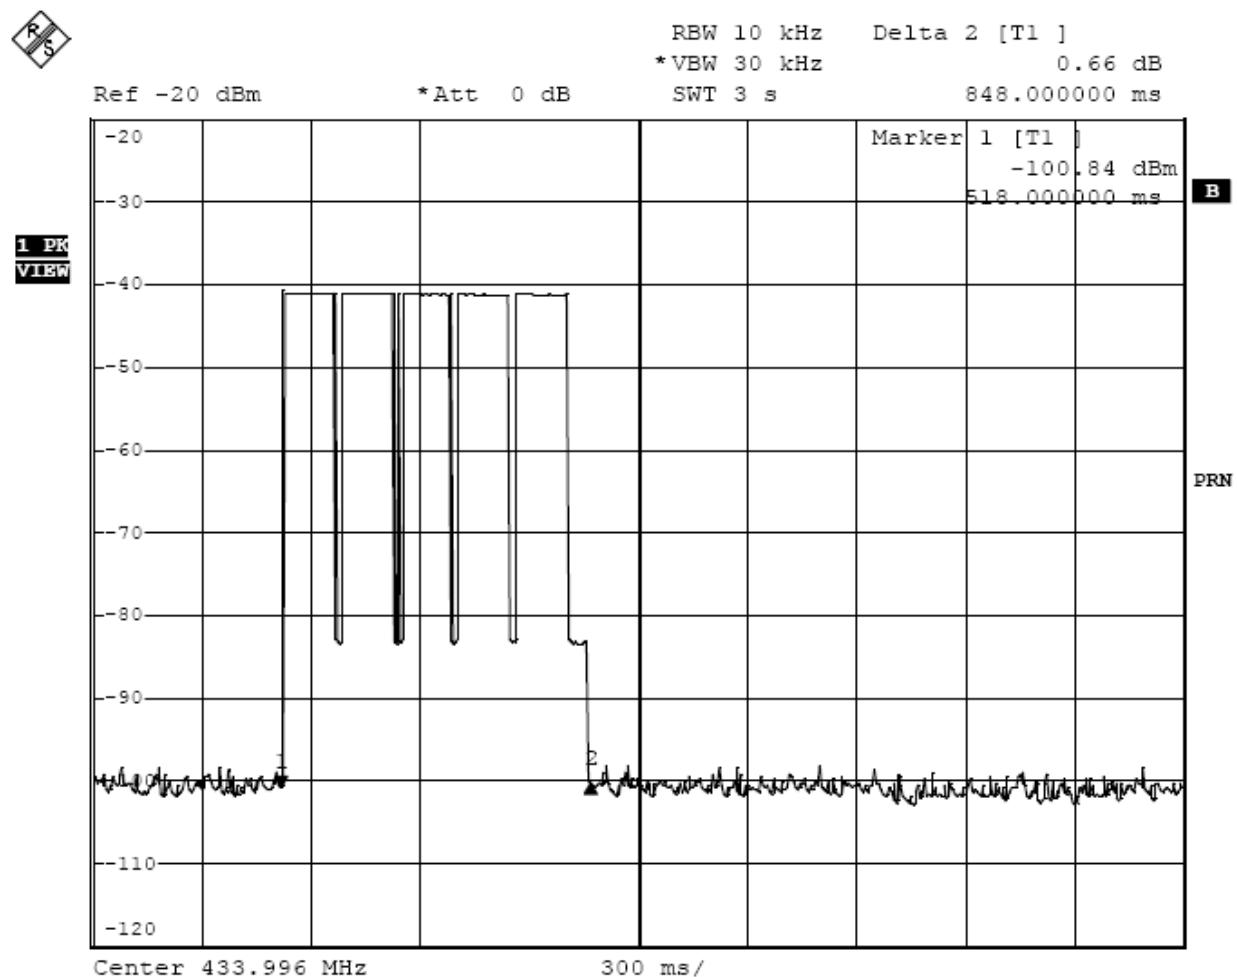

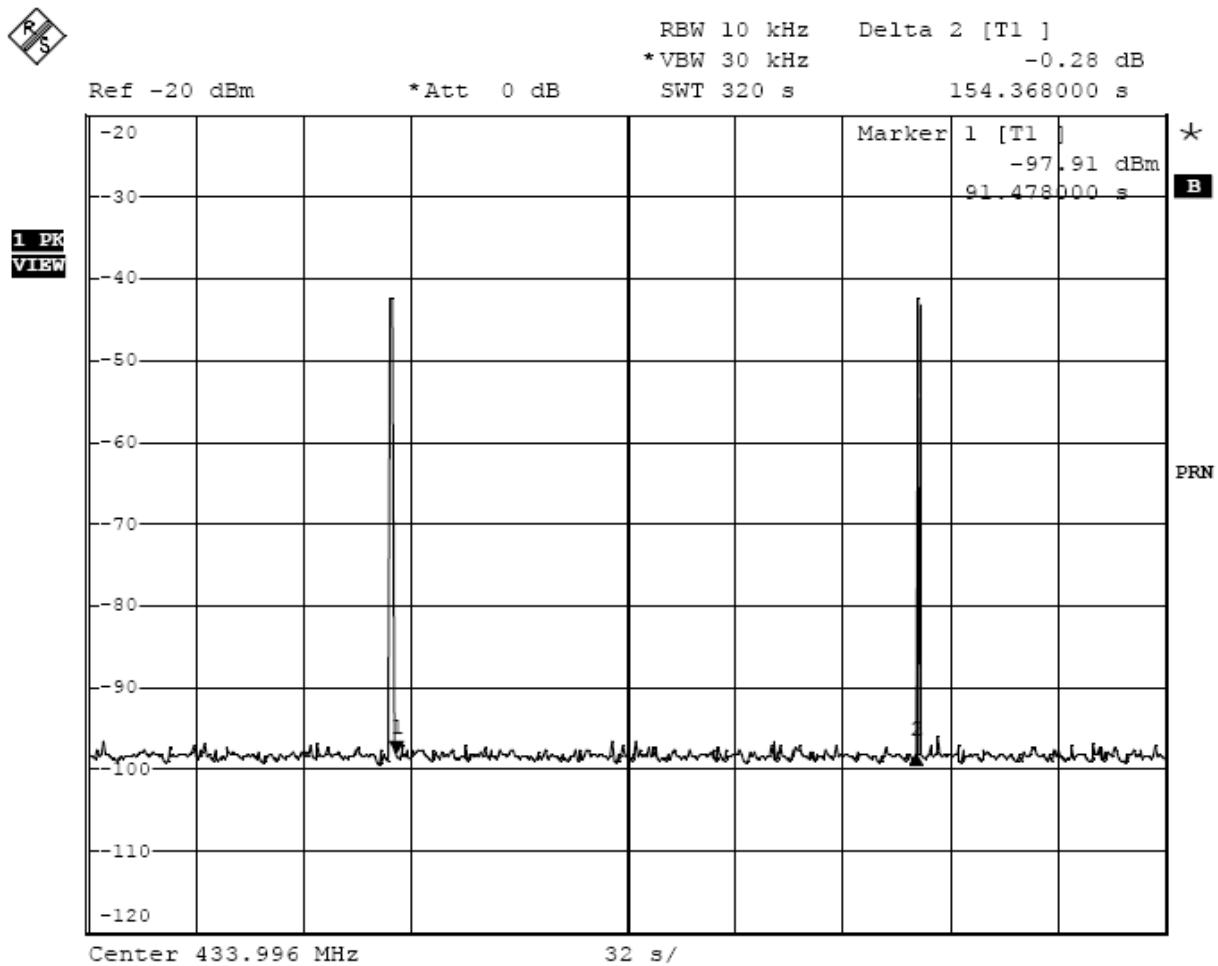

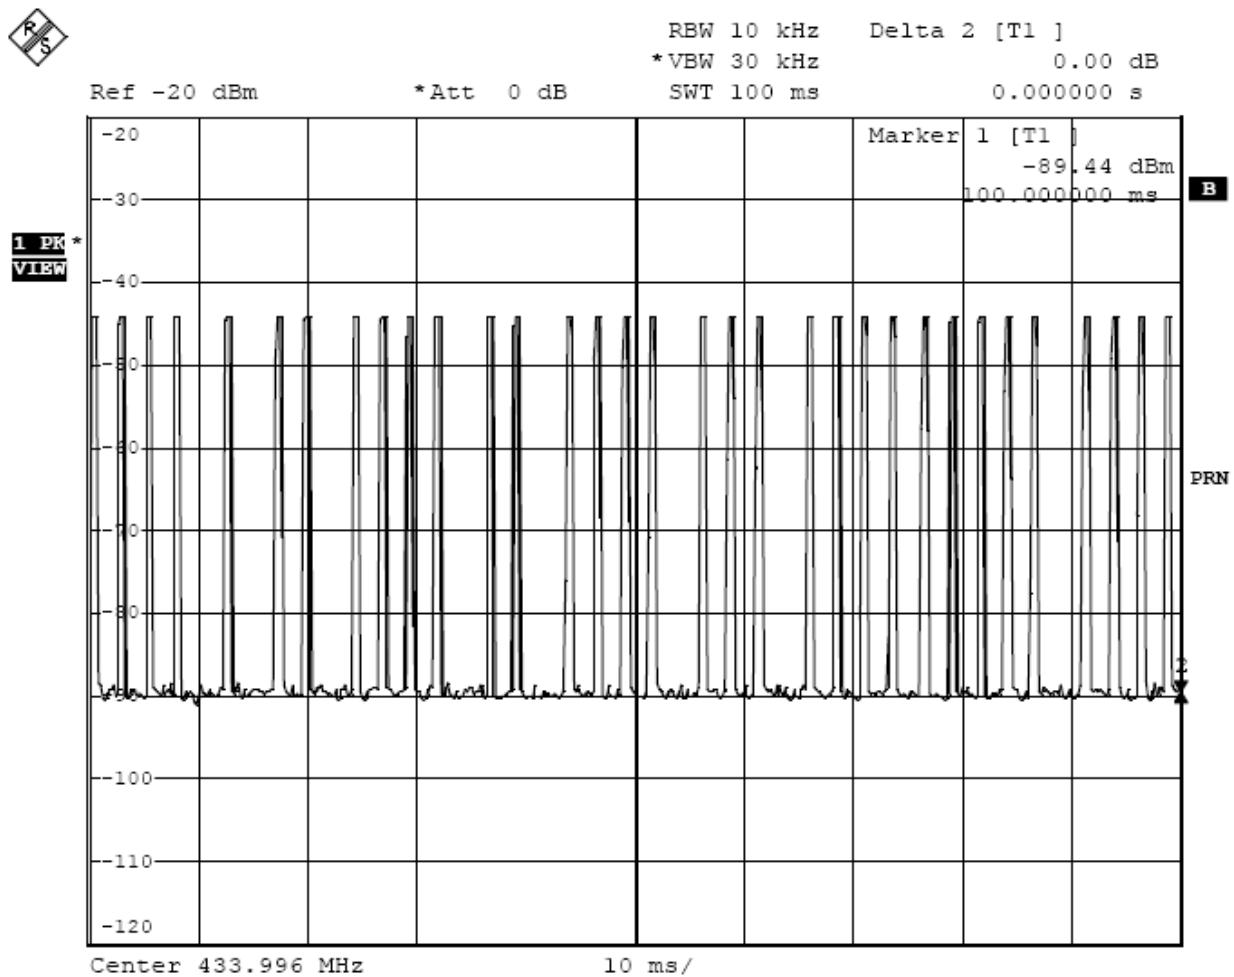

It sums of 33 'on' signals at 100ms.

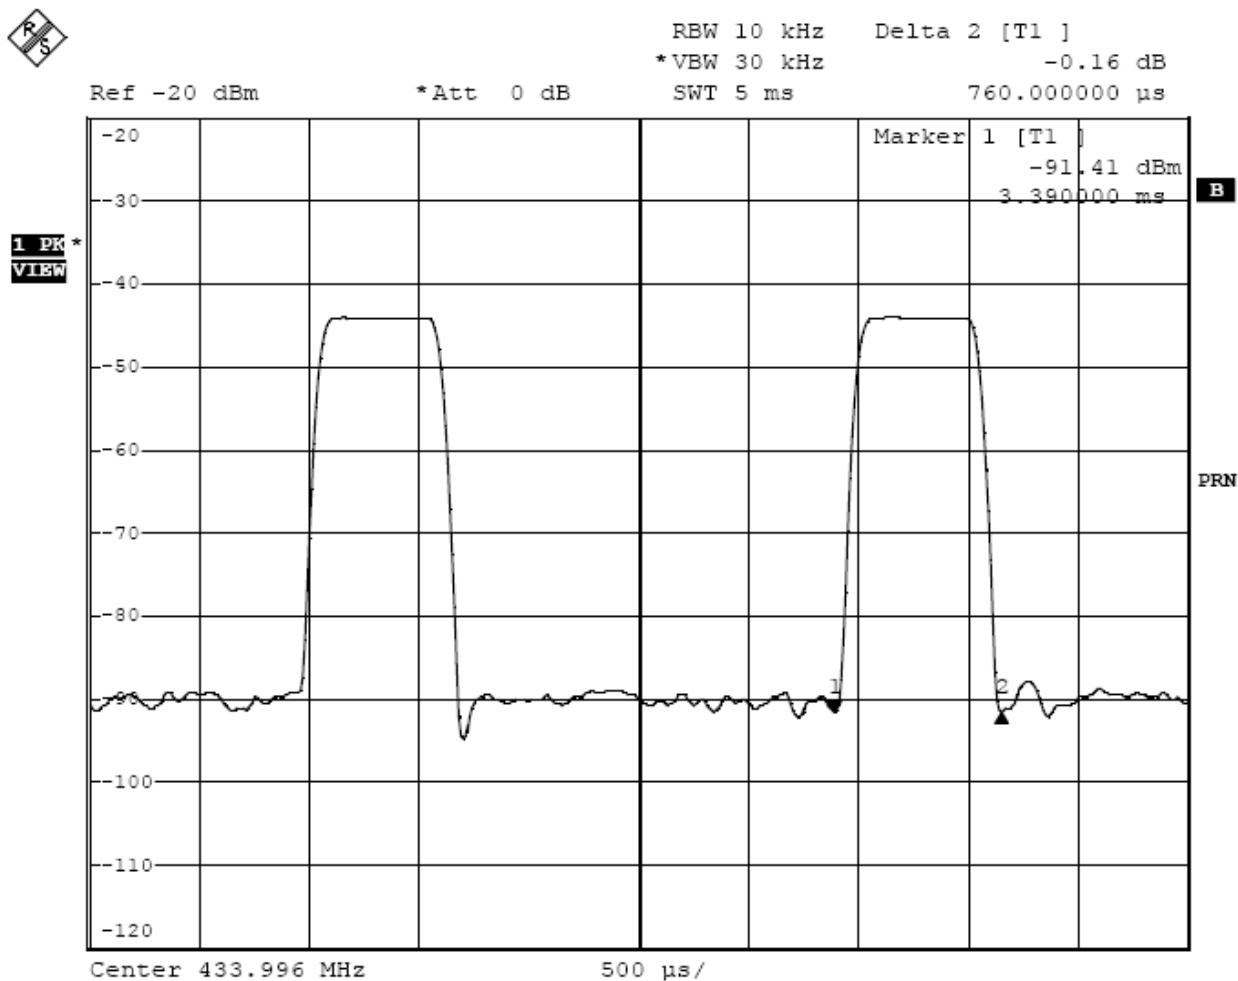

The graph shows the duration of 'on' signal. From marker 1 to marker 2, duration is 0.76ms.