



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

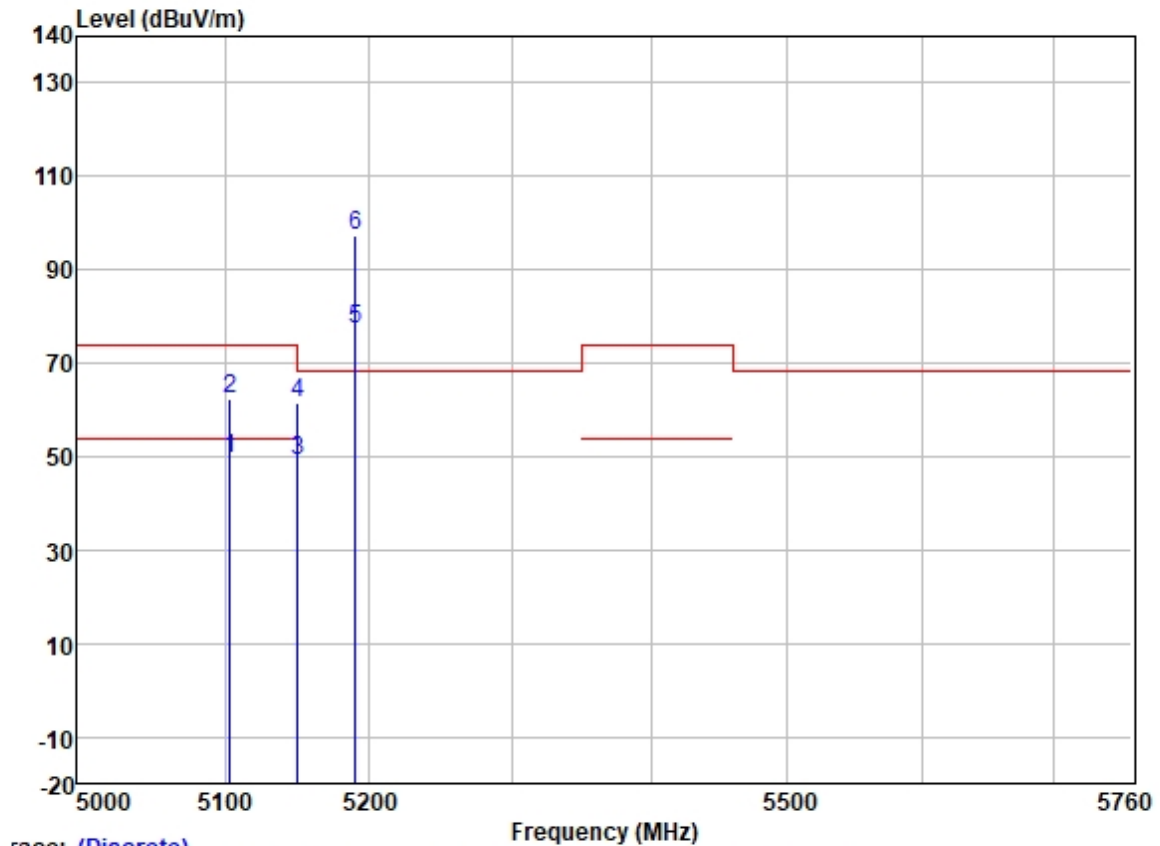

Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5103.204	48.87	31.72	5.65	36.86	49.38	54.00	-4.62	HORIZONTAL	Average
2	5103.204	61.89	31.72	5.65	36.86	62.40	74.00	-11.60	HORIZONTAL	Peak
3	5149.980	48.80	31.72	5.62	36.86	49.28	54.00	-4.72	HORIZONTAL	Average
4	5149.980	61.19	31.72	5.62	36.86	61.67	74.00	-12.33	HORIZONTAL	Peak
5	5190.000	76.89	31.73	5.60	36.87	77.35	-----	-----	HORIZONTAL	Average
6 *	5190.000	96.73	31.73	5.60	36.87	97.19	68.20	28.99	HORIZONTAL	Peak


Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

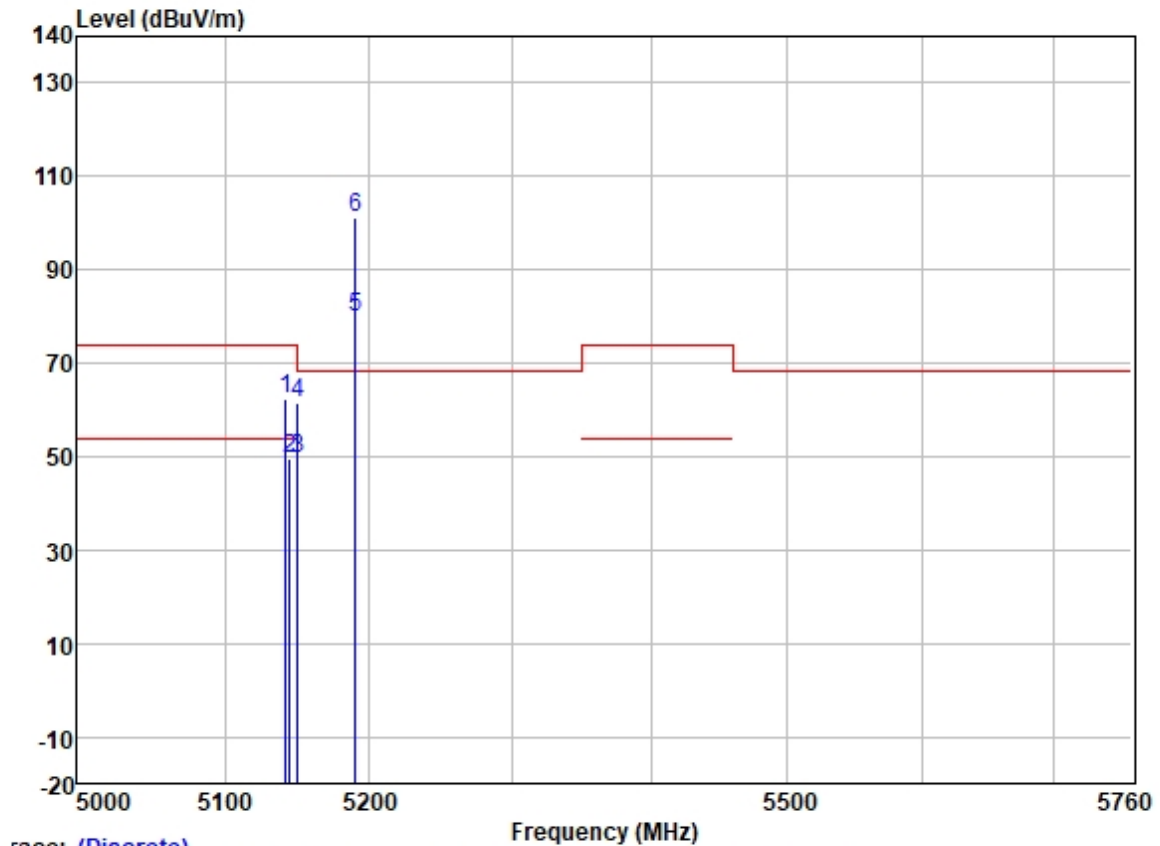

Trace: (Discrete)


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5141.444	62.01	31.72	5.63	36.86	62.50	74.00	-11.50	VERTICAL	Peak
2	5144.314	49.10	31.72	5.62	36.86	49.58	54.00	-4.42	VERTICAL	Average
3	5149.980	48.87	31.72	5.62	36.86	49.35	54.00	-4.65	VERTICAL	Average
4	5149.980	60.99	31.72	5.62	36.86	61.47	74.00	-12.53	VERTICAL	Peak
5	5190.000	79.39	31.73	5.60	36.87	79.85	-----	-----	VERTICAL	Average
6 *	5190.000	100.83	31.73	5.60	36.87	101.29	68.20	33.09	VERTICAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

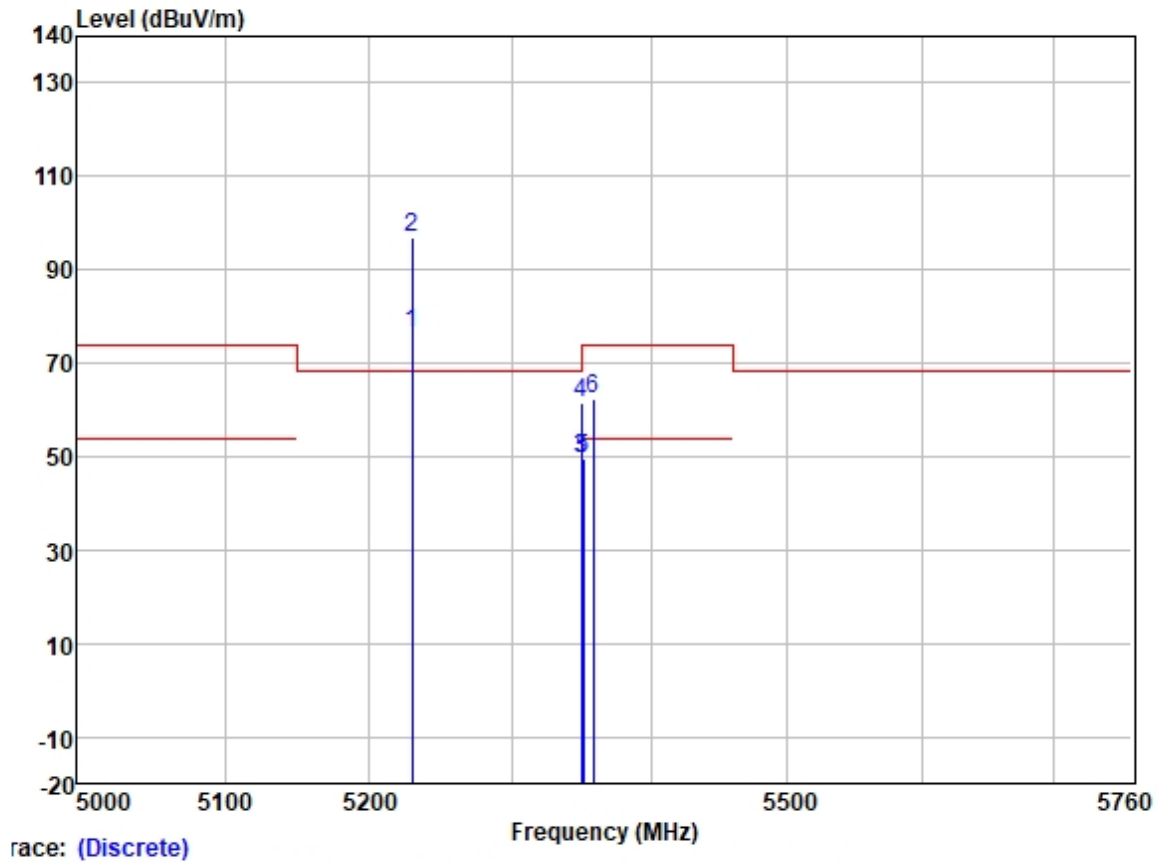


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5230.000	75.66	31.74	5.70	36.87	76.23	-----	-----	HORIZONTAL	Average
2 *	5230.000	96.30	31.74	5.70	36.87	96.87	68.20	28.67	HORIZONTAL	Peak
3	5350.020	48.48	31.77	6.05	36.88	49.42	54.00	-4.58	HORIZONTAL	Average
4	5350.020	60.45	31.77	6.05	36.88	61.39	74.00	-12.61	HORIZONTAL	Peak
5	5351.398	48.58	31.77	6.05	36.88	49.52	54.00	-4.48	HORIZONTAL	Average
6	5358.538	61.49	31.78	6.03	36.88	62.42	74.00	-11.58	HORIZONTAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

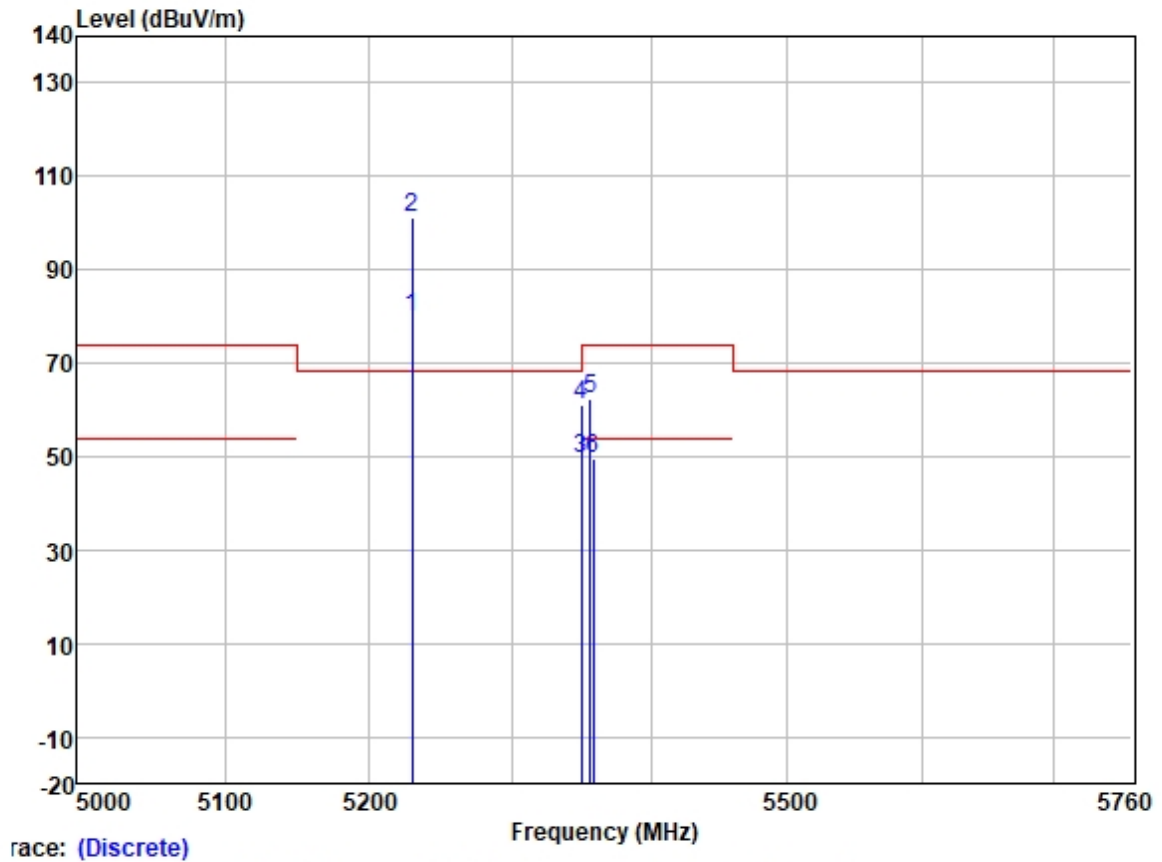

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5230.000	79.36	31.74	5.70	36.87	79.93	-----	-----	VERTICAL	Average
2 *	5230.000	100.57	31.74	5.70	36.87	101.14	68.20	32.94	VERTICAL	Peak
3	5350.020	48.49	31.77	6.05	36.88	49.43	54.00	-4.57	VERTICAL	Average
4	5350.020	59.98	31.77	6.05	36.88	60.92	74.00	-13.08	VERTICAL	Peak
5	5355.940	61.29	31.78	6.03	36.88	62.22	74.00	-11.78	VERTICAL	Peak
6	5358.376	48.64	31.78	6.03	36.88	49.57	54.00	-4.43	VERTICAL	Average

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

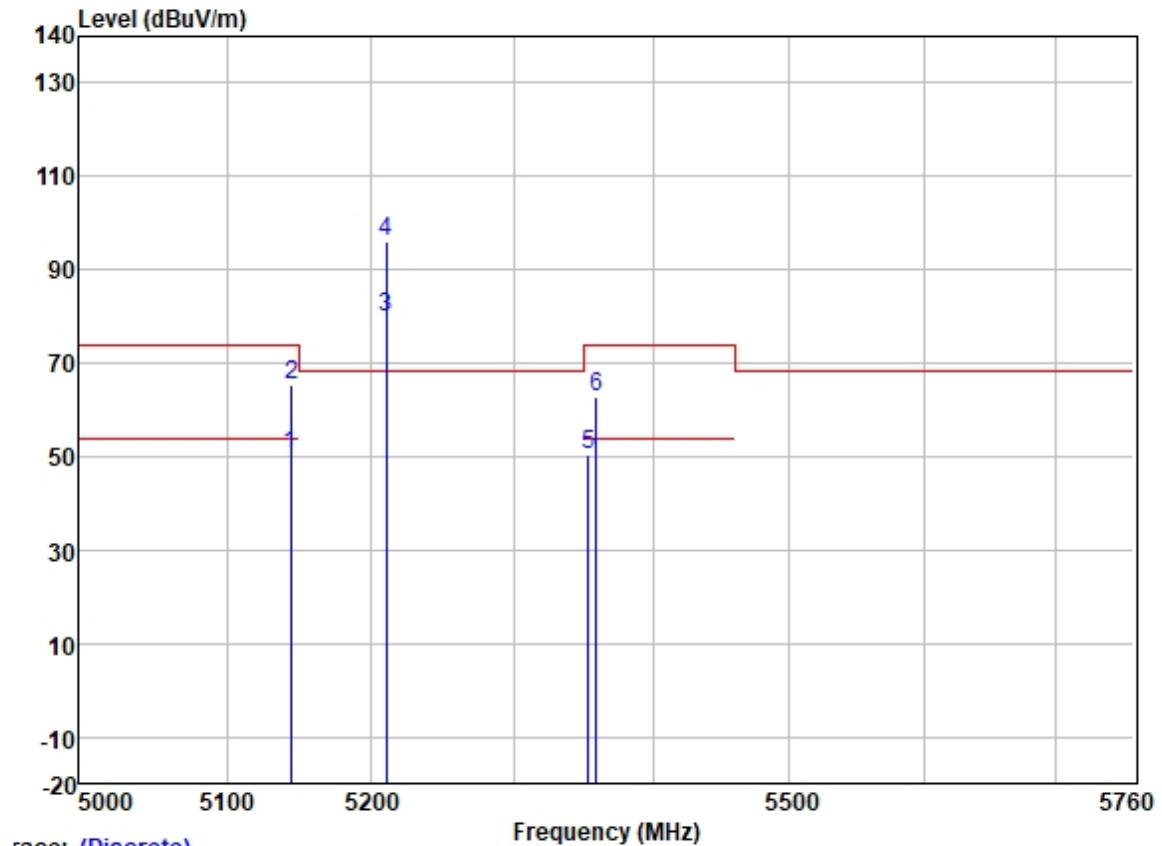

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5144.060	49.72	31.72	5.62	36.86	50.20	54.00	-3.80	HORIZONTAL	Average
2	5144.828	64.66	31.72	5.62	36.86	65.14	74.00	-8.86	HORIZONTAL	Peak
3	5210.000	79.33	31.74	5.65	36.87	79.85	-----	-----	HORIZONTAL	Average
4 *	5210.000	95.48	31.74	5.65	36.87	96.00	68.20	27.80	HORIZONTAL	Peak
5	5353.607	49.56	31.77	6.05	36.88	50.50	54.00	-3.50	HORIZONTAL	Average
6	5359.201	61.94	31.78	6.03	36.88	62.87	74.00	-11.13	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

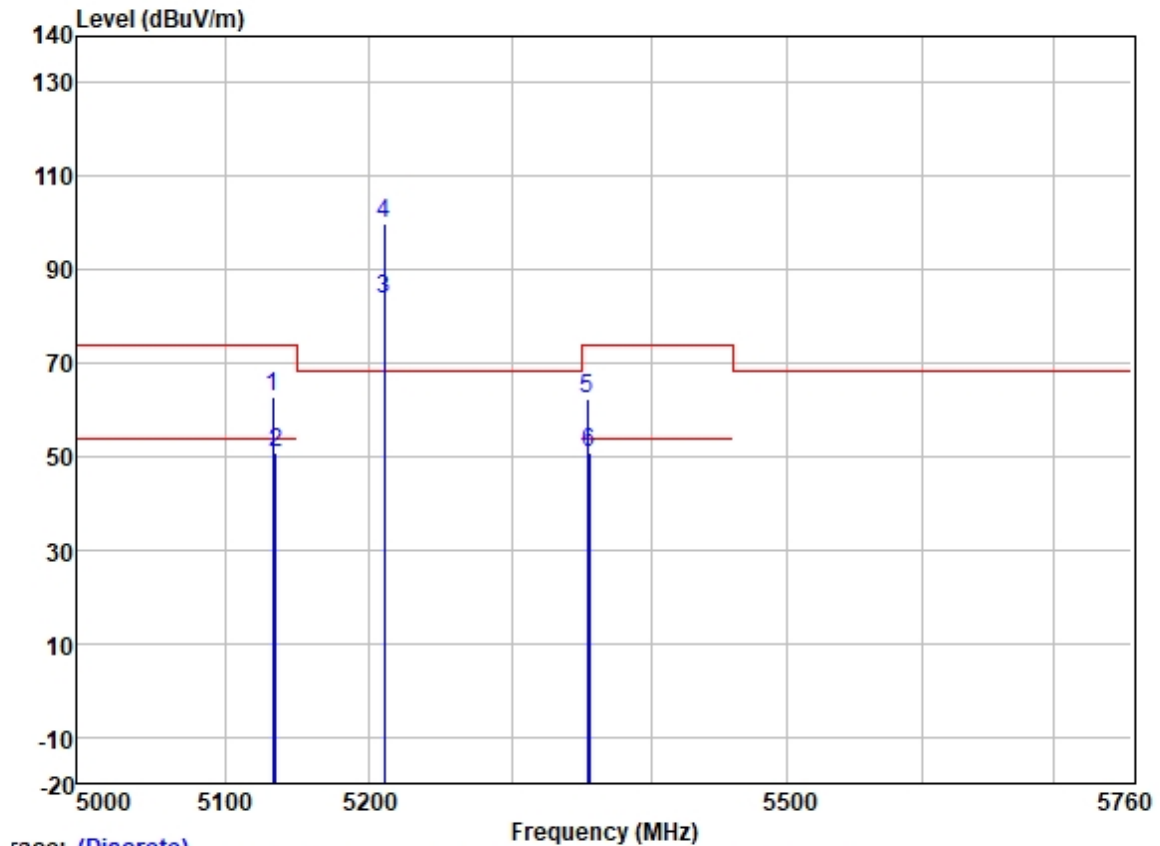


race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5132.563	62.24	31.72	5.63	36.86	62.73	74.00	-11.27	VERTICAL	Peak
2	5134.860	50.24	31.72	5.63	36.86	50.73	54.00	-3.27	VERTICAL	Average
3	5210.000	83.07	31.74	5.65	36.87	83.59	-----	-----	VERTICAL	Average
4 *	5210.000	99.39	31.74	5.65	36.87	99.91	68.20	31.71	VERTICAL	Peak
5	5353.874	61.38	31.77	6.05	36.88	62.32	74.00	-11.68	VERTICAL	Peak
6	5355.471	49.74	31.78	6.03	36.88	50.67	54.00	-3.33	VERTICAL	Average

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

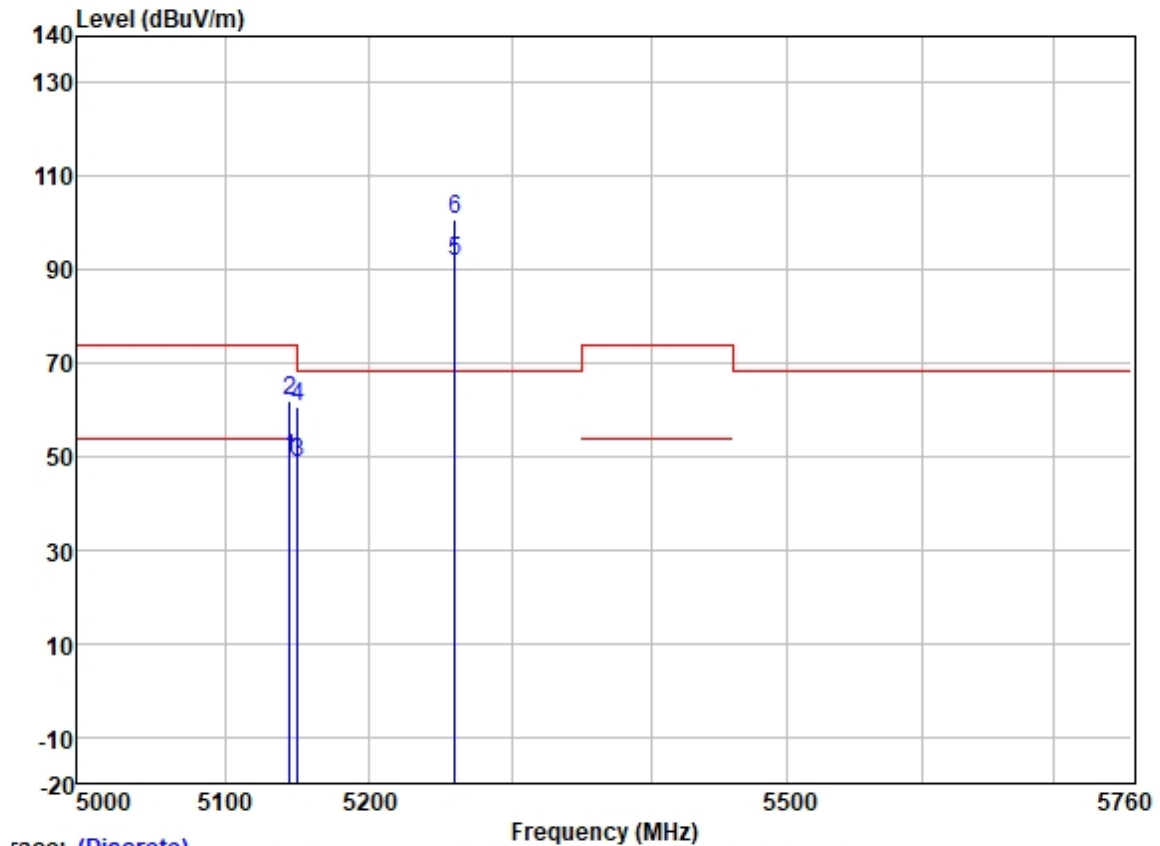

race: (Discrete)		Frequency (MHz)								
	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5144.238	48.90	31.72	5.62	36.86	49.38	54.00	-4.62	HORIZONTAL	Average
2	5144.238	61.55	31.72	5.62	36.86	62.03	74.00	-11.97	HORIZONTAL	Peak
3	5149.980	48.38	31.72	5.62	36.86	48.86	54.00	-5.14	HORIZONTAL	Average
4	5149.980	60.30	31.72	5.62	36.86	60.78	74.00	-13.22	HORIZONTAL	Peak
5	5260.000	91.34	31.75	5.77	36.87	91.99	-----	-----	HORIZONTAL	Average
6 *	5260.000	99.94	31.75	5.77	36.87	100.59	68.20	32.39	HORIZONTAL	Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

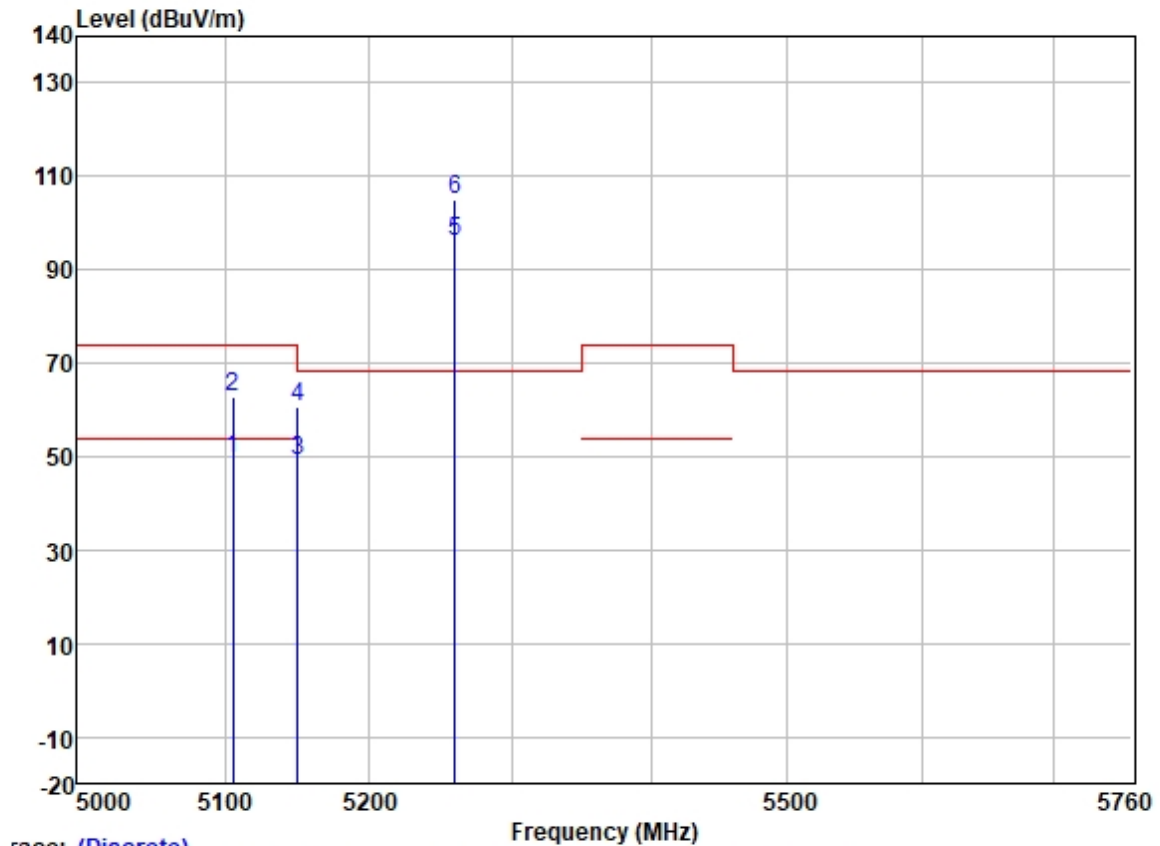

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5105.841	48.96	31.72	5.65	36.86	49.47	54.00	-4.53	VERTICAL	Average
2	5105.841	62.08	31.72	5.65	36.86	62.59	74.00	-11.41	VERTICAL	Peak
3	5149.980	48.53	31.72	5.62	36.86	49.01	54.00	-4.99	VERTICAL	Average
4	5149.980	60.19	31.72	5.62	36.86	60.67	74.00	-13.33	VERTICAL	Peak
5	5260.000	95.21	31.75	5.77	36.87	95.86	-----	-----	VERTICAL	Average
6 *	5260.000	104.43	31.75	5.77	36.87	105.08	68.20	36.88	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

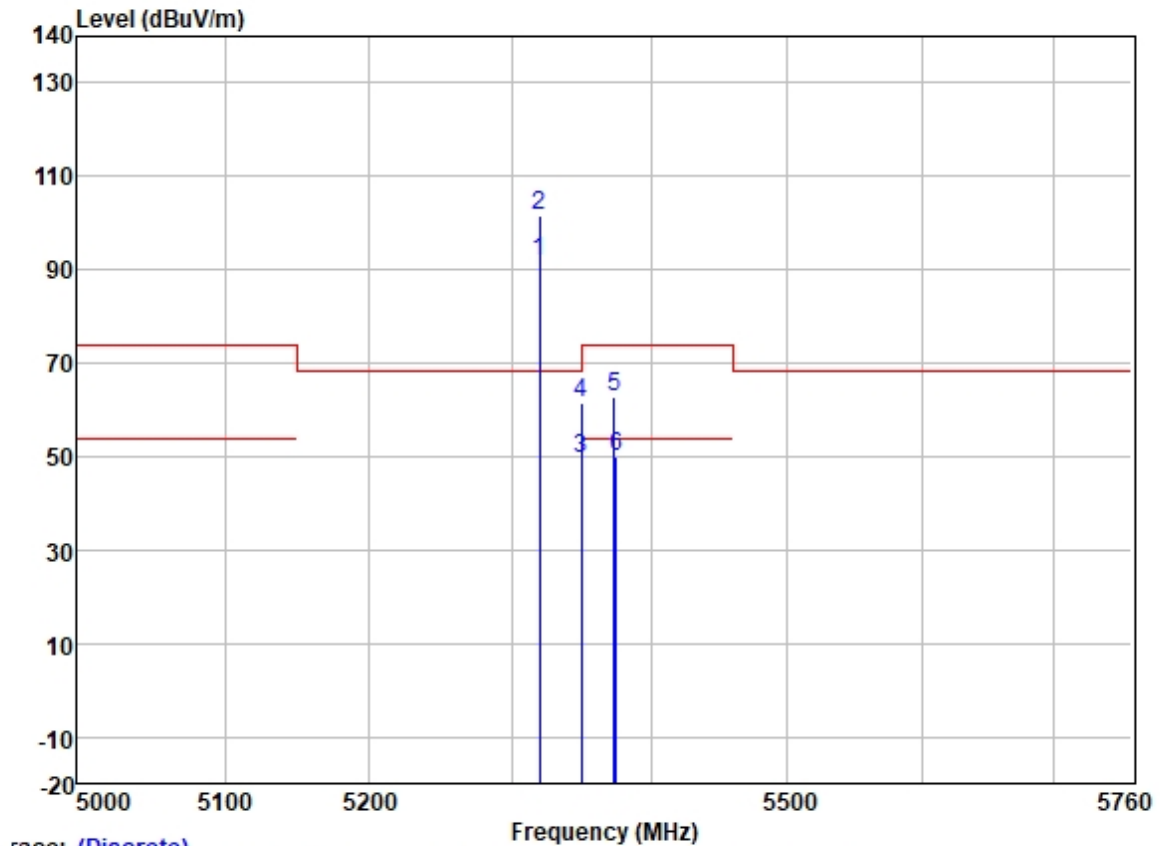

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	90.86	31.77	6.08	36.88	91.83	-----	-----	HORIZONTAL	Average
2 *	5320.000	100.42	31.77	6.08	36.88	101.39	68.20	33.19	HORIZONTAL	Peak
3	5350.020	48.48	31.77	6.05	36.88	49.42	54.00	-4.58	HORIZONTAL	Average
4	5350.020	60.41	31.77	6.05	36.88	61.35	74.00	-12.65	HORIZONTAL	Peak
5	5373.619	61.88	31.78	6.02	36.88	62.80	74.00	-11.20	HORIZONTAL	Peak
6	5374.624	48.92	31.78	6.02	36.88	49.84	54.00	-4.16	HORIZONTAL	Average


Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

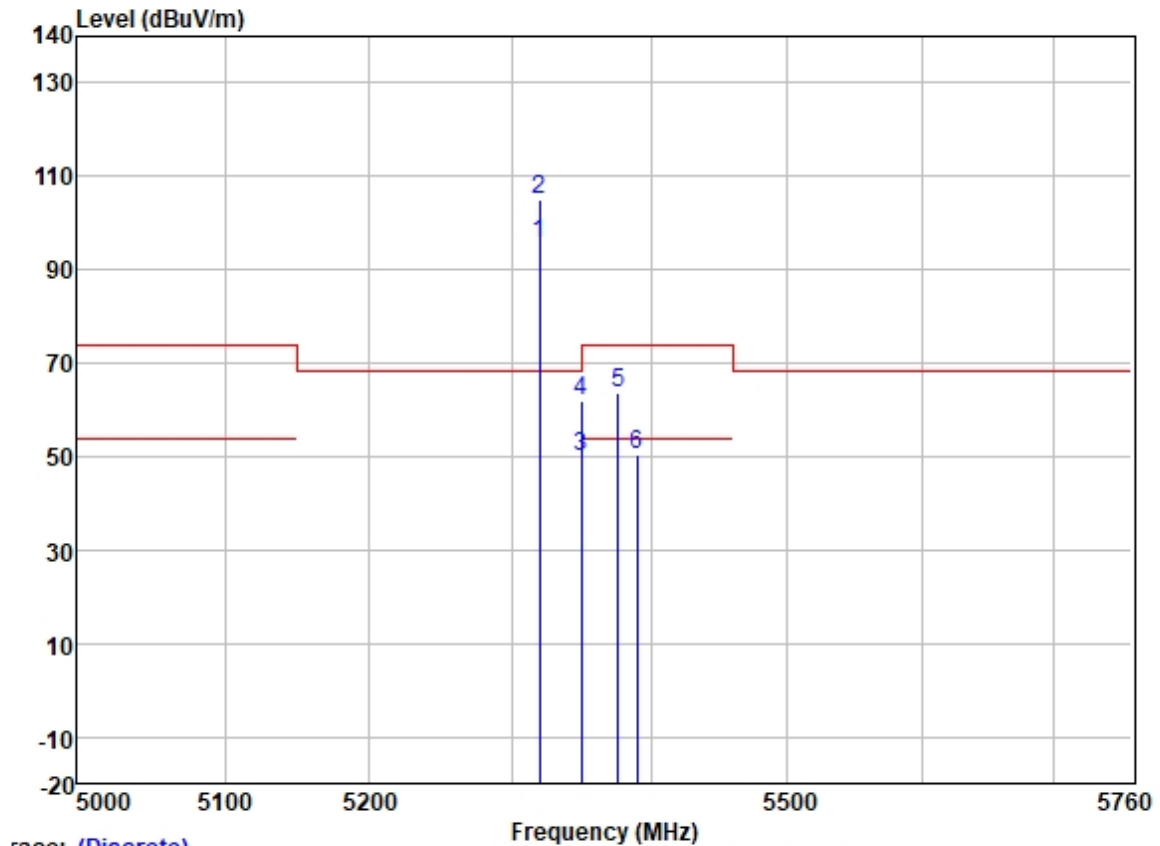

Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	94.77	31.77	6.08	36.88	95.74	-----	-----	VERTICAL	Average
2 *	5320.000	103.92	31.77	6.08	36.88	104.89	68.20	36.69	VERTICAL	Peak
3	5350.020	48.84	31.77	6.05	36.88	49.78	54.00	-4.22	VERTICAL	Average
4	5350.020	61.06	31.77	6.05	36.88	62.00	74.00	-12.00	VERTICAL	Peak
5	5376.432	62.61	31.78	6.02	36.88	63.53	74.00	-10.47	VERTICAL	Peak
6	5389.815	49.30	31.78	6.00	36.88	50.20	54.00	-3.80	VERTICAL	Average


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

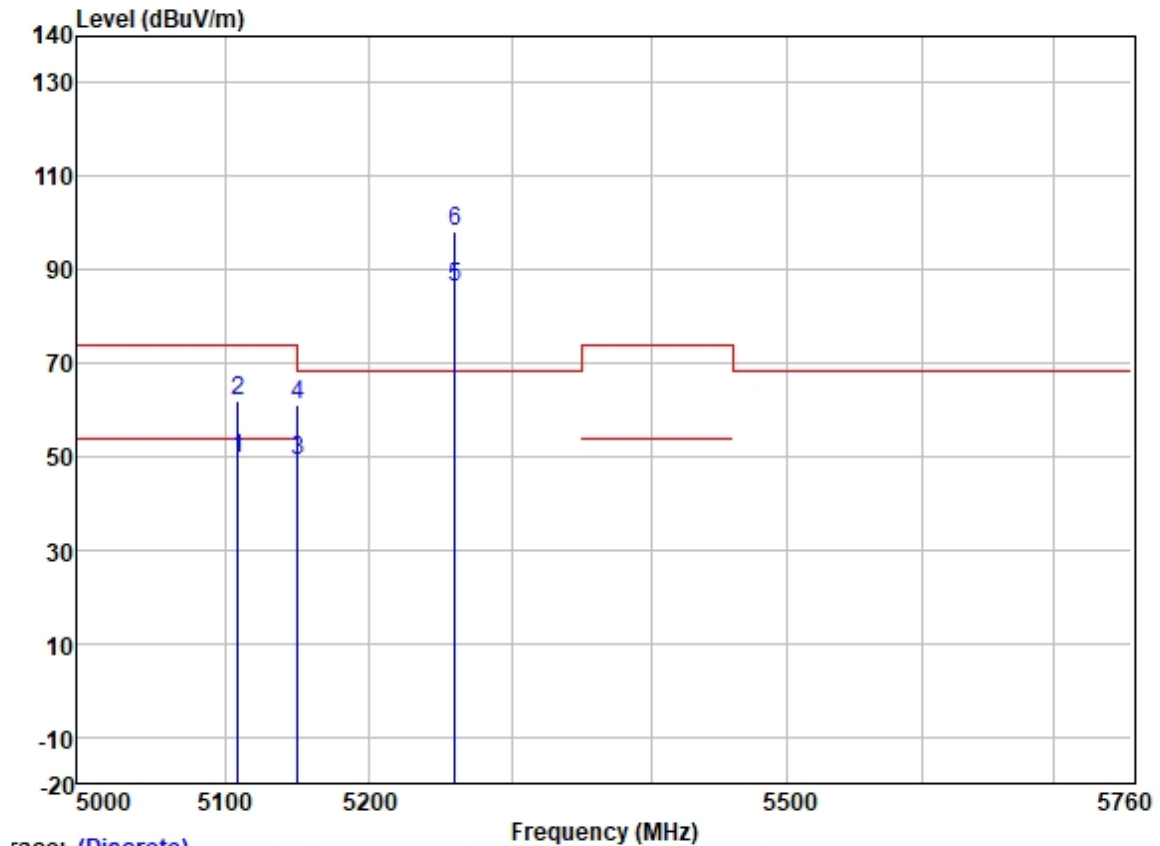

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5108.675	48.89	31.72	5.65	36.86	49.40	54.00	-4.60	HORIZONTAL	Average
2	5108.675	61.44	31.72	5.65	36.86	61.95	74.00	-12.05	HORIZONTAL	Peak
3	5149.980	48.53	31.72	5.62	36.86	49.01	54.00	-4.99	HORIZONTAL	Average
4	5149.980	60.60	31.72	5.62	36.86	61.08	74.00	-12.92	HORIZONTAL	Peak
5	5260.000	85.55	31.75	5.77	36.87	86.20	-----	-----	HORIZONTAL	Average
6 *	5260.000	97.63	31.75	5.77	36.87	98.28	68.20	30.08	HORIZONTAL	Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

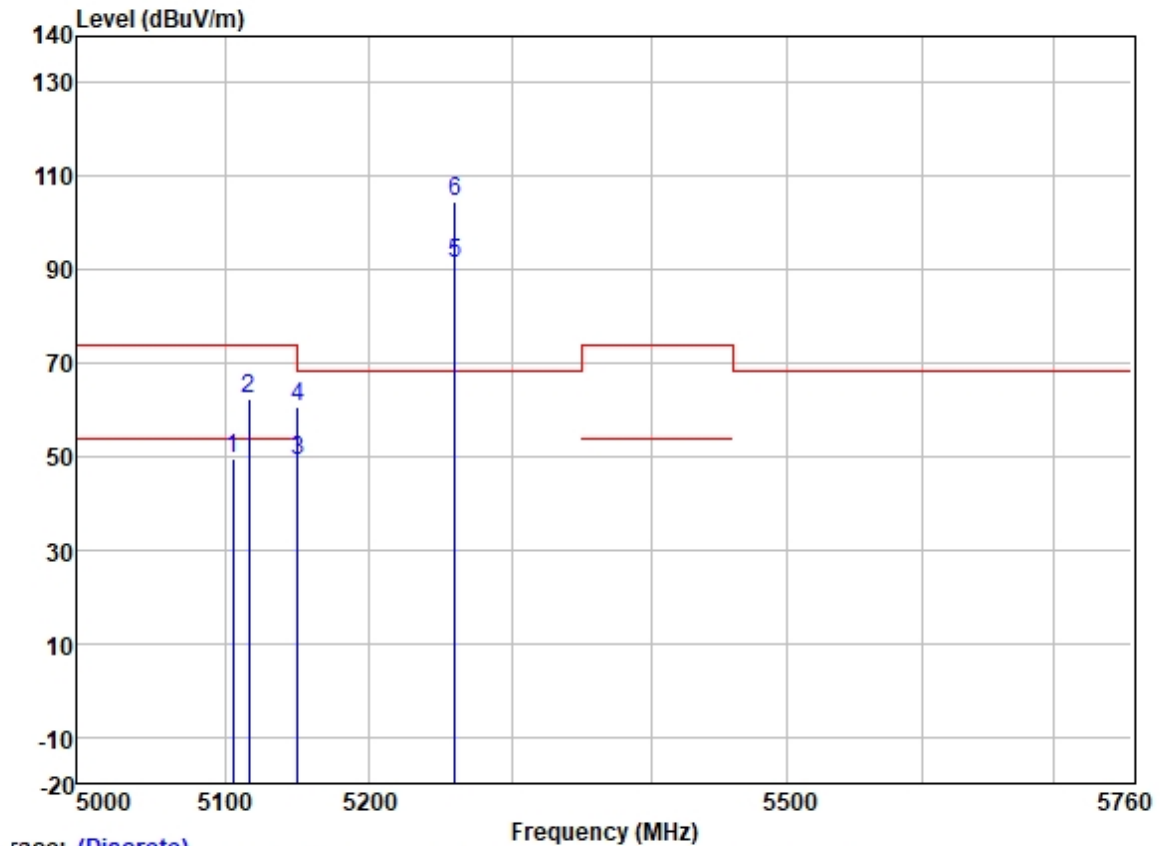

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5105.487	48.91	31.72	5.65	36.86	49.42	54.00	-4.58	VERTICAL	Average
2	5116.123	61.71	31.72	5.64	36.86	62.21	74.00	-11.79	VERTICAL	Peak
3	5149.980	48.60	31.72	5.62	36.86	49.08	54.00	-4.92	VERTICAL	Average
4	5149.980	60.03	31.72	5.62	36.86	60.51	74.00	-13.49	VERTICAL	Peak
5	5260.000	90.57	31.75	5.77	36.87	91.22	-----	-----	VERTICAL	Average
6 *	5260.000	103.76	31.75	5.77	36.87	104.41	68.20	36.21	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

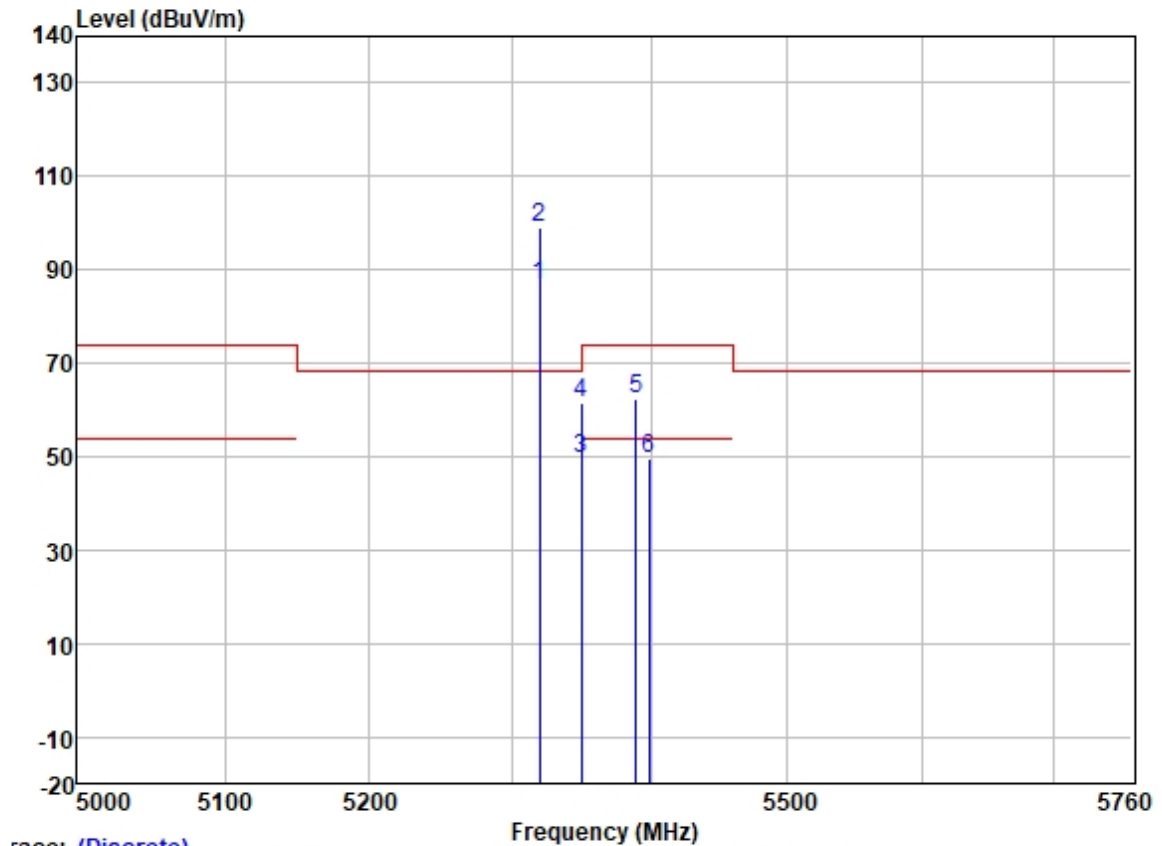

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	85.65	31.77	6.08	36.88	86.62	-----	-----	HORIZONTAL	Average
2 *	5320.000	98.12	31.77	6.08	36.88	99.09	68.20	30.89	HORIZONTAL	Peak
3	5350.020	48.40	31.77	6.05	36.88	49.34	54.00	-4.66	HORIZONTAL	Average
4	5350.020	60.72	31.77	6.05	36.88	61.66	74.00	-12.34	HORIZONTAL	Peak
5	5389.110	61.59	31.78	6.00	36.88	62.49	74.00	-11.51	HORIZONTAL	Peak
6	5398.284	48.75	31.78	6.00	36.88	49.65	54.00	-4.35	HORIZONTAL	Average

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

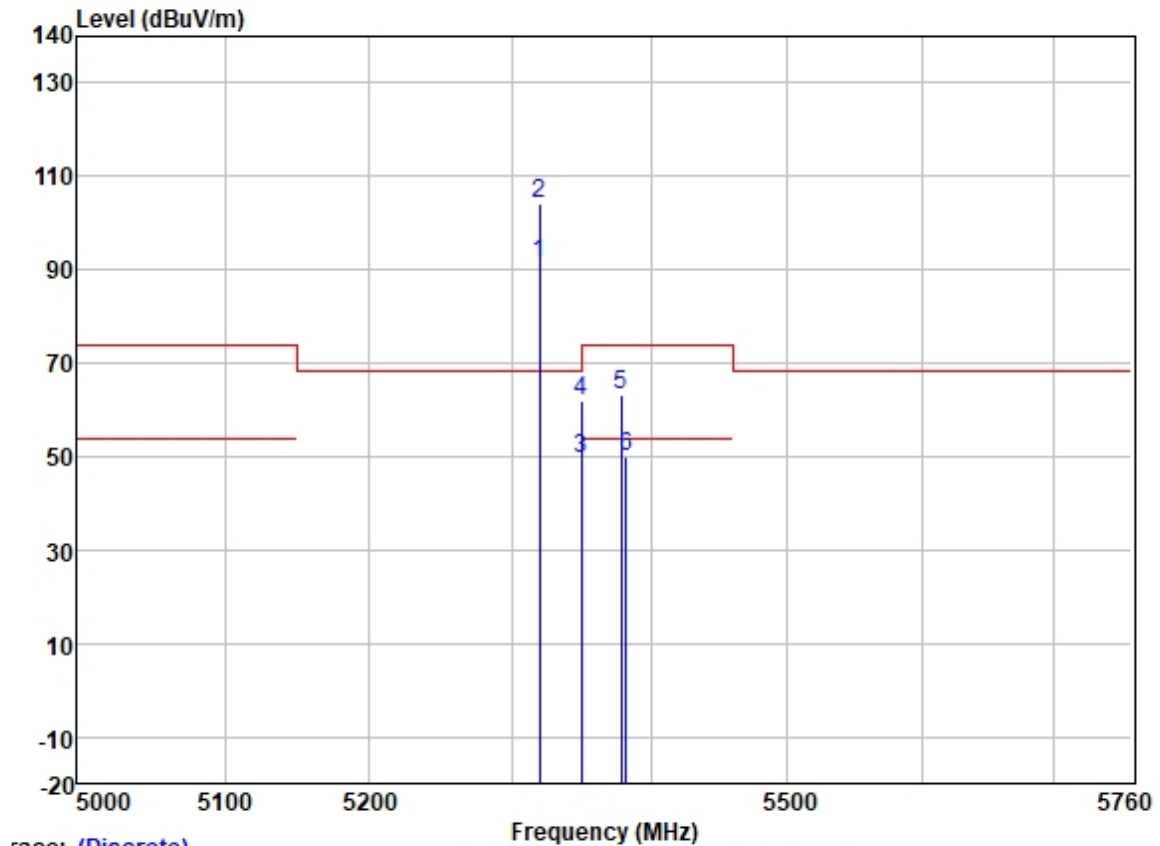

race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	90.41	31.77	6.08	36.88	91.38	-----	-----	VERTICAL	Average
2 *	5320.000	103.38	31.77	6.08	36.88	104.35	68.20	36.15	VERTICAL	Peak
3	5350.020	48.68	31.77	6.05	36.88	49.62	54.00	-4.38	VERTICAL	Average
4	5350.020	60.88	31.77	6.05	36.88	61.82	74.00	-12.18	VERTICAL	Peak
5	5378.141	62.20	31.78	6.02	36.88	63.12	74.00	-10.88	VERTICAL	Peak
6	5381.661	49.11	31.78	6.02	36.88	50.03	54.00	-3.97	VERTICAL	Average


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

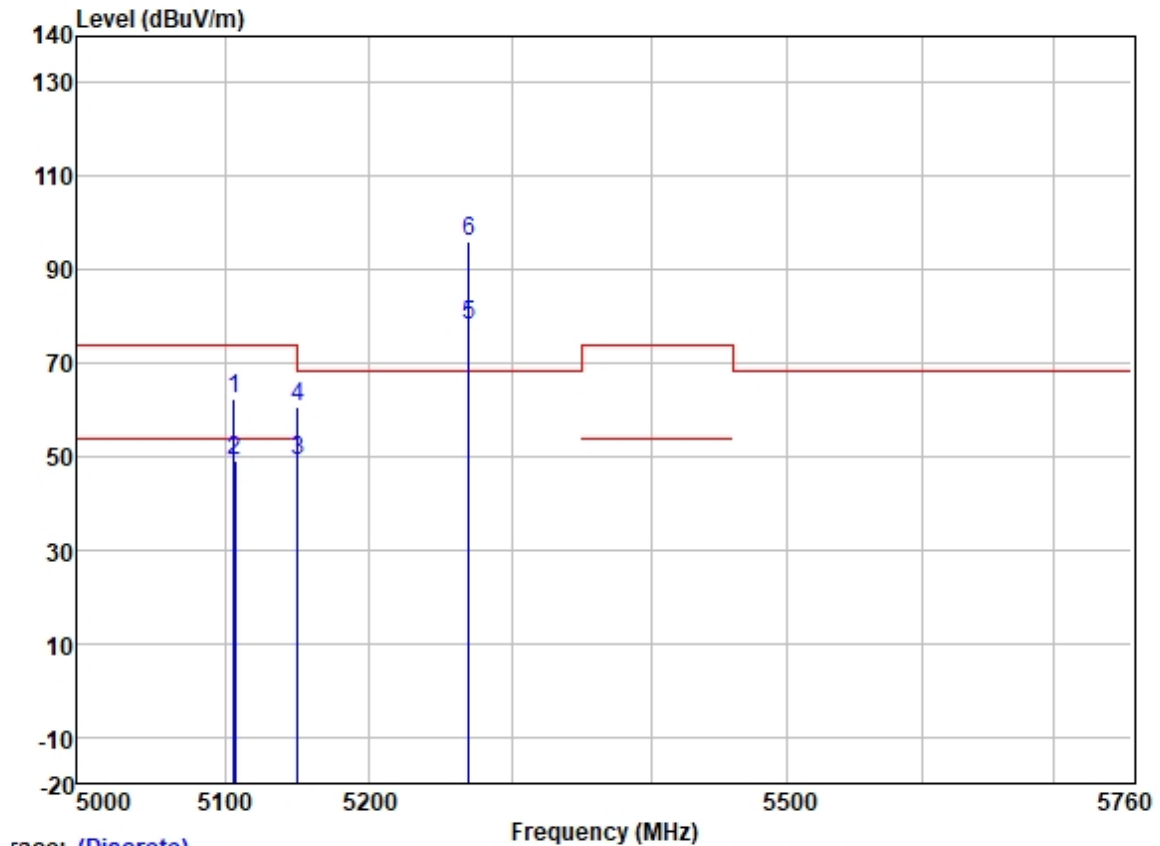

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5105.889	61.67	31.72	5.65	36.86	62.18	74.00	-11.82	HORIZONTAL	Peak
2	5106.871	48.80	31.72	5.65	36.86	49.31	54.00	-4.69	HORIZONTAL	Average
3	5149.980	48.60	31.72	5.62	36.86	49.08	54.00	-4.92	HORIZONTAL	Average
4	5149.980	60.01	31.72	5.62	36.86	60.49	74.00	-13.51	HORIZONTAL	Peak
5	5270.000	77.64	31.75	5.80	36.87	78.32	-----	-----	HORIZONTAL	Average
6 *	5270.000	95.56	31.75	5.80	36.87	96.24	68.20	28.04	HORIZONTAL	Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

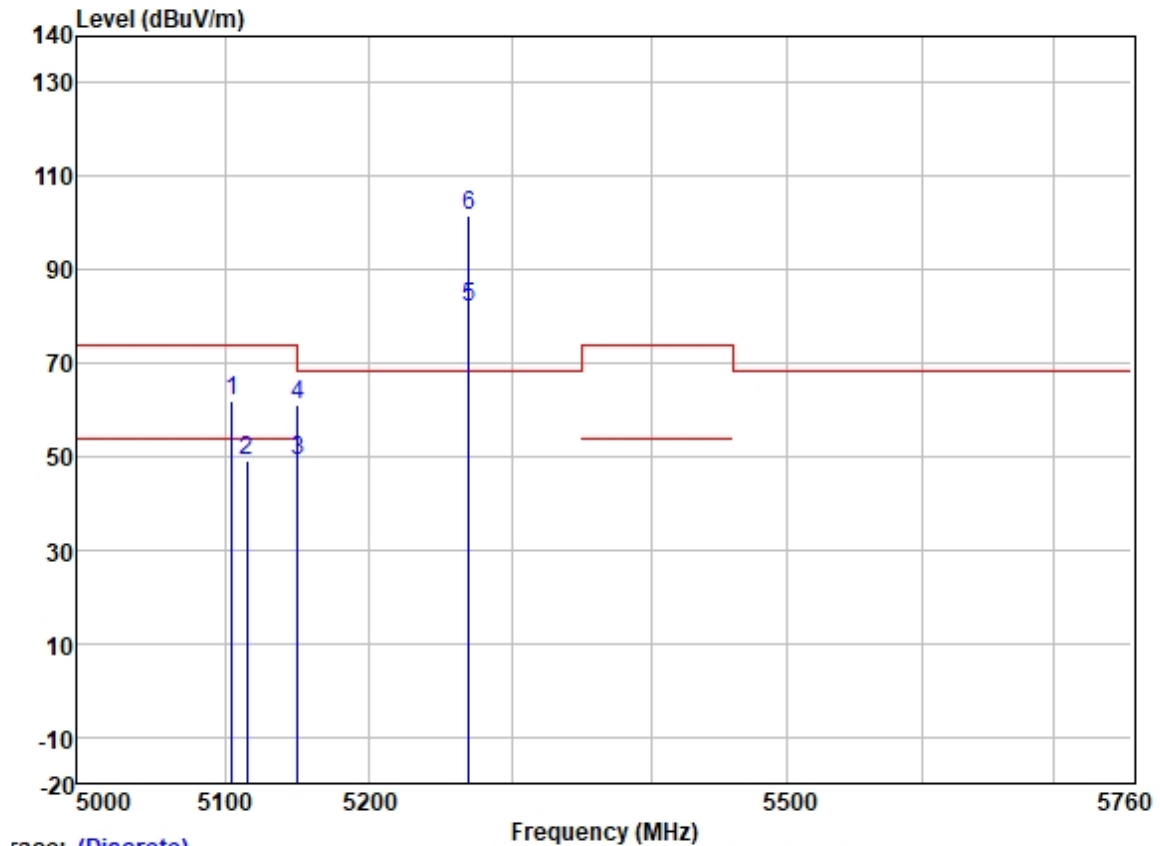

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5104.907	61.60	31.72	5.65	36.86	62.11	74.00	-11.89	VERTICAL	Peak
2	5114.931	48.75	31.72	5.64	36.86	49.25	54.00	-4.75	VERTICAL	Average
3	5149.980	48.55	31.72	5.62	36.86	49.03	54.00	-4.97	VERTICAL	Average
4	5149.980	60.71	31.72	5.62	36.86	61.19	74.00	-12.81	VERTICAL	Peak
5	5270.000	81.17	31.75	5.80	36.87	81.85	-----	-----	VERTICAL	Average
6 *	5270.000	101.07	31.75	5.80	36.87	101.75	68.20	33.55	VERTICAL	Peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

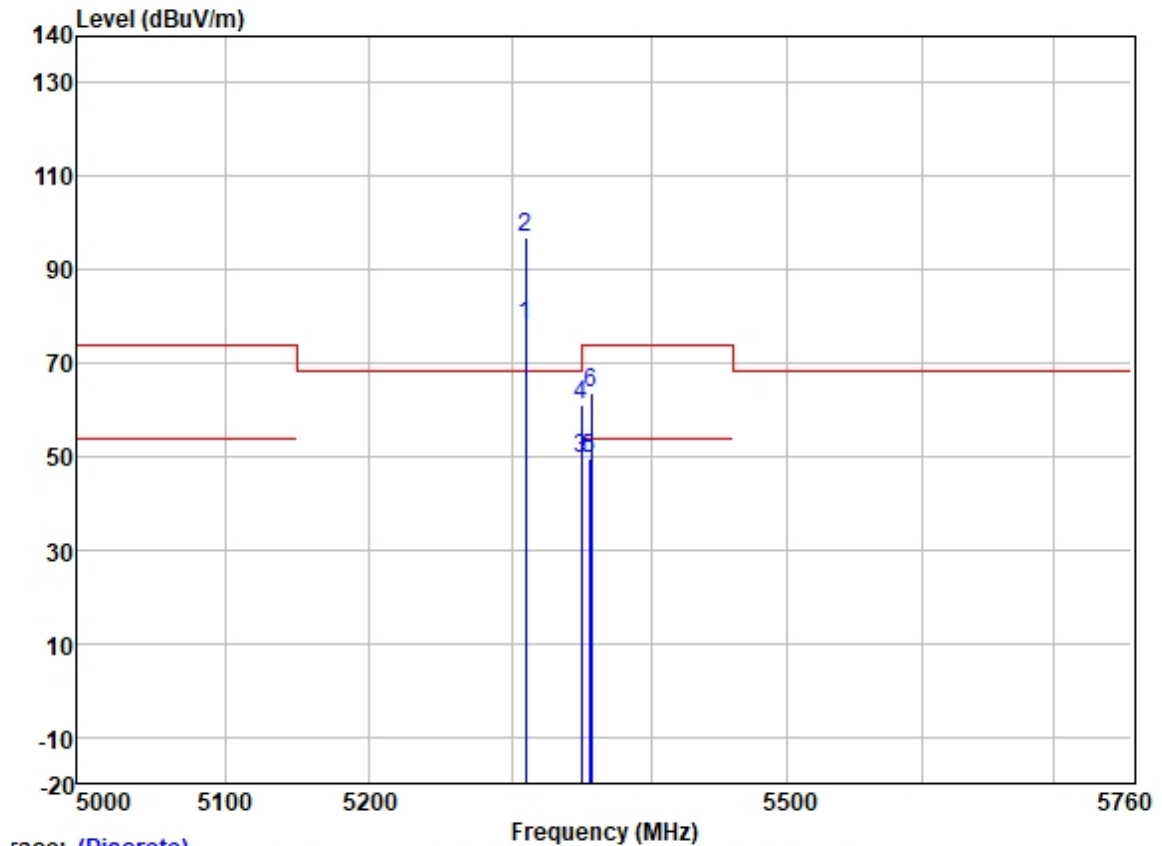


race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	77.27	31.77	6.08	36.87	78.25	-----	-----	HORIZONTAL	Average
2 *	5310.000	95.73	31.77	6.08	36.87	96.71	68.20	28.51	HORIZONTAL	Peak
3	5350.020	48.54	31.77	6.05	36.88	49.48	54.00	-4.52	HORIZONTAL	Average
4	5350.020	59.99	31.77	6.05	36.88	60.93	74.00	-13.07	HORIZONTAL	Peak
5	5355.767	48.68	31.78	6.03	36.88	49.61	54.00	-4.39	HORIZONTAL	Average
6	5357.211	62.76	31.78	6.03	36.88	63.69	74.00	-10.31	HORIZONTAL	Peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

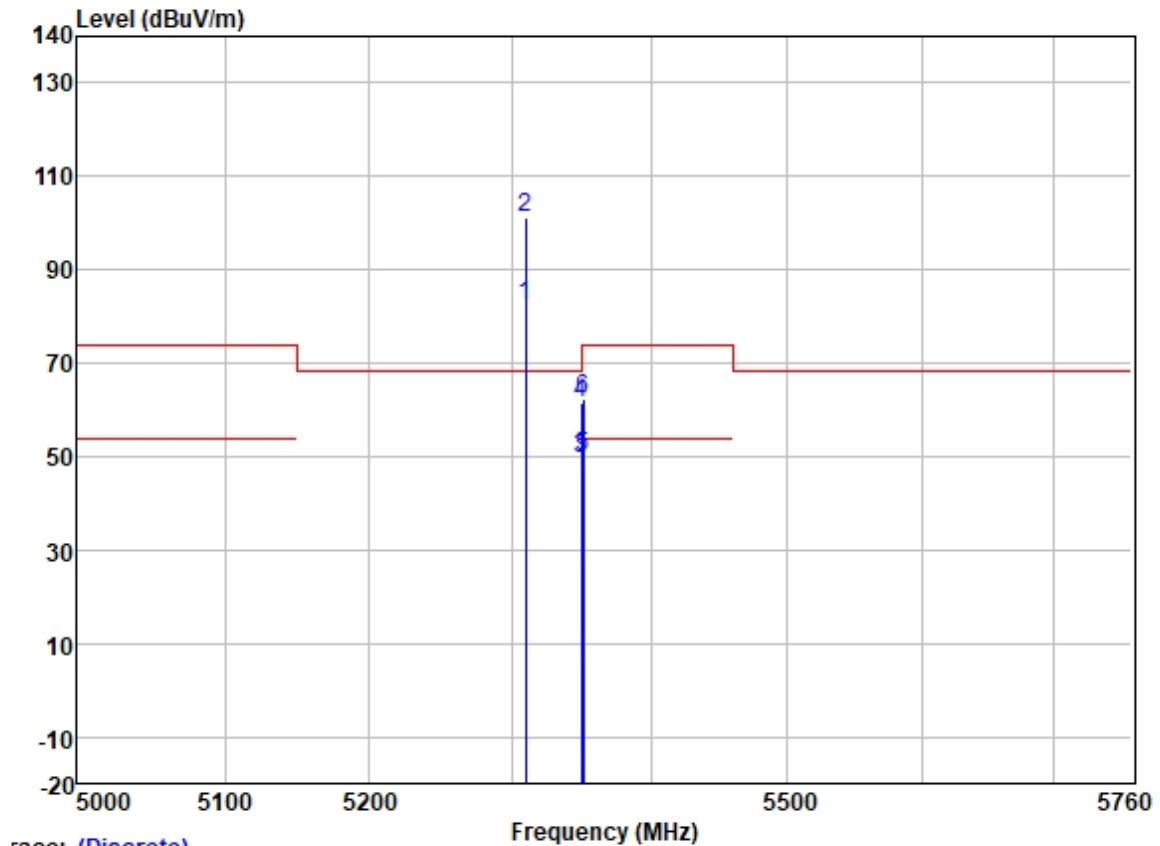

race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	81.25	31.77	6.08	36.87	82.23	-----	-----	VERTICAL	Average
2 *	5310.000	100.40	31.77	6.08	36.87	101.38	68.20	33.18	VERTICAL	Peak
3	5350.020	48.77	31.77	6.05	36.88	49.71	54.00	-4.29	VERTICAL	Average
4	5350.020	60.59	31.77	6.05	36.88	61.53	74.00	-12.47	VERTICAL	Peak
5	5351.195	48.98	31.77	6.05	36.88	49.92	54.00	-4.08	VERTICAL	Average
6	5351.195	61.51	31.77	6.05	36.88	62.45	74.00	-11.55	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

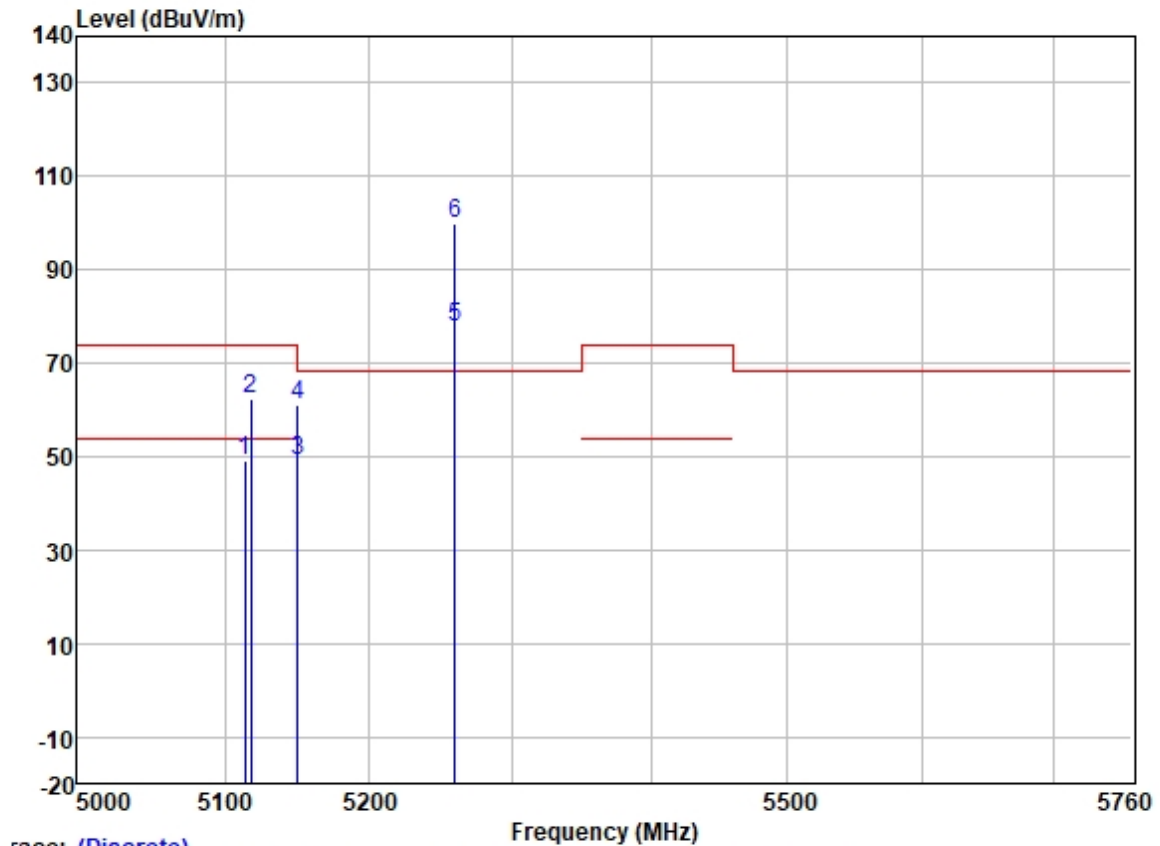

Trace: (Discrete)

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5113.816	48.83	31.72	5.64	36.86	49.33	54.00	-4.67	HORIZONTAL Average
2	5117.898	61.95	31.72	5.64	36.86	62.45	74.00	-11.55	HORIZONTAL Peak
3	5149.980	48.59	31.72	5.62	36.86	49.07	54.00	-4.93	HORIZONTAL Average
4	5149.980	60.43	31.72	5.62	36.86	60.91	74.00	-13.09	HORIZONTAL Peak
5	5260.000	77.05	31.75	5.77	36.87	77.70	-----	-----	HORIZONTAL Average
6 *	5260.000	99.28	31.75	5.77	36.87	99.93	68.20	31.73	HORIZONTAL Peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

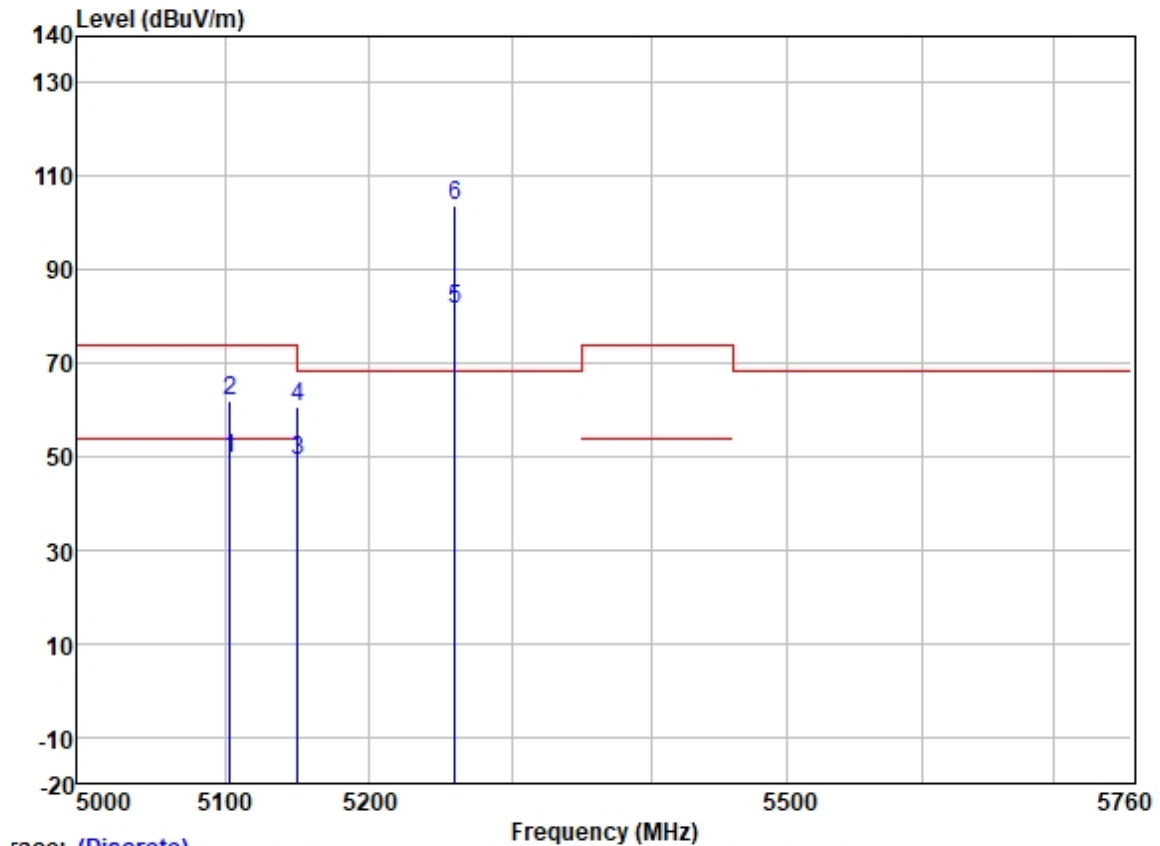

Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5103.716	49.03	31.72	5.65	36.86	49.54	54.00	-4.46	VERTICAL	Average
2	5103.716	61.55	31.72	5.65	36.86	62.06	74.00	-11.94	VERTICAL	Peak
3	5149.980	48.67	31.72	5.62	36.86	49.15	54.00	-4.85	VERTICAL	Average
4	5149.980	59.98	31.72	5.62	36.86	60.46	74.00	-13.54	VERTICAL	Peak
5	5260.000	81.04	31.75	5.77	36.87	81.69	-----	-----	VERTICAL	Average
6 *	5260.000	103.18	31.75	5.77	36.87	103.83	68.20	35.63	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

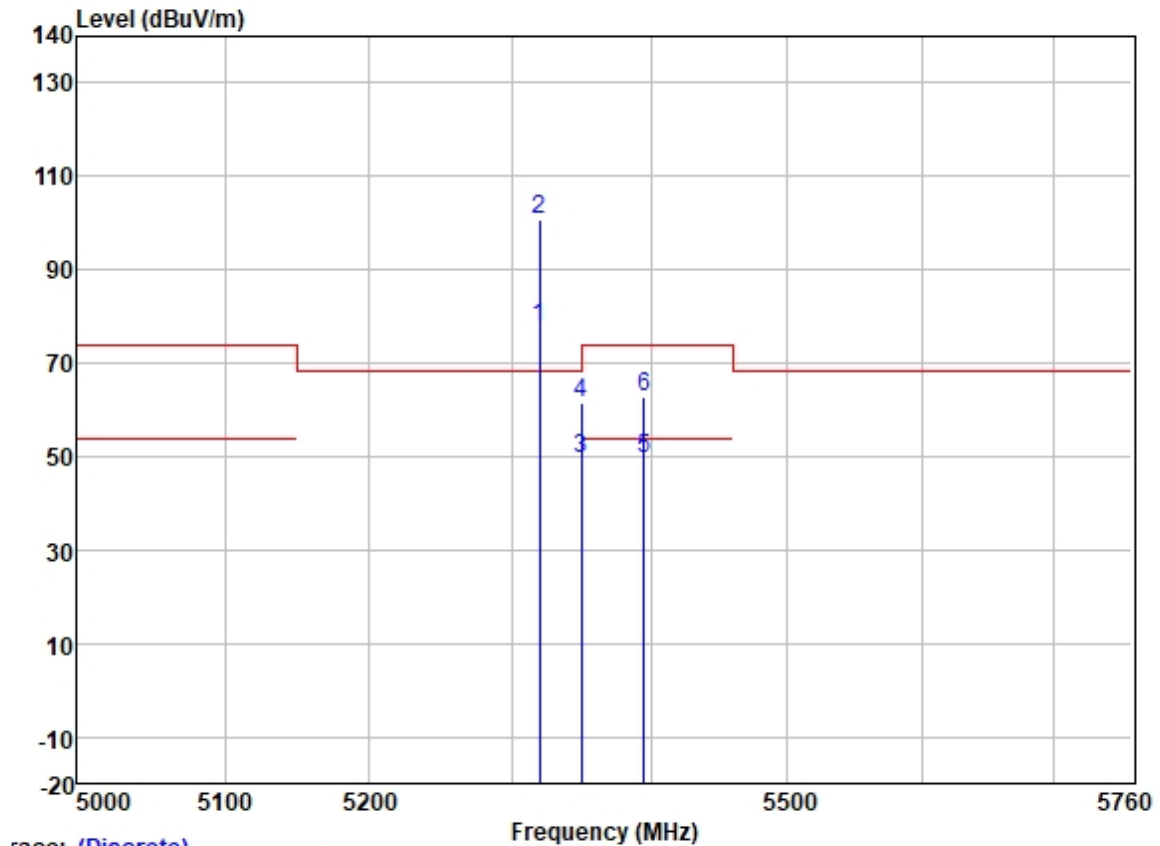

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	76.89	31.77	6.08	36.88	77.86	-----	-----	HORIZONTAL	Average
2 *	5320.000	99.62	31.77	6.08	36.88	100.59	68.20	32.39	HORIZONTAL	Peak
3	5350.020	48.49	31.77	6.05	36.88	49.43	54.00	-4.57	HORIZONTAL	Average
4	5350.020	60.50	31.77	6.05	36.88	61.44	74.00	-12.56	HORIZONTAL	Peak
5	5395.258	48.77	31.78	6.00	36.88	49.67	54.00	-4.33	HORIZONTAL	Average
6	5395.258	62.08	31.78	6.00	36.88	62.98	74.00	-11.02	HORIZONTAL	Peak

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

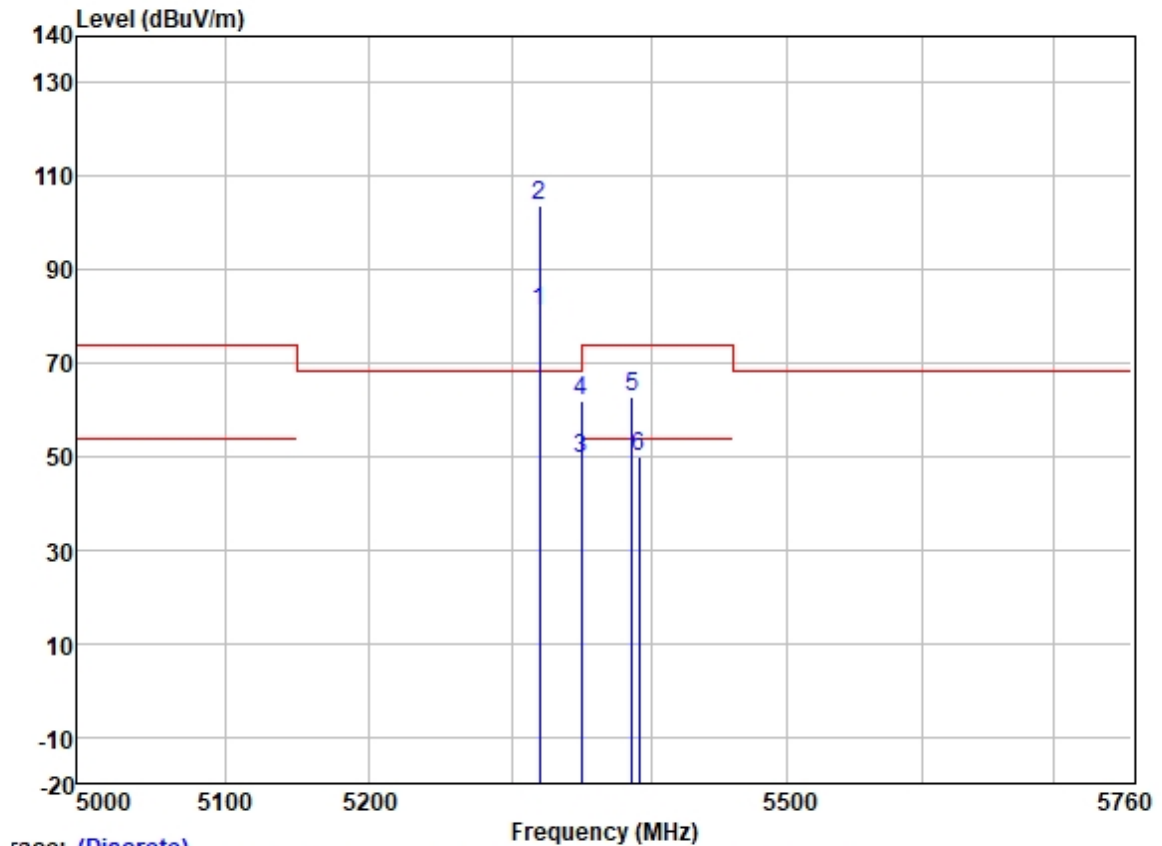


race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5320.000	80.28	31.77	6.08	36.88	81.25	-----	-----	VERTICAL	Average
2 *	5320.000	102.65	31.77	6.08	36.88	103.62	68.20	35.42	VERTICAL	Peak
3	5350.020	48.63	31.77	6.05	36.88	49.57	54.00	-4.43	VERTICAL	Average
4	5350.020	60.77	31.77	6.05	36.88	61.71	74.00	-12.29	VERTICAL	Peak
5	5386.491	61.95	31.78	6.00	36.88	62.85	74.00	-11.15	VERTICAL	Peak
6	5391.427	49.07	31.78	6.00	36.88	49.97	54.00	-4.03	VERTICAL	Average

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

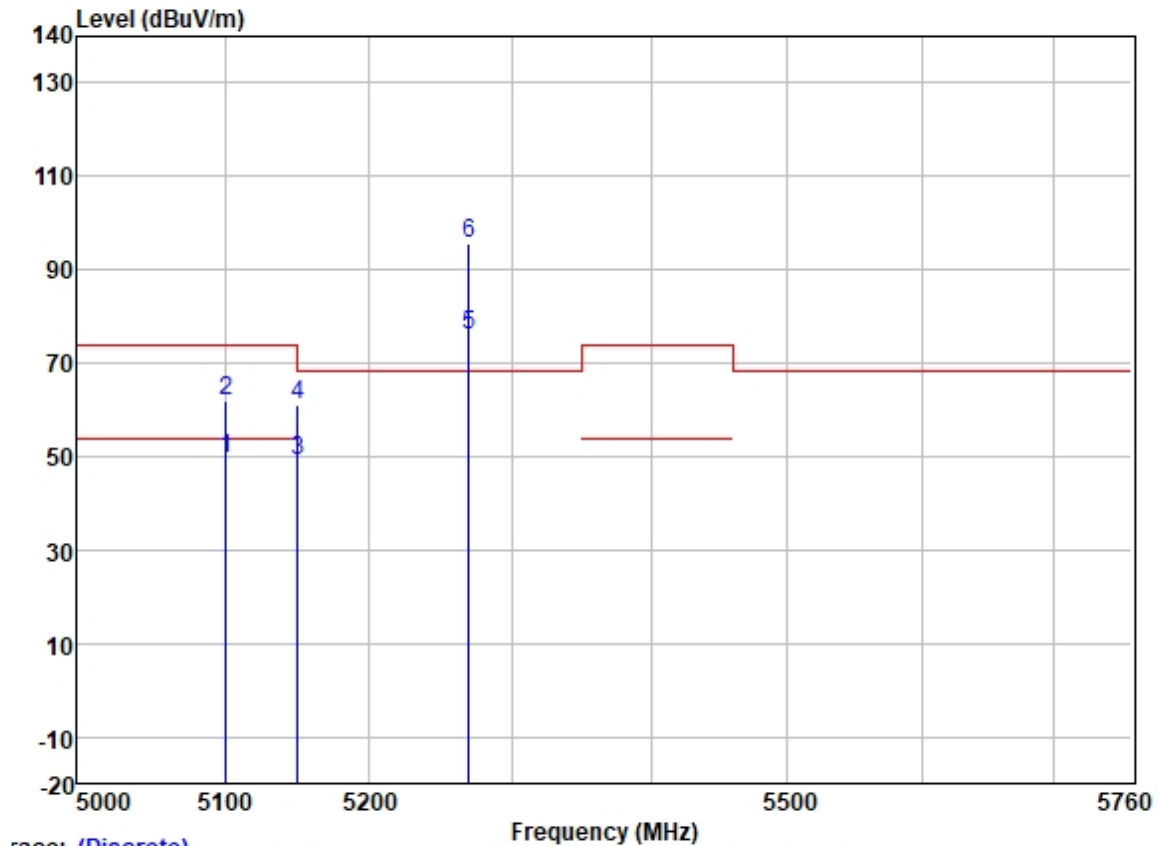


race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5100.981	48.84	31.72	5.65	36.86	49.35	54.00	-4.65	HORIZONTAL	Average
2	5100.981	61.22	31.72	5.65	36.86	61.73	74.00	-12.27	HORIZONTAL	Peak
3	5149.980	48.47	31.72	5.62	36.86	48.95	54.00	-5.05	HORIZONTAL	Average
4	5149.980	60.40	31.72	5.62	36.86	60.88	74.00	-13.12	HORIZONTAL	Peak
5	5270.000	75.36	31.75	5.80	36.87	76.04	-----	-----	HORIZONTAL	Average
6 *	5270.000	95.04	31.75	5.80	36.87	95.72	68.20	27.52	HORIZONTAL	Peak

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: Low

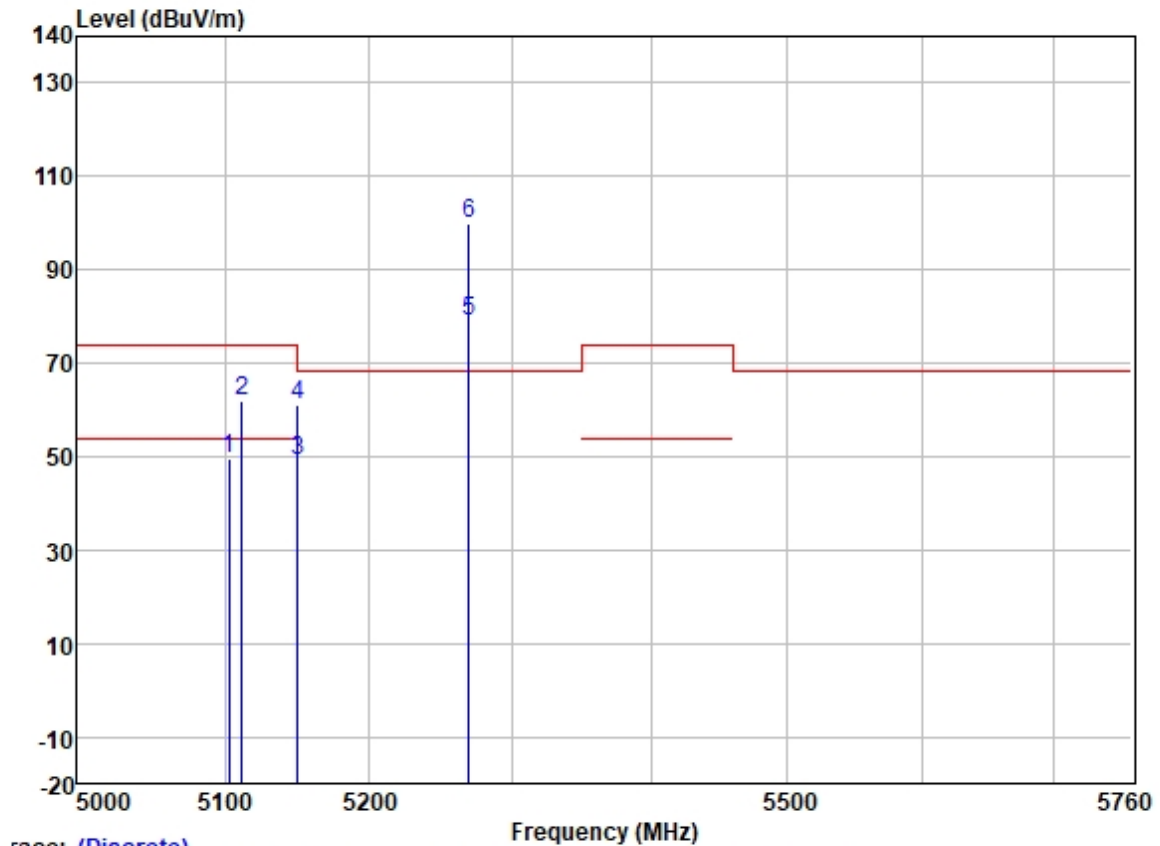

race: (Discrete)		Frequency (MHz)								
	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5102.551	48.92	31.72	5.65	36.86	49.43	54.00	-4.57	VERTICAL	Average
2	5111.588	61.47	31.72	5.65	36.86	61.98	74.00	-12.02	VERTICAL	Peak
3	5149.980	48.47	31.72	5.62	36.86	48.95	54.00	-5.05	VERTICAL	Average
4	5149.980	60.58	31.72	5.62	36.86	61.06	74.00	-12.94	VERTICAL	Peak
5	5270.000	78.26	31.75	5.80	36.87	78.94	-----	-----	VERTICAL	Average
6 *	5270.000	99.42	31.75	5.80	36.87	100.10	68.20	31.90	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

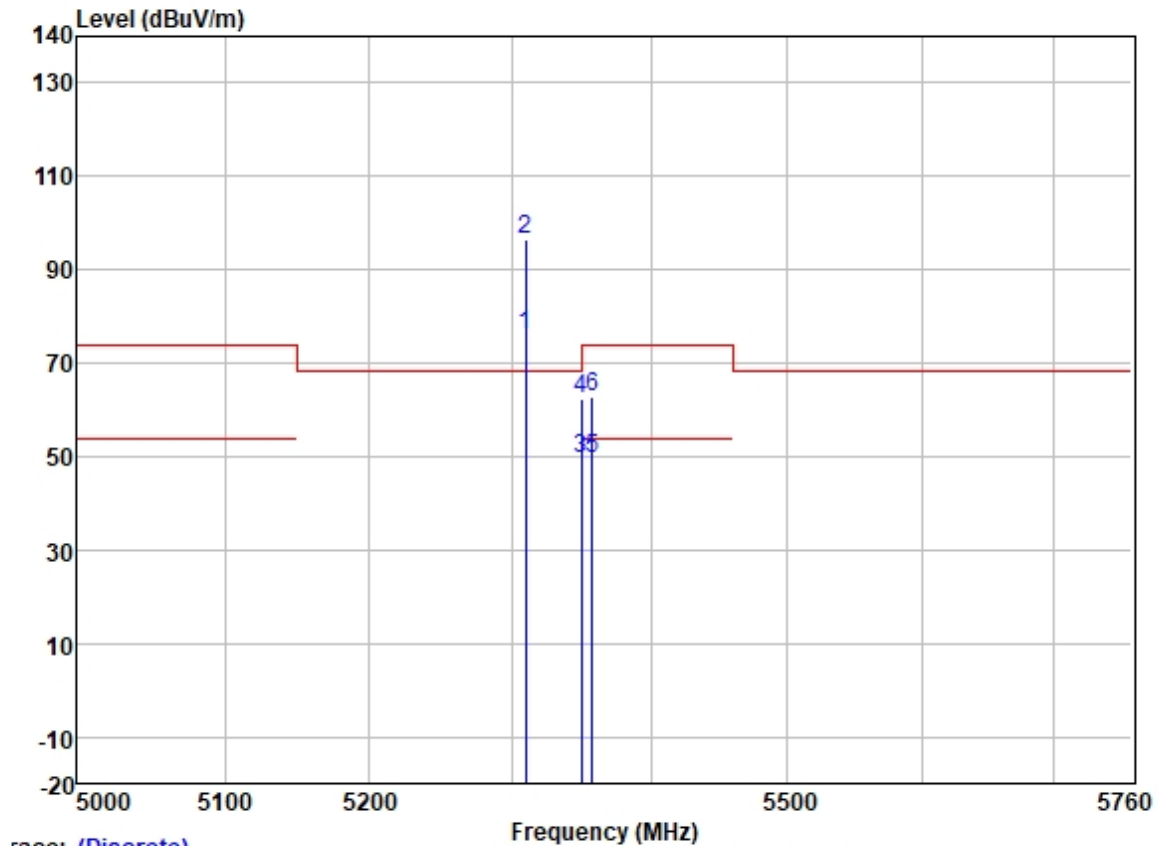

Trace: (Discrete)


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	74.99	31.77	6.08	36.87	75.97	-----	-----	HORIZONTAL	Average
2 *	5310.000	95.50	31.77	6.08	36.87	96.48	68.20	28.28	HORIZONTAL	Peak
3	5350.020	48.48	31.77	6.05	36.88	49.42	54.00	-4.58	HORIZONTAL	Average
4	5350.020	61.21	31.77	6.05	36.88	62.15	74.00	-11.85	HORIZONTAL	Peak
5	5357.452	48.80	31.78	6.03	36.88	49.73	54.00	-4.27	HORIZONTAL	Average
6	5357.452	62.03	31.78	6.03	36.88	62.96	74.00	-11.04	HORIZONTAL	Peak

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

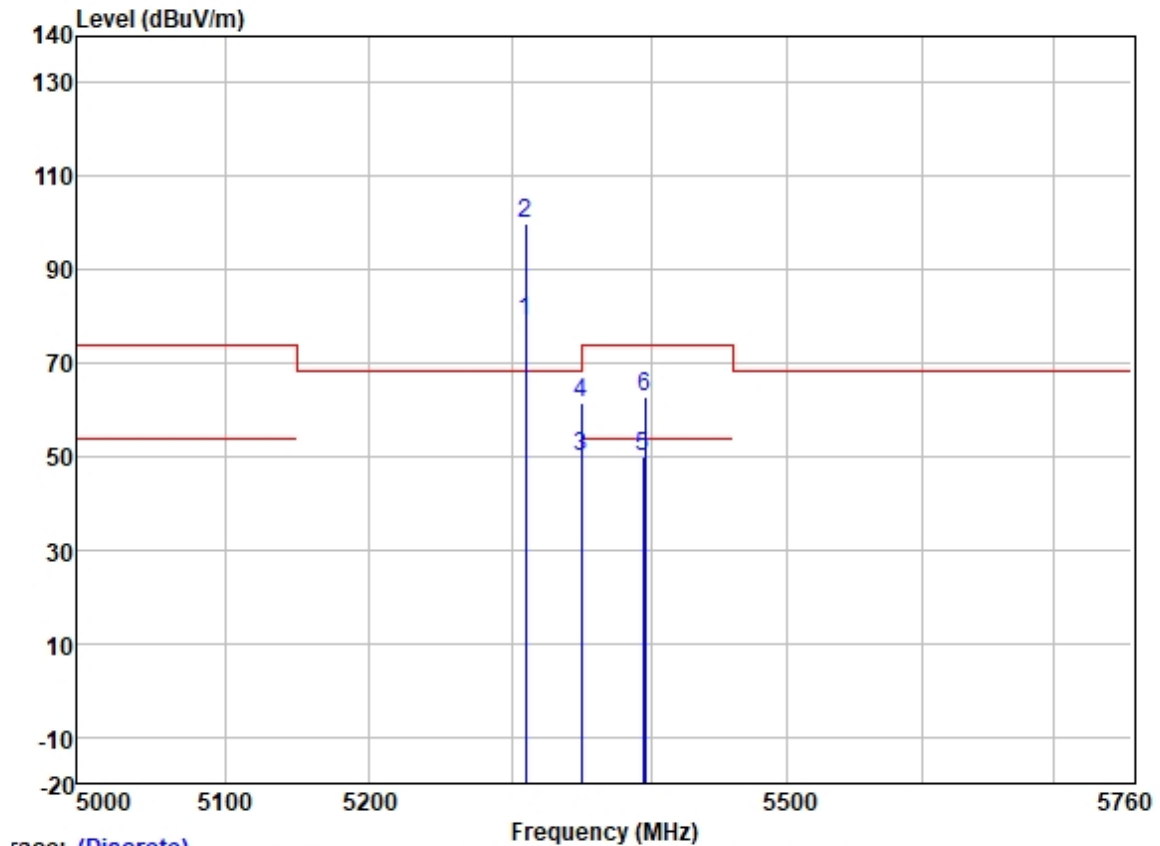

race: (Discrete)		Frequency (MHz)								
	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5310.000	77.96	31.77	6.08	36.87	78.94	-----	-----	VERTICAL	Average
2 *	5310.000	99.06	31.77	6.08	36.87	100.04	68.20	31.84	VERTICAL	Peak
3	5350.020	48.83	31.77	6.05	36.88	49.77	54.00	-4.23	VERTICAL	Average
4	5350.020	60.43	31.77	6.05	36.88	61.37	74.00	-12.63	VERTICAL	Peak
5	5394.178	48.96	31.78	6.00	36.88	49.86	54.00	-4.14	VERTICAL	Average
6	5395.512	61.71	31.78	6.00	36.88	62.61	74.00	-11.39	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

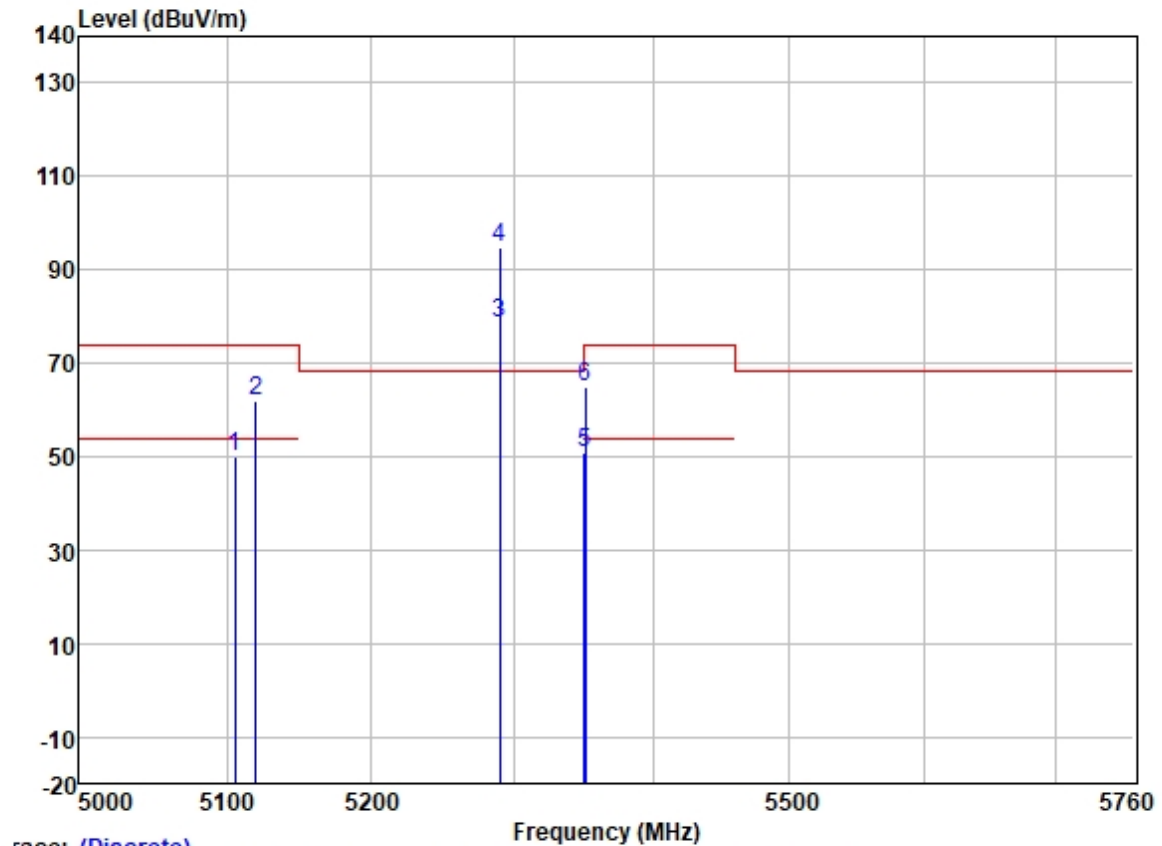

Trace: (Discrete)

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5105.542	49.55	31.72	5.65	36.86	50.06	54.00	-3.94	HORIZONTAL Average
2	5119.861	61.58	31.72	5.64	36.86	62.08	74.00	-11.92	HORIZONTAL Peak
3	5290.000	77.50	31.76	6.00	36.87	78.39	-----	-----	HORIZONTAL Average
4 *	5290.000	94.00	31.76	6.00	36.87	94.89	68.20	26.69	HORIZONTAL Peak
5	5350.229	49.74	31.77	6.05	36.88	50.68	54.00	-3.32	HORIZONTAL Average
6	5350.840	63.94	31.77	6.05	36.88	64.88	74.00	-9.12	HORIZONTAL Peak

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

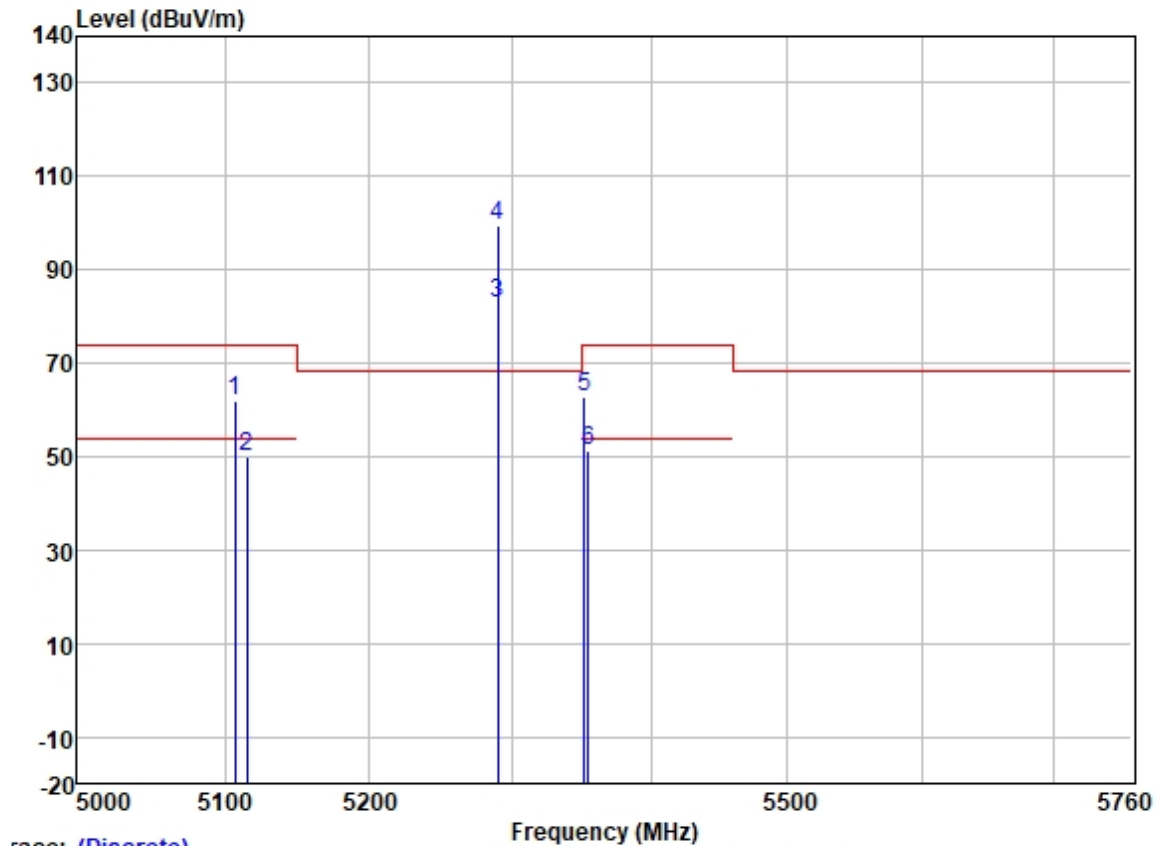

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5107.001	61.38	31.72	5.65	36.86	61.89	74.00	-12.11	VERTICAL	Peak
2	5114.889	49.59	31.72	5.64	36.86	50.09	54.00	-3.91	VERTICAL	Average
3	5290.000	81.82	31.76	6.00	36.87	82.71	-----	-----	VERTICAL	Average
4 *	5290.000	98.42	31.76	6.00	36.87	99.31	68.20	31.11	VERTICAL	Peak
5	5352.064	61.65	31.77	6.05	36.88	62.59	74.00	-11.41	VERTICAL	Peak
6	5354.818	50.25	31.78	6.03	36.88	51.18	54.00	-2.82	VERTICAL	Average