



FCC ID C44TCE2098BASE

Electrical (EMC)

DATE: 11 July 2000

I.T.L. (PRODUCT TESTING) LTD.
FCC EMC Test Report
for
Team Concepts Electronics Ltd.

Equipment under test:

Computerized Toy Analog Base

900M VER. 5.0 (Analog Base)

Approved by: _____
Y. Mordukhovitch, Test Engineer

Approved by: _____
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Team Concepts Electronics Ltd.

Equipment under test:

Computerized Toy Analog Base

M/N: 900M VER. 5.0 (Analog Base)

S/N B1001

FCC ID: C44TCE2098BASE

DATE: 17 July 2000

This report concerns: Original Grant x Class II change _____

Class B verification _____ Class A verification _____ Class I change _____

Equipment type: Radio Telemetry Transmitter

Request Issue of Grant:

x Immediately upon completion of review

Limits used:

CISPR 22 _____ Part 15 x

Measurement procedure used is ANSI C63.4-1992.

Application for Certification

prepared by:

Ishaiahou Raz

ITL (Product Testing) Ltd.

POB 211

Or Yehuda 60251

Israel

Tel: 972-3-533 9022

Fax: 972-3-533 9019

Applicant for this device:

(different from "prepared by")

Team Concepts Electronics Ltd

5/F Yan Hing Centre

9-13 Wong Chuk Yeung Street

Fo Tan, Shatin

N.T. Hong Kong

Tel: 852 2697 8138

Fax: 852 2691 0405

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	4
1.1 Product Description.....	4
1.2 Test Methodology	4
1.3 Test Facility.....	4
1.4 Measurement Uncertainty	4
2. PRODUCT LABELING -----	5
3. SYSTEM TEST CONFIGURATION-----	6
3.1 Justification.....	6
3.2 EUT Exercise Software	6
3.3 Special Accessories	6
3.4 Equipment Modifications	6
3.5 Configuration of Tested System	6
4. BLOCK DIAGRAM -----	7
4.1 Schematic Block/Connection Diagram.....	7
5. CONDUCTED EMISSION-----	8
6. RADIATED EMISSION DATA-----	13
6.1 Radiated Emission	13
6.2 Measured Data.....	13
6.3 Test Instrumentation Used, Radiated Measurements	30
6.4 Field Strength Calculation	31
7. RADIATED EMISSION DATA-----	32
7.1 Radiated Emission Above 1 GHz.....	32
7.2 Measured Data.....	32
7.3 Test Instruments used, Radiated Measurement Above 1 GHZ	41
7.4 Field Strength Calculation	42
8. PHOTOGRAPHS OF TESTED E.U.T. -----	43
9. SIGNATURES OF THE E.U.T'S TEST ENGINEERS -----	49
10. APPENDIX A - CORRECTION FACTORS-----	50
10.1 Correction factors for CABLE.....	50
10.2 Correction factors for CABLE.....	51
10.3 Correction factors for LOG PERIODIC ANTENNA.....	52
10.4 Correction factors for BICONICAL ANTENNA.....	53
10.5 Correction factors for BICONICAL ANTENNA Type 3109.....	54
10.6 Correction factors for BICONICAL ANTENNA Type 3109.....	55
10.7 Correction factors for SAS ANTENNA, 3 meter range	56

1. General Information

1.1 Product Description

This document describes the “Smart Alex” system operation.

The product includes a receiver operating between 925.3 MHz to 927.05MHz and a transmitter operating between 902.8MHz to 904.55MHz

This is an intelligent interactive toy, designed especially for interactive games and educational programs with kids of all ages. The toy has the appearance of a book, an intelligent book, with a face, eyes, mouth, legs and hands. The toy is connected to PC via an RF link so that it is completely mobile within the home surrounding range. The toy has full voice capabilities; thus being interactive it can talk, read stories, give assignments, and actually play with children. On the other hand the child can understand the toys talk and respond.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the data is located at Kfar Bin Nun, Israel. This site has been fully described in reports dated April 10, 1995 and May 8, 1995, submitted to the FCC office, and accepted in a letter dated July 23, 1998 (31040/SIT 1300F2).

1.4 Measurement Uncertainty

A. Radiated Emission:

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-1992. In accordance with Paragraph 5.4.6.2 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

B. Conducted Emission:

The uncertainty for this test is 2dB.

2. Product Labeling

MODEL: 900M VER. 5.0 (Analog Base)

FCC ID: C44TCE2098BASE

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Team Concepts Electronics Ltd.

Made In China

FCC ID Label {Length: 4.5cm height: 2.4cm}

Figure 1. FCC Label

Label affixed with permanent adhesive on rear of unit

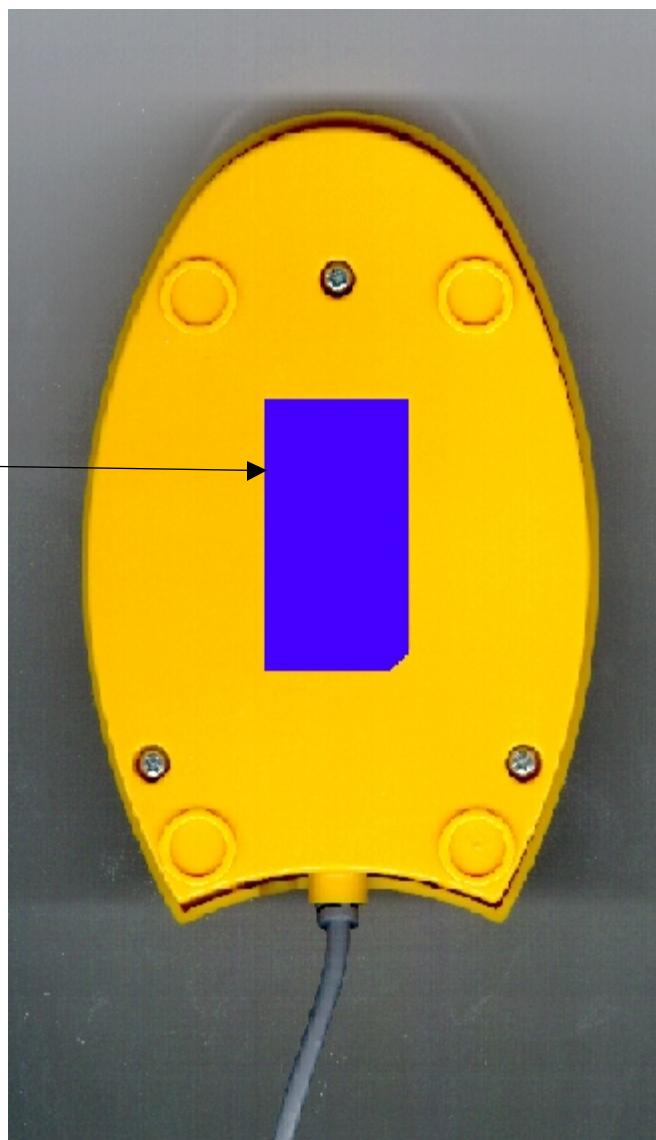


Figure 2. Location of Label on EUT

3. System Test Configuration

3.1 Justification

Typical system setup includes base connected via RS-232 cable to PC and receives power from the external wall mount power adapter. Toy is a stand-alone device operated from internal battery pack. RS-232 cable length is 1 (± 0.5) meter and the power cable before the connection to RS-232 cable is 0.3 (± 0.2) meter. The base and toy communicate via RF in American ISM frequency band. The distance between the base and toy on the open air is up to 70 meters and in close space is about 20 – 30 meters (depends on walls type and geometry).

3.2 EUT Exercise Software

During the FCC tests, the software used was the “Creator Living Toy™ system checker” (Lochecker.exe, ver 4.0). The system was operated using PC running software drivers, that a part of the main IDE software that controls the toy and base. Both base and toy were running in mode that fully simulates the system operation during the play: 20 seconds toy speaks, 10 seconds listen.

3.3 Special Accessories

No special accessories were needed to achieve compliance.

3.4 Equipment Modifications

To achieve compliance the following corrective actions were required.

1. SMT capacitors from 0805 series were added:
 - A. Between the RF Module Pin 1 (U8) and the ground a 47pF was added.
 - B. Between the RF Module Pin 4 (U8) and the ground a 47pF was added.
 - C. Between the RF Module Pin 11 (U8) and the ground a 100pF was added.
2. A ferrite core P/N 0443164251 manufactured by Fair – Rite was added to the communication cable near to the Analog Base inlet. The ferrite core has 1 turn.

3.5 Configuration of Tested System

The configuration of the tested system is described below.

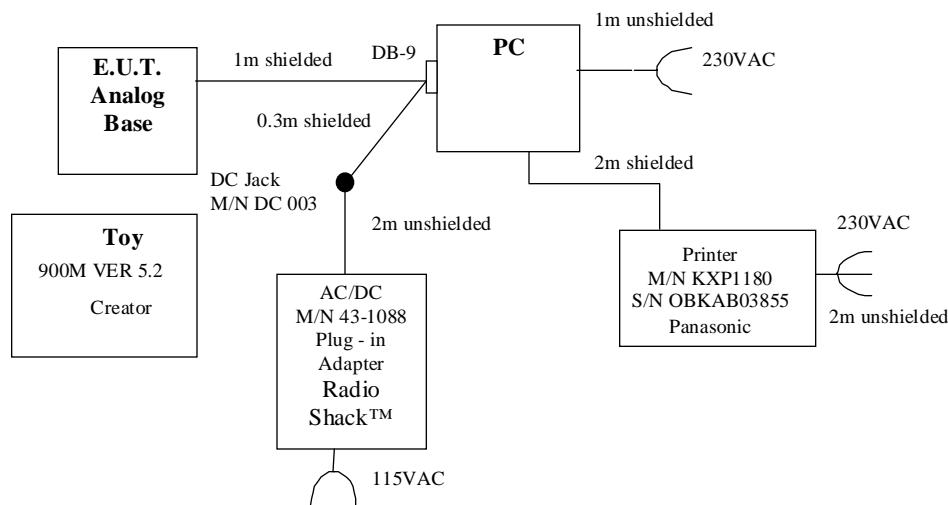


Figure 3. Configuration of Tested System

4. Block Diagram

4.1 Schematic Block/Connection Diagram

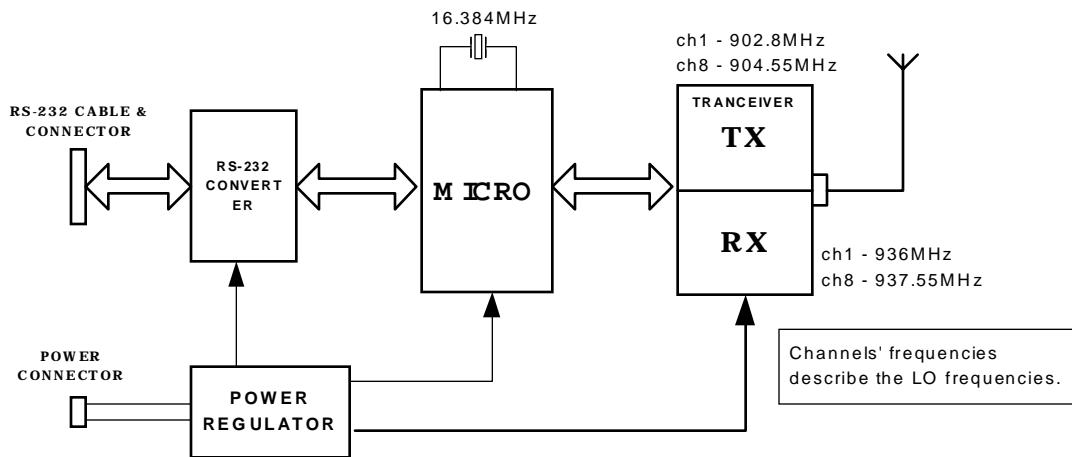


Figure 4. Block Diagram

5. Conducted Emission

Conducted Emission

0.45- 30 MHz, F.C.C., Part 15, Subpart C: Section 15.207

The E.U.T operation mode and test set-up are as described in Section 2. In order to minimise background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC / 60 Hz via 50 Ohm / 50 μ Hn Line Impedance Stabilisation Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The centre of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission.

The emission voltages at the LISN's outputs were measured using a computerised receiver, complying to CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.45 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak detector.

3.2 Measured Data

JUDGEMENT: Passed by 10.3 dB μ V.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

The worst case was 10.3dB for 24.57 MHz, on the phase line

The details of the highest emissions are given in *Figure 5* to *Figure 8*.

TEST PERSONNEL:

Tester Signature: _____ DATE: _____

Typed/Printed name Y. Mordukhovitch

Conducted Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: FCC Part 15, Subpart C, Section
15.207
Lead: Phase
Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Amplitude (dB μ V)	Quasi-peak Amplitude (dB μ V)	Specification (dB μ V)	Pass/Fail	Margin (dB)
1.73	26.3	22.1	48.0	Pass	-25.9
2.37	24.5	20.3	48.0	Pass	-27.7
16.38	36.0	35.3	48.0	Pass	-12.7
20.48	35.0	32.8	48.0	Pass	-15.2
20.54	35.3	30.9	48.0	Pass	-17.1
24.57	38.4	37.7	48.0	Pass	-10.3

Figure 5. Conducted Emission: PHASE. Detectors: Peak, QUASI-PEAK

Conducted Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: FCC Part 15, Subpart C, Section
15.207

Lead: Phase

Detectors: Peak, Quasi-peak

 08:21:17 MAY 25, 2000

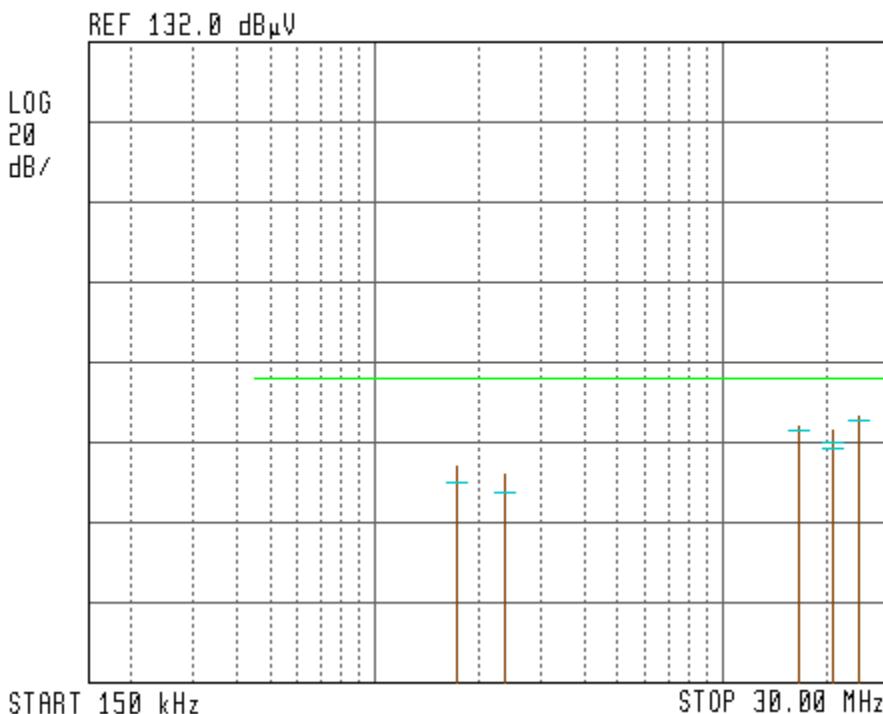


Figure 6. Detectors: Peak, Quasi-peak

Notes:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Conducted Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: FCC Part 15, Subpart C, Section
15.207

Lead: Neutral
Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Amplitude (dB μ V)	Quasi-peak Amplitude (dB μ V)	Specification (dB μ V)	Pass/Fail	Margin (dB)
2.41	23.6	19.9	48.0	Pass	-28.1
4.25	23.3	20.3	48.0	Pass	-27.7
16.38	33.6	33.2	48.0	Pass	-14.8
20.48	32.8	30.0	48.0	Pass	-18.0
20.66	34.3	29.1	48.0	Pass	-18.9
24.57	39.2	37.4	48.0	Pass	-10.6
28.67	25.6	23.0	48.0	Pass	-25.0

Figure 7. Detectors: Peak, QUASI-PEAK

Conducted Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: FCC Part 15, Subpart C, Section
15.207

Lead: Neutral

Detectors: Peak, Quasi-peak

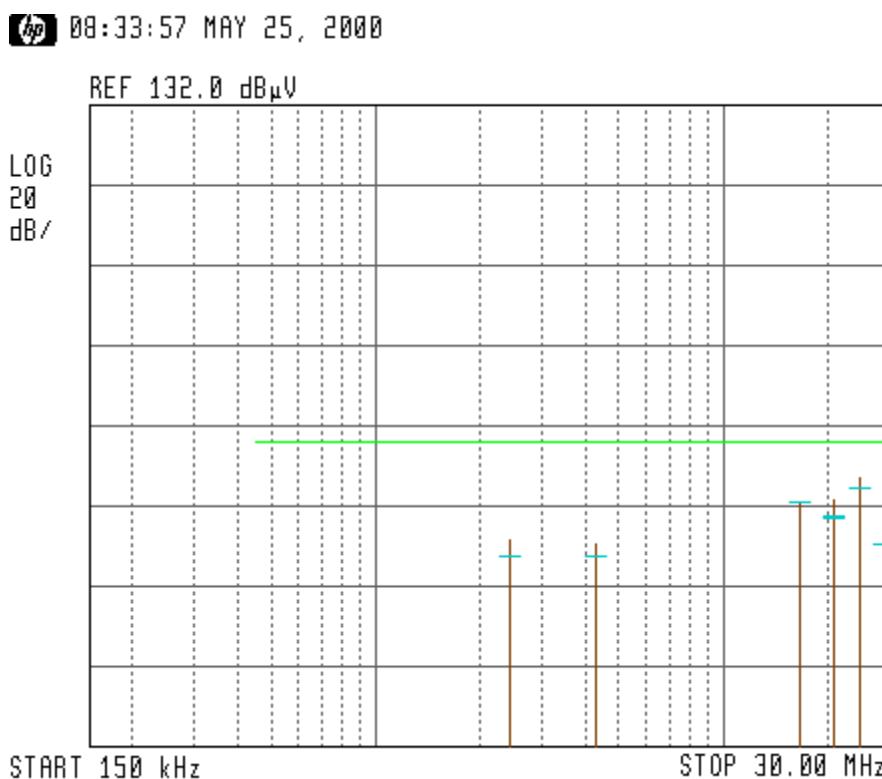


Figure 8 Conducted Emission: NEUTRAL
Detectors: Peak, Quasi-peak

Notes:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

6. Radiated Emission Data

6.1 Radiated Emission

16.3MHz-1000 MHz, Below 1GHz F.C.C. Part 15, Subpart C, Section 15.249

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in Figure 3.

The frequency range 16.3MHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

6.2 Measured Data

JUDGEMENT: Passed by 0.4 dB μ V/m

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

The worst case was 0.4dB for 902.8 MHz, vertical polarization on Channel 1

The worst case was 1.2dB for 904.55 MHz, vertical polarization on Channel 8.

The details of the highest emissions are given in Figure 9 to Figure 24.

TEST PERSONNEL:

tester signature: _____ DATE _____

typed/printed name Y. Mordukhovitch

Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz

Channel 1

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
49.16	29.3	23.3	11.6	40.0	-16.7
61.44	39.0	32.8	10.5	40.0	-7.2
75.16	34.0	30.4	10.4	40.0	-9.6
129.44	28.4	24.2	13.9	43.5	-19.3
259.99	37.0	32.0	21.3	46.0	-14.0
294.79	29.4	24.5	22.8	46.0	-21.5

**Figure 9. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Notes: 1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz

Channel 1

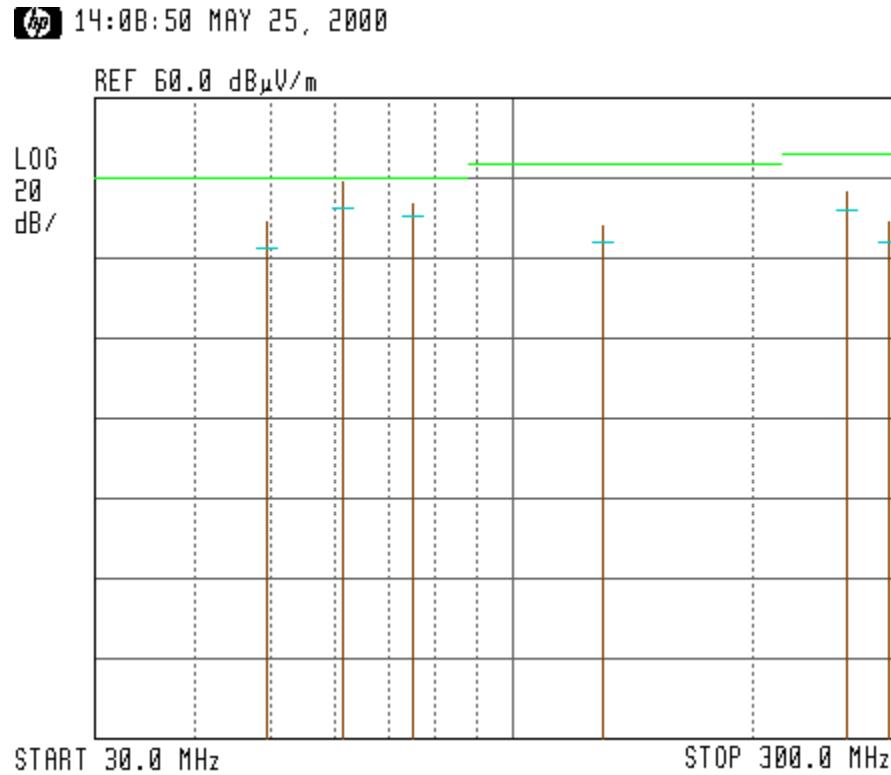

**Figure 10. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz

Channel 1

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
420.44	26.6	21.5	18.7	46.0	-24.5
600.01	36.8	30.1	22.1	46.0	-15.9
671.26	40.3	36.7	23.7	46.0	-9.3
816.23	37.7	32.9	25.7	46.0	-13.1
824.21	34.4	28.5	25.8	46.0	-17.5
902.8	91.2	91.0	27.1	94.0	-3.0
936.01	45.8	44.1	27.7	46.0	-1.9

**Figure 11. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Notes: 1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

15:13:47 MAY 30, 2000

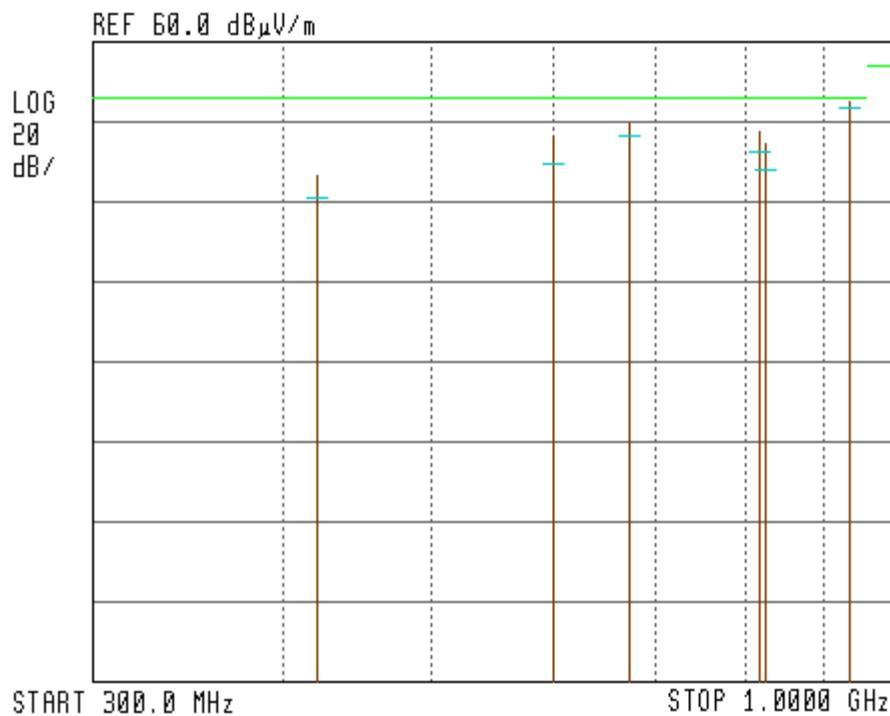

**Figure 12. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.
5. The fundamental TX component is not shown in the graph.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
 Type 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
 Test Distance: 3 meters Detector: Quasi-peak
 TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz

Channel 1

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (1) (dB μ V/m)
36.87	38.1	33.8	13.9	40.0	-6.2
40.95	36.9	31.1	12.9	40.0	-8.9
45.05	36.3	28.2	12.3	40.0	-11.8
49.15	36.7	32.5	11.6	40.0	-7.5
57.35	30.9	25.8	10.8	40.0	-14.2
61.44	39.2	33.6	10.5	40.0	-6.4
75.15	33.9	27.7	10.4	40.0	-12.3

**Figure 13. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Quasi-peak**


Notes: 1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
 2. This level includes the reading plus all correction factors.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

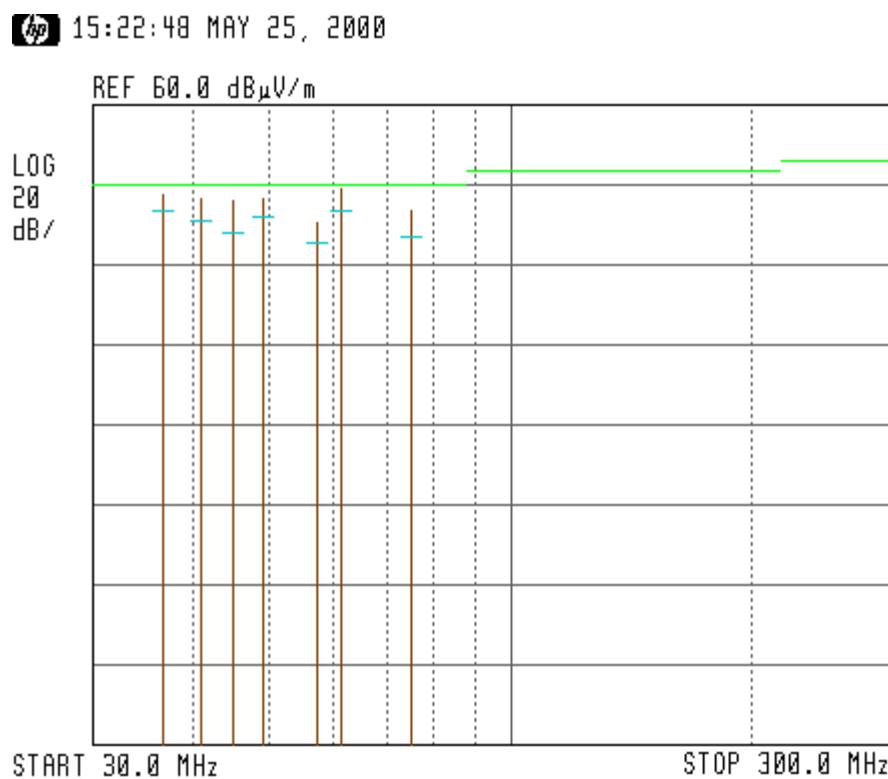

**Figure 14. Radiated Emission. Antenna Polarization: VERTICAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Vertical Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz

Channel 1

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (1) (dB μ V/m)
311.05	35.7	32.6	15.1	46.0	-13.4
600.13	38.7	31.6	22.1	46.0	-14.4
671.25	40.1	35.7	23.7	46.0	-10.3
816.23	40.9	36.7	25.7	46.0	-9.3
823.23	39.4	36.4	25.8	46.0	-9.6
828.71	38.0	33.6	25.9	46.0	-12.4
902.8	93.9	93.6	27.1	94.0	-0.4
936.01	44.6	42.2	27.7	46.0	-3.8

**Figure 15. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Quasi-peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Vertical Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

 09:45:45 MAY 30, 2000

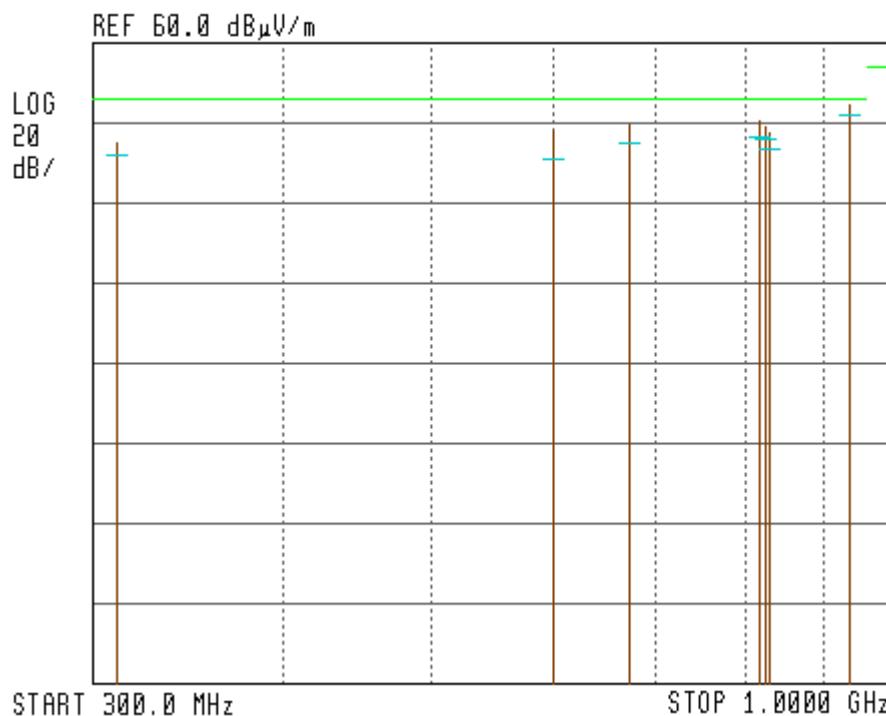

**Figure 16. Radiated Emission. Antenna Polarization: VERTICAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.
5. The fundamental TX component is not shown in the graph.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz

Channel 8

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
49.16	32.5	23.8	11.6	40.0	-16.2
61.44	39.2	32.7	10.5	40.0	-7.3
75.16	34.9	31.9	10.4	40.0	-8.1
129.44	28.5	24.4	13.9	43.5	-19.1
257.50	36.8	32.1	21.1	46.0	-13.9
294.79	29.4	24.5	22.8	46.0	-21.5

**Figure 17. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Notes: 1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

14:40:05 MAY 25, 2000

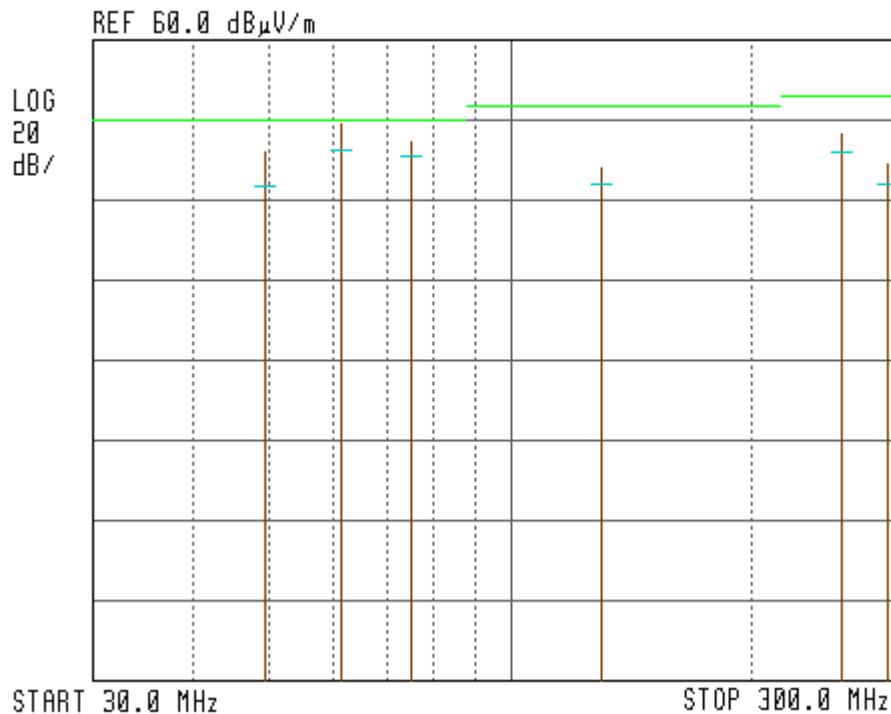

**Figure 18. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz

Channel 8					
Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (1) (dB μ V/m)
311.92	25.5	20.6	15.0	46.0	-25.4
671.25	39.7	37.1	23.7	46.0	-8.9
816.24	38.1	33.9	25.7	46.0	-12.1
822.81	33.6	28.5	25.8	46.0	-17.5
828.26	34.0	28.6	25.9	46.0	-17.4
904.55	93.1	92.8	27.2	94.0	-1.2
937.76	43.4	40.5	27.7	46.0	-5.5

**Figure 19. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

14:00:08 MAY 30, 2000

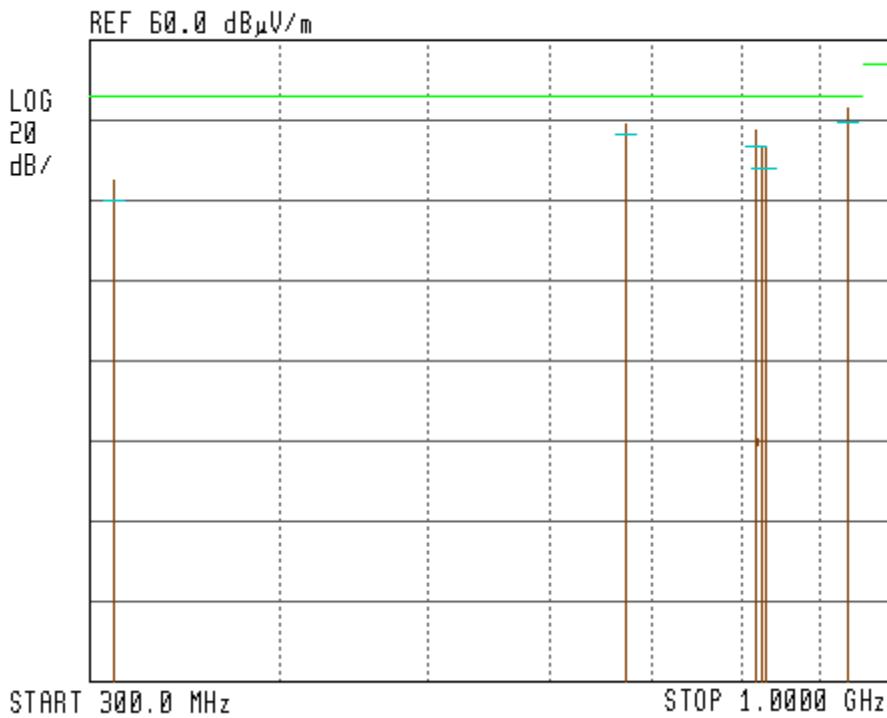

**Figure 20. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.
5. The fundamental TX component is not shown in the graph.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
 Type 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
 Test Distance: 3 meters Detector: Quasi-peak
 TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz

Channel 8

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (1) (dB μ V/m)
36.87	38.0	32.4	13.9	40.0	-7.6
40.95	36.0	31.2	12.9	40.0	-8.8
45.06	36.5	31.7	12.3	40.0	-8.3
49.15	36.8	32.2	11.6	40.0	-7.8
57.35	37.3	25.5	10.8	40.0	-14.5
61.44	40.6	35.8	10.5	40.0	-4.2
75.15	32.3	26.4	10.4	40.0	-13.6

**Figure 21. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Quasi-peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

 15:10:30 MAY 25, 2000

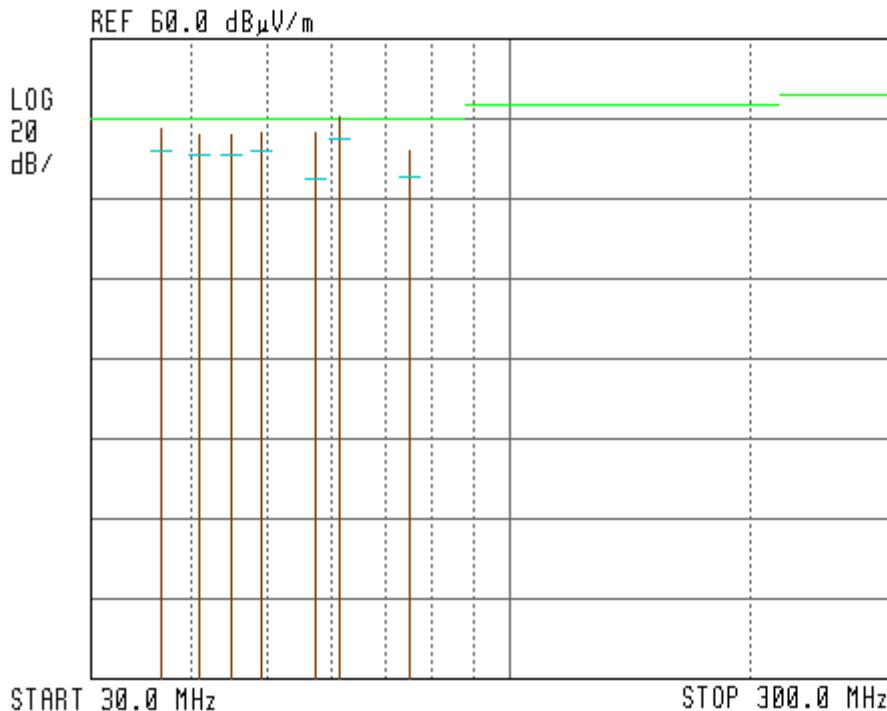

**Figure 22. Radiated Emission. Antenna Polarization: VERTICAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description Computerized Toy Analog Base
 Type 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Vertical Frequency range: 300 MHz to 1000 MHz
 Test Distance: 3 meters Detector: Quasi-peak
 TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz

Channel 8

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (2) (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (1) (dB μ V/m)
600.22	37.6	32.7	22.1	46.0	-13.3
671.26	38.3	36.1	23.7	46.0	-9.9
816.19	38.1	34.1	25.7	46.0	-11.9
823.25	34.9	29.8	25.8	46.0	-16.2
828.73	34.5	29.3	25.9	46.0	-16.7
904.55	93.1	92.8	27.2	94.0	-1.2
937.75	46.0	44.1	27.7	46.0	-1.9

**Figure 23. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Quasi-peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a negative result indicates that the product passes the test, and a positive number indicates failure.
2. This level includes the reading plus all correction factors.


Radiated Emission

E.U.T Description Computerized Toy Analog Base
Type 900M VER. 5.0 (Analog Base)
Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
Section 15.249

Antenna Polarization: Vertical Frequency range: 300 MHz to 1000 MHz
Test Distance: 3 meters Detector: Quasi-peak
TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

 13:31:54 MAY 30, 2000

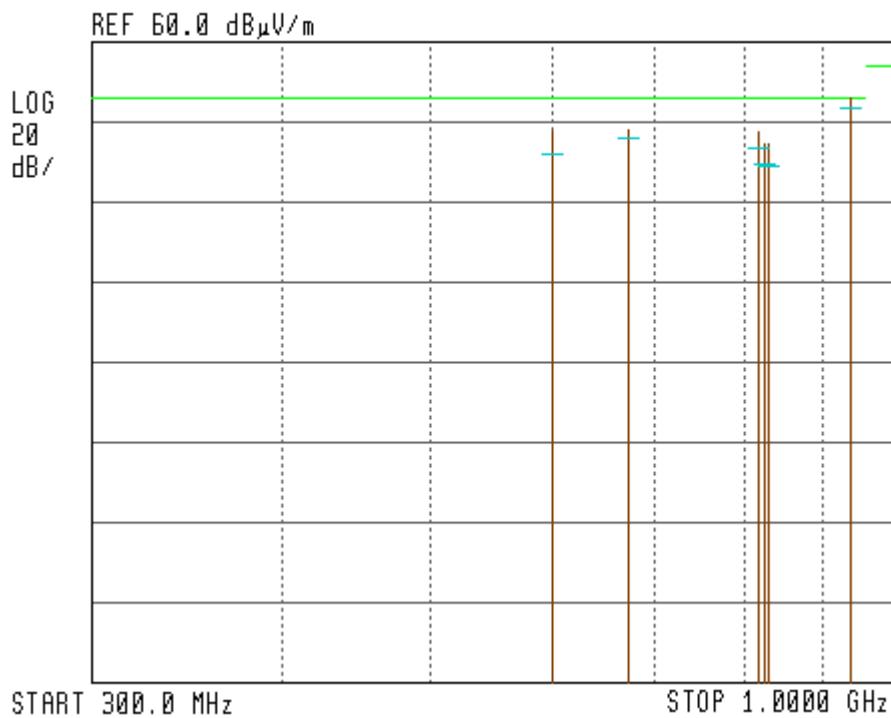

**Figure 24. Radiated Emission. Antenna Polarization: VERTICAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.
5. The fundamental TX component is not shown in the graph.

6.3 *Test Instrumentation Used, Radiated Measurements*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	8542E	3427A00103/34	December 24, 1999	1 year
Loop Antenna	EMCO	6507	2950	January 1 2000	1 year
Antenna - Biconical HP	ARA	BCD-235/B	1041	April 10, 2000	1 year
Antenna - Log Periodic	ARA	LPD-2010/A	1038	April 8, 2000	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet2225	2738508357.0	N/A	N/A

6.4 Field Strength Calculation

In the frequency range below 2.9GHz the field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

In the frequency range above 2.9GHz, the field strength is manually calculated using the following equation

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF} + \text{PRAF}$$

PRAF: Preamplifier Gain Factor

7. Radiated Emission Data

7.1 Radiated Emission Above 1 GHz

1GHz-9.4GHz, F.C.C. Part 15, Subpart C, Section 15.249

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterise the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in Figure 3.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used. The test distance was 3 meters.

In the frequency range 2.9-9.4 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

7.2 Measured Data

JUDGEMENT: Passed by 0.5 dB μ V/m

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

The worst case was 1.0dB for 2808.77 MHz, vertical polarization on Channel 1

The worst case was 0.5dB for 2807.99 MHz, horizontal polarization on Channel 8.

The details of the highest emissions are given in Figure 25 to Figure 32.

TEST PERSONNEL:

tester signature: _____ DATE: _____

typed/printed name:

Y. Mordukhovitch

Radiated Emission Above 1 GHz

E.U.T Description: Computerized Toy Analog Base
 Type: 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Horizontal Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Peak
 TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

Freq. (MHz)	Peak Reading (dB μ V)	Peak Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1805.60	12.3	51.0	74.0	-23.0	29.1	9.6	N/A
2709.39	12.3	56.3	74.0	-17.7	31.3	12.7	N/A
2808.00	15.9	60.6	74.0	-13.4	31.9	12.8	N/A
4514.00	36.0	45.1	74.0	-28.9	35.2	4.9	-31.1
6319.60	35.0	47.9	74.0	-26.1	37.7	5.7	-30.5
8129.20	39.0	56.3	74.0	-17.7	40.0	7.6	-30.3

Figure 25. Radiated Emission above 1 GHz Antenna Polarization: HORIZONTAL. Detector: Peak

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description: Computerized Toy Analog Base
 Type: 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Horizontal Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Average
 TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

Freq. (MHz)	Average Reading (dB μ V)	Average Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1805.60	0.7	39.4	54.0	-14.6	29.1	9.6	N/A
2709.39	-1.6	42.4	54.0	-11.6	31.4	12.7	N/A
2808.00	7.9	52.6	54.0	-1.4	31.9	12.8	N/A
4514.00	26.2	35.3	54.0	-18.7	35.2	4.9	-31.1
6319.60	25.1	38.0	54.0	-16.0	37.7	5.7	-30.5
8129.20	29.9	47.2	54.0	-6.8	40.0	7.6	-30.3

Figure 26. Radiated Emission above 1 GHz Antenna Polarization: HORIZONTAL. Detector: Average

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description: Computerized Toy Analog Base
 Type: 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Vertical Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Peak
 TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

Freq. (MHz)	Peak Reading (dB μ V)	(2) Peak Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1809.00	11.4	50.1	74.0	-23.9	29.1	9.6	N/A
2714.62	11.7	55.8	74.0	-18.2	31.4	12.7	N/A
2808.77	15.7	60.4	74.0	-13.6	31.9	12.8	N/A
3744.00	38.0	45.1	74.0	-28.9	33.8	4.5	-31.1
6319.60	35.0	47.9	74.0	-26.1	37.7	5.7	-30.5
8125.20	39.0	56.3	74.0	-17.7	40.0	7.6	-30.3

**Figure 27. Radiated Emission above 1 GHz Antenna Polarization: VERTICAL.
Detector: Peak**

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description: Computerized Toy Analog Base
 Type: 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Vertical Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Average
 TX operation Frequency 902.8MHz RX operation Frequency 925.3MHz
Channel 1

Freq. (MHz)	Average Reading (dB μ V)	Average Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1809.00	-2.3	36.4	54.0	-17.6	29.1	9.6	N/A
2714.62	-1.5	42.6	54.0	-11.4	31.4	12.7	N/A
2808.77	8.3	53.0	54.0	-1.0	31.9	12.8	N/A
3744.00	29.8	36.9	54.0	-17.1	33.8	4.5	-31.1
6319.60	25.2	38.1	54.0	-15.9	37.7	5.7	-30.5
8125.20	29.9	47.2	54.0	-16.8	40.0	7.6	-30.3

**Figure 28. Radiated Emission above 1 GHz Antenna Polarization: VERTICAL.
Detector: Average**

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description Computerized Toy Analog Base
 Type 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Horizontal Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Peak
 TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

Freq. (MHz)	Peak Reading (dB μ V)	Peak Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1805.6	11.3	50.7	74.0	-23.3	29.1	9.6	N/A
2709.3	12.0	56.0	74.0	-18.0	31.3	12.7	N/A
2807.99	15.7	60.4	74.0	-13.6	31.9	12.8	N/A
3751.00	35.0	42.1	74.0	-31.9	33.8	4.4	-31.1
5626.50	35.0	46.5	74.0	-27.5	36.8	5.4	-30.7
7502.00	39.5	55.0	74.0	-19.0	39.2	6.7	-30.4
9377.50	38.0	57.9	74.0	-16.1	41.0	9.2	-30.3

**Figure 29. Radiated Emission above 1 GHz Antenna Polarization: HORIZONTAL.
Detector: Peak**

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description Computerized Toy Analog Base
 Type 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Horizontal Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Average
 TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

Freq. (MHz)	Average Reading (dB μ V)	Average Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1805.6	-0.7	37.4	54.0	-16.6	29.1	9.6	N/A
2709.3	-1.4	42.6	54.0	-11.4	31.3	12.7	N/A
2807.99	9.8	53.5	54.0	-0.5	31.9	12.8	N/A
3751.00	26.7	33.8	54.0	-20.2	33.8	4.4	-31.1
5626.50	25.8	37.2	54.0	-16.8	36.8	5.4	-30.7
7502.00	29.8	45.3	54.0	-8.7	39.2	6.7	-30.4
9377.50	28.9	48.8	54.0	-5.2	41.0	9.2	-30.3

**Figure 30. Radiated Emission above 1 GHz Antenna Polarization: HORIZONTAL.
Detector: Average**

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description: Computerized Toy Analog Base
 Type: 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Vertical Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Peak
 TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

Freq. (MHz)	Peak Reading (dB μ V)	Peak Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1809.8	11.1	49.8	74.0	-24.2	29.1	9.6	N/A
2713.95	12.8	56.9	74.0	-17.1	31.3	12.7	N/A
2808.74	11.3	56.0	74.0	-18.0	31.9	12.8	N/A
3751.00	37.0	44.1	74.0	-29.9	33.8	4.4	-31.1
5626.50	34.0	45.5	74.0	-27.5	36.8	5.4	-30.7
7562.00	38.0	53.5	74.0	-20.5	39.2	6.7	-30.4
9377.50	38.0	57.9	74.0	-17.1	41.0	9.2	-30.3

**Figure 31. Radiated Emission above 1 GHz Antenna Polarization: VERTICAL.
Detector: Peak**

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

Radiated Emission Above 1 GHz

E.U.T Description Computerized Toy Analog Base
 Type 900M VER. 5.0 (Analog Base)
 Serial Number: B1001

Specification: F.C.C., Part 15, Subpart C:
 Section 15.249

Antenna Polarization: Vertical Frequency range: 1 GHz to 9.4 GHz
 Test Distance: 3 meters Detector: Average
 TX operation Frequency 904.55MHz RX operation Frequency 927.05MHz
Channel 8

Freq. (MHz)	Average Reading (dB μ V)	Average Result (dB μ V/m)	Spec. (dB μ V/m)	(1) Margin (dB μ V/m)	Correction Factor (dB)		
					Ant.	Cable	Gain
1809.8	-2.2	36.5	54.0	-17.5	29.1	9.6	N/A
2713.95	-1.6	42.5	54.0	-11.5	31.3	12.7	N/A
2808.74	6.9	51.6	54.0	-2.4	31.9	12.8	N/A
3751.00	28.2	35.3	54.0	-18.7	33.8	4.4	-31.1
5626.50	25.4	36.9	54.0	-17.1	36.8	5.4	-30.7
7562.00	29.7	45.2	54.0	-18.8	39.2	6.7	-30.4
9377.50	28.9	48.8	54.0	-5.2	41.0	9.2	-30.3

**Figure 32. Radiated Emission above 1 GHz Antenna Polarization: VERTICAL.
Detector: Average**

Note:

1. Margin refers to the test peak results obtained, minus the specification requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. This level includes the reading plus all correction factors.

7.3 *Test Instruments used, Radiated Measurement Above 1 GHZ*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	August 2, 1999	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet2225	2738508357.0	N/A	N/A
Antenna – Log Periodic	A.H. System	SA5-200/511	253	January 27, 2000	1 year
Low Noise Amplifier	DBS	0411N313	003	December 24, 1999	1 year
Receiver	HP	8542E	3427A00103/34	December 24, 1999	1 year

7.4 Field Strength Calculation

In the frequency range below 2.9GHz the field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

In the frequency range above 2.9GHz, the field strength is manually calculated using the following equation

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF} + \text{PRAF}$$

PRAF: Preamplifier Gain Factor

8. Photographs of Tested E.U.T.



Figure 33 Assembled Product, Front/Top View



Figure 34 Assembled Product, Side View



Figure 35 Assembled Product, Bottom View



Figure 36 Disassembled Product Bottom Cover

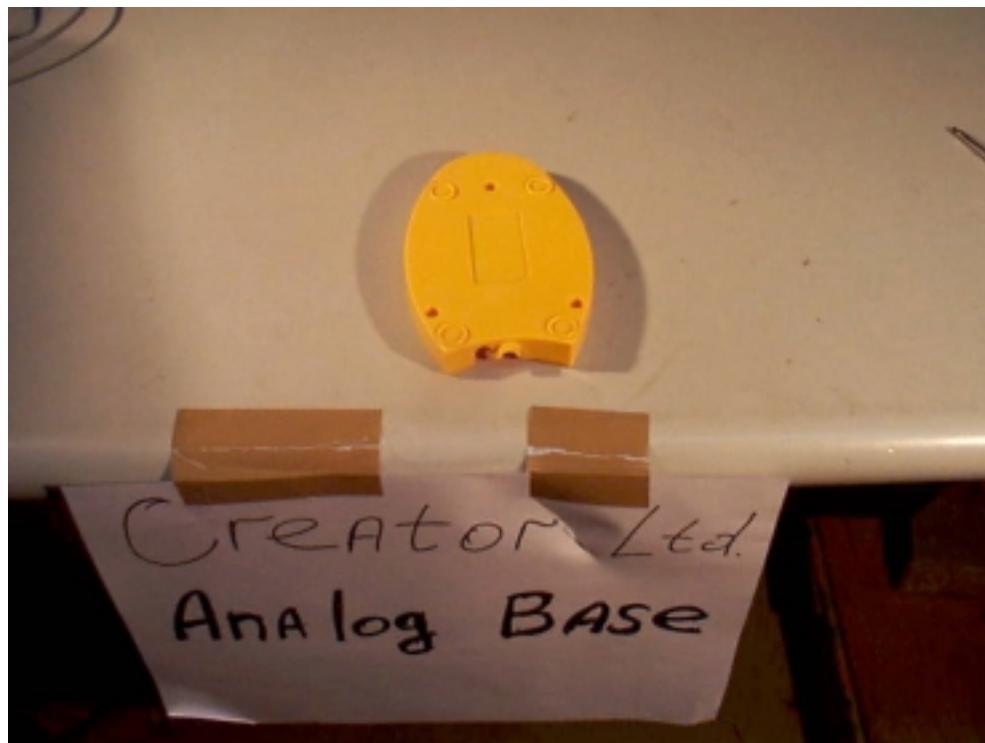


Figure 37 Disassembled Product, Bottom Cover

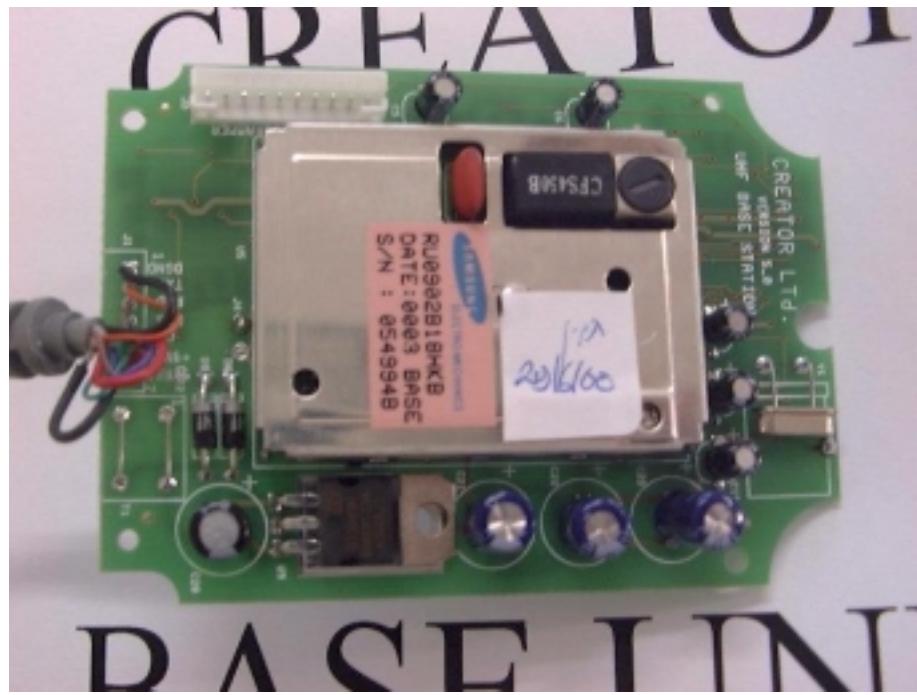


Figure 38 Base PCB Component Side

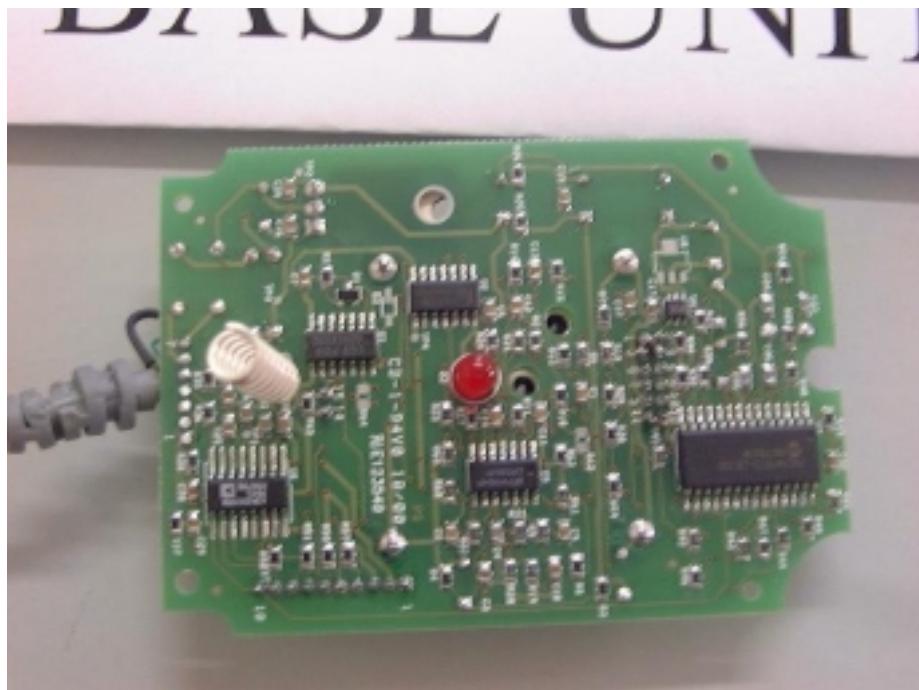


Figure 39 Base Print Side



Figure 40 Conducted Emissions Front View



Figure 41 Conducted Emissions Side View



Figure 42 Radiated Emissions Front View



Figure 43 Radiated Emissions Side View

9. Signatures of the E.U.T's Test Engineers

Test	Test Engineer Name	Signature	Date
Conducted Emissions	Y. Mordukhovitch		
Radiated Emissions	Y. Mordukhovitch		

10. APPENDIX A - CORRECTION FACTORS

10.1 *Correction factors for CABLE*

**from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.5	1200.0	7.5
20.0	0.7	1400.0	8.2
30.0	1.0	1600.0	9.0
40.0	1.2	1800.0	9.6
50.0	1.3	2000.0	10.7
60.0	1.5	2300.0	11.1
70.0	1.6	2600.0	11.8
80.0	1.7	2900.0	12.8
90.0	1.8		
100.0	1.9		
150.0	2.4		
200.0	2.7		
250.0	3.0		
300.0	3.3		
350.0	3.7		
400.0	4.0		
450.0	4.3		
500.0	4.7		
600.0	4.9		
700.0	5.4		
800.0	5.8		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 **Correction factors for CABLE**

**from EMI receiver
to test antenna
at 10 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.6	1200.0	9.7
20.0	1.1	1400.0	10.5
30.0	1.3	1600.0	11.5
40.0	1.6	1800.0	12.6
50.0	1.7	2000.0	13.5
60.0	1.9	2300.0	14.3
70.0	2.0	2600.0	15.5
80.0	2.2	2900.0	16.4
90.0	2.3		
100.0	2.4		
150.0	3.1		
200.0	3.6		
250.0	4.2		
300.0	4.5		
350.0	4.8		
400.0	5.2		
450.0	5.5		
500.0	6.2		
600.0	6.4		
700.0	7.0		
800.0	7.5		
900.0	8.1		
1000.0	8.6		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

10.3 **Correction factors for LOG PERIODIC ANTENNA**

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	11.4
400.0	14.5
500.0	15.2
600.0	17.3
700.0	19.0
850.0	20.1
1000.0	22.2

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.2
400.0	14.4
500.0	15.2
600.0	17.2
700.0	19.0
850.0	20.1
1000.0	22.1

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

10.4 **Correction factors for BICONICAL ANTENNA**

 Type BCD-235/B,
 at 3 and 10 meter ranges

3 meter range

FREQUENCY (MHz)	AFE (dB/m)
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13
180.0	13.5
190.0	14
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9

10 meter range

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

10.5 Correction factors for BICONICAL ANTENNA Type 3109
3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	18.4
30.0	14.0
40.0	12.3
50.0	10.6
60.0	8.3
70.0	8.7
80.0	7.2
90.0	8.6
100.0	10.1
110.0	11.2
120.0	11.8
130.0	12.3
140.0	12.7
150.0	12.5
160.0	12.4
170.0	12.1
180.0	12.2
190.0	12.8
200.0	13.7
210.0	14.5
220.0	15.4
230.0	15.9
240.0	16.3
250.0	16.7
260.0	17.1
270.0	17.2
280.0	17.5
290.0	18.1
300.0	18.9

NOTES:

1. Antenna serial number is 3244.
2. The above list is located in file 44BIC3M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver"

10.6 Correction factors for BICONICAL ANTENNA Type 3109
10 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	16.4
30.0	13.2
40.0	11.9
50.0	10.4
60.0	8.6
70.0	9.0
80.0	6.8
90.0	7.5
100.0	9.4
110.0	10.8
120.0	11.7
130.0	12.2
140.0	12.5
150.0	12.3
160.0	12.1
170.0	12.2
180.0	12.5
190.0	13.2
200.0	14.0
210.0	14.4
220.0	14.8
230.0	15.0
240.0	15.1
250.0	15.2
260.0	15.7
270.0	15.9
280.0	16.5
290.0	17.0
300.0	17.8

NOTES:

1. Antenna serial number is 3244.
2. The above list is located in file 44BIC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver"

10.7 Correction factors for SAS ANTENNA, 3 meter range

Type SAS-200/511

FREQUENCY (GHz)	AFE (dB/m)	FREQUENCY (GHz)	AFE (dB/m)
1.0	24.9	7.0	38.6
1.5	27.8	7.5	39.2
2.0	29.9	8.0	39.9
2.5	31.2	8.5	40.4
3.0	32.8	9.0	40.8
3.5	33.6	9.5	41.1
4.0	34.3	10.0	41.7
4.5	35.2	10.5	42.4
5.0	36.2	11.0	42.5
5.5	36.7	11.5	43.1
6.0	37.2	12.0	43.4
6.5	38.1	12.5	44.4

NOTES:

1. Antenna serial number is 253.
2. The above list is located in file SASLP3M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver"