



RD Systems Compliance,
485A Strawberry Cyn. Rd.
Waxoneville, CA 95070
Cell Phone 408-713-0556
Phone/Fax 831-724-1221

RD Systems Compliance

FCC Subpart C

FCC Class A

Test Report

For:

Westinghouse Security Electronics
47102 Mission Falls Court
Fremont, CA 94539

Equipment Tested:
Access Control Reader

Model:
DR4201

Test Report Number: WSE99284201fc
Date: July 19, 1999

This report contains 23 pages and may be reproduced in full only.
Partial reproduction may only be done with the written consent of
RD Systems Compliance



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsontown, PA 17776
Cell Phone 408-213-0596
Phone/Fax 831-734-1221

TABLE OF CONTENTS

TABLE OF CONTENTS	2
GENERAL INFORMATION	3
TEST EQUIPMENT	4
EQUIPMENT UNDER TEST CONFIGURATION	5
EQUIPMENT BLOCK DIAGRAM	6
EQUIPMENT UNDER TEST	7
TEST SETUP (RADIATED)	8
TEST SETUP (CONDUCTED)	9
APPENDIX A: EUT SETUP AND REQUIREMENTS	10
RADIATED EMISSIONS	11
CONDUCTED EMISSION	11
EUT CONFIGURATION	11
TEST METHODS	12
MEASUREMENT UNCERTAINTY	12
SAMPLE CALCULATIONS	12
RADIATED EMISSION TESTING (ELECTRIC FIELD)	13
CONDUCTED EMISSION TESTING	13
FCC PART 15 LIMITS	14
APPENDIX B: MEASUREMENT DATA	15
REPORT OF MEASUREMENTS RADIATED DATA	16
REPORT OF MEASUREMENTS CONDUCTED DATA	17
RADIATED DATA FOR EN-55022 CLASS A	18
RADIATED DATA FOR FCC SUBPART C	19
EXTRAPOLATION PLOT FOR FCC SUBPART C DATA	20
CONDUCTED DATA FOR CISPR 22 CLASS B - LINE	21
CONDUCTED DATA FOR CISPR 22 CLASS B - NEUTRAL	22
COMPLIANCE VERIFICATION REPORT	23



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-0595
Phone/Fax 831-724-1221

GENERAL INFORMATION

Test Report Number: WSE99284201fc
Date: July 19, 1999
Applicant: Westinghouse Security Electronics
47102 Mission Falls Court
Fremont, CA 94539
Equipment Tested: Access Control Reader
Model: DR4201
Purpose Of Test: To demonstrate the **compliance** of the Access Control Reader, DR4201 with the requirements of FCC Part 15/ANSI C63.4-1992 Rules and **Regulations Subpart C** **Limits** and **FCC Class A** **Limits**.
Test Site Location: Atlas Compliance & Engineering
OATS
726 Hidden Valley Road
Watsonville, California 95076
Tested for Compliance With: FCC Part 15 Rules and Regulations for
Subpart C and **Subpart B Class A** to ANSI / C63.4-1992 procedures
Frequency Range Investigated: 10 kHz to 1000 MHz
Date Product Tested: July 16, 1999
Test Personnel: Mario Baraona
EMC Engineer



RD Systems Compliance
485A Strawberry Cyn. Rd.
Wilsonville, CA 95076
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

TEST EQUIPMENT

The following test equipment was utilized in making the measurements contained in this report.

1. EMI Test Receiver 9kHz – 2500MHz, Rohde & Schwarz, Model No. ESPC, S/N 845296/024, Date Calibration due, May 9, 2000
2. Pre amp, Hewlett Packard, Model No. 8447D, S/N - 44A06739 (range 2-1300 MHz noise figure 3.5-4.0 dB, flatness of 1.5-2.0 dB, and an average gain of 28 dB), Date Calibration due, June 19, 2000
3. Pre amp, Q Bit Corporation, Model No. QB-820, S/N - 11605, Date Calibration due February 28, 2000
4. Active Loop Antenna, EMCO, Model No. 6502, S/N - 9307-2839, Date Calibration due, November 7, 2000
5. BiconiLog Antenna, Chase, Model No. CBL6141, S/N - 4034, Date Calibration due, March 18, 2000
6. Log Periodic Antenna, A.H. Systems, Model No . SAS 200/512, S/N - 288, Date Calibration due, May 12, 2000
7. LISN, Solar Electronic, Model No. 8028-50-TS-24-BNC, S/N 8379587, Date Calibration due, May 12, 2000
8. LISN, EMCO, Model No. 3825/2, S/N 9007-1683, Date Calibration due, January 23, 2000



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

EQUIPMENT UNDER TEST CONFIGURATION

Customer: Westinghouse Security Electronics
Date: July 16, 1999
Specification: **FCC Part 15 Subpart C and FCC Class A/ANSI C63.4-1992**

EUT Description:

The DR4201 is an access control panel with a keypad. It was setup in a configuration to simulate a typical installation. The host equipment was placed 25 feet from the equipment under test. The DR4201 was constantly reading an access card. EUT is a six layer PCB, EUT clock at 11.059 MHz.

EUT Support Devices:

Model:	Description:	S/N	FCC ID#
QVT-31	Qume, Terminal	N/A	N/A
4100	NexSentry, ACU	CAQL3180278	N/A
902-PI	Westinghouse, Power Supply	N/A	N/A

EUT Support Program:

The EUT and all support equipment were exercised in all operating modes for determination of worse case emission under typical operations. Data reported for conducted and radiated emissions reflects worse case conditions.

I/O Ports and Cables:

EUT:

I/O Port	Cable Type	Length	Connector	Termination
RS485	shielded - foil	25 feet	Phoenix - 5 pin	DR4226UK

Host:


I/O Port	Cable Type	Length	Connector	Termination
RS485	shielded - foil	2 meter	Phoenix - 5 pin	DR4226UK
RS232	shielded	6 feet	9 pin 'D'	Terminal
Power	Unshielded	6 feet	IEC	power mains



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-0595
Phone/Fax 831-724-1221

EQUIPMENT BLOCK DIAGRAM

EUT: DR4201

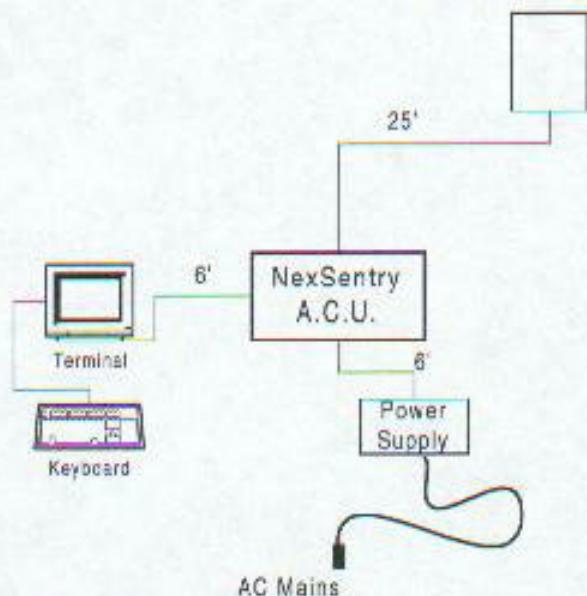




RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-213-0596
Phone/Fax 831-724-1221

EQUIPMENT UNDER TEST

The Photographs below show the condition of the EUT for test.

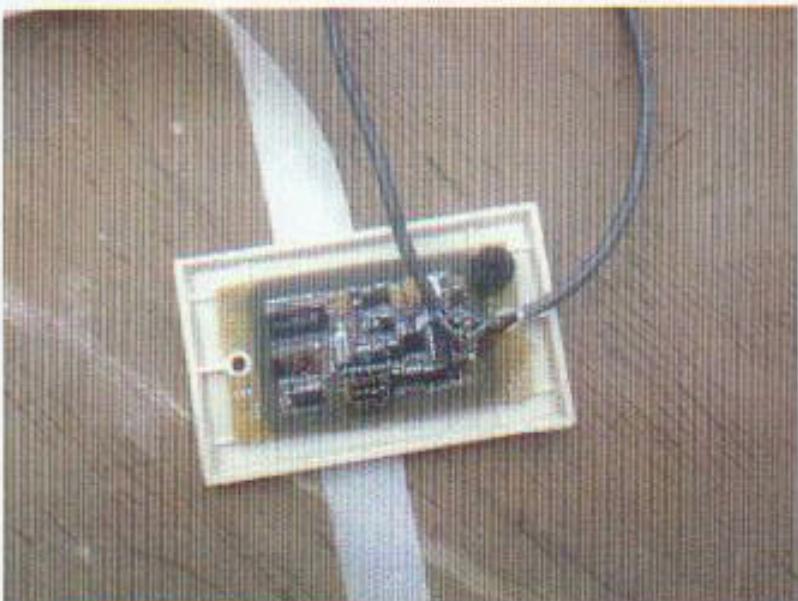




RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsenville, CA 95074
Cell Phone 408-313-0595
Phone/Fax 831-724-1221

TEST SETUP (Radiated)

The Photographs below show worst case setup for Radiated.

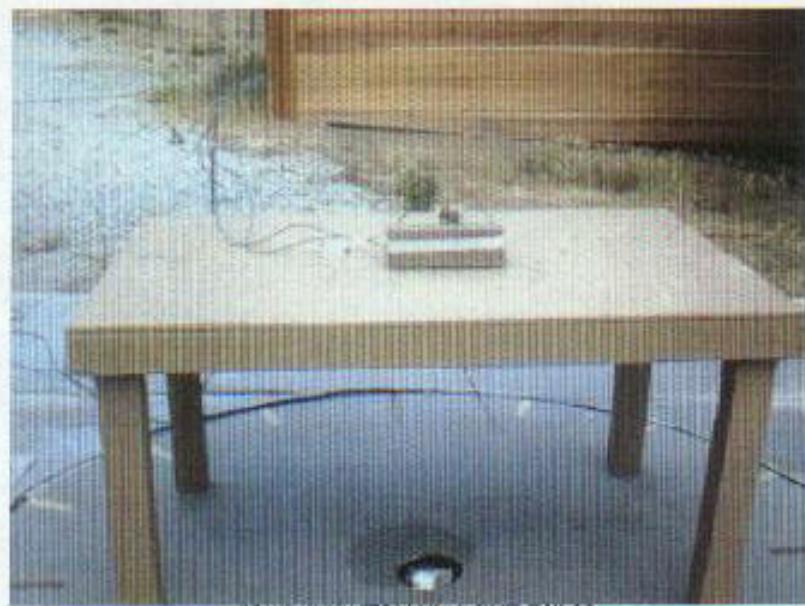




RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-213-0596
Phone/Fax 831-724-1221

TEST SETUP (Conducted)

The Photographs below show worst case setup for Line Conducted.

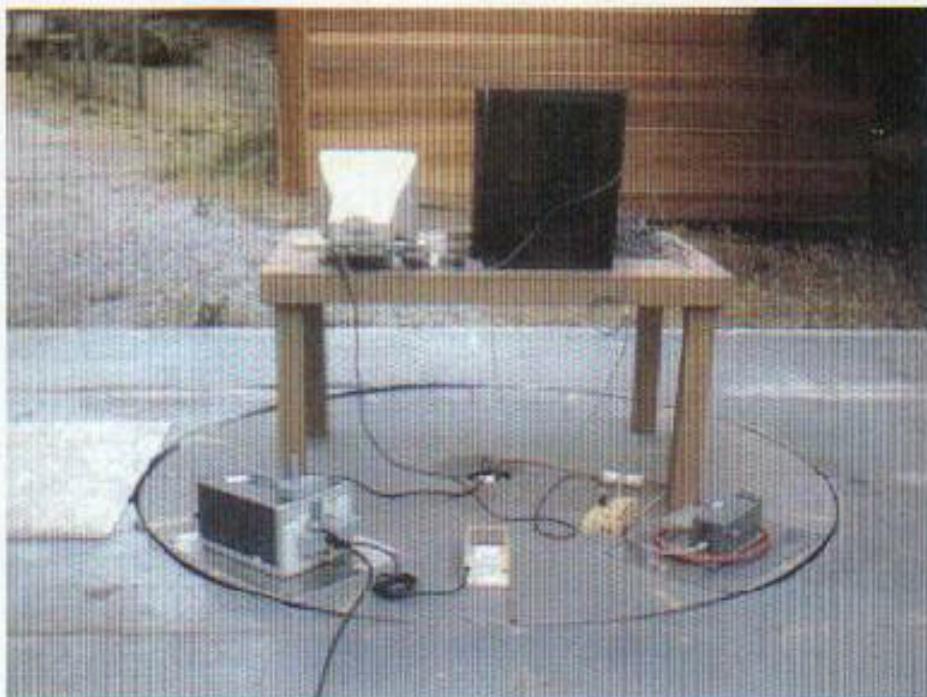



RD Systems Compliance
485A Strawberry Cyn. Rd.
Waneeville, CA 95076
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

APPENDIX A: EUT Setup and Requirements



RD Systems Compliance
485A Strawberry Cyn, Rd.
Watsonville, CA 95076
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

Radiated Emissions

In general, the equipment under test (EUT) and the peripherals listed were setup in a manner that represented their normal use. Any special conditions required for the EUT to operate normally are identified in the comments that accompany Table 1 for radiated emission, and Table 2 for conducted emissions. Additionally a complete description of all ports and I/O cables is included in the configuration page.

During radiated emission testing, the EUT was placed on a nonconductive rotating table .8 meter above the conductive grid. The nonconductive table dimensions were 1 meter deep by 1.5 meters wide at .8 meter high. This configuration is typical for radiated emission testing of table top devices.

Conducted Emission

During conducted emission testing the EUT, was located on a wooden test bench measuring .8 meter high, 1 meter deep, and 1.5 meters in width. The EUT was placed on the wooden test bench surface. Alternatively, conducted emission testing is performed with the test bench on the top of the metal turntable and by placing the metal frame of the LISN on top of the conductive horizontal ground plane.

The metal plane used for conducted emission testing was grounded to the earth through the green wire safety ground. Power to the EUT was provided from a filter grounded to the metal plane to a LISN. The LISN was also grounded to the plane. All other objects were kept a minimum of 1 meter away from the EUT during the conducted test.

EUT Configuration

The AC power line and I/O cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available I/O ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. This configuration was precisely noted in the test report. I/O cables were of the type and length specified in the individual requirements. If the length could be varied, the length which produced maximum emissions was selected.

Where there are multiple I/O ports all of the same type, connecting a cable to just one of the ports is sufficient if it can be shown that additional cables would not significantly affect the results.

If the length of cable between pieces of equipment, and the manufacturer did not provide specifications on their spacing, the interval between different pieces of equipment was about 10 centimeters.

If the length of cable between pieces of equipment was longer than necessary, all excessive cable was bundled with 30-40 cm lengths in a serpentine fashion. If the cable could be bundled in this fashion, it was arranged around the EUT. For more detail on the disposition of the



RD Systems Compliance
485A Strawberry Cyn., Rd.
Wausauville, CA 95475
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

cables during the test, refer to the information contained in the configuration page and on worst case photographs on the test setup page respectively.

Test Methods

The radiated and conducted emission data of the EUT was taken with the HP Spectrum Analyzer. Incorporating the application correction factors for distance, antenna, cable loss, and amplifier gain, the data was reduced as shown in the "Sample Calculations". The corrected data was then compared to the **FCC Part 15 Subpart C and to the Class A for the digital portion** emission limits to determine compliance.

Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

Measurement Uncertainty

Measurement uncertainty is caused by random effects and imperfect correction of systematic effects. The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with a confidence level of 95%.

Total Uncertainty at 95% confidence probability = $\pm 3.4\text{dB}$

Sample Calculations

An example of how the spectrum analyzer reading is converted using correction factors is given for the six highest emissions recorded in Table 1 and 2. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ is corrected by using the following formula:

Meter Reading ($\text{dB}\mu\text{V}$)
+ Antenna Factor (dB)
+ Cable Loss (dB)
- Pre amplifier Gain (dB)
= Corrected Reading ($\text{dB}\mu\text{V}/\text{m}$)

This reading is then compared to the applicable specification limits and the difference will determine compliance. For conducted emissions, no correction factors are needed when a 50 μH LISN is used.



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

Radiated Emission Testing (Electric Field)

During the primary radiated scan, the EUT was powered up and operating in its defined test mode. The frequency range of 30 MHz to 300 MHz was then scanned with the Biconical antenna located from 1 to 4 meters above the ground plane in the horizontal and vertical polarity. During these scans, the turntable was rotated and all peaks which were at or near the limits were recorded. Next the frequency range of 300 to 1000 MHz was scanned in the same manner, with a log periodic antenna, and the peaks recorded. Lastly, a scan of the FM band from 88 to 110 MHz was made, using a reduced resolution bandwidth and a reduced frequency span. Care was taken to ensure that no frequencies were missed within the FM and TV bands, an analysis was performed to determine if the signals that were at or near the limit were cause by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

For the final radiated scan, the equipment was scanned using tuned Dipole antennas to any frequency within 6 dB μ V of the limit, and a thorough scan of all frequency using a small frequency span was manually made. The turntable was rotated as needed. Comparison with the previously recorded measurements were then made. Using the peak readings from both scans as a guide, the test engineer then maximizes the readings with respect to the table rotation, antenna height and configuration of the peripherals and cables. The EUT components and cables were being moved and arranged on the EUT for maximum emissions. Figures and photographs showing the final worst case configuration of the EUT are contained in the Test Setup Page. The results of the Radiated Emissions Test are shown in Table 2.

Conducted Emission Testing

For conducted emissions testing a 30-50 second sweep time was used for automated measurements in the frequency bands of 450 kHz to 30 MHz. All readings within 20 dB of the limits were recorded, and those within 6 dB of the limit were examined with additional measurements using a slower sweep time. The results of the conducted emissions test are shown in Table 1.

For the conducted emissions, the LISN is manufactured by Solar Electronics, Model Type 8028-50-TS-24-BNC, 50 μ H-/+5 ohms. The coupling capacitor in the Solar LISN is then changed to a value of 0.25 μ f. Above 150 kHz, a 0.15 μ f series capacitor is then added in-line prior to connecting the analyzer to restore the proper Impedance for the range.



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-3596
Phone/Fax 831-724-1221

FCC PART 15 LIMITS

RADIATED LIMITS SECTION 15.209

Frequency MHz	Limit μV/m	Measurement Distance meters
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

10 Meter SECTION 15.109 CISPR Class A RADIATED LIMITS

Frequency MHz	Limit dBμV/m	Limit μV/m
30-230	40	100
230-1000	47	224

POWER LINE CONDUCTED LIMITS

Frequency MHz	Quasi-Peak Limit dBμV	Average Limit dBμV
0.15-0.50	66-56	56-46
0.50-5	56	46
5-30	60	50

NOTE

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.



R13 Systems Compliance,
485A Strawberry Cyn. Rd
Watsonville, CA 95076
Cell Phone 408-513-0596
Phone/Fax 831-724-1221

APPENDIX B: Measurement Data



RD Systems Compliance
485A Strawberry Cyn. Rd.
Wausauville, CA 93076
Cell: Phone 408-313-0596
Phone/Fax 831-724-1221

Report Of Measurements Radiated Data

The following table reports the results of the radiated measurements for the Access Control Reader, DR4201.

Table 1 - Six Highest Radiated Emission Levels

Frequency MHz	QP Level dB μ V	FCC Limit dB μ V	Margin dB μ V	Azimuth & Height	Polarization & Antenna
72.025	23.59	39.10	-15.51	0, 1.5M	Horizontal, BiLog
118.09	30.91	40.00	>-25	340, 1.6M	Vertical, BiLog
119.59	30.52	40.00	>-25	340, 1.6M	Vertical, BiLog
118.87	30.48	40.00	>-25	340, 1.6M	Vertical, BiLog
179.08	30.08	40.00	>-25	335, 3.7M	Horizontal, BiLog
180.07	30.05	40.00	>-25	335, 3.7M	Horizontal, BiLog

Test Method: C63.4-1992
Spec Limit: FCC/EN 55022 Class A
Test Distance: 10 Meters
Azimuth in degrees, Height in meters

COMMENTS: System continuously running. Ambient temperature 69° F and relative humidity of 59%.



RD Systems Compliance
485A Strawberry Cys. Rd.
Wilsonville, CA 95076
Cell Phone 408-313-3596
Phone/Fax 831.732.1221

REPORT OF MEASUREMENTS CONDUCTED DATA

The following table reports the results of the conducted measurements for Access Control Reader, DR4201.

Table 2 - Six Highest Conducted Emission Levels

Frequency MHz	QP Level dB μ V	CISPR Limit dB μ V	Margin dB	Note	PE Termination
0.85	34.07	56.00	-21.93	N	gnd
13.61	35.87	60.00	-24.13	L1	gnd
0.85	31.57	56.00	-24.43	L1	gnd
13.61	34.67	60.00	-25.33	N	gnd
0.74	27.46	56.00	-28.54	N	gnd
15.44	30.82	60.00	-29.18	L1	gnd

Test Method: ANSI C63.4:1992

Spec Limit: CISPR Class B

Note: N = Neutral side
L1 = Hot side

COMMENTS: System continuously running, power source 110 VAC. Ambient temperature 66° F and relative humidity of 55%..



RD Systems Compliance
485A Strawberry Cyn. Rd.
Wenatchee, CA 95976
Cell Phone 408 313-0296
Phone/Fax 831-724-1221

Radiated Data for EN-55022 Class A

Westinghouse Security Electronics
Product Name - Access Control Reader
Product Model - DR4201

Table 3 - Radiated Emission Data

Frequency MHz.	QP Level dB μ V	FCC Limit dB μ V	Margin dB μ V	Azimuth, Ht.	Polarization & Antenna
72.025	23.59	39.10	-15.51	0, 1.5M	Horizontal, BiLog
180.07	30.05	40.00	>-25	335, 3.7M	Horizontal, BiLog
179.08	30.08	40.00	>-25	335, 3.7M	Horizontal, BiLog
118.12	32.79	40.00	>-25	0, 3.9M	Horizontal, BiLog
179.57	29.54	40.00	>-25	80, 1.6M	Vertical, BiLog
120.58	29.99	40.00	>-25	340, 1.6M	Vertical, BiLog
118.87	30.48	40.00	>-25	340, 1.6M	Vertical, BiLog
119.59	30.52	40.00	>-25	340, 1.6M	Vertical, BiLog
118.09	30.91	40.00	>-25	340, 1.6M	Vertical, BiLog



RD Systems Compliance,
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-0595
Phone/Fax 831-724-1221

Radiated Data for FCC Subpart C

The following table reports the results of the radiated measurements for the Access Control Reader, DR4201 per the requirements of Part 15 Subpart C 15.209. Measurements were taken using an EMCO Active Loop antenna, model 6502. The test distance was 10 meters and the antenna height was 1 meter. The turntable was rotated to maximize the emissions.

Table 4, 10 Meters

Frequency MHz	EUT dB μ V	Spec Limit	Margin dB	Azimuth
.1383	56.77	99.23	-42.46	0
.4148	39.17	79.39	-40.22	300
.69115	34.62	52.18	-17.56	0
.9678	36.71	49.67	-12.96	95

Test Method: C63.4-1992 Spec Limit: 15.209
Test Distance: 10 Meters

Table 5, 3 Meters

Frequency MHz	EUT dB μ V	Spec Limit	Margin dB	Azimuth
.1383	75.19	119.23	-44.04	0
.4148	51.26	99.39	-48.13	0
.69115	48.21	72.18	-23.97	0
.9678	53.68	69.67	-15.99	0

Test Method: C63.4-1992 Spec Limit: 15.209
Test Distance: 3 Meters

COMMENTS: System continuously running, power source 110 VAC. EUT dB μ V is the emission measurement at a test distance of 10 meters. Spec limit is the specified limit from FCC Part 15 Subpart C section 15.209 as stated for the required measurement distance. A 40 dB/decade falloff extrapolation was calculated and algebraically added with the antenna factor and cable loss for the measured frequency to calculate the site CF. For frequencies from 9 kHz to 490 kHz the spec limit is stated at a test distance of 300 meters and the site CF is extrapolated to that distance. For frequencies from 490 kHz to 30 MHz the spec limit is stated at a test distance of 30 meters and the site CF is extrapolated to that distance.




RD Systems Compliance,
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone: 408 213-0596
Phone/Fax: 831-724-1221

Extrapolation Plot for FCC Subpart C Data

Measurements were taken at the fundamental frequency of the intentional radiator with the EMCO 6502 loop antenna at test distances of 10 and 3 meters. The antenna was placed at a fixed height of 1 meter. Measurements were taken in **three orthogonal orientations to find the maximum emissions, vertical was observed to be worse case**. The turntable was rotated to maximize the emission. The first measurement was taken at 3 meters, then the antenna was moved to 10 meters and the emission was measured. These readings were then plotted to extrapolate the corrected reading at a test distance of 30 and 300 meters. The limit was then calculated using 40 dB/decade falloff rate to show the corrected limit at a test distance of 30 meters. These limits were then plotted on the graph to extrapolate the limit at 10 and 3 meters. Reference measurement standards Part 15 section 15.31(f)(2)

Figure 1. Extrapolation Plot

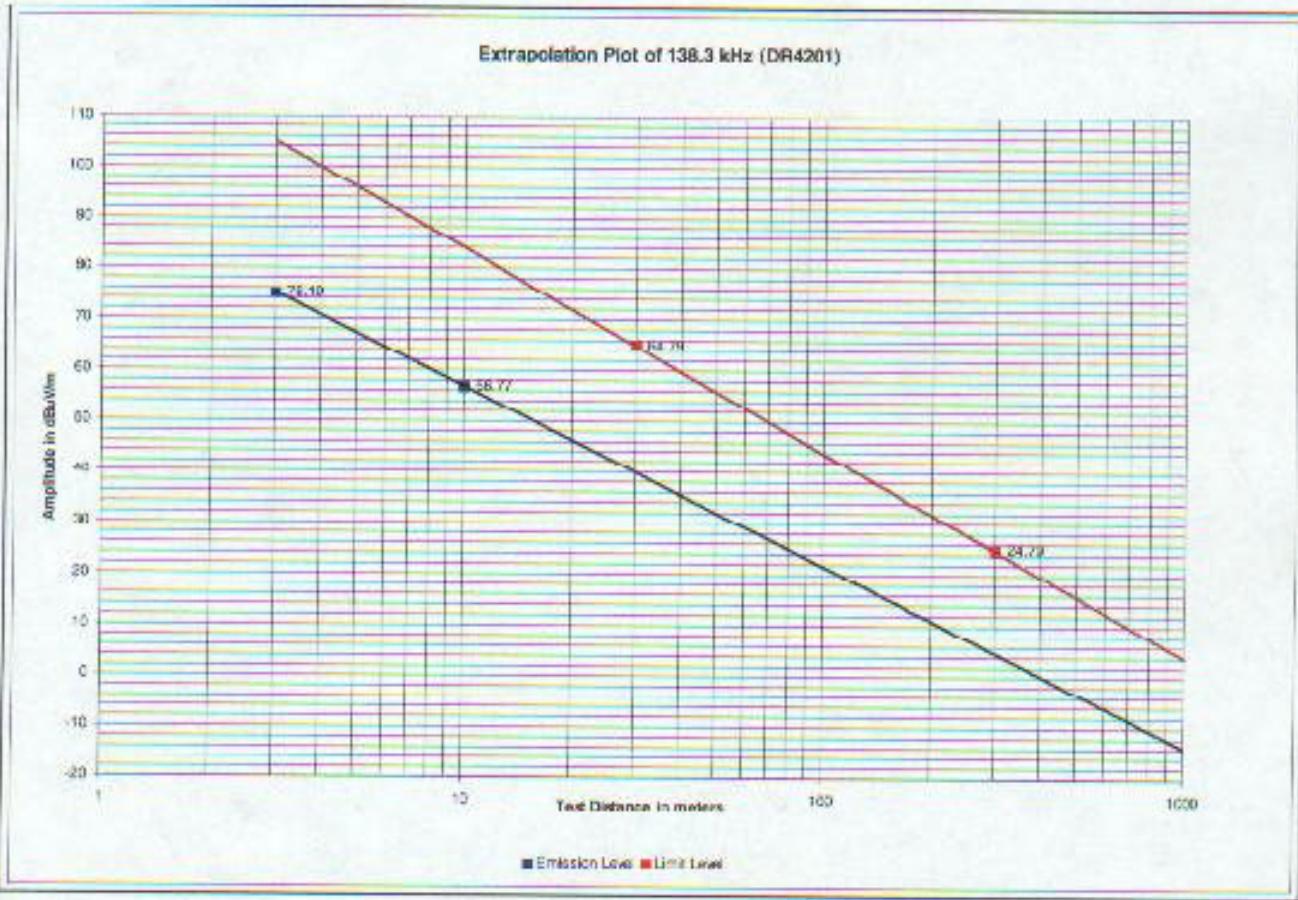




RD Systems Compliance
495A Strawberry Cyn. Rd.
Wilsonville, OR 97070
Cell Phone 408.313.0596
Phone/Fax 811.724.1221

Conducted Data for CISPR 22 Class B - Line

Figure 2 - Line Scan

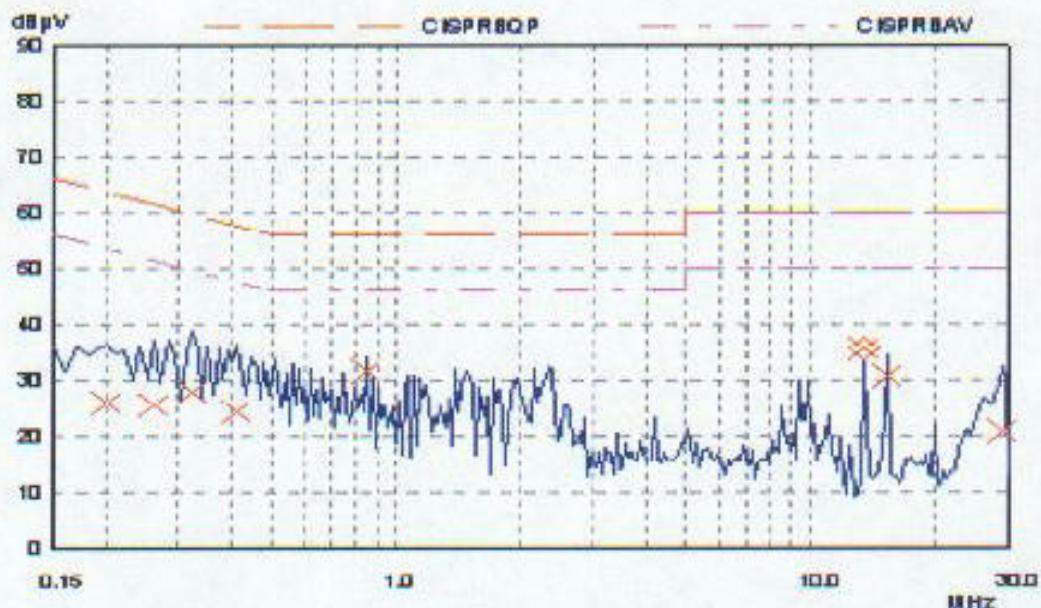

Scan Settings:

<u>Start Freq.</u>	<u>Stop Freq.</u>	<u>Step</u>	<u>IF BW</u>	<u>Detector</u>	<u>Scan-Time</u>	<u>Atten.</u>	<u>Op. Range</u>
150kHz	30MHz	10kHz	10kHz	PK	20msec	Auto	60dB

Final Measurement: X - QP @ 2sec

Table 6 - Line Scan Data


Freq. MHz	AV Level dB μ V	AV Limit dB μ V	Margin dB	Phase	PE
0.2	26.10	63.61	-37.51	L1	gnd
0.26	25.85	61.43	-35.58	L1	gnd
0.32	27.95	59.71	-31.76	L1	gnd
0.41	24.47	57.65	-33.18	L1	gnd
0.85	31.57	56.00	-24.43	L1	gnd
13.61	35.87	60.00	-24.13	L1	gnd
15.44	30.82	60.00	-29.18	L1	gnd
29.12	20.96	60.00	-39.04	L1	gnd



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone: 408-313-0595
Phone/Fax: 831-724-1221

Conducted Data for CISPR 22 Class B - Neutral

Figure 3 - Neutral Scan

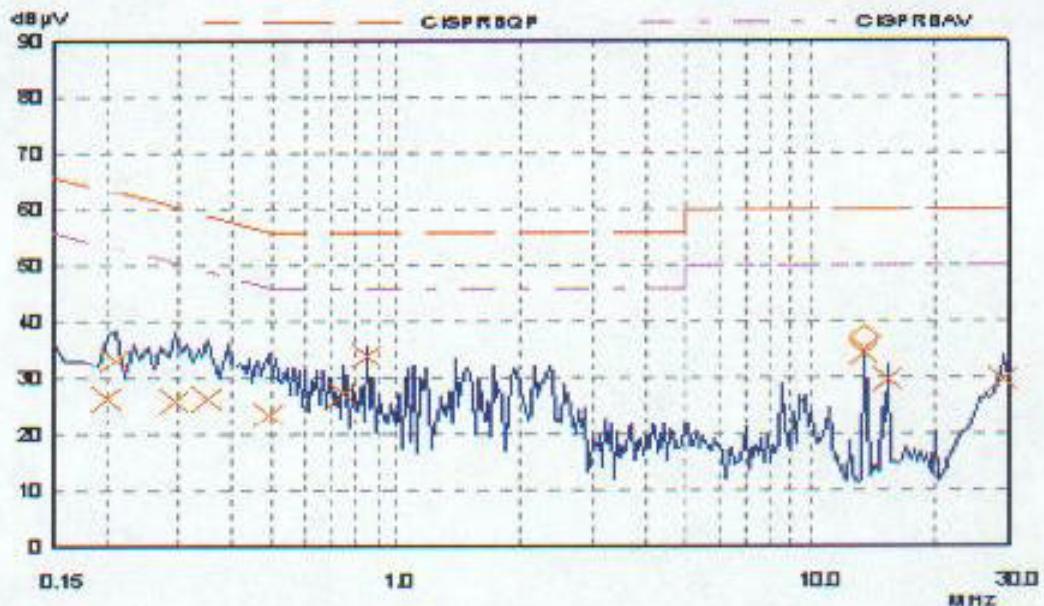

Scan Settings:

<u>Start Freq.</u>	<u>Stop Freq.</u>	<u>Step</u>	<u>IF BW</u>	<u>Detector</u>	<u>Scan-Time</u>	<u>Atten.</u>	<u>Op. Range</u>
150kHz	30MHz	10kHz	10kHz	PK	20msec	Auto	60dB

Final Measurement: X = QP @ 2sec

Table 7 - Neutral Scan Data

Freq. MHz	QP Level dB μ V	QP Limit dB μ V	Margin dB	Phase	PE
0.21	33.33	63.21	-29.88	N	gnd
0.29	26.11	60.52	-34.41	N	gnd
0.35	26.47	58.96	-32.49	N	gnd
0.49	23.82	56.17	-32.35	N	gnd
0.74	27.46	56.00	-28.54	N	gnd
0.85	34.07	56.00	-21.93	N	gnd
13.61	34.67	60.00	-25.33	N	gnd
15.44	29.58	60.00	-30.42	N	gnd
29.25	29.88	60.00	-30.12	N	gnd



RD Systems Compliance
485A Strawberry Cyn. Rd.
Watsonville, CA 95076
Cell Phone 408-313-0596
Phone/Fax 831-724-1221

COMPLIANCE VERIFICATION REPORT

Test Certificate

APPLICANT: Westinghouse Security Electronics
47102 Mission Falls Court
Fremont, CA 94539

Equipment Tested: Access Control Reader

Model: DR4201

I HEREBY CERTIFY THAT:

The measurements shown in this report were made in accordance with the procedures indicated and that the energy emitted by this equipment was found to be within the **FCC Part 15 Subpart C and Class A limits**.

I FURTHER CERTIFY THAT:

On the basis of the measurements taken at the test site, that the equipment tested per the procedures of ANSI C63.4-1992 is capable of operation for the **compliance of the requirements set forth in FCC CFR 47 Part 15.207 and 15.209**.

On this Date: July 19, 1999

Printed Name

Mario E. Baraona Sr.
Mario E. Baraona Sr.
RD Systems Compliance

Signature

Westinghouse Security Electronics Representative