




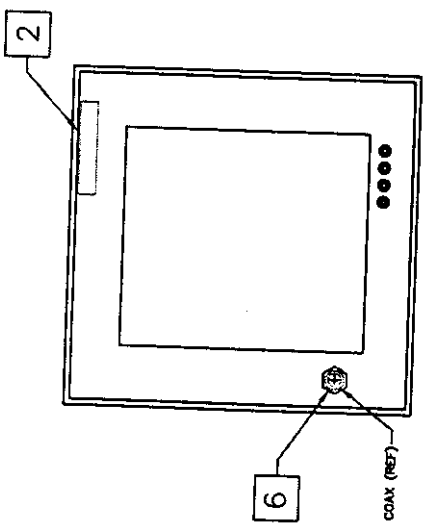


VIEW A-A
 SCALE: NONE



VIEW C-C
 SCALE: NONE

VIEW B-B
 SCALE: NONE

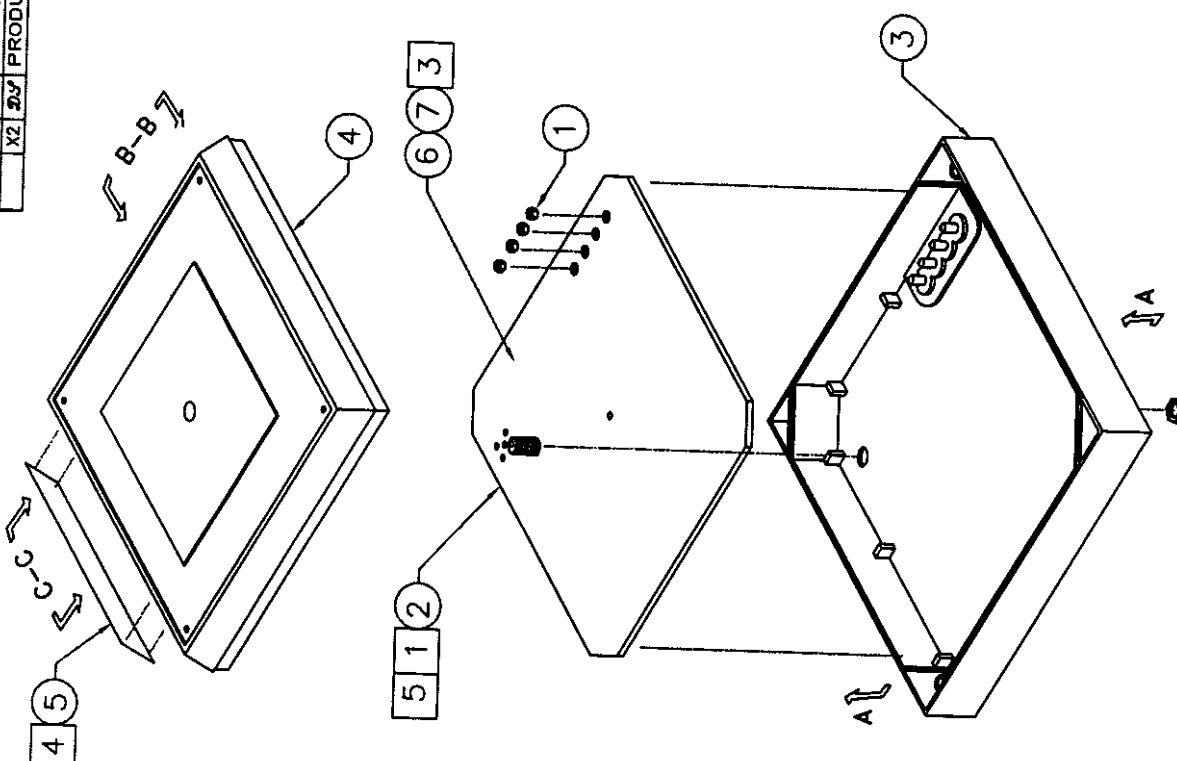


- 7 ALIGN COVER (VIEW B-B) WITH CONNECTOR SIDE OF BOTTOM.
- 6 INSTALL F-CONNECTOR NUT AND WASHER (PART OF ITEM 6)
- 5 COAX SHOWN IS ON BOTTOM OF PCB.
- 4 AFFIX AND CENTER REGULATORY LABEL WHERE SHOWN.
- 3 ITEM 7, CONFORMAL COAT PCA DURING ASSY PER SPEC 7500027.
- 2 PRIOR TO LABEL INSTALLATION, PERMANENTLY MARK DATE STAMP EACH UNIT IN APPROX LOCATION SHOWN AS FOLLOWS:
 Mfr P/N DAY Year Sequential #
 Eg: 4205-DDDY-####
 4 DIGITS FOR WSE ID
 3 DIGITS FOR DAY
 2 DIGITS FOR YEAR
 4 DIGITS FOR SEQUENTIAL NUMBER


- 1 APPLY A MINIMAL AMOUNT OF RTV TO THE BASE OF THE COAX CONNECTOR (PART OF ITEM 6). VERIFY THAT HOLE IS SEALED AND EXCESSIVE SILICONE DOES NOT PROTRUDE THROUGH THE OPENING.

NOTES: (UNLESS OTHERWISE SPECIFIED)



Q103 10/10/78 X2 20 PRODUCTION RELEASE DATE: 10/10/78 WORKING:		DS2805AD READER MECH, ASSY	
4 ± .005 .XX 2.00 (2.00) .XX 2.00 (2.00)		C 6300038 X2	
1/2 6300038.DWG		1 of 1	

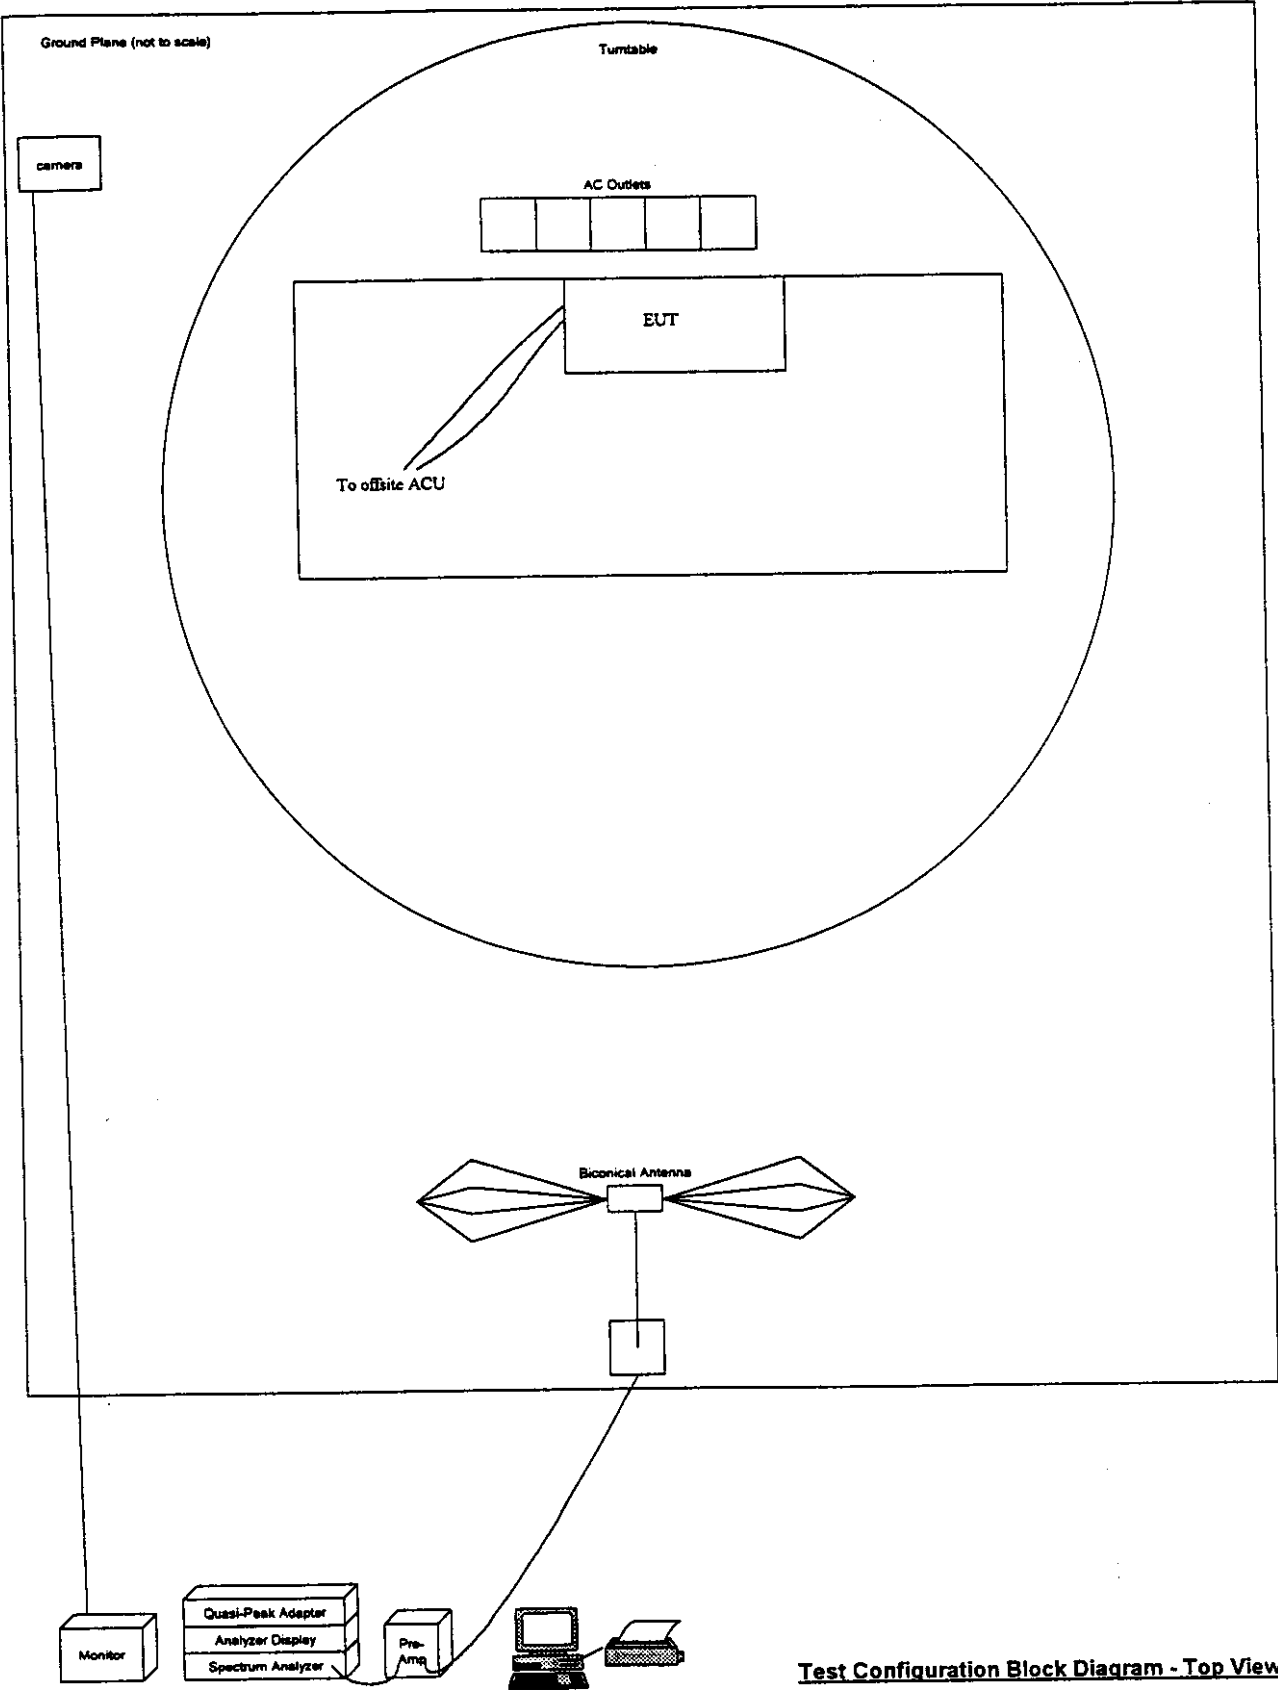

Test Configuration Block Diagram - Top View

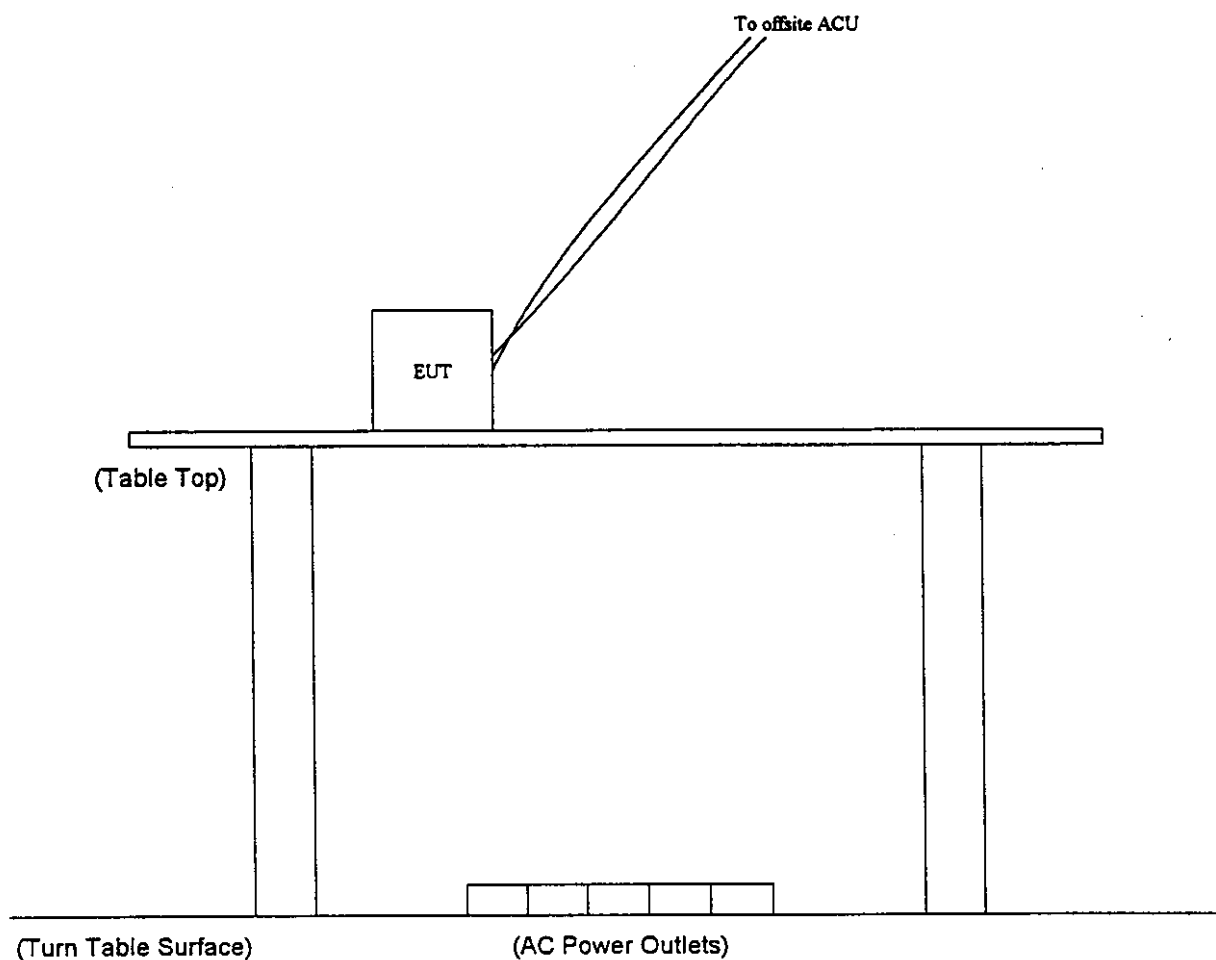

Test Configuration Block Diagram - Rear View

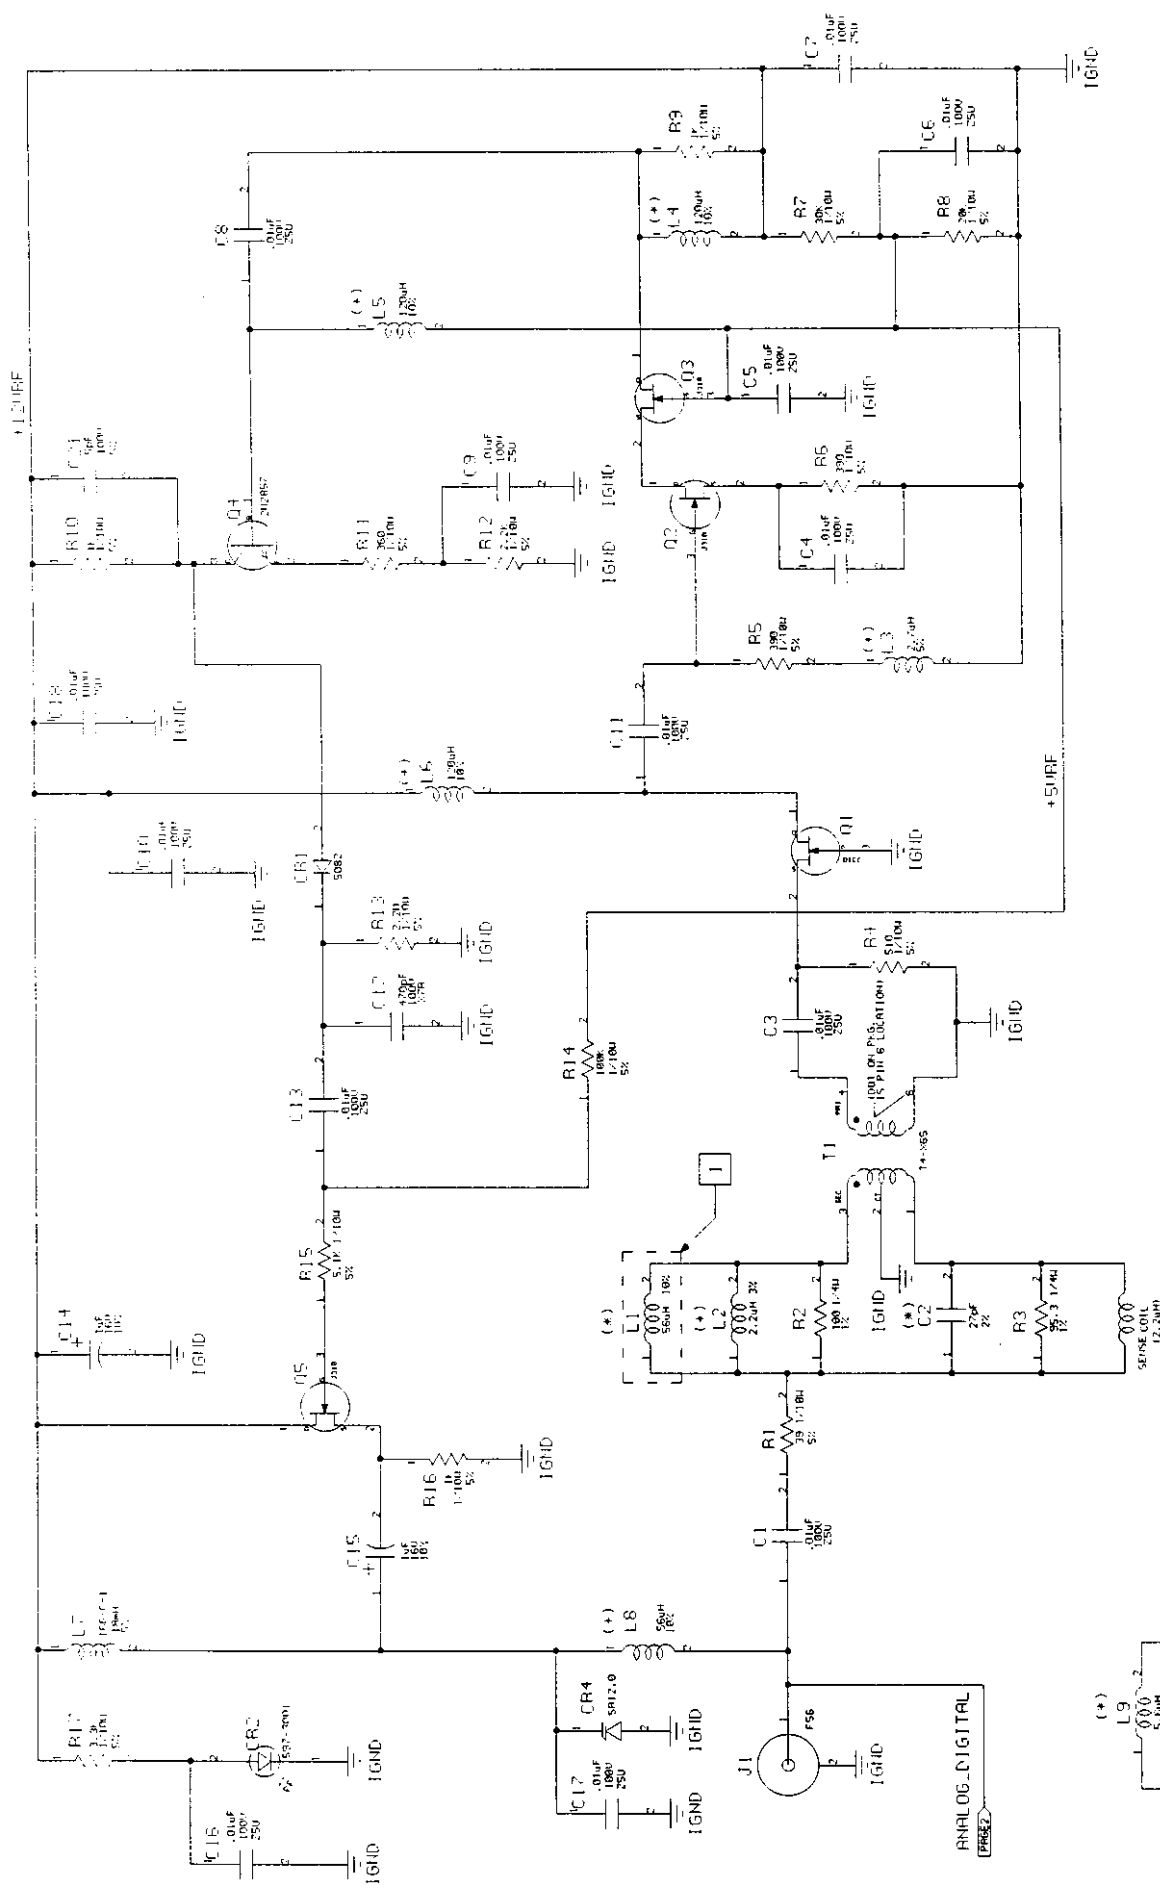

FEB 17 1964


PRELIMINARY

(*) DUAL FP COMPONENTS


[1] SEE B/M FOR SELECTED ITEM AND VALUE

NOTES: (UNLESS OTHERWISE SPECIFIED):

[illegible]



○ = PENS USED FOR PANTIN TYPE PURPOSES.

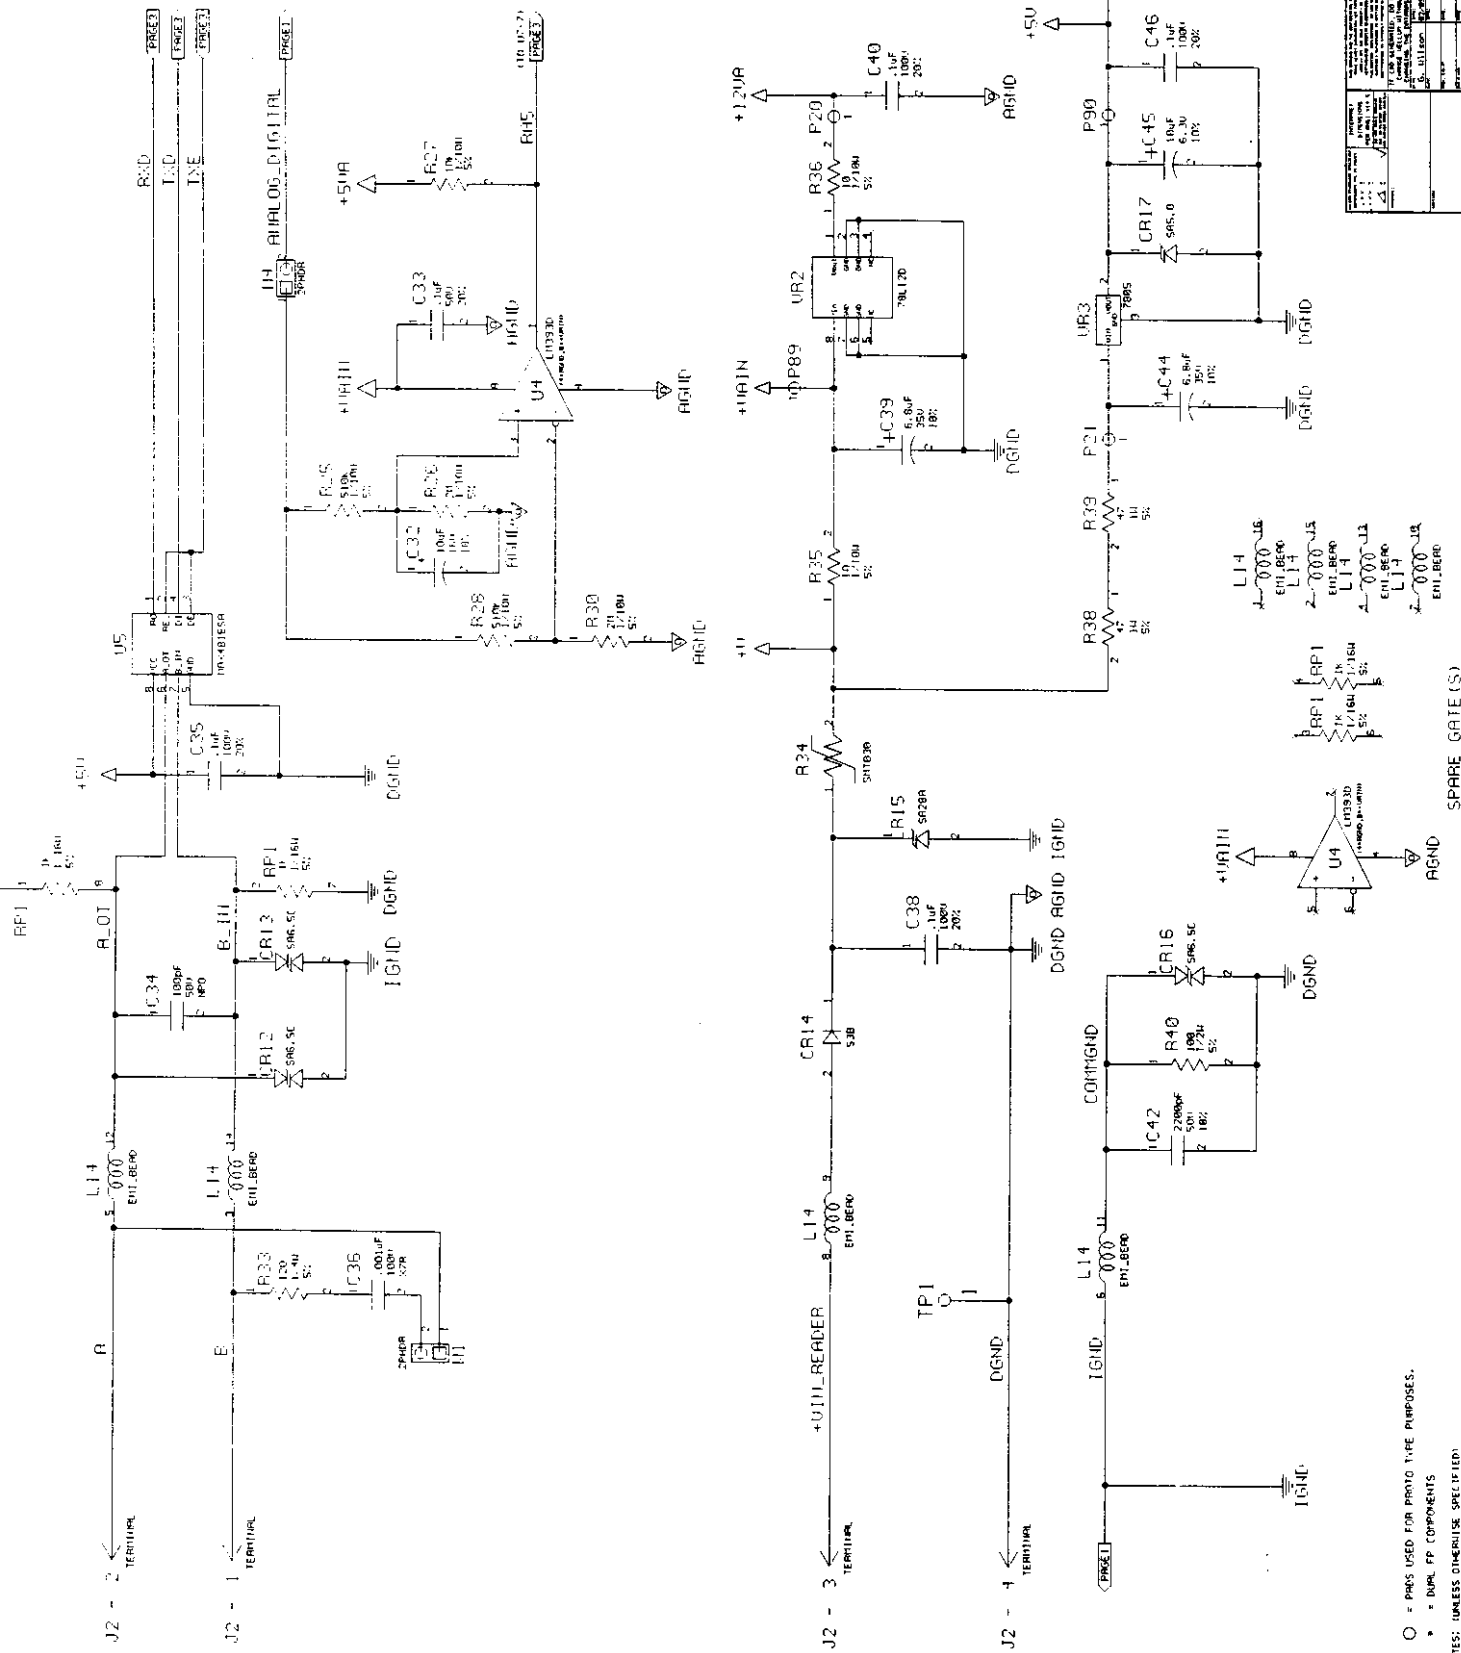

WSE		SCHEMATIC, PCB		DS2805AD READER		58000006		2 OF 4	
DATE	10/10/00	DESIGNED BY	WSE	CHECKED BY	WSE	DATE	10/10/00	REV	1
APP'D BY	WSE	DATE	10/10/00	REV	1				

○ = PADS USED FOR PHOTO TYPE PURPOSES.
 * = DUAL IN LINE COMPONENTS
 NOTES: UNLESS OTHERWISE SPECIFIED)

