

Nemko Korea Co., Ltd.

155, 153 and 159, Osan-ro, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 16885 Republic of Korea
TEL : + 82 31 330 1700 FAX : + 82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant :

DAEWOO Electronics Co., Ltd.
509, Dunchon-daero, Jungwon-gu,
Seongnam-si, Gyeonggi-do,
Korea, Republic of
Attn : Mr. You-Jin, Choi

Dates of Issue : November 21, 2018

Test Report No. : NK-18-E-0688

Test Site : Nemko Korea Co., Ltd.

EMC site, Korea

FCC ID

Trade Mark

Contact Person

C5F7NF1HMO100N

DAEWOO, SHARP

DAEWOO Electronics Co., Ltd.
(509, Dunchon-daero, Jungwon-gu,
Seongnam-si, Gyeonggi-do, Korea, Republic of
Mr. You-Jin, Choi
Telephone No. : + 82 31 799 2996

Applied Standard :	FCC Part 18 & Part 2
Classification :	Consumer ISM equipment
EUT Type :	Microwave Oven

The device bearing the Trade Mark and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5:1986.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Nov 21, 2018

Tested By : Taejoo Kim
Engineer



Nov. 21, 2018

Reviewed By : Changsoo Choi
Technical Manager

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
EUT INFORMATION	5
DESCRIPTION OF TESTS (Radiation Hazard)	6
DESCRIPTION OF TESTS (Input Power Measurement)	6
DESCRIPTION OF TESTS (Output Power Measurement)	6
DESCRIPTION OF TESTS (Frequency Measurements)	6
DESCRIPTION OF TESTS (Conducted Emissions)	7
DESCRIPTION OF TESTS (Radiated Emissions)	8
TEST DATA (Radiation Hazard)	9
TEST DATA (Input Power Measurement)	9
TEST DATA (RF Output Power Measurement)	9
TEST DATA (Frequency Measurements)	10
TEST DATA (Conducted Emissions)	12
TEST DATA (Radiated Emissions)	15
PLOT OF EMISSIONS (Frequency Measurements)	22
ACCURACY OF MEASUREMENT	42
LIST OF TEST EQUIPMENT	45
APPENDIX A - SAMPLE LABEL	46
APPENDIX B - PHOTOGRAPHS OF TEST SET-UP	47
APPENDIX C - EUT PHOTOGRAPHS	52
APPENDIX D - SCHEMATIC DIAGRAM	77
APPENDIX E - USER'S MANUAL	78
APPENDIX F - BLOCK DIAGRAM	79

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 18.

Responsible Party : DAEWOO Electronics Co., Ltd.

Contact Person : Mr. You-jin, Choi

Tel No.: + 82 31 799 2996

Manufacturer : DAEWOO Electronics Co., Ltd.

509, Dunchon-daero, Jungwon-gu,

Seongnam-si, Gyeonggi-do, Korea, Republic of

● FCC ID: C5F7NF1HMO100N

● Model: KOT-1H**

Note ¹⁾ First “*” : The first asterisk “*” can be any alphanumeric character (A-Z or 0-9) to denote enclosure design.

Note ²⁾ Second “*” : The second asterisk “*” can be any alphabet character (A-Z) to denote control type.

SMO1652D*

Note ¹⁾ First “*” : The asterisk “*” can be any alphanumeric character (A-Z or 0-9) to denote enclosure design.

● Trade Mark: DAEWOO, SHARP

● EUT Type: Microwave Oven

● Applied Standard: FCC Part 18 & Part 2

● Test Procedure(s): MP-5:1986

● Dates of Test: October 31, 2018 to November 08, 2018

● Place of Tests: Nemko Korea Co., Ltd. EMC Site

● Test Report No.: NK-18-E-0688

INTRODUCTION

The measurement procedure described in MP5:1986 for Methods of Measurement of radiated, powerline conducted radio noise, frequency and power output was used in determining emissions emanating from **DAEWOO Electronics Co., Ltd.**

FCC ID : **C5F7NF1HMO100N, Microwave Oven.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory.**

The site address is 155, 153 and 159, Osan-ro, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 16885 Republic of Korea

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

The Nemko Korea Co., Ltd. has been accredited as a Conformity Assessment Body (CAB).



Nemko Korea Co., Ltd.
155, 153 and 159, Osan-ro, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 16885 Republic of Korea
Tel) + 82 31 330 1700
Fax) + 82 31 322 2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.
The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

EUT INFORMATION

EUT Information

Intended use	Household
Type of appliance	Over the Range
Model	KOT-1H**, SMO1652D*
Rated voltage & frequency	a.c. 120 V, 60 Hz Single Phase
Rated power output	1 000 W
Rated power consumption(MW)	1 600 W
Magnetron	RM269 (DAEWOO)

Component List

Item	Model	Manufacturer	Serial Number
Magnetron	RM269	DAEWOO	N/A
Thermally Protected L. Air Over	OBB-22102X1	OH SUNG	N/A
Synchronous Motor	49TYD-16A1	YUYAO JING CHENG HIGH & NEW TECHNOLOGY CO., LTD.	N/A
FAN MOTOR	OEM-15DWX1-B07	OH SUNG	N/A
Diode H.V.	CL01-12	GAOXING	N/A
Trans H.V	DWAS11A0-1JA	ELEDEX CO.,LTD.	N/A
H.V. CAPACITOR	2100VAC 0.91uF	BICAI / CHINA	N/A
Noise Filter	DWLF-M30YL	DAEWOO	N/A
Main Board	M381	DAEWOO	40303-0114400-00
AC Motor Capacitor	DMF-251006.SH	DAEDONG	N/A
LED BOARD	KELSP-04-1002	KEI	N/A

DESCRIPTION OF TESTS

Radiation Hazard

A 700 ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

Input Power Measurement

A 700 ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility.

Input power and current were measured using a Power Analyzer.

Manufacturers to determine their input ratings commonly use this procedure.

Output Power Measurement

The Caloric Method was used to determine maximum output power.

The initial temperature of a 1000 ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 47 seconds. Then the temperature of the water re-measured.

Frequency Measurements

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 percent to 125 percent of the nominal rating.

And the load quantity was reduced by evaporation to approximately 20 % of the original quantity with nominal rating.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 m shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 0.5 m away from the side of wall of the shielded room Rohde & Schwarz (ESH2-Z5) of the 50 ohm / 50 uH Line Impedance Stabilization Network(LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz (ESH2-Z5) LISN.

Power to the LISN s are filtered by high-current high insertion loss power line filters.

The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ".

If d.c. power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 m were shortened by non-inductive bundling (serpentine fashion) to a 1 m length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 20 ms sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz, ESCI).

The detector functions were set to quasi-peak mode & CISPR average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux a.c. outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

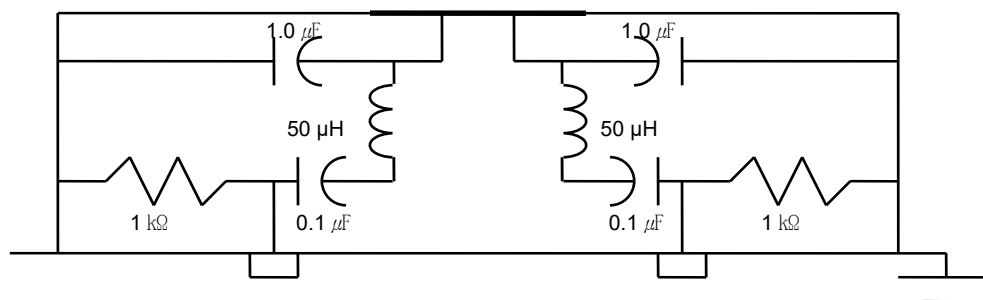


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Measurement were made indoors at 10 m & 3 m using antenna, signal conditioning unit and EMI test receiver to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 0.15 MHz to 30 MHz using Loop Antenna

(ROHDE & SCHWARZ/HFH2-Z2)

and from 30 MHz to 1000 MHz using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163).

Above 1 GHz, Double Ridged Broadband Horn antenna (Schwarzbeck, HF907) was used.

Final Measurements were made indoors at 3 m using Loop Antenna

(ROHDE & SCHWARZ/HFH2-Z2) for measurement from 0.15 to 30 MHz with RBW 9 kHz and

made indoor at 10 m using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163) for measurement from 30 MHz to 1000 MHz with RBW 120 kHz and made indoors at 3 m using Double Ridged Broadband Horn antenna (Schwarzbeck, HF907) for measurement from 1 GHz to 18 GHz with RBW 1 MHz.

The detector function were set to quasi peak mode and the bandwidth of the receiver were set to 9 kHz, 120 kHz and peak mode 1 MHz depending on the frequency or type of signal.

The Double Ridged Broadband Horn antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re-configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The EUT is rotated about its vertical axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation.

Each EME reported was calibrated using the R/S signal generator.

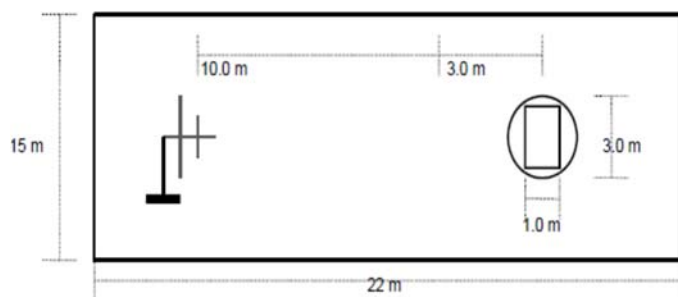


Fig. 3. Dimensions of 10 semi anechoic chamber

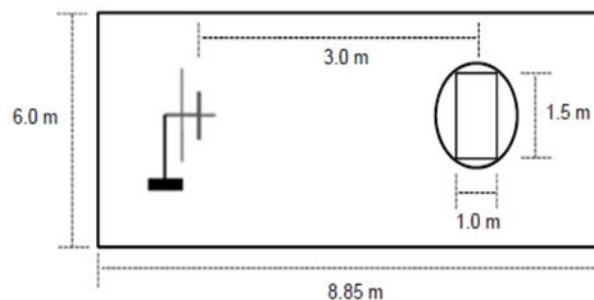


Fig. 4. Dimensions of 3 m full anechoic chamber

TEST DATA

Radiation Hazard

Probe Location	Maximum Leakage [mW/Cm2]	Limit [mW/Cm2]
A	0.03	1.00
B	0.02	1.00
C, D, E, F	0.01	1.00

Input Power Measurement

Operation mode	P rated (W)	P (W)	dP (%)	Required dP (%)
Power Input	1 600	1 613	1	+ 15 %

Output Power Measurement

Quantity of Water [ml]	Mass of the container [g]	Ambient temperature [°C]	Initial temperature [°C]	Final temperature [°C]	Heating time [s]	Power output [W]
1 000	400	20.0	10.0	20.1	42	1 007

Formula :

$$P = \frac{4.187 \times m_w \times (T_1 - T_0) + 0.55 \times m_c \times (T_1 - T_A)}{t}$$

NOTE :

P is the microwave power output (W)

m_w is the mass of the water (g)

m_c is the mass of the container (g)

T_A is the ambient temperature (°C)

T_0 is the initial temperature of the water (°C)

T_1 is the final temperature of the water (°C)

t is the heating time (s), excluding the magnetron filament heating-up time.



Tested by : Taejoo Kim

TEST DATA

Frequency measurements

► Frequency vs Line Voltage Variation Test

[Room Temperature : 22.0 ± 1.0 °C]

Line Voltage Variation (a.c. V)	*Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
96 (80 %)	H	Lower : 2 421.1	Lower : 2 400 MHz Upper : 2 500 MHz
	H	Upper : 2 462.5	
	V	Lower : 2 418.7	
	V	Upper : 2 464.9	
108 (90 %)	H	Lower : 2 409.6	
	H	Upper : 2 485.5	
	V	Lower : 2 417.3	
	V	Upper : 2 464.9	
120 (100 %)	H	Lower : 2 422.1	
	H	Upper : 2 466.3	
	V	Lower : 2 419.2	
	V	Upper : 2 466.8	
132 (110 %)	H	Lower : 2 420.6	
	H	Upper : 2 465.8	
	V	Lower : 2 417.7	
	V	Upper : 2 467.7	
150 (125 %)	H	Lower : 2 424.0	
	H	Upper : 2 467.3	
	V	Lower : 2 419.2	
	V	Upper : 2 464.4	

NOTE :

1. *Pol. H = Horizontal V = Vertical
2. Initial load : 1 000 ml of water in the beaker.
3. Line voltage varied from 80 % to 125 %.
4. ISM Frequency : 2 450 MHz, Tolerance : ± 50 MHz

RESULT : Pass



Tested by : Taejoo Kim

TEST DATA

► Frequency vs Load Variation Test

[Room Temperature : 22.0 ± 1.0 °C]

Volume of water (ml)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
200	H	Lower : 2 409.6	Lower : 2 400 MHz Upper : 2 500 MHz
	H	Upper : 2 489.4	
	V	Lower : 2 423.0	
	V	Upper : 2 462.5	
400	H	Lower : 2 425.9	
	H	Upper : 2 464.6	
	V	Lower : 2 426.9	
	V	Upper : 2 477.8	
600	H	Lower : 2 415.8	
	H	Upper : 2 478.8	
	V	Lower : 2 417.7	
	V	Upper : 2 465.8	
800	H	Lower : 2 412.9	
	H	Upper : 2 469.2	
	V	Lower : 2 412.0	
	V	Upper : 2 466.8	
1000	H	Lower : 2 422.1	
	H	Upper : 2 466.3	
	V	Lower : 2 419.2	
	V	Upper : 2 466.8	

NOTE :

1. *Pol. H = Horizontal, V = Vertical
2. The water load was varied between 200 ml to 1 000 ml.
3. Frequency was measured by using nominal voltage (a.c. 120 V).
4. ISM Frequency : 2 450 MHz, Tolerance : ± 50 MHz

RESULT : Pass



Tested by : Taejoo Kim

TEST DATA

Conducted Emissions

FCC ID : C5F7NF1HMO100N

[Room Temperature : 21.0 ± 1.0 °C]

EMI Auto Test(6)

1 / 2


Test Report

Common Information

Test Description:	Conducted emission (NK-18-E-0688)
Test Site:	3rd building shielded room
Test Standard:	Class B
Environment Conditions:	a.c. 120 V, 60 Hz
Operator Name:	Taejoo Kim

2.EMI Auto Test_4-Line Voltage LISN

2.EMI Auto Test_4-Line Voltage LISN

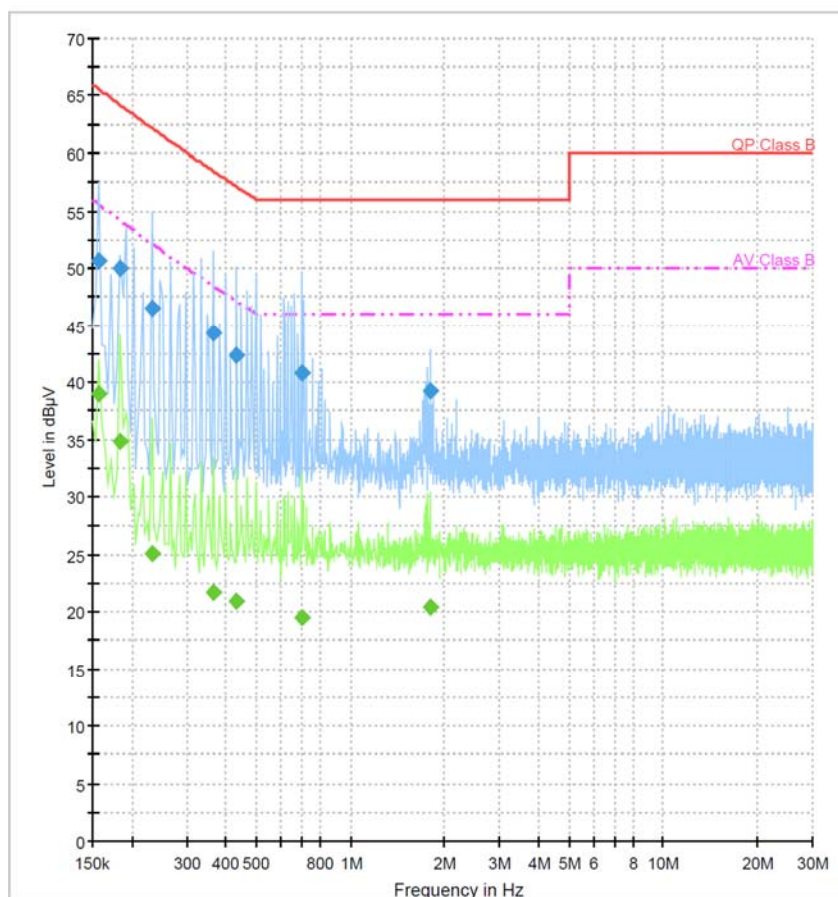

11/2/2018

1:12:38

EMI Auto Test(6)

2 / 2

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.157462	50.6	15000.0	9.000	GND	N	10.3	14.9	65.6	
0.183581	50.1	15000.0	9.000	GND	N	10.3	14.1	64.2	
0.232088	46.5	15000.0	9.000	GND	L1	10.3	15.7	62.2	
0.366412	44.3	15000.0	9.000	GND	L1	10.3	14.1	58.4	
0.433575	42.4	15000.0	9.000	GND	L1	10.3	14.7	57.1	
0.698494	40.8	15000.0	9.000	GND	L1	10.3	15.2	56.0	
1.802944	39.3	15000.0	9.000	GND	L1	10.4	16.7	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.157462	38.9	15000.0	9.000	GND	N	10.3	16.6	55.6	
0.183581	34.8	15000.0	9.000	GND	L1	10.3	19.4	54.2	
0.232088	25.1	15000.0	9.000	GND	L1	10.3	27.1	52.1	
0.366412	21.7	15000.0	9.000	GND	L1	10.3	26.7	48.4	
0.433575	20.9	15000.0	9.000	GND	L1	10.3	26.1	47.1	
0.698494	19.5	15000.0	9.000	GND	L1	10.3	26.5	46.0	
1.802944	20.4	15000.0	9.000	GND	L1	10.4	25.6	46.0	

11/2/2018

1:12:38

NOTES:

- 1. Measurements using quasi-peak mode & average mode.**
- 2. If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.**
- 3. Line : L = Line , N = Neutral**
- 4. The limit for consumer device is on the FCC Part section 18.307(b).**

A handwritten signature in blue ink, appearing to read 'Taejoo Kim', is positioned above a horizontal line.

Tested by : **Taejoo Kim**

TEST DATA

Radiated Emissions (150 kHz to 30 MHz)

FCC ID : C5F7NF1HMO100N

[Room Temperature : 20.0 ± 1.0 °C]

EMI Auto Test(1)

1 / 2


Test Report

Common Information

Test Description :	Radiated Emission(NK-18-E-0688)
Test Site :	3rd Building 10 m Chamber
Test Standard :	FCC Part 18
Environment Conditions :	a.c. 120 V, 60 Hz
Operator Name :	Taejoo Kim
Mode :	microwave

Full Spectrum

Full Spectrum

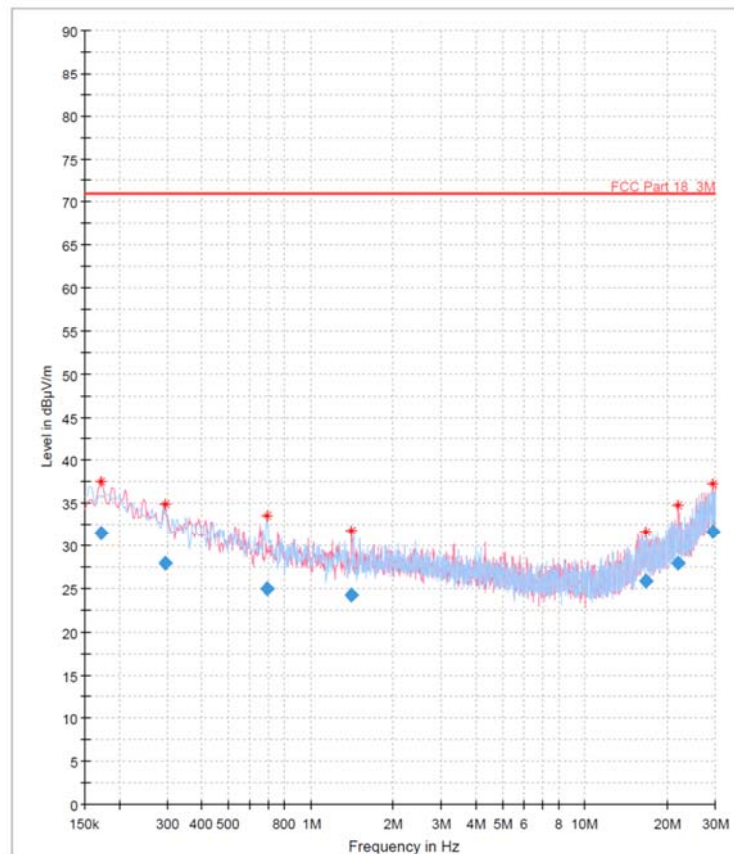

11/6/2018

EMI Auto Test(1)

2 / 2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
0.170895	31.53	71.00	39.47	15000.0	9.000	V	211.0	-22.4
0.293280	27.96	71.00	43.04	15000.0	9.000	V	21.0	-22.6
0.693270	24.99	71.00	46.01	15000.0	9.000	H	165.0	-22.8
1.412655	24.28	71.00	46.72	15000.0	9.000	V	78.0	-22.6
16.624215	25.91	71.00	45.09	15000.0	9.000	H	0.0	-19.9
21.809160	27.97	71.00	43.03	15000.0	9.000	V	273.0	-17.2
29.462700	31.63	71.00	39.37	15000.0	9.000	V	322.0	-12.9

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Comment
0.170895	10:56:19 PM - 11/6/2018
0.293280	10:55:12 PM - 11/6/2018
0.693270	10:54:28 PM - 11/6/2018
1.412655	10:55:41 PM - 11/6/2018
16.624215	10:53:45 PM - 11/6/2018
21.809160	10:56:50 PM - 11/6/2018
29.462700	10:57:17 PM - 11/6/2018

11/6/2018

<Radiated Measurements at 3 meters >

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300 / 3) = 40 \text{ dBuV/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT} (\text{RF Power} / 500))$
5. All other emissions were measured while a 700 $\text{m}\ell$ load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.

A handwritten signature in blue ink, appearing to read 'Taejoo Kim', is positioned above a horizontal line.


Tested by : **Taejoo Kim**

TEST DATA

Radiated Emissions (30 MHz to 1 GHz)

FCC ID : C5F7NF1HMO100N

[Room Temperature : 20.0 ± 1.0 °C]

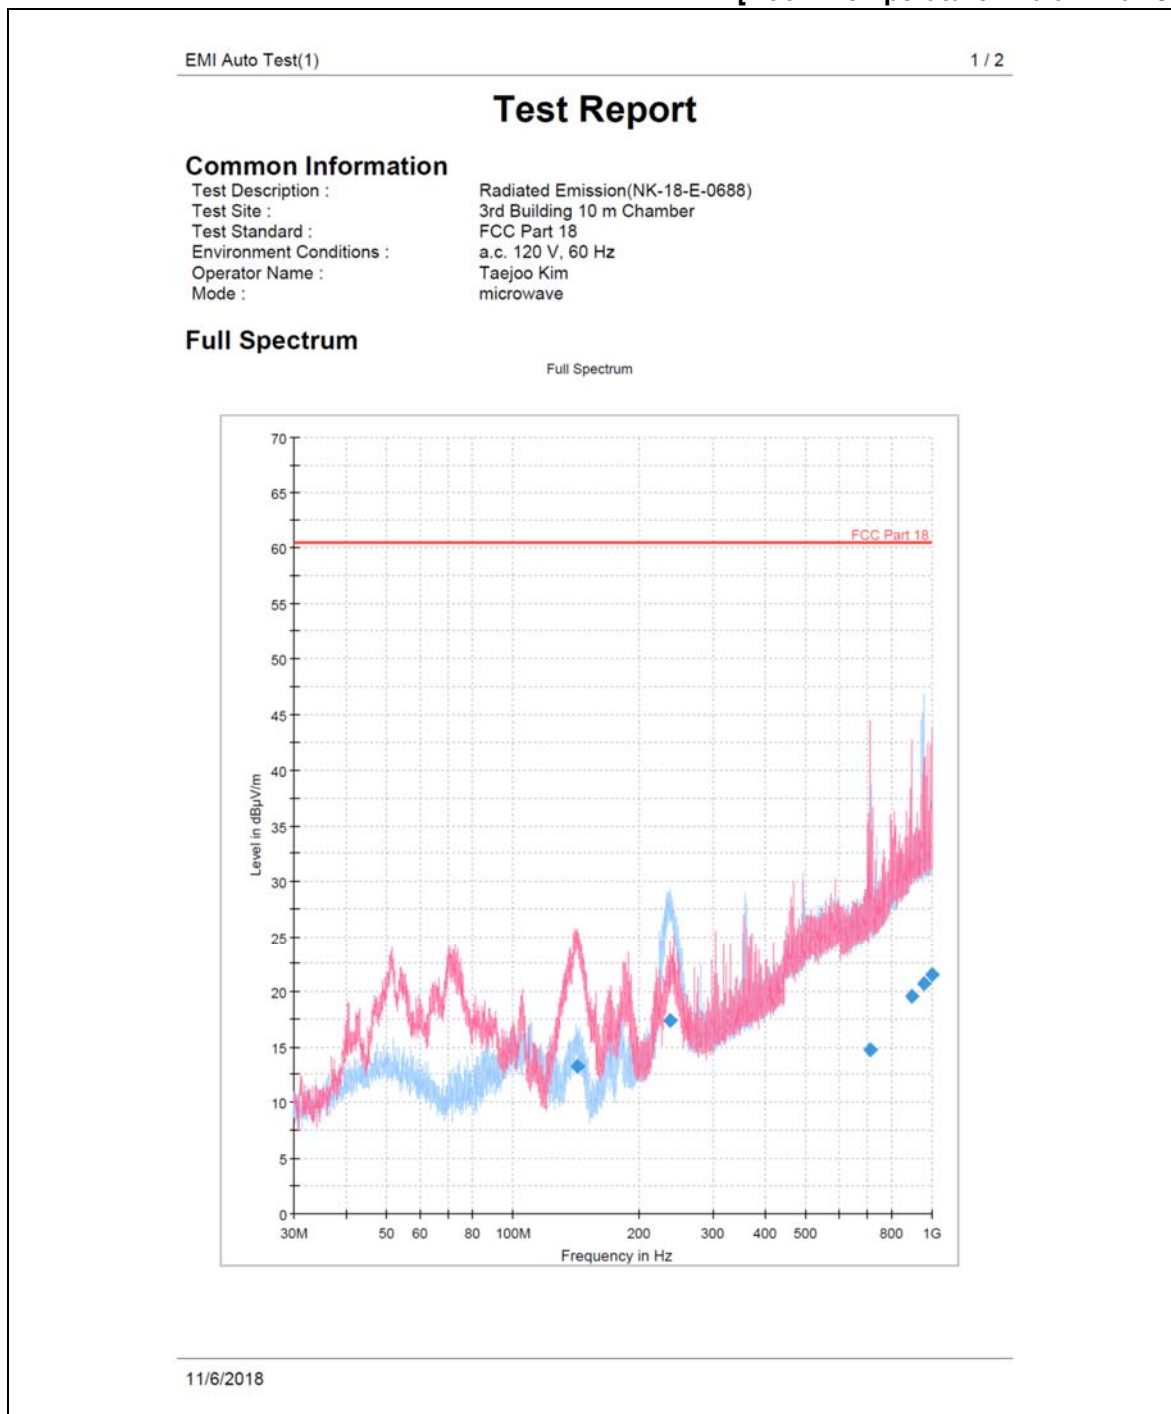

EMI Auto Test(1)

2 / 2

Final Result

Frequency (MHz)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
142.649333	13.17	60.50	47.33	15000.0	120.000	100.0	V	281.0	-25.3
236.610000	17.31	60.50	43.19	15000.0	120.000	302.0	H	280.0	-19.1
712.589000	14.77	60.50	45.73	15000.0	120.000	400.0	V	25.0	-6.1
893.526333	19.56	60.50	40.94	15000.0	120.000	270.0	V	-29.0	-2.8
954.701000	20.67	60.50	39.83	15000.0	120.000	106.0	H	126.0	-2.5
1000.000000	21.46	60.50	39.04	15000.0	120.000	230.0	V	303.0	-2.3

11/6/2018

<Radiated Measurements at 10 meters>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300/10) \doteq 29.5 \text{ dB } \mu\text{N/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT} (\text{RF Power}/500))$
5. All other emissions were measured while a 700 $\text{m}\ell$ load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.

A handwritten signature in blue ink, appearing to read 'Taejoo Kim', is positioned above a horizontal line.

Tested by : **Taejoo Kim**

TEST DATA

Radiated Emissions (Above 1 GHz)

FCC ID : C5F7NF1HMO100N

[Room Temperature : 20.0 ± 1.0 °C]

Frequency	Pol*	Antenna Heights	Turntable Angles	Reading Level	Total Loss**	Result at 3 m		K	Results at 300 m	Limits at 300 m
(MHz)	(H/V)	(cm)	(°)	(dBμV)	(dB)	(dBμV/m)	(μV/m)		(μV/m)	(μV/m)
1229.74	V	200.0	56	43.7	-9.6	34.14	50.9	0.004	0.2	35.4
1726.62	V	400.1	298	43.3	-9.6	33.72	48.5	0.004	0.2	35.4
4914.55	V	200.0	37	36.3	-1.3	34.97	56.0	0.001	0.1	35.4
7382.27	H	300.0	316	36.8	2.6	39.44	93.8	0.001	0.1	35.4
8078.30	H	99.8	320	36.6	3.6	40.19	102.2	0.001	0.1	35.4
8334.71	V	200.0	309	33.2	3.7	36.90	70.0	0.001	0.1	35.4
9826.49	V	99.8	60	34.6	5.6	40.23	102.7	0.001	0.1	35.4
14748.56	H	200	329	29.4	12.2	41.63	120.6	0.001	0.1	35.4

<Radiated Measurements at 3 meters>

NOTES:


- * Pol. H =Horizontal V=Vertical
- ** Total Loss = Antenna Factor + Cables Loss + Amplifier + HPF (High Pass Filter)
- Field Strength (at 300 m) (μV/m) = $K * 10^{[Fieldstrength\ at\ 3\ m\ (dB\mu V/m) / 20]}$
- The limit at 300 meters is $25 * \sqrt{RF\ Power/500}$
- Load for measurement of radiation on second and third harmonic : Two loads, one of 700 ml and the other of 300 ml, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
- The test was performed at peak detector mode with average.
- The limit for consumer device is on the FCC Part section 18.305.



Tested by : Taejoo Kim

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

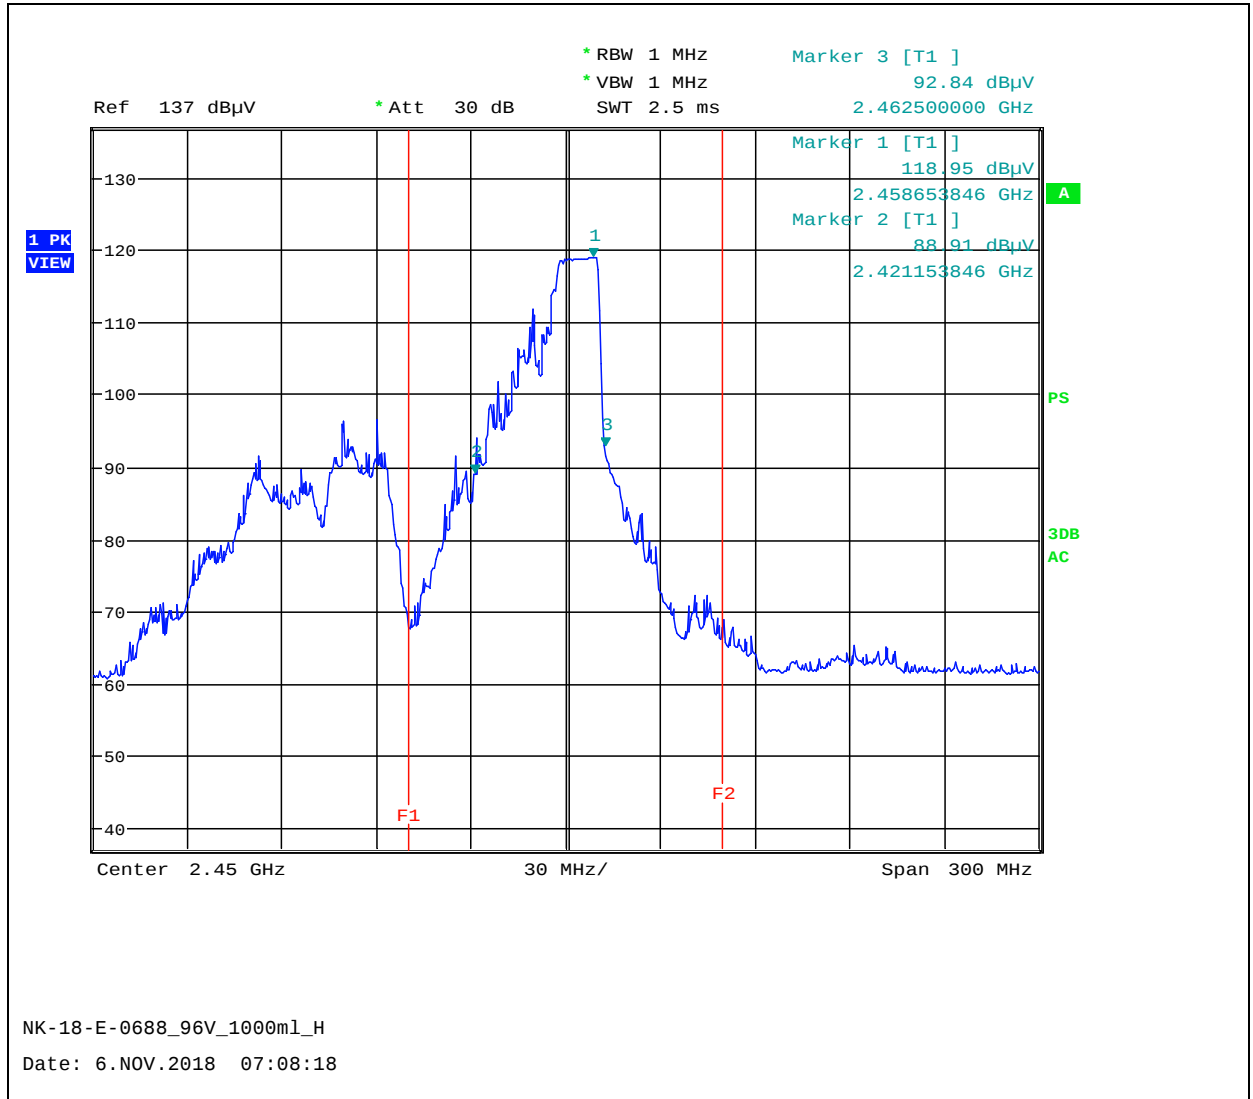

Horizontal (96 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

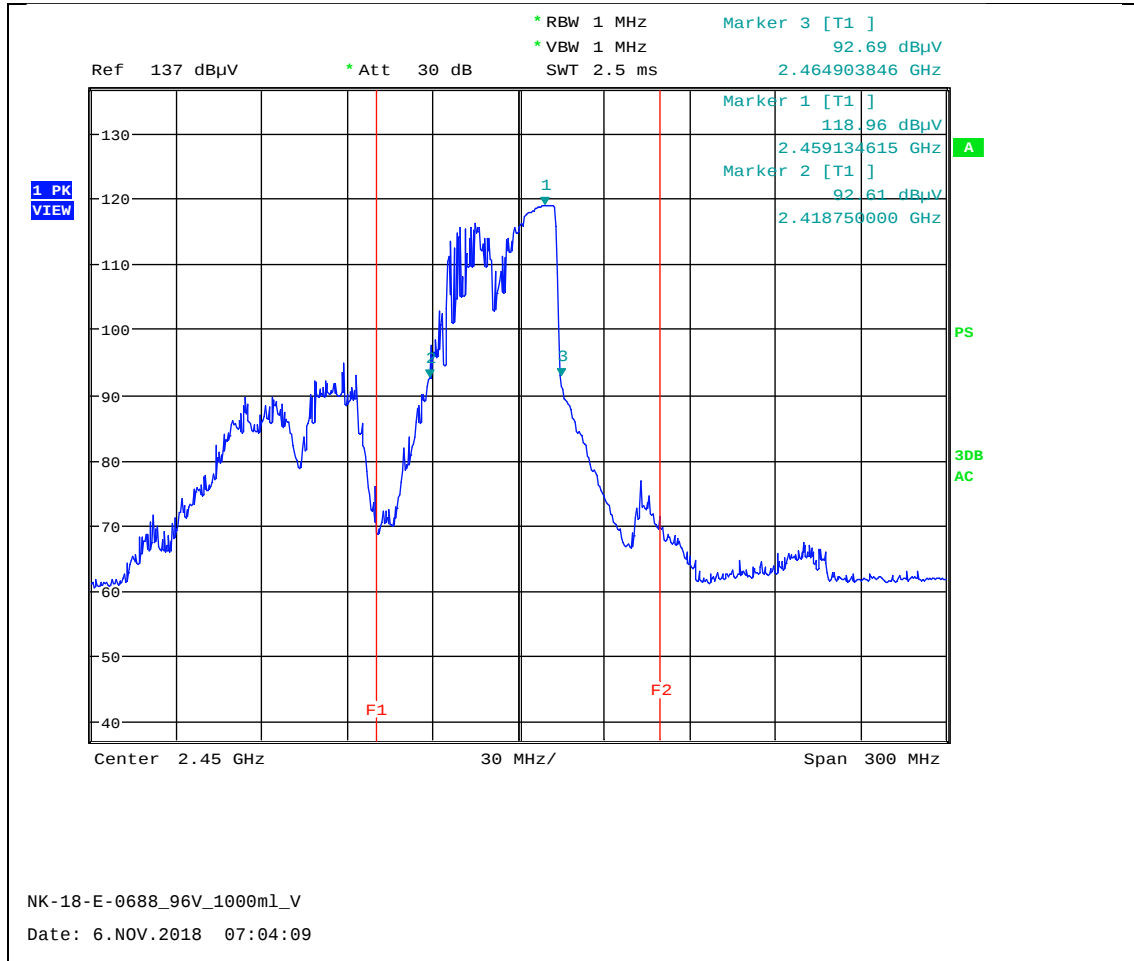

Vertical (96 V, 1000 mV)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

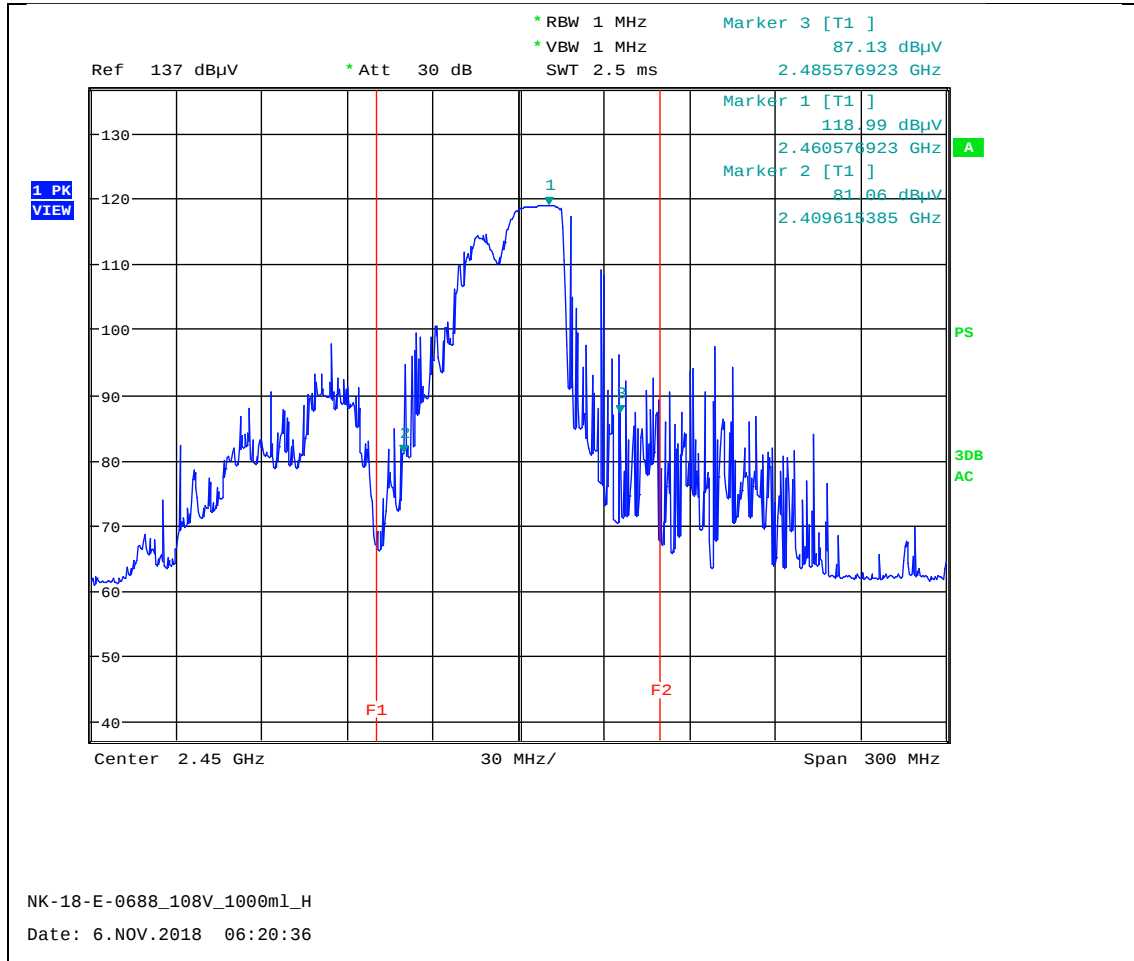

Horizontal (108 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

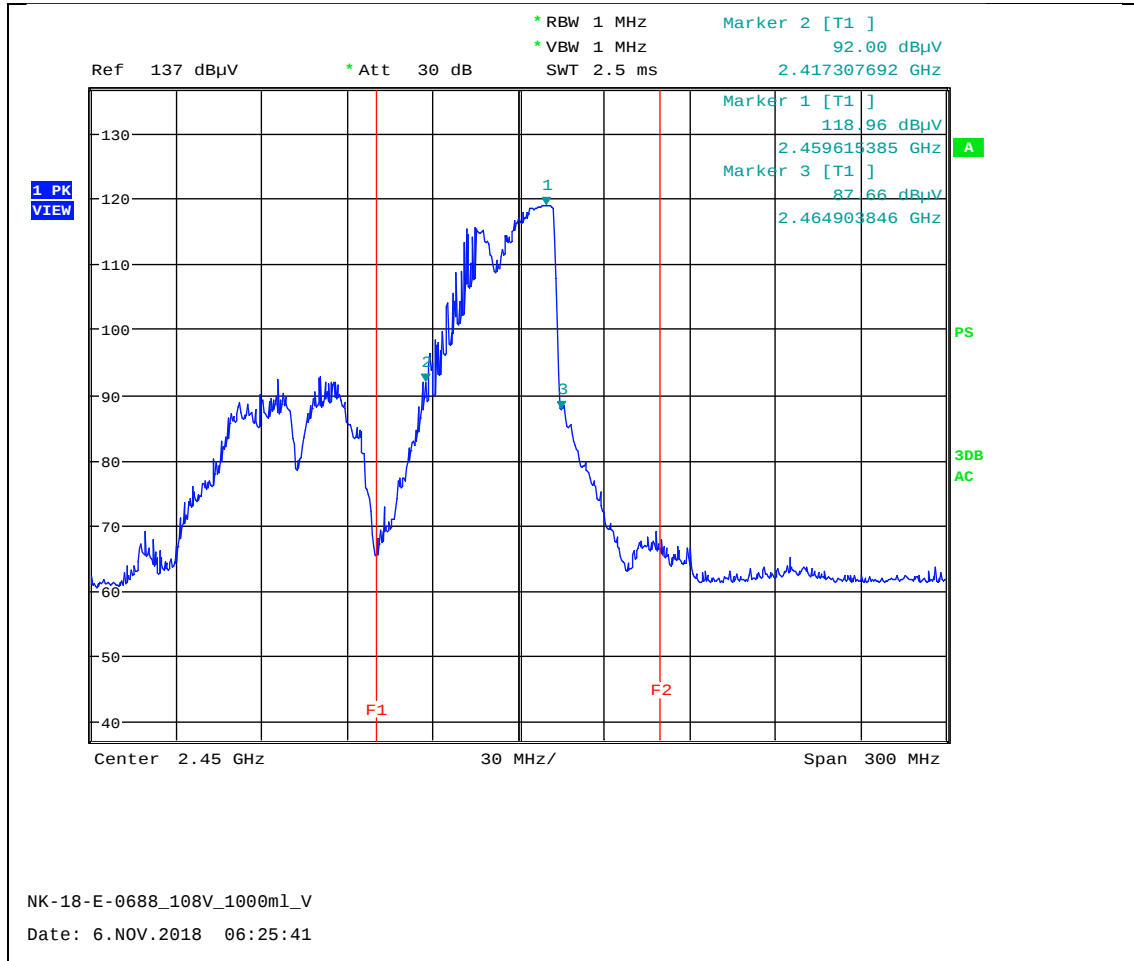

Vertical (108 V, 1000 ml)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

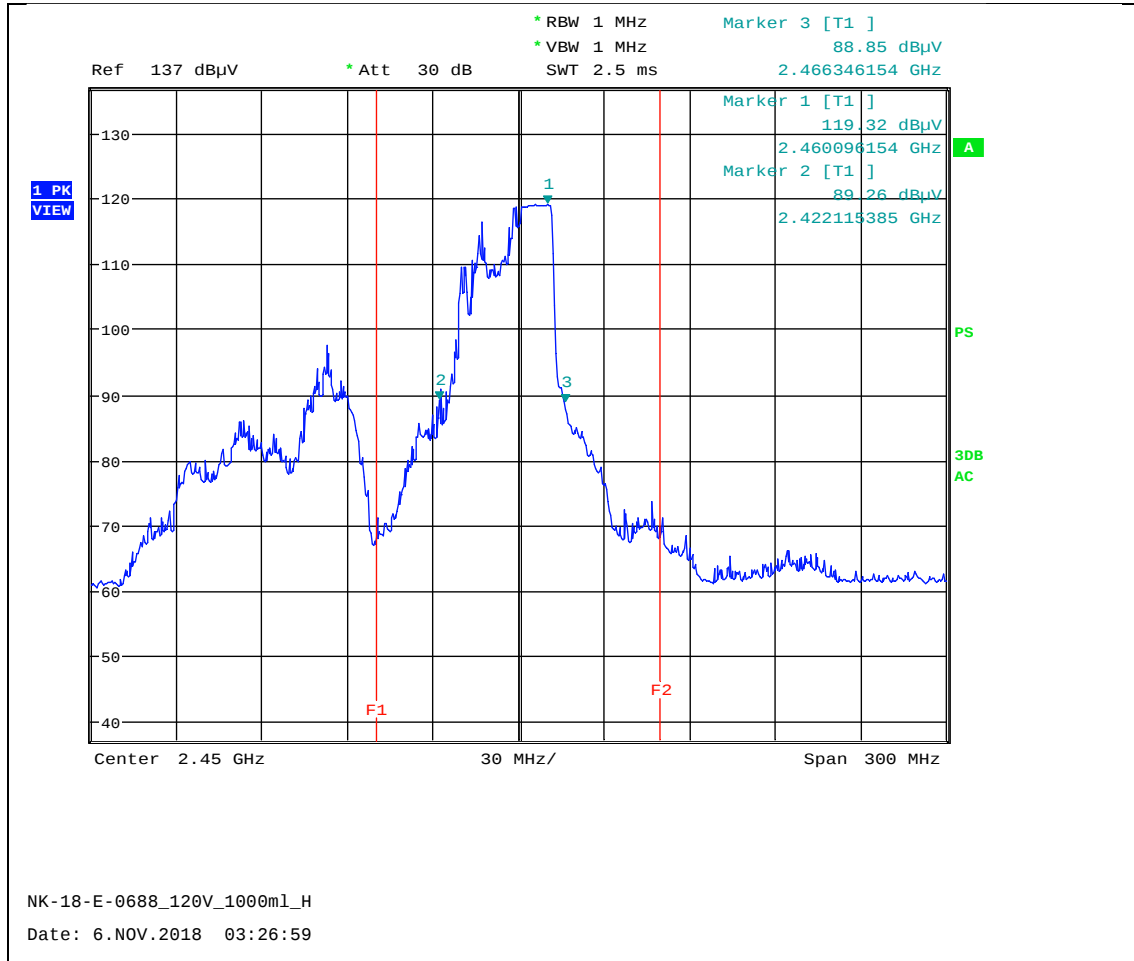

Horizontal (120 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

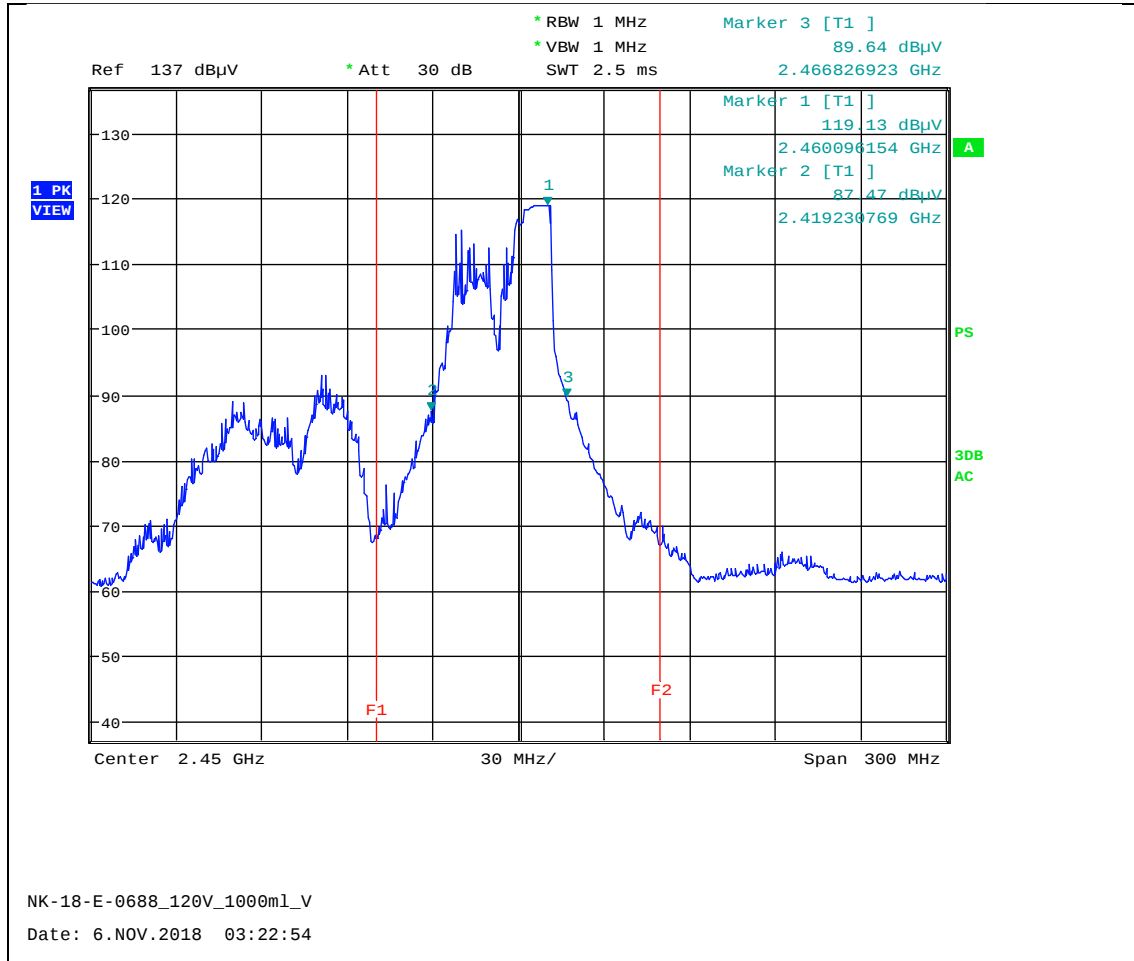

Vertical (120 V, 1000 ml)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

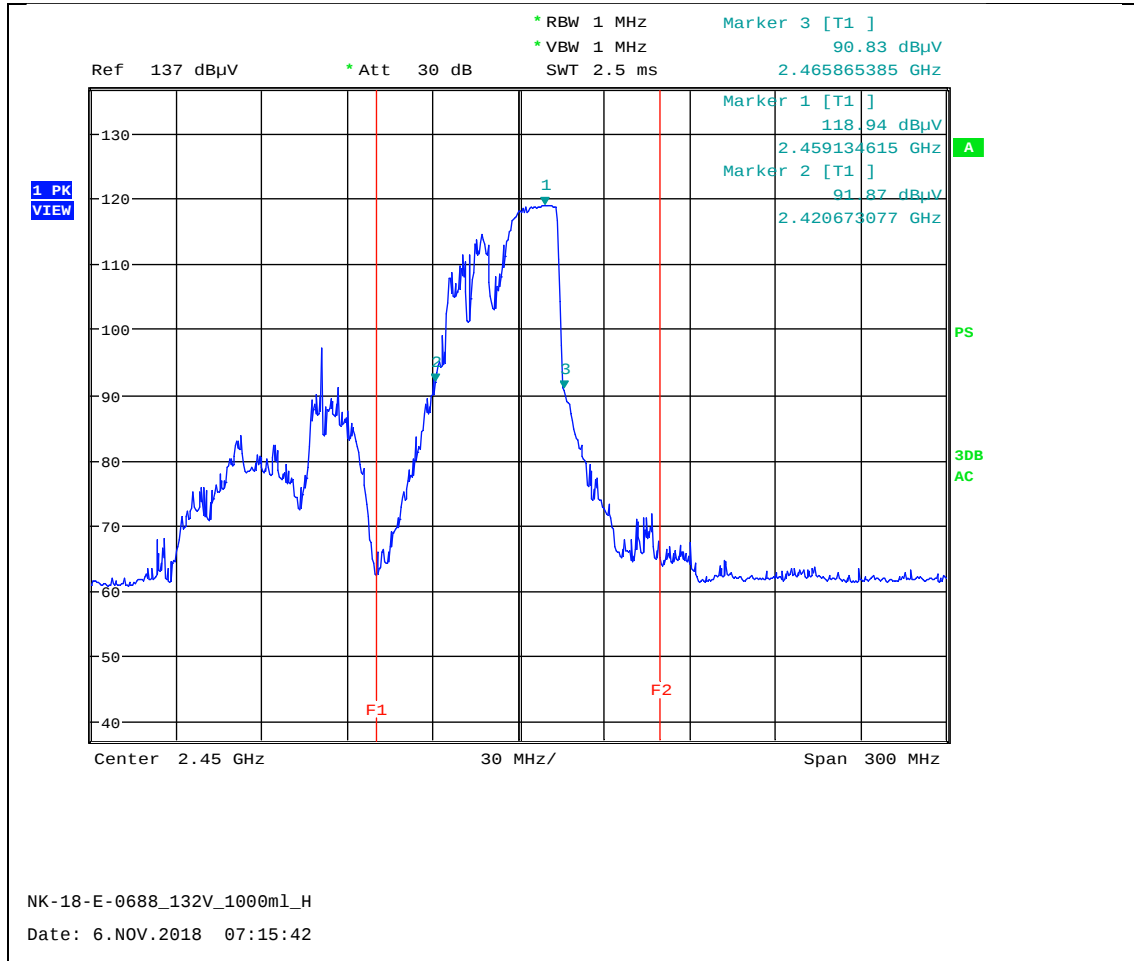

Horizontal (132 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

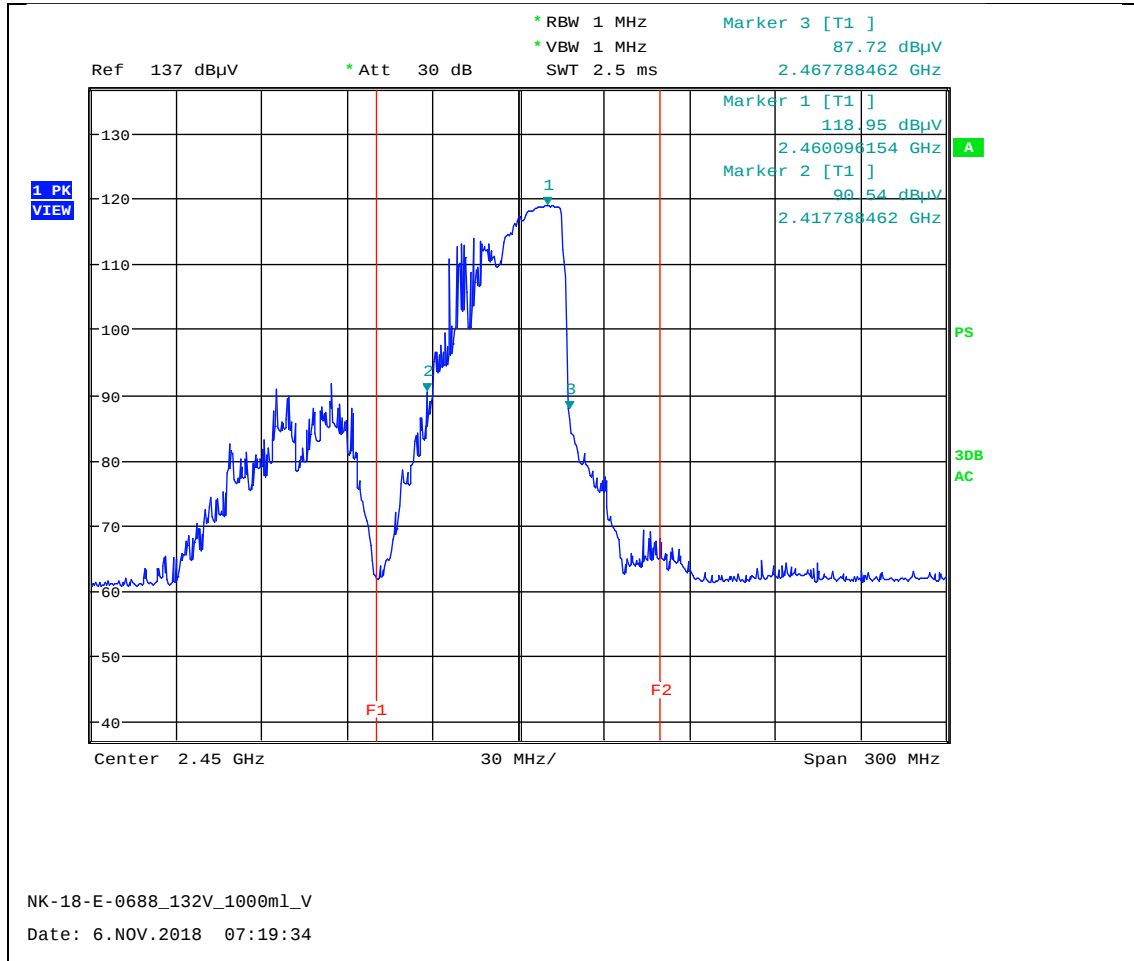

Vertical (132 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

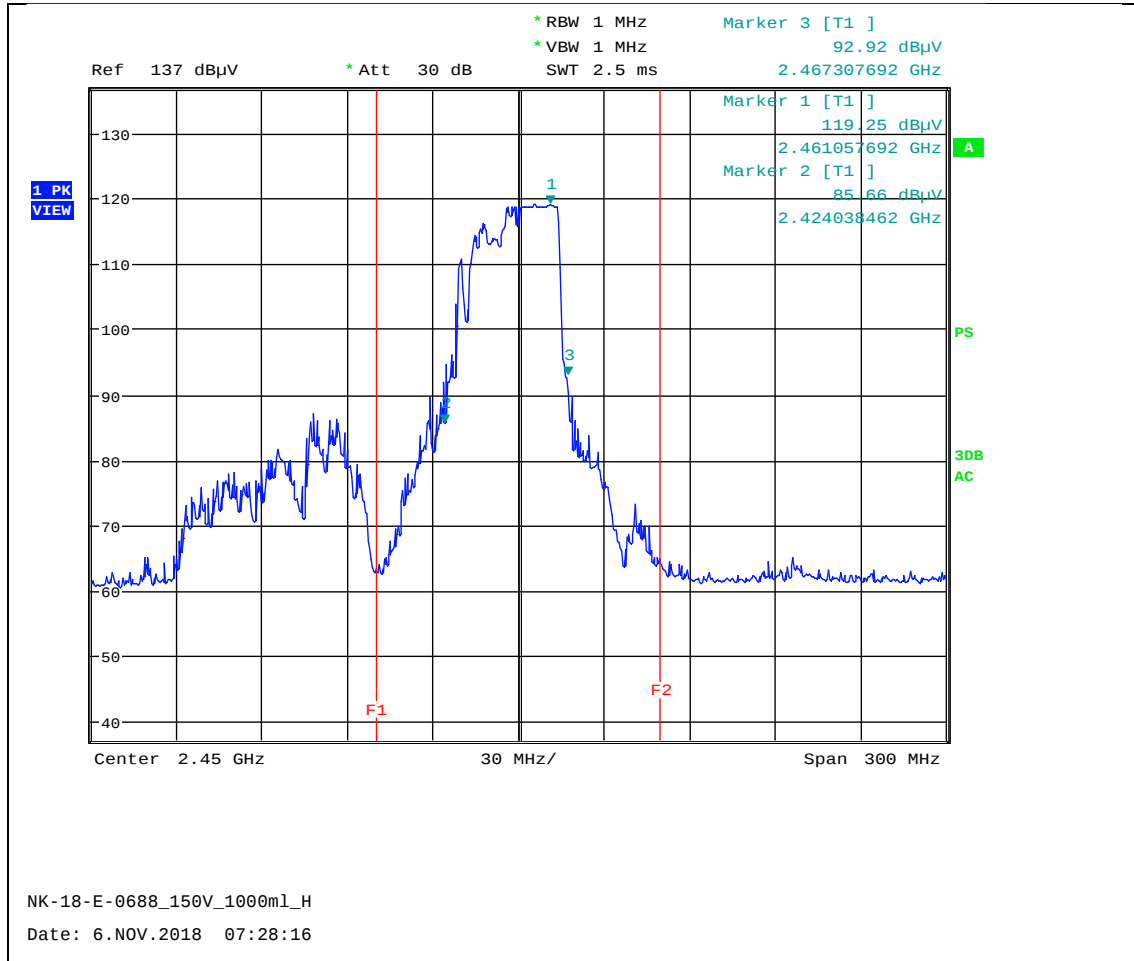

Horizontal (150 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

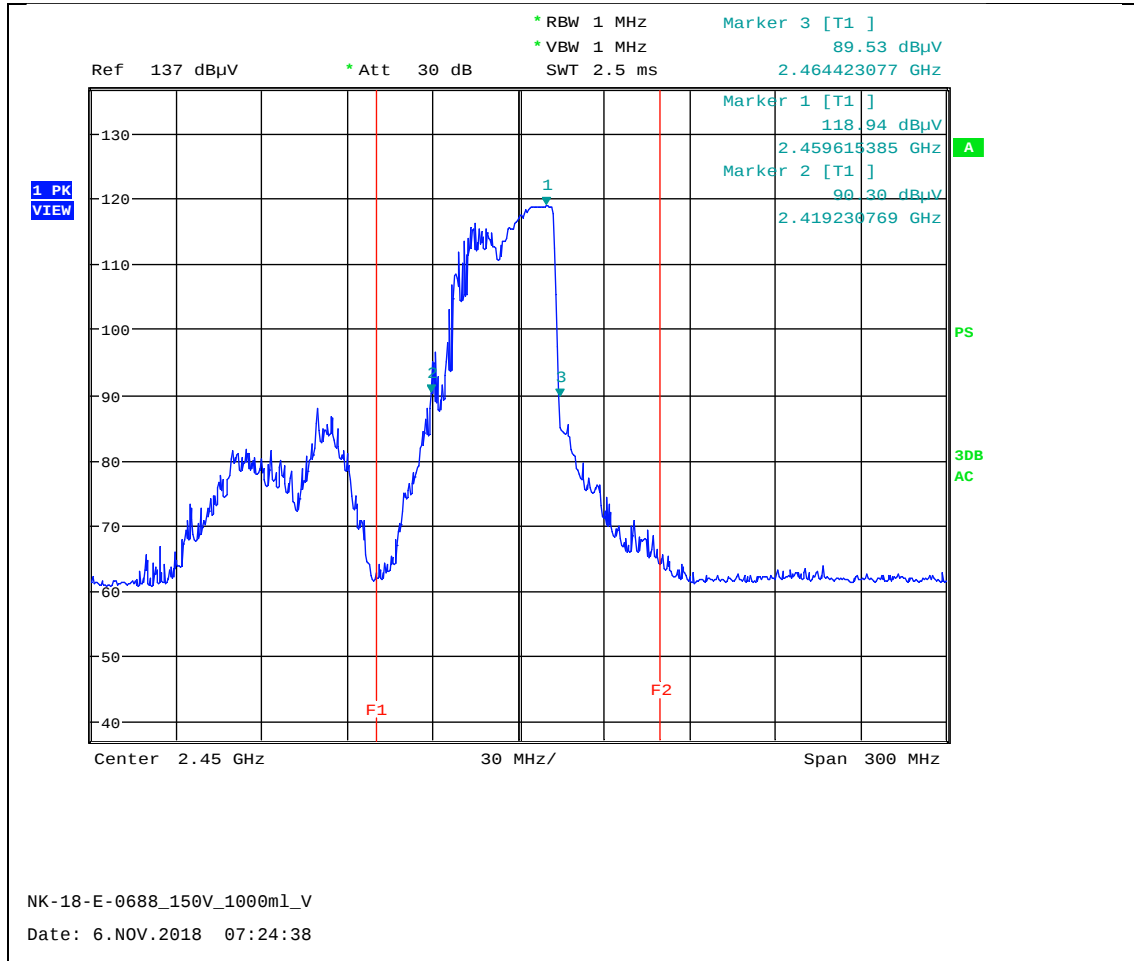

Vertical (150 V, 1000 mℓ)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

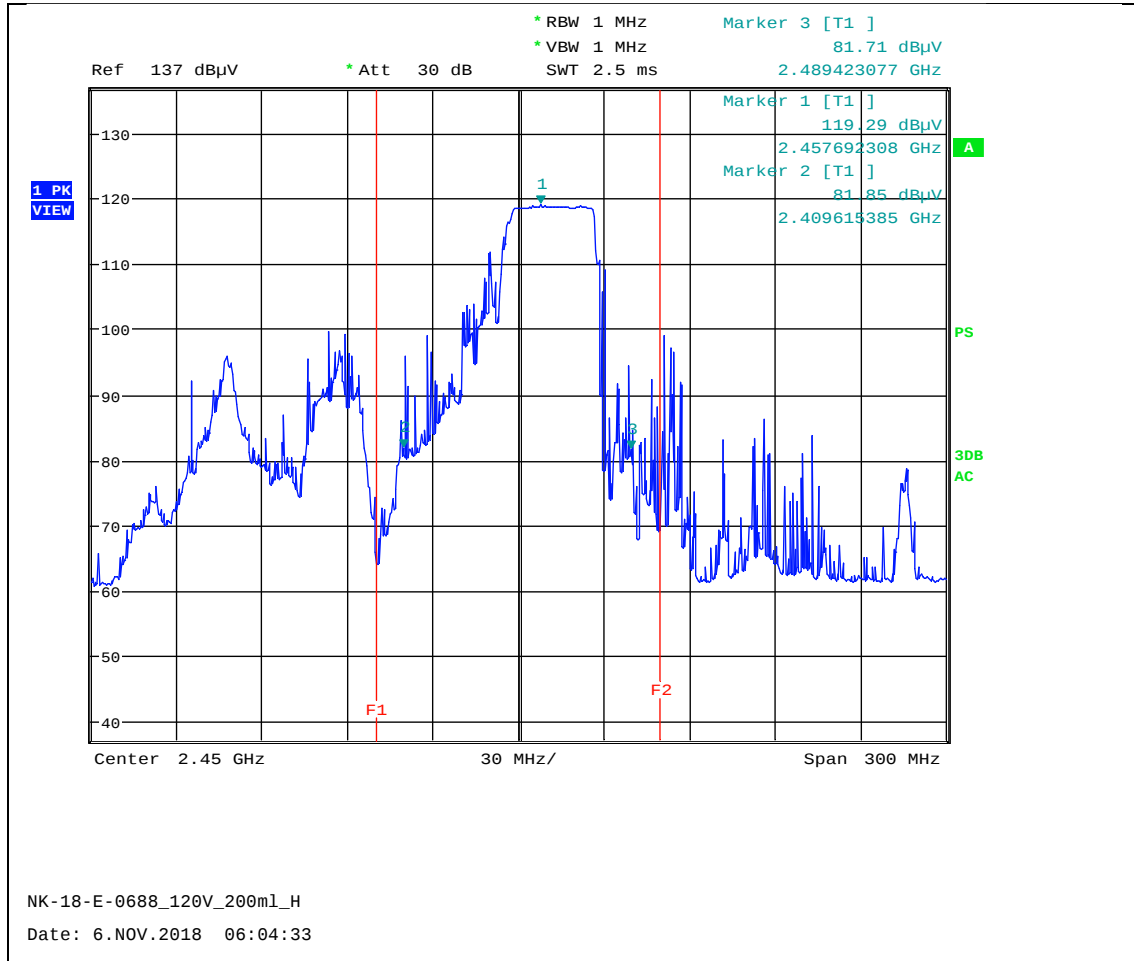

Horizontal (120 V, 200 ml)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

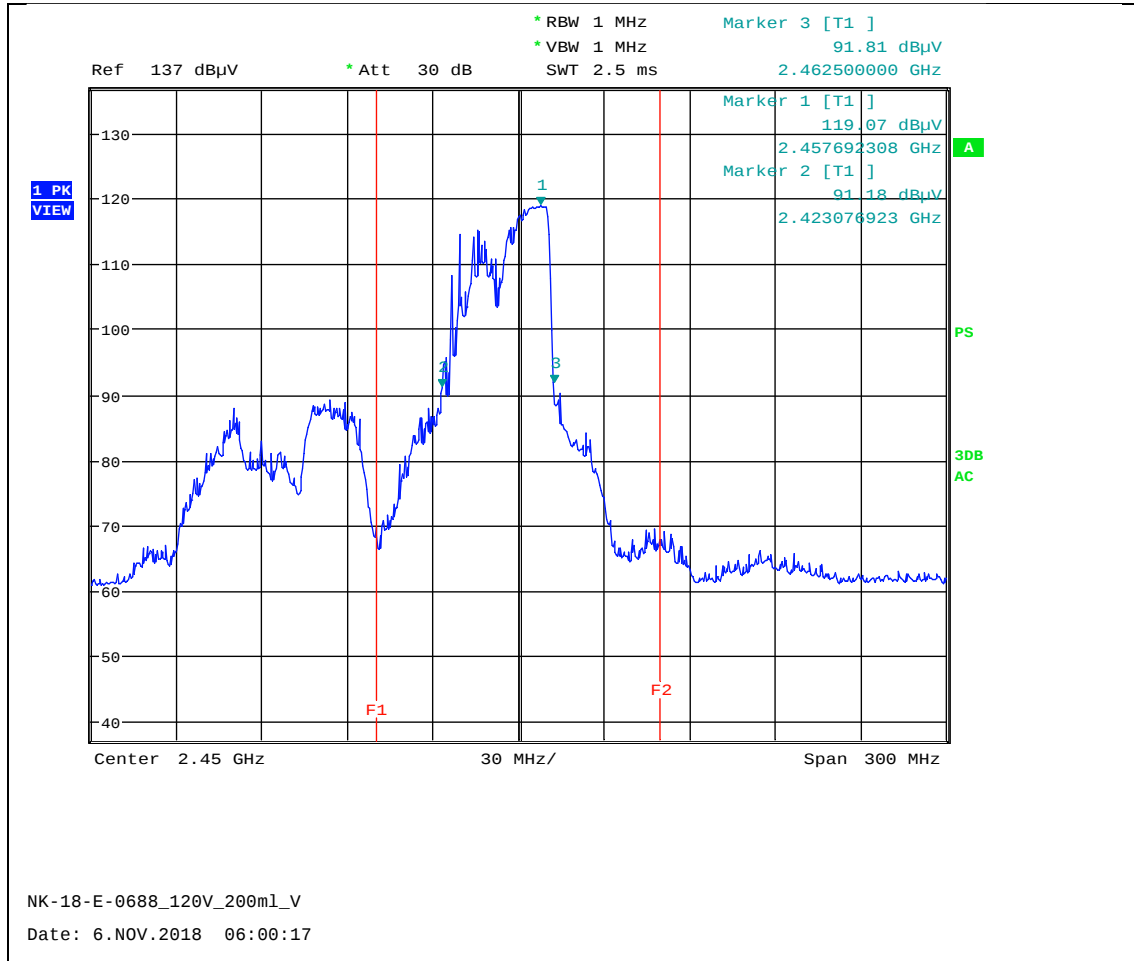

Vertical (120 V, 200 ml)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

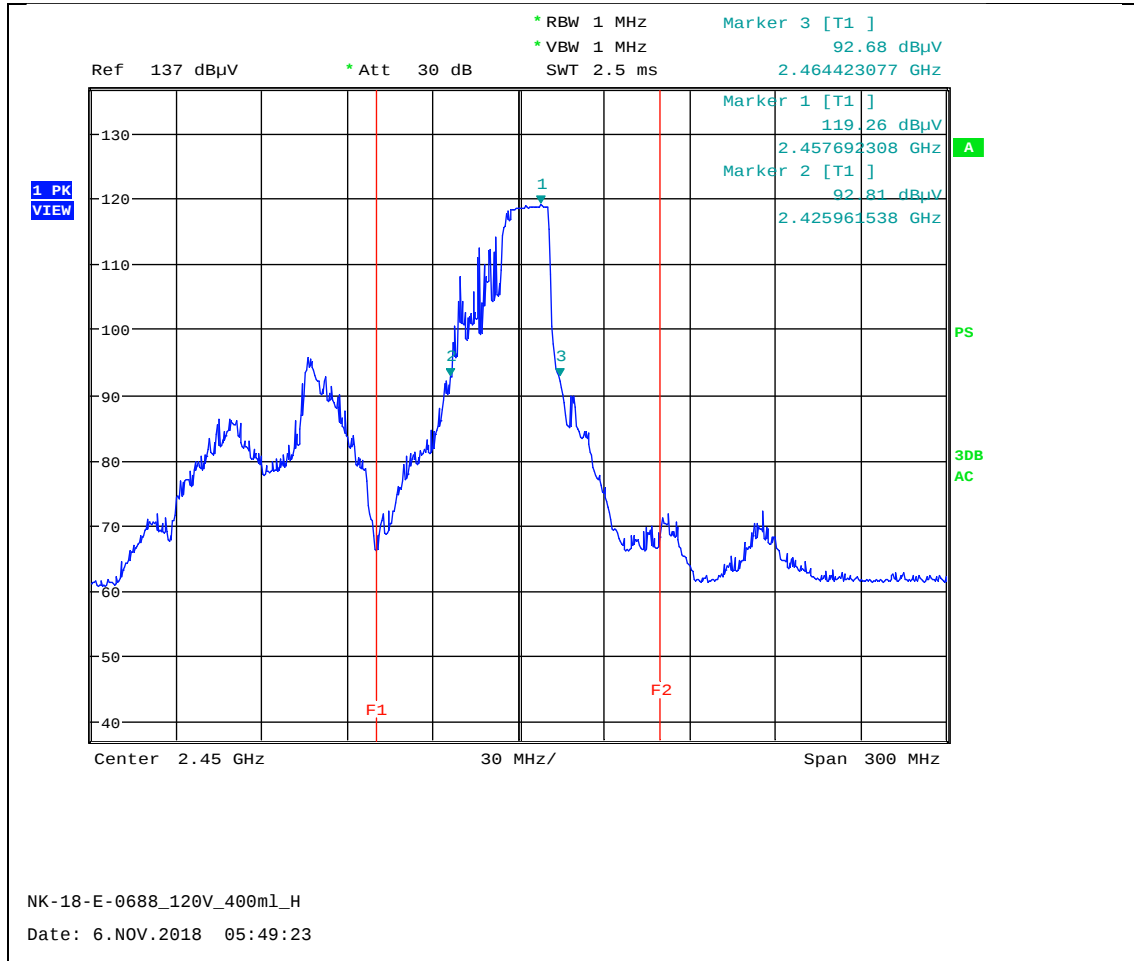

Horizontal (120 V, 400 mA)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

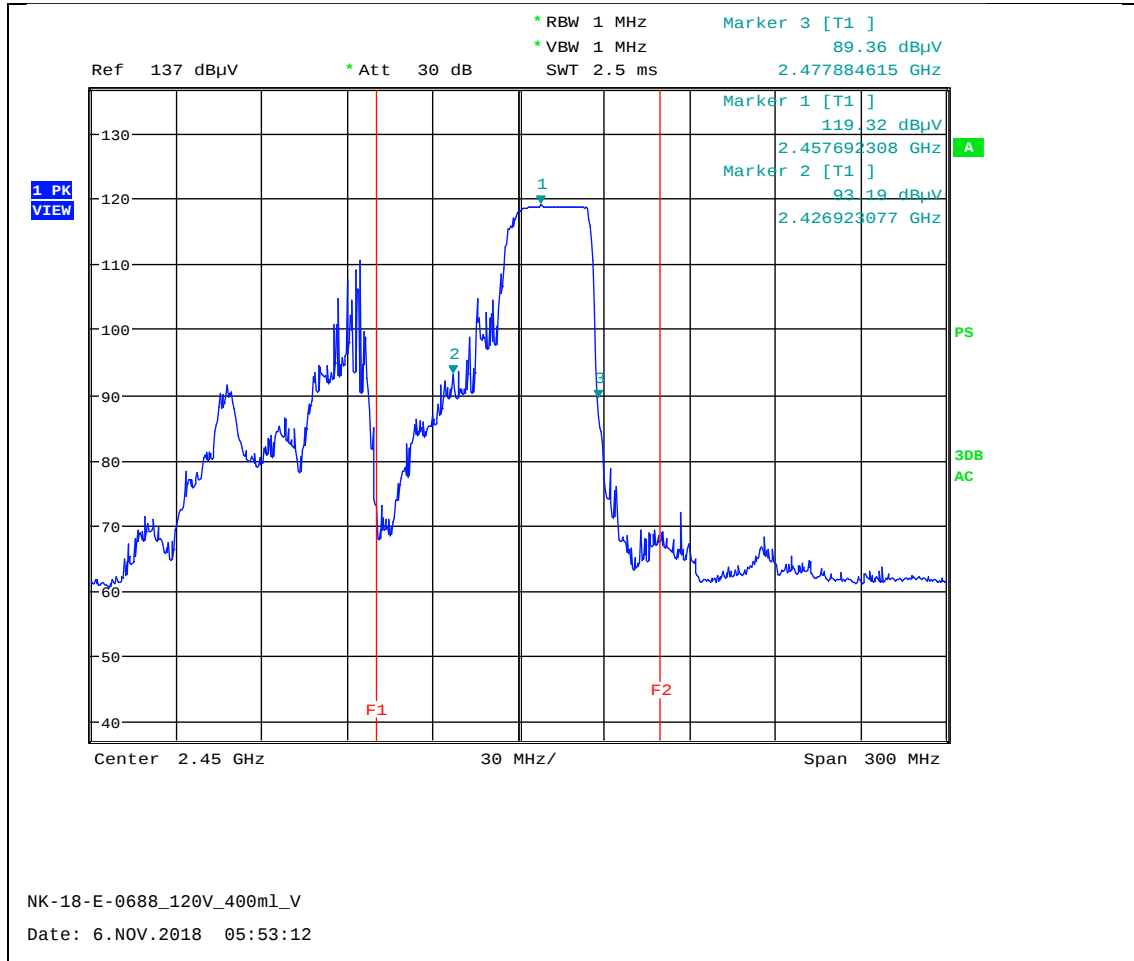

Vertical (120 V, 400 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

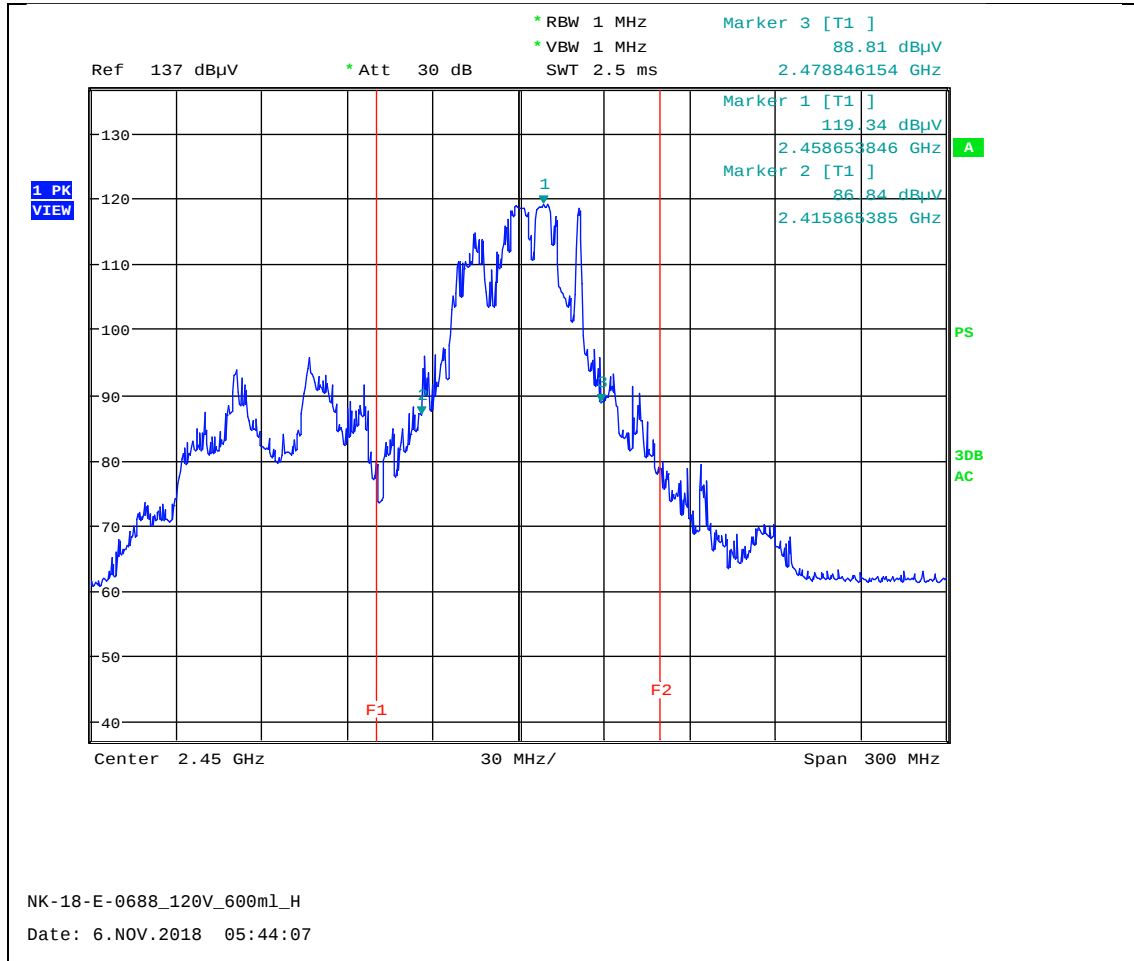

Horizontal (120 V, 600 ml)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

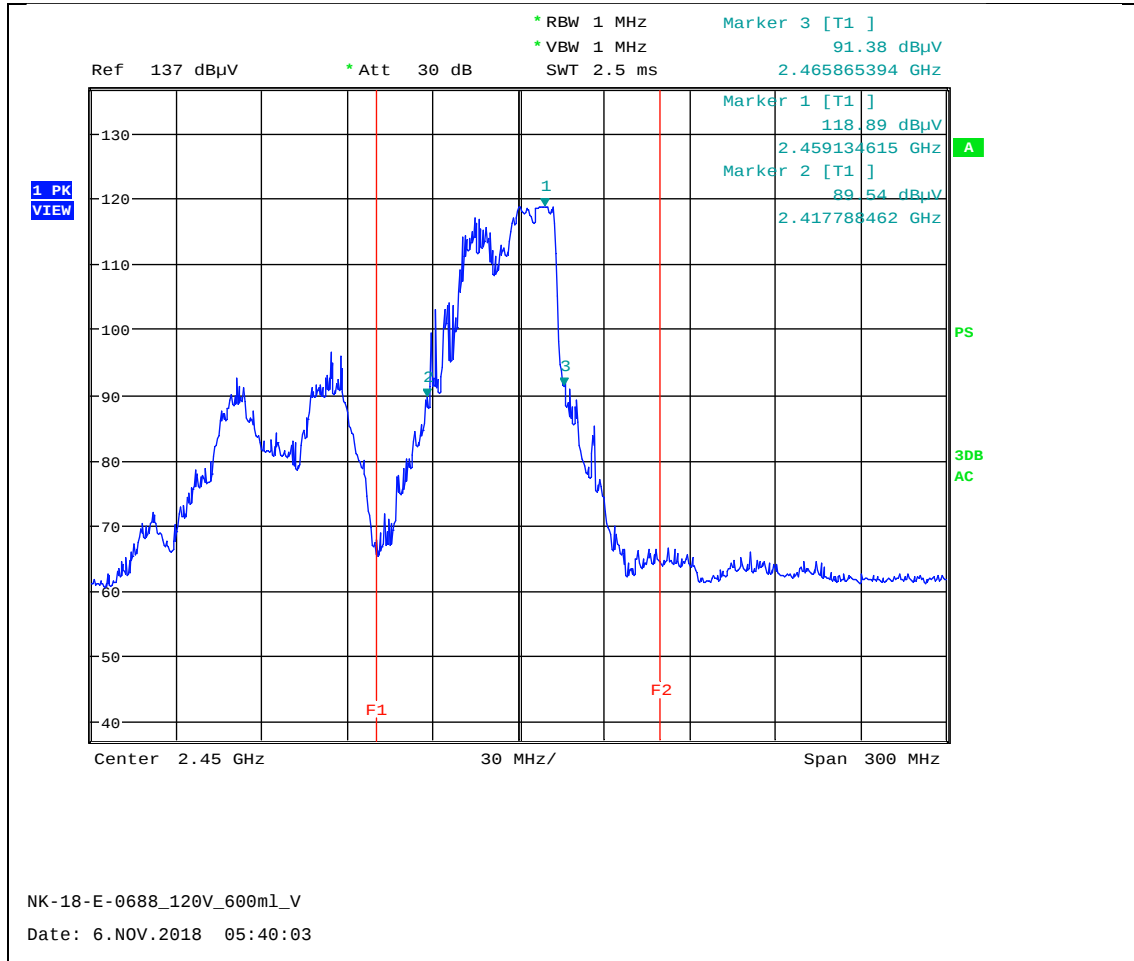

Vertical (120 V, 600 ml)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

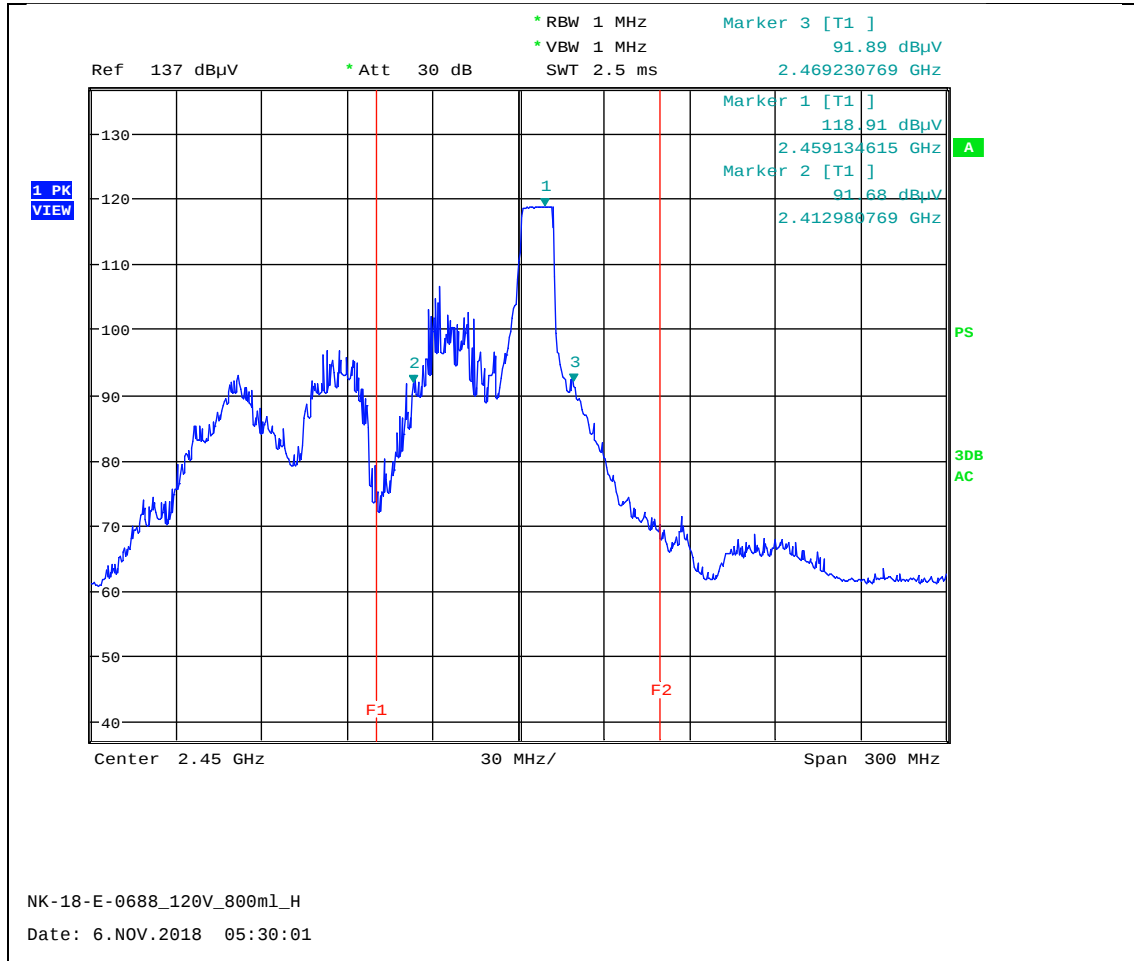

Horizontal (120 V, 800 ml)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

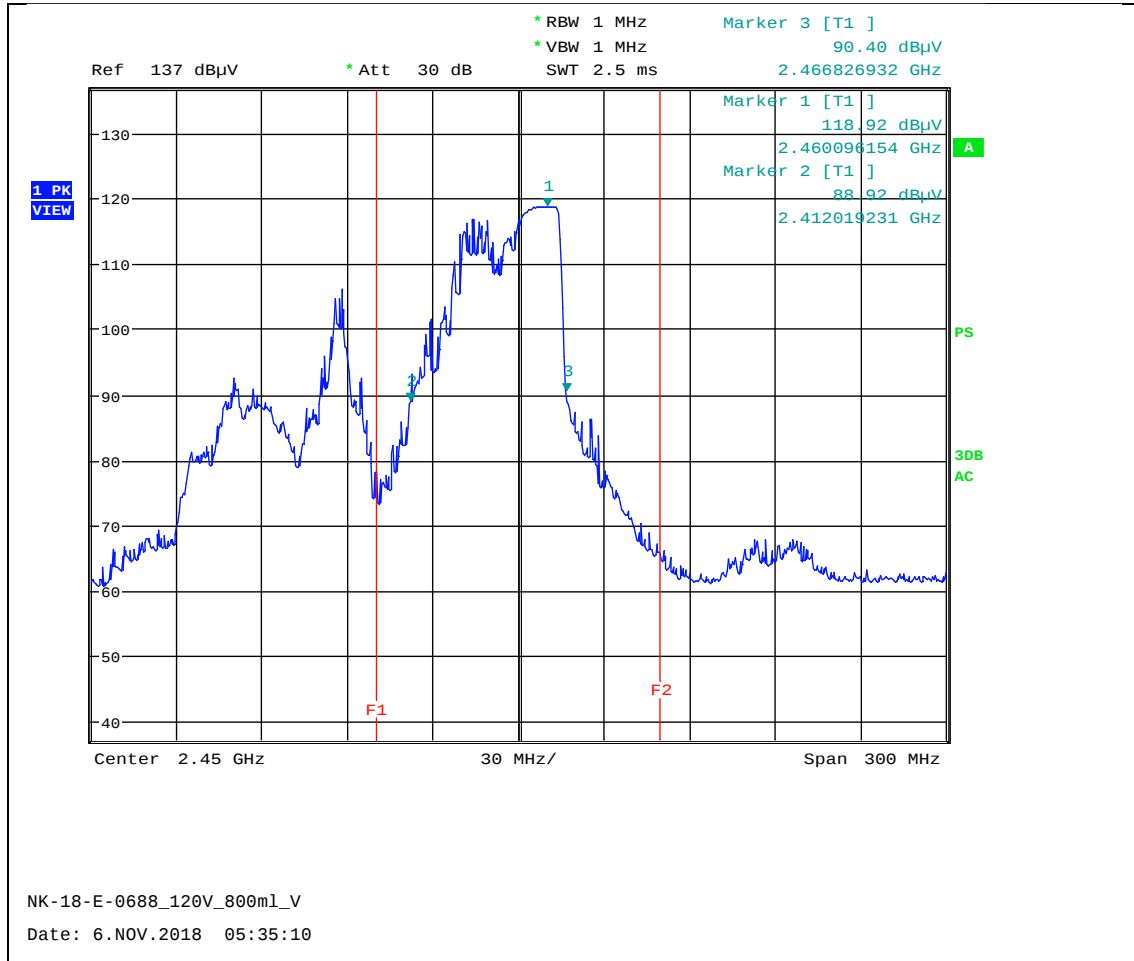

Vertical (120 V, 800 ml)

PLOTS OF EMISSIONS


● Frequency vs Load Variation Test

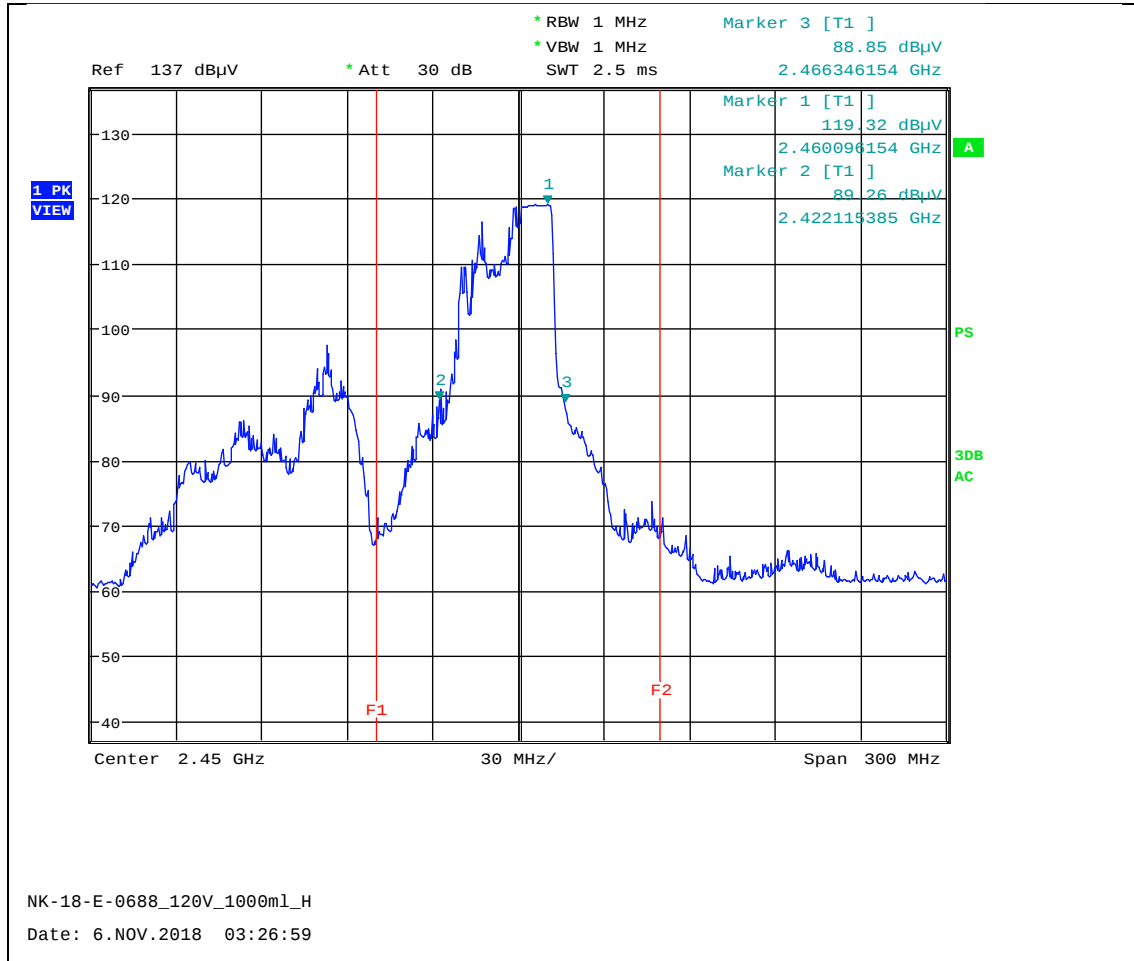

Horizontal (120 V, 1000 ml)

PLOTS OF EMISSIONS

● Frequency vs Load Variation Test

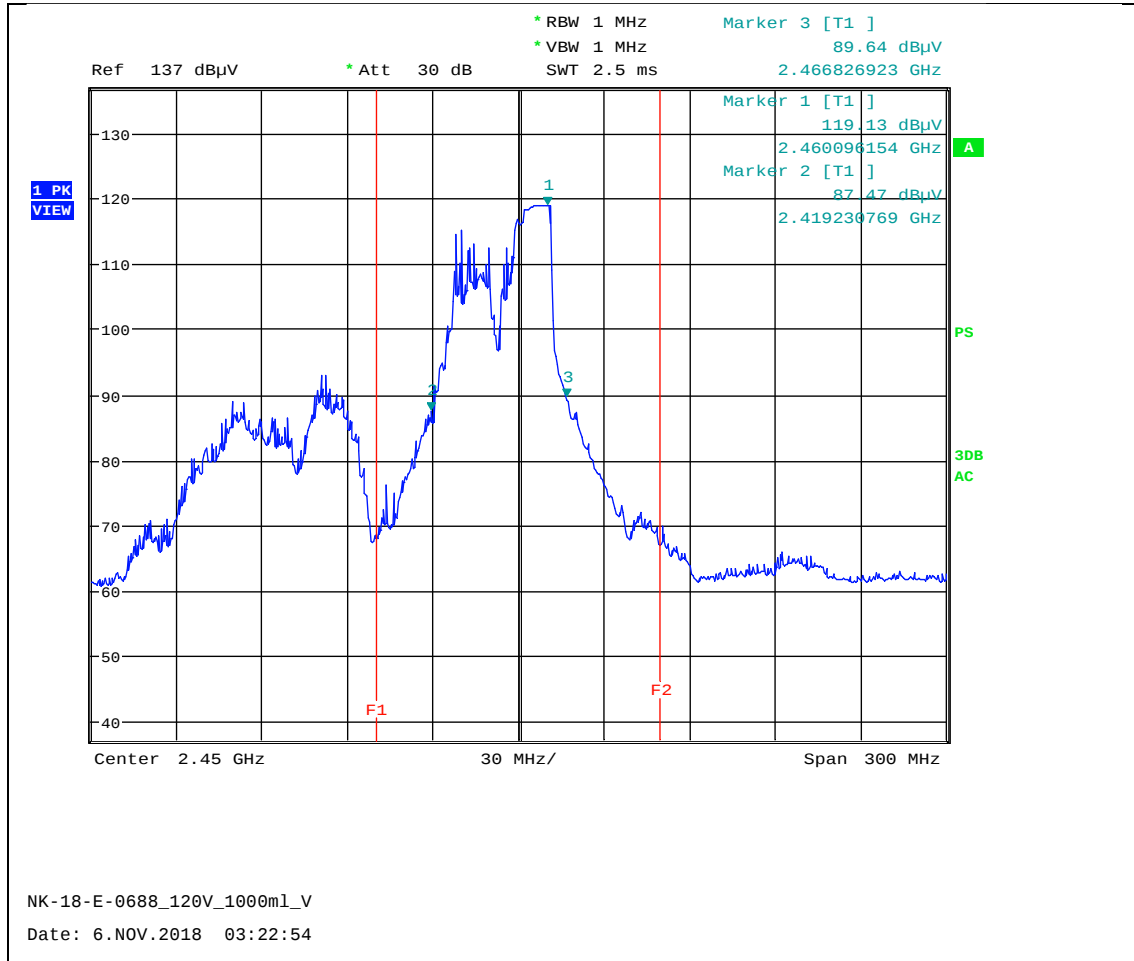

Vertical (120 V, 1000 ml)

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95 %

1. Conducted Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	R_s	0.24	normal 1	1.00	0.24	1	0.24
Receiver reading	R_i	± 0.02	normal 2	2.00	0.01	1	0.01
Attenuation AMN-Receiver	L_c	± 0.10	rectangular	$\sqrt{3}$	0.06	1	0.06
AMN Voltage division factor	L_{AMN}	± 0.09	normal 2	2.00	0.05	1	0.05
Sine wave voltage	dV_{SW}	± 0.17	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	dV_{PA}	± 0.92	normal 2	2.00	0.50	1	0.50
Pulse repetition rate response	dV_{PR}	± 0.35	normal 2	2.00	0.18	1	0.18
Noise floor proximity	dV_{NF}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
AMN Impedance	d_z	± 2.00	normal 2	2.00	1.00	1	1.00
Mismatch : AMN-Receiver	M	+ 0.80 - 0.89	U-Shaped	$\sqrt{2}$	0.60	1	0.60
Remark	Using 50 Ω / 50 μ H AMN						
Combined Standard Uncertainty	Normal			$u_c = 1.30$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			U = 2.6 dB (CL is 95 %)			

2. Radiation Uncertainty Calculation (Below 1 GHz)

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability 1)	R_s	0.15	normal 1	1.00	0.15	1	0.15
Receiver reading 2)	R_i	± 0.02	normal 2	2.00	0.01	1	0.01
Sine wave voltage 3)	dV_{sw}	± 0.17	normal 2	2.00	0.09	1	0.09
Pulse amplitude response 4)	dV_{pa}	± 0.92	normal 2	2.00	0.46	1	0.46
Pulse repetition rate response 5)	dV_{pr}	± 0.35	normal 2	2.00	0.18	1	0.18
Noise floor proximity 6)	dV_{nf}	± 0.50	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration 7)	A_F	± 1.50	rectangular	$\sqrt{3}$	0.87	1	0.87
Cable Loss 8)	C_L	± 1.00	normal 2	2.00	0.50	1	0.50
Antenna Directivity 9)	A_D	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Antenna Factor Height Dependence 10)	A_H	± 2.00	rectangular	$\sqrt{3}$	1.15	1	1.15
Antenna Phase Centre Variation 11)	A_P	± 0.20	rectangular	$\sqrt{3}$	0.12	1	0.12
Antenna Factor Frequency Interpolation 12)	A_i	± 0.25	rectangular	$\sqrt{3}$	0.14	1	0.14
Site Imperfections 13)	S_i	± 4.00	triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation 14)	D_v	± 0.60	rectangular	$\sqrt{3}$	0.35	1	0.35
Antenna Balance 15)	D_{bal}	± 0.90	rectangular	$\sqrt{3}$	0.52	1	0.52
Cross Polarisation 16)	D_{Cross}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Mismatch 17)	M	+ 0.98 - 1.11	U-Shaped	$\sqrt{2}$	0.74	1	0.74
EUT Volume Diameter 18)	V_d	0.33	normal 1	1.00	0.33	1	0.11
Combined Standard Uncertainty	Normal			$u_c = 2.53$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			5.1 dB (CL is 95 %)			

3. Radiation Uncertainty Calculation (Above 1 GHz)

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability 1)	R_s	0.25	normal 1	1.00	0.25	1	0.25
Receiver Reading 2)	R_i	± 0.27	normal 2	2	0.14	1	0.14
Attenuation (antenna-receiver) 3)	a_c	± 0.30	normal 2	2	0.15	1	0.15
Preamplifier gain 4)	G_p	± 0.23	normal 2	2	0.12	1	0.12
Receiver Sine Wave 5)	dV_{sw}	± 0.17	normal 2	2	0.08	1	0.08
Instability of preamp gain 6)	dG_p	± 1.2	rectangular	$\sqrt{3}$	0.70	1	0.70
Noise Floor Proximity 7)	dV_{nf}	± 0.70	rectangular	$\sqrt{3}$	0.40	1	0.40
Antenna Factor Calibration 8)	A_F	± 2.0	normal 2	2	1.00	1	1.00
Directivity difference 9)	DF_{adir}	± 1.00	rectangular	$\sqrt{3}$	0.58	1	0.58
Phase Centre location 10)	A_P	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Antenna Factor Frequency Interpolation 11)	A_i	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections 12)	S_i	± 3.00	triangular	$\sqrt{6}$	1.22	1	1.22
Effect of setup table material 13)	dA_{NT}	± 1.50	rectangular	$\sqrt{3}$	0.87	1	0.87
Separation distance 14)	d_D	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Cross Polarization 15)	D_{Cross}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Table height 16)	d_h	± 0.00	normal 2	2	0.00	1	0.00
Mismatch (antenna-Preamplifier) 17)	M	+ 1.30 - 1.50	U-Shaped	$\sqrt{2}$	1.00	1	1.00
Mismatch (preamplifier-receiver) 18)	M	+ 1.20 - 1.40	U-Shaped	$\sqrt{2}$	0.92	1	0.92
Combined Standard Uncertainty	Normal			$u_c = 2.51$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			$U = 5.0$ dB (CL is 95 %)			

LIST OF TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Due to Calibration	Calibration Interval
1	LOOP ANTENNA	ROHDE & SCHWARZ	HFH2-Z2	100279	Feb. 13 2019	2 years
2	Microwave survey meter	ETS Lindgren	1501	00033549	Feb. 20 2019	2 year
3	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101041	Apr. 03 2019	1 year
4	Software	ROHDE & SCHWARZ	EMC32	Version 8.53.0	-	-
5	ARTIFICIAL MAINS NETWORK	ROHDE & SCHWARZ	ESH2-Z5	100273	Apr. 03 2019	1 year
6	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW8	100994	Apr. 03 2019	1 year
7	ATTENUATOR	FAIRVIEW	SA3N5W-10	N/A	Apr. 04 2019	1 year
8	EMI Test Receiver	ROHDE & SCHWARZ	ESU 40	100202	May. 24 2019	1 year
9	Software	ROHDE & SCHWARZ	EMC32	Version 10.10.01	-	-
10	TRILOG Broadband Test Antenna	SCHWARZBECK	VULB 9163	9163-01027	Jan. 31 2020	2 year
11	ATTENUATOR	FAIRVIEW	SA3N5W-06	N/A	Jan. 09 2019	1 year
12	Controller	innco systems GmbH	CO2000-G	CO2000/562/23890210/L	N/A	N/A
13	Open Switch and Control Unit	ROHDE & SCHWARZ	OSP-120	100015	N/A	N/A
14	Antenna Mast (Left)	innco systems GmbH	MA4000-EP	N/A	N/A	N/A
15	Turn Table	innco systems GmbH	DT3000-3T	N/A	N/A	N/A
16	Signal Conditioning Unit	ROHDE & SCHWARZ	SCU 01	10030	Apr. 03 2019	1 year
17	Signal Conditioning Unit	Rohde & Schwarz	SCU 18	10065	Apr. 02 2019	1 year
18	DOUBLE RIDGED HORN ANTENNA	SCHWARZBECK	HF907	102585	Jan.18 2019	2 year
19	SWITCH AND POWER DETECTOR UNIT	ROHDE & SCHWARZ	OSP-120	101766	N/A	N/A
20	TILT ANTENNA MAST	innco systems GmbH	MA4640-XP-EP	N/A	N/A	N/A
21	CONTROLLER	innco systems GmbH	CO3000	CO3000/937/38330516/L	N/A	N/A
22	Turntable	innco systems GmbH	DT2000-2t	N/A	N/A	N/A
23	WiFi Filter Bank	ROHDE & SCHWARZ	U082	N/A	N/A	N/A
24	Band Reject	wainwright Instruments GmbH	RCJV8-2350-2400-2500-2550-40SS	2	N/A	N/A

APPENDIX A – SAMPLE LABEL


Labeling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

HOUSEHOLD MICROWAVE OVEN / HOGAR MICROONDAS		MODEL/MODELO: KOT-1HOU
INPUT / INPUT: 1600 W	WINIADA EWOO Electronics America, Inc.	UL LISTED 55K4
OUTPUT / SALIDA: 1000 W	65 Challenger Rd, Suite 360, Ridgeland Park, NJ 07660 USA	
120V AC 60Hz		
SERIAL NO. / NUMERO DE ORDEN:		FCC ID: C5F7NF1HMO100N
PRODUCTION DATE / FECHA DE FABRICACIÓN:		DHHS CODE NO: H7NF
PLACE OF MANUFACTURE / LUGAR DE FABRICACIÓN: TIANJIN, CHINA		

SHARP.	HOUSEHOLD MICROWAVE OVEN	FCC ID: C5F7NF1HMO100N MADE IN CHINA
MODEL NO.: SMO1652DS		
POWER INPUT 120V 60Hz AC ONLY, 1.6 KW	UL LISTED 55K4	DHHS CODE: H7NF
POWER OUTPUT 1000W, 2450MHz		DISTRIBUTED BY:
SINGLE PHASE WITH GROUNDING.		SHARP ELECTRONICS CORPORATION
SERIAL NO.:		100 Paragon Drive, Montvale, NJ 07645
MANUFACTURED:		

- FCC ID Location of EUT

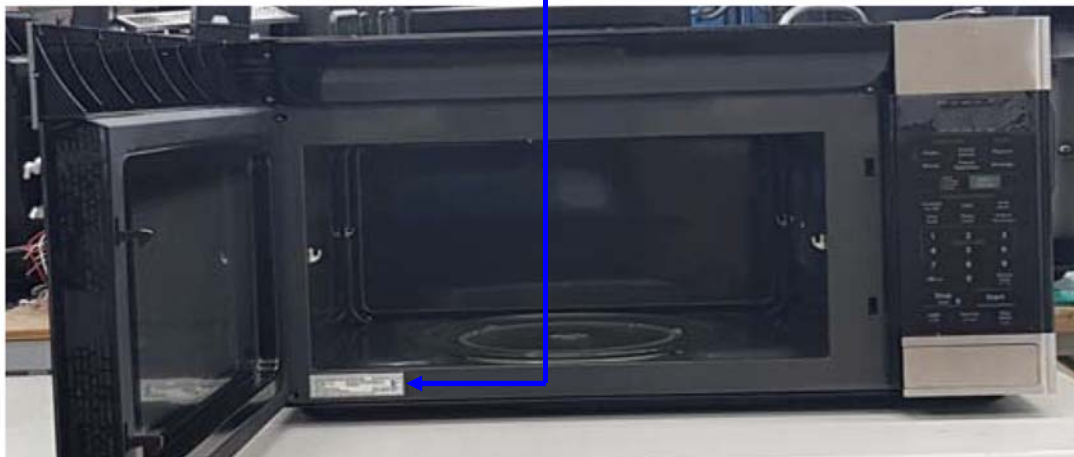


APPENDIX B – PHOTOGRAPHS OF TEST SET-UP

The **Conducted Test Picture** and **Radiated Test Picture** and show the worst-case configuration and cable placement.

- **Radiation hazard Test Picture**




- **Frequency measurement Test Picture**

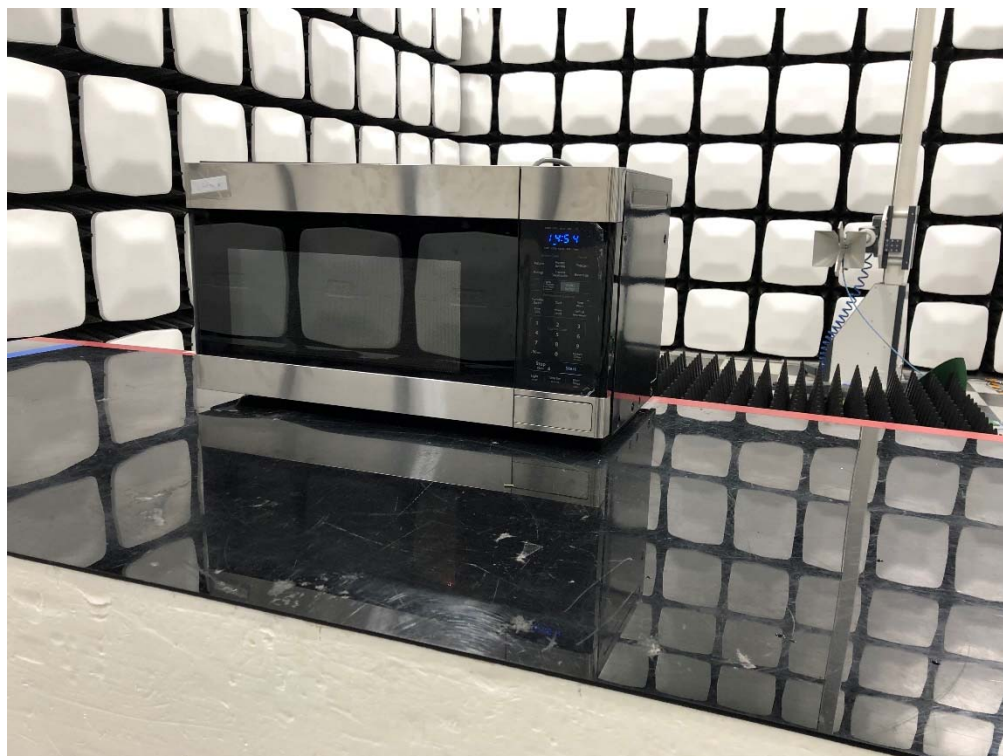

- **Conducted Test Picture (Front)**



- **Conducted Test Picture (Side)**

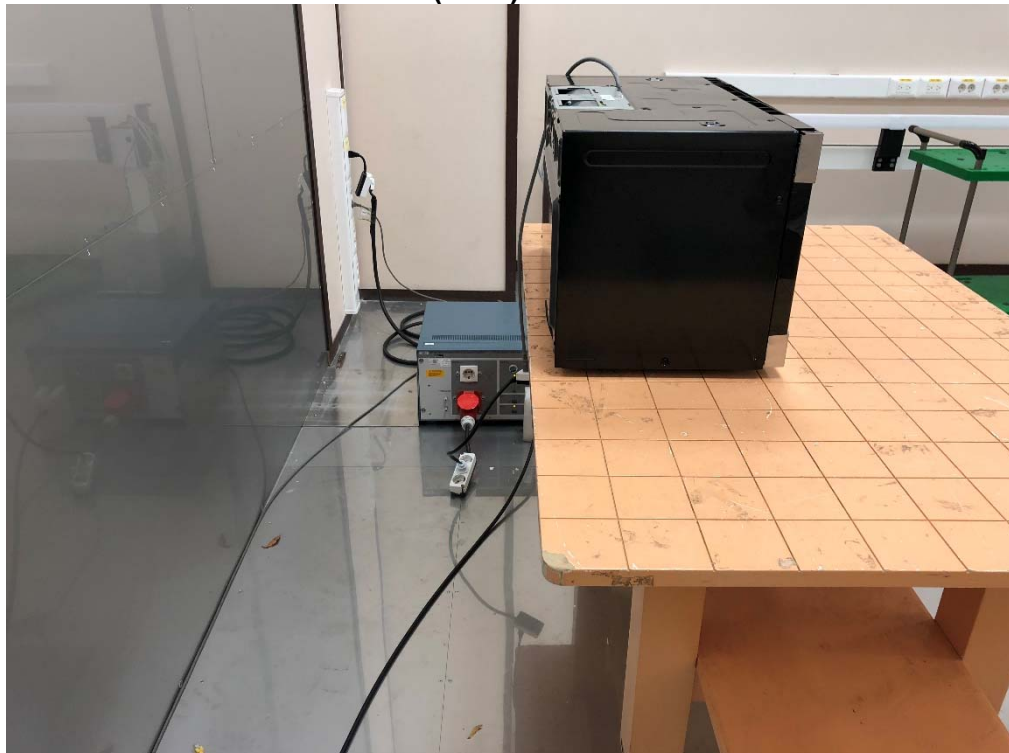

- Radiated Test Picture : 0.15 MHz ~ 30 MHz (Front)



- Radiated Test Picture : 0.15 MHz ~ 30 MHz (Rear)




- Radiated Test Picture : 30 MHz ~ 1 GHz (Front)



- Radiated Test Picture : 30 MHz ~ 1 GHz (Rear)



- Radiated Test Picture : 1 GHz ~ 18 GHz (Front)

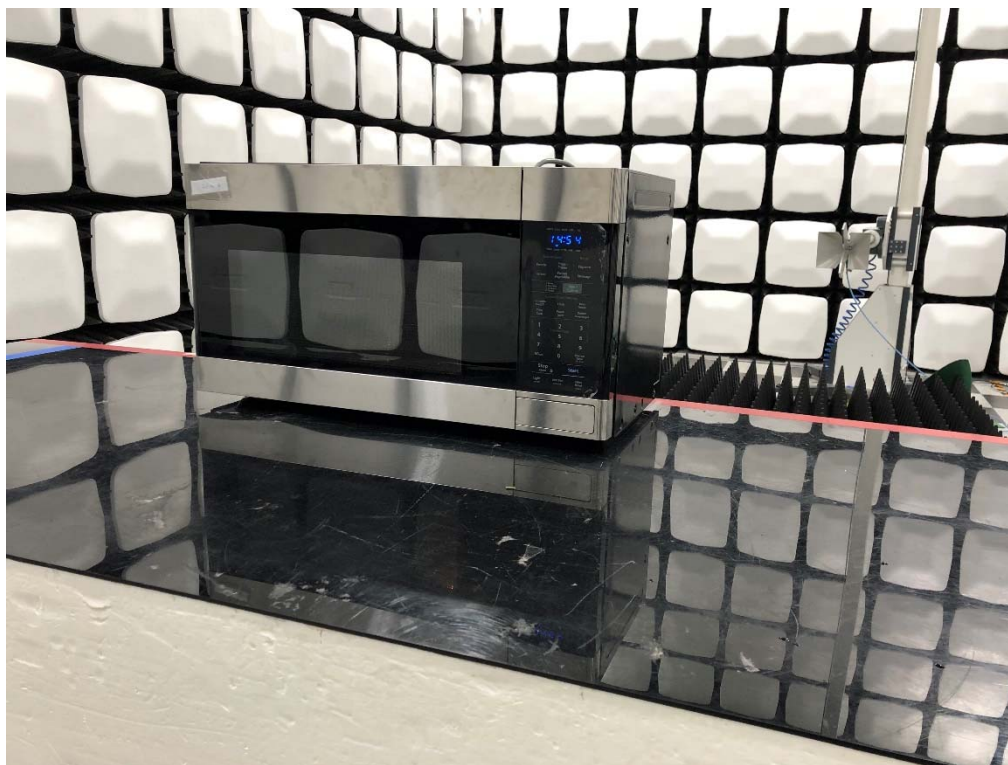

- Radiated Test Picture : 1 GHz ~ 18 GHz (Rear)



APPENDIX C – EUT PHOTOGRAPHS

► Front View of EUT



► Rear View of EUT




► Inside View of EUT



► Front View of Magnetron



► Rear View of Magnetron

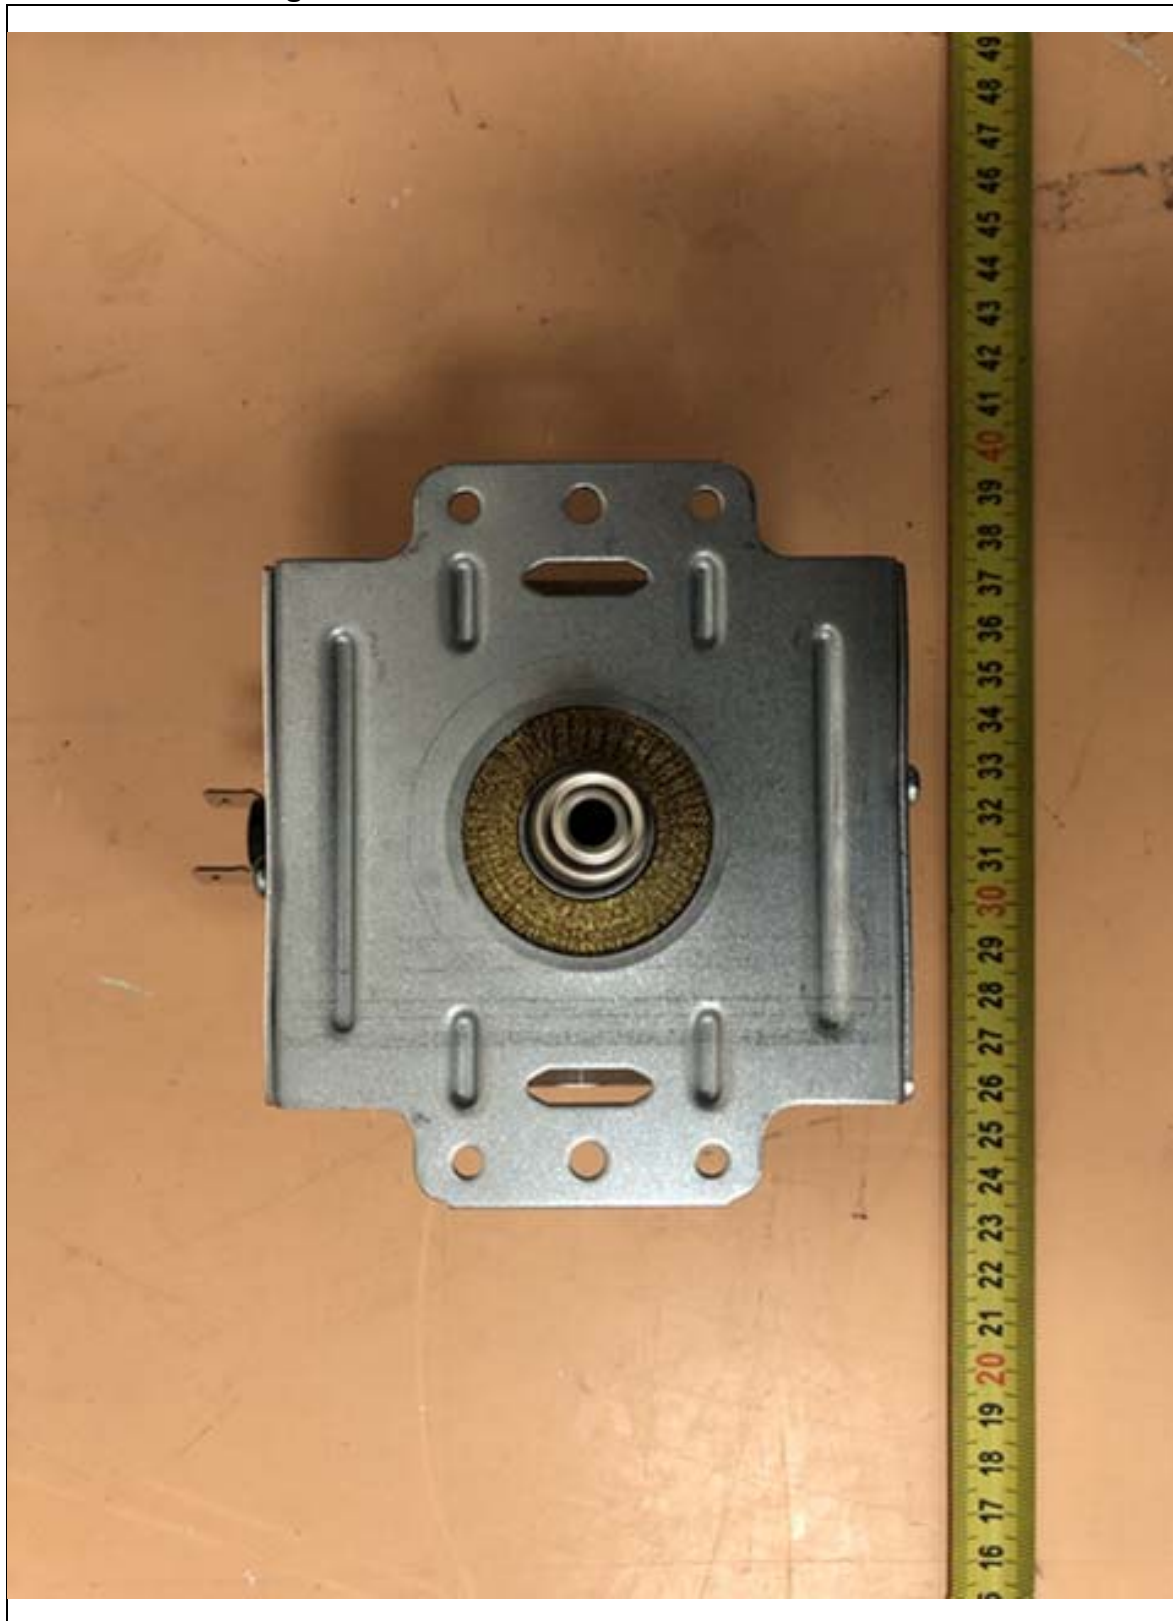

► Front View of Thermally Protected L. Air Over



► Rear View of Thermally Protected L. Air Over




► Front View of Synchronous Motor




► **Rear View of Synchronous Motor**



► Front View of FAN MOTOR

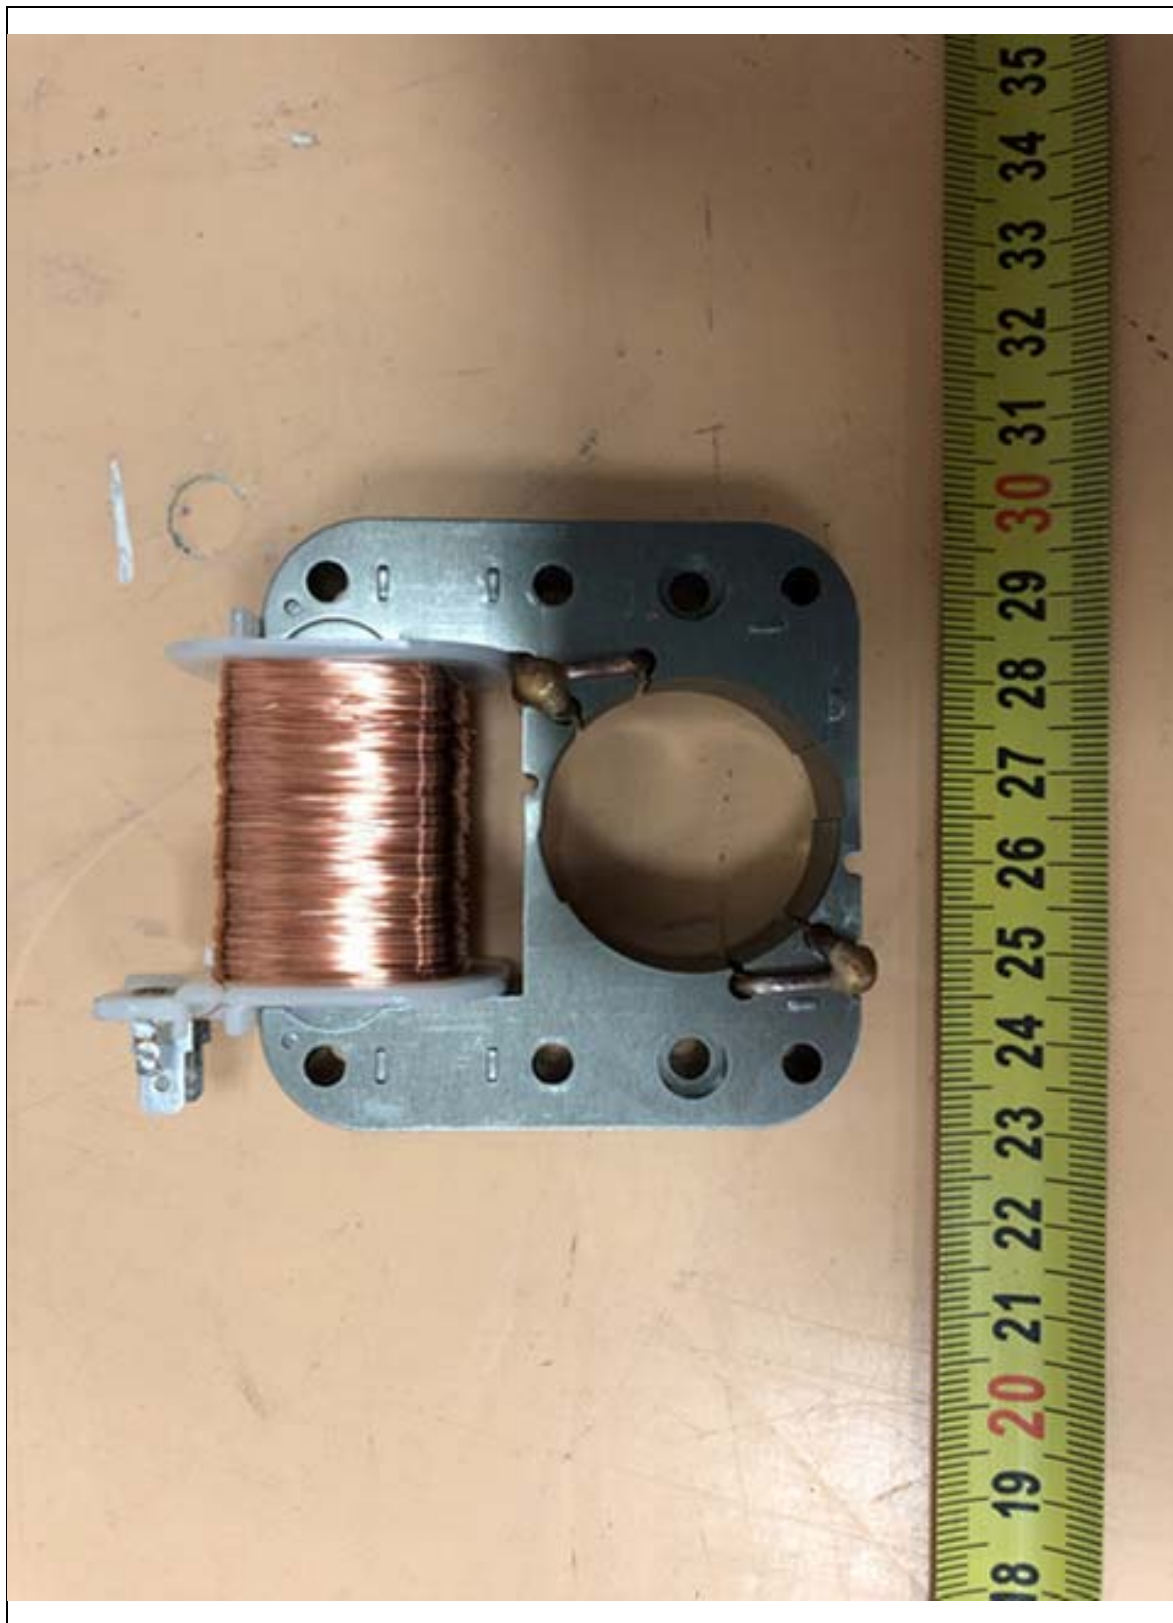

► **Rear View of FAN MOTOR**

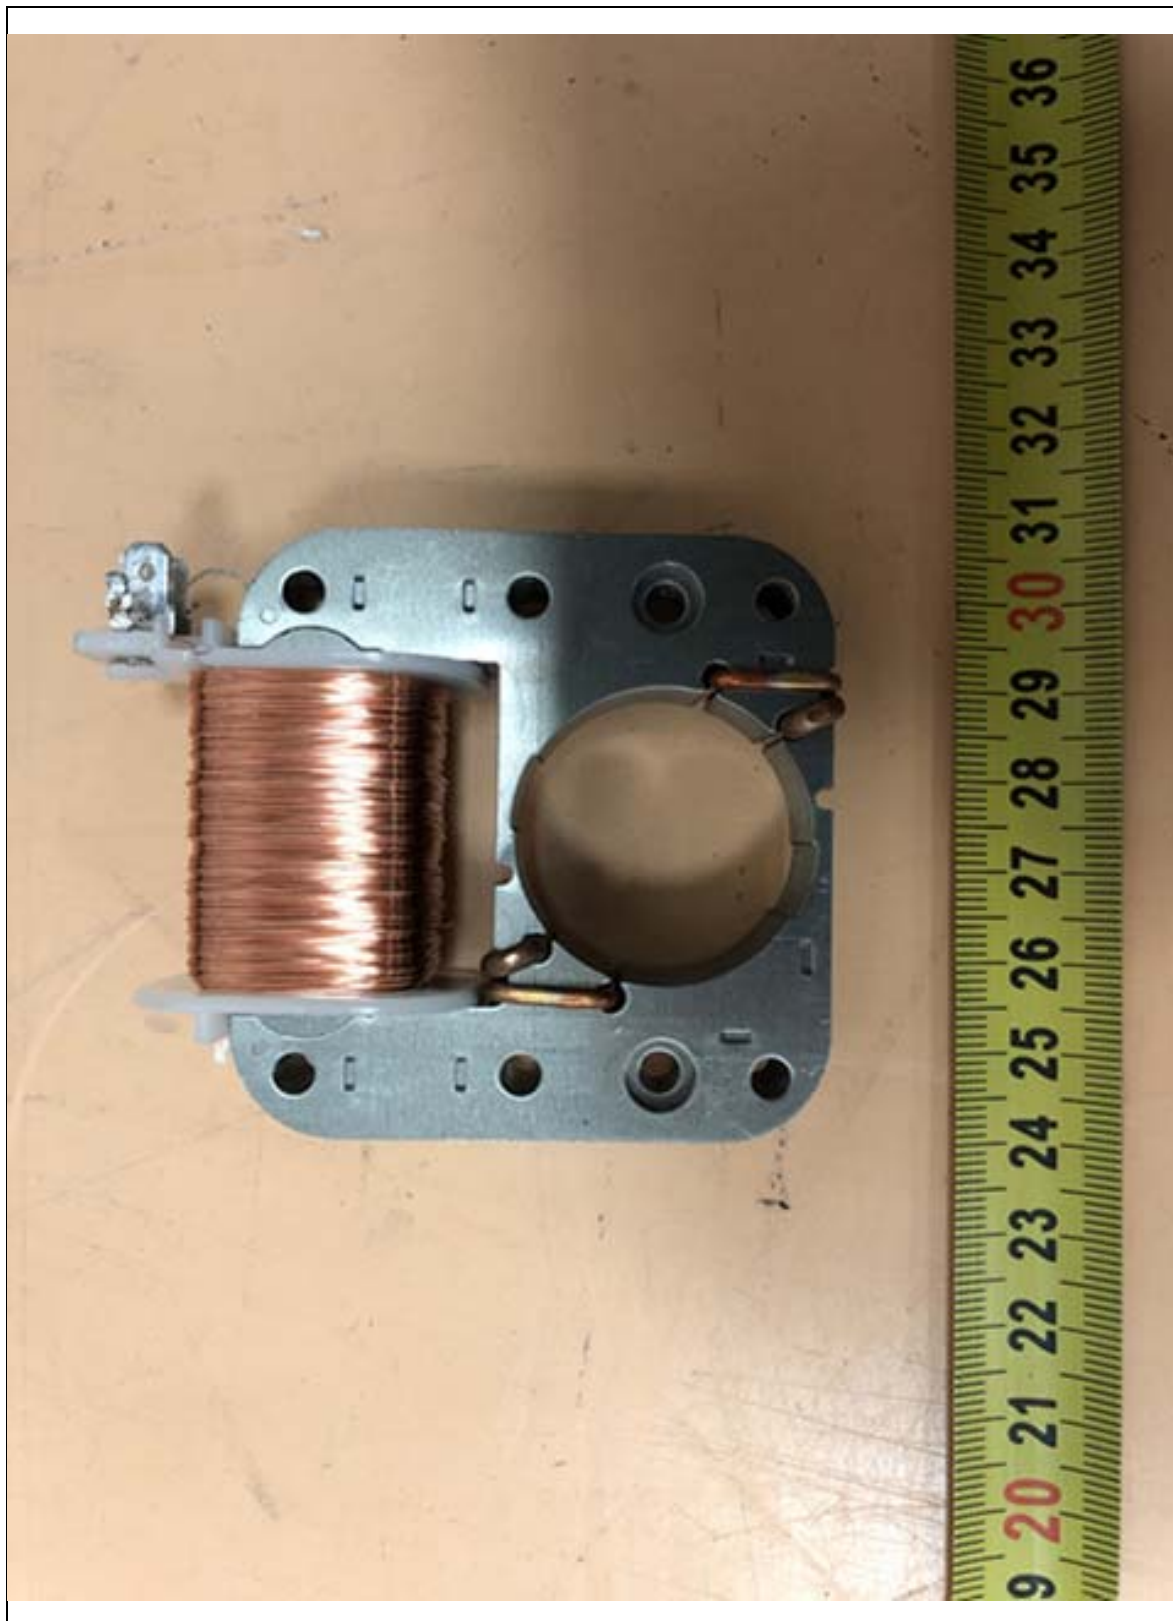

► Front View of Diode H.V.



► Rear View of Diode H.V.



► Front View of Trans H.V



► Rear View of Trans H.V




► Front View of H.V. CAPACITOR




► Rear View of H.V. CAPACITOR




► Front View of Noise Filter

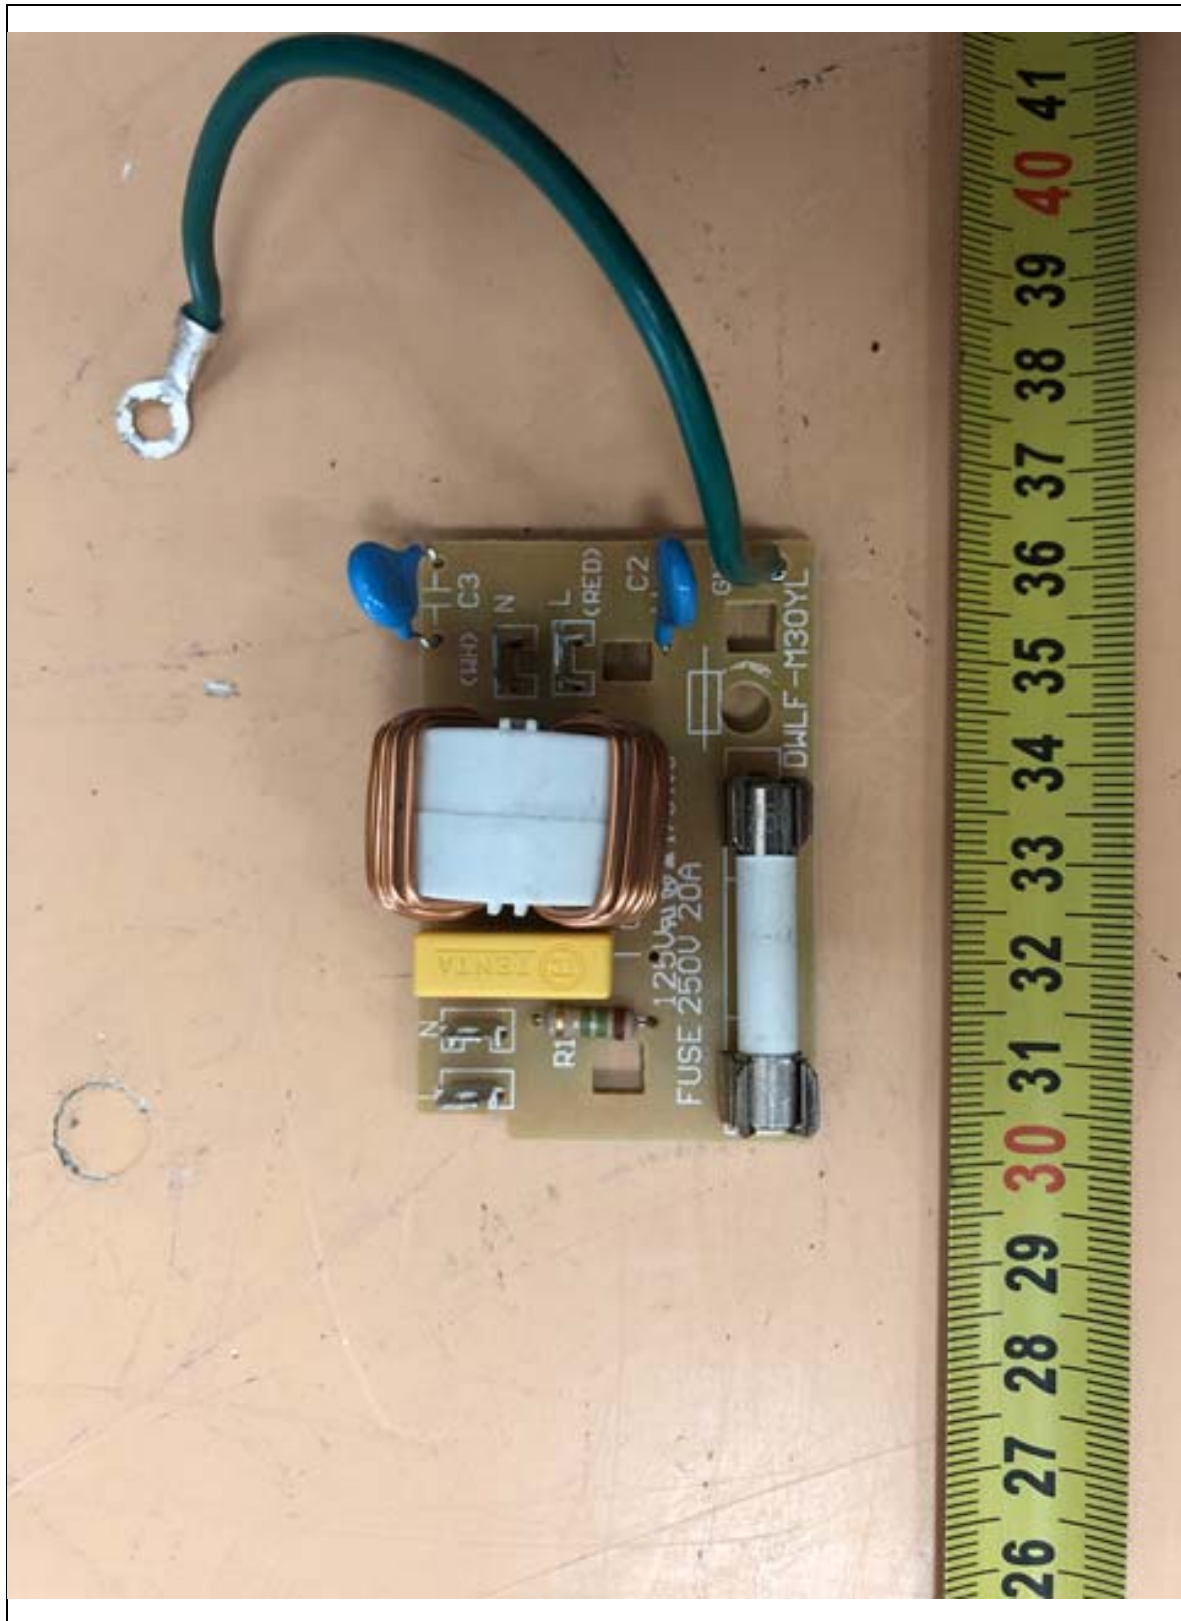

► **Rear View of Noise Filter**

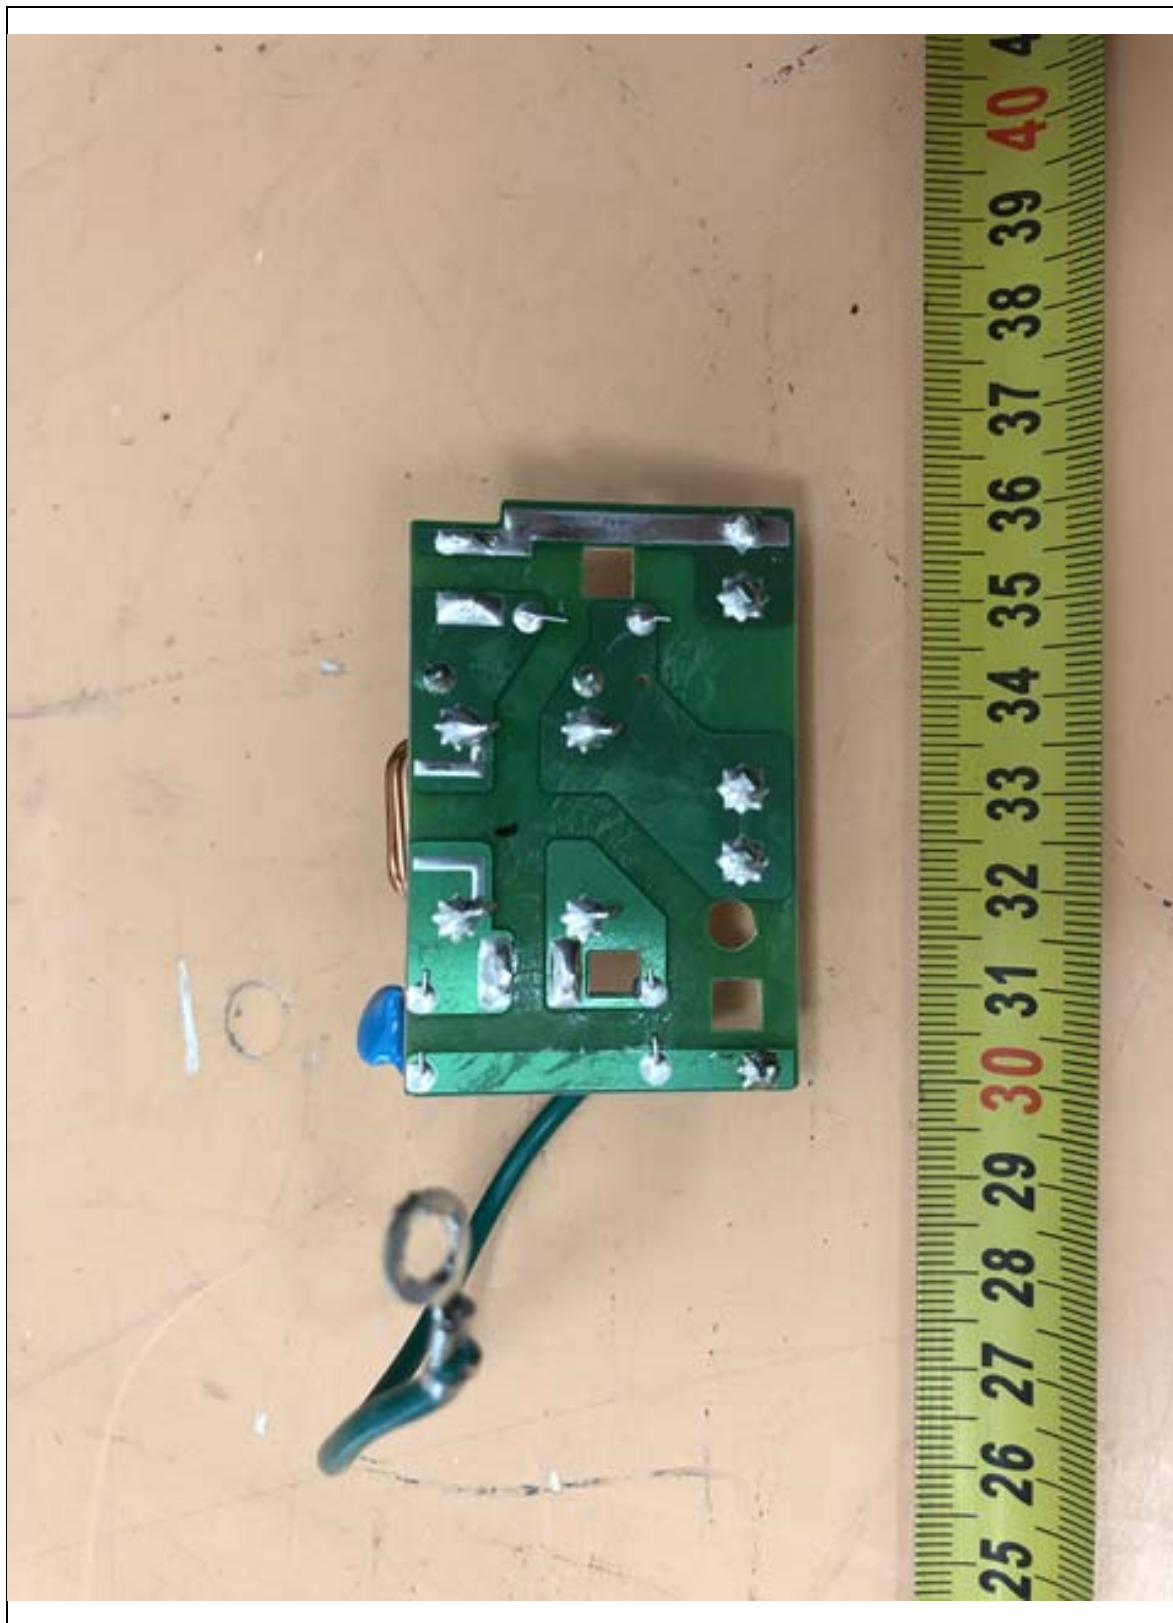


► Front View of Main Board

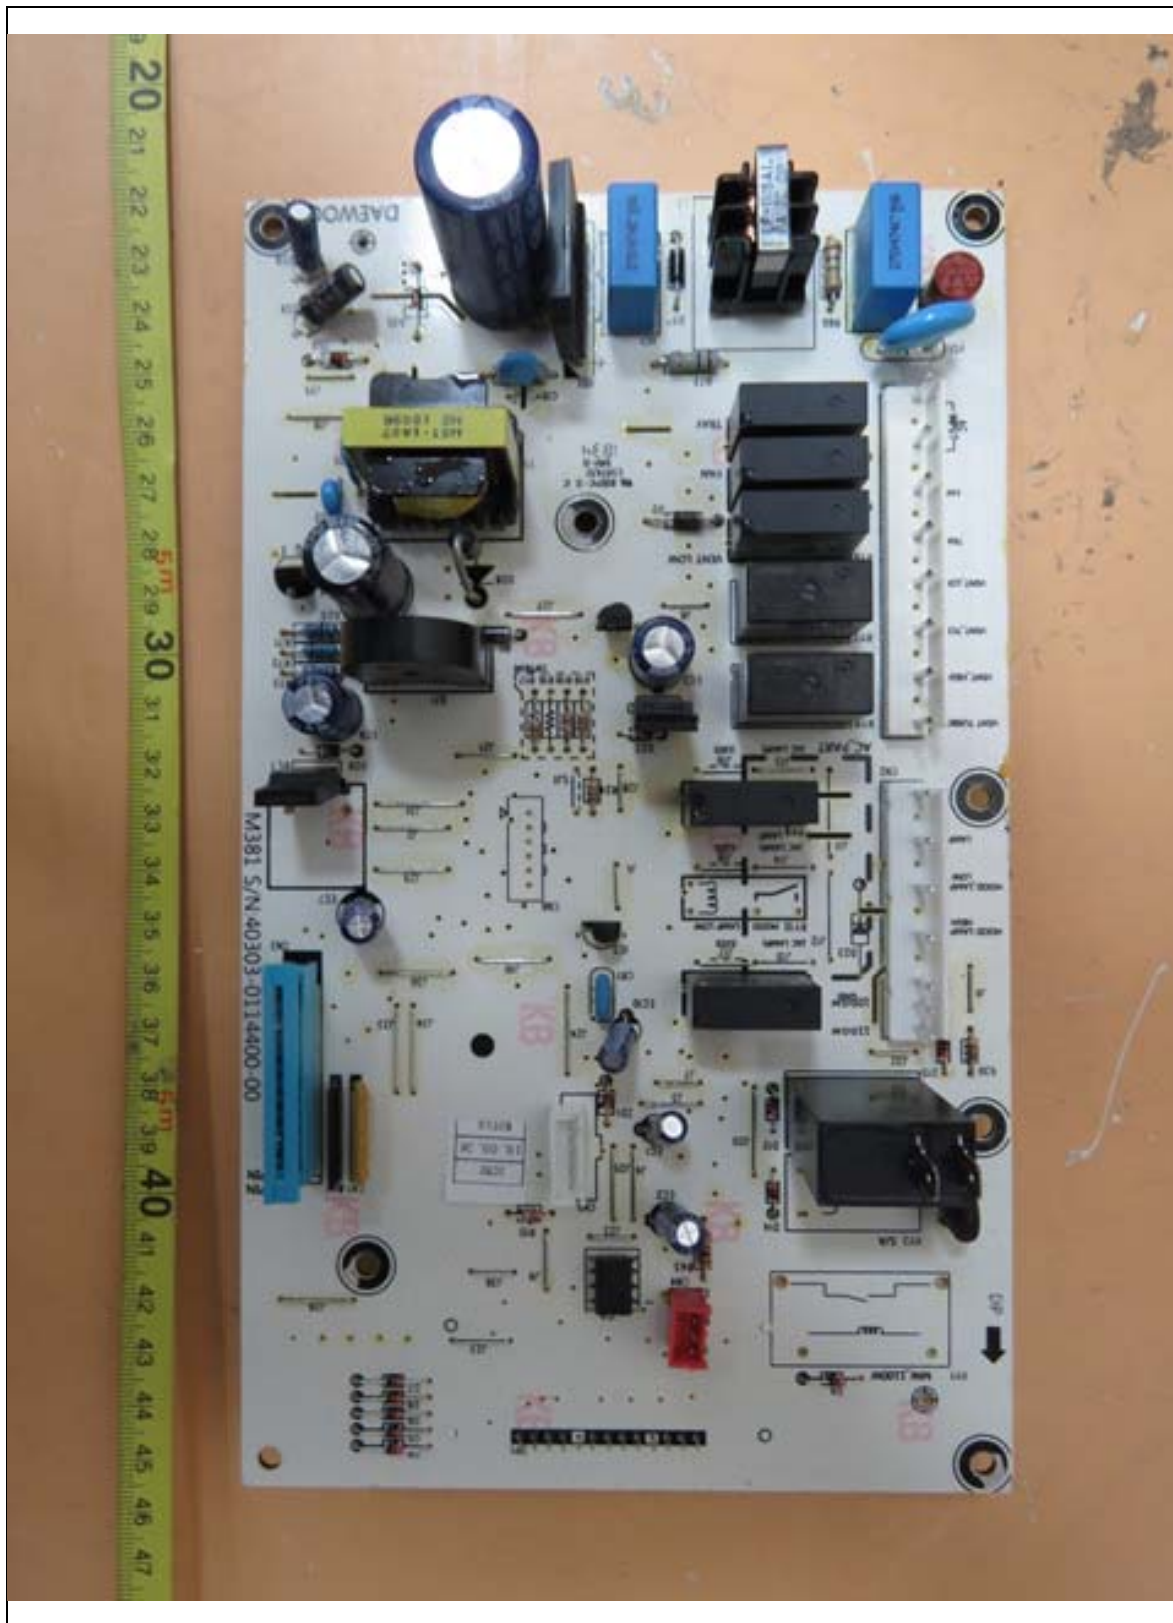

► **Rear View of Main Board**




► Front View of AC Motor Capacitor

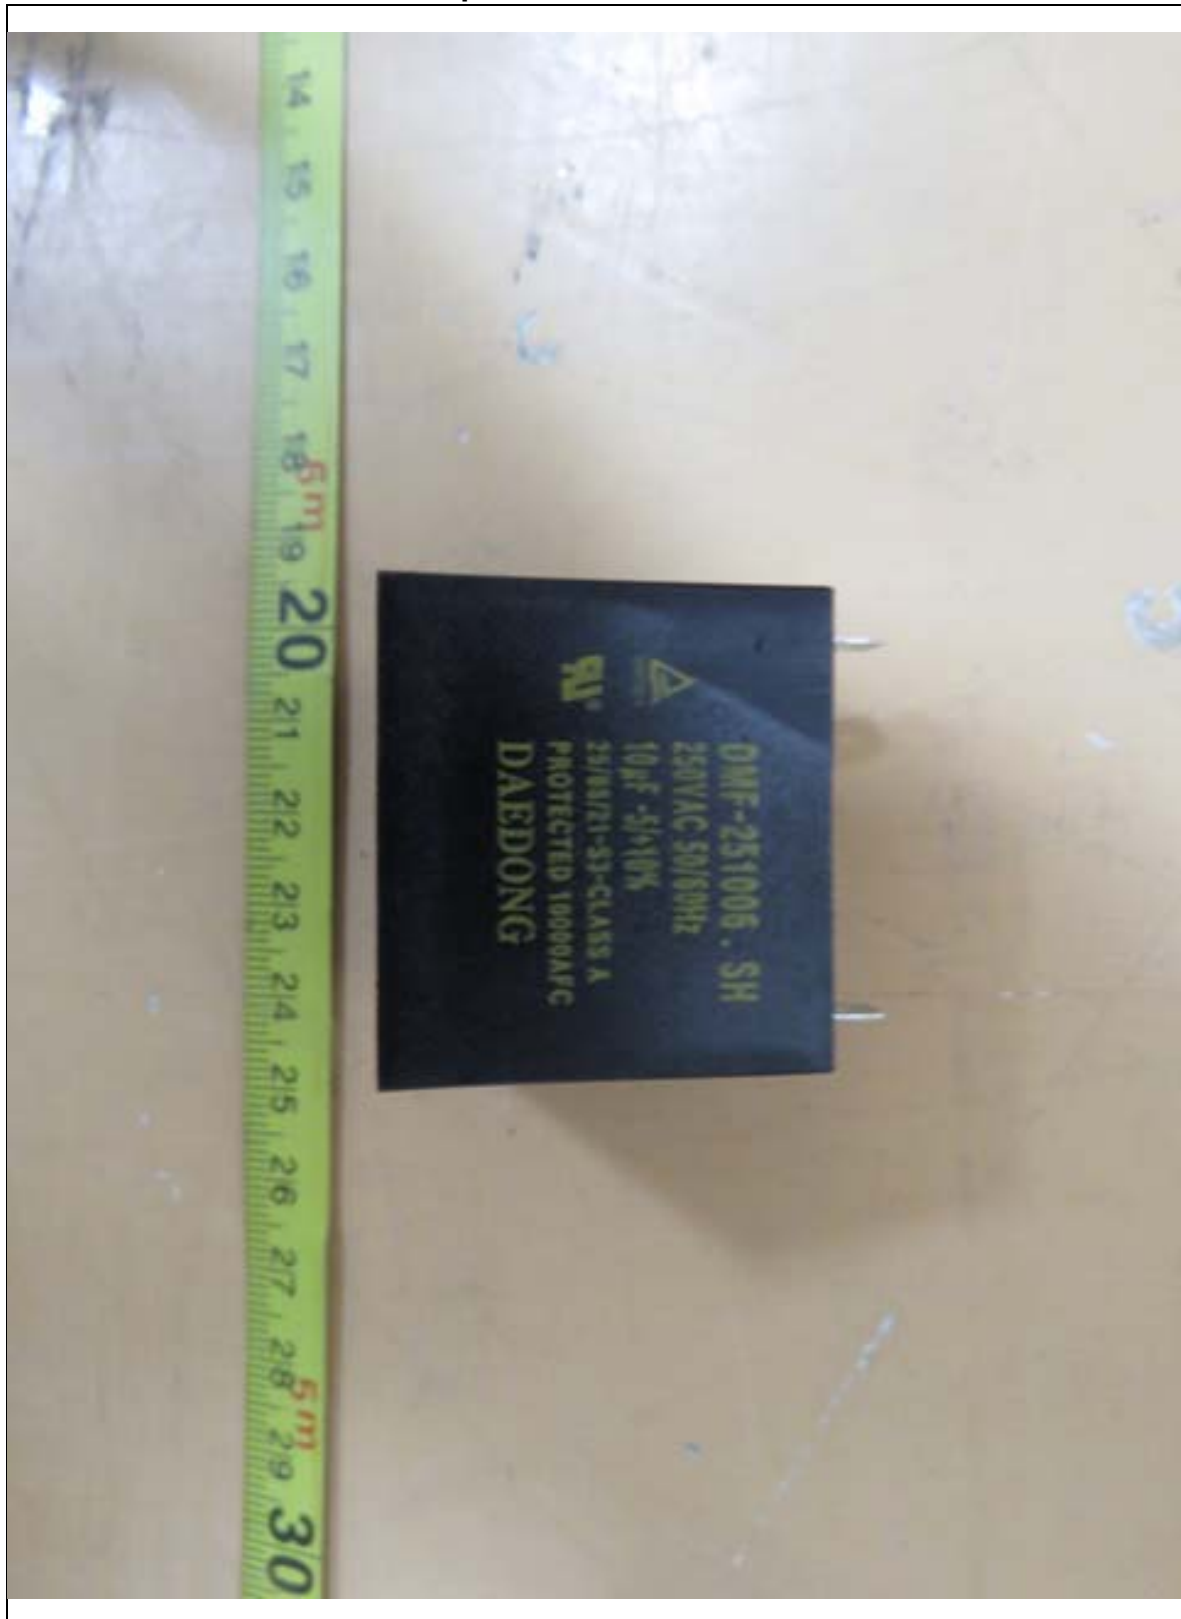

► **Rear View of AC Motor Capacitor**



► Front View of LED BOARD

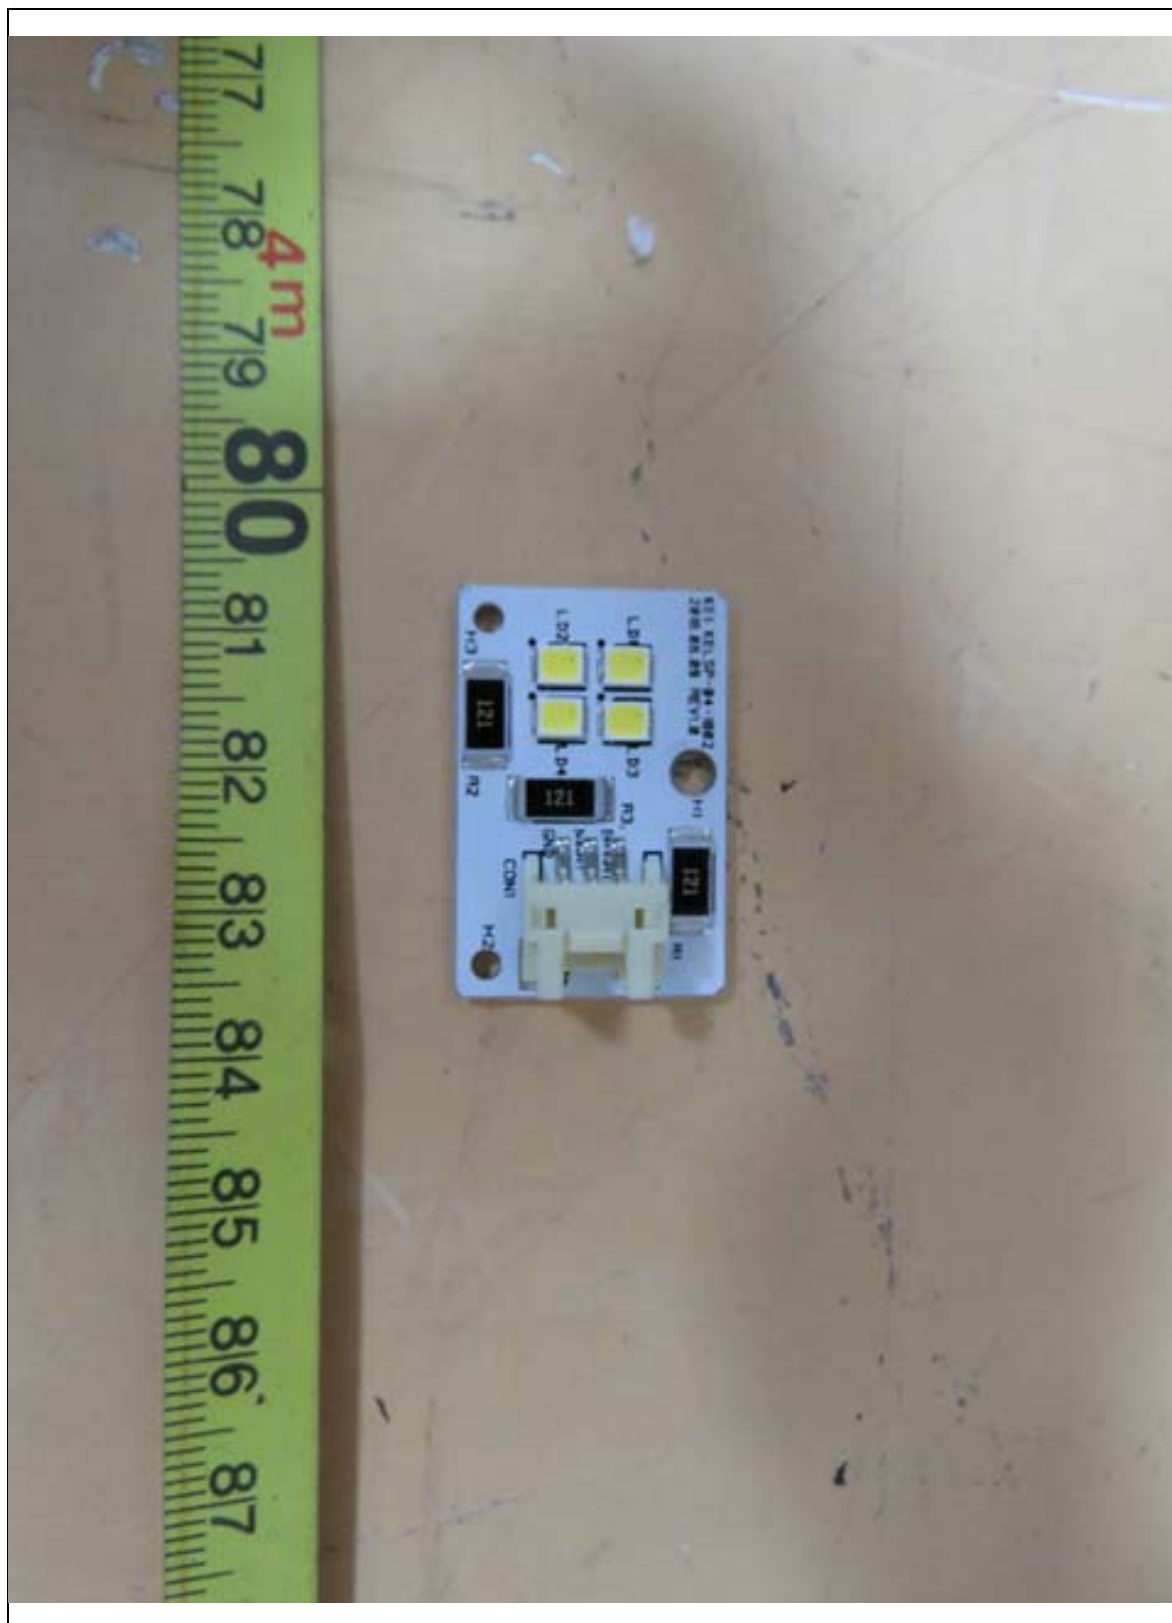

► **Rear View of LED BOARD**



APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – USER’S MANUAL

APPENDIX F – BLOCK DIAGRAM
