

Nemko Korea Co., Ltd.

155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 449-852 KOREA, REPUBLIC OF
TEL : + 82 31 330 1700 FAX : + 82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION**Applicant :**

Daewoo Electronics Corporation
412-2, Cheongcheon2-Dong, Bupyeong-Gu,
Incheon, 403-032, Korea
Attn : Mr. Kyunghoi Yang

Dates of Issue : March 18, 2013
Test Report No. : NK-13-E-186
Test Site : Nemko Korea Co., Ltd.
EMC site, Korea

FCC ID

Brand Name

Contact Person



Applied Standard:

Part 18 & 2

Classification :

Consumer ISM equipment

EUT Type:

Commercial Microwave Oven

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5:1986.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Mar 18, 2013

Tested By : Hyunsik Shin
Engineer



Mar 18, 2013

Reviewed By : Deokha Ryu
Technical Manager

TABLE OF CONTENTS

| | |
|--|-----------|
| SCOPE | 3 |
| INTRODUCTION (Site Description) | 4 |
| EUT INFORMATION | 5 |
| DESCRIPTION OF TESTS (Radiation Hazard) | 6 |
| DESCRIPTION OF TESTS (Input Power Measurement) | 6 |
| DESCRIPTION OF TESTS (RF Output Power Measurement) | 6 |
| DESCRIPTION OF TESTS (Operating Frequency Measurements) | 6 |
| DESCRIPTION OF TESTS (Conducted Emissions) | 7 |
| DESCRIPTION OF TESTS (Radiated Emissions) | 8 |
| TEST DATA (Radiation Hazard) | 9 |
| TEST DATA (Input Power Measurement) | 9 |
| TEST DATA (RF Output Power Measurement) | 9 |
| TEST DATA (Operating Frequency Measurements) | 10 |
| TEST DATA (Conducted Emissions) | 12 |
| TEST DATA (Radiated Emissions) | 13 |
| PLOT OF EMISSIONS (Operating Frequency Measurements) | 16 |
| PLOT OF EMISSIONS (Conducted Emissions Diagram) | 25 |
| PLOT OF EMISSIONS (Radiated Emissions Diagram) | 27 |
| ACCURACY OF MEASUREMENT | 29 |
| LIST OF TEST EQUIPMENT | 34 |
| APPENDIX A - SAMPLE LABEL | 35 |
| APPENDIX B - PHOTOGRAPHS OF TEST SET-UP | 36 |
| APPENDIX C - EUT PHOTOGRAPHS | 41 |
| APPENDIX D - SCHEMATIC DIAGRAM | 49 |
| APPENDIX E - USER'S MANUAL | 50 |
| APPENDIX F - BLOCK DIAGRAM | 51 |

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 18.

Responsible Party : Daewoo Electronics Corporation

Contact Person : Mr. Kyunghoi Yang

Tel No.: + 82 32 510 7910

Manufacturer : Daewoo Electronics Corporation

412-2, Cheongcheon2-Dong, Bupyeong-Gu, Incheon, 403-032,
Korea

Factory : Daewoo Microwave Oven Co., Ltd.

Development Area, Binhai New Area Tianjin China

● FCC ID: C5F7NF9PMO100N

● Model: KOM-9P**

Note 1) First “*” : 0 ~ 9 or A ~ Z (Enclosure design difference)

Note 2) Second “*” : 0 ~ 9 (Mechanical type) or A ~ Z (Electrical type)

● Brand Name: DAEWOO

● EUT Type: Commercial Microwave Oven

● Applied Standard: FCC Part 18 & Part 2

● Test Procedure(s): MP-5:1986

● Dates of Test: March 05, 2013 to March 12, 2013

● Place of Tests: Nemko Korea Co., Ltd. EMC Site

● Test Report No.: NK-13-E-186

※ The model KOM-9P0C was tested and was recorded the data in test report.

INTRODUCTION

The measurement procedure described in MP5:1986 for Methods of Measurement of radiated, powerline conducted radio noise, frequency and power output was used in determining emissions emanating from **Daewoo Electronics Corporation**.

FCC ID : **C5F7NF9PMO100N**, Commercial Microwave Oven.

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 449-852 KOREA, REPUBLIC OF

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on 2003.



Nemko Korea Co., Ltd.
155 & 159, Osan-Ro, Mohyeon-Myeon,
Cheoin-Gu, Yongin-Si, Gyeonggi-Do
449-852 KOREA, REPUBLIC OF
Tel) + 82 31 330 1700
Fax) + 82 31 322 2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

EUT INFORMATION

EUT Information

| | |
|-----------------------|-------------------|
| Electric Rating : | a.c. 120 V, 60 Hz |
| Clock : | 4 MHz |
| Magnetron Type : | 2M248 (TOSHIBA) |
| Operating Frequency : | 2.45 GHz |

DESCRIPTION OF TESTS

Radiation Hazard

A 700 ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

Input Power Measurement

The EUT was placed on a wooden table 0.8 m at 1 m distance Horn antenna.

A 700ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility.

Input power and current were measured using a Power Analyzer.

Manufacturers to determine their input ratings commonly use this procedure.

Output Power Measurement

The Caloric Method was used to determine maximum output power.

The initial temperature of a 1000 ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 120 seconds. Then the temperature of the water re-measured.

Frequency Measurements

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 to 125 percent of the nominal rating.

And the load quantity was reduced by evaporation to approximately 20 % of the original quantity with nominal rating.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m X 1.5 m wooden table 0.4 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room

Rohde & Schwarz (ESH2-Z5) of the 50 ohm/50 uH Line Impedance Stabilization Network (LISN) is bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN.

Power to the LISN is filtered by high-current high insertion loss Power line filters.

The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure.

All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISN,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150 kHz to 30 MHz with 20 m sec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function were set to CISPR quasi-peak mode & average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each EME reported was calibrated using the R&S signal generator.

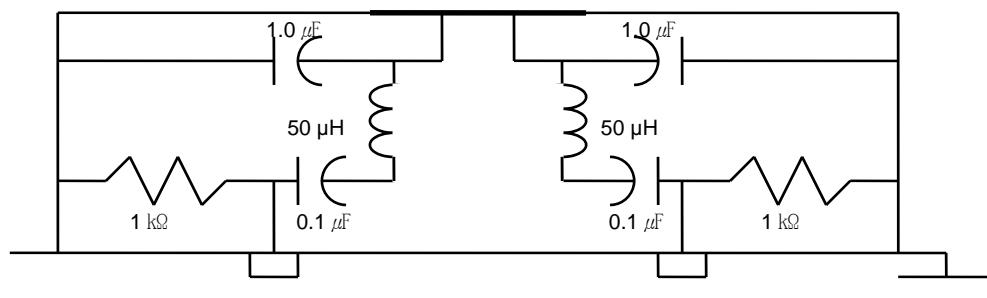


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 3 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 0.15 to 30 MHz using Triple-Loop Antenna (R&S/HM 020) and from 30 to 1000 MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1 GHz, Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) was used.

Final Measurements were made indoors at 3 m using Triple-Loop Antenna (R&S/HM 020) for measurement from 0.15 to 30 MHz with RBW 9 kHz & VBW 9 kHz and made outdoor at 3 m using Trilog-Broadband Antenna (Shwarzbeck, VULB9168) for measurement from 30 MHz to 1000 MHz with RBW 100 kHz & VBW 100 kHz and made indoors at 3 m using Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) for measurement from 1 GHz to 18 GHz with RBW 1 MHz & VBW 10 Hz.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver. (ESCS 30)

The detector function were set to CISPR quasi peak mode and the bandwidth of the receiver were set to 9 kHz, 100 kHz and peak mode 1 MHz depending on the frequency or type of signal.

The Double Ridged Broadband Horn antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re-configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non- metallic 1.0 X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The EUT is rotated about its vertical axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation.

Each EME reported was calibrated using the R/S signal generator.

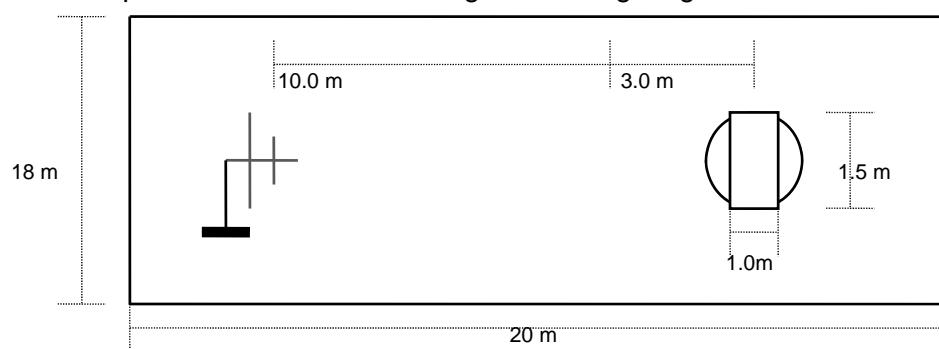


Fig. 3. Dimensions of Outdoor Test Site

TEST DATA

Radiation Hazard

| Probe Location | Maximum Leakage [mW/Cm ²] | Limit [mW/Cm ²] |
|----------------|--|--------------------------------|
| A | 0.08 | 1.00 |
| B | 0.06 | 1.00 |
| C | 0.05 | 1.00 |
| D | 0.03 | 1.00 |
| All others | 0.02 | 1.00 |

Input Power Measurement

| Operation mode | P rated (W) | P (W) | dP (%) | Required dP (%) |
|----------------|-------------|-------|--------|-----------------|
| Power Input | 1500 | 1551 | 3.4 | + 15 % |

RF Output Power Measurement

| Quantity of Water [ml] | Starting Temperature [Centigrade] | Final Temperature [Centigrade] | Temp. Rise | Elapsed Time [seconds] | RF Power [watts] |
|---------------------------|--------------------------------------|-----------------------------------|------------|---------------------------|---------------------|
| 1000 | 10 | 35.5 | 25.5 | 120 | 890 |

$$\text{RF Power} = \frac{(4.187 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temp. Rise})}{\text{Time in seconds}}$$



Tested by : *Hyunsik Shin*

TEST DATA**Operating Frequency measurements**

► Frequency vs Line Voltage Variation Test

| [Room Temperature : 19.0 °C] | | | |
|---------------------------------|--------|-----------------|--------------------------------------|
| Line Voltage Variation (a.c. V) | *)Pole | Frequency [MHz] | Allowed Tolerance for the ISM Band |
| 96 | H | Lower : 2418.6 | Lower : 2400 MHz Upper : 2500 MHz |
| | H | Upper : 2495.4 | |
| | V | Lower : 2423.8 | |
| | V | Upper : 2470.6 | |
| 108 | H | Lower : 2417.8 | Lower : 2400 MHz Upper : 2500 MHz |
| | H | Upper : 2468.5 | |
| | V | Lower : 2425.3 | |
| | V | Upper : 2467.6 | |
| 132 | H | Lower : 2422.7 | Lower : 2400 MHz Upper : 2500 MHz |
| | H | Upper : 2468.4 | |
| | V | Lower : 2423.2 | |
| | V | Upper : 2469.5 | |
| 150 | H | Lower : 2425.0 | Lower : 2400 MHz Upper : 2500 MHz |
| | H | Upper : 2467.9 | |
| | V | Lower : 2425.0 | |
| | V | Upper : 2468.7 | |

NOTE :

1. *Pol. H = Horizontal V = Vertical
2. Initial load : 1000 ml of water in the beaker.
3. Line voltage varied from a.c. 96 V to a.c. 150 V.
4. ISM Frequency : 2450 MHz, Tolerance : ± 50 MHz

RESULT : PassTested by : **Hyunsik Shin**

TEST DATA

► Frequency vs Load Variation Test

| [Room Temperature : 19.0 °C] | | | |
|--------------------------------|--------|--------------------|---------------------------------------|
| Volume of water (ml) | *)Pole | Frequency [MHz] | Allowed Tolerance for the ISM Band |
| 200 | H | Lower : 2431.4 | |
| | H | Upper : 2481.1 | |
| | V | Lower : 2422.3 | |
| | V | Upper : 2471.3 | |
| 400 | H | Lower : 2422.1 | |
| | H | Upper : 2482.0 | |
| | V | Lower : 2426.7 | |
| | V | Upper : 2466.4 | |
| 600 | H | Lower : 2422.2 | |
| | H | Upper : 2491.7 | |
| | V | Lower : 2423.5 | |
| | V | Upper : 2469.3 | |
| 800 | H | Lower : 2422.0 | |
| | H | Upper : 2493.2 | |
| | V | Lower : 2416.0 | |
| | V | Upper : 2484.7 | |
| 1000 | H | Lower : 2420.4 | |
| | H | Upper : 2483.3 | |
| | V | Lower : 2420.6 | |
| | V | Upper : 2467.7 | |

NOTE :

1. *Pol. H = Horizontal, V = Vertical
2. The water load was varied between 200 ml to 1000 ml.
3. Frequency was measured by using nominal voltage (a.c. 120 V).
4. ISM Frequency : 2450 MHz, Tolerance : ± 50 MHz

RESULT : Pass



Tested by : **Hyunsik Shin**

Daewoo Electronics Corporation

FCC ID: C5F7NF9PM0100N

Page 11 of 51

TEST DATA

Conducted Emissions

FCC ID : C5F7NF9PMO100N

| Frequency (MHz) | Level (dBuV) | | *) Factor (dB) | **) Line | Limit (dBuV) | | Margin (dB) | |
|--------------------|--------------|---------|-------------------|----------|--------------|---------|-------------|---------|
| | Q-Peak | Average | | | Q-Peak | Average | Q-Peak | Average |
| 0.17 | 48.7 | 22.4 | 0.2 | L | 65.0 | 55.0 | 16.3 | 32.6 |
| 0.29 | 45.8 | 21.6 | 0.2 | N | 60.5 | 50.5 | 14.7 | 28.9 |
| 0.36 | 48.8 | 24.2 | 0.2 | N | 58.7 | 48.7 | 9.9 | 24.5 |
| 0.52 | 45.2 | 20.5 | 0.1 | N | 56.0 | 46.0 | 10.8 | 25.5 |
| 1.32 | 42.4 | 17.9 | 0.2 | N | 56.0 | 46.0 | 13.6 | 28.1 |
| 20.26 | 35.7 | 31.3 | 1.7 | L | 60.0 | 50.0 | 24.3 | 18.7 |

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.
3. See attached Plots.
4. Line : L = Line , N = Neutral
5. The limit for consumer device is on the FCC Part section 18.307(b).



Tested by : **Hyunsik Shin**

Daewoo Electronics Corporation

FCC ID: C5F7NF9PMO100N

Page 12 of 51

TEST DATA

Radiated Emissions

FCC ID : C5F7NF9PM0100N

► 0.15 MHz ~ 30 MHz

[Room Temperature : 19.0 °C]

| Frequency (MHz) | Reading (dB μ V) | Pol* (H/V) | AF+CL+Amp (dB)** | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--|-------------------------|---------------|---------------------|--------------------------|-------------------------|----------------|
| The level was under 20 dB below limit. | | | | | | |

<Radiated Measurements at 3 meters>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300 / 3) = 40 \text{ dBuV/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT (RF Power / 500)})$
5. All other emissions were measured while a 700 ml load was placed in the center of the oven.
6. See attached Plots.
7. The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Hyunsik Shin**

Daewoo Electronics Corporation

FCC ID: C5F7NF9PM0100N

Page 13 of 51

TEST DATA

Radiated Emissions

FCC ID : C5F7NF9PM0100N

► 30 MHz ~ 1 GHz

[Room Temperature : 23.0 °C]

| Frequency (MHz) | Reading (dB μ N/m) | Pol* (H/V) | Antenna Heights (cm) | Turntable Angles (°) | AF+CL+Amp (dB)** | Result (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
|--------------------|---------------------------|---------------|-------------------------|-------------------------|---------------------|--------------------------|-------------------------|----------------|
| 112.69 | 36.0 | H | 100 | 95 | -18.1 | 17.9 | 70.5 | 52.6 |
| 117.05 | 38.6 | V | 100 | 131 | -18.1 | 20.5 | 70.5 | 50.0 |
| 331.20 | 35.9 | H | 100 | 125 | -13.8 | 22.1 | 70.5 | 48.4 |
| 431.01 | 39.4 | H | 155 | 32 | -11.3 | 28.1 | 70.5 | 42.4 |
| 835.62 | 36.7 | H | 130 | 45 | -4.2 | 32.5 | 70.5 | 38.0 |
| 920.31 | 31.9 | H | 146 | 178 | -2.0 | 29.9 | 70.5 | 40.6 |

<Radiated Measurements at 3 meters>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300/3) \div 40 \text{ dB } \mu\text{N/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT (RF Power/500)})$
5. All other emissions were measured while a 700 ml load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Hyunsik Shin**

TEST DATA

Radiated Emissions

FCC ID : C5F7NF9PM0100N

► **Above 1 GHz**

[Room Temperature : 19.0 °C]

| Frequency (MHz) | Pol* (H/V) | Antenna Heights (cm) | Turntable Angles (°) | Reading Level (dB μ V) | Total Loss** (dB) | Result at 3 m | | K | Results at 300 m (μ V/m) | Limits at 300 m (μ V/m) |
|--------------------|---------------|----------------------------|----------------------------|----------------------------------|-------------------------|----------------|--------------|------|-------------------------------------|------------------------------------|
| | | | | | | (dB μ V/m) | (μ V/m) | | | |
| 4928.16 | V | 130 | 180 | 44.1 | 4.0 | 48.1 | 254.1 | 0.01 | 2.5 | 33.4 |
| 7394.44 | V | 130 | 225 | 35.8 | 11.8 | 47.6 | 239.88 | 0.01 | 2.4 | 33.4 |
| 8759.18 | H | 130 | 315 | 38.1 | 13.6 | 51.7 | 384.59 | 0.01 | 3.8 | 33.4 |
| 9866.08 | H | 130 | 135 | 36.4 | 16.3 | 52.7 | 431.52 | 0.01 | 4.3 | 33.4 |
| 12326.42 | V | 130 | 270 | 35 | 20.3 | 55.3 | 582.1 | 0.01 | 5.8 | 33.4 |
| 14780.28 | V | 130 | 135 | 32.7 | 22.7 | 55.4 | 588.84 | 0.01 | 5.9 | 33.4 |

<Radiated Measurements at 3 meters>

NOTES:

1. * Pol. H =Horizontal V=Vertical
2. ** Total Loss = Antenna Factor + Cables Loss + Amplifier + HPF (High Pass Filter)
3. Field Strength (at 300 m) (μ V/m) = $K * 10^{[Fieldstrength at 3 m (dB μ V/m) / 20]}$
4. The limit at 300 meters is $25 * \sqrt{RF Power / 500}$
5. Load for measurement of radiation on second and third harmonic : Two loads, one of 700 ml and the other of 300 ml, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
6. The test was performed at peak detector mode with average.
7. The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Hyunsik Shin**

PLOTS OF EMISSIONS

- Frequency vs Line Voltage Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 96 V / 60 Hz
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

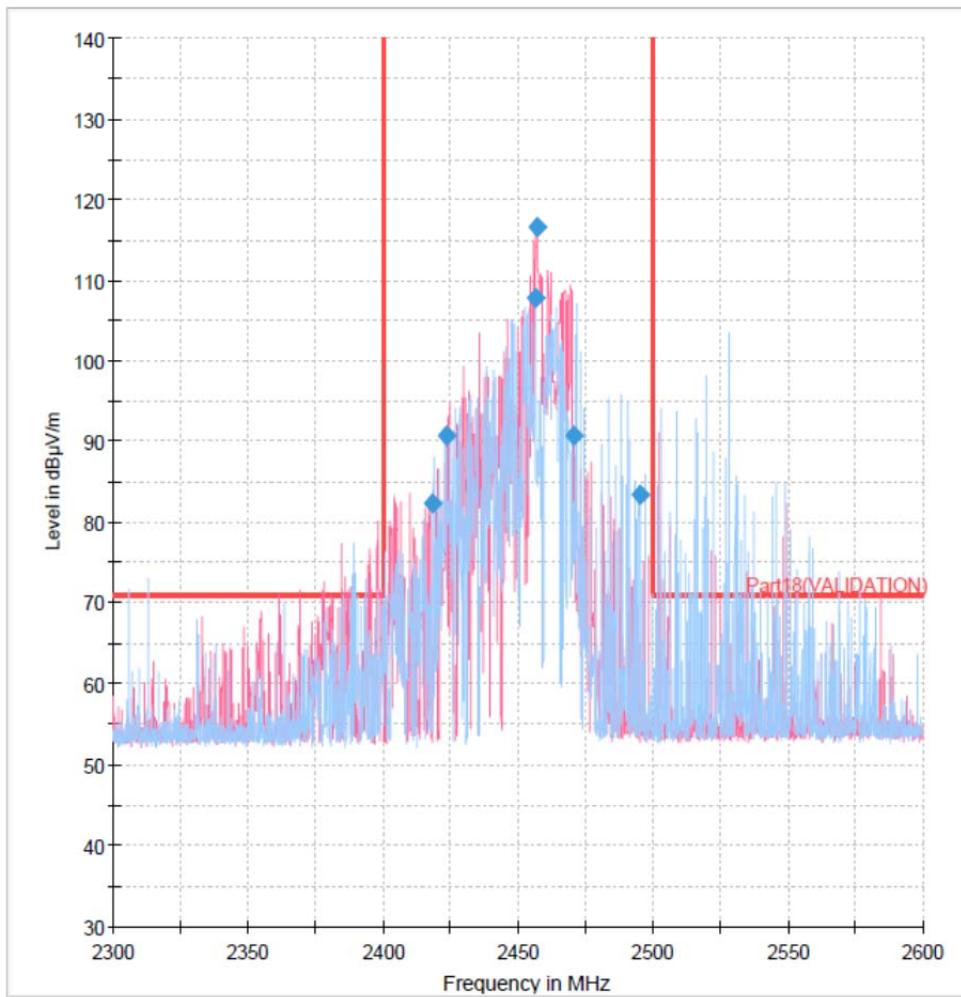

3/11/2013

11:05:09

(96 V, 1000 ml)

PLOTS OF EMISSIONS

- Frequency vs Line Voltage Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 108 V / 60 Hz
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

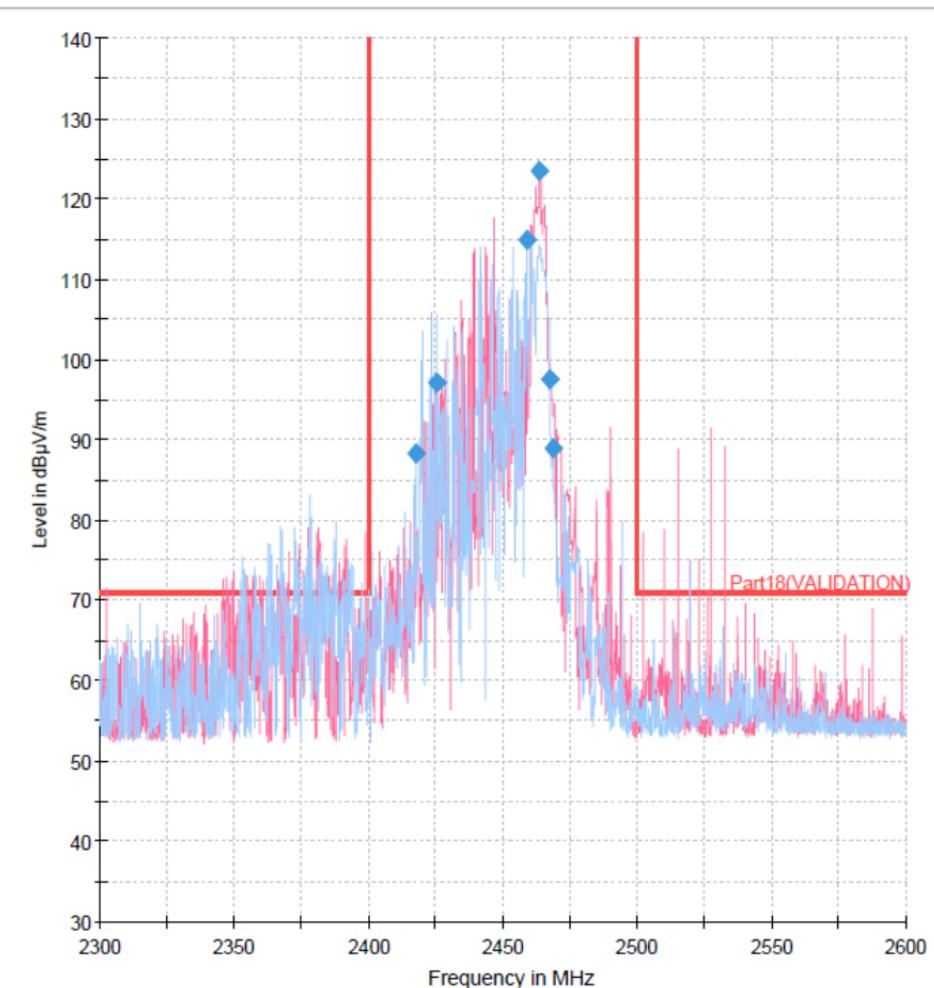

3/11/2013

11:23:42

(108 V, 1000 ml)

PLOTS OF EMISSIONS

- Frequency vs Line Voltage Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 132 V / 60 Hz
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

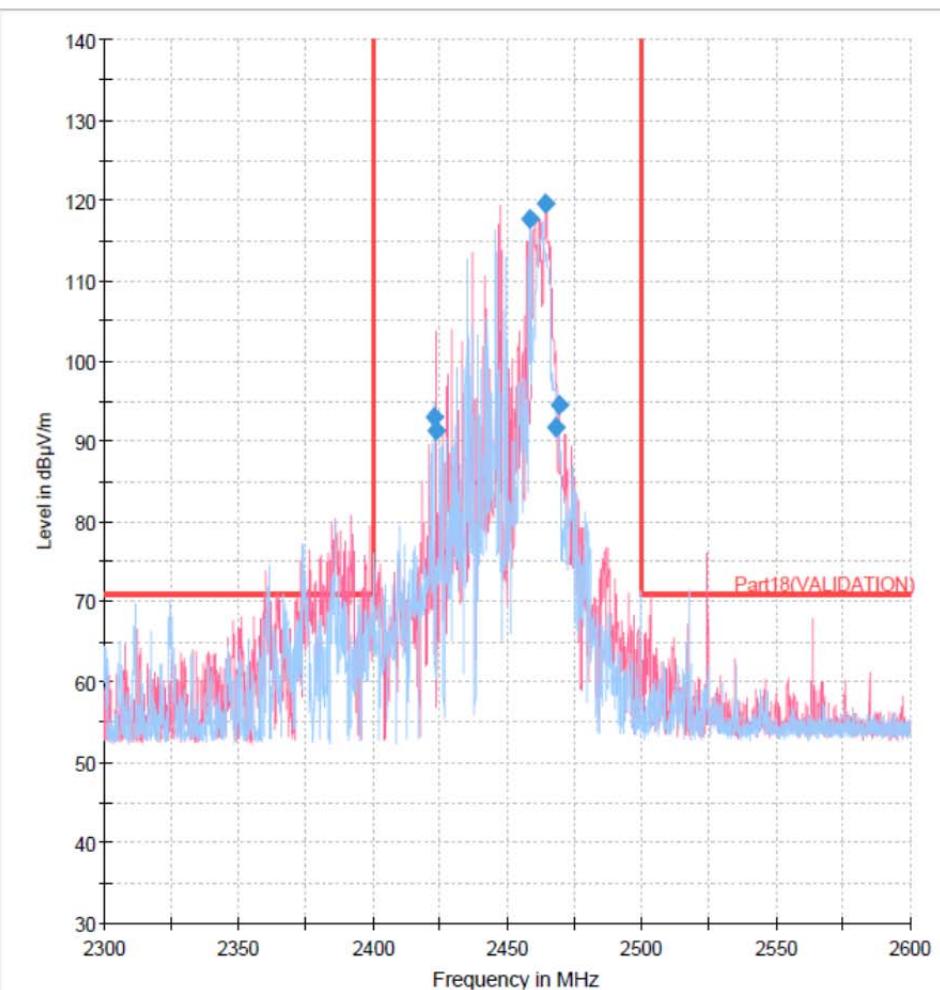

PLOTS OF EMISSIONS

- Frequency vs Line Voltage Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 150 V / 60 Hz
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

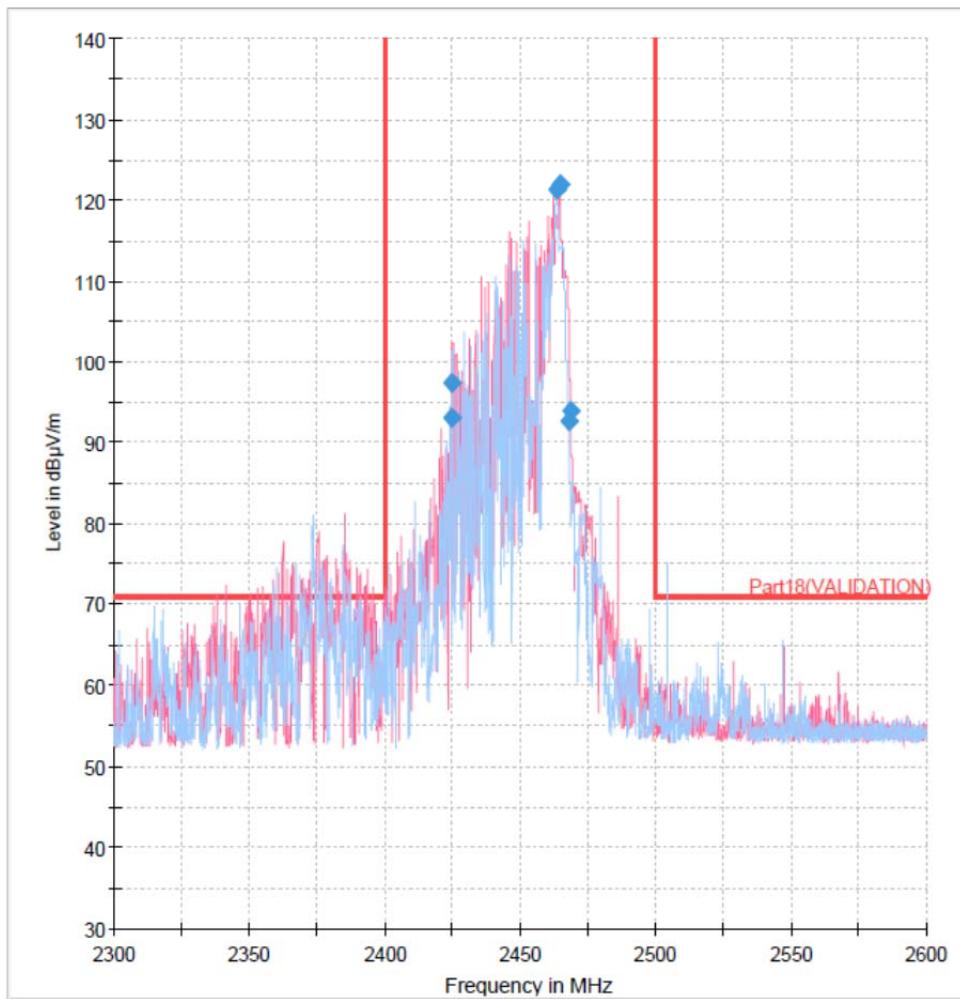

PLOTS OF EMISSIONS

- Frequency vs Load Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 120 V / 60 Hz, 200 ml
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

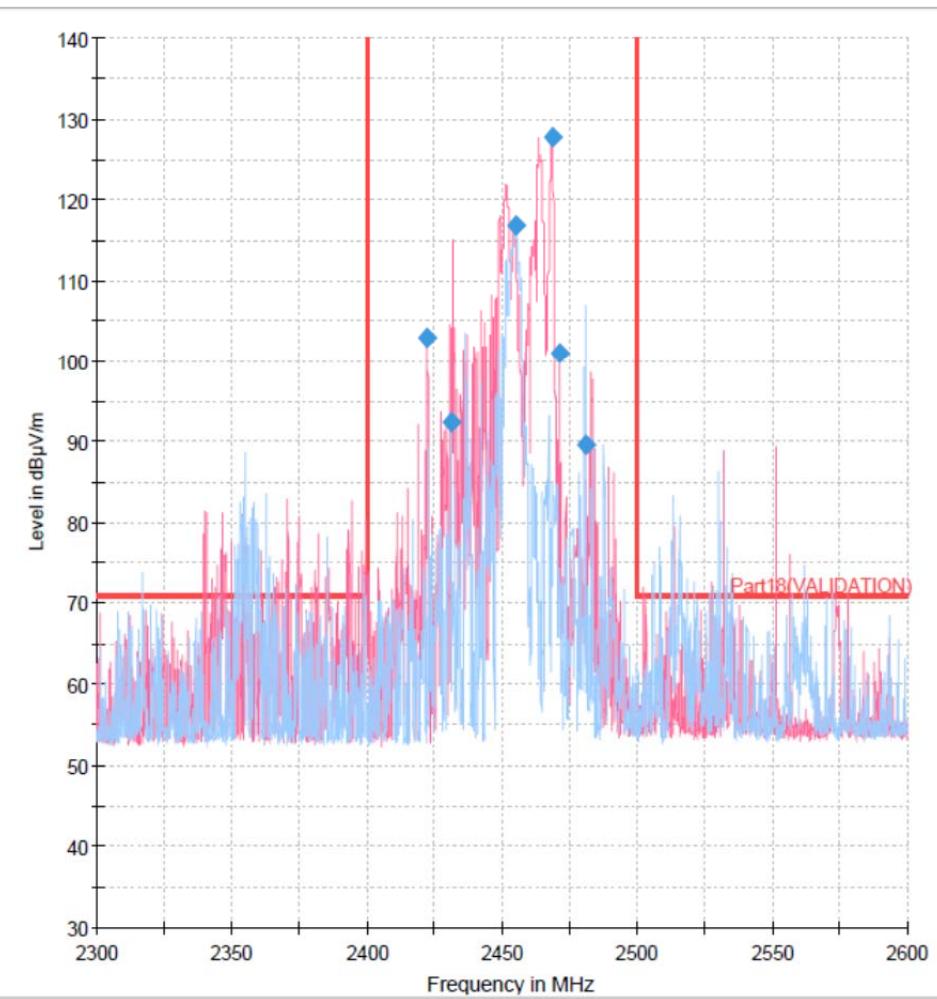

3/11/2013

9:55:57

(120 V, 200 ml)

Daewoo Electronics Corporation

FCC ID: C5F7NF9PM0100N

Page 20 of 51

PLOTS OF EMISSIONS

- Frequency vs Load Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 120 V / 60 Hz, 400 ml
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

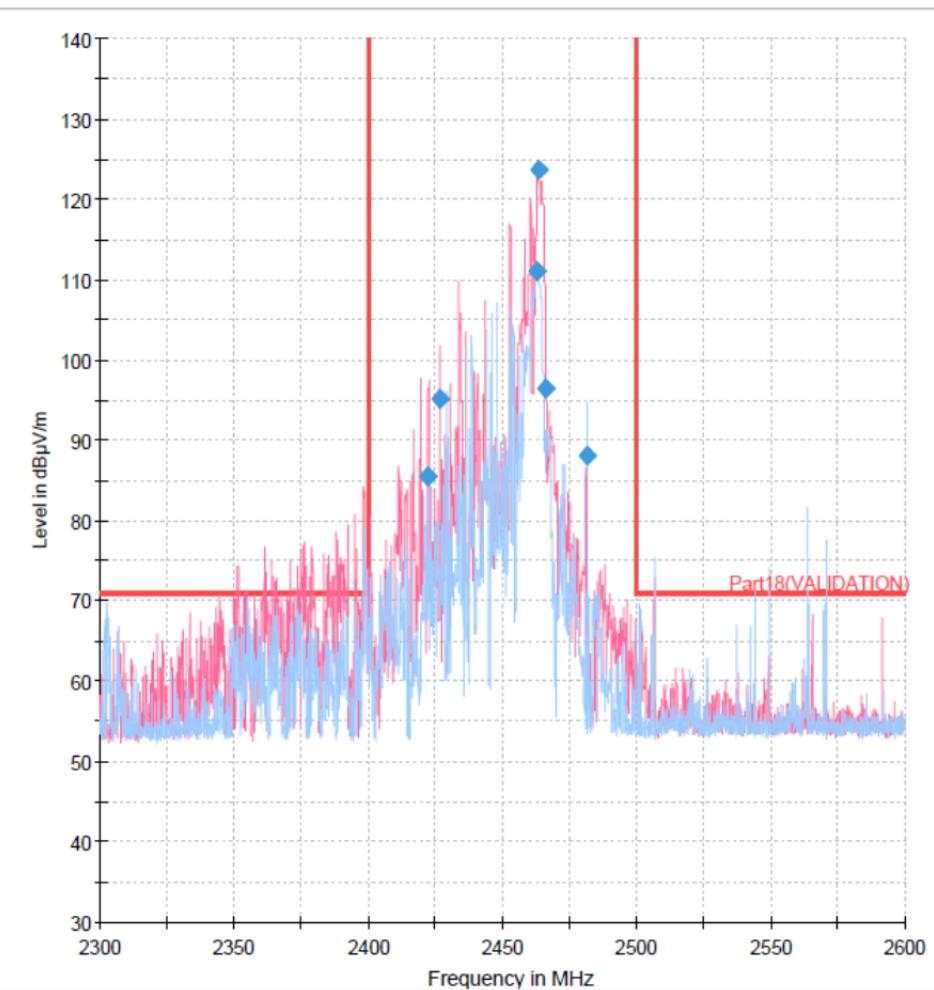

3/11/2013

10:09:03

(120 V, 400 ml)

PLOTS OF EMISSIONS

- Frequency vs Load Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 120 V / 60 Hz, 600 ml
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

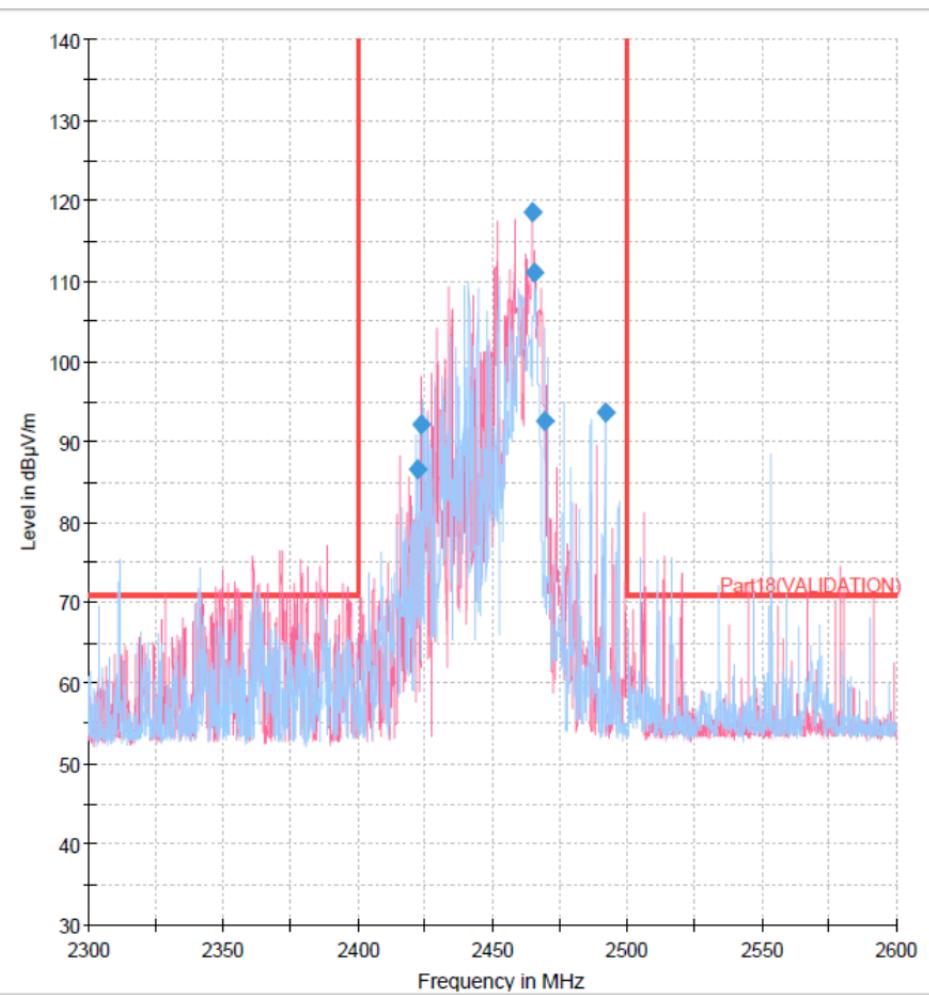

3/11/2013

10:20:15

(120 V, 600 ml)

PLOTS OF EMISSIONS

- Frequency vs Load Variation Test


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 120 V / 60 Hz, 800 ml
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

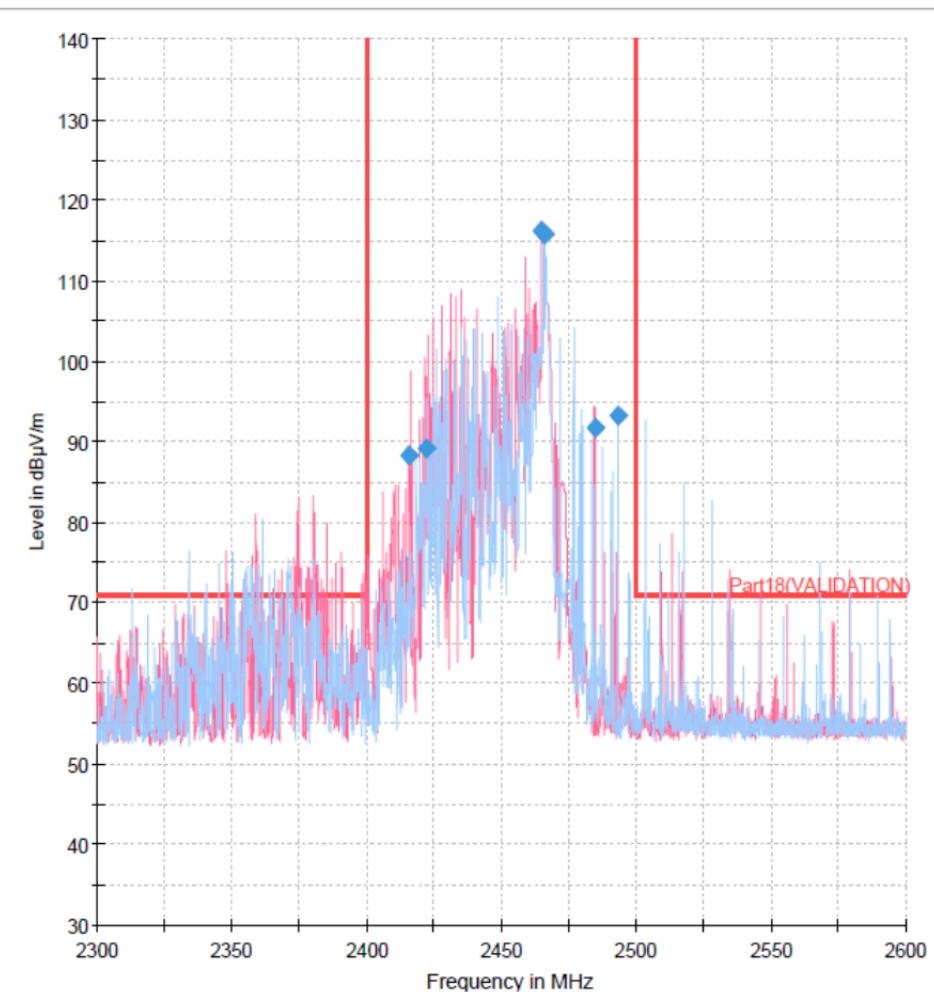

3/11/2013

10:31:21

(120 V, 800 ml)

Daewoo Electronics Corporation

FCC ID: C5F7NF9PM0100N

Page 23 of 51

PLOTS OF EMISSIONS

- Frequency vs Load Variation Test

EMI Auto Test(9)

1 / 2


Test Report

Common Information

Test Description: Radiated Emission (NK-13-E-186)
Test Site: Nemko Korea
Environment Conditions: a.c. 120 V / 60 Hz, 1000 ml
Standard: FCC Part 18
Tester: hyunsik shin
Comment: MODEL : KOM-9P**

Microwave 3G18G Tuned 40dB amp

Microwave 3G18G Tuned 40dB amp

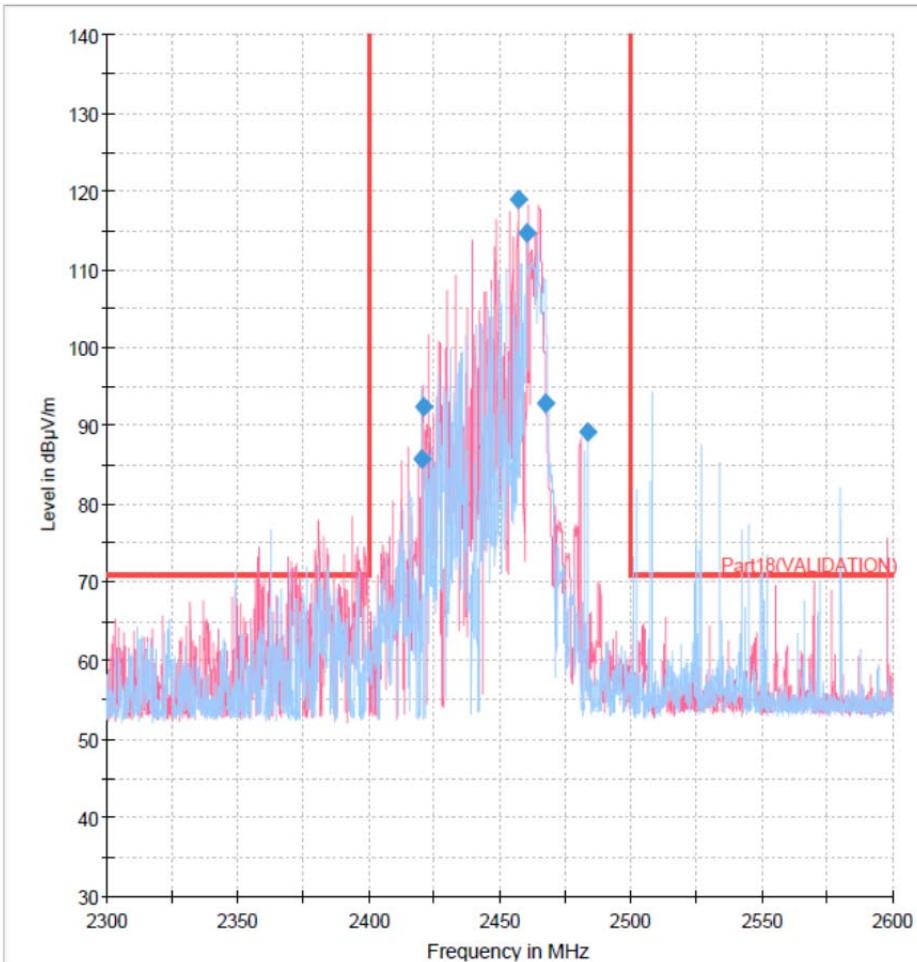


3/11/2013

10:57:00

(120 V, 1000 ml)


PLOTS OF EMISSIONS

- ***Conducted Emission at the Mains port (Line)***

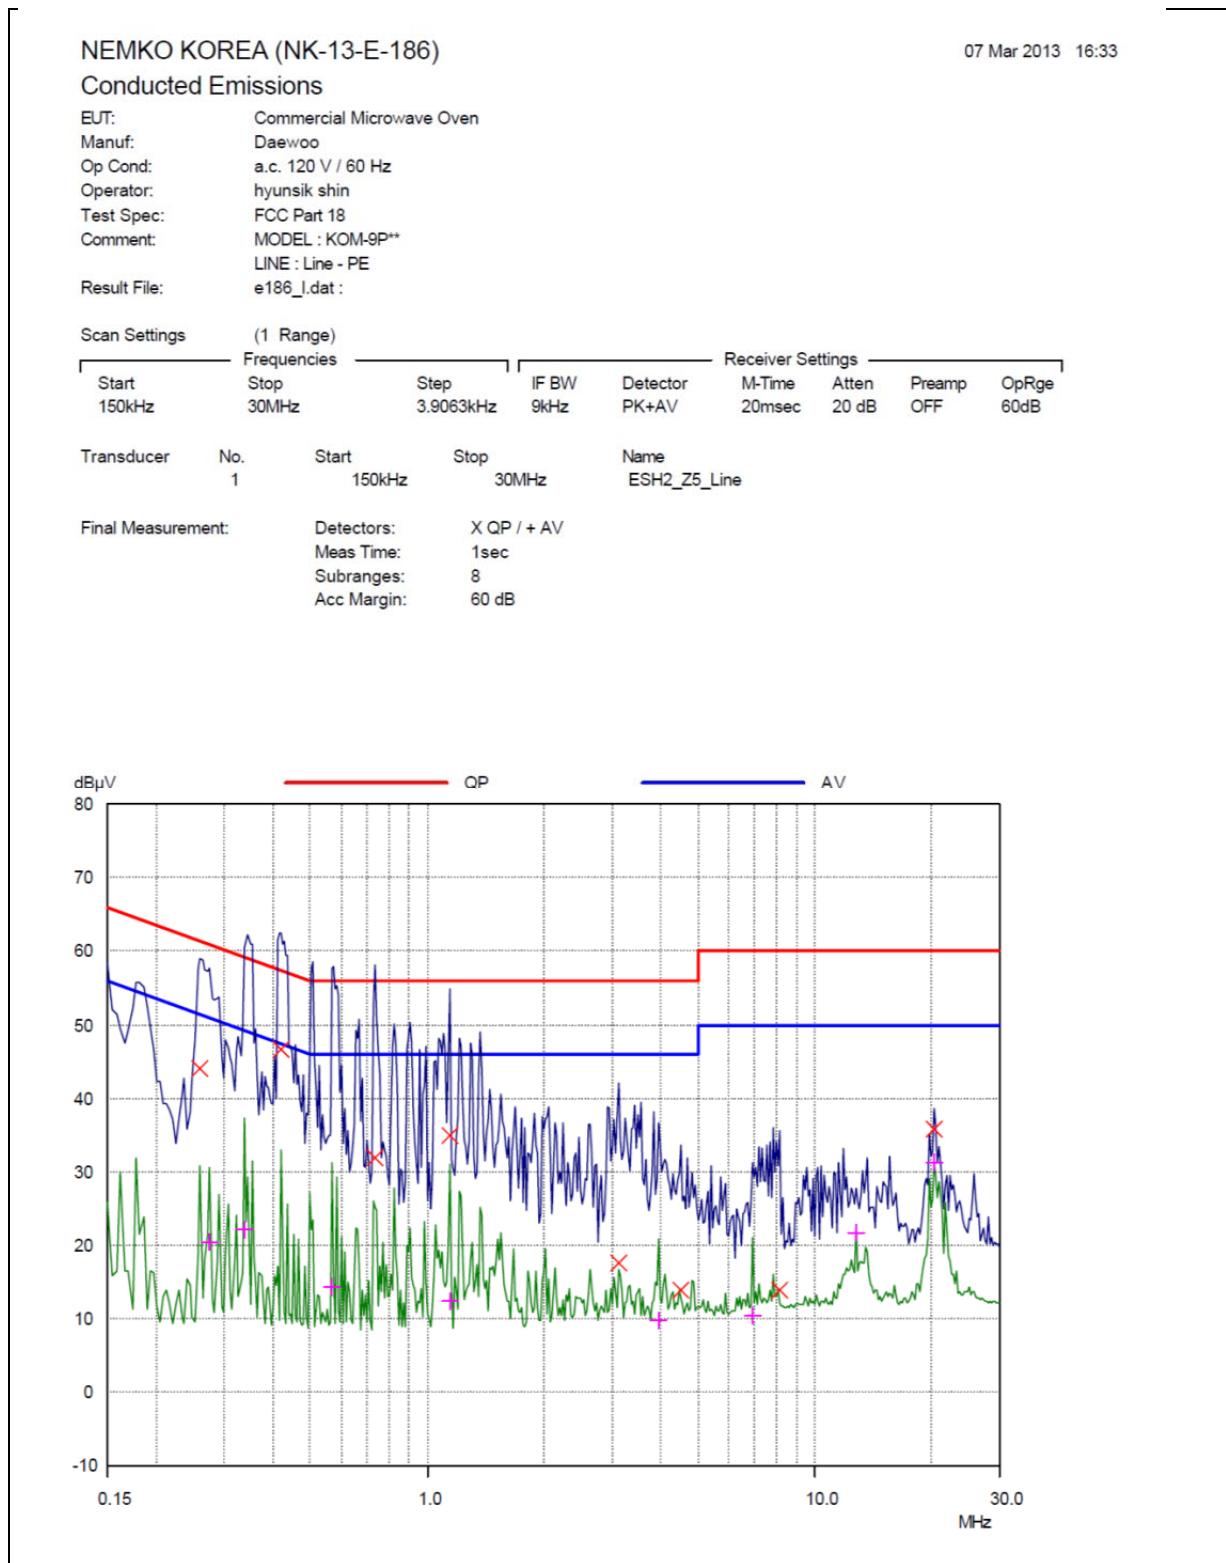

PLOTS OF EMISSIONS

- ***Conducted Emission at the Mains port (Neutral)***

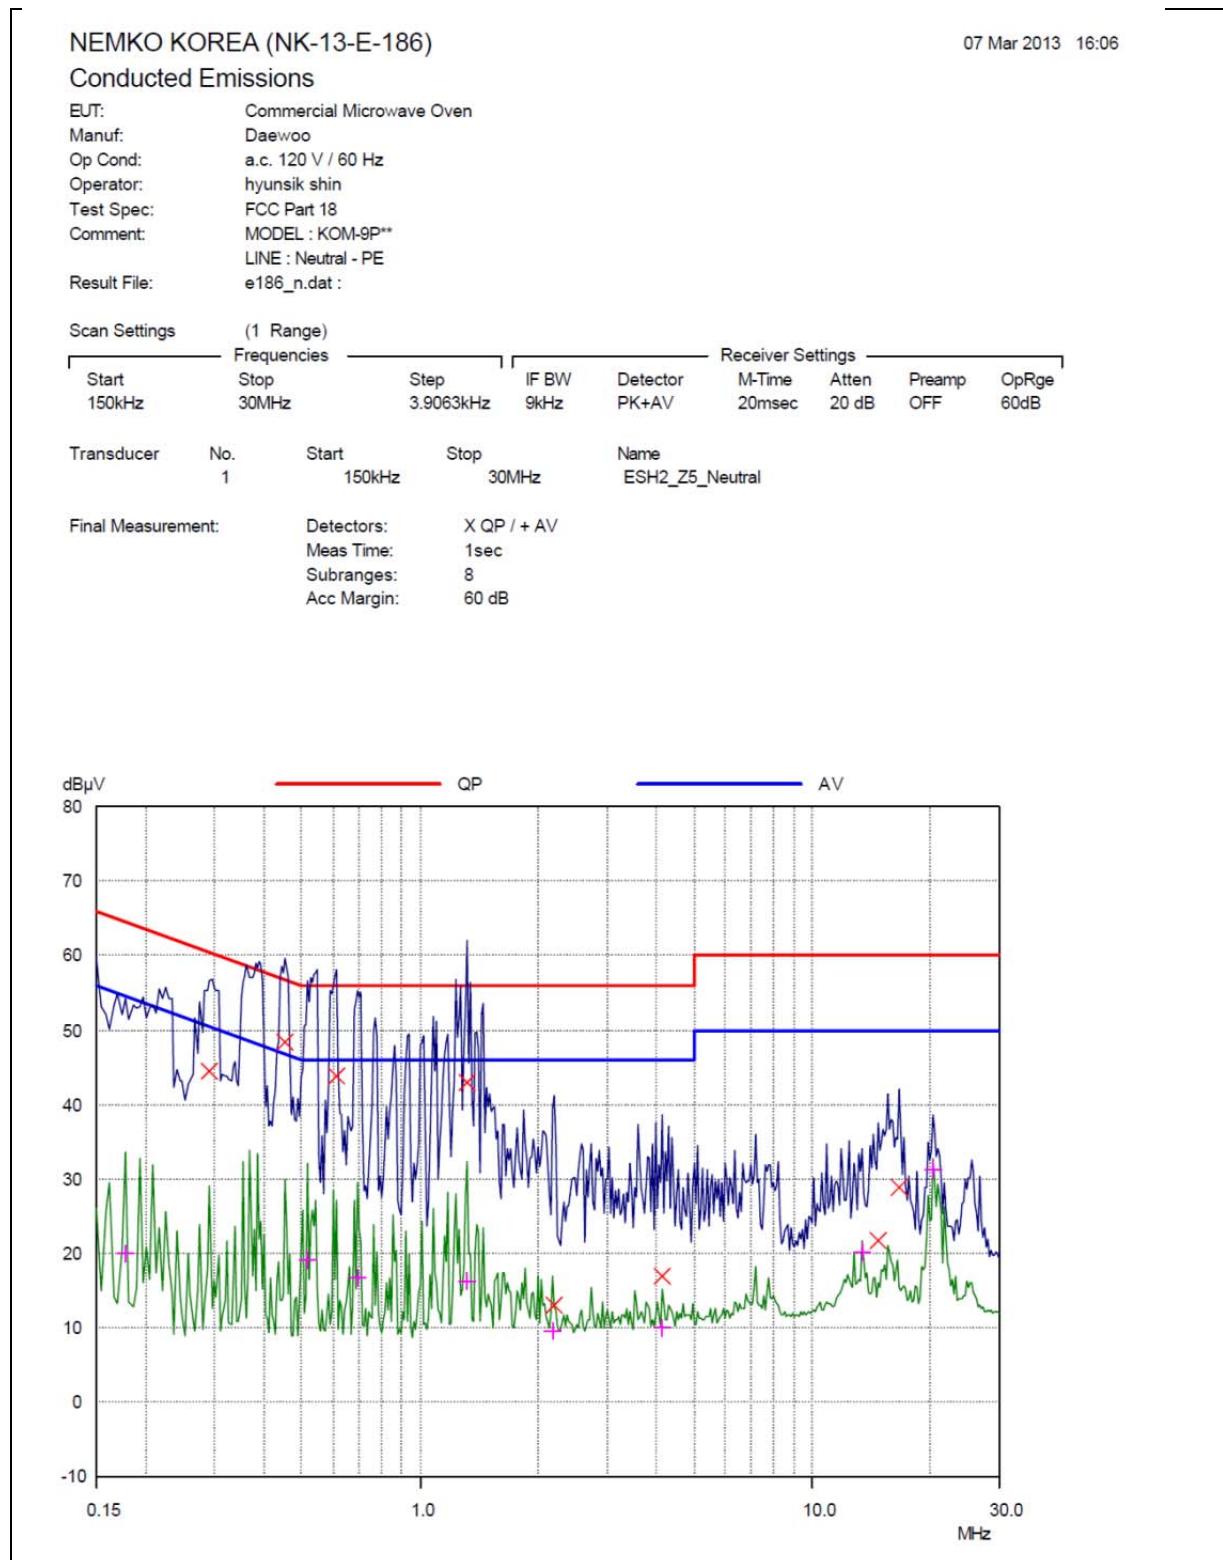

PLOTS OF EMISSIONS

- **Radiated Emission (0.15 MHz ~ 30 MHz)**

Radiated Emission(NK-13-E-186)

DAEWOO

P/N : Commercial Microwave Oven

M/N : KOM-9P**

Horizontal

R&S Controlled by EMC32

* RBW 10 kHz

* Att 5 dB

* VBW 30 kHz


M4[1]

38.96 dB μ V/m

Ref 97.00 dB μ V/m

SWT 300ms

10.428000000 MHz

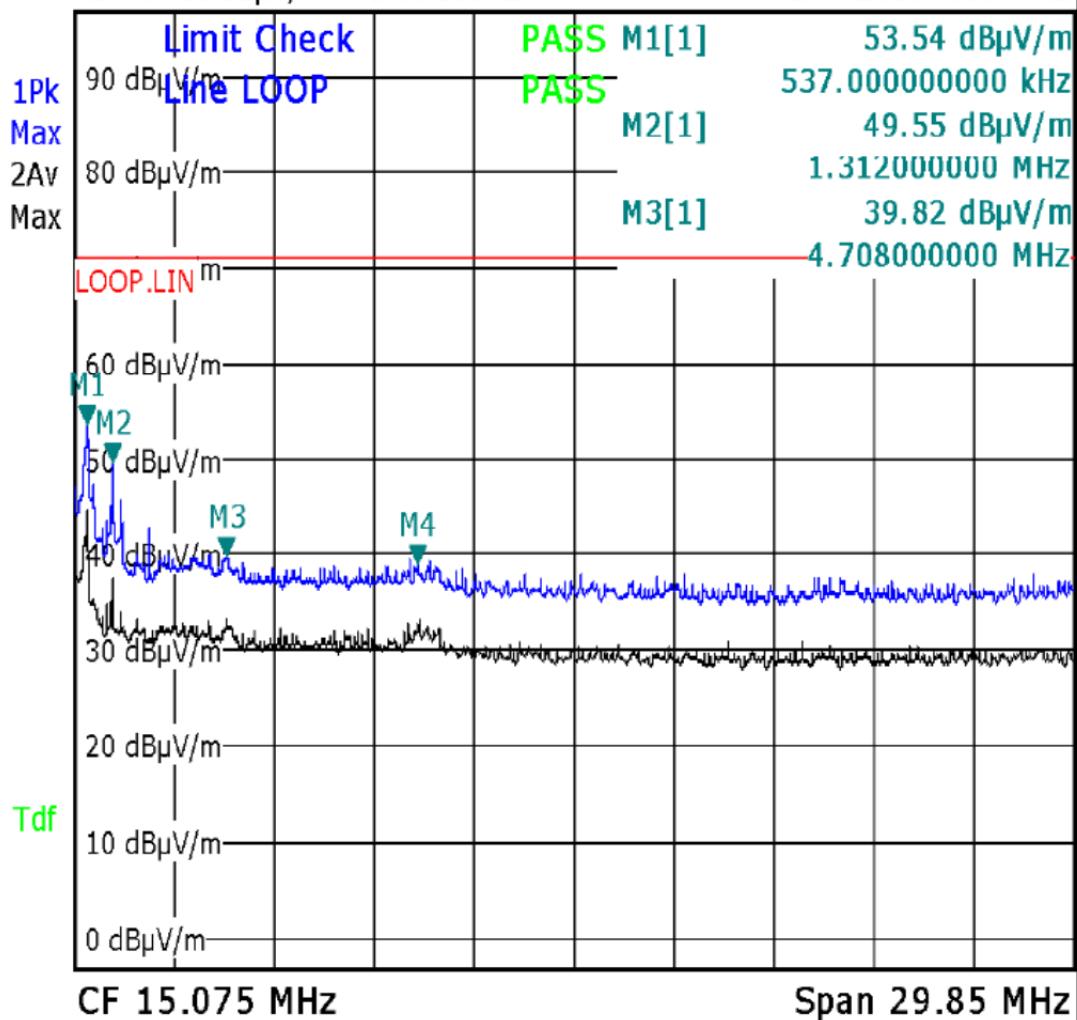

Date: 8.MAR.2013 04:38:56

(Horizontal)

Daewoo Electronics Corporation

FCC ID: C5F7NF9PM0100N

Page 27 of 51

PLOTS OF EMISSIONS

- **Radiated Emission (0.15 MHz ~ 30 MHz)**

Radiated Emission(NK-13-E-186)

DAEWOO

P/N : Commercial Microwave Oven

M/N : KOM-9P**

Vertical

R&S Controlled by EMC32

* RBW 10 kHz

* Att 5 dB


* VBW 30 kHz

Ref 97.00 dB μ V/m

M4[1]

40.70 dB μ V/m

13.585000000 MHz

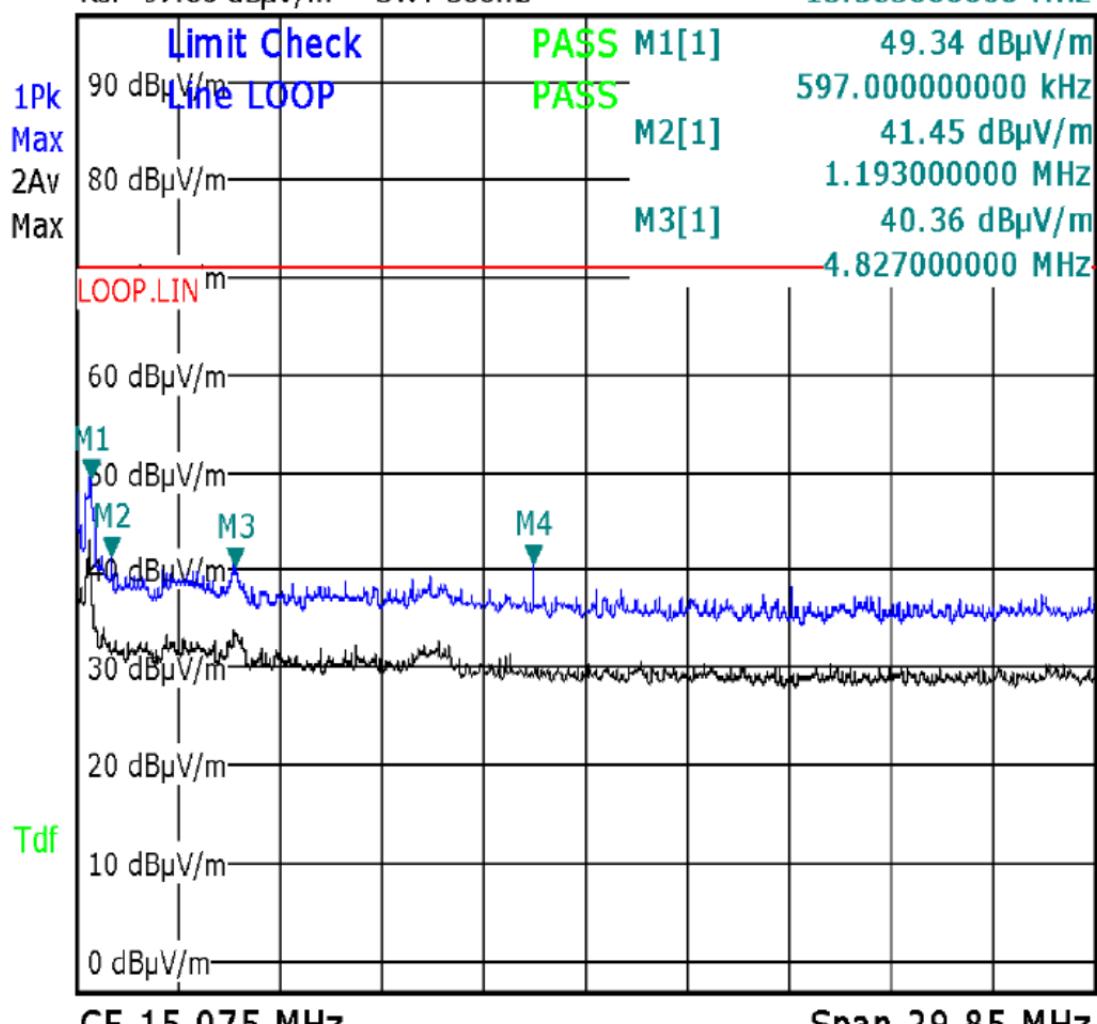

Date: 8.MAR.2013 04:43:51

(Vertical)

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95 %

1. Conducted Uncertainty Calculation

| Source of Uncertainty | X_i | Uncertainty of X_i | | Coverage factor k | $u(X_i)$ (dB) | C_i | $C_i u(X_i)$ (dB) |
|----------------------------------|--|----------------------|--------------------------|--|------------------|-------|----------------------|
| | | Value (dB) | Probability Distribution | | | | |
| Receiver reading | R_i | ± 0.30 | rectangular | $\sqrt{3}$ | 0.17 | 1 | 0.17 |
| Attenuation AMN–Receiver | L_{AMN} | ± 1.00 | normal 2 | 2.00 | 0.50 | 1 | 0.50 |
| AMN Voltage division factor | L_{AMN} | ± 0.09 | rectangular | $\sqrt{3}$ | 0.05 | 1 | 0.05 |
| Sine wave voltage | dV_{SW} | ± 0.17 | rectangular | $\sqrt{3}$ | 0.10 | 1 | 0.10 |
| Pulse amplitude response | dV_{PA} | ± 0.92 | rectangular | $\sqrt{3}$ | 0.53 | 1 | 0.53 |
| Pulse repetition rate response | dV_{PR} | ± 0.35 | rectangular | $\sqrt{3}$ | 0.20 | 1 | 0.20 |
| Noise floor proximity | dV_{NF} | ± 0.00 | | | 0.00 | 1 | 0.00 |
| AMN Impedance | dZ | ± 2.0 | rectangular | $\sqrt{3}$ | 1.15 | 1 | 1.15 |
| ⓐ Mismatch | M | +0.70 | U-Shaped | $\sqrt{2}$ | 0.49 | 1 | 0.49 |
| ⓑ Mismatch | M | -0.80 | U-Shaped | $\sqrt{2}$ | - 0.56 | 1 | - 0.56 |
| Measurement System Repeatability | Rs | 0.05 | normal 1 | 1.00 | 0.05 | 1 | 0.05 |
| Remark | ⓐ: AMN–Receiver Mismatch : + ⓑ: AMN–Receiver Mismatch : - | | | | | | |
| Combined Standard Uncertainty | Normal | | | Mismatch + 0.70, $uc = 1.86$ dB Mismatch - 0.80, $uc = 1.88$ dB | | | |
| Expended Uncertainty U | Normal ($k = 2$) | | | $U = \pm 3.0$ dB (CL is 95 %) | | | |

2. Radiation Uncertainty Calculation (Below 1 GHz)

| Source of Uncertainty | X_i | Uncertainty of X_i | | Coverage factor k | $u(X_i)$ (dB) | C_i | $C_i u(X_i)$ (dB) |
|--|-------------|----------------------|--------------------------|------------------------|------------------|-------|----------------------|
| | | Value (dB) | Probability Distribution | | | | |
| Receiver reading | R_i | ± 0.30 | rectangular | $\sqrt{3}$ | 0.17 | 1 | 0.17 |
| Sine wave voltage | dV_{sw} | ± 0.17 | rectangular | $\sqrt{3}$ | 0.10 | 1 | 0.10 |
| Pulse amplitude response | dV_{pa} | ± 0.92 | rectangular | $\sqrt{3}$ | 0.53 | 1 | 0.53 |
| Pulse repetition rate response | dV_{pr} | ± 0.35 | rectangular | $\sqrt{3}$ | 0.20 | 1 | 0.20 |
| Noise floor proximity | dV_{hf} | ± 0.50 | normal 2 | 2.00 | 0.25 | 1 | 0.25 |
| Antenna Factor Calibration | A_f | ± 2.0 | rectangular | $\sqrt{3}$ | 1.15 | 1 | 1.15 |
| Cable Loss | C_L | ± 1.00 | normal 2 | 2.00 | 0.50 | 1 | 0.50 |
| Antenna Directivity | A_d | ± 1.00 | rectangular | $\sqrt{3}$ | 0.58 | 1 | 0.58 |
| Antenna Factor Height Dependence | A_h | ± 0.50 | rectangular | $\sqrt{3}$ | 0.29 | 1 | 0.29 |
| Antenna Phase Centre Variation | A_p | ± 0.30 | rectangular | $\sqrt{3}$ | 0.17 | 1 | 0.17 |
| Antenna Factor Frequency Interpolation | A_i | ± 0.30 | rectangular | $\sqrt{3}$ | 0.17 | 1 | 0.17 |
| Site Imperfections | S_i | ± 4.00 | triangular | $\sqrt{6}$ | 1.63 | 1 | 1.63 |
| Measurement Distance Variation | D_v | ± 0.10 | rectangular | $\sqrt{3}$ | 0.06 | 1 | 0.06 |
| Antenna Balance | D_{bal} | ± 0.90 | rectangular | $\sqrt{3}$ | 0.52 | 1 | 0.52 |
| Cross Polarization | D_{cross} | ± 0.00 | rectangular | $\sqrt{3}$ | 0.00 | 1 | 0.00 |
| ⓐ Mismatch | M | +0.26 | U-Shaped | $\sqrt{2}$ | 0.18 | 1 | 0.18 |
| ⓑ Mismatch | M | -0.26 | U-Shaped | $\sqrt{2}$ | -0.18 | 1 | -0.18 |
| ⓒ Mismatch | M | +0.98 | U-Shaped | $\sqrt{2}$ | 0.69 | 1 | 0.69 |
| ⓓ Mismatch | M | -1.11 | U-Shaped | $\sqrt{2}$ | -0.78 | 1 | -0.79 |
| Measurement System Repeatability | R_s | 0.09 | normal 1 | 1.00 | 0.09 | 1 | 0.09 |

| | | |
|-------------------------------|--|---|
| Remark | ④: Antenna-receiver Mismatch : + 일 때(< 200 MHz) ⑤: Antenna-receiver Mismatch : - 일 때(< 200 MHz) ⑥: Antenna-receiver Mismatch : + 일 때(\geq 200 MHz) ⑦: Antenna-receiver Mismatch : - 일 때(\geq 200 MHz) | |
| Combined Standard Uncertainty | Normal | $< 200 \text{ MHz } U$ Mismatch + 0.26, $uc = 2.33 \text{ dB}$ Mismatch - 0.26, $uc = 2.33 \text{ dB}$ $\geq 200 \text{ MHz } U$ Mismatch + 0.98, $uc = 2.42 \text{ dB}$ Mismatch - 1.11, $uc = 2.45 \text{ dB}$ |
| Expended Uncertainty U | Normal ($k = 2$) | $U = \pm 4.9 \text{ dB}$ (CL is 95 %) |

3. Radiation Uncertainty Calculation (Above 1 GHz)

| Source of Uncertainty | X_i | Uncertainty of X_i | | Coverage factor k | $u(X_i)$ (dB) | C_i | $C_i u(X_i)$ (dB) |
|--|-------------|----------------------|--------------------------|------------------------|------------------|-------|----------------------|
| | | Value (dB) | Probability Distribution | | | | |
| Receiver reading | R_i | ± 0.58 | rectangular | $\sqrt{3}$ | 0.33 | 1 | 0.33 |
| Sine wave voltage | dV_{sw} | ± 0.13 | rectangular | $\sqrt{3}$ | 0.08 | 1 | 0.08 |
| Pulse amplitude response | dV_{pa} | ± 0.12 | rectangular | $\sqrt{3}$ | 0.07 | 1 | 0.07 |
| Pulse repetition rate response | dV_{pr} | ± 0.13 | rectangular | $\sqrt{3}$ | 0.08 | 1 | 0.08 |
| Noise floor proximity | dV_{hf} | ± 0.50 | normal 2 | 2.00 | 0.25 | 1 | 0.25 |
| Antenna Factor Calibration | A_f | ± 1.50 | rectangular | $\sqrt{3}$ | 0.87 | 1 | 0.87 |
| Cable Loss | C_L | ± 1.00 | normal 2 | 2.00 | 0.50 | 1 | 0.50 |
| Antenna Directivity | A_d | ± 1.00 | rectangular | $\sqrt{3}$ | 0.58 | 1 | 0.58 |
| Antenna Factor Height Dependence | A_h | ± 0.40 | rectangular | $\sqrt{3}$ | 0.23 | 1 | 0.23 |
| Antenna Phase Centre Variation | A_p | ± 0.30 | rectangular | $\sqrt{3}$ | 0.17 | 1 | 0.17 |
| Antenna Factor Frequency Interpolation | A_i | ± 0.30 | rectangular | $\sqrt{3}$ | 0.17 | 1 | 0.17 |
| Site Imperfections | S_i | ± 4.00 | triangular | $\sqrt{6}$ | 1.63 | 1 | 1.63 |
| Measurement Distance Variation | D_v | ± 0.50 | rectangular | $\sqrt{3}$ | 0.29 | 1 | 0.29 |
| Antenna Balance | D_{bal} | ± 1.00 | rectangular | $\sqrt{3}$ | 0.58 | 1 | 0.58 |
| Cross Polarization | D_{cross} | ± 0.00 | rectangular | $\sqrt{3}$ | 0.00 | 1 | 0.00 |
| Frequency step error | F_{step} | ± 0.49 | rectangular | $\sqrt{3}$ | 0.28 | 1 | 0.28 |
| Mismatch (+) | M | + 0.98 | U-Shaped | $\sqrt{2}$ | 0.69 | 1 | 0.69 |
| Mismatch (-) | M | -1.11 | U-Shaped | $\sqrt{2}$ | -0.78 | 1 | -0.78 |
| Measurement System Repeatability | R_s | ± 0.36 | normal 1 | 1.00 | 0.36 | 1 | 0.36 |
| Remark | Mismatch | | | | | | |

| | | |
|-------------------------------|---|--|
| | Receiver VRC : 0.3 Antenna + Cable VRC : 0.4 | |
| Combined Standard Uncertainty | Normal | Mismatch + 0.98, $uc = 2.28$ dB Mismatch - 1.11, $uc = 2.31$ dB |
| Expended Uncertainty U | Normal ($k = 2$) | $U = \pm 4.6$ dB (CL is 95 %) |

LIST OF TEST EQUIPMENT

| No. | Instrument | Manufacturer | Model | Serial No. | Calibration Date | Calibration Interval |
|-----|--------------------------------------|----------------|-------------|------------|------------------|----------------------|
| 1 | Test Receiver | R&S | ESCS 30 | 833364/020 | Jan. 09 2013 | 1 year |
| 2 | Test Receiver | R&S | ESCS 30 | 100302 | Oct. 08 2012 | 1 year |
| 3 | SPECTRUM ANALYZER | R&S | FSL3 | 101732 | Apr. 04 2012 | 1 year |
| 4 | Signal Conditioning Unit | R&S | SCU 01 | 10029 | Apr. 05 2012 | 1 year |
| 5 | Pre Amplifier | HP | 8449B | 3008A00107 | Jan. 09 2013 | 1 year |
| 6 | Signal Conditioning Unit | R&S | SCU 18 | 10065 | Apr. 05 2012 | 1 year |
| 7 | ATTENUATOR | FAIRVIEW | SA3N5W-06 | N/A | Apr. 05 2012 | 1 year |
| 8 | Microwave Survey Meter | ETS-LINDGEN | HI-1801 | 33549 | Mar. 05 2012 | 2 years |
| 9 | TRIPLE-LOOP ANTENNA | R&S | HM 020 | N/A | July 06 2011 | 2 years |
| 10 | Trilog-Broadband Antenna | SCHWARZBECK | VULB 9168 | 9168-257 | Apr. 26 2012 | 2 years |
| 11 | Double Ridged Broadband Horn Antenna | SCHWARZBECK | BBHA 9120 D | 9120D-474 | Aug. 13 2012 | 2 years |
| 12 | LISN | R&S | ESH2-Z5 | 100227 | Apr. 04 2012 | 1 year |
| 13 | Position Controller | DAEIL EMC | N/A | N/A | N/A | N/A |
| 14 | Turn Table | DAEIL EMC | N/A | N/A | N/A | N/A |
| 15 | Antenna Mast | DAEIL EMC | N/A | N/A | N/A | N/A |
| 16 | Anechoic Chamber | EM Eng. | N/A | N/A | N/A | N/A |
| 17 | Shielded Room | EM Eng. | N/A | N/A | N/A | N/A |
| 18 | Anechoic Chamber | SY Corporation | N/A | N/A | N/A | N/A |

APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – USER'S MANUAL

APPENDIX F – BLOCK DIAGRAM
