










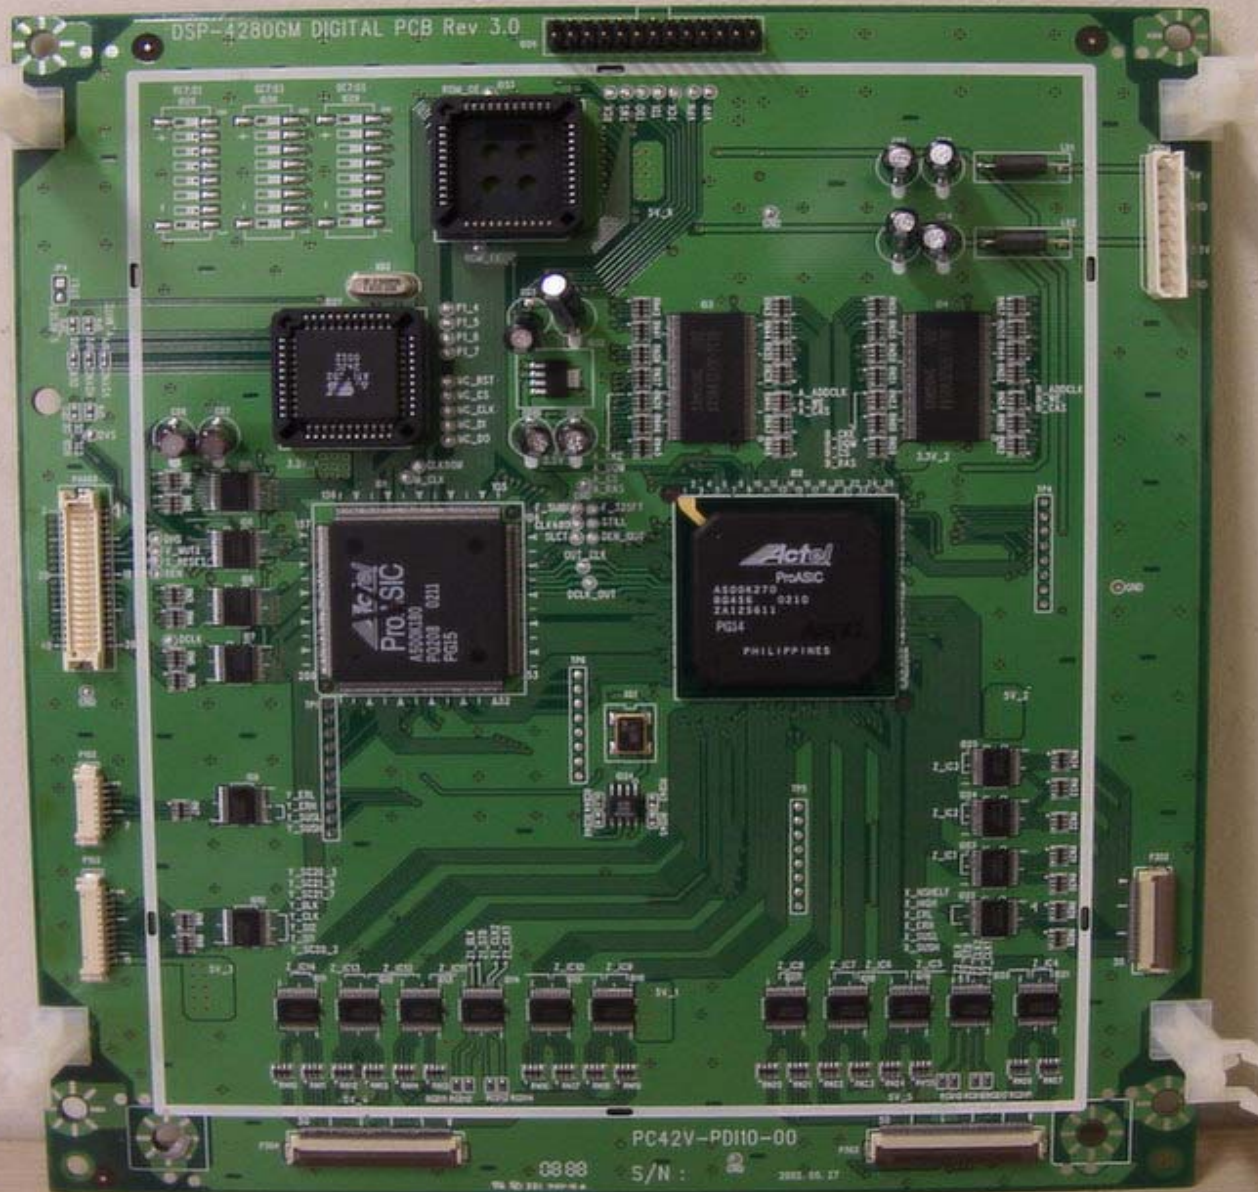

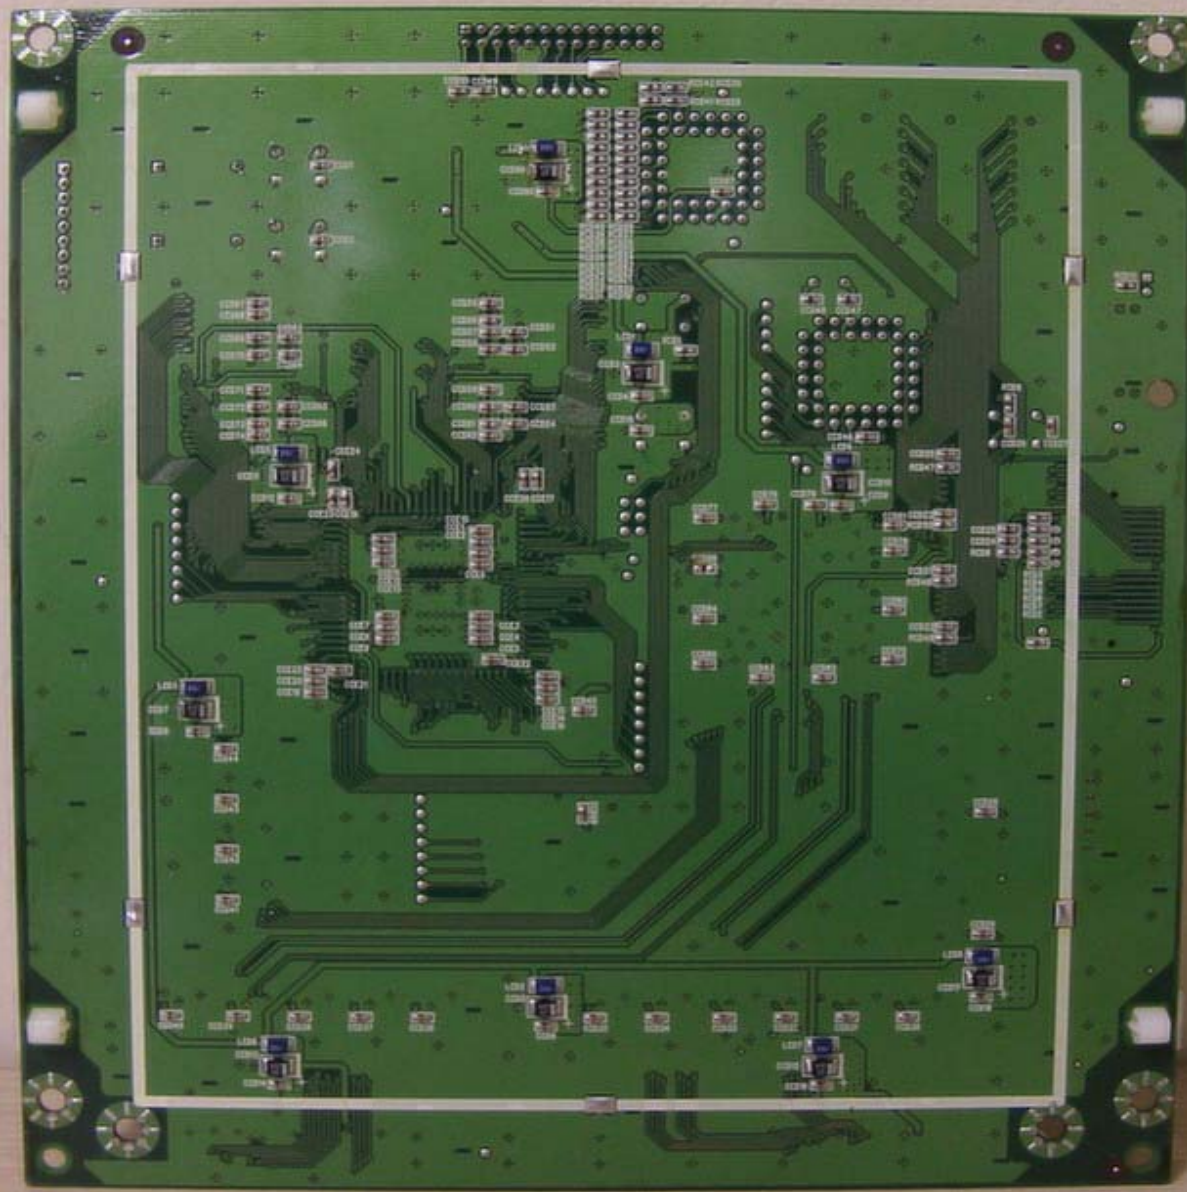



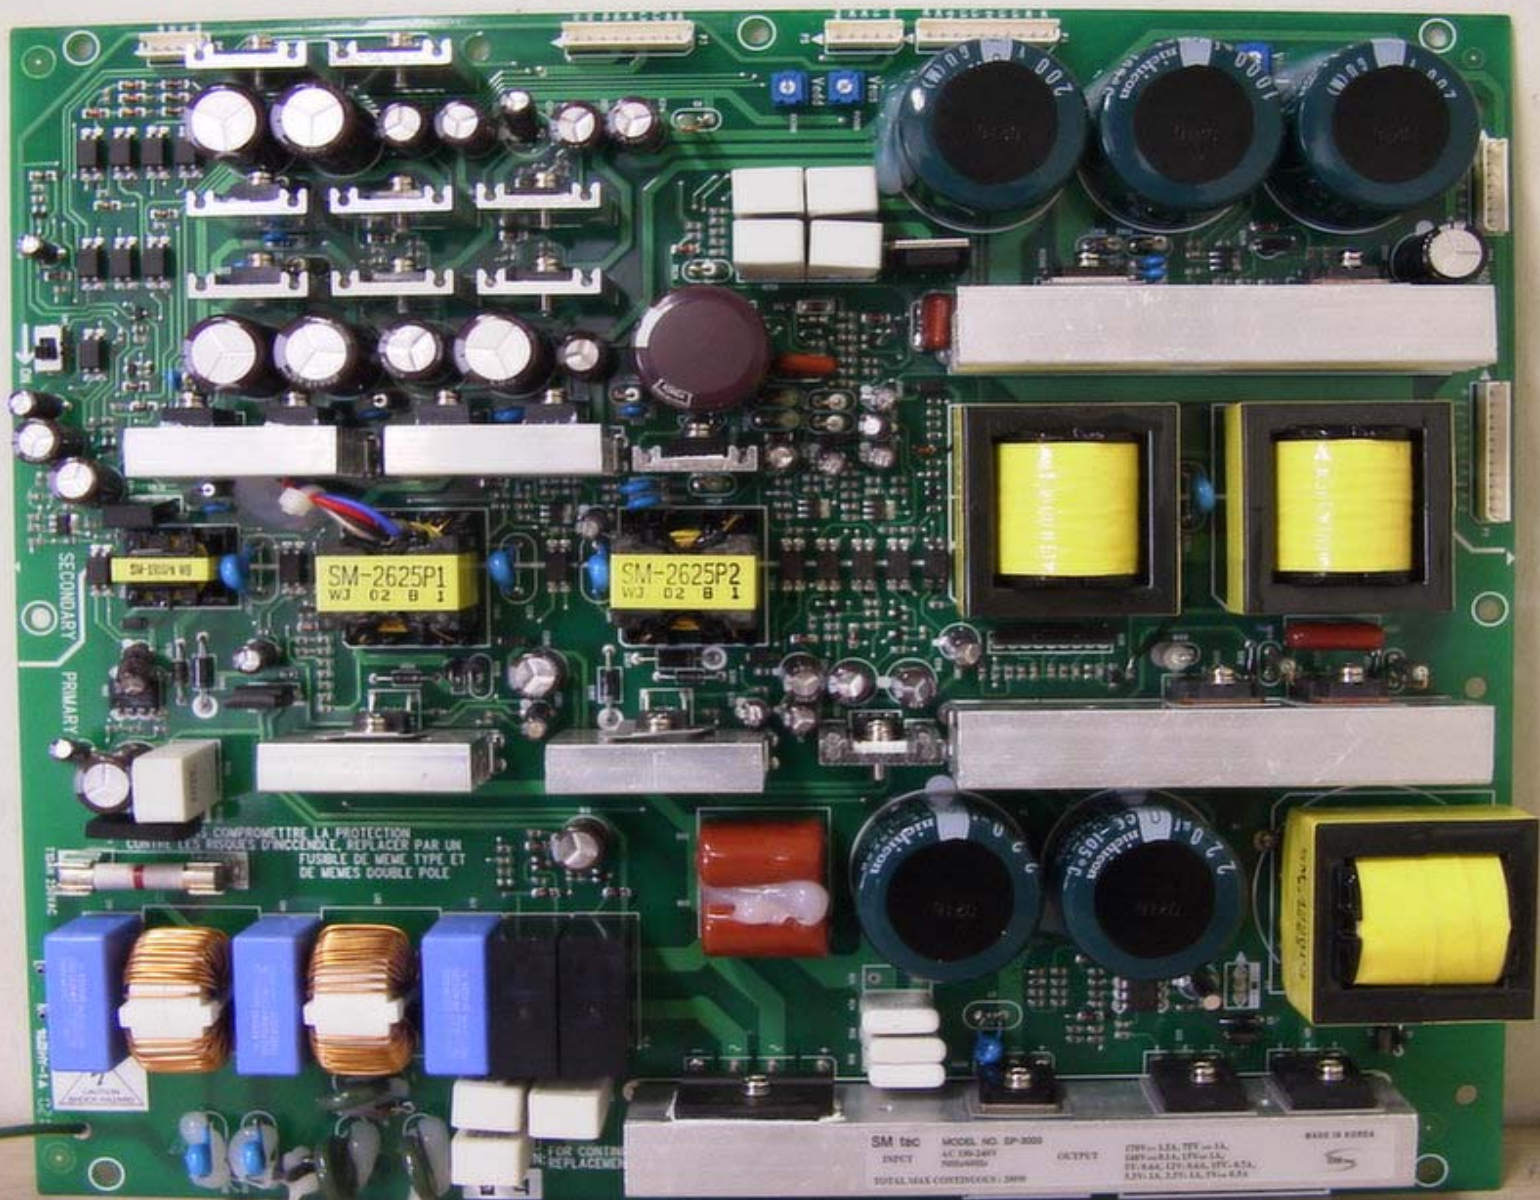

SECONDARY
PRIMARY

SM-2625P1
WJ 02 B 1


SM-2625P2
WJ 02 B 1


NE PAS COMPROMETTRE LA PROTECTION
CONTRE LES RISQUES D'INCENDIE. REMPLACER PAR UN
FUSIBLE DE MEME TYPE ET
DE MEMES DOUBLE POLE


CAUTION
REWORK SURFACES

FOR CONTINUED
REPLACEMENT

SM Inc. MODEL NO. SP-3000
INPUT AC 100-240V 50/60Hz
TOTAL MAX CONDUCTORS: 200W
OUTPUT 270V 1.5A, 175V 2.5A, 140V 3.5A, 115V 4.5A, 90V 5.5A, 75V 6.5A, 60V 7.5A
MADE IN KOREA

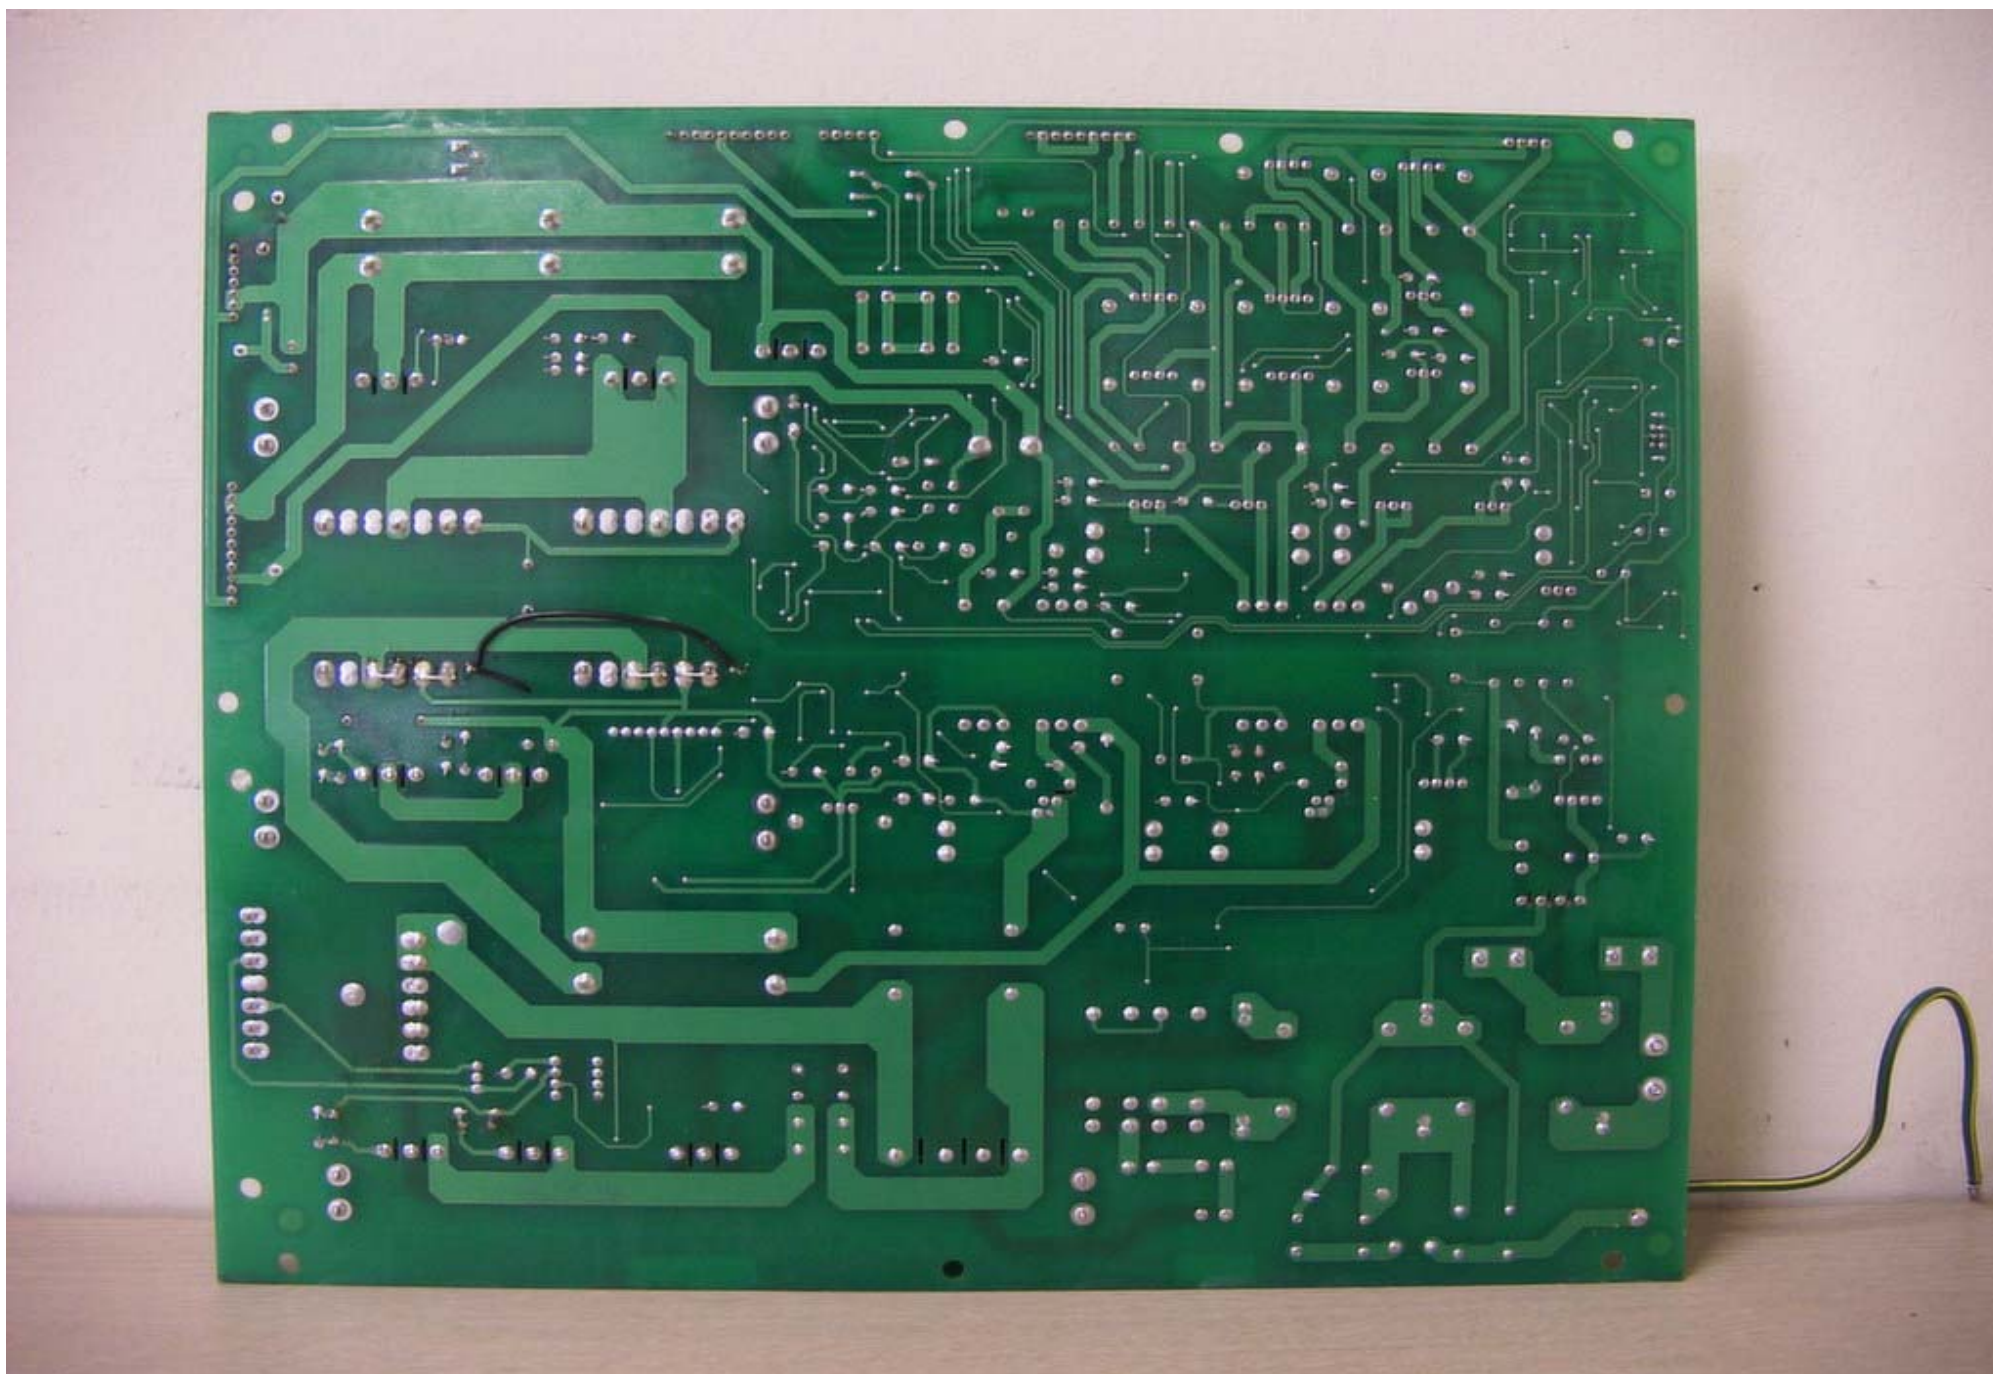

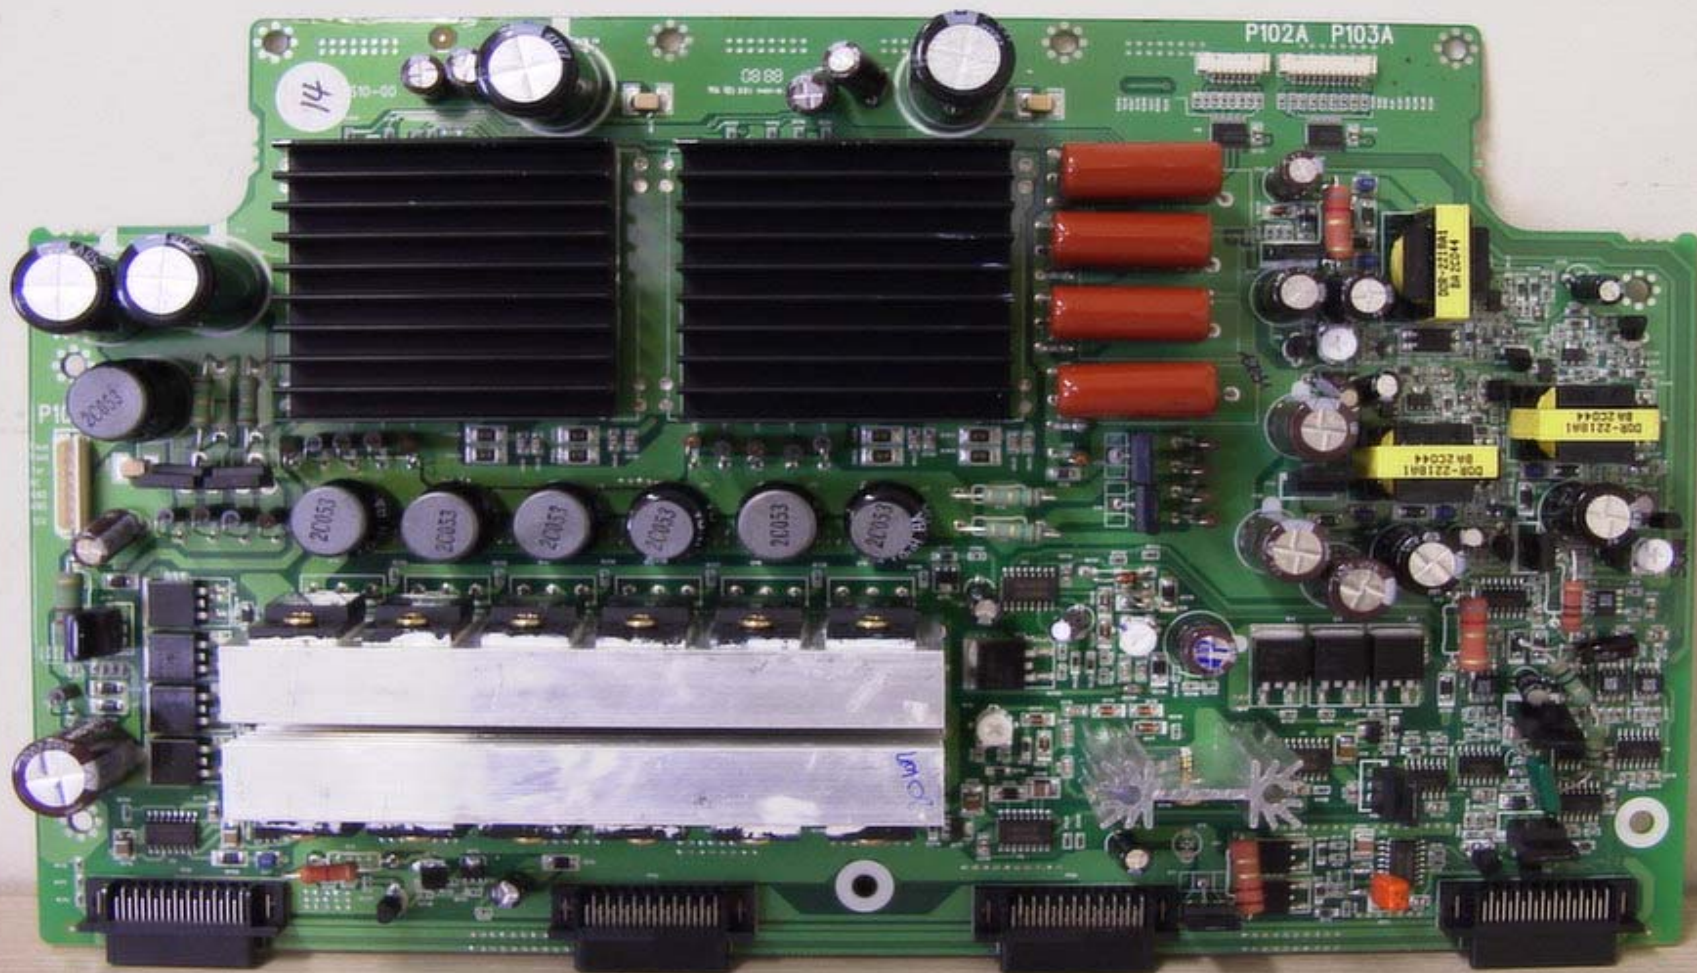


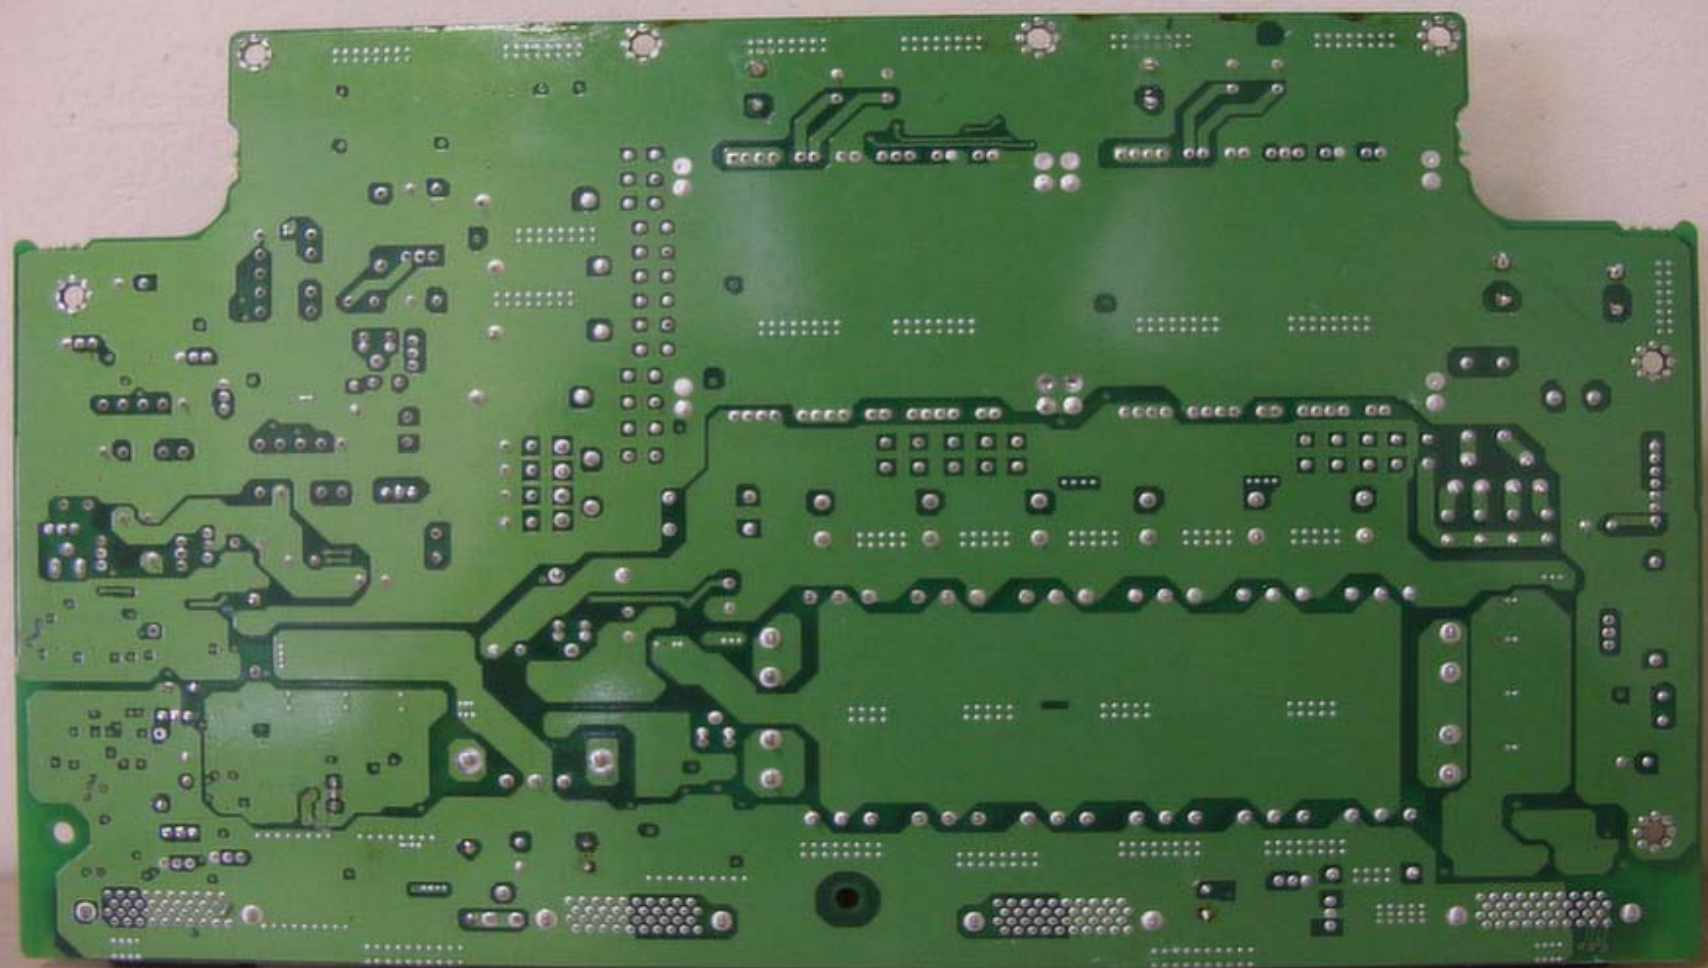









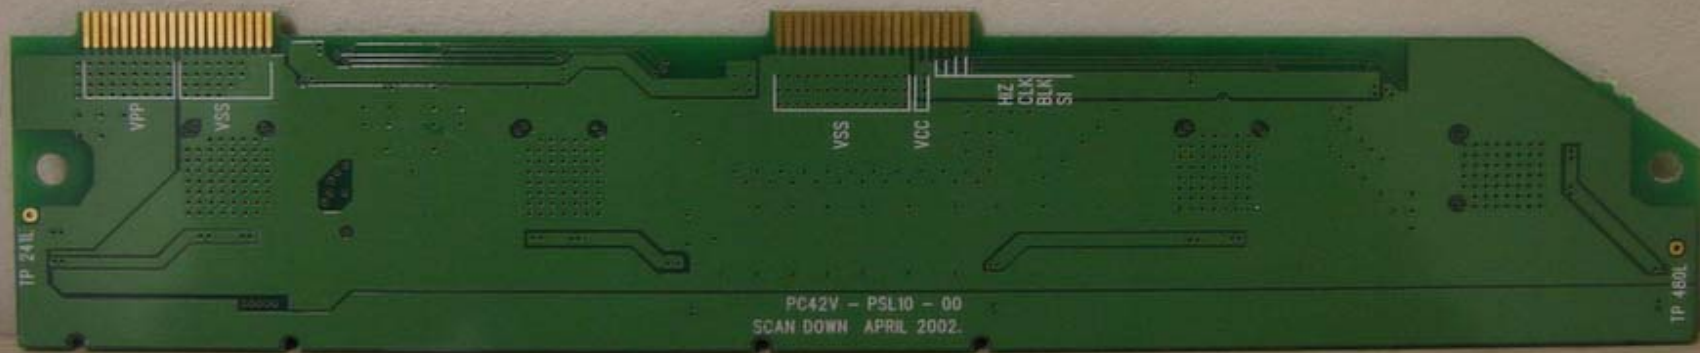

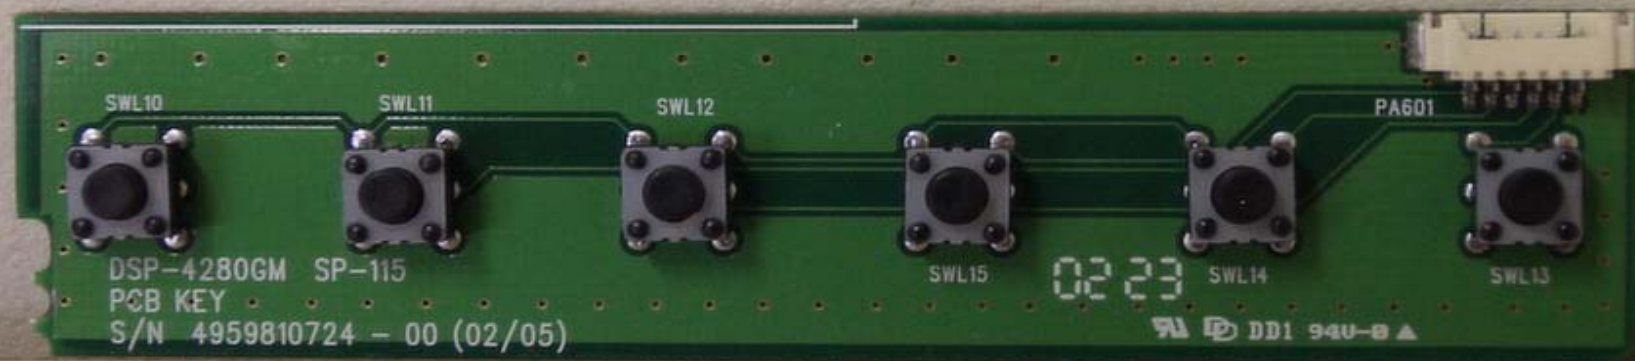

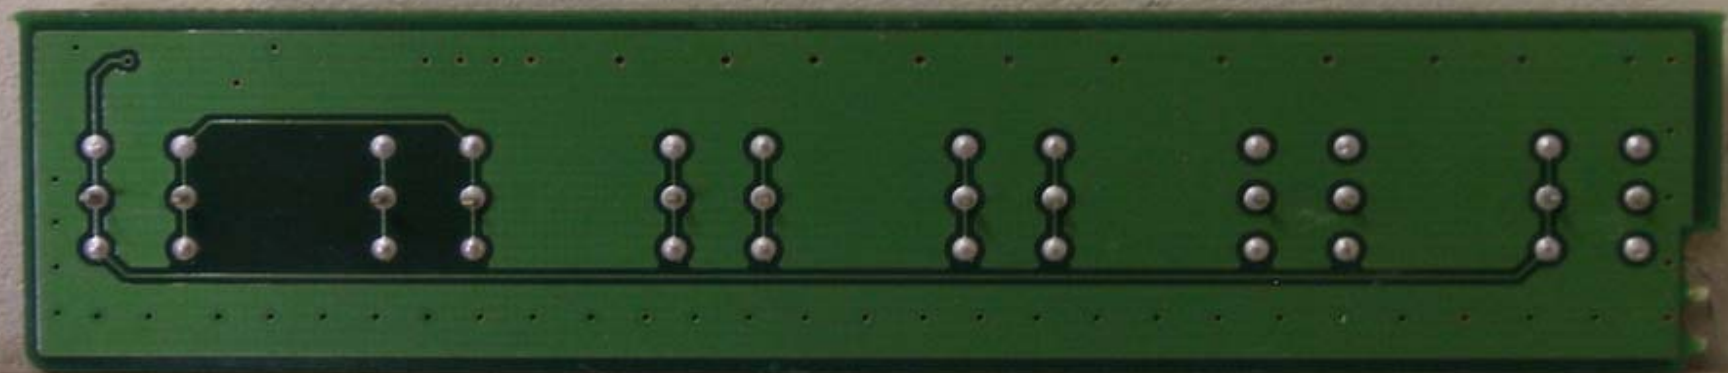



PA602

DSP-4280GM SP-115

PCB LED

S/N 4959810824 - 00 (02/05)

DD1
94U-0 ▲



