
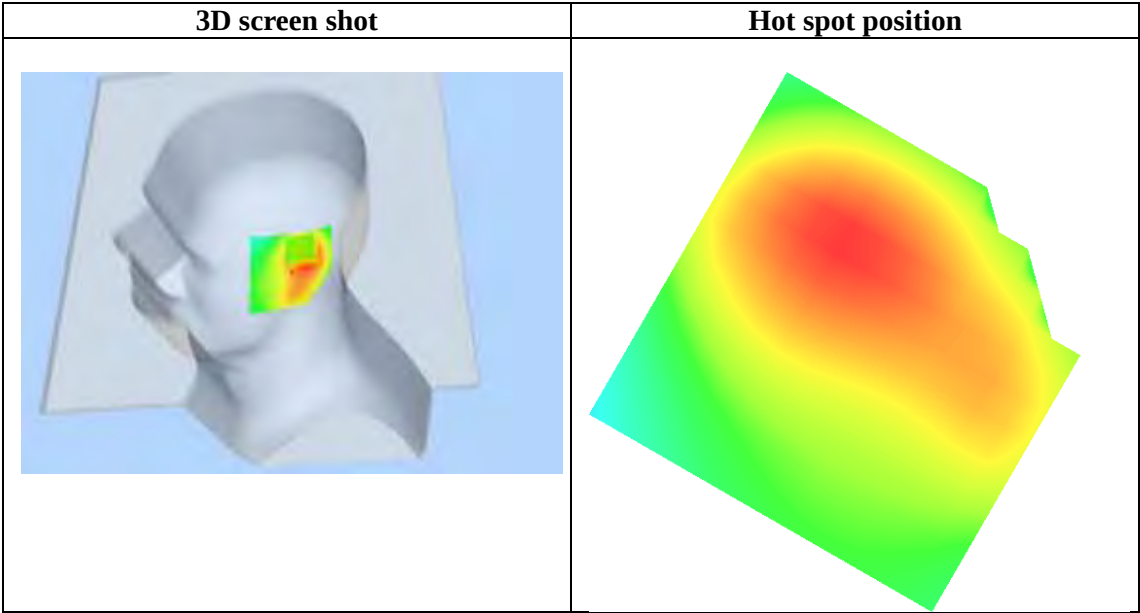


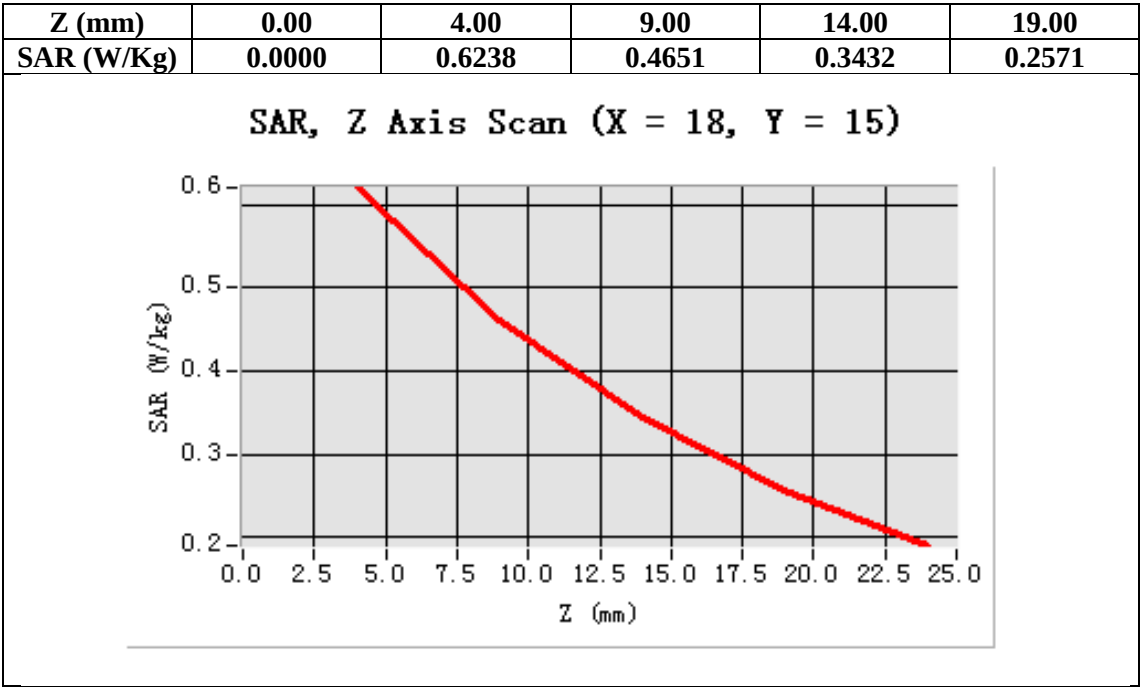

Test Laboratory: AGC Lab
WCDMA Band Low-Touch-Right (RMC)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72
Frequency: 1852.4 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band Low-Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band Low-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	WCDMA band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

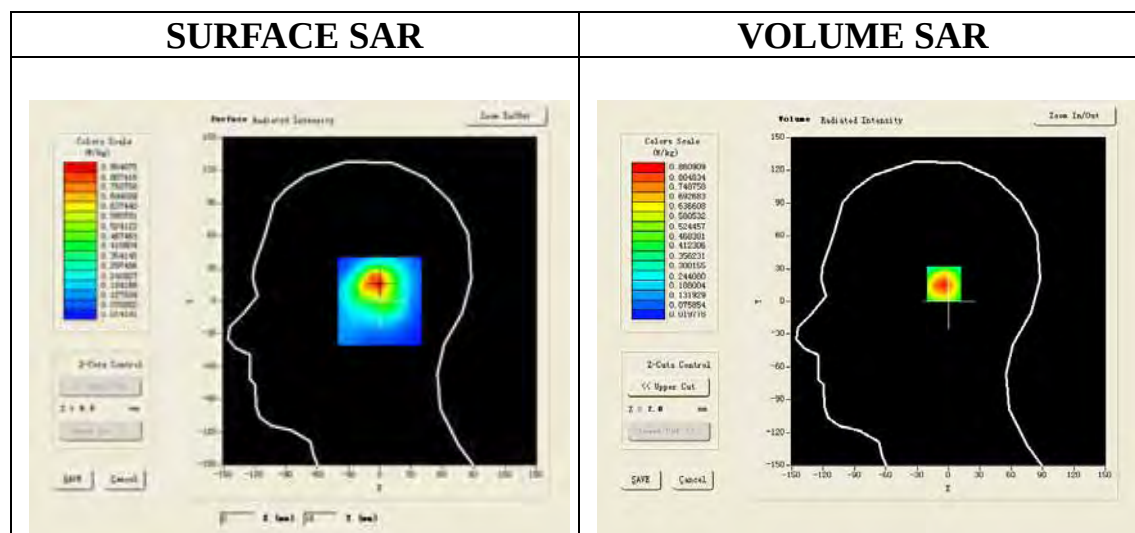

Maximum location: X=-1.00, Y=16.00

SAR 10g (W/Kg)	0.423790
SAR 1g (W/Kg)	0.805126

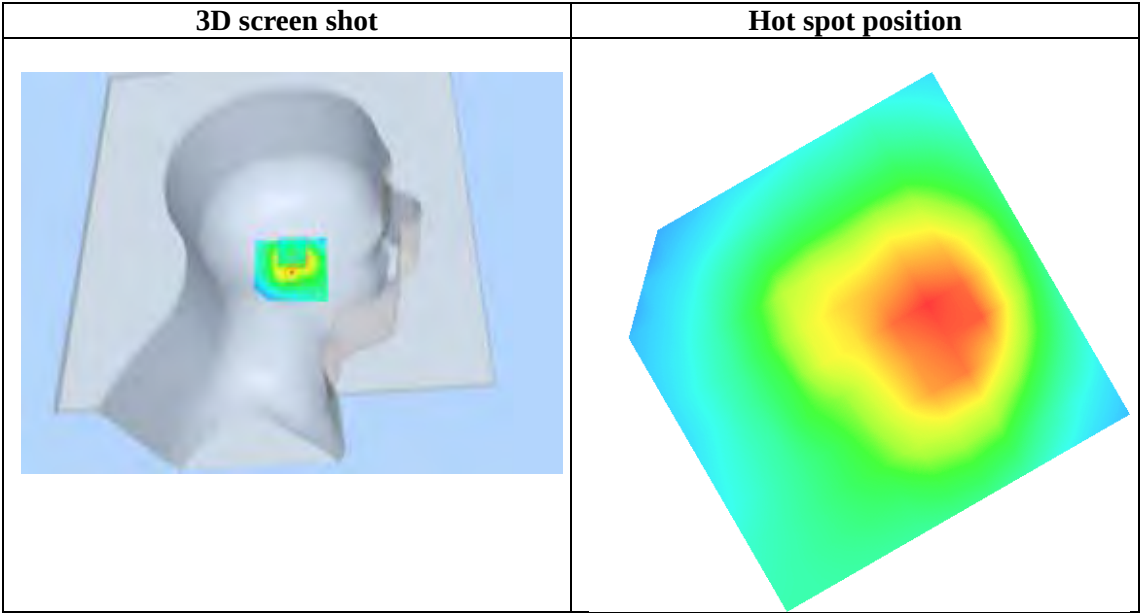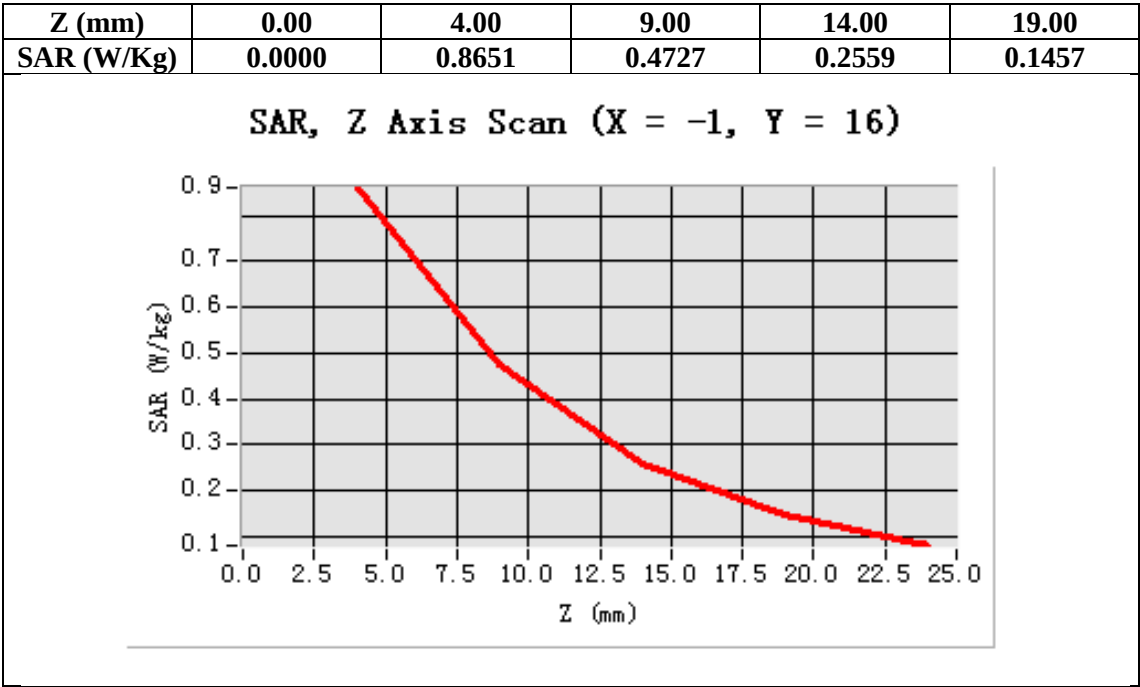

Test Laboratory: AGC Lab
WCDMA Band Mid-Touch-Right (RMC)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band Mid-Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	WCDMA band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

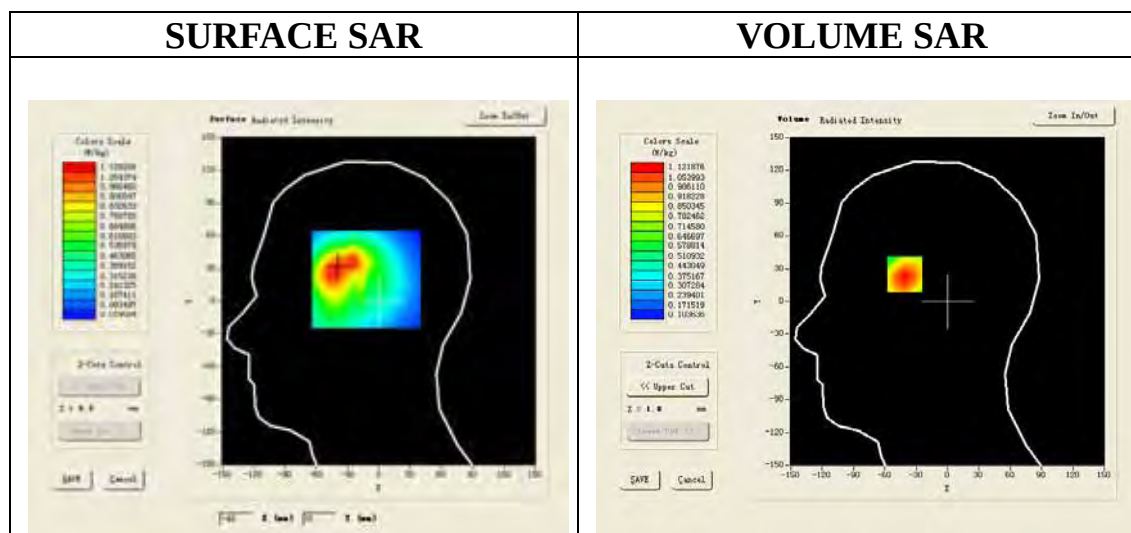

Maximum location: X=-41.00, Y=30.00

SAR 10g (W/Kg)	0.685097
SAR 1g (W/Kg)	1.074153

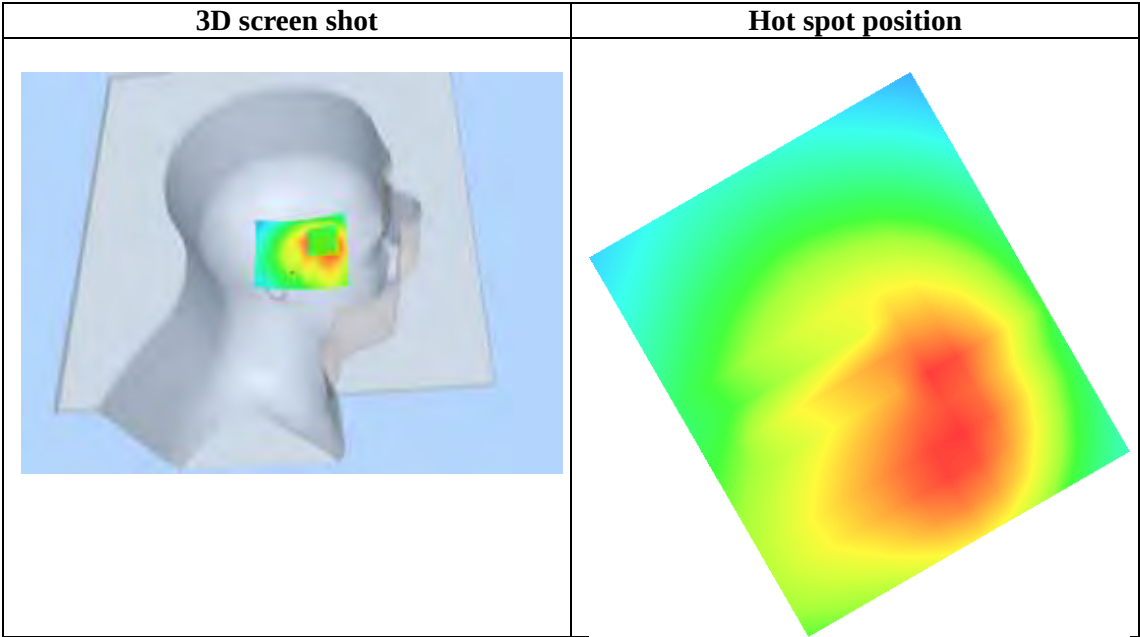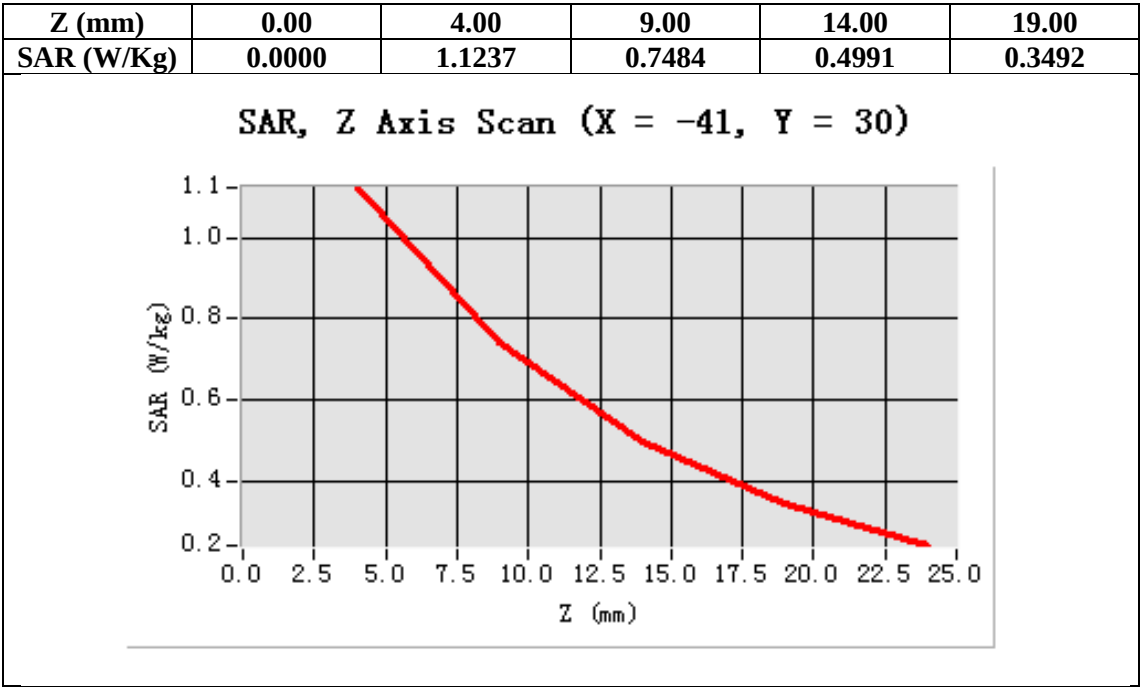

Test Laboratory: AGC Lab
WCDMA Band High-Touch-Right (RMC)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72
Frequency: 1907.6 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band High-Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band High-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	WCDMA band
Channels	High
Signal	TDMA (Crest factor: 1.0)

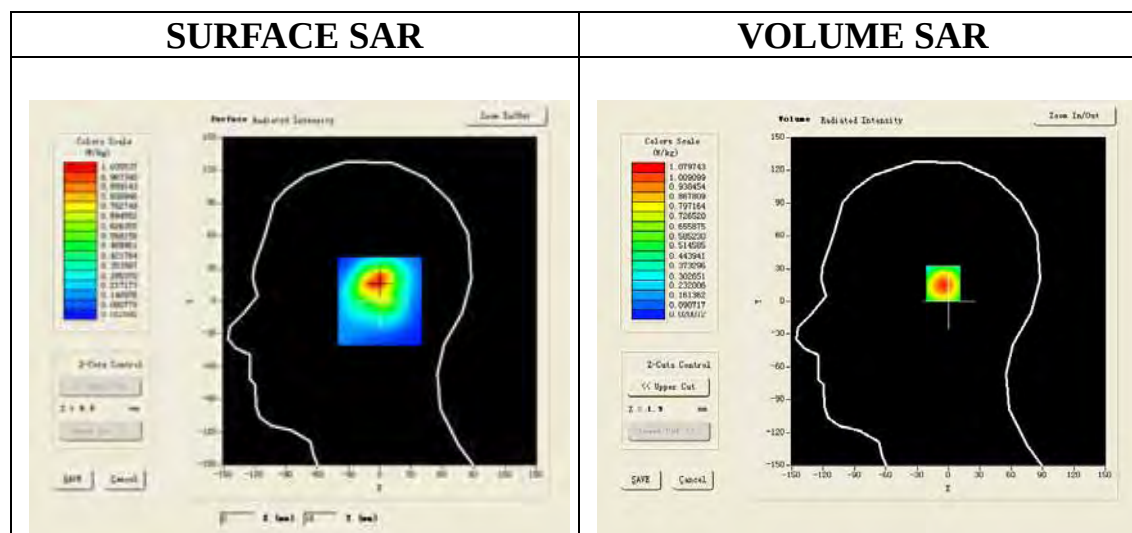

Maximum location: X=-2.00, Y=17.00

SAR 10g (W/Kg)	0.516843
SAR 1g (W/Kg)	1.016382

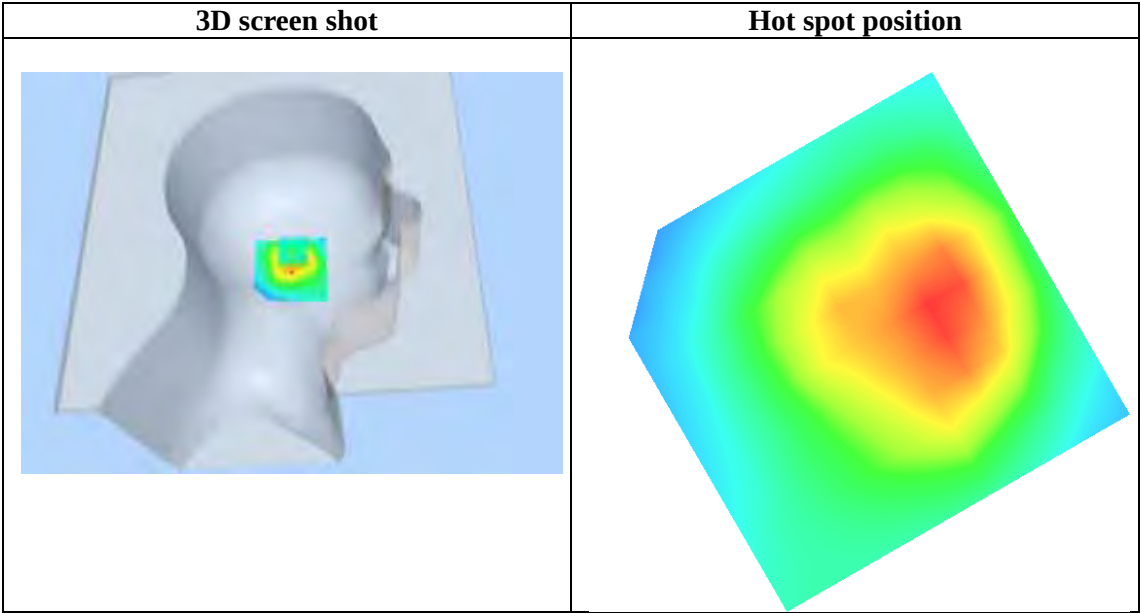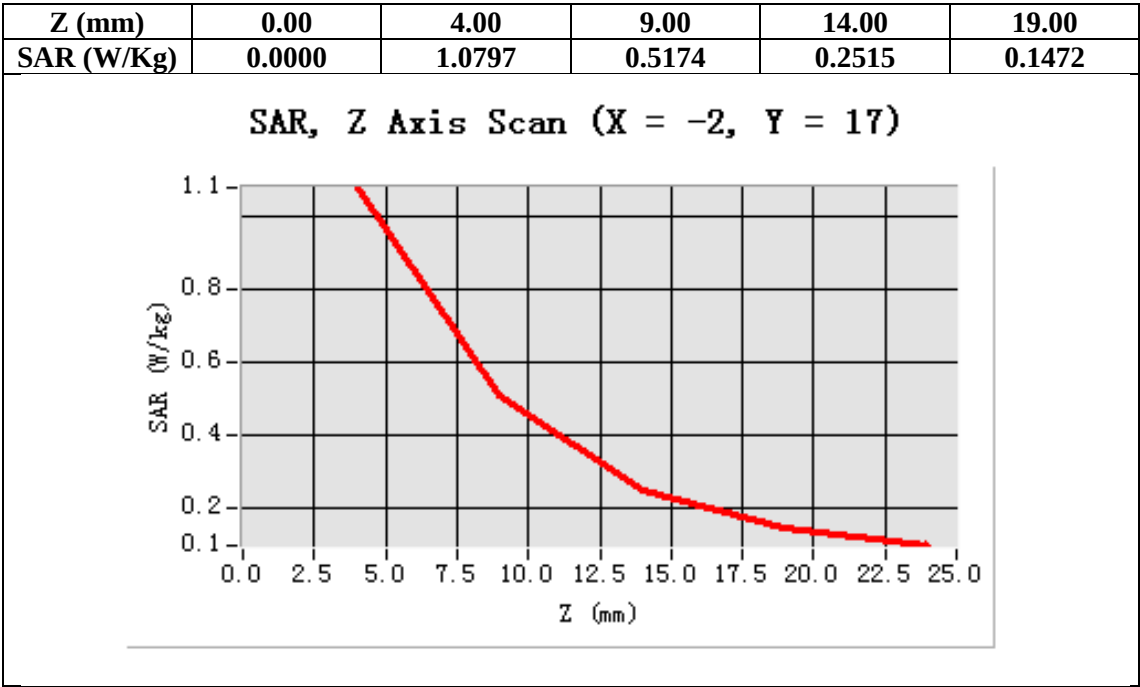

Test Laboratory: AGC Lab
WCDMA Band Low-Tilt-Right <RMC>
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72
Frequency: 1852.4 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Low-Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Low-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	WCDMA band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

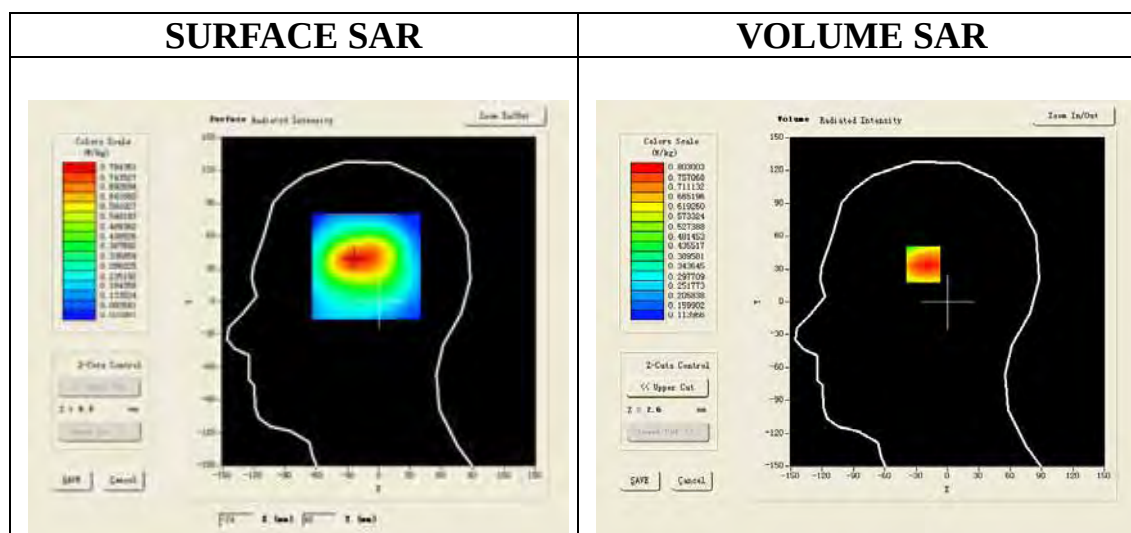

Maximum location: X=-23.00, Y=39.00

SAR 10g (W/Kg)	0.513875
SAR 1g (W/Kg)	0.769057

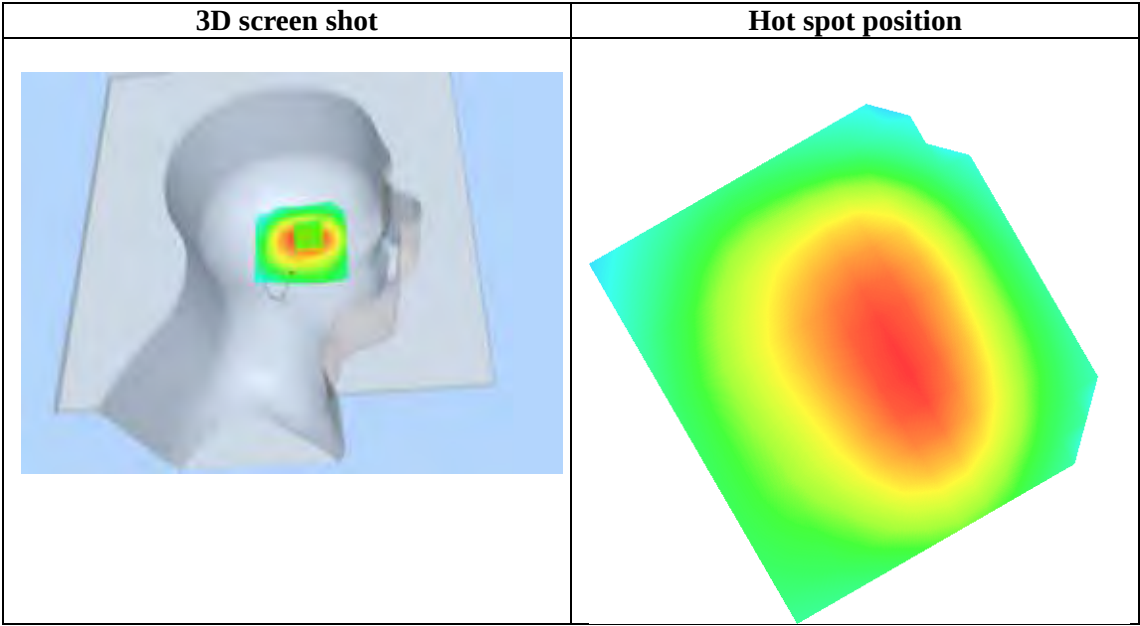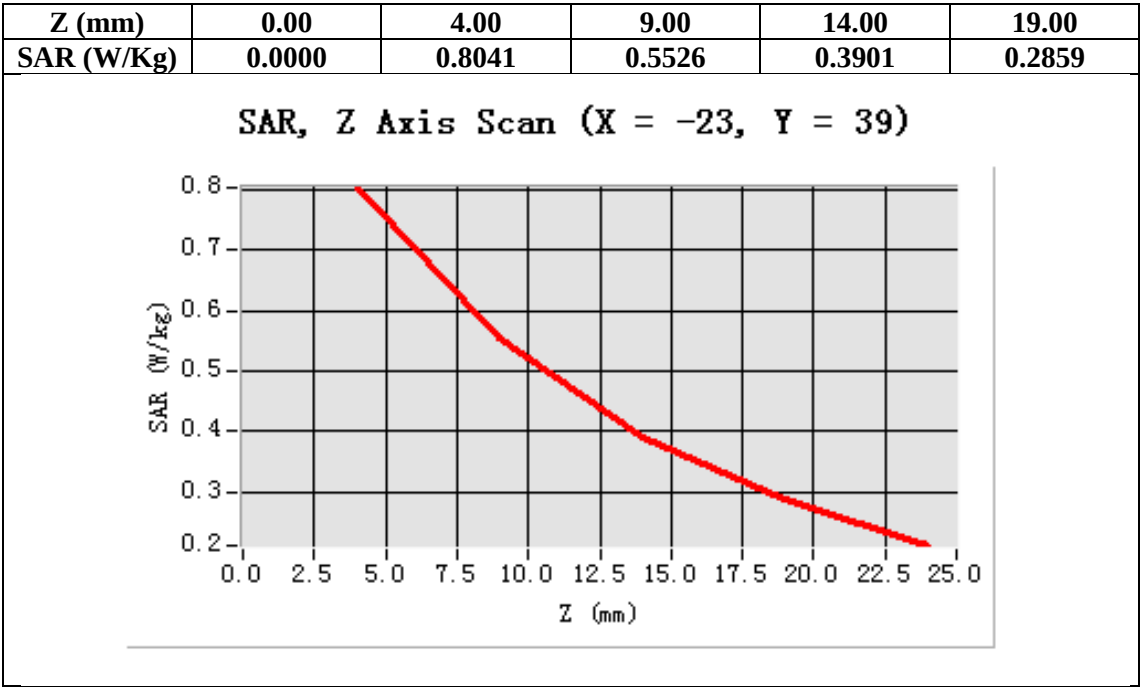

Test Laboratory: AGC Lab
WCDMA Band Mid-Tilt-Right <RMC>
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	WCDMA band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

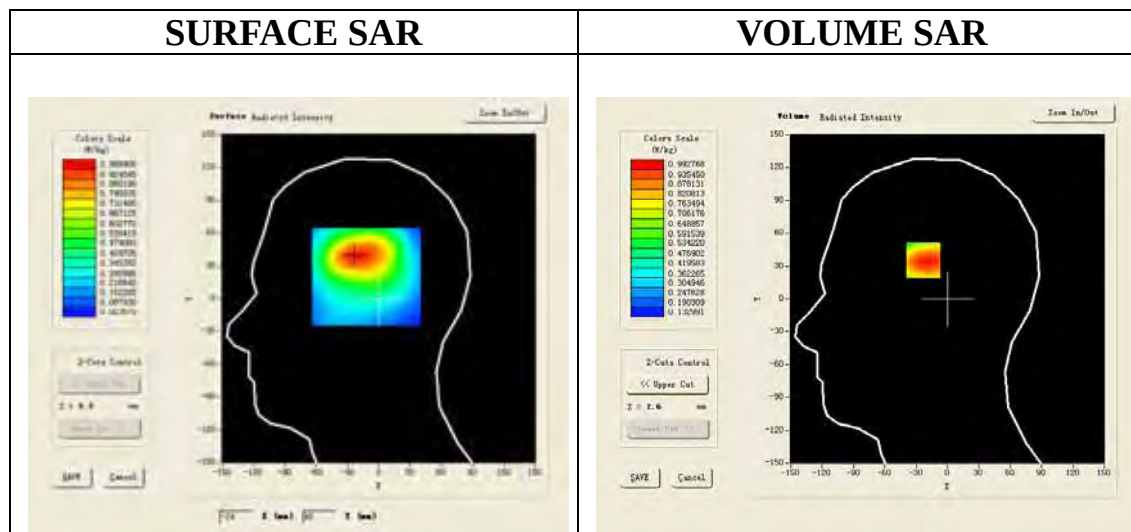

Maximum location: X=-23.00, Y=40.00

SAR 10g (W/Kg)	0.632742
SAR 1g (W/Kg)	0.959363

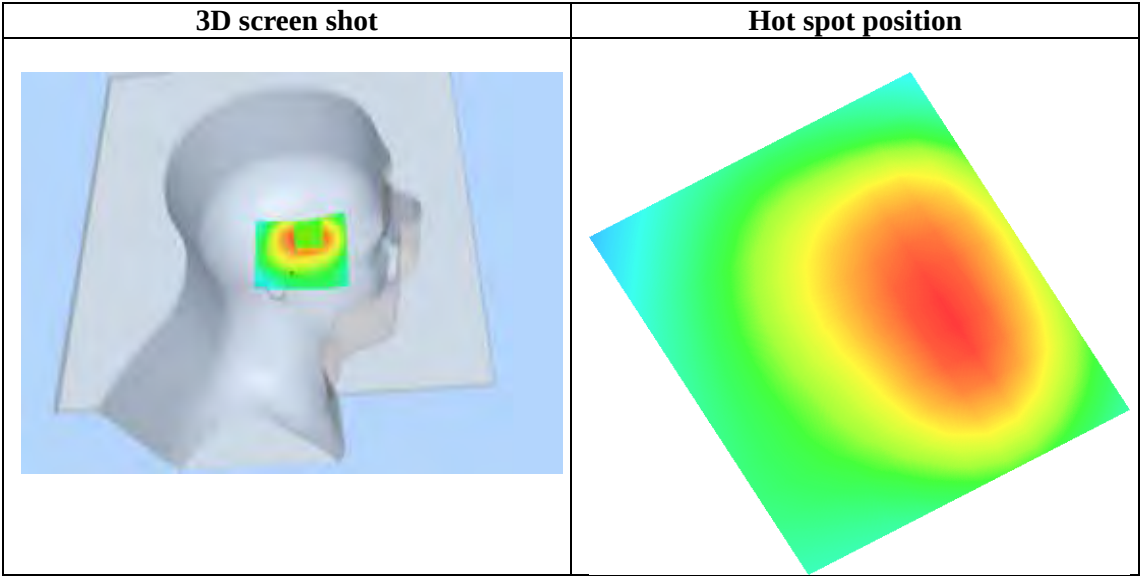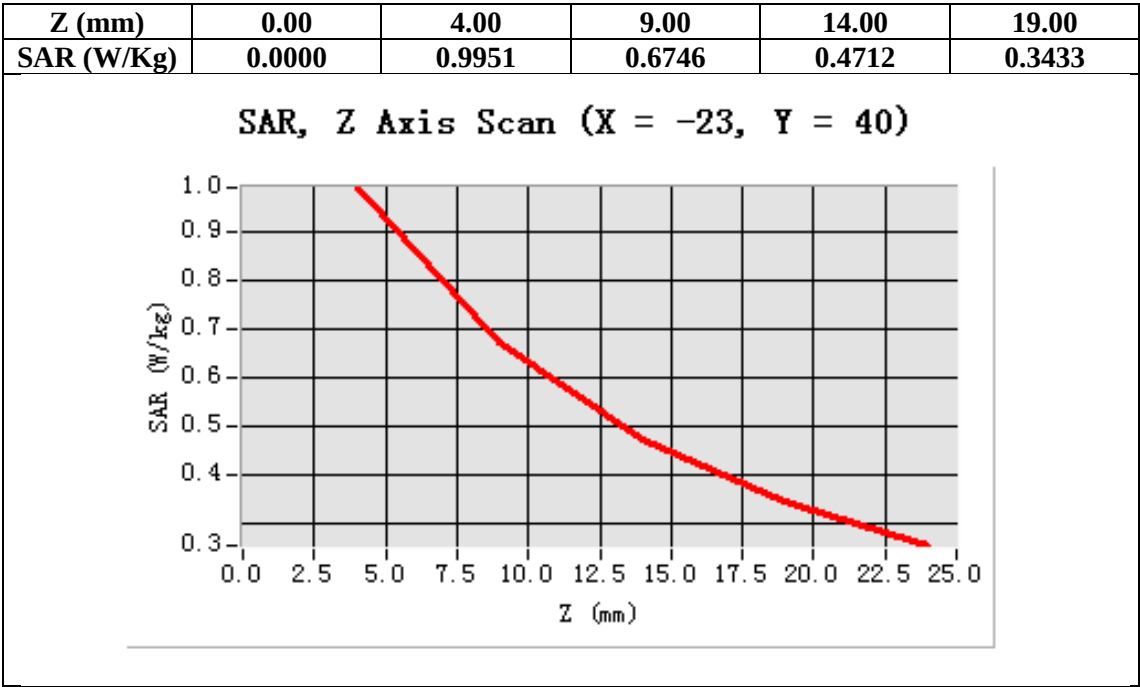

Test Laboratory: AGC Lab
WCDMA Band High-Tilt-Right <RMC>
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.72
Frequency: 1907.6 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 High-Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 High-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	WCDMA band
Channels	High
Signal	TDMA (Crest factor: 1.0)

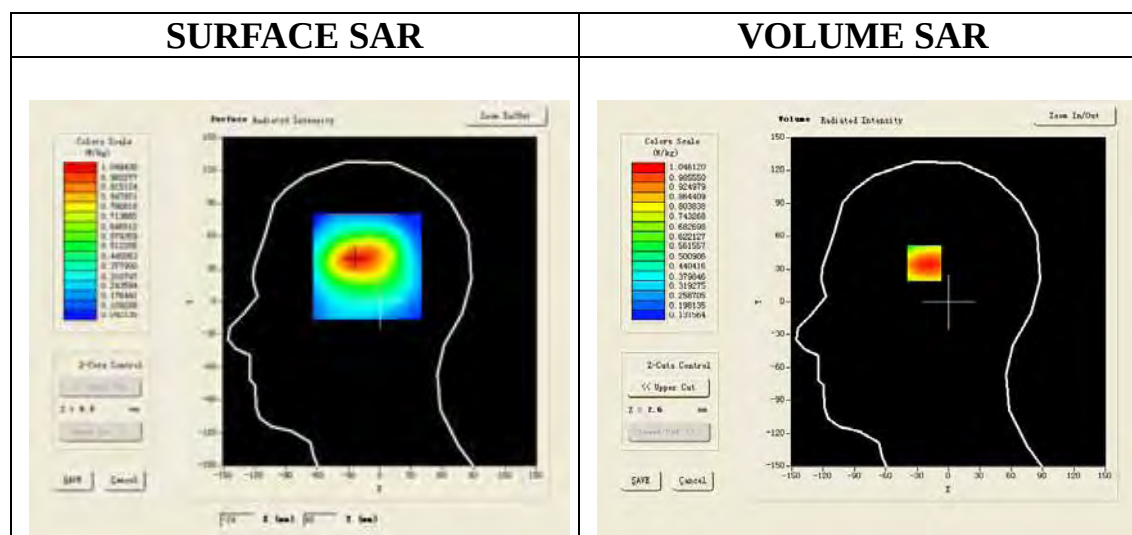

Maximum location: X=-23.00, Y=40.00

SAR 10g (W/Kg)	0.667341
SAR 1g (W/Kg)	1.005908

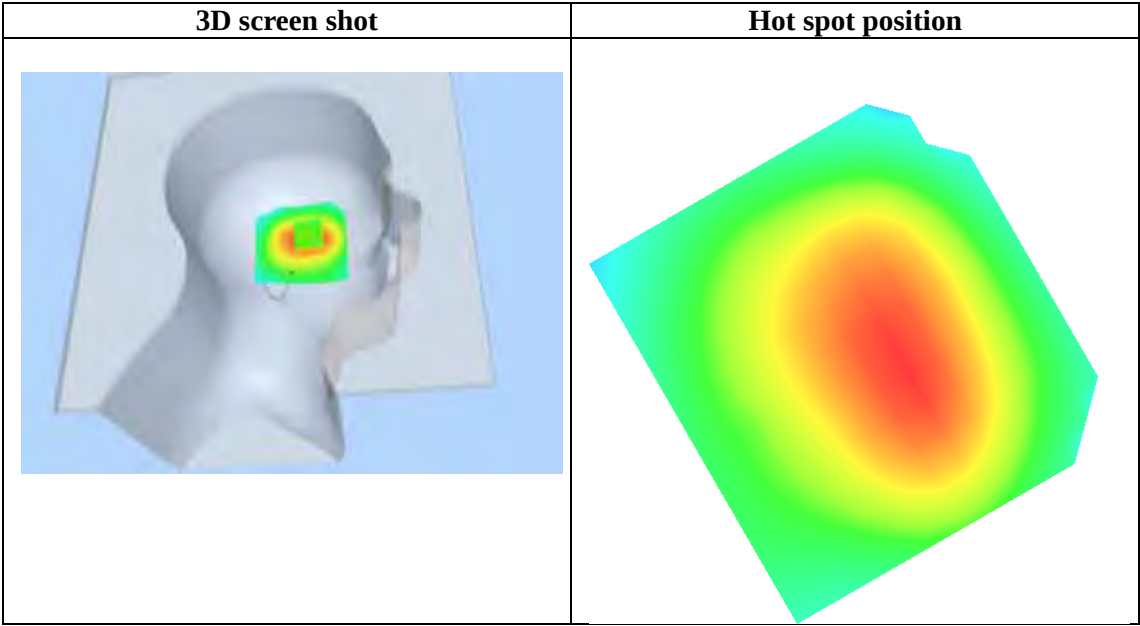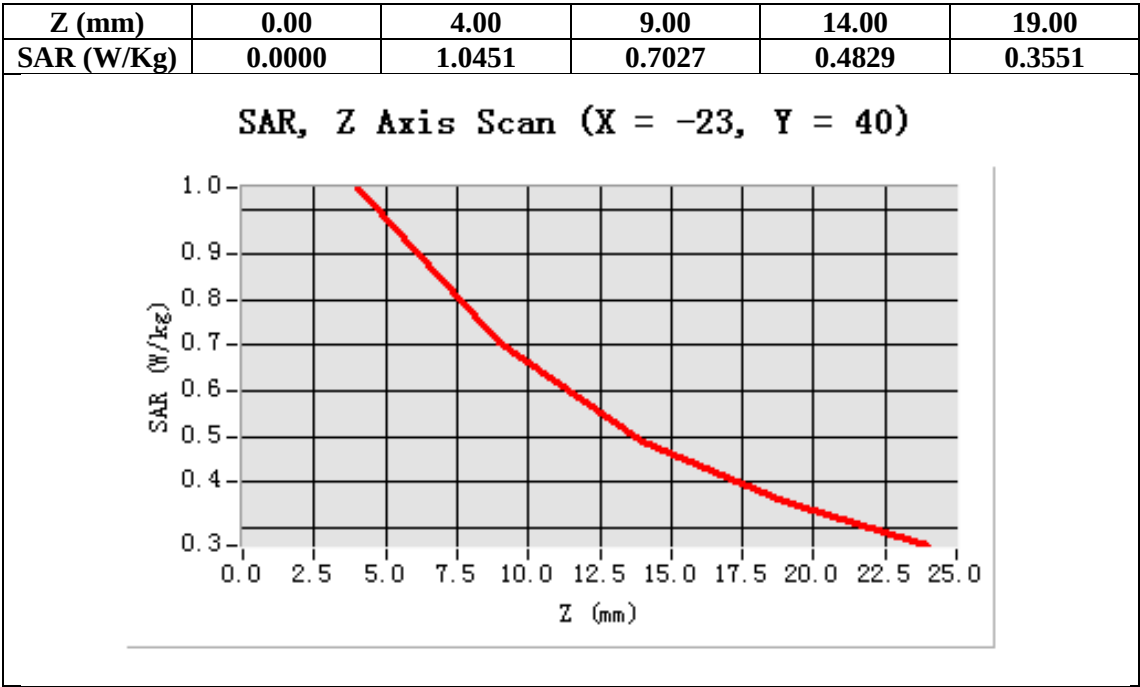

Test Laboratory: AGC Lab
WCDMA Band Low-Body-Towards Grounds (RMC)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1852.4 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band Low-Body-back/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band Low-Body-back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	WCDMA band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

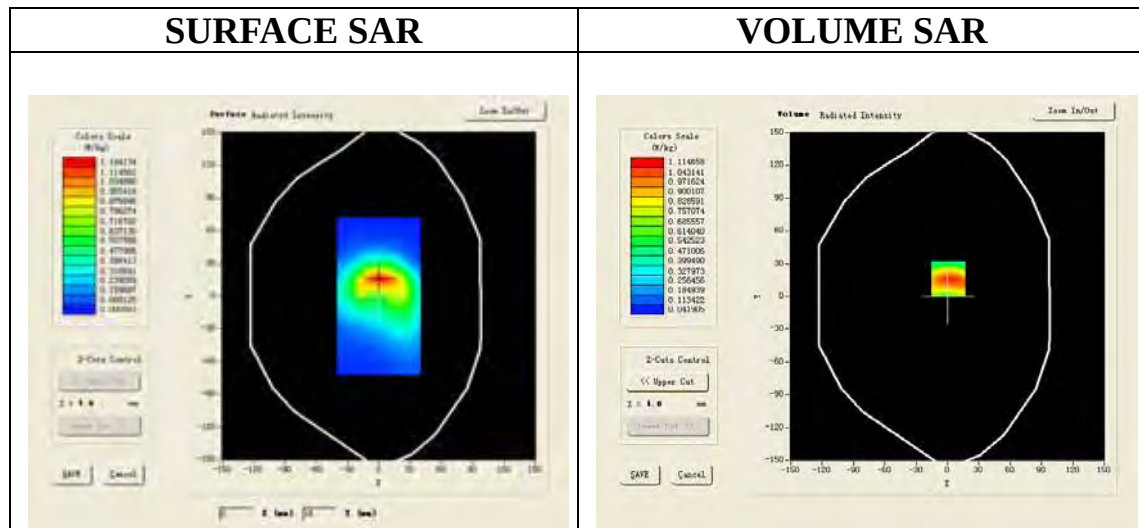

Maximum location: X=1.00, Y=16.00

SAR 10g (W/Kg)	0.644394
SAR 1g (W/Kg)	1.135002

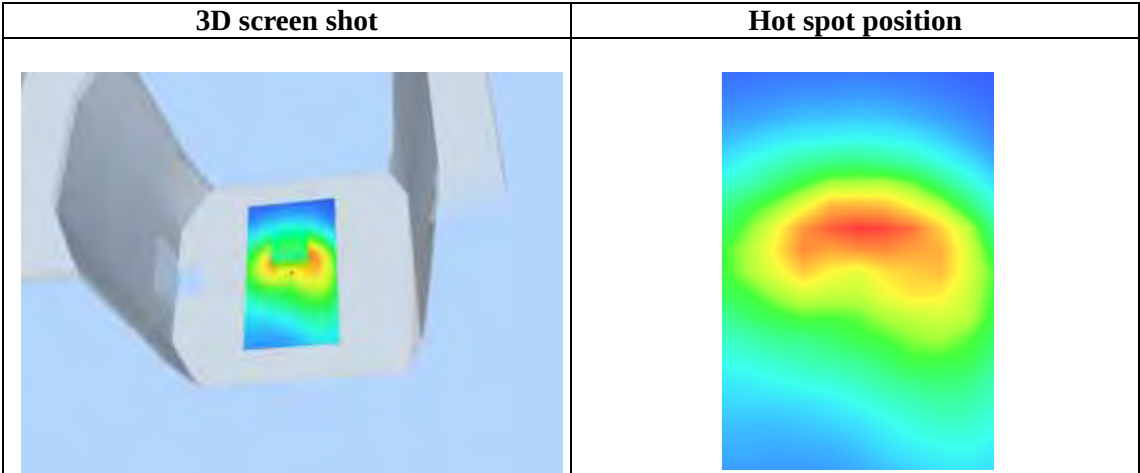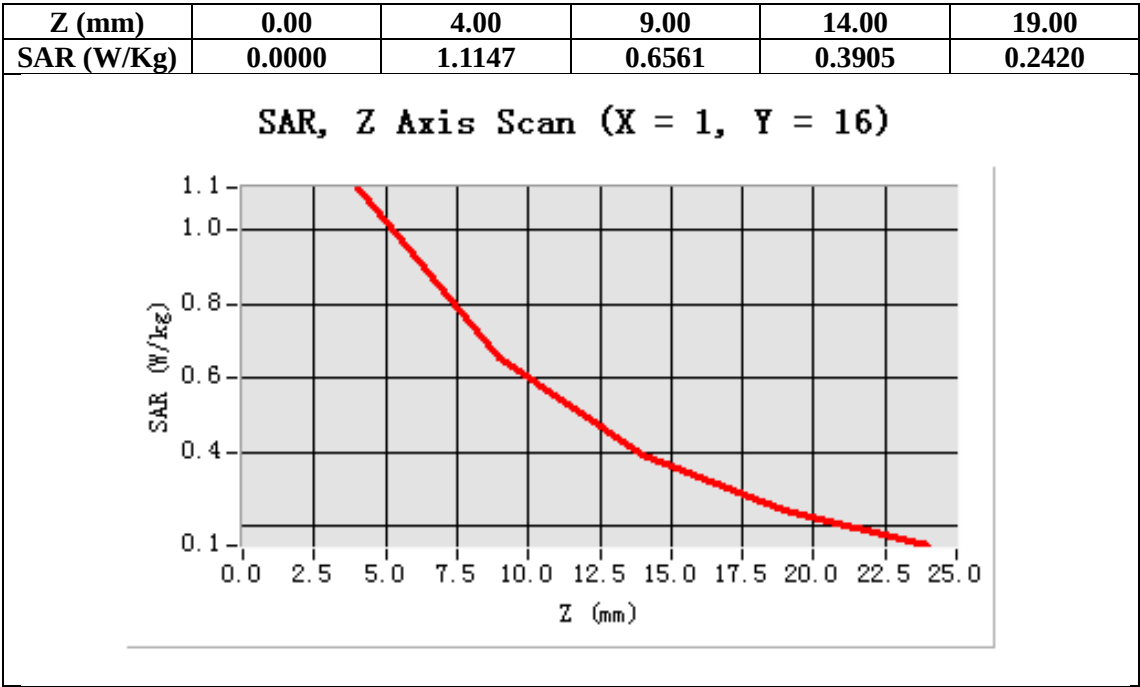

Test Laboratory: AGC Lab
WCDMA Band Mid-Body-Towards Grounds (RMC)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band Mid-Body-back/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	WCDMA band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

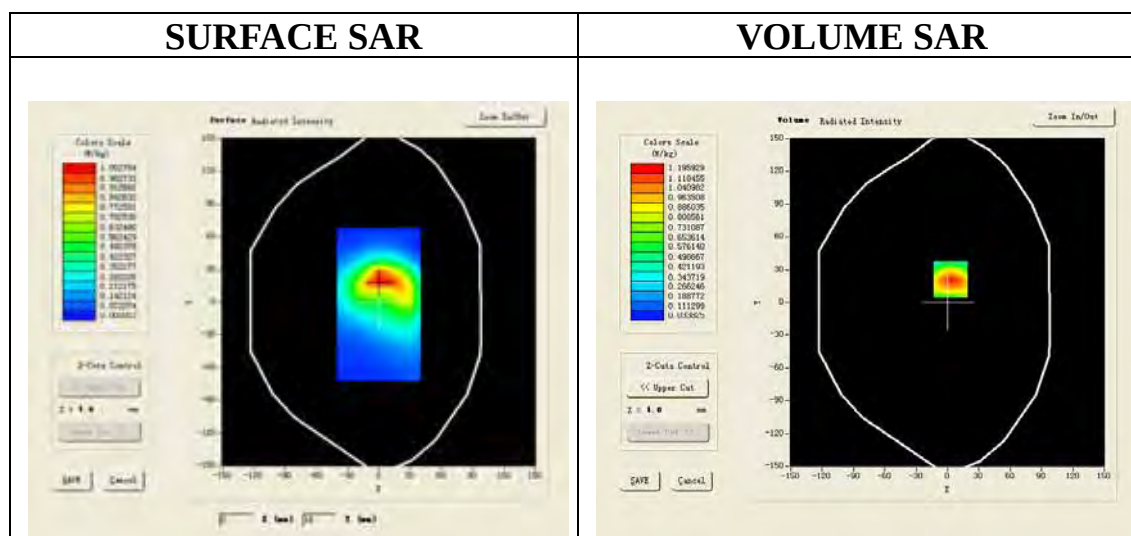

Maximum location: X=3.00, Y=21.00

SAR 10g (W/Kg)	0.643408
SAR 1g (W/Kg)	1.217251

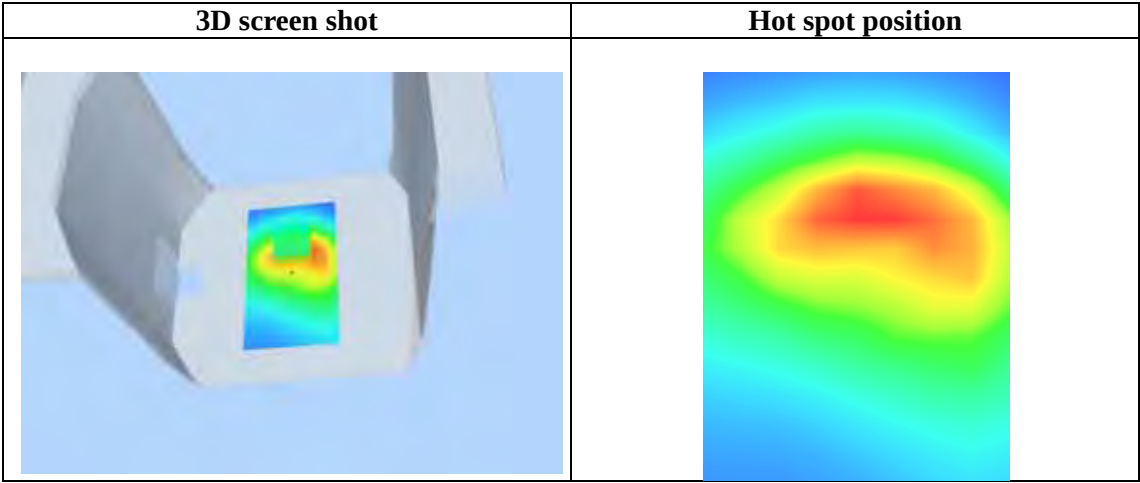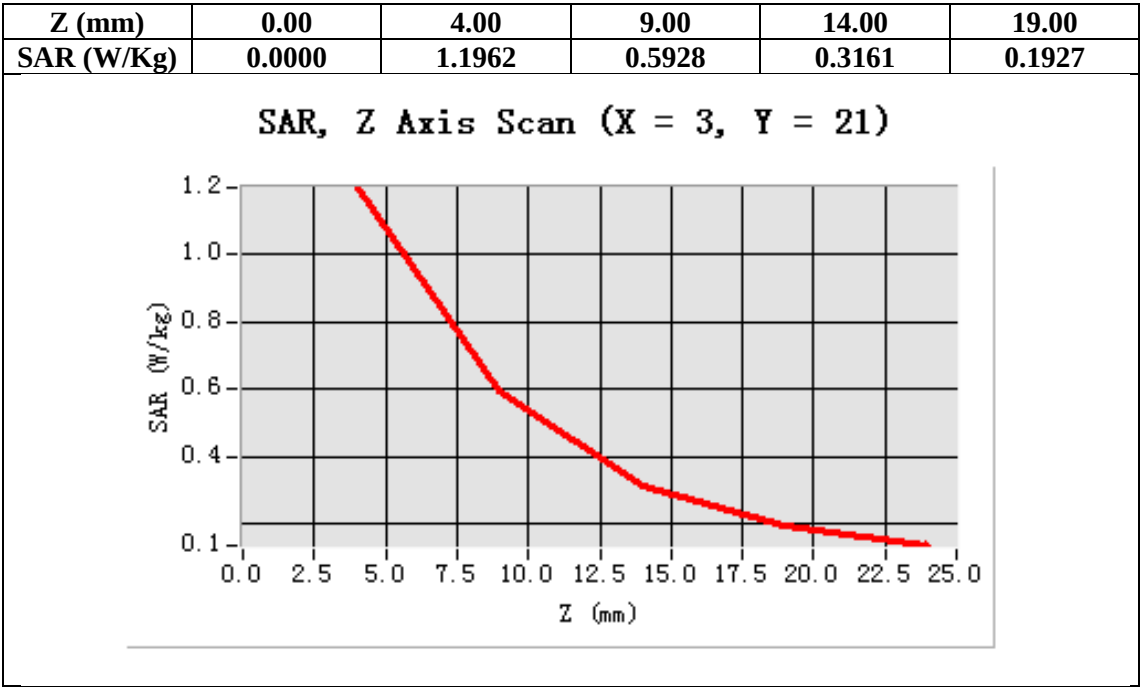

Test Laboratory: AGC Lab
WCDMA Band High-Body-Towards Grounds (RMC)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1907.6 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band High-Body-back/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band High-Body-back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	WCDMA band
Channels	High
Signal	TDMA (Crest factor: 1.0)

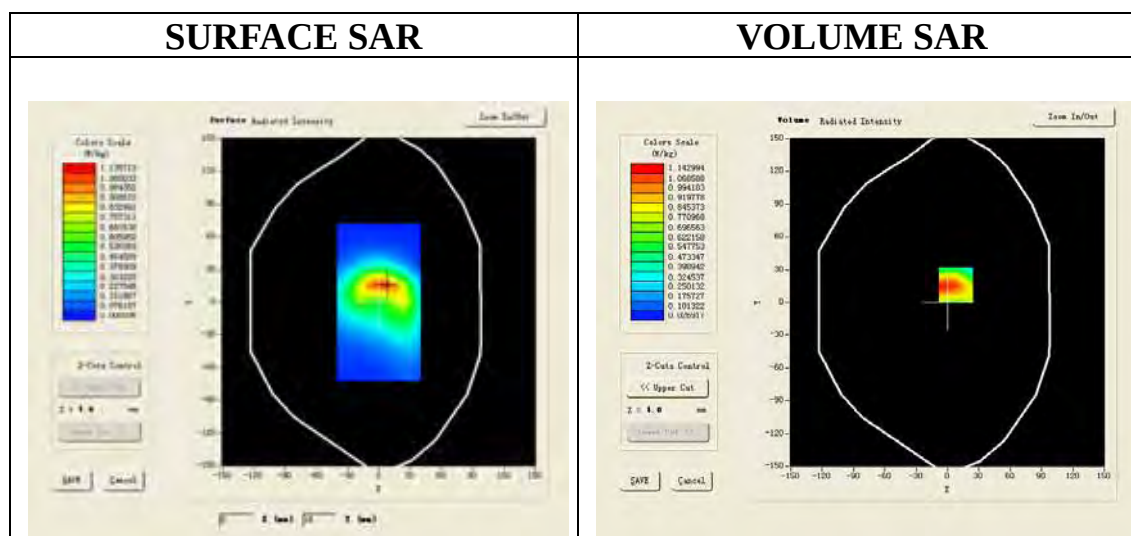

Maximum location: X=8.00, Y=16.00

SAR 10g (W/Kg)	0.656494
SAR 1g (W/Kg)	1.166865

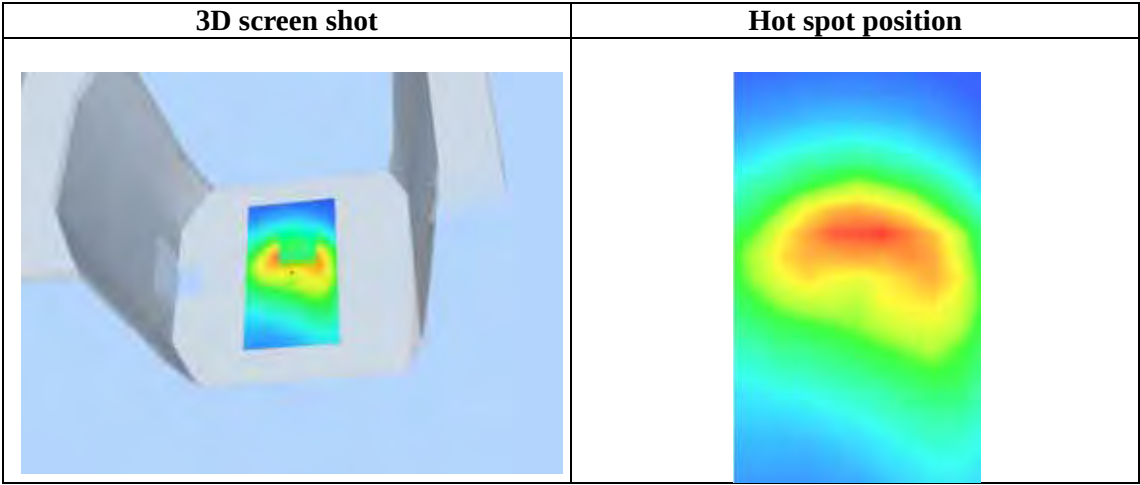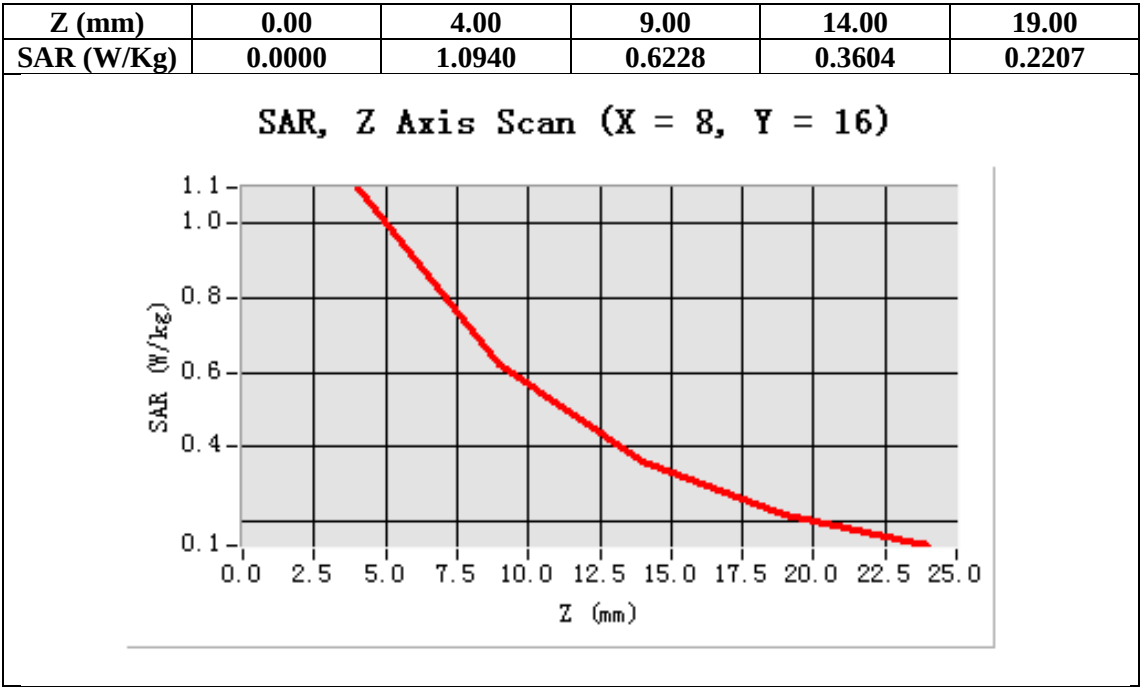

Test Laboratory: AGC Lab
WCDMA Band Mid-Body-Towards Ground (HSDPA)
DUT: Tablet PC; Type: G7

Date: TTDD

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA band Mid-Body-back/Area Scan: Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA band Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

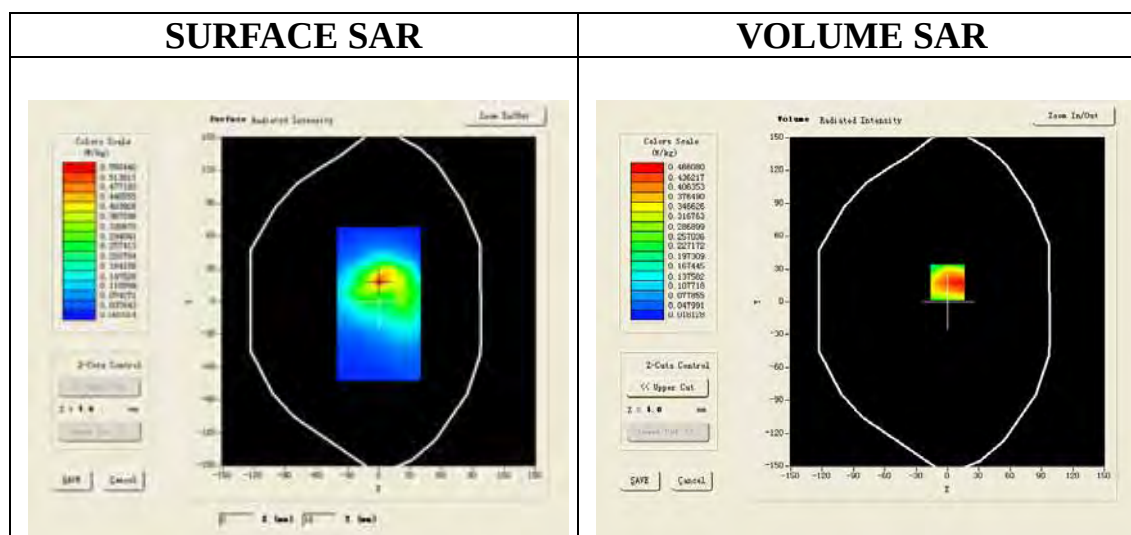

Maximum location: X=0.00, Y=18.00

SAR 10g (W/Kg)	0.272785
SAR 1g (W/Kg)	0.479632

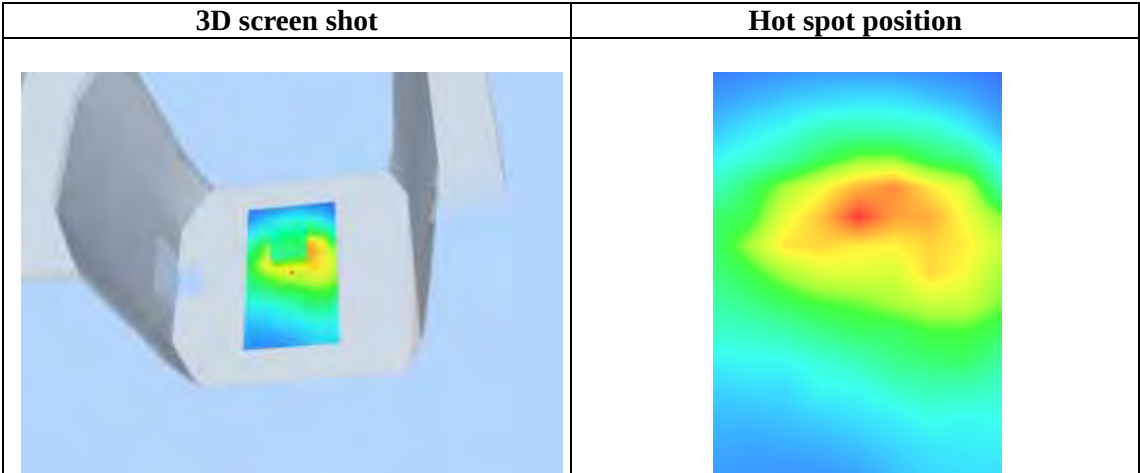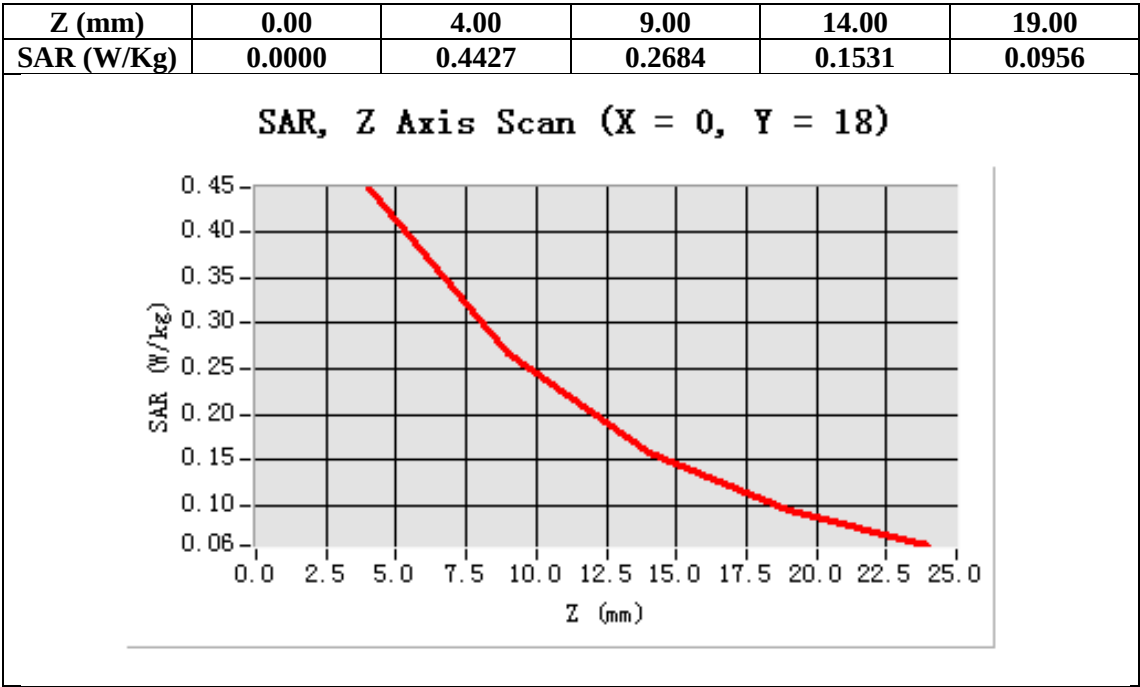

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band II Mid-Horizontal near antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid- Horizontal near antenna /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid- Horizontal near antenna /Zoom Scan: Measurement grid:dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Horizontal
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

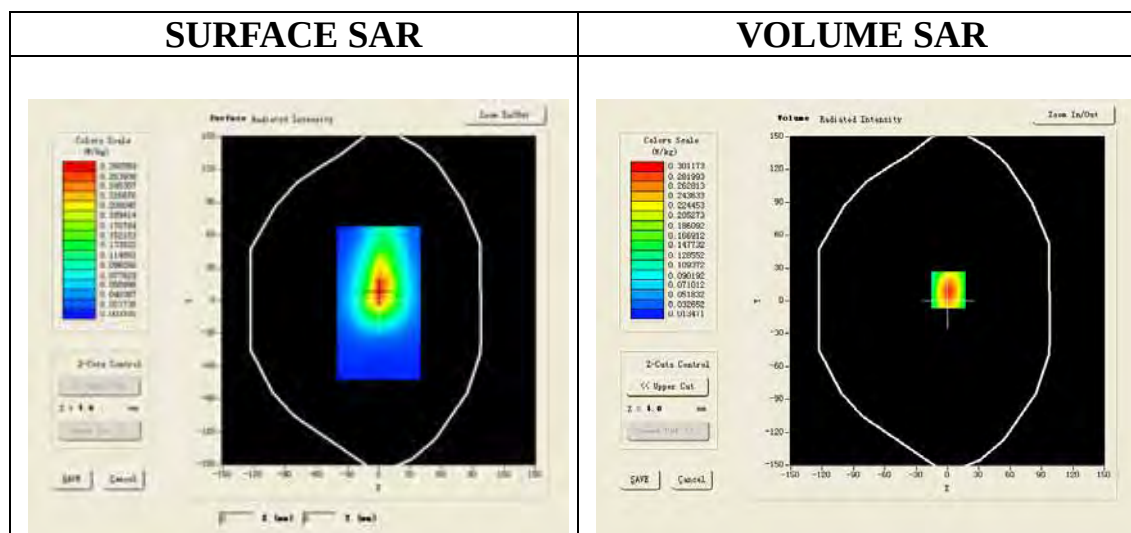

Maximum location: X=1.00, Y=10.00

SAR 10g (W/Kg)	0.162764
SAR 1g (W/Kg)	0.303907

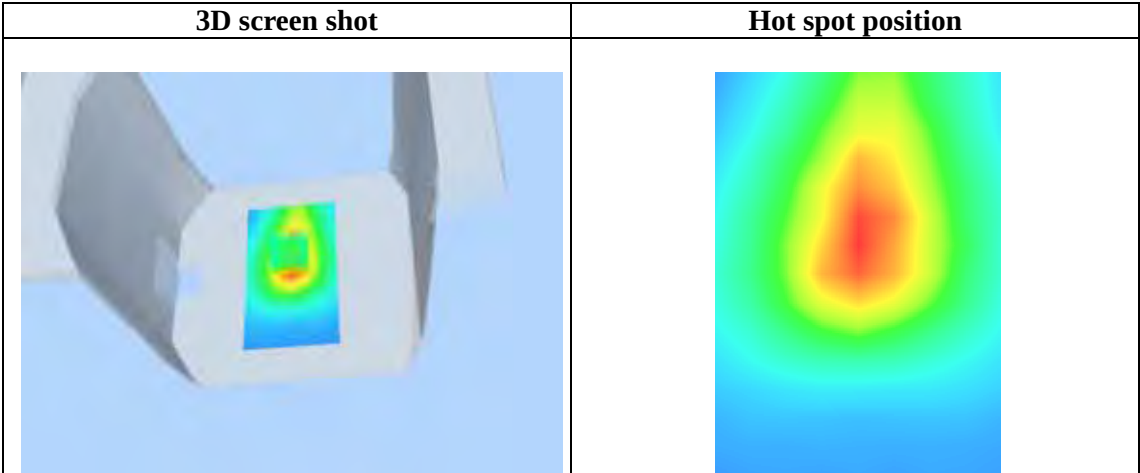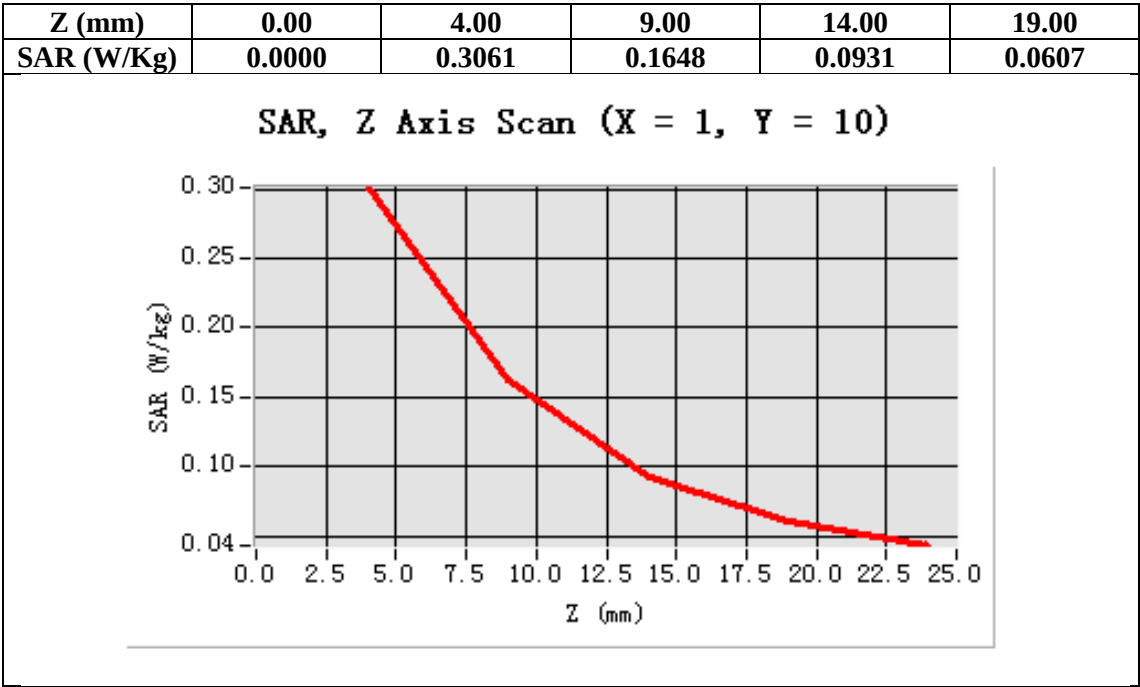

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band II Mid-Horizontal away from antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid- Horizontal away from antenna /Area Scan: Measurement grid:
dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid- Horizontal away from antenna /Zoom Scan: Measurement grid:
dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Horizontal
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

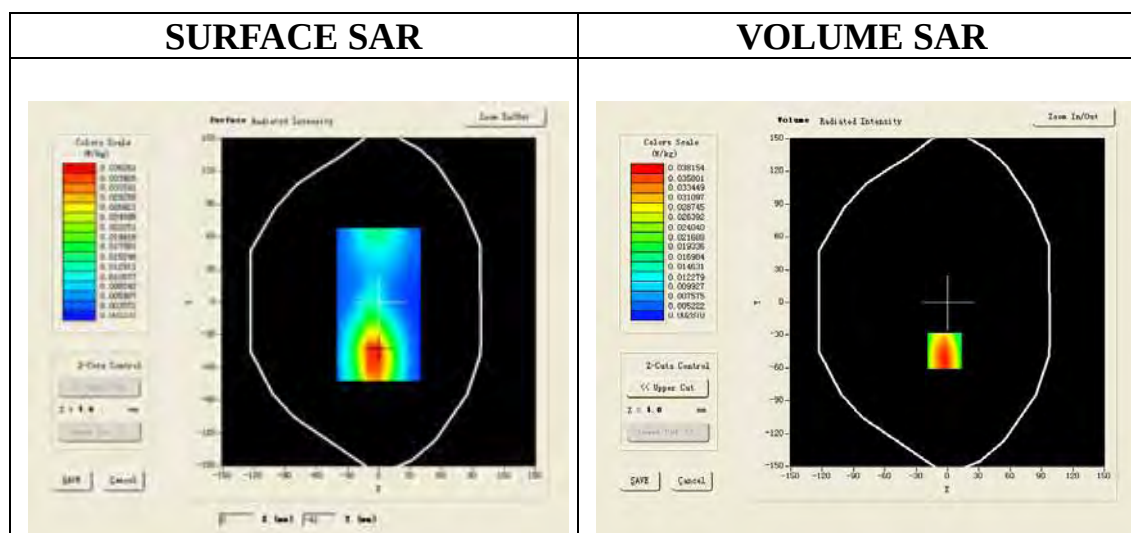

Maximum location: X=-3.00, Y=-44.00

SAR 10g (W/Kg)	0.026274
SAR 1g (W/Kg)	0.034079

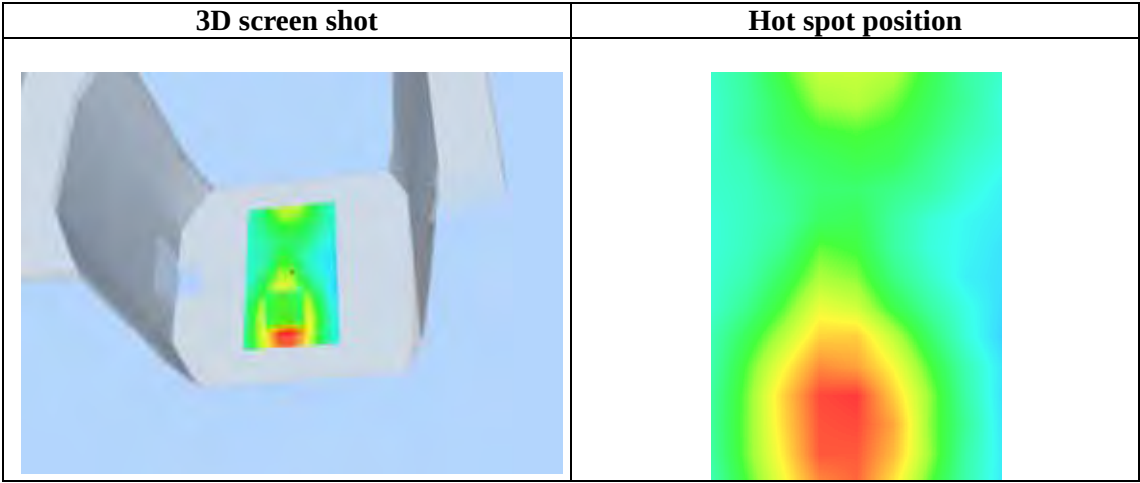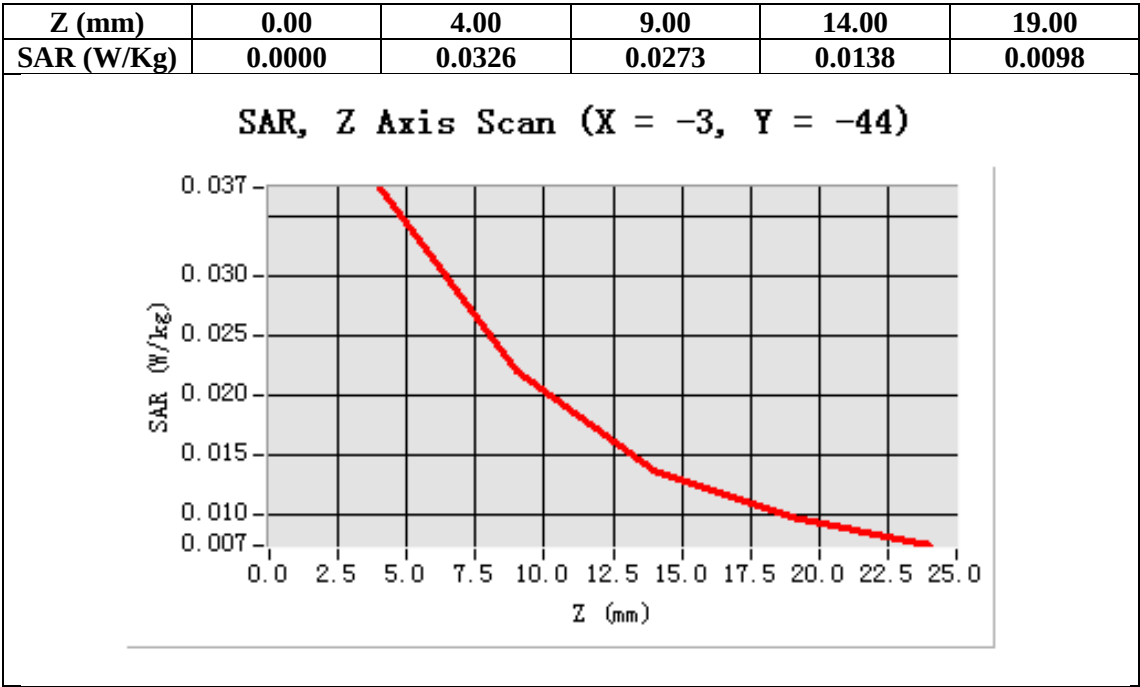

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band II Mid-Vertical near antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Vertical near antenna /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Vertical near antenna /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Vertical
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

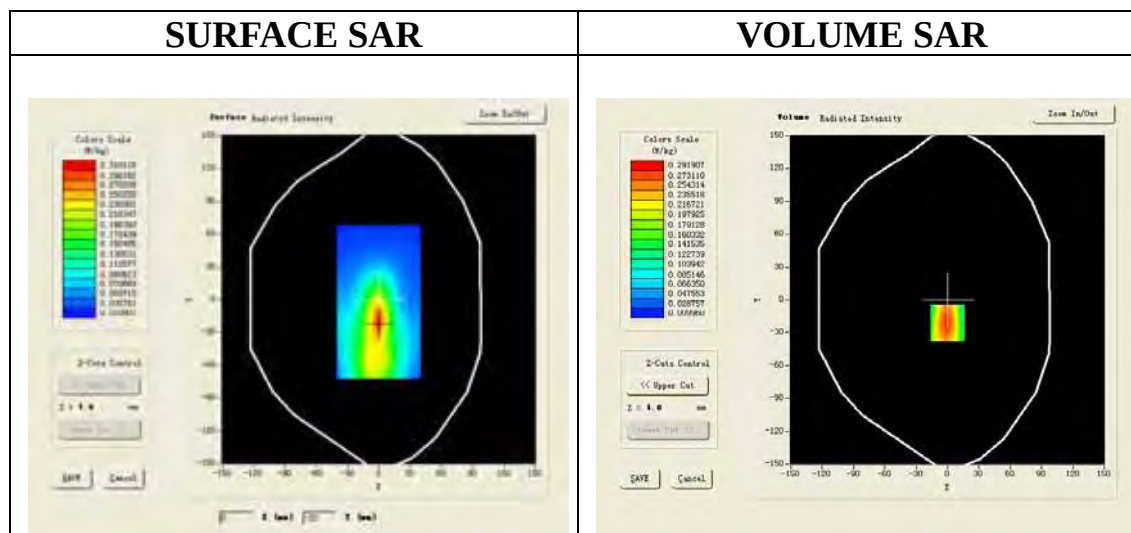

Maximum location: X=0.00, Y=-21.00

SAR 10g (W/Kg)	0.153785
SAR 1g (W/Kg)	0.299067

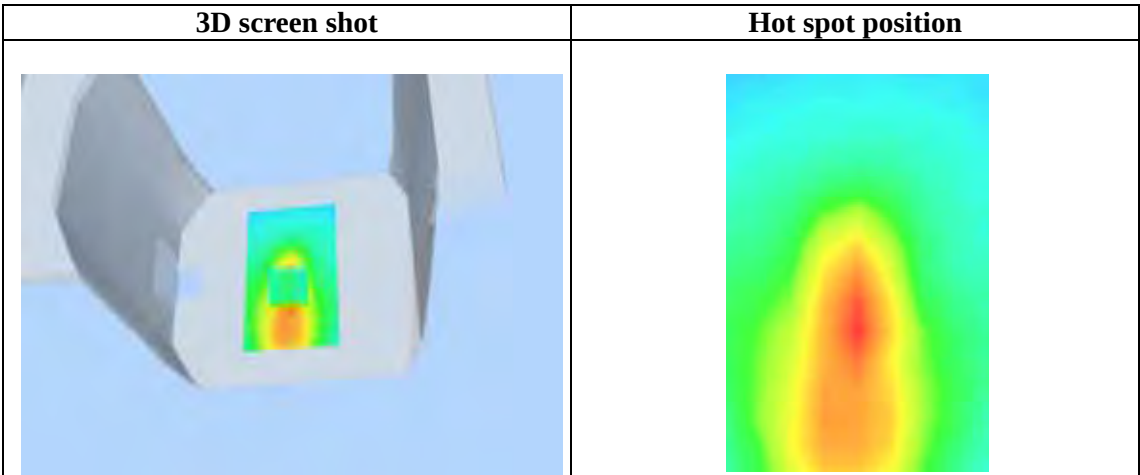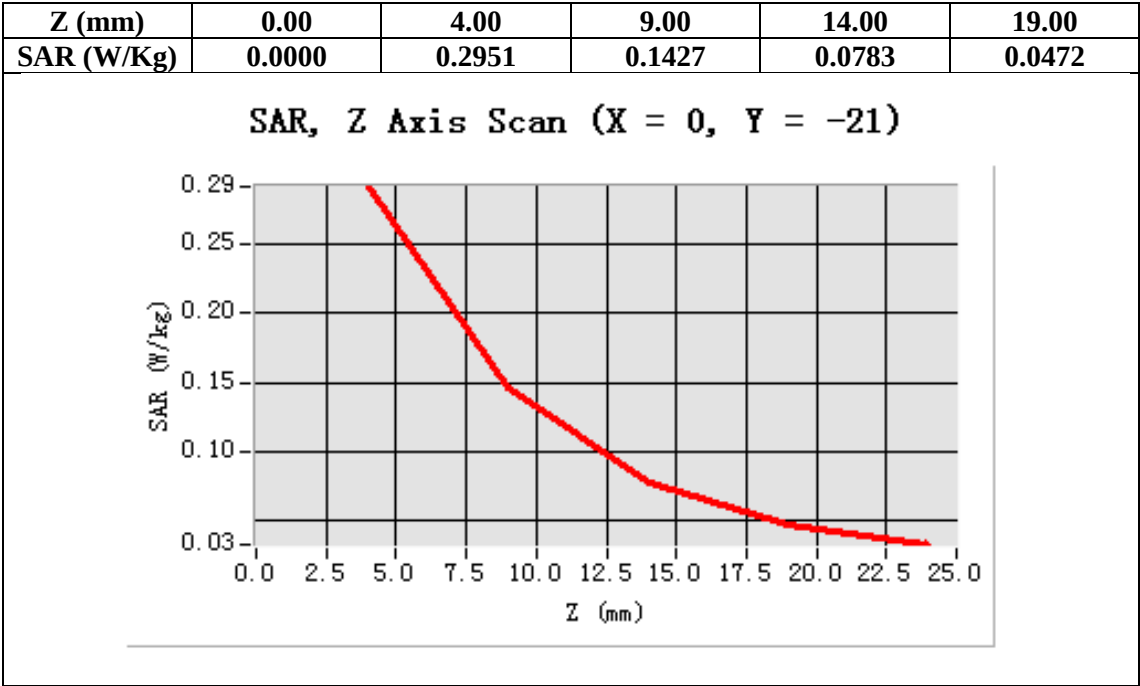

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band II Mid-Vertical away from antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: Band UTRA/FDD ;Duty Cycle:1:1; ConvF=4.84
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 52.67$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Vertical away from antenna /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Vertical away from antenna /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Vertical
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

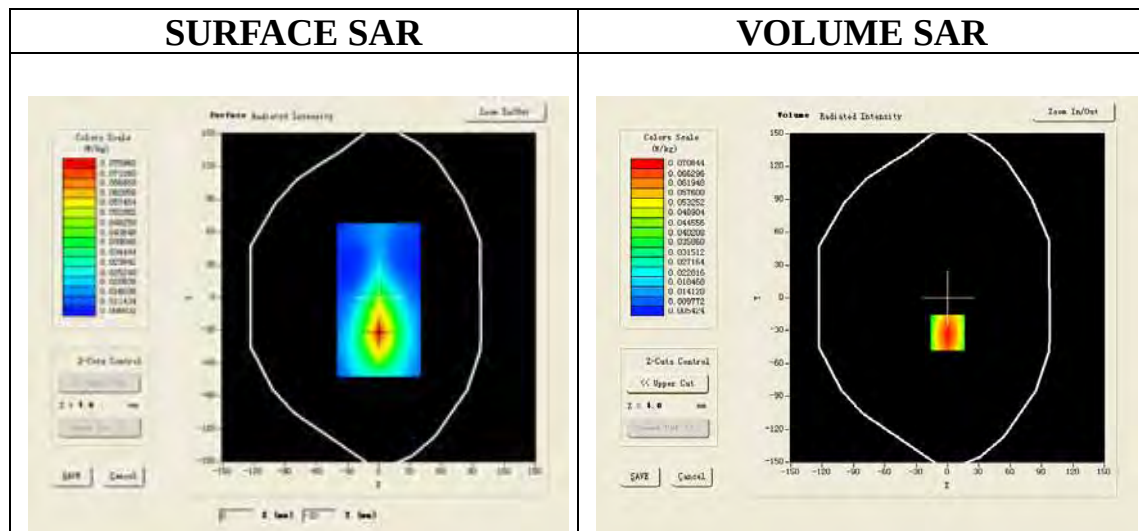

Maximum location: X=0.00, Y=-32.00

SAR 10g (W/Kg)	0.043980
SAR 1g (W/Kg)	0.075124

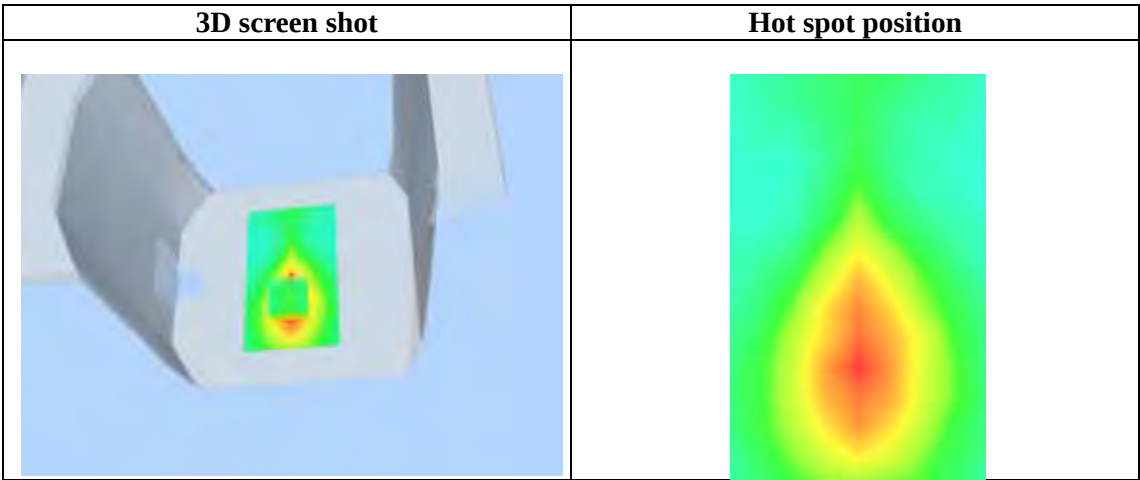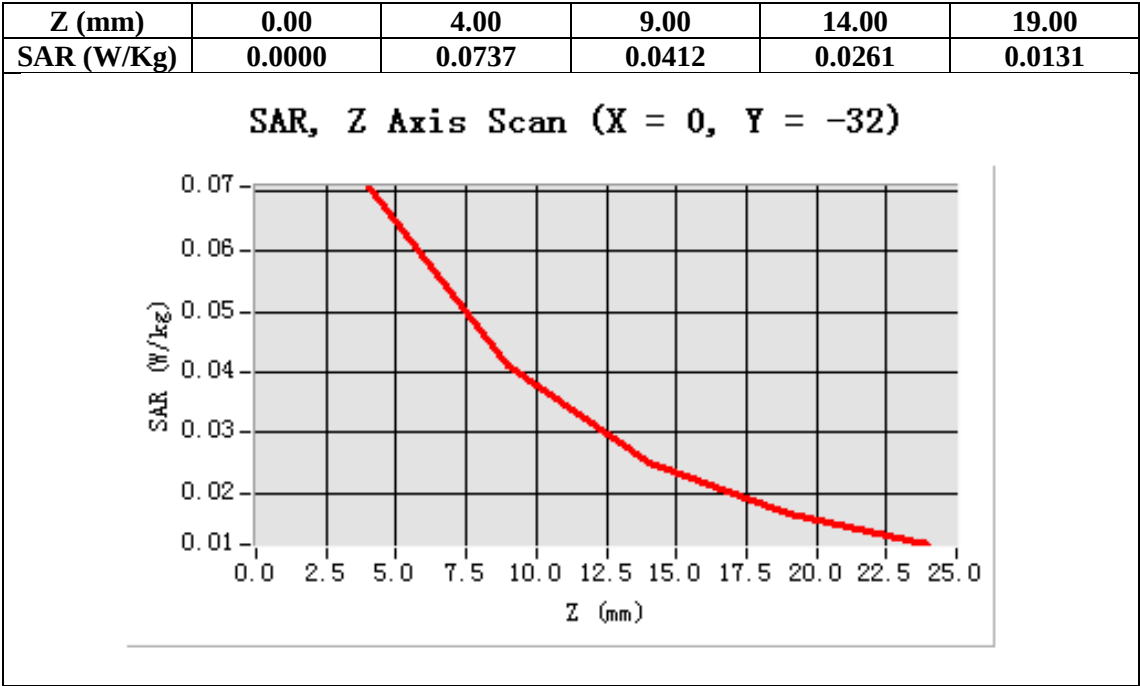

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Low-Touch-Left (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 826.4 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Low-Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Low-Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

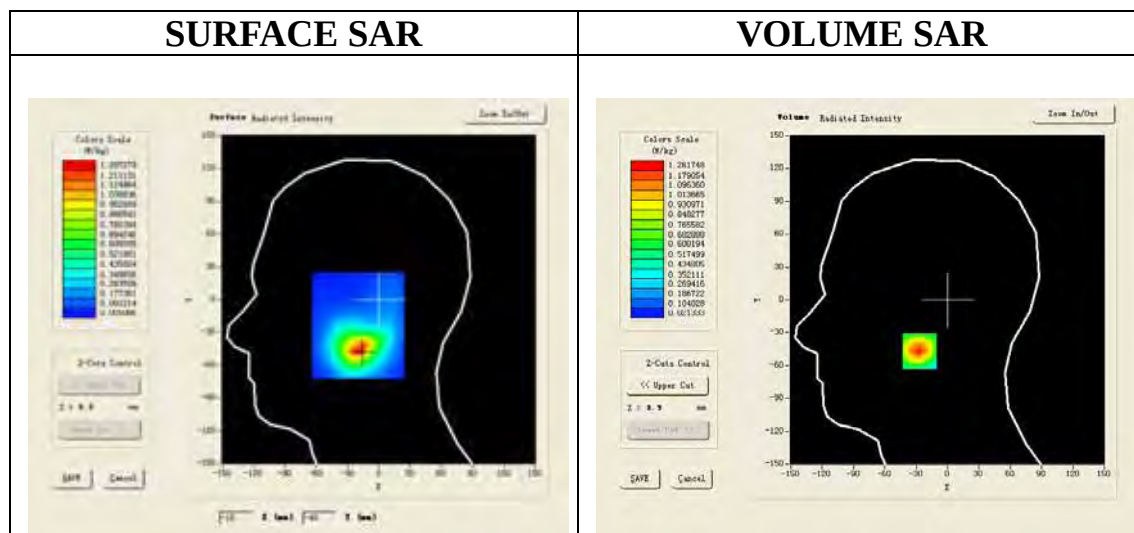

Maximum location: X=-18.00, Y=-47.00

SAR 10g (W/Kg)	0.604758
SAR 1g (W/Kg)	1.175241

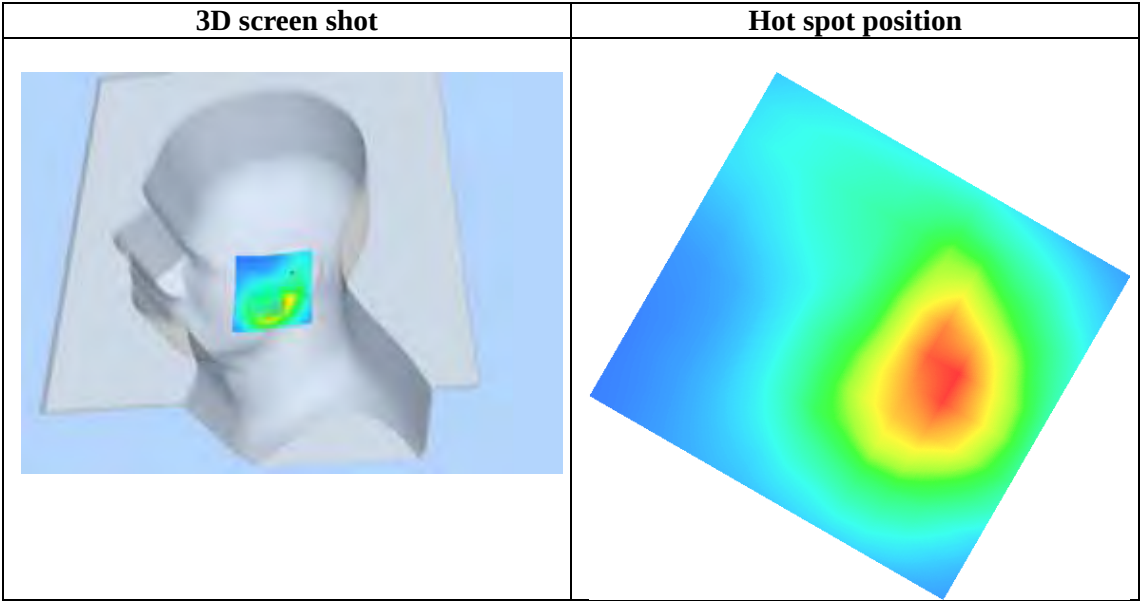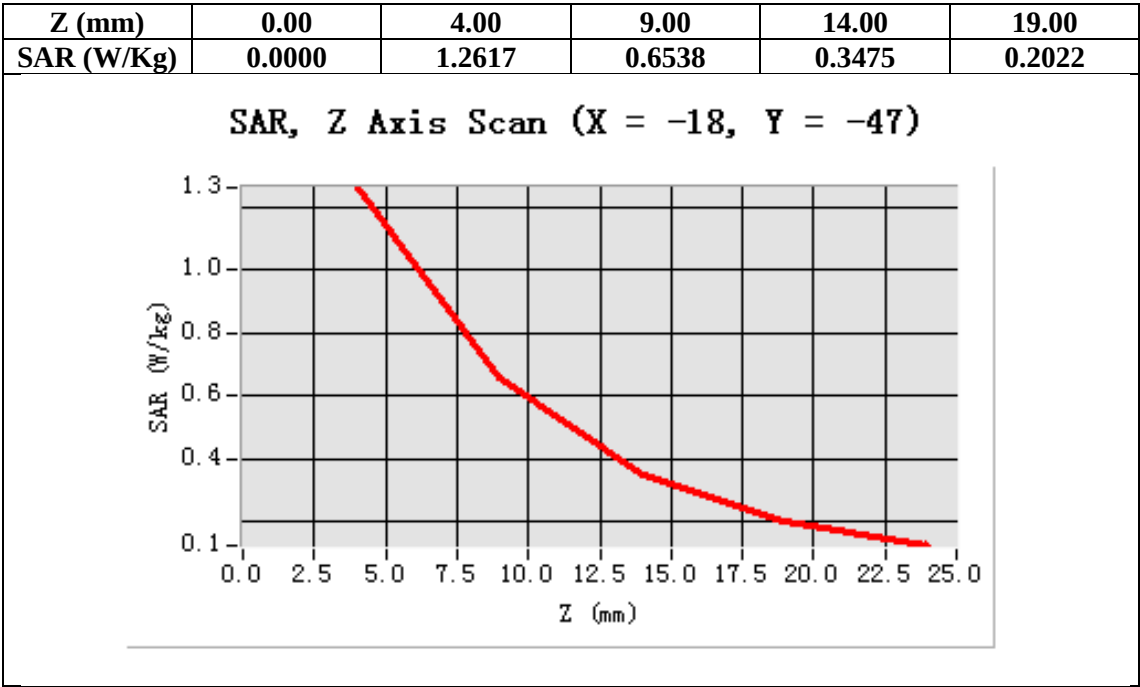

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Mid-Touch-Left (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.93$ mho/m; $\epsilon_r=41.38$; $\rho= 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA Band Mid-Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA Band Mid-Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

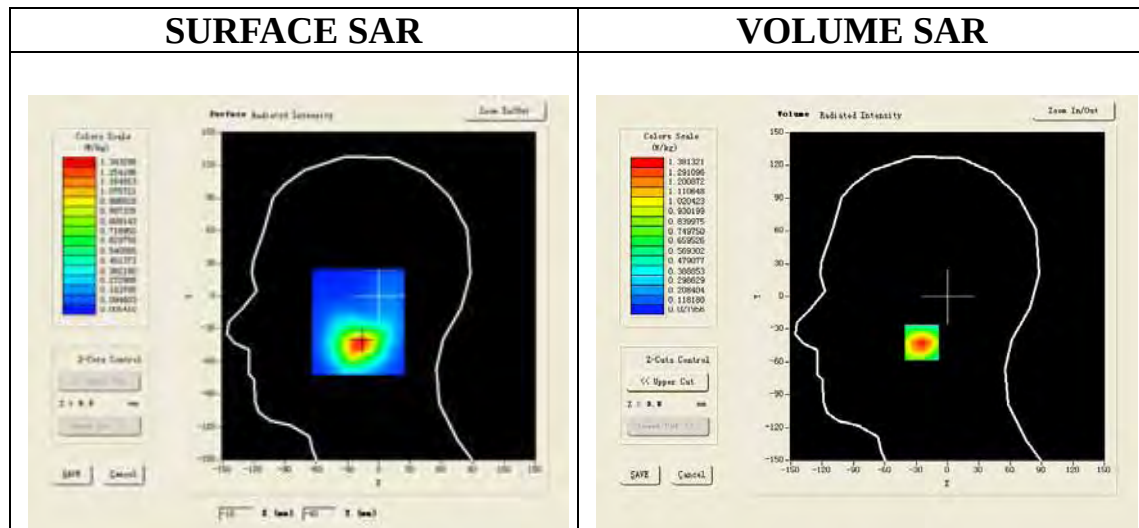

Maximum location: X=-17.00, Y=-42.00

SAR 10g (W/Kg)	0.654078
SAR 1g (W/Kg)	1.304147

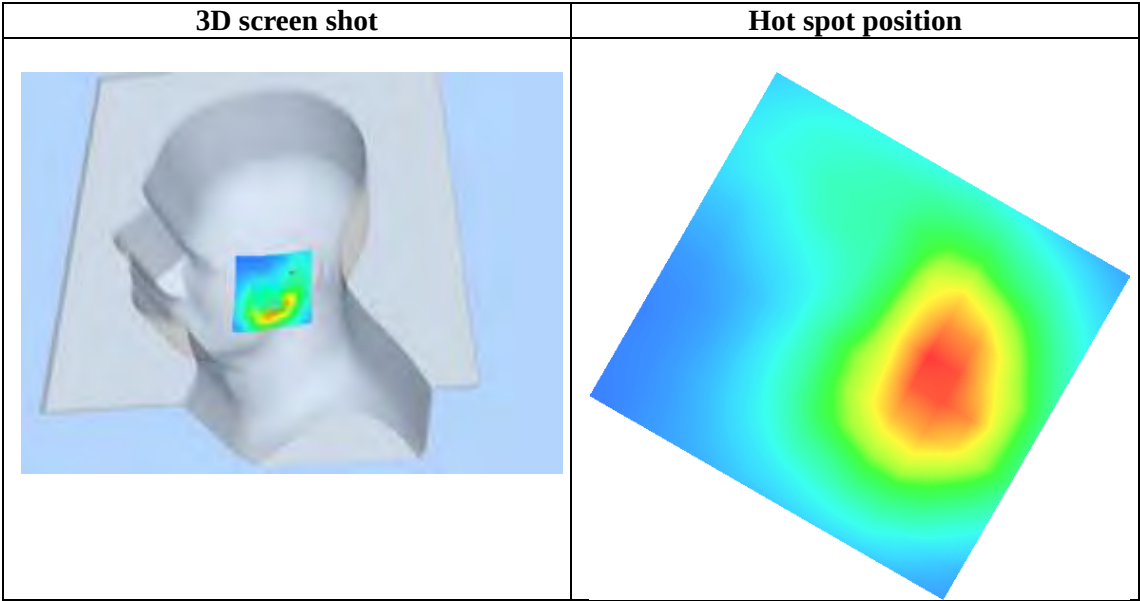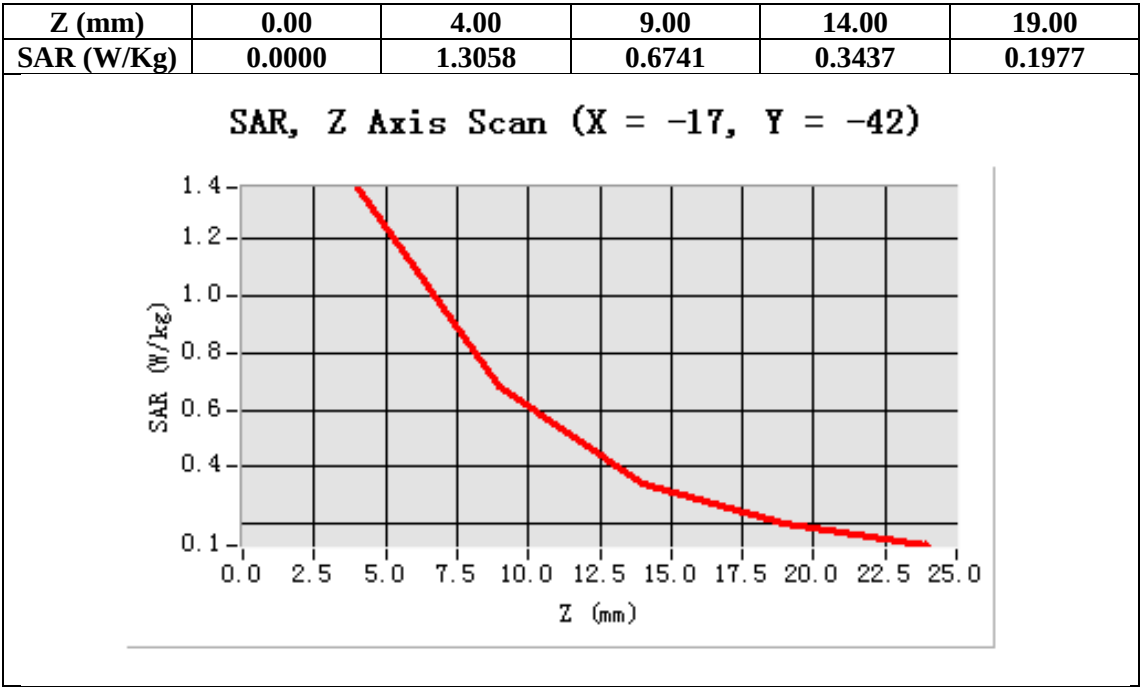

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V High-Touch-Left (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 846.6 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band High-Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band High-Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band
Channels	High
Signal	TDMA (Crest factor: 1.0)

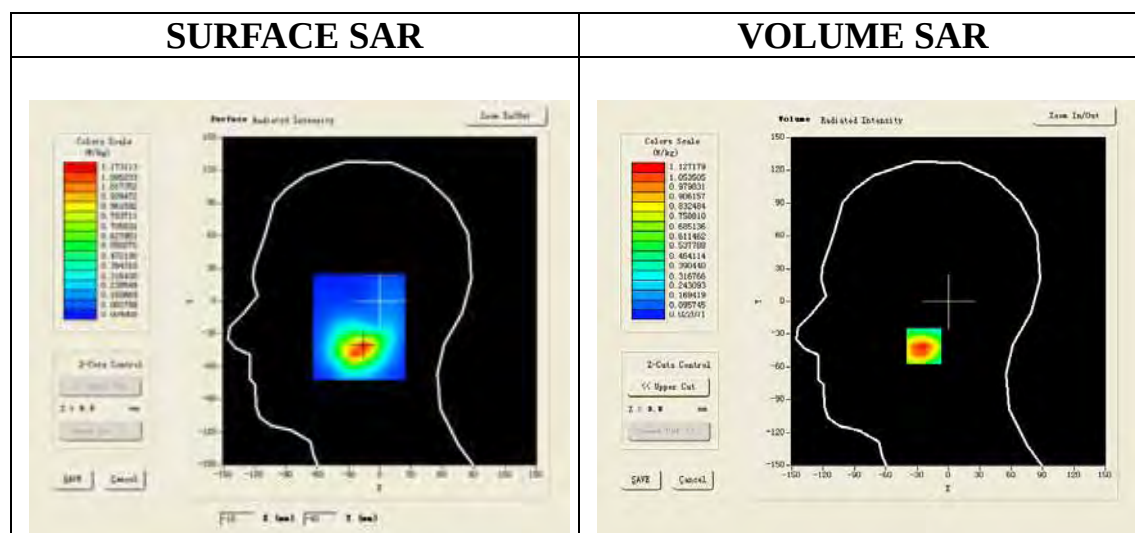

Maximum location: X=-16.00, Y=-41.00

SAR 10g (W/Kg)	0.545839
SAR 1g (W/Kg)	1.073071

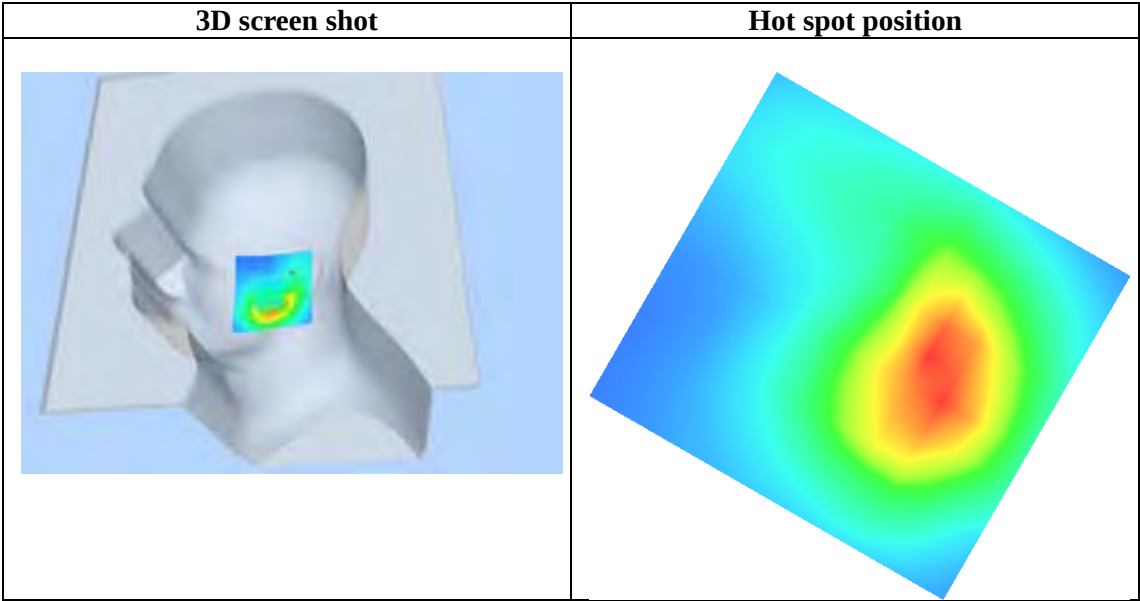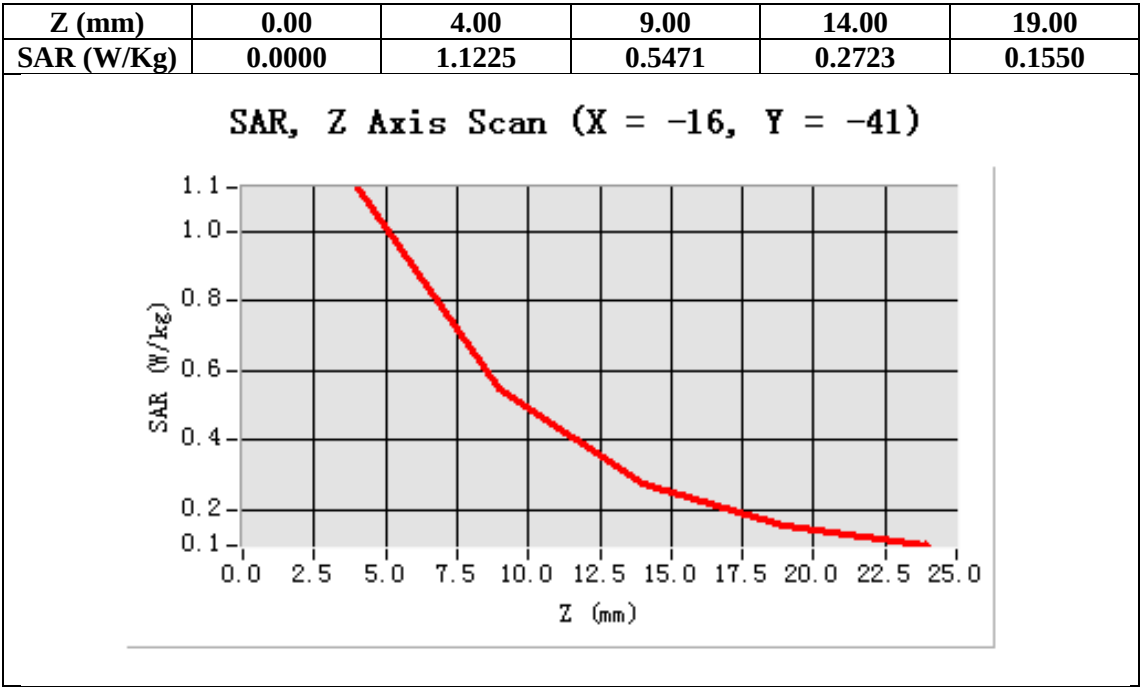

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Mid-Tilt-Left (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.93$ mho/m; $\epsilon_r=41.38$; $\rho= 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam direct droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

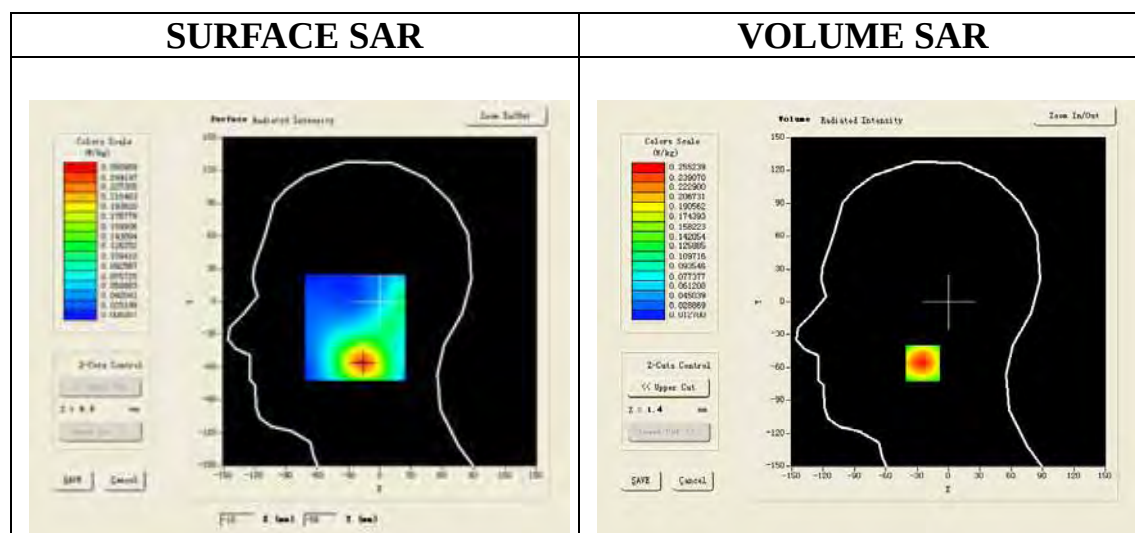

Maximum location: X=-16.00, Y=-56.00

SAR 10g (W/Kg)	0.134068
SAR 1g (W/Kg)	0.245138

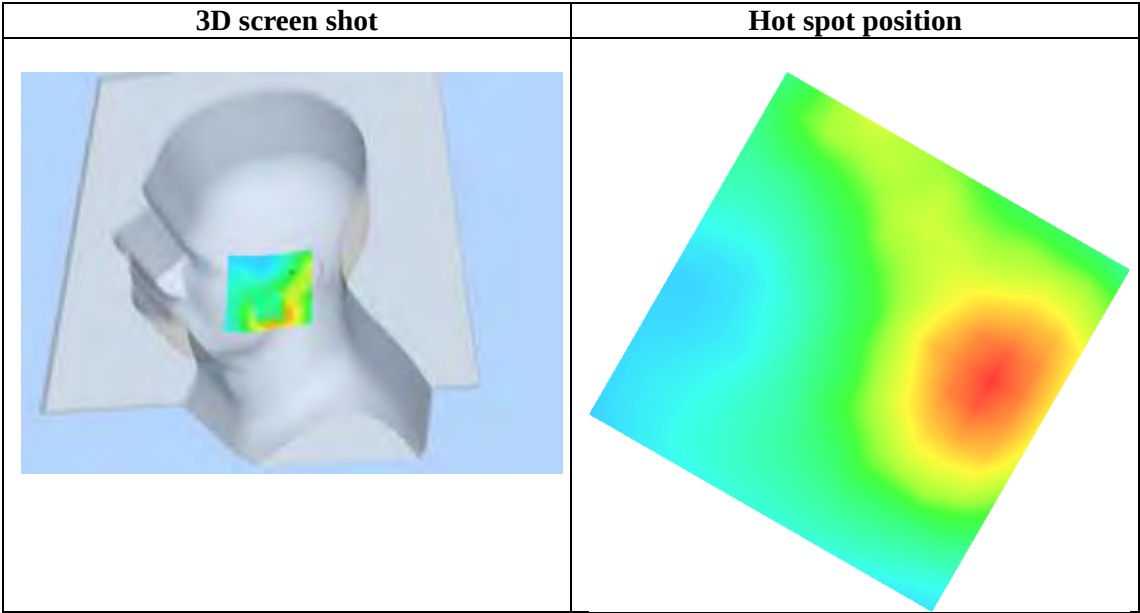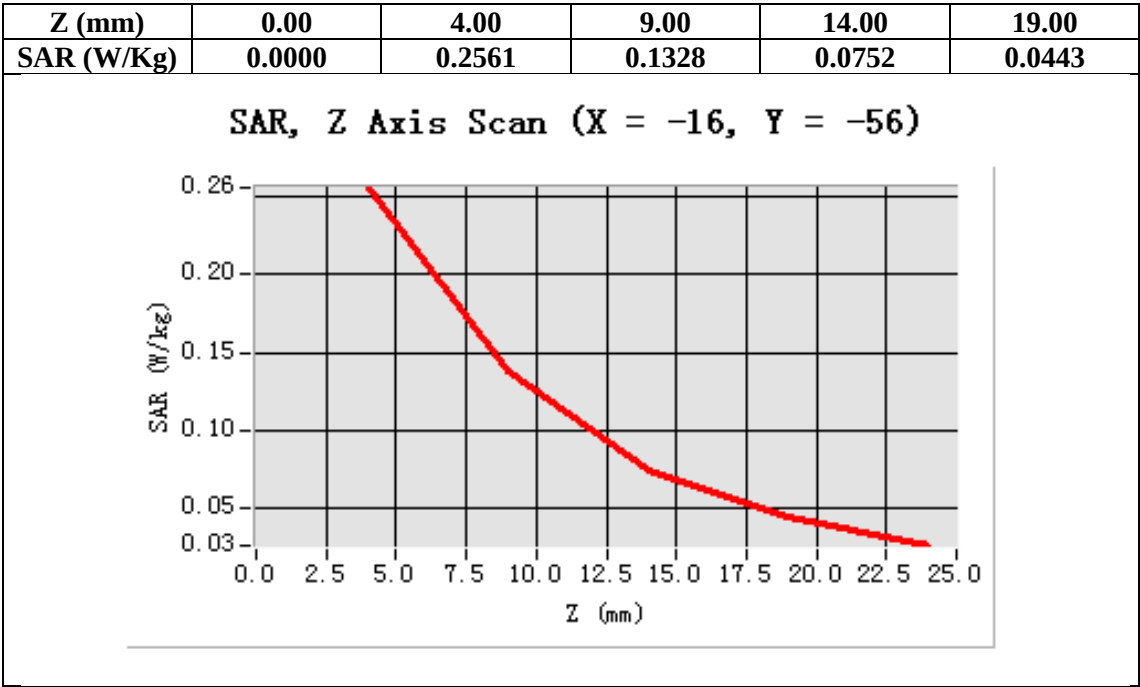

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Low-Touch-Right (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 826.4 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Low-Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Low-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

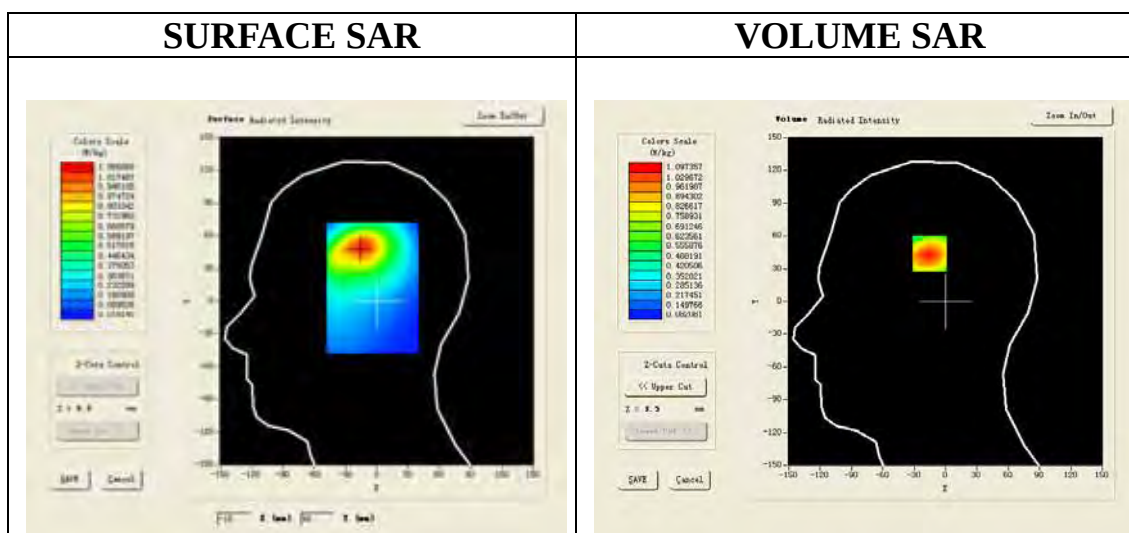

Maximum location: X=-15.00, Y=49.00

SAR 10g (W/Kg)	0.643785
SAR 1g (W/Kg)	1.046097

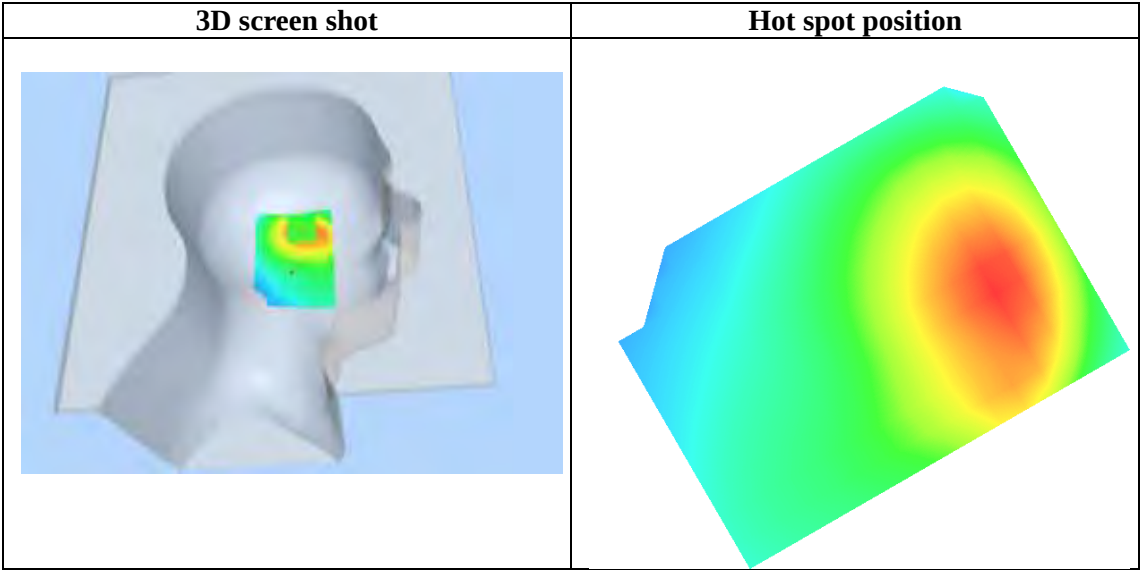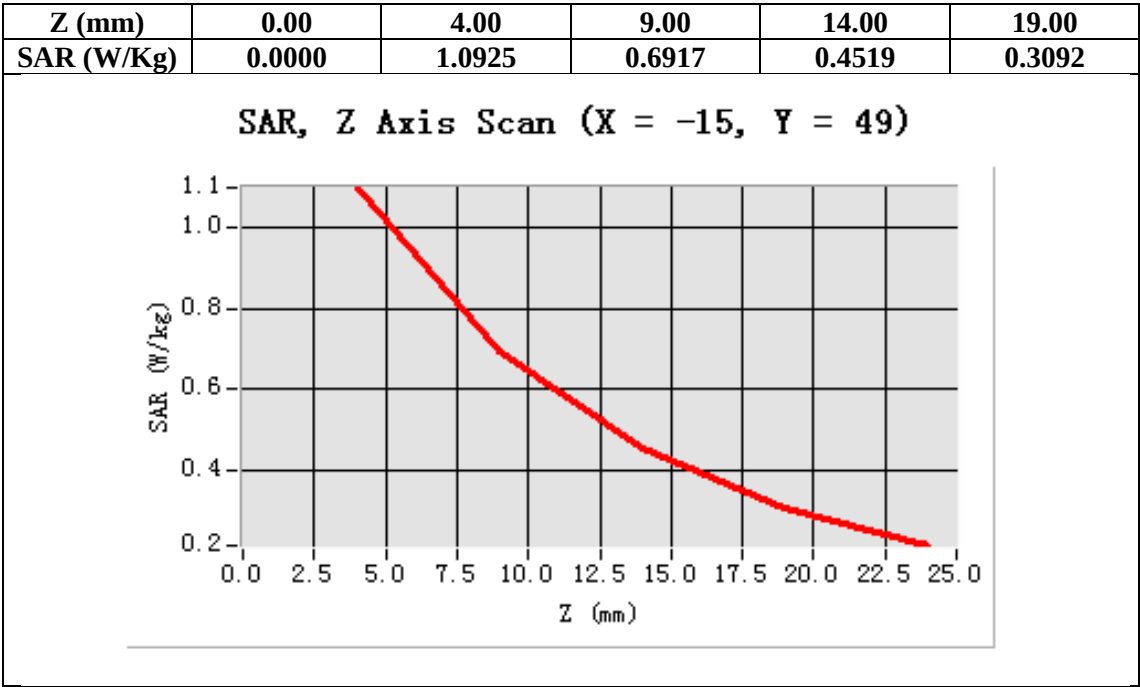

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Mid- Touch-Right (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.93$ mho/m; $\epsilon_r=41.38$; $\rho= 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

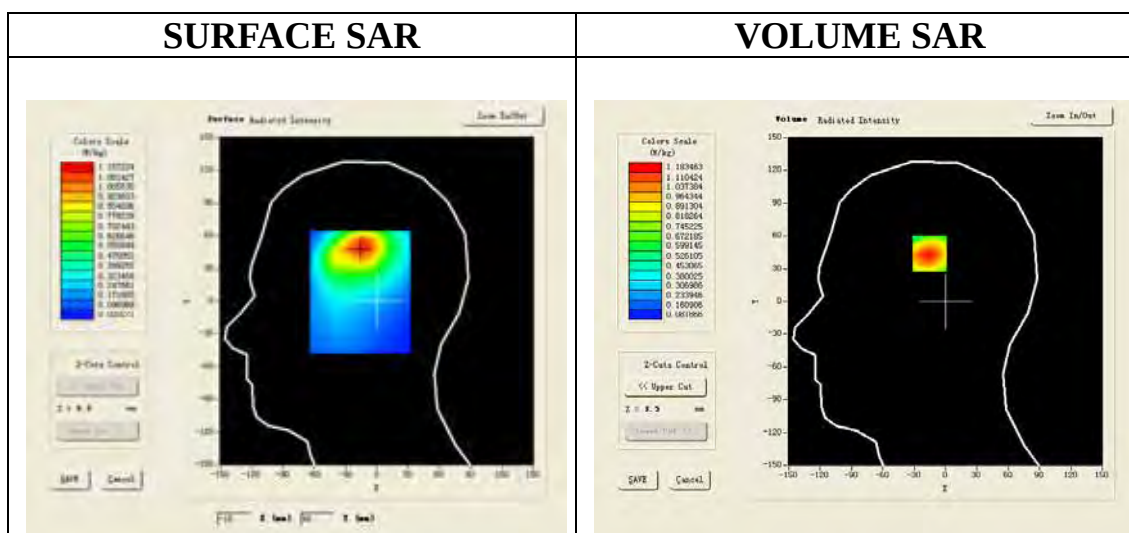

Maximum location: X=-15.00, Y=49.00

SAR 10g (W/Kg)	0.698264
SAR 1g (W/Kg)	1.126143

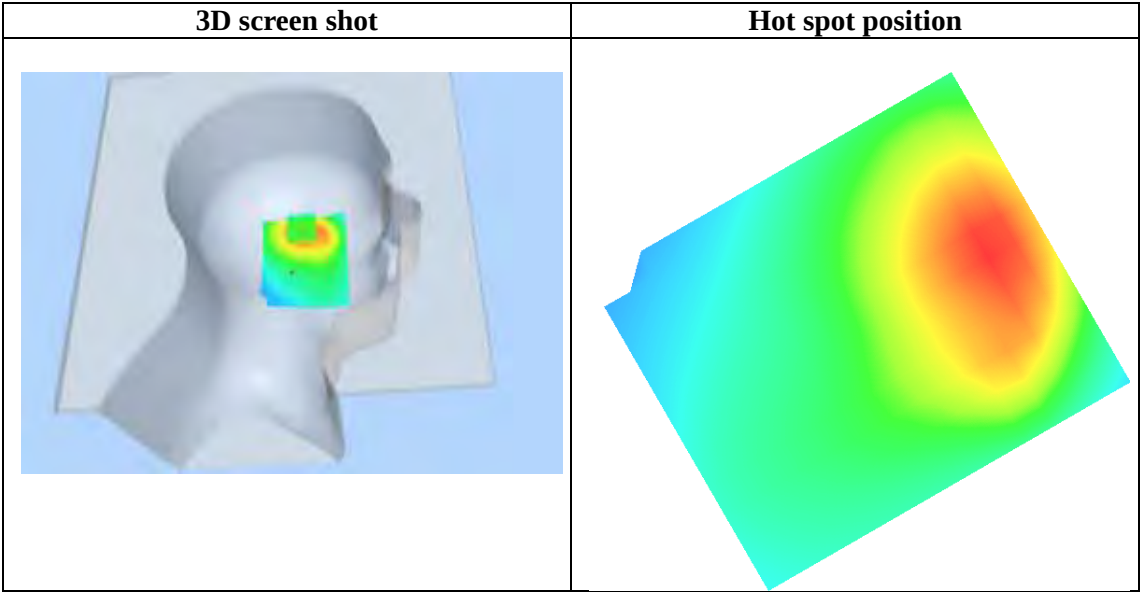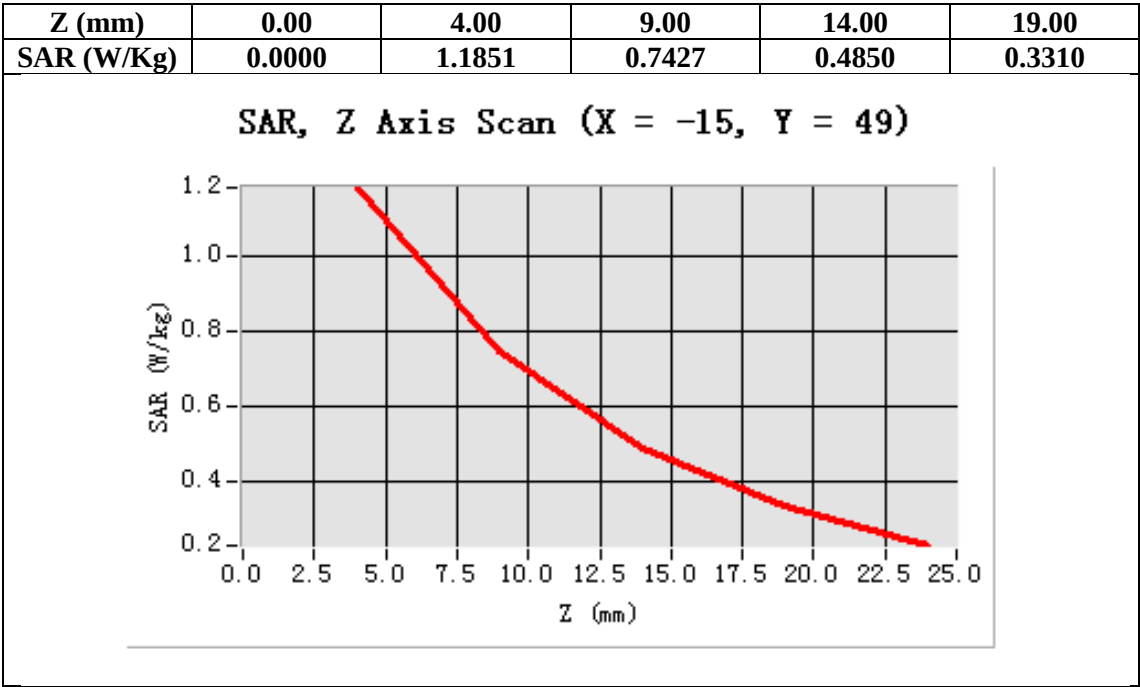

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V High-Touch-Right (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 846.6 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band High-Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band High-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band
Channels	High
Signal	TDMA (Crest factor: 1.0)

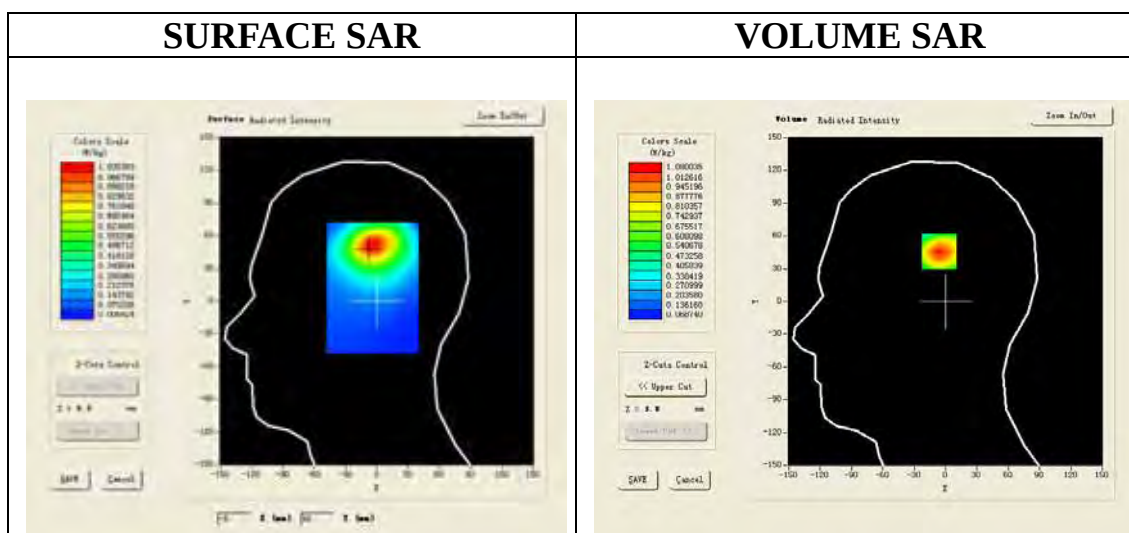

Maximum location: X=-5.00, Y=51.00

SAR 10g (W/Kg)	0.610615
SAR 1g (W/Kg)	1.017538

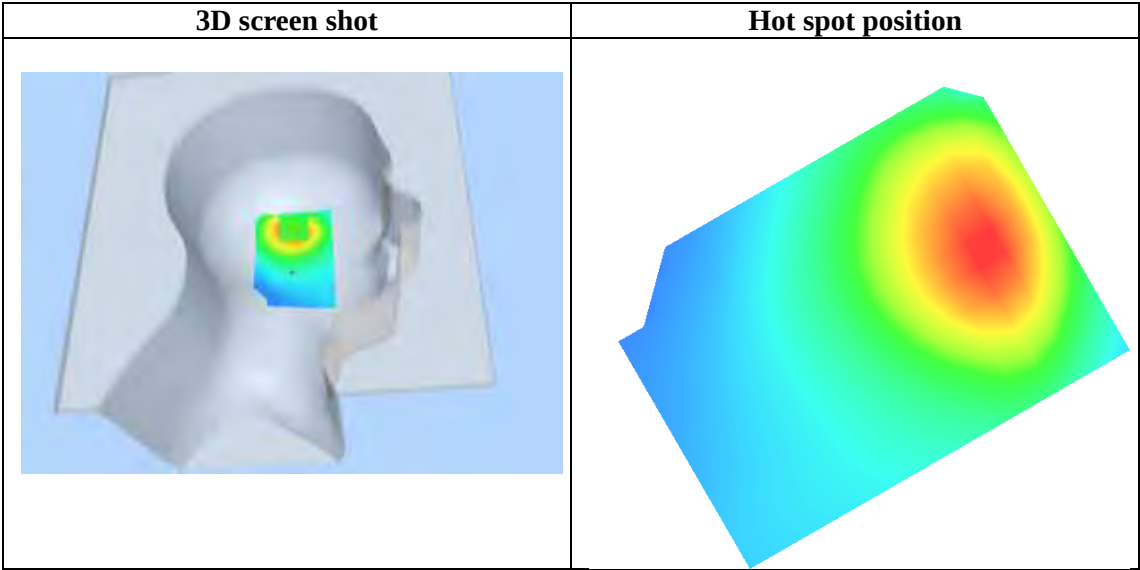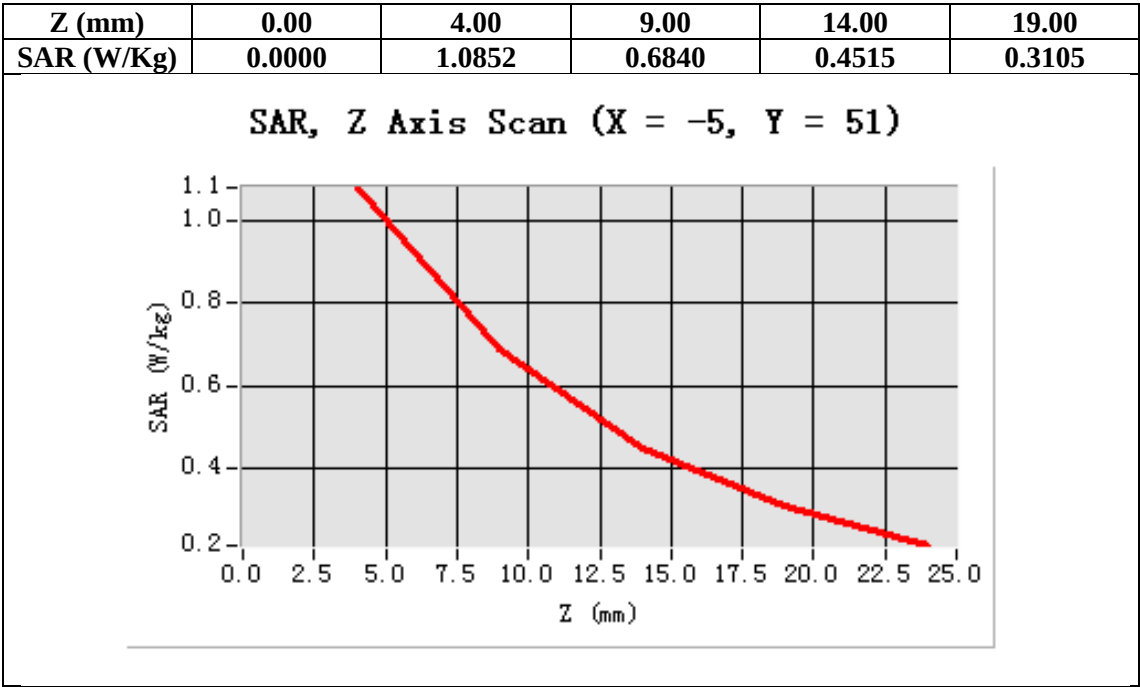

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Low-Tilt-Right (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 824.6 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Low-Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Low-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam direct droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	WCDMA Band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

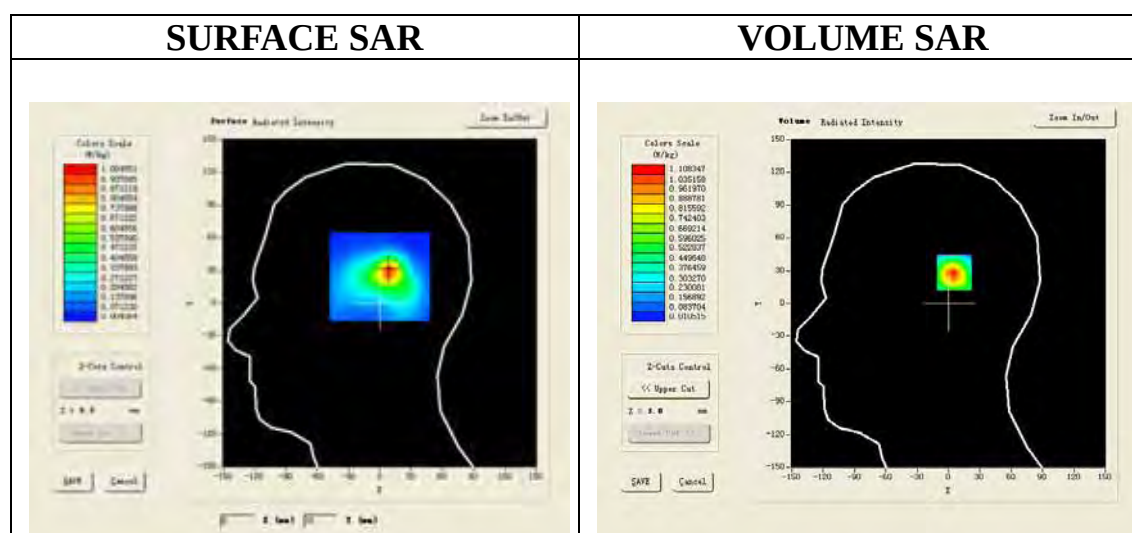

Maximum location: X=9.00, Y=30.00

SAR 10g (W/Kg)	0.504078
SAR 1g (W/Kg)	1.024236

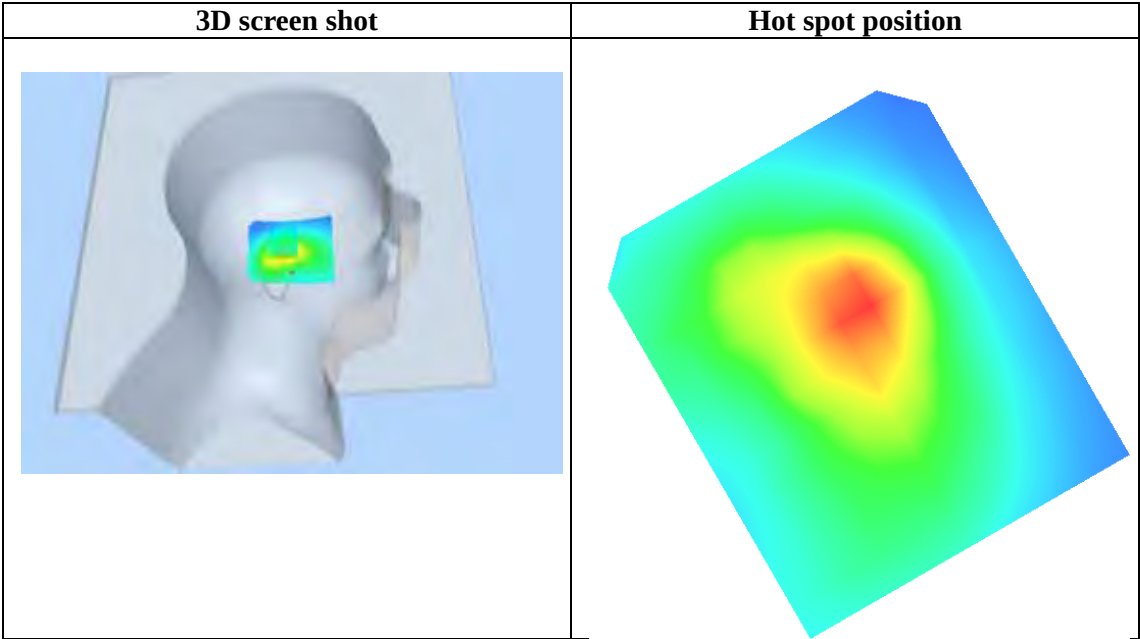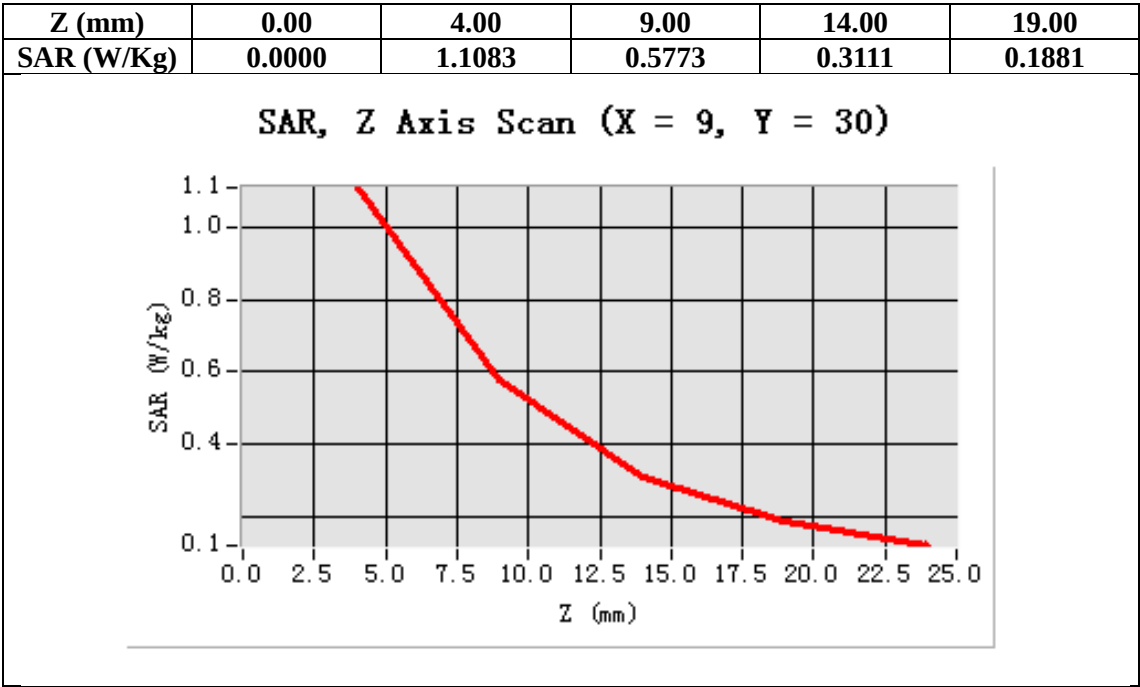

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Mid-Tilt-Right (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.93$ mho/m; $\epsilon_r=41.38$; $\rho= 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam direct droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

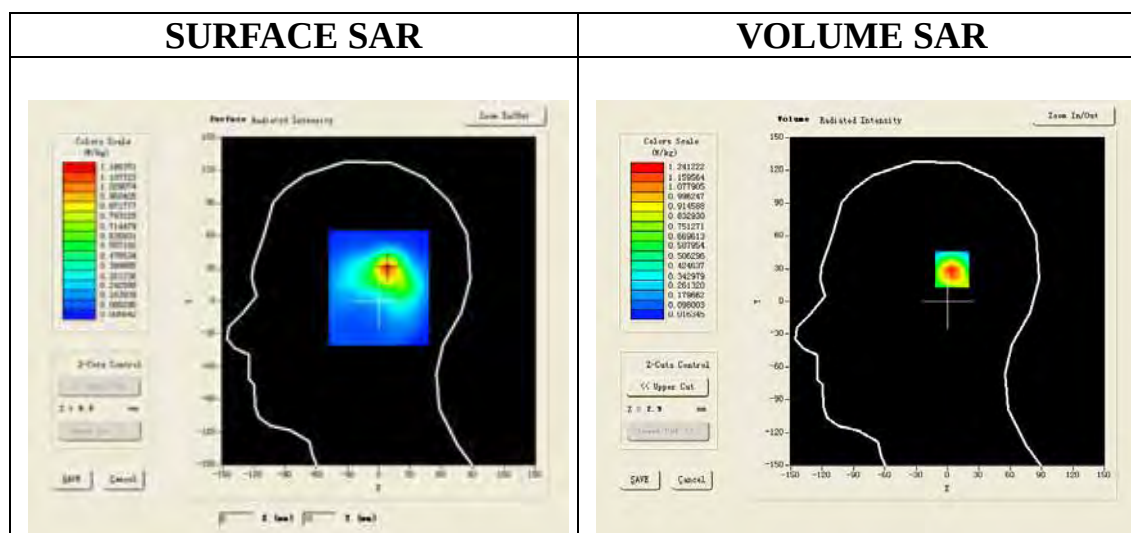

Maximum location: X=8.00, Y=31.00

SAR 10g (W/Kg)	0.599076
SAR 1g (W/Kg)	1.165237

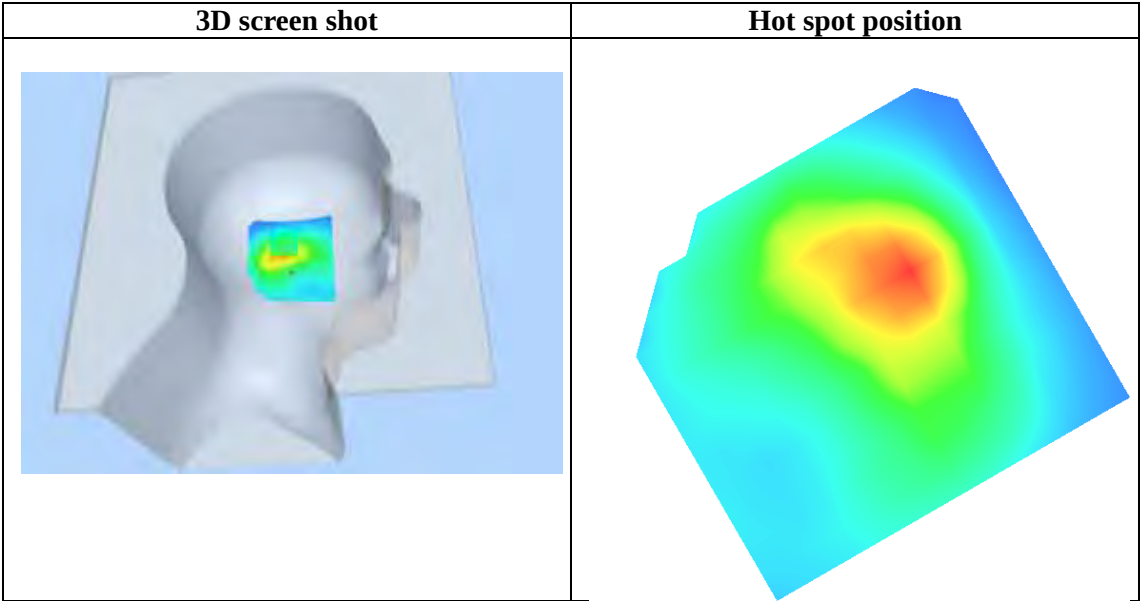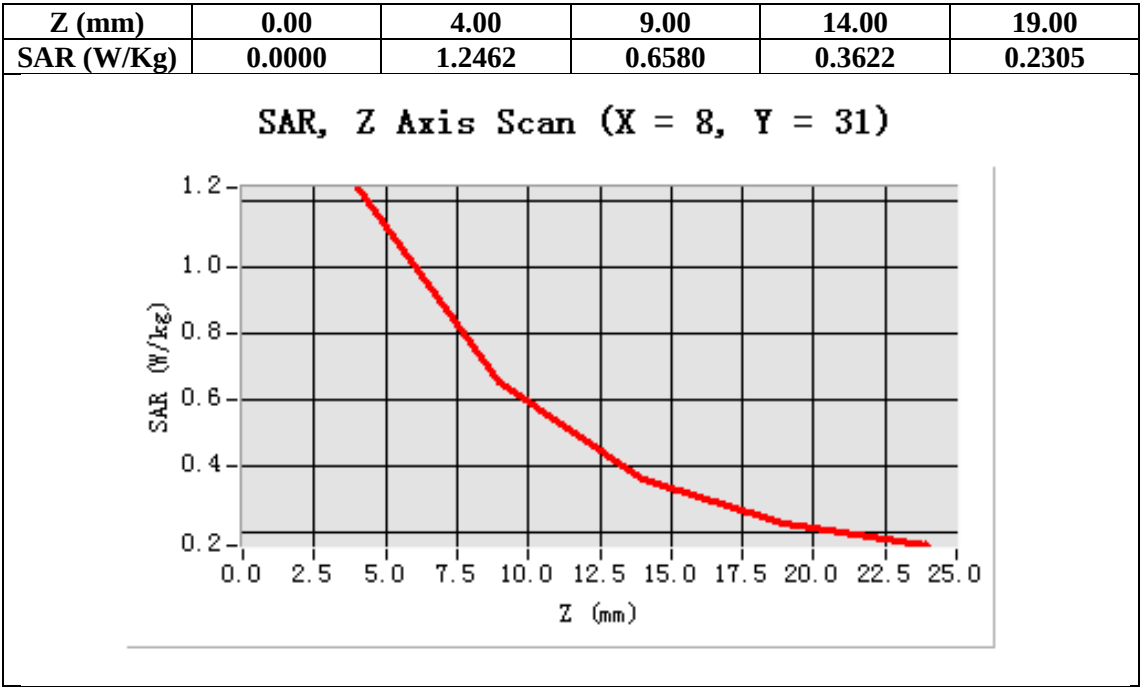

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V High-Tilt-Right (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.30
Frequency: 846.6 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band High-Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band High-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam direct droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	WCDMA Band
Channels	High
Signal	TDMA (Crest factor: 1.0)

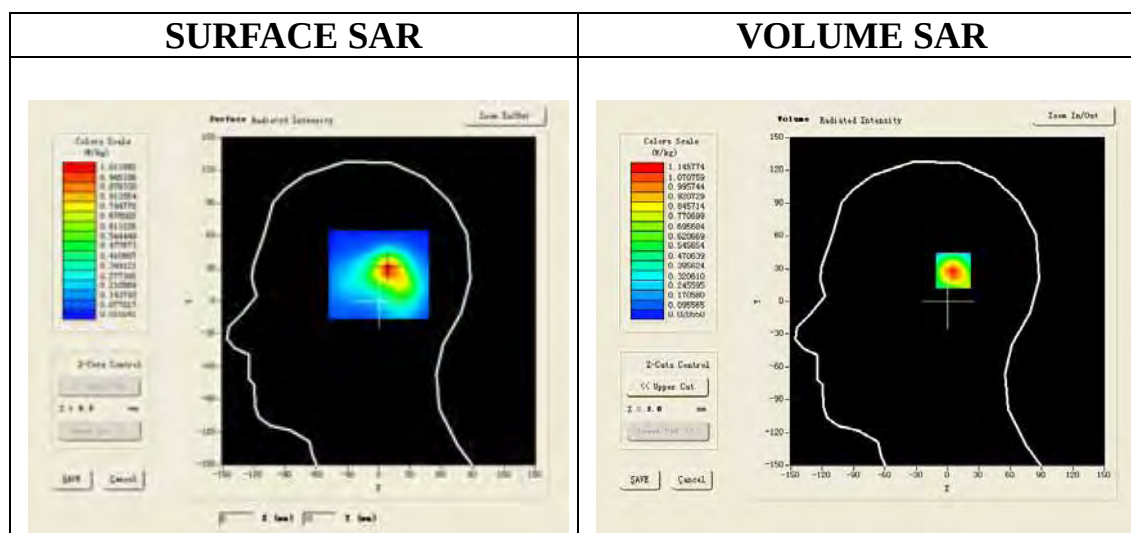

Maximum location: X=9.00, Y=30.00

SAR 10g (W/Kg)	0.553476
SAR 1g (W/Kg)	1.066230

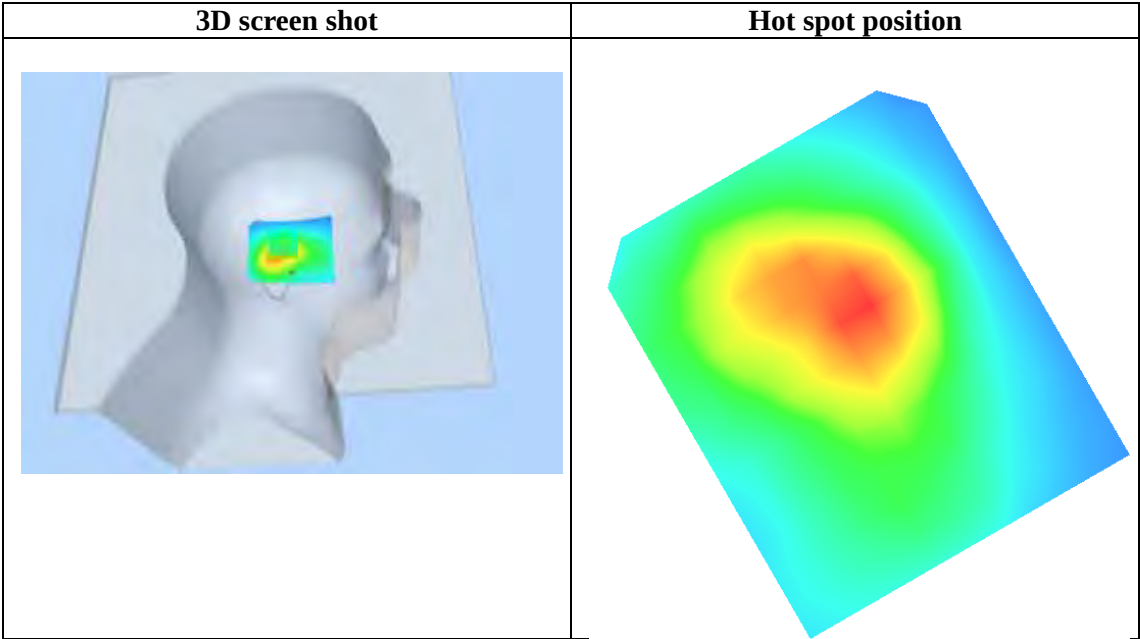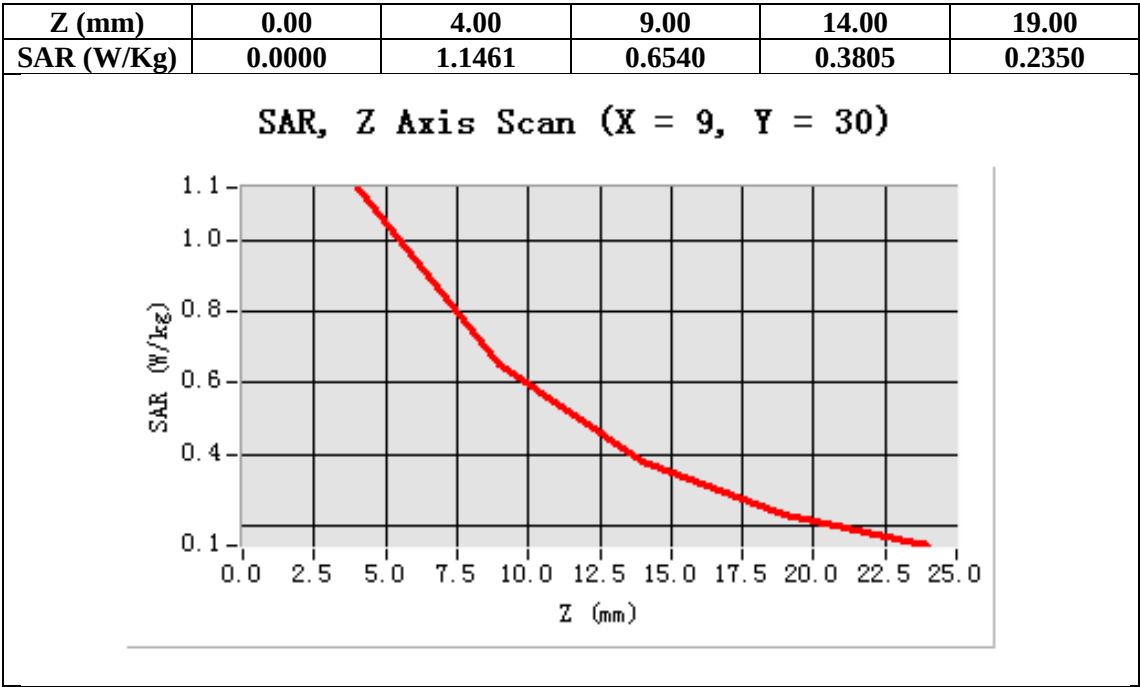

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Low-Body-Towards Grounds (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 826.4 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Low-Body-Front/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Low-Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	WCDMA Band
Channels	Low
Signal	TDMA (Crest factor: 1.0)

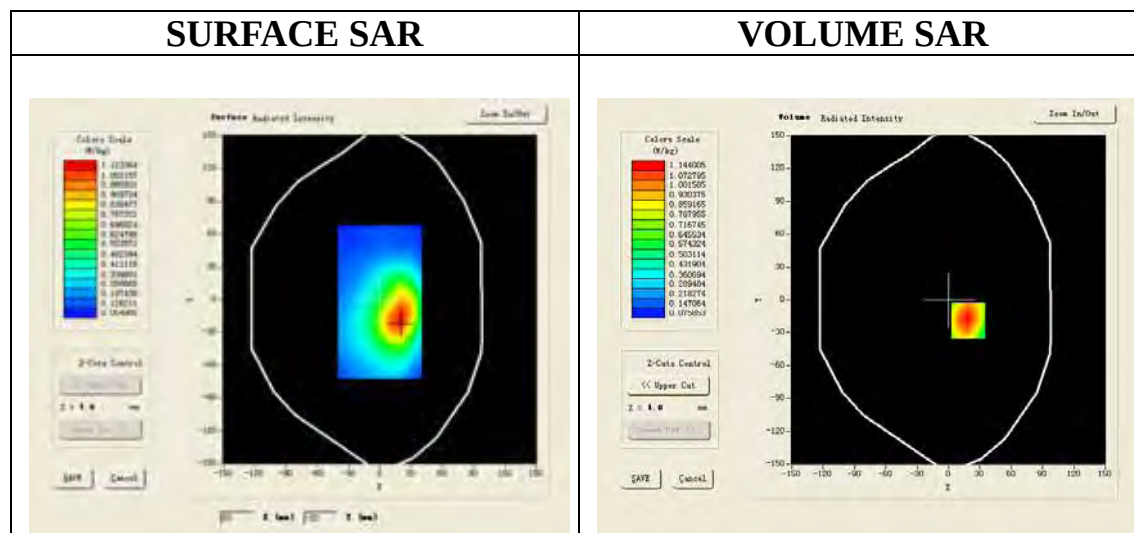

Maximum location: X=19.00, Y=-19.00

SAR 10g (W/Kg)	0.664824
SAR 1g (W/Kg)	1.084087

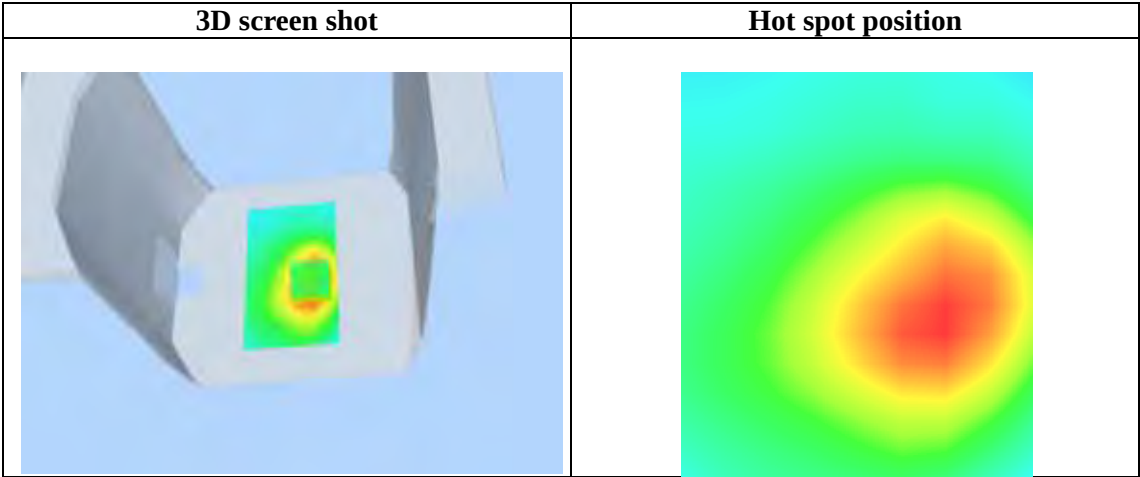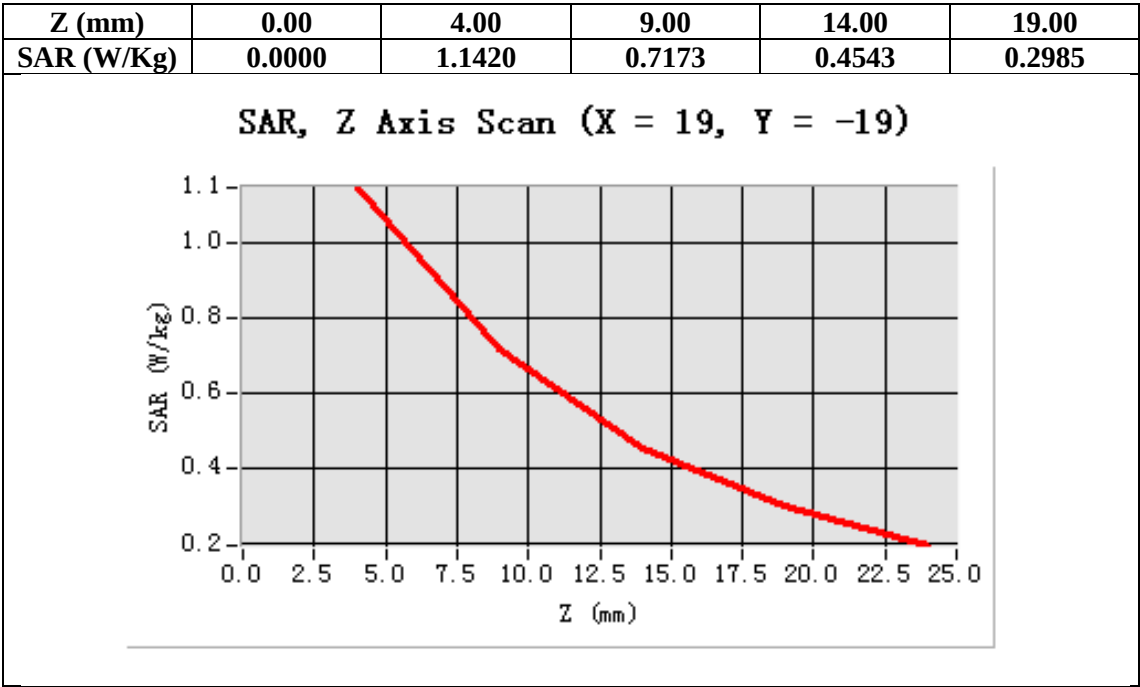

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V Mid-Body-Towards Grounds (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r=53.59$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Body-Front/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

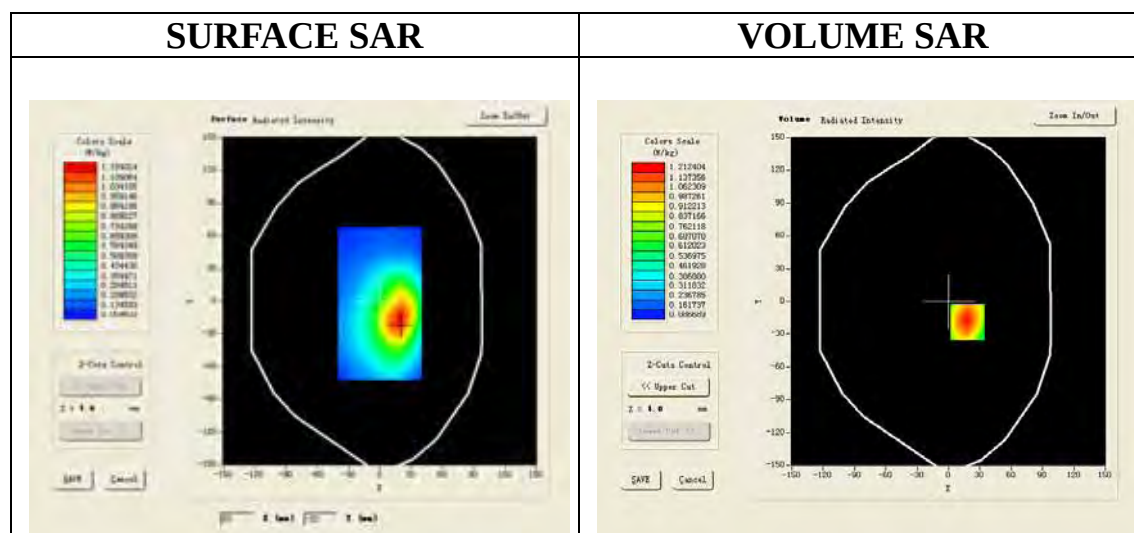

Maximum location: X=18.00, Y=-19.00

SAR 10g (W/Kg)	0.705337
SAR 1g (W/Kg)	1.156308

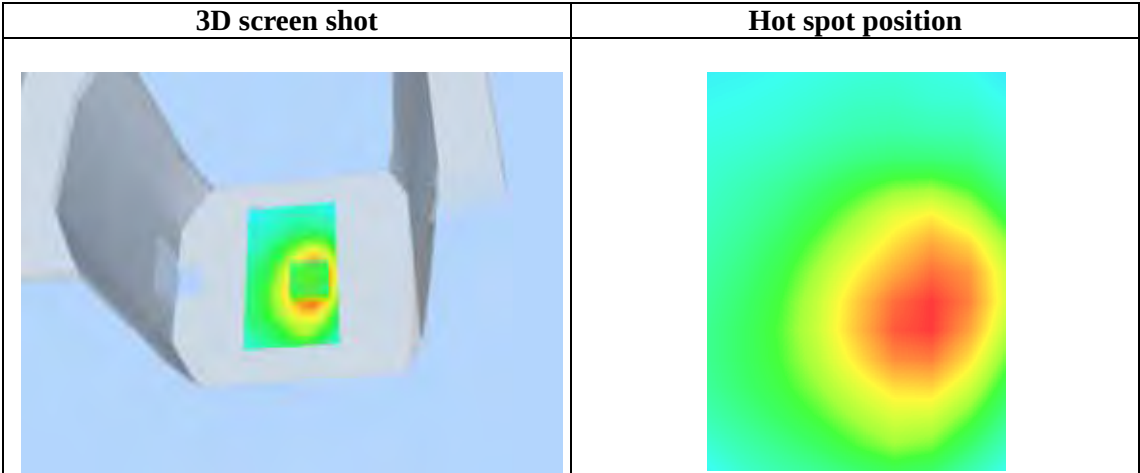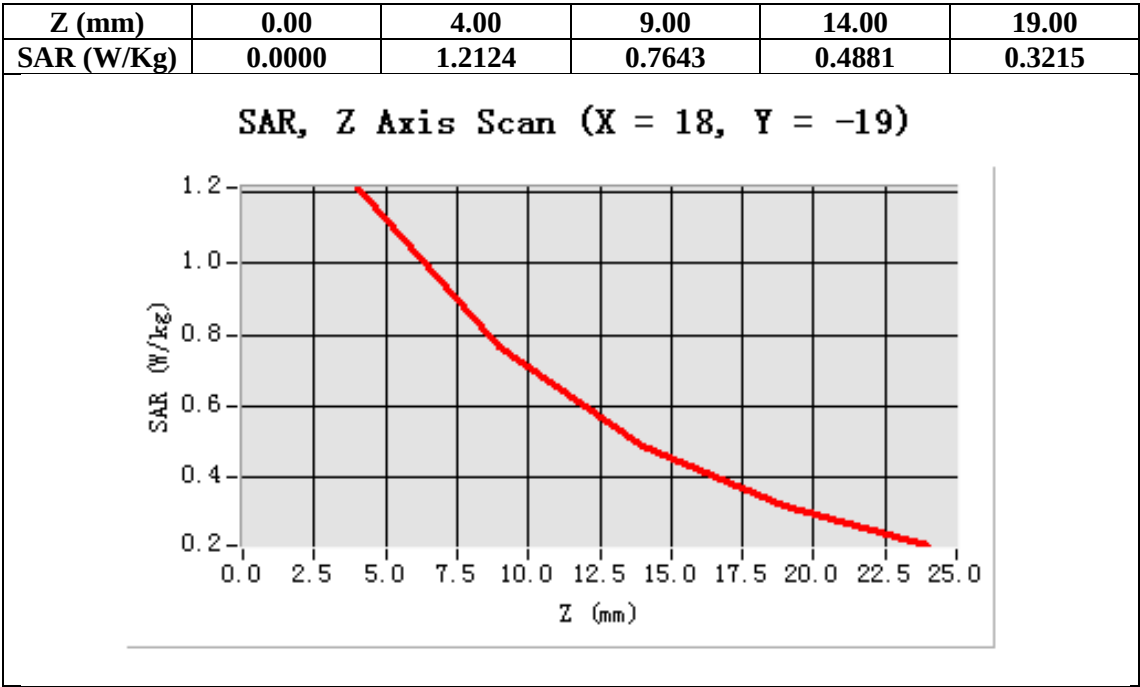

Test Laboratory: AGC Lab

Date: Jun.27, 2013

WCDMA Band V High-Body-Towards Grounds (RMC)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 846.6 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA Band High-Body-Front/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA Band High-Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	WCDMA Band
Channels	High
Signal	TDMA (Crest factor: 1.0)

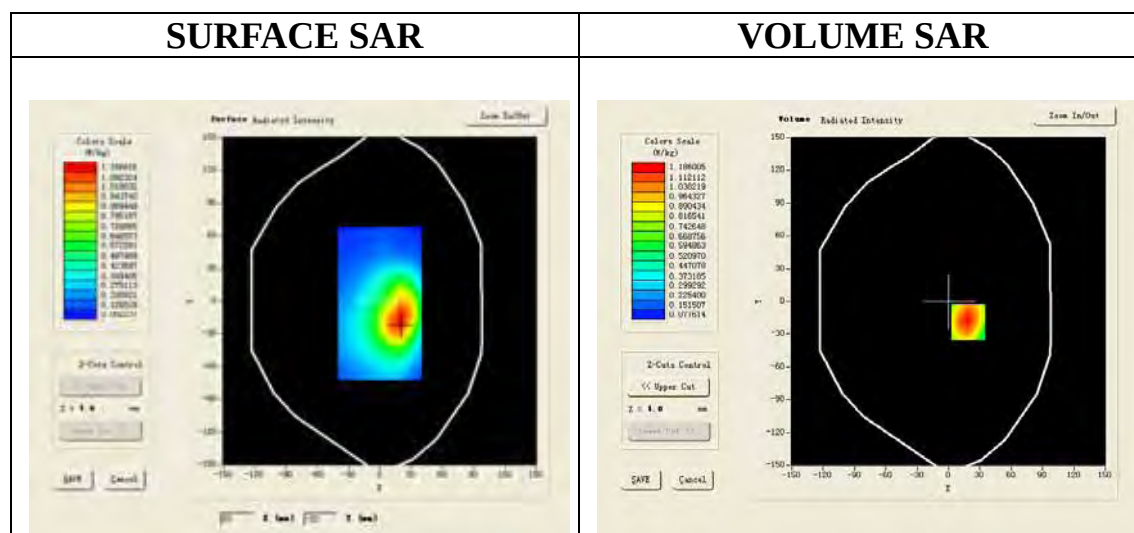

Maximum location: X=19.00, Y=-19.00

SAR 10g (W/Kg)	0.687249
SAR 1g (W/Kg)	1.123079

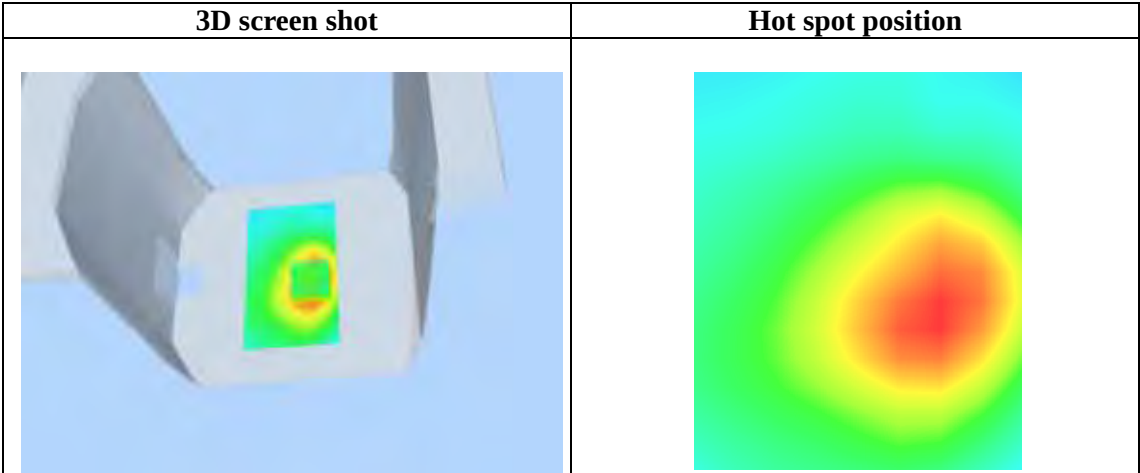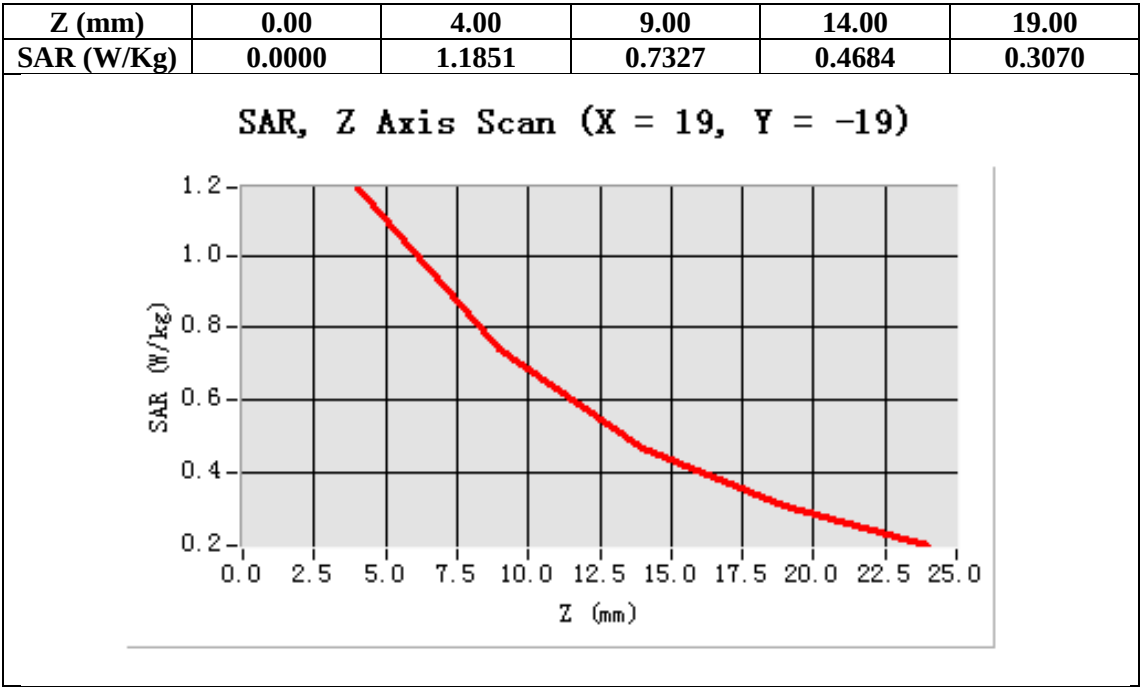

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band V Mid- Body - Towards Grounds(HSPA)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/ WCDMA Band Mid-Body- Back /Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/ WCDMA Band Mid-Body- Back /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

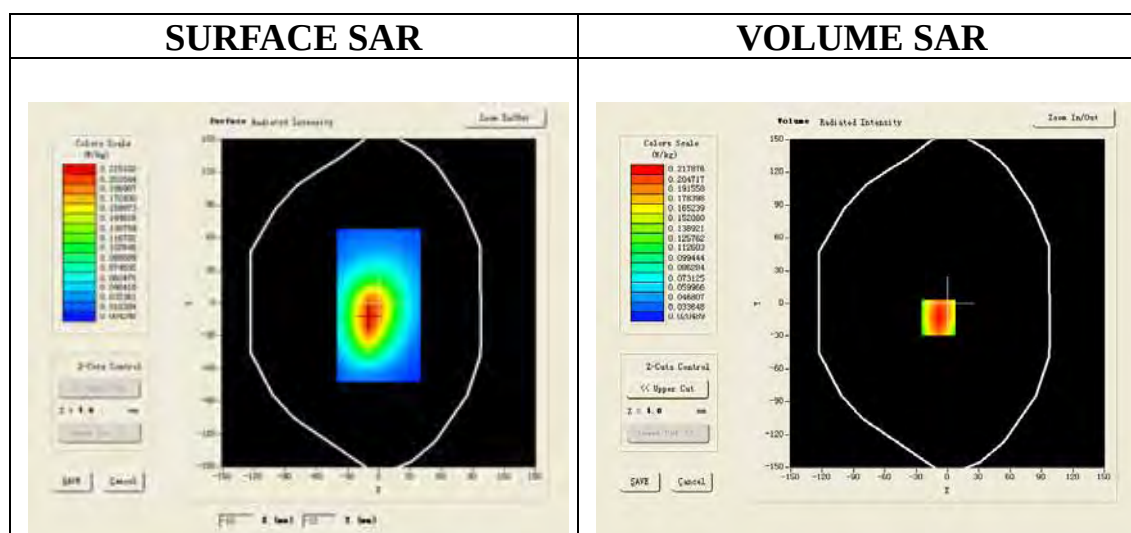

Maximum location: X=-9.00, Y=-13.00

SAR 10g (W/Kg)	0.127602
SAR 1g (W/Kg)	0.200651

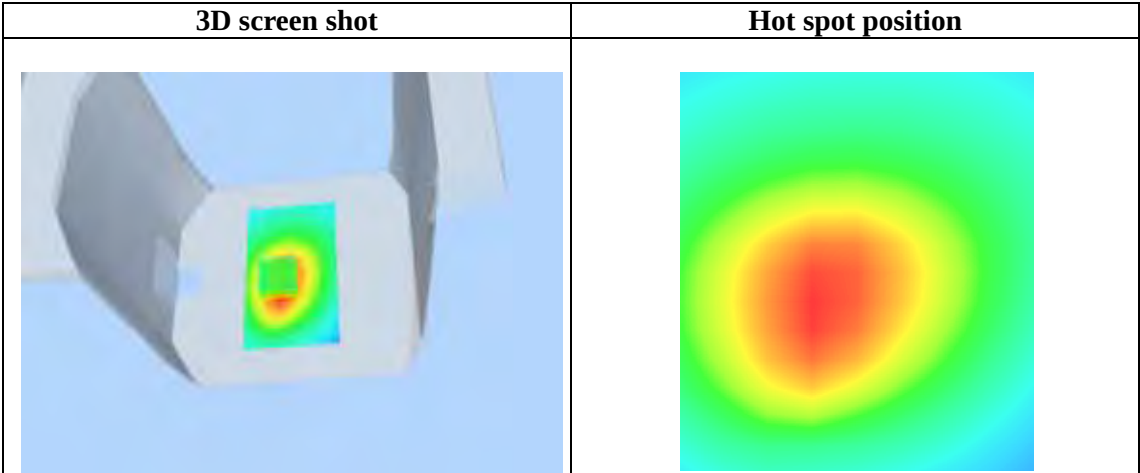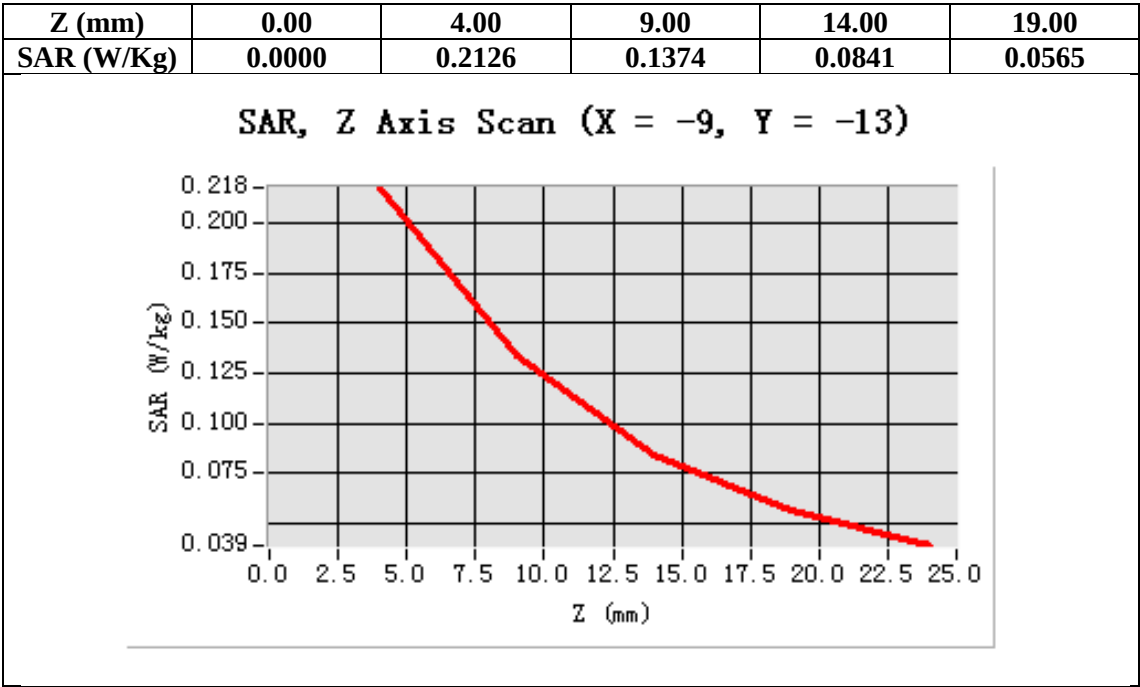

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band V Mid-Horizontal near antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r=53.59$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid- Horizontal near antenna /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid- Horizontal near antenna /Zoom Scan: Measurement grid:dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Horizontal
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

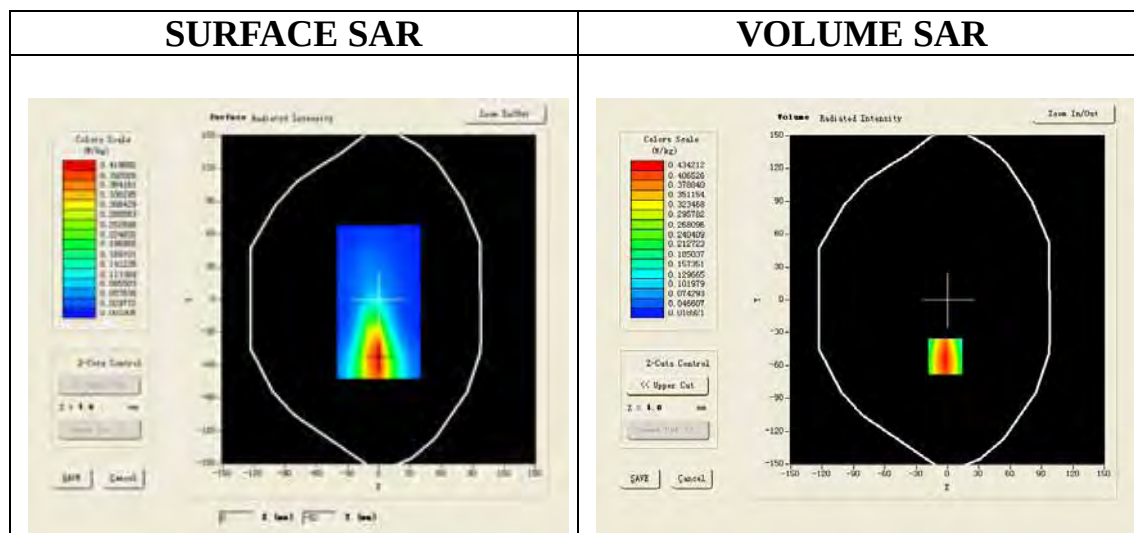

Maximum location: X=-2.00, Y=-52.00

SAR 10g (W/Kg)	0.244907
SAR 1g (W/Kg)	0.403752

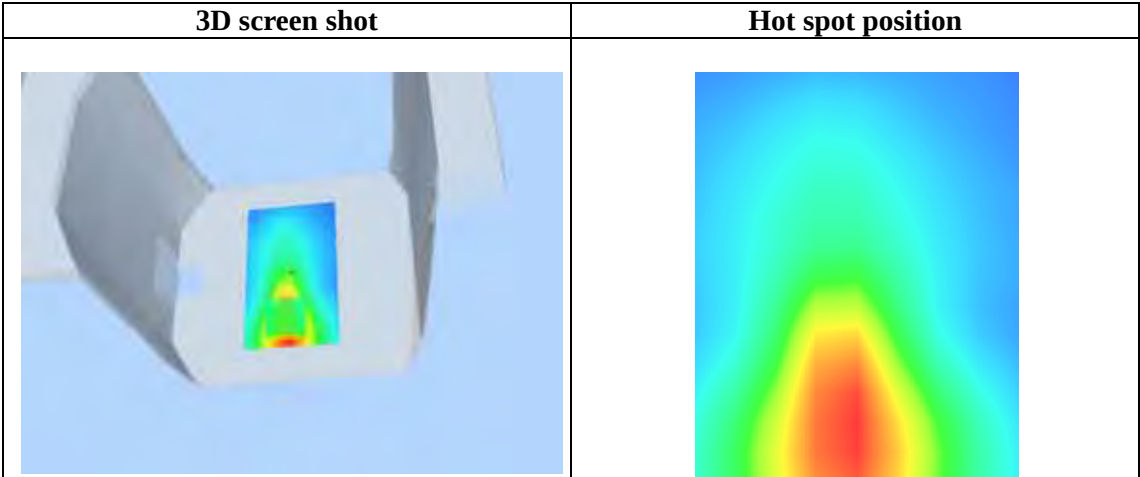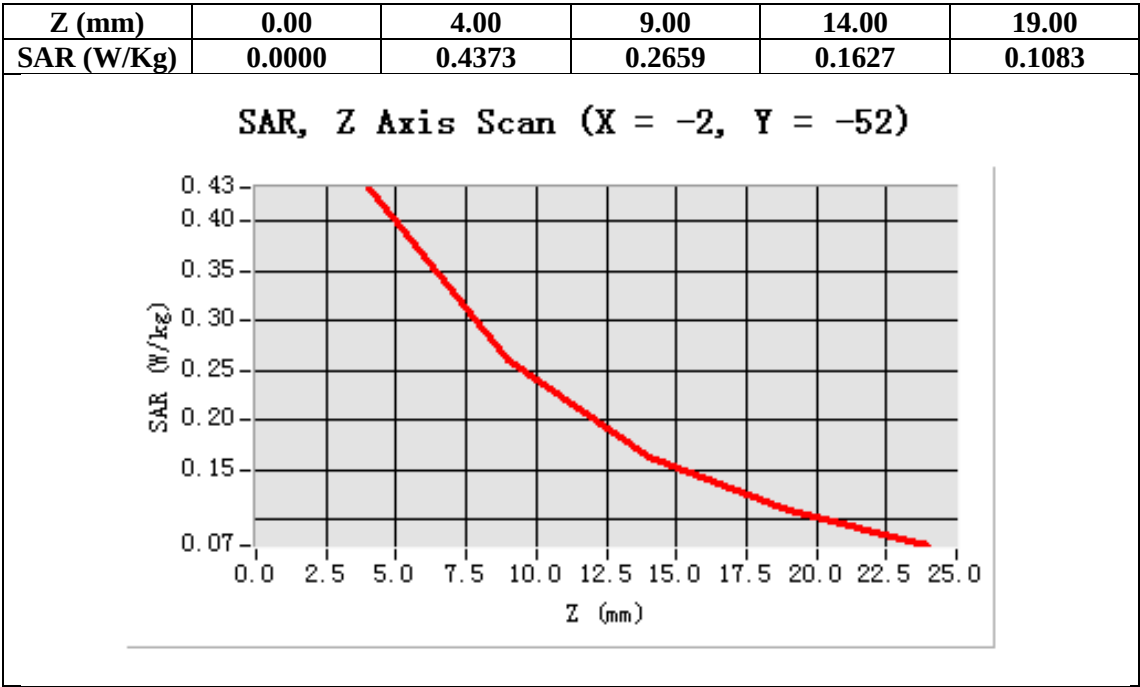

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band V Mid-Horizontal away from antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r=53.59$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid- Horizontal away from antenna /Area Scan: Measurement grid:
dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid- Horizontal away from antenna /Zoom Scan: Measurement grid:
dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Horizontal
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

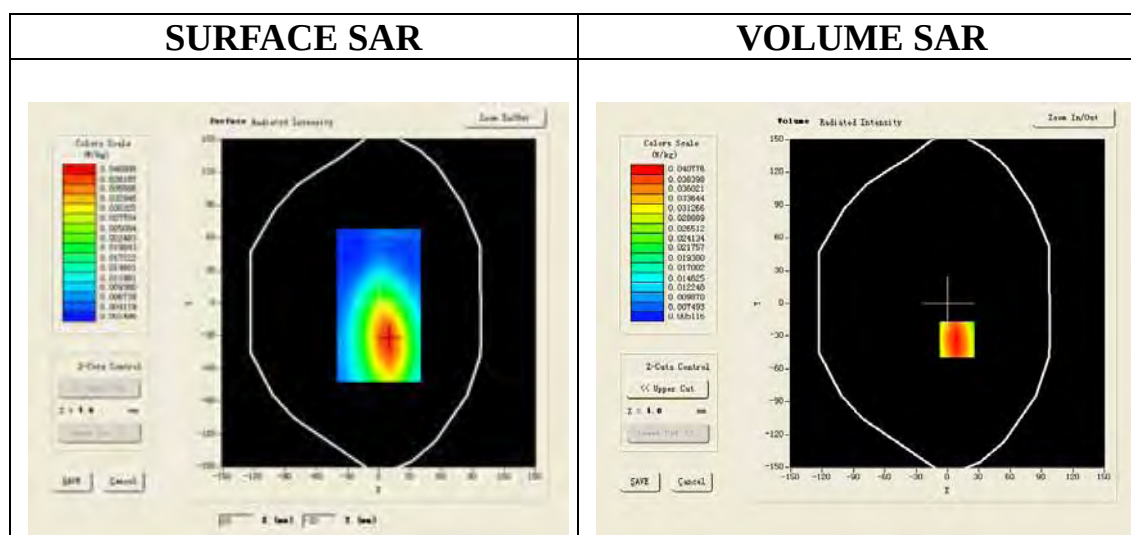

Maximum location: X=9.00, Y=-33.00

SAR 10g (W/Kg)	0.023067
SAR 1g (W/Kg)	0.032745

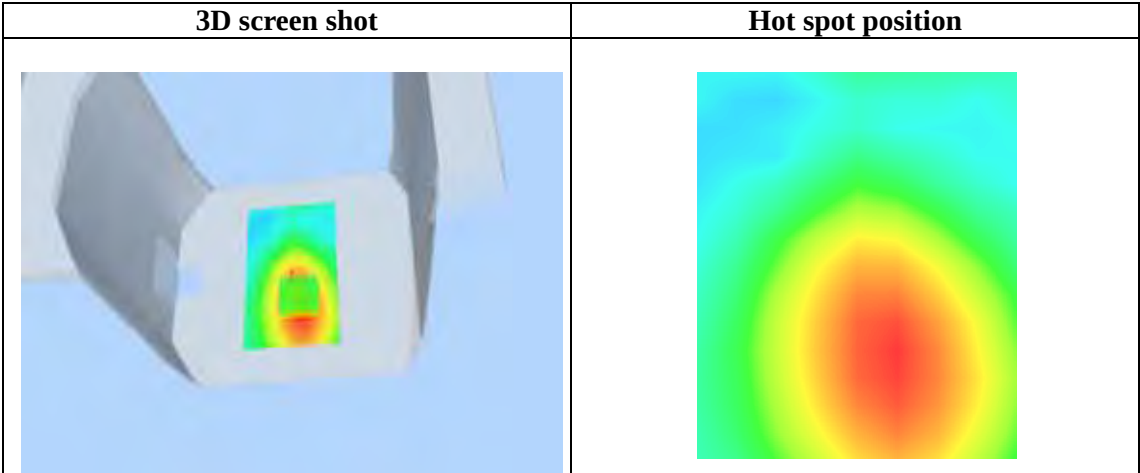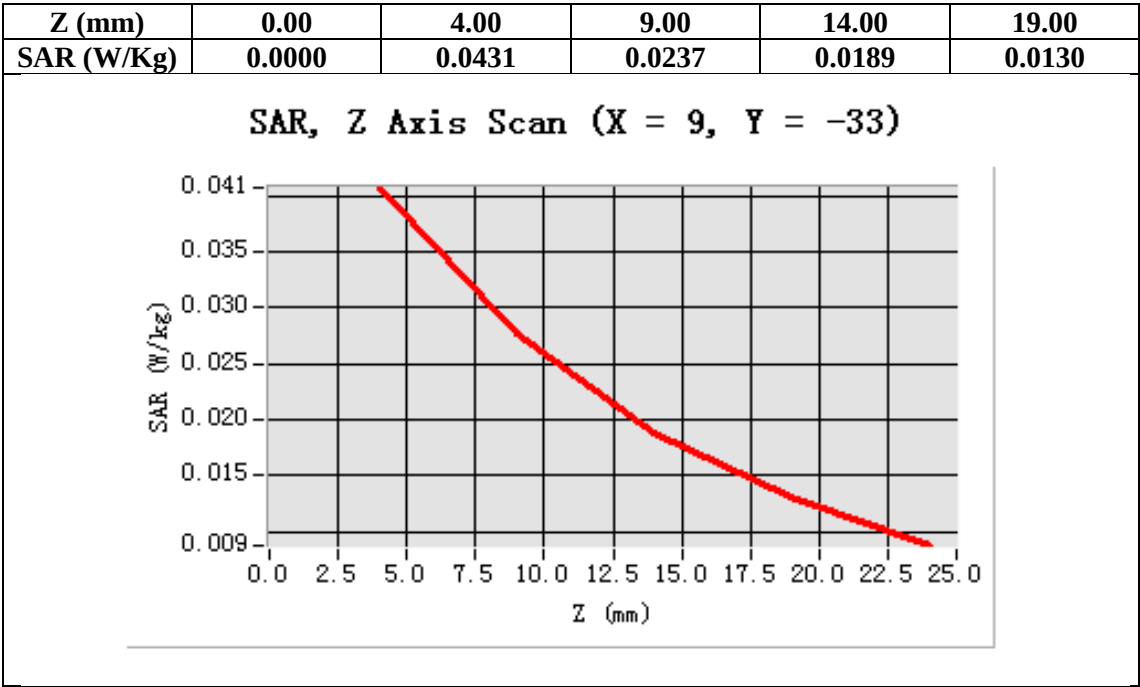

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band V Mid-Vertical near antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r=53.59$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Vertical near antenna /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Vertical near antenna /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Vertical
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

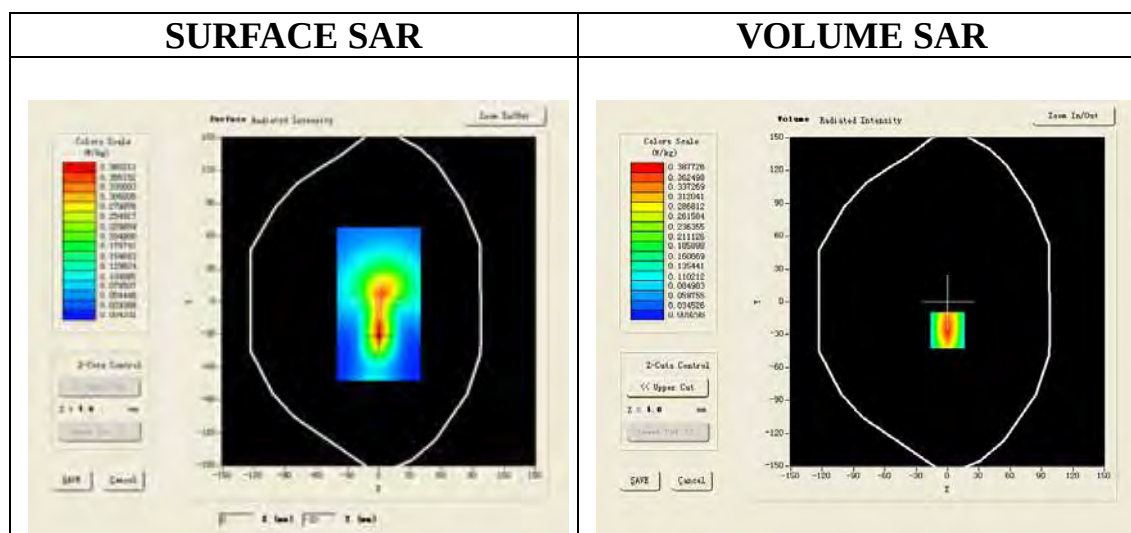

Maximum location: X=0.00, Y=-26.00

SAR 10g (W/Kg)	0.182785
SAR 1g (W/Kg)	0.353571

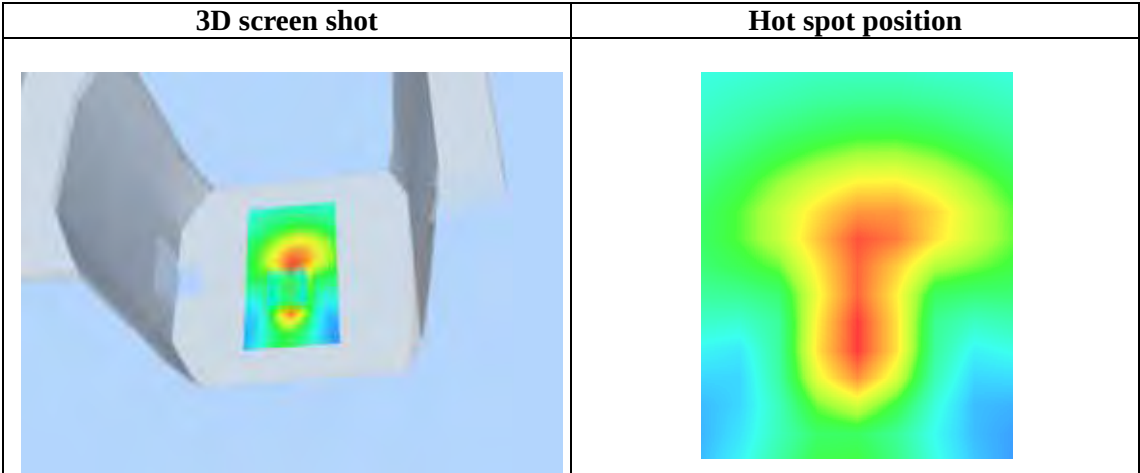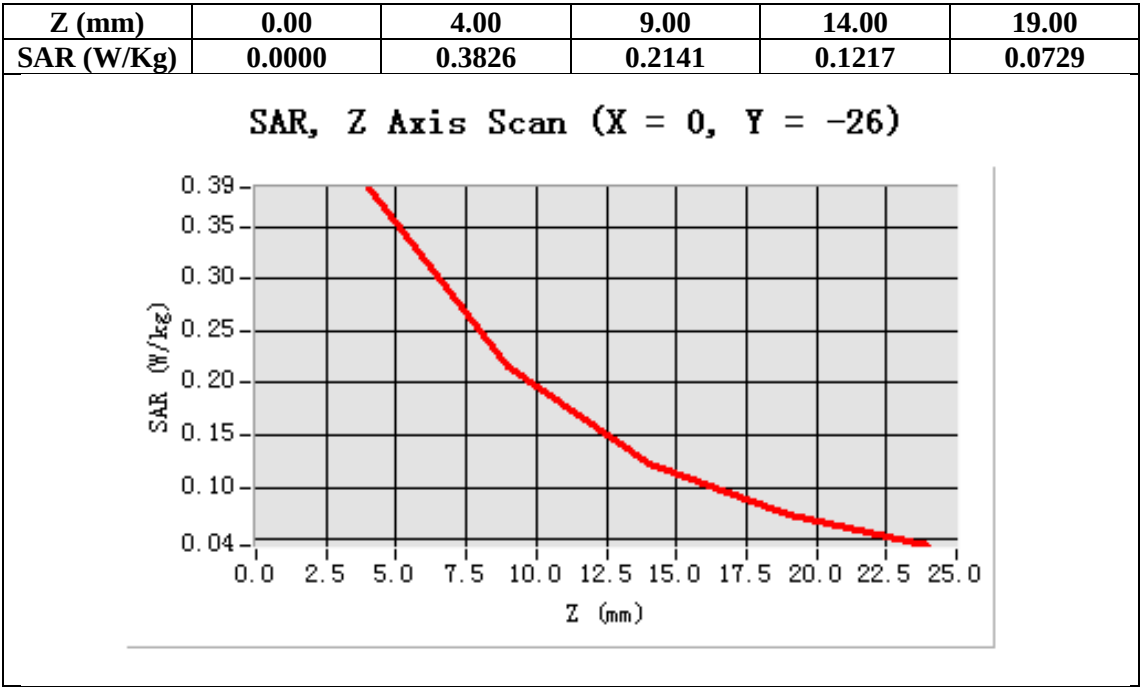

Test Laboratory: AGC Lab

Date: TTDD

WCDMA Band V Mid-Vertical away from antenna (MS)

DUT: Tablet PC; Type: G7

Communication System: UMTS; Communication System Band: BAND UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.46
Frequency: 835 MHz; Medium parameters used: $f = 850$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r=53.59$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band Mid-Vertical away from antenna /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/ WCDMA Band Mid-Vertical away from antenna /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Vertical
Band	WCDMA Band
Channels	Middle
Signal	TDMA (Crest factor: 1.0)

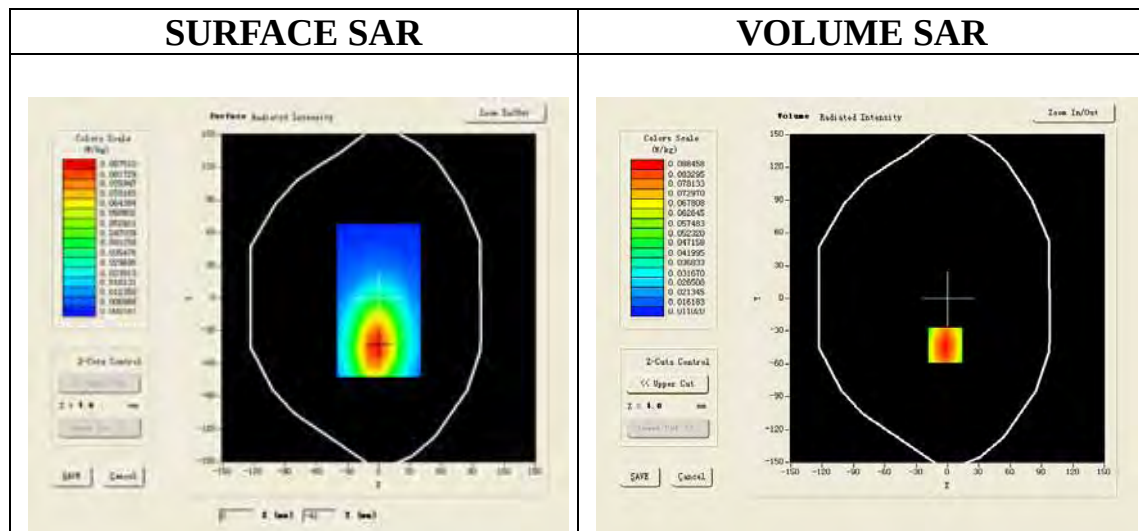

Maximum location: X=-2.00, Y=-43.00

SAR 10g (W/Kg)	0.053970
SAR 1g (W/Kg)	0.087338

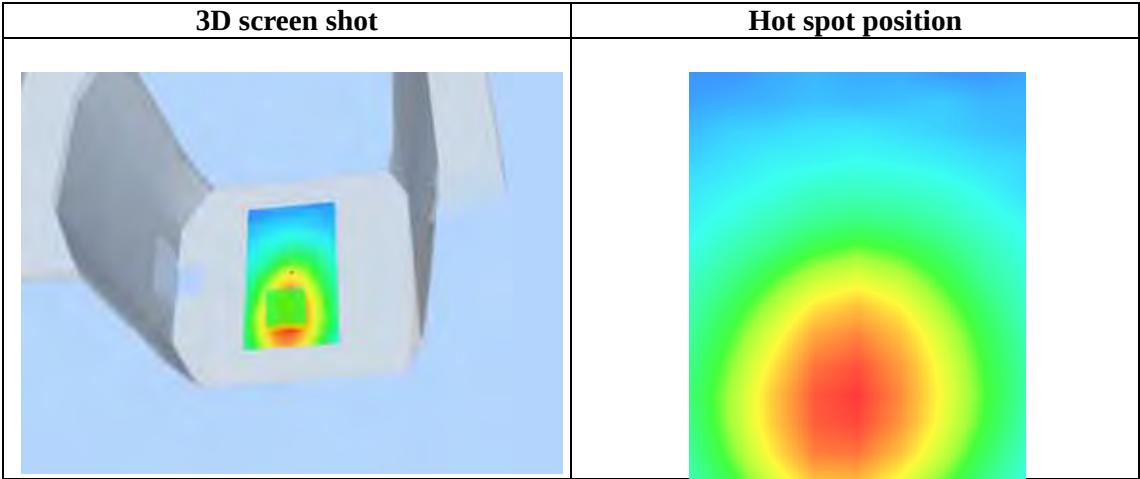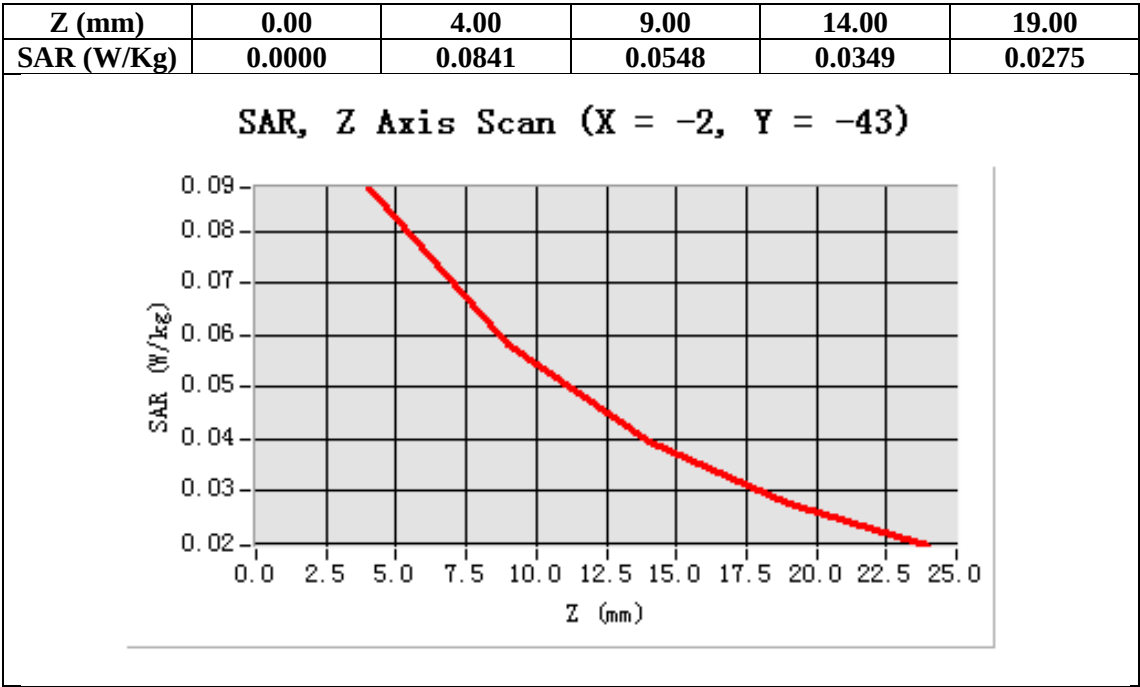

WIFI MODE

Test Laboratory: AGC Lab
802.11b Mid-Touch-Left

Date: Jun.27, 2013

DUT: Tablet PC; Type: G7

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11b Mid- Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11b Mid- Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

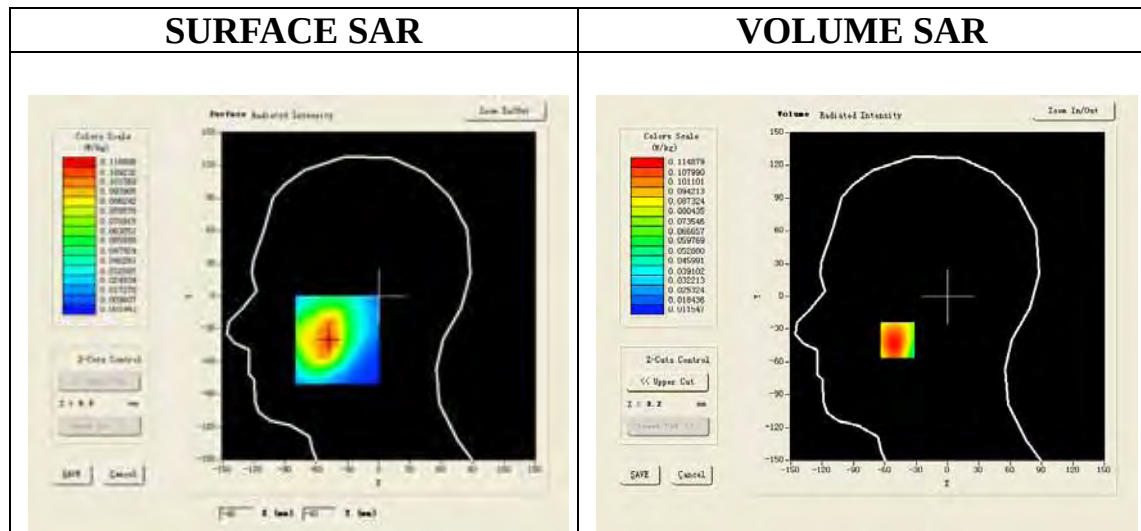

Maximum location: X=-48.00, Y=-40.00

SAR 10g (W/Kg)	0.078276
SAR 1g (W/Kg)	0.112568

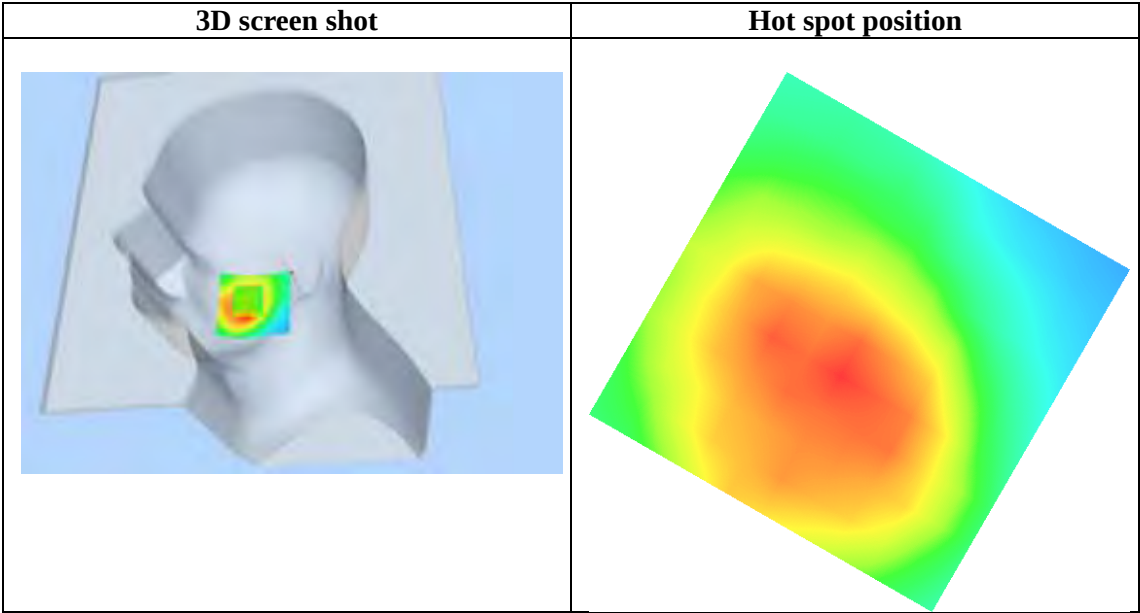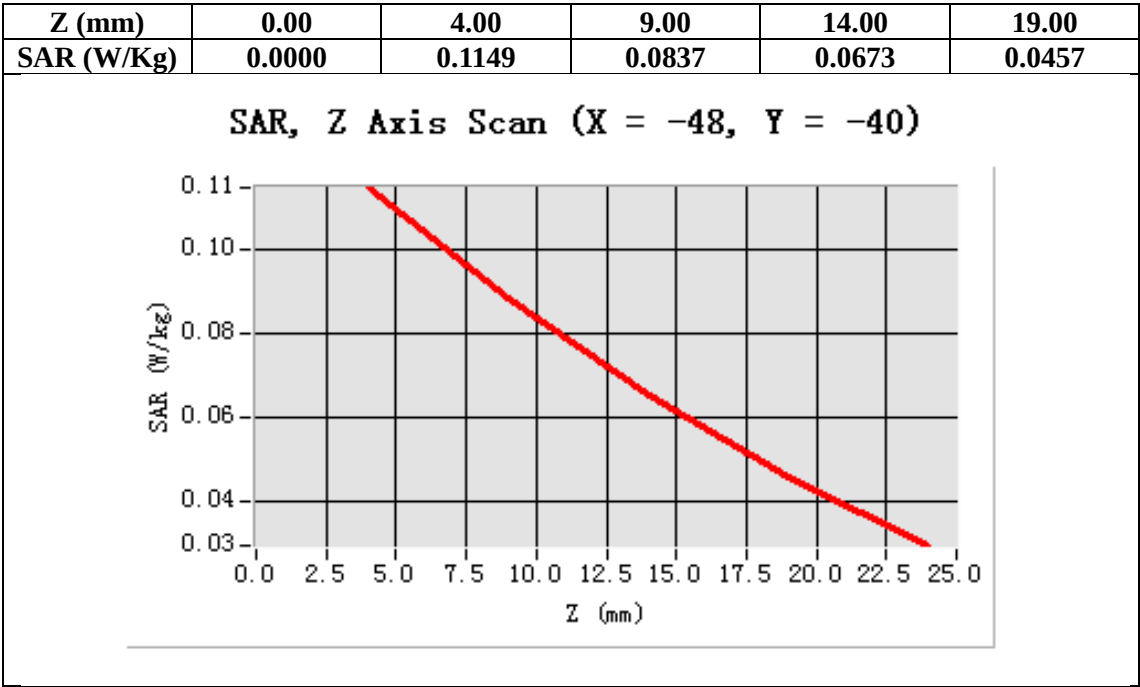

Test Laboratory: AGC Lab
802.11b Mid -Tilt-Left
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11b Mid- Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11b Mid- Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

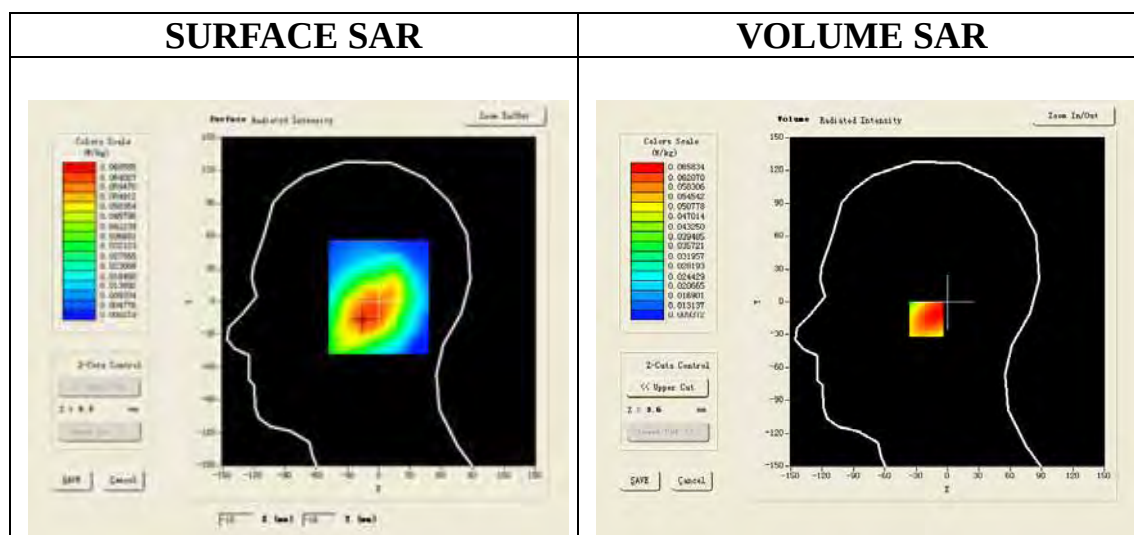

Maximum location: X=-16.00, Y=-16.00

SAR 10g (W/Kg)	0.043393
SAR 1g (W/Kg)	0.063564

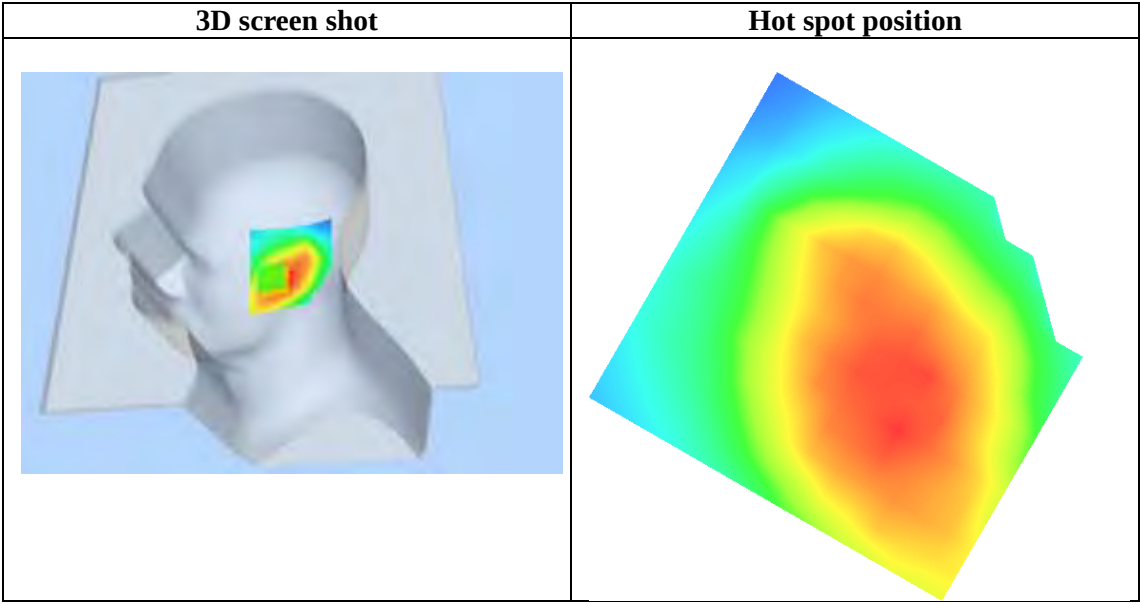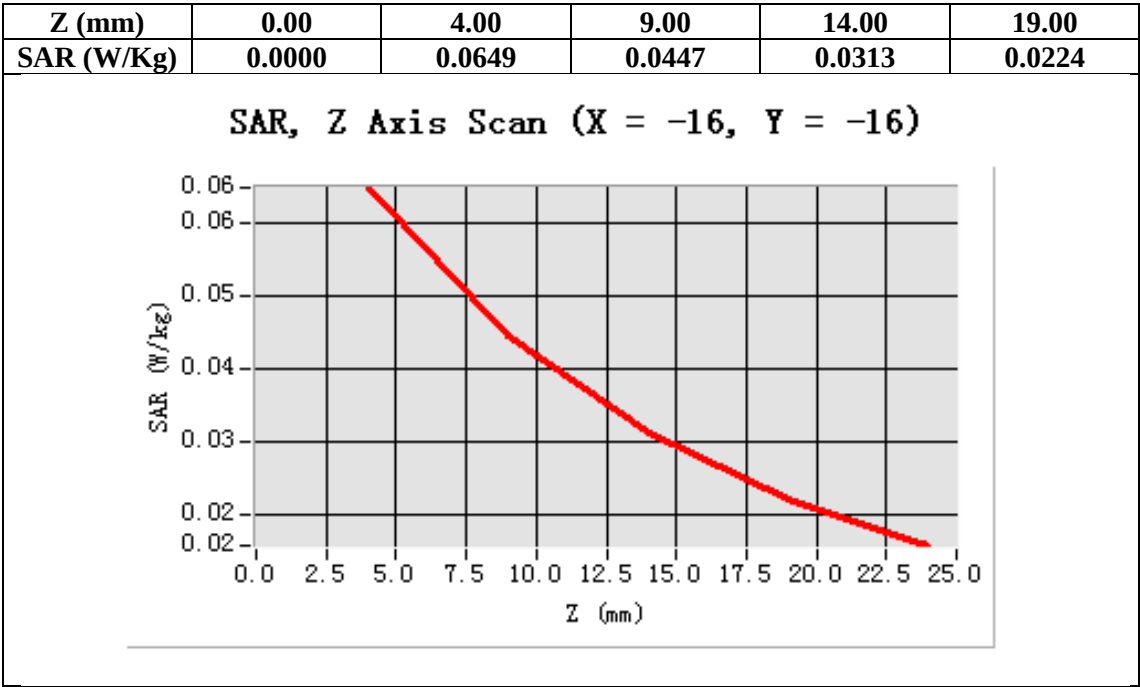

Test Laboratory: AGC Lab
802.11b Mid- Touch-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11b Mid- Touch-Right /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11b Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

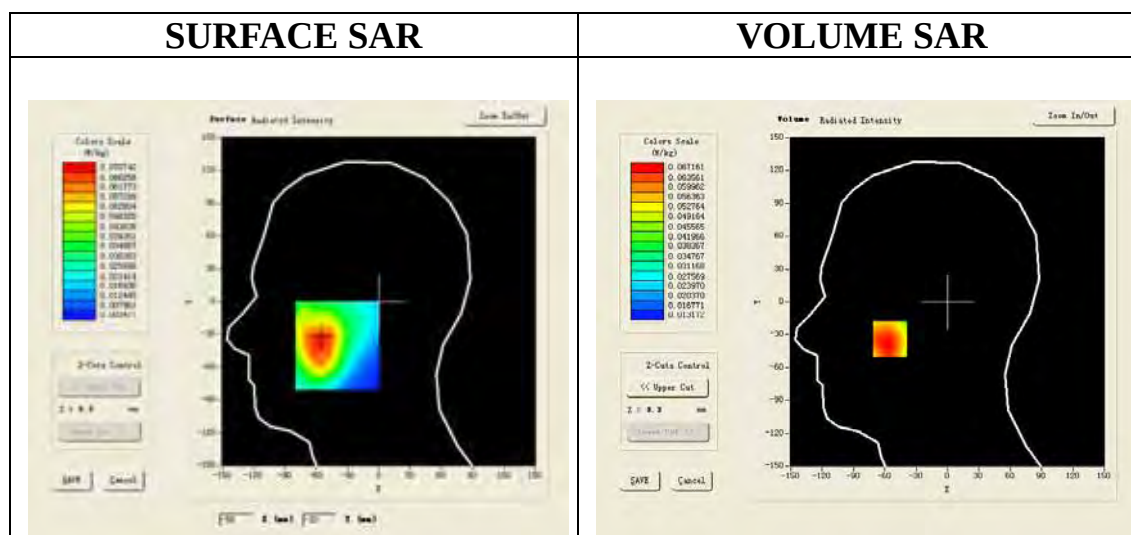

Maximum location: X=-55.00, Y=-34.00

SAR 10g (W/Kg)	0.046864
SAR 1g (W/Kg)	0.065287

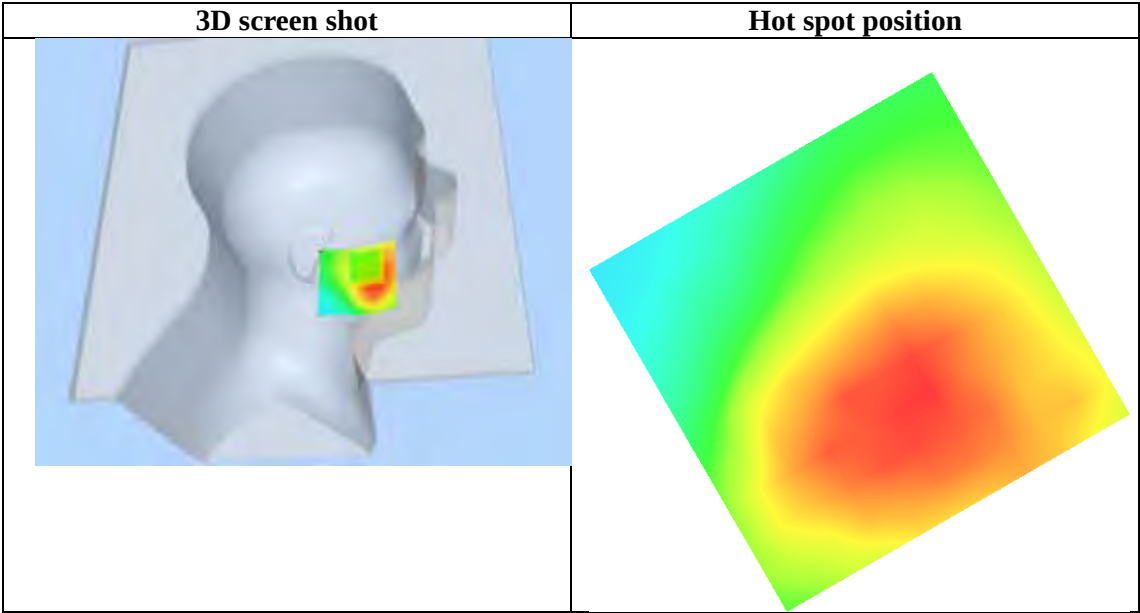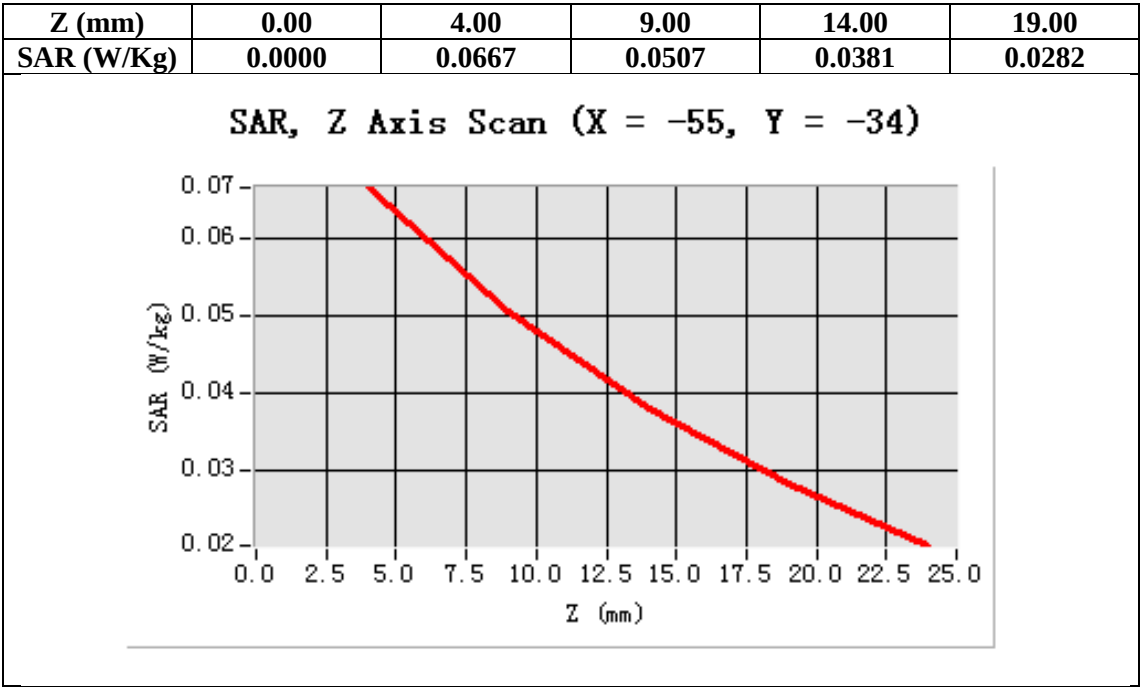

Test Laboratory: AGC Lab
802.11b Mid-Tilt-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11b Mid- Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11b Mid- Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

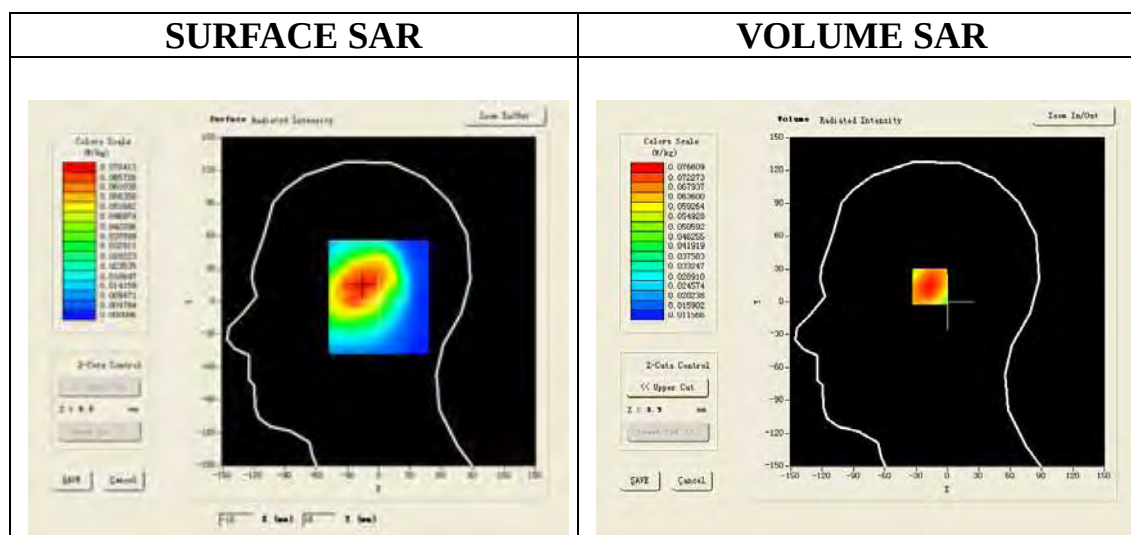

Maximum location: X=-15.00, Y=15.00

SAR 10g (W/Kg)	0.049246
SAR 1g (W/Kg)	0.073475

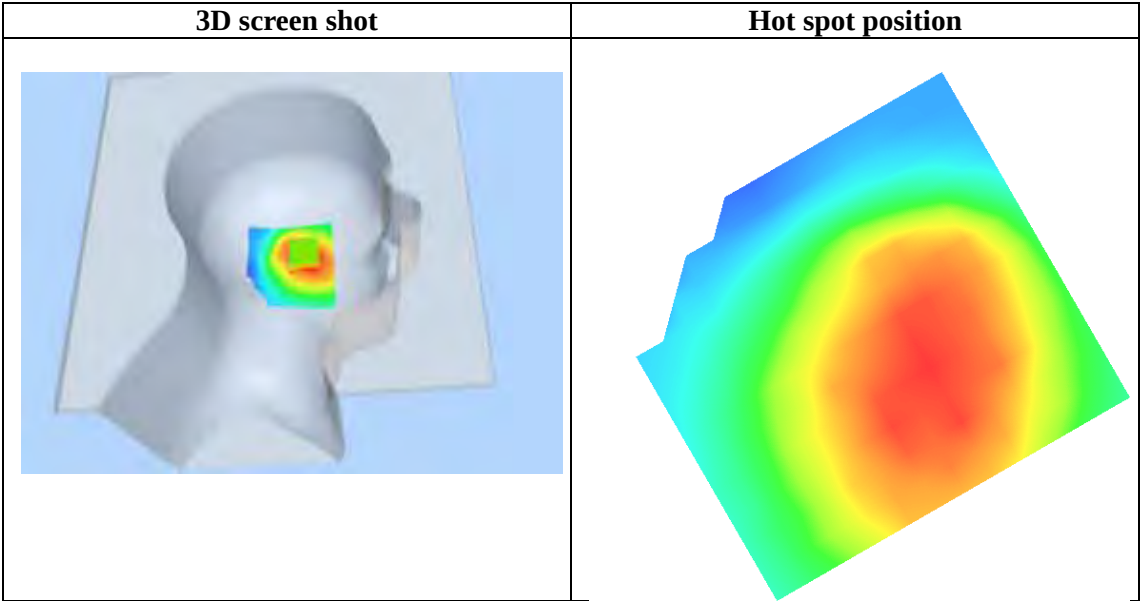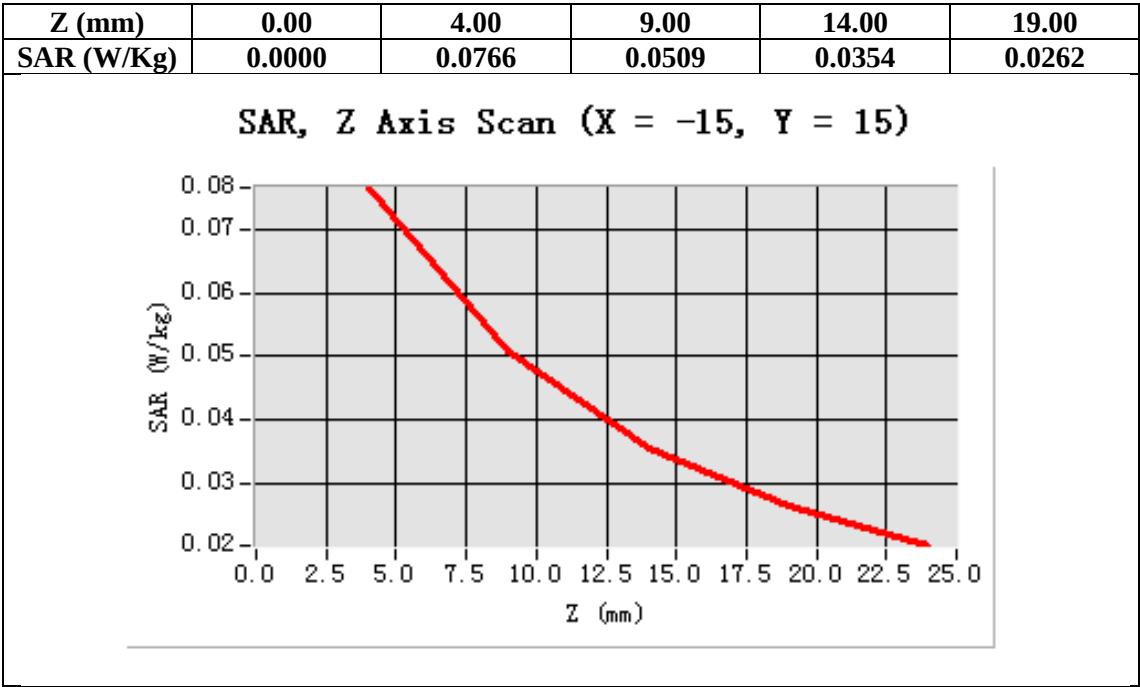

Test Laboratory: AGC Lab
802.11b Mid-Body-Worn- Touch (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11b Mid- Body- Touch /Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11b Mid- Body- Touch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

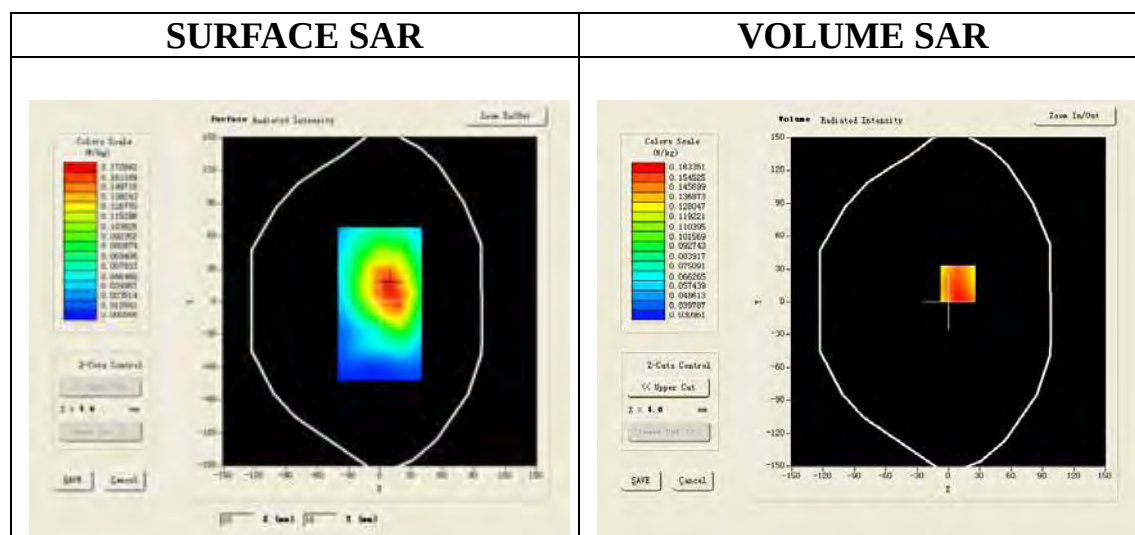

Maximum location: X=9.00, Y=17.00

SAR 10g (W/Kg)	0.107377
SAR 1g (W/Kg)	0.154748

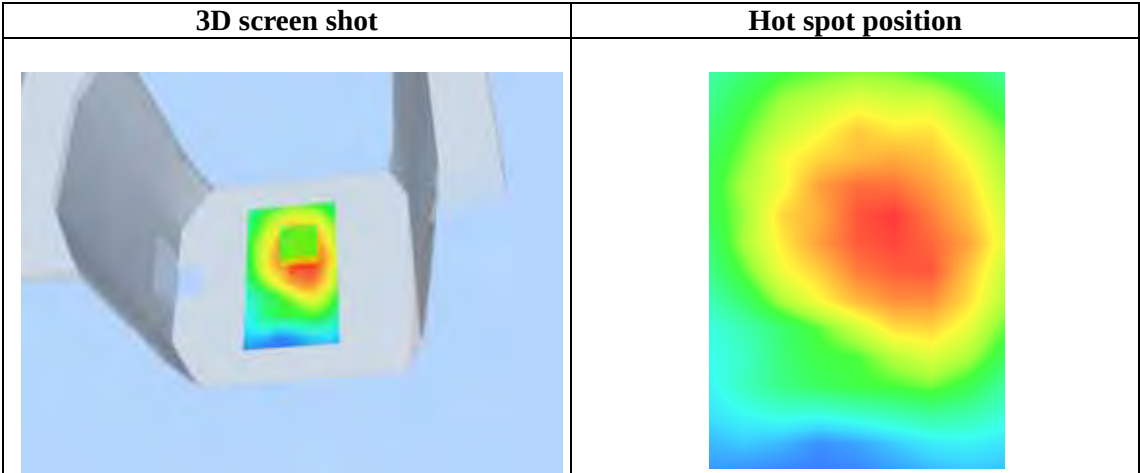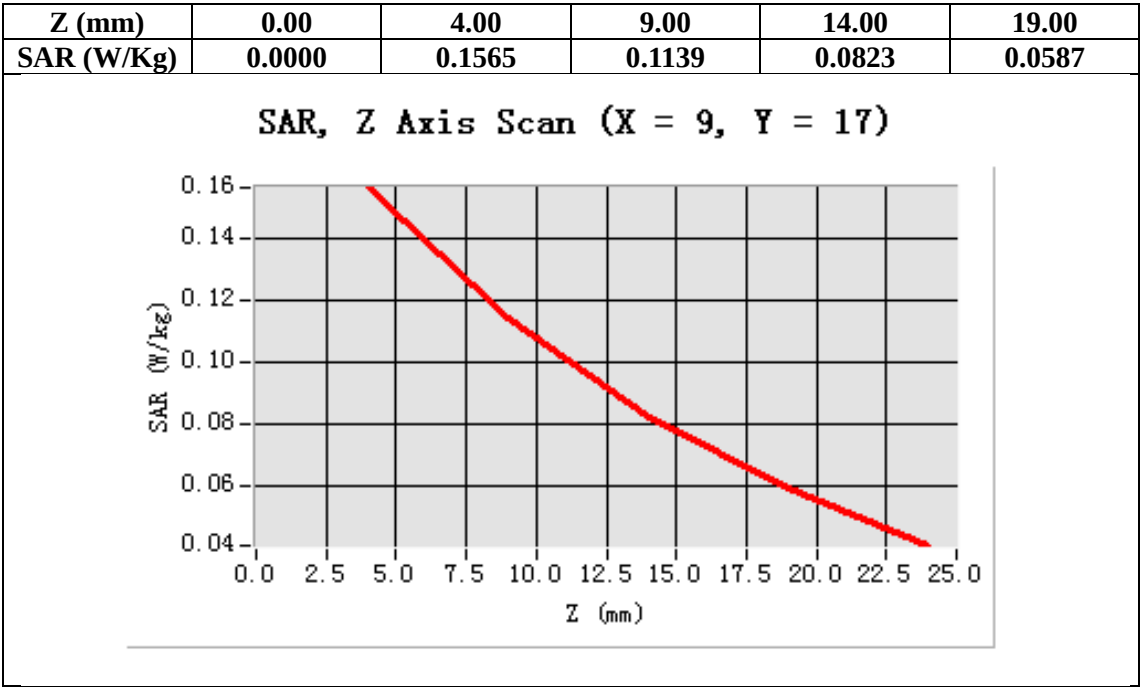

Test Laboratory: AGC Lab
802.11b Mid-Body -Front (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11b Mid-Body- Front /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11b Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Front
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

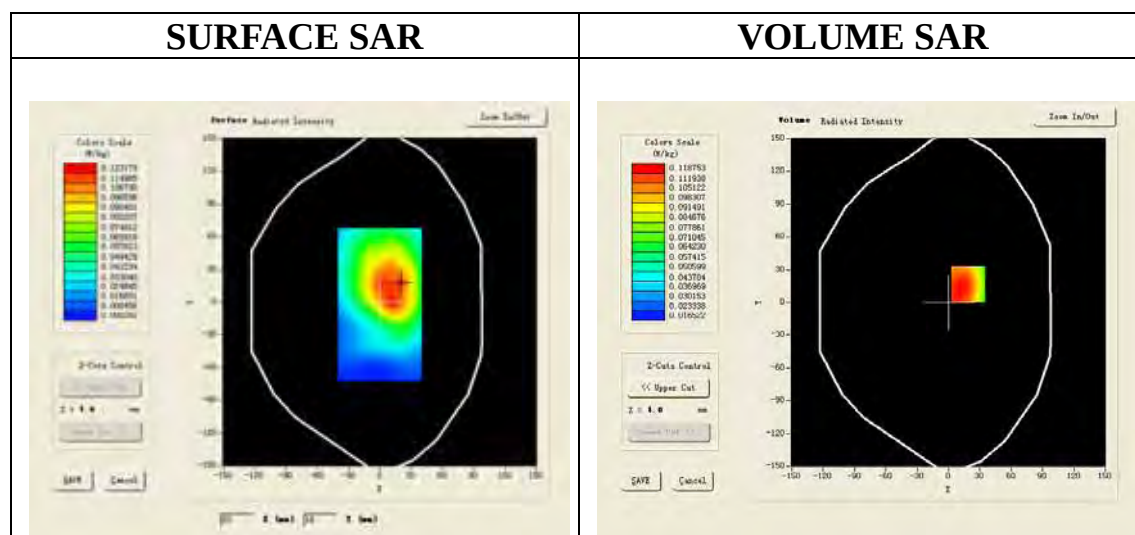

Maximum location: X=19.00, Y=17.00

SAR 10g (W/Kg)	0.078291
SAR 1g (W/Kg)	0.114643

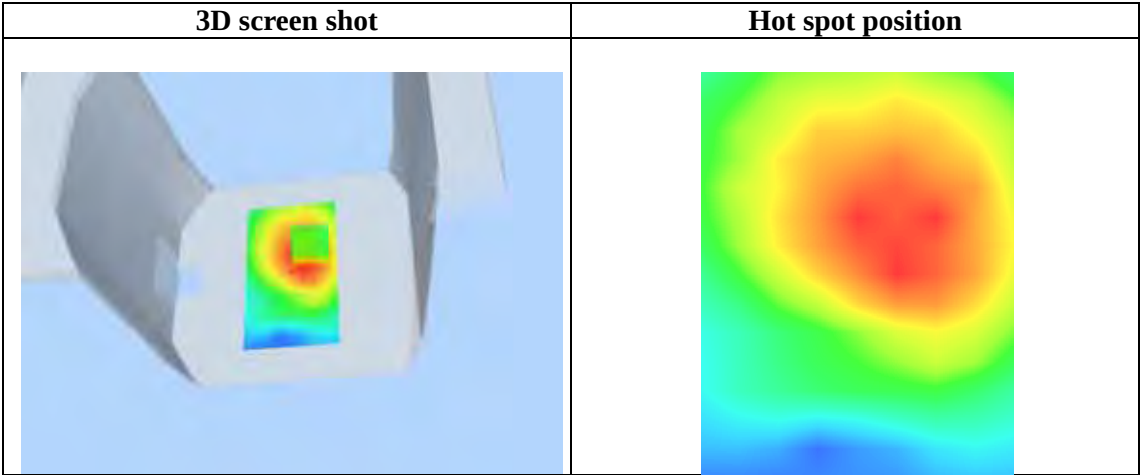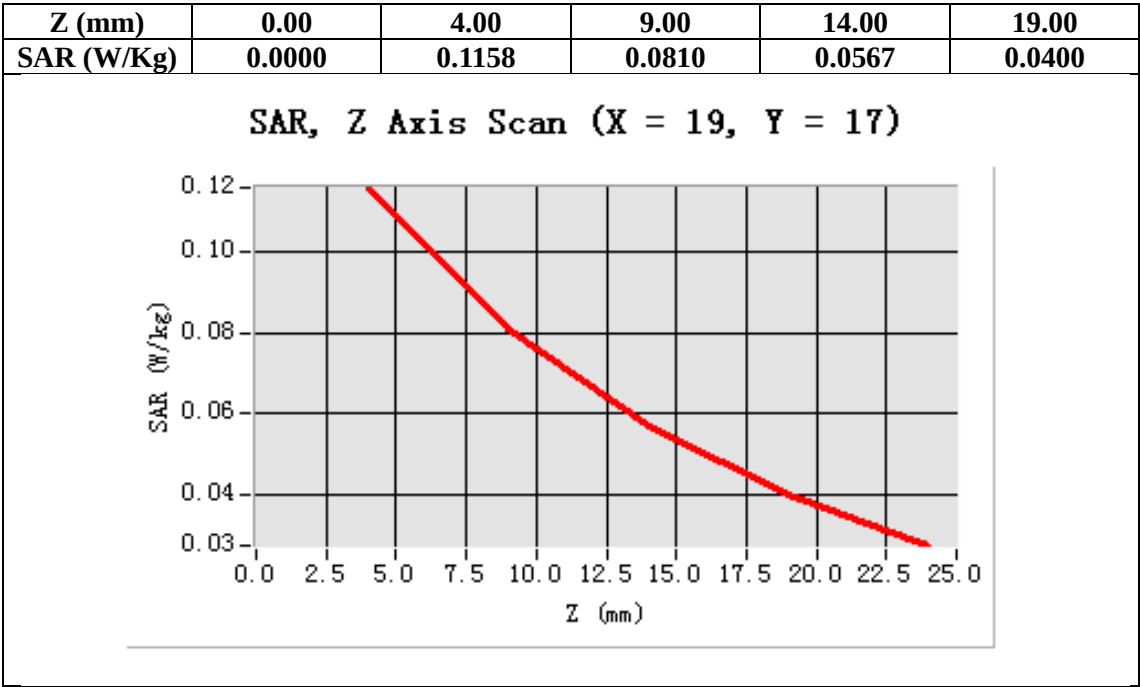

Test Laboratory: AGC Lab
802.11b Mid- Body- Touch (MS) - with earphone
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (): 21.0, Liquid temperature (): 21.0


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/802.11b Mid-Body-Touch/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/802.11b Mid-Body-Touch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

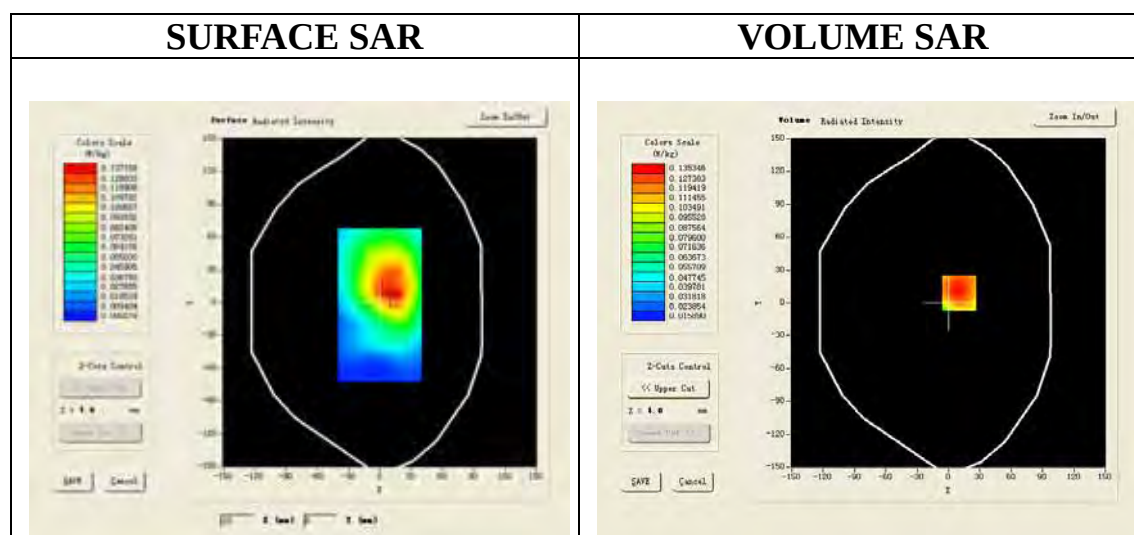

Maximum location: X=10.00, Y=9.00

SAR 10g (W/Kg)	0.085641
SAR 1g (W/Kg)	0.130145

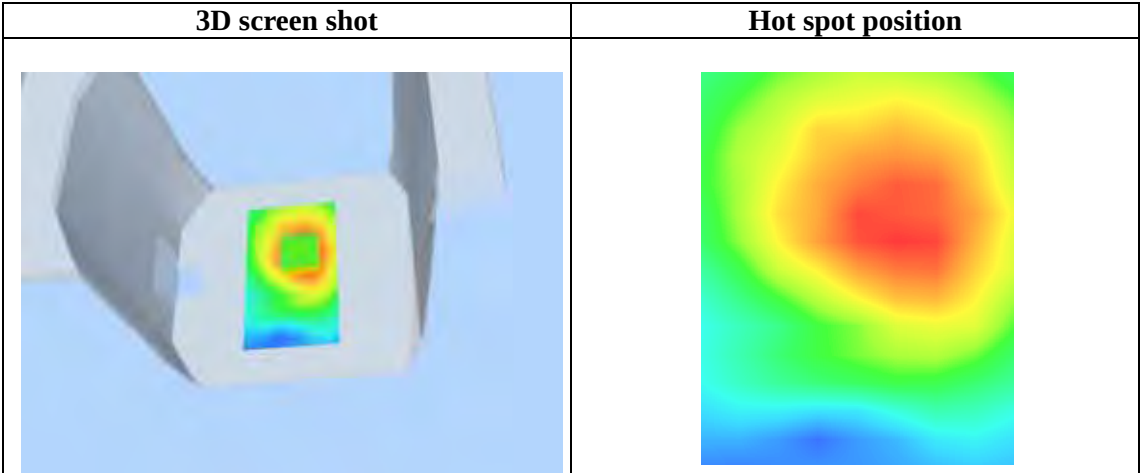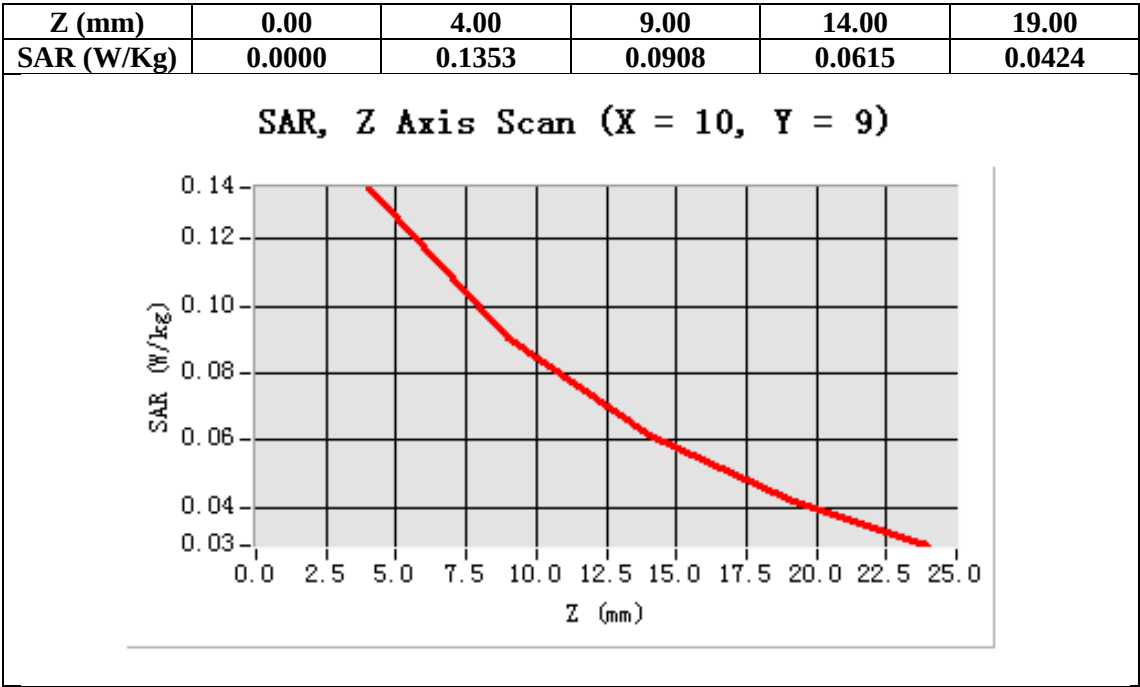

Test Laboratory: AGC Lab
802.11g Mid-Touch-Left
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid- Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11g Mid- Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

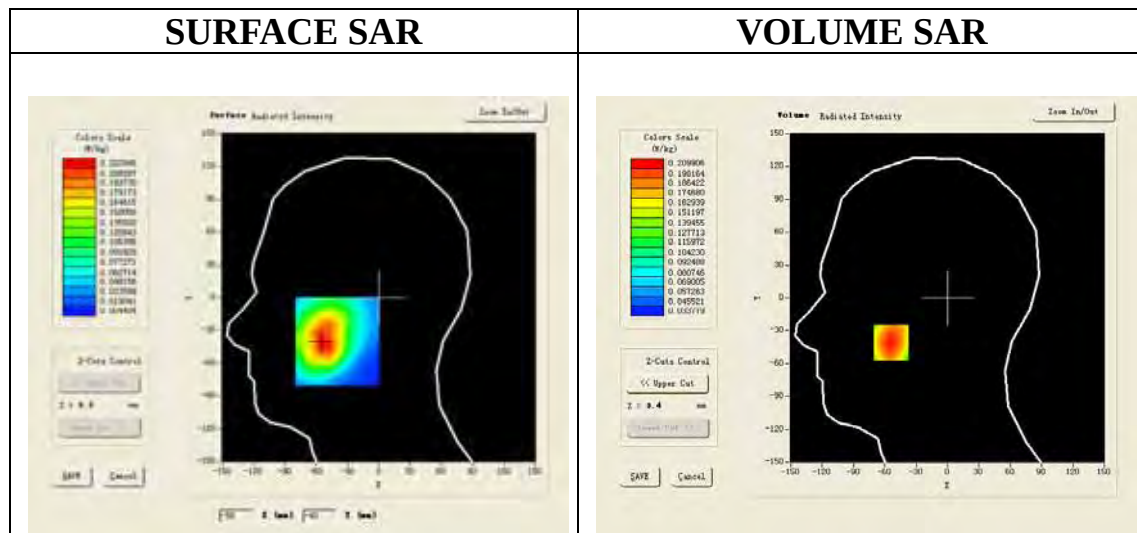

Maximum location: X=-54.00, Y=-41.00

SAR 10g (W/Kg)	0.133748
SAR 1g (W/Kg)	0.209563

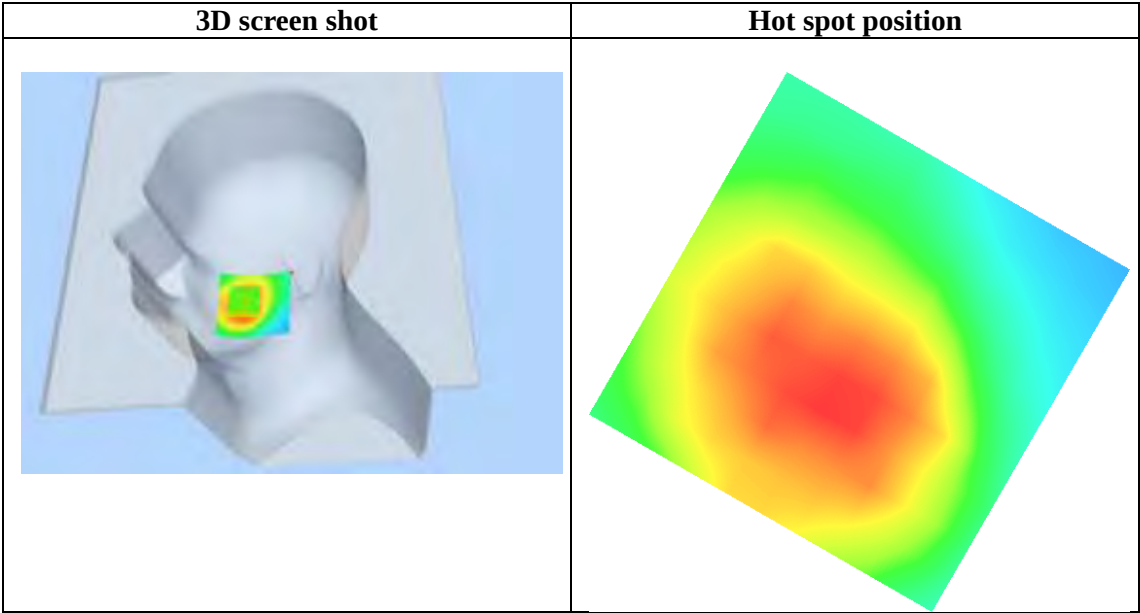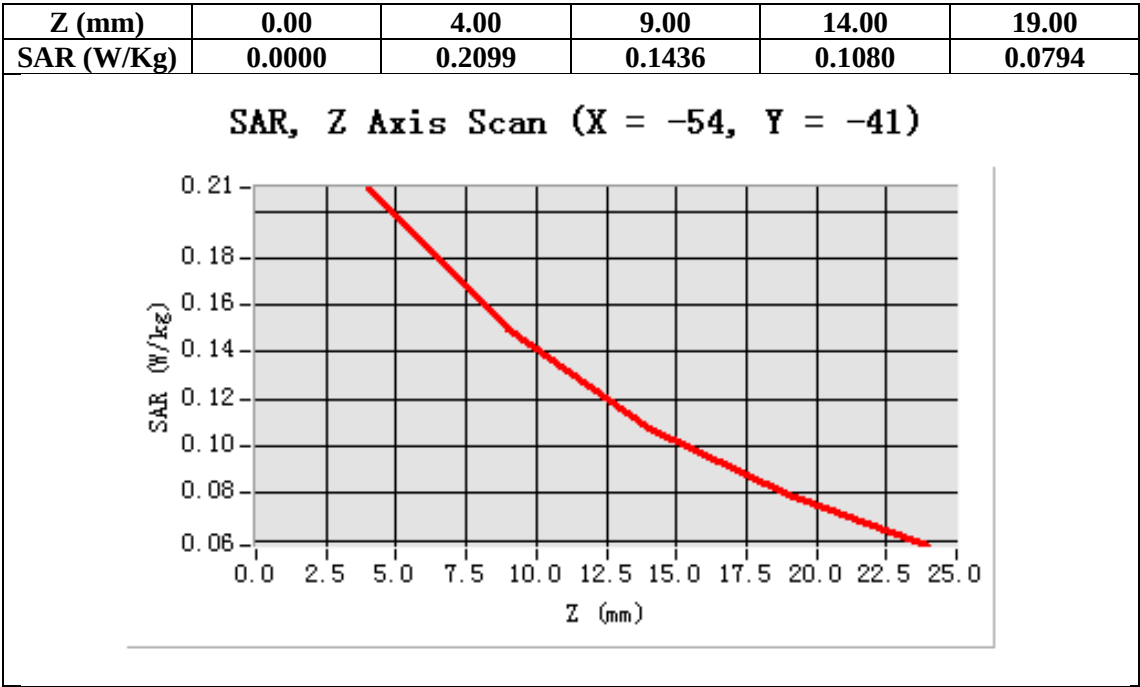

Test Laboratory: AGC Lab
802.11g Mid -Tilt-Left
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid- Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11g Mid- Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

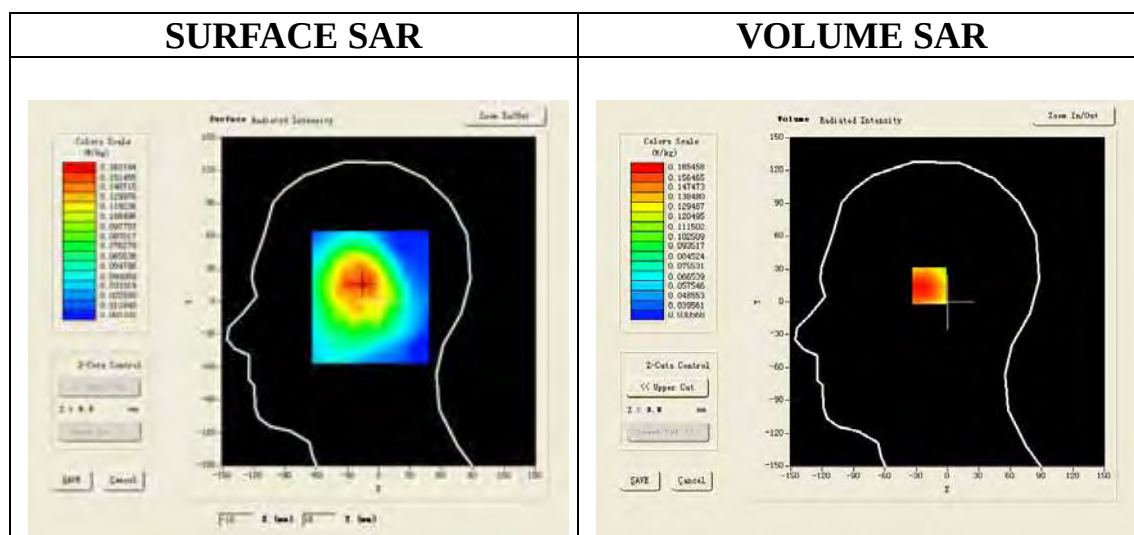

Maximum location: X=-16.00, Y=16.00

SAR 10g (W/Kg)	0.115311
SAR 1g (W/Kg)	0.160316

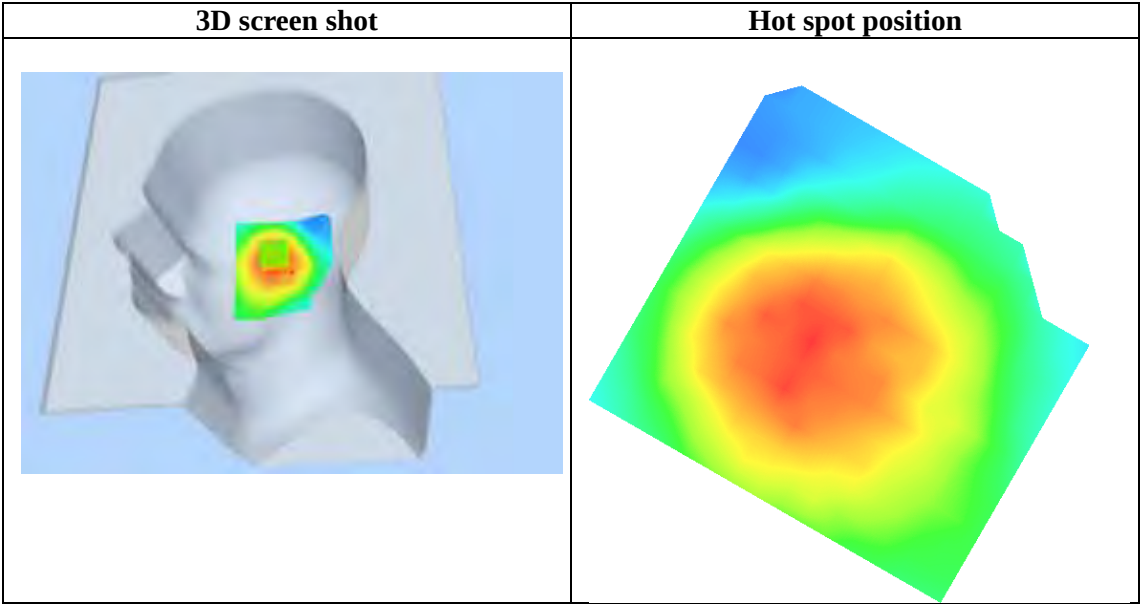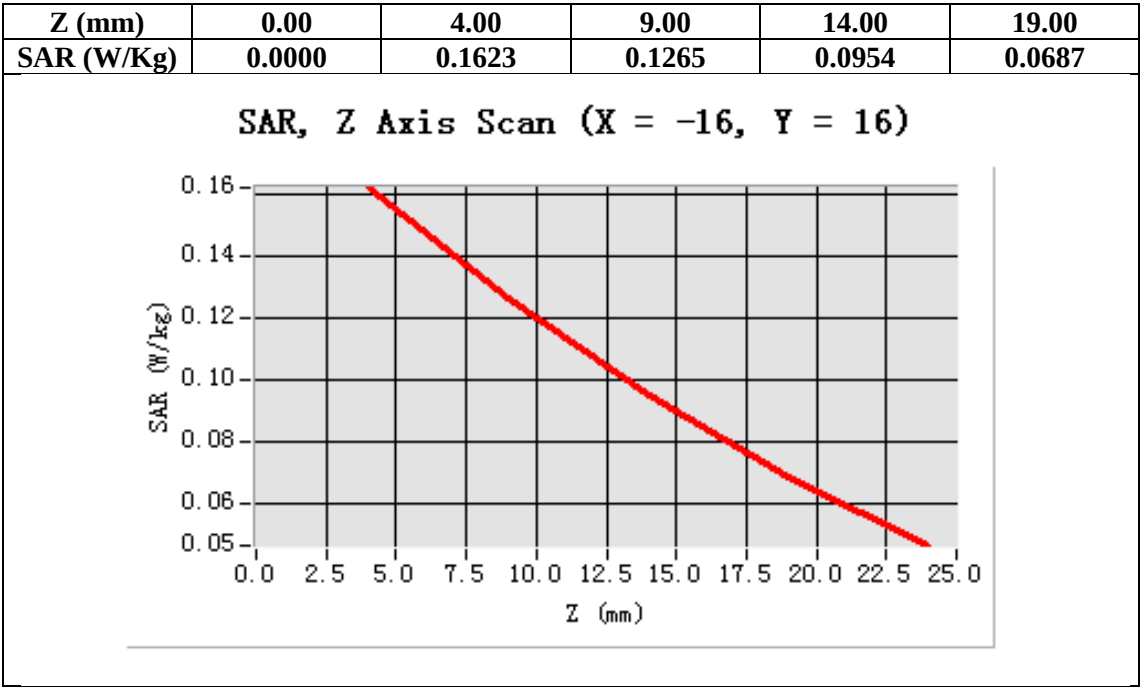

Test Laboratory: AGC Lab
802.11g Mid- Touch-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid- Touch-Right /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11g Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

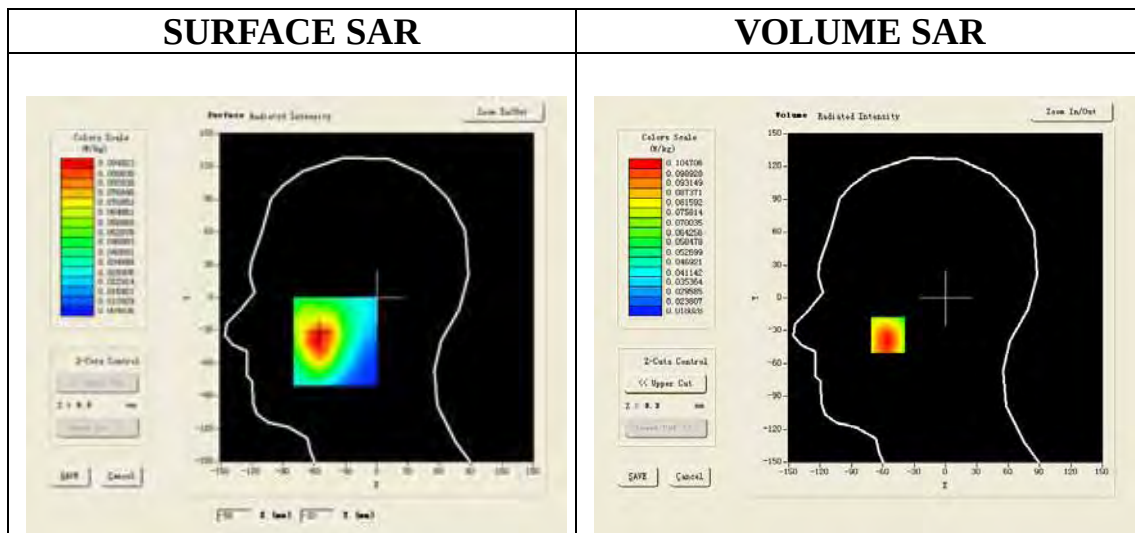

Maximum location: X=-55.00, Y=-34.00

SAR 10g (W/Kg)	0.069628
SAR 1g (W/Kg)	0.100582

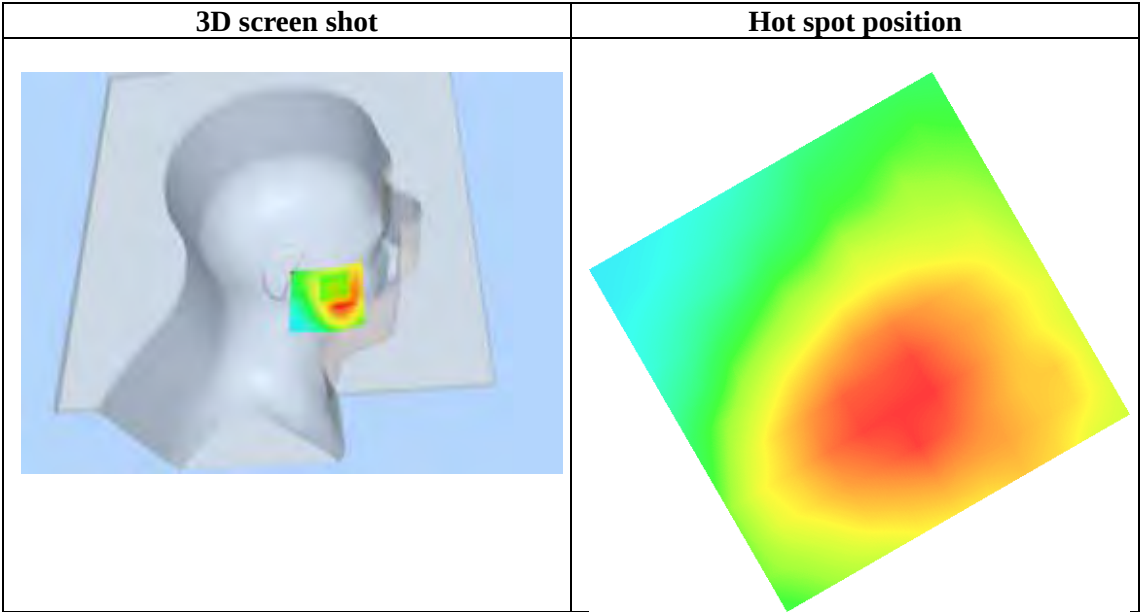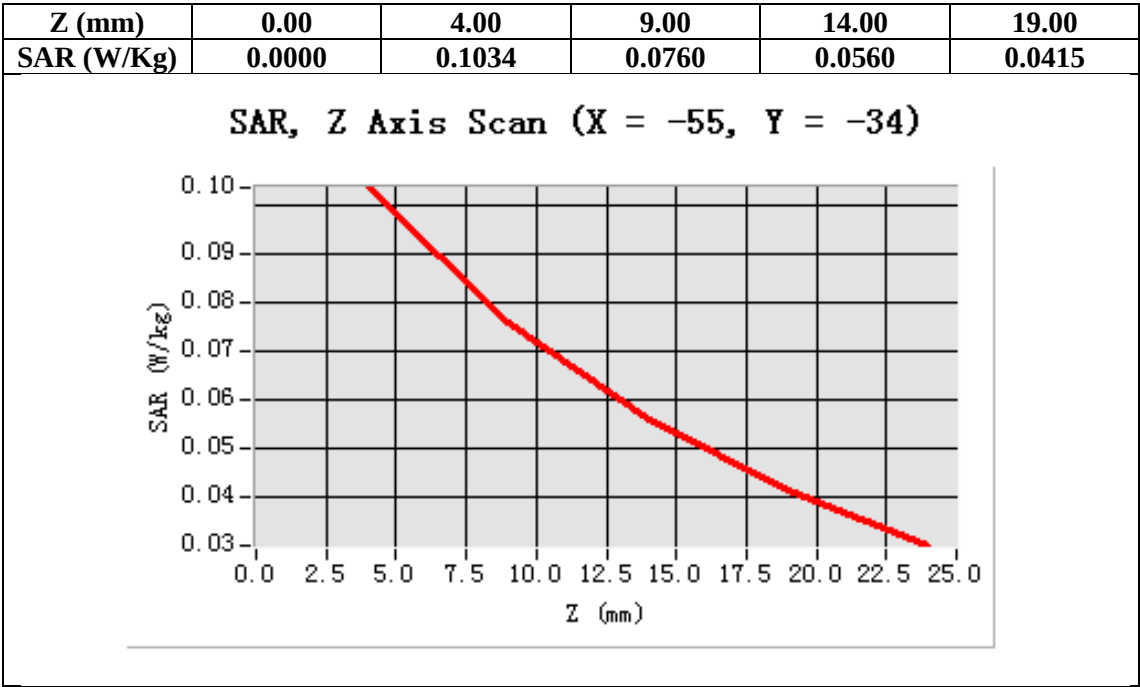

Test Laboratory: AGC Lab
802.11g Mid-Tilt-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid- Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm


Configuration/802.11g Mid- Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

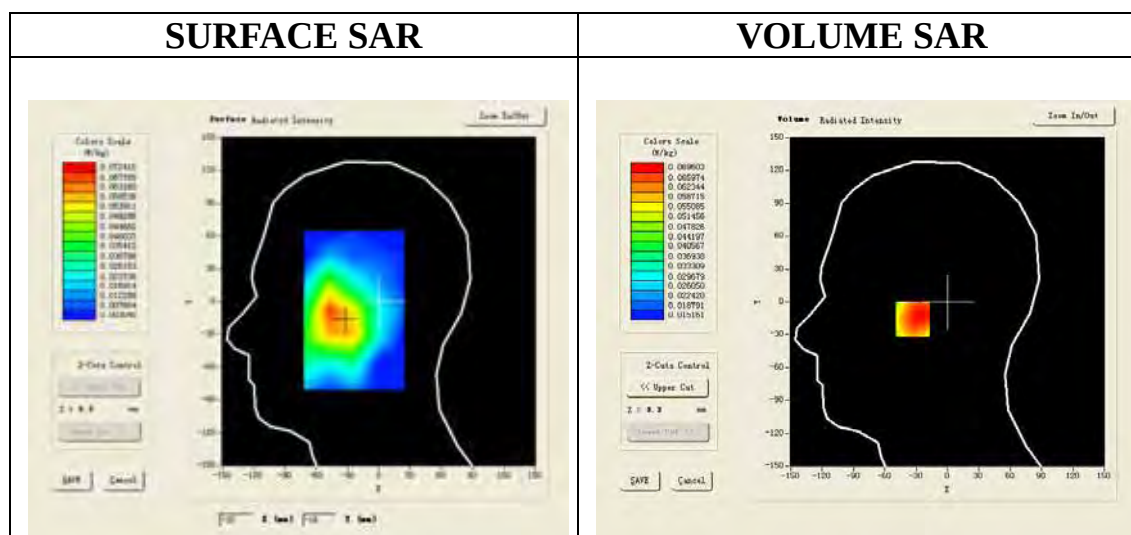

Maximum location: X=-30.00, Y=-16.00

SAR 10g (W/Kg)	0.050214
SAR 1g (W/Kg)	0.067702

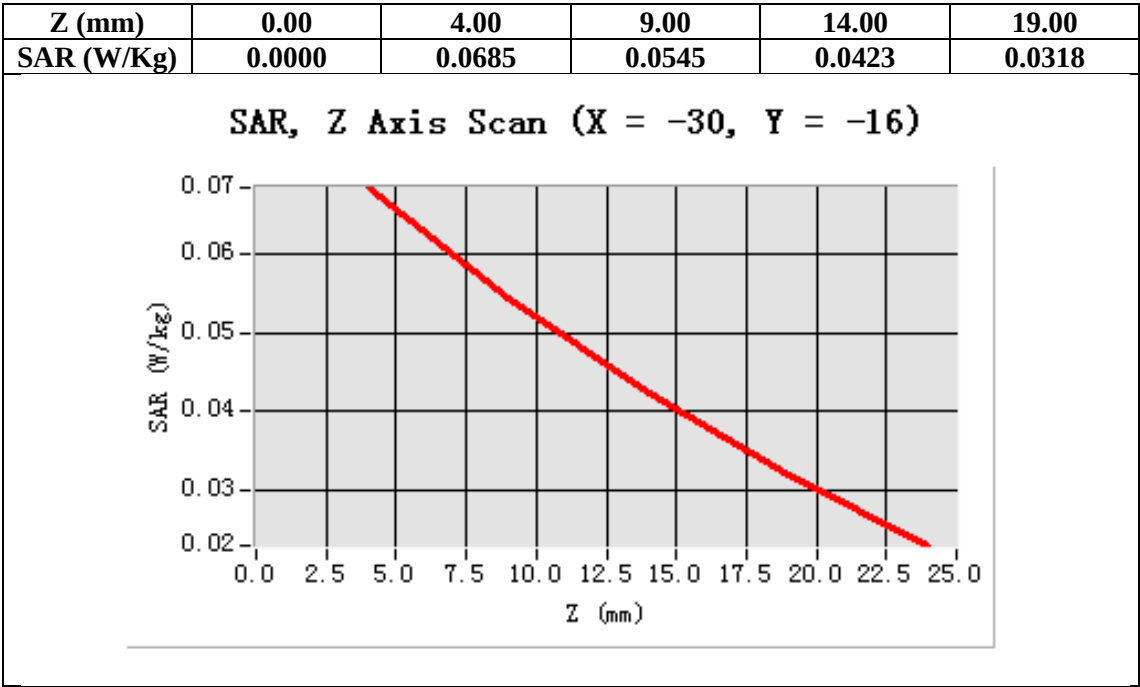

Test Laboratory: AGC Lab
802.11g Mid-Body-Worn- Touch (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid- Body- Touch /Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11g Mid- Body- Touch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

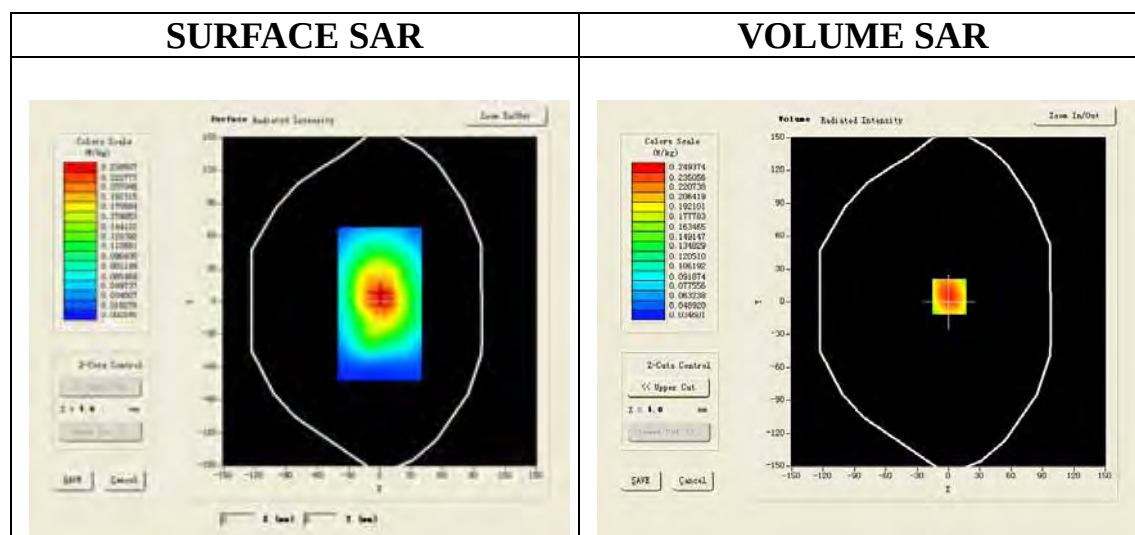

Maximum location: X=1.00, Y=5.00

SAR 10g (W/Kg)	0.163272
SAR 1g (W/Kg)	0.257550

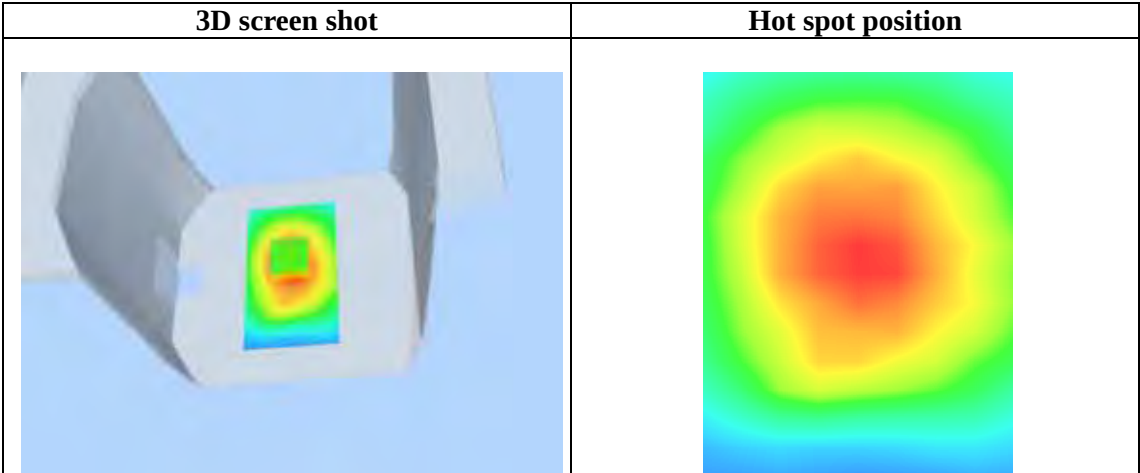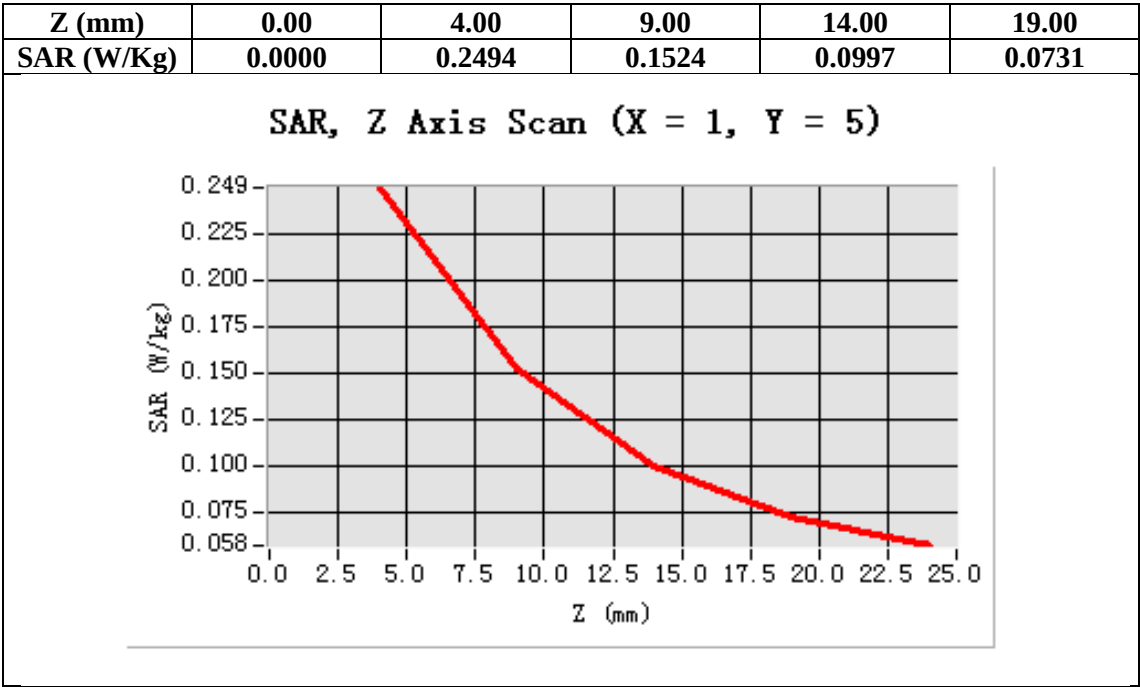

Test Laboratory: AGC Lab
802.11g Mid-Body -Front (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid-Body- Front /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11g Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Front
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

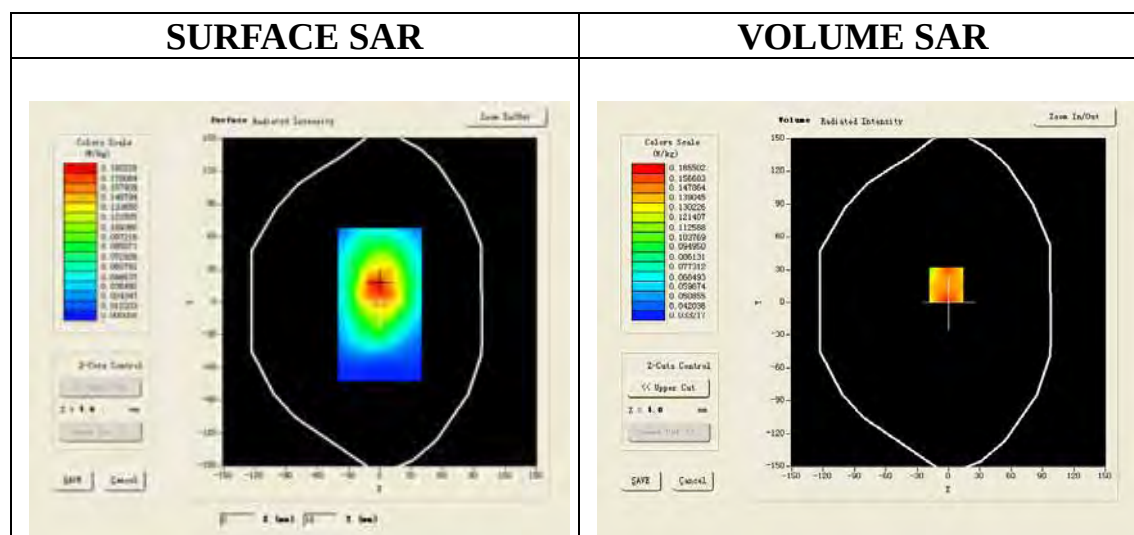

Maximum location: X=-2.00, Y=16.00

SAR 10g (W/Kg)	0.125896
SAR 1g (W/Kg)	0.166259

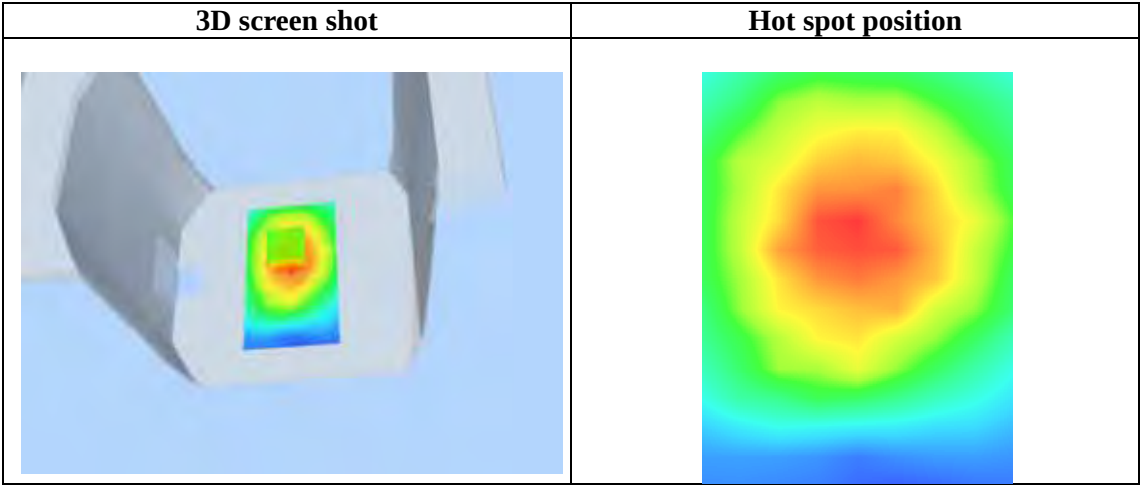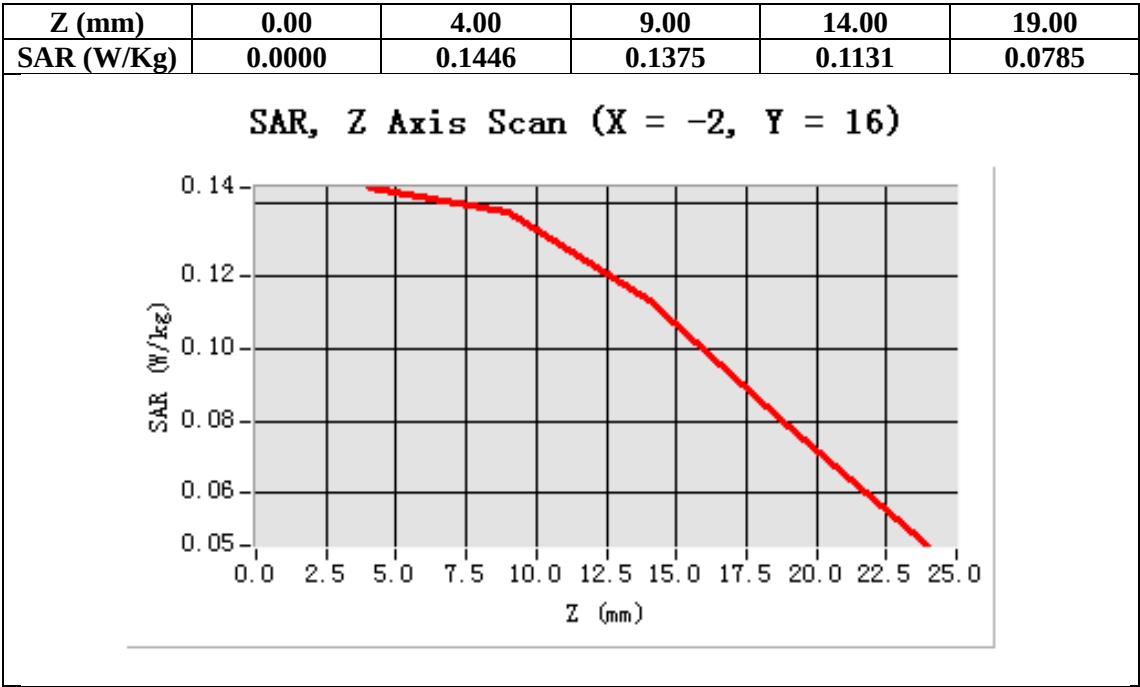

Test Laboratory: AGC Lab

Date: Jun.27, 2013

802.11g Mid- Body- Touch (MS) - with earphone

DUT: Tablet PC; Type: G7

Communication System: Wi-Fi; Communication System Band: 802.11g; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (): 21.0, Liquid temperature (): 21.0

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11g Mid-Body-Touch/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11g Mid-Body-Touch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

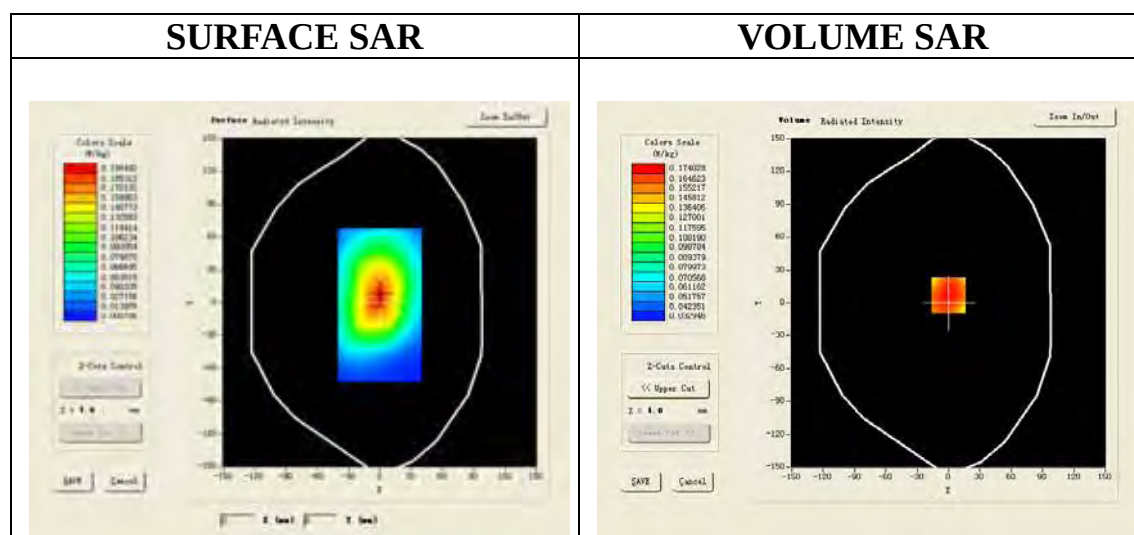

Maximum location: X=0.00, Y=7.00

SAR 10g (W/Kg)	0.128374
SAR 1g (W/Kg)	0.181386

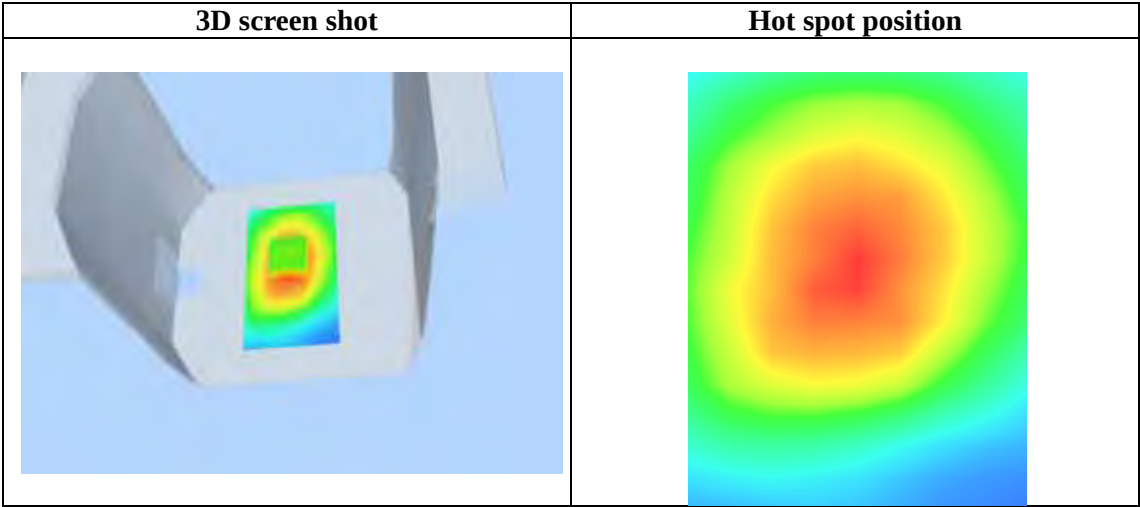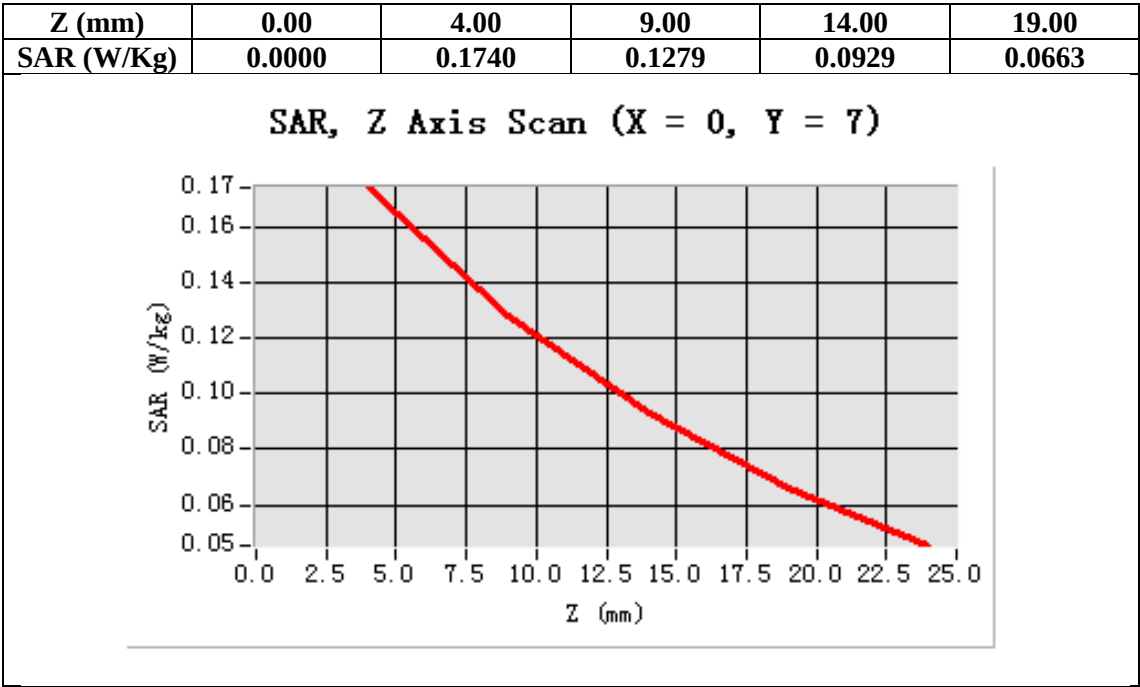

Test Laboratory: AGC Lab
802.11n (20) Mid-Touch-Left
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/802.11n (20) Mid- Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/802.11n (20) Mid- Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

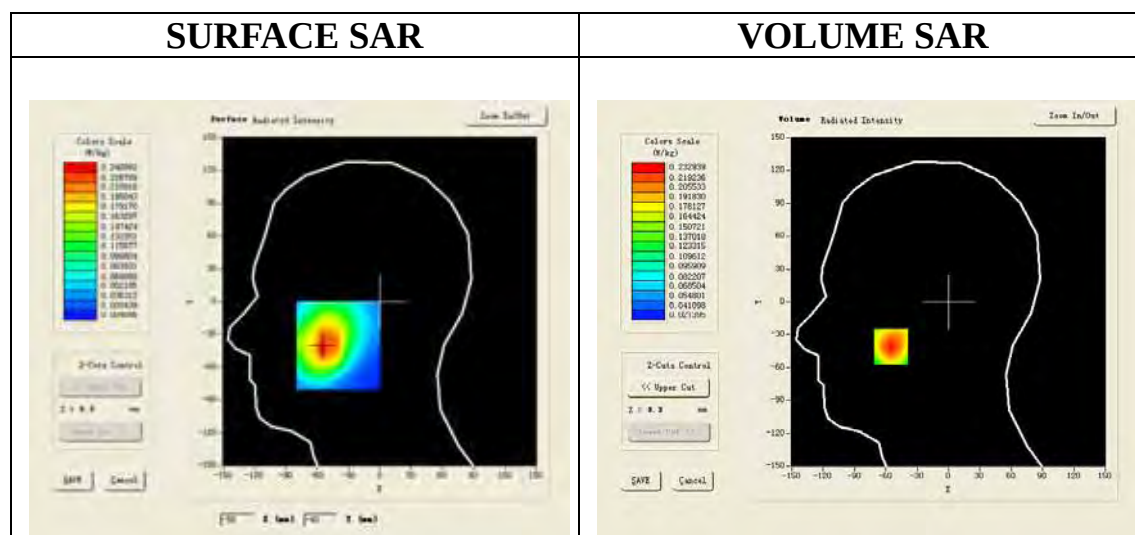

Maximum location: X=-55.00, Y=-41.00

SAR 10g (W/Kg)	0.149463
SAR 1g (W/Kg)	0.225885

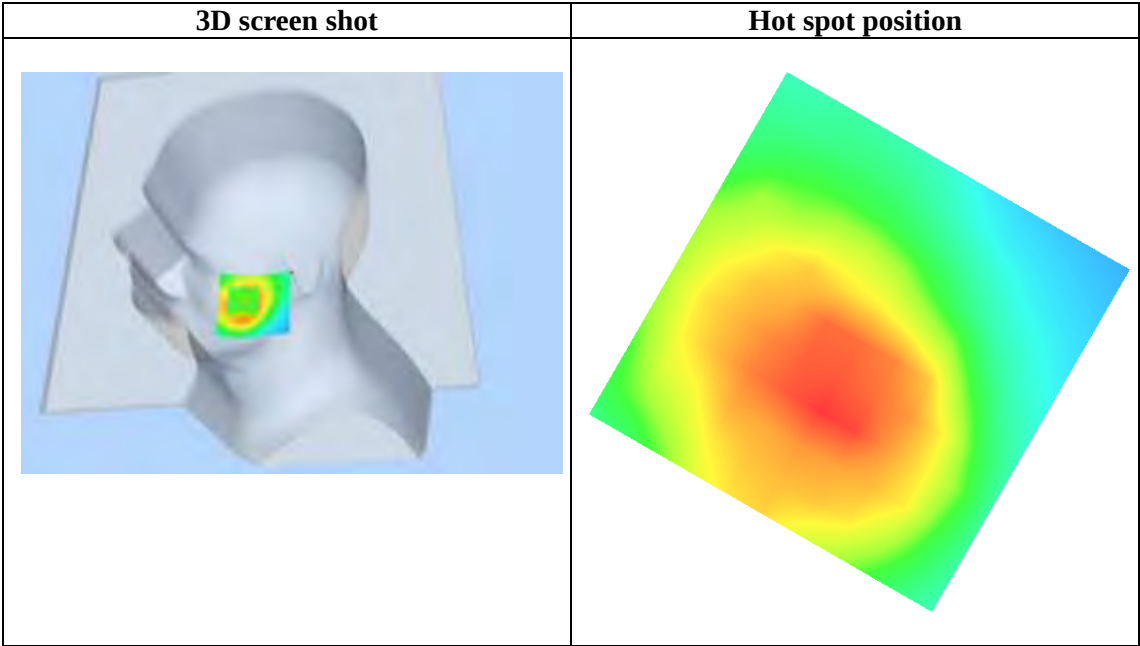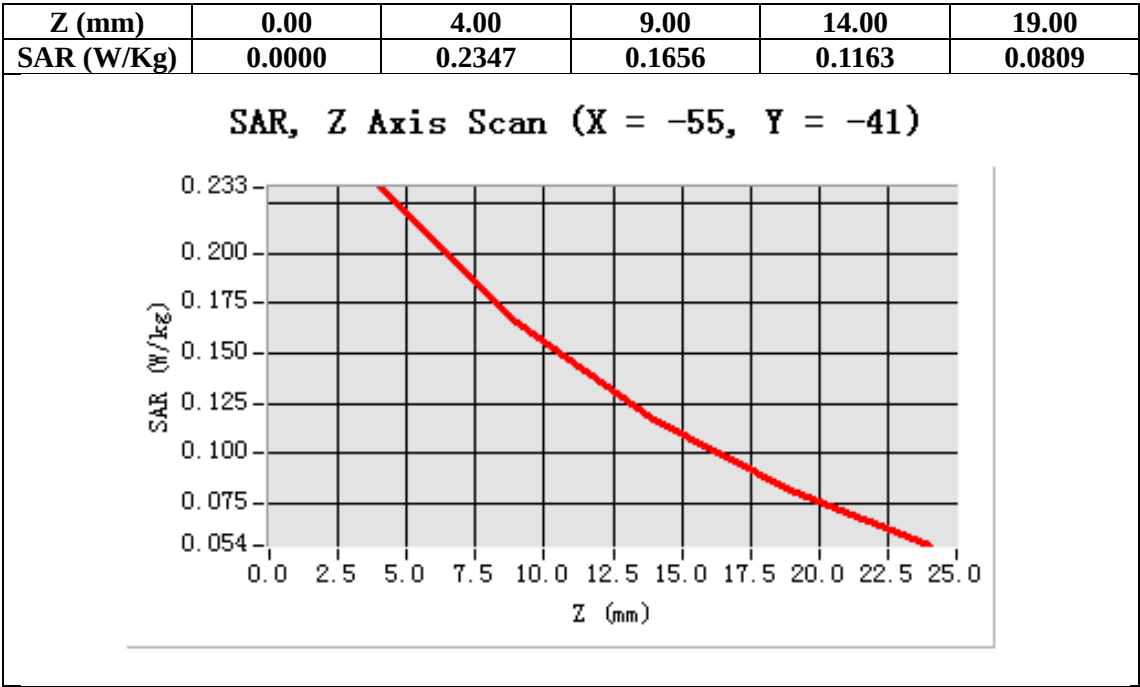

Test Laboratory: AGC Lab
802.11n (20) Mid -Tilt-Left
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11n (20) Mid- Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11n (20) Mid- Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

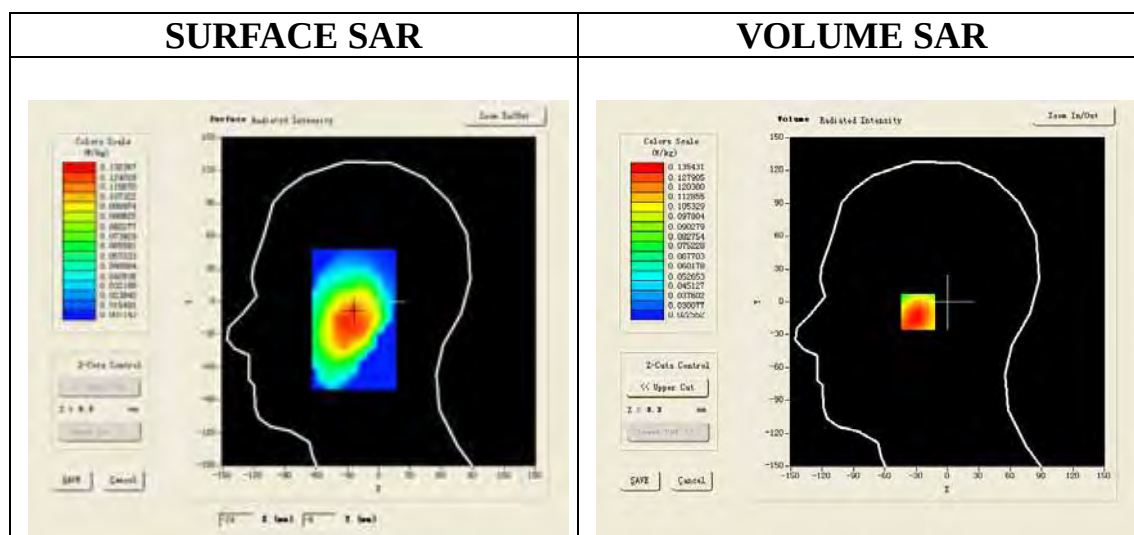

Maximum location: X=-25.00, Y=-9.00

SAR 10g (W/Kg)	0.092954
SAR 1g (W/Kg)	0.131745

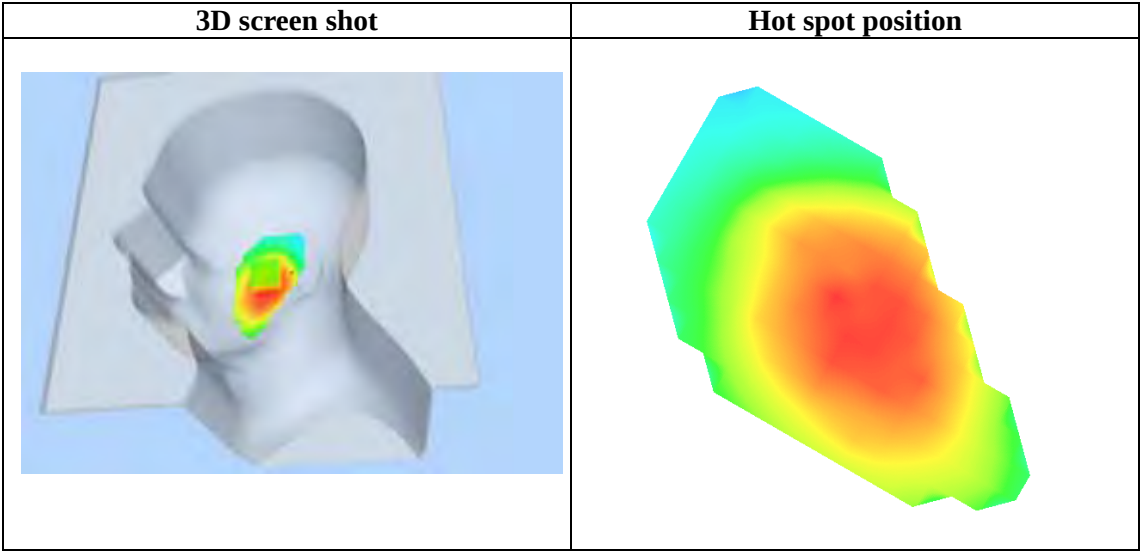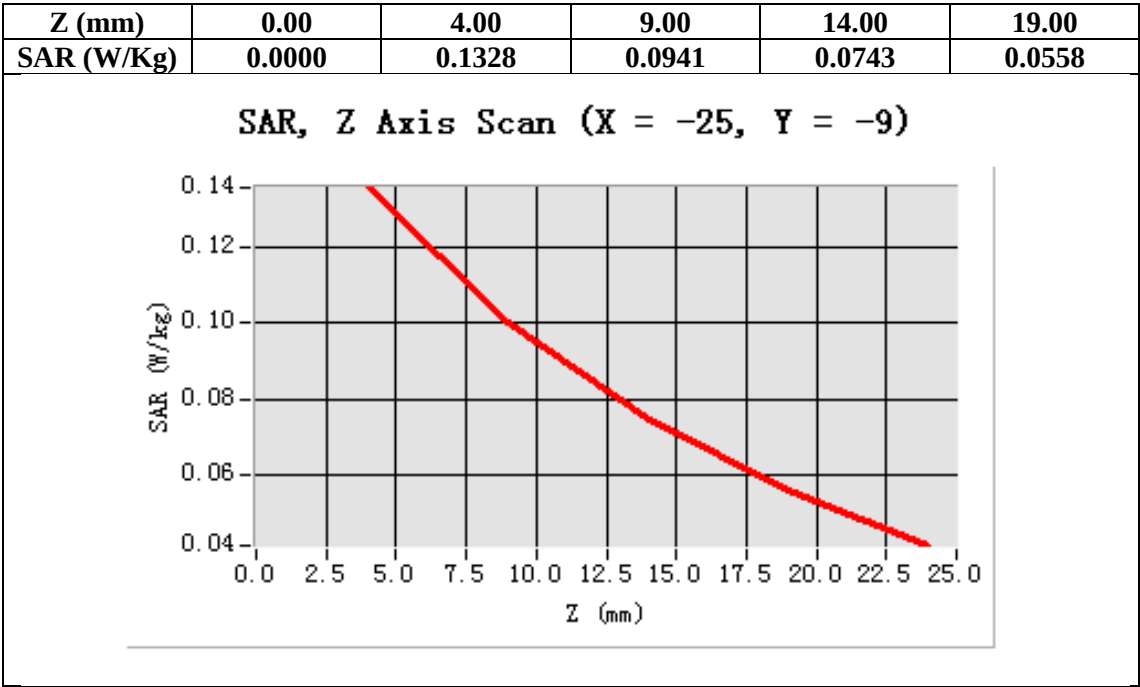

Test Laboratory: AGC Lab
802.11n (20) Mid- Touch-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11n (20) Mid- Touch-Right /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11n (20) Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

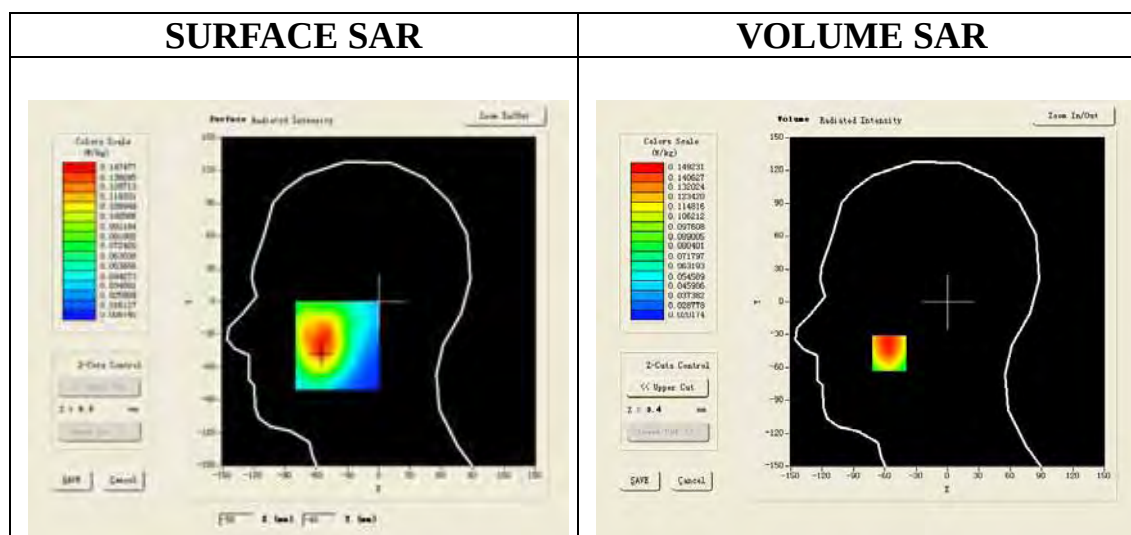

Maximum location: X=-56.00, Y=-47.00

SAR 10g (W/Kg)	0.099176
SAR 1g (W/Kg)	0.143774

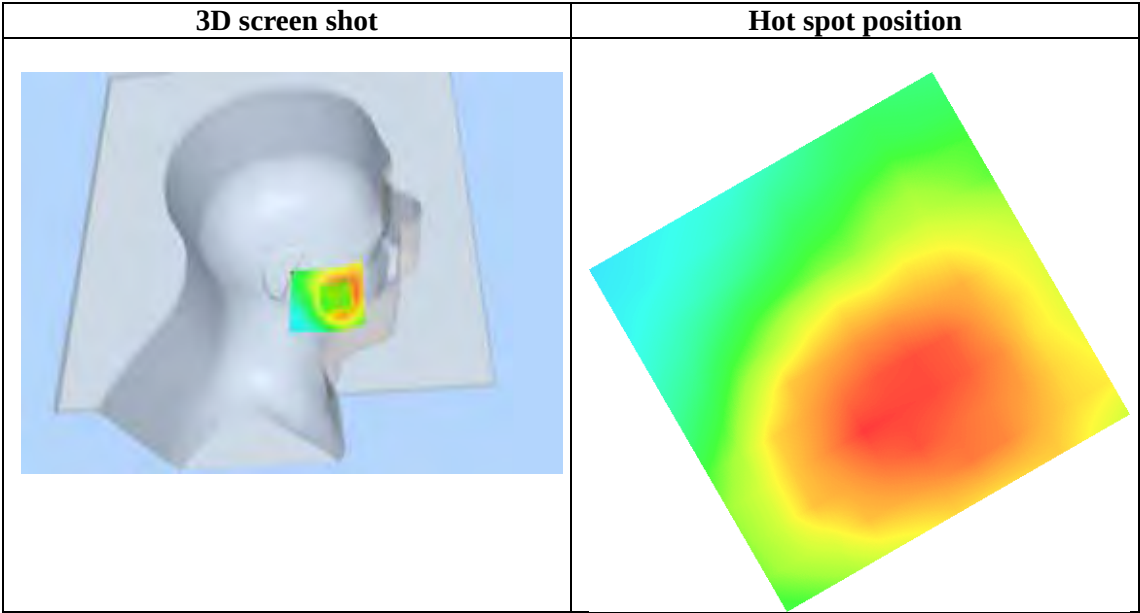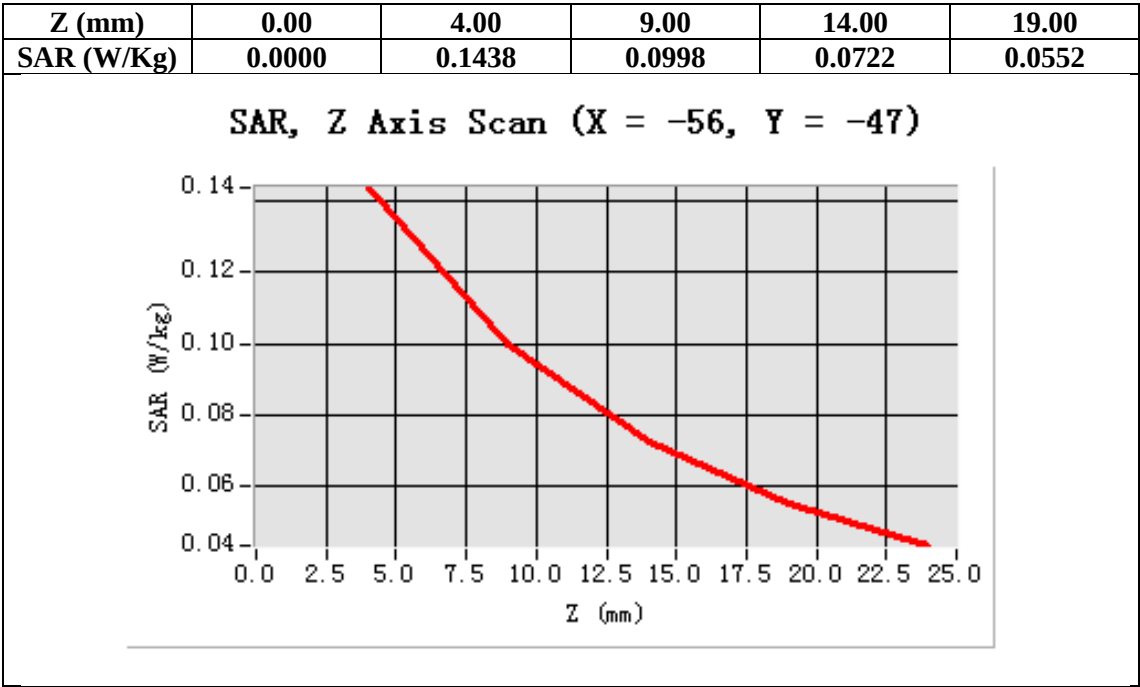

Test Laboratory: AGC Lab
802.11n (20) Mid-Tilt-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11n (20) Mid- Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11n (20) Mid- Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

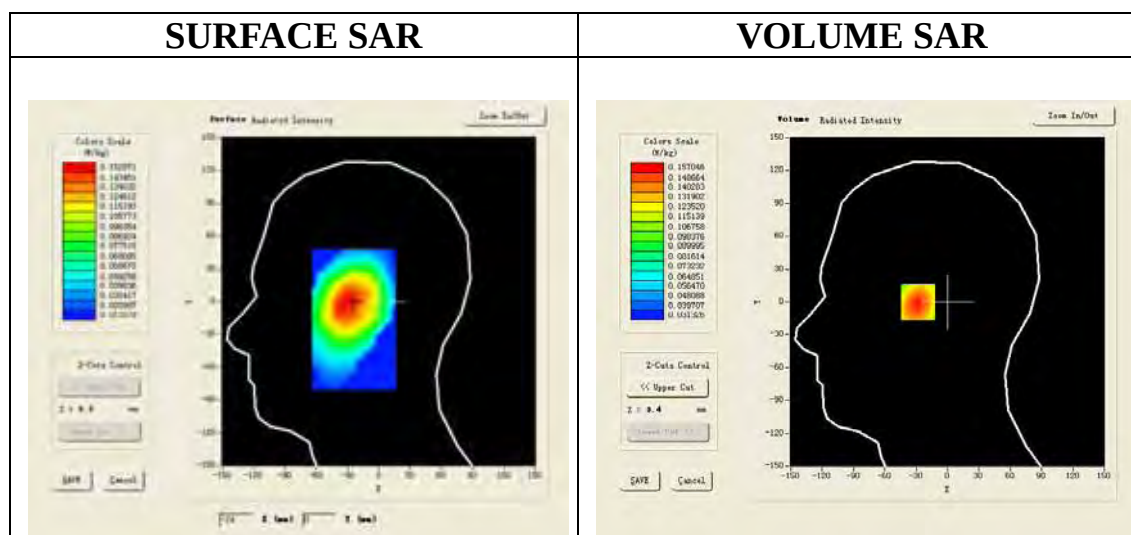

Maximum location: X=-26.00, Y=0.00

SAR 10g (W/Kg)	0.108264
SAR 1g (W/Kg)	0.152859

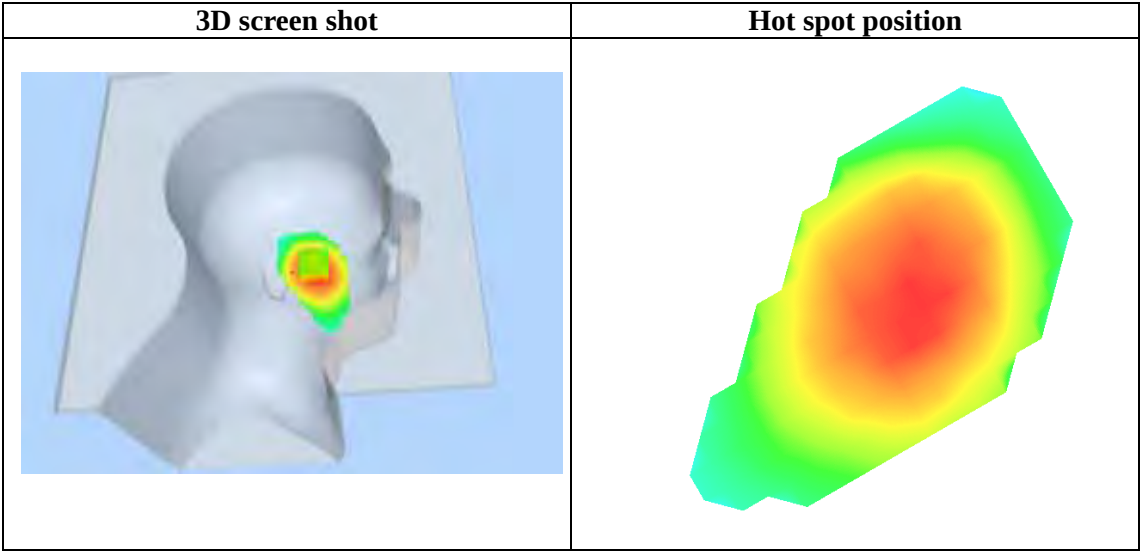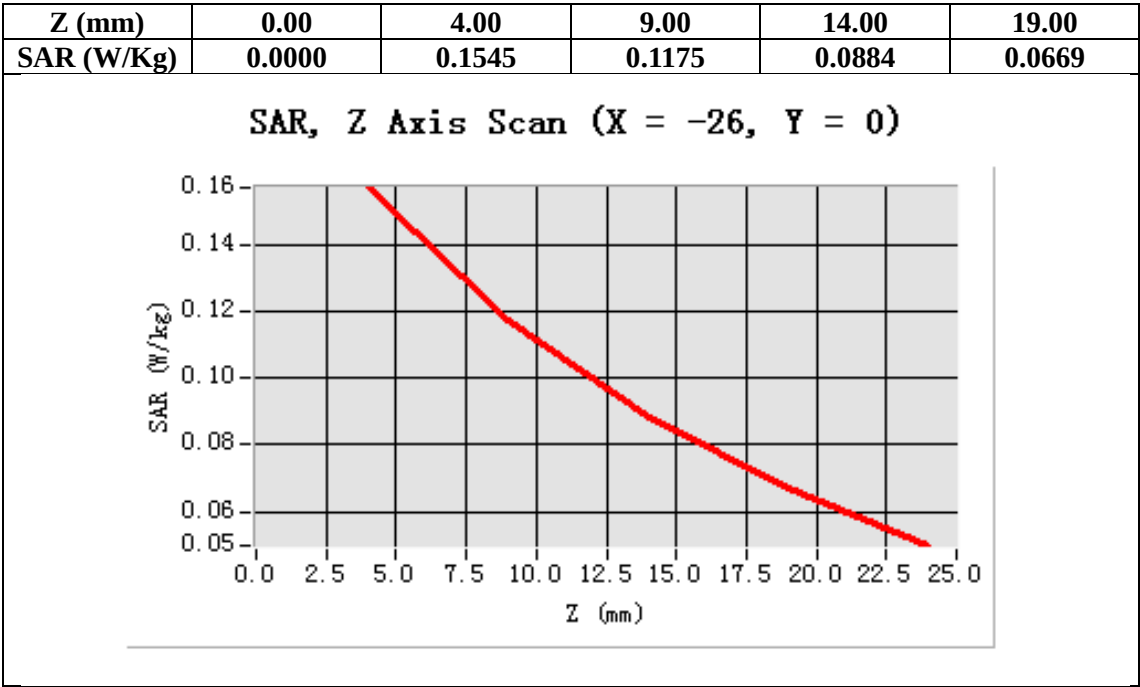

Test Laboratory: AGC Lab
802.11n (20) Mid-Body-Worn- Touch (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01



Configuration/802.11n (20) Mid- Body- Touch /Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/802.11n (20) Mid- Body- Touch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

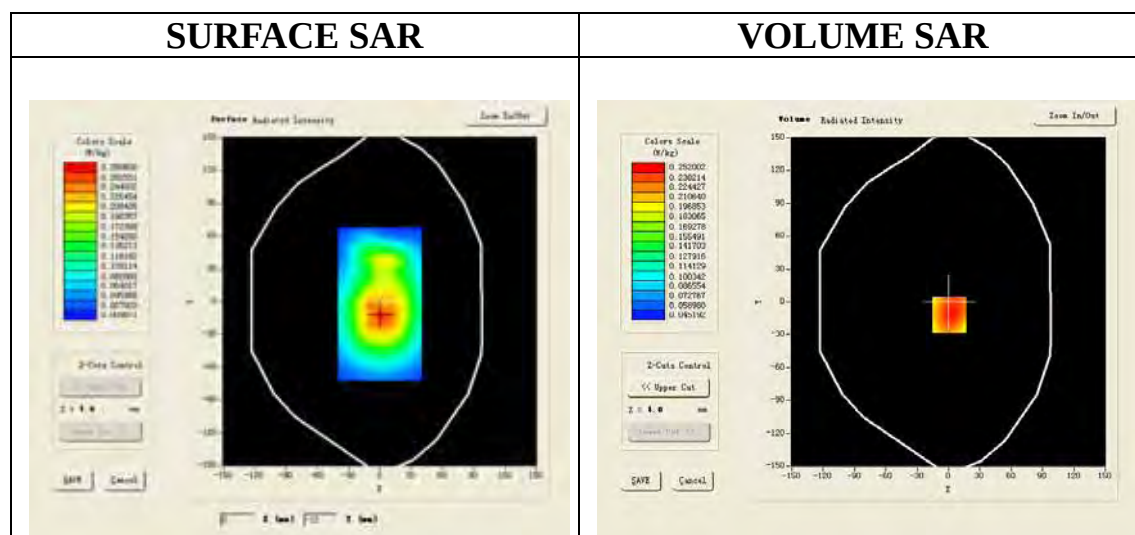

Maximum location: X=1.00, Y=-12.00

SAR 10g (W/Kg)	0.183982
SAR 1g (W/Kg)	0.262512

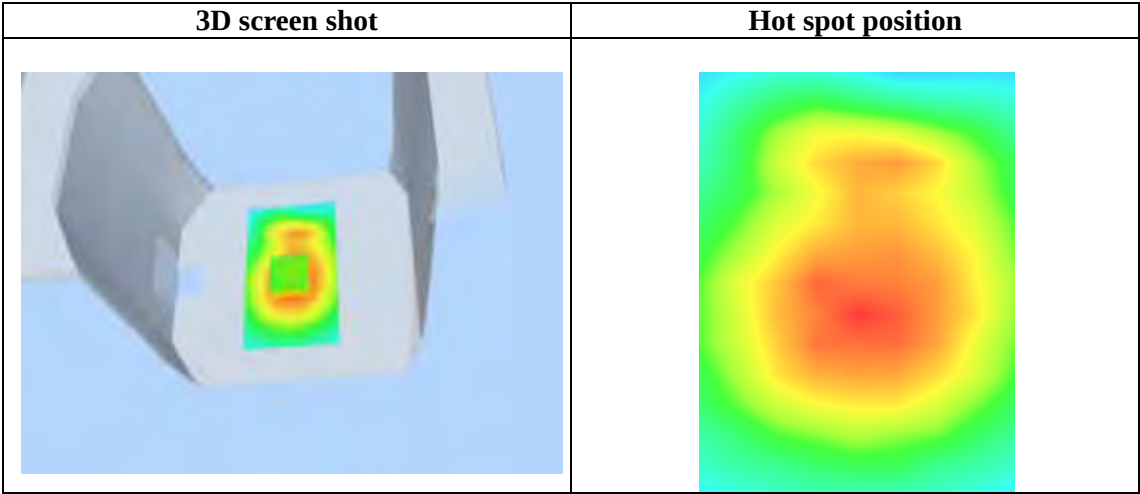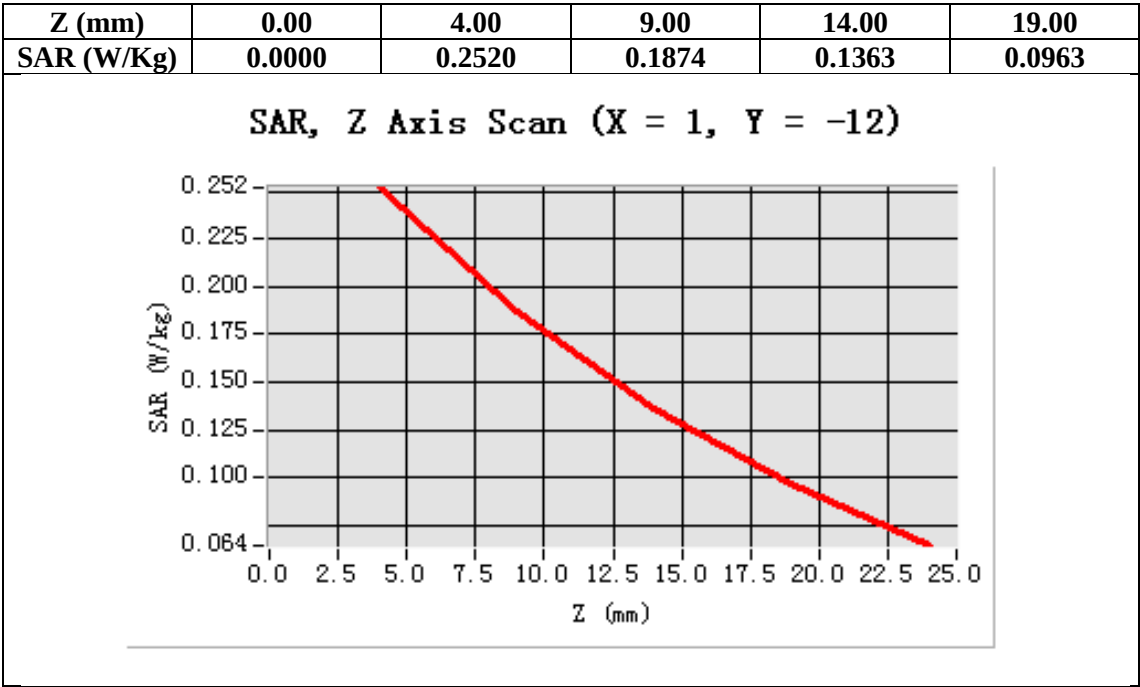

Test Laboratory: AGC Lab
802.11n (20) Mid-Body -Front (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11n (20) Mid-Body- Front /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/802.11n (20) Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Front
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

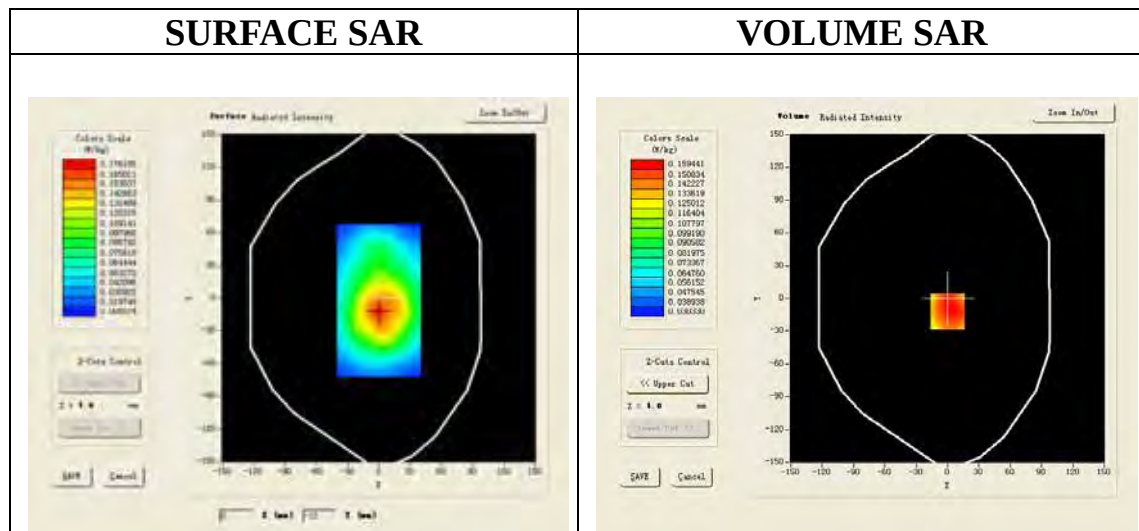

Maximum location: X=0.00, Y=-12.00

SAR 10g (W/Kg)	0.119070
SAR 1g (W/Kg)	0.167418

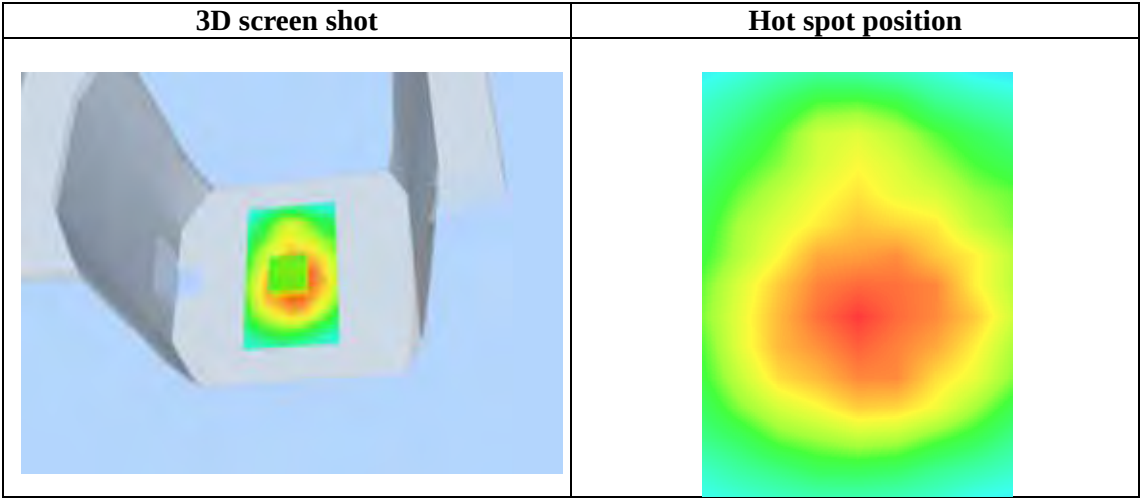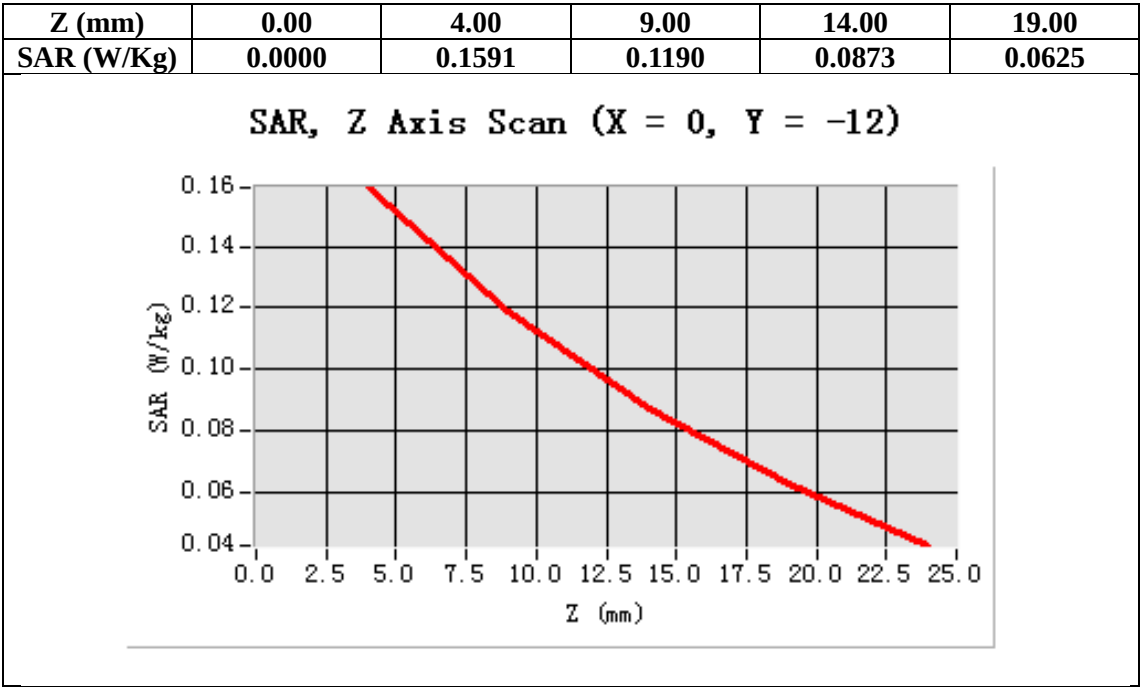

Test Laboratory: AGC Lab

Date: Jun.27, 2013

802.11n (20) Mid- Body- Touch (MS) - with earphone

DUT: Tablet PC; Type: G7

Communication System: Wi-Fi; Communication System Band: 802.11n (20); Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (): 21.0, Liquid temperature (): 21.0

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/802.11n (20) Mid-Body-Touch/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/802.11n (20) Mid-Body-Touch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

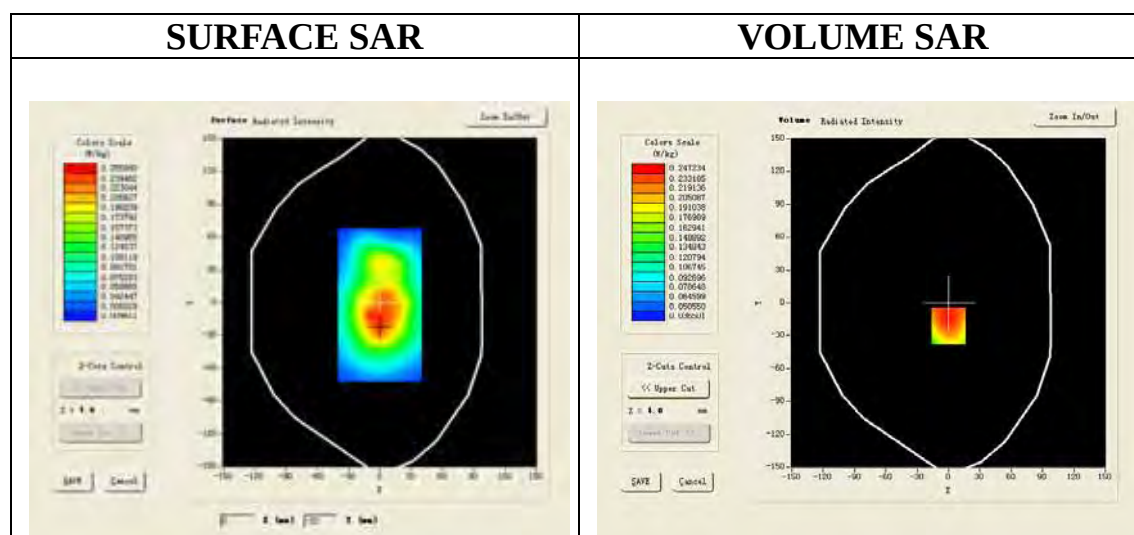

Maximum location: X=0.00, Y=-21.00

SAR 10g (W/Kg)	0.180119
SAR 1g (W/Kg)	0.257657

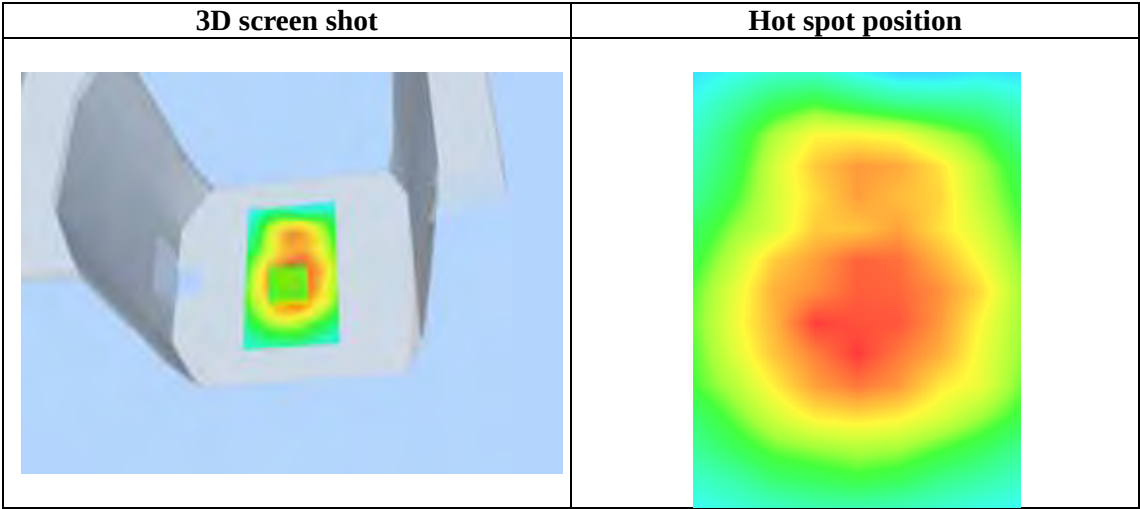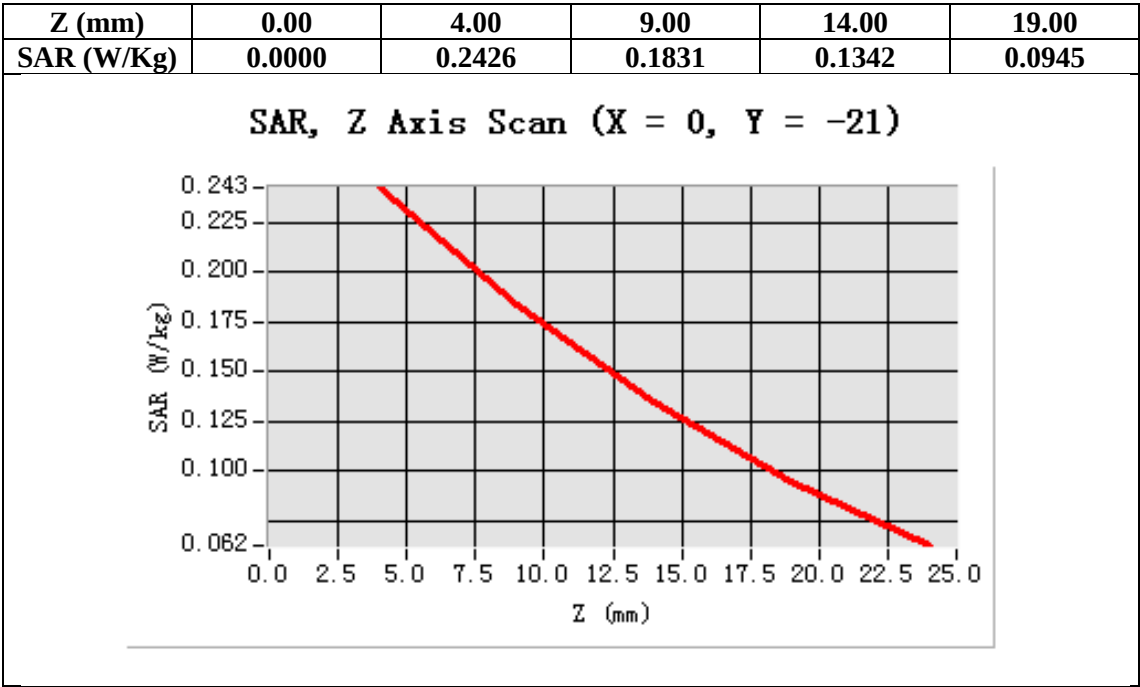

HOTSPOT MODE

Test Laboratory: AGC Lab

Hotspot Mid-Touch-Left

DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid- Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/Hotspot Mid- Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

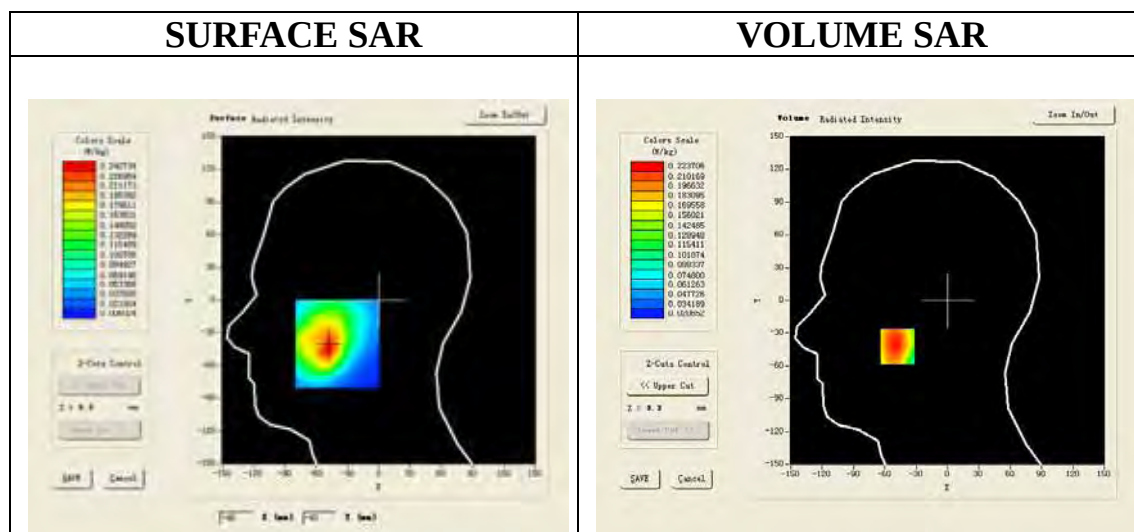

Maximum location: X=-48.00, Y=-42.00

SAR 10g (W/Kg)	0.142684
SAR 1g (W/Kg)	0.217743

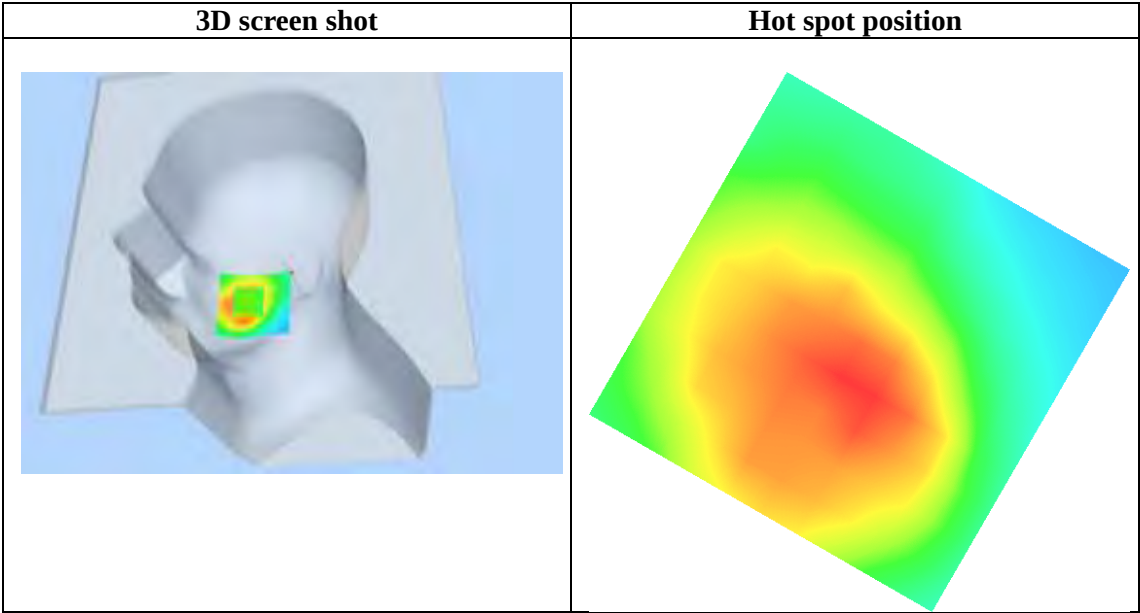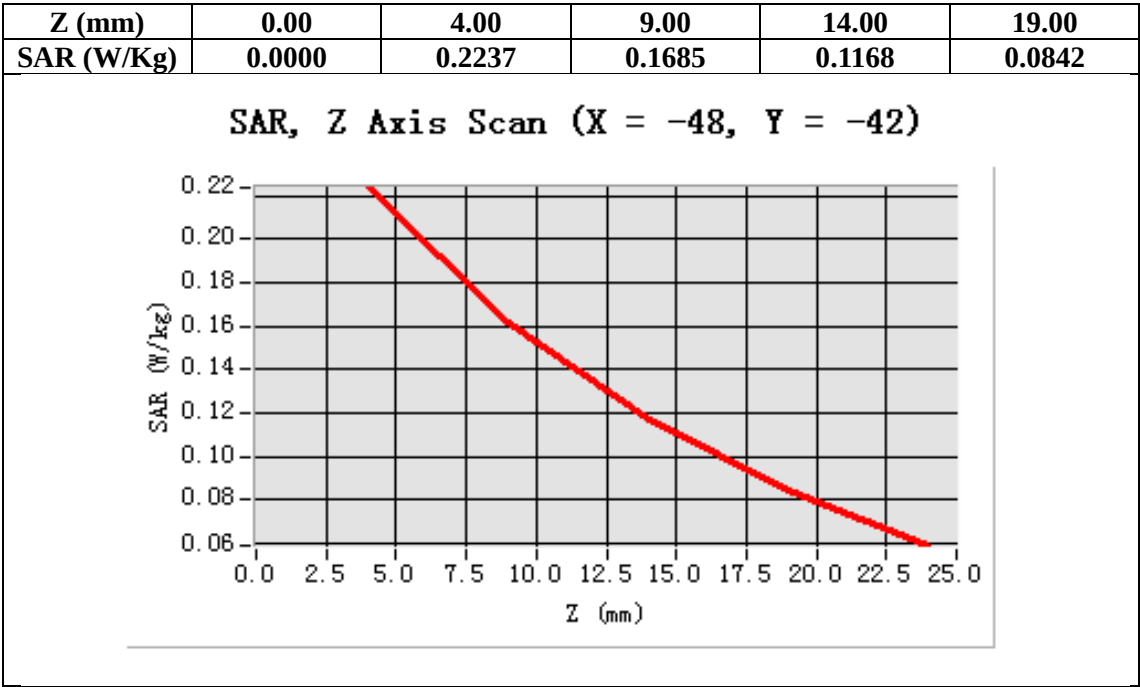

Test Laboratory: AGC Lab
Hotspot Mid -Tilt-Left
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid- Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm


Configuration/Hotspot Mid- Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

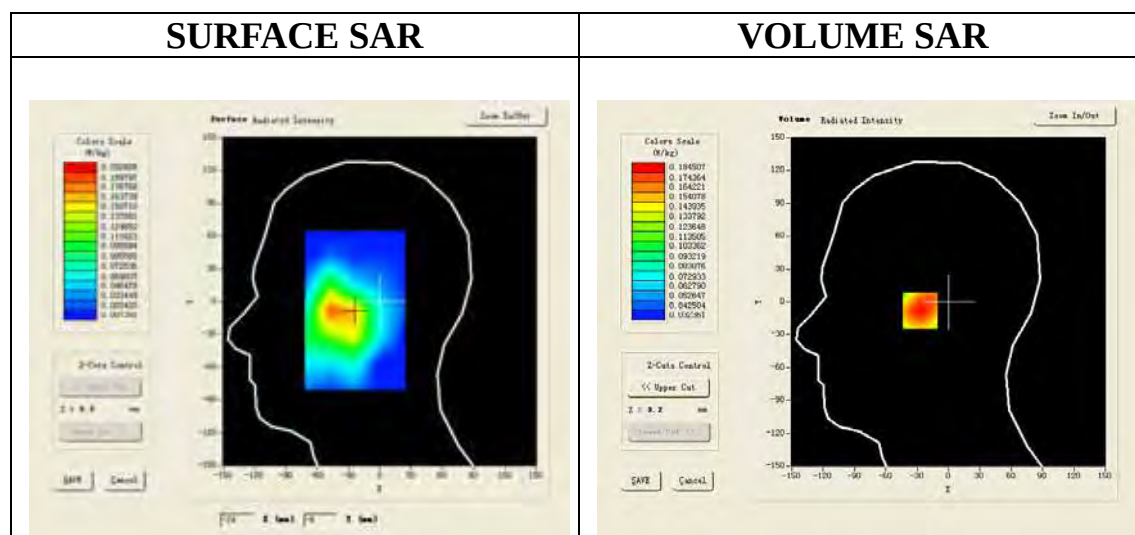

Maximum location: X=-24.00, Y=-8.00

SAR 10g (W/Kg)	0.128366
SAR 1g (W/Kg)	0.177391

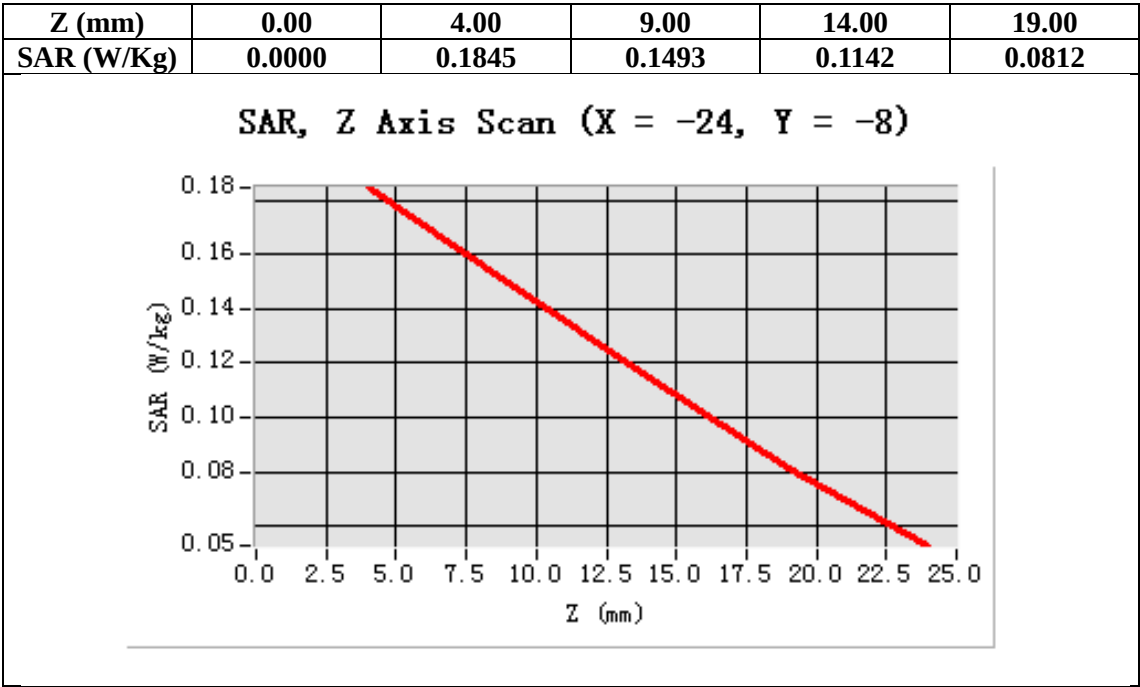

Test Laboratory: AGC Lab
Hotspot Mid- Touch-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid- Touch-Right /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/Hotspot Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

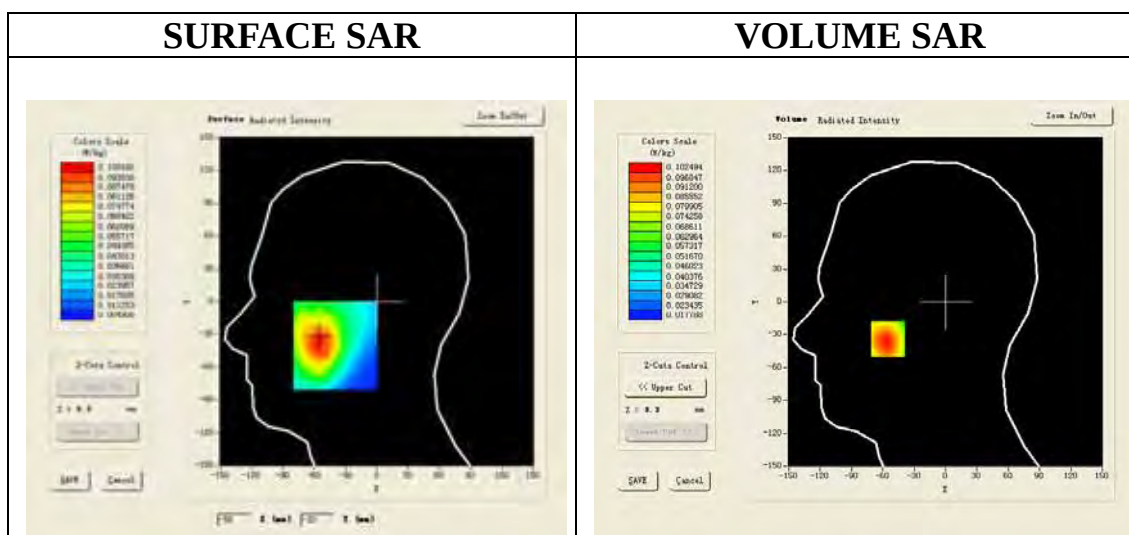

Maximum location: X=-55.00, Y=-34.00

SAR 10g (W/Kg)	0.066194
SAR 1g (W/Kg)	0.098725

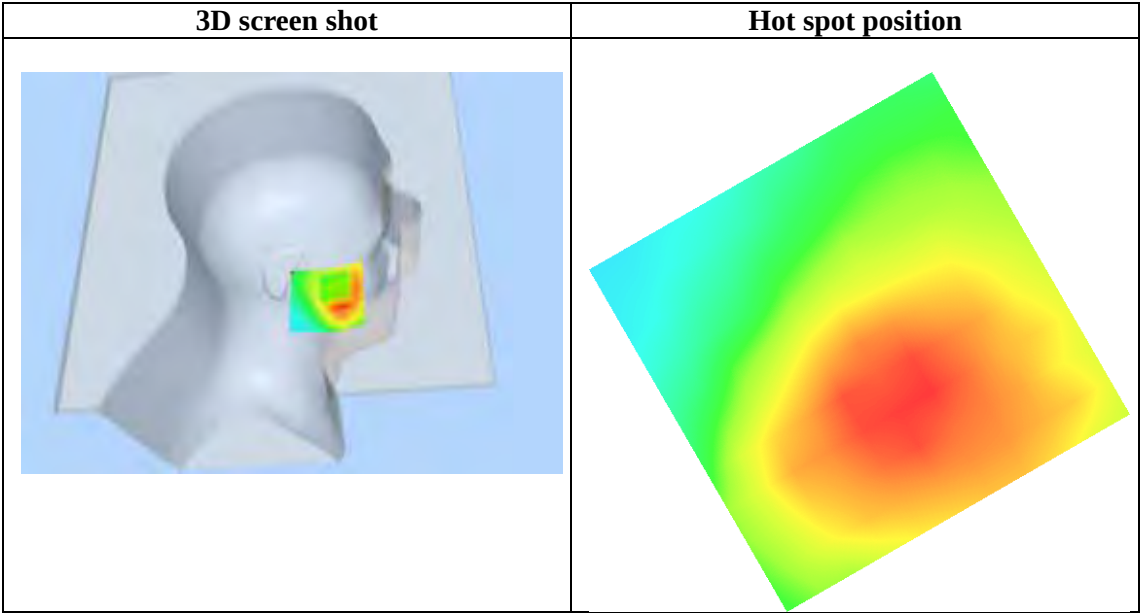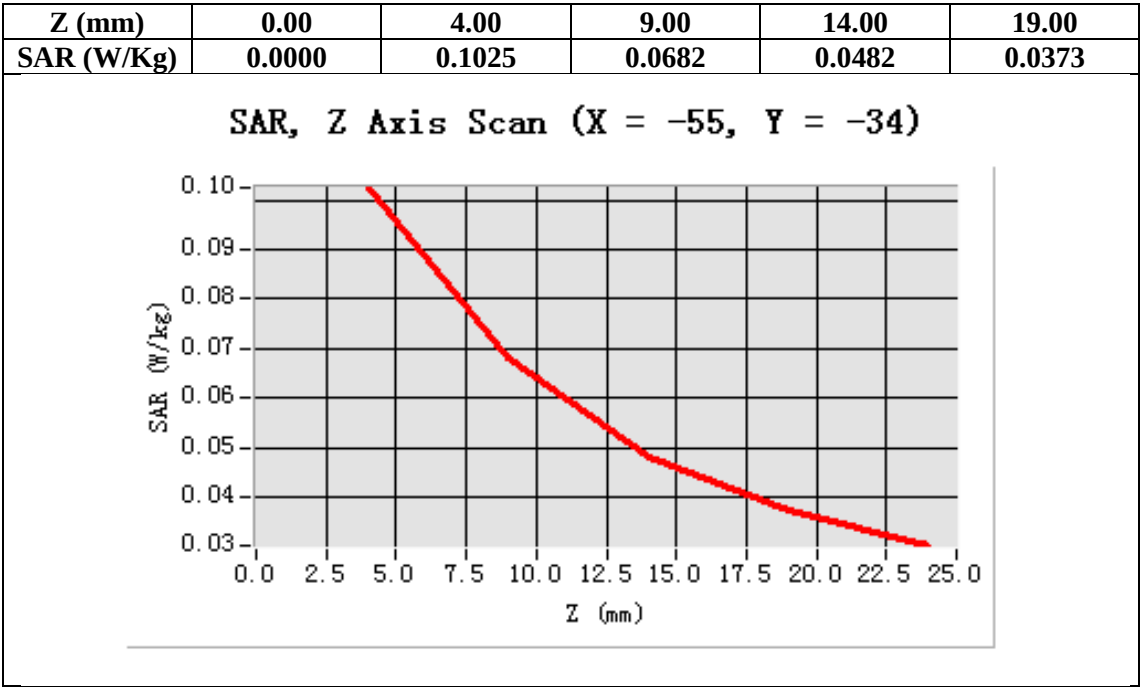

Test Laboratory: AGC Lab
Hotspot Mid-Tilt-Right
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.19;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (): 21, Liquid temperature (): 21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid- Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm


Configuration/Hotspot Mid- Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

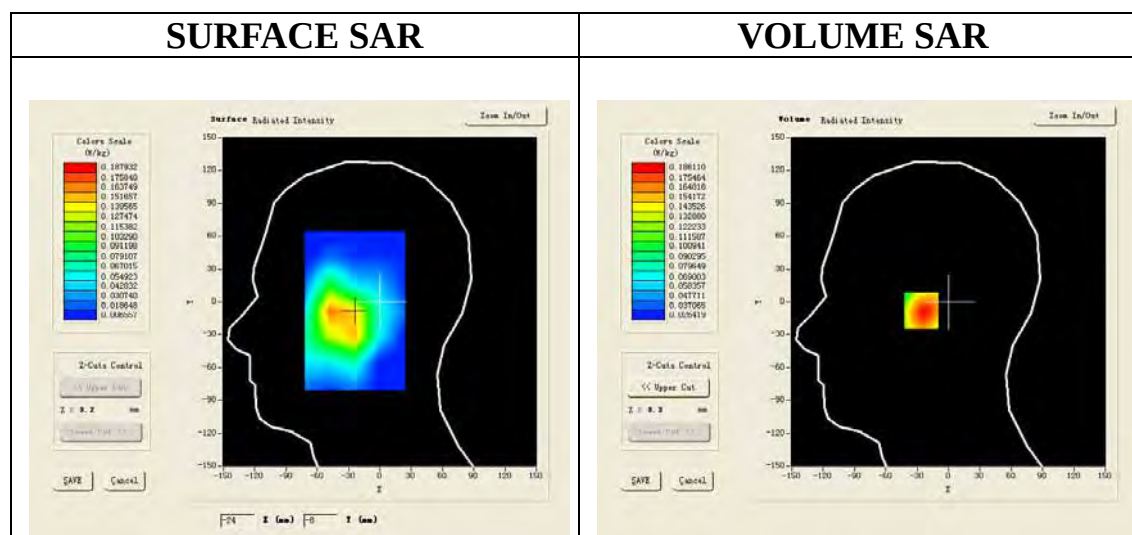

Maximum location: X=-23.00, Y=-8.00

SAR 10g (W/Kg)	0.121397
SAR 1g (W/Kg)	0.179242

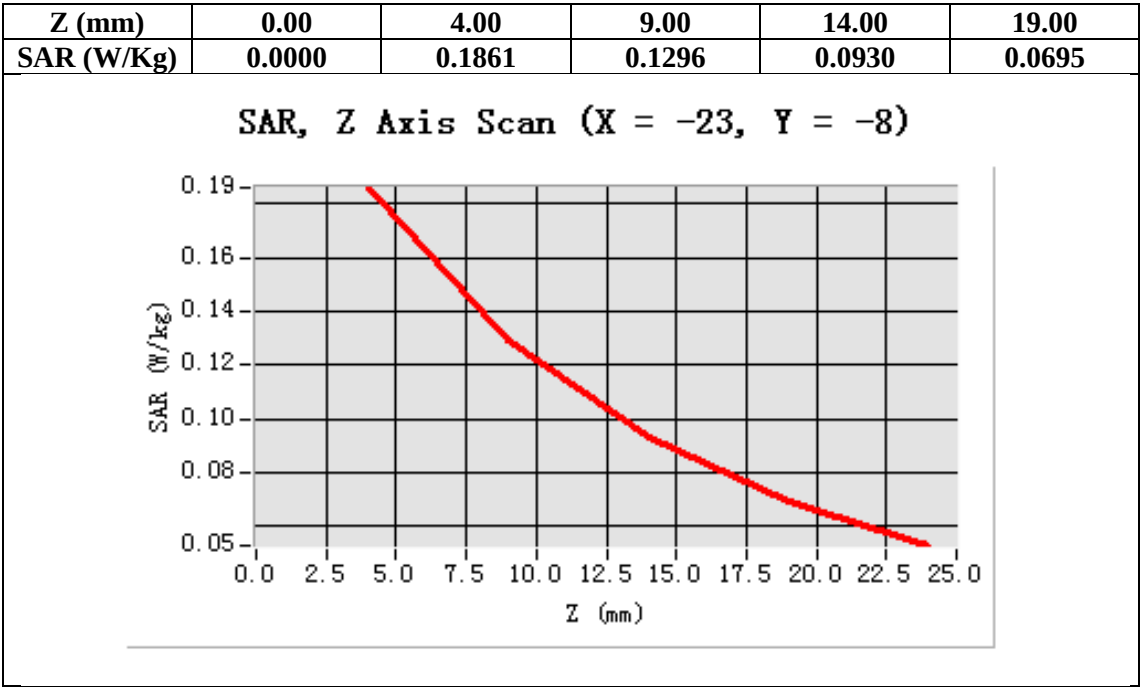

Test Laboratory: AGC Lab
Hotspot Mid-Body-Worn- Touch (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid- Body- Touch /Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/Hotspot Mid- Body- Touch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

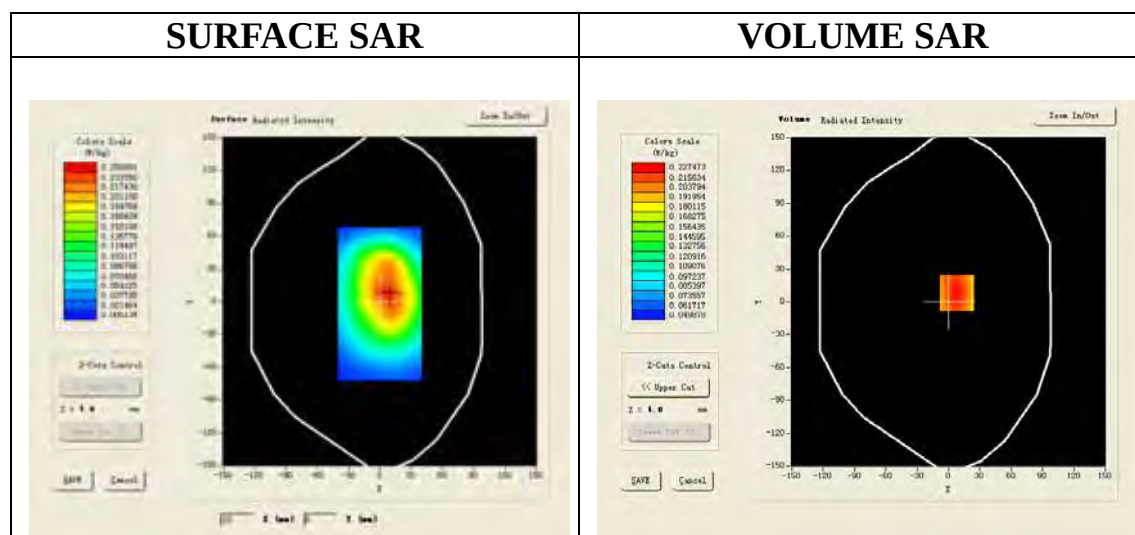

Maximum location: X=8.00, Y=8.00

SAR 10g (W/Kg)	0.164353
SAR 1g (W/Kg)	0.235870

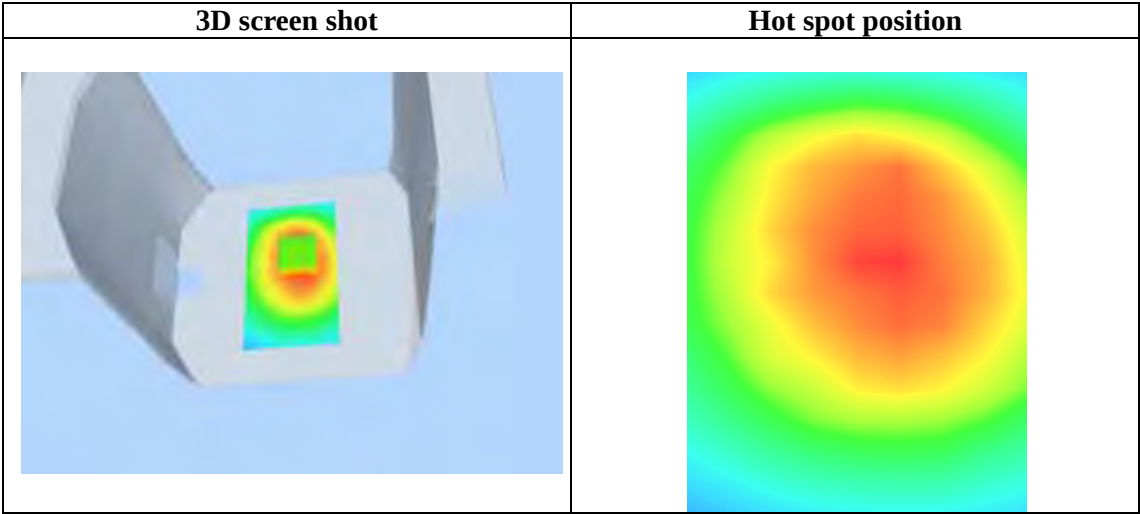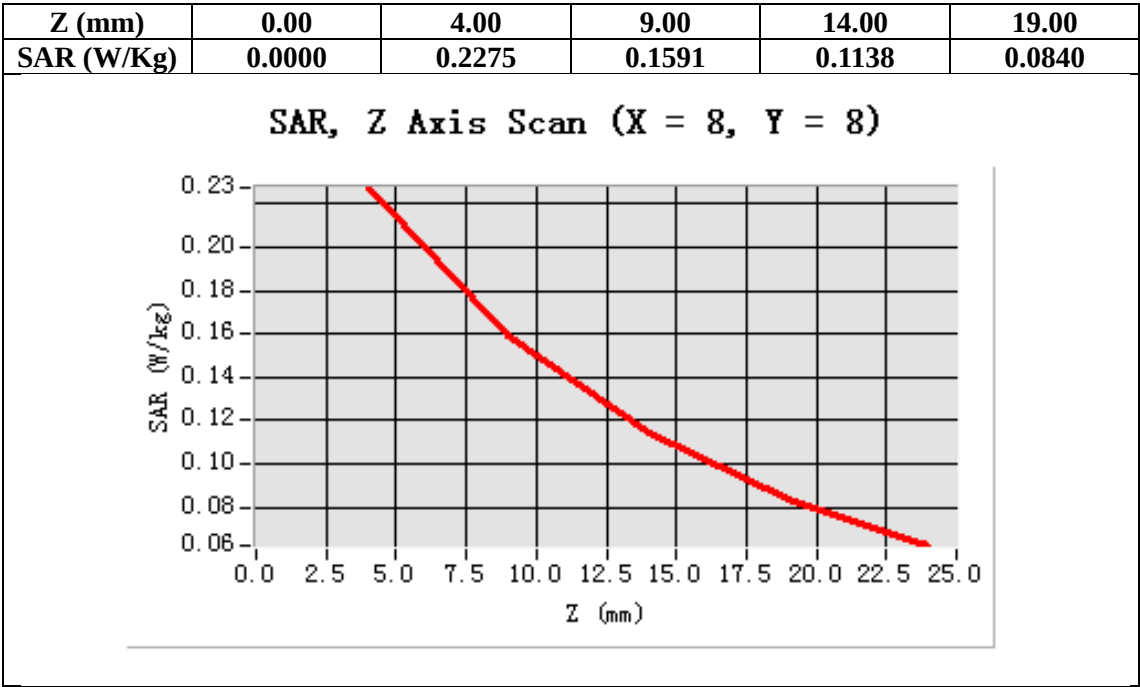

Test Laboratory: AGC Lab
Hotspot Mid-Body -Front (MS)
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma=1.93$ mho/m; $\epsilon_r=53.95$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature ():21, Liquid temperature ():21

Satimo Configuration:


Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid-Body- Front /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/Hotspot Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Front
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

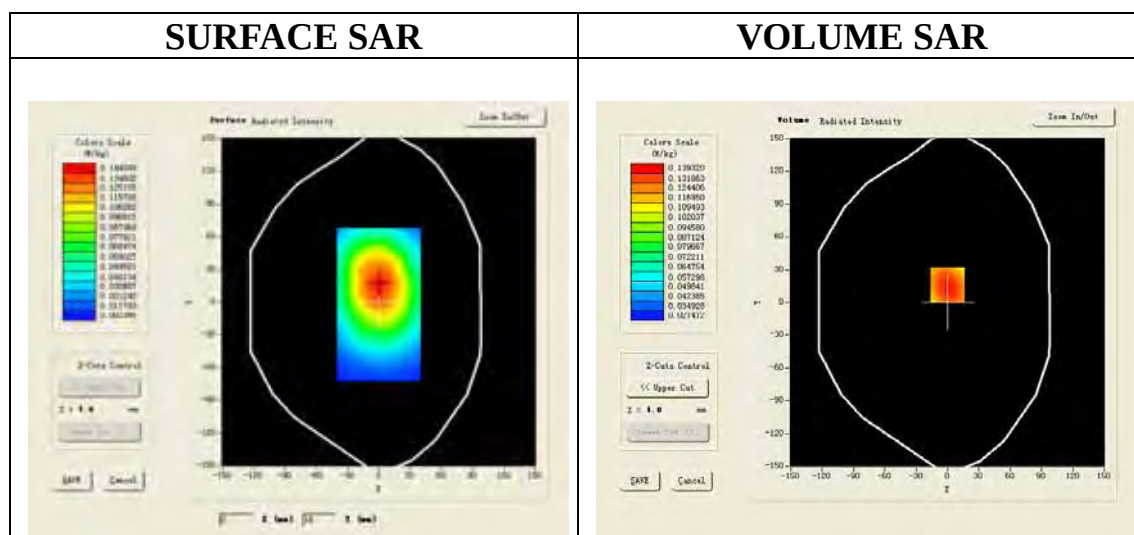

Maximum location: X=0.00, Y=16.00

SAR 10g (W/Kg)	0.100565
SAR 1g (W/Kg)	0.144403

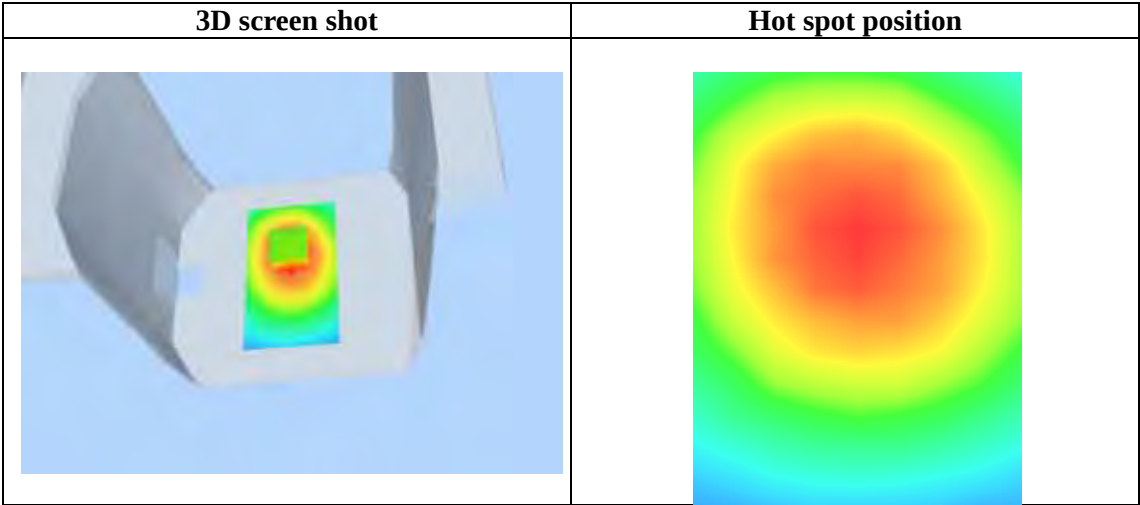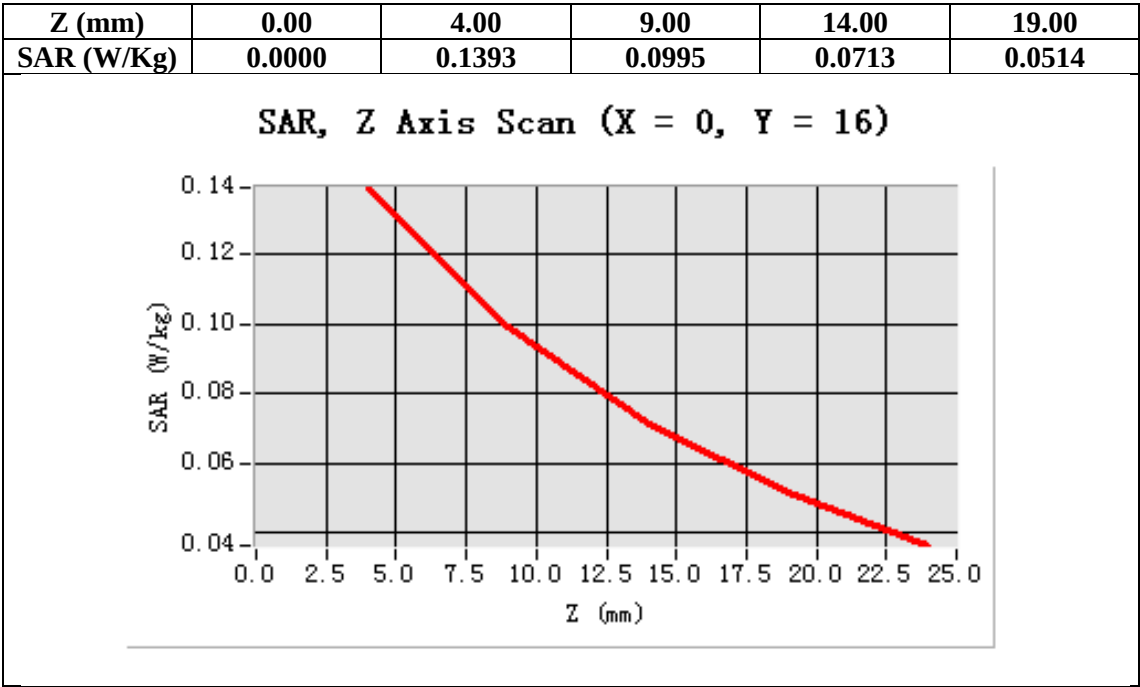

Test Laboratory: AGC Lab
Hotspot Mid- Body- Touch (MS) - with earphone
DUT: Tablet PC; Type: G7

Date: Jun.27, 2013

Communication System: Wi-Fi; Communication System Band: Hotspot; Duty Cycle: 1:1; Conv.F=4.32;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.95$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (): 21.0, Liquid temperature (): 21.0


Satimo Configuration:

Probe: EP165; Calibrated: 01/31/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: Flat Phantom; Type: Elliptical Phantom
- Measurement SW: OpenSAR V4_02_01

Configuration/Hotspot Mid-Body-Touch/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm
Configuration/Hotspot Mid-Body-Touch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body Touch
Band	2450MHz
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

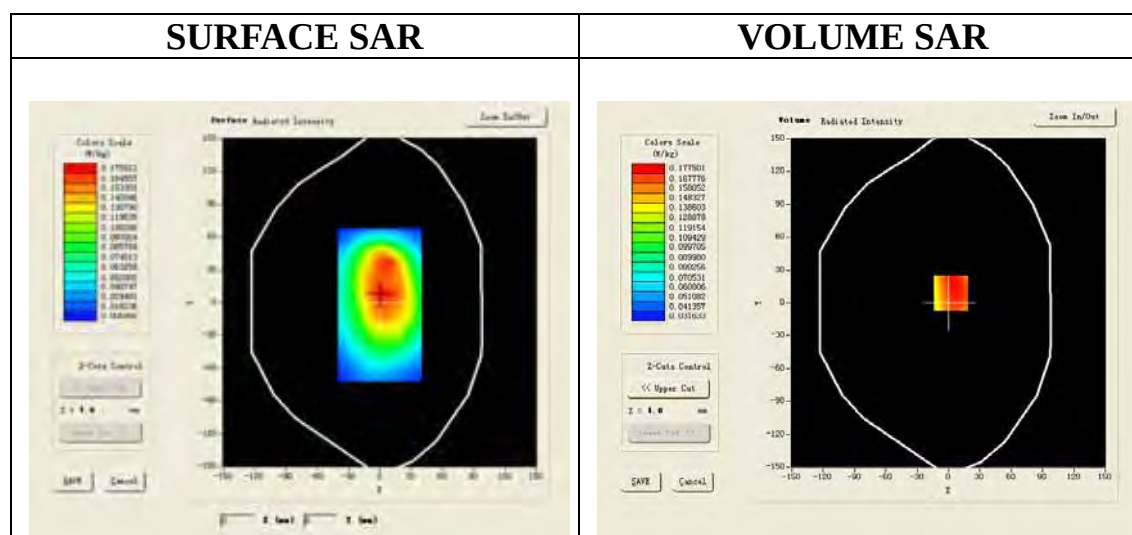

Maximum location: X=2.00, Y=9.00

SAR 10g (W/Kg)	0.126424
SAR 1g (W/Kg)	0.185414

