
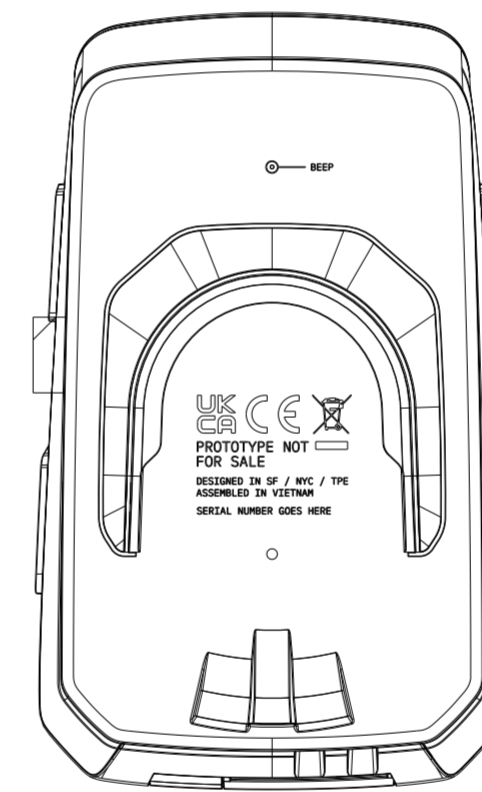
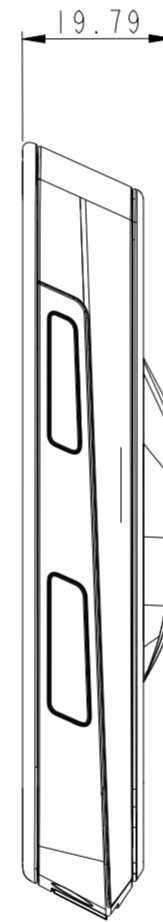
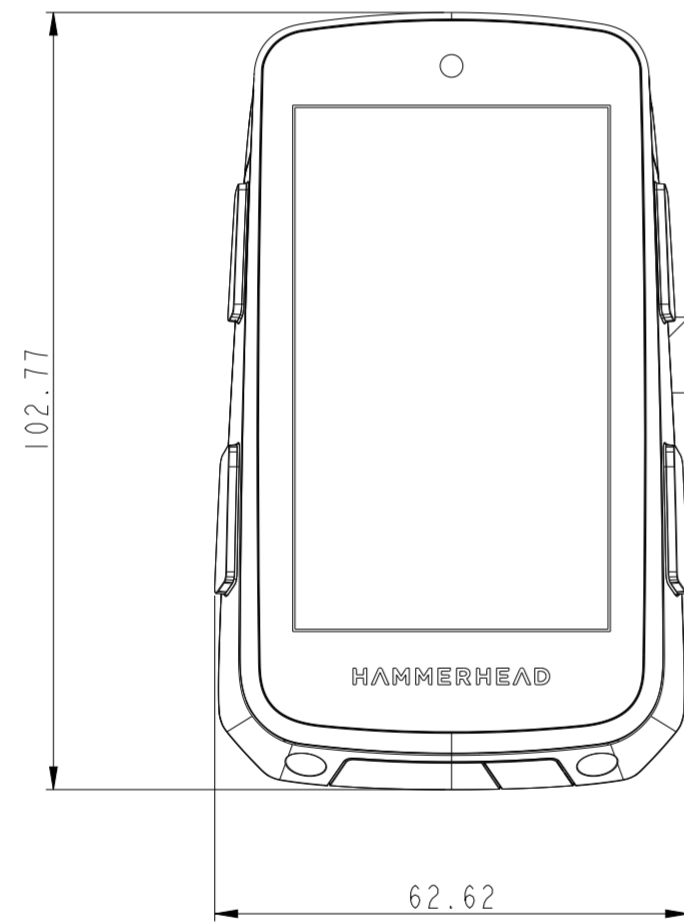


THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

REV	DESCRIPTION OF CHANGE	REV BY	DATE

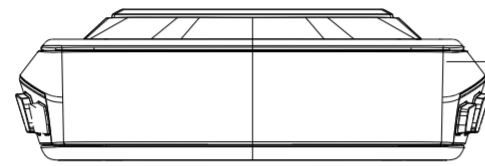

<--- Cert Label Placement

RoHS (BANNED SUBSTANCES)						
CEI LIMIT	Cd	Pb	Hg	Cr6	PBBs	PBDEs
UNIT	75(*1)	1000(*3)	ND	1000	1000	1000
ppm	20(*2)	500(*4)	ND	1000	1000	1000
		300(*5)				
		200(*6)				
		90(*7)				

(*) ALL APPLICATIONS OTHER THAN THE ABOVE. (2) SOLDER.
 (3) ALL COMPONENTS AND MATERIALS. (4) METAL.
 (5) PVC. (6) LEATHER, TEXTILE, FABRIC, CANVAS COATING AND NYLON.
 (7) LEAD IN PAINT, INK, PAINT, RUBBER AND BODY PARTS ON THE SYSTEM SHELL. (8) METAL/LEATHER.
 (9) CR6+ METAL / PLATING - ISO 3813 - NEED TO PROVIDE INFORMATION OF SAMPLE PLATING SO AS TO CALCULATE INTO mg / kg (ppm).
 (10) METAL MATERIAL TEST POINTS 4 HEAVY METALS ONLY (Pb, Cd, Hg, Cr6+).
 (11) HALOGEN CONTENT TEST NOT REQUIRED FOR PURE METAL MATERIAL (RAW MATERIAL).
 HOWEVER, IF SURFACE OF METAL HAS SPRAY PAINTING FINISH (FINAL PRODUCT), THEN HALOGEN CONTACT TEST IS REQUIRED.

UNLESS SPECIFIED TOLERANCE ARE:
 300 ABOVE : ± 0.20
 300 ≥ X ≥ 150 : ± 0.15
 150 > X ≥ 50 : ± 0.10
 50 > X ≥ 20 : ± 0.075
 20mm BELOW : ± 0.05
 ANGLES : ± 1°
 FLATNESS : ± 0.20
 CONCENTRICITY : ± 0.05

PART NUMBER	DESCRIPTION	SPECIFICATION
Karoo	DESIGNED BY	DRAWN BY SW
MODEL	CHECKED BY	APPROVED BY
THIRD ANGLE PROJECTION	ISSUED DATE	SCALE UNIT
	Mar-31-23	1000 mm
	DRAWING FILE NAME	
SIZE	SHEET	2D REV TOOL VER
A2	1 OF 2	01 NA

