

REPORT NUMBER 1834-E

November 2004

Class II Permissive Change to Report Number 1834

On the TBAH0 Base Station Transceiver

FCC ID: CASTBA-H0

Power Amplifier Type TBA7H0
TBA70H0-0000 S/No: 18001198

In accordance with

FCC 47 CFR Parts 22, 74 and 90

PREPARED BY: Bruce Jensen _____
Test Technician

CHECKED & APPROVED BY: Hamish Newton _____
Senior Technician



TELTEST Laboratories

Tait Electronics Limited

PO Box 1645

558 Wairakei Road

Christchurch

New Zealand

Phone : +64-3-358 3399

Fax: +64-3-358 3903

REPORT ON :

Type approval testing of a 5W Power Amplifier Module type TBA7H0 in accordance with FCC CFR 47 Parts 22, 74 & 90. This test report is an addendum to test report 1834 June 2003, and 1834-D October 2004. Radiated emissions are covered in the original submission test report EMC Technologies test report 30427.4 12 May 2003 & 30541.2 5 June 2003. The Power Amplifier was tested in conjunction with:

Reciter	TBA4H2	TBA40H2-0C00	Serial 18001109
Power Amplifier	TBA7H0	TBA70H0-0000	Serial 18001198
Power Management Unit		TBA30A1-0000	Serial 18001012

FCC ID: CASTBA-H0

PREPARED FOR :

Tait Electronics Ltd
PO Box 1645
558 Wairakei Rd
Christchurch
New Zealand

DISTRIBUTION :

TELTest Laboratory	Mr S Crompton	Copy No 1
Tait Electronics Ltd	Mr. Des Fox	Copy No 2
Tait Electronics Ltd	Mr. Ian Mackay	Copy No 3

APPROVED :

H Newton
Senior Technician

Date :

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager.

Copy No:

TABLE OF CONTENTS

DECLARATION OF CONFORMITY	4
TEST CONDITIONS	5
TEST RESULTS	6
TRANSMITTER OUTPUT POWER (CONDUCTED)	6
SPURIOUS EMISSIONS (CONDUCTED).....	7
TRANSIENT FREQUENCY BEHAVIOR	9
TEST EQUIPMENT USED	12
APPENDIX A	13
TEST SETUP DETAILS.....	13

DECLARATION OF CONFORMITY

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch New Zealand, declare under our sole responsibility that the product:

Equipment: Base Station Transmitter
Type: TBAH0
Fitted with:
Power Amplifier TBA7H0 TBA70H0-0000 Serial 18001198
Quantity: 1

To which this declaration relates is in conformity with the following standards:

FCC CFR 47 Parts 22, 74 & 90

Signature: _____

S. A. Crompton
Compliance Laboratory Manager.

Date: _____

Test Conditions

All testing was performed at the following conditions.

Ambient Temperature	15°C to 30°C
Relative Humidity	20% to 75%
Standard Test Voltage	230 V ac

Test Results

TRANSMITTER OUTPUT POWER (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1046

GUIDE: TIA/EIA-603B 2.2.1

MEASUREMENT PROCEDURE:

1. Refer Appendix A for Equipment set up.
2. The coaxial attenuator has an impedance of 50 Ohms.
3. The unmodulated output power was measured with an RF Power meter.

MEASUREMENT RESULTS:

Manufacturer's Rated Output Power: Adjustable between: 1 W and 5 W

440.0375 MHz	5 W nominal	1 W nominal
POWER (W)	4.8 W	1 W
Variation from Nominal (%)	-4%	0%
Measurement Uncertainty (dB)		+0.63 -0.68

LIMIT CLAUSE: FCC 47 CFR 90.205

Radio Type: Base Station Transceiver

Frequency Band: 421 MHz ~ 512 MHz

- (o) The output power shall not exceed by more than 20% the manufacturer's rated output power for the particular transmitter.

TRANSIENT FREQUENCY BEHAVIOR

SPECIFICATION: FCC 47 CFR 90.214

GUIDE: TIA/EIA-603B 2.2.19

MEASUREMENT PROCEDURE:

1. Refer Appendix A for equipment set up.
2. Measurements and plots were made following the TIA/EIA procedure.

MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz channel spacings.

LIMIT CLAUSE: FCC 47 CFR 90.214

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 440.0375 MHz 5 W 12.5 kHz Channel Spacing

FREQUENCY	440.0375 MHz @ 5 W Tx	
TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t_1	0.7	N/A
t_2	0.5	N/A
t_3	N/A	0.6
$t_2 \rightarrow t_3$ ppm	0.5	
ERROR LIMIT ($t_2 \rightarrow t_3$) ppm	1.5	

Confirm that during periods t_1 and t_3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	Y	
Confirm that during the period t_2 the frequency difference does not exceed half a channel separation.	YES	NO
	Y	
Confirm that during the period t_2 to t_3 the frequency difference does not exceed the frequency error limit.	YES	NO
	Y	



LIMIT:

TRANSIENT PERIODS	FREQUENCY RANGE 150MHz – 174 MHz	FREQUENCY RANGE 421MHz – 512 MHz
t_1 (ms)	5 ms	10 ms
t_2 (ms)	20 ms	25 ms
t_3 (ms)	5 ms	10 ms

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 440.0375 MHz 5 W 12.5 kHz Channel Spacing

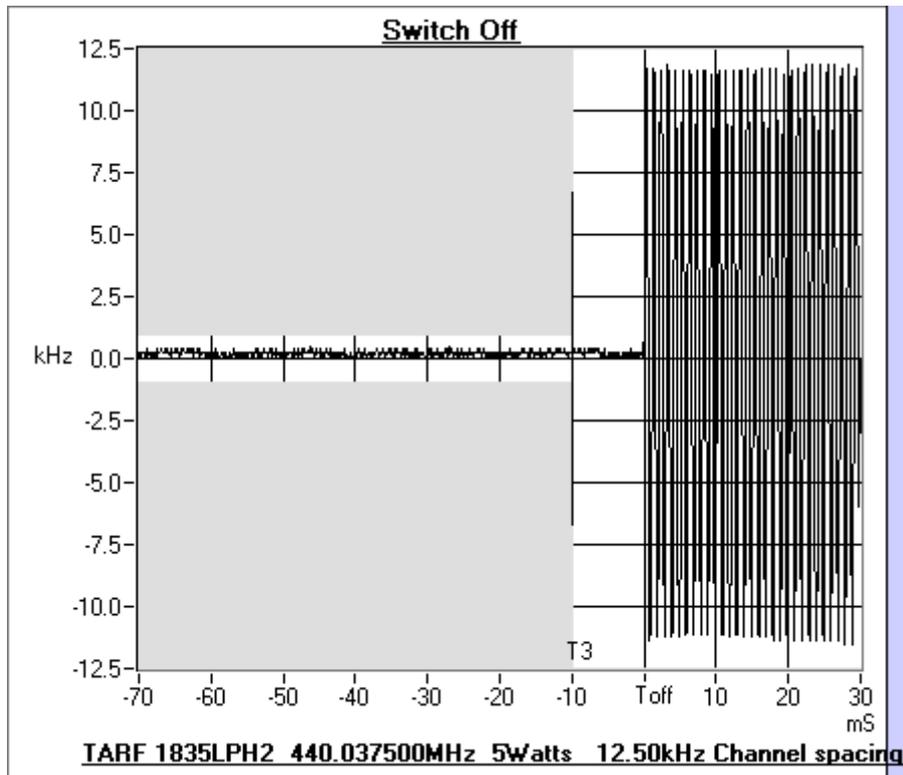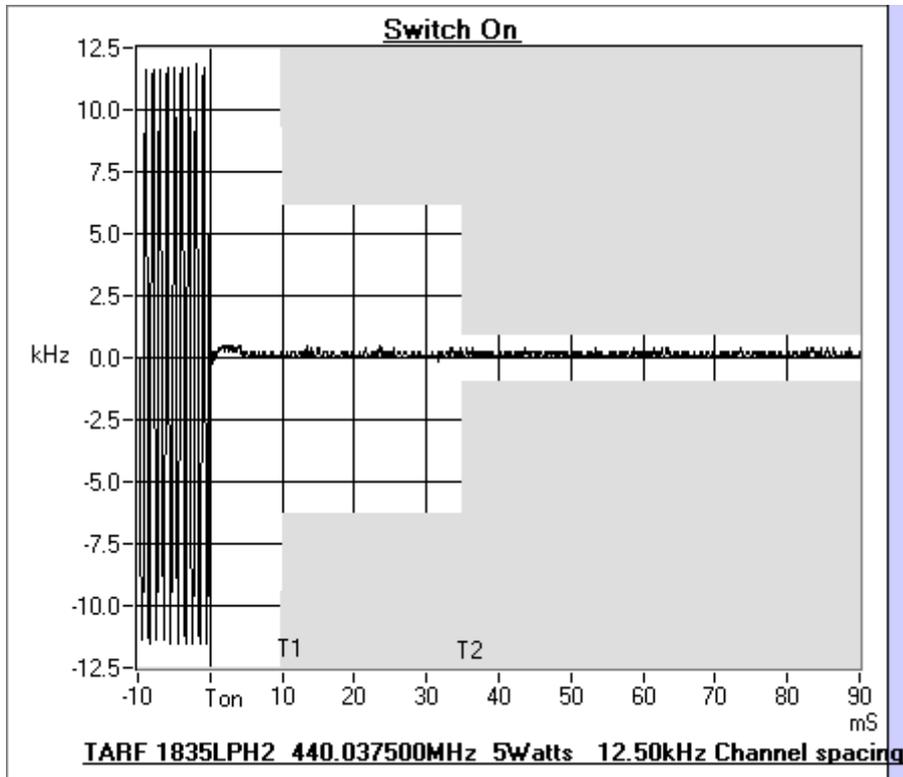

TEST EQUIPMENT USED

No#	Equipment	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
5	Signal Generator	Rohde & Schwarz	SMY01 1062.5502.11	841736/019	E3553	06-Nov-05
22	Oscilloscope	Tektronics	TDS340	B013611	E3585	06-Nov-05
62	RF Attenuator 150W	Weinschel	57-10-34	LB590	E3674	08-Nov-05
63	RF Attenuator 150W	Weinschel	40-06-34	KV457	E3561	07-Nov-05
65	RF Attenuator 50W	Weinschel	24-20-44	AW1266	E3562	08-Nov-05
66	RF Attenuator 25W	Weinschel	33-20-33	BD5871	E3673	07-Nov-05
82	3m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25033/4A	E3694	30-Nov-04
83	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25006/4A	E3693	30-Nov-04
84	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25005/4A	E3692	15-Jul-05
85	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25004/4A	E3691	15-Jul-05
123	Spectrum Analyser	Agilent	E4445A	MY42510072	E4139	23-Apr-05

APPENDIX A

TEST SETUP DETAILS

All testing is performed using the Teltest Radio **EVA**luation system (TREVA), which is configured as shown below. The Spectrum Analyser is connected to the EUT via the attenuator network for Conducted Emissions testing, and Occupied Bandwidth.

