

LABORATORY TEST REPORT

RADIO PERFORMANCE MEASUREMENTS

for the

TBCB1A Base Station Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12

RSS-Gen Issue 5

Report Revision: 1

Issue Date: 27 November 2019

PREPARED BY: L. M. White


Test Technician

CHECKED & APPROVED BY: M. C. James


Laboratory Technical Manager



FCC Registration: 838288

ISED Registration: 737A

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TELTEST Laboratories (A Division of Tait International Ltd)
PO Box 1645, 558 Wairakei Road, Christchurch, New Zealand.

Telephone: 64 3 358 3399
FAX: 64 3 359 4632

FCC ID: CASTBCB1A
IC : 737A-TBCB1A

Page 1 of 58

Report Revision: 1
Issue Date: 27 November 2019

TABLE OF CONTENTS

REVISION	3
INTRODUCTION	4
TEST REQUIREMENTS AND RESULT SUMMARY	5
STATEMENT OF COMPLIANCE	7
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS	8
TEST RESULTS	9
TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS	9
TRANSMITTER MODULATION LIMITING	14
TRANSMITTER 99% EMISSION BANDWIDTH	18
TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS	19
TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)	41
TEST EQUIPMENT LIST	57
ANNEX A – TEST SETUP DETAILS	58

REVISION

Date	Revision	Comments
27 November 2019	1	Initial test report

INTRODUCTION

This report is to prove continued compliance of the TBCB1A 50 watt Base Station Transceiver, after a change to the Power Amplifier low pass filter, a change to the IQ Filter which affects Analogue Modulation, and also adding two further modulation types; Digital FFSK and Digital Mobile Radio (DMR). This radio also supports APCO P25 phase-1 and APCO P25 phase-2 modulations. This report is to be read in combination with TELTEST reports 3535, 3653A, 3675, 3675B, 3761, 3807 and 3935.

Type Approval Testing of the TBCB1A
Frequency range 148 → 174 MHz

in accordance with:
FCC 47 CFR Parts 22 and 90
RSS-119 Issue 12 & RSS-Gen Issue 5

REPORT PREPARED FOR

Tait International Limited
245 Wooldridge Road
Harewood
Christchurch 8051
New Zealand

DESCRIPTION OF SAMPLE

Manufacturer Tait International Limited
Equipment: Base Station Transceiver
Type: TBCB1A
Quantity: 1

Modulation		Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
Analogue FM		12.5 kHz	1	-	-
FFSK	Fast Frequency Shift Keying	12.5 kHz	-	1200	1200
Digital Mobile Radio (DMR)	4 Level FSK (2 slot TDMA) (ETSI TS102 361-1)	12.5 kHz	2	4800	9600

HARDWARE & SOFTWARE

Module	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01103-DAAA	18302512	dmr-trunk.20191015T084706	1.01
Power Amplifier	T01-01121-BABA	18282968	0.01.00.master.20191001T185944.0001	0.06
Front Panel	T01-01110-BAAA	18283161	0.01.00.master.20190702T175230.0001	0.04
Power management unit	TBA30A0-0100	18282983	3.16	1.00

TEST CONDITIONS

All testing was performed on 30 → 31 October and 27 November 2019, and under the following conditions:

Ambient temperature: 15°C → 30°C
Relative Humidity: 20% → 75%
Standard Test Voltage 120 V_{AC}

TEST REQUIREMENTS AND RESULT SUMMARY

ISED Specification	FCC Specification	Test Items	Test Methods	Result
No specification	FCC 47 CFR 2.1047 (a)	Transmitter Audio Frequency Response – Pre-emphasis	ANSI C63.26 5.3.3.2	Pass
No specification	FCC 47 CFR 2.1047 (b)	Transmitter Modulation Limiting	ANSI C63.26 5.3.2	Pass
RSS-119 5.3	FCC 47 CFR 90.214	Transmitter Frequency Stability - Temperature	RSS-Gen 6.11 ANSI C63.26 5.6.4	N1
RSS-119 5.3	FCC 47 CFR 2.1055 (d) (1)	Transmitter Frequency Stability - Voltage	RSS-Gen 6.11 ANSI C63.26 5.6.5	N1
RSS-119 5.4	FCC 47 CFR 2.1046	Transmitter Output Power (Conducted)	RSS-Gen 6.12 ANSI C63.26 5.2.4.2	N1
RSS-119 5.5	FCC 47CFR 90.209	Transmitter 99% Emission Bandwidth	RSS-Gen 6.7 ANSI C63.26 5.4.4	Pass
RSS-119 5.5	FCC 47 CFR 2.1049 (c)	Transmitter Occupied Bandwidth and Spectrum Mask	RSS-119 4.2.2 TIA-603-E 2.2.11	Pass
RSS-119 5.8	FCC 47 CFR 2.1051	Transmitter Spurious Emissions (Conducted)	RSS-Gen 6.13 ANSI C63.26 5.7	Pass
RSS-119 5.8	FCC 47 CFR 2.1053	Transmitter Spurious Emissions (Radiated)	RSS-Gen 6.13 ANSI C63.26 5.5	N2
RSS-119 5.9	FCC 47 CFR 90.214	Transient Frequency Behaviour	TIA 603E 2.2.2	N/A
RSS-Gen 7	FCC 47CFR 15.111	Receiver Spurious Emissions (Conducted)	RSS-Gen 7.4 TIA-603E 2.1.2	N1

Test Case Result Definitions	
No test Performed	N
Test does not apply to the test object	N/A
Test object meets requirements	P (Pass)
Test object does not meet requirements	F (Fail)
Test object is not conclusive	I (Inconclusive)

Comments
N1: This report is for a Class 2 permissive change to add Analogue, FFSK and DMR modulations. There are no changes affecting these parameters. See the original submission.
N2: The original report (Teltest 3535) tested these parameters using P25 Phase 1 C4FM modulation (TIA 102) The added modulations have constant envelope characteristics and it has been assessed that they are highly unlikely to give significantly different results outside the spectrum masks.

STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Base Station Transceiver
Type: TBCB1A

Module	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01103-DAAA	18302512	dmr-trunk.20191015T084706	1.01
Power Amplifier	T01-01121-BABA	18282968	0.01.00.master.20191001T185944.0001	0.06
Front Panel	T01-01110-BAAA	18283161	0.01.00.master.20190702T175230.0001	0.04
Power management unit	TBA30A0-0100	18282983	3.16	1.00

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12 & RSS-Gen Issue 5

Signature:



Mike James
Technical Manager

Date:

29 November 2019

The results obtained in this test report pertain only to the item(s) tested. Teltest does not make any claims of compliance for samples or variants that were not tested.

MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

MODULATION TYPES:

F3E	FM Analogue Voice	-	-
F2D	Fast Frequency Shift Keying	1200 symbols/sec	1200 bps
FXW	Digital Voice / Data	4800 symbols/sec	9600 bps
FXD	Digital Data	4800 symbols/sec	9600 bps

CHANNEL SPACING: 12.5 kHz

EMISSION DESIGNATORS:

Analogue Voice	11K0F3E
FFSK	7K60F2D
DMR Digital Voice / Data	7K60FXW
DMR Digital Data	7K60FXD

Equation: $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

Analogue Voice 12.5 kHz Channel Spacing

Necessary bandwidth	Emission Designator
M = 3.0 kHz	11K0F3E
D = 2.5 kHz	F3E represents an FM voice transmission
$B_n = (2 \times 3.0) + (2 \times 2.5) \times 1$ $= 11.0 \text{ kHz}$	

Fast Frequency Shift Keying (FFSK – 1200 bps) 12.5 kHz Channel Spacing

Necessary bandwidth	Emission Designator
M = 1.8 kHz	7K60F2D
D = 2.0 kHz	F2D represents a FM data transmission with the use of a modulating sub carrier
$B_n = (2 \times 1.8) + (2 \times 2.0) \times 1$ $= 7.6 \text{ kHz}$	

Digital Mobile Radio (DMR) 4 level FSK (as per ETSI TS 102 361-1)
4800 symbols/sec 9600 bps

Digital Data 12.5 kHz Channel Spacing – 7K60FXW

99% bandwidth	Emission Designator
= 7.6 kHz	7K60FXW
FXW represents FM combination of data and telephony.	

Digital Data 12.5 kHz Channel Spacing – 7K60FXD

99% bandwidth	Emission Designator
= 7.6 kHz	7K60FXD
FXD represents FM data only	

TEST RESULTS

TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: ANSI C63.26 5.3.3.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0 dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000 Hz was measured.


MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing tested at 50 W transmit power.

LIMIT CLAUSE: TIA/EIA-603E 3.2.6

MEASUREMENT UNCERTAINTY: $\pm 1.5 \%$


Photo: Measurement Setup

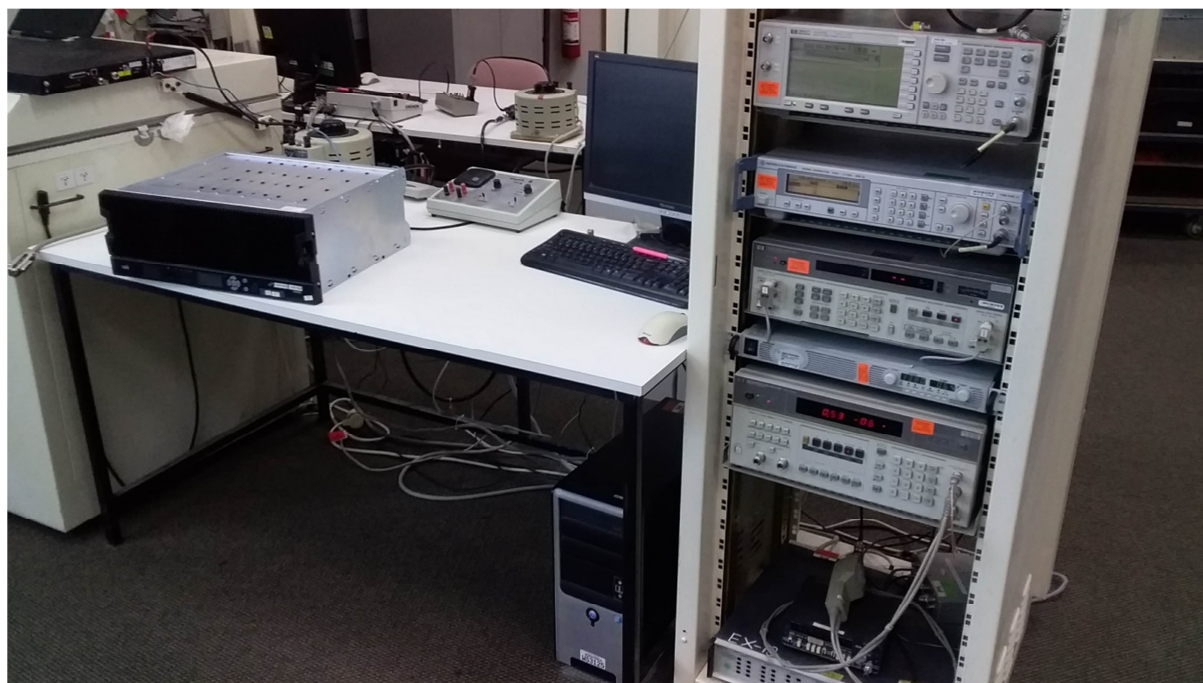

Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 148.1 MHz 12.5 kHz Channel Spacing

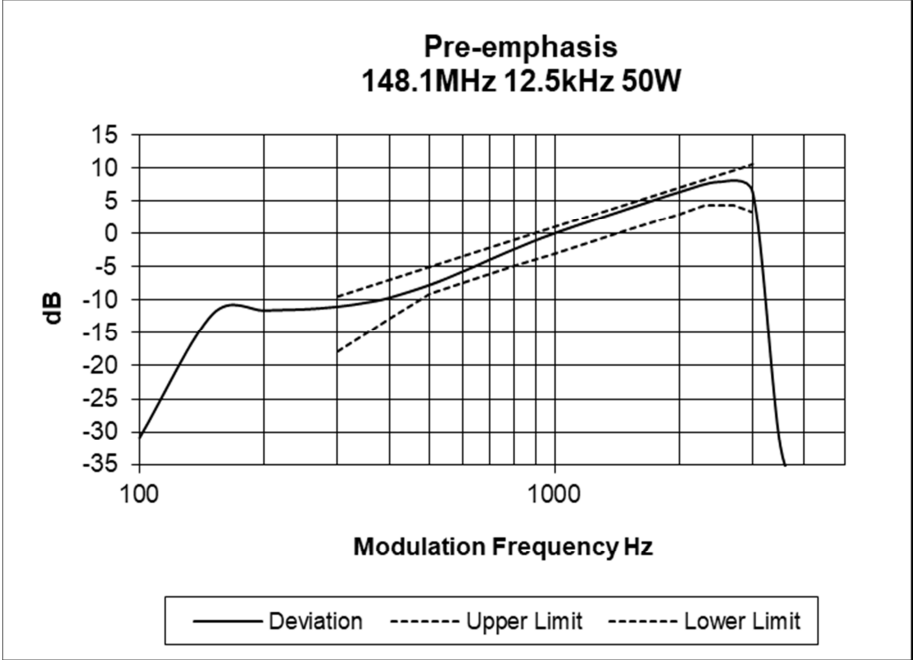

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 150.8 MHz 12.5 kHz Channel Spacing

