

# LABORATORY TEST REPORT

## RADIO PERFORMANCE MEASUREMENTS

for the

TBCB1B Base Station Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12

RSS-Gen Issue 5

Report Revision:

1

Issue Date:

29 November 2019

PREPARED BY:

L. M. White

  
Test Technician

CHECKED & APPROVED BY:

M. C. James

  
Laboratory Technical Manager



FCC Registration: 838288

ISED Registration: 737A

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TELTEST Laboratories (A Division of Tait International Ltd)  
PO Box 1645, 558 Wairakei Road, Christchurch, New Zealand.

Telephone: 64 3 358 3399  
FAX: 64 3 359 4632

FCC ID: CASTBCB1B  
IC : 737A-TBCB1B

Page 1 of 58

Report Revision: 1  
Issue Date: 29 November 2019

# TABLE OF CONTENTS

REVISION ..... 3  
INTRODUCTION ..... 4  
TEST REQUIREMENTS AND RESULT SUMMARY ..... 5  
STATEMENT OF COMPLIANCE ..... 7  
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS 8  
TEST RESULTS ..... 9  
    TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS ..... 9  
    TRANSMITTER MODULATION LIMITING ..... 14  
    TRANSMITTER 99% EMISSION BANDWIDTH ..... 18  
    TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS ..... 19  
    TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED) ..... 41  
TEST EQUIPMENT LIST ..... 57  
ANNEX A – TEST SETUP DETAILS ..... 58

## REVISION

Date	Revision	Comments
29 November 2019	1	Initial test report

## INTRODUCTION

This report is to prove continued compliance of the TBCB1B 100 watt Base Station Transceiver, after a change to the Power Amplifier low pass filter, a change to the IQ Filter which affects Analogue Modulation, and also adding two further modulation types; Digital FFSK and Digital Mobile Radio (DMR). This radio also supports APCO P25 phase-1 and APCO P25 phase-2 modulations. This report is to be read in combination with TELTEST reports 3490, 3653B, 3676, 3676B, 3762, 3807 and 3936.

Type Approval Testing of the TBCB1B  
Frequency range 148 → 174 MHz

in accordance with:  
FCC 47 CFR Parts 22 and 90  
RSS-119 Issue 12 & RSS-Gen Issue 5

### REPORT PREPARED FOR

Tait International Limited  
245 Wooldridge Road  
Harewood  
Christchurch 8051  
New Zealand

### DESCRIPTION OF SAMPLE

Manufacturer Tait International Limited  
Equipment: Base Station Transceiver  
Type: TBCB1B  
Quantity: 1

Modulation		Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
Analogue FM		12.5 kHz	1	-	-
FFSK	Fast Frequency Shift Keying	12.5 kHz	-	1200	1200
Digital Mobile Radio (DMR)	4 Level FSK (2 slot TDMA) (ETSI TS102 361-1)	12.5 kHz	2	4800	9600

### HARDWARE & SOFTWARE

Module	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01103-DAAA	18224993	dmr-trunk.20191015T084706	1.01
Power Amplifier	T01-01121-BBBA	18279006	0.01.00.master.20191001T185944.0001	0.06
Front Panel	T01-01110-AAAA	18200460	0.01.00.master.20190702T175230.0001	0.04
Power management unit	TBA30A0-0100	18184741	3.16	0.03

### TEST CONDITIONS

All testing was performed on 30 → 31 October and 28-29 November 2019, and under the following conditions:

Ambient temperature: 15°C → 30°C  
Relative Humidity: 20% → 75%  
Standard Test Voltage 120 V<sub>AC</sub>

## TEST REQUIREMENTS AND RESULT SUMMARY

<b>ISED Specification</b>	<b>FCC Specification</b>	<b>Test Items</b>	<b>Test Methods</b>	<b>Result</b>
No specification	FCC 47 CFR 2.1047 (a)	Transmitter Audio Frequency Response – Pre-emphasis	ANSI C63.26 5.3.3.2	Pass
No specification	FCC 47 CFR 2.1047 (b)	Transmitter Modulation Limiting	ANSI C63.26 5.3.2	Pass
RSS-119 5.3	FCC 47 CFR 90.214	Transmitter Frequency Stability - Temperature	RSS-Gen 6.11 ANSI C63.26 5.6.4	N1
RSS-119 5.3	FCC 47 CFR 2.1055 (d) (1)	Transmitter Frequency Stability - Voltage	RSS-Gen 6.11 ANSI C63.26 5.6.5	N1
RSS-119 5.4	FCC 47 CFR 2.1046	Transmitter Output Power (Conducted)	RSS-Gen 6.12 ANSI C63.26 5.2.4.2	N1
RSS-119 5.5	FCC 47CFR 90.209	Transmitter 99% Emission Bandwidth	RSS-Gen 6.7 ANSI C63.26 5.4.4	Pass
RSS-119 5.5	FCC 47 CFR 2.1049 (c)	Transmitter Occupied Bandwidth and Spectrum Mask	RSS-119 4.2.2 TIA-603-E 2.2.11	Pass
RSS-119 5.8	FCC 47 CFR 2.1051	Transmitter Spurious Emissions (Conducted)	RSS-Gen 6.13 ANSI C63.26 5.7	Pass
RSS-119 5.8	FCC 47 CFR 2.1053	Transmitter Spurious Emissions (Radiated)	RSS-Gen 6.13 ANSI C63.26 5.5	N2
RSS-119 5.9	FCC 47 CFR 90.214	Transient Frequency Behaviour	TIA 603E 2.2.2	N/A
RSS-Gen 7	FCC 47CFR 15.111	Receiver Spurious Emissions (Conducted)	RSS-Gen 7.4 TIA-603E 2.1.2	N1

<b>Test Case Result Definitions</b>	
No test Performed	N
Test does not apply to the test object	N/A
Test object meets requirements	P (Pass)
Test object does not meet requirements	F (Fail)
Test object is not conclusive	I (Inconclusive)

<b>Comments</b>
N1: This report is for a Class 2 permissive change to add Analogue, FFSK and DMR modulations. There are no changes affecting these parameters. See the original submission.
N2: The original report (Teltest 3490) tested these parameters using P25 Phase 1 C4FM modulation (TIA 102) The added modulations have constant envelope characteristics and it has been assessed that they are highly unlikely to give significantly different results outside the spectrum masks.

## STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Base Station Transceiver  
Type: TBCB1B

Module	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01103-DAAA	18224993	dmr-trunk.20191015T084706	1.01
Power Amplifier	T01-01121-BBBA	18279006	0.01.00.master.20191001T185944.0001	0.06
Front Panel	T01-01110-AAAA	18200460	0.01.00.master.20190702T175230.0001	0.04
Power management unit	TBA30A0-0100	18184741	3.16	0.03

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12 & RSS-Gen Issue 5

Signature: \_\_\_\_\_



Mike James  
Technical Manager

Date: \_\_\_\_\_

29 November 2019

The results obtained in this test report pertain only to the item(s) tested. Teltest does not make any claims of compliance for samples or variants that were not tested.

## MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

### MODULATION TYPES:

F3E	FM Analogue Voice	-	-
F2D	Fast Frequency Shift Keying	1200 symbols/sec	1200 bps
FXW	Digital Voice / Data	4800 symbols/sec	9600 bps
FXD	Digital Data	4800 symbols/sec	9600 bps

CHANNEL SPACING: 12.5 kHz

### EMISSION DESIGNATORS:

Analogue Voice	11K0F3E
FFSK	7K60F2D
DMR Digital Voice / Data	7K60FXW
DMR Digital Data	7K60FXD

Equation:  $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

#### Analogue Voice 12.5 kHz Channel Spacing

Necessary bandwidth	Emission Designator
M = 3.0 kHz	<b>11K0F3E</b>
D = 2.5 kHz	F3E represents an FM voice transmission
$B_n = (2 \times 3.0) + (2 \times 2.5) \times 1$ = 11.0 kHz	

#### Fast Frequency Shift Keying (FFSK – 1200 bps) 12.5 kHz Channel Spacing

Necessary bandwidth	Emission Designator
M = 1.8 kHz	<b>7K60F2D</b>
D = 2.0 kHz	F2D represents a FM data transmission with the use of a modulating sub carrier
$B_n = (2 \times 1.8) + (2 \times 2.0) \times 1$ = 7.6 kHz	

Digital Mobile Radio (DMR) 4 level FSK (as per ETSI TS 102 361-1)  
4800 symbols/sec 9600 bps

#### Digital Data 12.5 kHz Channel Spacing – 7K60FXW

99% bandwidth = 7.6 kHz	Emission Designator <b>7K60FXW</b> FXW represents FM combination of data and telephony.
----------------------------	---

#### Digital Data 12.5 kHz Channel Spacing – 7K60FXD

99% bandwidth = 7.6 kHz	Emission Designator <b>7K60FXD</b> FXD represents FM data only
----------------------------	--

## TEST RESULTS

### TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: ANSI C63.26 5.3.3.2

#### MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0 dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000 Hz was measured.


#### MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing tested at 100 W transmit power.

LIMIT CLAUSE: TIA/EIA-603E 3.2.6

MEASUREMENT UNCERTAINTY:  $\pm 1.5 \%$

Photo: Measurement Setup

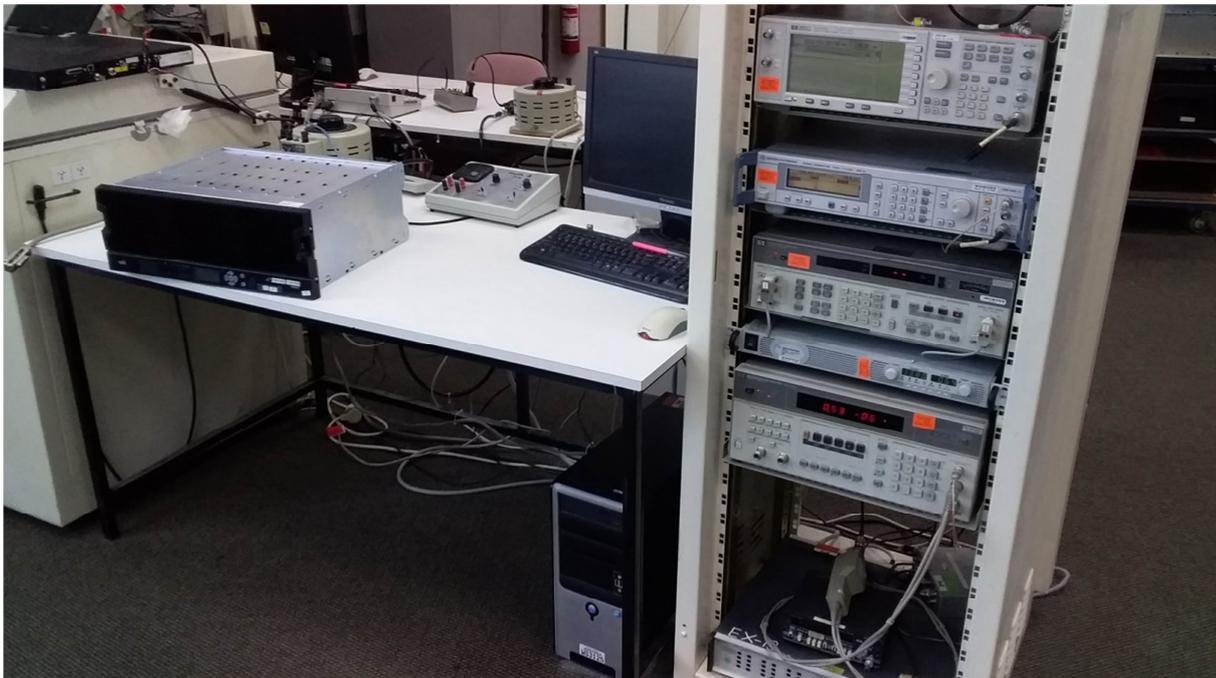


### Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 148.1 MHz

12.5 kHz Channel Spacing

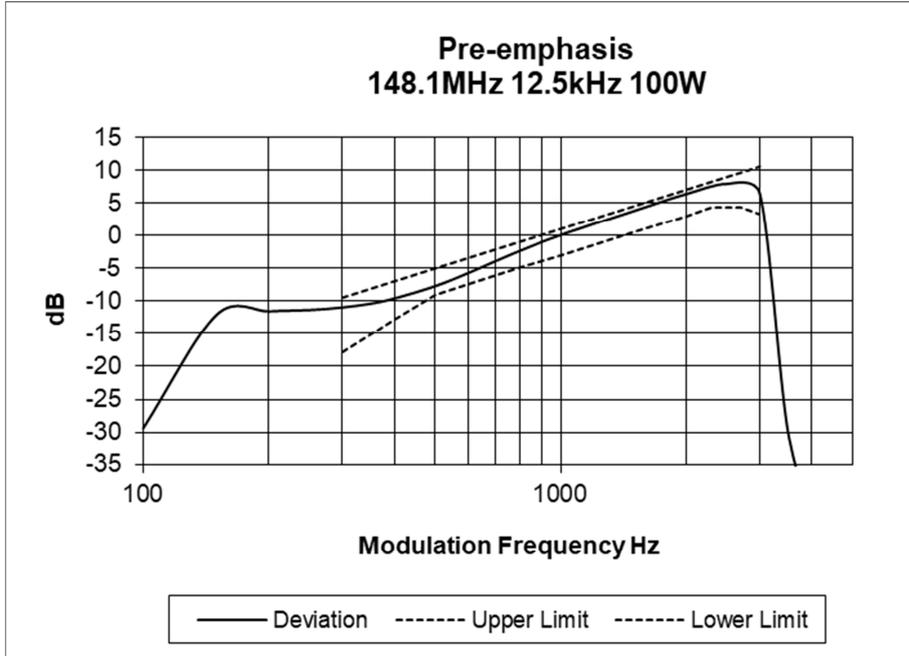

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 150.8 MHz

12.5 kHz Channel Spacing

