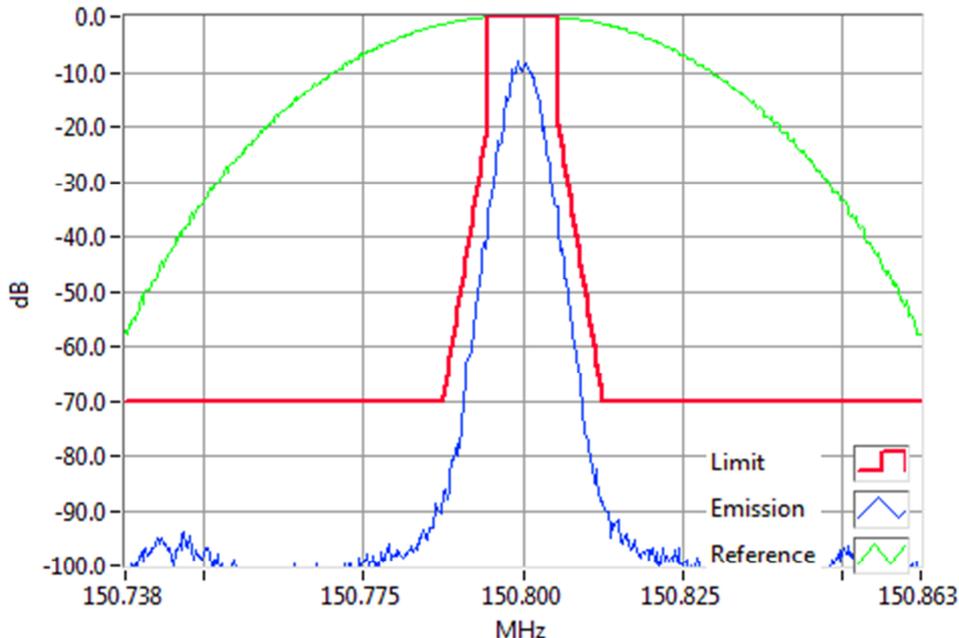# Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c)   RSS-119 5.5
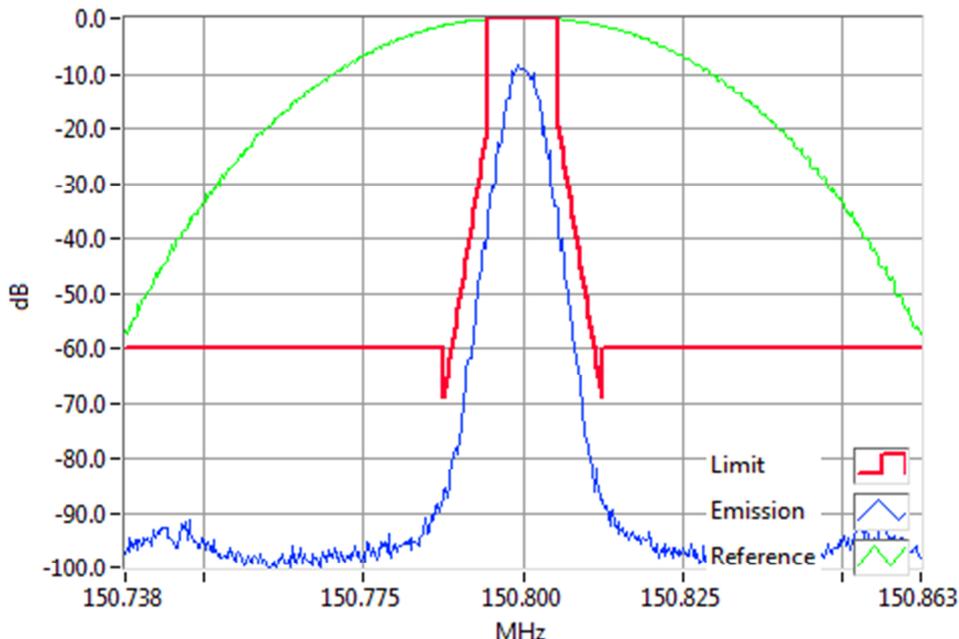
Tx FREQUENCY: 150.8 MHz   100 W   12.5 kHz Channel Spacing

DMR 150.8000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 150.8 MHz   10 W   12.5 kHz Channel Spacing

DMR 150.8000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks
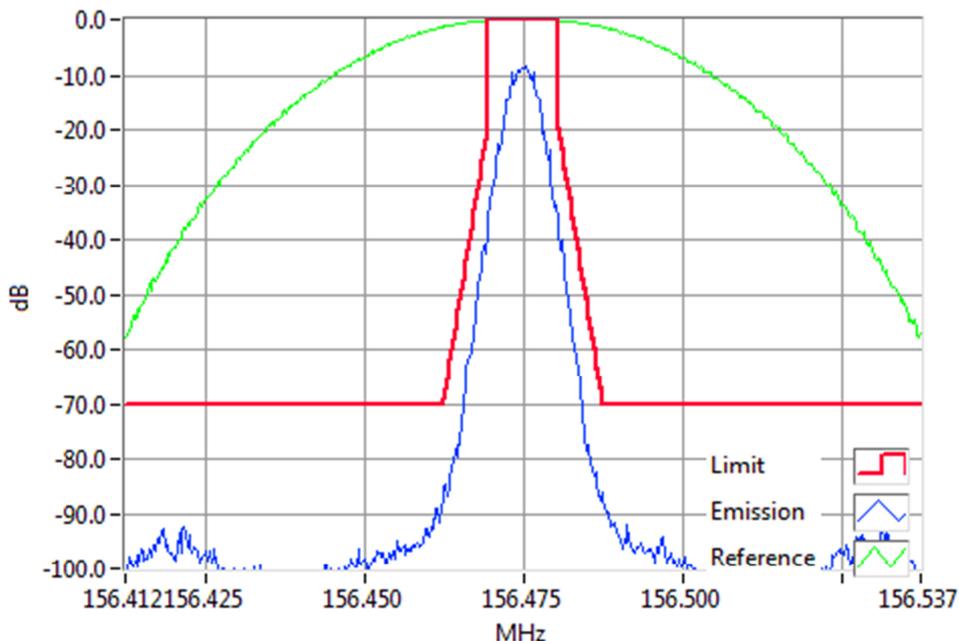
DMR

SPECIFICATION: FCC CFR 2.1049 (c)   RSS-119 5.5
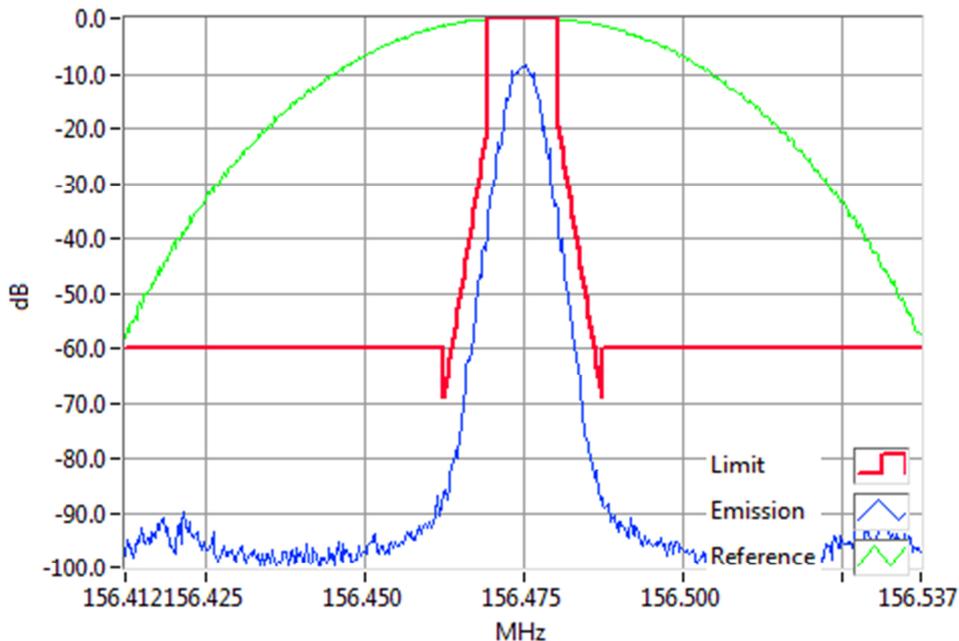
Tx FREQUENCY: 156.475 MHz   100 W   12.5 kHz Channel Spacing

DMR 156.4750MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 156.475 MHz   10 W   12.5 kHz Channel Spacing

DMR 156.4750MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks
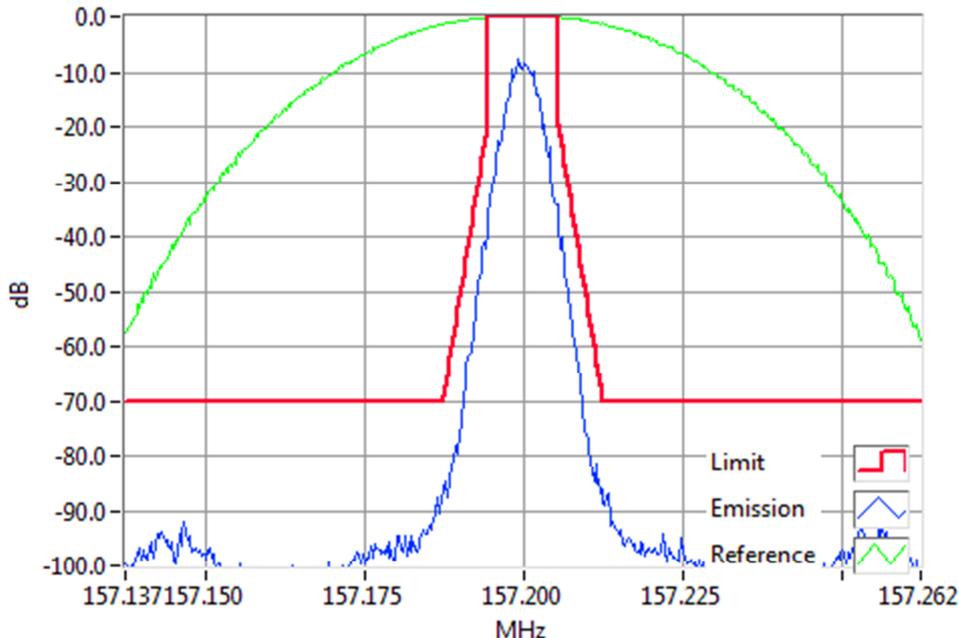
DMR

SPECIFICATION: FCC CFR 2.1049 (c)   RSS-119 5.5
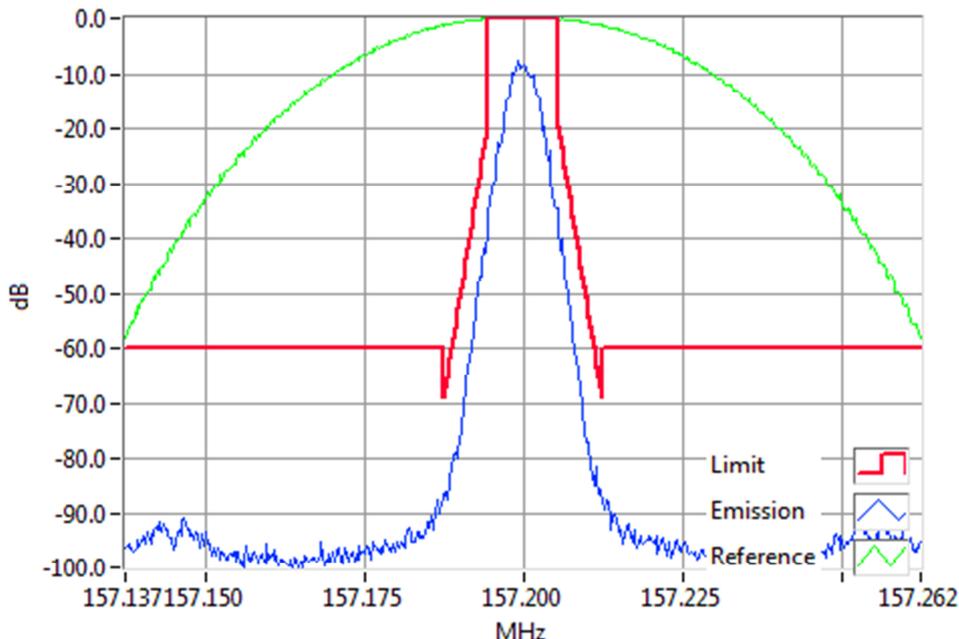
Tx FREQUENCY: 157.2 MHz   100 W   12.5 kHz Channel Spacing

DMR 157.2000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 157.2 MHz   10 W   12.5 kHz Channel Spacing

DMR 157.2000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass